



---

Junos<sup>®</sup> OS

# Channelized Interfaces Feature Guide for Routing Devices



---

Published: 2013-08-01

Juniper Networks, Inc.  
1194 North Mathilda Avenue  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

*Junos® OS Channelized Interfaces Feature Guide for Routing Devices*

Copyright © 2013, Juniper Networks, Inc.  
All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	ix
	Documentation and Release Notes . . . . .	ix
	Supported Platforms . . . . .	ix
	Using the Examples in This Manual . . . . .	ix
	Merging a Full Example . . . . .	x
	Merging a Snippet . . . . .	x
	Documentation Conventions . . . . .	xi
	Documentation Feedback . . . . .	xiii
	Requesting Technical Support . . . . .	xiii
	Self-Help Online Tools and Resources . . . . .	xiii
	Opening a Case with JTAC . . . . .	xiv
<b>Part 1</b>	<b>Overview</b>	
<b>Chapter 1</b>	<b>Channelized Interfaces . . . . .</b>	<b>3</b>
	Channelized Interfaces Overview . . . . .	3
	Channelized Interface Capabilities . . . . .	4
	Data-Link Connection Identifiers on Channelized Interfaces . . . . .	6
	Clock Sources on Channelized Interfaces . . . . .	8
	Channel Scaling Numbers of Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP . . . . .	12
	Channel Scaling Numbers of DS3/E3 MIC . . . . .	13
	Channelized E1 and T1 PIM Properties . . . . .	14
	Channelized IQ and IQE Interfaces Properties . . . . .	14
	Structure of Channelized IQ and Channelized IQE PICs . . . . .	16
<b>Part 2</b>	<b>Configuration</b>	
<b>Chapter 2</b>	<b>Network Interfaces Configuration Statements and Hierarchy . . . . .</b>	<b>27</b>
	[edit interfaces] Hierarchy Level . . . . .	27
	[edit logical-systems] Hierarchy Level . . . . .	43
<b>Chapter 3</b>	<b>Statement Summary . . . . .</b>	<b>49</b>
	clocking . . . . .	49
	dlci . . . . .	50
	fast-aps-switch . . . . .	51
	no-termination-request . . . . .	52

<b>Part 3</b>	<b>Administration</b>	
<b>Chapter 4</b>	<b>Monitoring Commands</b> .....	<b>55</b>
	show interfaces (Channelized DS3-to-DS0) .....	56
	show interfaces (Channelized DS3-to-DS1) .....	67
	show interfaces (Channelized E1 IQ) .....	70
	show interfaces (Channelized E1) .....	74
	show interfaces (Channelized OC12 IQ and IQE) .....	85
	show interfaces (Channelized OC12) .....	89
	show interfaces (Channelized OC3 IQ and IQE) .....	93
	show interfaces (Channelized STM1 IQ) .....	112
	show interfaces (Channelized STM1) .....	115
	show interfaces (Channelized T1 IQ) .....	130
	show interfaces (Channelized T3 IQ) .....	142
<b>Chapter 5</b>	<b>Command Summaries</b> .....	<b>145</b>
	Channelized E1 Interface Operational Mode Commands .....	145
	Channelized OC Interface Operational Commands .....	146
	Channelized STM1 Interface Operational Mode Commands .....	146
	Channelized T1 and T3 Interface Operational Mode Commands .....	147
<b>Part 4</b>	<b>Troubleshooting</b>	
<b>Chapter 6</b>	<b>Interface Diagnostics</b> .....	<b>151</b>
	Interface Diagnostics .....	151
	Configuring Loopback Testing .....	151
	Interface Diagnostics .....	153
	Starting and Stopping a BERT Test .....	157
	Example: Configuring Bit Error Rate Testing .....	157
<b>Part 5</b>	<b>Index</b>	
	Index .....	161

# List of Figures

## Part 1

### Chapter 1

## Overview

<b>Channelized Interfaces</b> .....	<b>3</b>
Figure 1: Channelized OC48/STM16 IQE PIC (in SONET Mode) .....	16
Figure 2: Channelized OC48/STM16 IQE PIC (in SDH Mode) .....	17
Figure 3: Channelized OC12 IQ PIC and Channelized OC12/STM4 IQE PIC (in SONET Mode) .....	17
Figure 4: Channelized OC12/STM4 IQE PIC (in SDH Mode) .....	18
Figure 5: Channelized OC12/STM4 IQ PIC (in SDH Mode) .....	18
Figure 6: Channelized OC3 Ports (in SONET Mode) on Channelized OC3 IQ and Channelized OC3/STM1 IQE PICs .....	19
Figure 7: Channelized CSTM1 Ports (in SDH Mode) on Channelized OC3/STM1 IQE PIC .....	19
Figure 8: Channelized STM1 IQ PIC .....	20
Figure 9: Channelized CDS3/E3 IQE PIC (in DS3 Mode) .....	20
Figure 10: Channelized CDS3/E3 IQE PIC (in E3 Mode) .....	20
Figure 11: Channelized DS3 IQ PIC .....	21
Figure 12: Channelized T1 IQ and IQE PIC .....	21
Figure 13: Channelized E1 IQ and IQE PIC .....	21



# List of Tables

	<b>About the Documentation</b> . . . . .	<b>ix</b>
	Table 1: Notice Icons . . . . .	xi
	Table 2: Text and Syntax Conventions . . . . .	xi
<b>Part 1</b>	<b>Overview</b>	
<b>Chapter 1</b>	<b>Channelized Interfaces</b> . . . . .	<b>3</b>
	Table 3: Frame Relay DLCI Limitations for Channelized Interfaces . . . . .	6
	Table 4: Per Unit Scheduler DLCI Limitations for Channelized Interfaces . . . . .	7
	Table 5: Protocol Family Combinations . . . . .	8
	Table 6: Clocking Capabilities by Channelized PIC Type . . . . .	9
	Table 7: Channel Scaling Numbers of MIC-3D-8CHOC3-4CHOC12 . . . . .	12
	Table 8: Channel Scaling Numbers of MIC-3D-4CHOC3-2CHOC12 . . . . .	12
	Table 9: Channel Scaling Numbers of MIC-3D-8DS3-E3 . . . . .	13
	Table 10: Structural Differences: Channelized IQE PICs . . . . .	22
	Table 11: Structural Differences: Channelized IQ PICs . . . . .	23
	Table 12: Structural Differences: Channelized PICs . . . . .	24
<b>Part 3</b>	<b>Administration</b>	
<b>Chapter 4</b>	<b>Monitoring Commands</b> . . . . .	<b>55</b>
	Table 13: Channelized DS3 show interfaces Output Fields . . . . .	56
	Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields . . . . .	74
	Table 15: Channelized OC show interfaces Output Fields . . . . .	94
	Table 16: Channelized STM1 show interfaces Output Fields . . . . .	115
	Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields . . . . .	130
<b>Chapter 5</b>	<b>Command Summaries</b> . . . . .	<b>145</b>
	Table 18: Channelized E1 Interface Operational Mode Commands . . . . .	145
	Table 19: Channelized OC Interface Operational Mode Commands . . . . .	146
	Table 20: Channelized STM1 Interface Operational Mode Commands . . . . .	146
	Table 21: Channelized T1 and T3 Interface Operational Mode Commands . . . . .	147
<b>Part 4</b>	<b>Troubleshooting</b>	
<b>Chapter 6</b>	<b>Interface Diagnostics</b> . . . . .	<b>151</b>
	Table 22: Loopback Modes by Interface Type . . . . .	152
	Table 23: BERT Capabilities by Interface Type . . . . .	156





# About the Documentation

- Documentation and Release Notes on page ix
- Supported Platforms on page ix
- Using the Examples in This Manual on page ix
- Documentation Conventions on page xi
- Documentation Feedback on page xiii
- Requesting Technical Support on page xiii

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

## Supported Platforms

---

For the features described in this document, the following platforms are supported:

- M Series
- MX Series
- T Series
- J Series

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the *CLI User Guide*.

## Documentation Conventions

Table 1 on page xi defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xi defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b> No alarms currently active

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies book names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS System Basics Configuration Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
<b>Text like this</b>	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Enclose optional keywords or variables.	<b>stub &lt;default-metric metric&gt;;</b>
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast   multicast</b>  <i>(string1   string2   string3)</i>
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Enclose a variable for which you can substitute one or more values.	<b>community name members [ community-ids ]</b>
Indentation and braces ( { } )	Identify a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
<b>GUI Conventions</b>		
<b>Bold text like this</b>	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

---

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net), or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

## Requesting Technical Support

---

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>

- Join and participate in the Juniper Networks Community Forum:  
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

## PART 1

# Overview

- [Channelized Interfaces on page 3](#)





## CHAPTER 1

# Channelized Interfaces

- [Channelized Interfaces Overview on page 3](#)
- [Channelized Interface Capabilities on page 4](#)
- [Data-Link Connection Identifiers on Channelized Interfaces on page 6](#)
- [Clock Sources on Channelized Interfaces on page 8](#)
- [Channel Scaling Numbers of Channelized SONET/SDH OC3/STM1 \(Multi-Rate\) MICs with SFP on page 12](#)
- [Channel Scaling Numbers of DS3/E3 MIC on page 13](#)
- [Channelized E1 and T1 PIM Properties on page 14](#)
- [Channelized IQ and IQE Interfaces Properties on page 14](#)
- [Structure of Channelized IQ and Channelized IQE PICs on page 16](#)

### Channelized Interfaces Overview

---

Channelized interfaces enable you to configure a number of individual channels that subdivide the bandwidth of a larger interface and minimize the number of Physical Interface Cards (PICs) that an installation requires.



**NOTE:** Channelized intelligent queuing (IQ) and channelized enhanced intelligent queuing (IQE) interfaces require M Series Enhanced Flexible PIC Concentrators (FPCs) and MX Series Enhanced Flexible PIC Concentrators (FPCs).

Wherever Junos configuration guides refer to channelized interfaces and PICs without the “intelligent queuing IQ or IQE” descriptor, they are referring to the original channelized interfaces and PICs.

On M40e routers, all supported interface types support a maximum number of 784 traffic-bearing interfaces that can be created per interface port and includes ports on channelized PICs.

MX Series routers support two Type 2 Channelized IQ PICs: OC12/STM4 IQE PIC with SFP and OC48/STM16 IQE PIC with SFP. Each channelized OC12/STM4 PIC supports 4 ports, and the channelized OC48/STM16 PIC supports one port.

T640 and TX Matrix routers support Type 3 Channelized IQE PICs: 4xCOC12 IQE PIC with SFP.

Channelized 4xCOC12 IQE PICs support deep-channelization of up to six OC slices (STS1) per port. For example, only six OC slices can be channelized to CT1/T1 or CE1/E1.

Channelized COC48 IQE PICs support deep-channelization of up to six OC slices (STS1) in a block of 12 contiguous OC slices. For example, only six OC slices out of OC slice 1-12 can be channelized to CT1/T1 or CE1/E1. The PIC supports deep-channelization of maximum 24 OC slices in this way.

Channelized OC48 IQE PICs do not support STS-48 clear-channel mode.

IQ and IQE PICs do not support aggregated SONET (link bonding).

For channelized IQ and IQE logical interfaces, you can configure class of service (CoS). For more information, see the *Junos OS Class of Service Library for Routing Devices*.

---

**Related Documentation** • [Channelized Interface Capabilities on page 4](#)

---

## Channelized Interface Capabilities

You can configure each port of a channelized IQ PIC or channelized IQE PIC as a single interface that uses the entire available bandwidth, or partition each port into smaller data channels. In either case, you start with a channelized interface (designated by a **c** in the interface name, as in **coc12**). From the channelized interfaces, you configure data channels. Following are the channelized interface names and data-channel interface names associated with channelized IQ and IQE PICs.

### Channelized Interface Names

This section lists the channelized interface names.

- **coc48-fpc/pic/port**—Channelized OC48 IQE interface. Configure on a Channelized OC48 IQE PIC.
- **coc12-fpc/pic/port**—Channelized OC12 interface. Configure on Channelized OC12 IQ or IQE PICs.
- **coc3-fpc/pic/port:channel**—Channelized OC3 interface. Configure on Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE PICs.
- **coc1-fpc/pic/port:channel**—Channelized OC1 interface. Configure on Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE, or Channelized OC48 IQE PICs.
- **ct3-fpc/pic/port:channel**—Channelized T3 interface. Configure on Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE, Channelized OC48 IQE, or Channelized DS3 IQ or IQE PICs.
- **cstm16-fpc/pic/port**—Channelized STM16 interface. Configure on a Channelized OC48 IQE PIC in SDH mode.
- **cstm4-fpc/pic/port**—Channelized STM4 interface. Configure on a Channelized OC12 IQ or IQE PIC in SDH mode.
- **cstm1-fpc/pic/port**—Channelized STM1 interface. Configure on a Channelized STM1 IQ or IQE PIC.
- **cau4-fpc/pic/port:channel**—Channelized AU-4 IQ interface. Configure on Channelized STM1 IQ or IQE, Channelized OC48 IQE, or Channelized OC12 IQE PICs.
- **ct1-fpc/pic/port:channel**—Channelized T1 interface. Configure on Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE, Channelized T1 IQ or IQE, Channelized OC48 IQE, or Channelized DS3 IQ or IQE PICs.
- **ce1-fpc/pic/port:channel**—Channelized E1 interface. Configure on Channelized E1 IQ or IQE, Channelized STM1 IQ or IQE, Channelized OC48/STM16 IQE, or Channelized OC12/STM4 IQE PICs.

### Data-Channel Interface Names

This section lists the data-channel interface names.

- **e1-fpc/pic/port:channel**—E1 channel. Configure on Channelized E1 IQ or IQE, Channelized STM1 IQ or IQE, Channelized OC12/STM4 IQE, or Channelized OC48/STM16 IQE PICs.
- **e3-fpc/pic/port:channel**—E3 channel. Configure on Channelized OC3/STM1 IQE, or Channelized OC12/STM4 IQE, Channelized OC48 IQE, or Channelized/Clear channel DS3E3 IQE or E3 IQ PICs.
- **ds-fpc/pic/port:channel**—NxDS0 channel. Configure on Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE, Channelized OC48/STM16 IQE, Channelized STM1 IQ or IQE, Channelized DS3 IQ or IQE, Channelized T1 IQ, or Channelized E1 IQ or IQE PICs.
- **so-fpc/pic/port:channel**—SONET/SDH channel. Configure one OC3 channel on a Channelized OC3 IQ or IQE, four OC3 channels on a Channelized OC12 IQ or IQE, one OC12 channel on a Channelized OC12 IQ or IQE, four OC12 channels on Channelized OC48 IQE, or one STM1 channel on a Channelized STM1 IQ or IQE PICs.

- **t1-fpc/pic/port:channel**—T1 channel. Configure on Channelized T1 IQ or IQE, Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE, Channelized OC48 IQE, or Channelized DS3 IQ or IQE PICs.
- **t3-fpc/pic/port:channel**—T3 channel. Configure on Channelized OC3 IQ or IQE, Channelized OC12 IQ or IQE, Channelized OC48 IQE, Clear Channel DS3E3 IQE, or Channelized DS3 IQ or IQE PICs.

**Related  
Documentation**

- [Channelized Interfaces Overview on page 3](#)

## Data-Link Connection Identifiers on Channelized Interfaces

If you use Frame Relay encapsulation on a channelized interface, see [Table 3 on page 6](#) for the maximum number of data-link connection identifiers (DLCIs) per channel that you can configure at each channel level for various channelized PICs.

If you use a per-unit-scheduler configuration on a channelized interface, see [Table 4 on page 7](#) for the maximum number of data-link connection identifiers (DLCIs) per channel that you can configure at each channel level for various channelized PICs.



**NOTE:** The actual number of DLCIs you can configure for each channel is determined by the capabilities of your system, such as the number and types of PICs installed. If the number of DLCIs in the configuration exceeds the capabilities of your system, the router might not be able to support the maximum DLCI values shown in [Table 3 on page 6](#). To determine the capabilities of your system, please contact Juniper Networks customer support.

**Table 3: Frame Relay DLCI Limitations for Channelized Interfaces**

PIC Types	Number of DLCIs per Level	Range
<b>Original Channelized PICs</b>		
DS0 level channels	3 for sparse mode	1–1022 for sparse mode (0 is reserved for the Local Management Interface [LMI])
T3 and T1 level channels	63 for regular mode	1–63 for regular mode
	3 for sparse mode	1–1022 for sparse mode (0 is reserved for the LMI)
<b>Channelized IQ and IQE PICs</b>		
DS0 level channels (Channelized DS3 IQ or IQE, Channelized STM1 IQ or IQE, Channelized E1 IQ or IQE, Channelized OC3 IQ or IQE, or Channelized OC12 IQ or IQE PICs)	16	1–1022 (0 is reserved for the LMI)

**Table 3: Frame Relay DLCI Limitations for Channelized Interfaces** (*continued*)

PIC Types	Number of DLCIs per Level	Range
E1 level channels (Channelized E1 IQ or IQE PIC)	64	1–1022 (0 is reserved for the LMI)
E1 level channels (Channelized STM1 IQ or IQE PIC)	64	1–1022 (0 is reserved for the LMI)
OC3 level channels (Channelized OC3 IQ or IQE, or Channelized OC12 IQ or IQE PIC)	1022	1–1022 (0 is reserved for the LMI)
OC12 level channels (Channelized OC12 IQ or IQE, Channelized OC48/STM16 IQE PICs, and (per port on) OC12 ports on 4xOC12/STM4 IQE PICs)	1022	1–1022 (0 is reserved for the LMI)
STM1 level channel (Channelized STM1 IQ or IQE PIC)	1022	1–1022 (0 is reserved for the LMI)
T1 level channels (Channelized DS3 IQ or IQE PIC)	64	1–1022 (0 is reserved for the LMI)
T1 level channels (Channelized OC3 IQ or IQE, or Channelized OC12 IQ or IQE PIC)	64	1–1022 (0 is reserved for the LMI)
T3 level channel (Channelized DS3 IQ or IQE, Channelized OC3 IQ or IQE, or Channelized OC12 IQ or IQE PIC)	1022	1–1022 (0 is reserved for the LMI)

**Table 4: Per Unit Scheduler DLCI Limitations for Channelized Interfaces**

PIC Types	Number of DLCIs per Level			
	Non M40e Platforms		M40e Platform Only	
	With Per-Unit-Scheduler	Without Per-Unit-Scheduler	With Per-Unit-Scheduler	Without Per-Unit-Scheduler
DS0 level channels	64	64	16	16
T1/E1 level channels	64	64	64	64
DS3/E3 level channels	975	† Protocol family combinations apply	256	256
SONET	975	† Protocol family combinations apply	975	† Protocol family combinations apply

† In these router, PIC, and scheduler configurations, combining multiple protocol families per PIC changes the number of Frame Relay DLCIs as shown in [Table 5 on page 8](#).

Table 5: Protocol Family Combinations

Protocol Family Combinations	Number of DLCIs per PIC
inet	3600
inet6	3600
mpls	3000
inet, inet6	2400
inet, mpls	2000
inet6, mpls	2000
inet, inet6, mpls	1550

**Related Documentation** • [Channelized Interfaces Overview on page 3](#)

## Clock Sources on Channelized Interfaces

Channelized interfaces, channelized IQ interfaces, and channelized IQE interfaces have different clocking capabilities. For channelized IQ and IQE interfaces, you can configure clocking on each interface independently by including the **clocking (internal | external)** statement at the **[edit interfaces interface-name]** hierarchy level.

For channelized IQ and IQE interfaces, clocking is provided as follows:

- For all channelized IQ and IQE PICs, the **clocking** statement is supported on all channels. To configure clocking on individual interfaces, include the **clocking** statement at the **[edit interfaces type-fpc/pic/port:channel]** hierarchy level. If you do not include the **clocking** statement, the individual interfaces use internal clocking by default.
- SONET/SDH-level clocking is provided at the root controller interface at the **[edit interfaces type-fpc/pic/port]** hierarchy level.
- Configure T3-level clocking by including the **clocking** statement at the **[edit interfaces ct3-fpc/pic/port]** hierarchy level.
- Configure T1-level clocking by including the **clocking** statement at the **[edit interfaces t1-fpc/pic/port:channel]** hierarchy level.
- Configure E1-level clocking by including the **clocking** statement at the **[edit interfaces ce1-fpc/pic/port]** hierarchy level.
- Configure clocking for all NxDS0 channels by including the **clocking** statement at the **[edit interfaces ct1-fpc/pic/port:channel]** or **[edit interfaces ce1-fpc/pic/port]** hierarchy level.

- The **clocking** statement is ignored if you include it at the **[edit interfaces coc1-fpc/pic/port:channel]** or **[edit interfaces cau4-fpc/pic/port:channel]** hierarchy level.
- SONET/SDH level clocking is applicable only at the controller interfaces for channelized IQ and IQE PICs. Clocking configuration is not effective at the **so-fpc/pic/port** or **so-fpc/pic/port:channel** for channelized IQ and IQE PICs.

For non-IQ and non-IQE channelized interfaces, clocking at each channel level is provided as follows:

- For Channelized OC12, DS3, and E1 PICs, the **clocking** statement is supported only for channel 0; it is ignored if included in the configuration of other channels. The clock source configured for channel 0 applies to all channels on these channelized interfaces.
- For the Channelized STM1 PIC, the **clocking** statement is supported on channels 0 through 62. To configure clocking on the STM1 interface, include the **loop-timing** statement at the **[edit interfaces e1-fpc/pic/port:0 sonet-options]** hierarchy level. To configure clocking on individual E1 interfaces, include the **clocking** statement at the **[edit interfaces e1-fpc/pic/port:channel]** hierarchy level. The channel number can be 0 through 62. If you do not include the **clocking** statement, the individual E1 interfaces use internal clocking by default.
- For channelized STM1 interfaces, you should configure the clock source at one side of the connection to be internal and configure the other side of the connection to be external.
- When you configure the clock source for a channelized interface—**t3-fpc/pic/port:0**, for example—you must also include the **channel-group** statement at the **[edit chassis]** hierarchy level, and specify channel group 0.

Table 6 on page 9 lists the clocking capabilities for each channelized PIC.

**Table 6: Clocking Capabilities by Channelized PIC Type**

PIC Type	SONET/SDH Level	DS3 Level	DS1/E1 Level
<b>Channelized PICs</b>			
Channelized DS3 and Multichannel DS3	Not applicable.	The <b>loop-timing</b> statement is supported at the <b>[edit interfaces t1-fpc/pic/port:0 t3-options]</b> or <b>[edit interfaces fpc/pic/port:0:0 t3-options]</b> hierarchy level.	The <b>clocking</b> statement is supported at the <b>[edit interfaces t1-fpc/pic/port:0]</b> or <b>[edit interfaces ds-fpc/pic/port:0:0]</b> hierarchy level.
Channelized E1	Not applicable.	Not applicable.	The <b>clocking</b> statement is supported at the <b>[edit interfaces e1-fpc/pic/port:0]</b> or <b>[edit interfaces ds-fpc/pic/port:0]</b> hierarchy level.
Channelized OC12	Not configurable.	The <b>clocking</b> statement is supported at the <b>[edit interfaces t3-fpc/pic/port:0]</b> hierarchy level.	Not applicable.

Table 6: Clocking Capabilities by Channelized PIC Type (*continued*)

PIC Type	SONET/SDH Level	DS3 Level	DS1/E1 Level
Channelized STM1	Not configurable.	Not applicable.	The <b>clocking</b> statement is supported at the <b>[edit interfaces e1-fpc/pic/port:[0-62]]</b> hierarchy level.
Channelized IQ and IQE PICs			
Channelized DS3 IQ or IQE	Not applicable.	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces ct3-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces t3-fpc/pic/port]</b> hierarchy level.</p>	<p>For T1 channels, the <b>clocking</b> statement is supported at the <b>[edit interfaces t1-fpc/pic/port:[1-28]]</b> hierarchy level.</p> <p>For NxDS0 channels, the <b>clocking</b> statement is supported at the <b>[edit interfaces ct1-fpc/pic/port:[1-28]]</b> hierarchy level.</p>
Channelized E1 IQ	Not applicable.	Not applicable.	<p>For E1 and NxDS0 channels, the <b>clocking</b> statement is supported at the <b>[edit interfaces ce1-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces e1-fpc/pic/port]</b> hierarchy level.</p>
Channelized OC3 IQ or IQE	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces coc3-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces so-fpc/pic/port]</b> hierarchy level.</p>	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces t3-fpc/pic/port:[1-12]]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces coc1-fpc/pic/port:channel]</b> hierarchy level.</p>	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces ct1-fpc/pic/port:[1-12]:[1-28]]</b> and <b>[edit interfaces t1-fpc/pic/port:[1-12]:[1-28]]</b> hierarchy levels.</p>
Channelized OC12 IQ or IQE	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces coc12-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces so-fpc/pic/port]</b> hierarchy level.</p>	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces t3-fpc/pic/port:[1-12]]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces coc1-fpc/pic/port:channel]</b> hierarchy level.</p>	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces ct1-fpc/pic/port:[1-12]:[1-28]]</b> and <b>[edit interfaces t1-fpc/pic/port:[1-12]:[1-28]]</b> hierarchy levels.</p>



Table 6: Clocking Capabilities by Channelized PIC Type (*continued*)

PIC Type	SONET/SDH Level	DS3 Level	DS1/E1 Level
Channelized OC48 IQE	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces coc48-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces so-fpc/pic/port]</b> hierarchy level.</p>	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces t3-fpc/pic/port:[1-48]]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces coc1-fpc/pic/port:channel]</b> hierarchy level.</p>	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces ct1fpc/pic/port:[1-48]:[1-28]]</b> and <b>[edit interfaces t1-fpc/pic/port:[1-48]:[1-28]]</b> hierarchy levels.</p>
Channelized STM1 IQ or IQE	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces cstm1-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces cau4-fpc/pic/port:channel]</b> or <b>[edit interfaces so-fpc/pic/port]</b> hierarchy level.</p>	Not applicable.	<p>For E1 and NxDS0 channels, the <b>clocking</b> statement is supported at the <b>[edit interfaces ce1-fpc/pic/port[1-63]]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces e1-fpc/pic/port]</b> hierarchy level.</p>
Channelized STM4 IQ or IQE	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces cstm4-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces cau4-fpc/pic/port:channel]</b> or <b>[edit interfaces so-fpc/pic/port]</b> hierarchy level.</p>	Not applicable.	<p>For E1 and NxDS0 channels, the <b>clocking</b> statement is supported at the <b>[edit interfaces ce1-fpc/pic/port[1-4]:[1-63]]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces e1-fpc/pic/port]</b> hierarchy level.</p>
Channelized STM16 IQE	<p>The <b>clocking</b> statement is supported at the <b>[edit interfaces cstm16-fpc/pic/port]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces cau4-fpc/pic/port:channel]</b> or <b>[edit interfaces so-fpc/pic/port]</b> hierarchy level.</p>	Not applicable.	<p>For E1 and NxDS0 channels, the <b>clocking</b> statement is supported at the <b>[edit interfaces ce1-fpc/pic/port[1-16]:[1-63]]</b> hierarchy level.</p> <p>The <b>clocking</b> statement is ignored if you include it at the <b>[edit interfaces e1-fpc/pic/port]</b> hierarchy level.</p>

Related • [clocking on page 49](#)  
Documentation

## Channel Scaling Numbers of Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP

There are two types of Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP—the 8-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (model number: MIC-3D-8CHOC3-4CHOC12), and the 4-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (model number: MIC-3D-4CHOC3-2CHOC12). These MICs support POS/PDH interfaces on the MX80 3D Universal Edge Routers and other MX Series routers using the MX-MPC1-3D-Q, MX-MPC2-3D-Q, and MX-MPC2-3D-EQ MPCs to position a single device to meet multiservice edge requirements.

Channel scaling numbers of the 8-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP are listed in [Table 7 on page 12](#).

**Table 7: Channel Scaling Numbers of MIC-3D-8CHOC3-4CHOC12**

SONET Channel Scaling Numbers	SDH Channel Scaling Numbers
<ul style="list-style-type: none"> <li>4xSTS12c</li> <li>16xSTS3c (when all ports are configured as channelized OC12)</li> <li>8xSTS3c (when all ports are configured as channelized OC3)</li> </ul>	<ul style="list-style-type: none"> <li>4xSTM4</li> <li>16xSTM1 (when all ports are configured as channelized STM4)</li> <li>8xSTM1 (when all ports are configured as channelized STM1)</li> </ul>
<ul style="list-style-type: none"> <li>48xDS3 (when all ports are configured as channelized OC12)</li> <li>24xDS3 (when all ports are configured as channelized OC3)</li> </ul>	<ul style="list-style-type: none"> <li>48xE3 (when all ports are configured as channelized STM4)</li> <li>24xE3 (when all ports are configured as channelized STM1)</li> </ul>
<ul style="list-style-type: none"> <li>672xDS1</li> <li>168xDS1 per channelized OC12 when the port is configured as channelized OC12</li> <li>84xDS1 per channelized OC3 when the port is configured as channelized OC3</li> </ul>	<ul style="list-style-type: none"> <li>504xE1</li> <li>126xE1 per channelized STM4 when the port is configured as channelized STM4</li> <li>62xE1 per channelized STM1 when the port is configured as channelized STM1</li> </ul>
<ul style="list-style-type: none"> <li>4044xDS0</li> <li>1011xDS0 per channelized OC12 when the port is configured as channelized OC12</li> <li>1011xDS0 per two channelized OC3 when the port is configured as channelized OC3</li> </ul>	<ul style="list-style-type: none"> <li>4044xDS0</li> <li>1011xDS0 per channelized STM4 when the port is configured as channelized STM4</li> <li>1011xDS0 per two channelized STM1 when the port is configured as channelized STM1</li> </ul>

Channel scaling numbers of the 4-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP are listed in [Table 8 on page 12](#).

**Table 8: Channel Scaling Numbers of MIC-3D-4CHOC3-2CHOC12**

SONET Channel Scaling Numbers	SDH Channel Scaling Numbers
<ul style="list-style-type: none"> <li>2xSTS12c</li> <li>8xSTS3c (when all ports are configured as channelized OC12)</li> <li>4xSTS3c (when all ports are configured as channelized OC3)</li> </ul>	<ul style="list-style-type: none"> <li>2xSTM4</li> <li>8xSTM1 (when all ports are configured as channelized STM4)</li> <li>4xSTM1 (when all ports are configured as channelized STM1)</li> </ul>

Table 8: Channel Scaling Numbers of MIC-3D-4CHOC3-2CHOC12 (*continued*)

SONET Channel Scaling Numbers	SDH Channel Scaling Numbers
<ul style="list-style-type: none"> <li>24xDS3 (when all ports are configured as channelized OC12)</li> <li>12xDS3 (when all ports are configured as channelized OC3)</li> </ul>	<ul style="list-style-type: none"> <li>24xE3 (when all ports are configured as channelized STM4)</li> <li>12xE3 (when all ports are configured as channelized STM1)</li> </ul>
<ul style="list-style-type: none"> <li>336xDS1</li> <li>168xDS1 per channelized OC12 when the port is configured as channelized OC12</li> <li>84xDS1 per channelized OC3 when the port is configured as channelized OC3</li> </ul>	<ul style="list-style-type: none"> <li>252xE1</li> <li>126xE1 per channelized STM4 when the port is configured as channelized STM4</li> <li>62xE1 per channelized STM1 when the port is configured as channelized STM1</li> </ul>
<ul style="list-style-type: none"> <li>2022xDS0</li> <li>1011xDS0 per channelized OC12 when the port is configured as channelized OC12</li> <li>1011xDS0 per two channelized OC3 when the port is configured as channelized OC3</li> </ul>	<ul style="list-style-type: none"> <li>2022xDS0</li> <li>1011xDS0 per channelized STM4 when the port is configured as channelized STM4</li> <li>1011xDS0 per two channelized STM1 when the port is configured as channelized STM1</li> </ul>



**NOTE:** When a port is configured as channelized OC12, only six of the twelve OC1 slices can be deep-channelized from T1 through DS0. The remaining six OC1 slices can be channelized only to T3 or can be combined to form two OC3 slices. They cannot be channelized to T1 or DS0.

**Related Documentation**

- [Channel Scaling Numbers of DS3/E3 MIC on page 13](#)

## Channel Scaling Numbers of DS3/E3 MIC

You can configure the DS3/E3 MIC (model number: MIC-3D-8DS3-E3) to function either in clear-channel mode or in channelized mode. When functioning in channelized mode, the DS3/E3 MIC supports PDH interfaces on the MX80 3D Universal Edge Router and MX Series routers that use MX-MPC1-3D-Q, MX-MPC2-3D-Q, or MX-MPC2-3D-EQ. When functioning in clear-channel mode, this MIC also supports PDH interfaces on the MX-MPC1-3D and MX-MPC2-3D MPCs.

Channel scaling numbers of the DS3/E3 MIC are listed in [Table 9 on page 13](#).

Table 9: Channel Scaling Numbers of MIC-3D-8DS3-E3

DS3	E3
8xDS3	8xE3
224xDS1	
2038xDS0	

- Related Documentation**
- *Configuring the Junos OS to Enable Channelization on DS3/E3 MIC*
  - *channelization*

---

## Channelized E1 and T1 PIM Properties

Channelized E1 and T1 PIMs on J Series routers provide support for ISDN Primary Rate Interface (PRI) connectivity for dial-in and callback and for use as primary or backup network connections. You can configure up to 30 channelized E1 time slots (**ce1-pim/0/port**) or 23 channelized T1 time slots (**ct1-pim/0/port**) as an ISDN PRI group, with the 16th E1 time slot or the 24th T1 time slot operating as the D-channel to control the group of time slots as B-channels. These B-channels can operate unconfigured. The encapsulation type **multilink-ppp**, **cisco-hdlc**, or **ppp** is configured under the dialer interface.

For more information about configuring the dialer interface, see *Configuring ISDN Logical Interface Properties*.

E1 and T1 time slots unused by ISDN PRI can operate normally as DS0 interfaces. PRI B-channels run at 64 Kbps, but do not support the 56-Kbps line rate.

For more information about Channelized E1 PIMs, ISDN PRI connectivity, and the ISDN features they support, see the *Junos OS Interfaces and Routing Configuration Guide*.

---

## Channelized IQ and IQE Interfaces Properties

On channelized IQ and IQE interfaces, you can specify options that are globally applied to all interface types associated with channelized IQ and IQE interfaces. For example, **e1-options** statements that you include at the **[edit interfaces ce1-fpc/pic/port]** hierarchy level apply globally to all E1 and NxDS0 interfaces that you create by partitioning **ce1-fpc/pic/port**. Likewise, **t3-options** statements that you include at the **[edit interfaces ct3-fpc/pic/port]** hierarchy level apply globally to all T1 and NxDS0 interfaces that you create by partitioning **ct3-fpc/pic/port**.

You can also apply interface options at the channel level. For example, you can include **t1-options** statements at the **[edit interfaces t1-fpc/pic/port <:channel>]** hierarchy level, and **ds0-options** statements at the **[edit interfaces ds-0/1/1<:channel>]** hierarchy level.

Only a subset of the interface options is valid on each type of channelized IQ interface. You configure all HDLC information at the end-data channel level, not at the parent level. For example, configure HDLC information at the **[edit interfaces ds-fpc/pic/port<:channel>]** hierarchy level, not at the **[edit interfaces ct1-fpc/pic/port<:channel>]** hierarchy level.

Automatic Protection Switching (APS) is supported on channelized OC3, OC12, STM1, and STM4 IQ interfaces. To configure APS, include the **aps** statement with options at the **[edit interfaces interface-name sonet-options]** hierarchy level. For information about configuring APS, see *Configuring Basic Automatic Protect Switching*.

In interchassis and intrachassis redundant LSQ configurations that use MLPPP and SONET APS, you can inhibit a router from sending PPP termination-request messages to the remote host if the link PIC fails. To inhibit the router from sending PPP

termination-request messages to the remote host if the link PIC fails, include the **no-termination-request** statement at the **[edit interfaces *interface-name* ppp-options]** hierarchy level.

The **no-termination-request** statement is supported only with MLPPP and SONET APS configurations and works with PPP, PPP over Frame Relay, and MLPPP interfaces only. The supported PIC types are as follows:

- Channelized OC48/STM16 IQE PICs
- Channelized OC12/STM4 IQ and IQE PICs
- Channelized OC3 IQ and IQE PICs
- Channelized STM1 IQ and IQE PICs

Channelized IQ and IQE interfaces do not support receive buckets or transmit buckets.

For channelized IQ and IQE interfaces, there are some limitations on where you place certain statements in the configuration. When you configure clocking, bit error rate testing (BERT), C-bit parity, and loopback statements on T3, T1, or DS0 channels, you must follow these guidelines:

- For T3 IQ interfaces, you can include the **loopback payload** statement at the **[edit interfaces *ct3-fpc/pic/port*]** and **[edit interfaces *t3-fpc/pic/port:channel*]** hierarchy levels. For T1 interfaces, you can include the **loopback payload** statement at the **[edit interfaces *t1-fpc/pic/port:channel*]** hierarchy level; it is ignored if included at the **[edit interfaces *ct1-fpc/pic/port*]** hierarchy level. For NxDS0 interfaces, payload and remote loopback are the same. If you configure one, the other is ignored. NxDS0 IQ interfaces do not support local loopback.
- If you include clocking, BERT, and C-bit parity configurations at both the **[edit interfaces *ct3-fpc/pic/port<:channel> t3-options*]** and **[edit interfaces *t3-fpc/pic/port<:channel> t3-options*]** hierarchy levels, the channelized T3-level statements are valid, and the T3-level statements are ignored.
- If you include clocking, BERT, and C-bit parity configurations at both the **[edit interfaces *ct3-fpc/pic/port<:channel> t3-options*]** and **[edit interfaces *t1-fpc/pic/port<:channel> t1-options*]** hierarchy levels, the channelized T3-level statements are operational for the T3 connections and the T1-level statements are operational for the T1 connections.
- Because DS0 channels do not have clocking capability, you must configure clocking at the **[edit interfaces *ct1-fpc/pic/port<:channel> t1-options*]** or **[edit interfaces *ce1-fpc/pic/port<:channel> e1-options*]** hierarchy level for channelized NxDS0 IQ interfaces.
- You can set BERT at the **[edit interfaces *t3-fpc/pic/port<:channel> t3-options*]** hierarchy level or on any partitioned channel of the channelized T3 interface. There are 12 BERT patterns available for NxDS0 channels and 28 BERT patterns for T1, channelized T1, T3, and channelized T3 interfaces within channelized IQ interfaces.
- For channelized IQ and IQE PICs, SONET/SDH level, use the **sonet-options loopback** statement **local** and **remote** options at the controller interface (*coc48*, *cstm16*, *coc12*,

cstm4, coc3, cstm1). It is ignored for path-level interfaces *so-fpc/pic/port* or *so-fpc/pic/port:channel*.

- For channelized interfaces that use Frame Relay encapsulation, the number of configurable DLCIs varies by channelized interface type.
- For channelized interfaces, you can configure class of service (CoS) on channels, but not at the controller level.
- For original Channelized OC12 PICs, limited CoS functionality is supported. For more information, contact Juniper Networks customer support.
- CoS is not configurable on controller interfaces.

**Related Documentation**

- *SONET/SDH Physical Interface Properties Overview*

## Structure of Channelized IQ and Channelized IQE PICs

Figure 1 on page 16 through Figure 13 on page 21 show the structural organization of the channelized PICs, channelized IQ PICs, and channelized IQE PICs. Table 10 on page 22 through Table 12 on page 24 show the structure of channelized IQE PICs, channelized IQ PICs, and channelized PICs.

**Figure 1: Channelized OC48/STM16 IQE PIC (in SONET Mode)**

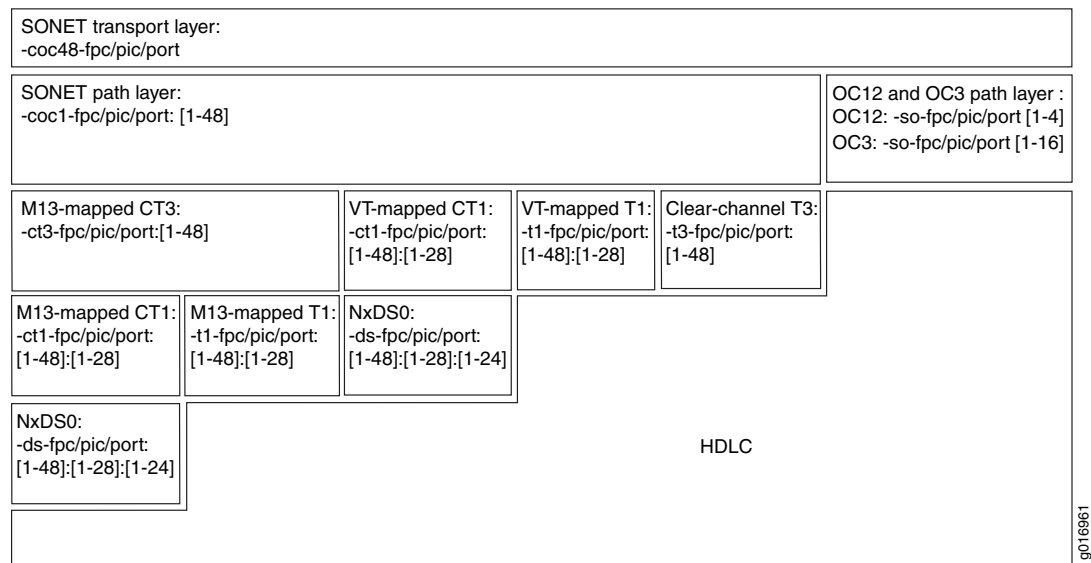


Figure 2: Channelized OC48/STM16 IQE PIC (in SDH Mode)

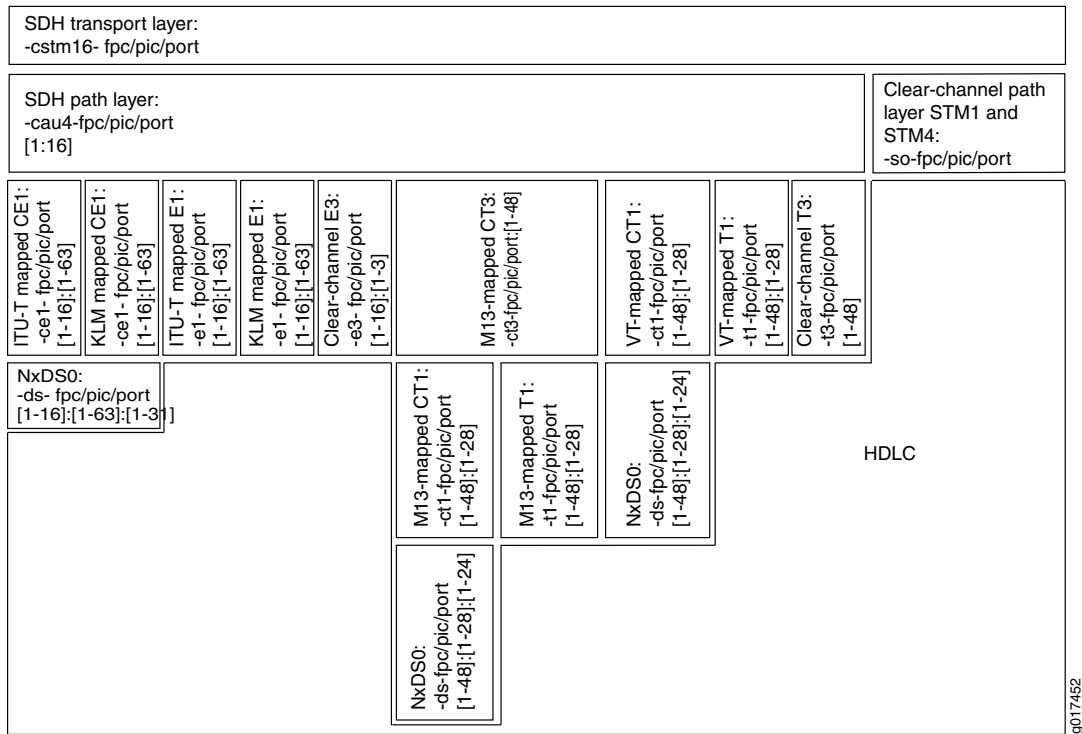


Figure 3: Channelized OC12 IQ PIC and Channelized OC12/STM4 IQE PIC (in SONET Mode)

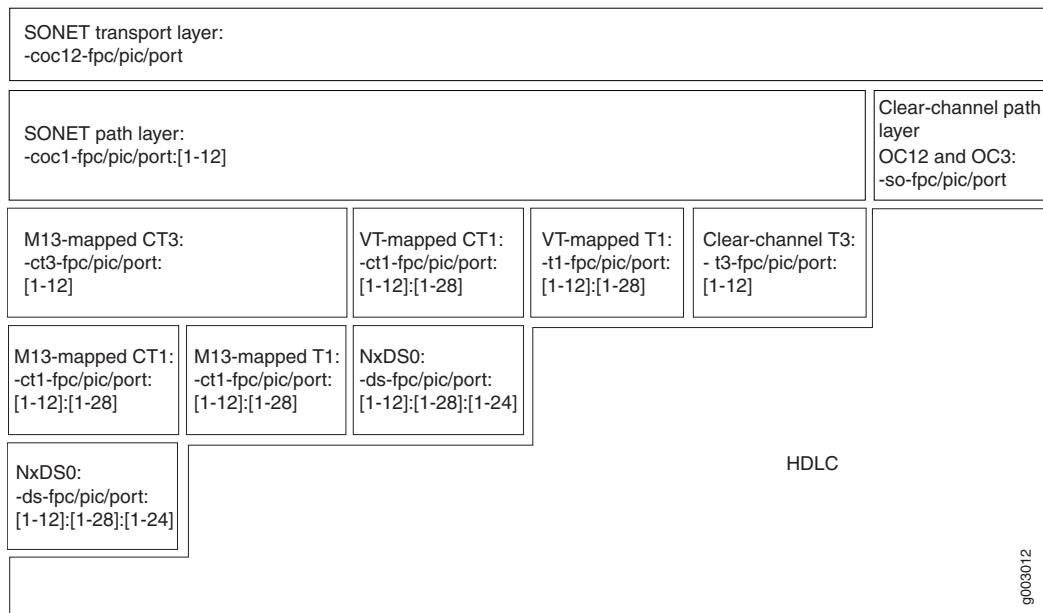


Figure 4: Channelized OC12/STM4 IQE PIC (in SDH Mode)

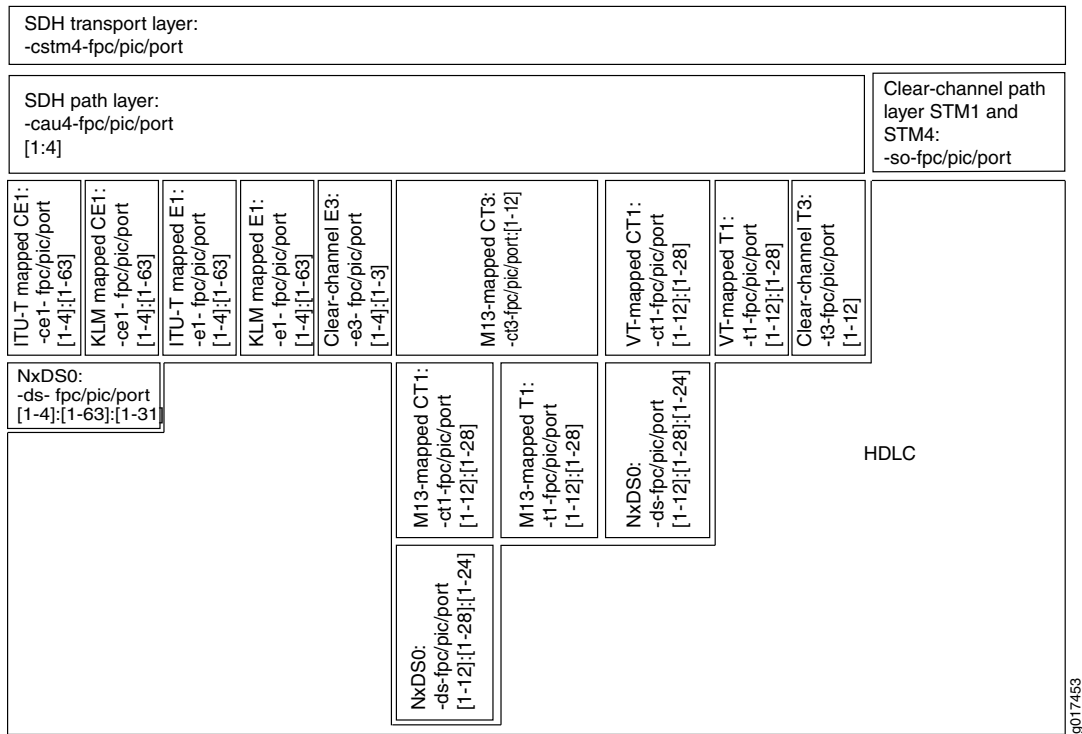
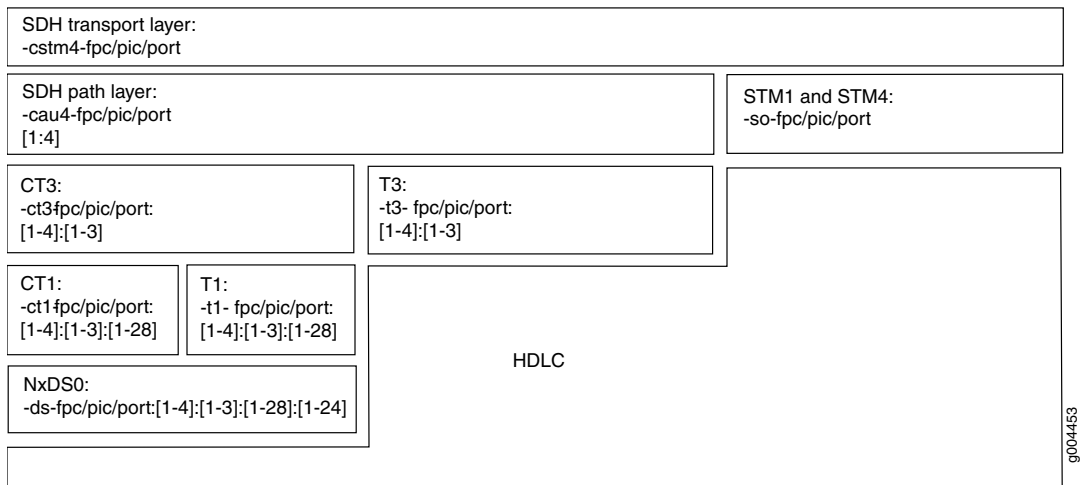
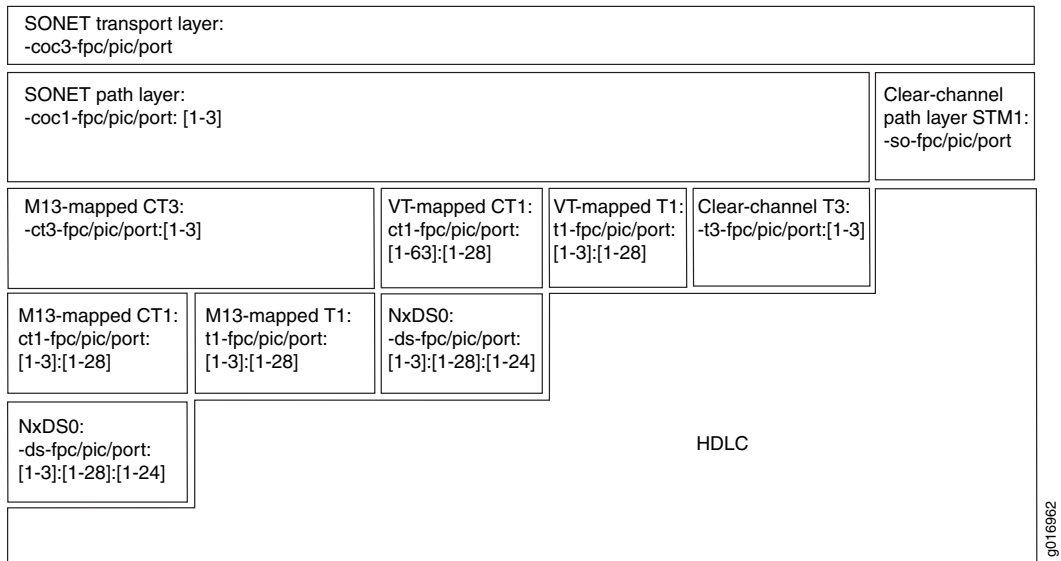


Figure 5: Channelized OC12/STM4 IQ PIC (in SDH Mode)





**Figure 6: Channelized OC3 Ports (in SONET Mode) on Channelized OC3 IQ and Channelized OC3/STM1 IQE PICs**



**Figure 7: Channelized CSTM1 Ports (in SDH Mode) on Channelized OC3/STM1 IQE PIC**

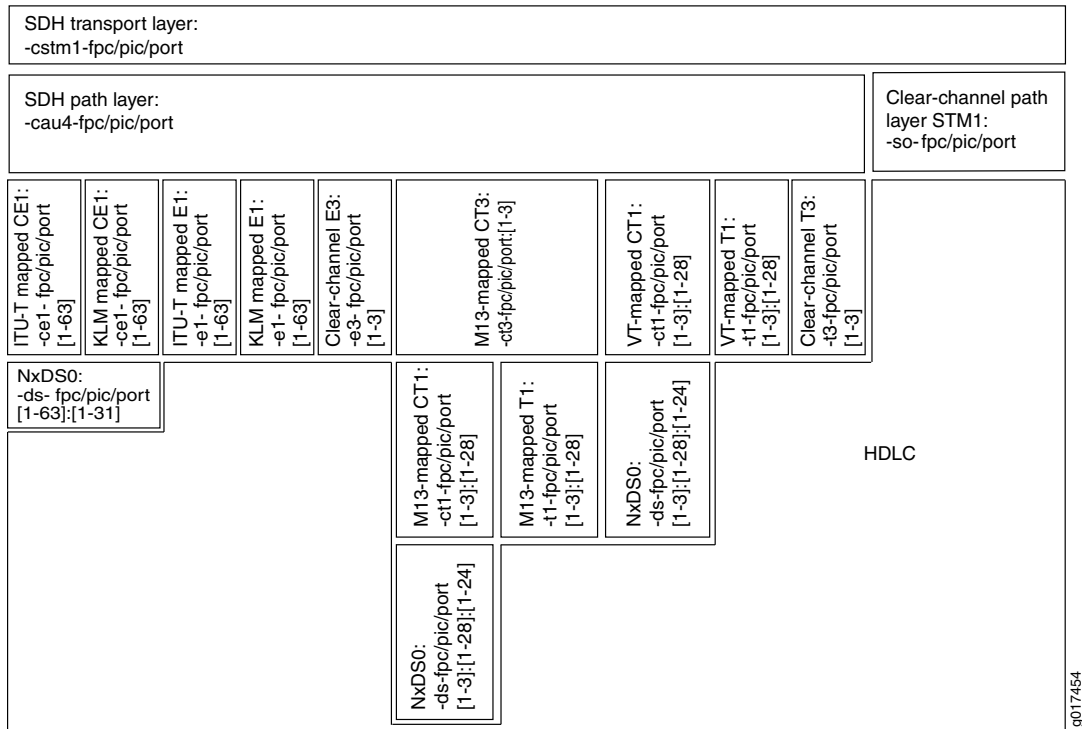


Figure 8: Channelized STM1 IQ PIC

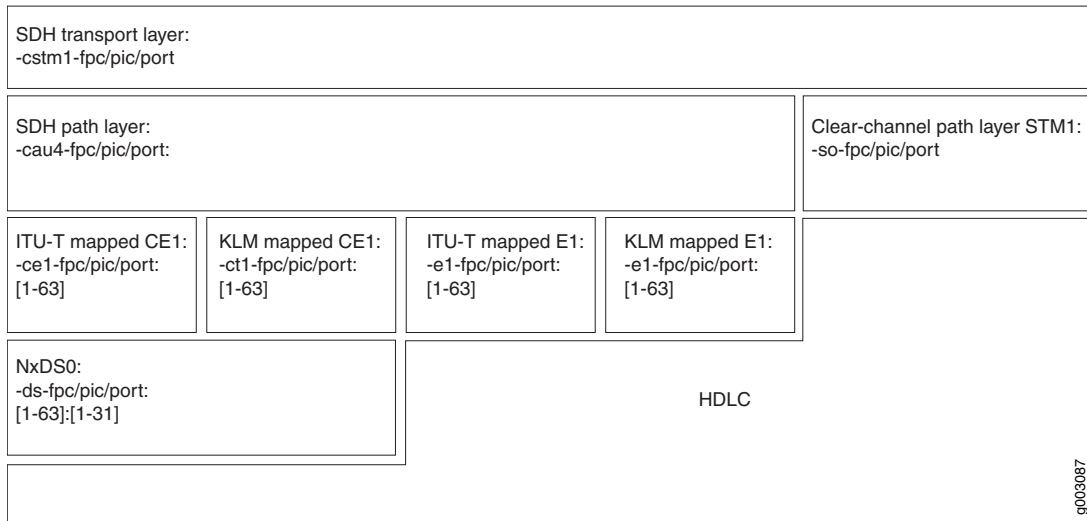


Figure 9: Channelized CDS3/E3 IQE PIC (in DS3 Mode)

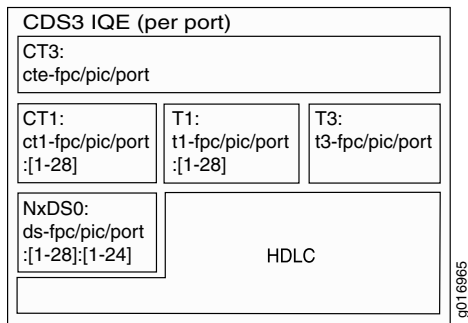


Figure 10: Channelized CDS3/E3 IQE PIC (in E3 Mode)

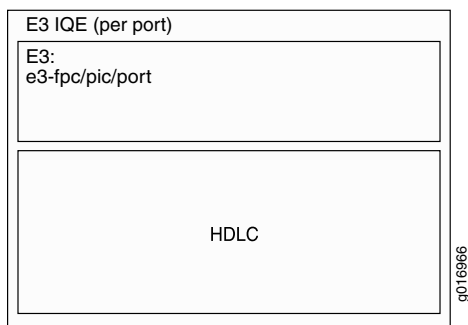


Figure 11: Channelized DS3 IQ PIC

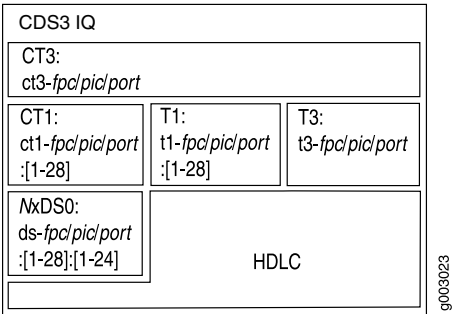


Figure 12: Channelized T1 IQ and IQE PIC

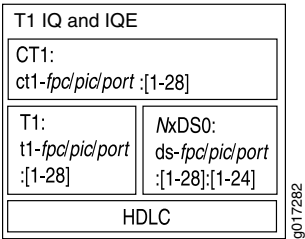


Figure 13: Channelized E1 IQ and IQE PIC

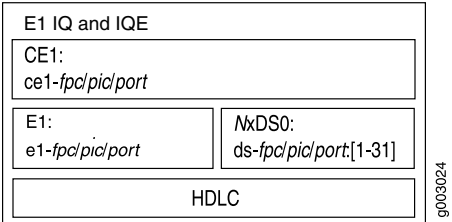


Table 10: Structural Differences: Channelized IQE PICs

PIC Type	Transport	Path	DS3	DS1/E1	E3
Channelized IQE PICs					
Channelized OC48/STM16 IQE (SONET Mode)	<i>coc48-fpc/pic/port</i>	<i>coc1-fpc/pic/port</i> :[1-48]	<i>ct3-fpc/pic/port</i> :[1-48]	<i>ct1-fpc/pic/port</i> :[1-48]:[1-28]	Not applicable.
		<i>so-fpc/pic/port</i>	<i>t3-fpc/pic/port</i> :[1-48]	<i>t1-fpc/pic/port</i> :[1-48]:[1-28]	
Channelized OC48/STM16 IQE (SDH Mode)	<i>cstm16-fpc/pic/port</i>	<i>cau4-fpc/pic/port</i> :[1-16]	<i>ct3-fpc/pic/port</i> :[1:16]:[1:3]	<i>ce1-fpc/pic/port</i> :[1-16]:[1-63]	<i>e3-fpc/pic/port</i> :[1-16]:[1-3]
		<i>so-fpc/pic/port</i>	<i>t3-fpc/pic/port</i> :[1:16]:[1:3]	<i>e1-fpc/pic/port</i> :[1-16]:[1-63]	
			<i>ct1-fpc/pic/port</i> :[1:16]:[1-84]	<i>ct1-fpc/pic/port</i> :[1:16]:[1-3]:[1-28]	
			<i>t1-fpc/pic/port</i> :[1:16]:[1-84]	<i>t1-fpc/pic/port</i> :[1:16]:[1-3]:[1-28]	
Channelized OC12 IQE (SONET Mode)	<i>coc12-fpc/pic/port</i>	<i>coc1-fpc/pic/port</i> :[1-12]	<i>ct3-fpc/pic/port</i> :[1-12]	<i>ct1-fpc/pic/port</i> :[1-12]:[1-28]	Not applicable.
		<i>so-fpc/pic/port</i>	<i>t3-fpc/pic/port</i> :[1-12]	<i>t1-fpc/pic/port</i> :[1-12]:[1-28]	
Channelized STM4 IQE (SDH Mode)	<i>cstm4-fpc/pic/port</i>	<i>cau4-fpc/pic/port</i> : [1-4]	<i>ct3-fpc/pic/port</i> :[1-4]:[1-3]	<i>ce1-fpc/pic/port</i> :[1-4]:[1-63]	<i>e3-fpc/pic/port</i> :[1-4]:[1-3]
		<i>so-fpc/pic/port</i>	<i>t3-fpc/pic/port</i> :[1-4]:[1-3]	<i>e1-fpc/pic/port</i> :[1-4]:[1-63]	
			<i>ct1-fpc/pic/port</i> :[1-4]:[1-84]	<i>ct1-fpc/pic/port</i> :[1-4]:[1-3]:[1-28]	
			<i>t1-fpc/pic/port</i> :[1-4]:[1-84]	<i>t1-fpc/pic/port</i> :[1-4]:[1-3]:[1-28]	
Channelized OC3 IQE (SONET)	<i>coc3-fpc/pic/port</i>	<i>coc1-fpc/pic/port</i> :[1-3]	<i>ct3-fpc/pic/port</i> :[1-3]	<i>ct1-fpc/pic/port</i> :[1-3]:[1-28]	Not applicable.
		<i>so-fpc/pic/port</i>	<i>t3-fpc/pic/port</i> :[1-3]	<i>t1-fpc/pic/port</i> :[1-3]:[1-28]	
Channelized STM1 IQE	<i>cstm1-fpc/pic/port</i>	<i>cau4-fpc/pic/port</i>	<i>ct3-fpc/pic/port</i> :[1-3]	<i>ce1-fpc/pic/port</i> :[1-63]	<i>e3-fpc/pic/port</i> :[1:3]]
		<i>so-fpc/pic/port</i>	<i>t3-fpc/pic/port</i> :[1-3]	<i>e1-fpc/pic/port</i> :[1-63]	
			<i>ct1-fpc/pic/port</i> :[1-84]	<i>ct1-fpc/pic/port</i> :[1-3]:[1-28]	
			<i>t1-fpc/pic/port</i> :[1-84]	<i>t1-fpc/pic/port</i> :[1-3]:[1-28]	

Table 10: Structural Differences: Channelized IQE PICs (*continued*)

PIC Type	Transport	Path	DS3	DS1/E1	E3
Channelized DS3 IQE	Not applicable.	Not applicable.	<i>ct3-fpc/pic/port</i> <i>t3-fpc/pic/port</i>	<i>ct1-fpc/pic/port</i> :[1-28] <i>t1-fpc/pic/port</i> :[1-28]	Not applicable.
Channelized E3 IQE	Not applicable.	Not applicable.	Not applicable.	Not applicable.	<i>e3-fpc/pic/port</i> :[1:4]
Channelized T1 IQE	Not applicable.	Not applicable.	Not applicable.	<i>ct1-fpc/pic/port</i> <i>t1-fpc/pic/port</i>	Not applicable.
Channelized E1 IQE	Not applicable.	Not applicable.	Not applicable.	<i>ce1-fpc/pic/port</i> <i>e1-fpc/pic/port</i>	Not applicable.

Table 11: Structural Differences: Channelized IQ PICs

PIC Type	Transport	Path	DS3	DS1/E1	E3
Channelized IQ PICs					
Channelized OC12/STM4 IQ (SONET Mode)	<i>coc12-fpc/pic/port</i>	<i>coc1-fpc/pic/port</i> :[1-12] <i>so-fpc/pic/port</i>	<i>ct3-fpc/pic/port</i> :[1-4]:[1-3] <i>t3-fpc/pic/port</i> :[1-4]:[1-3]	<i>ct1-fpc/pic/port</i> :[1-3]:[1-28] <i>t1-fpc/pic/port</i> :[1-4]:[1-3]:[1-28]	Not applicable.
Channelized OC12/STM4 IQ (SDH Mode)	<i>cstm4-fpc/pic/port</i>	<i>cau4-fpc/pic/port</i> : [1-4] <i>so-fpc/pic/port</i>	<i>ct3-fpc/pic/port</i> :[1-4]:[1-3] <i>t3-fpc/pic/port</i> :[1-4]:[1-3]	<i>ct1-fpc/pic/port</i> :[1-3]:[1-28] <i>t1-fpc/pic/port</i> :[1-4]:[1-3]:[1-28]	Not applicable.
Channelized OC3 IQ (SONET)	<i>coc3-fpc/pic/port</i>	<i>coc1-fpc/pic/port</i> :[1-3] <i>so-fpc/pic/port</i>	<i>ct3-fpc/pic/port</i> :[1-3] <i>t3-fpc/pic/port</i> :[1-3]	<i>ct1-fpc/pic/port</i> :[1-3]:[1-28] <i>t1-fpc/pic/port</i> :[1-3]:[1-28]	Not applicable.
Channelized STM1 IQ (SDH)	Not applicable.	<i>cau4-fpc/pic/port</i> <i>so-fpc/pic/port</i>	Not applicable.	<i>ce1-fpc/pic/port</i> :[1-63] <i>e1-fpc/pic/port</i> :[1-63]	Not applicable.
Channelized DS3 IQ	Not applicable.	Not applicable.	<i>ct3-fpc/pic/port</i> <i>t3-fpc/pic/port</i>	<i>ct1-fpc/pic/port</i> :[1-28] <i>t1-fpc/pic/port</i> :[1-28]	Not applicable.

Table 11: Structural Differences: Channelized IQ PICs (*continued*)

PIC Type	Transport	Path	DS3	DS1/E1	E3
Channelized E1 IQ	Not applicable.	Not applicable.	Not applicable.	<i>ce1-fpc/pic/port</i> <i>e1-fpc/pic/port</i>	Not applicable.

Table 12: Structural Differences: Channelized PICs

PIC Type	Transport	Path	DS3	DS1/E1	E3
Channelized PICs					
Channelized OC12	<i>t3-fpc/pic/port</i> :0	<i>t3-fpc/pic/port</i> :[0-11]	<i>t3-fpc/pic/port</i> :[0-11]	Not applicable.	Not applicable.
Channelized STM1	<i>e1-fpc/pic/port</i> :0	<i>e1-fpc/pic/port</i> :0	Not applicable.	<i>e1-fpc/pic/port</i> :[0-63]	Not applicable.
Channelized T3 and Multichannel T3	Not applicable.	Not applicable.	<i>t1-fpc/pic/port</i> :0	<i>t1-fpc/pic/port</i> :[0-27]	Not applicable.
Channelized E1	Not applicable.	Not applicable.	Not applicable.	<i>e1-fpc/pic/port</i>  <i>ds-fpc/pic/port</i> :0	Not applicable.

**Related Documentation**

- *Overview of Channelized IQ Interfaces*

## PART 2

# Configuration

- [Network Interfaces Configuration Statements and Hierarchy on page 27](#)
- [Statement Summary on page 49](#)





## CHAPTER 2

# Network Interfaces Configuration Statements and Hierarchy

- [\[edit interfaces\] Hierarchy Level on page 27](#)
- [\[edit logical-systems\] Hierarchy Level on page 43](#)

### [\[edit interfaces\] Hierarchy Level](#)

---

The statements at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level can also be configured at the `[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number]` hierarchy level.



**NOTE:** The *accounting-profile* statement is an exception to this rule. The *accounting-profile* statement can be configured at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level, but it cannot be configured at the `[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number]` hierarchy level.

```
interfaces {
  traceoptions {
    file filename <files number> <match regular-expression> <size size> <world-readable |
      no-world-readable> ;
    flag flag <disable>;
  }
  interface-name {
    account-layer2-overhead (Interface Level) {
      value;
      egress bytes;
      ingress bytes;
    }
    accounting-profile name;
    aggregated-ether-options {
      (flow-control | no-flow-control);
      lacp {
        (active | passive);
        link-protection {
          disable;
          (revertive | non-revertive);
        }
      }
    }
  }
}
```

```

    periodic interval;
    system-priority priority;
}
link-protection;
link-speed speed;
(loopback | no-loopback);
mc-ae{
    chassis-id chassis-id;
    mc-ae-id mc-ae-id;
    mode (active-active | active-standby);
    redundancy-group group-id;
    status-control (active | standby);
}
minimum-links number;
source-address-filter {
    mac-address;
}
(source-filtering | no-source-filtering);
}
shared-scheduler;
aggregated-sonet-options {
    link-speed speed | mixed;
    minimum-links number;
}
atm-options {
    cell-bundle-size cells;
    ilmi;
    linear-red-profiles profile-name {
        high-plp-max-threshold percent;
        low-plp-max-threshold percent;
        queue-depth cells high-plp-threshold percent low-plp-threshold percent;
    }
}
mpls {
    pop-all-labels {
        required-depth number;
    }
}
pic-type (atm1 | atm2);
plp-to-clp;
promiscuous-mode {
    vpi vpi-identifier;
}
scheduler-maps map-name {
    forwarding-class class-name {
        epd-threshold cells plp1 cells;
        linear-red-profile profile-name;
        priority (high | low);
        transmit-weight (cells number | percent number);
    }
    vc-cos-mode (alternate | strict);
}
use-null-cw;
vpi vpi-identifier {
    maximum-vcs maximum-vcs;
    oam-liveness {
        down-count cells;
    }
}

```

```

        up-count cells;
    }
    oam-period (seconds | disable);
    shaping {
        (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate
         burst length);
        queue-length number;
    }
}
}
clocking clock-source;
data-input (system | interface interface-name);
dce;
serial-options {
    clock-rate rate;
    clocking-mode (dce | internal | loop);
    control-polarity (negative | positive);
    cts-polarity (negative | positive);
    dcd-polarity (negative | positive);
    dce-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
        indication (ignore | normal | require);
        rts (assert | de-assert | normal);
        tm (ignore | normal | require);
    }
    dsr-polarity (negative | positive);
    dte-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
        indication (ignore | normal | require);
        rts (assert | de-assert | normal);
        tm (ignore | normal | require);
    }
    dtr-circuit (balanced | unbalanced);
    dtr-polarity (negative | positive);
    encoding (nrz | nrzi);
    indication-polarity (negative | positive);
    line-protocol protocol;
    loopback mode;
    rts-polarity (negative | positive);
    tm-polarity (negative | positive);
    transmit-clock invert;
}
description text;
dialer-options {
    pool pool-name <priority priority>;
}

```

```
disable;
ds0-options {
    bert-algorithm algorithm;
    bert-error-rate rate;
    bert-period seconds;
    byte-encoding (nx56 | nx64);
    fcs (16 | 32);
    idle-cycle-flag (flags | ones);
    invert-data;
    loopback payload;
    start-end-flag (filler | shared);
}
e1-options {
    bert-error-rate rate;
    bert-period seconds;
    fcs (16 | 32);
    framing (g704 | g704-no-crc4 | unframed);
    idle-cycle-flag (flags | ones);
    invert-data;
    loopback (local | remote);
    start-end-flag (filler | shared);
    timeslots time-slot-range;
}
e3-options {
    atm-encapsulation (direct | plcp);
    bert-algorithm algorithm;
    bert-error-rate rate;
    bert-period seconds;
    framing feet;
    compatibility-mode (digital-link | kentrox | larscom) <subrate value>;
    fcs (16 | 32);
    framing (g.751 | g.832);
    idle-cycle-flag (filler | shared);
    invert-data;
    loopback (local | remote);
    (payload-scrambler | no-payload-scrambler);
    start-end-flag (filler | shared);
    (unframed | no-unframed);
}
encapsulation type;
es-options {
    backup-interface es-fpc/pic/port;
}
fastether-options {
    802.3ad aex;
    (flow-control | no-flow-control);
    ignore-l3-incompletes;
    ingress-rate-limit rate;
    (loopback | no-loopback);
    mpls {
        pop-all-labels {
            required-depth number;
        }
    }
}
source-address-filter {
    mac-address;
```

---

31

```

frame-length (32 | 64 | 128 | 256);
frame-synchronization {
    alpha number;
    beta number;
    gamma number;
}
minimum-links number;
symmetry (symmetrical-config-and-operation |
    symmetrical-config-asymmetrical-operation);
test-procedure {
    ima-test-start;
    ima-test-stop;
    interface name;
    pattern number;
    period number;
}
transmit-clock (common | independent);
version (1.0 | 1.1);
}
ima-link-options group-id group-id;
interface-set interface-set-name {
    interface ethernet-interface-name {
        (unit unit-number | vlan-tags-outer vlan-tag);
    }
    interface interface-name {
        (unit unit-number);
    }
}
}
isdn-options {
    bchannel-allocation (ascending | descending);
    calling-number number;
    pool pool-name <priority priority>;
    spid1 spid-string;
    spid2 spid-string;
    static-tei-val value;
    switch-type (att5e | etsi | nil | ntdms100 | ntt);
    t310 seconds;
    tei-option (first-call | power-up);
}
keepalives <down-count number> <interval seconds> <up-count number>;
link-mode mode;
lmi {
    lmi-type (ansi | itu | c-lmi);
    n391dte number;
    n392dce number;
    n392dte number;
    n393dce number;
    n393dte number;
    t391dte seconds;
    t392dce seconds;
}
lsq-failure-options {
    no-termination-request;
    [ trigger-link-failure interface-name ];
}
mac mac-address;

```

```

mlfr-uni-nni-bundle-options {
  acknowledge-retries number;
  acknowledge-timer milliseconds;
  action-red-differential-delay (disable-tx | remove-link);
  drop-timeout milliseconds;
  fragment-threshold bytes;
  cisco-interoperability send-lip-remove-link-for-link-reject;
  hello-timer milliseconds;
  link-layer-overhead percent;
  lmi-type (ansi | itu | c-lmi);
  minimum-links number;
  mrru bytes;
  n391 number;
  n392 number;
  n393 number;
  red-differential-delay milliseconds;
  t391 seconds;
  t392 seconds;
  yellow-differential-delay milliseconds;
}
modem-options {
  dialin (console | routable);
  init-command-string initialization-command-string;
}
mtu bytes;
multi-chassis-protection {
  peer a.b.c.d {
    interface interface-name;
  }
}
multiservice-options {
  (core-dump | no-core-dump);
  (syslog | no-syslog);
}
native-vlan-id number;
no-gratuitous-arp-request;
no-keepalives;
no-partition {
  interface-type type;
}
no-vpivci-swapping;
optics-options {
  alarm low-light-alarm {
    (link-down | syslog);
  }
  tx-power dbm;
  warning low-light-warning {
    (link-down | syslog);
  }
  wavelength nm;
}
otn-options {
  bytes transmit-payload-type value;
  fec (efec | gfec | gfec-sdfec | none);
  (is-ma | no-is-ma);
  (laser-enable | no-laser-enable);
}

```

```

(line-loopback | no-line-loopback);
(local-loopback | no-local-loopback);
(odu-ttim-action-enable | no-odu-ttim-action-enable);
(otu-ttim-action-enable | no-otu-ttim-action-enable);
odu-delay-management {
    (bypass | no-bypass);
    (monitor-end-point | no-monitor-end-point);
    (number-of-frames | no-number-of-frames);
    (start-measurement | no-start-measurement);
}
(prbs | no-prbs);
preemptive-fast-reroute {
    (backward-frr-enable | no-backward-frr-enable);
    (signal-degrade-monitor-enable | no-signal-degrade-monitor-enable);
}
rate {
    (fixed-stuff-bytes | no-fixed-stuff-bytes);
    otu4;
    (pass-through | no-pass-through);
}
signal-degrade {
    ber-threshold-clear value;
    ber-threshold-signal-degrade value;
    interval value;
}
trigger trigger-identifier;
tti tti-identifier;
}
partition partition-number oc-slice oc-slice-range interface-type type;
timeslots time-slot-range;
passive-monitor-mode;
per-unit-scheduler;
ppp-options {
    chap {
        access-profile name;
        default-chap-secret name;
        local-name name;
        passive;
    }
    compression {
        acfc;
        pfc;
    }
    dynamic-profile profile-name;
    no-termination-request;
    pap {
        access-profile name;
        local-name name;
        local-password password;
        compression;
    }
}
psn-vcip psn-vci-identifier;
psn-vpip psn-vpi-identifier;
receive-bucket {
    overflow (discard | tag);
}

```



```

    rate percentage;
    threshold bytes;
}
redundancy-options {
    priority sp-fpc/pic/port;
    secondary sp-fpc/pic/port;
    hot-standby;
}
satop-options {
    payload-size n;
}
schedulers number;
serial-options {
    clock-rate rate;
    clocking-mode (dce | internal | loop);
    control-polarity (negative | positive);
    cts-polarity (negative | positive);
    dcd-polarity (negative | positive);
    dce-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
        indication (ignore | normal | require);
        rts (assert | de-assert | normal);
        tm (ignore | normal | require);
    }
    dsr-polarity (negative | positive);
    dte-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
        indication (ignore | normal | require);
        rts (assert | de-assert | normal);
        tm (ignore | normal | require);
    }
    dtr-circuit (balanced | unbalanced);
    dtr-polarity (negative | positive);
    encoding (nrz | nrzi);
    indication-polarity (negative | positive);
    line-protocol protocol;
    loopback mode;
    rts-polarity (negative | positive);
    tm-polarity (negative | positive);
    transmit-clock invert;
}
services-options {
    inactivity-timeout seconds;
    open-timeout seconds;
    session-limit {
        maximum number;
    }
}

```

```

        rate new-sessions-per-second;
    }
    syslog {
    host hostname {
        facility-override facility-name;
        log-prefix prefix-number;
        services priority-level;
    }
    }
}
shdsl-options {
    annex (annex-a | annex-b);
    line-rate line-rate;
    loopback (local | remote);
    snr-margin {
        current margin;
        snext margin;
    }
}
sonet-options {
    aggregate asx;
    aps {
        advertise-interval milliseconds;
        annex-b;
        authentication-key key;
        fast-aps-switch;
        force;
        hold-time milliseconds;
        lockout;
        neighbor address;
        paired-group group-name;
        preserve-interface;
        protect-circuit group-name;
        request;
        revert-time seconds;
        switching-mode (bidirectional | unidirectional);
        working-circuit group-name;
    }
}
bytes {
    c2 value;
    e1-quiet value;
    f1 value;
    f2 value;
    s1 value;
    z3 value;
    z4 value;
}
fcs (16 | 32);
loopback (local | remote);
mpls {
    pop-all-labels {
        required-depth number;
    }
}
}
path-trace trace-string;
(payload-scrambler | no-payload-scrambler);

```

```

    rfc-2615;
    trigger {
        defect ignore;
        hold-time up milliseconds down milliseconds;
    }
    vtmapping (itu-t | klm);
    (z0-increment | no-z0-increment);
}
speed (10m | 100m | 1g | oc3 | oc12 | oc48);
stacked-vlan-tagging;
switch-options {
    switch-port port-number {
        (auto-negotiation | no-auto-negotiation);
        speed (10m | 100m | 1g);
        link-mode (full-duplex | half-duplex);
    }
}
t1-options {
    bert-algorithm algorithm;
    bert-error-rate rate;
    bert-period seconds;
    buildout value;
    byte-encoding (nx56 | nx64);
    crc-major-alarm-threshold (1e-3 | 5e-4 | 1e-4 | 5e-5 | 1e-5);
    crc-minor-alarm-threshold (1e-3 | 5e-4 | 1e-4 | 5e-5 | 1e-5 | 5e-6 | 1e-6);
    fcs (16 | 32);
    framing (esf | sf);
    idle-cycle-flag (flags | ones);
    invert-data;
    line-encoding (ami | b8zs);
    loopback (local | payload | remote);
    remote-loopback-respond;
    start-end-flag (filler | shared);
    timeslots time-slot-range;
}
t3-options {
    atm-encapsulation (direct | plcp);
    bert-algorithm algorithm;
    bert-error-rate rate;
    bert-period seconds;
    buildout feet;
    (cbit-parity | no-cbit-parity);
    compatibility-mode (adtran | digital-link | kentrox | larscom | verilink) <subrate
        value>;
    fcs (16 | 32);
    (feac-loop-respond | no-feac-loop-respond);
    idle-cycle-flag value;
    (long-buildout | no-long-buildout);
    (loop-timing | no-loop-timing);
    loopback (local | payload | remote);
    (mac | no-mac);
    (payload-scrambler | no-payload-scrambler);
    start-end-flag (filler | shared);
}
traceoptions {
    flag flag <flag-modifier> <disable>;
}

```

```

}
transmit-bucket {
    overflow discard;
    rate percentage;
    threshold bytes;
}
(traps | no-traps);
unidirectional;
vlan-tagging;
vlan-vci-tagging;
unit logical-unit-number {
    accept-source-mac {
        mac-address mac-address {
            policer {
                input cos-policer-name;
                output cos-policer-name;
            }
        }
    }
}
account-layer2-overhead {
    value;
    egress bytes;
    ingress bytes;
}
accounting-profile name;
advisory-options {
    downstream-rate rate;
    upstream-rate rate;
}
allow-any-vci;
atm-scheduler-map (map-name | default);
backup-options {
    interface interface-name;
}
bandwidth rate;
cell-bundle-size cells;
clear-dont-fragment-bit;
compression {
    rtp {
        f-max-period number;
        maximum-contexts number <force>;
        queues [ queue-numbers ];
        port {
            minimum port-number;
            maximum port-number;
        }
    }
}
compression-device interface-name;
copy-tos-to-outer-ip-header;
demux-destination family;
demux-source family;
demux-options {
    underlying-interface interface-name;
}
description text;

```

```

interface {
    l2tp-interface-id name;
    (dedicated | shared);
}
dialer-options {
    activation-delay seconds;
    callback;
    callback-wait-period time;
    deactivation-delay seconds;
    dial-string [ dial-string-numbers ];
    idle-timeout seconds;
    incoming-map {
        caller (caller-id | accept-all);
        initial-route-check seconds;
        load-interval seconds;
        load-threshold percent;
        pool pool-name;
        redial-delay time;
        watch-list {
            [ routes ];
        }
    }
}
disable;
disable-mlppp-inner-ppp-pfc;
dlci dlci-identifier;
drop-timeout milliseconds;
dynamic-call-admission-control {
    activation-priority priority;
    bearer-bandwidth-limit kilobits-per-second;
}
encapsulation type;
epd-threshold cells plp1 cells;
fragment-threshold bytes;
inner-vlan-id-range start start-id end end-id;
input-vlan-map {
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-push | swap-swap);
    inner-tag-protocol-id tpid;
    inner-vlan-id number;
    tag-protocol-id tpid;
    vlan-id number;
}
interleave-fragments;
inverse-arp;
layer2-policer {
    input-policer policer-name;
    input-three-color policer-name;
    output-policer policer-name;
    output-three-color policer-name;
}
link-layer-overhead percent;
minimum-links number;
mrru bytes;
multicast-dlci dlci-identifier;
multicast-vci vpi-identifier.vci-identifier;
multilink-max-classes number;

```

```

multipoint;
oam-liveness {
    down-count cells;
    up-count cells;
}
oam-period (seconds | disable);
output-vlan-map {
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-push | swap-swap);
    inner-tag-protocol-id tpid;
    inner-vlan-id number;
    tag-protocol-id tpid;
    vlan-id number;
}
passive-monitor-mode;
peer-unit unit-number;
plp-to-clp;
point-to-point;
ppp-options {
    chap {
        access-profile name;
        default-chap-secret name;
        local-name name;
        passive;
    }
    compression {
        acfc;
        pfc;
        pap;
        default-pap-password password;
        local-name name;
        local-password password;
        passive;
    }
    dynamic-profile profile-name;
    lcp-max-conf-req number;
    lcp-restart-timer milliseconds;
    loopback-clear-timer seconds;
    ncp-max-conf-req number;
    ncp-restart-timer milliseconds;
}
pppoe-options {
    access-concentrator name;
    auto-reconnect seconds;
    (client | server);
    service-name name;
    underlying-interface interface-name;
}
proxy-arp;
service-domain (inside | outside);
shaping {
    (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate
    burst length);
    queue-length number;
}
short-sequence;
transmit-weight number;

```

```

(traps | no-traps);
trunk-bandwidth rate;
trunk-id number;
tunnel {
    backup-destination address;
    destination address;
    key number;
    routing-instance {
        destination routing-instance-name;
    }
    source source-address;
    ttl number;
}
vci vpi-identifier.vci-identifier;
vci-range start start-vci end end-vci;
vpi vpi-identifier;
vlan-id number;
vlan-id-list [vlan-id vlan-id-vlan-id];
vlan-id-range number-number;
vlan-tags inner tpid.vlan-id outer tpid.vlan-id;
vlan-tags-outer tpid.vlan-id inner-list [vlan-id vlan-id-vlan-id];
family family {
    accounting {
        destination-class-usage;
        source-class-usage {
            direction;
        }
    }
}
access-concentrator name;
address address {
    destination address;
}
bundle ml-fpc/pic/port | ls-fpc/pic/port);
duplicate-protection;
dynamic-profile profile-name;
filter {
    group filter-group-number;
    input filter-name;
    input-list {
        [filter-names ];
        output filter-name;
    }
    output-list {
        [filter-names ];
    }
}
ipsec-sa sa-name;
keep-address-and-control;
max-sessions number;
max-sessions-vs-a-ignore;
mtu bytes;
multicast-only;
negotiate-address;
no-redirects;
policer {
    arp policer-template-name;

```

```

    input policer-template-name;
    output policer-template-name;
}
primary;
proxy inet-address address;
receive-options-packets;
receive-ttl-exceeded;
remote (inet-address address | mac-address address);
rpf-check {
    fail-filter filter-name;
    mode loose;
}
sampling {
    direction;
}
service {
    input {
        service-set service-set-name <service-filter filter-name>;
        post-service-filter filter-name;
    }
    output {
        service-set service-set-names <service-filter filter-name>;
    }
}
service-name-table table-name;
short-cycle-protection <lockout-time-min minimum-seconds lockout-time-max
    maximum-seconds>;
targeted-broadcast {
    forward-and-send-to-re;
    forward-only;
}
(translate-discard-eligible | no-translate-discard-eligible);
(translate-fecn-and-becn | no-translate-fecn-and-becn);
translate-plp-control-word-de;
unnumbered-address interface-name <destination address destination-profile
    profile-name | preferred-source-address address>;
address address {
    arp ip-address (mac | multicast-mac) mac-address <publish>;
    broadcast address;
    destination address;
    destination-profile name;
    eui-64;
    multipoint-destination address (dlci dlci-identifier | vci vci-identifier);
    multipoint-destination address {
        epd-threshold cells plp1 cells;
        inverse-arp;
        oam-liveness {
            up-count cells;
            down-count cells;
        }
        oam-period (seconds | disable);
        shaping {
            (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained
                rate burst length);
            queue-length number;
        }
    }
}

```



```

        vci vpi-identifier.vci-identifier;
    }
    preferred;
    primary;
    (vrrp-group | vrrp-inet6-group) group-number {
        (accept-data | no-accept-data);
        advertise-interval seconds;
        authentication-type authentication;
        authentication-key key;
        fast-interval milliseconds;
        (preempt | no-preempt) {
            hold-time seconds;
        }
        priority-number number;
        track {
            priority-cost seconds;
            priority-hold-time interface-name {
                bandwidth-threshold bits-per-second {
                    priority;
                }
            }
            interface priority;
        }
        route ip-address/mask routing-instance instance-name priority-cost cost;
    }
    virtual-address [ addresses ];
}
}
}
}
}
}
}

```

- Related Documentation**
- [Junos OS Hierarchy and RFC Reference](#)
  - [Ethernet Interfaces](#)
  - [Junos OS Network Interfaces Library for Routing Devices](#)

## [\[edit logical-systems\] Hierarchy Level](#)

The following lists the statements that can be configured at the **[edit logical-systems]** hierarchy level that are also documented in this manual. For more information about logical systems, see the *Logical Systems Feature Guide for Routing Devices*.

```

logical-systems logical-system-name {
    interfaces interface-name {
        unit logical-unit-number {
            accept-source-mac {
                mac-address mac-address {
                    policer {
                        input cos-policer-name;
                        output cos-policer-name;
                    }
                }
            }
        }
    }
}

```

```
allow-any-vci;
atm-scheduler-map (map-name | default);
bandwidth rate;
backup-options {
    interface interface-name;
}
cell-bundle-size cells;
clear-dont-fragment-bit;
compression {
    rtp {
        f-max-period number;
        port {
            minimum port-number;
            maximum port-number;
        }
        queues [ queue-numbers ];
    }
}
compression-device interface-name;
description text;
interface {
    l2tp-interface-id name;
    (dedicated | shared);
}
dialer-options {
    activation-delay seconds;
    deactivation-delay seconds;
    dial-string [ dial-string-numbers ];
    idle-timeout seconds;
    initial-route-check seconds;
    load-threshold number;
    pool pool;
    remote-name remote-callers;
    watch-list {
        [ routes ];
    }
}
disable;
dlci dlci-identifier;
drop-timeout milliseconds;
dynamic-call-admission-control {
    activation-priority priority;
    bearer-bandwidth-limit kilobits-per-second;
}
encapsulation type;
epd-threshold cells plp1 cells;
fragment-threshold bytes;
input-vlan-map {
    inner-tag-protocol-id;
    inner-vlan-id;
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-push | swap-swap);
    tag-protocol-id tpid;
    vlan-id number;
}
interleave-fragments;
inverse-arp;
```

```

layer2-policer {
    input-policer policer-name;
    input-three-color policer-name;
    output-policer policer-name;
    output-three-color policer-name;
}
link-layer-overhead percent;
minimum-links number;
mrru bytes;
multicast-dlci dlci-identifier;
multicast-vci vpi-identifier.vci-identifier;
multilink-max-classes number;
multipoint;
oam-liveness {
    up-count cells;
    down-count cells;
}
oam-period (seconds | disable);
output-vlan-map {
    inner-tag-protocol-id;
    inner-vlan-id;
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-swap);
    tag-protocol-id tpid;
    vlan-id number;
}
passive-monitor-mode;
peer-unit unit-number;
plp-to-clp;
point-to-point;
ppp-options {
    chap {
        access-profile name;
        default-chap-secret name;
        local-name name;
        passive;
    }
    compression {
        acfc;
        pfc;
    }
}
dynamic-profile profile-name;
pap {
    default-pap-password password;
    local-name name;
    local-password password;
    passive;
}
}
proxy-arp;
service-domain (inside | outside);
shaping {
    (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate
    burst length);
    queue-length number;
}

```

```
short-sequence;
transmit-weight number;
(traps | no-traps);
trunk-bandwidth rate;
trunk-id number;
tunnel {
    backup-destination address;
    destination address;
    key number;
    routing-instance {
        destination routing-instance-name;
    }
    source source-address;
    ttl number;
}
vci vpi-identifier.vci-identifier;
vlan-id number;
vlan-id-list [vlan-id vlan-id–vlan-id]
vlan-tags inner tpid.vlan-id outer tpid.vlan-id;
vlan-tags outer tpid.vlan-id inner-list [vlan-id vlan-id–vlan-id]
vpi vpi-identifier;
family family {
    accounting {
        destination-class-usage;
        source-class-usage {
            direction;
        }
    }
}
bundle interface-name;
filter {
    group filter-group-number;
    input filter-name;
    input-list {
        [filter-names ];
    }
    output filter-name;
    output-list {
        [filter-names ];
    }
}
ipsec-sa sa-name;
keep-address-and-control;
mtu bytes;
multicast-only;
no-redirects;
policer {
    arp policer-template-name;
    input policer-template-name;
    output policer-template-name;
}
primary;
proxy inet-address address;
receive-options-packets;
receive-ttl-exceeded;
remote (inet-address address | mac-address address);
rpf-check <fail-filter filter-name> {
```

```

    <mode loose>;
}
sampling {
    direction;
}
service {
    input {
        service-set service-set-name <service-filter filter-name>;
        post-service-filter filter-name;
    }
    output {
        service-set service-set-name <service-filter filter-name>;
    }
}
(translate-discard-eligible | no-translate-discard-eligible);
(translate-fecn-and-becn | no-translate-fecn-and-becn);
unnumbered-address interface-name destination address destination-profile
    profile-name;
address address {
    arp ip-address (mac | multicast-mac) mac-address <publish>;
    broadcast address;
    destination address;
    destination-profile name;
    eui-64;
    multipoint-destination address (dlci dlci-identifier | vci vci-identifier);
    multipoint-destination address {
        epd-threshold cells plp1 cells;
        inverse-arp;
        oam-liveness {
            up-count cells;
            down-count cells;
        }
        oam-period (seconds | disable);
        shaping {
            (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained
                rate burst length);
            queue-length number;
        }
        vci vpi-identifier.vci-identifier;
    }
    preferred;
    primary;
    (vrrp-group | vrrp-inet6-group) group-number {
        (accept-data | no-accept-data);
        advertise-interval seconds;
        authentication-type authentication;
        authentication-key key;
        fast-interval milliseconds;
        (preempt | no-preempt) {
            hold-time seconds;
        }
        priority-number number;
        track {
            priority-cost seconds;
            priority-hold-time interface-name {
                interface priority;
            }
        }
    }
}

```

```
        bandwidth-threshold bits-per-second {  
            priority;  
        }  
    }  
    route ip-address/mask routing-instance instance-name priority-cost cost;  
    }  
    }  
    virtual-address [ addresses ];  
    }  
    }  
    }  
}
```

**Related  
Documentation**

- *Junos OS Hierarchy and RFC Reference*
- *Ethernet Interfaces*
- *Junos OS Network Interfaces Library for Routing Devices*

## CHAPTER 3

# Statement Summary

### clocking

---

<b>Syntax</b>	clocking (external [interface <i>interface-name</i> ]   internal);
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. <b>interface</b> option added in Junos OS Release 8.2. Statement introduced in Junos OS Release 12.2 for the ACX Series Universal Access Routers.
<b>Description</b>	For interfaces that can use various clock sources, configure the source of the transmit clock on each interface.
<b>Options</b>	<b>external</b> —The clock source is provided by the data communication equipment (DCE).  <b>interface <i>interface-name</i></b> —For interfaces operating on T1/E1 PIMs for J Series Services Routers only, configure clocking for the drop-and insert feature. When configuring this feature, both ports must use the same clock source: either the router's internal clock or an external clock on one of the interfaces. If an external clock source is required, one interface must specify clocking external and the other must specify the same clock.  <b>internal</b> —Use the internal stratum 3 clock as the reference clock. <b>Default:</b> internal
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring the Clock Source</i></li><li>• <i>Configuring the Clock Source on SONET/SDH Interfaces</i></li><li>• <a href="#">Clock Sources on Channelized Interfaces on page 8</a></li><li>• <i>Configuring a Channelized T1/E1 Interface to Drop and Insert Time Slots</i></li><li>• <i>loop-timing</i></li></ul>


## dlci

---

<b>Syntax</b>	<code>dlci <i>dlci-identifier</i>;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	<p>For Frame Relay and Multilink Frame Relay (MLFR) user-to-network interface (UNI) network-to-network interface (NNI) encapsulation only, and for link services, voice services and point-to-point interfaces only, configure the data-link connection identifier (DLCI) for a permanent virtual circuit (PVC) or an switched virtual circuit (SVC).</p> <p>To configure a DLCI for a point-to-multipoint interface, use the <b>multipoint-destination</b> statement to specify the DLCI.</p>
<b>Options</b>	<p><b><i>dlci-identifier</i></b>—Data-link connection identifier.</p> <p><b>Range:</b> 16 through 1022.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Data-Link Connection Identifiers on Channelized Interfaces on page 6</a></li><li>• <i>Configuring Frame Relay DLCIs</i></li><li>• <i>Junos OS Services Interfaces Library for Routing Devices</i></li><li>• <i>encapsulation (Logical Interface)</i></li><li>• <i>multicast-dlci</i></li><li>• <i>multipoint-destination</i></li></ul>



## fast-aps-switch

<b>Syntax</b>	fast-aps-switch;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> sonet-options aps]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1.
<b>Description</b>	(M320 routers with Channelized OC3/STM1 Circuit Emulation PIC with SFP only and EX Series switches) Reduce the Automatic Protection Switching (APS) switchover time in Layer 2 circuits.
	<div>  <p>NOTE:</p> <ul style="list-style-type: none"> <li>Configuring this statement reduces the APS switchover time only when the Layer 2 circuit encapsulation type for the interface receiving traffic from a Layer 2 circuit neighbor is SAToP.</li> <li>When the fast-aps-switch statement is configured in revertive APS mode, you must configure an appropriate value for revert time to achieve reduction in APS switchover time.</li> <li>To prevent the logical interfaces in the data path from being shut down, configure appropriate hold-time values on all the interfaces in the data path that support TDM.</li> <li>The fast-aps-switch statement cannot be configured when the APS annex-b option is configured.</li> <li>The interfaces that have the fast-aps-switch statement configured cannot be used in virtual private LAN service (VPLS) environments.</li> </ul> </div>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><i>Reducing APS Switchover Time in Layer 2 Circuits</i></li> </ul>

## no-termination-request

---

<b>Syntax</b>	no-termination-request;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ppp-options], [edit interfaces lsq- <i>fpc/pic/port</i> lsq-failure-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.4. Support at the [edit interfaces <i>interface-name</i> ppp-options] hierarchy level added in Junos OS Release 8.3.
<b>Description</b>	For LSQ PICs or link PICs in redundant LSQ configurations, you can inhibit the router from sending PPP termination-request messages to the remote host if the PIC fails.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring Link PIC Failover on Channelized OC3 IQ and IQE Interfaces</i></li><li>• <i>Configuring Link PIC Failover on Channelized OC12/STM4 IQ and IQE Interfaces</i></li><li>• <i>Configuring Link PIC Failover on Channelized STM1 Interfaces</i></li><li>• <i>Junos OS Services Interfaces Library for Routing Devices</i></li></ul>

## PART 3

# Administration

- [Monitoring Commands on page 55](#)
- [Command Summaries on page 145](#)



## CHAPTER 4

# Monitoring Commands

## show interfaces (Channelized DS3-to-DS0)

<b>Syntax</b>	<pre>show interfaces ds-fpc/pic/port:t1channel:ds0channel &lt;brief   detail   extensive&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index snmp-index&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized DS3-to-DS0 interface.
<b>Options</b>	<p><b>ds-fpc/pic/port:t1channel:ds0channel</b>—Display standard information about the specified channelized DS3-to-DS0 interface.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output interface.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (Channelized DS3-to-DS0) on page 64</a>
<b>Output Fields</b>	<a href="#">Table 13 on page 56</a> lists the output fields for the <b>show interfaces</b> (all Channelized DS3 interfaces) command. Output fields are listed in the approximate order in which they appear.

Table 13: Channelized DS3 show interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the "Enabled Field" section under <i>Common Output Fields Description</i> .	All levels
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	MTU size on the physical interface.	All levels
<b>Clocking</b>	Reference clock source. It can be <b>Internal</b> or <b>External</b> .	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Whether loopback is enabled and the type of loopback ( <b>local</b> or <b>remote</b> ).	All levels
<b>FCS</b>	Frame check sequence on the interface (either <b>16</b> or <b>32</b> ). The default is <b>16</b> bits.	All levels
<b>Mode</b>	Whether C-bit parity mode or M13 mode is enabled.	All levels
<b>Framing</b>	Physical layer framing format used on the link. It can be <b>ESF</b> or <b>SF</b> . The default is <b>ESF</b> .	All levels
<b>Parent</b>	(Channelized IQ interfaces only) Name and interface index of the interface to which a particular child interface belongs. <b>None</b> indicates that this interface is the top level.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the "Link Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Keepalive settings</b>	(PPP and HDLC) Configured settings for keepalives. <ul style="list-style-type: none"> <li>• <b>interval seconds</b>—The time in seconds between successive keepalive requests. The range is <b>10</b> seconds through <b>32,767</b> seconds, with a default of <b>10</b> seconds.</li> <li>• <b>down-count number</b>—The number of keepalive packets that a destination must fail to receive before the network takes a link down. The range is <b>1</b> through <b>255</b>, with a default of <b>3</b>.</li> <li>• <b>up-count number</b>—The number of keepalive packets a destination must receive to change a link's status from down to up. The range is <b>1</b> through <b>255</b>, with a default of <b>1</b>.</li> </ul>	<b>detail extensive none</b>

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
Keepalive statistics	<p>(PPP and HDLC) Information about keepalive packets.</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of keepalive packets received by PPP. <ul style="list-style-type: none"> <li><b>(last seen 00:00:00 ago)</b>—Time since the last keepalive packet was received, in the format <i>hh:mm:ss</i>.</li> </ul> </li> <li><b>Output</b>—Number of keepalive packets sent by PPP and how long ago the last keepalive packets were sent and received. <ul style="list-style-type: none"> <li><b>(last seen 00:00:00 ago)</b>—Time since the last keepalive packet was sent, in the format <i>hh:mm:ss</i>.</li> </ul> </li> </ul>	detail extensive none
LMI settings	<p>(Frame Relay) Settings for Local Management Interface (LMI) can be either <b>ANSI LMI settings</b> or <b>ITU LMI settings</b>. ANSI LMI settings is the default. The format is (ANSI or ITU) <b>LMI settings: value, value, value...xx</b> seconds, where <i>value</i> can be:</p> <ul style="list-style-type: none"> <li><b>n391dte</b>—DTE full status polling interval (1–255)</li> <li><b>n392dce</b>—DCE error threshold (1–10)</li> <li><b>n392dte</b>—DTE error threshold (1–10)</li> <li><b>n393dce</b>—DCE monitored event count (1–10)</li> <li><b>n393dte</b>—DTE monitored event count (1–10)</li> <li><b>t391dte</b>—DTE polling timer (5–30 seconds)</li> <li><b>t392dce</b>—DCE polling verification timer (5–30 seconds)</li> </ul>	detail extensive none
LMI	<p>(Frame Relay) LMI packet statistics:</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of packets coming in on the interface (<i>nn</i>) and how much time has passed since the last packet arrived. The format is <b>Input: nn (last seen hh:mm:ss ago)</b>.</li> <li><b>Output</b>—Number of packets sent out on the interface (<i>nn</i>) and how much time has passed since the last packet was sent. The format is <b>Output: nn (last seen hh:mm:ss ago)</b>.</li> </ul>	detail extensive none
LCP state	<p>(PPP) Link Control Protocol state.</p> <ul style="list-style-type: none"> <li><b>Conf-ack-received</b>—Acknowledgement was received.</li> <li><b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li><b>Conf-req-sent</b>—Request was sent.</li> <li><b>Down</b>—LCP negotiation is incomplete (not yet completed or has failed).</li> <li><b>Not-configured</b>—LCP is not configured on the interface.</li> <li><b>Opened</b>—LCP negotiation is successful.</li> </ul>	detail extensive none
NCP state	<p>(PPP) Network Control Protocol state.</p> <ul style="list-style-type: none"> <li><b>Conf-ack-received</b>—Acknowledgement was received.</li> <li><b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li><b>Conf-req-sent</b>—Request was sent.</li> <li><b>Down</b>—NCP negotiation is incomplete (not yet completed or has failed).</li> <li><b>Not-configured</b>—NCP is not configured on the interface.</li> <li><b>Opened</b>—NCP negotiation is successful.</li> </ul>	detail extensive none



Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>CHAP state</b>	<p>(PPP) Displays the state of the Challenge Handshake Authentication Protocol (CHAP) during its transaction.</p> <ul style="list-style-type: none"> <li>• <b>Chap-Chal-received</b>—Challenge was received but response not yet sent.</li> <li>• <b>Chap-Chal-sent</b>—Challenge was sent.</li> <li>• <b>Chap-Resp-received</b>—Response was received for the challenge sent, but CHAP has not yet moved into the <b>Success</b> state. (Most likely with RADIUS authentication).</li> <li>• <b>Chap-Resp-sent</b>—Response was sent for the challenge received.</li> <li>• <b>Closed</b>—CHAP authentication is incomplete.</li> <li>• <b>Failure</b>—CHAP authentication failed.</li> <li>• <b>Not-configured</b>—CHAP is not configured on the interface.</li> <li>• <b>Success</b>—CHAP authentication was successful.</li> </ul>	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: <i>year-month-day hour:minute:second timezone hh:mm:ss</i> ago</b> ). For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive none</b>
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface.</li> </ul>	<b>detail extensive</b>

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded.</li> <li>• <b>L2 channel errors</b>—Counter increments when the software could not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Count of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>SRAM errors</b>—Number of hardware errors that occurred in the static RAM (SRAM) on the PIC. If the value in this field increments, the PIC is malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Count of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> </ul>	<b>extensive</b>
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and up, or another problem occurs. If the number of carrier transitions increments quickly, (perhaps once every 10 seconds), the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> </ul>	<b>extensive</b>

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
DS1 alarms	Media-specific defects that can render the interface unable to pass packets. When a defect persists for a certain amount of time, it is promoted to an alarm.	detail extensive none
DS1 defects	Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface. <ul style="list-style-type: none"> <li>• <b>LOS</b>—Loss of signal.</li> <li>• <b>LOF</b>—Loss of frame.</li> <li>• <b>AIS</b>—Alarm indication signal.</li> <li>• <b>YLW</b>—Yellow alarm. Indicates errors at the remote site receiver.</li> </ul>	
T1 media	Counts of T1 media-specific errors. <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>The T1 media-specific error types can be:</p> <ul style="list-style-type: none"> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>BEE</b>—Bit error event</li> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>YELLOW</b>—Errors at the remote site receiver</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>PCV</b>—Pulse code violation</li> <li>• <b>CS</b>—Carrier state</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>ES</b>—Errored seconds</li> <li>• <b>SEFS</b>—Severely errored framing seconds (section)</li> <li>• <b>SES</b>—Severely errored seconds</li> <li>• <b>BES</b>—Bit error seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> </ul>	extensive

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>DS3 media</b>	<p>Counts of T3 media-specific errors. For detailed definitions of the T3 (DS-3) error events (BPV, EXZ, LCV, PCV, and CCV) and performance parameters (LES, PES, PSES, CES, CSES, SEFS, and UAS), see RFC 2496.</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop out of lock</li> <li>• <b>Reframing</b>—Frame alignment recovery time</li> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>IDLE</b>—Idle code detected</li> <li>• <b>YELLOW</b>—Remote defect indication</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>PCV</b>—Pulse code violation</li> <li>• <b>CCV</b>—C-bit coding violation</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>PES</b>—P-bit errored seconds</li> <li>• <b>PSES</b>—P-bit errored seconds (section)</li> <li>• <b>CES</b>—C-bit errored seconds</li> <li>• <b>CSES</b>—C-bit severely errored seconds</li> <li>• <b>SEFS</b>—Severely errored framing seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> </ul>	<b>extensive</b>
<b>HDLC configuration</b>	<p>Information about the HDLC configuration.</p> <ul style="list-style-type: none"> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> <li>• <b>Timeslots</b>—Configured time slots for the interface.</li> <li>• <b>Byte encoding</b>—Byte encoding used: <b>Nx64K</b> or <b>Nx56K</b>.</li> <li>• <b>Data inversion</b>—HDLC data inversion setting: <b>Enabled</b> or <b>Disabled</b></li> </ul>	<b>extensive</b>
<b>Interface transmit queues</b>	<p>Name of the transmit queues and their associated statistics for each DS1 channel on the Channelized DS3-to-DS1 PIC.</p> <ul style="list-style-type: none"> <li>• <b>B/W</b>—Queue bandwidth as a percentage of the total interface bandwidth.</li> <li>• <b>WRR</b>—Weighted round-robin (in percent).</li> <li>• <b>Packets</b>—Number of packets transmitted.</li> <li>• <b>Bytes</b>—Number of bytes transmitted.</li> <li>• <b>Drops</b>—Number of packets dropped.</li> <li>• <b>Errors</b>—Number of packet errors.</li> </ul>	<b>extensive</b>

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>DS1 or DS3 BERT configuration</b>	<p>BERT (bit error rate test) checks the quality of the line. This output appears only when a BERT is run on the interface.</p> <ul style="list-style-type: none"> <li>• <b>BERT time period</b>—Configured total time period that the BERT is to run.</li> <li>• <b>Elapsed</b>—Actual time elapsed since the start of the BERT (in seconds).</li> <li>• <b>Induced error rate</b>—Configured rate at which the bit errors are induced in the BERT pattern.</li> <li>• <b>Algorithm</b>—Type of algorithm selected for the BERT.</li> </ul>	<b>detail extensive none</b>
<b>Packet Forwarding Engine configuration</b>	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>	<b>extensive</b>
<b>CoS information</b>	<p>Information about the CoS queue for the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface; values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Bandwidth</b>	Bandwidth configured on the interface.	All levels
<b>Protocol</b>	Protocol family configured on the logical interface, such as <b>iso</b> , <b>inet6</b> , <b>mpls</b> .	<b>detail extensive none</b>

Table 13: Channelized DS3 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
MTU	MTU size on the logical interface.	detail extensive none
Generation	Unique number for use by Juniper Networks technical support only.	detail extensive
Route table	Routing table in which the logical interface address is located. For example, 0 refers to the routing table inet.0.	detail extensive
Flags	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	detail extensive none
Addresses, Flags	Information about the address flags. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	detail extensive none
Destination	IP address of the remote side of the connection.	detail extensive none
Local	IP address of the logical interface.	detail extensive none
Broadcast	Broadcast address.	detail extensive none
Generation	Unique number for use by Juniper Networks technical support only.	detail extensive none
Redundant Link	(LSQ redundancy) Backup link for Link Services IQ redundancy.	detail extensive none

## Sample Output

### show interfaces extensive (Channelized DS3-to-DS0)

```

user@host> show interfaces ds-0/0/0:0:0 extensive
Physical interface: ds-0/0/0:0:0, Enabled, Physical link is Up
  Interface index: 174, SNMP ifIndex: 4298, Generation: 177
  Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: 640kbps, FCS: 16,
  Mode: C/Bit parity, Framing: ESF
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : Keepalives
  Hold-times     : Up 0 ms, Down 0 ms
  Keepalive settings: Interval 10 seconds, Up-count 1, Down-count 3
  Keepalive statistics:
    Input : 280 (last seen 00:00:09 ago)
    Output: 286 (last sent 00:00:00 ago)
  LCP state: Opened
  NCP state: inet: Opened, inet6: Not-configured, iso: Not-configured,
  mpls: Not-configured
  CHAP state: Not-configured
  Last flapped   : 2002-05-23 17:53:29 PDT (00:46:46 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes   :          6814          16 bps
    Output bytes  :         28840          72 bps
    Input packets :           568           0 pps
    Output packets:           893           0 pps
  Input errors:

```

Errors: 0, Drops: 0, Framing errors: 39, Policed discards: 0,  
 L3 incompletes: 0, L2 channel errors: 2, L2 mismatch timeouts: 0,  
 HS link CRC errors: 0

Output errors:

Carrier transitions: 3, Errors: 0, Drops: 0, Aged packets: 0

DS1 alarms : None

DS3 alarms : None

DS1 defects : None

DS3 defects : None

T1 media:	Seconds	Count	State
SEF	0	0	OK
BEE	5	1	OK
AIS	0	0	OK
LOF	0	0	OK
LOS	0	0	OK
YELLOW	17	1	OK
BPV	0	0	
EXZ	0	0	
LCV	5	27765	
PCV	0	0	
CS	0	0	
LES	0		
ES	0		
SES	5		
SEFS	10		
BES	0		
UAS	0		

DS3 media:	Seconds	Count	State
PLL Lock	0	0	OK
Reframing	0	0	OK
AIS	0	0	OK
LOF	0	0	OK
LOS	0	0	OK
IDLE	0	0	OK
YELLOW	0	0	OK
BPV	1	65535	
EXZ	1	65535	
LCV	2	131070	
PCV	1	1825	
CCV	0	0	
LES	1		
PES	1		
PSES	1		
CES	0		
CSES	0		
SEFS	0		
UAS	0		

Interface transmit queues:

	B/W	WRR	Packets	Bytes	Drops	Errors
Queue0	95	95	0	0	0	0
Queue1	5	5	893	28840	0	0

HDLC configuration:

Giant threshold: 1514, Runt threshold: 3

Timeslots : 1-10

Byte encoding: Nx64K, Data inversion: Disabled

DS3 BERT configuration:

BERT time period: 10 seconds, Elapsed: 0 seconds

Algorithm: 2^15 - 1, Induced error rate: 10e-0

DS1 BERT configuration:

BERT time period: 10 seconds, Elapsed: 0 seconds

Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)

```
Packet Forwarding Engine configuration:
  Destination slot: 0, PLP byte: 2 (0x01)
  CoS information:    CoS transmit queue      Bandwidth      Buffer
Priority  Limit
          %          bps  %          usec
0 best-effort      95    608000  95          0    low  none
3 network-control  5     32000   5          0    low  none
Logical interface ds-0/0/0:0:0.0 (Index 5) (SNMP ifIndex 4299)
(Generation 943)
Flags: Point-To-Point SNMP-Traps Encapsulation: PPP
Protocol inet, MTU: 1500, Generation: 949, Route table: 0
Flags: None
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 18.18.18.1, Local: 18.18.18.2, Broadcast: Unspecified,
  Generation: 1849
```



## show interfaces (Channelized DS3-to-DS1)

<b>Syntax</b>	<pre>show interfaces t1-fpc/pic/port:t1channel &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized DS3-to-DS1 interface.
<b>Options</b>	<p><b>t1-fpc/pic/port:t1channel</b>—Display standard information about the specified channelized DS3-to-DS1 interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display brief interface information.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (channelized DS3-to-DS1) on page 67</a>
<b>Output Fields</b>	See the output field table for the <a href="#">show interfaces (Channelized DS3-to-DS0) command</a> .

## Sample Output

### show interfaces extensive (channelized DS3-to-DS1)

```
user@host> show interfaces t1-0/0/0:0 extensive
Physical interface: t1-0/0/0:0, Enabled, Physical link is Up
  Interface index: 210, SNMP ifIndex: 14, Generation: 2977
  Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: 640kbps,
  Loopback: None, FCS: 16, Mode: C/Bit parity, Framing: ESF
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : Keepalives
  Hold-times     : Up 0 ms, Down 0 ms
  Keepalive settings: Interval 10 seconds, Up-count 1, Down-count 3
  Keepalive statistics:
    Input : 30 (last seen 00:00:05 ago)
    Output: 29 (last sent 00:00:00 ago)
  LCP state: Opened
  NCP state: inet: Opened, inet6: Not-configured, iso: Not-configured, mpls:
  Not-configured
```

```

CHAP state: Not-configured
Last flapped   : 2002-05-23 17:30:12 PDT (17:29:43 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes   :          944          16 bps
Output bytes  :         1162          16 bps
Input packets :          66           0 pps
Output packets:          82           0 pps
Input errors:
  Errors: 1, Drops: 0, Framing errors: 1, Policed discards: 8,
  L3 incompletes: 0, L2 channel errors: 1, L2 mismatch timeouts: 0,
  HS link CRC errors: 0, SRAM errors: 0
Output errors:
  Carrier transitions: 3, Errors: 0, Drops: 0, Aged packets: 0
DS1  alarms   : None
DS3  alarms   : None
DS1  defects  : None
DS3  defects  : None
T1  media:
Seconds      Count  State
SEF          0        0 OK
BEE         11         5 OK
AIS         28         1 OK
LOF         27         1 OK
LOS          0         0 OK
YELLOW      23         1 OK
BPV          0         0
EXZ          0         0
LCV         11      20574
PCV          0         0
CS           0         0
LES         28
ES          28
SES         39
SEFS        50
BES         0
UAS         0
DS3 media:
Seconds      Count  State
PLL Lock     0         0 OK
Reframing    0         0 OK
AIS          0         0 OK
LOF          1         1 OK
LOS          1         1 OK
IDLE         0         0 OK
YELLOW       0         0 OK
BPV          2     131070
EXZ          3     49910
LCV          5     180980
PCV          2        327
CCV         12     264558
LES          3
PES          3
PSES         2
CES         13
CSES         13
SEFS         1
UAS         35
Interface transmit queues:
      B/W  WRR  Packets  Bytes  Drops  Errors
Queue0  95  95      0      0      0      0
Queue1   5   5     82    1162    0      0
HDLC configuration:

```

```

Giant threshold: 1514, Runt threshold: 3
Timeslots      : 1-10
Line encoding: B8ZS, Byte encoding: Nx64K, Data inversion: Disabled
DS3 BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Algorithm: 2^15 - 1, Induced error rate: 10e-0
DS1 BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
Packet Forwarding Engine configuration:
  Destination slot: 0, PLP byte: 2 (0x00) CoS information:
  CoS transmit queue      Bandwidth      Buffer Priority  Limit
                           %      bps      %      usec
0 best-effort             95      608000  95      0      low  none
3 network-control         5       32000   5       0      low  none
Logical interface t1-0/0/0:0.0 (Index 11) (SNMP ifIndex 23) (Generation 497)
Flags: Point-To-Point SNMP-Traps Encapsulation: PPP
Bandwidth: 0
Protocol inet, MTU: 1500, Generation: 576, Route table: 0
Flags: None
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 21.21.21.2, Local: 21.21.21.1, Broadcast: Unspecified,
  Generation: 977

```

## show interfaces (Channelized E1 IQ)

<b>Syntax</b>	<code>show interfaces (ce1-fpc/pic/port   type-fpc/pic/port&lt;:channel&gt;) &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index snmp-index&gt; &lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized E1 IQ interface.
<b>Options</b>	<p><b>type-fpc/pic/port:&lt;channel&gt;</b>—Interface type with optional corresponding channel levels. For the physical channelized E1 IQ interface, <b>type</b> is <b>ce</b>. For the clear channel, <b>type</b> is <b>e1</b>. At the first level of channelization, <b>type</b> is <b>ds</b>.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces (Channelized E1 IQ) (Physical) on page 70</a></p> <p><a href="#">show interfaces extensive (Channelized E1 IQ Multilink PPP Encapsulation) on page 71</a></p> <p><a href="#">show interfaces extensive (Channelized E1 IQ MLFR Encapsulation) on page 72</a></p> <p><a href="#">show interfaces detail (Clear Channel E1) on page 73</a></p>
<b>Output Fields</b>	For information about output fields, see the output field table for the <a href="#">show interfaces (Channelized E1)</a> command. Output fields are listed in the approximate order in which they appear.

## Sample Output

### show interfaces (Channelized E1 IQ) (Physical)

```

user@host> show interfaces ce1-1/2/3
Physical interface: ce1-1/2/3, Enabled, Physical link is Up
  Interface index: 18, SNMP ifIndex: 1128
  Link-level type: Frame-relay, Controller, MTU: 1504, Clocking: Internal, Speed:
E1, Loopback: None, FCS: 16, Framing: G704, Parent: None
  Device flags      : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags       : Keepalives DTE
  ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds

```

```

LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
DTE statistics:
  Enquiries sent                : 43186
  Full enquiries sent           : 8515
  Enquiry responses received    : 43185
  Full enquiry responses received : 8515
DCE statistics:
  Enquiries received            : 0
  Full enquiries received       : 0
  Enquiry responses sent        : 0
  Full enquiry responses sent    : 0
Common statistics:
  Unknown messages received     : 0
  Asynchronous updates received : 0
  Out-of-sequence packets received : 0
  Keepalive responses timedout   : 0
Nonmatching DCE-end DLCIs:
  2
Last flapped   : 2002-10-04 17:52:51 PDT (00:32:57 ago)
Input rate     : 0 bps (0 pps)
Output rate    : 0 bps (0 pps)
DS1 alarms    : None
DS1 defects    : None

```

#### show interfaces extensive (Channelized E1 IQ Multilink PPP Encapsulation)

```

user@host> show interfaces ds-0/3/4:1 extensive
Physical interface: ds-0/3/4:1, Enabled, Physical link is Up
Interface index: 151, SNMP ifIndex: 63, Generation: 34
Link-level type: Multilink-PPP, MTU: 1518, Clocking: Internal, Speed: 64kbps,
Loopback: None, FCS: 16,
Parent: ce1-0/3/4 Interface index 150
Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Link flags     : None
Hold-times     : Up 0 ms, Down 0 ms
Keepalive settings: Interval 10 seconds, Up-count 1, Down-count 3
Keepalive statistics:
  Input : 0 (last seen: never)
  Output: 0 (last sent: never)
LCP state: Down
CHAP state: Closed
CoS queues    : 4 supported, 4 maximum usable queues
Last flapped  : Never
Statistics last cleared: 2005-12-21 10:32:15 PST (1w0d 03:10 ago)
Traffic statistics:
  Input bytes   : 0                      0 bps
  Output bytes  : 6070570                 224 bps
  Input packets : 0                      0 pps
  Output packets: 209330                 0 pps
Input errors:
  Errors: 3, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
  Policed discards: 0, L3 incompletes: 0, L2 channel errors: 0,
  L2 mismatch timeouts: 0, HS link CRC errors: 0, Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Aged packets: 0, MTU errors: 0,
  Resource errors: 0
HDLC configuration:
  Giant threshold: 1528, Runt threshold: 2
  Timeslots      : 1
  Data inversion: Disabled, Idle cycle flag: flags, Start end flag: shared

```

```

DSO BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
Packet Forwarding Engine configuration:
  Destination slot: 0, PLP byte: 4 (0x00)

Logical interface ds-0/3/4:1.0 (Index 74) (SNMP ifIndex 64) (Generation 13)
  Flags: Hardware-Down Point-To-Point SNMP-Traps Encapsulation: PPP
  Protocol mlppp, Multilink bundle: ls-0/1/0.0, MTU: 1514, Generation: 24,
  Route table: 0

```

### show interfaces extensive (Channelized E1 IQ MLFR Encapsulation)

```

user@host> show interfaces ds-0/3/4:5 extensive
Physical interface: ds-0/3/4:5, Enabled, Physical link is Up
  Interface index: 155, SNMP ifIndex: 72, Generation: 38
  Link-level type: Multilink-FR, MTU: 1518, Clocking: Internal, Speed: 64kbps,
  Loopback: None, FCS: 16,
  Parent: ce1-0/3/4 Interface index 150
  Device flags   : Present Running
  Interface flags: Link-Layer-Down Point-To-Point SNMP-Traps Internal: 0x4000
  Link flags     : No-Keepalives DCE
  Hold-times    : Up 0 ms, Down 0 ms
  ANSI LMI settings: n392dce 3, n393dce 4, t392dce 15 seconds
  LMI statistics:
    Input : 0 (last seen: never)
    Output: 0 (last sent: never)
  DTE statistics:
    Enquiries sent           : 0
    Full enquiries sent      : 0
    Enquiry responses received : 0
    Full enquiry responses received : 0
  DCE statistics:
    Enquiries received       : 0
    Full enquiries received   : 0
    Enquiry responses sent    : 0
    Full enquiry responses sent : 0
  Common statistics:
    Unknown messages received : 0
    Asynchronous updates received : 0
    Out-of-sequence packets received : 0
    Keepalive responses timeout : 0
  CoS queues : 4 supported, 4 maximum usable queues
  Last flapped : 2005-12-21 09:59:01 PST (1w0d 03:44 ago)
  Statistics last cleared: 2005-12-21 10:32:15 PST (1w0d 03:10 ago)
  Traffic statistics:
    Input bytes : 0 0 bps
    Output bytes : 0 0 bps
    Input packets: 0 0 pps
    Output packets: 0 0 pps
  Input errors:
    Errors: 3, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
    Policed discards: 0, L3 incompletes: 0, L2 channel errors: 0,
    L2 mismatch timeouts: 0, HS link CRC errors: 0, Resource errors: 0
  Output errors:
    Carrier transitions: 0, Errors: 0, Drops: 0, Aged packets: 0, MTU errors: 0,
    Resource errors: 0
  HDLC configuration:
    Giant threshold: 1528, Runt threshold: 2
    Timeslots : 5
    Data inversion: Disabled, Idle cycle flag: flags, Start end flag: shared

```

```

DSO BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
Packet Forwarding Engine configuration:
  Destination slot: 0, PLP byte: 4 (0x01)

Logical interface ds-0/3/4:5.0 (Index 78) (SNMP ifIndex 73) (Generation 17)
  Flags: Device-Down Point-To-Point SNMP-Traps Encapsulation: FR-NLPID
  Traffic statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  Local statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  Transit statistics:
    Input bytes : 0 0 bps
    Output bytes : 0 0 bps
    Input packets: 0 0 pps
    Output packets: 0 0 pps
  Protocol mlfrr, Multilink bundle: ls-0/1/0.1, MTU: 1514, Generation: 28, Route
table: 0
  DLCI 10
    Flags: Active
    Total down time: 0 sec, Last down: Never
    Traffic statistics:
      Input bytes : 0
      Output bytes : 0
      Input packets: 0
      Output packets: 0
  DLCI statistics:
    Active DLCI :1 Inactive DLCI :0

```

#### show interfaces detail (Clear Channel E1)

```

user@host> show interfaces e1-1/2/6 detail
Physical interface: e1-1/2/6, Enabled, Physical link is Up
  Interface index: 89, SNMP ifIndex: 1278, Generation: 341
  Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: E1, Loopback:None,
...
  Logical interface e1-1/2/6.0 (Index 52) (SNMP ifIndex 1279) (Generation 169)
    Flags: Point-To-Point SNMP-Traps Encapsulation: PPP
    Bandwidth: 0
...

```

## show interfaces (Channelized E1)

<b>Syntax</b>	<pre>show interfaces ds-fpc/pic/port:ds0channel &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index snmp-index&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information the specified channelized E1 interface.
<b>Options</b>	<p><b>ds-fpc/pic/port:ds0channel</b>—Display standard information about the specified channelized E1 interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (Channelized E1) on page 82</a>
<b>Output Fields</b>	Table 14 on page 74 lists the output fields for the <b>show interfaces</b> (Channelized E1 and Channelized E1 IQ) command. Output fields are listed in the approximate order in which they appear.

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the "Enabled Field" section under <i>Common Output Fields Description</i> .	All levels
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	detail extensive none
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	detail extensive none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	detail extensive



Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	MTU size on the physical interface.	All levels
<b>Clocking</b>	Reference clock source: <b>Internal</b> or <b>External</b> .	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Whether loopback is enabled and the type of loopback ( <b>local</b> or <b>remote</b> ).	All levels
<b>FCS</b>	Frame check sequence on the interface (either <b>16</b> or <b>32</b> ). The default is <b>16</b> bits.	All levels
<b>Framing</b>	Physical layer framing format used on the link. It can be <b>G704</b> , <b>G704-NO-CRC4</b> , or <b>Unframed</b> . The default is <b>G704</b> .	All levels
<b>Parent</b>	(Channelized E1 IQ interfaces only) Name and interface index of the interface to which a particular child interface belongs. <b>None</b> indicates that this interface is the top level.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the "Link Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Keepalive settings</b>	(PPP and HDLC) Configured settings for keepalives. <ul style="list-style-type: none"> <li><b>Interval <i>seconds</i></b>—Time in seconds between successive keepalive requests. The range is <b>10</b> seconds through <b>32,767</b> seconds, with a default of <b>10</b> seconds.</li> <li><b>Down-count <i>number</i></b>—Number of keepalive packets a destination must fail to receive before the network takes a link down. The range is <b>1</b> through <b>255</b>, with a default of <b>3</b>.</li> <li><b>Up-count <i>number</i></b>—Number of keepalive packets a destination must receive to change a link's status from down to up. The range is <b>1</b> through <b>255</b>, with a default of <b>1</b>.</li> </ul>	<b>detail extensive none</b>

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
Keepalive statistics	<p>(PPP and HDLC) Information about keepalive packets.</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of keepalive packets received by PPP. <ul style="list-style-type: none"> <li>(<b>last seen 00:00:00 ago</b>)—Time since the last keepalive packet was received, in the format <i>hh:mm:ss</i>.</li> </ul> </li> <li><b>Output</b>—Number of keepalive packets sent by PPP and how long ago the last keepalive packets were sent and received. <ul style="list-style-type: none"> <li>(<b>last seen 00:00:00 ago</b>)—Time since the last keepalive packet was sent, in the format <i>hh:mm:ss</i>.</li> </ul> </li> </ul>	detail extensive none
LMI settings	<p>(Frame Relay) Settings for link management can be either ANSI LMI settings or ITU LMI settings. ANSI LMI settings is the default. The format is (<b>ANSI or ITU</b>) <b>LMI settings: value, value...xx</b> seconds, where <i>value</i> can be:</p> <ul style="list-style-type: none"> <li><b>n391dte</b>—DTE full status polling interval (1–255)</li> <li><b>n392dce</b>—DCE error threshold (1–10)</li> <li><b>n392dte</b>—DTE error threshold (1–10)</li> <li><b>n393dce</b>—DCE monitored event count (1–10)</li> <li><b>n393dte</b>—DTE monitored event count (1–10)</li> <li><b>t391dte</b>—DTE polling timer (5–30 seconds)</li> <li><b>t392dce</b>—DCE polling verification timer (5–30 seconds)</li> </ul>	detail extensive none
LMI	<p>(Frame Relay) Statistics about the link management.</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of packets coming in on the interface (<i>nn</i>) and how much time has passed since the last packet arrived. The format is <b>Input: nn (last seen hh:mm:ss ago)</b></li> <li><b>Output</b>—Number of packets sent out on the interface (<i>nn</i>) and how much time has passed since the last packet was sent. The format is <b>Output: nn (last sent hh:mm:ss ago)</b>.</li> </ul>	detail extensive none
DTE statistics	<p>(Frame Relay) Statistics about messages transmitted from the data terminal equipment (DTE) to the data circuit-terminating equipment (DCE):</p> <ul style="list-style-type: none"> <li><b>Enquiries sent</b>—Number of link status enquiries sent from the DTE to the DCE.</li> <li><b>Full enquiries sent</b>—Number of full enquiries sent from the DTE to the DCE.</li> <li><b>Enquiry responses received</b>—Number of enquiry responses received by the DTE from the DCE.</li> <li><b>Full enquiry responses received</b>—Number of full enquiry responses sent from the DTE to the DCE.</li> </ul>	detail extensive none
DCE statistics	<p>(Frame Relay) Statistics about messages transmitted from the DCE to the DTE:</p> <ul style="list-style-type: none"> <li><b>Enquiries received</b>—Number of enquiries received by the DCE from the DTE.</li> <li><b>Full enquiries received</b>—Number of full enquiries received by the DCE from the DTE.</li> <li><b>Enquiry responses sent</b>—Number of enquiry responses sent from the DCE to the DTE.</li> <li><b>Full enquiry responses sent</b>—Number of full enquiry responses sent from the DCE to the DTE.</li> </ul>	detail extensive none

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Common statistics</b>	<p>(Frame Relay) Statistics about messages sent between the DTE and the DCE:</p> <ul style="list-style-type: none"> <li>• <b>Unknown messages received</b>—Number of received packets that do not fall into any category.</li> <li>• <b>Asynchronous updates received</b>—Number of link status peer changes received.</li> <li>• <b>Out-of-sequence packets received</b>—Number of packets for which the sequence of the packets received is different from the expected sequence.</li> <li>• <b>Keepalive responses timedout</b>—Number of keepalive responses that timed out when no LMI packet was reported for <code>n392dte</code> or <code>n393dce</code> intervals. (See <b>LMI settings</b>).</li> </ul>	<b>detail extensive none</b>
<b>Nonmatching DCE-end DLCIs</b>	(Frame Relay, displayed only from the DTE) Number of DLCIs configured from the DCE.	<b>detail extensive none</b>
<b>LCP state</b>	<p>(PPP) Link Control Protocol state.</p> <ul style="list-style-type: none"> <li>• <b>Conf-ack-received</b>—Acknowledgement was received.</li> <li>• <b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li>• <b>Conf-req-sent</b>—Request was sent.</li> <li>• <b>Down</b>—LCP negotiation is incomplete (not yet completed or has failed).</li> <li>• <b>Not-configured</b>—LCP is not configured on the interface.</li> <li>• <b>Opened</b>—LCP negotiation is successful.</li> </ul>	<b>detail extensive none</b>
<b>CHAP state</b>	<p>(PPP) Displays the state of the Challenge Handshake Authentication Protocol (CHAP) during its transaction.</p> <ul style="list-style-type: none"> <li>• <b>Chap-Chal-received</b>—Challenge was received but response not yet sent.</li> <li>• <b>Chap-Chal-sent</b>—Challenge was sent.</li> <li>• <b>Chap-Resp-received</b>—Response was received for the challenge sent, but CHAP has not yet moved into the Success state. (Most likely with RADIUS authentication.)</li> <li>• <b>Chap-Resp-sent</b>—Response was sent for the challenge received.</li> <li>• <b>Closed</b>—CHAP authentication is incomplete.</li> <li>• <b>Failure</b>—CHAP authentication failed.</li> <li>• <b>Not-configured</b>—CHAP is not configured on the interface.</li> <li>• <b>Success</b>—CHAP authentication was successful.</li> </ul>	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went down to up. The format is <b>Last flapped: <i>year-month-day hour:minute:second timezone (hour:minute:second ago)</i></b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive none</b>
<b>CoS Queues</b>	Number of CoS queues configured.	<b>detail extensive none</b>
<b>Input Rate</b>	Input rate in bits per second (bps) and packets per second (pps).	None specified
<b>Output Rate</b>	Output rate in bps and pps.	None specified
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Traffic statistics</b>	<p>Number of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), then either the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>MTU errors</b>—Number of packets larger than the MTU threshold.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>DS1 alarms</b> <b>DS1 defects</b>	<p>E1 media-specific defects that can render the interface unable to pass packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface. The following lists all possible alarms and defects. For complete explanations of most of these alarms and defects, see <i>Bellcore Telcordia GR-499-CORE</i>.</p> <ul style="list-style-type: none"> <li>• <b>LOS</b>—Loss of signal.</li> <li>• <b>LOF</b>—Loss of frame.</li> <li>• <b>AIS</b>—Alarm indication signal.</li> <li>• <b>YLW</b>—Yellow alarm. Indicates errors at the remote site receiver.</li> </ul>	<b>detail extensive none</b>

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>E1 media</b>	<p>Active alarms and defects, plus counts of specific E1 errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than OK indicates a problem.</li> </ul> <p>The E1 media-specific error types can be:</p> <ul style="list-style-type: none"> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>BEE</b>—Bit error</li> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>YELLOW</b>—Errors at the remote site receiver</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>PCV</b>—Pulse code violation</li> <li>• <b>CS</b>—Carrier state</li> <li>• <b>FEBS</b>—Far-end block error</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>ES</b>—Errored seconds</li> <li>• <b>BES</b>—Bursty errored seconds</li> <li>• <b>SES</b>—Severely errored seconds</li> <li>• <b>SEFS</b>—Severely errored framing seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> </ul>	<b>extensive</b>
<b>HDLC configuration</b>	<p>Information about the HDLC configuration.</p> <ul style="list-style-type: none"> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> <li>• <b>Timeslots</b>—Configured time slots for the interface.</li> <li>• <b>Line encodingHDB3</b>—Line encoding used.</li> </ul>	<b>extensive</b>
<b>Interface transmit queues</b>	<p>Names of the transmit queues and their associated statistics for each DS0 channel on the Channelized E1 to DS0 PIC.</p> <ul style="list-style-type: none"> <li>• <b>B/W</b>—Queue bandwidth as a percentage of the total interface bandwidth.</li> <li>• <b>WRR</b>—Weighted round robin (in percent).</li> <li>• <b>Packets</b>—Number of packets transmitted.</li> <li>• <b>Bytes</b>—Number of bytes transmitted.</li> <li>• <b>Drops</b>—Number of packets dropped.</li> <li>• <b>Errors</b>—Number of packet errors.</li> </ul>	<b>extensive</b>

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>DSx BERT configuration</b>	<p>BERT (bit error rate test) checks the quality of the line. This output appears only when a BERT is run on the interface.</p> <ul style="list-style-type: none"> <li>• <b>BERT time period</b>—Configured total time period that the BERT is to run.</li> <li>• <b>Elapsed</b>—Actual time elapsed since the start of the BERT (in seconds).</li> <li>• <b>Induced error rate</b>—Configured rate at which the bit errors are induced in the BERT pattern.</li> <li>• <b>Algorithm</b>—Type of algorithm selected for the BERT.</li> </ul>	<b>detail extensive none</b>
<b>Packet Forwarding Engine configuration</b>	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>	<b>extensive</b>
<b>CoS information</b>	<p>Information about the CoS queue for the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the "Logical Interface Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Input packets</b>	Number of packets received on the logical interface.	None specified
<b>Output packets</b>	Number of packets transmitted on the logical interface.	None specified

Table 14: Channelized E1 and Channelized E1 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Traffic statistics</b>	Number and rate of bytes and packets received and transmitted on the logical interface. <ul style="list-style-type: none"> <li><b>Input bytes</b>—Number of bytes received on the interface.</li> <li><b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li><b>Input packets</b>—Number of packets received on the interface.</li> <li><b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Local statistics</b>	(Frame Relay) Statistics for traffic received from and transmitted to the Routing Engine. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than one second) for this counter to stabilize.	<b>detail extensive</b>
<b>Transit statistics</b>	(Frame Relay) Statistics for traffic transiting the router. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize.	<b>detail extensive</b>
<b>Protocol</b>	Protocol family configured on the logical interface, such as <b>iso</b> , <b>inet6</b> , <b>mpls</b> .	<b>detail extensive none</b>
<b>Multilink bundle</b>	(Multilink) Interface name for the multilink bundle, if configured.	<b>detail extensive none</b>
<b>MTU</b>	MTU size on the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route table</b>	Routing table in which the logical interface address is located. For example, <b>0</b> refers to the routing table <b>inet.0</b> .	<b>detail extensive</b>
<b>DLCI</b>	(Frame Relay) DLCI number of the logical interface. The following DLCI information is displayed: <b>Flags</b> , <b>Total down time</b> , <b>Last down</b> , and <b>Traffic statistics</b> . <b>Flags</b> is one or more of the following: <ul style="list-style-type: none"> <li><b>Active</b>—Set when the link is active and the DTE and DCE are exchanging information.</li> <li><b>Down</b>—Set when link is active, but no information is received from the DCE.</li> <li><b>Unconfigured</b>—Set when the corresponding DLCI in the DCE is not configured.</li> <li><b>Configured</b>—Set when the corresponding DLCI in the DCE is configured.</li> <li><b>Dce-configured</b>—Displayed when the command is issued from the DTE.</li> </ul>	<b>detail extensive none</b>
<b>DLCI statistics</b>	(Frame Relay) Data-link connection identifier (DLCI) statistics. <ul style="list-style-type: none"> <li><b>Active DLCI</b>—Number of active DLCIs.</li> <li><b>Inactive DLCI</b>—Number of inactive DLCIs.</li> </ul>	<b>detail extensive none</b>

## Sample Output

### show interfaces extensive (Channelized E1)

```
user@host> show interfaces ds-0/1/1:1 extensive
```



```

Physical interface: ds-0/1/1:1, Enabled, Physical link is Down
  Interface index: 163, SNMP ifIndex: 37, Generation: 46
  Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: E1,
  Loopback: None, FCS: 16, Framing: G704
  Device flags   : Present Running Down
  Interface flags: Hardware-Down Point-To-Point SNMP-Traps Internal: 0x4000
  Link flags     : Keepalives
  Hold-times     : Up 0 ms, Down 0 ms
  CoS queues     : 4 supported, 4 maximum usable queues
  Last flapped   : 2005-12-28 14:44:06 PST (00:00:30 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes :                0                0 bps
    Output bytes :                0                0 bps
    Input packets:                0                0 pps
    Output packets:                0                0 pps
  Input errors:
    Errors: 0, Drops: 0, Framing errors: 0, Policed discards: 0,
    L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
    HS link CRC errors: 0, Resource errors: 0
  Output errors:
    Carrier transitions: 0, Errors: 0, Drops: 0, Aged packets: 0, MTU errors: 0,
    Resource errors: 0
  DS1 alarms : LOF, LOS
  DS1 defects : LOF, LOS
  E1 media:
    Seconds      Count  State
    SEF          982318    1 Defect Active
    BEE           0         0 OK
    AIS           0         0 OK
    LOF          982318    1 Defect Active
    LOS          982318    1 Defect Active
    YELLOW        0         0 OK
    BPV           1         1
    EXZ           1         1
    LCV           1         1
    PCV           1         2
    CS            0         0
    FEBE          1         9
    LES           1
    ES            982318
    SES            982318
    SEFS            982318
    BES           1
    UAS           0
  Interface transmit queues:
    B/W  WRR  Packets  Bytes  Drops  Errors
  Queue0  95  95      0      0      0      0
  Queue1   5   5      0      0      0      0
  HDLC configuration:
    Giant threshold: 1514, Runt threshold: 3
    Timeslots      : 31
    Line encoding: HDB3, Data inversion: Disabled, Idle cycle flag: flags,
    Start end flag: shared
  DS1 BERT configuration:
    BERT time period: 0 seconds, Elapsed: 0 seconds
    Induced Error rate: 10e-0, Algorithm: 2^11 - 1, 0.152 and 0.153 (2047 type),
    Pseudorandom (8)
  Packet Forwarding Engine configuration:
    Destination slot: 0, PLP byte: 2 (0x1b)
  CoS information:
    CoS transmit queue  Bandwidth  Buffer  Priority  Limit

```

		%	bps	%	usec		
0	best-effort	95	1945600	95	0	low	none
3	network-control	5	102400	5	0	low	none

## show interfaces (Channelized OC12 IQ and IQE)

**Syntax** `show interfaces (type-fpc/pic/port<:channel><:channel><:channel>)  
<brief | detail | extensive | terse>  
<descriptions>  
<media>  
<snmp-index snmp-index>  
<statistics>`

**Release Information** Command introduced before Junos OS Release 7.4.

**Description** Display status information about the specified channelized OC12 IQ and IQE interface.

**Options** `type-fpc/pic/port:channel:channel:channel`—Interface type with optional corresponding channel levels.  
For SONET mode, the interface type can be one of the following:

- `type-fpc/pic/port`—For the physical channelized OC12 IQ or IQE interface, **type** is `coc12`. For the clear channel, **type** is `so` (for OC12).
- `type-fpc/pic/port:channel`—At the first level of channelization, **type** can be `coc1` (channelized OC1), `ct3` (from `coc1`), `so` (for OC3), or `t3`.
- `type-fpc/pic/port:channel:channel`—At the second level of channelization, **type** can be `ct1` (from `ct3` or `coc1`) or `t1` (from `ct3` or `coc1`).
- `type-fpc/pic/port:channel:channel:channel`—At the third level of channelization, **type** is `ds` (from `ct1`).

For SDH mode, the interface type can be one of the following:

- `type-fpc/pic/port`—For the physical channelized OC12 IQ or IQE interface, **type** is `cstm4`. For the clear channel, **type** is `so` (for SONET/SDH (vc-4-4c)).
- `type-fpc/pic/port:channel`—At the first level of channelization, **type** can be `so` (from `cstm4`) or `cau4` (from `cstm4`).
- `type-fpc/pic/port:channel:channel`—At the second level of channelization, **type** can be `ct3` or `t3` (from or `cau4`).
- `type-fpc/pic/port:channel:channel:channel`—At the third level of channelization, **type** is `ct1` or `t1` (from `ct3`).
- `type-fpc/pic/port:channel:channel:channel:channel`—At the fourth level of channelization, **type** is `ds` (from `ct1`).

**brief | detail | extensive | terse**—(Optional) Display the specified level of output.

**descriptions**—(Optional) Display interface description strings.

**media**—(Optional) Display media-specific information about network interfaces.

**snmp-index snmp-index**—(Optional) Display information for the specified SNMP index of the interface.

**statistics**—(Optional) Display static interface statistics.

<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (CAU4 on Channelized OC-12 IQ) on page 86</a> <a href="#">show interfaces extensive (Channelized OC1 on Channelized OC12 IQ) on page 86</a> <a href="#">show interfaces extensive (Channelized OC12 IQ) (Physical) on page 86</a> <a href="#">show interfaces extensive (Channelized T1 from Channelized OC12 IQ) on page 87</a> <a href="#">show interfaces extensive (Channelized T3 on Channelized OC12 IQ) on page 87</a> <a href="#">show interfaces extensive (CSTM4 on Channelized OC-12 IQ) on page 87</a> <a href="#">show interfaces extensive (DS0 on Channelized OC12 IQ) on page 87</a> <a href="#">show interfaces extensive (SONET Interface on Channelized OC12 IQ) on page 87</a> <a href="#">show interfaces extensive (T1 on Channelized OC12 IQ) on page 88</a>
<b>Output Fields</b>	See the output field table for the <a href="#">show interfaces (Channelized OC3 IQ and IQE)</a> command.

## Sample Output

### show interfaces extensive (CAU4 on Channelized OC-12 IQ)

```
user@host> show interfaces cau4-0/2/0:1 extensive
Physical interface: cau4-0/2/0:1, Enabled, Physical link is Up
  Interface index: 219, SNMP ifIndex: 139, Generation: 221
  Link-level type: Controller, Clocking: Internal, SDH mode, Speed: OC3,
  Loopback: None, Parent: cstm4-0/2/0 Interface index 216
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
  Link flags     : None
...
```

### show interfaces extensive (Channelized OC1 on Channelized OC12 IQ)

```
user@host> show interfaces extensive coc1-4/2/0:7
Physical interface: coc1-4/2/0:7, Enabled, Physical link is Up
  Interface index: 381, SNMP ifIndex: 2524, Generation: 728
  Link-level type: Controller, MTU: 4474, Clocking: Internal, SONET mode,
  Speed: 51840kbps, Loopback: None,
  FCS: 16, Payload scrambler: Disabled, Parent: coc12-4/2/0 (Index 266)
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : None
...
```

### show interfaces extensive (Channelized OC12 IQ) (Physical)

```
user@host> show interfaces extensive coc12-4/2/0
Physical interface: coc12-4/2/0, Enabled, Physical link is Up
  Interface index: 266, SNMP ifIndex: 1269, Generation: 601
  Link-level type: Controller, MTU: 4474, Clocking: Internal, SONET mode,
  Speed: OC12, Loopback: None,
  FCS: 16, Payload scrambler: Disabled, Parent: None Device flags   : Present
Running
  Interface flags: Point-To-Point SNMP-Traps
```

```

Link flags      : Keepalives DTE
...

```

#### show interfaces extensive (Channelized T1 from Channelized OC12 IQ)

```

user@host> show interfaces extensive ct1-4/2/0:7:1
Physical interface: ct1-4/2/0:4:1, Enabled, Physical link is Up
Interface index: 305, SNMP ifIndex: 2410, Generation: 640
Link-level type: Controller, MTU: 1504, Clocking: Internal, Speed: T1,
Loopback: None, FCS: 16,
Framing: ESF, Parent: coc1-4/2/0:7 (Index 304)
Device flags    : Present Running
Interface flags: Point-To-Point SNMP-Traps
Link flags      : None
...

```

#### show interfaces extensive (Channelized T3 on Channelized OC12 IQ)

```

user@host> show interfaces ct3-0/2/0:1 extensive
Physical interface: ct3-0/2/0:1:1, Enabled, Physical link is Up
Interface index: 220, SNMP ifIndex: 140, Generation: 222
Link-level type: Controller, Clocking: Internal, Speed: T3, Loopback: None,
Mode: C/Bit parity, Parent: cau4-0/2/0:1 Interface index 219
Device flags    : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Link flags      : None
...

```

#### show interfaces extensive (CSTM4 on Channelized OC-12 IQ)

```

user@host> show interfaces cstm4-0/2/0 extensive
Physical interface: cstm4-0/2/0, Enabled, Physical link is Up
Interface index: 216, SNMP ifIndex: 33, Generation: 218
Link-level type: Controller, Clocking: Internal, SDH mode, Speed: OC12,
Loopback: None, Parent: None Device flags    : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Link flags      : None
...

```

#### show interfaces extensive (DSO on Channelized OC12 IQ)

```

user@host> show interfaces extensive ds-4/2/0:7:1:1
Physical interface: ds-4/2/0:4:1:1, Enabled, Physical link is Up
Interface index: 306, SNMP ifIndex: 2411, Generation: 641
Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: 64kbps,
Loopback: None, FCS: 16, Parent: ct1-4/2/0:7:1 (Index 305)
Device flags    : Present Running
Interface flags: Point-To-Point SNMP-Traps
Link flags      : Keepalives
...

```

#### show interfaces extensive (SONET Interface on Channelized OC12 IQ)

```

user@host> show interfaces so-0/2/0:1 extensive
Physical interface: so-0/2/0:1, Enabled, Physical link is Up
Interface index: 750, SNMP ifIndex: 23, Generation: 11709
Link-level type: Multilink-FR, MTU: 4474, Clocking: Internal, SONET mode,
Speed: OC3, Loopback: None, FCS: 16,
Payload scrambler: Enabled, Parent: coc12-0/2/0 Interface index 749
Device flags    : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000

```

```
Link flags      : Keepalives DTE
...
```

#### show interfaces extensive (T1 on Channelized OC12 IQ)

```
user@host> show interfaces t1-0/2/0:1:1 extensive
Physical interface: t1-0/2/0:1:1:1, Enabled, Physical link is Up
Interface index: 222, SNMP ifIndex: 143, Generation: 226
Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: T1,
Loopback: None, FCS: 16, Framing: ESF, Parent: ct3-0/2/0:1:1
Interface index 221
Device flags    : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Link flags      : Keepalives
...
```

## show interfaces (Channelized OC12)

<b>Syntax</b>	<code>show interfaces t3-fpc/pic/port:t3channel</code> <brief   detail   extensive   terse> <descriptions> <media> <snmp-index <i>snmp-index</i> > <statistics>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	Display status information about the specified channelized OC12 interface.
<b>Options</b>	<p><code>t3-fpc/pic/port:t3channel</code>—Display standard information about the specified channelized OC12 interface.</p> <p><code>brief   detail   extensive   terse</code>—(Optional) Display the specified level of output.</p> <p><code>descriptions</code>—(Optional) Display interface description strings.</p> <p><code>media</code>—(Optional) Display media-specific information about network interfaces.</p> <p><code>snmp-index <i>snmp-index</i></code>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><code>statistics</code>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (Channelized OC12) on page 89</a>
<b>Output Fields</b>	See the output field table for the <a href="#">show interfaces (Channelized OC3 IQ and IQE)</a> command.

## Sample Output

### show interfaces extensive (Channelized OC12)

```

user@host> show interfaces t3-0/3/0:0 extensive
Physical interface: t3-0/3/0:0, Enabled, Physical link is Up
  Interface index: 32, SNMP ifIndex: 21, Generation: 2719
  Link-level type: Frame-Relay, PPP, MTU: 4474, Clocking: Internal, SONET mode,
  Speed: T3, Loopback: None, SONET Loopback: None, FCS: 16, Mode: C/Bit parity
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : Keepalives DTE
  ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds
  LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
  DTE statistics:
    Enquiries sent           : 43186
    Full enquiries sent      : 8515
    Enquiry responses received : 43185
    Full enquiry responses received : 8515
  DCE statistics:

```

```

Enquiries received           : 0
Full enquiries received      : 0
Enquiry responses sent       : 0
Full enquiry responses sent   : 0
Common statistics:
  Unknown messages received   : 0
  Asynchronous updates received : 0
  Out-of-sequence packets received : 0
  Keepalive responses timedout : 0
Nonmatching DCE-end DLCIs:
  2
Hold-times      : Up 0 ms, Down 0 ms
Last flapped    : 2002-05-23 16:59:03 PDT (18:23:58 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes : 1700 0 bps
  Output bytes : 1714 0 bps
  Input packets: 123 0 pps
  Output packets: 124 0 pps
Input errors:
  Errors: 0, Drops: 0, Framing errors: 1100817, Bucket drops: 0,
  Policed discards: 0, L3 incompletes: 0, L2 channel errors: 0,
  L2 mismatch timeouts: 0, HS link CRC errors: 0, SRAM errors: 0
Output errors:
  Carrier transitions: 3, Errors: 0, Drops: 0, Aged packets: 0
DS3 alarms : None
SONET alarms : None
DS3 defects : None
SONET defects : None
DS3 media:
  Seconds      Count  State
  AIS          0      0 OK
  LOF          18      1 OK
  LOS          0      0 OK
  IDLE         0      0 OK
  YELLOW       0      0 OK
  BPV          0      0
  EXZ          0      0
  LCV          0      0
  PCV          36     122399
  CCV          72     91948
  LES          0
  PES          18
  PSES         18
  CES          18
  CSES         18
  SEFS         18
  UAS          0
HDLC configuration:
  Policing bucket: Disabled
  Shaping bucket : Disabled
  Giant threshold: 4484, Runt threshold: 3
DSU configuration:
  Compatibility mode: None, Scrambling: Disabled, Subrate: Disabled
  FEAC loopback: Inactive, Response: Disabled, Count: 0
DS3 BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Algorithm: Unknown (0), Induced error rate: 10e-0
Interface transmit queues:
  B/W  WRR  Packets  Bytes  Drops  Errors
Queue0  95  95      0      0      0      0
Queue1   5   5     529    6348    0      0

```



```

SONET PHY:                Seconds      Count  State
  PLL Lock                  0           0  OK
  PHY Light                 20           1  OK
SONET section:
  BIP-B1                    0           0
  SEF                      20           1  OK
  LOS                      20           1  OK
  LOF                      20           1  OK
  ES-S                     20
  SES-S                    20
  SEFS-S                   20
SONET line:
  BIP-B2                    0           0
  REI-L                    0           0
  RDI-L                    0           0  OK
  AIS-L                    0           0  OK
  BERR-SF                  18           1  OK
  BERR-SD                   2           1  OK
  ES-L                     20
  SES-L                    20
  UAS-L                    10
  ES-LFE                   0
  SES-LFE                  0
  UAS-LFE                  0
SONET path:
  BIP-B3                    0           0
  REI-P                    0           0
  LOP-P                    20           1  OK
  AIS-P                    0           0  OK
  RDI-P                    0           0  OK
  UNEQ-P                   0           0  OK
  PLM-P                    20           1  OK
  ES-P                     20
  SES-P                    20
  UAS-P                    10
  ES-PFE                   0
  SES-PFE                  0
  UAS-PFE                  0
Received SONEt overhead:
  F1      : 0x00, J0      : 0x00, K1      : 0x00, K2      : 0x00
  S1      : 0x00, C2      : 0x04, C2(cmp) : 0x04, F2      : 0x00
  Z3      : 0x00, Z4      : 0x00, S1(cmp) : 0x00, V5      : 0x00
  V5(cmp) : 0x00
Transmitted SONEt overhead:
  F1      : 0x00, J0      : 0x01, K1      : 0x00, K2      : 0x00
  S1      : 0x00, C2      : 0x04, F2      : 0x00, Z3      : 0x00
  Z4      : 0x00, V5      : 0x00
Received path trace: t3-0/3/0:0
  74 33 2d 30 2f 33 2f 30 3a 30 00 00 00 00 0d 0a  t3-0/3/0:0:.....
Transmitted path trace: t3-0/3/0:0
  74 33 2d 30 2f 33 2f 30 3a 30 00 00 00 00 00 00  t3-0/3/0:0:.....
Packet Forwarding Engine configuration:
  Destination slot: 0, PLP byte: 1 (0x00)
CoS information:
  CoS transmit queue      Bandwidth      Buffer Priority  Limit
                           %      bps      %      usec
  0 best-effort           95      42499200 95      0      low  none
  3 network-control       5       2236800  5      0      low  none
Logical interface t3-0/3/0:0.0 (Index 11) (SNMP ifIndex 268) (Generation 499)
Flags: Point-To-Point SNMP-Traps Encapsulation: PPP
Protocol inet, MTU: 4470, Generation: 578, Route table: 0

```

```
Flags: None
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 22.22.22.1, Local: 22.22.22.2, Broadcast: Unspecified,
Generation: 98
DLCI 100
  Flags: Active, Dce-configured
  Total down time: 0 sec, Last down: Never
  Traffic statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  DLCI statistics:
    Active DLCI :2 Inactive DLCI : 0
```

## show interfaces (Channelized OC3 IQ and IQE)

<b>Syntax</b>	<pre>show interfaces (<i>type-fpc/pic/port</i> &lt;:<i>channel</i>&gt;&lt;:<i>channel</i>&gt;&lt;:<i>channel</i>&gt;) &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized OC3 IQ or IQE interface.
<b>Options</b>	<p><b><i>type-fpc/pic/port:channel:channel:channel</i></b>—Interface type with optional corresponding channel levels. The interface type can be one of the following:</p> <ul style="list-style-type: none"> <li><b><i>type-fpc/pic/port</i></b>—For the physical interface, <b><i>type</i></b> is <b>coc3</b>. For the clear channel, <b><i>type</i></b> is <b>so</b> (for OC3).</li> <li><b><i>type-fpc/pic/port:channel</i></b>—At the first level of channelization, <b><i>type</i></b> can be <b>coc1</b> (channelized OC1), <b>ct3</b> (from <b>coc1</b>), or <b>t3</b> (from <b>coc1</b>).</li> <li><b><i>type-fpc/pic/port:channel:channel</i></b>—At the second level of channelization, <b><i>type</i></b> can be <b>ct1</b> (from <b>coc1</b> or <b>ct3</b>) or <b>t1</b> (from <b>coc1</b> or <b>ct3</b>).</li> <li><b><i>type-fpc/pic/port:channel:channel:channel</i></b>—At the third level of channelization, <b><i>type</i></b> can be <b>ds</b> (from <b>ct1</b>).</li> </ul> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces extensive (Channelized OC3 IQ) (Physical) on page 107</a></p> <p><a href="#">show interfaces extensive (Channelized OC1 on Channelized OC3 IQ) on page 108</a></p> <p><a href="#">show interfaces extensive (Channelized T1 on Channelized OC3 IQ) on page 109</a></p> <p><a href="#">show interfaces extensive (DSO on Channelized OC3 IQ) on page 110</a></p>
<b>Output Fields</b>	Table 15 on page 94 lists the output fields for the <b>show interfaces</b> (all Channelized OC interfaces) command. Output fields are listed in the approximate order in which they appear.

Table 15: Channelized OC show interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Description</b>	Interface description.	All levels
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	MTU size on the physical interface.	All levels
<b>Clocking</b>	SONET/SDH reference clock source. It can be <b>Internal</b> or <b>External</b> . Clocking is configured and displayed only for channel 0.	All levels
<b>Framing mode</b>	Framing mode: <b>SONET</b> or <b>SDH</b> .	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Whether loopback is enabled and the type of loopback ( <b>local</b> or <b>remote</b> ).	All levels
<b>SONET loopback</b>	Whether loopback is enabled on a SONET/SDH interface, and the type of loopback ( <b>local</b> or <b>remote</b> ).	All levels
<b>FCS</b>	Frame check sequence on the interface (either <b>16</b> or <b>32</b> ). The default is <b>16-bit</b> .	All levels
<b>Payload scrambler</b>	Whether payload scrambling is enabled.	All levels
<b>Parent</b>	Name and interface index of the interface to which a particular child interface belongs. <b>None</b> indicates that this interface is the top level.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the “Device Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the “Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the “Link Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>ANSI or ITU LMI settings</b>	<p>(Frame Relay) Settings for Local Management Interface (LMI). The format is (ANSI or ITU) LMI settings: <i>value, value... nn</i> seconds, where <i>value</i> can be:</p> <ul style="list-style-type: none"> <li>• <b>n391dte</b>—DTE full status polling interval (1–255)</li> <li>• <b>n392dce</b>—DCE error threshold (1–10)</li> <li>• <b>n392dte</b>—DTE error threshold (1–10)</li> <li>• <b>n393dce</b>—DCE monitored event count (1–10)</li> <li>• <b>n393dte</b>—DTE monitored event count (1–10)</li> <li>• <b>t391dte</b>—DTE polling timer (5–30 seconds)</li> <li>• <b>t392dce</b>—DCE polling verification timer (5–30 seconds)</li> </ul>	All levels
<b>LMI statistics</b>	<p>(Frame Relay) Statistics about the link management.</p> <ul style="list-style-type: none"> <li>• <b>Input</b>—Number of packets coming in on the interface (<i>nn</i>) and how much time has passed since the last packet arrived. The format is <b>Input: nn (last sent hh:mm:ss ago)</b>.</li> <li>• <b>Output</b>—Number of packets sent out on the interface (<i>nn</i>) and how much time has passed since the last packet was sent. The format is <b>Output: nn (last sent hh:mm:ss ago)</b>.</li> </ul>	detail extensive
<b>DTE statistics</b>	<p>(Frame Relay) Statistics about messages transmitted from the data terminal equipment (DTE) to the data circuit-terminating equipment (DCE):</p> <ul style="list-style-type: none"> <li>• <b>Enquiries sent</b>—Number of link status enquiries sent from the DTE to the DCE.</li> <li>• <b>Full enquiries sent</b>—Number of full enquiries sent from the DTE to the DCE.</li> <li>• <b>Enquiry responses received</b>—Number of enquiry responses received by the DTE from the DCE.</li> <li>• <b>Full enquiry responses received</b>—Number of full enquiry responses sent from the DTE to the DCE.</li> </ul>	detail extensive none
<b>DCE statistics</b>	<p>(Frame Relay) Statistics about messages transmitted from the DCE to the DTE:</p> <ul style="list-style-type: none"> <li>• <b>Enquiries received</b>—Number of enquiries received by the DCE from the DTE.</li> <li>• <b>Full enquiries received</b>—Number of full enquiries received by the DCE from the DTE.</li> <li>• <b>Enquiry responses sent</b>—Number of enquiry responses sent from the DCE to the DTE.</li> <li>• <b>Full enquiry responses sent</b>—Number of full enquiry responses sent from the DCE to the DTE.</li> </ul>	detail extensive none
<b>Common statistics</b>	<p>(Frame Relay) Statistics about messages sent between the DTE and the DCE:</p> <ul style="list-style-type: none"> <li>• <b>Unknown messages received</b>—Number of received packets that do not fall into any category.</li> <li>• <b>Asynchronous updates received</b>—Number of link status peer changes received.</li> <li>• <b>Out-of-sequence packets received</b>—Number of packets for which the sequence of the packets received is different from the expected sequence.</li> <li>• <b>Keepalive responses timedout</b>—Number of keepalive responses that timed out when no LMI packet was reported for <b>n392dte</b> or <b>n393dce</b> intervals. (See LMI settings.)</li> </ul>	detail extensive none

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Nonmatching DCE-end DLCIs</b>	(Frame Relay) Number of DLCIs configured from the DCE, displayed only from the DTE.	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: <i>year-month-day hh:mm:ss timezone year-month-day (hh:mm:ss ago)</i></b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive none</b>
<b>CoS Queues</b>	Number of CoS queues configured.	<b>detail extensive none</b>
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
<b>DS1 alarms</b> <b>DS1 defects</b>	<p>Elor T1 media-specific defects that can prevent the interface from passing packets. When a defect persists for a certain period, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface. See the following list for all possible alarms and defects. For complete explanations of most of these alarms and defects, see <i>Bellcore Telcordia GR-499-CORE</i>.</p> <ul style="list-style-type: none"> <li>• <b>LOS</b>—Loss of signal.</li> <li>• <b>LOF</b>—Loss of frame.</li> <li>• <b>AIS</b>—Alarm indication signal.</li> <li>• <b>YLW</b>—Yellow alarm. Indicates errors at the remote site receiver.</li> </ul>	<b>detail extensive none</b>

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>T1 media</b>	<p>Counts of T1 or E1 media-specific errors.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>The T1 or E1 media-specific error types are:</p> <ul style="list-style-type: none"> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>BEE</b>—Bit error</li> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>YELLOW</b>—Errors at the remote site receiver</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>PCV</b>—Pulse code violation</li> <li>• <b>CS</b>—Carrier state</li> <li>• <b>FEBE</b>—Far-end block error (E1 only)</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>ES</b>—Errored seconds</li> <li>• <b>BES</b>—Bit error seconds</li> <li>• <b>SES</b>—Severely errored seconds</li> <li>• <b>SEFS</b>—Severely errored framing seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> </ul>	<b>extensive</b>
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Bucket Drops</b>—Drops caused by traffic load exceeding the interface transmit/receive leaky bucket configuration. The default is off.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>SRAM errors</b>—Number of hardware errors that occurred in the static RAM (SRAM) on the PIC. If the value of this field increments, the PIC is malfunctioning.</li> <li>• <b>HS link FIFO overflows</b>—Number of FIFO overflows on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>



Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>HS link FIFO underflows</b>—Number of FIFO underflows on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeds the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Active alarms</b>	Defects that can prevent the interface from passing packets:	<b>detail extensive</b>
<b>Active defects</b>	<ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>LOF</b>—Loss of frame.</li> </ul>	
<b>SONET alarms</b>	Media-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm.	All levels
<b>SONET defects</b>	Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router or light the red or yellow alarm LED on the craft interface. See these fields for possible alarms and defects: <b>SONET PHY</b> , <b>SONET section</b> , <b>SONET line</b> , and <b>SONET path</b> .	

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
SONET vt	<p>SONET virtual-tributary (VT) alarms and defects:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>REI-V</b>—Remote error indication (near-end VT)</li> <li>• <b>LOP-V</b>—Loss of pointer (near-end VT)</li> <li>• <b>AIS-V</b>—Alarm indication signal (near-end VT)</li> <li>• <b>RDI-V</b>—Remote defect indication (near-end VT)</li> <li>• <b>UNEQ-V</b>—Unequipped (near-end VT)</li> <li>• <b>PLM-V</b>—Payload label mismatch (near-end VT)</li> <li>• <b>ES-V</b>—Errored seconds (near-end VT)</li> <li>• <b>SES-V</b>—Severely errored seconds (near-end VT)</li> <li>• <b>UAS-V</b>—Unavailable seconds (near-end VT)</li> <li>• <b>ES-VFE</b>—Errored seconds (far-end VT)</li> <li>• <b>SES-VFE</b>—Severely errored seconds (far-end VT)</li> <li>• <b>UAS-VFE</b>—Unavailable seconds (far-end VT)</li> </ul>	extensive
SONET PHY	<p>Counts of specific SONET errors with detailed information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>	extensive
SONET section	<p>Counts of specific SONET errors with detailed information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B1</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>LOL</b>—Loss of light</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>ES-S</b>—Errored seconds (section)</li> <li>• <b>SES-S</b>—Severely errored seconds (section)</li> <li>• <b>SEFS-S</b>—Severely errored framing seconds (section)</li> </ul>	extensive

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>SONET line</b>	<p>Active alarms and defects, plus counts of specific SONET errors with detailed information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>REI-L</b>—Remote error indication (near-end line)</li> <li>• <b>RDI-L</b>—Remote defect indication (near-end line)</li> <li>• <b>AIS-L</b>—Alarm indication signal (near-end line)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>ES-L</b>—Errored seconds (near-end line)</li> <li>• <b>SES-L</b>—Severely errored seconds (near-end line)</li> <li>• <b>UAS-L</b>—Unavailable seconds (near-end line)</li> <li>• <b>ES-LFE</b>—Errored seconds (far-end line)</li> <li>• <b>SES-LFE</b>—Severely errored seconds (far-end line)</li> <li>• <b>UAS-LFE</b>—Unavailable seconds (far-end line)</li> </ul>	<b>extensive</b>
<b>SONET path</b>	<p>Active alarms and defects, plus counts of specific SONET errors with detailed information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B3</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>REI-P</b>—Remote error indication</li> <li>• <b>LOP-P</b>—Loss of pointer (path)</li> <li>• <b>AIS-P</b>—Path alarm indication signal</li> <li>• <b>RDI-P</b>—Path remote defect indication</li> <li>• <b>UNEQ-P</b>—Path unequipped</li> <li>• <b>PLM-P</b>—Path payload (signal) label mismatch</li> <li>• <b>ES-P</b>—Errored seconds (near-end STS path)</li> <li>• <b>SES-P</b>—Severely errored seconds (near-end STS path)</li> <li>• <b>UAS-P</b>—Unavailable seconds (near-end STS path)</li> <li>• <b>ES-PFE</b>—Errored seconds (far-end STS path)</li> <li>• <b>SES-PFE</b>—Severely errored seconds (far-end STS path)</li> <li>• <b>UAS-PFE</b>—Unavailable seconds (far-end STS path)</li> </ul>	<b>extensive</b>

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
Received SONET overhead	Values of the received and transmitted SONET/SDH overhead:	extensive
Transmitted SONET overhead	<p>F1—Section user channel byte. This byte is set aside for the purposes of users.</p> <p>S1—Synchronization Status (S1). The S1 byte is located in the first STS-1 of an STS-N. Bits 5 through 8 convey the synchronization status of the network element.</p> <p>Z3 and Z4—Path overhead.</p> <p>V5—Virtual Tributary (VT) path overhead byte.</p>	
SDH alarms	SDH media-specific defects that can prevent the interface from passing packets. When a defect persists for a certain period, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router or light the red or yellow alarm LED on the craft interface. See these fields for possible alarms and defects: SDH PHY, SDH regenerator section, SDH multiplex section, and SDH path.	All levels
SDH defects	<p><b>NOTE:</b> For controller based SONET PICs, the SDH alarms and SDH defects output in the <b>show interface coc3 extensive</b> command output only shows the section and line level defects. The path level defects can be found under the SONET (so) interface output.</p>	
SDH PHY	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>	extensive
SDH regenerator section	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>RS-BIP8</b>—24-bit BIP for multiplex section overhead (B2 bytes)</li> <li>• <b>OOF</b>—Out of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>RS-ES</b>—Errored seconds (near-end regenerator section)</li> <li>• <b>RS-SES</b>—Severely errored seconds (near-end regenerator section)</li> <li>• <b>RS-SEFS</b>—Severely errored framing seconds (regenerator section)</li> </ul>	extensive

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
SDH multiplex section	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>MS-BIP24</b>—8-bit BIP for high-order path overhead (B3 byte)</li> <li>• <b>MS-FEBE</b>—Far-end block error (multiplex section)</li> <li>• <b>MS-FERF</b>—Far-end remote fail (multiplex section)</li> <li>• <b>MS-AIS</b>—alarm indication signal (multiplex section)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>MS-ES</b>—Errored seconds (near-end multiplex section)</li> <li>• <b>MS-SES</b>—Severely errored seconds (near-end multiplex section)</li> <li>• <b>MS-UAS</b>—Unavailable seconds (near-end multiplex section)</li> <li>• <b>MS-ES-FE</b>—Errored seconds (far-end multiplex section)</li> <li>• <b>MS-SES-FE</b>—Severely errored seconds (far-end multiplex section)</li> <li>• <b>MS-UAS-FE</b>—Unavailable seconds (far-end multiplex section)</li> </ul>	extensive
SDH path	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>HP-BIP8</b>—8-bit BIP for regenerator section overhead (B1 byte)</li> <li>• <b>HP-FEBE</b>—Far-end block error (high-order path)</li> <li>• <b>HP-LOP</b>—Loss of pointer (high-order path)</li> <li>• <b>HP-AIS</b>—High-order-path alarm indication signal</li> <li>• <b>HP-FERF</b>—Far-end remote fail (high-order path)</li> <li>• <b>HP-UNEQ</b>—Unequipped (high-order path)</li> <li>• <b>HP-PLM</b>—Payload label mismatch (high-order path)</li> <li>• <b>HP-ES</b>—Errored seconds (near-end high-order path)</li> <li>• <b>HP-SES</b>—Severely errored seconds (near-end high-order path)</li> <li>• <b>HP-UAS</b>—Unavailable seconds (near-end high-order path)</li> <li>• <b>HP-ES-FE</b>—Errored seconds (far-end high-order path)</li> <li>• <b>HP-SES-FE</b>—Severely errored seconds (far-end high-order path)</li> <li>• <b>HP-UAS-FE</b>—Unavailable seconds (far-end high-order path)</li> </ul>	extensive

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
Received SDH overhead	Values of the received and transmitted SONET overhead:	extensive
Transmitted SDH overhead	<ul style="list-style-type: none"> <li>• <b>C2</b>—Signal label. Allocated to identify the construction and content of the STS-level SPE and for PDI-P.</li> <li>• <b>F1</b>—Section user channel byte. This byte is set aside for the purposes of users.</li> <li>• <b>K1</b> and <b>K2</b>—These bytes are allocated for APS signaling for the protection of the multiplex section.</li> <li>• <b>J0</b>—Section trace. This byte is defined for STS-1 number 1 of an STS-<i>N</i> signal. Used to transmit a 1-byte fixed-length string or a 16-byte message so that a receiving terminal in a section can verify its continued connection to the intended transmitter.</li> <li>• <b>S1</b>—Synchronization status. The S1 byte is located in the first STS-1 of an STS-<i>N</i>.</li> <li>• <b>Z3</b> and <b>Z4</b>—Allocated for future use.</li> </ul>	
Received path trace	Channelized OC12 interfaces allow path trace bytes to be sent inband across the SONET/SDH link. The received path trace value is the message received from the router at the other end of the fiber. The transmitted path trace value is the message that this router transmits. This information is specific to each of the 12 channelized OC12 interfaces.	extensive
Transmitted path trace		
DS3 media	<p>Counts of T3 media-specific errors. For detailed definitions of the T3 (DS-3) error events (BPV, EXZ, LCV, PCV, and CCV) and performance parameters (LES, PES, PSES, CES, CSES, SEFS, and UAS), see RFC 2496.</p> <p>The DS3 or E3 media-specific error types can be:</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop out of lock</li> <li>• <b>Reframing</b>—Frame alignment recovery time</li> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>IDLE</b>—Idle code detected</li> <li>• <b>YELLOW</b>—Errors at the remote site receiver</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>PCV</b>—(DS3 only) Pulse code violation</li> <li>• <b>CCV</b>—(DS3 only) C-bit coding violation</li> <li>• <b>FEBE</b>—(DS3 only) Far-end block error</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>PES</b>—(DS3 only) P-bit errored seconds</li> <li>• <b>PSES</b>—(DS3 only) P-bit errored seconds (section)</li> <li>• <b>CES</b>—(DS3 only) C-bit errored seconds</li> <li>• <b>CSES</b>—(DS3 only) C-bit severely errored seconds</li> <li>• <b>SEFS</b>—Severely errored framing seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> </ul>	extensive

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
HDLC configuration	<p>Information about the HDLC configuration.</p> <ul style="list-style-type: none"> <li>• <b>Policing bucket</b>—Configured state of the receiving policer.</li> <li>• <b>Shaping bucket</b>—Configured state of the transmitting shaper.</li> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> <li>• <b>Timeslots</b>—Configured time slots for the interface.</li> <li>• <b>Line encoding</b>—Line encoding used. It is always <b>HDB3</b>.</li> <li>• <b>Byte encoding</b>—(T1 only) Byte encoding used: <b>Nx64K</b> or <b>Nx56K</b>.</li> <li>• <b>Line encoding</b>—Line encoding used. For T1, the value can be <b>B8ZS</b> or <b>AMI</b>. For E1, the value is <b>HDB3</b>.</li> <li>• <b>Data inversion</b>—HDLC data inversion setting: <b>Enabled</b> or <b>Disabled</b>.</li> <li>• <b>Idle cycle flag</b>—Idle cycle flags.</li> <li>• <b>Start end flag</b>—Start and end flag.</li> </ul>	extensive
Interface transmit queues	<p>Name of the transmit queues and their associated statistics for each DS3 channel on the Channelized OC12 PIC.</p> <ul style="list-style-type: none"> <li>• <b>B/W</b>—Queue bandwidth as a percentage of the total interface bandwidth.</li> <li>• <b>WRR</b>—Weighted round-robin (in percent).</li> <li>• <b>Packets</b>—Number of packets transmitted.</li> <li>• <b>Bytes</b>—Number of bytes transmitted.</li> <li>• <b>Drops</b>—Number of packets dropped.</li> <li>• <b>Errors</b>—Number of packet errors.</li> </ul>	extensive
DSU configuration	<p>Information about the DSU configuration. The last three lines (<b>Bit count</b>, <b>Error bit count</b>, and <b>LOS information</b>) are displayed only if a BERT has ever been run on the interface.</p> <ul style="list-style-type: none"> <li>• <b>Compatibility mode</b>—CSU/DSU compatibility mode: <b>None</b>, <b>Larscom</b>, <b>Kentrox</b>, or <b>Digital-Link</b>.</li> <li>• <b>Scrambling</b>—Payload scrambling. It can be <b>Enabled</b> or <b>Disabled</b>.</li> <li>• <b>Subrate</b>—Configured subrate setting. Applies only when <b>Digital-Link</b> compatibility mode is used. It can be <b>Disabled</b> or display units in kbps.</li> <li>• <b>FEAC loopback</b>—(T3) Whether a far-end alarm and control (FEAC) loopback is <b>Active</b> or <b>Inactive</b>. This feature is used to send alarm or status information from the far-end terminal back to the near-end terminal and to initiate T3 loopbacks at the far-end terminal from the near-end terminal.</li> <li>• <b>Response</b>—Whether the FEAC signal is <b>Enabled</b> or <b>Disabled</b>.</li> <li>• <b>Count</b>—Number of FEAC loopbacks.</li> </ul>	extensive
BERT configuration	<p>(DS interfaces) BERT (bit error rate test) checks the quality of the line. This output appears only when a BERT is run on the interface.</p> <ul style="list-style-type: none"> <li>• <b>BERT time period</b>—Configured total time period that the BERT is to run.</li> <li>• <b>Elapsed</b>—Actual time elapsed since the start of the BERT (in seconds).</li> <li>• <b>Induced error rate</b>—Configured rate at which the bit errors are induced in the BERT pattern.</li> <li>• <b>Algorithm</b>—Type of algorithm selected for the BERT.</li> </ul>	detail extensive none

Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Packet Forwarding Engine configuration</b>	Information about the configuration of the Packet Forwarding Engine: <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>	<b>extensive</b>
<b>CoS information</b>	Information about the CoS queue for the physical interface. <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive none</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Traffic statistics</b>	Total number of bytes and packets received and transmitted on the logical interface. These statistics are the sum of the local and transit statistics. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize. <ul style="list-style-type: none"> <li>• <b>Input rate</b>—Rate of bits and packets received on the interface.</li> <li>• <b>Output rate</b>—Rate of bits and packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Local statistics</b>	Statistics for traffic received from and transmitted to the Routing Engine. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize.	<b>detail extensive</b>



Table 15: Channelized OC show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Transit statistics</b>	Statistics for traffic transiting the router. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize.	<b>detail extensive</b>
<b>Protocol</b>	Protocol family configured on the logical interface, such as <b>iso</b> , <b>inet6</b> , or <b>mpls</b> .	<b>detail extensive none</b>
<b>Multilink bundle</b>	(If the logical interface is configured as part of a multilink bundle.) Interface name for the multilink bundle.	<b>detail extensive none</b>
<b>MTU</b>	MTU size on the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route table</b>	Routing table in which the logical interface address is located. For example, <b>0</b> refers to the routing table inet.0.	<b>detail extensive</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address.	<b>detail extensive none</b>
<b>DLCI</b>	(Frame Relay) DLCI number of the logical interface. The following DLCI information is displayed: <b>Flags</b> , <b>Total down time</b> , <b>Last down</b> , and <b>Traffic statistics</b> . <b>Flags</b> is one or more of the following: <ul style="list-style-type: none"> <li>• <b>Active</b>—Set when the link is active and the DTE and DCE are exchanging information.</li> <li>• <b>Down</b>—Set when the link is active, but no information is received from the DCE.</li> <li>• <b>Unconfigured</b>—Set when the corresponding DLCI in the DCE is not configured.</li> <li>• <b>Configured</b>—Set when the corresponding DLCI in the DCE is configured.</li> <li>• <b>Dce-configured</b>—Displayed when the command is issued from the DTE.</li> </ul>	<b>detail extensive none</b>
<b>DLCI statistics</b>	(Frame Relay) Data-link connection identifier (DLCI) statistics. <ul style="list-style-type: none"> <li>• <b>Active DLCI</b>—Number of active DLCIs.</li> <li>• <b>Inactive DLCI</b>—Number of inactive DLCIs.</li> </ul>	<b>detail extensive none</b>

## Sample Output

### show interfaces extensive (Channelized OC3 IQ) (Physical)

```

user@host> show interfaces extensive coc3-0/0/0
Physical interface: coc3-0/0/0, Enabled, Physical link is Down
  Interface index: 128, SNMP ifIndex: 22, Generation: 11
  Description: pink coc3-0/0/0

```

```

Link-level type: Controller, Clocking: Internal, SONET mode, Speed: OC3,
Loopback: None, Parent: None
Device flags   : Present Running Down
Interface flags: Hardware-Down Point-To-Point SNMP-Traps 16384
Link flags     : None
Hold-times    : Up 0 ms, Down 0 ms
CoS queues    : 4 supported
Last flapped  : 2005-01-27 16:39:21 PST (1w0d 22:09 ago)
Statistics last cleared: Never
SONET alarms  : PLL, LOS
SONET defects : PLL, LOF, LOS, SEF, AIS-L
SONET PHY:
  Seconds      Count  State
  PLL Lock     681767    1  PLL Lock Error
  PHY Light      0        0  OK
SONET section:
  BIP-B1         0        0
  SEF            681767    1  Defect Active
  LOS            681767    1  Defect Active
  LOF            681767    1  Defect Active
  ES-S           681767
  SES-S          681767
  SEFS-S         681767
SONET line:
  BIP-B2         0        0
  REI-L          0        0
  RDI-L          0        0  OK
  AIS-L          681767    1  Defect Active
  BERR-SF        0        0  OK
  BERR-SD        0        0  OK
  ES-L           681767
  SES-L          681767
  UAS-L          681757
  ES-LFE         0
  SES-LFE        0
  UAS-LFE        0
Received SONET overhead:
  F1   : 0x00, J0       : 0x00, K1       : 0xff, K2       : 0xff
  S1   : 0xff
Transmitted SONET overhead:
  F1   : 0x00, J0       : 0x01, K1       : 0x00, K2       : 0x00
  S1   : 0x00

```

#### show interfaces extensive (Channelized OC1 on Channelized OC3 IQ)

```

user@host> show interfaces extensive coc1-0/0/0:1
Physical interface: coc1-0/0/0:1, Enabled, Physical link is Down
  Interface index: 133, SNMP ifIndex: 27, Generation: 16
  Link-level type: Controller, Clocking: Internal, SONET mode, Speed: 51840kbps,

  Loopback: None, Parent: coc3-0/0/0
Interface index 128
Device flags   : Present Running Down 16384
Interface flags: Hardware-Down Point-To-Point SNMP-Traps 16384
Link flags     : None
Hold-times    : Up 0 ms, Down 0 ms
CoS queues    : 4 supported
Last flapped  : 2005-02-04 14:51:07 PST (00:00:35 ago)
Statistics last cleared: Never
SONET alarms  : None
SONET defects : AIS-P
SONET path:

```

```

BIP-B3          0          0
REI-P           0          0
LOP-P           0          0 OK
AIS-P           36         1 Defect Active
RDI-P           0          0 OK
UNEQ-P          0          0 OK
PLM-P           0          0 OK
ES-P            36
SES-P            36
UAS-P            26
ES-PFE          0
SES-PFE          0
UAS-PFE          0
Received SONET overhead:
  C2      : 0xff, C2(cmp) : 0x01, F2      : 0x00, Z3      : 0x00
  Z4      : 0x00, S1(cmp) : 0x00
Transmitted SONET overhead:
  C2      : 0x01, F2      : 0x00, Z3      : 0x00, Z4      : 0x00
Received path trace:
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Transmitted path trace: router-1 coc1-0/0/0:1
  6b 61 76 65 72 69 20 63 6f 63 31 2d 30 2f 30 2f   router-1 coc1-0/0/0:1
  30 3a 31 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Packet Forwarding Engine configuration:
  Destination slot: 0 (0x00)

```

#### show interfaces extensive (Channelized T1 on Channelized OC3 IQ)

```

user@host> show interfaces extensive ct1-0/0/0:1:1
Physical interface: ct1-0/0/0:1:1, Enabled, Physical link is Down
Interface index: 134, SNMP ifIndex: 62, Generation: 17
Link-level type: Controller, Clocking: Internal, Speed: T1, Loopback: None,
Framing: ESF, Parent: coc1-0/0/0:1 Interface index 133
Device flags   : Present Running Down 16384
Interface flags: Hardware-Down Point-To-Point SNMP-Traps 16384
Link flags     : None
Hold-times     : Up 0 ms, Down 0 ms
CoS queues     : 4 supported
Last flapped   : 2005-02-04 14:54:35 PST (00:00:18 ago)
Statistics last cleared: Never
DS1 alarms    : None
DS1 defects    : AIS, LOF
T1 media:
  Seconds      Count  State
SEF            1       1 OK
BEE            1       1 OK
AIS           18       1 Defect Active
LOF           18       1 Defect Active
LOS            0       0 OK
YELLOW         0       0 OK
BPV            0       0
EXZ            0       0
LCV            0       0
PCV            0       0
CS             0       0
LES           18       0
ES            18       0

```

```

SES                      18
SEFS                     18
BES                      0
UAS                      14
DS1 BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
SONET alarms   : None
SONET defects  : None
SONET vt:
  BIP-BIP2      0          0
  REI-V         0          0
  LOP-V         0          0 OK
  AIS-V        19          1 Defect Active
  RDI-V        19          1 Defect Active
  UNEQ-V        0          0 OK
  PLM-V        19          1 Defect Active
  ES-V         19
  SES-V        19
  UAS-V         9
  ES-VFE       0
  SES-VFE      0
  UAS-VFE      0
Received SONET overhead:
  V5          : 0x07, V5(cmp) : 0x02
Transmitted SONET overhead:
  V5          : 0x02
Packet Forwarding Engine configuration:
  Destination slot: 0 (0x00)

```

#### show interfaces extensive (DS0 on Channelized OC3 IQ)

```

user@host> show interfaces extensive ds-0/0/0:1:1
Physical interface: ds-0/0/0:1:1, Enabled, Physical link is Down
Interface index: 135, SNMP ifIndex: 63, Generation: 18
Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: 320kbps,
Loopback: None, FCS: 16, Parent: ct1-0/0/0:1:1 Interface index 134
Device flags   : Present Running
Interface flags: Hardware-Down Point-To-Point SNMP-Traps 16384
Link flags     : Keepalives
Hold-times     : Up 0 ms, Down 0 ms
CoS queues     : 4 supported
Last flapped   : Never
Statistics last cleared: Never
Traffic statistics:
  Input bytes   :          0          0 bps
  Output bytes  :          0          0 bps
  Input packets:          0          0 pps
  Output packets:        0          0 pps
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
  Policed discards: 0, L3 incompletes: 0, L2 channel errors: 0,
  L2 mismatch timeouts: 0, HS link CRC errors: 0, Resource errors: 0
Output errors:
  Carrier transitions: 1, Errors: 0, Drops: 0, Aged packets: 0, MTU errors: 0,
  Resource errors: 0
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort      0              0              0

  1 expedited-fo     0              0              0

```

2 assured-forw	0	0	0
3 network-cont	0	0	0

**HDLC configuration:**

Giant threshold: 1514, Runt threshold: 2

Timeslots : 1-5

Byte encoding: Nx64K, Data inversion: Disabled, Idle cycle flag: flags,

Start end flag: shared

**DS0 BERT configuration:**

BERT time period: 10 seconds, Elapsed: 0 seconds

Induced Error rate: 10e-0, Algorithm:  $2^{15} - 1$ , 0.151, Pseudorandom (9)**Packet Forwarding Engine configuration:**

Destination slot: 0, PLP byte: 4 (0x00)

## show interfaces (Channelized STM1 IQ)

<b>Syntax</b>	<code>show interfaces (type-fpc/pic/port &lt;:channel&gt;&lt;:channel&gt;)</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;media&gt;</code> <code>&lt;snmp-index snmp-index&gt;</code> <code>&lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized STM1 IQ interface.
<b>Options</b>	<p><b>type-fpc/pic/port:channel:channel</b>—Interface type with optional corresponding channel levels. The interface type can be one of the following types:</p> <ul style="list-style-type: none"> <li><b>type-fpc/pic/port:channel</b>—For the physical channelized STM1 IQ interface, <b>type</b> is <b>cstm1</b>. For the clear channel, <b>type</b> is <b>so</b>. For channelization, the STM1 IQ interface must be converted to interface type <b>cau4</b>.</li> <li><b>type-fpc/pic/port:channel</b>—At the first level of channelization, <b>type</b> can be <b>ce1</b> or <b>e1</b> ( clear channel or fractional channel from <b>cau4</b>).</li> <li><b>type-fpc/pic/port:channel:channel</b>—At the second level of channelization, <b>type</b> is <b>ds</b> (from <b>ce1</b>).</li> </ul> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces (Channelized STM1 IQ) (Physical) on page 112</a> <a href="#">show interfaces (Channelized AU-4) (Physical) on page 113</a> <a href="#">show interfaces (Channelized E1) (Physical) on page 113</a> <a href="#">show interfaces (DS) on page 114</a>
<b>Output Fields</b>	See the output field table for the <a href="#">show interfaces (Channelized STM1)</a> command.

### Sample Output

#### show interfaces (Channelized STM1 IQ) (Physical)

```
user@host> show interfaces cstm1-0/0/0
```

```

Physical interface: cstm1-0/0/0, Enabled, Physical link is Up
Interface index: 146, SNMP ifIndex: 35
Link-level type: Frame-relay, Controller, Clocking: Internal, SDH mode,
Speed: OC3, Loopback: None, Parent: None Device flags : Present Running
Interface flags: Point-To-Point SNMP-Traps
Link flags : Keepalives DTE
ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds
LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
DTE statistics:
  Enquiries sent : 43186
  Full enquiries sent : 8515
  Enquiry responses received : 43185
  Full enquiry responses received : 8515
DCE statistics:
  Enquiries received : 0
  Full enquiries received : 0
  Enquiry responses sent : 0
  Full enquiry responses sent : 0
Common statistics:
  Unknown messages received : 0
  Asynchronous updates received : 0
  Out-of-sequence packets received : 0
  Keepalive responses timedout : 0
Nonmatching DCE-end DLCIs:
  2
Last flapped : 2003-02-06 15:01:56 PST (07:15:06 ago)
...

```

#### show interfaces (Channelized AU-4) (Physical)

```

user@host> show interfaces cau4-0/0/0
Physical interface: cau4-0/0/0, Enabled, Physical link is Up
Interface index: 147, SNMP ifIndex: 36
Link-level type: Controller, Clocking: Internal, SDH mode, Speed: OC3,
Loopback: None, Parent: cstm1-0/0/0 Interface index 146
Device flags : Present Running
Interface flags: Point-To-Point SNMP-Traps
Link flags : None
Last flapped : 2003-02-06 19:36:31 PST (02:40:42 ago)
SDH alarms : None
SDH defects : None
...

```

#### show interfaces (Channelized E1) (Physical)

```

user@host> show interfaces ce1-0/0/0:11
Physical interface: ce1-0/0/0:11, Enabled, Physical link is Up
Interface index: 169, SNMP ifIndex: 288
Link-level type: Frame-relay, Controller, Clocking: Internal, Speed: E1,
Loopback: None, Framing: G704, Parent: cau4-0/0/0 Interface index 147
Device flags : Present Running
Interface flags: Point-To-Point SNMP-Traps
Link flags : Keepalives DTE
ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds
LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
DTE statistics:
  Enquiries sent : 43186
  Full enquiries sent : 8515
  Enquiry responses received : 43185
  Full enquiry responses received : 8515
DCE statistics:

```

```

    Enquiries received           : 0
    Full enquiries received      : 0
    Enquiry responses sent       : 0
    Full enquiry responses sent   : 0
Common statistics:
    Unknown messages received    : 0
    Asynchronous updates received : 0
    Out-of-sequence packets received : 0
    Keepalive responses timedout   : 0
Nonmatching DCE-end DLCIs:
    2
Last flapped   : 2003-02-06 22:05:23 PST (00:13:45 ago)
DS1  alarms    : None
DS1  defects    : None
SDH   alarms    : None
SDH   defects    : None
...

```

### show interfaces (DS)

```

user@host> show interfaces ds-0/0/0:11:1
Physical interface: ds-0/0/0:11:1, Enabled, Physical link is Up
  Interface index: 170, SNMP ifIndex: 289
  Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: 640kbps,
  Loopback: Illegal, FCS: 16, Parent: ce1-0/0/0:11 Interface index 169
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : Keepalives
  CoS Queues: 8 maximum usable queues, 4 in use
  Keepalive settings: Interval 10 seconds, Up-count 1, Down-count 3
  Keepalive: Input: 0 (never), Output: 0 (never)
  LCP state: Conf-req-sent
  Egress queues: 8 supported, 4 in use
...
Logical interface ds-0/0/0:11:1.0 (Index 77) (SNMP ifIndex 290)
  Flags: Hardware-Down Point-To-Point SNMP-Traps Encapsulation: PPP
  Bandwidth: 0
  Protocol inet, MTU: 1500
  Flags: Protocol-Down
  Addresses, Flags: Dest-route-down Is-Preferred Is-Primary
    Destination: 10.134.1.0/30, Local: 10.134.1.1
DLCI 100
  Flags: Active, Dce-configured
  Total down time: 0 sec, Last down: Never
  Traffic statistics:
    Input bytes   : 0
    Output bytes  : 0
    Input packets : 0
    Output packets: 0
...

```



## show interfaces (Channelized STM1)

<b>Syntax</b>	<pre>show interfaces e1-fpc/pic/port:elchannel &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index snmp-index&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized STM1 interface.
<b>Options</b>	<p><b>e1-fpc/pic/port:elchannel</b>—Display standard status information about the specified channelized STM1 interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (Channelized STM1, SDH) on page 126</a>
<b>Output Fields</b>	<a href="#">Table 16 on page 115</a> lists the output fields for the <b>show interfaces</b> (all Channelized STM1 interfaces) command. Output fields are listed in the approximate order in which they appear.

Table 16: Channelized STM1 show interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP IfIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	MTU size on the physical interface.	All levels
<b>Clocking</b>	Reference clock source. It can be <b>Internal</b> or <b>External</b> .	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Whether loopback is enabled and the type of loopback ( <b>local</b> or <b>remote</b> ).	All levels
<b>FCS</b>	Frame check sequence on the interface (either <b>16</b> or <b>32</b> ). The default is <b>16</b> bits.	All levels
<b>Framing</b>	Physical layer framing format used on the link. It can be <b>G704</b> , <b>G704-NO-CRC4</b> , or <b>Unframed</b> . The default is <b>G704</b> .	All levels
<b>Parent</b>	(Channelized STM1 IQ interfaces only) Name and interface index of the interface to which a particular child interface belongs. <b>None</b> indicates that this interface is the top level.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the "Link Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Keepalive settings</b>	(PPP and HDLC) Configured settings for keepalives. <ul style="list-style-type: none"> <li><b>intervalseconds</b>—The time in seconds between successive keepalive requests. The range is <b>10</b> seconds through <b>32,767</b> seconds, with a default of <b>10</b> seconds.</li> <li><b>down-count number</b>—The number of keepalive packets a destination must fail to receive before the network takes a link down. The range is <b>1</b> through <b>255</b>, with a default of <b>3</b>.</li> <li><b>up-count number</b>—The number of keepalive packets a destination must receive to change a link's status from down to up. The range is <b>1</b> through <b>255</b>, with a default of <b>1</b>.</li> </ul>	<b>detail extensive none</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
Keepalive statistics	<p>(PPP and HDLC) Information about keepalive packets.</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of keepalive packets received by PPP. <ul style="list-style-type: none"> <li><b>(last seen 00:00:00 ago)</b>—Time since the last keepalive packet was received, in the format <i>hh:mm:ss</i>.</li> </ul> </li> <li><b>Output</b>—Number of keepalive packets sent by PPP and how long ago the last keepalive packets were sent and received. <ul style="list-style-type: none"> <li><b>(last seen 00:00:00 ago)</b>—Time since the last keepalive packet was sent, in the format <i>hh:mm:ss</i>.</li> </ul> </li> </ul>	detail extensive none
ANSI LMI settings or ITU LMI settings	<p>(Frame Relay) Local Management Interface settings. The format is (ANSI or ITU) LMI settings: <i>value, value...xx</i> seconds, where <i>value</i> can be:</p> <ul style="list-style-type: none"> <li><b>n391dte</b>—DTE full status polling interval (1- 255)</li> <li><b>n392dce</b>—DCE error threshold (1-10)</li> <li><b>n392dte</b>—DTE error threshold (1-10)</li> <li><b>n393dce</b>—DCE monitored event count (1-10)</li> <li><b>n393dte</b>—DTE monitored event count (1-10)</li> <li><b>t391dte</b>—DTE polling timer (5-30 seconds)</li> <li><b>t392dce</b>—DCE polling verification timer (5-30 seconds)</li> </ul>	detail extensive none
LMI	<p>(Frame Relay) Statistics about the link management.</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of packets coming in on the interface (<i>nn</i>) and how much time has passed since the last packet arrived. The format is <b>Input: <i>nn</i> (last seen <i>hh:mm:ss</i> ago)</b>.</li> <li><b>Output</b>—Number of packets sent out on the interface (<i>nn</i>) and how much time has passed since the last packet was sent. The format is <b>Output: <i>nn</i> (last seen <i>hh:mm:ss</i> ago)</b>.</li> </ul>	detail extensive none
DTE statistics	<p>(Frame Relay) Statistics about messages transmitted from the data terminal equipment (DTE) to the data circuit-terminating equipment (DCE):</p> <ul style="list-style-type: none"> <li><b>Enquiries sent</b>—Number of link status enquiries sent from the DTE to the DCE.</li> <li><b>Full enquiries sent</b>—Number of full enquiries sent from the DTE to the DCE.</li> <li><b>Enquiry responses received</b>—Number of enquiry responses received by the DTE from the DCE.</li> <li><b>Full enquiry responses received</b>—Number of full enquiry responses sent from the DTE to the DCE.</li> </ul>	detail extensive none
DCE statistics	<p>(Frame Relay) Statistics about messages transmitted from the DCE to the DTE:</p> <ul style="list-style-type: none"> <li><b>Enquiries received</b>—Number of enquiries received by the DCE from the DTE.</li> <li><b>Full enquiries received</b>—Number of full enquiries received by the DCE from the DTE.</li> <li><b>Enquiry responses sent</b>—Number of enquiry responses sent from the DCE to the DTE.</li> <li><b>Full enquiry responses sent</b>—Number of full enquiry responses sent from the DCE to the DTE.</li> </ul>	detail extensive none

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Common statistics</b>	(Frame Relay) Statistics about messages sent between the DTE and the DCE: <ul style="list-style-type: none"> <li>• <b>Unknown messages received</b>—Number of received packets that do not fall into any category.</li> <li>• <b>Asynchronous updates received</b>—Number of link status peer changes received.</li> <li>• <b>Out-of-sequence packets received</b>—Number of packets for which the sequence of the packets received is different from the expected sequence.</li> <li>• <b>Keepalive responses timedout</b>—Number of keepalive responses that timed out when no LMI packet was reported for <b>n392dte</b> or <b>n393dce</b> intervals. (See <b>LMI settings</b>.)</li> </ul>	<b>detail extensive none</b>
<b>Nonmatching DCE-end DLCIs</b>	(Frame Relay, displayed only from the DTE) Number of DLCIs configured from the DCE.	<b>detail extensive none</b>
<b>LCP state</b>	(PPP) Link Control Protocol state. <ul style="list-style-type: none"> <li>• <b>Conf-ack-received</b>—Acknowledgement was received.</li> <li>• <b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li>• <b>Conf-req-sent</b>—Request was sent.</li> <li>• <b>Down</b>—LCP negotiation is incomplete (not yet completed or has failed).</li> <li>• <b>Not-configured</b>—LCP is not configured on the interface.</li> <li>• <b>Opened</b>—LCP negotiation is successful.</li> </ul>	<b>detail extensive none</b>
<b>NCP state</b>	(PPP) Network Control Protocol state. <ul style="list-style-type: none"> <li>• <b>Conf-ack-received</b>—Acknowledgement was received.</li> <li>• <b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li>• <b>Conf-req-sent</b>—Request was sent.</li> <li>• <b>Down</b>—NCP negotiation is incomplete (not yet completed or has failed).</li> <li>• <b>Not-configured</b>—NCP is not configured on the interface.</li> <li>• <b>Opened</b>—NCP negotiation is successful.</li> </ul>	<b>detail extensive none</b>
<b>CHAP state</b>	(PPP) Displays the state of the Challenge Handshake Authentication Protocol (CHAP) during its transaction. <ul style="list-style-type: none"> <li>• <b>Chap-Chal-received</b>—Challenge was received but response not yet sent.</li> <li>• <b>Chap-Chal-sent</b>—Challenge was sent.</li> <li>• <b>Chap-Resp-received</b>—Response was received for the challenge sent, but CHAP has not yet moved into the Success state. (Most likely with RADIUS authentication.)</li> <li>• <b>Chap-Resp-sent</b>—Response was sent for the challenge received.</li> <li>• <b>Closed</b>—CHAP authentication is incomplete.</li> <li>• <b>Failure</b>—CHAP authentication failed.</li> <li>• <b>Not-configured</b>—CHAP is not configured on the interface.</li> <li>• <b>Success</b>—CHAP authentication was successful.</li> </ul>	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive none</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>SRAM errors</b>—Number of hardware errors that occurred in the static RAM (SRAM) on the PIC. If the value of this field increments, the PIC is malfunctioning.</li> </ul>	<b>extensive</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> </ul>	<b>extensive</b>
<b>DS1 alarms</b> <b>DS1 defects</b>	<p>E1 media-specific defects that can prevent the interface from passing packets. When a defect persists for a certain period, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface. The following lists all possible alarms and defects. For complete explanations of most of these alarms and defects, see <i>Bellcore Telcordia GR-499-CORE</i>.</p> <ul style="list-style-type: none"> <li>• <b>LOS</b>—Loss of signal.</li> <li>• <b>LOF</b>—Loss of frame.</li> <li>• <b>AIS</b>—Alarm indication signal.</li> <li>• <b>YLW</b>—Yellow alarm. Indicates errors at the remote site receiver.</li> </ul>	<b>detail extensive none</b>
<b>SDH alarms</b> <b>SDH defects</b>	<p>SDH media-specific defects that can prevent the interface from passing packets. When a defect persists for a certain period, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router or light the red or yellow alarm LED on the craft interface. See these fields for possible alarms and defects: SDH PHY, SDH regenerator section, SDH multiplex section, and SDH path.</p> <p><b>NOTE:</b> For controller-based SONET PICs, the SDH alarms and SDH defects output in the <b>show interface cstm1 extensive</b> command output only shows the section and line level defects. The path level defects can be found under the SONET (so) interface output.</p>	<b>All levels</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
E1 media	<p>Active alarms and defects, plus counts of specific E1 errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Error types can be:</p> <ul style="list-style-type: none"> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>BEE</b>—Bit error</li> <li>• <b>BES</b>—Bit error seconds</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>CS</b>—Carrier state</li> <li>• <b>ES</b>—Errored seconds</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>FEBE</b>—Far-end block error</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>PCV</b>—Pulse code violation</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>SEFS-S</b>—Severely errored framing seconds (section)</li> <li>• <b>SES</b>—Severely errored seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> <li>• <b>YELLOW</b>—Errors at the remote site receiver</li> </ul>	extensive
Interface transmit queues	<p>Names of the transmit queues and their associated statistics for each E1 channel on the Channelized STM1-to-E1 PIC.</p> <ul style="list-style-type: none"> <li>• <b>B/W</b>—Queue bandwidth as a percentage of the total interface bandwidth.</li> <li>• <b>WRR</b>—Weighted round-robin (in percent).</li> <li>• <b>Packets</b>—Number of packets transmitted.</li> <li>• <b>Bytes</b>—Number of bytes transmitted.</li> <li>• <b>Drops</b>—Number of packets dropped.</li> <li>• <b>Errors</b>—Number of packet errors.</li> </ul>	extensive
HDLC configuration	<p>Information about the HDLC configuration.</p> <ul style="list-style-type: none"> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> <li>• <b>Timeslots</b>—Configured time slots for the interface.</li> <li>• <b>Line encoding</b>—Line encoding used. It is always <b>HDB3</b>.</li> </ul>	extensive

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>DS1 BERT configuration</b>	<p>BERT (bit error rate test) checks the quality of the line. This output appears only when a BERT is run on the interface.</p> <ul style="list-style-type: none"> <li>• <b>BERT time period</b>—Configured total time period that the BERT is to run.</li> <li>• <b>Elapsed</b>—Actual time elapsed since the start of the BERT (in seconds).</li> <li>• <b>Induced error rate</b>—Configured rate at which the bit errors are induced in the BERT pattern.</li> <li>• <b>Algorithm</b>—Type of algorithm selected for the BERT.</li> </ul>	<b>detail extensive none</b>
<b>SDH PHY</b>	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>	<b>extensive</b>
<b>SDH regenerator section</b>	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>RS-BIP8</b>—24-bit BIP for multiplex section overhead (B2 bytes)</li> <li>• <b>OOF</b>—Out of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>RS-ES</b>—Errored seconds (near-end regenerator section)</li> <li>• <b>RS-SES</b>—Severely errored seconds (near-end regenerator section)</li> <li>• <b>RS-SEFS</b>—Severely errored framing seconds (regenerator section)</li> </ul>	<b>extensive</b>



Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
SDH multiplex section	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>MS-BIP24</b>—8-bit BIP for high-order path overhead (B3 byte)</li> <li>• <b>MS-FEBE</b>—Far-end block error (multiplex section)</li> <li>• <b>MS-FERF</b>—Far-end remote fail (multiplex section)</li> <li>• <b>MS-AIS</b>—alarm indication signal (multiplex section)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>MS-ES</b>—Errored seconds (near-end multiplex section)</li> <li>• <b>MS-SES</b>—Severely errored seconds (near-end multiplex section)</li> <li>• <b>MS-UAS</b>—Unavailable seconds (near-end multiplex section)</li> <li>• <b>MS-ES-FE</b>—Errored seconds (far-end multiplex section)</li> <li>• <b>MS-SES-FE</b>—Severely errored seconds (far-end multiplex section)</li> <li>• <b>MS-UAS-FE</b>—Unavailable seconds (far-end multiplex section)</li> </ul>	extensive
SDH path	<p>Active alarms and defects, plus counts of specific SDH errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>HP-BIP8</b>—8-bit BIP for regenerator section overhead (B1 byte)</li> <li>• <b>HP-FEBE</b>—Far-end block error (high-order path)</li> <li>• <b>HP-LOP</b>—Loss of pointer (high-order path)</li> <li>• <b>HP-AIS</b>—High-order-path alarm indication signal</li> <li>• <b>HP-FERF</b>—Far-end remote fail (high-order path)</li> <li>• <b>HP-UNEQ</b>—Unequipped (high-order path)</li> <li>• <b>HP-PLM</b>—Payload label mismatch (high-order path)</li> <li>• <b>HP-ES</b>—Errored seconds (near-end high-order path)</li> <li>• <b>HP-SES</b>—Severely errored seconds (near-end high-order path)</li> <li>• <b>HP-UAS</b>—Unavailable seconds (near-end high-order path)</li> <li>• <b>HP-ES-FE</b>—Errored seconds (far-end high-order path)</li> <li>• <b>HP-SES-FE</b>—Severely errored seconds (far-end high-order path)</li> <li>• <b>HP-UAS-FE</b>—Unavailable seconds (far-end high-order path)</li> </ul>	extensive

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>SDH tu</b>	<p>Active alarms and defects, plus counts of specific SDH tributary unit (TU) errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>TU-BIP-2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>TU-FEBE</b>—(near-end TU)</li> <li>• <b>TU-LOP</b>—Loss of pointer (near-end TU)</li> <li>• <b>TU-AIS</b>—Alarm indication signal (near-end TU)</li> <li>• <b>TU-FERF</b>—(near-end TU)</li> <li>• <b>TU-UNEQ</b>—Unequipped (near-end TU)</li> <li>• <b>TU-PLM</b>—Payload label mismatch (near-end TU)</li> <li>• <b>TU-ES</b>—Errored seconds (near-end TU)</li> <li>• <b>TU-SES</b>—Severely errored seconds (near-end TU)</li> <li>• <b>TU-UAS</b>—Unavailable seconds (near-end TU)</li> <li>• <b>TU-ES-FE</b>—Errored seconds (far-end TU)</li> <li>• <b>TU-SES-FE</b>—Severely errored seconds (far-end TU)</li> <li>• <b>TU-UAS-FE</b>—Unavailable seconds (far-end TU)</li> </ul>	<b>extensive</b>
<b>Received SDH overhead</b>  <b>Transmitted SDH overhead</b>	<p>Values of the received and transmitted SONET overhead:</p> <ul style="list-style-type: none"> <li>• <b>C2</b>—Signal label. Allocated to identify the construction and content of the STS-level SPE and for PDI-P.</li> <li>• <b>F1</b>—Section user channel byte. This byte is set aside for the purposes of users.</li> <li>• <b>K1</b> and <b>K2</b>—These bytes are allocated for APS signaling for the protection of the multiplex section.</li> <li>• <b>J0</b>—Section trace. This byte is defined for STS-1 number 1 of an STS-<i>N</i> signal. Used to transmit a 1-byte fixed-length string or a 16-byte message so that a receiving terminal in a section can verify its continued connection to the intended transmitter.</li> <li>• <b>S1</b>—Synchronization status. The S1 byte is located in the first STS-1 of an STS-<i>N</i> signal.</li> <li>• <b>Z3</b> and <b>Z4</b>—Allocated for future use.</li> </ul>	<b>extensive</b>
<b>Received path trace</b>  <b>Transmitted path trace</b>	<p>Channelized OC12 interfaces allow path trace bytes to be sent inband across the SONET/SDH link. The received path trace value is the message received from the router at the other end of the fiber. The transmitted path trace value is the message that this router transmits. This information is specific to each of the 12 channelized OC12 interfaces.</p>	<b>extensive</b>
<b>Packet Forwarding Engine configuration</b>	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>	<b>extensive</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>CoS information</b>	<p>Information about the CoS queue for the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive none</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family configured on the logical interface, such as <b>iso</b> , <b>inet6</b> , or <b>mpls</b> .	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route table</b>	Routing table in which the logical interface address is located. For example, <b>0</b> refers to the routing table <b>inet.0</b> .	<b>detail extensive</b>
<b>Flags</b>	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>

Table 16: Channelized STM1 show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address.	<b>detail extensive none</b>
<b>DLCI</b>	(Frame Relay) DLCI number of the logical interface. The following DLCI information is displayed: <b>Flags</b> , <b>Total down time</b> , <b>Last down</b> , and <b>Traffic statistics</b> . <b>Flags</b> is one or more of the following: <ul style="list-style-type: none"> <li>• <b>Active</b>—Set when the link is active and the DTE and DCE are exchanging information.</li> <li>• <b>Down</b>—Set when the link is active, but no information is received from the DCE.</li> <li>• <b>Unconfigured</b>—Set when the corresponding DLCI in the DCE is not configured.</li> <li>• <b>Configured</b>—Set when the corresponding DLCI in the DCE is configured.</li> <li>• <b>Dce-configured</b>—Displayed when the command is issued from the DTE.</li> </ul>	<b>detail extensive none</b>
<b>DLCI statistics</b>	(Frame Relay) Data-link connection identifier (DLCI) statistics. <ul style="list-style-type: none"> <li>• <b>Active DLCI</b>—Number of active DLCIs.</li> <li>• <b>Inactive DLCI</b>—Number of inactive DLCIs.</li> </ul>	<b>detail extensive none</b>

## Sample Output

### show interfaces extensive (Channelized STM1, SDH)

```

user@host> show interfaces e1-1/0/0:1 extensive
Physical interface: e1-1/0/0:1, Enabled, Physical link is Up
  Interface index: 148, SNMP ifIndex: 285, Generation: 2915
  Link-level type: Frame-relay, MTU: 1504, SDH mode, Speed: E1, Loopback: None,
  FCS: 16, Framing: G704
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : Keepalives DTE
  ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds
  LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
  DTE statistics:
    Enquiries sent           : 43186
    Full enquiries sent      : 8515
    Enquiry responses received : 43185
    Full enquiry responses received : 8515
  DCE statistics:
    Enquiries received       : 0
    Full enquiries received  : 0
    Enquiry responses sent   : 0
    Full enquiry responses sent : 0
  Common statistics:
    Unknown messages received : 0
    Asynchronous updates received : 0
    Out-of-sequence packets received : 0
    Keepalive responses timedout : 0
  Nonmatching DCE-end DLCIs:
    2
  Hold-times      : Up 0 ms, Down 0 ms

```

```

Last flapped   : 2002-05-23 17:02:59 PDT (17:23:45 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes   :           592           48 bps
  Output bytes  :           644           48 bps
  Input packets :           46           0 pps
  Output packets:           46           0 pps
Input errors:
  Errors: 0, Drops: 9, Framing errors: 0, Policed discards: 0,
  L3 incompletes: 0, L2 channel errors: 11, L2 mismatch timeouts: 0,
  HS link CRC errors: 0, SRAM errors: 0
Output errors:
  Carrier transitions: 1, Errors: 0, Drops: 0, Aged packets: 0
DS1 alarms   : None
DS1 defects  : None
SDH alarms   : None
SDH defects  : None
E1 media:
  Seconds      Count  State
SEF            0        0 OK
BEE            0        0 OK
AIS           124        1 OK
LOF           124        1 OK
LOS            0        0 OK
YELLOW         0        0 OK
BPV            0        0
EXZ            0        0
LCV            0        0
PCV            0        0
CS             0        0
FEBE           0        0
LES           124
ES            125
SES           124
SEFS          124
BES            0
UAS            37
Interface transmit queues:
      B/W  WRR  Packets      Bytes      Drops      Errors
Queue0   95  95         0         0         0         0
Queue1    5   5       529       6348         0         0
HDLC configuration:
  Giant threshold: 0, Runt threshold: 0
  Timeslots      : All active
  Line encoding: HDB3
DS1 BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
SDH PHY:
  Seconds      Count  State
PLL Lock       0        0 OK
PHY Light      0        0 OK
SDH regenerator section:
  RS-BIP8       0        0
  OOF           125        1 OK
  LOS           125        1 OK
  LOF           125        1 OK
  RS-ES         125
  RS-SES        125
  RS-SEFS       125
SDH multiplex section:
  MS-BIP24      0        0
  MS-FEBE       0        0

```

```

MS-FERF          0          0 OK
MS-AIS          125        1 OK
BERR-SF          0          0 OK
BERR-SD          0          0 OK
MS-ES           125
MS-SES           125
MS-UAS           115
MS-ES-FE         0
MS-SES-FE        0
MS-UAS-FE        0
SDH path:
HP-BIP8          0          0
HP-FEBE          0          0
HP-LOP           0          0 OK
HP-AIS          125        1 OK
HP-FERF          0          0 OK
HP-UNEQ          0          0 OK
HP-PLM           125        1 OK
HP-ES            125
HP-SES            125
HP-UAS            115
HP-ES-FE         0
HP-SES-FE        0
HP-UAS-FE        0
SDH tu:
TU-BIP2          0          0
TU-FEBE          124        1
TU-LOP           0          0 OK
TU-AIS           124        1 OK
TU-FERF          124        1 OK
TU-UNEQ          0          0 OK
TU-PLM           124        1 OK
TU-ES            125
TU-SES            125
TU-UAS            115
TU-ES-FE         0
TU-SES-FE        0
TU-UAS-FE        0
Received SDH overhead:
F1      : 0x00, J0      : 0x00, K1      : 0x00, K2      : 0x00
S1      : 0x00, C2      : 0x02, C2(cmp) : 0x02, F2      : 0x00
Z3      : 0x00, Z4      : 0x00, S1(cmp) : 0x00, V5      : 0x02
V5(cmp) : 0x02
Transmitted SDH overhead:
F1      : 0x00, J0      : 0x00, K1      : 0x00, K2      : 0x00
S1      : 0x00, C2      : 0x02, F2      : 0x00, Z3      : 0x00
Z4      : 0x00, V5      : 0x02
Received path trace:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Transmitted path trace:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Packet Forwarding Engine configuration:
Destination slot: 1, PLP byte: 2 (0x07)
CoS information:
CoS transmit queue      Bandwidth      Buffer Priority  Limit
                        %      bps      %      usec
0 best-effort            95      1945600 95      0      low  none
3 network-control        5       102400 5       0      low  none
Logical interface e1-1/0/0:1.0 (Index 10) (SNMP ifIndex 369) (Generation 496)
Flags: Point-To-Point SNMP-Traps Encapsulation: PPP
Protocol inet, MTU: 1500, Generation: 575, Route table: 0

```

```
Flags: None
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 19.19.19.3, Local: 19.19.19.4, Broadcast: Unspecified,
  Generation: 975
DLCI 100
Flags: Active, Dce-configured
Total down time: 0 sec, Last down: Never
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
DLCI statistics:
  Active DLCI :2 Inactive DLCI : 0
```

## show interfaces (Channelized T1 IQ)

<b>Syntax</b>	<pre>show interfaces (ct1-fpc/pic/port   type-fpc/pic/port&lt;:channel&gt;&lt;:channel&gt;) &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index snmp-index&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized T1 IQ interface.
<b>Options</b>	<p><b>type-fpc/pic/port:channel</b>—Interface type. With optional corresponding channel levels, the interface type can be one of the following:</p> <ul style="list-style-type: none"> <li><b>type-fpc/pic/port</b>—For the physical channelized T1 IQ interface, <b>type</b> is <b>ct1</b>.</li> <li><b>type-fpc/pic/port:channel</b>—For the clear channel, <b>type</b> is <b>t1</b>. At the first level of channelization, <b>type</b> can be <b>ct1</b> or <b>t1</b>.</li> <li><b>type-fpc/pic/port:channel:channel</b>—At the second level of channelization, <b>type</b> can be <b>ds</b>.</li> </ul> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces extensive (CT1) on page 138</a></p> <p><a href="#">show interfaces extensive (T1) on page 139</a></p> <p><a href="#">show interfaces extensive (DS0) on page 140</a></p>
<b>Output Fields</b>	Table 17 on page 130 lists the output fields for the <b>show interfaces</b> (Channelized T1 IQ and T3 IQ interfaces) command. Output fields are listed in the approximate order in which they appear.

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields

Field Name	Field Description	Level of Output
Physical Interface		
Physical interface	Name of the physical interface.	All levels



Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	MTU size on the physical interface.	All levels
<b>Clocking</b>	Reference clock source. It can be <b>Internal</b> or <b>External</b> .	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Whether loopback is enabled and the type of loopback ( <b>local</b> or <b>remote</b> ).	All levels
<b>FCS</b>	Frame check sequence on the interface (either <b>16</b> or <b>32</b> ). The default is <b>16</b> bits.	All levels
<b>Framing</b>	Physical layer framing format used on the link. It can be <b>ESF</b> or <b>SF</b> . The default is <b>ESF</b> .	All levels
<b>Parent</b>	Name and interface index of the interface to which a particular child interface belongs. <b>None</b> indicates that this interface is the top level.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the “Device Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the “Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the “Link Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>
<b>Keepalive settings</b>	Configured settings for keepalives. <ul style="list-style-type: none"> <li><b>interval seconds</b>—The time in seconds between successive keepalive requests. The range is <b>10</b> seconds through <b>32,767</b> seconds, with a default of <b>10</b> seconds.</li> <li><b>down-count number</b>—The number of keepalive packets a destination must fail to receive before the network takes a link down. The range is <b>1</b> through <b>255</b>, with a default of <b>3</b>.</li> <li><b>up-count number</b>—The number of keepalive packets a destination must receive to change a link's status from down to up. The range is <b>1</b> through <b>255</b>, with a default of <b>1</b>.</li> </ul>	<b>detail extensive</b> none

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Keepalive statistics</b>	<p>Information about keepalive packets.</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of keepalive packets received by PPP. <ul style="list-style-type: none"> <li><b>(last seen 00:00:00 ago)</b>—Time since the last keepalive packet was received, in the format <i>hh:mm:ss</i>.</li> </ul> </li> <li><b>Output</b>—Number of keepalive packets sent by PPP and how long ago the last keepalive packets were sent and received. <ul style="list-style-type: none"> <li><b>(last seen 00:00:00 ago)</b>—Time since the last keepalive packet was sent, in the format <i>hh:mm:ss</i>.</li> </ul> </li> </ul>	<b>detail extensive none</b>
<b>LMI settings</b>	<p>(Frame Relay) Settings for Local Management Interface (LMI) can be either <b>ANSI LMI settings</b> or <b>ITU LMI settings</b>. ANSI LMI settings is the default. The format is (ANSI or ITU) <b>LMI settings: value, value... xx seconds</b>, where <i>value</i> can be:</p> <ul style="list-style-type: none"> <li><b>n391dte</b>—DTE full status polling interval (1–255)</li> <li><b>n392dce</b>—DCE error threshold (1–10)</li> <li><b>n392dte</b>—DTE error threshold (1–10)</li> <li><b>n393dce</b>—DCE monitored event count (1–10)</li> <li><b>n393dte</b>—DTE monitored event count (1–10)</li> <li><b>t391dte</b>—DTE polling timer (5–30 seconds)</li> <li><b>t392dce</b>—DCE polling verification timer (5–30 seconds)</li> </ul>	<b>detail extensive none</b>
<b>LMI</b>	<p>(Frame Relay) LMI packet statistics:</p> <ul style="list-style-type: none"> <li><b>Input</b>—Number of packets coming in on the interface (<i>nn</i>) and how much time has passed since the last packet arrived. The format is <b>Input: nn (last seen hh:mm:ss ago)</b>.</li> <li><b>Output</b>—Number of packets sent out on the interface (<i>nn</i>) and how much time has passed since the last packet was sent. The format is <b>Output: nn (last sent hh:mm:ss ago)</b>.</li> </ul>	<b>detail extensive none</b>
<b>DTE statistics</b>	<p>(Frame Relay) Statistics about messages transmitted from the data terminal equipment (DTE) to the data communication equipment (DCE):</p> <ul style="list-style-type: none"> <li><b>Enquiries sent</b>—Number of link status enquiries sent from the DTE to the DCE.</li> <li><b>Full enquiries sent</b>—Number of full enquiries sent from the DTE to the DCE.</li> <li><b>Enquiry responses received</b>—Number of enquiry responses received by the DTE from the DCE.</li> <li><b>Full enquiry responses received</b>—Number of full enquiry responses sent from the DTE to the DCE.</li> </ul>	<b>detail extensive none</b>
<b>DCE statistics</b>	<p>(Frame Relay) Statistics about messages transmitted from the DCE to the DTE:</p> <ul style="list-style-type: none"> <li><b>Enquiries received</b>—Number of enquiries received by the DCE from the DTE.</li> <li><b>Full enquiries received</b>—Number of full enquiries received by the DCE from the DTE.</li> <li><b>Enquiry responses sent</b>—Number of enquiry responses sent from the DCE to the DTE.</li> <li><b>Full enquiry responses sent</b>—Number of full enquiry responses sent from the DCE to the DTE.</li> </ul>	<b>detail extensive none</b>

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Common statistics</b>	(Frame Relay) Statistics about messages sent between the DTE and the DCE: <ul style="list-style-type: none"> <li>• <b>Unknown messages received</b>—Number of received packets that do not fall into any category.</li> <li>• <b>Asynchronous updates received</b>—Number of link status peer changes received.</li> <li>• <b>Out-of-sequence packets received</b>—Number of packets for which the sequence of the packets received is different from the expected sequence.</li> <li>• <b>Keepalive responses timedout</b>—Number of keepalive responses that timed out when no LMI packet was reported for <b>n392dte</b> or <b>n393dce</b> intervals. (See <b>LMI settings</b>.)</li> </ul>	<b>detail extensive none</b>
<b>Nonmatching DCE-end DLCIs</b>	(Frame Relay) Number of DLCIs configured from the DCE, displayed only from the DTE.	<b>detail extensive none</b>
<b>LCP state</b>	(PPP) Link Control Protocol state. <ul style="list-style-type: none"> <li>• <b>Conf-ack-received</b>—Acknowledgement was received.</li> <li>• <b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li>• <b>Conf-req-sent</b>—Request was sent.</li> <li>• <b>Down</b>—LCP negotiation is incomplete (not yet completed or has failed).</li> <li>• <b>Not-configured</b>—LCP is not configured on the interface.</li> <li>• <b>Opened</b>—LCP negotiation is successful.</li> </ul>	<b>detail extensive none</b>
<b>NCP state</b>	(PPP) Network Control Protocol state. <ul style="list-style-type: none"> <li>• <b>Conf-ack-received</b>—Acknowledgement was received.</li> <li>• <b>Conf-ack-sent</b>—Acknowledgement was sent.</li> <li>• <b>Conf-req-sent</b>—Request was sent.</li> <li>• <b>Down</b>—NCP negotiation is incomplete (not yet completed or has failed).</li> <li>• <b>Not-configured</b>—NCP is not configured on the interface.</li> <li>• <b>Opened</b>—NCP negotiation is successful.</li> </ul>	<b>detail extensive none</b>
<b>CHAP state</b>	(PPP) Displays the state of the Challenge Handshake Authentication Protocol (CHAP) during its transaction. <ul style="list-style-type: none"> <li>• <b>Chap-Chal-received</b>—Challenge was received but response not yet sent.</li> <li>• <b>Chap-Chal-sent</b>—Challenge was sent.</li> <li>• <b>Chap-Resp-received</b>—Response was received for the challenge sent, but CHAP has not yet moved into the <b>Success</b> state. (Most likely with RADIUS authentication.)</li> <li>• <b>Chap-Resp-sent</b>—Response was sent for the challenge received.</li> <li>• <b>Closed</b>—CHAP authentication is incomplete.</li> <li>• <b>Failure</b>—CHAP authentication failed.</li> <li>• <b>Not-configured</b>—CHAP is not configured on the interface.</li> <li>• <b>Success</b>—CHAP authentication was successful.</li> </ul>	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive none</b>

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields *(continued)*

Field Name	Field Description	Level of Output
CoS queues	Number of CoS queues configured.	detail extensive none
Statistics last cleared	Time when the statistics for the interface were last set to zero.	detail extensive
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface.</li> </ul>	detail extensive
Input errors	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded.</li> <li>• <b>L2 channel errors</b>—Counter increments when the software could not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Count of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>HS link CRC errors</b>—Count of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>SRAM errors</b>—Number of hardware errors that occurred in the static RAM (SRAM) on the PIC. If the value in this field increments, the PIC is malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	extensive

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields *(continued)*

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly, (perhaps once every 10 seconds), the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeds the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Queue counters</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>DS1 alarms DS1 defects</b>	<p>Media-specific defects that can render the interface unable to pass packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface.</p> <ul style="list-style-type: none"> <li>• <b>LOS</b>—Loss of signal.</li> <li>• <b>LOF</b>—Loss of frame.</li> <li>• <b>AIS</b>—Alarm indication signal.</li> <li>• <b>YLW</b>—Yellow alarm. Indicates errors at the remote site receiver.</li> </ul>	<b>detail extensive none</b>

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields *(continued)*

Field Name	Field Description	Level of Output
<b>T1 media</b>	<p>Counts of T1 media-specific errors.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>The T1 media-specific error types can be:</p> <ul style="list-style-type: none"> <li>• <b>AIS</b>—Alarm indication signal</li> <li>• <b>BEE</b>—Bit error event</li> <li>• <b>BES</b>—Bit error seconds</li> <li>• <b>BPV</b>—Bipolar violation</li> <li>• <b>CS</b>—Carrier state</li> <li>• <b>ES</b>—Errored seconds</li> <li>• <b>EXZ</b>—Excessive zeros</li> <li>• <b>FEBE</b>—Far-end block error</li> <li>• <b>LCV</b>—Line code violation</li> <li>• <b>LES</b>—Line error seconds</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>PCV</b>—Pulse code violation</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>SEFS</b>—Severely errored framing seconds (section)</li> <li>• <b>SES</b>—Severely errored seconds</li> <li>• <b>UAS</b>—Unavailable seconds</li> <li>• <b>YELLOW</b>—Errors at the remote site receiver</li> </ul>	<b>extensive</b>
<b>Line encoding</b>	Line encoding used: <b>B8ZS</b> or <b>AMI</b> .	All levels
<b>Buildout</b>	Buildout setting.	All levels
<b>HDLC configuration</b>	<p>Information about the HDLC configuration.</p> <ul style="list-style-type: none"> <li>• <b>Policing bucket</b>—Configured state of the receiving policer.</li> <li>• <b>Shaping bucket</b>—Configured state of the transmitting shaper.</li> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> <li>• <b>Timeslots</b>—Configured time slots for the interface.</li> <li>• <b>Line encoding</b>—Line encoding used: <b>B8ZS</b> or <b>AMI</b>.</li> <li>• <b>Byte encoding</b>—Byte encoding used: <b>Nx64K</b> or <b>Nx56K</b>.</li> <li>• <b>Data inversion</b>—HDLC data inversion setting: <b>Enabled</b> or <b>Disabled</b>.</li> <li>• <b>Idle cycle Flag</b>—Idle cycle flags.</li> <li>• <b>Start end Flag</b>—Start and end flag.</li> </ul>	<b>extensive</b>

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>DSO or DS1 BERT configuration</b>	<p>BERT (bit error rate test) checks the quality of the line. This output appears only when a BERT is run on the interface.</p> <ul style="list-style-type: none"> <li>• <b>BERT time period</b>—Configured total time period that the BERT is to run.</li> <li>• <b>Elapsed</b>—Actual time elapsed since the start of the BERT (in seconds).</li> <li>• <b>Induced error rate</b>—Configured rate at which the bit errors are induced in the BERT pattern.</li> <li>• <b>Algorithm</b>—Type of algorithm selected for the BERT.</li> </ul>	<b>detail extensive none</b>
<b>Packet Forwarding Engine configuration</b>	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface; values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	<b>All levels</b>
<b>Encapsulation</b>	Encapsulation on the logical interface.	<b>All levels</b>
<b>Protocol</b>	Protocol family configured on the logical interface, such as <b>iso</b> , <b>inet6</b> , or <b>mpls</b> .	<b>detail extensive none</b>
<b>MTU</b>	MTU size on the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route table</b>	Routing table in which the logical interface address is located. For example, <b>0</b> refers to the routing table <b>inet.0</b> .	<b>detail extensive</b>
<b>Flags</b>	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address.	<b>detail extensive none</b>

Table 17: Channelized T1 IQ and T3 IQ show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>DLCI</b>	<p>(Frame Relay) DLCI number of the logical interface. The following DLCI information is displayed: <b>Flags</b>, <b>Total down time</b>, <b>Last down</b>, and <b>Traffic statistics</b>. <b>Flags</b> is one or more of the following:</p> <ul style="list-style-type: none"> <li>• <b>Active</b>—Set when the link is active and the DTE and DCE are exchanging information.</li> <li>• <b>Down</b>—Set when the link is active, but no information is received from the DCE.</li> <li>• <b>Unconfigured</b>—Set when the corresponding DLCI in the DCE is not configured.</li> <li>• <b>Configured</b>—Set when the corresponding DLCI in the DCE is configured.</li> <li>• <b>Dce-configured</b>—Displayed when the command is issued from the DTE.</li> </ul>	<b>detail extensive none</b>
<b>DLCI statistics</b>	<p>(Frame Relay) Data-link connection identifier (DLCI) statistics.</p> <ul style="list-style-type: none"> <li>• <b>Active DLCI</b>—Number of active DLCIs.</li> <li>• <b>Inactive DLCI</b>—Number of inactive DLCIs.</li> </ul>	<b>detail extensive none</b>

## Sample Output

### show interfaces extensive (CT1)

```

user@host> show interfaces extensive ct1-0/1/1
Physical interface: ct1-0/1/1, Enabled, Physical link is Up
  Interface index: 145, SNMP ifIndex: 32, Generation: 28
  Link-level type: Controller, Clocking: Internal, Speed: T1,
  Loopback: None, Framing: ESF, Parent: None
Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps 16384
Link flags     : None
Hold-times    : Up 0 ms, Down 0 ms
CoS queues    : 4 supported
Last flapped  : 2005-08-17 11:47:09 PDT (1d 03:38 ago)
Statistics last cleared: 2005-08-18 15:25:37 PDT (00:00:27 ago)
DS1 alarms    : None
DS1 defects   : None
T1 media:
      Seconds      Count  State
      SEF          0       0  OK
      BEE          0       0  OK
      AIS          0       0  OK
      LOF          0       0  OK
      LOS          0       0  OK
      YELLOW       0       0  OK
      BPV          0       0
      EXZ          0       0
      LCV          0       0
      PCV          0       0
      CS           0       0
      LES          0
      ES           0
      SES          0
      SEFS         0
      BES          0

```



```

UAS                                0
Line encoding: B8ZS
Buildout       : 0 to 132 feet
DS1 BERT configuration:
  BERT time period: 10 seconds, Elapsed: 0 seconds
  Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
Packet Forwarding Engine configuration:
  Destination slot: 0 (0x00)

```

### show interfaces extensive (T1)

```

user@host> show interfaces extensive t1-0/2/0
Physical interface: t1-0/2/0, Enabled, Physical link is Up
  Interface index: 161, SNMP ifIndex: 33, Generation: 61
  Link-level type: PPP, MTU: 1504, Speed: T1, Loopback: None, FCS: 16,
  Parent: ct1-0/2/0 Interface index 148
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps 16384
  Link flags     : Keepalives DTE
ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds
LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
DTE statistics:
  Enquiries sent           : 43186
  Full enquiries sent      : 8515
  Enquiry responses received : 43185
  Full enquiry responses received : 8515
DCE statistics:
  Enquiries received       : 0
  Full enquiries received  : 0
  Enquiry responses sent   : 0
  Full enquiry responses sent : 0
Common statistics:
  Unknown messages received : 0
  Asynchronous updates received : 0
  Out-of-sequence packets received : 0
  Keepalive responses timeout : 0
Nonmatching DCE-end DLCIs:
  2
Hold-times   : Up 0 ms, Down 0 ms
CoS queues   : 4 supported
Last flapped : 2005-09-07 15:43:47 PDT (00:00:06 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes   : 0          0 bps
  Output bytes  : 14         0 bps
  Input packets : 0          0 pps
  Output packets : 1         0 pps
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
  Policed discards: 0, L3 incompletes: 0,
  L2 channel errors: 0, L2 mismatch timeouts: 0,
  HS link CRC errors: 0, SRAM errors: 0, Resource errors: 0
Output errors:
  Carrier transitions: 1, Errors: 0, Drops: 0, Aged packets: 0,
  MTU errors: 0, Resource errors: 0
Queue counters:      Queued packets  Transmitted packets  Dropped packets
  0 best-effort      0          0          0
  1 expedited-fo     0          0          0
  2 assured-forw     0          0          0
  3 network-cont     1          1          0
DS1 alarms   : None

```

```

DS1  defects   : None
HDLC configuration:
  Policing bucket: Disabled
  Shaping bucket : Disabled
  Giant threshold: 1514, Runt threshold: 2
  Timeslots      : All active
  Byte encoding: Nx64K, Data inversion: Disabled, Idle cycle flag:
  flags, Start end flag: shared
Packet Forwarding Engine configuration:
  Destination slot: 0, PLP byte: 4 (0x00)

```

### show interfaces extensive (DS0)

```

user@host> show interfaces extensive ds-0/1/0:0
Physical interface: ds-0/1/0:1, Enabled, Physical link is Up
  Interface index: 157, SNMP ifIndex: 52, Generation: 46
  Link-level type: Frame-Relay, PPP, MTU: 1504, Clocking: Internal,
  Speed: 640kbps, Loopback: None, FCS:16,
  Parent: ct1-0/1/0 Interface index 143
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps 16384
  Link flags     : Keepalives DTE
ANSI LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds
LMI: Input: 51700 (00:00:02 ago), Output: 51701 (00:00:02 ago)
DTE statistics:
  Enquiries sent           : 43186
  Full enquiries sent      : 8515
  Enquiry responses received : 43185
  Full enquiry responses received : 8515
DCE statistics:
  Enquiries received       : 0
  Full enquiries received  : 0
  Enquiry responses sent   : 0
  Full enquiry responses sent : 0
Common statistics:
  Unknown messages received : 0
  Asynchronous updates received : 0
  Out-of-sequence packets received : 0
  Keepalive responses timedout : 0
Nonmatching DCE-end DLCIs:
  2
Hold-times      : Up 0 ms, Down 0 ms
Keepalive settings: Interval 10 seconds, Up-count 1, Down-count 3
Keepalive statistics:
  Input : 8 (last seen 00:00:12 ago)
  Output: 8 (last sent 00:00:07 ago)
LCP state: Opened
NCP state: inet: Opened, inet6: Not-configured, iso: Not-configured,
mpls: Not-configured
CHAP state: Not-configured
CoS queues   : 4 supported
Last flapped : 2005-08-18 15:23:46 PDT (00:03:17 ago)
Statistics last cleared: 2005-08-18 15:25:37 PDT (00:01:26 ago)
Traffic statistics:
  Input bytes   : 840          0 bps
  Output bytes  : 912          0 bps
  Input packets: 25           0 pps
  Output packets: 26          0 pps
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
  Policed discards: 0, L3 incompletes: 0,

```

```

    L2 channel errors: 0, L2 mismatch timeouts: 0, HS link CRC errors: 0,
    Resource errors: 0
  Output errors:
    Carrier transitions: 0, Errors: 0, Drops: 0, Aged packets: 0,
    MTU errors: 0, Resource errors: 0
  Queue counters:
    Queued packets    Transmitted packets  Dropped packets
    0 best-effort      0                0                0
    1 expedited-fo     0                0                0
    2 assured-forw     0                0                0
    3 network-cont     26               26               0
  HDLC configuration:
    Giant threshold: 1514, Runt threshold: 2
    Timeslots       : 1-10
    Byte encoding: Nx64K, Data inversion: Disabled, Idle cycle flag: flags,
    Start end flag: shared
  DSO BERT configuration:
    BERT time period: 10 seconds, Elapsed: 0 seconds
    Induced Error rate: 10e-0, Algorithm: 2^15 - 1, 0.151, Pseudorandom (9)
  Packet Forwarding Engine configuration:
    Destination slot: 0, PLP byte: 4 (0x00)
  Logical interface ds-0/1/0:1.0 (Index 67) (SNMP ifIndex 53) (Generation 11)
    Flags: Point-To-Point SNMP-Traps Encapsulation: PPP
    Protocol inet, MTU: 1500, Generation: 26, Route table: 0
    Flags: None
    Addresses, Flags: Is-Preferred Is-Primary
      Destination: 11.11.11.0/30, Local: 11.11.11.2, Broadcast: 11.11.11.3,
      Generation: 39
  DLCI 100
    Flags: Active, Dce-configured
    Total down time: 0 sec, Last down: Never
    Traffic statistics:
      Input bytes : 0
      Output bytes : 0
      Input packets: 0
      Output packets: 0
  DLCI statistics:
    Active DLCI :2 Inactive DLCI : 0
  ...

```

## show interfaces (Channelized T3 IQ)

---

<b>Syntax</b>	<code>show interfaces (ct3-fpc/pic/port   type-fpc/pic/port&lt;:channel&gt;&lt;:channel&gt;)</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;descriptions&gt;</code> <code>&lt;media&gt;</code> <code>&lt;snmp-index snmp-index&gt;</code> <code>&lt;statistics&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified channelized T3 IQ interface.
<b>Options</b>	<p><b>type-fpc/pic/port:channel</b>—Interface type. With optional corresponding channel levels, the interface type can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>type-fpc/pic/port</b>—For the physical channelized T3 IQ interface, <b>type</b> is <b>ct3</b>.</li><li>• <b>type-fpc/pic/port:channel</b>—For the clear channel, <b>type</b> is <b>t3</b>. At the first level of channelization, <b>type</b> can be <b>ct1</b> or <b>t1</b>.</li><li>• <b>type-fpc/pic/port:channel:channel</b>—At the second level of channelization, <b>type</b> is <b>ds</b>.</li></ul> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index snmp-index</b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (Channelized T3 IQ) (Physical) on page 143</a> <a href="#">show interfaces extensive (Channelized T1 on Channelized T3 IQ) on page 143</a> <a href="#">show interfaces extensive (DSO on Channelized T3 IQ) on page 143</a>
<b>Output Fields</b>	See the output field table for the <a href="#">show interfaces (Channelized T1 IQ)</a> command.

## Sample Output

### show interfaces extensive (Channelized T3 IQ) (Physical)

```
user@host> show interfaces extensive ct3-0/0/1
Physical interface: ct3-0/0/1, Enabled, Physical link is Up
  Interface index: 30, SNMP ifIndex: 317, Generation: 29
  Link-level type: Controller, MTU: 4474, Clocking: Internal, Speed: T3,
  Loopback: None, FCS: 16, Mode: C/Bit parity, Parent: None
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : None
...
```

### show interfaces extensive (Channelized T1 on Channelized T3 IQ)

```
user@host> show interfaces extensive ct1-0/0/1:2
Physical interface: ct1-0/0/1:2, Enabled, Physical link is Up
  Interface index: 175, SNMP ifIndex: 1505, Generation: 174
  Link-level type: Controller, MTU: 1504, Clocking: Internal, Speed: T1,
  Loopback: None, FCS: 16, Framing: ESF, Parent: ct3-0/0/1 (Index 32)
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : None
...
```

### show interfaces extensive (DSO on Channelized T3 IQ)

```
user@host> show interfaces extensive ds-0/0/1:2:1
Physical interface: ds-0/0/1:2:1, Enabled, Physical link is Up
  Interface index: 176, SNMP ifIndex: 1563, Generation: 175
  Link-level type: PPP, MTU: 1504, Clocking: Internal, Speed: 640kbps,
  Loopback: None, FCS: 16, Parent: ct1-0/0/1:2(Index 175)
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link flags     : Keepalives
...
```



## CHAPTER 5

# Command Summaries

- [Channelized E1 Interface Operational Mode Commands on page 145](#)
- [Channelized OC Interface Operational Commands on page 146](#)
- [Channelized STM1 Interface Operational Mode Commands on page 146](#)
- [Channelized T1 and T3 Interface Operational Mode Commands on page 147](#)

### Channelized E1 Interface Operational Mode Commands

---

[Table 18 on page 145](#) summarizes the command-line interface (CLI) commands that you can use to monitor and troubleshoot channelized E1 interfaces. Commands are listed in alphabetical order.

**Table 18: Channelized E1 Interface Operational Mode Commands**

Task	Command
Display status information about channelized E1 interfaces.	<a href="#">show interfaces (Channelized E1)</a>
Display channelized E1 IQ interface information.	<a href="#">show interfaces (Channelized E1 IQ)</a>
Display the interface names of the physical channelized E1 IQ interface and the channels configured on each interface.	<a href="#">show interfaces controller (Channelized E1 IQ)</a>



**NOTE:** For more information about the channel type and level of channelization, and for information about the number of channels that are supported on the channelized E1 interface, see the *Junos OS Network Interfaces Library for Routing Devices*.

For channelization illustrations and configuration examples for channelized IQ interfaces, see the *Junos Feature Guide*.

---

## Channelized OC Interface Operational Commands

Table 19 on page 146 summarizes the command-line interface (CLI) commands to monitor and troubleshoot channelized OC interfaces. Commands are listed in alphabetical order.

**Table 19: Channelized OC Interface Operational Mode Commands**

Task or Information to Monitor	CLI Command
Display channelized OC3 IQ and IQE interface information.	<a href="#">show interfaces (Channelized OC3 IQ and IQE)</a>
Display status information about channelized OC12 interfaces.	<a href="#">show interfaces (Channelized OC12)</a>
Display channelized OC12 IQ and IQE interface information.	<a href="#">show interfaces (Channelized OC12 IQ and IQE)</a>
Display the interface names of the physical channelized OC3 IQ and IQE interface and the channels configured on each interface.	<a href="#">show interfaces controller (Channelized OC3 IQ and IQE)</a>
Display the interface names of the physical channelized OC12 IQ and IQE interface and the channels configured on each interface.	<a href="#">show interfaces controller (Channelized OC12 IQ and IQE)</a>
Display channelized OC48 IQ and IQE interface information.	<a href="#">show interfaces (Channelized OC48 IQ and IQE)</a>



**NOTE:** For more information about the channel type and level of channelization, and for information about the number of channels that are supported on channelized OC interfaces, see the *Junos Network Interfaces Configuration Guide*.

For channelization illustrations and configuration examples for channelized IQ and IQE interfaces, see the *Junos Feature Guide*.

## Channelized STM1 Interface Operational Mode Commands

Table 20 on page 146 summarizes the command-line interface (CLI) commands that you can use to monitor and troubleshoot channelized STM1 interfaces. Commands are listed in alphabetical order.

**Table 20: Channelized STM1 Interface Operational Mode Commands**

Task	Command
Display status information about channelized STM1 interfaces.	<a href="#">show interfaces (Channelized STM1)</a>



**Table 20: Channelized STM1 Interface Operational Mode Commands** (*continued*)

Task	Command
Display channelized STM1 IQ interface information.	<code>show interfaces</code> (Channelized STM1 IQ)
Display the interface names of the physical channelized STM1 IQ interface and the channels configured on each interface.	<code>show interfaces controller</code> (Channelized STM1 IQ)



**NOTE:** For more information about the channel type and level of channelization, and for information about the number of channels that are supported on the channelized STM1 interface, see the *Junos Network Interfaces Configuration Guide*.

For channelization illustrations and configuration examples for channelized IQ interfaces, see the *Junos Feature Guide*.

## Channelized T1 and T3 Interface Operational Mode Commands

Table 21 on page 147 summarizes the command-line interface (CLI) commands that you can use to monitor and troubleshoot channelized T1 and T3 interfaces. Commands are listed in alphabetical order.

**Table 21: Channelized T1 and T3 Interface Operational Mode Commands**

Task	Command
Display status information about channelized DS3-to-DS0 interfaces.	<code>show interfaces</code> (Channelized DS3-to-DS0)
Display status information about channelized DS3-to-DS1 interfaces.	<code>show interfaces</code> (Channelized DS3-to-DS1)
Display channelized T1 IQ interface information.	<code>show interfaces</code> (Channelized T1 IQ)
Display channelized T3 IQ interface information.	<code>show interfaces</code> (Channelized T3 IQ)
Display the interface names of the physical channelized T1 IQ interface and the channels configured on each interface.	<code>show interfaces controller</code> (Channelized T1 IQ)
Display the interface names of the physical channelized T3 IQ interface and the channels configured on each interface.	<code>show interfaces controller</code> (Channelized T3 IQ)



.....

**NOTE:** For more information about the channel type and level of channelization, and for information about the number of channels that are supported on the different types of channelized T1 and T3 interfaces, see the *Junos Network Interfaces Configuration Guide*.

For more information on monitoring and troubleshooting channelized DS3-to-DS0 and DS3-to-DS1 interfaces, see the *Junos Interfaces Network Operations Guide*.

For channelization illustrations and configuration examples for channelized IQ interfaces, see the *Junos Feature Guide*.

.....

## PART 4

# Troubleshooting

- [Interface Diagnostics on page 151](#)



## CHAPTER 6

# Interface Diagnostics

- [Interface Diagnostics on page 151](#)

## Interface Diagnostics

---

You can use two diagnostic tools to test the physical layer connections of interfaces: loopback testing and bit error rate test (BERT) testing. Loopback testing enables you to verify the connectivity of a circuit. BERT testing enables you to identify poor signal quality on a circuit. This section contains the following topics:

- [Configuring Loopback Testing on page 151](#)
- [Interface Diagnostics on page 153](#)

## Configuring Loopback Testing

Loopback testing allows you to verify the connectivity of a circuit. You can configure any of the following interfaces to execute a loopback test: Aggregated Ethernet, Fast Ethernet, Gigabit Ethernet, E1, E3, NxDS0, serial, SONET/SDH, T1, and T3.

The physical path of a network data circuit usually consists of segments interconnected by devices that repeat and regenerate the transmission signal. The transmit path on one device connects to the receive path on the next device. If a circuit fault occurs in the form of a line break or a signal corruption, you can isolate the problem by using a loopback test. Loopback tests allow you to isolate segments of the circuit and test them separately.

To do this, configure a *line loopback* on one of the routers. Instead of transmitting the signal toward the far-end device, the line loopback sends the signal back to the originating router. If the originating router receives back its own data link layer packets, you have verified that the problem is beyond the originating router. Next, configure a line loopback farther away from the local router. If this originating router does not receive its own data link layer packets, you can assume the problem is on one of the segments between the local router and the remote router's interface card. In this case, the next troubleshooting step is to configure a line loopback closer to the local router to find the source of the problem.

There are several types of loopback testing supported by the Junos OS, as follows:

- DCE local—Loops packets back on the local DCE.
- DCE remote—Loops packets back on the remote DCE.

- **Local**—Useful for troubleshooting physical PIC errors. Configuring local loopback on an interface allows transmission of packets to the channel service unit (CSU) and then to the circuit toward the far-end device. The interface receives its own transmission, which includes data and timing information, on the local router's PIC. The data received from the CSU is ignored. To test a local loopback, issue the **show interfaces *interface-name*** command. If PPP keepalives transmitted on the interface are received by the PIC, the **Device Flags** field contains the output **Loop-Detected**.
- **Payload**—Useful for troubleshooting the physical circuit problems between the local router and the remote router. A payload loopback loops data only (without clocking information) on the remote router's PIC. With payload loopback, overhead is recalculated.
- **Remote**—Useful for troubleshooting the physical circuit problems between the local router and the remote router. A remote loopback loops packets, including both data and timing information, back on the remote router's interface card. A router at one end of the circuit initiates a remote loopback toward its remote partner. When you configure a remote loopback, the packets received from the physical circuit and CSU are received by the interface. Those packets are then retransmitted by the PIC back toward the CSU and the circuit. This loopback tests all the intermediate transmission segments.

Table 22 on page 152 shows the loopback modes supported on the various interface types.

**Table 22: Loopback Modes by Interface Type**

Interface	Loopback Modes	Usage Guidelines
Aggregated Ethernet, Fast Ethernet, Gigabit Ethernet	Local	<i>Configuring Ethernet Loopback Capability</i>
Circuit Emulation E1	Local and remote	<i>Configuring E1 Loopback Capability</i>
Circuit Emulation T1	Local and remote	<i>Configuring T1 Loopback Capability</i>
E1 and E3	Local and remote	<i>Configuring E1 Loopback Capability and Configuring E3 Loopback Capability</i>
NxDSO	Payload	<i>Configuring Channelized E1 IQ and IQE Interfaces, Configuring T1 and NxDSO Interfaces, Configuring Channelized OC12/STM4 IQ and IQE Interfaces (SONET Mode), Configuring Channelized STM1 IQ and IQE Interfaces, and Configuring Channelized T3 IQ Interfaces</i>
Serial (V.35 and X.21)	Local and remote	<i>Configuring Serial Loopback Capability</i>
Serial (EIA-530)	DCE local, DCE remote, local, and remote	<i>Configuring Serial Loopback Capability</i>
SONET/SDH	Local and remote	<i>Configuring SONET/SDH Loopback Capability</i>

Table 22: Loopback Modes by Interface Type (*continued*)

Interface	Loopback Modes	Usage Guidelines
T1 and T3	Local, payload, and remote	<i>Configuring T1 Loopback Capability</i> and <i>Configuring T3 Loopback Capability</i>  <i>See also Configuring the T1 Remote Loopback Response</i>

To configure loopback testing, include the **loopback** statement:

**loopback mode;**

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* aggregated-ether-options]
- [edit interfaces *interface-name* ds0-options]
- [edit interfaces *interface-name* e1-options]
- [edit interfaces *interface-name* e3-options]
- [edit interfaces *interface-name* fastether-options]
- [edit interfaces *interface-name* gigether-options]
- [edit interfaces *interface-name* serial-options]
- [edit interfaces *interface-name* sonet-options]
- [edit interfaces *interface-name* t1-options]
- [edit interfaces *interface-name* t3-options]

## Interface Diagnostics

BERT allows you to troubleshoot problems by checking the quality of links. You can configure any of the following interfaces to execute a BERT when the interface receives a request to run this test: E1, E3, T1, T3; the channelized DS3, OC3, OC12, and STM1 interfaces; and the channelized DS3 IQ, E1 IQ, and OC12 IQ interfaces.

A BERT test requires a line loop to be in place on either the transmission devices or the far-end router. The local router generates a known bit pattern and sends it out the transmit path. The received pattern is then verified against the sent pattern. The higher the bit error rate of the received pattern, the worse the noise is on the physical circuit. As you move the position of the line loop increasingly downstream toward the far-end router, you can isolate the troubled portion of the link.

To configure BERT, you must configure the duration of the test, the bit pattern to send on the transmit path, and the error rate to monitor when the inbound pattern is received.

To configure the duration of the test, the pattern to send in the bit stream, and the error rate to include in the bit stream, include the **bert-period**, **bert-algorithm**, and **bert-error-rate** statements, respectively, at the [edit interfaces *interface-name* *interface-type*-options] hierarchy level:

```
[edit interfaces interface-name interface-type-options]
bert-algorithm algorithm;
bert-error-rate rate;
bert-period seconds;
```

By default, the BERT period is 10 seconds. You can configure the BERT period to last from 1 through 239 seconds on some PICs and from 1 through 240 seconds on other PICs.

**rate** is the bit error rate. This can be an integer from 0 through 7, which corresponds to a bit error rate from  $10^{-0}$  (1 error per bit) to  $10^{-7}$  (1 error per 10 million bits).

**algorithm** is the pattern to send in the bit stream. For a list of supported algorithms, enter a ? after the **bert-algorithm** statement; for example:

```
[edit interfaces t1-0/0/0 t1-options]
user@host# set bert-algorithm ?
Possible completions:
pseudo-2e11-o152    Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151    Pattern is 2^15 - 1 (per 0.152 standard)
pseudo-2e20-o151    Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e20-o153    Pattern is 2^20 - 1 (per 0.153 standard)
...
```

For specific hierarchy information, see the individual interface types.



**NOTE:** The 4-port E1 PIC supports only the following algorithms:

pseudo-2e11-o152	Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151	Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151	Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e23-o151	Pattern is 2^23 (per 0.151 standard)

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.





**NOTE:** The 12-port T1/E1 Circuit Emulation (CE) PIC supports only the following algorithms:

```
all-ones-repeating    Repeating one bits
all-zeros-repeating   Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
pseudo-2e11-o152     Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151     Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151     Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e7           Pattern is 2^7 - 1
pseudo-2e9-o153      Pattern is 2^9 - 1 (per 0.153 standard)
repeating-1-in-4      1 bit in 4 is set
repeating-1-in-8      1 bit in 8 is set
repeating-3-in-24     3 bits in 24 are set
```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



**NOTE:** The IQE PICs support only the following algorithms:

```
all-ones-repeating    Repeating one bits
all-zeros-repeating   Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
pseudo-2e9-o153       Pattern is 2^9 - 1 (per 0.153 (511 type) standard)
pseudo-2e11-o152      Pattern is 2^11 - 1 (per 0.152 and 0.153 (2047 type)
standards)
pseudo-2e15-o151      Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151      Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e20-o153      Pattern is 2^20 - 1 (per 0.153 standard)
pseudo-2e23-o151      Pattern is 2^23 - 1 (per 0.151 standard)
repeating-1-in-4       1 bit in 4 is set
repeating-1-in-8       1 bit in 8 is set
repeating-3-in-24      3 bits in 24 are set
```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



**NOTE:** BERT is supported on the PDH interfaces of the Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP and the DS3/E3 MIC. The following BERT algorithms are supported:

all-ones-repeating	Repeating one bits
all-zeros-repeating	Repeating zero bits
alternating-double-ones-zeros	Alternating pairs of ones and zeros
alternating-ones-zeros	Alternating ones and zeros
repeating-1-in-4	1 bit in 4 is set
repeating-1-in-8	1 bit in 8 is set
repeating-3-in-24	3 bits in 24 are set
pseudo-2e9-o153	Pattern is $2^9 - 1$ (per 0.153 standard)
pseudo-2e11-o152	Pattern is $2^{11} - 1$ (per 0.152 standard)
pseudo-2e15-o151	Pattern is $2^{15} - 1$ (per 0.151 standard)
pseudo-2e20-o151	Pattern is $2^{20} - 1$ (per 0.151 standard)
pseudo-2e20-o153	Pattern is $2^{20} - 1$ (per 0.153 standard)
pseudo-2e23-o151	Pattern is $2^{23} - 1$ (per 0.151 standard)

Table 23 on page 156 shows the BERT capabilities for various interface types.

**Table 23: BERT Capabilities by Interface Type**

Interface	T1 BERT	T3 BERT	Comments
12-port T1/E1 Circuit Emulation	Yes (ports 0–11)		<ul style="list-style-type: none"> <li>Limited algorithms</li> </ul>
4-port Channelized OC3/STM1 Circuit Emulation	Yes (port 0–3)		<ul style="list-style-type: none"> <li>Limited algorithms</li> </ul>
E1 or T1	Yes (port 0–3)	Yes (port 0–3)	<ul style="list-style-type: none"> <li>Single port at a time</li> <li>Limited algorithms</li> </ul>
E3 or T3	Yes (port 0–3)	Yes (port 0–3)	<ul style="list-style-type: none"> <li>Single port at a time</li> </ul>
Channelized OC12	N/A	Yes (channel 0–11)	<ul style="list-style-type: none"> <li>Single channel at a time</li> <li>Limited algorithms</li> <li>No bit count</li> </ul>
Channelized STM1	Yes (channel 0–62)	N/A	<ul style="list-style-type: none"> <li>Multiple channels</li> <li>Only one algorithm</li> <li>No error insert</li> <li>No bit count</li> </ul>
Channelized T3 and Multichannel T3	Yes (channel 0–27)	Yes (port 0–3 on channel 0)	<ul style="list-style-type: none"> <li>Multiple ports and channels</li> <li>Limited algorithms for T1</li> <li>No error insert for T1</li> <li>No bit count for T1</li> </ul>

These limitations do not apply to channelized IQ interfaces. For information about BERT capabilities on channelized IQ interfaces, see “[Channelized IQ and IQE Interfaces Properties](#)” on page 14.

### Starting and Stopping a BERT Test

Before you can start the BERT test, you must disable the interface. To do this, include the **disable** statement at the **[edit interfaces *interface-name*]** hierarchy level:

```
[edit interfaces interface-name]
disable;
```

After you configure the BERT properties and commit the configuration, begin the test by issuing the **test interface *interface-name* *interface-type*-bert-start** operational mode command:

```
user@host> test interface interface-name interface-type-bert-start
```

The test runs for the duration you specify with the **bert-period** statement. If you wish to terminate the test sooner, issue the **test interface *interface-name* *interface-type*-bert-stop** command:

```
user@host> test interface interface-name interface-type-bert-stop
```

For example:

```
user@host> test interface t3-1/2/0 t3-bert-start
user@host> test interface t3-1/2/0 t3-bert-stop
```

To view the results of the BERT test, issue the **show interfaces extensive | find BERT** command:

```
user@host> show interfaces interface-name extensive | find BERT
```

For more information about running and evaluating the results of the BERT procedure, see the *Junos OS Operational Mode Commands*.



**NOTE:** To exchange BERT patterns between a local router and a remote router, include the **loopback remote** statement in the interface configuration at the remote end of the link. From the local router, issue the **test interface** command.

### Example: Configuring Bit Error Rate Testing

Configure a BERT test on a T3 interface. In this example, the run duration lasts for 120 seconds. The configured error rate is 0, which corresponds to a bit error rate of  $10^{-0}$  (1 error per bit). The configured bit pattern of **all-ones-repeating** means that every bit the interface sends is a set to a value of 1.

```
[edit interfaces]
t3-1/2/0 {
  t3-options {
    bert algorithm all-ones-repeating;
    bert-error-rate 0;
```

```
        bert-period 120;  
    }  
}
```

## PART 5

# Index

- [Index on page 161](#)



# Index

## Symbols

#, comments in configuration statements.....	xii
( ), in syntax descriptions.....	xii
< >, in syntax descriptions.....	xii
[ ], in configuration statements.....	xii
{ }, in configuration statements.....	xii
(pipe), in syntax descriptions.....	xii

## B

BERT	
configuring interface diagnostics.....	153
bert-algorithm statement	
usage guidelines.....	153
bert-error-rate statement	
usage guidelines.....	153
bert-period statement	
usage guidelines.....	153
bit error rate test See BERT	
braces, in configuration statements.....	xii
brackets	
angle, in syntax descriptions.....	xii
square, in configuration statements.....	xii

## C

channel scaling numbers	
channelized sonet/sdh oc3/stm1 (multi-rate)	
mics with sfp.....	12
ds3/e3 mic.....	13
channelized DS3-to-DS0 interfaces	
status information, displaying.....	56
channelized DS3-to-DS1 interfaces	
status information, displaying.....	67
channelized E1 interfaces	
status information, displaying.....	74
channelized E1 IQ interfaces	
status information, displaying.....	70
channelized interfaces	
clock sources.....	8
channelized IQ interfaces	
supported options.....	14

channelized OC12 interfaces	
status information, displaying.....	89
channelized OC12 IQ interfaces	
status information, displaying.....	85
channelized OC12 IQE interfaces	
status information, displaying.....	85
channelized OC3 IQ interfaces	
status information, displaying.....	93
channelized OC3 IQE interfaces	
status information, displaying.....	93
channelized STM1 interfaces	
status information, displaying.....	115
channelized STM1 IQ interfaces	
status information, displaying.....	112
channelized T1 IQ interfaces	
status information, displaying.....	130
channelized T3 IQ interfaces	
status information, displaying.....	142
clock sources.....	49
channelized interfaces.....	8
clocking statement.....	49
comments, in configuration statements.....	xii
conventions	
text and syntax.....	xi
curly braces, in configuration statements.....	xii
customer support.....	xiii
contacting JTAC.....	xiii

## D

dlci statement.....	50
documentation	
comments on.....	xiii

## E

external clock sources.....	49
-----------------------------	----

## F

fast-aps-switch statement.....	51
font conventions.....	xi

## I

interfaces	
clock sources.....	49
configuration statements.....	27
internal clock sources.....	49

## L

logical systems	
configuration statements.....	43

loopback testing.....151

## M

manuals

    comments on.....xiii

## N

no-termination-request statement.....52

## P

parentheses, in syntax descriptions.....xii

physical interfaces

    clock sources.....49

## S

show interfaces (Channelized DS3-to-DS0)

    command.....56

show interfaces (Channelized DS3-to-DS1)

    command.....67

show interfaces (Channelized E1 IQ) command.....70

show interfaces (Channelized E1) command.....74

show interfaces (Channelized OC12 IQ)

    command.....85

show interfaces (Channelized OC12)

    command.....89

show interfaces (Channelized OC3 IQ and IQE)

    command.....93

show interfaces (Channelized STM1 IQ)

    command.....112

show interfaces (Channelized STM1)

    command.....115

show interfaces (Channelized T1 IQ)

    command.....130

show interfaces (Channelized T3 IQ)

    command.....142

support, technical See technical support

syntax conventions.....xi

## T

technical support

    contacting JTAC.....xiii