

Mist 設定マニュアル

- WLAN -

フィルタリングの設定

ジュニパーネットワークス株式会社

2021年7月 Ver 1.0


JUNIPER 
driven by Mist AI

はじめに


- ❖ 本マニュアルは、『フィルタリングの設定』について説明します
- ❖ 手順内容は 2021年7月 時点の Mist Cloud にて確認を実施しております
実際の画面と表示が異なる場合は以下のアップデート情報をご確認下さい
<https://www.mist.com/documentation/category/product-updates/>
- ❖ 設定内容やパラメータは導入する環境や構成によって異なります
各種設定内容の詳細は下記リンクよりご確認ください
<https://www.mist.com/documentation/>
- ❖ 他にも多数の Mist 日本語マニュアルを「ソリューション&テクニカル情報サイト」に掲載しております
<https://www.juniper.net/jp/ja/local/solution-technical-information/mist.html>

無線LAN フィルタリングの設定

1. [Network]から[WLANs] をクリックします

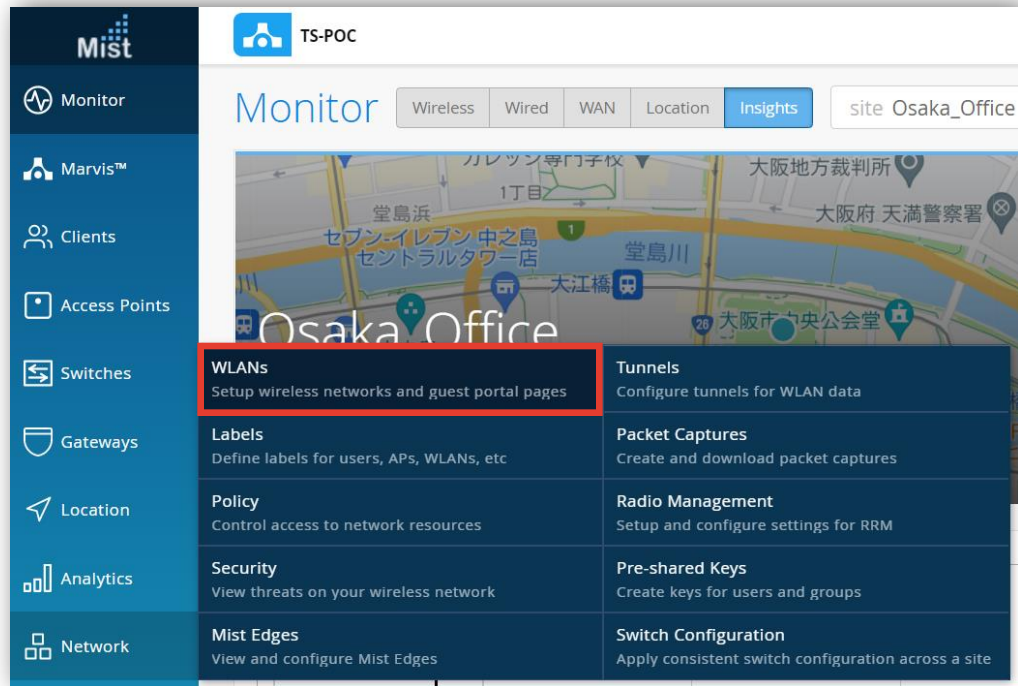

2. 対象のSSIDをクリックします

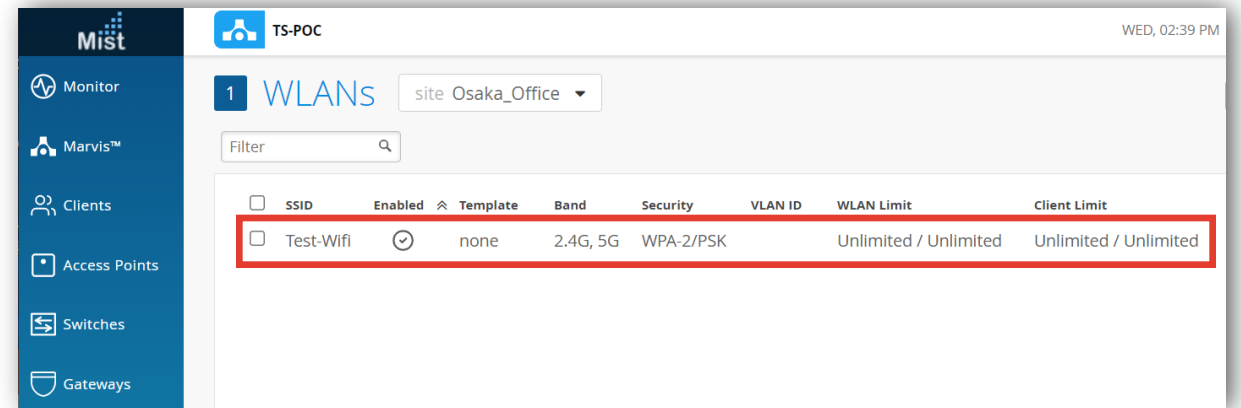

無線LAN フィルタリングの設定

3. Filtering (Wireless)欄にてフィルタリング設定を実施します

The screenshot shows the configuration interface for wireless LAN filtering. It is divided into three main sections, each highlighted with a red border and a callout box:

- Isolation:** Contains the checkbox "prohibit peer to peer communication". The callout explains that this should be enabled when you want to prohibit peer-to-peer communication.
- Filtering (Wireless):** Contains several checked options: "ARP", "Broadcast/Multicast", "Allow mDNS", "Allow IPv6 Neighbor Discovery", and "Ignore Broadcast SSID Probe Requests". The callout explains that these should be enabled when you want to filter ARP, broadcast/multicast, or ignore broadcast SSID probe requests.
- DTIM Period:** Contains a text input field for "DTIM period" with the value "2". The callout explains that this is the interval for Wi-Fi beacons.

無線LAN フィルタリングの設定

4. [Save]をクリックすれば、設定完了です

The screenshot displays the Mist management console interface for configuring a WLAN. The left sidebar contains navigation options: Monitor, Marvis™, Clients, Access Points, Switches, and Gateways. The main content area is titled 'WLANs : Test-Wifi' and includes the following configuration fields:

- SSID:** Test-Wifi (with a copy icon and '= Test-Wifi' text)
- WLAN ID:** bd478bc6-e9c3-4e5c-b322-095b249ae1bf (with a copy icon)
- Security:**
 - WPA-2/PSK with passphrase (with a password field containing dots and a 'Reveal' link)
 - Enable PPSK Radius Mac Auth
 - WPA-2/EAP (802.1X)
 - Open Access

At the top right of the configuration area, there are four buttons: 'Create Template', 'Delete WLAN', 'Save' (highlighted with a red box), and 'Cancel'. The top navigation bar shows the Mist logo, 'TS-POC', the date and time 'WED, 02:43 PM', and user profile icons.

Thank you

JUNIPER
driven by Mist AI 