

Traffic Policers on EX9200 Switches



Modified: 2016-02-03

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Traffic Policers on EX9200 Switches
Copyright © 2016, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xiii
	Documentation and Release Notes	xiii
	Supported Platforms	xiii
	Using the Examples in This Manual	xiii
	Merging a Full Example	xiv
	Merging a Snippet	xiv
	Documentation Conventions	xv
	Documentation Feedback	xvii
	Requesting Technical Support	xvii
	Self-Help Online Tools and Resources	xvii
	Opening a Case with JTAC	xviii
Part 1	Overview	
Chapter 1	Introduction to Traffic Policing	3
	Traffic Policing Overview	3
	Congestion Management for IP Traffic Flows	3
	Traffic Limits	4
	Traffic Color Marking	5
	Forwarding Classes and PLP Levels	6
	Policer Application to Traffic	6
	Traffic Policer Types	7
	Single-Rate Two-Color Policers	7
	Basic Single-Rate Two-Color Policer	7
	Bandwidth Policer	8
	Logical Bandwidth Policer	8
	Three-Color Policers	8
	Single-Rate Three-Color Policers	8
	Two-Rate Three-Color Policers	8
	Two-Color and Three-Color Policer Options	9
	Logical Interface (Aggregate) Policers	9
	Physical Interface Policers	9
	Policers Applied to Layer 2 Traffic	10
	Multifield Classification	10
	Order of Policer and Firewall Filter Operations	10
	Understanding the Frame Length for Policing Packets	11
Chapter 2	Introduction to Configuring Policers	13
	Statement Hierarchy for Configuring Policers	13
	Two-Color Policer Configuration Overview	15
	Three-Color Policer Configuration Overview	19

	Guidelines for Applying Traffic Policers	23
Chapter 3	Policer Rate Limits and Actions	25
	Policer Bandwidth and Burst-Size Limits	25
	Policer Color-Marking and Actions	26
	Single Token Bucket Algorithm	28
	Token Bucket Concepts	28
	Single Token Bucket Algorithm	28
	Conformance Measurement for Two-Color Marking	29
	Dual Token Bucket Algorithms	30
	Token Bucket Concepts	30
	Guaranteed Bandwidth for Three-Color Marking	30
	Nonconformance Measurement for Single-Rate Three-Color Marking	31
	Nonconformance Measurement for Two-Rate Three-Color Marking	31
Chapter 4	Policer Implementation	33
	Policer Implementation Overview	33
	Understanding the Benefits of Policers and Token Bucket Algorithms	37
	Scenario 1: Single TCP Connection	37
	Scenario 2: Multiple TCP Connections	38
	Determining Proper Burst Size for Traffic Policers	39
Part 2	Configuration	
Chapter 5	Configuring Single-Rate Two-Color Policers	45
	Basic Single-Rate Two-Color Policers	45
	Single-Rate Two-Color Policer Overview	45
	Example: Configuring a Single-Rate Two-Color Policer	46
	Example: Configuring Interface and Firewall Filter Policers at the Same Interface	52
	Bandwidth Policers	62
	Bandwidth Policer Overview	62
	Guidelines for Configuring a Bandwidth Policer	62
	Guidelines for Applying a Bandwidth Policer	63
	Example: Configuring a Logical Bandwidth Policer	63
	Filter-Specific Counters and Policers	70
	Filter-Specific Policer Overview	70
	Example: Configuring a Stateless Firewall Filter to Protect Against TCP and ICMP Floods	71
	Prefix-Specific Counting and Policing Actions	81
	Prefix-Specific Counting and Policing Overview	81
	Separate Counting and Policing for Each IPv4 Address Range	81
	Prefix-Specific Action Configuration	82
	Counter and Policer Set Size and Indexing	83
	Filter-Specific Counter and Policer Set Overview	83
	Example: Configuring Prefix-Specific Counting and Policing	84
	Prefix-Specific Counting and Policing Configuration Scenarios	91
	Prefix Length of the Action and Prefix Length of Addresses in Filtered Packets	91
	Scenario 1: Firewall Filter Term Matches on Multiple Addresses	92

	Scenario 2: Subnet Prefix Is Longer Than the Prefix in the Filter Match Condition	94
	Scenario 3: Subnet Prefix Is Shorter Than the Prefix in the Firewall Filter Match Condition	95
	Multifield Classification	97
	Multifield Classification Overview	97
	Forwarding Classes and PLP Levels	97
	Multifield Classification and BA Classification	97
	Multifield Classification Used In Conjunction with Policers	98
	Multifield Classification Requirements and Restrictions	99
	Supported Platforms	99
	CoS Tricolor Marking Requirement	100
	Restrictions	100
	Multifield Classification Limitations on M Series Routers	100
	Problem: Output-Filter Matching on Input-Filter Classification	100
	Workaround: Configure All Actions in the Ingress Filter	101
	Example: Configuring Multifield Classification	102
	Example: Configuring a Multifield Classifier	108
	Policer Overhead to Account for Rate Shaping in the Traffic Manager	114
	Policer Overhead to Account for Rate Shaping Overview	114
	Example: Configuring Policer Overhead to Account for Rate Shaping	115
Chapter 6	Configuring Three-Color Policers	123
	Three-Color Policer Configuration Guidelines	123
	Platforms Supported for Three-Color Policers	123
	Color Modes for Three-Color Policers	124
	Color-Blind Mode	124
	Color-Aware Mode	124
	Naming Conventions for Three-Color Policers	125
	Basic Single-Rate Three-Color Policers	126
	Single-Rate Three-Color Policer Overview	126
	Example: Configuring a Single-Rate Three-Color Policer	127
	Basic Two-Rate Three-Color Policers	132
	Two-Rate Three-Color Policer Overview	132
	Example: Configuring a Two-Rate Three-Color Policer	133
Chapter 7	Configuring Logical and Physical Interface Policers	139
	Two-Color and Three-Color Logical Interface Policers	139
	Logical Interface (Aggregate) Policer Overview	139
	Example: Configuring a Two-Color Logical Interface (Aggregate) Policer	140
	Example: Configuring a Three-Color Logical Interface (Aggregate) Policer	145
	Two-Color and Three-Color Physical Interface Policers	151
	Physical Interface Policer Overview	151
	Example: Configuring a Physical Interface Policer for Aggregate Traffic at a Physical Interface	153

Chapter 8	Configuring Layer 2 Policers	161
	Two-Color and Three-Color Policers at Layer 2	161
	Two-Color Policing at Layer 2 Overview	161
	Guidelines for Configuring Two-Color Policing of Layer 2 Traffic	161
	Statement Hierarchy for Configuring a Two-Color Policer for Layer 2 Traffic	162
	Statement Hierarchy for Applying a Two-Color Policer to Layer 2 Traffic	162
	Three-Color Policing at Layer 2 Overview	163
	Guidelines for Configuring Three-Color Policing of Layer 2 Traffic	163
	Statement Hierarchy for Configuring a Three-Color Policer for Layer 2 Traffic	163
	Statement Hierarchy for Applying a Three-Color Policer to Layer 2 Traffic	164
	Example: Configuring a Three-Color Logical Interface (Aggregate) Policer	164
Chapter 9	Configuration Statements	171
	[edit firewall] Hierarchy Level	172
	Common Firewall Actions	172
	Common IP Firewall Actions	173
	Common IPv4 Firewall Actions	173
	Common IP Firewall Match Conditions	174
	Common IPv4 Firewall Match Conditions	175
	Common Layer 2 Firewall Match Conditions	175
	Complete [edit firewall] Hierarchy	177
	action	186
	bandwidth-limit (Policer)	187
	bandwidth-percent	189
	burst-size-limit (Policer)	191
	color-aware	194
	color-blind	195
	committed-burst-size	196
	committed-information-rate	198
	excess-burst-size	200
	filter-specific	201
	hierarchical-policer	202
	if-exceeding (Policer)	203
	input-hierarchical-policer	204
	input-policer	205
	input-three-color	206
	layer2-policer	207
	load-balance-group	208
	logical-bandwidth-policer	208
	logical-interface-policer	209
	loss-priority (Firewall Filter Action)	210
	loss-priority high then discard (Three-Color Policer)	211
	output-policer	212
	output-three-color	213

	peak-burst-size	214
	peak-information-rate	216
	physical-interface-filter	217
	physical-interface-policer	218
	policer (Applying to a Logical Interface)	219
	policer (Configuring)	220
	policer (Firewall Filter Action)	221
	prefix-action (Configuring)	222
	prefix-action (Firewall Filter Action)	223
	single-rate	224
	three-color-policer (Applying)	225
	three-color-policer (Configuring)	226
	two-rate	227
Part 3	Administration	
Chapter 10	Traffic Policing Standards	231
	Supported Standards for Policing	231
Chapter 11	Firewall Filter and Policer Operational Mode Commands	233
	clear firewall	234
	show firewall	236
	show firewall filter version	243
	show firewall log	244
	show firewall prefix-action-stats	247
	show policer	249
Part 4	Index	
	Index	253

List of Figures

Part 1	Overview	
Chapter 1	Introduction to Traffic Policing	3
	Figure 1: Network Traffic and Burst Rates	4
	Figure 2: Incoming and Outgoing Policers and Firewall Filters	11
Chapter 4	Policer Implementation	33
	Figure 3: Token Bucket Algorithm	36
	Figure 4: Traffic Behavior Using Policer and Burst Size	37
	Figure 5: Policer Behavior With a Single TCP Connection	38
	Figure 6: Policer Behavior With Background Traffic (Multiple TCP Connections)	38
	Figure 7: Bursty Traffic Without Configured Burst Size (Excessive Unused Bandwidth)	40
	Figure 8: Bursty Traffic With Configured Burst Size (Less Unused Bandwidth)	40
	Figure 9: Comparing Burst Size Configuration Methods: 5 ms V.S. 10 MTU	41
Part 2	Configuration	
Chapter 5	Configuring Single-Rate Two-Color Policers	45
	Figure 10: Firewall Filter to Protect Against TCP and ICMP Floods	72
	Figure 11: Multifield Classifier Based on TCP Source Ports	109
	Figure 12: Multifield Classifier Scenario	110

List of Tables

	About the Documentation	xiii
	Table 1: Notice Icons	xv
	Table 2: Text and Syntax Conventions	xv
Part 1	Overview	
Chapter 1	Introduction to Traffic Policing	3
	Table 3: Packet Lengths Considered for Traffic Policers	11
Chapter 2	Introduction to Configuring Policers	13
	Table 4: Two-Color Policer Configuration and Application Overview	15
	Table 5: Three-Color Policer Configuration and Application Overview	20
Chapter 3	Policer Rate Limits and Actions	25
	Table 6: Policer Bandwidth Limits and Burst-Size Limits	25
	Table 7: Implicit and Configurable Policer Actions Based on Color Marking	26
Part 2	Configuration	
Chapter 5	Configuring Single-Rate Two-Color Policers	45
	Table 8: Examples of Counter and Policer Set Size and Indexing	83
	Table 9: Summary of Prefix-Specific Action Scenarios	91
Chapter 6	Configuring Three-Color Policers	123
	Table 10: Recommended Naming Convention for Policers	125
Chapter 9	Configuration Statements	171
	Table 11: Bandwidth Limits and Token Rates	192
Part 3	Administration	
Chapter 11	Firewall Filter and Policer Operational Mode Commands	233
	Table 12: show firewall Output Fields	237
	Table 13: show firewall filter version Output Fields	243
	Table 14: show firewall log Output Fields	244
	Table 15: show firewall prefix-action-stats Output Fields	248
	Table 16: show policer Output Fields	249

About the Documentation

- Documentation and Release Notes on page xiii
- Supported Platforms on page xiii
- Using the Examples in This Manual on page xiii
- Documentation Conventions on page xv
- Documentation Feedback on page xvii
- Requesting Technical Support on page xvii

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- EX Series

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the *CLI User Guide*.

Documentation Conventions

Table 1 on page xv defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xv defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Fixed-width text like this	Represents output that appears on the terminal screen.	<pre>user@host> show chassis alarms</pre> <p>No alarms currently active</p>
<i>Italic text like this</i>	<ul style="list-style-type: none"> Introduces or emphasizes important new terms. Identifies guide names. Identifies RFC and Internet draft titles. 	<ul style="list-style-type: none"> A policy <i>term</i> is a named structure that defines match conditions and actions. <i>Junos OS CLI User Guide</i> RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	<p>Configure the machine's domain name:</p> <pre>[edit] root@# set system domain-name domain-name</pre>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> To configure a stub area, include the stub statement at the <code>[edit protocols ospf area area-id]</code> hierarchy level. The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast <i>(string1 string2 string3)</i>
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [community-ids]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	<pre>[edit] routing-options { static { route default { nexthop <i>address</i>; retain; } } }</pre>
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> In the Logical Interfaces box, select All Interfaces. To cancel the configuration, click Cancel.

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page at the Juniper Networks Technical Documentation site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>

- Download the latest versions of software and review release notes:
<http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications:
<http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum:
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

PART 1

Overview

- [Introduction to Traffic Policing on page 3](#)
- [Introduction to Configuring Policers on page 13](#)
- [Policer Rate Limits and Actions on page 25](#)
- [Policer Implementation on page 33](#)

CHAPTER 1

Introduction to Traffic Policing

- [Traffic Policing Overview on page 3](#)
- [Traffic Policer Types on page 7](#)
- [Order of Policer and Firewall Filter Operations on page 10](#)
- [Understanding the Frame Length for Policing Packets on page 11](#)

Traffic Policing Overview

This topic covers the following information:

- [Congestion Management for IP Traffic Flows on page 3](#)
- [Traffic Limits on page 4](#)
- [Traffic Color Marking on page 5](#)
- [Forwarding Classes and PLP Levels on page 6](#)
- [Policer Application to Traffic on page 6](#)

Congestion Management for IP Traffic Flows

Traffic policing, also known *rate limiting*, is an essential component of network access security that is designed to thwart denial-of-service (DoS) attacks. Traffic policing enables you to control the maximum rate of IP traffic sent or received on an interface and also to partition network traffic into multiple priority levels, also known as *classes of service*. A policer defines a set of traffic rate limits and sets consequences for traffic that does not conform to the configured limits. Packets in a traffic flow that does not conform to traffic limits are either discarded or marked with a different forwarding class or packet loss priority (PLP) level.

With the exception of policers configured to rate-limit aggregate traffic (all protocol families and logical interfaces configured on a physical interface), you can apply a policer to all IP packets in a Layer 2 or Layer 3 traffic flow at a logical interface.

With the exception of policers configured to rate-limit based on physical interface media rate, you can apply a policer to specific IP packets in a Layer 3 traffic flow at a logical interface by using a stateless firewall filter.

You can apply a policer to inbound or outbound interface traffic. Policers applied to inbound traffic help to conserve resources by dropping traffic that does not need to be

routed through a network. Dropping inbound traffic also helps to thwart denial-of-service (DoS) attacks. Policers applied to outbound traffic control the bandwidth used.



NOTE: Traffic policers are instantiated on a per-PIC basis. Traffic policing does not work when the traffic for one local policy decision function (L-PDF) subscriber is distributed over multiple Multiservices PICs in an AMS group.


Traffic Limits

Junos[®] OS policers use the *token-bucket* algorithm to enforce a limit on average transmit or receive rate of IP traffic at an interface while allowing bursts of traffic up to a maximum value based on the overall traffic load. The token-bucket algorithm offers more flexibility than the *leaky-bucket* algorithm in that you can allow a specified amount of bursting before starting to discard packets or apply a penalty to packet output-queuing priority or packet drop priority.

In the token-bucket model, the bucket represents the policing function. Tokens are added to the bucket at a fixed rate, but only up to the specified depth of the bucket. Each token represents a “credit” for some number of bits, and tokens in the bucket are “cashed in” for the ability to transmit or receive traffic at the interface. When sufficient tokens are present in the bucket, a traffic flow continues unrestricted. Otherwise, packets might be dropped or else re-marked with a lower forwarding class, a higher packet loss priority (PLP) level, or both.

- The rate at which tokens are added to the bucket represents the highest average transmit or receive rate in bits per second allowed for a given service level. You specify this highest average traffic rate as the *bandwidth limit* of the policer. If the traffic arrival rate is so high that at some point insufficient tokens are present in the bucket, then the traffic flow is no longer conforming to the traffic limit.
- The depth of the bucket in bytes controls the amount of back-to-back bursting allowed. You specify this factor as the *burst-size limit* of the policer. This second limit affects the average transmit or receive rate by limiting the number of bytes permitted in a transmission burst for a given interval of time. Bursts exceeding the current burst-size limit are dropped until there are sufficient tokens available to permit the burst to proceed.

Figure 1: Network Traffic and Burst Rates

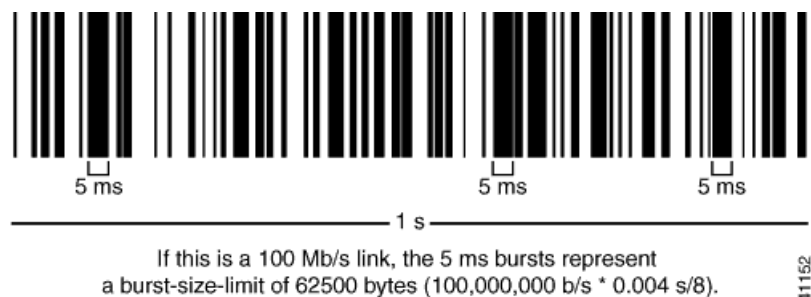

9041152

As shown in the figure above, a UPC bar code is a good facsimile of what traffic looks like on the line; an interface is either transmitting (bursting at full rate) or it is not. The black lines represent periods of data transmission and the white space represents periods of silence when the token bucket can replenish.

Depending on the type of policer used, packets in a policed traffic flow that surpasses the defined limits might be implicitly set to a higher PLP level, assigned to a configured forwarding class or set to a configured PLP level (or both), or simply discarded. If packets encounter downstream congestion, packets with a **low** PLP level are less likely to be discarded than those with a **medium-low**, **medium-high**, or **high** PLP level.

Traffic Color Marking

Based on the particular set of traffic limits configured, a policer identifies a traffic flow as belonging to one of either two or three categories that are similar to the colors of a traffic light used to control automobile traffic.

A *two-color-marking* policer categorizes traffic as either conforming to the traffic limits (green) or violating the traffic limits (red):

- **Green**—Two-color-marking policers implicitly set the packets in a green flow to the low PLP level, and you cannot configure any policer actions for conforming traffic.
- **Red**—Two-color-marking policers do not perform any implicit actions on packets in a red flow. Instead, those packets are handled according to the actions specified in the policer configuration. You can configure a two-color-marking policer to simply discard packets if the traffic flow is red. Alternatively, you can configure a two-color-marking policer to handle the packets in a red flow by setting the PLP level to either **low** or **high**, assigning the packets to any forwarding class already configured, or both.

On MX Series, M120, and M320 routers and M7i and M10i routers with the Enhanced CFEB (CFEB-E) and EX Series switches only, you can specify two additional PLP levels for packets in a red flow: **medium-low** or **medium-high**.

Three-color-marking policers categorize traffic as conforming to the traffic limits (green), violating the traffic limits (red), or exceeding the traffic limits but within an allowed range (yellow):

- **Green**—Like two-color-marking policers, three-color-marking policers implicitly set the packets in a green flow to the low PLP level, and you cannot configure any policer actions for conforming traffic.
- **Yellow**—Unlike two-color-marking policers, three-color-marking policers categorize a second type of nonconforming traffic: yellow.

Single-rate three-color policing categorizes as yellow traffic that exceeds the traffic limits while conforming to a second defined burst-size limit. Two-rate three-color policing categorizes as yellow traffic that exceeds the traffic limits while conforming to both a second defined burst-size limit and a second defined bandwidth limit.

Three-color-marking policers implicitly set the packets in a yellow flow to the medium-high PLP level so that the packets incur a less severe penalty than those in a red flow. You cannot configure any policer actions for yellow traffic.

- Red—Unlike two-color-marking policers, three-color-marking policers implicitly set the packets in a red flow to the high PLP level, which is the highest PLP value. You can also configure a three-color-marking policer to discard the packets in a red flow instead of forwarding them with a high PLP setting.

Two-color-marking policers allows bursts of traffic for short periods, whereas three-color-marking policers allow more sustained bursts of traffic.

Forwarding Classes and PLP Levels

A packet's forwarding class assignment and PLP level are used by the Junos OS class of service (CoS) features. The Junos CoS features include a set of mechanisms that you can use to provide differentiated services when best-effort traffic delivery is insufficient. For router (and switch) interfaces that carry IPv4, IPv6, and MPLS traffic, you can configure CoS features to take in a single flow of traffic entering at the edge of your network and provide different levels of service across the network—internal forwarding and scheduling (queuing) for output—based on the forwarding class assignments and PLP levels of the individual packets.



NOTE: Forwarding-class or loss-priority assignments performed by a policer or a stateless firewall filter override any such assignments performed on the ingress by the CoS default IP precedence classification at all logical interfaces or by any configured behavior aggregate (BA) classifier that is explicitly mapped to a logical interface.

Based on CoS configurations, packets of a given forwarding class are transmitted through a specific output queue, and each output queue is associated with a transmission service level defined in a *scheduler*.

Based on other CoS configurations, when packets in an output queue encounter congestion, packets with higher loss-priority values are more likely to be dropped by the random early detection (RED) algorithm. Packet loss priority values affect the scheduling of a packet without affecting the packet's relative ordering within the traffic flow.

Policer Application to Traffic

After you have defined and named a policer, it is stored as a template. You can later use the same policer name to provide the same policer configuration each time you want to use it. This eliminates the need to define the same policer values more than once.

You can apply a policer to a traffic flow in either of two ways:

- You can configure a standard stateless firewall filter that specifies the **policer *policer-name*** nonterminating action or the **three-color-policer (single-rate | two-rate) *policer-name*** nonterminating action. When you apply the standard filter to the input or output at a logical interface, the policer is applied to all packets of the filter-specific protocol family that match the conditions specified in the filter configuration.

With this method of applying a policer, you can define specific classes of traffic on an interface and apply traffic rate-limiting to each class.

- You can apply a policer directly to an interface so that traffic rate-limiting applies to all traffic on that interface, regardless of protocol family or any match conditions.

You can configure policers at the queue, logical interface, or Layer 2 (MAC) level. Only a single policer is applied to a packet at the egress queue, and the search for policers occurs in this order:

- Queue level
- Logical interface level
- Layer 2 (MAC) level

Related Documentation

- *Stateless Firewall Filter Overview.*
- *Traffic Policer Types*
- [Order of Policer and Firewall Filter Operations on page 10](#)
- *Packet Flow Through the CoS Process Overview*

Traffic Policer Types

This topic covers the following information:

- [Single-Rate Two-Color Policers on page 7](#)
- [Three-Color Policers on page 8](#)
- [Two-Color and Three-Color Policer Options on page 9](#)

Single-Rate Two-Color Policers

You can use a single-rate two-color policer, or “policer” when used without qualification, to rate-limit a traffic flow to an average bits-per-second arrival rate (specified by the single specified bandwidth limit) while allowing bursts of traffic for short periods (controlled by the single specified burst-size limit). This type of policer categorizes a traffic flow as either green (conforming) or red (nonconforming). Packets in a green flow are implicitly set to a **low** loss priority and then transmitted. Packets in a red flow are handled according to actions specified in the policer configuration. Packets in a red flow can be marked—set to a specified forwarding class, set to a specified loss priority, or both—or they can be discarded.

A single-rate two-color policer is most useful for metering traffic at the port (physical interface) level.

Basic Single-Rate Two-Color Policer

You can apply a basic single-rate two-color policer to Layer 3 traffic in either of two ways: as an interface policer or as a firewall filter policer. You can apply the policer as an *interface policer*, meaning that you apply the policer directly to a logical interface at the protocol family level. If you want to apply the policer to selected packets only, you can

apply the policer as a *firewall filter policer*, meaning that you reference the policer in a stateless firewall filter term and then apply the filter to a logical interface at the protocol family level.

Bandwidth Policer

A bandwidth policer is simply a single-rate two-color policer that is defined using a bandwidth limit specified as a percentage value rather than as an absolute number of bits per second. When you apply the policer (as an interface policer or as a firewall filter policer) to a logical interface at the protocol family level, the effective bandwidth limit is calculated based on either the physical interface media rate or the logical interface configured shaping rate.

Logical Bandwidth Policer

A logical bandwidth policer is a bandwidth policer for which the effective bandwidth limit is calculated based on the logical interface configured shaping rate. You can apply the policer as a firewall filter policer only, and the firewall filter must be configured as an interface-specific filter. When you apply an interface-specific filter to multiple logical interfaces on supported routing platforms, any **count** or **policer** actions act on the traffic stream entering or exiting each individual interface, regardless of the sum of traffic on the multiple interfaces.

Three-Color Policers

The Junos OS supports two types of three-color policers: single-rate and two-rate. The main difference between a single-rate and a two-rate policer is that the single-rate policer allows bursts of traffic for short periods, while the two-rate policer allows more sustained bursts of traffic. Single-rate policing is implemented using a single token-bucket model, so that periods of relatively low traffic must occur between traffic bursts to allow the token bucket to refill. Two-rate policing is implemented using a dual token-bucket model, which allows bursts of traffic for longer periods.

Single-Rate Three-Color Policers

The single-rate three-color type of policer is defined in RFC 2697, *A Single Rate Three Color Marker*. You use this type of policer to rate-limit a traffic flow to a single rate and three traffic categories (green, yellow, and red). A single-rate three-color policer defines a *committed* bandwidth limit and burst-size limit plus an excess burst-size limit. Traffic that conforms to the committed traffic limits is categorized as green (conforming). Traffic that conforms to the bandwidth limit while allowing bursts of traffic as controlled by the excess burst-size limit is categorized as yellow. All other traffic is categorized as red.

A single-rate three-color policer is most useful when a service is structured according to packet length, not peak arrival rate.

Two-Rate Three-Color Policers

The two-rate three-color type of policer is defined in RFC 2698, *A Two Rate Three Color Marker*. You use this type of policer to rate-limit a traffic flow to two rates and three traffic categories (green, yellow, and red). A two-rate three-color policer defines a *committed* bandwidth limit and burst-size limit plus a *peak* bandwidth limit and burst-size limit. Traffic that conforms to the committed traffic limits is categorized as green (conforming).

Traffic that exceeds the committed traffic limits but remains below the peak traffic limits is categorized as yellow. Traffic that exceeds the peak traffic limits is categorized as red.

A two-rate three-color policer is most useful when a service is structured according to arrival rates and not necessarily packet length.

Two-Color and Three-Color Policer Options

Both two-color and three-color policers can be configured with the following options:

- [Logical Interface \(Aggregate\) Policers on page 9](#)
- [Physical Interface Policers on page 9](#)
- [Policers Applied to Layer 2 Traffic on page 10](#)
- [Multifield Classification on page 10](#)

Logical Interface (Aggregate) Policers

A logical interface policer can be a two-color policer, not a three-color policer. When you apply a logical interface policer to multiple protocol families on the same logical interface, multiple instances of the policer are created, meaning that traffic for each protocol family is policed separately. You apply a logical interface policer directly to a logical interface configuration (and not by referencing the policer in a stateless firewall filter and then applying the filter to the logical interface).

- You can apply the policer at the interface logical unit level to rate-limit all traffic types, regardless of the protocol family.

When applied in this manner, the logical interface policer will be used by all traffic types (inet, inet6, etc.) and across all layers (layer 2, layer 3) no matter where the policer is attached on the logical interface.

- You can also apply the policer at the logical interface protocol family level, to rate-limit traffic for a specific protocol family.

You can apply a logical interface policer to unicast traffic only. For information about configuring a stateless firewall filter for flooded traffic, see “*Applying Filters to Forwarding Tables*” in the “Traffic Sampling, Forwarding, and Monitoring” section of the *Routing Policy Configuration Guide*.

Physical Interface Policers

A physical interface policer can be a two-color or three-color policer. When you apply physical interface policer, to different protocol families on the same logical interface, the protocol families share the same policer instance. This means that rate limiting is performed aggregately for the protocol families for which the policer is applied. This feature enables you to use a single policer instance to perform aggregate policing for different protocol families on the same physical interface. If you want a policer instance to be associated with a protocol family, the corresponding physical interface filter needs to be applied to that protocol family. The policer is not automatically applied to all protocol families configured on the physical interface.

In contrast, with logical interface policers there are multiple separate policer instances.

Policers Applied to Layer 2 Traffic

In addition to hierarchical policing, you can also apply single-rate two-color policers and three-color policers (both single-rate and two-rate) to Layer 2 input or output traffic. You must configure the two-color or three-color policer as a logical interface policer and reference the policer in the interface configuration at the logical unit level, and not at the protocol level. You cannot apply a two-color or three-color policer to Layer 2 traffic as a stateless firewall filter action.

Multifield Classification

Like behavior aggregate (BA) classification, which is sometimes referred to as class-of-service (CoS) value traffic classification, multifield classification is a method of classifying incoming traffic by associating each packet with a forwarding class, a packet loss priority level, or both. The CoS scheduling configuration assigns packets to output queues based on forwarding class. The CoS random early detection (RED) process uses the drop probability configuration, output queue fullness percentage, and packet loss priority to drop packets as needed to control congestion at the output stage.

BA classification and multifield classification use different fields of a packet to perform traffic classification. BA classification is based on a *CoS value* in the IP packet header. Multifield classification can be based on *multiple fields* in the IP packet header, including CoS values. Multifield classification is used instead of BA classification when you need to classify packets based on information in the packet other than the CoS values only. Multifield classification is configured using a stateless firewall filter term that matches on any packet header fields and associates matched packets with a forwarding class, a loss priority, or both. The forwarding class or loss priority can be set by a firewall filter action or by a policer referenced as a firewall filter action.

Related Documentation

- [Traffic Policing Overview on page 3](#)
- [Order of Policer and Firewall Filter Operations on page 10](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Three-Color Policer Configuration Overview on page 19](#)
- [Two-Color Policing at Layer 2 Overview on page 161](#)
- [Three-Color Policing at Layer 2 Overview on page 163](#)

Order of Policer and Firewall Filter Operations


You can apply both a traffic policer and a stateless firewall filter (with or without policing actions) to a single logical interface at the same time. In this case, the order of precedence of operations is such that policers applied directly to the logical interface are evaluated before input filters but after output filters.

- If an input firewall filter is configured on the same logical interface as a policer, the policer is executed first.

- If an output firewall filter is configured on the same logical interface as a policer, the firewall filter is executed first.

Figure 2 on page 11 illustrates the order of policer and firewall filter processing at the same interface.

Figure 2: Incoming and Outgoing Policers and Firewall Filters

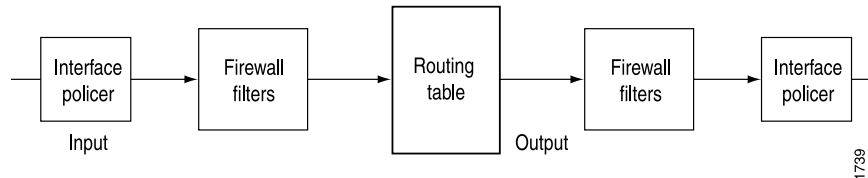

Related Documentation

- [Two-Color Policer Configuration Overview on page 15](#)
- [Three-Color Policer Configuration Overview on page 19](#)
- [Hierarchical Policer Configuration Overview](#)

Understanding the Frame Length for Policing Packets

Table 3 on page 11 describes the packet lengths that are considered when you use a traffic policer.

Table 3: Packet Lengths Considered for Traffic Policers

Protocol	Policing Packet Lengths
Any	L3 frame including header
IPv4	L3 frame including header
IPv6	L3 frame including header
MPLS	L3 frame including header
VPLS	L2 frame including header + FCS
ethernet-switching	L2 frame including header + FCS
CCC	L2 frame including header + FCS

Related Documentation

- [Policer Overhead to Account for Rate Shaping in the Traffic Manager on page 114](#)

CHAPTER 2

Introduction to Configuring Policers

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Three-Color Policer Configuration Overview on page 19](#)
- [Guidelines for Applying Traffic Policers on page 23](#)

Statement Hierarchy for Configuring Policers

```
firewall {
  family (any |ccc | ethernet-switching | inet | inet6 | mpls | vpls) {
    filter filter-name {
      ... protocol-family-specific-firewall-filter-configuration ...
      prefix-action name {
        count;
        destination-prefix-length prefix-length;
        policer policer-name;
        source-prefix-length prefix-length;
        subnet-prefix-length prefix-length;
      }
    }
  }
  filter filter-name {
    accounting-profile [ profile-names ];
    interface-specific;
    physical-interface-filter;
    term term-name {
      filter filter-name;
      from {
        ... ipv4-firewall-filter-match-conditions ...
      }
      then {
        ... ipv4-firewall-filter-terminating-actions ...
        ... ipv4-firewall-filter-nonterminating-actions ...
        next term;
      }
    }
  }
  hierarchical-policer policer-name {
    aggregate {
      if-exceeding {
        bandwidth-limit-limit bps;
      }
    }
  }
}
```

```
        burst-size-limit bytes;
    }
    then {
        discard;
        forwarding-class class-name;
        loss-priority (high | low | medium-high | medium-low);
    }
}
premium {
    if-exceeding {
        bandwidth-limit bps;
        burst-size-limit bytes;
    }
    then {
        discard;
    }
}
}
interface-set interface-set-name {
    interface-name;
}
load-balance-group group-name {
    next-hop-group [ group-names ];
}
policer policer-name {
    filter-specific;
    if-exceeding {
        (bandwidth-limit bps | bandwidth-percent percentage);
        burst-size-limit bytes;
    }
    logical-bandwidth-policer;
    logical-interface-policer;
    physical-interface-policer;
    then {
        discard;
        forwarding-class class-name;
        loss-priority (high | low | medium-high | medium-low);
    }
}
three-color-policer policer-name {
    action {
        loss-priority high then discard;
    }
    logical-interface-policer;
    physical-interface-policer;
    single-rate {
        (color-aware | color-blind);
        committed-burst-size bytes;
        committed-information-rate bps;
        excess-burst-size bytes;
    }
    two-rate {
        (color-aware | color-blind);
        committed-burst-size bytes;
        committed-information-rate bps;
        peak-burst-size bytes;
    }
}
```



```
        peak-information-rate bps;
    }
}
}
```

- Related Documentation**
- [Two-Color Policer Configuration Overview on page 15](#)
 - [Three-Color Policer Configuration Overview on page 19](#)
 - [Hierarchical Policer Configuration Overview](#)
 - [Guidelines for Applying Traffic Policers on page 23](#)

Two-Color Policer Configuration Overview

Table 4 on page 15 describes the hierarchy levels at which you can configure and apply single-rate two-color policers to Layer 3 traffic. For information about applying single-rate two-color policers to Layer 2 traffic, see “[Two-Color Policing at Layer 2 Overview](#)” on page 161.

Table 4: Two-Color Policer Configuration and Application Overview

Policer Configuration	Layer 3 Application	Key Points
Single-Rate Two-Color Policer <i>Defines traffic rate limiting that you can apply to Layer 3 protocol-specific traffic at a logical interface. Can be applied as an interface policer or as a firewall filter policer.</i>		
Basic policer configuration: [edit firewall] policer <i>policer-name</i> { if-exceeding { bandwidth-limit <i>bps</i> ; burst-size-limit <i>bytes</i> ; } then { discard; forwarding-class <i>class-name</i> ; loss-priority <i>supported-value</i> ; } }	Method A—Apply as an interface policer at the protocol family level: [edit interfaces] <i>interface-name</i> { unit <i>unit-number</i> { family <i>family-name</i> { policer { input <i>policer-name</i> ; output <i>policer-name</i> ; } } } } Method B—Apply as a firewall filter policer at the protocol family level: [edit firewall] family <i>family-name</i> { filter <i>filter-name</i> { interface-specific; # (*) from { ... <i>match-conditions</i> ... } then { policer <i>policer-name</i> ; } } }	Policer configuration: <ul style="list-style-type: none">• Use bandwidth-limit <i>bps</i> to specify an absolute value. Firewall filter configuration (*) <ul style="list-style-type: none">• If applying to multiple interfaces, include the interface-specific statement to create unique policers and counters for each interface. Interface policer verification: <ul style="list-style-type: none">• Use the show interfaces (detail extensive) operational mode command.• Use the show policer operational mode command. Firewall filter policer verification: <ul style="list-style-type: none">• Use the show interfaces (detail extensive) operational mode command.• Use the show firewall filter <i>filter-name</i> operational mode command.

Table 4: Two-Color Policer Configuration and Application Overview (*continued*)

Policer Configuration	Layer 3 Application	Key Points
	<pre>} [edit interfaces] interface-name { unit unit-number { family family-name { filter { input filter-name; output filter-name; } ... protocol-configuration ... } } }</pre>	

Table 4: Two-Color Policer Configuration and Application Overview (*continued*)

Policer Configuration	Layer 3 Application	Key Points
Bandwidth Policer <i>Defines traffic rate limiting that you can apply to Layer 3 protocol-specific traffic at a logical interface, but the bandwidth limit is specified as a percentage value. Bandwidth can be based on physical interface line rate (the default) or the logical interface shaping rate. Can be applied as an interface policer or as a firewall filter policer where the filter is either interface-specific or a physical interface filter.</i>		
Bandwidth policer configuration: <pre>[edit firewall] policer <i>policer-name</i> { logical-bandwidth-policer; if-exceeding { bandwidth-percent (1..100); burst-size-limit <i>bytes</i>; } then { discard; forwarding-class <i>class-name</i>; loss-priority <i>supported-value</i>; } }</pre>	Method A—Apply as an interface policer at the protocol family level: <pre>[edit interfaces] interface-name { unit <i>unit-number</i> { family <i>family-name</i> { policer { input <i>policer-name</i>; output <i>policer-name</i>; } } } }</pre> Method B—Apply as a firewall filter policer at the protocol family level: <pre>[edit firewall] family <i>family-name</i> { filter <i>filter-name</i> { interface-specific; from { ... <i>match-conditions</i> ... } then { policer <i>policer-name</i>; } } }</pre> <pre>[edit interfaces] interface-name { unit <i>unit-number</i> { family <i>family-name</i> { filter { input <i>filter-name</i>; output <i>filter-name</i>; } ... <i>protocol-configuration</i> ... } } }</pre>	Policer configuration: <ul style="list-style-type: none"> Use the bandwidth-percent <i>percentage</i> statement instead of the bandwidth-limit <i>bps</i> statement. By default, bandwidth policing rate-limits traffic based on a percentage of the physical interface media rate. To rate-limit traffic based on a percentage of the logical interface configured shaping rate, also include the logical-bandwidth-policer statement. Firewall filter configuration: <ul style="list-style-type: none"> Percentage bandwidth policers can only be referenced by filters configured with the interface-specific statement. Interface policer verification: <ul style="list-style-type: none"> Use the show interfaces (<i>detail</i> <i>extensive</i>) operational mode command. Use the show policer operational mode command. Firewall filter policer verification: <ul style="list-style-type: none"> Use the show interfaces (<i>detail</i> <i>extensive</i>) operational mode command. Use the show firewall filter <i>filter-name</i> operational mode command.

Table 4: Two-Color Policer Configuration and Application Overview (*continued*)

Policy Configuration	Layer 3 Application	Key Points
Logical Interface (Aggregate) Policer <i>Defines traffic rate limiting that you can apply to multiple protocol families on the same logical interface without creating multiple instances of the policer. Can be applied directly to a logical interface configuration only.</i>		
Logical interface policer configuration: <pre>[edit firewall] policer <i>policer-name</i> { logical-interface-policer; if-exceeding { bandwidth-limit <i>bps</i>; burst-size-limit <i>bytes</i>; } then { discard; forwarding-class <i>class-name</i>; loss-priority <i>supported-value</i>; } }</pre>	Apply as an interface policer only: <pre>[edit interfaces] interface <i>name</i> { unit <i>unit-number</i> { policer { # All protocols input <i>policer-name</i>; output <i>policer-name</i>; } } family <i>family-name</i> { policer { # One protocol input <i>policer-name</i>; output <i>policer-name</i>; } } }</pre>	Policer configuration: <ul style="list-style-type: none"> • Include the logical-interface-policer statement. Two options for interface policer application: <ul style="list-style-type: none"> • To rate-limit all traffic types, regardless of the protocol family, apply the logical interface policer at the logical unit level. • To rate-limit traffic of a specific protocol family, apply the logical interface policer at the protocol family level. Interface policer verification: <ul style="list-style-type: none"> • Use the show interfaces (detail extensive) operational mode command. • Use the show policer operational mode command.

Table 4: Two-Color Policer Configuration and Application Overview (*continued*)

Policy Configuration	Layer 3 Application	Key Points
Physical Interface Policer Defines traffic rate limiting that applies to all logical interfaces and protocol families configured on a physical interface, even if the interfaces belong to different routing instances. Can be applied as a firewall filter policer referenced from a physical interface filter only.		
Physical interface policer configuration: <pre>[edit firewall] policer <i>policer-name</i> { physical-interface-policer; if-exceeding { bandwidth-limit <i>bps</i>; burst-size-limit <i>bytes</i>; } then { discard; forwarding-class <i>class-name</i>; loss-priority <i>supported-value</i>; } }</pre>	Apply as a firewall filter policer referenced from a physical interface filter that you apply at the protocol family level: <pre>[edit firewall] family <i>family-name</i> { filter <i>filter-name</i> { physical-interface-filter; from { ... <i>match-conditions</i> ... } then { policer <i>policer-name</i>; } } }</pre> <pre>[edit interfaces] interface-name { unit <i>number</i> { family <i>family-name</i> { filter { input <i>filter-name</i>; output <i>filter-name</i>; } ... <i>protocol-configuration</i> ... } } }</pre>	Policer configuration: <ul style="list-style-type: none"> • Include the physical-interface-policer statement. Firewall filter configuration: <ul style="list-style-type: none"> • Include the physical-interface-filter statement. Application: <ul style="list-style-type: none"> • Apply the filter to the input or output of a logical interface at the protocol family level. Firewall filter policer verification: <ul style="list-style-type: none"> • Use the show interfaces (detail extensive) operational mode command. • Use the show firewall filter <i>filter-name</i> operational mode command.

Related Documentation

- [Basic Single-Rate Two-Color Policers on page 45](#)
- [Bandwidth Policers on page 62](#)
- [Filter-Specific Counters and Policers on page 70](#)
- [Prefix-Specific Counting and Policing Actions on page 81](#)
- [Multifield Classification on page 97](#)
- [Policer Overhead to Account for Rate Shaping in the Traffic Manager on page 114](#)
- [Two-Color and Three-Color Physical Interface Policers on page 151](#)

Three-Color Policer Configuration Overview

Table 5 on page 20 describes the hierarchy levels at which you can configure and apply single-rate tricolor-marking (single-rate TCM) policers and two-rate tricolor-marking

(two-rate TCM) policers to Layer 3 traffic. For information about applying three-color policers to Layer 2 traffic, see [“Three-Color Policing at Layer 2 Overview” on page 163](#).

Table 5: Three-Color Policer Configuration and Application Overview

Policer Configuration	Layer 3 Application	Key Points
Single-Rate Three-Color Policer Defines traffic rate limiting that you can apply to Layer 3 protocol-specific traffic at a logical interface. Can be applied as a firewall filter policer only. Provides moderate allowances for short periods of traffic that exceed the committed burst size.		
Basic single-rate TCM policer configuration: <pre>[edit firewall] three-color-policer <i>policer-name</i> { single-rate { (color-aware color-blind); committed-information-rate <i>bps</i>; committed-burst-size <i>bytes</i>; excess-burst-size <i>bytes</i>; } action { loss-priority high then discard; } }</pre>	Reference the policer from a firewall filter, and apply the filter to a protocol family on a logical interface: <pre>[edit firewall] family <i>family-name</i> { filter <i>filter-name</i> { term <i>term-name</i> { from { ... <i>match-conditions</i> ... } then { three-color-policer { single-rate <i>policer-name</i>; } } } } }</pre> Apply the filter to a logical interface at the protocol family level: <pre>[edit interfaces] interface <i>name</i> { unit <i>unit-number</i> { family <i>family-name</i> { filter { input <i>filter-name</i>; output <i>filter-name</i>; } } } }</pre>	Policer configuration: <ul style="list-style-type: none"> Include the single-rate (color-aware color-blind) statement. Firewall filter configuration: <ul style="list-style-type: none"> Include the three-color-policer single-rate <i>policer-name</i> action. Applying the firewall filter to the logical interface: <ul style="list-style-type: none"> Include the filter (input output) <i>filter-name</i> statement.

Table 5: Three-Color Policer Configuration and Application Overview (*continued*)

Policer Configuration	Layer 3 Application	Key Points
Single-Rate Three-Color Physical Interface Policer Defines traffic rate limiting that applies to all logical interfaces and protocol families configured on a physical interface, even if the interfaces belong to different routing instances. Can be applied as a firewall filter policer only.		
Physical interface single-rate TCM policer: <pre>[edit firewall] three-color-policer <i>policer-name</i> { physical-interface-policer; single-rate { (color-aware color-blind); committed-information-rate <i>bps</i>; committed-burst-size <i>bytes</i>; excess-burst-size <i>bytes</i>; } action { loss-priority high then discard; } }</pre>	Reference the policer from a physical interface filter only, and apply the filter to a protocol family on a logical interface: <pre>[edit firewall] family <i>family-name</i> { filter <i>filter-name</i> { physical-interface-filter term <i>term-name</i> { from { ... <i>match-conditions</i> ... } then { three-color-policer { single-rate <i>policer-name</i>; } } } } }</pre> <pre>[edit interfaces] interface-name { unit <i>number</i> { family <i>family-name</i> { filter { input <i>filter-name</i>; output <i>filter-name</i>; } } } }</pre>	Policer configuration: <ul style="list-style-type: none"> • Include the physical-interface-policer statement. Firewall filter configuration: <ul style="list-style-type: none"> • Include the physical-interface-filter statement. Application: <ul style="list-style-type: none"> • Include the filter (input output) <i>filter-name</i> statement. Verification <ul style="list-style-type: none"> • To verify, use the show firewall filter <i>filter-name</i> operational mode command.

Table 5: Three-Color Policer Configuration and Application Overview (*continued*)

Policy Configuration	Layer 3 Application	Key Points
Basic Two-Rate Three-Color Policer Defines traffic rate limiting that you can apply to Layer 3 protocol-specific traffic at a logical interface. Can be applied as a firewall filter policer only. Provides moderate allowances for sustained periods of traffic that exceed the committed bandwidth limit or burst size.		
Basic two-rate TCM policer configuration: <pre>[edit firewall] three-color-policer <i>policer-name</i> { two-rate { (color-aware color-blind); committed-information-rate <i>bps</i>; committed-burst-size <i>bytes</i>; peak-information-rate <i>bps</i>; peak-burst-size <i>bytes</i>; } action { loss-priority high then discard; } }</pre>	Reference the policer from a firewall filter, and apply the filter to a protocol family on a logical interface: <pre>[edit firewall] family <i>family-name</i> { filter <i>filter-name</i> { term <i>term-name</i> { from { ... <i>match-conditions</i> ... } then { three-color-policer { two-rate <i>policer-name</i>; } } } } }</pre> <pre>[edit interfaces] interface-name { unit <i>unit-number</i> { family <i>family-name</i> { filter { input <i>filter-name</i>; output <i>filter-name</i>; } } } }</pre>	Policer configuration: <ul style="list-style-type: none"> Include the two-rate (color-aware color-blind) statement. Firewall filter configuration: <ul style="list-style-type: none"> Include the three-color-policer two-rate <i>policer-name</i> action. Applying the firewall filter to the logical interface: <ul style="list-style-type: none"> Include the filter (input output) <i>filter-name</i> statement.

Related Documentation

- [Three-Color Policer Configuration Guidelines on page 123](#)
- [Basic Single-Rate Three-Color Policers on page 126](#)
- [Basic Two-Rate Three-Color Policers on page 132](#)
- [Two-Color and Three-Color Logical Interface Policers on page 139](#)
- [Two-Color and Three-Color Physical Interface Policers on page 151](#)

Guidelines for Applying Traffic Policers

The following general guidelines pertain to applying traffic policers:

- Only one type of policer can be applied to the input or output of the same physical or logical interface. For example, you are not allowed to apply a policer and a hierarchical policer in the same direction at the same logical interface.
- Chaining of policers—that is, applying policers to both a port and the logical interfaces of that port—is not allowed.
- A maximum of 64 policers is supported per physical or logical interface, provided no behavior aggregate (BA) classification—traffic classification based on CoS values in the packet headers—is applied to the logical interface.
- The policer should be independent of BA classification. Without BA classification, all traffic on an interface is treated either as expedited forwarding (EF) or non-EF, based on the configuration. With BA classification, a physical or logical interface can support up to 64 policers. The interface might be a physical interface or logical interface.
- With BA classification, the miscellaneous traffic (the traffic *not* matching any of the BA classification DSCP/EXP bits) is policed as non-EF traffic. No separate policers are installed for this traffic.
- Policers can be applied to unicast packets only. For information about configuring a filter for flooded traffic, see “*Applying Filters to Forwarding Tables*” in the “Traffic Sampling, Forwarding, and Monitoring” section of the *Routing Policy Configuration Guide*.

Related Documentation

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Three-Color Policer Configuration Overview on page 19](#)
- [Hierarchical Policer Configuration Overview](#)

CHAPTER 3

Policer Rate Limits and Actions

- [Policer Bandwidth and Burst-Size Limits on page 25](#)
- [Policer Color-Marking and Actions on page 26](#)
- [Single Token Bucket Algorithm on page 28](#)
- [Dual Token Bucket Algorithms on page 30](#)

Policer Bandwidth and Burst-Size Limits

[Table 6 on page 25](#) lists each of the Junos OS policer types supported. For each policer type, the table summarizes the bandwidth limits and burst-size limits used to rate-limit traffic.

Table 6: Policer Bandwidth Limits and Burst-Size Limits

Policer Type	Bandwidth Limits	Burst-Size Limits
Single-Rate Two-Color Policer		
Defines a single rate limit: a bandwidth limit and an allowed burst size for conforming traffic.	bandwidth-limit <i>bps</i>; M, MX, T Series routers and EX Series switches: 8000..500000000000	burst-size-limit <i>bytes</i>; M, MX, T Series routers, and EX Series switches: 1500..100000000000
For a single-rate two-color policer only, you can specify the bandwidth limit as a percentage value from 1 through 100 instead of as an absolute number of bits per second. The effective bandwidth limit is calculated as a percentage of either the physical interface media rate or the logical interface configured shaping rate.	bandwidth-percent 1..100 percent	
Single-Rate Three-Color Policer		
Defines a single rate limit: a bandwidth limit and an allowed burst size for conforming traffic.	committed-information-rate <i>bps</i>; M, MX, T Series routers, and EX Series switches: 1500..100000000000	committed-burst-size <i>bytes</i>; M, MX, T Series routers, and EX Series switches: 1500..100000000000
Also defines a second, larger burst size. This second burst size is used to differentiate between two categories of nonconforming traffic (yellow or red).		excess-burst-size <i>bytes</i>; M, MX, T Series routers, and EX Series switches: 1500..100000000000

Table 6: Policer Bandwidth Limits and Burst-Size Limits (*continued*)

Policer Type	Bandwidth Limits	Burst-Size Limits
Two-Rate Three-Color Policer		
Defines a committed rate limit: a bandwidth limit and an allowed burst size for conforming traffic.	committed-information-rate <i>bps</i> ; M, MX, T Series routers, and EX Series switches:	committed-burst-size <i>bytes</i> ; M, MX, T Series routers, and EX Series switches:
Also defines a peak rate limit: a second, larger burst size and a second, higher bandwidth limit. These additional rate-limit components are used to differentiate between two categories of nonconforming traffic (yellow or red).	1500..1000000000000 peak-information-rate <i>bps</i> ; M, MX, T Series routers, and EX Series switches: 1500..1000000000000	1500..1000000000000 peak-burst-size <i>bytes</i> ; M, MX, T Series routers, and EX Series switches: 1500..1000000000000

- Related Documentation**
- [Policer Color-Marking and Actions on page 26](#)
 - [Determining Proper Burst Size for Traffic Policers on page 39](#)

Policer Color-Marking and Actions

Table 7 on page 26 lists each of the Junos OS policer types supported. For each policer type, the table summarizes the color-marking criteria used to categorize a traffic flow and, for each color, the actions taken on packets in that type of traffic flow.

Table 7: Implicit and Configurable Policer Actions Based on Color Marking

Policer Rate Limits and Color Marking	Implicit Action	Configurable Actions
Single-Rate Two-Color Policer		
<ul style="list-style-type: none"> • Bandwidth limit • Burst size 		
Green Conforms to rate and burst size limits	Set PLP to low	—
Red Exceeds rate and burst size limits	—	<ul style="list-style-type: none"> • Discard the packet. • Assign to a forwarding class. • Set PLP to low or high. On some platforms, you can also set the PLP to medium-low or medium-high.
Single-Rate Three-Color Policer		
<ul style="list-style-type: none"> • Committed information rate (CIR) • Committed burst size (CBS) • Excess burst size (EBS) 		

Table 7: Implicit and Configurable Policer Actions Based on Color Marking (*continued*)

Policer Rate Limits and Color Marking	Implicit Action	Configurable Actions
Green Conforms to the CIR and CBS	Set PLP to low	–
Yellow Exceeds the CIR and CBS but conforms to the EBS	Set PLP to medium-high	–
Red Exceeds the EBS	Set PLP to high	<ul style="list-style-type: none"> Discard the packet.
Two-Rate Three-Color Policer		
<ul style="list-style-type: none"> Committed information rate (CIR) Committed burst size (CBS) Peak information rate (PIR) Peak burst size (PBS) 		
Green Conforms to the CIR and CBS	Set PLP to low	–
Yellow Exceeds the CIR and CBS, but conforms to the PIR	Set PLP to medium-high	–
Red Exceeds the PIR and PBS	Set PLP to high	<ul style="list-style-type: none"> Discard the packet.
Hierarchical Policer		
Aggregate policer		
<ul style="list-style-type: none"> Bandwidth limit Burst size 		
Green Conforms to rate limits	Set PLP to low	–
Red Exceeds rate limits	–	<ul style="list-style-type: none"> Discard the packet. Assign to a forwarding class. Set PLP to low or high. On some platforms, you can also set the PLP to medium-low or medium-high.
Premium policer		
<ul style="list-style-type: none"> Bandwidth limit Burst size 		

Table 7: Implicit and Configurable Policer Actions Based on Color Marking (*continued*)

Policer Rate Limits and Color Marking	Implicit Action	Configurable Actions
Green Conforms to rate limits	Set PLP to low	–
Red Exceeds rate limits	–	<ul style="list-style-type: none"> Discard the packet.

- Related Documentation**
- [Policer Bandwidth and Burst-Size Limits](#)
 - [Determining Proper Burst Size for Traffic Policers on page 39](#)

Single Token Bucket Algorithm

This topic covers the following information:

- [Token Bucket Concepts on page 28](#)
- [Single Token Bucket Algorithm on page 28](#)
- [Conformance Measurement for Two-Color Marking on page 29](#)

Token Bucket Concepts

When you apply traffic policing to the input or output traffic at an interface, the rate limits and actions specified in the policer configuration are used to enforce a limit on the average throughput rate at the interface while also allowing bursts of traffic up to a maximum number of bytes based on the overall traffic load. Junos OS policers measure traffic-flow conformance to a policing rate limit by using a *token bucket algorithm*:

- The *bucket* represents a rate-limiting function of the policer on the interface input or output traffic.
- Each *token* in the bucket represents a “credit” for some number of *bits*, and tokens in the bucket are “cashed in” for the ability to receive or transmit traffic that conforms to a rate limit configured for the policer.
- The *token arrival rate* is the fixed *bits-per-second* rate at which tokens are added to the token bucket, but only up to the specified depth of the bucket.
- The *token bucket depth* defines the capacity of the bucket in *bytes*.

An algorithm based on a single token bucket allows burst of traffic for short periods, whereas an algorithm based dual token buckets allows more sustained bursts of traffic.

Single Token Bucket Algorithm

A single-rate two-color policer limits traffic throughput at an interface based on how the traffic conforms to rate-limit values specified in the policer configuration. Similarly, a hierarchical policer limits traffic throughput at an interface based on how aggregate and premium traffic subflows conform to aggregate and premium rate-limit values specified

in the policer configuration. For both two-color policer types, packets in a conforming traffic flow are categorized as *green*, and packets in a non-conforming traffic flow are categorized as *red*.

The single token bucket algorithm measures traffic-flow conformance to a two-color policer rate limit as follows:

- The token arrival rate represents the single *bandwidth limit* configured for the policer. You can specify the bandwidth limit as an absolute number of bits per second by including the **bandwidth-limit *bps*** statement. Alternatively, for single-rate two-color policers only, you can use the **bandwidth-percent *percentage*** statement to specify the bandwidth limit as a percentage of either the physical interface port speed or the configured logical interface shaping rate.
- The token bucket depth represents the single *burst size* configured for the policer. You specify the burst size by including the **burst-size-limit *bytes*** statement.
- If the bucket is filled to capacity, arriving tokens “overflow” the bucket and are lost.

When the bucket contains insufficient tokens for receiving or transmitting the traffic at the interface, packets might be dropped or else re-marked with a lower forwarding class, a higher packet loss priority (PLP) level, or both.

Conformance Measurement for Two-Color Marking

In two-color-marking policing, a traffic flow whose average arrival or departure rate does not exceed the token arrival rate (bandwidth limit) is considered *conforming traffic*. Packets in a conforming traffic flow (categorized as green traffic) are implicitly marked with a packet loss priority (PLP) level of **low** and then passed through the interface.

For a traffic flow whose average arrival or departure rate exceeds the token arrival rate, conformance to a two-color policer rate limit depends on the tokens in the bucket. If sufficient tokens remain in the bucket, the flow is considered conforming traffic. If the bucket does not contain sufficient tokens, the flow is considered *non-conforming traffic*. Packets in a non-conforming traffic flow (categorized as red traffic) are handled according to policing actions. Depending on the configuration of the two-color policer, packets might be implicitly discarded; or the packets might be re-marked with a specified forwarding class, a specified PLP, or both, and then passed through the interface.



NOTE: The number of tokens remaining in the bucket at any given time is a function of the token bucket depth and the overall traffic load.

The token bucket is initially filled to capacity, and so the policer allows an initial traffic burst (back-to-back traffic at average rates that exceed the token arrival rate) up to the size of the token bucket depth.

During periods of relatively low traffic (traffic that arrives at or departs from the interface at average rates below the token arrival rate), unused tokens accumulate in the bucket, but only up to the configured token bucket depth.

- Related Documentation**
- [Two-Color Policer Configuration Overview on page 15](#)
 - [Hierarchical Policer Configuration Overview](#)
 - [Policer Color-Marking and Actions on page 26](#)
 - [bandwidth-limit \(Hierarchical Policer\)](#)
 - [bandwidth-limit \(Policer\) on page 187](#)
 - [bandwidth-percent on page 189](#)
 - [burst-size-limit \(Hierarchical Policer\)](#)
 - [burst-size-limit \(Policer\) on page 191](#)

Dual Token Bucket Algorithms

This topic covers the following information:

- [Token Bucket Concepts on page 30](#)
- [Guaranteed Bandwidth for Three-Color Marking on page 30](#)
- [Nonconformance Measurement for Single-Rate Three-Color Marking on page 31](#)
- [Nonconformance Measurement for Two-Rate Three-Color Marking on page 31](#)

Token Bucket Concepts

When you apply traffic policing to the input or output traffic at an interface, the rate limits and actions specified in the policer configuration are used to enforce a limit on the average throughput rate at the interface while also allowing bursts of traffic up to a maximum number of bytes based on the overall traffic load. Junos OS policers measure traffic-flow conformance to a policing rate limit by using a *token bucket algorithm*:

- The *bucket* represents a rate-limiting function of the policer on the interface input or output traffic.
- Each *token* in the bucket represents a “credit” for some number of *bits*, and tokens in the bucket are “cashed in” for the ability to receive or transmit traffic that conforms to a rate limit configured for the policer.
- The *token arrival rate* is the fixed *bits-per-second* rate at which tokens are added to the token bucket, but only up to the specified depth of the bucket.
- The *token bucket depth* defines the capacity of the bucket in *bytes*.

An algorithm based on a single token bucket allows burst of traffic for short periods, whereas an algorithm based dual token buckets allows more sustained bursts of traffic.

Guaranteed Bandwidth for Three-Color Marking

A committed information rate (CIR) defines the guaranteed bandwidth for traffic arriving at or departing from the interface under normal line conditions. A flow of traffic at an average rate that conforms to the CIR is categorized green, and packets in a green flow are implicitly marked with **low** packet loss priority (PLP) and then passed through the

interface. During periods of relatively low traffic (traffic that arrives at or departs from the interface at average rates below the CIR), any unused bandwidth capacity accumulates in the first token bucket, but only up to a configured number of bytes. If any unused bandwidth capacity overflows the first bucket, the excess accumulates in a second token bucket.

The committed burst size (CBS) defines the maximum number of bytes for which unused amounts of the guaranteed bandwidth can be accumulated in the first token bucket. A burst of traffic at an average rate that exceeds the CIR is also categorized as green provided that sufficient unused bandwidth capacity is available in the first token bucket.

Nonconformance Measurement for Single-Rate Three-Color Marking

Single-rate three-color policer configurations specify a second burst size—the excess burst size (EBS)—that defines the maximum number of bytes for which the second token bucket can accumulate unused bandwidth that overflows from the first bucket.

A traffic flow is categorized yellow if its average rate exceeds the CIR and the available bandwidth capacity accumulated in the first bucket if sufficient unused bandwidth capacity is available in the second token bucket. Packets in a yellow flow are implicitly marked with **medium-high** PLP and then passed through the interface.

A traffic flow is categorized red if its average rate exceeds the CIR and the available bandwidth capacity accumulated in the second bucket. Packets in a red flow are implicitly marked with **high** PLP and then either passed through the interface or optionally discarded.

Nonconformance Measurement for Two-Rate Three-Color Marking

Two-rate three-color policer configurations include a second rate limit—the peak-information-rate (PIR)—that you set to the expected average data rate for traffic arriving at or departing from the interface under peak conditions.

Two-rate three-color policer configurations also include a second burst size—the peak burst size (PBS)—that defines the maximum number of bytes for which the second token bucket can accumulate unused peak bandwidth capacity. During periods of relatively little peak traffic (traffic that arrives at or departs from the interface at average rates that exceed the PIR), any unused peak bandwidth capacity accumulates in the second token bucket, but only up to the maximum number of bytes specified by the PBS.

A traffic flow is categorized yellow if it exceeds the CIR and the available committed bandwidth capacity accumulated in the first token bucket but conforms to the PIR. Packets in a yellow flow are implicitly marked with **medium-high** PLP and then passed through the interface.

A traffic flow is categorized red if it exceeds the PIR and the available peak bandwidth capacity accumulated in the second token bucket. Packets in a red flow are implicitly marked with **high** PLP and then either passed through the interface or optionally discarded.

Related Documentation

- [Three-Color Policer Configuration Overview on page 19](#)
- [Policer Color-Marking and Actions on page 26](#)
- [committed-burst-size on page 196](#)

- [committed-information-rate on page 198](#)
- [excess-burst-size on page 200](#)
- [peak-burst-size on page 214](#)
- [peak-information-rate on page 216](#)

CHAPTER 4

Policer Implementation

- [Policer Implementation Overview on page 33](#)
- [Understanding the Benefits of Policers and Token Bucket Algorithms on page 37](#)
- [Determining Proper Burst Size for Traffic Policers on page 39](#)

Policer Implementation Overview

Traffic policing enables you to control the maximum rate of traffic sent or received on an interface and also to partition network traffic into multiple priority levels, also known as classes of service. A policer defines a set of traffic rate limits and sets consequences for traffic that does not conform to the configured limits. Packets in a traffic flow that do not conform to traffic limits are either discarded or marked with a different forwarding class or packet loss priority (PLP) level.

You can apply a policer to inbound or outbound traffic. Policers applied to inbound traffic help to conserve resources by dropping traffic that does not need to be routed through a network. Policers applied to outbound traffic control the bandwidth used.

The Juniper Networks® Junos® operating system (Junos OS) supports three types of policers:

- *Single-rate two-color policer* — The most common policer. Single-rate means that there is only a single bandwidth and burst rate referenced in the policer. The two colors associated with this policer are red (nonconforming) and green (conforming).
- *Single-rate three-color policer* — Similar to the single-rate two-color policer with the addition of the color yellow. This type also introduces the *committed information rate* (CIR) and a *committed burst rate* (CBR).
- *Two-rate three-color policer* — Builds off of the single-rate three-color policer by adding a second rate tier. *Two-rate* means there is an upper bandwidth limit and associated burst size as well as a *peak information rate* (PIR) and a *peak burst rate* (PBS).



NOTE: The remainder of this topic covers the single-rate two-color policer. For more information about the other types of policers, see the *Junos OS Traffic Policers Configuration Guide*.

Junos OS policers use a *token bucket algorithm* to enforce a limit on an average transmit or receive rate of traffic at an interface while allowing bursts of traffic up to a maximum value based on the configured bandwidth limit and configured burst size. The token bucket algorithm offers more flexibility than a *leaky bucket algorithm* in that you can allow a specified traffic burst before starting to discard packets or apply a penalty such as packet output-queuing priority or packet-drop priority.

There are two types of token bucket algorithms that can be used, depending on the type of policer that is applied to network traffic. Single-rate two-color policers use the *single token bucket algorithm* to measure traffic flow conformance to a two-color policer rate limit. Single-rate three-color policers and two-rate three-color policers both use the *dual token bucket algorithm* to measure traffic flow conformance to a three-color policer rate. The main difference between these two token bucket algorithms is that the single token bucket algorithm allows bursts of traffic for short periods, whereas the dual token bucket algorithm allows more sustained bursts of traffic.



NOTE: The remainder of this topic discusses the single token bucket algorithm. For more information about the dual token bucket algorithm, see the *Junos OS Traffic Policers Configuration Guide*.

Following are the main components of the token bucket algorithm:

- The *bucket* represents a rate-limiting function of the policer on the interface input or output traffic.
- Each *token* in the bucket represents a “credit” for some number of *bits*, and tokens in the bucket are “cached in” for the ability to receive or transmit traffic that conforms to a rate limit configured for the policer.
- The *token arrival rate* is a periodic allocation of tokens into the token bucket that is calculated from the configured bandwidth limit.
- The *token bucket depth* defines the capacity of the bucket in *bytes*. Tokens that are allocated after the bucket reaches capacity are not able to be stored and used.

In the token bucket model, the bucket represents the policing function. Tokens are added to the bucket at a fixed rate, but once the specified depth of the bucket is reached, tokens allocated after cannot be stored and used. Each token represents a “credit” for some number of bits, and the tokens in the bucket are “cached in” for the ability to transmit or receive traffic at the interface. When sufficient tokens are present in the bucket, a traffic flow continues unrestricted.

- The rate at which tokens are added to the bucket represents the highest average transmit or receive rate in bits per second allowed for a given service level. You specify this highest average traffic rate as the *bandwidth limit* of the policer. If the traffic arrival rate is so high that at some point insufficient tokens are present in the bucket, then the traffic flow is no longer conforming to the traffic limit. During periods of relatively low traffic (traffic that arrives at or departs from the interface at average rates below the token arrival rate), unused tokens accumulate in the bucket.

- The depth of the bucket in bytes controls the amount of back-to-back bursting allowed. You specify this factor as the *burst-size limit* of the policer. This second limit affects the average transmit or receive rate by limiting the number of bytes permitted in a transmission burst for a given interval of time. Bursts exceeding the current burst-size limit are dropped until there are sufficient tokens available to permit the burst to proceed.

To configure a policer, you need to set two parameters:

- Bandwidth limit configured in bps (using the **bandwidth-limit** statement)
- Burst size configured in bytes (using the **burst-size-limit** statement)



NOTE: For single-rate two-color policers only, you can also specify the bandwidth limit as a percentage of either the physical interface port speed or the configured logical interface shaping rate by using the **bandwidth-percent *percentage*** statement. You cannot configure a policer to use bandwidth percentage for aggregate, tunnel, or software interfaces.

Use the following command to set the policer conditions:

```
user@router# set firewall policer <policer name> if-exceeding ?
Possible completions:
  <[Enter]>          Execute this command
+ apply-groups       Groups from which to inherit configuration data
+ apply-groups-except Don't inherit configuration data from these groups
  bandwidth-limit    Bandwidth limit (8000..1000000000000 bits per second)
  bandwidth-percent   Bandwidth limit in percentage (1..100 percent)
  burst-size-limit    Burst size limit (1500..1000000000000 bytes)
  |                  Pipe through a command
```

The bandwidth limit parameter is used to determine the average rate limit applied to the traffic, while the burst-size parameter is used to allow for short periods of traffic bursting (back-to-back traffic at average rates that exceed the configured bandwidth limit). Once you apply a set of policer configuration settings (bandwidth limit and burst size), the configured values are adjusted to hardware programmable values. The conversion adjustment introduced is normally less than 1 percent of the configured bandwidth limit. This adjustment is needed because the software allows you to configure the bandwidth limit and burst size to any value within the specified ranges, but those values must be adjusted to the nearest value that can be programmed in the hardware.

The policer bandwidth limit configuration in the hardware is represented by two values: the *credit update frequency* and the *credit size*. The credit update frequency is used by the hardware to determine how frequently tokens (bits of unused bandwidth) are added to the token bucket. The credit size is based on the number of tokens that can fit in the token bucket. The MX Series, M120, M320 routers, and EX Series switches contain a set of credit update frequencies instead of having a single credit update frequency to minimize the adjustment difference from the configured bandwidth limit and to support a wide range of policer bandwidth rates (from 40 Kbps to 40 Gbps). One of the frequencies is used to program the policer (bandwidth limit and burst size) in the hardware.

The burst size is based on the overall traffic load and allows bursts of traffic to exceed the configured bandwidth limit. A policer with a large burst size effectively disables the configured bandwidth limit function, so the burst size must be relative to the configured bandwidth limit. You need to consider the traffic patterns in your network before determining the burst size. For more information about determining burst size, see [“Determining Proper Burst Size for Traffic Policers” on page 39](#).


The configured burst size is adjusted in the hardware to a value that is based on the configured bandwidth limit. The burst size extends the configured bandwidth limit for bursty traffic that exceeds the configured bandwidth limit.

When a policer is applied to the traffic at an interface, the initial capacity for traffic bursting is equal to the number of bytes specified in the **burst-size-limit** statement.

[Figure 3 on page 36](#) represents how a policer is implemented using the token bucket algorithm. The token allocator allocates tokens to the policer based on the configured bandwidth limit, which is the token size multiplied by the token arrival rate.

token size x token arrival rate = policer rate (configured bandwidth limit)

Figure 3: Token Bucket Algorithm

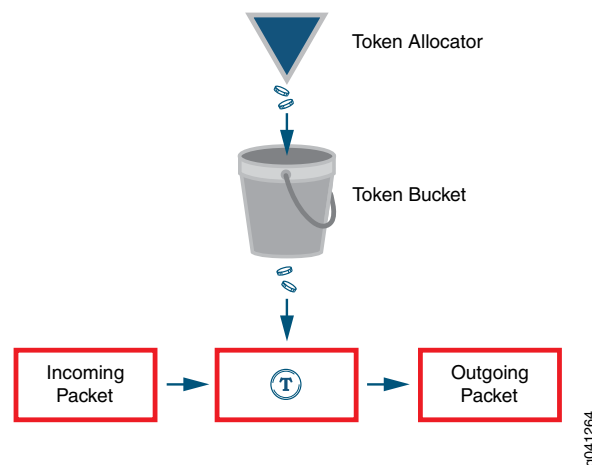


When a packet arrives at an interface configured with a policer, tokens that represent the number of bits that correspond to the length of the packet are used (or “cashed in”) from the token bucket. If the token arrival rate is higher than the rate of traffic so that there are tokens not being used, the token bucket is filled to capacity, and arriving tokens “overflow” the bucket and are lost. The token bucket depth represents the single user-configured burst size for the policer.

If there are tokens in the token bucket and the incoming traffic rate is higher than the token rate (the configured policer rate, bandwidth limit), the traffic can use the tokens until the bucket is empty. The token consumption rate can be as high as the incoming traffic rate, which creates the burst of traffic shown in [Figure 4 on page 37](#).

By using the token bucket algorithm, the average bandwidth rate being allowed is close to the configured bandwidth limit while simultaneously supporting bursty traffic, as shown in [Figure 4 on page 37](#).

Figure 4: Traffic Behavior Using Policer and Burst Size

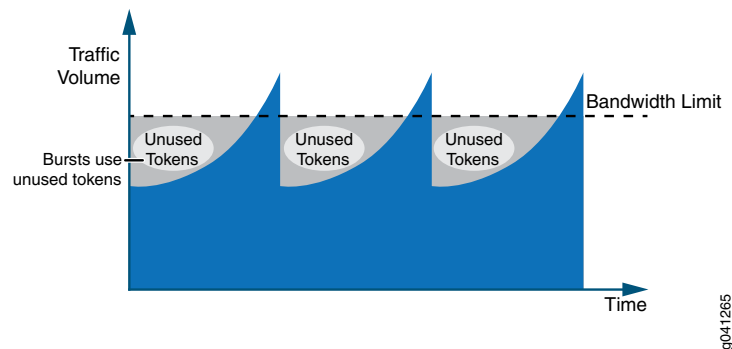

NOTE: The measured length of a packet changes according to the family type that the policer applies to. If the policer is applied under the family inet hierarchy, the policer considers only the IPv4 packet length. If the policer is applied under the family vpls hierarchy, the entire Ethernet frame (including the Ethernet MAC header) is included in the packet length.

The major factor that affects the policer shaping result is not the conversion adjustment, but the traffic pattern since most network traffic is not consistent and is not sent at a constant rate. Due to the fluctuation of the incoming traffic rate, some of the allocated tokens are not used. As a result, the shaped traffic rate is lower than you might expect, and the TCP connection behavior discussed in “[Understanding the Benefits of Policers and Token Bucket Algorithms](#)” on page 37 is a typical example of this. To alleviate this effect of the lower shaped traffic rate, a proper burst size configuration is required.

Related Documentation

- [Understanding the Benefits of Policers and Token Bucket Algorithms on page 37](#)
- [Determining Proper Burst Size for Traffic Policers on page 39](#)

Understanding the Benefits of Policers and Token Bucket Algorithms

This topic describes some scenarios that demonstrate how difficult it is to control traffic that comes into your network without the help of policers and the token bucket algorithm. These scenarios assume that traffic is coming from a TCP-based connection. Depending on the number of TCP connections, policers can have different affects on rate limits.

This topic presents the following scenarios:


- [Scenario 1: Single TCP Connection on page 37](#)
- [Scenario 2: Multiple TCP Connections on page 38](#)

Scenario 1: Single TCP Connection

[Figure 5 on page 38](#) shows the traffic loading on an interface with a policer configured. When the traffic rate reaches the configured bandwidth limit (which results in a packet

drop), a TCP slow-start mechanism reduces the traffic rate down to half of what it was. When the traffic rate rises again, the same cycle repeats.

Figure 5: Policer Behavior With a Single TCP Connection

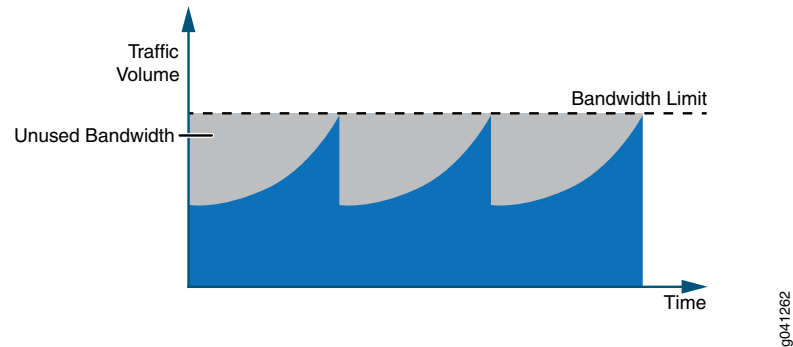


The problem presented in this scenario is that some bandwidth is available, but it is not being used by the traffic. The unused bandwidth shown in [Figure 5 on page 38](#) is the result of an overall data throughput that is lower than the configured bandwidth value. This example is an extreme case because there is only a single TCP connection.

Scenario 2: Multiple TCP Connections

With multiple TCP connections or some background non-TCP-based traffic, there is less unused bandwidth, as depicted in [Figure 6 on page 38](#). However, the same issue of unused bandwidth still exists if all the TCP connections experience a drop when the aggregated traffic rate exceeds the configured bandwidth limit.

Figure 6: Policer Behavior With Background Traffic (Multiple TCP Connections)

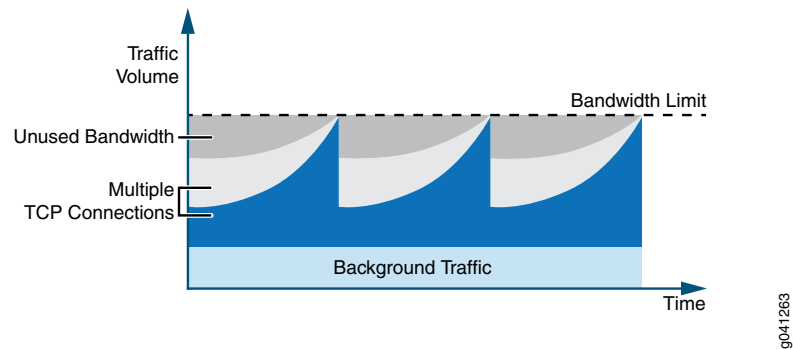

To reduce the problem of unused bandwidth in your network, you can configure a burst size.

Related Documentation

- [Policer Implementation Overview on page 33](#)
- [Determining Proper Burst Size for Traffic Policers on page 39](#)

Determining Proper Burst Size for Traffic Policers

A policer burst-size limit controls the number of bytes of traffic that can pass unrestricted through a policed interface when a burst of traffic pushes the average transmit or receive rate above the configured bandwidth limit. The actual number of bytes of bursty traffic allowed to pass through a policed interface can vary from zero to the configured burst-size limit, depending on the overall traffic load.

By configuring a proper burst size, the effect of a lower shaped rate is alleviated. Use the **burst-size-limit** statement to configure the burst size.



NOTE: If you set the burst-size limit too low, too many packets will be subjected to rate limiting. If you set the burst-size limit too high, too few packets will be rate-limited.

Consider these two main factors when determining the burst size to use:

- The allowed duration of a blast of traffic on the line.
- The burst size is large enough to handle the maximum transmission unit (MTU) size of the packets.

The following general guidelines apply to choosing a policer burst-size limit:

- A burst-size limit should not be set lower than 10 times the MTU of the traffic on the interface to be policed.
- The amount of time to allow a burst of traffic at the full line rate of a policed interface should not be lower than 5 ms.
- The minimum and maximum values you can specify for a policer burst-size limit depends on the policer type (two-color or three-color).



BEST PRACTICE: The preferred method for choosing a burst-size limit is based on the line rate of the interface on which you apply the policer and the amount of time you want to allow a burst of traffic at the full line rate.

Bursty traffic requires a relatively large burst size so that extra tokens can be allocated into the token bucket for upcoming traffic to use. [Figure 7 on page 40](#) shows an extreme case of bursty traffic where the opportunity to allocate tokens is missed, and the bandwidth goes unused because a large burst size is not configured.

Figure 7: Bursty Traffic Without Configured Burst Size (Excessive Unused Bandwidth)


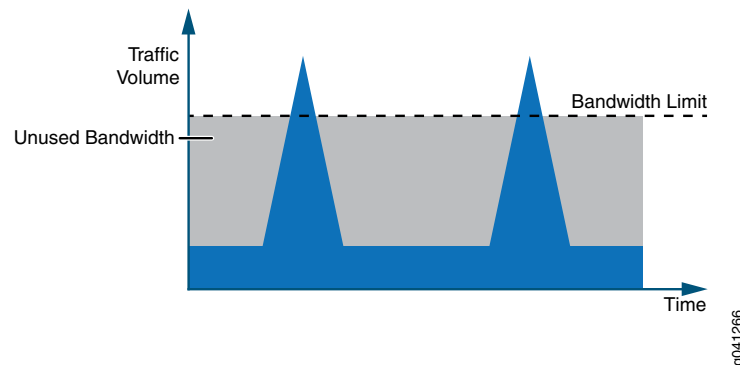


Figure 8 on page 40 depicts how bandwidth usage changes when a large burst size is configured to handle bursty traffic. The large burst size minimizes the amount of unused bandwidth because tokens are being allocated in between the bursts of traffic that can be used during traffic peaks. The burst size determines the depth of the token bucket.

Figure 8: Bursty Traffic With Configured Burst Size (Less Unused Bandwidth)

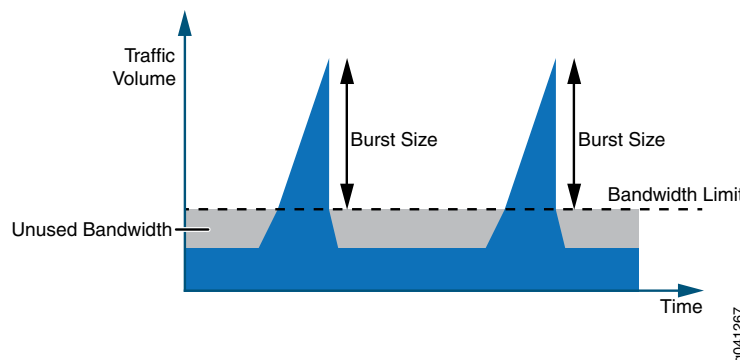

Configuring a large burst size for the unused tokens creates another issue. If the burst size is set to a very large value, the burst of traffic can be transmitted from the interface at line rate until all the accumulated tokens in the token bucket are used up. This means that configuring a large burst size can allow too many packets to avoid rate limiting, which can lead to a traffic rate that exceeds the bandwidth limit for an extended period of time.

If the average rate is considered within 1 second, the rate is still below the configured bandwidth limit. However, the downstream device might not be able to handle bursty traffic, so some packets might be dropped. As a result, the way to determine the best burst size configuration is to perform experimental configurations, since one burst size is not suitable for every traffic pattern.


To program the burst size on the MX Series, M120, M320 routers, and EX Series switches, the user-configured burst size value is restricted to 1 ms through 600 ms of the policer rate (configured bandwidth limit).

Before performing burst size test configurations, select the initial burst size value using one of the following:

- The recommended formula for calculating burst size for bandwidth described as bits per second is: **burst size = bandwidth x allowable time for burst traffic / 8** (5 ms of the policer rate)
- For policers where the interface bandwidth is unknown, use the MTU method of calculating burst size: **burst size = interface MTU x 10**

Figure 9 on page 41 depicts a comparison between the two methods.

Figure 9: Comparing Burst Size Configuration Methods: 5 ms V.S. 10 MTU

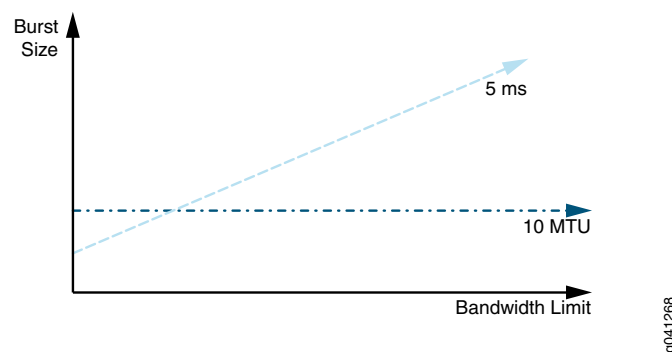

In Figure 9 on page 41, with the 5 ms method, the burst size decreases with the policer rate (the configured bandwidth limit). As a result, the burst size can become so small that it might not be able to hold 2 MTU packets. This can severely affect the policer performance, which makes the 10 MTU method appear to be a better choice.

For example, with a 100 Kbps bandwidth limit configured on a Gigabit Ethernet interface and a burst size configured to 100 ms, the burst size becomes **100 Kbps x 100 ms = 1250 bytes**. This burst size is smaller than one standard MTU payload size on an Ethernet-type interface. A 10 MTU burst size provides a burst size of **1500 bytes x 10 = 15000 bytes**. However, since the maximum burst size is 600 ms of the bandwidth limit, the maximum configured burst size is **100 Kbps x 600 ms = 7500 bytes**. On the Gigabit Ethernet interface, the burst duration is **7500 bytes / 1 Gbps = 60 μs** at Gigabit Ethernet line rate. If the burst size is too large for the downstream device, the burst size can be further reduced until the result is acceptable.

However, if the bandwidth limit is very high, the 10 MTU method might not be able to create a token bucket large enough to accommodate the unused credits. As a result, the average bandwidth limit is lower than what you configured. In this case, the 5 ms method is the better choice for configuring the burst size.

If a 200 Mbps bandwidth limit is configured with a 5 ms burst size, the calculation becomes **200 Mbps x 5 ms = 125 Kbytes**, which is approximately 83 1500-byte packets. If the 200 Mbps bandwidth limit is configured on a Gigabit Ethernet interface, the burst duration is **125000 bytes / 1 Gbps = 1 ms** at the Gigabit Ethernet line rate.

If a large burst size is configured at 600 ms with the bandwidth limit configured at 200 Mbps, the calculation becomes **200 Mbps x 600 ms = 15 Mbytes**. This creates a burst duration of 120 ms at the Gigabit Ethernet line rate. The average bandwidth rate in 1 second becomes **200 Mbps + 15 Mbytes = 320 Mbps**, which is much higher than the configured bandwidth limit at 200 Mbps. This example shows that a larger burst size can affect the measured bandwidth rate.

**Related
Documentation**

- [Policer Implementation Overview on page 33](#)
- [Understanding the Benefits of Policers and Token Bucket Algorithms on page 37](#)

PART 2

Configuration

- [Configuring Single-Rate Two-Color Policers on page 45](#)
- [Configuring Three-Color Policers on page 123](#)
- [Configuring Logical and Physical Interface Policers on page 139](#)
- [Configuring Layer 2 Policers on page 161](#)
- [Configuration Statements on page 171](#)

CHAPTER 5

Configuring Single-Rate Two-Color Policers

- [Basic Single-Rate Two-Color Policers on page 45](#)
- [Bandwidth Policers on page 62](#)
- [Filter-Specific Counters and Policers on page 70](#)
- [Prefix-Specific Counting and Policing Actions on page 81](#)
- [Multifield Classification on page 97](#)
- [Policer Overhead to Account for Rate Shaping in the Traffic Manager on page 114](#)

Basic Single-Rate Two-Color Policers

- [Single-Rate Two-Color Policer Overview on page 45](#)
- [Example: Configuring a Single-Rate Two-Color Policer on page 46](#)
- [Example: Configuring Interface and Firewall Filter Policers at the Same Interface on page 52](#)

Single-Rate Two-Color Policer Overview

Single-rate two color policing enforces a configured rate of traffic flow for a particular service level by applying implicit or configured actions to traffic that does not conform to the limits. When you apply a single-rate two-color policer to the input or output traffic at an interface, the policer meters the traffic flow to the rate limit defined by the following components:

- **Bandwidth limit**—The average number of bits per second permitted for packets received or transmitted at the interface. You can specify the bandwidth limit as an absolute number of bits per second or as a percentage value from 1 through 100. If a percentage value is specified, the effective bandwidth limit is calculated as a percentage of either the physical interface media rate or the logical interface configured shaping rate.
- **Burst-size limit**—The maximum size permitted for bursts of data.

For a traffic flow that conforms to the configured limits (categorized as green traffic), packets are implicitly marked with a packet loss priority (PLP) level of **low** and are allowed to pass through the interface unrestricted.

For a traffic flow that exceeds the configured limits (categorized as red traffic), packets are handled according to the traffic-policing actions configured for the policer. The action might be to discard the packet, or the action might be to re-mark the packet with a specified forwarding class, a specified PLP, or both, and then transmit the packet.

To rate-limit Layer 3 traffic, you can apply a two-color policer in the following ways:

- Directly to a logical interface, at a specific protocol level.
- As the action of a standard stateless firewall filter that is applied to a logical interface, at a specific protocol level.

To rate-limit Layer 2 traffic, you can apply a two-color policer as a *logical interface policer* only. You cannot apply a two-color policer to Layer 2 traffic through a firewall filter.

Example: Configuring a Single-Rate Two-Color Policer

This example shows how to configure a single-rate two-color policer that you apply to a logical interface as a firewall filter action.

- [Requirements on page 46](#)
- [Overview on page 46](#)
- [Configuration on page 46](#)
- [Verification on page 51](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

To set the maximum burst size of the policer, you should know the line rate of the interface (preferred) or else the maximum transmission unit (MTU) of the traffic on the target interface.

Overview

In this example, you configure a single-rate two-color policer and then use an IPv4 firewall filter to apply the policer to all traffic except for BGP messages. You apply the firewall filter to the input and output of the same logical interface.

Topology

Assume that you know the traffic flow needs to be rate-limited to an average bandwidth of 9 Mbps. Also assume that you do not know the line rate of the target interface, but you do know that the MTU of traffic on the interface is 4700 bytes. As described in [“Determining Proper Burst Size for Traffic Policers” on page 39](#), you can estimate a starting value of 10 times the MTU.

Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interface and Monitoring the Traffic Rate Without Policing on page 47](#)
- [Configuring the Basic Single-Rate Two-Color Policer on page 48](#)
- [Referencing the Policer from a Term in a Stateless Firewall Filter on page 49](#)
- [Applying the Firewall Filter to the Input and Output of the Logical Interface on page 50](#)

CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces so-1/3/0 unit 0 family inet address 10.39.1.1/16
set firewall policer p-9m-47k-discard if-exceeding bandwidth-limit 9m
set firewall policer p-9m-47k-discard if-exceeding burst-size-limit 47k
set firewall policer p-9m-47k-discard then discard
set firewall family inet filter rate-limit-in term t1 from protocol tcp
set firewall family inet filter rate-limit-in term t1 from port bgp
set firewall family inet filter rate-limit-in term t1 then accept
set firewall family inet filter rate-limit-in term t2 then policer p-9m-47k-discard
set firewall family inet filter rate-limit-in term t2 then accept
set interfaces so-1/3/0 unit 0 family inet filter input rate-limit-in
set interfaces so-1/3/0 unit 0 family inet filter output rate-limit-in
```

Configuring the Logical Interface and Monitoring the Traffic Rate Without Policing

Step-by-Step Procedure

To configure the logical interface and monitor the traffic rate:

1. Configure IPv4 on the logical interface.

```
[edit]
user@host# edit interfaces so-1/3/0 unit 0 family inet address 10.39.1.1/16
```

2. Commit the configuration.

```
[edit]
user@host# commit
```

3. Monitor the traffic flow at the interface (press 'q' to terminate monitoring).

```
[edit]
user@host# run monitor interface so-1/3/0.0
```

The traffic statistics report the input and output rates before applying interface rate limiting.

Results

Confirm the configuration of the logical interface by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
so-3/3/0 {
  unit 0 {
    family inet {
      address 10.39.1.1/16
```

```

    }
  }
}

```

Configuring the Basic Single-Rate Two-Color Policer

Step-by-Step Procedure

To configure the basic single-rate two-color policer:

1. Enable configuration of a single-rate two-color policer.

[edit]

user@host# edit firewall **policer** p-9m-47k-discard



NOTE:

This example illustrates a basic two-color policer, which does not require any of the following statements:

- **filter-specific**—You can include this statement so that, when this policer is applied as a firewall filter policer, a single instance of the policer is used by all terms within the same firewall filter.
- **logical-bandwidth-policer**—Include this statement only if the policer bandwidth limit is specified as a percentage value (using the **bandwidth-percent percent** statement) and you want the bandwidth limit to be based on the configured shaping rate for the target logical interface.
- **logical-interface-policer**—Include this statement only if you apply the policer directly to a physical or logical interface to rate-limit traffic for any configured protocol family based on the physical interface media rate.
- **physical-interface-policer**—Include this statement if you apply the policer to packets filtered by a standard stateless firewall filter term and you want the policer to meter the aggregate traffic (all protocol families and logical interfaces configured on the underlying physical interface).

2. Configure the policer to rate-limit to an average bandwidth of 9 Mbps and a burst size of 47 KB.

[edit firewall policer p-9m-47k-discard]

user@host# set if-exceeding **bandwidth-limit** 9m

user@host# set if-exceeding **burst-size-limit** 47k

For information about configuring the burst size, see “[Determining Proper Burst Size for Traffic Policers](#)” on page 39.

When the traffic flow conforms to these limits, the flow is categorized as green. For a single-rate two-color policer, packets in a green flow are implicitly set to a **low** packet loss priority (PLP) level.

3. Configure the policer to discard packets in a red traffic flow.

```
[edit firewall policer p-9m-47k-discard]
user@host# set then discard
```

Instead of discarding the traffic that exceeds the traffic limits, you can set the PLP level, the forwarding class assignment, or both.

Results Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer p-9m-47k-discard {
  if-exceeding {
    bandwidth-limit 9m;
    burst-size-limit 47k;
  }
  then discard;
}
```

Referencing the Policer from a Term in a Stateless Firewall Filter

Step-by-Step Procedure To reference the policer from a term in a stateless firewall filter:

1. Enable configuration of the stateless firewall filter.

```
[edit]
user@host# edit firewall family inet filter rate-limit-in
```

2. Configure the first term to accept all BGP traffic.

BGP messages are transported over TCP port 179.

```
[edit firewall family inet filter rate-limit-in]
user@host# set term t1 from protocol tcp
user@host# set term t1 from port bgp
user@host# set term t1 then accept
```

The BGP traffic is not rate-limited to avoid having the BGP session time out because the packet is discarded by the policer.

3. Configure the second term to rate-limit all other traffic using the policer.

```
[edit firewall family inet filter rate-limit-in]
user@host# set term t2 then policer p-9m-47k-discard
user@host# set term t2 then accept
```

Results Confirm the configuration of the firewall filter by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
family inet {
  filter rate-limit-in {
```

```

term t1 {
  from {
    protocol tcp;
    port bgp;
  }
  then accept;
}
term t2 {
  then {
    policer p-9m-47k-discard;
    accept;
  }
}
}
}
policer p-9m-47k-discard {
  if-exceeding {
    bandwidth-limit 9m;
    burst-size-limit 47k;
  }
  then discard;
}

```

Applying the Firewall Filter to the Input and Output of the Logical Interface

Step-by-Step Procedure

To apply the stateless firewall filter to the input and output of the logical interface:

1. Enable configuration of IPv4 on the logical interface.

```

[edit]
user@host# edit interfaces so-1/3/0 unit 0 family inet

```

2. Apply the stateless firewall filter.

```

[edit interfaces so-1/3/0 unit 0 family inet]
user@host# set filter input rate-limit-in
user@host# set filter output rate-limit-in

```

Results Confirm the configuration of the logical interface by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
so-3/3/0 {
  unit 0 {
    family inet {
      filter {
        input rate-limit-in;
        output rate-limit-in;
      }
      address 10.39.1.1/16;
    }
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Monitoring and Adjusting Policing of the Logical Interface on page 51](#)
- [Displaying the Number of Packets Processed by the Policer at the Logical Interface on page 51](#)

Monitoring and Adjusting Policing of the Logical Interface

Purpose Ensure that the traffic limits configured in the policer are throttling the input and output rate as you intended.

Action To ensure that the configured traffic limits are throttling the traffic rate as intended:

1. Monitor the traffic flow at the interface (press 'q' to terminate monitoring).

[edit]

```
user@host# run monitor interface so-1/3/0.0
```

The traffic statistics report the input and output rate after applying interface rate limiting.

2. Adjust the burst-size limit if necessary.

If the policer appears to be throttling the input and output rate more than you intended, increase the burst size (possibly doubling it) and then check again.

Displaying the Number of Packets Processed by the Policer at the Logical Interface

Purpose Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

Action Use the **show firewall** operational mode command for the filter you applied to the logical interface:

[edit]

```
user@host# run show firewall filter rate-limit-in
```

```
Filter: rate-limit-in
```

```
Policers:
```

Name	Packets
p-9m-47k-discard-t2	32863

The command output displays the name of policer (**p-9m-47k-discard**), the name of the filter term (**t2**) under which the policer action is specified, and the number of packets that matched the filter term. This is only the number of out-of-specification (out-of-spec) packet counts, not all packets policed by the policer.

Example: Configuring Interface and Firewall Filter Policers at the Same Interface

This example shows how to configure three single-rate two-color policers and apply the policers to the IPv4 input traffic at the same single-tag virtual LAN (VLAN) logical interface.

- [Requirements on page 52](#)
- [Overview on page 52](#)
- [Configuration on page 53](#)
- [Verification on page 59](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

In this example, you configure three single-rate two-color policers and apply the policers to the IPv4 input traffic at the same single-tag VLAN logical interface. Two policers are applied to the interface through a firewall filter, and one policer is applied directly to the interface.

You configure one policer, named **p-all-1m-5k-discard**, to rate-limit traffic to 1 Mbps with a burst size of 5000 bytes. You apply this policer directly to IPv4 input traffic at the logical interface. When you apply a policer directly to protocol-specific traffic at a logical interface, the policer is said to be applied as an *interface policer*.

You configure the other two policers to allow burst sizes of 500 KB, and you apply these policers to IPv4 input traffic at the logical interface by using an IPv4 standard stateless firewall filter. When you apply a policer to protocol-specific traffic at a logical interface through a firewall filter action, the policer is said to be applied as a *firewall-filter policer*.

- You configure the policer named **p-icmp-500k-500k-discard** to rate-limit traffic to 500 Kbps with a burst size of 500 K bytes by discarding packets that do not conform to these limits. You configure one of the firewall filter terms to apply this policer to Internet Control Message Protocol (ICMP) packets.
- You configure the policer named **p-ftp-10p-500k-discard** to rate-limit traffic to a 10 percent bandwidth with a burst size of 500 KB by discarding packets that do not conform to these limits. You configure another firewall-filter term to apply this policer to File Transfer Protocol (FTP) packets.

A policer that you configure with a bandwidth limit expressed as a percentage value (rather than as an absolute bandwidth value) is called a *bandwidth policer*. Only single-rate two-color policers can be configured with a percentage bandwidth specification. By default, a bandwidth policer rate-limits traffic to the specified percentage of the line rate of the physical interface underlying the target logical interface.

Topology

You configure the target logical interface as a single-tag VLAN logical interface on a Fast Ethernet interface operating at 100 Mbps. This means that the policer you configure with the 10-percent bandwidth-limit (the policer that you apply to FTP packets) rate-limits the FTP traffic on this interface to 10 Mbps.



NOTE: In this example, you do not configure the bandwidth policer as a *logical-bandwidth policer*. Therefore, the percentage is based on the physical media rate rather than on the configured shaping rate of the logical interface.

The firewall filter that you configure to reference two of the policers must be configured as an *interface-specific filter*. Because the policer that is used to rate-limit FTP packets specifies the bandwidth limit as a percentage value, the firewall filter that references this policer must be configured as an interface-specific filter. Thus, if this firewall filter were to be applied to multiple interfaces instead of just the Fast Ethernet interface in this example, unique policers and counters would be created for each interface to which the filter is applied.

Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Single-Tag VLAN Logical Interface on page 54](#)
- [Configuring the Three Policers on page 55](#)
- [Configuring the IPv4 Firewall Filter on page 57](#)
- [Applying the Interface Policer and Firewall Filter Policers to the Logical Interface on page 58](#)

CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces fe-0/1/1 vlan-tagging
set interfaces fe-0/1/1 unit 0 vlan-id 100
set interfaces fe-0/1/1 unit 0 family inet address 10.20.15.1/24
set interfaces fe-0/1/1 unit 1 vlan-id 101
set interfaces fe-0/1/1 unit 1 family inet address 10.20.240.1/24
set firewall policer p-all-1m-5k-discard if-exceeding bandwidth-limit 1m
set firewall policer p-all-1m-5k-discard if-exceeding burst-size-limit 5k
set firewall policer p-all-1m-5k-discard then discard
set firewall policer p-ftp-10p-500k-discard if-exceeding bandwidth-percent 10
set firewall policer p-ftp-10p-500k-discard if-exceeding burst-size-limit 500k
set firewall policer p-ftp-10p-500k-discard then discard
set firewall policer p-icmp-500k-500k-discard if-exceeding bandwidth-limit 500k
set firewall policer p-icmp-500k-500k-discard if-exceeding burst-size-limit 500k
set firewall policer p-icmp-500k-500k-discard then discard
```

```

set firewall family inet filter filter-ipv4-with-limits interface-specific
set firewall family inet filter filter-ipv4-with-limits term t-ftp from protocol tcp
set firewall family inet filter filter-ipv4-with-limits term t-ftp from port ftp
set firewall family inet filter filter-ipv4-with-limits term t-ftp from port ftp-data
set firewall family inet filter filter-ipv4-with-limits term t-ftp then policer
    p-ftp-10p-500k-discard
set firewall family inet filter filter-ipv4-with-limits term t-icmp from protocol icmp
set firewall family inet filter filter-ipv4-with-limits term t-icmp then policer
    p-icmp-500k-500k-discard
set firewall family inet filter filter-ipv4-with-limits term catch-all then accept
set interfaces fe-0/1/1 unit 1 family inet filter input filter-ipv4-with-limits
set interfaces fe-0/1/1 unit 1 family inet policer input p-all-1m-5k-discard

```

Configuring the Single-Tag VLAN Logical Interface

Step-by-Step Procedure

To configure the single-tag VLAN logical interface:

1. Enable configuration of the Fast Ethernet interface.

```

[edit]
user@host# edit interfaces fe-0/1/1

```

2. Enable single-tag VLAN framing.

```

[edit interfaces fe-0/1/1]
user@host# set vlan-tagging

```

3. Bind VLAN IDs to the logical interfaces.

```

[edit interfaces fe-0/1/1]
user@host# set unit 0 vlan-id 100
user@host# set unit 1 vlan-id 101

```

4. Configure IPv4 on the single-tag VLAN logical interfaces.

```

[edit interfaces fe-0/1/1]
user@host# set unit 0 family inet address 10.20.15.1/24
user@host# set unit 1 family inet address 10.20.240.1/24

```

Results Confirm the configuration of the VLAN by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
fe-0/1/1 {
  vlan-tagging;
  unit 0 {
    vlan-id 100;
    family inet {
      address 10.20.15.1/24;
    }
  }
  unit 1 {
    vlan-id 101;
    family inet {
      address 10.20.240.1/24;
    }
  }
}

```



```

    }
  }
}

```

Configuring the Three Policers

Step-by-Step Procedure

To configure the three policers:

1. Enable configuration of a two-color policer that discards packets that do not conform to a bandwidth of 1 Mbps and a burst size of 5000 bytes.



NOTE: You apply this policer directly to all IPv4 input traffic at the single-tag VLAN logical interface, so the packets will not be filtered before being subjected to rate limiting.

```

[edit]
user@host# edit firewall policer p-all-1m-5k-discard

```

2. Configure the first policer.

```

[edit firewall policer p-all-1m-5k-discard]
user@host# set if-exceeding bandwidth-limit 1m
user@host# set if-exceeding burst-size-limit 5k
user@host# set then discard

```

3. Enable configuration of a two-color policer that discards packets that do not conform to a bandwidth specified as “10 percent” and a burst size of 500,000 bytes.

You apply this policer only to the FTP traffic at the single-tag VLAN logical interface.

You apply this policer as the action of an IPv4 firewall filter term that matches FTP packets from TCP.

```

[edit firewall policer p-all-1m-5k-discard]
user@host# up

```

```

[edit]
user@host# edit firewall policer p-ftp-10p-500k-discard

```

4. Configure policing limits and actions.

```

[edit firewall policer p-ftp-10p-500k-discard]
user@host# set if-exceeding bandwidth-percent 10
user@host# set if-exceeding burst-size-limit 500k
user@host# set then discard

```

Because the bandwidth limit is specified as a percentage, the firewall filter that references this policer must be configured as an interface-specific filter.



NOTE: If you wanted this policer to rate-limit to 10 percent of the logical interface configured shaping rate (rather than to 10 percent of the physical interface media rate), you would need to include the `logical-bandwidth-policer` statement at the [edit firewall policer p-all-1m-5k-discard] hierarchy level. This type of policer is called a *logical-bandwidth policer*.

5. Enable configuration of the IPv4 firewall filter policer for ICMP packets.

```
[edit firewall policer p-ftp-10p-500k-discard]
user@host# up
```

```
[edit]
user@host# edit firewall policer p-icmp-500k-500k-discard
```

6. Configure policing limits and actions.

```
[edit firewall policer p-icmp-500k-500k-discard]
user@host# set if-exceeding bandwidth-limit 500k
user@host# set if-exceeding burst-size-limit 500k
user@host# set then discard
```

Results Confirm the configuration of the policers by entering the `show firewall` configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer p-all-1m-5k-discard {
  if-exceeding {
    bandwidth-limit 1m;
    burst-size-limit 5k;
  }
  then discard;
}
policer p-ftp-10p-500k-discard {
  if-exceeding {
    bandwidth-percent 10;
    burst-size-limit 500k;
  }
  then discard;
}
policer p-icmp-500k-500k-discard {
  if-exceeding {
    bandwidth-limit 500k;
    burst-size-limit 500k;
  }
  then discard;
}
```

*Configuring the IPv4 Firewall Filter***Step-by-Step
Procedure**

To configure the IPv4 firewall filter:

1. Enable configuration of the IPv4 firewall filter.

```
[edit]
user@host# edit firewall family inet filter filter-ipv4-with-limits
```

2. Configure the firewall filter as interface-specific.

```
[edit firewall family inet filter filter-ipv4-with-limits]
user@host# set interface-specific
```

The firewall filter must be interface-specific because one of the policers referenced is configured with a bandwidth limit expressed as a percentage value.

3. Enable configuration of a filter term to rate-limit FTP packets.

```
[edit firewall family inet filter filter-ipv4-with-limits]
user@host# edit term t-ftp
```

```
[edit firewall family inet filter filter-ipv4-with-limits term t-ftp]
user@host# set from protocol tcp
user@host# set from port [ ftp ftp-data ]
```

FTP messages are sent over TCP port 20 (**ftp**) and received over TCP port 21 (**ftp-data**).

4. Configure the filter term to match FTP packets.

```
[edit firewall family inet filter filter-ipv4-with-limits term t-ftp]
user@host# set then policer p-ftp-10p-500k-discard
```

5. Enable configuration of a filter term to rate-limit ICMP packets.

```
[edit firewall family inet filter filter-ipv4-with-limits term t-ftp]
user@host# up
```

```
[edit firewall family inet filter filter-ipv4-with-limits]
user@host# edit term t-icmp
```

6. Configure the filter term for ICMP packets

```
[edit firewall family inet filter filter-ipv4-with-limits term t-icmp]
user@host# set from protocol icmp
user@host# set then policer p-icmp-500k-500k-discard
```

7. Configure a filter term to accept all other packets without policing.

```
[edit firewall family inet filter filter-ipv4-with-limits term t-icmp]
user@host# up
```

```
[edit firewall family inet filter filter-ipv4-with-limits]
user@host# set term catch-all then accept
```

Results Confirm the configuration of the firewall filter by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
family inet {
  filter filter-ipv4-with-limits {
    interface-specific;
    term t-ftp {
      from {
        protocol tcp;
        port [ ftp ftp-data ];
      }
      then policer p-ftp-10p-500k-discard;
    }
    term t-icmp {
      from {
        protocol icmp;
      }
      then policer p-icmp-500k-500k-discard;
    }
    term catch-all {
      then accept;
    }
  }
}
policer p-all-1m-5k-discard {
  if-exceeding {
    bandwidth-limit 1m;
    burst-size-limit 5k;
  }
  then discard;
}
policer p-ftp-10p-500k-discard {
  if-exceeding {
    bandwidth-percent 10;
    burst-size-limit 500k;
  }
  then discard;
}
policer p-icmp-500k-500k-discard {
  if-exceeding {
    bandwidth-limit 500k;
    burst-size-limit 500k;
  }
  then discard;
}
```

Applying the Interface Policer and Firewall Filter Policers to the Logical Interface

Step-by-Step Procedure To apply the three policers to the VLAN:

1. Enable configuration of IPv4 on the logical interface.

```
[edit]
```

```
user@host# edit interfaces fe-0/1/1 unit 1 family inet
```

2. Apply the firewall filter policers to the interface.

```
[edit interfaces fe-0/1/1 unit 1 family inet]
user@host# set filter input filter-ipv4-with-limits
```

3. Apply the interface policer to the interface.

```
[edit interfaces fe-0/1/1 unit 1 family inet]
user@host# set policer input p-all-1m-5k-discard
```

Input packets at **fe-0/1/1.0** are evaluated against the interface policer before they are evaluated against the firewall filter policers. For more information, see [“Order of Policer and Firewall Filter Operations” on page 10](#).

Results Confirm the configuration of the interface by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
fe-0/1/1 {
  vlan-tagging;
  unit 0 {
    vlan-id 100;
    family inet {
      address 10.20.15.1/24;
    }
  }
  unit 1 {
    vlan-id 101;
    family inet {
      filter {
        input filter-ipv4-with-limits;
      }
      policer {
        input p-all-1m-5k-discard;
      }
      address 10.20.240.1/24;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Displaying Policers Applied Directly to the Logical Interface on page 60](#)
- [Displaying Statistics for the Policer Applied Directly to the Logical Interface on page 60](#)
- [Displaying the Policers and Firewall Filters Applied to an Interface on page 60](#)
- [Displaying Statistics for the Firewall Filter Policers on page 61](#)

Displaying Policers Applied Directly to the Logical Interface

Purpose Verify that the interface policer is evaluated when packets are received on the logical interface.

Action Use the *show interfaces policers* operational mode command for logical interface **fe-0/1/1.1**. The command output section for the **Proto** column and **Input Policer** column shows that the policer **p-all-1m-5k-discard** is evaluated when packets are received on the logical interface.

```
user@host> show interfaces policers fe-0/1/1.1
Interface      Admin Link Proto Input Policer      Output Policer
fe-0/1/1.1     up      up      inet  p-all-1m-5k-discard-fe-0/1/1.1-inet-i
```

In this example, the interface policer is applied to logical interface traffic in the input direction only.

Displaying Statistics for the Policer Applied Directly to the Logical Interface

Purpose Verify the number of packets evaluated by the interface policer.

Action Use the *show policer* operational mode command and optionally specify the name of the policer. The command output displays the number of packets evaluated by each configured policer (or the specified policer), in each direction.

```
user@host> show policer p-all-1m-5k-discard-fe-0/1/1.1-inet-i
Policers:
Name                                     Bytes      Packets
p-all-1m-5k-discard-fe-0/1/1.1-inet-i  200        5
```

Displaying the Policers and Firewall Filters Applied to an Interface

Purpose Verify that the firewall filter **filter-ipv4-with-limits** is applied to the IPv4 input traffic at logical interface **fe-0/1/1.1**.

Action Use the *show interfaces statistics* operational mode command for logical interface **fe-0/1/1.1**, and include the **detail** option. Under the **Protocol inet** section of the command output section, the **Input Filters** and **Policer** lines display the names of filter and policer applied to the logical interface in the input direction.

```
user@host> show interfaces statistics fe-0/1/1.1 detail
Logical interface fe-0/1/1.1 (Index 83) (SNMP ifIndex 545) (Generation 153)
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.100 ] Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 46
  Input packets: 0
  Output packets: 1
Local statistics:
  Input bytes : 0
  Output bytes : 46
  Input packets: 0
  Output packets: 1
```

```

Transit statistics:
Input bytes : 0 0 bps
Output bytes : 0 0 bps
Input packets: 0 0 pps
Output packets: 0 0 pps
Protocol inet, MTU: 1500, Generation: 176, Route table: 0
Flags: Sendbroadcast-pkt-to-re
Input Filters: filter-ipv4-with-limits-fe-0/1/1.1-i
Policer: Input: p-all-1m-5k-discard-fe-0/1/1.1-inet-i
Addresses, Flags: Is-Preferred Is-Primary
Destination: 10.20.130/24, Local: 10.20.130.1, Broadcast: 10.20.130.255,

Generation: 169

```

In this example, the two firewall filter policers are applied to logical interface traffic in the input direction only.

Displaying Statistics for the Firewall Filter Policers

Purpose Verify the number of packets evaluated by the firewall filter policers.

Action Use the **show firewall** operational mode command for the filter you applied to the logical interface.

```

[edit]
user@host> show firewall filter filter-ipv4-with-limits-fe-0/1/1.1-i

Filter: filter-ipv4-with-limits-fe-0/1/1.1-i
Policers:

```

Name	Bytes	Packets
p-ftp-10p-500k-discard-t-ftp-fe-0/1/1.1-i	0	0
p-icmp-500k-500k-discard-t-icmp-fe-0/1/1.1-i	0	0

The command output displays the names of the policers (**p-ftp-10p-500k-discard** and **p-icmp-500k-500k-discard**), combined with the names of the filter terms (**t-ftp** and **t-icmp**, respectively) under which the policer action is specified. The policer-specific output lines display the number of packets that matched the filter term. This is only the number of out-of-specification (out-of-spec) packet counts, not all packets policed by the policer.

- Related Documentation**
- [Order of Policer and Firewall Filter Operations on page 10](#)
 - [Statement Hierarchy for Configuring Policers on page 13](#)
 - [Two-Color Policer Configuration Overview on page 15](#)
 - [Guidelines for Applying Traffic Policers on page 23](#)
 - [Determining Proper Burst Size for Traffic Policers on page 39](#)

Bandwidth Policers

- [Bandwidth Policer Overview on page 62](#)
- [Example: Configuring a Logical Bandwidth Policer on page 63](#)

Bandwidth Policer Overview

For a single-rate two-color policer only, you can specify the bandwidth limit as a percentage value from 1 through 100 instead of as an absolute number of bits per second. This type of two-color policer, called a *bandwidth policer*, rate-limits traffic to a bandwidth limit that is calculated as a percentage of either the physical interface media rate or the logical interface configured shaping rate.

Guidelines for Configuring a Bandwidth Policer

The following guidelines apply to configuring a bandwidth policer:

- To specify a percentage bandwidth limit, you include the **bandwidth-percent *percentage*** statement in place of the **bandwidth-limit *bps*** statement.
- By default, a bandwidth policer calculates the percentage bandwidth limit based on the physical interface port speed. To configure a bandwidth policer to calculate the percentage bandwidth limit based on the configured logical interface shaping rate instead, include the **logical-bandwidth-policer** statement at the **[edit firewall policer *policer-name*]** hierarchy level. This type of bandwidth policer is called a *logical bandwidth policer*.

You can configure a logical interface shaping rate by including the **shaping-rate *bps*** statement at the **[edit class-of-service interfaces interface *interface-name* unit *logical-unit-number*]** hierarchy level. A logical interface shaping rate causes the specified amount of bandwidth to be allocated to the logical interface.



NOTE: If you configure a logical-bandwidth policer and then apply the policer to a logical interface that is not configured with a shaping rate, then the policer rate-limits traffic on that logical interface to calculate the percentage bandwidth limit based on the physical interface port speed, even if you include the **logical-bandwidth-policer** statement in the bandwidth policer configuration.

- If you reference a bandwidth policer from a stateless firewall filter term, you must include the **interface-specific** statement in the firewall filter configuration.

Guidelines for Applying a Bandwidth Policer

The following guidelines pertain to applying a bandwidth policer to traffic:

- You can use a bandwidth policer to rate-limit protocol-specific traffic (not **family any**) at the input or output of a logical interface.
- You can apply a bandwidth policer directly to protocol-specific input or output traffic at a logical interface.
- To send only selected packets to a bandwidth policer, you can reference the bandwidth policer from a stateless firewall filter term and then apply the filter to logical interface traffic for a specific protocol family.
 - To reference a *logical bandwidth policer* from a firewall filter, you must include the **interface-specific** statement in the firewall filter configuration.
 - You cannot use a bandwidth policer for forwarding-table filters.
- You cannot apply a bandwidth policer to an aggregate interface, a tunnel interface, or a software interface.

Example: Configuring a Logical Bandwidth Policer

This example shows how to configure a logical bandwidth policer.

- [Requirements on page 63](#)
- [Overview on page 63](#)
- [Configuration on page 64](#)
- [Verification on page 68](#)

Requirements

Before you begin, make sure that you have two logical units available on a Gigabit Ethernet interface.

Overview

In this example, you configure a single-rate two-color policer that specifies the bandwidth limit as a percentage value rather than as an absolute number of bits per second. This type of policer is called a *bandwidth policer*. By default, a bandwidth policer enforces a bandwidth limit based on the line rate of the underlying physical interface. As an option, you can configure a bandwidth policer to enforce a bandwidth limit based on the configured shaping rate of the logical interface. To configure this type of bandwidth policer, called a *logical bandwidth policer*, you include the **logical-bandwidth-policer** statement in the policer configuration.

To configure a logical interface shaping rate, include the **shaping-rate bps** statement at the **[edit class-of-service interfaces interface interface-name unit logical-unit-number]** hierarchy level. This class-of-service (CoS) configuration statement causes the specified amount of bandwidth to be allocated to the logical interface.



NOTE: If you configure a policer bandwidth limit as a percentage but a shaping rate is not configured for the target logical interface, the policer bandwidth limit is calculated as a percentage of the physical interface media rate, even if you enable the logical-bandwidth policing feature.

To apply a logical bandwidth policer to a logical interface, you can apply the policer directly to the logical interface at the protocol family level or (if you only need to rate-limit filtered packets) you can reference the policer from a stateless firewall filter configured to operate in *interface-specific* mode.

Topology

In this example, you configure two logical interfaces on a single Gigabit Ethernet interface and configure a shaping rate on each logical interface. On logical interface **ge-1/3/0.0**, you allocate 4 Mbps of bandwidth. On logical interface **ge-1/3/0.1**, you allocate 2 Mbps of bandwidth.

You also configure a logical bandwidth policer with a bandwidth limit of 50 percent and a maximum burst size of 125,000 bytes, and then you apply the policer to input and output traffic at the logical units configured on **ge-1/3/0.0**. For logical interface **ge-1/3/0.0**, the policer rate-limits to a bandwidth limit of 2 Mbps (50 percent of the 4 Mbps shaping rate configured for the logical interface). For logical interface **ge-1/3/0.1**, the policer rate-limits traffic to a bandwidth limit of 1 Mbps (50 percent of the 2 Mbps shaping rate configured for the logical interface).

If no shaping rate is configured for a target logical interface, the policer rate-limits to a bandwidth limit calculated as 50 percent of the physical interface media rate. For example, if you apply a 50 percent bandwidth policer to input or output traffic at a Gigabit Ethernet logical interface without rate shaping, the policer applies a bandwidth limit of 500 Mbps (50 percent of 1000 Mbps).

Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interfaces on page 65](#)
- [Configuring Traffic Rate-Shaping by Specifying the Amount of Bandwidth to be Allocated to the Logical Interface on page 66](#)
- [Configuring the Logical Bandwidth Policer on page 66](#)
- [Applying the Logical Bandwidth Policers to the Logical Interfaces on page 67](#)

CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/3/0 per-unit-scheduler
```

```

set interfaces ge-1/3/0 vlan-tagging
set interfaces ge-1/3/0 unit 0 vlan-id 100
set interfaces ge-1/3/0 unit 0 family inet address 172.1.1.1/30
set interfaces ge-1/3/0 unit 1 vlan-id 200
set interfaces ge-1/3/0 unit 1 family inet address 172.2.1.1/30
set class-of-service interfaces ge-1/3/0 unit 0 shaping-rate 4m
set class-of-service interfaces ge-1/3/0 unit 1 shaping-rate 2m
set firewall policer LB-policer logical-bandwidth-policer
set firewall policer LB-policer if-exceeding bandwidth-percent 50
set firewall policer LB-policer if-exceeding burst-size-limit 125k
set firewall policer LB-policer then discard
set interfaces ge-1/3/0 unit 0 family inet policer input LB-policer
set interfaces ge-1/3/0 unit 0 family inet policer output LB-policer
set interfaces ge-1/3/0 unit 1 family inet policer input LB-policer
set interfaces ge-1/3/0 unit 1 family inet policer output LB-policer

```

Configuring the Logical Interfaces

Step-by-Step Procedure

To configure the logical interfaces:

1. Enable configuration of the physical interface.

```

[edit]
user@host# edit interfaces ge-1/3/0

```

```

[edit interfaces ge-1/3/0]
user@host# set per-unit-scheduler
user@host# set vlan-tagging

```

2. Configure the first logical interface.

```

[edit interfaces ge-1/3/0]
user@host# set unit 0 vlan-id 100
user@host# set unit 0 family inet address 172.1.1.1/30

```

3. Configure the second logical interface.

```

[edit interfaces ge-1/3/0]
user@host# set unit 1 vlan-id 200
user@host# set unit 1 family inet address 172.2.1.1/30

```

Results Confirm the configuration of the interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
ge-1/3/0 {
  per-unit-scheduler;
  vlan-tagging;
  unit 0 {
    vlan-id 100;
    family inet {
      address 172.1.1.1/30;
    }
  }
  unit 1 {

```

```

    vlan-id 200;
    family inet {
        address 172.2.1.1/30;
    }
}

```

Configuring Traffic Rate-Shaping by Specifying the Amount of Bandwidth to be Allocated to the Logical Interface

Step-by-Step Procedure To configure rate shaping by specifying the bandwidth to be allocated to the logical interface:

1. Enable CoS configuration on the physical interface.

```

[edit]
user@host# edit class-of-service interfaces ge-1/3/0

```

2. Configure rate shaping for the logical interfaces.

```

[edit]
user@host# set unit 0 shaping-rate 4m
user@host# set unit 1 shaping-rate 2m

```

These statements allocate 4 Mbps of bandwidth to logical unit **ge-1/3/0.0** and 2 Mbps of bandwidth to logical unit **ge-1/3/0.1**.

Results Confirm the configuration of the rate shaping by entering the **show class-of-service** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show class-of-service
interfaces {
    ge-1/3/0 {
        unit 0 {
            shaping-rate 4m;
        }
        unit 1 {
            shaping-rate 2m;
        }
    }
}

```

Configuring the Logical Bandwidth Policer

Step-by-Step Procedure To configure the logical bandwidth policer:

1. Enable configuration of a single-rate two-color policer.

```

[edit]
user@host# edit firewall policer LB-policer

```

2. Configure the policer as a logical-bandwidth policer.

```

[edit firewall policer LB-policer]
user@host# set logical-bandwidth-policer

```

This applies the rate-limiting to logical interfaces.

3. Configure the policer traffic limits and actions.

```
[edit firewall policer LB-policer]
user@host# set if-exceeding bandwidth-percent 50
user@host# set if-exceeding burst-size-limit 125k
user@host# set then discard
```

Results Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer LB-policer {
  logical-bandwidth-policer;
  if-exceeding {
    bandwidth-percent 50;
    burst-size-limit 125k;
  }
  then discard;
}
```

Applying the Logical Bandwidth Policers to the Logical Interfaces

Step-by-Step Procedure To configure the logical bandwidth policers to the logical interfaces:

1. Enable configuration of the interface.

```
[edit]
user@host# edit interfaces ge-1/3/0
```

2. Apply the logical bandwidth policer to the first logical interface.

```
[edit interfaces ge-1/3/0]
user@host# set unit 0 family inet policer input LB-policer
user@host# set unit 0 family inet policer output LB-policer
```

3. Apply the policing to the second logical interface.

```
[edit interfaces ge-1/3/0]
user@host# set unit 1 family inet policer input LB-policer
user@host# set unit 1 family inet policer output LB-policer
```

Results Confirm the configuration of the interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
ge-1/3/0 {
  per-unit-scheduler;
  vlan-tagging;
  unit 0 {
    vlan-id 100;
    family inet {
```

```

    policer {
        input LB-policer;
        output LB-policer;
    }
    address 172.1.1.1/30;
}
}
unit 1 {
    vlan-id 200;
    family inet {
        policer {
            input LB-policer;
            output LB-policer;
        }
        address 172.2.1.1/30;
    }
}
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Displaying Traffic Statistics and Policers for the Logical Interface on page 68](#)
- [Displaying Statistics for the Policer on page 69](#)

Displaying Traffic Statistics and Policers for the Logical Interface

Purpose Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

Action Use the **show interfaces** operational mode command for logical interfaces **ge-1/3/0.0** and **ge-1/3/0.1**, and include the **detail** or **extensive** option. The command output section for **Traffic statistics** lists the number of bytes and packets received and transmitted on the logical interface, and the **Protocol inet** section contains a **Policer** field that lists the policer **LB-policer** as an input or output policer as follows:

- **Input: LB-policer-ge-1/3/0.0-inet-i**
- **Output: LB-policer-ge-1/3/0.0-inet-o**

In this example, the policer is applied to logical interface traffic in both the input and output directions.

```

user@host> show interfaces ge-1/3/0.0 detail
Logical interface ge-1/3/0.0 (Index 80) (SNMP ifIndex 154) (Generation 150)
  Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.100 ] Encapsulation: ENET2
  Traffic statistics:
    Input bytes :                0
    Output bytes :               46
    Input packets:                0
    Output packets:               1
  Local statistics:
    Input bytes :                0

```

```

Output bytes : 46
Input packets: 0
Output packets: 1
Transit statistics:
Input bytes : 0 0 bps
Output bytes : 0 0 bps
Input packets: 0 0 pps
Output packets: 0 0 pps
Protocol inet, MTU: 1500, Generation: 174, Route table: 0
Flags: Sendbcst-pkt-to-re
Policer: Input: LB-policer-ge-1/3/0.0-inet-i, Output:
LB-policer-ge-1/3/0.0-inet-o
Addresses, Flags: Is-Preferred Is-Primary
Destination: 172.1.1.0/30, Local: 172.1.1.1, Broadcast: 172.1.1.3,
Generation: 165

```

```

user@host> show interfaces ge-1/3/0.1 detail
Logical interface ge-1/3/0.1 (Index 81) (SNMP ifIndex 543) (Generation 151)
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.200 ] Encapsulation: ENET2
Traffic statistics:
Input bytes : 0
Output bytes : 46
Input packets: 0
Output packets: 1
Local statistics:
Input bytes : 0
Output bytes : 46
Input packets: 0
Output packets: 1
Transit statistics:
Input bytes : 0 0 bps
Output bytes : 0 0 bps
Input packets: 0 0 pps
Output packets: 0 0 pps
Protocol inet, MTU: 1500, Generation: 175, Route table: 0
Flags: Sendbcst-pkt-to-re
Policer: Input: LB-policer-ge-1/3/0.1-inet-i, Output:
LB-policer-ge-1/3/0.1-inet-o
Addresses, Flags: Is-Preferred Is-Primary
Destination: 172.2.1.0/30, Local: 172.2.1.1, Broadcast: 172.2.1.3,
Generation: 167

```

Displaying Statistics for the Policer

Purpose Verify the number of packets evaluated by the policer.

Action Use the `show policer` operational mode command and optionally specify the name of the policer. The command output displays the number of packets evaluated by each configured policer (or the specified policer), in each direction. For the policer **LB-policer**, the input and output policer names are displayed as follows:

- LB-policer-ge-1/3/0.0-inet-i
- LB-policer-ge-1/3/0.0-inet-o
- LB-policer-ge-1/3/0.1-inet-i
- LB-policer-ge-1/3/0.1-inet-o

The **-inet-i** suffix denotes a policer applied to logical interface input traffic, while the **-inet-o** suffix denotes a policer applied to logical interface output traffic. In this example, the policer is applied to both input and output traffic on logical interface **ge-1/3/0.0** and logical interface **ge-1/3/0.1**.

```
user@host> show policer
Policers:
Name                                     Packets
__default_arp_policer__                 0
LB-policer-ge-1/3/0.0-inet-i            0
LB-policer-ge-1/3/0.0-inet-o            0
LB-policer-ge-1/3/0.1-inet-i            0
LB-policer-ge-1/3/0.1-inet-o            0
```

Related Documentation

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Guidelines for Applying Traffic Policers on page 23](#)
- [bandwidth-percent on page 189](#)
- [interface-specific \(Firewall Filters\)](#)
- [logical-bandwidth-policer on page 208](#)
- [shaping-rate \(Applying to an Interface\)](#)

Filter-Specific Counters and Policers

- [Filter-Specific Policer Overview on page 70](#)
- [Example: Configuring a Stateless Firewall Filter to Protect Against TCP and ICMP Floods on page 71](#)

Filter-Specific Policer Overview

By default, a policer operates in *term-specific* mode so that, for a given firewall filter, the Junos OS creates a separate policer instance for every filter term that references the policer. As an option, you can configure a policer to operate in *filter-specific* mode so that a single policer instance is used by all terms (within the same firewall filter) that reference the policer.

For an IPv4 firewall filter with multiple terms that reference the same policer, configuring the policer to operate in filter-specific mode enables you to count and monitor the activity of the policer at the firewall filter level.



NOTE: Term-specific mode and filter-specific mode also apply to prefix-specific policer sets.

To enable a single-rate two-color policer to operate in filter-specific mode, you can include the **filter-specific** statement at the following hierarchy levels:

- **[edit firewall policer *policer-name*]**

- `[edit logical-systems logical-system-name firewall policer policer-name]`

You can reference filter-specific policers from IPv4 (**family inet**) firewall filters only.

Example: Configuring a Stateless Firewall Filter to Protect Against TCP and ICMP Floods

This example shows how to create a stateless firewall filter that protects against TCP and ICMP denial-of-service attacks.

- [Requirements on page 71](#)
- [Overview on page 71](#)
- [Configuration on page 72](#)
- [Verification on page 77](#)

Requirements

No special configuration beyond device initialization is required before configuring stateless firewall filters.

Overview

In this example we create a stateless firewall filter called **protect-RE** to police TCP and ICMP packets. It uses the policers described here:

- **tcp-connection-policer**—This policer limits TCP traffic to 1,000,000 bits per second (bps) with a maximum burst size of 15,000 bytes. Traffic exceeding either limit is discarded.
- **icmp-policer**—This policer limits ICMP traffic to 1,000,000 bps with a maximum burst size of 15,000 bytes. Traffic exceeding either limit is discarded.

When specifying limits, the bandwidth limit can be from 32,000 bps to 32,000,000,000 bps and the burst-size limit can be from 1,500 bytes through 100,000,000 bytes. Use the following abbreviations when specifying limits: k (1,000), m (1,000,000), and g (1,000,000,000).

Each policer is incorporated into the action of a filter term. This example includes the following terms:

- **tcp-connection-term**—Polices certain TCP packets with a source address of 192.168.0.0/24 or 10.0.0.0/24. These addresses are defined in the **trusted-addresses** prefix list.

Filtered packets include **tcp-established** packets. The **tcp-established** match condition is an alias for the bit-field match condition **tcp-flags "(ack | rst)"**, which indicates an established TCP session, but not the first packet of a TCP connection.

- **icmp-term**—Polices ICMP packets. All ICMP packets are counted in the **icmp-counter** counter.




NOTE: You can move terms within the firewall filter by using the **insert** command. See *insert* in the *CLI User Guide*.

You can apply a stateless firewall to the input or output sides, or both, of an interface. To filter packets transiting the device, apply the firewall filter to any non-Routing Engine interface. To filter packets originating from, or destined for, the Routing Engine, apply the firewall filter to the loopback (lo0) interface.

Figure 10 on page 72 shows the sample network.

Figure 10: Firewall Filter to Protect Against TCP and ICMP Floods

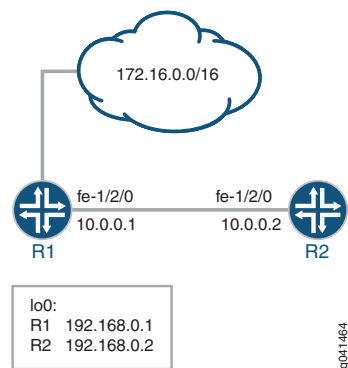

Because this firewall filter limits Routing Engine traffic to TCP packets, routing protocols that use other transport protocols for Layer 4 cannot successfully establish sessions when this filter is active. To demonstrate, this example sets up OSPF between Device R1 and Device R2.

“CLI Quick Configuration” on page 72 shows the configuration for all of the devices in Figure 10 on page 72.

The section “Step-by-Step Procedure” on page 73 describes the steps on Device R2.

Configuration

CLI Quick Configuration To quickly configure the stateless firewall filter, copy the following commands to a text file, remove any line breaks, and then paste the commands into the CLI.

```

Device R1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces lo0 unit 0 family inet address 192.168.0.1/32 primary
set interfaces lo0 unit 0 family inet address 172.16.0.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext peer-as 200
set protocols bgp group ext neighbor 10.0.0.2
set protocols ospf area 0.0.0.0 interface fe-1/2/0.0
set protocols ospf area 0.0.0.0 interface lo0.0 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 100

Device R2
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces lo0 unit 0 family inet filter input protect-RE
set interfaces lo0 unit 0 family inet address 192.168.0.2/32 primary
set interfaces lo0 unit 0 family inet address 172.16.0.2/32

```

```

set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext neighbor 10.0.0.1 peer-as 100
set protocols ospf area 0.0.0.0 interface lo0.0 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.0
set policy-options prefix-list trusted-addresses 10.0.0.0/24
set policy-options prefix-list trusted-addresses 192.168.0.0/24
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.2
set routing-options autonomous-system 200
set firewall family inet filter protect-RE term tcp-connection-term from source-prefix-list
trusted-addresses
set firewall family inet filter protect-RE term tcp-connection-term from protocol tcp
set firewall family inet filter protect-RE term tcp-connection-term from tcp-established
set firewall family inet filter protect-RE term tcp-connection-term then policer
tcp-connection-policer
set firewall family inet filter protect-RE term tcp-connection-term then accept
set firewall family inet filter protect-RE term icmp-term from source-prefix-list
trusted-addresses
set firewall family inet filter protect-RE term icmp-term from protocol icmp
set firewall family inet filter protect-RE term icmp-term then policer icmp-policer
set firewall family inet filter protect-RE term icmp-term then count icmp-counter
set firewall family inet filter protect-RE term icmp-term then accept
set firewall policer tcp-connection-policer filter-specific
set firewall policer tcp-connection-policer if-exceeding bandwidth-limit 1m
set firewall policer tcp-connection-policer if-exceeding burst-size-limit 15k
set firewall policer tcp-connection-policer then discard
set firewall policer icmp-policer filter-specific
set firewall policer icmp-policer if-exceeding bandwidth-limit 1m
set firewall policer icmp-policer if-exceeding burst-size-limit 15k
set firewall policer icmp-policer then discard

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure stateless firewall filter policers:

1. Configure the device interfaces.

```

[edit interfaces fe-1/2/0 unit 0 family inet ]
user@R2# set address 10.0.0.2/30

```

```

[edit interfaces lo0 unit 0 family inet]
user@R2# set address 192.168.0.2/32 primary
user@R2# set address 172.16.0.2/32

```

2. Configure the BGP peering session.

```

[edit protocols bgp group ext]
user@R2# set type external
user@R2# set export send-direct
user@R2# set neighbor 10.0.0.1 peer-as 100

```

3. Configure the autonomous system (AS) number and router ID.

- ```
[edit routing-options]
user@R2# set autonomous-system 200
user@R2# set router-id 192.168.0.2
```
4. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface lo0.0 passive
user@R2# set interface fe-1/2/0.0
```
  5. Define the list of trusted addresses.

```
[edit policy-options prefix-list trusted-addresses]
user@R2# set 10.0.0.0/24
user@R2# set 192.168.0.0/24
```
  6. Configure a policy to advertise direct routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R2# set from protocol direct
user@R2# set then accept
```
  7. Configure the TCP policer.

```
[edit firewall policer tcp-connection-policer]
user@R2# set filter-specific
user@R2# set if-exceeding bandwidth-limit 1m
user@R2# set if-exceeding burst-size-limit 15k
user@R2# set then discard
```
  8. Create the ICMP policer.

```
[edit firewall policer icmp-policer]
user@R2# set filter-specific
user@R2# set if-exceeding bandwidth-limit 1m
user@R2# set if-exceeding burst-size-limit 15k
user@R2# set then discard
```
  9. Configure the TCP filter rules.

```
[edit firewall family inet filter protect-RE term tcp-connection-term]
user@R2# set from source-prefix-list trusted-addresses
user@R2# set from protocol tcp
user@R2# set from tcp-established
user@R2# set then policer tcp-connection-policer
user@R2# set then accept
```
  10. Configure the ICMP filter rules.

```
[edit firewall family inet filter protect-RE term icmp-term]
user@R2# set from source-prefix-list trusted-addresses
user@R2# set from protocol icmp
user@R2# set then policer icmp-policer
user@R2# set then count icmp-counter
user@R2# set then accept
```
  11. Apply the filter to the loopback interface.

```
[edit interfaces lo0 unit 0]
user@R2# set family inet filter input protect-RE
```

**Results** Confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, **show routing-options**, and **show firewall** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R2# show interfaces
fe-1/2/0 {
 unit 0 {
 family inet {
 address 10.0.0.2/30;
 }
 }
}
lo0 {
 unit 0 {
 family inet {
 filter {
 input protect-RE;
 }
 address 192.168.0.2/32 {
 primary;
 }
 address 172.16.0.2/32;
 }
 }
}
user@R2# show protocols
bgp {
 group ext {
 type external;
 export send-direct;
 neighbor 10.0.0.1 {
 peer-as 100;
 }
 }
}
ospf {
 area 0.0.0.0 {
 interface lo0.0 {
 passive;
 }
 interface fe-1/2/0.0;
 }
}
user@R2# show policy-options
prefix-list trusted-addresses {
 10.0.0.0/24;
 192.168.0.0/24;
}
policy-statement send-direct {
 term 1 {
 from protocol direct;
 then accept;
 }
}

```

```
}

user@R2# show routing-options
router-id 192.168.0.2;
autonomous-system 200;

user@R2# show firewall
family inet {
 filter protect-RE {
 term tcp-connection-term {
 from {
 source-prefix-list {
 trusted-addresses;
 }
 protocol tcp;
 tcp-established;
 }
 then {
 policer tcp-connection-policer;
 accept;
 }
 }
 term icmp-term {
 from {
 source-prefix-list {
 trusted-addresses;
 }
 protocol icmp;
 }
 then {
 policer icmp-policer;
 count icmp-counter;
 accept;
 }
 }
 }
}

policer tcp-connection-policer {
 filter-specific;
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 15k;
 }
 then discard;
}

policer icmp-policer {
 filter-specific;
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 15k;
 }
 then discard;
}
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.



**NOTE:** To verify the TCP policer, you can use a packet generation tool. This task is not shown here.

- [Displaying Stateless Firewall Filter That Are in Effect on page 77](#)
- [Using telnet to Verify the tcp-established Condition in the TCP Firewall Filter on page 77](#)
- [Using telnet to Verify the Trusted Prefixes Condition in the TCP Firewall Filter on page 78](#)
- [Using OSPF to Verify the TCP Firewall Filter on page 79](#)
- [Verifying the ICMP Firewall Filter on page 80](#)

### *Displaying Stateless Firewall Filter That Are in Effect*

**Purpose** Verify the configuration of the firewall filter.

**Action** From operational mode, enter the **show firewall** command.

```
user@R2> show firewall
Filter: protect-RE
Counters:
Name Bytes Packets
icmp-counter 0 0
Policers:
Name Bytes Packets
icmp-policer 0 0
tcp-connection-policer 0 0
```

**Meaning** The output shows the filter, the counter, and the policers that are in effect on Device R2.

### *Using telnet to Verify the tcp-established Condition in the TCP Firewall Filter*

**Purpose** Make sure that telnet traffic works as expected.

**Action** Verify that the device can establish only TCP sessions with hosts that meet the **from tcp-established** condition..

1. From Device R2, make sure that the BGP session with Device R1 is established.

```
user@R2> show bgp summary | match down
Groups: 1 Peers: 1 Down peers: 0
```

2. From Device R2, telnet to Device R1.

```
user@R2> telnet 192.168.0.1
Trying 192.168.0.1...
Connected to R1.acme.net.
Escape character is '^['.
```

```
R1 (tty4)
```

```
login:
```

3. From Device R1, telnet to Device R2.

```
user@R1> telnet 192.168.0.2
Trying 192.168.0.2...
telnet: connect to address 192.168.0.2: Operation timed out
telnet: Unable to connect to remote host
```

4. On Device R2, deactivate the **from tcp-established** match condition.

```
[edit firewall family inet filter protect-RE term tcp-connection-term]
user@R2# deactivate from tcp-established
user@R2# commit
```

5. From Device R1, try again to telnet to Device R2.

```
user@R1> telnet 192.168.0.1
Trying 192.168.0.2...
Connected to R2.acme.net.
Escape character is '^J'.
```

R2 (ttyp4)

login:

**Meaning** Verify the following information:

- As expected, the BGP session is established. The **from tcp-established** match condition is not expected to block BGP session establishment.
- From Device R2, you can telnet to Device R1. Device R1 has no firewall filter configured, so this is the expected behavior.
- From Device R1, you cannot telnet to Device R2. Telnet uses TCP as the transport protocol, so this result might be surprising. The cause for the lack of telnet connectivity is the **from tcp-established** match condition. This match condition limits the type of TCP traffic that is accepted of Device R2. After this match condition is deactivated, the telnet session is successful.

#### *Using telnet to Verify the Trusted Prefixes Condition in the TCP Firewall Filter*

**Purpose** Make sure that telnet traffic works as expected.

**Action** Verify that the device can establish only telnet sessions with a host at an IP address that matches one of the trusted source addresses. For example, log in to the device with the **telnet** command from another host with one of the trusted address prefixes. Also, verify that telnet sessions with untrusted source addresses are blocked.

1. From Device R1, telnet to Device R2 from an untrusted source address.

```
user@R1> telnet 172.16.0.2 source 172.16.0.1
Trying 172.16.0.2...
^C
```

2. From Device R2, add 172.16/16 to the list of trusted prefixes.

```
[edit policy-options prefix-list trusted-addresses]
user@R2# set 172.16.0.0/16
user@R2# commit
```



- From Device R1, try again to telnet to Device R2.

```

user@R1> telnet 172.16.0.2 source 172.16.0.1
Trying 172.16.0.2...
Connected to R2.acme.net.
Escape character is '^]'.

R2 (ttyp4)

Login:

```

**Meaning** Verify the following information:

- From Device R1, you cannot telnet to Device R2 with an untrusted source address. After the 172.16/16 prefix is added to the list of trusted prefixes, the telnet request from source address 172.16.0.1 is accepted.
- OSPF session establishment is blocked. OSPF does not use TCP as its transport protocol. After the **from protocol tcp** match condition is deactivated, OSPF session establishment is not blocked.

#### *Using OSPF to Verify the TCP Firewall Filter*

**Purpose** Make sure that OSPF traffic works as expected.

**Action** Verify that the device cannot establish OSPF connectivity.

- From Device R1, check the OSPF sessions.

```

user@R1> show ospf neighbor
Address Interface State ID Pri Dead
10.0.0.2 fe-1/2/0.0 Init 192.168.0.2 128 34

```

- From Device R2, check the OSPF sessions.

```

user@R2> show ospf neighbor

```

- From Device R2, remove the **from protocol tcp** match condition.

```

[edit firewall family inet filter protect-RE term tcp-connection-term]
user@R2# deactivate from protocol
user@R2# commit

```

- From Device R1, recheck the OSPF sessions.

```

user@R1> show ospf neighbor
Address Interface State ID Pri Dead
10.0.0.2 fe-1/2/0.0 Full 192.168.0.2 128 36

```

- From Device R2, recheck the OSPF sessions.

```

user@R2> show ospf neighbor
Address Interface State ID Pri Dead
10.0.0.1 fe-1/2/0.0 Full 192.168.0.1 128 39

```

**Meaning** Verify the following information:

- OSPF session establishment is blocked. OSPF does not use TCP as its transport protocol. After the **from protocol tcp** match condition is deactivated, OSPF session establishment is successful.

### Verifying the ICMP Firewall Filter

**Purpose** Verify that ICMP packets are being policed and counted. Also make sure that ping requests are discarded when the requests originate from an untrusted source address.

**Action** 1. Undo the configuration changes made in previous verification steps.

Reactivate the TCP firewall settings, and delete the 172.16/16 trusted source address.

```
[edit firewall family inet filter protect-RE term tcp-connection-term]
user@R2# activate from protocol
user@R2# activate from tcp-established
```

```
[edit policy-options prefix-list trusted-addresses]
user@R2# delete 172.16.0.0/16
```

```
user@R2# commit
```

2. From Device R1, ping the loopback interface on Device R2.

```
user@R1> ping 192.168.0.2 rapid count 600 size 2000
PING 192.168.0.2 (192.168.0.2): 2000 data bytes
#####
--- 192.168.0.2 ping statistics ---
600 packets transmitted, 536 packets received, 10% packet loss
pinground-trip min/avg/max/stddev = 2.976/3.405/42.380/2.293 ms
```

3. From Device R2, check the firewall statistics.

```
user@R2> show firewall

Filter: protect-RE
Counters:
Name Bytes Packets
icmp-counter 1180804 1135
Policers:
Name Bytes Packets
icmp-policer 66
tcp-connection-policer 0
```

4. From an untrusted source address on Device R1, send a ping request to Device R2's loopback interface.

```
user@R1> ping 172.16.0.2 source 172.16.0.1

PING 172.16.0.2 (172.16.0.2): 56 data bytes
^C
--- 172.16.0.2 ping statistics ---
14 packets transmitted, 0 packets received, 100% packet loss
```

**Meaning** Verify the following information:

- The ping output shows that 10% packet loss is occurring.

- The ICMP packet counter is incrementing, and the icmp-policer is incrementing.
- Device R2 does not send ICMP responses to the **ping 172.16.0.2 source 172.16.0.1** command.

#### Related Documentation

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Guidelines for Applying Traffic Policers on page 23](#)
- [Prefix-Specific Counting and Policing Actions on page 81](#)

## Prefix-Specific Counting and Policing Actions

- [Prefix-Specific Counting and Policing Overview on page 81](#)
- [Filter-Specific Counter and Policer Set Overview on page 83](#)
- [Example: Configuring Prefix-Specific Counting and Policing on page 84](#)
- [Prefix-Specific Counting and Policing Configuration Scenarios on page 91](#)

## Prefix-Specific Counting and Policing Overview

This topic covers the following information:

- [Separate Counting and Policing for Each IPv4 Address Range on page 81](#)
- [Prefix-Specific Action Configuration on page 82](#)
- [Counter and Policer Set Size and Indexing on page 83](#)

### Separate Counting and Policing for Each IPv4 Address Range

Prefix-specific counting and policing enables you to configure an IPv4 firewall filter term that matches on a source or destination address, applies a single-rate two-color policer as the term action, but associates the matched packet with a specific counter and policer instance based on the source or destination in the packet header. You can implicitly create a separate counter or policer instance for a single address or for a group of addresses.



**NOTE:** J Series Services Routers do not support prefix-specific counting and policing.

Prefix-specific counting and policing uses a *prefix-specific action* configuration that specifies the name of the policer you want to apply, whether prefix-specific counting is to be enabled, and a source or destination address prefix range.

The prefix range specifies between 1 and 16 sequential set bits of an IPv4 address mask. The length of the prefix range determines the size of the counter and policer *set*, which consists of as few as 2 or as many as 65,536 counter and policer instances. The position of the bits of the prefix range determines the indexing of filter-matched packets into the set of instances.



**NOTE:** A prefix-specific action is specific to a source or destination *prefix range*, but it is not specific to a particular source or destination *address range*, and it is not specific to a particular interface.

To apply a prefix-specific action to the traffic at an interface, you configure a firewall filter term that matches on source or destination addresses, and then you apply the firewall filter to the interface. The flow of filtered traffic is rate-limited using prefix-specific counter and policer instances that are selected per packet based on the source or destination address in the header of the filtered packet.

### Prefix-Specific Action Configuration

---

To configure a prefix-specific action, you specify the following information:

- Prefix-specific action name—Name that can be referenced as the action of an IPv4 standard firewall filter term that matches packets on source or destination addresses.
- Policer name—Name of a single-rate two-color policer for which you want to implicitly create prefix-specific instances.



**NOTE:** For aggregated Ethernet interfaces, you can configure a prefix-specific action that references a logical interface policer (also called an aggregate policer). You can reference this type of prefix-specific action from an IPv4 standard firewall filter and then apply the filter at the aggregate level of the interface.

- Counting option—Option to include if you want to enable prefix-specific counters.
- Filter-specific option—Option to include if you want a single counter and policer set to be shared across all terms in the firewall filter. A prefix-specific action that operates in this way is said to operate in *filter-specific* mode. If you do not enable this option, the prefix-specific action operates in *term-specific* mode, meaning that a separate counter and policer set is created for each filter term that references the prefix-specific action.
- Source address prefix length—Length of the address prefix, from 0 through 32, to be used with a packet matched on the source address.
- Destination address prefix length—Length of the address prefix, from 0 through 32, to be used with a packet matched on the destination address.
- Subnet prefix length—Length of the subnet prefix, from 0 through 32, to be used with a packet matched on either the source or destination address.

You must configure source and destination address prefix lengths to be from 1 to 16 bits longer than the subnet prefix length. If you configure source or destination address prefix lengths to be more than 16 bits beyond the configured subnet prefix length, an error occurs when you try to commit the configuration.

### Counter and Policer Set Size and Indexing

The number of prefix-specific actions (counters or policers) implicitly created for a prefix-specific action is determined by the length of the address prefix and the length of the subnet prefix:

$$\text{Size of Counter and Policer Set} = 2^{(\text{source-or-destination-prefix-length} - \text{subnet-prefix-length})}$$

Table 8 on page 83 shows examples of counter and policer set size and indexing.

**Table 8: Examples of Counter and Policer Set Size and Indexing**

| Example Prefix Lengths Specified in the Prefix-Specific Action       | Calculation of Counter or Policer Set Size                                                                                              | Indexing of Instances |             |
|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------|
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 16 | Size = $2^{(32-16)} = 2^{16} = 65,536$ instances<br><br>NOTE: This calculation shows the largest counter or policer set size supported. | Instance 0:           | x.x.0.0     |
|                                                                      |                                                                                                                                         | Instance 1:           | x.x.0.1     |
|                                                                      |                                                                                                                                         | Instance 65535:       | x.x.255.255 |
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 24 | Size = $2^{(32-24)} = 2^8 = 256$ instances                                                                                              | Instance 0:           | x.x.x.0     |
|                                                                      |                                                                                                                                         | Instance 1:           | x.x.x.1     |
|                                                                      |                                                                                                                                         | Instance 255:         | x.x.x.255   |
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 25 | Size = $2^{(32-25)} = 2^7 = 128$ instances                                                                                              | Instance 0:           | x.x.x.0     |
|                                                                      |                                                                                                                                         | Instance 1:           | x.x.x.1     |
|                                                                      |                                                                                                                                         | Instance 127:         | x.x.x.127   |
| <i>source-prefix-length</i> = 24<br><i>subnet-prefix-length</i> = 20 | Size = $2^{(24-20)} = 2^4 = 16$ instances                                                                                               | Instance 0:           | x.x.0.x     |
|                                                                      |                                                                                                                                         | Instance 1:           | x.x.1.x     |
|                                                                      |                                                                                                                                         | Instance 15:          | x.x.15.x    |

### Filter-Specific Counter and Policer Set Overview

By default, a prefix-specific policer set operates in *term-specific* mode so that, for a given firewall filter, the Junos OS creates a separate counter and policer set for every filter term that references the prefix-specific action. As an option, you can configure a prefix-specific policer set to operate in *filter-specific* mode so that a single prefix-specific policer set is used by all terms (within the same firewall filter) that reference the policer.

For an IPv4 firewall filter with multiple terms that reference the same prefix-specific policer set, configuring the policer set to operate in filter-specific mode enables you to count and monitor the activity of the policer set at the firewall filter level.



**NOTE:** Term-specific mode and filter-specific mode also apply to policers. See “[Filter-Specific Policer Overview](#)” on page 70.

To enable a prefix-specific policer set to operate in filter-specific mode, you can include the **filter-specific** statement at the following hierarchy levels:

- **[edit firewall family inet prefix-action *prefix-action-name*]**
- **[edit logical-systems *logical-system-name* firewall family inet prefix-action *prefix-action-name*]**

You can reference filter-specific, prefix-specific policer sets from IPv4 (**family inet**) firewall filters only.

## Example: Configuring Prefix-Specific Counting and Policing

This example shows how to configure prefix-specific counting and policing.

- [Requirements on page 84](#)
- [Overview on page 84](#)
- [Configuration on page 85](#)
- [Verification on page 89](#)

---

### Requirements

No special configuration beyond device initialization is required before configuring this example.

---

### Overview

In this example, you configure prefix-specific counting and policing based on the last octet of the source address field in packets matched by an IPv4 firewall filter.

The single-rate two-color policer named **1Mbps-policer** rate-limits traffic to a bandwidth of 1,000,000 bps and a burst-size limit of 63,000 bytes, discarding any packets in a traffic flow that exceeds the traffic limits.

Independent of the IPv4 addresses contained in any packets passed from a firewall filter, the prefix-specific action named **psa-1Mbps-per-source-24-32-256** specifies a set of 256 counters and policers, numbered from 0 through 255. For each packet, the last octet of the source address field is used to index into the associated prefix-specific counter and policer in the set:

- Packets with a source address ending with the octet 0x0000 0000 index the first counter and policer in the set.

- Packets with a source address ending with the octet 0x0000 0001 index the second counter and policer in the set.
- Packets with a source address ending with the octet 0x1111 1111 index the last counter and policer in the set.

The **limit-source-one-24** firewall filter contains a single term that matches all packets from the /24 subnet of source address 10.10.10.0, passing these packets to the prefix-specific action **psa-1Mbps-per-source-24-32-256**.

### Topology

In this example, because the filter term matches the /24 subnet of a single source address, each counting and policing instance in the prefix-specific set is used for only one source address.

- Packets with a source address 10.10.10.0 index the first counter and policer in the set.
- Packets with a source address 10.10.10.1 index the second counter and policer in the set.
- Packets with a source address 10.10.10.255 index the last counter and policer in the set.

This example shows the simplest case of prefix-specific actions, in which the filter term matches on one address with a prefix length that is the same as the prefix length specified in the prefix-specific action for indexing into the set of prefix-specific counters and policers.

For descriptions of other configurations for prefix-specific counting and policing, see [“Prefix-Specific Counting and Policing Configuration Scenarios” on page 91](#).

### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring a Policer for Prefix-Specific Counting and Policing on page 86](#)
- [Configuring a Prefix-Specific Action Based on the Policer on page 87](#)
- [Configuring an IPv4 Filter That References the Prefix-Specific Action on page 88](#)
- [Applying the Firewall Filter to IPv4 Input Traffic at a Logical Interface on page 89](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set firewall policer 1Mbps-policer if-exceeding bandwidth-limit 1m
set firewall policer 1Mbps-policer if-exceeding burst-size-limit 63k
set firewall policer 1Mbps-policer then discard
set firewall family inet prefix-action psa-1Mbps-per-source-24-32-256 policer
 1Mbps-policer
set firewall family inet prefix-action psa-1Mbps-per-source-24-32-256 count
```

```

set firewall family inet prefix-action psa-1Mbps-per-source-24-32-256
 subnet-prefix-length 24
set firewall family inet prefix-action psa-1Mbps-per-source-24-32-256 source-prefix-length
 32
set firewall family inet filter limit-source-one-24 term one from source-address
 10.10.10.0/24
set firewall family inet filter limit-source-one-24 term one then prefix-action
 psa-1Mbps-per-source-24-32-256
set interfaces so-0/0/2 unit 0 family inet filter input limit-source-one-24
set interfaces so-0/0/2 unit 0 family inet address 10.39.1.1/16

```

### *Configuring a Policer for Prefix-Specific Counting and Policing*

#### **Step-by-Step Procedure**

To configure a policer to be used for prefix-specific counting and policing:

1. Enable configuration of a single-rate two-color policer.

```

[edit]
user@host# edit firewall policer 1Mbps-policer

```

2. Define the traffic limit.

```

[edit firewall policer 1Mbps-policer]
user@host# set if-exceeding bandwidth-limit 1m
user@host# set if-exceeding burst-size-limit 63k

```

Packets in a traffic flow that conforms to this limit are passed with the PLP set to **low**.

3. Define the actions for nonconforming traffic.

```

[edit firewall policer 1Mbps-policer]
user@host# set then discard

```

Packets in a traffic flow that exceeds this limit are discarded. Other configurable actions for a single-rate two-color policer are to set the forwarding class and to set the PLP level.

**Results** Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show firewall
policer 1Mbps-policer {
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 63k;
 }
 then discard;
}

```



*Configuring a Prefix-Specific Action Based on the Policer*

**Step-by-Step Procedure** To configure a prefix-specific action that references the policer and specifies a portion of a source address prefix:

1. Enable configuration of a prefix-specific action.

```
[edit]
user@host# edit firewall family inet prefix-action psa-1Mbps-per-source-24-32-256
```

Prefix-specific counting and policing can be defined for IPv4 traffic only.

2. Reference the policer for which a prefix-specific set is to be created.

```
[edit firewall family inet prefix-action psa-1Mbps-per-source-24-32-256]
user@host# set policer 1Mbps-policer
user@host# set count
```



**NOTE:** For aggregated Ethernet interfaces, you can configure a prefix-specific action that references a logical interface policer (also called an aggregate policer). You can reference this type of prefix-specific action from an IPv4 standard firewall filter and then apply the filter at the aggregate level of the interface.

3. Specify the prefix range on which IPv4 addresses are to be indexed to the counter and policer set.

```
[edit firewall family inet prefix-action psa-1Mbps-per-source-24-32-256]
user@host# set source-prefix-length 32
user@host# set subnet-prefix-length 24
```

**Results** Confirm the configuration of the prefix-specific action by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer 1Mbps-policer {
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 63k;
 }
 then discard;
}
family inet {
 prefix-action psa-1Mbps-per-source-24-32-256 {
 policer 1Mbps-policer;
 subnet-prefix-length 24;
 source-prefix-length 32;
 }
}
```

*Configuring an IPv4 Filter That References the Prefix-Specific Action***Step-by-Step Procedure**

To configure an IPv4 standard firewall filter that references the prefix-specific action:

1. Enable configuration of the IPv4 standard firewall filter.

```
[edit]
user@host# edit firewall family inet filter limit-source-one-24
```

Prefix-specific counting and policing can be defined for IPv4 traffic only.

2. Configure the filter term to match on the packet source address or destination address.

```
[edit firewall family inet filter limit-source-one-24]
user@host# set term one from source-address 10.10.10.0/24
```

3. Configure the filter term to reference the prefix-specific action.

```
[edit firewall family inet filter limit-source-one-24]
user@host# set term one then prefix-action psa-1Mbps-per-source-24-32-256
```

You could also use the **next term** action to configure all Hypertext Transfer Protocol (HTTP) traffic to each host to transmit at 500 Kbps and have the total HTTP traffic limited to 1 Mbps.

**Results**

Confirm the configuration of the prefix-specific action by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer 1Mbps-policer {
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 63k;
 }
 then discard;
}
family inet {
 prefix-action psa-1Mbps-per-source-24-32-256 {
 policer 1Mbps-policer;
 subnet-prefix-length 24;
 source-prefix-length 32;
 }
 filter limit-source-one-24 {
 term one {
 from {
 source-address {
 10.10.10.0/24;
 }
 }
 then prefix-action psa-1Mbps-per-source-24-32-256;
 }
 }
}
```

**Applying the Firewall Filter to IPv4 Input Traffic at a Logical Interface****Step-by-Step Procedure**

To apply the firewall filter to IPv4 input traffic at a logical interface:

1. Enable configuration of IPv4 on the logical interface.

```
[edit]
user@host# edit interfaces so-0/0/2 unit 0 family inet
```

2. Configure an IP address.

```
[edit interfaces so-0/0/2 unit 0 family inet]
user@host# set address 10.39.1.1/16
```

3. Apply the IPv4 standard stateless firewall filter.

```
[edit interfaces so-0/0/2 unit 0 family inet]
user@host# set filter input limit-source-one-24
```

**Results**

Confirm the configuration of the prefix-specific action by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
so-0/0/2 {
 unit 0 {
 family inet {
 filter {
 input limit-source-one-24;
 }
 address 10.39.1.1/16;
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

**Verification**

Confirm that the configuration is working properly.

- [Displaying the Firewall Filters Applied to an Interface on page 89](#)
- [Displaying Prefix-Specific Actions Statistics for the Firewall Filter on page 90](#)

**Displaying the Firewall Filters Applied to an Interface****Purpose**

Verify that the firewall filter **limit-source-one-24** is applied to the IPv4 input traffic at logical interface **so-0/0/2.0**.

**Action**

Use the **show interfaces statistics** operational mode command for logical interface **so-0/0/2.0**, and include the **detail** option. In the command output section for **Protocol inet**,

the **Input Filters** field displays **limit-source-one-24**, indicating that the filter is applied to IPv4 traffic in the input direction:

```
user@host> show interfaces statistics so-0/0/2.0 detail
Logical interface so-0/0/2.0 (Index 79) (SNMP ifIndex 510) (Generation 149)
Flags: Hardware-Down Point-To-Point SNMP-Traps 0x4000 Encapsulation: PPP
Protocol inet, MTU: 4470, Generation: 173, Route table: 0
Flags: Sendbroadcast-pkt-to-re, Protocol-Down
Input Filters: limit-source-one-24
Addresses, Flags: Dest-route-down Is-Preferred Is-Primary
Destination: 10.39/16, Local: 10.39.1.1, Broadcast: 10.39.255.255,
Generation: 163
```

### *Displaying Prefix-Specific Actions Statistics for the Firewall Filter*

**Purpose** Verify the number of packets evaluated by the policer.

**Action** Use the **show firewall prefix-action-stats filter filter-name prefix-action name** operational mode command to display statistics about a prefix-specific action configured on a firewall filter.

As an option, you can use the **from set-index to set-index** command option to specify the starting and ending counter or policer to be displayed. A policer set is indexed from 0 through 65535.

The command output displays the specified filter name followed by a listing of the number of bytes and packets processed by each policer in the policer set.

For a term-specific policer, each policer in the set is identified as follows:

*prefix-specific-action-name-term-name-set-index*

For a filter-specific policer, each policer is identified in the command output as follows:

*prefix-specific-action-name-set-index*

Because the example prefix-specific action **psa-1Mbps-per-source-24-32-256** is referenced by only one term of the example filter **limit-source-one-24**, the example policer **1Mbps-policer** is configured as term-specific. In the **show firewall prefix-action-stats** command output, the policer statistics are displayed as **psa-1Mbps-per-source-24-32-256-one-0**, **psa-1Mbps-per-source-24-32-256-one-1**, and so on through **psa-1Mbps-per-source-24-32-256-one-255**.

```
user@host> show firewall prefix-action-stats filter limit-source-one-24 prefix-action
psa-1Mbps-per-source-24-32-256 from 0 to 9
Filter: limit-source-one-24
Counters:
```

| Name                                 | Bytes | Packets |
|--------------------------------------|-------|---------|
| psa-1Mbps-per-source-24-32-256-one-0 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-1 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-2 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-3 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-4 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-5 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-6 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-7 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-8 | 0     | 0       |
| psa-1Mbps-per-source-24-32-256-one-9 | 0     | 0       |

## Prefix-Specific Counting and Policing Configuration Scenarios

This topic covers the following information:

- [Prefix Length of the Action and Prefix Length of Addresses in Filtered Packets on page 91](#)
- [Scenario 1: Firewall Filter Term Matches on Multiple Addresses on page 92](#)
- [Scenario 2: Subnet Prefix Is Longer Than the Prefix in the Filter Match Condition on page 94](#)
- [Scenario 3: Subnet Prefix Is Shorter Than the Prefix in the Firewall Filter Match Condition on page 95](#)

### Prefix Length of the Action and Prefix Length of Addresses in Filtered Packets

Table 9 on page 91 describes the relationship between the prefix length specified in the prefix-specific action and the prefix length of the addresses matched by the firewall filter term that references the prefix-specific action.

**Table 9: Summary of Prefix-Specific Action Scenarios**

| Counter and Policer Set                                                                                                      | Packet-Filtering Criteria             | Indexing of Instances |                              |
|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------|------------------------------|
| <b>Prefix-specific action scenario:</b><br>“Example: Configuring Prefix-Specific Counting and Policing” on page 84           |                                       |                       |                              |
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 24<br><br>Set size: 2^8 = 256<br>Instance numbers: 0 - 255 | <i>source-address</i> = 10.10.10.0/24 | Instance 0            | 10.10.10.0                   |
|                                                                                                                              |                                       | Instance 1:           | 10.10.10.1                   |
|                                                                                                                              |                                       | ...                   | ...                          |
|                                                                                                                              |                                       | Instance 255:         | 10.10.10.255                 |
| <b>Prefix-specific action scenario:</b><br>“Scenario 1: Firewall Filter Term Matches on Multiple Addresses” on page 92       |                                       |                       |                              |
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 24<br><br>Set size: 2^8 = 256<br>Instance numbers: 0 - 255 | <i>source-address</i> = 10.10.10.0/24 | Instance 0            | 10.10.10.0,<br>10.11.x.0     |
|                                                                                                                              | <i>source-address</i> = 10.11.0.0/16  | Instance 1:           | 10.10.10.1,<br>10.11.x.1     |
|                                                                                                                              |                                       | ...                   | ...                          |
|                                                                                                                              |                                       | Instance 255:         | 10.10.10.255,<br>10.11.x.255 |
| For addresses in the /16 subnet, x ranges from 0 through 255.                                                                |                                       |                       |                              |

Table 9: Summary of Prefix-Specific Action Scenarios (*continued*)

| Counter and Policer Set                                                                                                                      | Packet-Filtering Criteria                                                                                                                                                           | Indexing of Instances |                               |
|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|
| Prefix-specific action scenario:<br>“Scenario 2: Subnet Prefix Is Longer Than the Prefix in the Filter Match Condition” on page 94           |                                                                                                                                                                                     |                       |                               |
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 25<br><br>Set size: 2^7 = 128<br>Instance numbers: 0 - 127                 | <i>source-address</i> = 10.10.10.0/24                                                                                                                                               | Instance 0            | 10.10.10.0,<br>10.10.10.128   |
|                                                                                                                                              |                                                                                                                                                                                     | Instance 1:           | 10.10.10.1,<br>10.10.10.120   |
|                                                                                                                                              |                                                                                                                                                                                     | ...                   | ...                           |
|                                                                                                                                              |                                                                                                                                                                                     | Instance 127:         | 10.10.10.255,<br>10.10.10.127 |
|                                                                                                                                              |                                                                                                                                                                                     |                       |                               |
| Prefix-specific action scenario:<br>“Scenario 3: Subnet Prefix Is Shorter Than the Prefix in the Firewall Filter Match Condition” on page 95 |                                                                                                                                                                                     |                       |                               |
| <i>source-prefix-length</i> = 32<br><i>subnet-prefix-length</i> = 24<br><br>Set size: 2^8 = 256<br>Instance numbers: 0 - 255                 | <i>source-address</i> = 10.10.10.0/25<br><br><b>NOTE:</b> Only packets with source addresses ranging from 10.10.10.0 through 10.10.10.127 are passed to the prefix-specific action. | Instance 0            | 10.10.10.0                    |
|                                                                                                                                              |                                                                                                                                                                                     | Instance 1:           | 10.10.10.1                    |
|                                                                                                                                              |                                                                                                                                                                                     | ...                   | ...                           |
|                                                                                                                                              |                                                                                                                                                                                     | Instance 127:         | 10.10.10.127                  |
|                                                                                                                                              |                                                                                                                                                                                     |                       | Instances 128 – 255: unused   |

### Scenario 1: Firewall Filter Term Matches on Multiple Addresses

The complete example, "Example: Configuring Prefix-Specific Counting and Policing" on page 84, shows the simplest case of prefix-specific actions, in which a single-term firewall filter matches on one address with a prefix length that is the same as the subnet prefix length specified in the prefix-specific action. Unlike the example, this scenario describes a configuration in which a single-term firewall filter matches on two IPv4 source addresses. In addition, the additional condition matches on a source address with a prefix length that is different from the subnet prefix length defined in the prefix-specific action. In this case, the additional condition matches on the /16 subnet of the source address 10.11.0.0.



**NOTE:** Unlike packets that match the source address 10.10.10.0/24, packets that match the source address 10.11.0.0/16 are in a many-to-one correspondence with the instances in the counter and policer set.

The filter-matched packets that are passed to the prefix-specific action index into the counter and policer set in such a way that the counting and policing instances are shared by packets that contain source addresses across the **10.10.10.0/24** and **10.11.0.0/16** subnets as follows:

- The first counter and policer in the set are indexed by packets with source addresses **10.10.10.0** and **10.11.x.0**, where **x** ranges from **0** through **255**.
- The second counter and policer in the set are indexed by packets with source addresses **10.10.10.1** and **10.11.x.1**, where **x** ranges from **0** through **255**.
- The 256th (last) counter and policer in the set are indexed by packets with source addresses **10.10.10.255** and **10.11.x.255**, where **x** ranges from **0** through **255**.

The following configuration shows the statements for configuring the single-rate two-color policer, the prefix-specific action that references the policer, and the IPv4 standard stateless firewall filter that references the prefix-specific action:

```
[edit]
firewall {
 policer 1Mbps-policer {
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 63k;
 }
 then discard;
 }
 family inet {
 prefix-action psa-1Mbps-per-source-24-32-256 {
 policer 1Mbps-policer;
 subnet-prefix-length 24;
 source-prefix-length 32;
 }
 filter limit-source-two-24-16 {
 term one {
 from {
 source-address {
 10.10.10.0/24;
 10.11.0.0/16;
 }
 }
 then prefix-action psa-1Mbps-per-source-24-32-256;
 }
 }
 }
}
interfaces {
 so-0/0/2 {
 unit 0 {
 family inet {
 filter {
 input limit-source-two-24-16;
 }
 address 10.39.1.1/16;
 }
 }
 }
}
```

```

 }
 }
}

```

### Scenario 2: Subnet Prefix Is Longer Than the Prefix in the Filter Match Condition

The complete example, “[Example: Configuring Prefix-Specific Counting and Policing](#)” on [page 84](#), shows the simplest case of prefix-specific actions, in which the single-term firewall filter matches on one address with a prefix length that is the same as the subnet prefix length specified in the prefix-specific action. Unlike the example, this scenario describes a configuration in which the prefix-specific action defines a subnet prefix length that is longer than the prefix of the source address matched by the firewall filter. In this case, the prefix-specific action defines a subnet-prefix value of **25**, while the firewall filter matches on a source address in the **/24** subnet.



**NOTE:** The firewall filter passes the prefix-specific action packets with source addresses that range from 10.10.10.0 through 10.10.10.255, while the prefix-specific action specifies a set of only 128 counters and policers, numbered from 0 through 127.

The filter-matched packets that are passed to the prefix-specific action index into the counter and policer set in such a way that the counting and policing instances are shared by packets that contain either of two source addresses within the **10.10.10.0/24** subnet:

- The first counter and policer in the set are indexed by packets with source addresses **10.10.10.0** and **10.10.10.128**.
- The second counter and policer in the set are indexed by packets with source addresses **10.10.10.1** and **10.10.10.129**.
- The 128th (last) counter and policer in the set are indexed by packets with source addresses **10.10.10.127** and **10.10.10.255**.

The following configuration shows the statements for configuring the single-rate two-color policer, the prefix-specific action that references the policer, and the IPv4 standard stateless firewall filter that references the prefix-specific action:

```

[edit]
firewall {
 policer 1Mbps-policer {
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 63k;
 }
 then discard;
 }
 family inet {
 prefix-action psa-1Mbps-per-source-25-32-128 {
 policer 1Mbps-policer;
 subnet-prefix-length 25;
 source-prefix-length 32;
 }
 }
}

```



```

filter limit-source-one-24 {
 term one {
 from {
 source-address {
 10.10.10.0/24;
 }
 }
 then prefix-action psa-1Mbps-per-source-25-32-128;
 }
}
}
}
interfaces {
 so-0/0/2 {
 unit 0 {
 family inet {
 filter {
 input limit-source-one-24;
 }
 address 10.39.1.1/16;
 }
 }
 }
}
}

```

### Scenario 3: Subnet Prefix Is Shorter Than the Prefix in the Firewall Filter Match Condition

The complete example, “[Example: Configuring Prefix-Specific Counting and Policing](#)” on [page 84](#), shows the simplest case of prefix-specific actions, in which the single-term firewall filter matches on one address with a prefix length that is the same as the subnet prefix length specified in the prefix-specific action. Unlike the example, this scenario describes a configuration in which the prefix-specific action defines a subnet prefix length that is shorter than the prefix of the source address matched by the firewall filter. In this case, the filter term matches on the /25 subnet of the source address 10.10.10.0.



**NOTE:** The firewall filter passes the prefix-specific action only packets with source addresses that range from 10.10.10.0 through 10.10.10.127, while the prefix-specific action specifies a set of 256 counters and policers, numbered from 0 through 255.

The matched packets that are passed to the prefix-specific action index into the lower half of the counter and policer set only:

- The first counter and policer in the set are indexed by packets with source address 10.10.10.0.
- The second counter and policer in the set are indexed by packets with source address 10.10.10.1 and 10.10.10.129.

- The 128th counter and policer in the set are indexed by packets with source address 10.10.10.127.
- The upper half of the set (instances numbered from 128 through 255) are not indexed by packets passed to the prefix-specific action from this particular firewall filter.

The following configuration shows the statements for configuring the single-rate two-color policer, the prefix-specific action that references the policer, and the IPv4 standard stateless firewall filter that references the prefix-specific action:

```
[edit]
firewall {
 policer 1Mbps-policer {
 if-exceeding {
 bandwidth-limit 1m;
 burst-size-limit 63k;
 }
 then discard;
 }
 family inet {
 prefix-action psa-1Mbps-per-source-24-32-256 {
 policer 1Mbps-policer;
 subnet-prefix-length 24;
 source-prefix-length 32;
 }
 filter limit-source-one-25 {
 term one {
 from {
 source-address {
 10.10.10.0/25;
 }
 }
 then prefix-action psa-1Mbps-per-source-24-32-256;
 }
 }
 }
}
interfaces {
 so-0/0/2 {
 unit 0 {
 family inet {
 filter {
 input limit-source-one-25;
 }
 address 10.39.1.1/16;
 }
 }
 }
}
```

#### Related Documentation

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Guidelines for Applying Traffic Policers on page 23](#)

---

## Multifield Classification

---

- [Multifield Classification Overview on page 97](#)
- [Multifield Classification Requirements and Restrictions on page 99](#)
- [Multifield Classification Limitations on M Series Routers on page 100](#)
- [Example: Configuring Multifield Classification on page 102](#)
- [Example: Configuring a Multifield Classifier on page 108](#)

### Multifield Classification Overview

This topic covers the following information:

- [Forwarding Classes and PLP Levels on page 97](#)
- [Multifield Classification and BA Classification on page 97](#)
- [Multifield Classification Used In Conjunction with Policers on page 98](#)

---

#### Forwarding Classes and PLP Levels

You can configure the Junos OS class of service (CoS) features to classify incoming traffic by associating each packet with a forwarding class, a packet loss priority (PLP) level, or both:

- Based on the associated forwarding class, each packet is assigned to an output queue, and the router services the output queues according to the associated scheduling you configure.
- Based on the associated PLP, each packet carries a lower or higher likelihood of being dropped if congestion occurs. The CoS random early detection (RED) process uses the drop probability configuration, output queue fullness percentage, and packet PLP to drop packet as needed to control congestion at the output stage.

---

#### Multifield Classification and BA Classification

The Junos OS supports two general types of packet classification: behavior aggregate (BA) classification and multifield classification:

- BA classification, or CoS value traffic classification, refers to a method of packet classification that uses a CoS configuration to set the forwarding class or PLP of a packet based on the *CoS value* in the IP packet header. The CoS value examined for BA classification purposes can be the Differentiated Services code point (DSCP) value, DSCP IPv6 value, IP precedence value, MPLS EXP bits, and IEEE 802.1p value. The default classifier is based on the IP precedence value.
- Multifield classification refers to a method of packet classification that uses a standard stateless firewall filter configuration to set the forwarding class or PLP for each packet entering or exiting the interface based on *multiple fields* in the IP packet header, including the DSCP value (for IPv4 only), the IP precedence value, the MPLS EXP bits, and the IEEE 802.1p bits. Multifield classification commonly matches on IP address fields, the IP protocol type field, or the port number in the UDP or TCP pseudoheader field.

Multifield classification is used instead of BA classification when you need to classify packets based on information in the packet information other than the CoS values only.

With multifield classification, a firewall filter term can specify the packet classification actions for matching packets through the use of the **forwarding-class** *class-name* or **loss-priority** (**high** | **medium-high** | **medium-low** | **low**) nonterminating actions in the term's **then** clause. For more information about these actions, see .



**NOTE:** BA classification of a packet can be overridden by the stateless firewall filter actions **forwarding-class** and **loss-priority**.

---

### Multifield Classification Used In Conjunction with Policers

---

To configure multifield classification in conjunction with rate limiting, a firewall filter term can specify the packet classification actions for matching packets through the use of a **policer** nonterminating action that references a single-rate two-color policer.

When multifield classification is configured to perform classification through a policer, the filter-matched packets in the traffic flow are rate-limited to the policer-specified traffic limits. Packets in a conforming flow of filter-matched packets are implicitly set to a **low** PLP. Packets in a nonconforming traffic flow can be discarded, or the packets can be set to a specified forwarding class, set to a specified PLP level, or both, depending on the type of policer and how the policer is configured to handle nonconforming traffic.



**NOTE:** Before you apply a firewall filter that performs multifield classification and also a policer to the same logical interface and for the same traffic direction, make sure that you consider the order of policer and firewall filter operations.

As an example, consider the following scenario:

- You configure a firewall filter that performs multifield classification (acts on matched packets by setting the forwarding class, the PLP, or both) based on the packet's existing forwarding class or PLP. You apply the firewall filter at the input of a logical interface.
- You also configure a single-rate two-color policer that acts on a red traffic flow by re-marking (setting the forwarding class, the PLP, or both) rather than discarding those packets. You apply the policer as an interface policer at the input of the same logical interface to which you apply the firewall filter.

Because of the order of policer and firewall operations, the input policer is executed before the input firewall filter. This means that the multifield classification specified by the firewall filter is performed on input packets that have already been re-marked once by policing actions. Consequently, any input packet that matches the conditions specified in a firewall filter term is then subject to a second re-marking according to the forwarding-class or loss-priority nonterminating actions also specified in that term.

## Multifield Classification Requirements and Restrictions

This topic covers the following information:

- [Supported Platforms on page 99](#)
- [CoS Tricolor Marking Requirement on page 100](#)
- [Restrictions on page 100](#)

### Supported Platforms

The **loss-priority** firewall filter action is supported on the following routing and switching platforms only:

- EX Series switches
- M7i and M10i routers with the Enhanced CFEB (CFEB-E)
- M120 and M320 routers
- MX Series routers
- T Series routers with Enhanced II Flexible PIC Concentrators (FPCs)

### CoS Tricolor Marking Requirement

---

The **loss-priority** firewall filter action has platform-specific requirements dependencies on the CoS tricolor marking feature, as defined in RFC 2698:

- On an M320 router, you cannot commit a configuration that includes the **loss-priority** firewall filter action unless you enable the CoS tricolor marking feature.
- On all routing platforms that support the **loss-priority** firewall filter action, you cannot set the **loss-priority** firewall filter action to **medium-low** or **medium-high** unless you enable the CoS tricolor marking feature. .

To enable the CoS tricolor marking feature, include the **tri-color** statement at the **[edit class-of-service]** hierarchy level.

### Restrictions

---

You cannot configure the **loss-priority** and **three-color-policer** nonterminating actions for the same firewall filter term. These two nonterminating actions are mutually exclusive.

## Multifield Classification Limitations on M Series Routers

This topic covers the following information:

- [Problem: Output-Filter Matching on Input-Filter Classification on page 100](#)
- [Workaround: Configure All Actions in the Ingress Filter on page 101](#)

### Problem: Output-Filter Matching on Input-Filter Classification

---

On M Series routers (except M120 routers), you cannot classify packets with an output filter match based on the ingress classification that is set with an input filter applied to the same IPv4 logical interface.

For example, in the following configuration, the filter called **ingress** assigns all incoming IPv4 packets to the **expedited-forwarding** class. The filter called **egress** counts all packets that were assigned to the **expedited-forwarding** class in the **ingress** filter. This configuration does not work on most M Series routers. It works on all other routing platforms, including M120 routers, MX Series routers, and T Series routers, and EX Series switches.

```
[edit]
user@host # show firewall
family inet {
 filter ingress {
 term 1 {
 then {
 forwarding-class expedited-forwarding;
 accept;
 }
 }
 term 2 {
 then accept;
 }
 }
 filter egress {
```

```

 term 1 {
 from {
 forwarding-class expedited-forwarding;
 }
 then count ef;
 }
 term 2 {
 then accept;
 }
}

[edit]
user@host# show interfaces
ge-1/2/0 {
 unit 0 {
 family inet {
 filter {
 input ingress;
 output egress;
 }
 }
 }
}

```

### Workaround: Configure All Actions in the Ingress Filter

As a workaround, you can configure all of the actions in the ingress filter.

```

user@host # show firewall
family inet {
 filter ingress {
 term 1 {
 then {
 forwarding-class expedited-forwarding;
 accept;
 count ef;
 }
 }
 term 2 {
 then accept;
 }
 }
}

[edit]
user@host# show interfaces
ge-1/2/0 {
 unit 0 {
 family inet {
 filter {
 input ingress;
 }
 }
 }
}

```

## Example: Configuring Multifield Classification

This example shows how to configure multifield classification of IPv4 traffic by using firewall filter actions and two firewall filter policers.

- [Requirements on page 102](#)
- [Overview on page 103](#)
- [Configuration on page 104](#)
- [Verification on page 108](#)

### Requirements

---

Before you begin, make sure that your environment supports the features shown in this example:

1. The **loss-priority** firewall filter action must be supported on the router and configurable to all four values.
  - a. To be able to set a **loss-priority** firewall filter action, configure this example on logical interface **ge-1/2/0.0** on one of the following routing or switching platforms:
    - EX Series switch
    - MX Series router
    - M120 or M320 router
    - M7i or M10i router with the Enhanced CFEB (CFEB-E)
    - T Series router with Enhanced II Flexible PIC Concentrator (FPC)
  - b. To be able to set a **loss-priority** firewall filter action to **medium-low** or **medium-high**, make sure that the CoS tricolor marking feature is enabled. To enable the CoS tricolor marking feature, include the **tri-color** statement at the **[edit class-of-service]** hierarchy level.
2. The **expedited-forwarding** and **assured-forwarding** forwarding classes must be scheduled on the underlying physical interface **ge-1/2/0**.
  - a. Make sure that the following forwarding classes are assigned to output queues:
    - **expedited-forwarding**
    - **assured-forwarding**



**NOTE:** You cannot commit a configuration that assigns the same forwarding class to two different queues.



- b. Make sure that the output queues to which the forwarding classes are assigned are associated with schedulers. A scheduler defines the amount of interface bandwidth assigned to the queue, the size of the memory buffer allocated for storing packets, the priority of the queue, and the random early detection (RED) drop profiles associated with the queue.
  - You configure output queue schedulers at the **[edit class-of-service schedulers]** hierarchy level.
  - You associate output queue schedulers with forwarding classes by means of a scheduler map that you configure at the **[edit class-of-service scheduler-maps map-name]** hierarchy level.
- c. Make sure that output-queue scheduling is applied to the physical interface **ge-1/2/0**.

You apply a scheduler map to a physical interface at the **[edit class-of-service interfaces ge-1/2/0 scheduler-map map-name]** hierarchy level.

## Overview

In this example, you apply multifield classification to the input IPv4 traffic at a logical interface by using stateless firewall filter actions and two firewall filter policers that are referenced from the firewall filter. Based on the source address field, packets are either set to the **low** loss priority or else policed. Neither of the policers discards nonconforming traffic. Packets in nonconforming flows are marked for a specific forwarding class (**expedited-forwarding** or **assured-forwarding**), set to a specific loss priority, and then transmitted.



**NOTE:** Single-rate two-color policers always transmit packets in a conforming traffic flow after implicitly setting a **low** loss priority.

## Topology

In this example, you apply multifield classification to the IPv4 traffic on logical interface **ge-1/2/0.0**. The classification rules are specified in the IPv4 stateless firewall filter **mfc-filter** and two single-rate two-color policers, **ef-policer** and **af-policer**.

The IPv4 standard stateless firewall filter **mfc-filter** defines three filter terms:

- **isp1-customers**—The first filter term matches packets with the source address 10.1.1.0/24 or 10.1.2.0/24. Matched packets are assigned to the **expedited-forwarding** forwarding class and set to the **low** loss priority.
- **isp2-customers**—The second filter term matches packets with the source address 10.1.3.0/24 or 10.1.4.0/24. Matched packets are passed to **ef-policer**, a policer that rate-limits traffic to a bandwidth limit of 300 Kbps with a burst-size limit of 50 KB. This policer specifies that packets in a nonconforming flow are marked for the **expedited-forwarding** forwarding class and set to the **high** loss priority.

- **other-customers**—The third and final filter term passes all other packets to **af-policer**, a policer that rate-limits traffic to a bandwidth limit of 300 Kbps and a burst-size limit of 50 KB (the same traffic limits as defined by **ef-policer**). This policer specifies that packets in a nonconforming flow are marked for the **assured-forwarding** forwarding class and set to the **medium-high** loss priority.

### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring Policers to Rate-Limit Expedited-Forwarding and Assured-Forwarding Traffic on page 104](#)
- [Configuring a Multifield Classification Filter That Also Applies Policing on page 105](#)
- [Applying Multifield Classification Filtering and Policing to the Logical Interface on page 107](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set firewall policer ef-policer if-exceeding bandwidth-limit 300k
set firewall policer ef-policer if-exceeding burst-size-limit 50k
set firewall policer ef-policer then loss-priority high
set firewall policer ef-policer then forwarding-class expedited-forwarding
set firewall policer af-policer if-exceeding bandwidth-limit 300k
set firewall policer af-policer if-exceeding burst-size-limit 50k
set firewall policer af-policer then loss-priority high
set firewall policer af-policer then forwarding-class assured-forwarding
set firewall family inet filter mfc-filter term isp1-customers from source-address 10.1.1.0/24
set firewall family inet filter mfc-filter term isp1-customers from source-address 10.1.2.0/24
set firewall family inet filter mfc-filter term isp1-customers then loss-priority low
set firewall family inet filter mfc-filter term isp1-customers then forwarding-class
 expedited-forwarding
set firewall family inet filter mfc-filter term isp2-customers from source-address
 10.1.3.0/24
set firewall family inet filter mfc-filter term isp2-customers from source-address
 10.1.4.0/24
set firewall family inet filter mfc-filter term isp2-customers then policer ef-policer
set firewall family inet filter mfc-filter term other-customers then policer af-policer
set interfaces ge-1/2/0 unit 0 family inet address 192.168.1.1/24
set interfaces ge-1/2/0 unit 0 family inet filter input mfc-filter
```

#### Configuring Policers to Rate-Limit Expedited-Forwarding and Assured-Forwarding Traffic

#### Step-by-Step Procedure

To configure policers to rate-limit expedited-forwarding and assured-forwarding traffic:

1. Define traffic limits for expedited-forwarding traffic.

```
[edit]
user@host# edit firewall policer ef-policer
```

```
[edit firewall policer ef-policer]
user@host# set if-exceeding bandwidth-limit 300k
user@host# set if-exceeding burst-size-limit 50k
user@host# set then loss-priority high
user@host# set then forwarding-class expedited-forwarding
```

2. Configure a policer for assured-forwarding traffic.

```
[edit firewall policer ef-policer]
user@host# up
```

```
[edit firewall]
user@host# edit policer af-policer
```

```
[edit firewall policer af-policer]
user@host# set if-exceeding bandwidth-limit 300k
user@host# set if-exceeding burst-size-limit 50k
user@host# set then loss-priority high
user@host# set then forwarding-class assured-forwarding
```

**Results** Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer af-policer {
 if-exceeding {
 bandwidth-limit 300k;
 burst-size-limit 50k;
 }
 then {
 loss-priority high;
 forwarding-class assured-forwarding;
 }
}
policer ef-policer {
 if-exceeding {
 bandwidth-limit 300k;
 burst-size-limit 50k;
 }
 then {
 loss-priority high;
 forwarding-class expedited-forwarding;
 }
}
```

### *Configuring a Multifield Classification Filter That Also Applies Policing*

**Step-by-Step Procedure** To configure a multifield classification filter that additionally applies policing:

1. Enable configuration of a firewall filter term for IPv4 traffic.

```
[edit]
user@host# edit firewall family inet filter mfc-filter
```

2. Configure the first term to match on source addresses and then classify the matched packets.

```
[edit firewall family inet filter mfc-filter]
user@host# set term isp1-customers from source-address 10.1.1.0/24
user@host# set term isp1-customers from source-address 10.1.2.0/24
user@host# set term isp1-customers then loss-priority low
user@host# set term isp1-customers then forwarding-class expedited-forwarding
```

3. Configure the second term to match on different source addresses and then police the matched packets.

```
[edit firewall family inet filter mfc-filter]
user@host# set term isp2-customers from source-address 10.1.3.0/24
user@host# set term isp2-customers from source-address 10.1.4.0/24
user@host# set term isp2-customers then policer ef-policer
```

4. Configure the third term to police all other packets to a different set of traffic limits and actions.

```
[edit firewall family inet filter mfc-filter]
user@host# set term other-customers then policer af-policer
```

**Results** Confirm the configuration of the filter by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
family inet {
 filter mfc-filter {
 term isp1-customers {
 from {
 source-address 10.1.1.0/24;
 source-address 10.1.2.0/24;
 }
 then {
 loss-priority low;
 forwarding-class expedited-forwarding;
 }
 }
 term isp2-customers {
 from {
 source-address 10.1.3.0/24;
 source-address 10.1.4.0/24;
 }
 then {
 policer ef-policer;
 }
 }
 term other-customers {
 then {
 policer af-policer;
 }
 }
 }
}
```

```

policer af-policer {
 if-exceeding {
 bandwidth-limit 300k;
 burst-size-limit 50k;
 }
 then discard;
}
policer ef-policer {
 if-exceeding {
 bandwidth-limit 200k;
 burst-size-limit 50k;
 }
 then {
 loss-priority high;
 forwarding-class expedited-forwarding;
 }
}

```

### *Applying Multifield Classification Filtering and Policing to the Logical Interface*

#### **Step-by-Step Procedure**

To apply multifield classification filtering and policing to the logical interface:

1. Enable configuration of IPv4 on the logical interface.

```

[edit]
user@host# edit interfaces ge-1/2/0 unit 0 family inet

```

2. Configure an IP address for the logical interface.

```

[edit interfaces ge-1/2/0 unit 0 family inet]
user@host# set address 192.168.1.1/24

```

3. Apply the firewall filter to the logical interface input.

```

[edit interfaces ge-1/2/0 unit 0 family inet]
user@host# set filter input mfc-filter

```



**NOTE:** Because the policer is executed before the filter, if an input policer is also configured on the logical interface, it cannot use the forwarding class and PLP of a multifield classifier associated with the interface.

**Results** Confirm the configuration of the interface by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
ge-1/2/0 {
 unit 0 {
 family inet {
 filter {
 input mfc-filter;
 }
 address 192.168.1.1/24;
 }
 }
}

```

```

 }
 }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

#### *Displaying the Number of Packets Processed by the Policer at the Logical Interface*

**Purpose** Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

**Action** Use the **show firewall** operational mode command for the filter you applied to the logical interface.

```

user@host> show firewall filter rate-limit-in
Filter: rate-limit-in
Policers:
Name Packets
ef-policer-isp2-customers 32863
af-policer-other-customers 3870

```

The command output lists the policers applied by the firewall filter **rate-limit-in**, and the number of packets that matched the filter term.



**NOTE:** The packet count includes the number of out-of-specification (out-of-spec) packet counts, not all packets policed by the policer.

The policer name is displayed concatenated with the name of the firewall filter term in which the policer is referenced as an action.

## Example: Configuring a Multifield Classifier

This example shows how to configure a firewall filter to classify traffic using a multifield classifier. The classifier detects packets of interest to CoS as they arrive on an interface.

- [Requirements on page 108](#)
- [Overview on page 109](#)
- [Configuration on page 110](#)
- [Verification on page 113](#)

### Requirements

To verify this procedure, this example uses a traffic generator. The traffic generator can be hardware-based or it can be software running on a server or host machine.

The functionality in this procedure is widely supported on devices that run Junos OS. The example shown here was tested and verified on MX Series routers running Junos OS Release 10.4.

### Overview


A classifier is a software operation that inspects a packet as it enters the router or switch. The packet header contents are examined, and this examination determines how the packet is treated when the network becomes too busy to handle all of the packets and you want your devices to drop packets intelligently, instead of dropping packets indiscriminately. One common way to detect packets of interest is by source port number. The TCP port numbers 80 and 12345 are used in this example, but many other matching criteria for packet detection are available to multifield classifiers, using firewall filter match conditions. The configuration in this example specifies that TCP packets with source port 80 are classified into the BE-data forwarding class and queue number 0. TCP packets with source port 12345 are classified into the Premium-data forwarding class and queue number 1.

Multifield classifiers are typically used at the network edge as packets enter an autonomous system (AS).

In this example, you configure the firewall filter `mf-classifier` and specify some custom forwarding classes on Device R1. In specifying the custom forwarding classes, you also associate each class with a queue.

The classifier operation is shown in [Figure 11 on page 109](#).

**Figure 11: Multifield Classifier Based on TCP Source Ports**

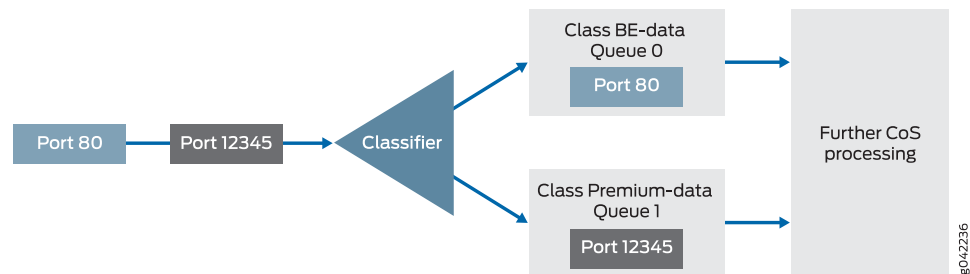


You apply the multifield classifier's firewall filter as an input filter on each customer-facing or host-facing interface that needs the filter. The incoming interface is `ge-1/0/0` on Device R1. The classification and queue assignment is verified on the outgoing interface. The outgoing interface is Device R1's `ge-1/0/2` interface.

### Topology

[Figure 12 on page 110](#) shows the sample network.

Figure 12: Multifield Classifier Scenario

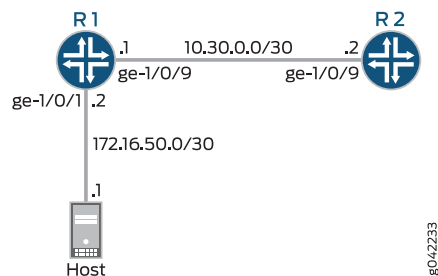

“CLI Quick Configuration” on page 110 shows the configuration for all of the Juniper Networks devices in Figure 12 on page 110.

The section “Step-by-Step Procedure” on page 111 describes the steps on Device R1.



Video:

### Configuration

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CLI Quick Configuration | To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the <b>[edit]</b> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Device R1               | <pre> set interfaces ge-1/0/0 description to-host set interfaces ge-1/0/0 unit 0 family inet filter input mf-classifier set interfaces ge-1/0/0 unit 0 family inet address 172.16.50.2/30 set interfaces ge-1/0/2 description to-R2 set interfaces ge-1/0/2 unit 0 family inet address 10.30.0.1/30 set class-of-service forwarding-classes class BE-data queue-num 0 set class-of-service forwarding-classes class Premium-data queue-num 1 set class-of-service forwarding-classes class Voice queue-num 2 set class-of-service forwarding-classes class NC queue-num 3 set firewall family inet filter mf-classifier term BE-data from protocol tcp set firewall family inet filter mf-classifier term BE-data from port 80 set firewall family inet filter mf-classifier term BE-data then forwarding-class BE-data set firewall family inet filter mf-classifier term Premium-data from protocol tcp set firewall family inet filter mf-classifier term Premium-data from port 12345 set firewall family inet filter mf-classifier term Premium-data then forwarding-class Premium-data set firewall family inet filter mf-classifier term accept-all-else then accept </pre> |
| Device R2               | <pre> set interfaces ge-1/0/2 description to-R1 set interfaces ge-1/0/2 unit 0 family inet address 10.30.0.2/30 </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device R1:

1. Configure the device interfaces.

```
[edit interfaces]
user@R1# set ge-1/0/0 description to-host
user@R1# set ge-1/0/0 unit 0 family inet address 172.16.50.2/30
```

```
user@R1# set ge-1/0/2 description to-R2
user@R1# set ge-1/0/2 unit 0 family inet address 10.30.0.1/30
```

2. Configure the custom forwarding classes and associated queue numbers.

```
[edit class-of-service forwarding-classes]
user@R1# set BE-data queue-num 0
user@R1# set Premium-data queue-num 1
user@R1# set Voice queue-num 2
user@R1# set NC queue-num 3
```

3. Configure the firewall filter term that places TCP traffic with a source port of 80 (HTTP traffic) into the BE-data forwarding class, associated with queue 0.

```
[edit firewall family inet filter mf-classifier]
user@R1# set term BE-data from protocol tcp
user@R1# set term BE-data from port 80
user@R1# set term BE-data then forwarding-class BE-data
```

4. Configure the firewall filter term that places TCP traffic with a source port of 12345 into the Premium-data forwarding class, associated with queue 1.

```
[edit firewall family inet filter mf-classifier]
user@R1# set term Premium-data from protocol tcp
user@R1# set term Premium-data from port 12345
user@R1# set term Premium-data then forwarding-class Premium-data
```

5. At the end of your firewall filter, configure a default term that accepts all other traffic.

Otherwise, all traffic that arrives on the interface and is not explicitly accepted by the firewall filter is discarded.

```
[edit firewall family inet filter mf-classifier]
user@R1# set term accept-all-else then accept
```

6. Apply the firewall filter to the ge-1/0/0 interface as an input filter.

```
[edit interfaces]
user@R1# set ge-1/0/0 unit 0 family inet filter input mf-classifier
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show class-of-service**, **show firewall** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
```

```
ge-1/0/0 {
 description to-host;
 unit 0 {
 family inet {
 filter {
 input mf-classifier;
 }
 address 172.16.50.2/30;
 }
 }
}
ge-1/0/2 {
 description to-R2;
 unit 0 {
 family inet {
 address 10.30.0.1/30;
 }
 }
}

user@R1# show class-of-service
forwarding-classes {
 class BE-data queue-num 0;
 class Premium-data queue-num 1;
 class Voice queue-num 2;
 class NC queue-num 3;
}

user@R1# show firewall
family inet {
 filter mf-classifier {
 term BE-data {
 from {
 protocol tcp;
 port 80;
 }
 then forwarding-class BE-data;
 }
 term Premium-data {
 from {
 protocol tcp;
 port 12345;
 }
 then forwarding-class Premium-data;
 }
 term accept-all-else {
 then accept;
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the CoS Settings on page 113](#)
- [Sending TCP Traffic into the Network and Monitoring the Queue Placement on page 113](#)

### Checking the CoS Settings

**Purpose** Confirm that the forwarding classes are configured correctly.

**Action** From Device R1, run the **show class-of-service forwarding-classes** command.

```
user@R1> show class-of-service forwarding-class
```

| Forwarding class                        | ID | Queue    | Restricted queue | Fabric |
|-----------------------------------------|----|----------|------------------|--------|
| priority Policing priority SPU priority |    |          |                  |        |
| <b>BE-data</b>                          | 0  | <b>0</b> | 0                | low    |
| normal                                  |    |          |                  |        |
| <b>Premium-data</b>                     | 1  | <b>1</b> | 1                | low    |
| normal                                  |    |          |                  |        |
| Voice                                   | 2  | 2        | 2                | low    |
| normal                                  |    |          |                  |        |
| NC                                      | 3  | 3        | 3                | low    |
| normal                                  |    |          |                  |        |

**Meaning** The output shows the configured custom classifier settings.

### Sending TCP Traffic into the Network and Monitoring the Queue Placement

**Purpose** Make sure that the traffic of interest is sent out the expected queue.

**Action** 1. Clear the interface statistics on Device R1's outgoing interface.

```
user@R1> clear interfaces statistics ge-1/0/2
```

2. Use a traffic generator to send 50 TCP port 80 packets to Device R2 or to some other downstream device.

3. On Device R1, check the queue counters.

Notice that you check the queue counters on the downstream output interface, not on the incoming interface.

```
user@R1> show interfaces extensive ge-1/0/2 | find "Queue counters"
```

| Queue counters: | Queued packets | Transmitted packets | Dropped packets |
|-----------------|----------------|---------------------|-----------------|
| 0               | <b>50</b>      | 50                  |                 |
| 0               |                |                     |                 |
| 1               | 0              | 57                  |                 |
| 0               |                |                     |                 |
| 2               | 0              | 0                   |                 |
| 0               |                |                     |                 |
| 3               | 0              | 0                   |                 |
| 0               |                |                     |                 |

4. Use a traffic generator to send 50 TCP port 12345 packets to Device R2 or to some other downstream device.
5. On Device R1, check the queue counters.

```
user@R1> show interfaces extensive ge-1/0/2 | find "Queue counters"
```

| Queue counters: | Queued packets | Transmitted packets | Dropped packets |
|-----------------|----------------|---------------------|-----------------|
| 0               |                | 50                  | 50              |
| 0               |                |                     |                 |
| 1               | 50             |                     | 57              |
| 0               |                |                     |                 |
| 2               | 0              |                     | 0               |
| 0               |                |                     |                 |
| 3               | 0              |                     | 0               |
| 0               |                |                     |                 |

**Meaning** The output shows that the packets are classified correctly. When port 80 is used in the TCP packets, queue 0 is incremented. When port 12345 is used, queue 1 is incremented.

#### Related Documentation

- [Standard Firewall Filter Nonterminating Actions](#)
- [Order of Policer and Firewall Filter Operations on page 10](#)
- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Guidelines for Applying Traffic Policers on page 23](#)
- [Junos CoS Components](#)
- [BA Classifier Overview](#)
- [Overview of Forwarding Classes](#)
- [Default Forwarding Classes](#)
- [RED Drop Profiles Overview](#)
- [tri-color statement](#)

## Policer Overhead to Account for Rate Shaping in the Traffic Manager

- [Policer Overhead to Account for Rate Shaping Overview on page 114](#)
- [Example: Configuring Policer Overhead to Account for Rate Shaping on page 115](#)

### Policer Overhead to Account for Rate Shaping Overview

If you configure ingress or egress traffic-shaping overhead values for an interface, the traffic manager cannot apply these values to any rate-limiting also applied to the interface. To enable the router to account for the additional Ethernet frame length when policing actions are being determined, you must configure the ingress or egress overhead values for policers separately.



**NOTE:** When a policer overhead value is changed, the PIC or DPC goes offline and then comes back online.

For Gigabit Ethernet Intelligent Queuing 2 (IQ2) and Enhanced IQ2 (IQ2E) PICs or interfaces on Dense Port Concentrators (DPCs) in MX Series routers, you can control the rate of traffic that passes through all interfaces on the PIC or DPC by configuring a *policer overhead*. You can configure a policer ingress overhead and a policer egress overhead, each with values from 0 through 255 bytes. The policer overhead values are added to the length of the final Ethernet frame when determining ingress and egress policer actions.

### Example: Configuring Policer Overhead to Account for Rate Shaping

This example shows how to configure overhead values for policers when rate-shaping overhead is configured.

- [Requirements on page 115](#)
- [Overview on page 115](#)
- [Configuration on page 116](#)
- [Verification on page 122](#)

#### Requirements

Before you begin, make sure that interface for which you are applying ingress or egress policer overhead is hosted on one of the following:

- Gigabit Ethernet IQ2 PIC
- IQ2E PIC
- DPCs in MX Series routers

#### Overview

This example shows how to configure policer overhead values for all physical interfaces on a supported PIC or MPC so that the rate shaping value configured on a logical interface is accounted for in any policing on that logical interface.

#### Topology

The router hosts a Gigabit Ethernet IQ2 PIC, installed in PIC location 3 of the Flexible PIC Concentrator (FPC) in slot number 1. The physical interface on port 1 on that PIC is configured to receive traffic on logical interface 0 and send it back out on logical interface 1. Class-of-service scheduling includes 100 Mbps of traffic rate-shaping overhead for the output traffic. A policer egress overhead of 100 bytes is configured on the entire PIC so that, for any policers applied to the output traffic, 100 bytes are added to the final Ethernet frame length when determining ingress and egress policer actions.

**NOTE:**

Traffic rate-shaping and corresponding policer overhead are configured separately:

- You configure rate shaping at the [edit class-of-service interfaces *interface-name* unit *unit-number*] hierarchy level.
- You configure policer overhead at the [edit chassis fpc *slot-number* pic *pic-number*] hierarchy level.

When a policer overhead value is changed, the PIC or DPC goes offline and then comes back online.

### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interfaces on page 117](#)
- [Configuring Traffic Rate-Shaping on the Logical Interface That Carries Output Traffic on page 118](#)
- [Configuring Policer Overhead on the PIC or MPC That Hosts the Rate-Shaped Logical Interface on page 120](#)
- [Applying a Policer to the Logical Interface That Carries Input Traffic on page 120](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the [edit] hierarchy level.

```
set interfaces ge-1/3/1 per-unit-scheduler
set interfaces ge-1/3/1 vlan-tagging
set interfaces ge-1/3/1 unit 0 vlan-id 100
set interfaces ge-1/3/1 unit 0 family inet address 10.10.10.1/30
set interfaces ge-1/3/1 unit 1 vlan-id 101
set interfaces ge-1/3/1 unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
 00:00:11:22:33:44
set class-of-service schedulers be transmit-rate percent 5
set class-of-service schedulers ef transmit-rate percent 30
set class-of-service schedulers af transmit-rate percent 30
set class-of-service schedulers nc transmit-rate percent 35
set class-of-service scheduler-maps my-map forwarding-class best-effort scheduler be
set class-of-service scheduler-maps my-map forwarding-class expedited-forwarding
 scheduler ef
set class-of-service scheduler-maps my-map forwarding-class network-control scheduler
 nc
set class-of-service scheduler-maps my-map forwarding-class assured-forwarding
 scheduler af
set class-of-service interfaces ge-1/3/1 unit 1 scheduler-map my-map
set class-of-service interfaces ge-1/3/1 unit 1 shaping-rate 100m
```

```

set firewall policer 500Kbps logical-interface-policer
set firewall policer 500Kbps if-exceeding bandwidth-limit 500k
set firewall policer 500Kbps if-exceeding burst-size-limit 625k
set firewall policer 500Kbps then discard
set chassis fpc 1 pic 3 ingress-policer-overhead 100
set chassis fpc 1 pic 3 egress-policer-overhead 100
set interfaces ge-1/3/1 unit 0 family inet policer input 500Kbps

```

### Configuring the Logical Interfaces

#### Step-by-Step Procedure

To configure the logical interfaces:

1. Enable configuration of the interface

```

[edit]
user@host# edit interfaces ge-1/3/1

```

2. Enable multiple queues for each logical interface (so that you can associate an output scheduler with each logical interface).

```

[edit interfaces ge-1/3/1]
user@host# set per-unit scheduler
user@host# set vlan-tagging

```



**NOTE:** For Gigabit Ethernet IQ2 PICs only, use the `shared-scheduler` statement to enable shared schedulers and shapers on a physical interface.

3. Configure logical interface `ge-1/3/1.0`.

```

[edit interfaces ge-1/3/1]
user@host# set unit 0 vlan-id 100
user@host# set unit 0 family inet address 10.10.10.1/30

```

4. Configure logical interface `ge-1/3/1.1`.

```

[edit interfaces ge-1/3/1]
user@host# set unit 1 vlan-id 101
user@host# set unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
00:00:11:22:33:44

```

**Results** Confirm the configuration of the interfaces by entering the `show interfaces` configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
ge-1/3/1 {
 per-unit-scheduler;
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 family inet {
 address 10.10.10.1/30;

```

```

 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}

```

### *Configuring Traffic Rate-Shaping on the Logical Interface That Carries Output Traffic*

#### **Step-by-Step Procedure**

To configure traffic rate-shaping on the logical interface that carries output traffic:

1. Enable configuration of class-of-service features.

```

[edit]
user@host# edit class-of-service

```

2. Configure packet scheduling on logical interface **ge-1/3/1.0**.

- a. Configure schedulers that specify the percentage of transmission capacity.

```

[edit class-of-service]
user@host# edit schedulers

[edit class-of-service schedulers]
user@host# set be transmit-rate percent 5
user@host# set ef transmit-rate percent 30
user@host# set af transmit-rate percent 30
user@host# set nc transmit-rate percent 35

```

A percentage of zero drops all packets in the queue. When the **rate-limit** option is specified, the transmission rate is limited to the rate-controlled amount. In contrast with the **exact** option, a scheduler with the **rate-limit** option shares unused bandwidth above the rate-controlled amount.

- b. Configure a scheduler map to associate each scheduler with a forwarding class.

```

[edit class-of-service]
user@host# edit scheduler-maps my-map

[edit class-of-service scheduler-maps my-map]
user@host# set forwarding-class best-effort scheduler be
user@host# set forwarding-class expedited-forwarding scheduler ef
user@host# set forwarding-class network-control scheduler nc
user@host# set forwarding-class assured-forwarding scheduler af

```

- c. Associate the scheduler map with logical interface **ge-1/3/1.0**.

```

[edit class-of-service]
user@host# edit interfaces ge-1/3/1 unit 1

[edit class-of-service interfaces ge-1/3/1 unit 1]
user@host# set scheduler-map my-map

```



3. Configure 100 Mbps of traffic rate-shaping overhead on logical interface **ge-1/3/1.1**.

```
[edit class-of-service interfaces ge-1/3/1 unit 1]
user@host# set shaping-rate 100
```

Alternatively, you can configure a shaping rate for a logical interface and oversubscribe the physical interface by including the **shaping-rate** statement at the **[edit class-of-service traffic-control-profiles]** hierarchy level. With this configuration approach, you can independently control the delay-buffer rate.

**Results** Confirm the configuration of the class-of-service features (including the 100 Mbp of shaping of the egress traffic) by entering the **show class-of-service** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show class-of-service
interfaces {
 ge-1/3/1 {
 unit 1 {
 scheduler-map my-map;
 shaping-rate 100m;
 }
 }
}
scheduler-maps {
 my-map {
 forwarding-class best-effort scheduler be;
 forwarding-class expedited-forwarding scheduler ef;
 forwarding-class network-control scheduler nc;
 forwarding-class assured-forwarding scheduler af;
 }
}
schedulers {
 be {
 transmit-rate percent 5;
 }
 ef {
 transmit-rate percent 30;
 }
 af {
 transmit-rate percent 30;
 }
 nc {
 transmit-rate percent 35;
 }
}
```

### *Configuring Policer Overhead on the PIC or MPC That Hosts the Rate-Shaped Logical Interface*

**Step-by-Step Procedure** To configure policer overhead on the PIC or MPC that hosts the rate-shaped logical interface:

1. Enable configuration of the supported PIC or MPC.  

```
[edit]
user@host# set chassis fpc 1 pic 3
```
2. Configure 100 bytes of policer overhead on the supported PIC or MPC.  

```
[edit]
user@host# set ingress-policer-overhead 100
user@host# set egress-policer-overhead 100
```



**NOTE:** These values are added to the length of the final Ethernet frame when determining ingress and egress policer actions for all physical interfaces on the PIC or MPC.

You can specify policer overhead with values from 0 through 255 bytes.

**Results** Confirm the configuration of the policer overhead on the physical interface to account for rate-shaping by entering the **show chassis** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show chassis
chassis {
 fpc 1 {
 pic 3 {
 egress-policer-overhead 100;
 ingress-policer-overhead 100;
 }
 }
}
```

### *Applying a Policer to the Logical Interface That Carries Input Traffic*

**Step-by-Step Procedure** To apply a policer to the logical interface that carries input traffic:

1. Configure the logical interface (aggregate) policer.  

```
[edit]
user@host# edit firewall policer 500Kbps

[edit firewall policer 500Kbps]
user@host# set logical-interface-policer
user@host# set if-exceeding bandwidth-limit 500k
user@host# set if-exceeding burst-size-limit 625k
user@host# set then discard
```

2. Apply the policer to Layer 3 input on the IPv4 logical interface.

[edit]

```
user@host# set interfaces ge-1/3/1 unit 0 family inet policer input 500Kbps
```



**NOTE:** The 100 Mbps policer overhead is added to the length of the final Ethernet frame when determining ingress and egress policer actions,

**Results** Confirm the configuration of the policer with rate-shaping overhead by entering the **show firewall** and **show interfaces** configuration mode commands. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

[edit]

```
user@host# show firewall
```

```
policer 500Kbps {
 logical-interface-policer;
 if-exceeding {
 bandwidth-limit 500k;
 burst-size-limit 625k;
 }
 then discard;
}
```

[edit]

```
user@host# show interfaces
```

```
ge-1/3/1 {
 per-unit-scheduler;
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 layer2-policer {
 input-policer 500Kbps;
 }
 family inet {
 address 10.10.10.1/30;
 }
 }
}
unit 0 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

---

Confirm that the configuration is working properly.

- [Displaying Traffic Statistics and Policers for the Logical Interface on page 122](#)
- [Displaying Statistics for the Policer on page 122](#)

### *Displaying Traffic Statistics and Policers for the Logical Interface*

**Purpose** Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

**Action** Use the **show interfaces** operational mode command for logical interface **ge-1/3/1.0**, and include the **detail** or **extensive** option. The command output section for **Traffic statistics** lists the number of bytes and packets received and transmitted on the logical interface, and the **Protocol inet** section contains a **Policer** field that would list the policer **500Kbps** as an input or output policer as follows:

- Input: 500Kbps-ge-1/3/1.0-log\_int-i
- Output: 500Kbps-ge-1/3/1.0-log\_int-o

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to Input traffic only.

### *Displaying Statistics for the Policer*

**Purpose** Verify the number of packets evaluated by the policer.

**Action** Use the **show policer** operational mode command and optionally specify the name of the policer. The command output displays the number of packets evaluated by each configured policer (or the specified policer), in each direction. For the policer **500Kbps**, the input and output policer names are displayed as follows:

- 500Kbps-ge-1/3/1.0-log\_int-i
- 500Kbps-ge-1/3/1.0-log\_int-o

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to input traffic only.

### **Related Documentation**

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Guidelines for Applying Traffic Policers on page 23](#)
- “Configuring a Policer Overhead” in the [CLI Explorer](#)

## CHAPTER 6

# Configuring Three-Color Policers

- [Three-Color Policer Configuration Guidelines on page 123](#)
- [Basic Single-Rate Three-Color Policers on page 126](#)
- [Basic Two-Rate Three-Color Policers on page 132](#)

### Three-Color Policer Configuration Guidelines

---

- [Platforms Supported for Three-Color Policers on page 123](#)
- [Color Modes for Three-Color Policers on page 124](#)
- [Naming Conventions for Three-Color Policers on page 125](#)

### Platforms Supported for Three-Color Policers

Three-color policers are supported on the following Juniper Networks routers and switch:

- EX Series switches
- M120 Multiservice Edge Routers
- M320 Multiservice Edge Routers and T Series Core Routers with Enhanced II Flexible PIC Concentrators (FPCs)
- MX Series 3D Universal Edge Routers
- T640 Core Routers with Enhanced Scaling FPC4
- T4000 Core Routers with FPC5

On MX Series and M120 routers and EX Series switches, you can apply three-color policers to aggregated interfaces.

The **discard** action for a tricolor marking policer for a firewall filter is supported on the M120 routers, M320 routers with Enhanced-III FPCs, M7i and M10i routers with the Enhanced CFEB (CFEB-E), and MX Series routers with Trio MPCs and EX Series switches, so it is not necessary to include the **logical-interface-policer** statement for them.

## Color Modes for Three-Color Policers

Three-color policers—both single-rate and two-rate three-color policer schemes—can operate in either of two modes:

- [Color-Blind Mode on page 124](#)
- [Color-Aware Mode on page 124](#)

---

### Color-Blind Mode

In *color-blind* mode, the three-color policer assumes that all packets examined have not been previously marked or metered. If you configure a three-color policer to be color-blind instead of color-aware, the policer ignores preexisting color markings that might have been set for a packet by another traffic policer configured at a previous network node.

---

### Color-Aware Mode

In *color-aware* mode, the three-color policer assumes that all packets examined have been previously marked or metered. In other words, the three-color policer takes into account any coloring markings that might have been set for a packet by another traffic policer configured at a previous network node. At the node where color-aware policing is configured, any preexisting color markings are used in determining the appropriate policing action for the packet.

In color-aware mode, the three-color policer can increase the packet loss priority (PLP) level of a packet, but never decrease it. For example, if a color-aware three-color policer meters a packet with a medium PLP marking, it can raise the PLP level to high, but cannot reduce the PLP level to low.

For two-rate, three-color policing, the Junos OS uses two token buckets to manage bandwidth based on the two rates of traffic. For example, two-rate policing might be configured on a node upstream in the network. The two-rate policer has marked a packet as yellow (loss priority medium-low). The color-aware policer takes this yellow marking into account when determining the appropriate policing action. In color-aware policing, the yellow packet would never receive the action associated with either the green packets or red packets. This way, tokens for violating packets are never taken from the metering token buckets at the color-aware policing node.



**NOTE:** For a three-color policer operating in color-aware mode and when the PLP of the input packet is medium-low, the color of the input packet to the policer is mapped to the color yellow.

In such a scenario, if the color of the input packet remains unchanged, the policer operates in the following way:

- On a T1600 Enhanced Scaling Type 4 FPC (T1600-FPC4-ES), the PLP of the output packet remains medium-low.
- On a T4000 Type 5 FPC (T4000-FPC5-3D), the PLP of the output packet is marked as medium-high.

Because of this difference, for any applications (such as rewrite and WRED selection on egress interface) that use PLP, the packets are treated differently for the same flow depending on the FPC type (T1600 Enhanced Scaling FPC4 (T1600-FPC4-ES) or T4000 FPC5 (T4000-FPC5-3D)) on which the policer is applied.

## Naming Conventions for Three-Color Policers

Because policers can be numerous and must be applied correctly to work, a simple naming convention makes it easier to apply the policers properly.

We recommend that you name your policer using a convention that identifies the basic components of the policer:

- Three-color policer type—Where **srTCM** identifies a *single-rate* three-color policer and **trTCM** identifies a *two-rate* three-color policer.
- Three-color policer color mode—Where **ca** identifies a *color-aware* three-color policer and **cb** identifies a *color-blind three-color policer*.



**NOTE:**

TCM stands for tricolor marking.

Table 10 on page 125 describes a recommended naming convention for policers.

**Table 10: Recommended Naming Convention for Policers**

| Three-Color Policer Type             | Naming Convention     | Example Names                                 |
|--------------------------------------|-----------------------|-----------------------------------------------|
| Single-rate three-color, color-aware | <b>srTCMnumber-ca</b> | srTCM1-ca,<br>srTCM2-ca,<br>srTCM3-ca,<br>... |

Table 10: Recommended Naming Convention for Policers (*continued*)

| Three-Color Policer Type             | Naming Convention     | Example Names                                 |
|--------------------------------------|-----------------------|-----------------------------------------------|
| Single-rate three-color, color-blind | <b>srTCMnumber-cb</b> | srTCM1-cb,<br>srTCM2-cb,<br>srTCM3-cb,<br>... |
| Two-rate three-color, color-aware    | <b>trTCMnumber-ca</b> | trTCM1-ca,<br>trTCM2-ca,<br>trTCM3-ca,<br>... |
| Two-rate three-color, color-blind    | <b>trTCMnumber-cb</b> | trTCM1-cb,<br>trTCM2-cb,<br>trTCM3-cb,<br>... |

#### Related Documentation

- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Three-Color Policer Configuration Overview on page 19](#)
- [Guidelines for Applying Traffic Policers on page 23](#)

## Basic Single-Rate Three-Color Policers

- [Single-Rate Three-Color Policer Overview on page 126](#)
- [Example: Configuring a Single-Rate Three-Color Policer on page 127](#)

### Single-Rate Three-Color Policer Overview

A single-rate three-color policer defines a bandwidth limit and a maximum burst size for guaranteed traffic and a second burst size for peak traffic. A single-rate three-color policer is most useful when a service is structured according to packet length and not peak arrival rate.

Single-rate three-color policing meters a traffic stream based on the following configured traffic criteria:

- Committed information rate (CIR)—Bandwidth limit for guaranteed traffic.
- Committed burst size (CBS)—Maximum packet size permitted for bursts of data that exceed the CIR.
- Excess burst size (EBS)—Maximum packet size permitted for peak traffic.



Single-rate tricolor marking (single-rate TCM) classifies traffic as belonging to one of three color categories and performs congestion-control actions on the packets based on the color marking:

- Green—Traffic that conforms to *either* the bandwidth limit *or* the burst size for guaranteed traffic (CIR and CBS). For a green traffic flow, single-rate marks the packets with an implicit loss priority of **low** and transmits the packets.
- Yellow—Traffic that exceeds *both* the bandwidth limit *and* the burst size for guaranteed traffic (CIR or CBS) but not the burst size for peak traffic (EBS). For a yellow traffic flow, single-rate marks the packets with an implicit loss priority of **medium-high** and transmits the packets.
- Red—Traffic that exceeds the burst size for peak traffic (EBS), single-rate marks packets with an implicit loss priority of **high** and, optionally, discards the packets.

If congestion occurs downstream, the packets with higher loss priority are more likely to be discarded.



**NOTE:** For both single-rate and two-rate three-color policers, the only *configurable* action is to discard packets in a red traffic flow.

The **discard** action for a tricolor marking policer for a firewall filter is supported on the M120 routers, M320 routers with Enhanced-III FPCs, M7i and M10i routers with the Enhanced CFEB (CFEB-E), and MX Series routers with Trio MPCs and EX Series switches, so it is not necessary to include the **logical-interface-policer** statement for them.

## Example: Configuring a Single-Rate Three-Color Policer

This example shows how to configure a single-rate three-color policer.

- [Requirements on page 127](#)
- [Overview on page 127](#)
- [Configuration on page 128](#)
- [Verification on page 131](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview

A single-rate three-color policer meters a traffic flow against a bandwidth limit and burst-size limit for guaranteed traffic, plus a second burst-size limit for excess traffic. Traffic that conforms to the limits for guaranteed traffic is categorized as green, and nonconforming traffic falls into one of two categories:

- Nonconforming traffic that does not exceed the burst size for excess traffic is categorized as yellow.

- Nonconforming traffic that exceeds the burst size for excess traffic is categorized as red.

Each category is associated with an action. For green traffic, packets are implicitly set with a loss-priority value of **low** and then transmitted. For yellow traffic, packets are implicitly set with a loss-priority value of **medium-high** and then transmitted. For red traffic, packets are implicitly set with a loss-priority value of **high** and then transmitted. If the policer configuration includes the optional **action** statement (**action loss-priority high then discard**), then packets in a red flow are discarded instead.

You can apply a three-color policer to Layer 3 traffic as a firewall filter policer only. You reference the policer from a stateless firewall filter term, and then you apply the filter to the input or output of a logical interface at the protocol level.

### **Topology**

In this example, you apply a color-aware, single-rate three-color policer to the input IPv4 traffic at logical interface **ge-2/0/5.0**. The IPv4 firewall filter term that references the policer does not apply any packet-filtering. The filter is used only to apply the three-color policer to the interface.

You configure the policer to rate-limit traffic to a bandwidth limit of 40 Mbps and a burst-size limit of 100 KB for green traffic but also allow an excess burst-size limit of 200 KB for yellow traffic. Only nonconforming traffic that exceeds the peak burst-size limit is categorized as red. In this example, you configure the three-color policer action **loss-priority high then discard**, which overrides the implicit marking of red traffic to a **high** loss priority.

### **Configuration**

---

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring a Single-Rate Three-Color Policer on page 129](#)
- [Configuring an IPv4 Stateless Firewall Filter That References the Policer on page 130](#)
- [Applying the Filter to the Logical Interface on page 130](#)

### **CLI Quick Configuration**

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set firewall three-color-policer srTCM1-ca single-rate color-aware
set firewall three-color-policer srTCM1-ca single-rate committed-information-rate 40m
set firewall three-color-policer srTCM1-ca single-rate committed-burst-size 100k
set firewall three-color-policer srTCM1-ca single-rate excess-burst-size 200k
set firewall three-color-policer srTCM1-ca action loss-priority high then discard
set firewall family inet filter filter-srTCM1ca-all term 1 then three-color-policer single-rate
srTCM1-ca
set class-of-service interfaces ge-2/0/5 unit 0 forwarding-class af
set interfaces ge-2/0/5 unit 0 family inet address 10.20.130.1/24
```

```
set interfaces ge-2/0/5 unit 0 family inet filter input filter-srTCM1ca-all
```

### Configuring a Single-Rate Three-Color Policer

#### Step-by-Step Procedure

To configure a single-rate three-color policer:

1. Enable configuration of a three-color policer.

```
[edit]
user@host# edit firewall three-color-policer srTCM1-ca
```

2. Configure the color mode of the single-rate three-color policer.

```
[edit firewall three-color-policer srTCM1-ca]
user@host# set single-rate color-aware
```

3. Configure the single-rate guaranteed traffic limits.

```
[edit firewall three-color-policer srTCM1-ca]
user@host# set single-rate committed-information-rate 40m
user@host# set single-rate committed-burst-size 100k
```

4. Configure the single-rate burst-size limit that is used to classify nonconforming traffic.

```
[edit firewall three-color-policer srTCM1-ca]
user@host# set single-rate excess-burst-size 200k
```

5. (Optional) Configure the action for nonconforming traffic.

```
[edit firewall three-color-policer srTCM1-ca]
user@host# set action loss-priority high then discard
```

For three-color policers, the only configurable action is to discard packets in a red traffic flow. In this example, packets in a red traffic flow have been implicitly marked with a **high** packet loss priority (PLP) level because the traffic flow exceeded the rate-limiting defined by the single rate-limit (specified by the **committed-information-rate 40m** statement) and the larger burst-size limit (specified by the **excess-burst-size 200k** statement). Because the optional **action** statement is included, this example takes the more severe action of discarding packets in a red traffic flow.

**Results** Confirm the configuration of the hierarchical policer by entering the **show firewall** configuration command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
three-color-policer srTCM1-ca {
 action {
 loss-priority high then discard;
 }
 single-rate {
 color-aware;
 committed-information-rate 40m;
 committed-burst-size 100k;
 excess-burst-size 200k;
 }
}
```

*Configuring an IPv4 Stateless Firewall Filter That References the Policer***Step-by-Step Procedure**

To configure a standard stateless firewall filter that references the policer:

1. Enable configuration of an IPv4 standard stateless firewall filter.

```
[edit]
user@host# edit firewall family inet filter filter-srtcm1ca-all
```

2. Specify the filter term that references the policer.

```
[edit firewall family inet filter filter-srtcm1ca-all]
user@host# set term 1 then three-color-policer single-rate srTCM1-ca
```

Note that the term does not specify any match conditions. The firewall filter passes all packets to the policer.

**Results**

Confirm the configuration of the firewall filter by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
family inet {
 filter filter-srtcm1ca-all {
 term 1 {
 then {
 three-color-policer {
 single-rate srTCM1-ca;
 }
 }
 }
 }
}
three-color-policer srTCM1-ca {
 action {
 loss-priority high then discard;
 }
 single-rate {
 color-aware;
 committed-information-rate 40m;
 committed-burst-size 100k;
 excess-burst-size 200k;
 }
}
```

*Applying the Filter to the Logical Interface***Step-by-Step Procedure**

To apply the filter to the logical interface:

1. (MX Series routers and EX Series switches only) (Optional) Reclassify all incoming packets on the logical interface **ge-2/0/5.0** to assured forwarding, regardless of any preexisting classification.

```
[edit]
user@host# set class-of-service interfaces ge-2/0/5 unit 0 forwarding-class af
```

The classifier name can be a configured classifier or one of the default classifiers.

2. Enable configuration of the logical interface.

```
[edit]
user@host# edit interfaces ge-2/0/5 unit 0 family inet
```

3. Configure an IP address.

```
[edit interfaces ge-2/0/5 unit 0 family inet]
user@host# set address 10.20.130.1/24
```

4. Reference the filter as an input filter.

```
[edit interfaces ge-2/0/5 unit 0 family inet]
user@host# set filter input filter-srtcm1ca-all
```

**Results** Confirm the configuration of the interface by entering the **show class-of-service** and **show interfaces** configuration mode commands. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show class-of-service
interfaces {
 ge-2/0/5 {
 unit 0 {
 forwarding-class af;
 }
 }
}
[edit]
user@host# show interfaces
ge-2/0/5 {
 unit 0 {
 family inet {
 filter {
 input filter-srtcm1ca-all;
 }
 address 10.20.130.1/24;
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

#### *Displaying the Firewall Filters Applied to the Logical Interface*

**Purpose** Verify that the firewall filter is applied to IPv4 input traffic at the logical interface.

**Action** Use the **show interfaces** operational mode command for the logical interface **ge-2/0/5.0**, and specify **detail** mode. The **Protocol inet** section of the command output displays IPv4

information for the logical interface. Within that section, the **Input Filters** field displays the name of the firewall filter applied to IPv4 input traffic at the logical interface.

```
user@host> show interfaces ge-2/0/5.0 detail
Logical interface ge-2/0/5.0 (Index 105) (SNMP ifIndex 556) (Generation 170)
Flags: Device-Down SNMP-Traps 0x4004000 Encapsulation: ENET2
Traffic statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
Local statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
Transit statistics:
 Input bytes : 0 0 bps
 Output bytes : 0 0 bps
 Input packets: 0 0 pps
 Output packets: 0 0 pps
Protocol inet, MTU: 1500, Generation: 242, Route table: 0
Flags: Sendbcast-pkt-to-re
Input Filters: filter-srtcm1ca-all
Addresses, Flags: Dest-route-down Is-Preferred Is-Primary
Destination: 10.20.130/24, Local: 10.20.130.1, Broadcast: 10.20.130.255,
Generation: 171
Protocol multiservice, MTU: Unlimited, Generation: 243, Route table: 0
Policer: Input: __default_arp_policer__
```

- Related Documentation**
- [Statement Hierarchy for Configuring Policers on page 13](#)
  - [Three-Color Policer Configuration Overview on page 19](#)
  - [Three-Color Policer Configuration Guidelines on page 123](#)

## Basic Two-Rate Three-Color Policers

- [Two-Rate Three-Color Policer Overview on page 132](#)
- [Example: Configuring a Two-Rate Three-Color Policer on page 133](#)

### Two-Rate Three-Color Policer Overview

A two-rate three-color policer defines two bandwidth limits (one for guaranteed traffic and one for peak traffic) and two burst sizes (one for each of the bandwidth limits). A two-rate three-color policer is most useful when a service is structured according to arrival rates and not necessarily packet length.

Two-rate three-color policing meters a traffic stream based on the following configured traffic criteria:

- Committed information rate (CIR)—Bandwidth limit for guaranteed traffic.
- Committed burst size (CBS)—Maximum packet size permitted for bursts of data that exceed the CIR.

- Peak information rate (PIR)—Bandwidth limit for peak traffic.
- Peak burst size (PBS)—Maximum packet size permitted for bursts of data that exceed the PIR.

Two-rate tricolor marking (two-rate TCM) classifies traffic as belonging to one of three color categories and performs congestion-control actions on the packets based on the color marking:

- Green—Traffic that conforms to the bandwidth limit and burst size for guaranteed traffic (CIR and CBS). For a green traffic flow, two-rate TCM marks the packets with an implicit loss priority of **low** and transmits the packets.
- Yellow—Traffic that exceeds the bandwidth limit or burst size for guaranteed traffic (CIR or CBS) but not the bandwidth limit and burst size for peak traffic (PIR and PBS). For a yellow traffic flow, two-rate TCM marks packets with an implicit loss priority of **medium-high** and transmits the packets.
- Red—Traffic that exceeds the bandwidth limit and burst size for peak traffic (PIR and PBS). For a red traffic flow, two-rate TCM marks packets with an implicit loss priority of **high** and, optionally, discards the packets.

If congestion occurs downstream, the packets with higher loss priority are more likely to be discarded.



**NOTE:** For both single-rate and two-rate three-color policers, the only *configurable* action is to discard packets in a red traffic flow.

For a tricolor marking policer referenced by a firewall filter term, the **discard** policing action is supported on the following routing and switching platforms:

- EX Series switches
- M7i and M10i routers with the Enhanced CFEB (CFEB-E)
- M120 and M320 routers with Enhanced-III FPCs
- MX Series routers with Trio MPCs

To apply a tricolor marking policer on these routing platforms, it is not necessary to include the **logical-interface-policer** statement.

### Example: Configuring a Two-Rate Three-Color Policer

This example shows how to configure a two-rate three-color policer.

- [Requirements on page 134](#)
- [Overview on page 134](#)
- [Configuration on page 134](#)
- [Verification on page 137](#)

## Requirements

---

No special configuration beyond device initialization is required before configuring this example.

## Overview

---

A two-rate three-color policer meters a traffic flow against a bandwidth limit and burst-size limit for guaranteed traffic, plus a bandwidth limit and burst-size limit for peak traffic. Traffic that conforms to the limits for guaranteed traffic is categorized as green, and nonconforming traffic falls into one of two categories:

- Nonconforming traffic that does not exceed peak traffic limits is categorized as yellow.
- Nonconforming traffic that exceeds peak traffic limits is categorized as red.

Each category is associated with an action. For green traffic, packets are implicitly set with a loss-priority value of **low** and then transmitted. For yellow traffic, packets are implicitly set with a loss-priority value of **medium-high** and then transmitted. For red traffic, packets are implicitly set with a loss-priority value of **high** and then transmitted. If the policer configuration includes the optional **action** statement (**action loss-priority high then discard**), then packets in a red flow are discarded instead.

You can apply a three-color policer to Layer 3 traffic as a firewall filter policer only. You reference the policer from a stateless firewall filter term, and then you apply the filter to the input or output of a logical interface at the protocol level.

## Topology

In this example, you apply a color-aware, two-rate three-color policer to the input IPv4 traffic at logical interface **fe-0/1/1.0**. The IPv4 firewall filter term that references the policer does not apply any packet-filtering. The filter is used only to apply the three-color policer to the interface.

You configure the policer to rate-limit traffic to a bandwidth limit of 40 Mbps and a burst-size limit of 100 KB for green traffic, and you configure the policer to also allow a peak bandwidth limit of 60 Mbps and a peak burst-size limit of 200 KB for yellow traffic. Only nonconforming traffic that exceeds the peak traffic limits is categorized as red. In this example, you configure the three-color policer action **loss-priority high then discard**, which overrides the implicit marking of red traffic to a **high** loss priority.

## Configuration

---

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring a Two-Rate Three-Color Policer on page 135](#)
- [Configuring an IPv4 Stateless Firewall Filter That References the Policer on page 136](#)
- [Applying the Filter to a Logical Interface at the Protocol Family Level on page 137](#)



**CLI Quick Configuration** To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the [edit] hierarchy level.

```
set firewall three-color-policer trTCM1-ca two-rate color-aware
set firewall three-color-policer trTCM1-ca two-rate committed-information-rate 40m
set firewall three-color-policer trTCM1-ca two-rate committed-burst-size 100k
set firewall three-color-policer trTCM1-ca two-rate peak-information-rate 60m
set firewall three-color-policer trTCM1-ca two-rate peak-burst-size 200k
set firewall three-color-policer trTCM1-ca action loss-priority high then discard
set firewall family inet filter filter-trtcm1ca-all term 1 then three-color-policer two-rate
trTCM1-ca
set interfaces ge-2/0/5 unit 0 family inet address 10.10.10.1/30
set interfaces ge-2/0/5 unit 0 family inet filter input filter-trtcm1ca-all
set class-of-service interfaces ge-2/0/5 forwarding-class af
```

### *Configuring a Two-Rate Three-Color Policer*

**Step-by-Step Procedure** To configure a two-rate three-color policer:

1. Enable configuration of a three-color policer.

```
[edit]
user@host# set firewall three-color-policer trTCM1-ca
```

2. Configure the color mode of the two-rate three-color policer.

```
[edit firewall three-color-policer trTCM1-ca]
user@host# set two-rate color-aware
```

3. Configure the two-rate guaranteed traffic limits.

```
[edit firewall three-color-policer trTCM1-ca]
user@host# set two-rate committed-information-rate 40m
user@host# set two-rate committed-burst-size 100k
```

Traffic that does not exceed both of these limits is categorized as green. Packets in a green flow are implicitly set to **low** loss priority and then transmitted.

4. Configure the two-rate peak traffic limits.

```
[edit firewall three-color-policer trTCM1-ca]
user@host# set two-rate peak-information-rate 60m
user@host# set two-rate peak-burst-size 200k
```

Nonconforming traffic that does not exceed both of these limits is categorized as yellow. Packets in a yellow flow are implicitly set to **medium-high** loss priority and then transmitted. Nonconforming traffic that exceeds both of these limits is categorized as red. Packets in a red flow are implicitly set to **high** loss priority.

5. (Optional) Configure the policer action for red traffic.

```
[edit firewall three-color-policer trTCM1-ca]
user@host# set action loss-priority high then discard
```

For three-color policers, the only configurable action is to discard red packets. Red packets are packets that have been assigned high loss priority because they exceeded the peak information rate (PIR) and the peak burst size (PBS).

**Results** Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
three-color-policer trTCM1-ca {
 action {
 loss-priority high then discard;
 }
 two-rate {
 color-aware;
 committed-information-rate 40m;
 committed-burst-size 100k;
 peak-information-rate 60m;
 peak-burst-size 200k;
 }
}
```

#### *Configuring an IPv4 Stateless Firewall Filter That References the Policer*

**Step-by-Step Procedure** To configure an IPv4 stateless firewall filter that references the policer:

1. Enable configuration of an IPv4 standard stateless firewall filter.

```
[edit]
user@host# set firewall family inet filter filter-trtcm1ca-all
```

2. Specify the filter term that references the policer.

```
[edit firewall family inet filter filter-trtcm1ca-all]
user@host# set term 1 then three-color-policer two-rate trTCM1-ca
```

Note that the term does not specify any match conditions. The firewall filter passes all packets to the policer.

**Results** Confirm the configuration of the firewall filter by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
family inet {
 filter filter-trtcm1ca-all {
 term 1 {
 then {
 three-color-policer {
 two-rate trTCM1-ca;
 }
 }
 }
 }
}
three-color-policer trTCM1-ca {
 action {
 loss-priority high then discard;
 }
}
```

```

two-rate {
 color-aware;
 committed-information-rate 40m;
 committed-burst-size 100k;
 peak-information-rate 60m;
 peak-burst-size 200k;
}
}

```

### *Applying the Filter to a Logical Interface at the Protocol Family Level*

#### **Step-by-Step Procedure**

To apply the filter to the logical interface at the protocol family level:

1. Enable configuration of an IPv4 firewall filter.

```

[edit]
user@host# edit interfaces ge-2/0/5 unit 0 family inet

```

2. Apply the policer to the logical interface at the protocol family level.

```

[edit interfaces ge-2/0/5 unit 0 family inet]
user@host# set address 10.10.10.1/30
user@host# set filter input filter-trtcm1ca-all

```

3. (MX Series routers and EX Series switches only) (Optional) For input policers, you can configure a fixed classifier. A fixed classifier reclassifies all incoming packets, regardless of any preexisting classification.

```

[edit]
user@host# set class-of-service interfaces ge-2/0/5 forwarding-class af

```

The classifier name can be a configured classifier or one of the default classifiers.

**Results** Confirm the configuration of the interface by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
ge-2/0/5 {
 unit 0 {
 family inet {
 address 10.10.10.1/30;
 filter {
 input filter-trtcm1ca-all;
 }
 }
 }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### **Verification**

Confirm that the configuration is working properly.

- [Displaying the Firewall Filters Applied to the Logical Interface on page 138](#)

*Displaying the Firewall Filters Applied to the Logical Interface*

**Purpose** Verify that the firewall filter is applied to IPv4 input traffic at the logical interface.

**Action** Use the **show interfaces** operational mode command for the logical interface **ge-2/0/5.0**, and specify **detail** mode. The **Protocol inet** section of the command output displays IPv4 information for the logical interface. Within that section, the **Input Filters** field displays the name of IPv4 firewall filters associated with the logical interface.

```
user@host> show interfaces ge-2/0/5.0 detail
Logical interface ge-2/0/5.0 (Index 105) (SNMP ifIndex 556) (Generation 170)
 Flags: Device-Down SNMP-Traps 0x4004000 Encapsulation: ENET2
 Traffic statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
 Local statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
 Transit statistics:
 Input bytes : 0 0 bps
 Output bytes : 0 0 bps
 Input packets: 0 0 pps
 Output packets: 0 0 pps
 Protocol inet, MTU: 1500, Generation: 242, Route table: 0
 Flags: Sendbroadcast-pkt-to-re
 Input Filters: filter-trtcm1ca-all
 Addresses, Flags: Dest-route-down Is-Preferred Is-Primary
 Destination: 10.20.130/24, Local: 10.20.130.1, Broadcast: 10.20.130.255,

 Generation: 171
 Protocol multiservice, MTU: Unlimited, Generation: 243, Route table: 0
 Policer: Input: __default_arp_policer__
```

- Related Documentation**
- [Statement Hierarchy for Configuring Policers on page 13](#)
  - [Three-Color Policer Configuration Overview on page 19](#)
  - [Three-Color Policer Configuration Guidelines on page 123](#)

## CHAPTER 7

# Configuring Logical and Physical Interface Policers

- [Two-Color and Three-Color Logical Interface Policers on page 139](#)
- [Two-Color and Three-Color Physical Interface Policers on page 151](#)

## Two-Color and Three-Color Logical Interface Policers

---

- [Logical Interface \(Aggregate\) Policer Overview on page 139](#)
- [Example: Configuring a Two-Color Logical Interface \(Aggregate\) Policer on page 140](#)
- [Example: Configuring a Three-Color Logical Interface \(Aggregate\) Policer on page 145](#)

### Logical Interface (Aggregate) Policer Overview

A *logical interface policer*—also called an *aggregate policer*—is a two-color or three-color policer that defines traffic rate limiting that you can apply to input or output traffic for multiple protocol families on the same logical interface without creating multiple instances of the policer.

To configure a single-rate two-color logical interface policer, include the **logical-interface-policer** statement at one of the following hierarchy levels:

- [edit *firewall* **policer** *policer-name*]
- [edit *logical-systems* *logical-system-name* *firewall* **policer** *policer-name*]

To configure a single-rate or two-rate three-color logical interface policer, include the **logical-interface-policer** statement at one of the following hierarchy levels:

- [edit *firewall* **three-color-policer** *name*]
- [edit *logical-systems* *logical-system-name* *firewall* **three-color-policer** *name*]



**NOTE:** A three-color policer can be applied to Layer 2 traffic as a logical interface policer only. You cannot apply a three-color policer to Layer 2 traffic as a physical interface policer (through a firewall filter).

You apply a logical interface policer to Layer 3 traffic directly to the interface configuration at the logical unit level (to rate-limit all traffic types, regardless of the protocol family) or at the protocol family level (to rate-limit traffic of a specific protocol family). You cannot reference a logical interface policer from a stateless firewall filter term and then apply the filter to a logical interface.

You can apply a logical interface policer to unicast traffic only. For information about configuring a stateless firewall filter for flooded traffic, see “*Applying Filters to Forwarding Tables*” in the “Traffic Sampling, Forwarding, and Monitoring” section of the *Routing Policy Configuration Guide*.

To display a logical interface policer on a particular interface, issue the **show interfaces policers** operational mode command.

### Example: Configuring a Two-Color Logical Interface (Aggregate) Policer

This example shows how to configure a single-rate two-color policer as a logical interface policer and apply it to incoming IPv4 traffic on a logical interface.

- [Requirements on page 140](#)
- [Overview on page 140](#)
- [Configuration on page 140](#)
- [Verification on page 144](#)

---

#### Requirements

Before you begin, make sure that the logical interface to which you apply the two-color logical interface policer is hosted on a Gigabit Ethernet interface (**ge-**) or a 10-Gigabit Ethernet interface (**xe-**).

---

#### Overview

In this example, you configure the single-rate two-color policer **policer\_IFL** as a logical interface policer and apply it to incoming IPv4 traffic at logical interface **ge-1/3/1.0**.

#### Topology

If the input IPv4 traffic on the physical interface **ge-1/3/1** exceeds the bandwidth limit equal to 90 percent of the media rate with a 300 KB burst-size limit, then the logical interface policer **policer\_IFL** rate-limits the input IPv4 traffic on the logical interface **ge-1/3/1.0**. Configure the policer to mark nonconforming traffic by setting packet loss priority (PLP) levels to **high** and classifying packets as **best-effort**.

As the incoming IPv4 traffic rate on the physical interface slows and conforms to the configured limits, Junos OS stops marking the incoming IPv4 packets at the logical interface.

---

#### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interfaces on page 141](#)
- [Configuring the Single-Rate Two-Color Policer as a Logical Interface Policer on page 142](#)
- [Applying the Logical Interface Policer to Input IPv4 Traffic at a Logical Interface on page 143](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/3/1 vlan-tagging
set interfaces ge-1/3/1 unit 0 vlan-id 100
set interfaces ge-1/3/1 unit 0 family inet address 10.10.10.1/30
set interfaces ge-1/3/1 unit 1 vlan-id 101
set interfaces ge-1/3/1 unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
00:00:11:22:33:44
set firewall policer policer_IFL logical-interface-policer
set firewall policer policer_IFL if-exceeding bandwidth-percent 90
set firewall policer policer_IFL if-exceeding burst-size-limit 300k
set firewall policer policer_IFL then loss-priority high
set firewall policer policer_IFL then forwarding-class best-effort
set interfaces ge-1/3/1 unit 0 family inet policer input policer_IFL
```

#### Configuring the Logical Interfaces

#### Step-by-Step Procedure

To configure the logical interfaces:

1. Enable configuration of the interface.

```
[edit]
user@host# edit interfaces ge-1/3/1
```

2. Configure single tagging.

```
[edit interfaces ge-1/3/1]
user@host# set vlan-tagging
```

3. Configure logical interface **ge-1/3/1.0**.

```
[edit interfaces ge-1/3/1]
user@host# set unit 0 vlan-id 100
user@host# set unit 0 family inet address 10.10.10.1/30
```

4. Configure logical interface **ge-1/3/1.0**.

```
[edit interfaces ge-1/3/1]
user@host# set unit 1 vlan-id 101
user@host# set unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
00:00:11:22:33:44
```

#### Results

Confirm the configuration of the logical interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
```

```

ge-1/3/1 {
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 family inet {
 address 10.10.10.1/30;
 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}

```

### *Configuring the Single-Rate Two-Color Policer as a Logical Interface Policer*

#### **Step-by-Step Procedure**

To configure a single-rate two-color policer as a logical interface policer:

1. Enable configuration of a single-rate two-color policer.

```

[edit]
user@host# edit firewall policer policer_IFL

```

2. Specify that the policer is a logical interface (aggregate) policer.

```

[edit firewall policer policer_IFL]
user@host# set logical-interface-policer

```

A logical interface policer rate-limits traffic based on a percentage of the media rate of the physical interface underlying the logical interface to which the policer is applied. The policer is applied directly to the interface rather than referenced by a firewall filter.

3. Specify the policer traffic limits.
  - a. Specify the bandwidth limit.
    - To specify the bandwidth limit as an absolute rate, from 8,000 bits per second through 50,000,000,000 bits per second, include the **bandwidth-limit *bps*** statement.
    - To specify the bandwidth limit as a percentage of the physical port speed on the interface, include the **bandwidth-percent *percent*** statement.

In this example, the CLI commands and output are based on a bandwidth limit specified as a percentage rather than as an absolute rate.

```

[edit firewall policer policer_IFL]
user@host# set if-exceeding bandwidth-percent 90

```



- b. Specify the burst-size limit, from 1,500 bytes through 100,000,000,000 bytes, which is the maximum packet size to be permitted for bursts of data that exceed the specified bandwidth limit.

```
[edit firewall policer policer_IFL]
user@host# set if-exceeding burst-size-limit 300k
```

4. Specify the policer actions to be taken on traffic that exceeds the configured rate limits.
  - To discard the packet, include the **discard** statement.
  - To set the loss-priority value of the packet, include the **loss-priority (low | medium-low | medium-high | high)** statement.
  - To classify the packet to a forwarding class, include the **forwarding-class (forwarding-class | assured-forwarding | best-effort | expedited-forwarding | network-control)** statement.

In this example, the CLI commands and output are based on both setting the packet loss priority level and classifying the packet.

```
[edit firewall policer policer_IFL]
user@host# set then loss-priority high
user@host# set then forwarding-class best-effort
```

**Results** Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer policer_IFL {
 logical-interface-policer;
 if-exceeding {
 bandwidth-percent 90;
 burst-size-limit 300k;
 }
 then {
 loss-priority high;
 forwarding-class best-effort;
 }
}
```

#### *Applying the Logical Interface Policer to Input IPv4 Traffic at a Logical Interface*

**Step-by-Step Procedure** To apply the two-color logical interface policer to input IPv4 traffic a logical interface:

1. Enable configuration of the logical interface.

```
[edit]
user@host# edit interfaces ge-1/3/1 unit 0
```

2. Apply the policer to all traffic types or to a specific traffic type on the logical interface.

- To apply the policer to all traffic types, regardless of the protocol family, include the **policer (input | output) *policer-name*** statement at the **[edit interfaces *interface-name* unit *number*]** hierarchy level.
- To apply the policer to traffic of a specific protocol family, include the **policer (input | output) *policer-name*** statement at the **[edit interfaces *interface-name* unit *unit-number* family *family-name*]** hierarchy level.

To apply the logical interface policer to incoming packets, use the **policer input *policer-name*** statement. To apply the logical interface policer to outgoing packets, use the **policer output *policer-name*** statement.

In this example, the CLI commands and output are based on rate-limiting the IPv4 input traffic at logical interface **ge-1/3/1.0**.

```
[edit interfaces ge-1/3/1 unit 0]
user@host# set family inet policer input policer_IFL
```

**Results** Confirm the configuration of the interface by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
ge-1/3/1 {
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 family inet {
 policer input policer_IFL;
 address 10.10.10.1/30;
 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Displaying Traffic Statistics and Policers for the Logical Interface on page 145](#)
- [Displaying Statistics for the Policer on page 145](#)

*Displaying Traffic Statistics and Policers for the Logical Interface*

**Purpose** Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

**Action** Use the **show interfaces** operational mode command for logical interface **ge-1/3/1.0**, and include the **detail** or **extensive** option. The command output section for **Traffic statistics** lists the number of bytes and packets received and transmitted on the logical interface. The **Protocol inet** subsection contains a **Policer** field that would list the policer **policer\_IFL** as an input or output logical interface policer as follows:

- Input: **policer\_IFL-ge-1/3/1.0-log\_int-i**
- Output: **policer\_IFL-ge-1/3/1.0-log\_int-o**

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to input traffic only.

*Displaying Statistics for the Policer*

**Purpose** Verify the number of packets evaluated by the policer.

**Action** Use the **show policer** operational mode command and optionally specify the name of the policer. The command output displays the number of packets evaluated by each configured policer (or the specified policer), in each direction. For the policer **policer\_IFL**, the input and output policer names are displayed as follows:

- **policer\_IFL-ge-1/3/1.0-log\_int-i**
- **policer\_IFL-ge-1/3/1.0-log\_int-o**

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to input traffic only.

**Example: Configuring a Three-Color Logical Interface (Aggregate) Policer**

This example shows how to configure a two-rate three-color color-blind policer as a logical interface (aggregate) policer and apply the policer directly to Layer 2 input traffic at a supported logical interface.

- [Requirements on page 146](#)
- [Overview on page 146](#)
- [Configuration on page 147](#)
- [Verification on page 150](#)

## Requirements

---

Before you begin, make sure that the logical interface to which you apply the three-color logical interface policer is hosted on a Gigabit Ethernet interface (**ge-**) or a 10-Gigabit Ethernet interface (**xe-**) on an MX Series router and EX Series switch.

## Overview

---

A two-rate three-color policer meters a traffic flow against a bandwidth limit and burst-size limit for guaranteed traffic, plus a second set of bandwidth and burst-size limits for peak traffic. Traffic that conforms to the limits for guaranteed traffic is categorized as green, and nonconforming traffic falls into one of two categories:

- Nonconforming traffic that does not exceed the bandwidth and burst-size limits for peak traffic is categorized as yellow.
- Nonconforming traffic that exceeds the bandwidth and burst-size limits for peak traffic is categorized as red.

A logical interface policer defines traffic rate-limiting rules that you can apply to multiple protocol families on the same logical interface without creating multiple instances of the policer.



**NOTE:** You apply a logical interface policer directly to a logical interface at the logical unit level, and not by referencing the policer in a stateless firewall filter and then applying the filter to the logical interface at the protocol family level.

---

## Topology

In this example, you configure the two-rate three-color policer **trTCM2-cb** as a color-blind logical interface policer and apply the policer to incoming Layer 2 traffic on logical interface **ge-1/3/1.0**.



**NOTE:** When using a three-color policer to rate-limit Layer 2 traffic, color-aware policing can be applied to egress traffic only.

---

The policer defines guaranteed traffic rate limits such that traffic that conforms to the bandwidth limit of 40 Mbps with a 100 KB allowance for traffic bursting (based on the token-bucket formula) is categorized as green. As with any policed traffic, the packets in a green flow are implicitly set to a **low** loss priority and then transmitted.

Nonconforming traffic that falls within the peak traffic limits of a 60 Mbps bandwidth limit and a 200 KB allowance for traffic bursting (based on the token-bucket formula) is categorized as yellow. The packets in a yellow traffic flow are implicitly set to a **medium-high** loss priority and then transmitted.

Nonconforming traffic that exceeds the peak traffic limits are categorized as red. The packets in a red traffic flow are implicitly set to a **high** loss priority. In this example, the

optional policer action for red traffic (**loss-priority high then discard**) is configured, so packets in a red traffic flow are discarded instead of transmitted.

### Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interfaces on page 147](#)
- [Configuring the Two-Rate Three-Color Policer as a Logical Interface Policer on page 148](#)
- [Applying the Three-Color Policer to the Layer 2 Input at the Logical Interface on page 149](#)

#### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/3/1 vlan-tagging
set interfaces ge-1/3/1 unit 0 vlan-id 100
set interfaces ge-1/3/1 unit 0 family inet address 10.10.10.1/30
set interfaces ge-1/3/1 unit 1 vlan-id 101
set interfaces ge-1/3/1 unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
 00:00:11:22:33:44
set firewall three-color-policer trTCM2-cb logical-interface-policer
set firewall three-color-policer trTCM2-cb two-rate color-blind
set firewall three-color-policer trTCM2-cb two-rate committed-information-rate 40m
set firewall three-color-policer trTCM2-cb two-rate committed-burst-size 100k
set firewall three-color-policer trTCM2-cb two-rate peak-information-rate 60m
set firewall three-color-policer trTCM2-cb two-rate peak-burst-size 200k
set firewall three-color-policer trTCM2-cb action loss-priority high then discard
set interfaces ge-1/3/1 unit 0 layer2-policer input-three-color trTCM2-cb
```

### Configuring the Logical Interfaces

#### Step-by-Step Procedure

To configure the logical interfaces:

1. Enable configuration of the interface.  
  
[edit]  
user@host# edit interfaces ge-1/3/1
2. Configure single tagging.  
  
[edit interfaces ge-1/3/1]  
user@host# set vlan-tagging
3. Configure logical interface ge-1/3/1.0.  
  
[edit interfaces ge-1/3/1]  
user@host# set unit 0 vlan-id 100  
user@host# set unit 0 family inet address 10.10.10.1/30
4. Configure logical interface ge-1/3/1.0.  
  
[edit interfaces ge-1/3/1]

```

user@host# set unit 1 vlan-id 101
user@host# set unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
00:00:11:22:33:44

```

**Results** Confirm the configuration of the logical interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
ge-1/3/1 {
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 family inet {
 address 10.10.10.1/30;
 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}

```

### *Configuring the Two-Rate Three-Color Policer as a Logical Interface Policer*

#### **Step-by-Step Procedure**

To configure the two-rate three-color policer as a logical interface policer:

1. Enable configuration of a three-color policer.

```

[edit]
user@host# edit firewall three-color-policer trTCM2-cb

```

2. Specify that the policer is a logical interface (aggregate) policer.

```

[edit firewall three-color-policer trTCM2-cb]
user@host# set logical-interface-policer

```

A logical interface policer rate-limits traffic based on a percentage of the media rate of the physical interface underlying the logical interface to which the policer is applied, and the policer is applied directly to the interface rather than referenced by a firewall filter.

3. Specify that the policer is two-rate and color-blind.

```

[edit firewall three-color-policer trTCM2-cb]
user@host# set two-rate color-blind

```

A color-aware three-color policer takes into account any coloring markings that might have been set for a packet by another traffic policer configured at a previous network node, and any preexisting color markings are used in determining the appropriate policing action for the packet.

Because you are applying this three-color policer applied to input at Layer 2, you must configure the policer to be color-blind.

4. Specify the policer traffic limits used to classify a green traffic flow.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set two-rate committed-information-rate 40m
user@host# set two-rate committed-burst-size 100k
```

5. Specify the additional policer traffic limits used to classify a yellow or red traffic flow.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set two-rate peak-information-rate 60m
user@host# set two-rate peak-burst-size 200k
```

6. (Optional) Specify the configured policer action for packets in a red traffic flow.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set action loss-priority high then discard
```

In color-aware mode, the three-color policer configured action can increase the packet loss priority (PLP) level of a packet, but never decrease it. For example, if a color-aware three-color policer meters a packet with a medium PLP marking, it can raise the PLP level to high, but cannot reduce the PLP level to low.

**Results** Confirm the configuration of the three-color policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
three-color-policer trTCM2-cb {
 logical-interface-policer;
 action {
 loss-priority high then discard;
 }
 two-rate {
 color-blind;
 committed-information-rate 40m;
 committed-burst-size 100k;
 peak-information-rate 60m;
 peak-burst-size 200k;
 }
}
```

#### *Applying the Three-Color Policer to the Layer 2 Input at the Logical Interface*

##### **Step-by-Step Procedure**

To apply the three-color policer to the Layer 2 input at the logical interface:

1. Enable application of Layer 2 logical interface policers.

```
[edit]
user@host# edit interfaces ge-1/3/1 unit 0
```

2. Apply the three-color logical interface policer to a logical interface input.

```
[edit interfaces ge-1/3/1 unit 0]
```

```
user@host# set layer2-policerinput-three-color trTCM2-cb
```

**Results** Confirm the configuration of the logical interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
ge-1/3/1 {
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 layer2-policer {
 input-three-color trTCM2-cb;
 }
 family inet {
 address 10.10.10.1/30;
 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Displaying Traffic Statistics and Policers for the Logical Interface on page 150](#)
- [Displaying Statistics for the Policer on page 151](#)

#### *Displaying Traffic Statistics and Policers for the Logical Interface*

**Purpose** Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

**Action** Use the **show interfaces** operational mode command for logical interface **ge-1/3/1.0**, and include the **detail** or **extensive** option. The command output section for **Traffic statistics** lists the number of bytes and packets received and transmitted on the logical interface, and the **Protocol inet** section contains a **Policer** field that would list the policer **trTCM2-cb** as an input or output policer as follows:

- **Input:** trTCM2-cb-ge-1/3/1.0-log\_int-i
- **Output:** trTCM2-cb-ge-1/3/1.0-log\_int-o



The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to in the input direction only.

#### *Displaying Statistics for the Policer*

**Purpose** Verify the number of packets evaluated by the policer.

**Action** Use the **show policer** operational mode command and optionally specify the name of the policer. The command output displays the number of packets evaluated by each configured policer (or the specified policer), in each direction. For the policer **trTCM2-cb**, the input and output policer names are displayed as follows:

- **trTCM2-cb-ge-1/3/1.0-log\_int-i**
- **trTCM2-cb-e-1/3/1.0-log\_int-o**

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to input traffic only.

- Related Documentation**
- [Statement Hierarchy for Configuring Policers on page 13](#)
  - [Two-Color Policer Configuration Overview on page 15](#)
  - [Three-Color Policer Configuration Overview on page 19](#)
  - [Guidelines for Applying Traffic Policers on page 23](#)

---

## Two-Color and Three-Color Physical Interface Policers

- [Physical Interface Policer Overview on page 151](#)
- [Example: Configuring a Physical Interface Policer for Aggregate Traffic at a Physical Interface on page 153](#)

### Physical Interface Policer Overview

A *physical interface policer* is a two-color or three-color policer that defines traffic rate limiting that you can apply to input or output traffic for all the logical interfaces and protocol families configured on a physical interface, even if the logical interfaces belong to different routing instances. This feature is useful when you want to perform aggregate policing for different protocol families and different logical interfaces on the same physical interface.

For example, suppose that a provider edge (PE) router has numerous logical interfaces, each corresponding to a different customer, configured on the same link to a customer edge (CE) device. Now suppose that a customer wants to apply one set of rate limits aggregately for certain types of traffic on a single physical interface. To accomplish this, you could apply a single physical interface policer to the physical interface, which rate-limits all the logical interfaces configured on the interface and all the routing instances to which those interfaces belong.

To configure a single-rate two-color physical interface policer, include the **physical-interface-policer** statement at one of the following hierarchy levels:

- [edit *firewall* **policer** *policer-name*]
- [edit logical-system *logical-system-name* firewall **policer** *policer-name*]
- [edit routing-instances *routing-instance-name* firewall **policer** *policer-name*]
- [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* firewall **policer** *policer-name*]

To configure a single-rate or two-rate three-color physical interface policer, include the **physical-interface-policer** statement at one of the following hierarchy levels:

- [edit *firewall* **three-color-policer** *policer-name*]
- [edit logical-system *logical-system-name* firewall **three-color-policer** *policer-name*]
- [edit routing-instances *routing-instance-name* firewall **three-color-policer** *policer-name*]
- [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* firewall **three-color-policer** *policer-name*]

You apply a physical interface policer to Layer 3 traffic by referencing the policer from a stateless firewall filter term and then applying the filter to a logical interface. You cannot apply a physical interface to Layer 3 traffic directly to the interface configuration.

To reference a single-rate two-color policer from a stateless firewall filter term, use the **policer** nonterminating action. To reference a single-rate or two-rate three-color policer from a stateless firewall filter term, use the **three-color-policer** nonterminating action.

The following requirements apply to a stateless firewall filter that references a physical interface policer:

- You must configure the firewall filter for a specific, supported protocol family: **ipv4**, **ipv6**, **mpls**, **vpls**, or circuit cross-connect (**ccc**), but not for **family any**.
- You must configure the firewall filter as a *physical interface filter* by including the **physical-interface-filter** statement at the [edit *firewall* **family** *family-name* **filter** *filter-name*] hierarchy level.
- A firewall filter that is defined as a physical interface filter can reference a physical interface policer only.
- A firewall filter that is defined as a physical interface filter cannot reference a policer configured with the **interface-specific** statement.
- You cannot configure a firewall filter as both a physical interface filter and as a logical interface filter that also includes the **interface-specific** statement.

## Example: Configuring a Physical Interface Policer for Aggregate Traffic at a Physical Interface

This example shows how to configure a single-rate two-color policer as a physical interface policer.

- [Requirements on page 153](#)
- [Overview on page 153](#)
- [Configuration on page 154](#)
- [Verification on page 158](#)

---

### Requirements

No special configuration beyond device initialization is required before configuring this example.

---

### Overview

A *physical interface policer* specifies rate-limiting for aggregate traffic, which encompasses all protocol families and logical interfaces configured on a physical interface, even if the interfaces belong to different routing instances.

You can apply a physical interface policer to Layer 3 input or output traffic only by referencing the policer from a stateless firewall filter that is configured for specific a specific protocol family (not for **family any**) and configured as a physical interface filter. You configure the filter terms with match conditions that select the types of packets you want to rate-limit, and you specify the physical interface policer as the action to apply to matched packets.

### Topology

The physical interface policer in this example, **shared-policer-A**, rate-limits to 10,000,000 bps and permits a maximum burst of traffic of 500,000 bytes. You configure the policer to discard packets in nonconforming flows, but you could instead configure the policer to re-mark nonconforming traffic with a forwarding class, a packet loss priority (PLP) level, or both.

To be able to use the policer to rate-limit IPv4 traffic, you reference the policer from an IPv4 physical interface filter. For this example, you configure the filter to pass the policer IPv4 packets that meet either of the following match terms:

- Packets received through TCP and with the IP precedence fields **critical-ecp** (0xa0), **immediate** (0x40), or **priority** (0x20)
- Packets received through TCP and with the IP precedence fields **internet-control** (0xc0) or **routine** (0x00)

You could also reference the policer from physical interface filters for other protocol families.

## Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interfaces on the Physical Interface on page 154](#)
- [Configuring a Physical Interface Policer on page 155](#)
- [Configuring an IPv4 Physical Interface Filter on page 156](#)
- [Applying the IPv4 Physical interface Filter to a Physical Interface on page 157](#)

### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces so-1/0/0 unit 0 family inet address 192.168.1.1/24
set interfaces so-1/0/0 unit 0 family vpls
set interfaces so-1/0/0 unit 1 family mpls
set firewall policer shared-policer-A physical-interface-policer
set firewall policer shared-policer-A if-exceeding bandwidth-limit 100m burst-size-limit 500k
set firewall policer shared-policer-A then discard
set firewall family inet filter ipv4-filter physical-interface-filter
set firewall family inet filter ipv4-filter term tcp-police-1 from precedence [critical-ecp immediate priority]
set firewall family inet filter ipv4-filter term tcp-police-1 from protocol tcp
set firewall family inet filter ipv4-filter term tcp-police-1 then policer shared-policer-A
set firewall family inet filter ipv4-filter term tcp-police-2 from precedence [internet-control routine]
set firewall family inet filter ipv4-filter term tcp-police-2 from protocol tcp
set firewall family inet filter ipv4-filter term tcp-police-2 then policer shared-policer-A
set interfaces so-1/0/0 unit 0 family inet filter input ipv4-filter
```

### Configuring the Logical Interfaces on the Physical Interface

#### Step-by-Step Procedure

To configure the logical interfaces on the physical interface:

1. Enable configuration of logical interfaces.  
  
[edit]  
user@host# edit interfaces so-1/0/0
2. Configure protocol families on logical unit 0.  
  
[edit interfaces so-1/0/0]  
user@host# set unit 0 family inet address 192.168.1.1/24  
user@host# set unit 0 family vpls
3. Configure protocol families on logical unit 1.  
  
[edit interfaces so-1/0/0]  
user@host# set unit 1 family mpls

**Results** Confirm the configuration of the firewall filter by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
so-1/0/0 {
 unit 0 {
 family inet {
 address 192.168.1.1/24;
 }
 family vpls;
 }
 unit 1 {
 family mpls;
 }
}
```

### *Configuring a Physical Interface Policer*

**Step-by-Step Procedure** To configure a physical interface policer:

1. Enable configuration of the two-color policer.

```
[edit]
user@host# edit firewall policer shared-policer-A
```

2. Configure the type of two-color policer.

```
[edit firewall policer shared-policer-A]
user@host# set physical-interface-policer
```

3. Configure the traffic limits and the action for packets in a nonconforming traffic flow.

```
[edit firewall policer shared-policer-A]
user@host# set if-exceeding bandwidth-limit 100m burst-size-limit 500k
user@host# set then discard
```

For a physical interface filter, the actions you can configure for packets in a nonconforming traffic flow are to discard the packets, assign a forwarding class, assign a PLP value, or assign both a forwarding class and a PLP value.

**Results** Confirm the configuration of the policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
policer shared-policer-A {
 physical-interface-policer;
 if-exceeding {
 bandwidth-limit 100m;
 burst-size-limit 500k;
 }
 then discard;
}
```

*Configuring an IPv4 Physical Interface Filter*

- Step-by-Step Procedure** To configure a physical interface policer as the action for terms in an IPv4 physical interface policer:
1. Configure a standard stateless firewall filter under a specific protocol family.  

```
[edit]
user@host# edit firewall family inet filter ipv4-filter
```

You cannot configure a physical interface firewall filter for **family any**.
  2. Configure the filter as a physical interface filter so that you can apply the physical interface policer as an action.  

```
[edit firewall family inet filter ipv4-filter]
user@host# set physical-interface-filter
```
  3. Configure the first term to match IPv4 packets received through TCP with the IP precedence fields **critical-ecp**, **immediate**, or **priority** and to apply the physical interface policer as a filter action.  

```
[edit firewall family inet filter ipv4-filter]
user@host# set term tcp-police-1 from precedence [critical-ecp immediate priority]
user@host# set term tcp-police-1 from protocol tcp
user@host# set term tcp-police-1 then policer shared-policer-A
```
  4. Configure the first term to match IPv4 packets received through TCP with the IP precedence fields **internet-control** or **routine** and to apply the physical interface policer as a filter action.  

```
[edit firewall family inet filter ipv4-filter]
user@host# set term tcp-police-2 from precedence [internet-control routine]
user@host# set term tcp-police-2 from protocol tcp
user@host# set term tcp-police-2 then policer shared-policer-A
```
- Results** Confirm the configuration of the firewall filter by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
family inet {
 filter ipv4-filter {
 physical-interface-filter;
 term tcp-police-1 {
 from {
 precedence [critical-ecp immediate priority];
 protocol tcp;
 }
 then policer shared-policer-A;
 }
 }
 term tcp-police-2 {
 from {
 precedence [internet-control routine];
 protocol tcp;
 }
 }
}
```

```

 }
 then policer shared-policer-A;
 }
}
}
policer shared-policer-A {
 physical-interface-policer;
 if-exceeding {
 bandwidth-limit 100m;
 burst-size-limit 500k;
 }
 then discard;
}

```

### *Applying the IPv4 Physical interface Filter to a Physical Interface*

**Step-by-Step Procedure** To apply the physical interface filter to a physical interface:

1. Enable configuration of IPv4 on the logical interface.  

```

[edit]
user@host# edit interfaces so-1/0/0 unit 0 family inet

```
2. Apply the IPv4 physical interface filter in the input direction.  

```

[edit interfaces so-1/0/0 unit 0 family inet]
user@host# set filter input ipv4-filter

```

**Results** Confirm the configuration of the firewall filter by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```

[edit]
user@host# show interfaces
so-1/0/0 {
 unit 0 {
 family inet {
 filter {
 input ipv4-filter;
 }
 address 192.168.1.1/24;
 }
 family vpls;
 }
 unit 1 {
 family mpls;
 }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Displaying the Firewall Filters Applied to an Interface on page 158](#)
- [Displaying the Number of Packets Processed by the Policer at the Logical Interface on page 158](#)

### *Displaying the Firewall Filters Applied to an Interface*

**Purpose** Verify that the firewall filter **ipv4-filter** is applied to the IPv4 input traffic at logical interface **so-1/0/0.0**.

**Action** Use the **show interfaces statistics** operational mode command for logical interface **so-1/0/0.0**, and include the **detail** option. In the **Protocol inet** section of the command output, the **Input Filters** field shows that the firewall filter **ipv4-filter** is applied in the input direction.

```
user@host> show interfaces statistics so-1/0/0 detail
Logical interface so-1/0/0.0 (Index 79) (SNMP ifIndex 510) (Generation 149)
Flags: Hardware-Down Point-To-Point SNMP-Traps 0x4000 Encapsulation: PPP
Protocol inet, MTU: 4470, Generation: 173, Route table: 0
Flags: Sendbcst-pkt-to-re, Protocol-Down
Input Filters: ipv4-filter
Addresses, Flags: Dest-route-down Is-Preferred Is-Primary
Destination: 10.39/16, Local: 10.39.1.1, Broadcast: 10.39.255.255,
Generation: 163
```

### *Displaying the Number of Packets Processed by the Policer at the Logical Interface*

**Purpose** Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

**Action** Use the **show firewall** operational mode command for the filter you applied to the logical interface.

```
user@host> show firewall filter ipv4-filter
Filter: ipv4-filter
Policers:
Name Packets
shared-policer-A-tcp-police-1 32863
shared-policer-A-tcp-police-2 3870
```

The command output displays the name of policer (**shared-policer-A**), the name of the filter term (**police-1**) under which the policer action is specified, and the number of packets that matched the filter term. This is only the number of out-of-specification (out-of-spec) packet counts, not all packets policed by the policer.

## Related Documentation

- [Firewall Filter Match Conditions Based on Numbers or Text Aliases](#)
- [Firewall Filter Match Conditions Based on Bit-Field Values](#)
- [Firewall Filter Match Conditions Based on Address Fields](#)
- [Firewall Filter Match Conditions Based on Address Classes](#)



- [Statement Hierarchy for Configuring Policers on page 13](#)
- [Two-Color Policer Configuration Overview on page 15](#)
- [Three-Color Policer Configuration Overview on page 19](#)
- [Guidelines for Applying Traffic Policers on page 23](#)
- [physical-interface-filter on page 217](#)
- [physical-interface-policer on page 218](#)



## CHAPTER 8

# Configuring Layer 2 Policers

- [Two-Color and Three-Color Policers at Layer 2 on page 161](#)

## Two-Color and Three-Color Policers at Layer 2

---

- [Two-Color Policing at Layer 2 Overview on page 161](#)
- [Three-Color Policing at Layer 2 Overview on page 163](#)
- [Example: Configuring a Three-Color Logical Interface \(Aggregate\) Policer on page 164](#)

## Two-Color Policing at Layer 2 Overview

This topic covers the following information:

- [Guidelines for Configuring Two-Color Policing of Layer 2 Traffic on page 161](#)
- [Statement Hierarchy for Configuring a Two-Color Policer for Layer 2 Traffic on page 162](#)
- [Statement Hierarchy for Applying a Two-Color Policer to Layer 2 Traffic on page 162](#)

### Guidelines for Configuring Two-Color Policing of Layer 2 Traffic

The following guidelines apply to two-color policing of Layer 2 traffic:

- You can apply a two-color policer to ingress or egress Layer 2 traffic at a logical interface hosted on a Gigabit Ethernet interface (**ge-**) or a 10-Gigabit Ethernet interface (**xe-**) only.
- A single logical interface supports Layer 2 policing in both directions.
- You can apply a two-color policer to Layer 2 traffic as a logical interface policer only. You cannot apply a two-color policer to Layer 2 traffic as a stateless firewall filter action.
- You can apply a two-color policer to Layer 2 traffic by referencing the policer in the interface configuration at the logical unit level, and not at the protocol level.

For information about configuring three-color policing of Layer 2 traffic, see [“Three-Color Policing at Layer 2 Overview” on page 163](#).

### Statement Hierarchy for Configuring a Two-Color Policer for Layer 2 Traffic

To enable a single-rate two-color policer to rate-limit Layer 2 traffic, include the **logical-interface-policer** statement in the **policer** configuration.

```
firewall {
 policer policer-name {
 logical-interface-policer;
 if-exceeding {
 (bandwidth-limit bps | bandwidth-percent percentage);
 burst-size-limit bytes;
 }
 then {
 discard;
 forwarding-class class-name;
 loss-priority (high | low | medium-high | medium-low);
 }
 }
}
```

You can include the configuration at the following hierarchy levels:

- [edit]
- [edit logical-systems *logical-system-name*]

### Statement Hierarchy for Applying a Two-Color Policer to Layer 2 Traffic

To apply a logical interface policer to Layer 2 traffic, include the **layer2-policer input-policer *policer-name*** statement or the **layer2-policer output-policer *policer-name*** statement to a supported logical interface. Use the **input-policer** or **output-policer** statements to apply a two-color policer at Layer 2.

```
interfaces {
 (ge-fpc/pic/port | xe-fpc/pic/port) {
 unit unit-number {
 layer2-policer {
 input-policer policer-name;
 output-policer policer-name;
 }
 }
 }
}
```

You can include the configuration at the following hierarchy levels:

- [edit]
- [edit logical-systems *logical-system-name*]

## Three-Color Policing at Layer 2 Overview

This topic covers the following information:

- [Guidelines for Configuring Three-Color Policing of Layer 2 Traffic](#) on page 163
- [Statement Hierarchy for Configuring a Three-Color Policer for Layer 2 Traffic](#) on page 163
- [Statement Hierarchy for Applying a Three-Color Policer to Layer 2 Traffic](#) on page 164

### Guidelines for Configuring Three-Color Policing of Layer 2 Traffic

The following guidelines apply to three-color policing of Layer 2 traffic:

- You can apply a three-color policer to Layer 2 traffic at a logical interface hosted on a Gigabit Ethernet interface (**ge-**) or a 10-Gigabit Ethernet interface (**xe-**) only.
- A single logical interface supports Layer 2 policing in both directions.
- You can apply a three-color policer to Layer 2 traffic as a logical interface policer only. You cannot apply a two-color policer to Layer 2 traffic as a stateless firewall filter action.
- You can apply a three-color policer to Layer 2 traffic by referencing the policer in the interface configuration at the logical unit level, and not at the protocol level.
- You can apply a color-aware three-color policer to Layer 2 traffic in the egress direction only, but you apply a color-blind three-color policer to Layer 2 traffic in either direction.

For information about configuring two-color policing of Layer 2 traffic, see [“Two-Color Policing at Layer 2 Overview”](#) on page 161.

### Statement Hierarchy for Configuring a Three-Color Policer for Layer 2 Traffic

To enable a single-rate or two-rate three-color policer to rate-limit Layer 2 traffic, include the **logical-interface-policer** statement in the **three-color-policer** configuration.

```
firewall {
 three-color-policer policer-name {
 action {
 loss-priority high then discard;
 }
 logical-interface-policer;
 single-rate {
 (color-aware | color-blind);
 committed-burst-size bytes;
 committed-information-rate bps;
 excess-burst-size bytes;
 }
 two-rate {
 (color-aware | color-blind);
 committed-burst-size bytes;
 committed-information-rate bps;
 peak-burst-size bytes;
 peak-information-rate bps;
 }
 }
}
```

```
}
```

You can include the configuration at the following hierarchy levels:

- **[edit]**
- **[edit logical-systems *logical-system-name*]**

### Statement Hierarchy for Applying a Three-Color Policer to Layer 2 Traffic

---

To apply a logical interface policer to Layer 2 traffic, include the **layer2-policer** statement for a supported logical interface at the logical unit level. Use the **input-three-color *policer-name*** statement or **output-three-color *policer-name*** statement to specify the direction of the traffic to be policed.

```
interfaces {
 (ge-fpc/pic/port | xe-fpc/pic/port) {
 unit unit-number {
 layer2-policer {
 input-three-color policer-name;
 output-three-color policer-name;
 }
 }
 }
}
```

You can include the configuration at the following hierarchy levels:

- **[edit]**
- **[edit logical-systems *logical-system-name*]**

### Example: Configuring a Three-Color Logical Interface (Aggregate) Policer

This example shows how to configure a two-rate three-color color-blind policer as a logical interface (aggregate) policer and apply the policer directly to Layer 2 input traffic at a supported logical interface.

- [Requirements on page 164](#)
- [Overview on page 165](#)
- [Configuration on page 166](#)
- [Verification on page 169](#)

### Requirements

---

Before you begin, make sure that the logical interface to which you apply the three-color logical interface policer is hosted on a Gigabit Ethernet interface (**ge-**) or a 10-Gigabit Ethernet interface (**xe-**) on an MX Series router and EX Series switch.

## Overview

A two-rate three-color policer meters a traffic flow against a bandwidth limit and burst-size limit for guaranteed traffic, plus a second set of bandwidth and burst-size limits for peak traffic. Traffic that conforms to the limits for guaranteed traffic is categorized as green, and nonconforming traffic falls into one of two categories:

- Nonconforming traffic that does not exceed the bandwidth and burst-size limits for peak traffic is categorized as yellow.
- Nonconforming traffic that exceeds the bandwidth and burst-size limits for peak traffic is categorized as red.

A logical interface policer defines traffic rate-limiting rules that you can apply to multiple protocol families on the same logical interface without creating multiple instances of the policer.



**NOTE:** You apply a logical interface policer directly to a logical interface at the logical unit level, and not by referencing the policer in a stateless firewall filter and then applying the filter to the logical interface at the protocol family level.

## Topology

In this example, you configure the two-rate three-color policer **trTCM2-cb** as a color-blind logical interface policer and apply the policer to incoming Layer 2 traffic on logical interface **ge-1/3/1.0**.



**NOTE:** When using a three-color policer to rate-limit Layer 2 traffic, color-aware policing can be applied to egress traffic only.

The policer defines guaranteed traffic rate limits such that traffic that conforms to the bandwidth limit of 40 Mbps with a 100 KB allowance for traffic bursting (based on the token-bucket formula) is categorized as green. As with any policed traffic, the packets in a green flow are implicitly set to a **low** loss priority and then transmitted.

Nonconforming traffic that falls within the peak traffic limits of a 60 Mbps bandwidth limit and a 200 KB allowance for traffic bursting (based on the token-bucket formula) is categorized as yellow. The packets in a yellow traffic flow are implicitly set to a **medium-high** loss priority and then transmitted.

Nonconforming traffic that exceeds the peak traffic limits are categorized as red. The packets in a red traffic flow are implicitly set to a **high** loss priority. In this example, the optional policer action for red traffic (**loss-priority high then discard**) is configured, so packets in a red traffic flow are discarded instead of transmitted.

## Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the Logical Interfaces on page 166](#)
- [Configuring the Two-Rate Three-Color Policer as a Logical Interface Policer on page 167](#)
- [Applying the Three-Color Policer to the Layer 2 Input at the Logical Interface on page 168](#)

### CLI Quick Configuration

To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/3/1 vlan-tagging
set interfaces ge-1/3/1 unit 0 vlan-id 100
set interfaces ge-1/3/1 unit 0 family inet address 10.10.10.1/30
set interfaces ge-1/3/1 unit 1 vlan-id 101
set interfaces ge-1/3/1 unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
 00:00:11:22:33:44
set firewall three-color-policer trTCM2-cb logical-interface-policer
set firewall three-color-policer trTCM2-cb two-rate color-blind
set firewall three-color-policer trTCM2-cb two-rate committed-information-rate 40m
set firewall three-color-policer trTCM2-cb two-rate committed-burst-size 100k
set firewall three-color-policer trTCM2-cb two-rate peak-information-rate 60m
set firewall three-color-policer trTCM2-cb two-rate peak-burst-size 200k
set firewall three-color-policer trTCM2-cb action loss-priority high then discard
set interfaces ge-1/3/1 unit 0 layer2-policer input-three-color trTCM2-cb
```

### Configuring the Logical Interfaces

### Step-by-Step Procedure

To configure the logical interfaces:

1. Enable configuration of the interface.  
  
[edit]  
user@host# edit interfaces ge-1/3/1
2. Configure single tagging.  
  
[edit interfaces ge-1/3/1]  
user@host# set vlan-tagging
3. Configure logical interface ge-1/3/1.0.  
  
[edit interfaces ge-1/3/1]  
user@host# set unit 0 vlan-id 100  
user@host# set unit 0 family inet address 10.10.10.1/30
4. Configure logical interface ge-1/3/1.0.  
  
[edit interfaces ge-1/3/1]  
user@host# set unit 1 vlan-id 101



```
user@host# set unit 1 family inet address 20.20.20.1/30 arp 20.20.20.2 mac
00:00:11:22:33:44
```

**Results** Confirm the configuration of the logical interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
ge-1/3/1 {
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 family inet {
 address 10.10.10.1/30;
 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}
```

### *Configuring the Two-Rate Three-Color Policer as a Logical Interface Policer*

**Step-by-Step Procedure** To configure the two-rate three-color policer as a logical interface policer:

1. Enable configuration of a three-color policer.

```
[edit]
user@host# edit firewall three-color-policer trTCM2-cb
```

2. Specify that the policer is a logical interface (aggregate) policer.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set logical-interface-policer
```

A logical interface policer rate-limits traffic based on a percentage of the media rate of the physical interface underlying the logical interface to which the policer is applied, and the policer is applied directly to the interface rather than referenced by a firewall filter.

3. Specify that the policer is two-rate and color-blind.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set two-rate color-blind
```

A color-aware three-color policer takes into account any coloring markings that might have been set for a packet by another traffic policer configured at a previous network node, and any preexisting color markings are used in determining the appropriate policing action for the packet.

Because you are applying this three-color policer applied to input at Layer 2, you must configure the policer to be color-blind.

4. Specify the policer traffic limits used to classify a green traffic flow.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set two-rate committed-information-rate 40m
user@host# set two-rate committed-burst-size 100k
```

5. Specify the additional policer traffic limits used to classify a yellow or red traffic flow.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set two-rate peak-information-rate 60m
user@host# set two-rate peak-burst-size 200k
```

6. (Optional) Specify the configured policer action for packets in a red traffic flow.

```
[edit firewall three-color-policer trTCM2-cb]
user@host# set action loss-priority high then discard
```

In color-aware mode, the three-color policer configured action can increase the packet loss priority (PLP) level of a packet, but never decrease it. For example, if a color-aware three-color policer meters a packet with a medium PLP marking, it can raise the PLP level to high, but cannot reduce the PLP level to low.

**Results** Confirm the configuration of the three-color policer by entering the **show firewall** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show firewall
three-color-policer trTCM2-cb {
 logical-interface-policer;
 action {
 loss-priority high then discard;
 }
 two-rate {
 color-blind;
 committed-information-rate 40m;
 committed-burst-size 100k;
 peak-information-rate 60m;
 peak-burst-size 200k;
 }
}
```

#### *Applying the Three-Color Policer to the Layer 2 Input at the Logical Interface*

##### **Step-by-Step Procedure**

To apply the three-color policer to the Layer 2 input at the logical interface:

1. Enable application of Layer 2 logical interface policers.

```
[edit]
user@host# edit interfaces ge-1/3/1 unit 0
```

2. Apply the three-color logical interface policer to a logical interface input.

```
[edit interfaces ge-1/3/1 unit 0]
```

```
user@host# set layer2-policerinput-three-color trTCM2-cb
```

**Results** Confirm the configuration of the logical interfaces by entering the **show interfaces** configuration mode command. If the command output does not display the intended configuration, repeat the instructions in this procedure to correct the configuration.

```
[edit]
user@host# show interfaces
ge-1/3/1 {
 vlan-tagging;
 unit 0 {
 vlan-id 100;
 layer2-policer {
 input-three-color trTCM2-cb;
 }
 family inet {
 address 10.10.10.1/30;
 }
 }
 unit 1 {
 vlan-id 101;
 family inet {
 address 20.20.20.1/30 {
 arp 20.20.20.2 mac 00:00:11:22:33:44;
 }
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Displaying Traffic Statistics and Policers for the Logical Interface on page 169](#)
- [Displaying Statistics for the Policer on page 170](#)

#### *Displaying Traffic Statistics and Policers for the Logical Interface*

**Purpose** Verify the traffic flow through the logical interface and that the policer is evaluated when packets are received on the logical interface.

**Action** Use the **show interfaces** operational mode command for logical interface **ge-1/3/1.0**, and include the **detail** or **extensive** option. The command output section for **Traffic statistics** lists the number of bytes and packets received and transmitted on the logical interface, and the **Protocol inet** section contains a **Policer** field that would list the policer **trTCM2-cb** as an input or output policer as follows:

- **Input:** trTCM2-cb-ge-1/3/1.0-log\_int-i
- **Output:** trTCM2-cb-ge-1/3/1.0-log\_int-o

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to in the input direction only.

#### *Displaying Statistics for the Policer*

**Purpose** Verify the number of packets evaluated by the policer.

**Action** Use the **show policer** operational mode command and optionally specify the name of the policer. The command output displays the number of packets evaluated by each configured policer (or the specified policer), in each direction. For the policer **trTCM2-cb**, the input and output policer names are displayed as follows:

- **trTCM2-cb-ge-1/3/1.0-log\_int-i**
- **trTCM2-cb-e-1/3/1.0-log\_int-o**

The **log\_int-i** suffix denotes a logical interface policer applied to input traffic, while the **log\_int-o** suffix denotes a logical interface policer applied to output traffic. In this example, the logical interface policer is applied to input traffic only.

- Related Documentation**
- [Statement Hierarchy for Configuring Policers on page 13](#)
  - [Guidelines for Applying Traffic Policers on page 23](#)
  - [layer2-policer on page 207](#)
  - [logical-interface-policer on page 209](#)
  - [policer \(Configuring\) on page 220](#)
  - [three-color-policer \(Configuring\) on page 226](#)

## CHAPTER 9

# Configuration Statements

- [\[edit firewall\] Hierarchy Level on page 172](#)
- [action on page 186](#)
- [bandwidth-limit \(Policer\) on page 187](#)
- [bandwidth-percent on page 189](#)
- [burst-size-limit \(Policer\) on page 191](#)
- [color-aware on page 194](#)
- [color-blind on page 195](#)
- [committed-burst-size on page 196](#)
- [committed-information-rate on page 198](#)
- [excess-burst-size on page 200](#)
- [filter-specific on page 201](#)
- [hierarchical-policer on page 202](#)
- [if-exceeding \(Policer\) on page 203](#)
- [input-hierarchical-policer on page 204](#)
- [input-policer on page 205](#)
- [input-three-color on page 206](#)
- [layer2-policer on page 207](#)
- [load-balance-group on page 208](#)
- [logical-bandwidth-policer on page 208](#)
- [logical-interface-policer on page 209](#)
- [loss-priority \(Firewall Filter Action\) on page 210](#)
- [loss-priority high then discard \(Three-Color Policer\) on page 211](#)
- [output-policer on page 212](#)
- [output-three-color on page 213](#)
- [peak-burst-size on page 214](#)
- [peak-information-rate on page 216](#)
- [physical-interface-filter on page 217](#)
- [physical-interface-policer on page 218](#)

- [policer \(Applying to a Logical Interface\) on page 219](#)
- [policer \(Configuring\) on page 220](#)
- [policer \(Firewall Filter Action\) on page 221](#)
- [prefix-action \(Configuring\) on page 222](#)
- [prefix-action \(Firewall Filter Action\) on page 223](#)
- [single-rate on page 224](#)
- [three-color-policer \(Applying\) on page 225](#)
- [three-color-policer \(Configuring\) on page 226](#)
- [two-rate on page 227](#)

---

## [edit firewall] Hierarchy Level

Several statements in the **[edit firewall]** hierarchy are valid at numerous locations within the hierarchy. To make the complete hierarchy easier to read, the repeated statements are listed in the following sections, which are referenced at the appropriate locations in “Complete [edit firewall] Hierarchy” on page 177.

- [Common Firewall Actions on page 172](#)
- [Common IP Firewall Actions on page 173](#)
- [Common IPv4 Firewall Actions on page 173](#)
- [Common IP Firewall Match Conditions on page 174](#)
- [Common IPv4 Firewall Match Conditions on page 175](#)
- [Common Layer 2 Firewall Match Conditions on page 175](#)
- [Complete \[edit firewall\] Hierarchy on page 177](#)

## Common Firewall Actions

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in “Complete [edit firewall] Hierarchy” on page 177 instead of the statements being repeated.

- **[edit firewall family (any | ccc | ethernet-switching | inet | inet6 | mpls | vpls) filter *filter-name* term *term-name* then]**
- **[edit firewall filter *filter-name* term *term-name* then]**

The common firewall actions are as follows:

```
count counter-name;
forwarding-class class-name;
loss-priority (high | low | medium-high | medium-low);
next term;
policer policer-name;
three-color-policer policer-name {
 (single-rate single-rate-policer-name | two-rate two-rate-policer-name);
}
```

## Common IP Firewall Actions

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in “[Complete \[edit firewall\] Hierarchy](#)” on page 177 instead of the statements being repeated.

- [edit firewall family inet filter *filter-name* term *term-name* then]
- [edit firewall family inet6 filter *filter-name* term *term-name* then]
- [edit firewall filter *filter-name* term *term-name* then]

The common IP firewall actions are as follows:

```
log;
logical-system logical-system-name <routing-instance routing-instance-name>
 <topology topology-name>;
port-mirror;
port-mirror-instance instance-name;
routing-instance routing-instance-name <topology topology-name>;
sample;
service-filter-hit;
syslog;
topology topology-name;
```

## Common IPv4 Firewall Actions

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in “[Complete \[edit firewall\] Hierarchy](#)” on page 177 instead of the statements being repeated.

- [edit firewall family inet filter *filter-name* term *term-name* then]
- [edit firewall filter *filter-name* term *term-name* then]

The common IP version 4 (IPv4) firewall actions are as follows:

```
(accept | discard <accounting collector-name> | reject <administratively-prohibited |
 bad-host-tos | bad-network-tos | fragmentation-needed | host-prohibited |
 host-unknown | host-unreachable | network-prohibited | network-unknown |
 network-unreachable | port-unreachable | precedence-cutoff | precedence-violation |
 protocol-unreachable | source-host-isolated | source-route-failed | tcp-reset>);
ipsec-sa sa-name;
load-balance sa-name;
next-hop-group group-name;
prefix-action action-name;
```

## Common IP Firewall Match Conditions

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in “[Complete \[edit firewall\] Hierarchy](#)” on page 177 instead of the statements being repeated.

- **[edit firewall family inet dialer-filter *filter-name* term *term-name* from]** (with the exceptions noted at this level in “[Complete \[edit firewall\] Hierarchy](#)” on page 177)
- **[edit firewall family inet filter *filter-name* term *term-name* from]**
- **[edit firewall family inet6 dialer-filter *filter-name* term *term-name* from]** (with the exceptions noted at this level in “[Complete \[edit firewall\] Hierarchy](#)” on page 177)
- **[edit firewall family inet6 filter *filter-name* term *term-name* from]**
- **[edit firewall filter *filter-name* term *term-name* from]**

The common IP firewall match conditions are as follows:

```

address {
 ip-prefix</prefix-length> <except>;
}
destination-address {
 ip-prefix</prefix-length> <except>;
}
destination-class [class-names] | destination-class-except [class-names];
(destination-port [port-names] | destination-port-except [port-names]);
destination-prefix-list {
 list-name <except>;
}
(forwarding-class [class-names] | forwarding-class-except [class-names]);
icmp-code [codes] | icmp-code-except [codes];
icmp-type [types] | icmp-type-except [types];
interface interface-name;
(interface-group [group-names] | interface-group-except [group-names]);
interface-set set-name;
(loss-priority [priorities] | loss-priority-except [priorities]);
(packet-length [values] | packet-length-except [values]);
(port [port-names] | port-except [port-names]);
prefix-list {
 list-name <except>;
}
service-filter-hit;
source-address {
 ip-prefix</prefix-length> <except>;
}
(source-class [class-names] | source-class-except [class-names]);
(source-port [port-names] | source-port-except [port-names]);
source-prefix-list {
 list-name <except>;
}
tcp-established;
tcp-flags flag;
tcp-initial;

```



## Common IPv4 Firewall Match Conditions

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in “[Complete \[edit firewall\] Hierarchy](#)” on page 177 instead of the statements being repeated.

- **[edit firewall family inet dialer-filter *filter-name* term *term-name* from]** (with the exceptions noted at this level in “[Complete \[edit firewall\] Hierarchy](#)” on page 177)
- **[edit firewall family inet filter *filter-name* term *term-name* from]**
- **[edit firewall filter *filter-name* term *term-name* from]**

The common IPv4 firewall match conditions are as follows:

```
(ah-spi [values] | ah-spi-except [values]);
(dscp [code-point-values] | dscp-except [code-point-values]);
(esp-spi [values] | esp-spi-except [values]);
first-fragment;
fragment-flags flag;
(fragment-offset [offsets] | fragment-offset-except [offsets]);
(ip-options [option-names] | ip-options-except [option-names]);
is-fragment;
(precedence [precedence-names] | precedence-except [precedence-names]);
(protocol [protocol-names] | protocol-except [protocol-names]);
(ttl [tll-values] | ttl-except [tll-values]);
```

## Common Layer 2 Firewall Match Conditions

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in “[Complete \[edit firewall\] Hierarchy](#)” on page 177 instead of the statements being repeated.

- **[edit firewall family ethernet-switching filter *filter-name* term *term-name* from]**
- **[edit firewall family vpls filter *filter-name* term *term-name* from]**

The common Layer 2 firewall match conditions are as follows:

```
destination-mac-address {
 mac-address <except>;
}
(destination-port [port-names] | destination-port-except [port-names]);
(dscp [code-point-values] | dscp-except [code-point-values]);
(ether-type [protocol-types] | ether-type-except [protocol-types]);
(forwarding-class [class-names] | forwarding-class-except [class-names]);
(icmp-code [codes] | icmp-code-except [codes]);
(icmp-type [types] | icmp-type-except [types]);
(interface-group [group-names] | interface-group-except [group-names]);
ip-address {
 ip-prefix</prefix-length> <except>;
}
ip-destination-address {
 ip-prefix</prefix-length> <except>;
}
```

```
(ip-precedence [precedence-names] | ip-precedence-except [precedence-names]);
(ip-protocol [protocol-names] | ip-protocol-except [protocol-names]);
ip-source-address ip-prefix </prefix-length>;
(learn-vlan-1p-priority [priorities] | learn-vlan-1p-priority [priorities]);
(learn-vlan-id [vlan-ids] | learn-vlan-id-except [vlan-ids]);
(loss-priority [priorities] | loss-priority-except [priorities]);
(port [port-names] | port-except [port-names]);
source-mac-address {
 mac-address <except>;
}
(source-port [port-names] | source-port-except [port-names]);
tcp-flags flag;
(traffic-type [broadcast known-unicast multicast unknown-unicast] |
 traffic-type-except [broadcast known-unicast multicast unknown-unicast]);
(user-vlan-1p-priority [priorities] | user-vlan-1p-priority [priorities]);
(user-vlan-id [vlan-ids] | user-vlan-id-except [vlan-ids]);
(vlan-ether-type [protocol-types] | vlan-ether-type-except [protocol-types]);
```

## Complete [edit firewall] Hierarchy

```

firewall {
 family (any | ccc | ethernet-switching | inet | inet6 | mpls | vpls) {
 ... the family subhierarchies appear after the main [edit firewall] hierarchy ...
 }
 filter filter-name {
 accounting-profile [profile-names];
 enhanced-mode;
 interface-shared-with;
 interface-specific;
 physical-interface-policer;
 term term-name {
 filter filter-name;
 from {
 ... statements in Common IP Firewall Match Conditions on page 174 AND
 ... statements in Common IPv4 Firewall Match Conditions on page 175 ...
 }
 then {
 ... statements in Common Firewall Actions on page 172 AND
 ... statements in Common IP Firewall Actions on page 173 AND
 ... statements in Common IPv4 Firewall Actions on page 173 ...
 }
 }
 }
}
hierarchical-policer policer-name {
 aggregate {
 if-exceeding {
 bandwidth-limit bps;
 burst-size-limit bytes;
 }
 then {
 discard;
 forwarding-class class-name;
 loss-priority (high | low | medium-high | medium-low);
 }
 }
 logical-interface-policer;
 physical-interface-policer;
 premium {
 if-exceeding {
 bandwidth-limit bps;
 burst-size-limit bytes;
 }
 then {
 discard;
 }
 }
}
shared-bandwidth-policer;
interface-set interface-set-name {
 interface-name;
}
load-balance-group group-name {
 next-hop-group [group-names];
}

```

```

}
policer policer-name {
 filter-specific;
 if-exceeding {
 (bandwidth-limit bps | bandwidth-percent percentage);
 burst-size-limit bytes;
 }
 logical-bandwidth-policer;
 logical-interface-policer;
 physical-interface-policer;
 then {
 discard;
 forwarding-class class-name;
 loss-priority (high | low | medium-high | medium-low);
 }
}
three-color-policer policer-name {
 action {
 loss-priority high then discard;
 }
 filter-specific;
 logical-interface-policer;
 physical-interface-policer;
 shared-bandwidth-policer;
 single-rate {
 (color-aware | color-blind);
 committed-burst-size bytes;
 committed-information-rate bps;
 excess-burst-size bytes;
 }
 two-rate {
 (color-aware | color-blind);
 committed-burst-size bytes;
 committed-information-rate bps;
 peak-burst-size bytes;
 peak-information-rate bps;
 }
}
}

firewall {
 family any {
 filter filter-name {
 interface-shared;
 term term-name {
 from {
 (forwarding-class [class-names] | forwarding-class-except [class-names]);
 interface interface-name;
 interface-set set-name;
 (loss-priority [priorities] | loss-priority-except [priorities]);
 (packet-length [values] | packet-length-except [values]);
 }
 then {
 ... statements in Common Firewall Actions on page 172 PLUS ...
 (accept | discard);
 }
 }
 }
 }
}

```

```

 }
 }
}

firewall {
 family ccc {
 filter filter-name {
 accounting-profile [profile-names];
 physical-interface-filter;
 interface-specific;
 term term-name {
 filter filter-name;
 from {
 (forwarding-class [class-names] | forwarding-class-except [class-names]);
 (interface-group [group-names] | interface-group-except [group-names]);
 (learn-vlan-1p-priority [priorities] | learn-vlan-1p-priority [priorities]);
 (loss-priority [priorities] | loss-priority-except [priorities]);
 (user-vlan-1p-priority [priorities] | user-vlan-1p-priority [priorities]);
 }
 then {
 ... statements in Common Firewall Actions on page 172 PLUS ...
 (accept | discard);
 port-mirror-instance instance-name;
 }
 }
 }
 }
}

firewall {
 family ethernet-switching {
 filter filter-name {
 interface-specific;
 term term-name {
 from {
 destination-address {
 ip-prefix</prefix-length>;
 }
 destination-mac-address {
 mac-address;
 }
 destination-port [port-names];
 destination-prefix-list {
 list-name;
 }
 dot1q-tag [tag-values];
 dot1q-user-priority [priority-values];
 dscp [code-point-values];
 ether-type [protocol-names];
 fragment-flags flag;
 icmp-code [codes];
 icmp-type [types];
 interface interface-name;
 is-fragment;

```

```

precedence [precedence-names];
protocol [protocol-names];
source-address {
 ip-prefix </prefix-length>;
}
source-mac-address {
 mac-address;
}
source-port [port-names];
source-prefix-list {
 list-name;
}
tcp-established;
tcp-flags flag;
tcp-initial;
vlan [vlan-names];
}
then {
 (accept | discard);
 analyzer analyzer-name;
 count counter-name;
 forwarding-class class-name;
 interface interface-name;
 log;
 loss-priority (high | low);
 policer policer-name;
 syslog;
 vlan vlan-name;
}
}
}
}
}

firewall {
 family inet {
 dialer-filter filter-name {
 accounting-profile [profile-names];
 term term-name {
 from {
 ... statements in Common IP Firewall Match Conditions on page 174 AND
 statements in Common IPv4 Firewall Match Conditions on page 175 EXCEPT
 FOR ...
 (ah-spi [values] | ah-spi-except [values]); # NOT valid at this level
 (destination-class [class-names] |
 destination-class-except [class-names]); # NOT valid at this level
 interface interface-name; # NOT valid at this level
 (loss-priority [priorities] | loss-priority-except [priorities]); # NOT valid at
 this level
 service-filter-hit; # NOT valid at this level
 (source-class [class-names] | source-class-except [class-names]); # NOT
 valid at this level
 }
 }
 then {
 (ignore | note);
 log;
 }
 }
 }
}

```

```

 sample;
 syslog;
 }
}
filter filter-name {
 accounting-profile [profile-names];
 interface-specific;
 term term-name {
 filter filter-name;
 from {
 ... statements in Common IP Firewall Match Conditions on page 174 AND
 statements in Common IPv4 Firewall Match Conditions on page 175 ...
 }
 then {
 ... statements in Common Firewall Actions on page 172 AND
 statements in Common IP Firewall Actions on page 173 AND
 statements in Common IPv4 Firewall Actions on page 173 ...
 }
 }
}
prefix-action name {
 count;
 destination-prefix-length prefix-length;
 filter-specific;
 policer policer-name;
 source-prefix-length prefix-length;
 subnet-prefix-length prefix-length;
}
service-filter filter-name {
 term term-name {
 from {
 address {
 ip-prefix</prefix-length>;
 }
 (ah-spi [values] | ah-spi-except [values]);
 destination-address {
 ip-prefix</prefix-length>;
 }
 (destination-port [port-names] | destination-port-except [port-names]);
 destination-prefix-list {
 list-name;
 }
 (esp-spi [values] | esp-spi-except [values]);
 first-fragment;
 fragment-flags flag;
 (fragment-offset [offsets] | fragment-offset-except [offsets]);
 (interface-group [group-names] | interface-group-except [group-names]);
 (ip-options [option-names] | ip-options-except [option-names]);
 is-fragment;
 (loss-priority [priorities] | loss-priority-except [priorities]);
 (port [port-names] | port-except [port-names]);
 prefix-list {
 list-name;
 }
 (protocol [protocol-names] | protocol-except [protocol-names]);
 }
 }
}

```

```

 source-address {
 ip-prefix </prefix-length>;
 }
 (source-port [port-names] | source-port-except [port-names]);
 source-prefix-list {
 list-name;
 }
 tcp-flags flag-name;
 }
 then {
 count counter-name;
 log;
 port-mirror;
 sample;
 (service | skip);
 }
}
}
simple-filter filter-name {
 term term-name {
 from {
 destination-address ip-prefix </prefix-length>;
 destination-port port-name;
 forwarding-class [class-names];
 protocol protocol-name;
 source-address ip-prefix </prefix-length>;
 source-port port-name;
 }
 then {
 forwarding-class class-name;
 loss-priority (high | low | medium-high | medium-low);
 policer policer-name;
 }
 }
}
}
}
}
firewall {
 family inet6 {
 dialer-filter filter-name {
 accounting-profile [profile-names];
 term term-name {
 from {
 ... statements in Common IP Firewall Match Conditions on page 174 PLUS ...
 (next-header [protocol-types] | next-header-except [protocol-types]);
 ... BUT NOT ...
 (destination-class [class-names] |
 destination-class-except [class-names]); # NOT valid at this level
 (forwarding-class [class-names] |
 forwarding-class-except [class-names]); # NOT valid at this level
 interface interface-name; # NOT valid at this level
 (interface-group [group-names] | interface-group-except [group-names]); #
 NOT valid at this level
 (loss-priority [priorities] | loss-priority-except [priorities]); # NOT valid at
 this level
 }
 }
 }
 }
}

```



```

 service-filter-hit; # NOT valid at this level
 (source-class [class-names] | source-class-except [class-names]); # NOT
 valid at this level
 tcp-established; # NOT valid at this level
 tcp-flags flag; # NOT valid at this level
 tcp-initial; # NOT valid at this level
 }
 then {
 (ignore | note);
 log;
 sample;
 syslog;
 }
}
filter filter-name {
 accounting-profile [profile-names];
 interface-specific;
 term term-name {
 filter filter-name;
 from {
 ... statements in Common IP Firewall Match Conditions on page 174 PLUS ...
 (next-header [protocol-types] | next-header-except [protocol-types]);
 (traffic-class [code-point-values] | traffic-class-except [code-point-values]);
 }
 then {
 ... statements in Common Firewall Actions on page 172 AND
 statements in Common IP Firewall Actions on page 173 PLUS ...
 (accept | discard | reject <address-unreachable | administratively-prohibited |
 beyond-scope | fragmentation-needed | no-route | port-unreachable |
 tcp-reset>);
 }
 }
}
service-filter filter-name {
 term term-name {
 from {
 address {
 ip-prefix</prefix-length>;
 }
 (ah-spi [values] | ah-spi-except [values]);
 destination-address {
 ip-prefix</prefix-length>;
 }
 (destination-port [port-names] | destination-port-except [port-names]);
 destination-prefix-list {
 list-name;
 }
 (esp-spi [values] | esp-spi-except [values]);
 (interface-group [group-names] | interface-group-except [group-names]);
 (next-header [protocol-types] | next-header-except [protocol-types]);
 (port [port-names] | port-except [port-names]);
 prefix-list {
 list-name;
 }
 source-address {

```

```

 ip-prefix </prefix-length>;
 }
 (source-port [port-names] | source-port-except [port-names]);
 source-prefix-list {
 list-name;
 }
 tcp-flags flag-name;
}
then {
 count counter-name;
 log;
 port-mirror;
 sample;
 (service | skip);
}
}
}
}
}

firewall {
 family mpls {
 filter filter-name {
 accounting-profile [profile-names];
 interface-specific;
 physical-interface-filter;
 term term-name {
 from {
 (exp [exp-bits] | exp-except [exp-bits]);
 }
 then {
 (ignore | note);
 log;
 sample;
 syslog;
 }
 }
 }
 }
 filter filter-name {
 accounting-profile [profile-names];
 interface-specific;
 physical-interface-filter;
 term term-name {
 filter filter-name;
 from {
 (exp [exp-bits] | exp-except [exp-bits]);
 (forwarding-class [class-names] | forwarding-class-except [class-names]);
 interface interface-name;
 interface-set set-name;
 (loss-priority [priorities] | loss-priority-except [priorities]);
 }
 then {
 ... statements in Common Firewall Actions on page 172 PLUS ...
 (accept | discard);
 sample;
 }
 }
 }
}

```

```

 }
 }
}

firewall {
 family vpls {
 filter filter-name {
 accounting-profile [profile-names];
 interface-specific;
 term term-name {
 filter filter-name;
 from {
 ... statements in Common Layer 2 Firewall Match Conditions on page 175 ...
 }
 then {
 ... statements in Common Firewall Actions on page 172 PLUS ...
 (accept | discard);
 port-mirror;
 port-mirror-instance instance-name;
 }
 }
 }
 }
}

```

**Related Documentation**

- *Notational Conventions Used in Junos OS Configuration Hierarchies*

## action

---

|                            |                                                                                                                                                                                                                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> action {     loss-priority high then discard; } </pre>                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> ],<br>[edit firewall <b>three-color-policer</b> <i>name</i> ],<br>[edit logical-systems <i>logical-system-name</i> firewall <b>three-color-policer</b> <i>name</i> ]                                                        |
| <b>Release Information</b> | Statement introduced in Junos OS Release 8.2.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Support at the [edit dynamic-profiles ... <b>three-color-policer</b> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches. |
| <b>Description</b>         | Discard traffic on a logical interface using tricolor marking policing.                                                                                                                                                                                                                                                |




**NOTE:** This statement is supported only on IQ2 interfaces.

---

The remaining statement is explained separately.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li>• <a href="#">Basic Single-Rate Three-Color Policers on page 126</a></li> <li>• <a href="#">Basic Two-Rate Three-Color Policers on page 132</a></li> <li>• <a href="#">Two-Color and Three-Color Logical Interface Policers on page 139</a></li> <li>• <a href="#">Two-Color and Three-Color Physical Interface Policers on page 151</a></li> <li>• <a href="#">Two-Color and Three-Color Policers at Layer 2 on page 161</a></li> <li>• <a href="#">loss-priority high then discard on page 211</a></li> </ul> |

## bandwidth-limit (Policer)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>bandwidth-limit <i>bps</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>     | [edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i> <b>if-exceeding</b> ],<br>[edit firewall <b>policer</b> <i>policer-name</i> <b>if-exceeding</b> ],<br>[edit logical-systems <i>logical-system-name</i> <b>policer</b> <i>policer-name</i> <b>if-exceeding</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>if-exceeding</b> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>         | <p>For a single-rate two-color policer, configure the bandwidth limit as a number of bits per second. Single-rate two-color policing uses the single token bucket algorithm to measure traffic-flow conformance to a two-color policer rate limit.</p> <p>Traffic at the interface that conforms to the bandwidth limit is categorized green. Traffic that exceeds the specified rate is also categorized as green provided that sufficient tokens remain in the single token bucket. Packets in a green flow are implicitly marked with <b>low</b> packet loss priority (PLP) and then passed through the interface.</p> <p>Traffic that exceeds the specified rate when insufficient tokens remain in the single token bucket is categorized red. Depending on the configuration of the two-color policer, packets in a red traffic flow might be implicitly discarded; or the packets might be re-marked with a specified forwarding class, a specified PLP, or both, and then passed through the interface.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p> <b>NOTE:</b> This statement specifies the bandwidth limit as an absolute number of bits per second. Alternatively, for single-rate two-color policers only, you can use the <b>bandwidth-percent <i>percentage</i></b> statement to specify the bandwidth limit as a percentage of either the physical interface port speed or the configured logical interface shaping rate.</p> </div> <p>Single-rate two-color policing allows bursts of traffic for short periods, whereas single-rate and two-rate three-color policing allows more sustained bursts of traffic.</p> <p>Hierarchical policing is a form of two-color policing that applies different policing actions based on whether the packets are classified for expedited forwarding (EF) or for a lower priority. You apply a hierarchical policer to ingress Layer 2 traffic to allow bursts of EF traffic for short period and bursts of non-EF traffic for short periods, with EF traffic always taking precedence over non-EF traffic.</p> |
| <b>Options</b>             | <b>bps</b> —You can specify the number of bits per second either as a decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Range:** (M Series, MX Series, T Series routers, and EX Series switches)  
8000 through 100,000,000,000

**Default:** None.

**Required Privilege Level** firewall—To view this statement in the configuration.  
firewall-control—To add this statement to the configuration.

- Related Documentation**
- [Two-Color Policer Configuration Overview on page 15](#)
  - [Policer Bandwidth and Burst-Size Limits](#)
  - [Policer Color-Marking and Actions on page 26](#)
  - [Single Token Bucket Algorithm on page 28](#)
  - [Determining Proper Burst Size for Traffic Policers on page 39](#)
  - [bandwidth-percent on page 189](#)
  - [burst-size-limit \(Policer\) on page 191](#)

## bandwidth-percent

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>bandwidth-percent <i>percentage</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>     | [edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i> <b>if-exceeding</b> ],<br>[edit firewall <b>policer</b> <i>policer-name</i> <b>if-exceeding</b> ],<br>[edit logical-systems <i>logical-system-name</i> <b>policer</b> <i>policer-name</i> <b>if-exceeding</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>if-exceeding</b> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>         | For a single-rate two-color policer, configure the bandwidth limit as a percentage value. Single-rate two-color policing uses the <i>single token bucket algorithm</i> to measure traffic-flow conformance to a two-color policer rate limit.<br><br>Traffic at the interface that conforms to the bandwidth limit is categorized green. Traffic that exceeds the specified rate is also categorized as green provided that sufficient tokens remain in the single token bucket. Packets in a green flow are implicitly marked with <b>low</b> packet loss priority and then passed through the interface.<br><br>Traffic that exceeds the specified rate when insufficient tokens remain in the single token bucket is categorized red. Depending on the configuration of the two-color policer, packets in a red traffic flow might be implicitly discarded; or the packets might be re-marked with a specified forwarding class, a specified PLP, or both, and then passed through the interface. |



**NOTE:** This statement specifies the bandwidth limit as a percentage of either the physical interface port speed or the configured logical interface shaping rate. Alternatively, you can use the **bandwidth-limit *bps*** statement to specify the bandwidth limit as an absolute number of bits per second.

The function of the bandwidth limit is extended by the burst size (configured using the **burst-size-limit *bytes*** statement) to allow bursts of traffic up to a limit based on the overall traffic load:

- When a single-rate two-color policer is applied to the input or output traffic at an interface, the initial capacity for traffic bursting is equal to the number of bytes specified by this statement.
- During periods of relatively low traffic (traffic that arrives at or departs from the interface at overall rates below the token arrival rate), unused tokens accumulate in the bucket, but only up to the configured token bucket depth.

Single-rate two-color policing allows bursts of traffic for short periods, whereas single-rate and two-rate three-color policing allows more sustained bursts of traffic.

Hierarchical policing is a form of two-color policing that applies different policing actions based on whether the packets are classified for expedited forwarding (EF) or for a lower priority. You apply a hierarchical policer to ingress Layer 2 traffic to allow bursts of EF traffic for short period and bursts of non-EF traffic for short periods, with EF traffic always taking precedence over non-EF traffic.

**Options**    **percentage**—Traffic rate as a percentage of either the physical interface media rate or the logical interface configured shaping rate. You can configure a shaping rate on a logical interface by using class-of-service statement.



**NOTE:** You cannot rate-limit based on bandwidth percentage for tunnel or software interfaces. The bandwidth percentage policer also cannot be used for forwarding table filters. Bandwidth percentage policers can only be used for interface-specific filters. Bandwidth percentage policers applied on an aggregated Ethernet bundle or an aggregated SONET bundle *do* match the effective bandwidth and burst-size to user-configured values by default and do not require shared-bandwidth-policer configuration.

---

**Range:** 0 through 100

**Default:** None.

**Required Privilege**    firewall—To view this statement in the configuration.  
**Level**                    firewall-control—To add this statement to the configuration.

- Related Documentation**
- [Two-Color Policer Configuration Overview on page 15](#)
  - [Policer Bandwidth and Burst-Size Limits](#)
  - [Policer Color-Marking and Actions on page 26](#)
  - [Single Token Bucket Algorithm on page 28](#)
  - [Determining Proper Burst Size for Traffic Policers on page 39](#)
  - [Bandwidth Policers on page 62](#)
  - [bandwidth-limit \(Policer\) on page 187](#)
  - [burst-size-limit \(Policer\) on page 191](#)



## burst-size-limit (Policer)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>burst-size-limit bytes;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>     | <p>[edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i> <b>if-exceeding</b>],</p> <p>[edit firewall <b>policer</b> <i>policer-name</i> <b>if-exceeding</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> <b>policer</b> <i>policer-name</i> <b>if-exceeding</b>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Support at the [edit dynamic-profiles ... <b>if-exceeding</b>] hierarchy level introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>         | <p>For a single-rate two-color policer, configure the burst size as a number of bytes. The burst size allows for short periods of traffic bursting (back-to-back traffic at average rates that exceed the configured bandwidth limit). Single-rate two-color policing uses the <i>single token bucket algorithm</i> to measure traffic-flow conformance to a two-color policer rate limit.</p> <p>Traffic at the interface that conforms to the bandwidth limit is categorized green. Traffic that exceeds the specified rate is also categorized as green provided that sufficient tokens remain in the single token bucket. Packets in a green flow are implicitly marked with <b>low</b> packet loss priority and then passed through the interface.</p> <p>Traffic that exceeds the specified rate when insufficient tokens remain in the single token bucket is categorized red. Depending on the configuration of the two-color policer, packets in a red traffic flow might be implicitly discarded; or the packets might be re-marked with a specified forwarding class, a specified PLP, or both, and then passed through the interface.</p> <p>The burst size extends the function of the bandwidth limit (configured using either the <b>bandwidth-limit bps</b> statement or the <b>bandwidth-percent percentage</b> statement) to allow bursts of traffic up to a limit based on the overall traffic load:</p> <ul style="list-style-type: none"> <li>• When a single-rate two-color policer is applied to the input or output traffic at an interface, the initial capacity for traffic bursting is equal to the number of bytes specified by this statement.</li> <li>• During periods of relatively low traffic (traffic that arrives at or departs from the interface at overall rates below the token arrival rate), unused tokens accumulate in the bucket, but only up to the configured token bucket depth.</li> </ul> <p>Single-rate two-color policing allows bursts of traffic for short periods, whereas single-rate and two-rate three-color policing allows more sustained bursts of traffic.</p> <p>Hierarchical policing is a form of two-color policing that applies different policing actions based on whether the packets are classified for expedited forwarding (EF) or for a lower priority. You apply a hierarchical policer to ingress Layer 2 traffic to allow bursts of EF traffic for short period and bursts of non-EF traffic for short periods, with EF traffic always taking precedence over non-EF traffic.</p> |

Table 11 on page 192 summarizes the relationship between the **bandwidth-limit** and the token arrival rate. This information is useful in calculating the minimum **burst-size-limit**.

**Table 11: Bandwidth Limits and Token Rates**

| Bandwidth Limit     | Token Rate         |
|---------------------|--------------------|
| 0-333 Mbps          | low (262 $\mu$ s)  |
| 334-666 Mbps        | high (8.2 $\mu$ s) |
| 667-1333 Mbps       | low                |
| 1334 Mbps and above | high               |

The burst-size limit enforced is based on the burst-size limit you configure. For a rate-limited logical interface, the Packet Forwarding Engine calculates the optimum burst-size-limit values and then applies the value closest to the burst-size-limit value specified in the policer configuration.

On MX Series routers and EX Series switches, the burst-size limit is not as freely configurable as it is on other platforms. Junos OS does not support an unlimited combination of policer bandwidth and burst-size limits on MX Series routers and EX Series switches. For a single-rate two-color policer on an MX Series router and on an EX Series switch, the minimum supported burst-size limit is equivalent to the amount of traffic allowed by the policer bandwidth limit in a time span of 1 millisecond. For example, for a policer configured with a **bandwidth-limit** value of 1 Gbps, the minimum supported value for **burst-size-limit** on an MX Series router and on an EX Series switch is 125 KB. If you configure a value that is smaller than the minimum, Junos OS overrides the configuration and applies the actual minimum.

**Options** **bytes**—Burst-size limit in bytes. The minimum recommended value is the maximum transmission unit (MTU) of the IP packets being policed. You can specify the value either as a complete decimal number or as a decimal number followed by the abbreviation **k** (1000), **m** (1,000,000), or **g** (1,000,000,000).


**Range:** 1500 through 100,000,000,000

**Default:** None


**Required Privilege Level** firewall—To view this statement in the configuration.  
 firewall-control—To add this statement to the configuration.

- Related Documentation**
- [Two-Color Policer Configuration Overview on page 15](#)
  - [Policer Bandwidth and Burst-Size Limits](#)
  - [Policer Color-Marking and Actions on page 26](#)
  - [Single Token Bucket Algorithm on page 28](#)
  - [Determining Proper Burst Size for Traffic Policers on page 39](#)
  - [bandwidth-limit \(Policer\) on page 187](#)
  - [bandwidth-percent on page 189](#)

## color-aware

|                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                         | color-aware;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>single-rate</b> ],<br>[edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>two-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>single-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>two-rate</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>                                                                                                                                                                                                                                            | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>single-rate</b> ] and [edit dynamic-profiles ... <b>two-rate</b> ] hierarchy levels introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                                                                                                                                                                                                                                                    | <p>For a three-color policer, configure the way preclassified packets are metered. In color-aware mode, the local router can assign a higher packet loss priority, but cannot assign a lower packet loss priority.</p> <p>For example, suppose an upstream router assigned medium-high packet loss priority to a packet because the packet exceeded the committed information rate on the upstream router interface.</p> <ul style="list-style-type: none"> <li>• If the local router applies color-aware policing to the packet, the router <i>cannot</i> change the packet loss priority to low, even if the packet conforms to the configured committed information route on the local router interface.</li> <li>• If the local router applies color-blind policing to the packet, the router <i>can</i> change the packet loss priority to low if the packet conforms to the configured committed information route on the local router interface.</li> </ul> |
| <div style="display: flex; align-items: center;">  <div> <p><b>NOTE:</b> A color-aware policer cannot be applied to Layer 2 traffic.</p> </div> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Default</b>                                                                                                                                                                                                                                                        | If you omit the <b>color-aware</b> statement, the default behavior is color-aware mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                       | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li>• <a href="#">Color Modes for Three-Color Policers on page 124</a></li> <li>• <a href="#">color-blind on page 195</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## color-blind

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | color-blind;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>single-rate</b> ],<br>[edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>two-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>single-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>two-rate</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>single-rate</b> ] and [edit dynamic-profiles ... <b>two-rate</b> ] hierarchy levels introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>For a three-color policer, configure the way preclassified packets are metered. In color-blind mode, the local router ignores the preclassification of packets and can assign a higher or lower packet loss priority.</p> <p>For example, suppose an upstream router assigned medium-high packet loss priority to a packet because the packet exceeded the committed information rate on the upstream router interface.</p> <ul style="list-style-type: none"> <li>• If the local router applies color-aware policing to the packet, the router <i>cannot</i> change the packet loss priority to low, even if the packet conforms to the configured committed information route on the local router interface.</li> </ul> <div style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;"> <p> <b>NOTE:</b> A color-aware policer cannot be applied to Layer 2 traffic.</p> </div> <ul style="list-style-type: none"> <li>• If the local router applies color-blind policing to the packet, the router <i>can</i> change the packet loss priority to low if the packet conforms to the configured committed information route on the local router interface.</li> </ul> |
| <b>Default</b>                  | If you omit the <b>color-blind</b> statement, the default behavior is color-aware mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li>• <a href="#">Color Modes for Three-Color Policers on page 124</a></li> <li>• <a href="#">color-aware on page 194</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## committed-burst-size

|                            |                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>committed-burst-size bytes;</code>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>     | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>single-rate</b> ],<br>[edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>two-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>single-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>two-rate</b> ] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>single-rate</b> ] and [edit dynamic-profiles ... <b>two-rate</b> ] hierarchy levels introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                           |
| <b>Description</b>         | For a three-color policer, configure the committed burst size (CBS) as a number of bytes.                                                                                                                                                                                                                                                                                                                   |



**NOTE:** When you include the **committed-burst-size** statement in the configuration, you must also include the **committed-information-rate** statement at the same hierarchy level.

In three-color policing, a committed information rate (CIR) defines the guaranteed bandwidth for traffic arriving at or departing from the interface under normal line conditions. A flow of traffic at an average rate that conforms to the CIR is categorized green.

During periods of average traffic rates below the CIR, any unused bandwidth capacity accumulates up to a maximum amount defined by the CBS. Short periods of bursting traffic (back-to-back traffic at averages rates that exceed the CIR) are also categorized as green provided that unused bandwidth capacity is available.

Traffic that exceeds both the CIR and the CBS is considered nonconforming.

Single-rate three-color policers use a *dual token bucket algorithm* to measure traffic against a single rate limit. Nonconforming traffic is categorized as yellow or red, based on the **excess-burst-size** statement included in the policer configuration.

Two-rate three-color policers use a *dual-rate dual token bucket algorithm* to measure traffic against two rate limits. Nonconforming traffic is categorized as yellow or red based on the **peak-information-rate** and **peak-burst-rate** statements included in the policer configuration.

**Options** **bytes**—Number of bytes. You can specify a value in bytes either as a complete decimal number or as a decimal number followed by the abbreviation **k** (1000), **m** (1,000,000), or **g** (1,000,000,000).  
**Range:** 1500 through 100,000,000,000 bytes

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li><li>• <i>Policer Bandwidth and Burst-Size Limits</i></li><li>• <a href="#">Policer Color-Marking and Actions on page 26</a></li><li>• <a href="#">Dual Token Bucket Algorithms on page 30</a></li><li>• <a href="#">Determining Proper Burst Size for Traffic Policers on page 39</a></li><li>• <a href="#">committed-information-rate on page 198</a></li><li>• <a href="#">excess-burst-size on page 200</a></li><li>• <a href="#">peak-burst-size on page 214</a></li><li>• <a href="#">peak-information-rate on page 216</a></li></ul> |

## committed-information-rate

|                            |                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>committed-information-rate <i>bps</i>;</code>                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>     | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>single-rate</b> ],<br>[edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>two-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>single-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>two-rate</b> ] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>single-rate</b> ] and [edit dynamic-profiles ... <b>two-rate</b> ] hierarchy levels introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                           |
| <b>Description</b>         | For a three-color policer, configure the committed information rate as a number of bits per second. The committed information rate (CIR) is the guaranteed bandwidth for traffic arriving at or departing from the interface under normal line conditions.                                                                                                                                                  |



**NOTE:** When you include the **committed-information-rate** statement in the configuration, you must also include the **committed-burst-size** statement at the same hierarchy level.

In three-color policing, a CIR defines the guaranteed bandwidth for traffic arriving at or departing from the interface under normal line conditions. A flow of traffic at an average rate that conforms to the CIR is categorized green.

During periods of average traffic rates below the CIR, any unused bandwidth capacity accumulates up to a maximum amount defined by the committed burst size (CBS). Short periods of bursting traffic (back-to-back traffic at averages rates that exceed the CIR) are also categorized as green provided that unused bandwidth capacity is available.

Traffic that exceeds both the CIR and the CBS is considered nonconforming.

Single-rate three-color policers use a *dual token bucket algorithm* to measure traffic against a single rate limit. Nonconforming traffic is categorized as yellow or red, based on the **excess-burst-size** statement included in the policer configuration.

Two-rate three-color policers use a *dual-rate dual token bucket algorithm* to measure traffic against two rate limits. Nonconforming traffic is categorized as yellow or red based on the **peak-information-rate** and **peak-burst-rate** statements included in the policer configuration.

**Options** ***bps***—Number of bits per second. You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation **k** (1000), **m** (1,000,000), or **g** (1,000,000,000).

**Range:** 1500 through 100,000,000,000 bps



|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li><li>• <a href="#">Policer Bandwidth and Burst-Size Limits</a></li><li>• <a href="#">Policer Color-Marking and Actions on page 26</a></li><li>• <a href="#">Dual Token Bucket Algorithms on page 30</a></li><li>• <a href="#">Determining Proper Burst Size for Traffic Policers on page 39</a></li><li>• <a href="#">committed-burst-size on page 196</a></li><li>• <a href="#">excess-burst-size on page 200</a></li><li>• <a href="#">peak-burst-size on page 214</a></li><li>• <a href="#">peak-information-rate on page 216</a></li></ul> |

## excess-burst-size

|                            |                                                                                                                                                                                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>excess-burst-size bytes;</code>                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>single-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>single-rate</b> ]                                                |
| <b>Release Information</b> | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>single-rate</b> ] hierarchy level introduced in Junos Release OS 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.       |
| <b>Description</b>         | For a single-rate three-color policer, configure the excess burst size (EBS) as a number of bytes. The EBS allows for moderate periods of bursting traffic that exceeds both the committed information rate (CIR) and the committed burst size (CBS). |



**NOTE:** When you include the **excess-burst-size** statement in the configuration, you must also include the **committed-burst-size** and **committed-information-rate** statements at the same hierarchy level.

Traffic that exceeds both the CIR and the CBS is considered nonconforming.

Single-rate three-color policing uses a *dual token bucket algorithm* to measure traffic against a single rate limit. Nonconforming traffic is categorized as yellow or red based on the **excess-burst-size** statement included in the policer configuration.

During periods of traffic that conforms to the CIR, any unused portion of the guaranteed bandwidth capacity accumulates in the first token bucket, up to the maximum number of bytes defined by the CBS. If any accumulated bandwidth capacity overflows the first bucket, the excess accumulates in a second token bucket, up to the maximum number of bytes defined by the EBS.

A nonconforming traffic flow is categorized yellow if its size conforms to bandwidth capacity accumulated in the first token bucket. Packets in a yellow flow are marked with **medium-high** packet loss priority (PLP) and then passed through the interface.

A nonconforming traffic flow is categorized red if its size exceeds the bandwidth capacity accumulated in the second token bucket. Packets in a red traffic flow are marked with **high** PLP and then either passed through the interface or optionally discarded.

|                                 |                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <b>bytes</b> —Number of bytes. You can specify a value in bytes either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).<br><b>Range:</b> 1500 through 100,000,000,000 bytes |
| <b>Required Privilege Level</b> | <b>firewall</b> —To view this statement in the configuration.<br><b>firewall-control</b> —To add this statement to the configuration.                                                                                                                                           |

- Related Documentation**
- [Three-Color Policer Configuration Overview on page 19](#)
  - [Policer Bandwidth and Burst-Size Limits](#)
  - [Policer Color-Marking and Actions on page 26](#)
  - [Dual Token Bucket Algorithms on page 30](#)
  - [Determining Proper Burst Size for Traffic Policers on page 39](#)
  - [committed-burst-size on page 196](#)
  - [committed-information-rate on page 198](#)

## filter-specific

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | filter-specific;                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i> ],<br>[edit firewall family inet <b>prefix-action</b> <i>name</i> ],<br>[edit firewall <b>policer</b> <i>policer-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> firewall <b>policer</b> <i>policer-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> firewall family inet <b>prefix-action</b> <i>name</i> ]            |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Support at the [edit dynamic-profiles ... <b>policer</b> <i>policer-name</i> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                            |
| <b>Description</b>              | Set the prefix-specific action or policer to operate in <i>filter-specific</i> mode, meaning that a single policer and counter are shared by all filter terms that reference the prefix-specific action or policer. By default, the prefix-specific action or policer operates in <i>term-specific</i> mode, meaning that a separate policer and counter are used for each filter term that references the prefix-specific action or policer. |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Filter-Specific Policer Overview on page 70</a></li> <li>• <a href="#">Prefix-Specific Counting and Policing Overview on page 81</a></li> <li>• <a href="#">Filter-Specific Counter and Policer Set Overview on page 83</a></li> </ul>                                                                                                                                                   |

## hierarchical-policer

|                                 |                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> hierarchical-policer <i>policer-name</i> {   aggregate {     if-exceeding {       bandwidth-limit <i>bps</i>;       burst-size-limit <i>bytes</i>;     }     then {       discard;     }   }   premium {     if-exceeding {       bandwidth-limit <i>bps</i>;       burst-size-limit <i>bytes</i>;     }     then {       discard;     }   } } </pre> |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> firewall],<br>[edit firewall]                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the [edit dynamic-profiles ... <b>firewall</b>] hierarchy level introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                  |
| <b>Description</b>              | On M40e, M120, and M320 edge routers with Flexible PIC Concentrator (FPC) input as FFPC and FPC output as SFPC, and on MX Series, T320, T640, and T1600 edge routers with Enhanced Intelligent Queuing (IQE) PICs, T4000 routers with Type 5 FPC and Enhanced Scaling Type 4 FPC, specify a hierarchical policer.                                           |
| <b>Options</b>                  | <p><b><i>policer-name</i></b>—Name that identifies the policer. The name can contain letters, numbers, and hyphens (-), and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" ").</p> <p>The remaining statements are explained separately.</p>                                                             |
| <b>Required Privilege Level</b> | <p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Hierarchical Policer Configuration Overview</i></li> <li>• <i>Hierarchical Policers</i></li> <li>• <i>aggregate (Hierarchical Policer)</i></li> <li>• <i>bandwidth-limit (Hierarchical Policer)</i></li> </ul>                                                                                                  |

- *burst-size-limit* (*Hierarchical Policer*)
- *if-exceeding* (*Hierarchical Policer*)
- *premium* (*Hierarchical Policer*)

## if-exceeding (Policer)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>if-exceeding {   (bandwidth-limit <i>bps</i>   bandwidth-percent <i>number</i>);   burst-size-limit <i>bytes</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i>],</p> <p>[edit firewall <b>policer</b> <i>policer-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> firewall <b>policer</b> <i>policer-name</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Logical systems support introduced in Junos OS Release 9.3.</p> <p>Support at the [edit dynamic-profiles ... <b>policer</b> <i>policer-name</i>] hierarchy level introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Configure rate limits for a single-rate two-color policer.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Two-Color Policer Configuration Overview on page 15</a></li> <li>• <a href="#">Hierarchical Policer Configuration Overview</a></li> <li>• <a href="#">Basic Single-Rate Two-Color Policers on page 45</a></li> <li>• <a href="#">Bandwidth Policers on page 62</a></li> <li>• <a href="#">Filter-Specific Counters and Policers on page 70</a></li> <li>• <a href="#">Prefix-Specific Counting and Policing Actions on page 81</a></li> <li>• <a href="#">Multifield Classification on page 97</a></li> <li>• <a href="#">Policer Overhead to Account for Rate Shaping in the Traffic Manager on page 114</a></li> <li>• <a href="#">Hierarchical Policers</a></li> </ul> |

## input-hierarchical-policer

---

|                                 |                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>input-hierarchical-policer <i>policer-name</i>;</code>                                                                                       |
| <b>Hierarchy Level</b>          | [edit interfaces <i>interface-name</i> layer2-policer],<br>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> layer2-policer], |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                           |
| <b>Description</b>              | Apply a hierarchical policer to the Layer 2 input traffic for all protocol families at the physical or logical interface.                          |
| <b>Options</b>                  | <i>policer-name</i> —Name of the hierarchical policer.                                                                                             |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Hierarchical Policers</i></li><li>• <i>layer2-policer (Hierarchical Policer)</i></li></ul>              |

## input-policer

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>input-policer <i>policer-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <b>layer2-policer</b>]</code><br><code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <b>layer2-policer</b>]</code>                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Apply a single-rate two-color policer to the Layer 2 input traffic at the logical interface. The <b>input-policer</b> and <b>input-three-color</b> statements are mutually exclusive.                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <b><i>policer-name</i></b> —Name of the single-rate two-color policer that you define at the <code>[edit firewall]</code> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Two-Color and Three-Color Policers at Layer 2 on page 161</a></li> <li>• <i>Applying Layer 2 Policers to Gigabit Ethernet Interfaces</i></li> <li>• <i>Configuring a Gigabit Ethernet Policer</i></li> <li>• <a href="#">input-three-color on page 206</a></li> <li>• <a href="#">layer2-policer on page 207</a></li> <li>• <a href="#">logical-interface-policer on page 209</a></li> <li>• <a href="#">output-policer on page 212</a></li> <li>• <a href="#">output-three-color on page 213</a></li> </ul> |

## input-three-color

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>input-three-color <i>policer-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">layer2-policer</a> ]<br>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">layer2-policer</a> ]                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Apply a single-rate or two-rate three-color policer to the Layer 2 input traffic at the logical interface. The <b>input-three-color</b> and <b>input-policer</b> statements are mutually exclusive.                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <b><i>policer-name</i></b> —Name of the single-rate or two-rate three-color policer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Two-Color and Three-Color Policers at Layer 2 on page 161</a></li><li>• <a href="#">Applying Layer 2 Policers to Gigabit Ethernet Interfaces</a></li><li>• <a href="#">Configuring a Gigabit Ethernet Policer</a></li><li>• <a href="#">input-policer on page 205</a></li><li>• <a href="#">layer2-policer on page 207</a></li><li>• <a href="#">logical-interface-policer on page 209</a></li><li>• <a href="#">output-policer on page 212</a></li><li>• <a href="#">output-three-color on page 213</a></li></ul> |



## layer2-policer

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> layer2-policer {     input-policer <i>policer-name</i>;     input-three-color <i>policer-name</i>;     output-policer <i>policer-name</i>;     output-three-color <i>policer-name</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i>],</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>For 1-Gigabit Ethernet and 10-Gigabit Ethernet IQ2 and IQ2-E interfaces on M Series, MX Series, and T Series routers, and for aggregated Ethernet, Gigabit Ethernet, and 10-Gigabit Ethernet interfaces on EX Series switches, apply Layer 2 logical interface policers. The following policers are supported:</p> <ul style="list-style-type: none"> <li>• Two-color</li> <li>• Single-rate tricolor marking (srTCM)</li> <li>• Two-rate tricolor marking (trTCM)</li> </ul> <p>Two-color and tricolor policers are configured at the <b>[edit firewall]</b> hierarchy level.</p>                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>input-policer <i>policer-name</i></b>—Two-color input policer to associate with the interface. This statement is mutually exclusive with the <b>input-three-color</b> statement.</p> <p><b>input-three-color <i>policer-name</i></b>—Tricolor input policer to associate with the interface. This statement is mutually exclusive with the <b>input-policer</b> statement.</p> <p><b>output-policer <i>policer-name</i></b>—Two-color output policer to associate with the interface. This statement is mutually exclusive with the <b>output-three-color</b> statement.</p> <p><b>output-three-color <i>policer-name</i></b>—Tricolor output policer to associate with the interface. This statement is mutually exclusive with the <b>output-policer</b> statement.</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Applying Layer 2 Policers to Gigabit Ethernet Interfaces</i></li> <li>• <i>Configuring Gigabit Ethernet Two-Color and Tricolor Policers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## load-balance-group

---

|                          |                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>load-balance-group group-name {<br/>    next-hop-group [ group-names ];<br/>}</pre>                                                         |
| Hierarchy Level          | [edit firewall]                                                                                                                                  |
| Release Information      | Statement introduced before Junos OS Release 7.4.                                                                                                |
| Description              | Configure a load-balance group.                                                                                                                  |
| Options                  | <p><b>group-name</b>—Name of load-balance group.</p> <p><b>group-names</b>—Name of next-hop groups to include in the load-balance group set.</p> |
| Required Privilege Level | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                            |
| Related Documentation    | <ul style="list-style-type: none"><li>• <i>Configuring Load-Balance Groups</i> in the <i>Routing Policy Configuration Guide</i></li></ul>        |

## logical-bandwidth-policer

---

|                          |                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>logical-bandwidth-policer;</pre>                                                                                                                                                                                                                                                                                          |
| Hierarchy Level          | [edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i> ],<br>[edit firewall <b>policer</b> <i>policer-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> firewall <b>policer</b> <i>policer-name</i> ]                                                                            |
| Release Information      | Statement introduced in Junos OS Release 8.2.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Support at the [edit dynamic-profiles ... <b>policer</b> <i>policer-name</i> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches. |
| Description              | For a policer with a bandwidth limit configured as a percentage (using the <b>bandwidth-percent</b> statement), specify that the percentage be based on the shaping rate defined on the logical interface, rather than on the media rate of the physical interface.                                                            |
| Required Privilege Level | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                        |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Bandwidth Policers on page 62</a></li><li>• <i>Configuring Logical Bandwidth Policers</i></li><li>• <b>bandwidth-percent on page 189</b> statement</li><li>• <b>interface-specific</b> statement</li></ul>                                                                 |

## logical-interface-policer

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | logical-interface-policer;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>     | <p>[edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i>],</p> <p>[edit firewall atm-policer <i>atm-policer-name</i>]</p> <p>[edit firewall <b>policer</b> <i>policer-name</i>],</p> <p>[edit firewall policer <i>policer-template-name</i>],</p> <p>[edit firewall <b>three-color-policer</b> <i>policer-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> firewall <b>policer</b> <i>policer-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> firewall <b>three-color-policer</b> <i>name</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Support at the [edit firewall <b>three-color-policer</b> <i>policer-name</i>] hierarchy level introduced in Junos OS Release 8.2.</p> <p>Logical systems support introduced in Junos OS Release 9.3.</p> <p>Support at the [edit dynamic-profiles ... <b>policer</b> <i>policer-name</i>] and [edit dynamic-profiles ... <b>three-color-policer</b> <i>name</i>] hierarchy levels introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                        |
| <b>Description</b>         | Configure a logical interface policer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



**NOTE:** Starting in Junos OS Release 12.2R2, on T Series Core Routers only, you can configure an MPLS LSP policer for a specific LSP to be shared across different protocol family types. You must include the logical-interface-policer statement to do so.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p>firewall—To view this statement in the configuration.</p> <p>firewall-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Two-Color and Three-Color Logical Interface Policers on page 139</a></li> <li>• <i>Traffic Policer Types</i></li> <li>• <i>Configuring Tricolor Marking Policers</i></li> <li>• <a href="#">action on page 186</a></li> <li>• <i>Configuring Gigabit Ethernet Two-Color and Tricolor Policers</i></li> <li>• <i>action</i></li> </ul> |

## loss-priority (Firewall Filter Action)

---

|                                 |                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | loss-priority (high   low);                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit firewall family <i>family-name</i> filter <i>filter-name</i> term <i>term-name</i> then],<br>[edit logical-systems <i>logical-system-name</i> firewall family <i>family-name</i> filter <i>filter-name</i> term <i>term-name</i> then]            |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                            |
| <b>Description</b>              | Set the loss priority of incoming packets.                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Standard Firewall Filter Nonterminating Actions</i></li><li>• <a href="#">Policer Color-Marking and Actions on page 26</a></li><li>• <a href="#">Multifield Classification Overview on page 97</a></li></ul> |

## loss-priority high then discard (Three-Color Policer)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | loss-priority high then discard;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>action</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>action</b> ],<br>[edit logical-systems <i>logical-system-name</i> firewall <b>three-color-policer</b> <i>policer-name</i> <b>action</b> ]                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 8.2.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Support at the [edit dynamic-profiles ... <b>action</b> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>For packets with high loss priority, discard the packets. The loss priority setting is implicit and is not configurable. Include this statement if you do not want the local router to forward packets that have high packet loss priority.</p> <p>For single-rate three-color policers, the Junos OS assigns high loss priority to packets that exceed the committed information rate and the excess burst size.</p> <p>For two-rate three-color policers, the Junos OS assigns high loss priority to packets that exceed the peak information rate and the peak burst size.</p>                           |
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li>• <a href="#">Basic Single-Rate Three-Color Policers on page 126</a></li> <li>• <a href="#">Basic Two-Rate Three-Color Policers on page 132</a></li> <li>• <a href="#">Two-Color and Three-Color Logical Interface Policers on page 139</a></li> <li>• <a href="#">Two-Color and Three-Color Physical Interface Policers on page 151</a></li> <li>• <a href="#">Two-Color and Three-Color Policers at Layer 2 on page 161</a></li> <li>• <a href="#">action on page 186</a></li> </ul> |

## output-policer

---


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>output-policer <i>policer-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">layer2-policer</a> ],<br>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">layer2-policer</a> ]                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Apply a single-rate two-color policer to the Layer 2 output traffic at the logical interface. The <b>output-policer</b> and <b>output-three-color</b> statements are mutually exclusive.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <b><i>policer-name</i></b> —Name of the single-rate two-color policer that you define at the [edit <b>firewall</b> ] hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Two-Color and Three-Color Policers at Layer 2 on page 161</a></li><li>• <i>Applying Layer 2 Policers to Gigabit Ethernet Interfaces</i></li><li>• <i>Configuring a Gigabit Ethernet Policer</i></li><li>• <a href="#">input-policer on page 205</a></li><li>• <a href="#">input-three-color on page 206</a></li><li>• <a href="#">layer2-policer on page 207</a></li><li>• <a href="#">logical-interface-policer on page 209</a></li><li>• <a href="#">output-three-color on page 213</a></li></ul> |

## output-three-color

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>output-three-color <i>policer-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">layer2-policer</a> ]<br>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">layer2-policer</a> ]                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Apply a single-rate or two-rate three-color policer to the Layer 2 output traffic at the logical interface. The <b>output-three-color</b> and <b>output-policer</b> statements are mutually exclusive.                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <i>policer-name</i> —Name of the single-rate or two-rate three-color policer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Two-Color and Three-Color Policers at Layer 2 on page 161</a></li> <li>• <a href="#">Applying Layer 2 Policers to Gigabit Ethernet Interfaces</a></li> <li>• <a href="#">Configuring a Gigabit Ethernet Policer</a></li> <li>• <a href="#">input-three-color on page 206</a></li> <li>• <a href="#">input-policer on page 205</a></li> <li>• <a href="#">layer2-policer on page 207</a></li> <li>• <a href="#">logical-interface-policer on page 209</a></li> <li>• <a href="#">output-policer on page 212</a></li> </ul> |


## peak-burst-size

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <code>peak-burst-size bytes;</code>                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>two-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>two-rate</b> ]                                                                                                                                                                |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>two-rate</b> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | For a two-rate three-color policer, configure the peak burst size (PBS) as a number of bytes. The PBS defines the maximum number of bytes of unused peak bandwidth capacity that can be accumulated. The accumulated bandwidth allows for moderate periods of bursting traffic that exceeds the peak information rate (PIR) and the committed burst size (CBS). |
| <div>  <b>NOTE:</b> When you include the <code>peak-burst-size</code> statement in the configuration, you must also include the <code>committed-burst-size</code> and <code>peak-information-rate</code> statements at the same hierarchy level. </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                 |
| <p>Two-rate three-color policers use a <i>dual-rate dual token bucket algorithm</i> to measure traffic against two rate limits.</p> <ul style="list-style-type: none"> <li>A traffic flow is categorized green if it conforms to both the committed information rate (CIR) and the CBS-bounded accumulation of available committed bandwidth capacity.</li> <li>A traffic flow is categorized yellow if exceeds the CIR and CBS but conforms to the PIR. Packets in a yellow flow are marked with <b>medium-high</b> packet loss priority (PLP) and then passed through the interface.</li> <li>A traffic flow is categorized red if exceeds the PIR and the PBS-bounded accumulation of available peak bandwidth capacity. Packets in a red traffic flow are marked with <b>high</b> PLP and then either passed through the interface or optionally discarded.</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>bytes</b> —Number of bytes. You can specify a value in bytes either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).<br><b>Range:</b> 1500 through 100,000,000,000 bytes                                                                                 |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li><a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li><a href="#">Policer Bandwidth and Burst-Size Limits</a></li> </ul>                                                                                                                                                                        |



- [Policer Color-Marking and Actions on page 26](#)
- [Dual Token Bucket Algorithms on page 30](#)
- [Determining Proper Burst Size for Traffic Policers on page 39](#)
- [committed-burst-size on page 196](#)
- [committed-information-rate on page 198](#)
- [excess-burst-size on page 200](#)
- [peak-information-rate on page 216](#)

## peak-information-rate

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <code>peak-information-rate bps;</code>                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> <b>two-rate</b> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> <b>two-rate</b> ]                                                                                                                                                  |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Statement introduced in Junos OS Release 7.4.<br>Support at the [edit dynamic-profiles ... <b>two-rate</b> ] hierarchy level introduced in Junos OS Release 11.4.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                      |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | For a two-rate three-color policer, configure the peak information rate (PIR) as a number of bits per second. The PIR is the maximum rate for traffic arriving at or departing from the interface under peak line conditions. Traffic that exceeds the committed information rate (CIR) and the committed burst size (CBS) is metered to the PIR. |
| <div>  <p><b>NOTE:</b> When you include the <b>peak-information-rate</b> statement in the configuration, you must also include the <b>committed-information-rate</b> and <b>peak-burst-size</b> statements at the same hierarchy level.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                   |
| <p>Two-rate three-color policers use a <i>dual-rate dual token bucket algorithm</i> to measure traffic against two rate limits.</p> <ul style="list-style-type: none"> <li>• A traffic flow is categorized green if it conforms to both the CIR and the CBS-bounded accumulation of available committed bandwidth capacity.</li> <li>• A traffic flow is categorized yellow if exceeds the CIR and CBS but conforms to the PIR. Packets in a yellow flow are marked with <b>medium-high</b> packet loss priority (PLP) and then passed through the interface.</li> <li>• A traffic flow is categorized red if exceeds the PIR and the PBS-bounded accumulation of available peak bandwidth capacity. Packets in a red traffic flow are marked with <b>high</b> PLP and then either passed through the interface or optionally discarded.</li> </ul> |                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>bps</b> —Number of bits per second. You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation <b>k</b> (1000), <b>m</b> (1,000,000), or <b>g</b> (1,000,000,000).<br><b>Range:</b> 1500 through 100,000,000,000 bps                                                   |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                             |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li>• <a href="#">Policer Bandwidth and Burst-Size Limits</a></li> <li>• <a href="#">Policer Color-Marking and Actions on page 26</a></li> </ul>                                                                              |

- [Dual Token Bucket Algorithms on page 30](#)
- [Determining Proper Burst Size for Traffic Policers on page 39](#)
- [committed-burst-size on page 196](#)
- [committed-information-rate on page 198](#)
- [excess-burst-size on page 200](#)
- [peak-burst-size on page 214](#)

## physical-interface-filter


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | physical-interface-filter;                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit firewall family <i>family-name</i> filter <i>filter-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> firewall family <i>family-name</i> filter <i>filter-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> firewall family <i>family-name</i> filter <i>filter-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> firewall family <i>family-name</i> filter <i>filter-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure a physical interface filter. Use this statement to reference a physical interface policer for the specified protocol family.                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Two-Color and Three-Color Physical Interface Policers on page 151</a></li> <li>• <a href="#">physical-interface-policer on page 218</a></li> <li>• <a href="#">policer (Configuring) on page 220</a></li> </ul>                                                                                                                                                                                                                |

## physical-interface-policer

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | physical-interface-policer;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <p>[edit dynamic-profiles <i>profile-name</i> firewall <b>policer</b> <i>policer-name</i>],<br/> [edit firewall <b>policer</b> <i>policer-name</i>],<br/> [edit firewall <b>three-color-policer</b> <i>policer-name</i>],<br/> [edit logical-system <i>logical-system-name</i> firewall <b>policer</b> <i>policer-name</i>],<br/> [edit logical-system <i>logical-system-name</i> <b>three-color-policer</b> <i>policer-name</i>],<br/> [edit routing-instances <i>routing-instance-name</i> firewall <b>policer</b> <i>policer-name</i>],<br/> [edit routing-instances <i>routing-instance-name</i> firewall <b>three-color-policer</b> <i>policer-name</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> firewall <b>policer</b> <i>policer-name</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> firewall <b>three-color-policer</b> <i>policer-name</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.6.</p> <p>Support at the [edit dynamic-profiles ... <b>policer</b> <i>policer-name</i>] hierarchy level introduced in Junos Release OS 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Configure an aggregate policer for a physical interface.</p> <p>A physical interface policer can be a two-color or three-color policer. When you apply physical interface policer, to different protocol families on the same logical interface, the protocol families share the same policer instance. This means that rate limiting is performed aggregately for the protocol families for which the policer is applied. This feature enables you to use a single policer instance to perform aggregate policing for different protocol families on the same physical interface. If you want a policer instance to be associated with a protocol family, the corresponding physical interface filter needs to be applied to that protocol family. The policer is not automatically applied to all protocol families configured on the physical interface.</p> <p>In contrast, with logical interface policers there are multiple separate policer instances.</p>               |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Two-Color and Three-Color Physical Interface Policers on page 151</a></li> <li>• <a href="#">physical-interface-filter on page 217</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## policer (Applying to a Logical Interface)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> policer {     input <i>policer-name</i>;     output <i>policer-name</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <pre> [edit interfaces <i>interface-name</i> unit <i>unit-number</i>], [edit interfaces <i>interface-name</i> unit <i>unit-number</i> family <i>family</i>], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>unit-number</i>], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>unit-number</i>   family <i>family</i>] </pre>                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Apply a single-rate two-color policer—except for a physical interface policer—to Layer 3 input or output traffic at a logical interface.</p> <ul style="list-style-type: none"> <li>To rate-limit all traffic types, regardless of the protocol family, you can apply a logical interface policer at the logical unit level of a supported interface.</li> <li>To rate-limit traffic of a specific protocol family, you can apply a basic two-color policer, a bandwidth policer, or a logical interface policer at the protocol family level of a supported interface.</li> </ul> |
|                                 | <p> <b>NOTE:</b> You cannot apply a physical interface policer as part of the interface configuration. You can apply a physical interface policer by referencing the policer from a physical interface filter term.</p>                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>input <i>policer-name</i></b>—Name of one policer to evaluate packets received on the interface.</p> <p><b>output <i>policer-name</i></b>—Name of one policer to evaluate packets transmitted on the interface.</p>                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Single-Rate Two-Color Policer Overview on page 45</a></li> <li>• <a href="#">Bandwidth Policer Overview on page 62</a></li> <li>• <a href="#">Logical Interface (Aggregate) Policer Overview on page 139</a></li> </ul>                                                                                                                                                                                                                                                                                                          |

## policer (Configuring)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> policer <i>policer-name</i> {     filter-specific;     if-exceeding {         bandwidth-limit <i>bps</i>;         bandwidth-percent <i>number</i>;         burst-size-limit <i>bytes</i>;     }     logical-bandwidth-policer;     logical-interface-policer;     physical-interface-policer;     shared-bandwidth-policer;     then {         <i>policer-action</i>;     } } </pre>                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | <p>[edit dynamic-profiles <i>profile-name</i> firewall],<br/> [edit firewall],<br/> [edit logical-systems <i>logical-system-name</i> firewall]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>The <b>out-of-profile</b> policer action added in Junos OS Release 8.1.</p> <p>The <b>logical-bandwidth-policer</b> statement added in Junos OS Release 8.2.</p> <p>Logical systems support introduced in Junos OS Release 9.3.</p> <p>The <b>physical-interface-policer</b> statement introduced in Junos OS Release 9.6.</p> <p>The <b>shared-bandwidth-policer</b> statement added in Junos OS Release 11.2.</p> <p>Support at the [edit dynamic-profiles ... firewall] hierarchy level introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                        |
| <b>Description</b>         | <p>Configure policer rate limits and actions. When included at the [edit firewall] hierarchy level, the <b>policer</b> statement creates a template, and you do not have to configure a policer individually for every firewall filter or interface. To activate a policer, you must include the <b>policer-action</b> modifier in the <b>then</b> statement in a firewall filter term or on an interface.</p>                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>             | <p><b><i>policer-action</i></b>—One or more actions to take:</p> <ul style="list-style-type: none"> <li>• <b>discard</b>—Discard traffic that exceeds the rate limits.</li> <li>• <b>forwarding-class <i>class-name</i></b>—Specify the particular forwarding class.</li> <li>• <b>loss-priority</b>—Set the packet loss priority (PLP) to <b>low</b>, <b>medium-low</b>, <b>medium-high</b>, or <b>high</b>.</li> <li>• <b>out-of-profile</b>—On J Series routers with strict priority queuing, prevent starvation of other queues by rate limiting the data stream entering the strict priority queue, marking the packets that exceed the rate limit as out-of-profile, and dropping the out-of-profile packets if the physical interface is congested.</li> </ul> |

***policer-name***—Name that identifies the policer. The name can contain letters, numbers, and hyphens (-), and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" "). Policer names cannot begin with an underscore in the form `_.*`.

**then**—Actions to take on matching packets.

The remaining statements are explained separately.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                 | firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Bandwidth Policer Overview on page 62</a></li> <li>• <a href="#">Configuring Multifield Classifiers</a></li> <li>• <a href="#">Logical Interface (Aggregate) Policer Overview on page 139</a></li> <li>• <a href="#">Physical Interface Policer Overview on page 151</a></li> <li>• <a href="#">Statement Hierarchy for Configuring Policers on page 13</a></li> <li>• <a href="#">Single-Rate Two-Color Policer Overview on page 45</a></li> <li>• <a href="#">Using Multifield Classifiers to Set PLP</a></li> <li>• <a href="#">filter (Configuring)</a></li> <li>• <a href="#">priority (Schedulers)</a></li> </ul> |

## **policer (Firewall Filter Action)**

|                                 |                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>policer <i>policer-name</i>;</code>                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit firewall family <i>family-name</i> filter <i>filter-name</i> term <i>term-name</i> then],<br>[edit logical-systems <i>logical-system-name</i> firewall family <i>family-name</i> filter <i>filter-name</i> term <i>term-name</i> then] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                  |
| <b>Description</b>              | For T Series routers and M320 routers with Enhanced II Flexible PIC Concentrators (FPCs) and the T640 Core Router with Enhanced Scaling FPC4, apply a tricolor marking policer.                                                              |
| <b>Options</b>                  | <b><i>policer-name</i></b> —Name of a single-rate two-color policer to use to rate-limit traffic.                                                                                                                                            |
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Standard Firewall Filter Nonterminating Actions</a></li> <li>• <a href="#">Two-Color Policer Configuration Overview on page 15</a></li> </ul>                                           |

## prefix-action (Configuring)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>prefix-action <i>prefix-action-name</i> {<br/>    count;<br/>    destination-prefix-length <i>prefix-length</i>;<br/>    filter-specific;<br/>    policer <i>policer-name</i>;<br/>    source-prefix-length <i>prefix-length</i>;<br/>    subnet-prefix-length <i>prefix-length</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit firewall family inet],<br>[edit logical-systems <i>logical-system-name</i> firewall family inet]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure a prefix-specific action.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>count</b>—Enable counter.</p> <p><b>destination-prefix-length <i>prefix-length</i></b>—Destination prefix length.<br/><b>Range:</b> 0 through 32</p> <p><b>filter-specific</b>—Create the prefix-specific set of policers and counters as a filter-specific set. If this option is not specified, the prefix-specific set of policers and counters are created as term-specific.</p> <p><b>policer <i>policer-name</i></b>—Policer name.</p> <p><b>source-prefix-length <i>prefix-length</i></b>—Source prefix length.<br/><b>Range:</b> 0 through 32</p> <p><b>subnet-prefix-length <i>prefix-length</i></b>—Subnet prefix length.<br/><b>Range:</b> 0 through 32</p> |
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Prefix-Specific Counting and Policing Actions on page 81</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



## prefix-action (Firewall Filter Action)

---

|                              |                                                                                                                                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                | <code>prefix-action <i>prefix-action-name</i>;</code>                                                                                                                                                            |
| <b>Hierarchy Level</b>       | [edit firewall family inet filter <i>filter-name</i> term <i>term-name</i> then],<br>[edit logical-systems <i>logical-system-name</i> firewall family inet filter <i>filter-name</i> term <i>term-name</i> then] |
| <b>Release Information</b>   | Statement introduced before Junos OS Release 7.4.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.                      |
| <b>Description</b>           | Reference a prefix-specific action.                                                                                                                                                                              |
| <b>Options</b>               | <i>prefix-action-name</i> —Name of a prefix-specific action to use to rate-limit traffic.                                                                                                                        |
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Standard Firewall Filter Nonterminating Actions</a></li><li>• <a href="#">Prefix-Specific Counting and Policing Actions on page 81</a></li></ul>             |

## single-rate

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>single-rate {<br/>  (color-aware   color-blind);<br/>  committed-information-rate <i>bps</i>;<br/>  committed-burst-size <i>bytes</i>;<br/>  excess-burst-size <i>bytes</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Hierarchy Level          | [edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i> ],<br>[edit firewall <b>three-color-policer</b> <i>policer-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> firewall <b>three-color-policer</b> <i>policer-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Release Information      | Statement introduced before Junos OS Release 7.4.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Support at the [edit dynamic-profiles ... <b>three-color-policer</b> <i>name</i> ] hierarchy level introduced in Junos OS Release 11.4.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description              | <p>Configure a single-rate three-color policer in which marking is based on the committed information rate (CIR), committed burst size (CBS), and excess burst size (EBS).</p> <p>Packets that conform to the CIR or the CBS are assigned low loss priority (green). Packets that exceed the CIR and the CBS but are within the EBS are assigned medium-high loss priority (yellow). Packets that exceed the EBS are assigned high loss priority (red).</p> <p>Green and yellow packets are always forwarded; this action is not configurable. You can configure red packets to be discarded. By default, red packets are forwarded.</p> <p>The remaining statements are explained separately.</p> |
| Required Privilege Level | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li><li>• <a href="#">color-aware on page 194</a></li><li>• <a href="#">color-blind on page 195</a></li><li>• <a href="#">two-rate on page 227</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                         |

## three-color-policer (Applying)

|                                 |                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | three-color-policer {<br>(single-rate   two-rate) <i>policer-name</i> ;<br>}                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit firewall family <i>family-name</i> filter <i>filter-name</i> term <i>term-name</i> then]<br>[edit logical-systems <i>logical-system-name</i> firewall family <i>family-name</i> filter <i>filter-name</i> term <i>term-name</i> then]                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.4.<br><b>single-rate</b> statement added in Junos OS Release 8.2.<br>Logical systems support introduced in Junos OS Release 9.3.<br>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.               |
| <b>Description</b>              | For M320 and T Series routers with Enhanced II Flexible PIC Concentrators (FPCs) and the T640 router with Enhanced Scaling FPC4, apply a tricolor marking policer.                                                                                                   |
| <b>Options</b>                  | <b>single-rate</b> —Named tricolor policer is a single-rate policer.<br><br><b>two-rate</b> —Named tricolor policer is a two-rate policer.<br><br><b><i>policer-name</i></b> —Name of a tricolor policer.                                                            |
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Applying Tricolor Marking Policers to Firewall Filters</i></li> <li>• <i>Standard Firewall Filter Nonterminating Actions</i></li> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> </ul> |

## three-color-policer (Configuring)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> three-color-policer <i>policer-name</i> {     action {         loss-priority high then discard;     }     filter-specific;     logical-interface-policer;     physical-interface-policer;     shared-bandwidth-policer;     single-rate {         (color-aware   color-blind);         committed-burst-size <i>bytes</i>;         committed-information-rate <i>bps</i>;         excess-burst-size <i>bytes</i>;     }     two-rate {         (color-aware   color-blind);         committed-burst-size <i>bytes</i>;         committed-information-rate <i>bps</i>;         peak-burst-size <i>bytes</i>;         peak-information-rate <i>bps</i>;     } } </pre> |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> firewall],<br>[edit firewall],<br>[edit logical-systems <i>logical-system-name</i> firewall]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>The <b>action</b> and <b>single-rate</b> statements added in Junos OS Release 8.2.</p> <p>Logical systems support introduced in Junos OS Release 9.3.</p> <p>Support at the [edit dynamic-profiles ... firewall] hierarchy level introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure a three-color policer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b><i>policer-name</i></b>—Name of the three-color policer. Reference this name when you apply the policer to an interface.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | firewall—To view this statement in the configuration.<br>firewall-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Statement Hierarchy for Configuring Policers on page 13</a></li> <li>• <a href="#">Configuring Tricolor Marking Policers</a></li> <li>• <a href="#">Three-Color Policer Configuration Guidelines on page 123</a></li> <li>• <a href="#">Basic Single-Rate Three-Color Policers on page 126</a></li> </ul>                                                                                                                                                                                                                                                                                                            |

- [Basic Two-Rate Three-Color Policers on page 132](#)
- [Two-Color and Three-Color Logical Interface Policers on page 139](#)
- [Two-Color and Three-Color Physical Interface Policers on page 151](#)
- [Two-Color and Three-Color Policers at Layer 2 on page 161](#)

## two-rate

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>two-rate {   (color-aware   color-blind);   committed-information-rate <i>bps</i>;   committed-burst-size <i>bytes</i>;   peak-information-rate <i>bps</i>;   peak-burst-size <i>bytes</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <p>[edit dynamic-profiles <i>profile-name</i> firewall <b>three-color-policer</b> <i>name</i>],<br/> [edit firewall <b>three-color-policer</b> <i>policer-name</i>],<br/> [edit logical-systems <i>logical-system-name</i> firewall <b>three-color-policer</b> <i>policer-name</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.<br/> Logical systems support introduced in Junos OS Release 9.3.<br/> Support at the [edit dynamic-profiles ... <b>three-color-policer</b> <i>name</i>] hierarchy levels introduced in Junos OS Release 11.4.<br/> Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Configure a two-rate three-color policer in which marking is based on the committed information rate (CIR), committed burst size (CBS), peak information rate (PIR), and peak burst size (PBS).</p> <p>Packets that conform to the CIR or the CBS are assigned low loss priority (green). Packets that exceed the CIR and the CBS but are within the PIR or the PBS are assigned medium-high loss priority (yellow). Packets that exceed the PIR and the PBS are assigned high loss priority (red).</p> <p>Green and yellow packets are always forwarded; this action is not configurable. You can configure red packets to be discarded. By default, red packets are forwarded.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>firewall—To view this statement in the configuration.<br/> firewall-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Three-Color Policer Configuration Overview on page 19</a></li> <li>• <a href="#">color-aware on page 194</a></li> <li>• <a href="#">color-blind on page 195</a></li> <li>• <a href="#">single-rate on page 224</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



## PART 3

# Administration

- [Traffic Policing Standards on page 231](#)
- [Firewall Filter and Policer Operational Mode Commands on page 233](#)





# Traffic Policing Standards

- [Supported Standards for Policing on page 231](#)

## Supported Standards for Policing

---

Three-color policers are part of an assured forwarding (AF) per-hop-behavior (PHB) classification system for a Differentiated Services (DiffServ) environment, which is described and defined in the following RFCs:

- RFC 2474, *Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers*
- RFC 2475, *An Architecture for Differentiated Service*
- RFC 2597, *Assured Forwarding PHB Group*
- RFC 2598, *An Expedited Forwarding PHB*
- RFC 2698, *A Two Rate Three Color Marker*

In a DiffServ environment, the most significant 6 bits of the type-of-service (ToS) octet in the IP header contain a value called the *Differentiated Services code point* (DSCP). Within the DSCP field, the most significant 3 bits are interpreted as the *IP precedence* field, which can be used to select different per-hop forwarding treatments for the packet.




## CHAPTER 11

# Firewall Filter and Policier Operational Mode Commands

- `clear firewall`
- `show firewall`
- `show firewall filter version`
- `show firewall log`
- `show firewall prefix-action-stats`
- `show policer`

## clear firewall

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                            | <a href="#">Syntax on page 234</a><br><a href="#">Syntax (EX Series Switches) on page 234</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    | clear firewall (all   counter <i>counter-name</i>   filter <i>filter-name</i>   log (all   <i>logical-system-name</i> )   logical-system <i>logical-system-name</i> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Syntax (EX Series Switches)</b>                                                                                                                                                                                                                                                                                                                                                                                                                               | clear firewall (all   counter <i>counter-name</i>   filter <i>filter-name</i>   log (all   <i>logical-system-name</i> )   policer counter (all   counter-id <i>counter-index</i> ))                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>logical-system</b> option introduced in Junos OS Release 9.3.</p> <p><b>log</b> option introduced before Junos OS Release 11.4.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>Clear statistics about configured firewall filters.</p> <p>When you clear the counters of a filter, this impacts not only the counters shown by the CLI, but also the ones tracked by SNMP2.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <div>  <p><b>NOTE:</b> The <b>clear firewall</b> command cannot be used to clear the Routing Engine filter counters on a backup Routing Engine that is enabled for graceful Routing Engine switchover (GRES).</p> </div>                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <p>If you clear statistics for firewall filters that are applied to Trio-based DPCs and that also use the <b>prefix-action</b> action on matched packets, wait at least 5 seconds before you enter the <b>show firewall prefix-action-stats</b> command. A 5-second pause between issuing the <b>clear firewall</b> and <b>show firewall prefix-action-stats</b> commands avoids a possible timeout of the <b>show firewall prefix-action-stats</b> command.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p><b>all</b>—Clear the packet and byte counts for all filters. On EX Series switches, this option also clears the packet counts for all policer counters.</p> <p><b>counter <i>counter-name</i></b>—Clear the packet and byte counts for a filter counter that has been configured with the counter firewall filter action.</p> <p><b>filter <i>filter-name</i></b>—Clear the packet and byte counts for the specified firewall filter.</p> <p><b>log (all   <i>logical-system-name</i>)</b>—Clear log entries for IPv4 firewall filters that have <b>then log</b> as an action. Use <b>log all</b> to clear all log entries or <b>log <i>logical-system-name</i></b> to clear log entries for the specified logical system.</p> <p><b>logical-system <i>logical-system-name</i></b>—Clear the packet and byte counts for the specified logical system.</p> <p><b>policer counter (all   counter-id <i>counter-index</i>)</b>—(EX8200 switches only) Clear all policer counters using the <b>policer counter all</b> command, or clear a specific policer counter</p> |

using the **policer counter counter-id counter-index** command. The value of *counter-index* can be 0, 1, or 2.

|                          |                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Required Privilege Level | clear                                                                                                                                                                                                                                                                                                                                                                               |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">show firewall on page 236</a></li> </ul>                                                                                                                                                                                                                                                                                       |
| List of Sample Output    | <a href="#">clear firewall all on page 235</a><br><a href="#">clear firewall (counter counter-name) on page 235</a><br><a href="#">clear firewall (filter filter-name) on page 235</a><br><a href="#">clear firewall (policer counter all) (EX8200 Switch) on page 235</a><br><a href="#">clear firewall (policer counter counter-id counter-index) (EX8200 Switch) on page 235</a> |

## Sample Output

clear firewall all

```
user@host> clear firewall all
```

clear firewall (counter counter-name)

```
user@host> clear firewall counter port-filter-counter
```

clear firewall (filter filter-name)

```
user@host> clear firewall filter ingress-port-filter
```

clear firewall (policer counter all) (EX8200 Switch)

```
user@switch> clear firewall policer counter all
```

clear firewall (policer counter counter-id counter-index) (EX8200 Switch)

```
user@switch> clear firewall policer counter counter-id 0
```

## show firewall

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 236</a><br><a href="#">Syntax (EX Series Switches) on page 236</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax</b>                      | <pre>show firewall &lt;counter <i>counter-name</i>&gt; &lt;detail&gt; &lt;filter <i>filter-name</i>&gt; &lt;log&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;terse&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switches)</b> | <pre>show firewall &lt;counter <i>counter-name</i>&gt; &lt;detail&gt; &lt;filter <i>filter-name</i>&gt; &lt;log &lt;(detail   interface <i>interface-name</i>)&gt;&gt; &lt;policer counters &lt;(detail   counter-id <i>counter-index</i> &lt;detail&gt;)&gt;&gt; &lt;terse&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Option <b>logical-system</b> introduced in Junos OS Release 9.3.</p> <p>Option <b>terse</b> introduced in Junos OS Release 9.4.</p> <p>Option <b>policer counters</b> introduced in Junos OS Release 12.2 for EX Series switches.</p> <p>Option <b>detail</b> introduced in Junos OS Release 12.3 for MX Series Switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                 | Display enhanced statistics and counters for all configured firewall filters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                     | <p><b>none</b>—(Optional) Display statistics and counters for all configured firewall filters and counters. For EX Series switches, this command also displays statistics about all configured policers.</p> <p><b>counter <i>counter-name</i></b>—(Optional) Name of a filter counter.</p> <p><b>detail</b>—(Optional) Display firewall filter statistics and enhanced policer statistics and counters.</p> <p><b>filter <i>filter-name</i></b>—(Optional) Name of a configured filter.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>log</b>—(Optional) Display log entries for firewall filters.</p> <p><b>log &lt;(detail   interface <i>interface-name</i>)&gt;</b>—(EX Series switches only) (Optional) Display detailed log entries of firewall activity or log information about a specific interface.</p> <p><b>policer counters &lt;(detail   counter-id <i>counter-index</i> &lt;detail&gt;)&gt;</b>—(EX8200 switches only) (Optional) Display enhanced policer counter statistics in brief or in detail.</p> <p><b>terse</b>—(Optional) Display firewall filter names only.</p> |

**Required Privilege Level** view

- Related Documentation**
- [clear firewall on page 234](#)
  - [show firewall log on page 244](#)
  - *Verifying That Firewall Filters Are Operational*
  - *Verifying That Policers Are Operational*

**List of Sample Output**

- [show firewall filter \(MX Series Router and EX Series Switch\) on page 239](#)
- [show firewall filter \(non MX Series Router and EX Series Switch\) on page 239](#)
- [show firewall filter \(Hierarchical Policers, MX Series with MPC\) on page 239](#)
- [show firewall filter \(Dynamic Input Filter\) on page 239](#)
- [show firewall \(Logical Systems\) on page 239](#)
- [show firewall \(counter counter-name\) on page 240](#)
- [show firewall log on page 240](#)
- [show firewall policer counters \(EX8200 Switch\) on page 240](#)
- [show firewall policer counters \(detail\) \(EX8200 Switch\) on page 241](#)
- [show firewall policer counters \(counter-id counter-index\) \(EX8200 Switch\) on page 241](#)
- [show firewall policer counters \(counter-id counter-index detail\) \(EX8200 Switch\) on page 241](#)
- [show firewall detail on page 242](#)

**Output Fields** Table 12 on page 237 lists the output fields for the **show firewall** command. Output fields are listed in the approximate order in which they appear.

**Table 12: show firewall Output Fields**

| Field Name      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Filter</b>   | <p>Name of a filter that has been configured with the <b>filter</b> statement at the <b>[edit firewall]</b> hierarchy level.</p> <p>Except on EX Series switches:</p> <ul style="list-style-type: none"> <li>• When an interface-specific filter is displayed, the name of the filter is followed by the full interface name and by either <b>-i</b> for an input filter or <b>-o</b> for an output filter.</li> <li>• When dynamic filters are displayed, the name of the filter is followed by the full interface name and by either <b>-in</b> for an input filter or <b>-out</b> for an output filter. When a logical system-specific filter is displayed, the name of the filter is prefixed with two underscore (__) characters and the name of the logical system (for example, <b>__ls1/filter1</b>).</li> </ul>                        |
| <b>Counters</b> | <p>Display filter counter information:</p> <ul style="list-style-type: none"> <li>• <b>Name</b>—Name of a filter counter that has been configured with the <b>counter</b> firewall filter action.</li> <li>• <b>Bytes</b>—Number of bytes that match the filter term under which the <b>counter</b> action is specified.</li> <li>• <b>Packets</b>—Number of packets that matched the filter term under which the <b>counter</b> action is specified.</li> </ul> <p><b>NOTE:</b> On M and T series routers, firewall filters cannot count <b>ip-options</b> packets on a per option type and per interface basis. A limited work around is to use the <b>show pfe statistics ip options</b> command to see <b>ip-options</b> statistics on a per Packet Forwarding Engine (PFE) basis. See <i>show pfe statistics ip</i> for sample output.</p> |

Table 12: show firewall Output Fields (*continued*)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Policers</b>              | <p>Display policer information:</p> <ul style="list-style-type: none"> <li>• <b>Name</b>—Name of policer.</li> <li>• <b>Bytes</b>—(For two-color policers on MX Series routers and EX Series switches, and for hierarchical policers on interfaces hosted on MICs and MPCs in MX Series routers) Number of bytes that match the filter term under which the policer action is specified. This is only the number out-of-specification (out-of-spec) byte counts, not all the bytes in all packets policed by the policer.<br/>For other platforms, this field is blank.</li> <li>• <b>Packets</b>—Number of packets that matched the filter term under which the policer action is specified. This is only the number of out-of-specification (out-of-spec) packet counts, not all packets policed by the policer.</li> </ul> |
| <b>Policer Counter Index</b> | (EX8200 switch only) Global management counter ID. The counter ID value ( <i>counter-index</i> ) can be 0, 1, or 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Green</b>                 | (EX8200 switch only) Number of packets within the limits. The number of packets is smaller than the committed information rate (CIR).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Yellow</b>                | (EX8200 switch only) Number of packets partially within the limits. The number of packets is greater than the CIR, but the burst size is within the excess burst size (EBS) limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Discard</b>               | (EX8200 switch only) Number of discarded packets.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Bytes</b>                 | (EX8200 switch only) Number of green, yellow, red, or discarded packets in bytes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Packets</b>               | (EX8200 switch only) Number of green, yellow, red, or discarded packets.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Filter name</b>           | (EX8200 switch only) Name of the filter with a term associated to a policer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Term name</b>             | (EX8200 switch only) Name of the term associated with a policer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Policer name</b>          | (EX8200 switch only) Name of the policer that is associated with a global management counter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## Sample Output

### show firewall filter (MX Series Router and EX Series Switch)

```
user@host> show firewall filter test
Filter: test
Counters:
Name Bytes Packets
Counter-1 0 0
Counter-2 0 0
Policers:
Name Bytes Packets
Policer-1 2770 70
```

### show firewall filter (non MX Series Router and EX Series Switch)

```
user@host> show firewall filter test
Filter: test
Counters:
Name Bytes Packets
Counter-1 0 0
Counter-2 0 0
Policers:
Name Bytes Packets
Policer-1 70
```

### show firewall filter (Hierarchical Policier, MX Series with MPC)

```
user@host> show firewall filter
FL_V4_PHY-HP-EF-AWARE-Gold=400k-MCAST=200k-Total=1M-ds-10/0/0:2:1-i

Filter: FL_V4_PHY-HP-EF-AWARE-Gold=400k-MCAST=200k-Total=1M-ds-10/0/0:2:1-i
Counters:
Name Bytes Packets
AF1x_counter-ds-10/0/0:2:1-i 0 0
AF2x_counter-ds-10/0/0:2:1-i 25529445976 24500428
AF3x_counter-ds-10/0/0:2:1-i 2182022 39482
AF4x_counter-ds-10/0/0:2:1-i 0 0
BE_counter-ds-10/0/0:2:1-i 0 0
EF_counter-ds-10/0/0:2:1-i 14817044120 12265765
STD_counter-ds-10/0/0:2:1-i 0 0
Policers:
Name Bytes Packets
POL_CE-PE_M=200k-filter-ds-10/0/0:2:1-i 5948099658 5708349
POL_CE-PE_G=400K_R=1M-filter-ds-10/0/0:2:1-i ?????????? 3572794
????????????? ?????????? ????????
```

### show firewall filter (Dynamic Input Filter)

```
user@host> show firewall filter dfwd-ge-5/0/0.1-in
Filter: dfwd-ge-5/0/0.1-in
Counters:
Name Bytes Packets
c1-ge-5/0/0.1-in 0 0
```

### show firewall (Logical Systems)

```
user@host> show firewall
```

```

Filter: __lr1/test
Counters:
Name Bytes Packets
icmp 420 5
Filter: __default_bpdu_filter__
Filter: __lr1/inet_filter1
Counters:
Name Bytes Packets
inet_tcp_count 0 0
inet_udp_count 0 0
Filter: __lr1/inet_filter2
Counters:
Name Bytes Packets
inet_icmp_count 0 0
inet_pim_count 0 0
Filter: __lr2/inet_filter1
Counters:
Name Bytes Packets
inet_tcp_count 0 0
inet_udp_count 0 0

```

#### show firewall (counter counter-name)

```

user@host> show firewall counter icmp-counter
Filter: ingress-port-voip-class-filter
Counters:
Name Bytes Packets
icmp-counter 0 0

```

#### show firewall log

```

user@host> show firewall log
Log :

Time Filter Action Interface Protocol Src Addr
 Dest Addr
08:00:53 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4
08:00:52 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4
08:00:51 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4
08:00:50 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4
08:00:49 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4
08:00:48 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4
08:00:47 pfe R ge-1/0/1.0 ICMP 192.168.3.5
 192.168.3.4

```

#### show firewall policer counters (EX8200 Switch)

```

user@switch> show firewall policer counters
Policer Counter Index 0:
Green: 73 15914
Yellow: 9 1962
Discard: 119 25942

```

```

Policer Counter Index 1:
 Bytes Packets
Green: 0 0
Yellow: 0 0
Discard: 0 0

Policer Counter Index 2:
 Bytes Packets
Green: 0 0
Yellow: 0 0
Discard: 0 0

```

### show firewall policer counters (detail) (EX8200 Switch)

```

user@switch> show firewall policer counters detail
Policer Counter Index 0:
 Bytes Packets
Green: 73 15914
Yellow: 9 1962
Discard: 119 25942

Filter name Term name Policer name
myfilter polcr-term-1 myfilter-polcr-1
inet-filter-ae ae-snmp policer-1
inet-filter-ae ae-ssh policer-2

Policer Counter Index 1:
 Bytes Packets
Green: 0 0
Yellow: 0 0
Discard: 0 0

Filter name Term name Policer name

Policer Counter Index 2:
 Bytes Packets
Green: 0 0
Yellow: 0 0
Discard: 0 0

Filter name Term name Policer name

```

### show firewall policer counters (counter-id counter-index) (EX8200 Switch)

```

user@switch> show firewall policer counters counter-id 0
Policer Counter Index 0:
 Bytes Packets
Green: 73 15914
Yellow: 9 1962
Discard: 119 25942

```

### show firewall policer counters (counter-id counter-index detail) (EX8200 Switch)

```

user@switch> show firewall policer counters counter-id 0 detail
Policer Counter Index 0:
 Bytes Packets
Green: 73 15914
Yellow: 9 1962
Discard: 119 25942

Filter name Term name Policer name

```

|                |              |                  |
|----------------|--------------|------------------|
| myfilter       | polcr-term-1 | myfilter-polcr-1 |
| inet-filter-ae | ae-snmp      | policer-1        |
| inet-filter-ae | ae-ssh       | policer-2        |

#### show firewall detail

```
user@host> show firewall detail
Filter: __default_bpdu_filter__
```

```
Filter: foo
```

```
Counters:
```

```
Name
```

```
c1
```

| Bytes    | Packets |
|----------|---------|
| 17652140 | 160474  |

```
Policers:
```

```
Name
```

```
P1-t1
```

| Bytes | Packets |
|-------|---------|
|-------|---------|

```
00S
```

|   |       |
|---|-------|
| 0 | 18286 |
|---|-------|

```
Offered
```

|                        |  |
|------------------------|--|
| 0 18446744073709376546 |  |
|------------------------|--|

```
Transmitted
```

|                        |  |
|------------------------|--|
| 0 18446744073709358260 |  |
|------------------------|--|

## show firewall filter version

|                                 |                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show firewall filter version <filter-name>                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced in Junos OS Release 10.2R2.<br>Command introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                                                            |
| <b>Description</b>              | Display the version number of the installed firewall filter in the Routing Engine.                                                                                                                                                                                 |
| <b>Options</b>                  | none—(Optional) Display the version number of all installed firewall filters.<br><br>filter-name—(Optional) Name of a configured filter. If you specify the name of a filter, only the version number of that filter is displayed.                                 |
| <b>Additional Information</b>   | The initial version number is 1. This number increments by one when you modify the firewall filter settings or an associated prefix action. The maximum version number is 4,294,967,295. When the version number reaches 4,294,967,295, this number is reset to 1. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                               |
| <b>List of Sample Output</b>    | <a href="#">show firewall filter version on page 243</a>                                                                                                                                                                                                           |
| <b>Output Fields</b>            | <a href="#">Table 13 on page 243</a> lists the output fields for the <b>show firewall filter version</b> command. Output fields are listed in the approximate order in which they appear.                                                                          |

Table 13: show firewall filter version Output Fields

| Field Name | Field Description                                                                                                         |
|------------|---------------------------------------------------------------------------------------------------------------------------|
| Filter     | Name of a filter that has been configured with the <b>filter</b> statement at the <b>[edit firewall]</b> hierarchy level. |
| Version    | Display the version number of the firewall filter.                                                                        |

## Sample Output

### show firewall filter version

```

user@host> show firewall filter version
Filter version information :
Filter Version
test 10

```

## show firewall log

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 244</a><br><a href="#">Syntax (EX Series Switches) on page 244</a>                                                                                                                                                                                                                                                                                                     |
| <b>Syntax</b>                      | <pre>show firewall log &lt;detail&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical-system (<i>logical-system-name</i>   all)&gt;</pre>                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switches)</b> | <pre>show firewall log &lt;detail&gt; &lt;interface <i>interface-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>logical-system</b> option introduced in Junos OS Release 9.3.</p>                                                                                                                                                                                          |
| <b>Description</b>                 | Display log information about firewall filters.                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                     | <p><b>none</b>—Display log information about firewall filters.</p> <p><b>detail</b>—(Optional) Display detailed information.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display log information about a specific interface.</p> <p><b>logical-system (<i>logical-system-name</i>   all)</b>—(Optional) Perform this operation on all logical systems or on a particular system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>       | <a href="#">show firewall log on page 245</a><br><a href="#">show firewall log detail on page 245</a>                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>               | <p><a href="#">Table 14 on page 244</a> lists the output fields for the <b>show firewall log</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                             |

**Table 14: show firewall log Output Fields**

| Field Name         | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Time of Log</b> | Time that the event occurred.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Filter</b>      | <p>Name of a filter that has been configured with the <b>filter</b> statement at the <b>[edit firewall]</b> hierarchy level.</p> <ul style="list-style-type: none"> <li>A hyphen (-) indicates that the packet was handled by the Packet Forwarding Engine.</li> <li>A space (no hyphen) indicates the packet was handled by the Routing Engine.</li> <li>The notation <b>pfe</b> indicates packets logged by the Packet Forwarding Engine hardware filters.</li> </ul> |

Table 14: show firewall log Output Fields (*continued*)

| Field Name          | Field Description                                                                                                    |
|---------------------|----------------------------------------------------------------------------------------------------------------------|
| Filter Action       | Filter action: <ul style="list-style-type: none"> <li>• A—Accept</li> <li>• D—Discard</li> <li>• R—Reject</li> </ul> |
| Name of Interface   | Ingress interface for the packet.                                                                                    |
| Name of protocol    | Packet's protocol name: <b>egp, gre, icmp, ipip, ospf, pim, rsvp, tcp, or udp.</b>                                   |
| Packet length       | Length of the packet.                                                                                                |
| Source address      | Packet's source address.                                                                                             |
| Destination address | Packet's destination address and port.                                                                               |

## Sample Output

### show firewall log

```

user@host>show firewall log
Time Filter Action Interface Protocol Src Addr Dest Addr
13:10:12 pfe D rlsq0.902 ICMP 180.1.177.2 180.1.177.1
13:10:11 pfe D rlsq0.902 ICMP 180.1.177.2 180.1.177.1

```

### show firewall log detail

```

user@host> show firewall log detail
Time of Log: 2004-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0Name of protocol: TCP, Packet Length: 50824, Source address:
172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2004-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 1020, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2004-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2004-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2004-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0
Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,
Destination address: 192.168.70.66:513
Time of Log: 2004-10-13 10:37:17 PDT, Filter: f, Filter action: accept, Name of
interface: fxp0.0

```

Name of protocol: TCP, Packet Length: 49245, Source address: 172.17.22.108:829,  
Destination address: 192.168.70.66:513  
....



## show firewall prefix-action-stats

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                | <a href="#">Syntax (filter-specific mode) on page 247</a><br><a href="#">Syntax (term-specific mode) on page 247</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Syntax (filter-specific mode) | show firewall prefix-action-stats filter <i>filter-name</i> prefix-action <i>prefix-action-name</i><br><from <i>number</i> to <i>number</i> ><br><logical-system ( <i>logical-system-name</i>   all)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Syntax (term-specific mode)   | show firewall prefix-action-stats filter <i>filter-name</i> prefix-action <i>prefix-action-name-term-name</i><br><from <i>number</i> to <i>number</i> ><br><logical-system ( <i>logical-system-name</i>   all)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Release Information           | Command introduced before Junos OS Release 7.4.<br><b>logical-system</b> option introduced in Junos OS Release 9.3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description                   | <p>Display prefix action statistics about configured firewall filters.</p> <p>If you clear statistics for firewall filters that are applied to MPCs and that also use the <b>prefix-action</b> action on matched packets, wait at least 5 seconds before you enter the <b>show firewall prefix-action-stats</b> command. A 5-second pause between issuing the <b>clear firewall</b> and <b>show firewall prefix-action-stats</b> commands avoids a possible timeout of the <b>show firewall prefix-action-stats</b> command.</p> <p>By default, policers operate in <i>term-specific</i> mode.</p> <p>See “<a href="#">Filter-Specific Policer Overview</a>” on <a href="#">page 70</a> for information about how to configure policers in <i>filter-specific</i> mode.</p> |
| Options                       | <p><b>filter <i>filter-name</i></b>—Name of a filter.</p> <p><b>prefix-action <i>prefix-action-name</i></b>—Name of a prefix action.</p> <p><b>from <i>number</i> to <i>number</i></b>—(Optional) Starting and ending counter or policer.</p> <p><b>logical-system (<i>logical-system-name</i>   all)</b>—(Optional) Perform this operation on all logical systems or on a particular system.</p>                                                                                                                                                                                                                                                                                                                                                                           |
| Required Privilege Level      | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Related Documentation         | <ul style="list-style-type: none"> <li>• <a href="#">clear firewall on page 234</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| List of Sample Output         | <a href="#">show firewall prefix-action-stats on page 248</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Output Fields                 | <a href="#">Table 15 on page 248</a> lists the output fields for the <b>show firewall prefix-action-stats</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

Table 15: show firewall prefix-action-stats Output Fields

| Field Name    | Field Description                                                                                                                                                                                           |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Filter</b> | Filter name.<br><br>Filters configured for logical systems include the name of the filter prefixed with the two underscore characters (__) and the name of the logical system (for example, __ls1/filter1). |

## Sample Output

The following sample output assumes that the policer *act1* is in term mode and that there is a term named *term1* configured in the firewall filter *test*.

### show firewall prefix-action-stats

```

user@host> show firewall prefix-action-stats filter test prefix-action act1-term1 from 0 to 9
Filter: test
Counters:
Name Bytes Packets
act1-0 0 0
act1-1 0 0
act1-2 0 0
act1-3 0 0
act1-4 0 0
act1-5 0 0
act1-6 0 0
act1-7 0 0
act1-8 0 0
act1-9 0 0
Policers:
Name Bytes Packets
act1-0 0 0
act1-1 0 0
act1-2 0 0
act1-3 0 0
act1-4 0 0
act1-5 0 0
act1-6 0 0
act1-7 0 0
act1-8 0 0
act1-9 0 0

```

## show policer

|                                 |                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show policer</code><br><code>&lt;detail&gt;</code><br><code>&lt;policer-name&gt;</code>                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Option <b>detail</b> introduced in Junos OS Release 12.3.<br>Command introduced in Junos OS Release 12.3R2 for EX Series switches.                                                                                                        |
| <b>Description</b>              | Display the number of policed packets for a given policer or an aggregate policer. An aggregate policer is an aggregate of different policers on the same logical interface.                                                                                                                 |
| <b>Options</b>                  | <b>none</b> —Display the number of policed packets for all configured policers.<br><br><b>detail</b> —(Optional) Display enhanced statistics for policers.<br><br><b>policer-name</b> —(Optional) Display the number of policed packets for the specified policer.                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <a href="#">show policer (MX Series Router and EX Series Switch) on page 249</a><br><a href="#">show policer (non MX Series Router) on page 250</a><br><a href="#">show policer (Aggregate Policer, non MX Series Router) on page 250</a><br><a href="#">show policer detail on page 250</a> |
| <b>Output Fields</b>            | <a href="#">Table 16 on page 249</a> lists the output fields for the <b>show policer</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                    |

**Table 16: show policer Output Fields**

| Field Name     | Field Description                                                                                                                                                                                                                                                       |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>    | Name of the policer.                                                                                                                                                                                                                                                    |
| <b>Bytes</b>   | (For two-color policers on MX Series routers and EX Series switches, and for hierarchical policers on interfaces hosted on MICs and MPCs in MX Series routers) Total number of bytes policed by the specified policer.<br><br>For other platforms, this field is blank. |
| <b>Packets</b> | Total number of packets policed by the specified policer.                                                                                                                                                                                                               |

## Sample Output

### show policer (MX Series Router and EX Series Switch)

```

user@host> show policer
Policers:
Name Bytes Packets
__default_arp_policer__ 314520 5242

```

|                             |          |        |
|-----------------------------|----------|--------|
| pol-2M-ge-1/2/0.1-inet-i    | 10372300 | 103723 |
| pol-2M-ge-1/2/0.1-inet6-i   | 7727800  | 77278  |
| pol-2M-ge-1/2/0.1-mp1s-i    | 7070336  | 67984  |
| pol-2M-ge-1/2/0.1001-vp1s-i | 65153700 | 651537 |
| pol-2M-ge-1/2/0.2001-vp1s-i | 65180900 | 651809 |
| pol-2M-ge-1/2/0.3001-ccc-i  | 62202144 | 647939 |

**show policer (non MX Series Router)**

```
user@host> show policer
Policers:
Name Bytes Packets
__default_arp_policer__
pol-2M-ge-1/2/0.1-inet-i
pol-2M-ge-1/2/0.1-inet6-i
pol-2M-ge-1/2/0.1-mp1s-i
pol-2M-ge-1/2/0.1001-vp1s-i
pol-2M-ge-1/2/0.2001-vp1s-i
pol-2M-ge-1/2/0.3001-ccc-i
```

**show policer (Aggregate Policer, non MX Series Router)**

```
user@host> show policer
Policers:
Name Bytes Packets
__default_arp_policer__
P1-ae0.0-log_int-o
P2-ge-7/0/2.0-inet-o
P2-ge-7/0/2.0-inet6-o
__policer_tmpl__-term
__policer_tmpl__-fc0
__policer_tmpl__-fc0
__policer_tmpl__-fc1
__policer_tmpl__-fc0
__policer_tmpl__-fc1
__policer_tmpl__-fc2
__policer_tmpl__-fc0
__policer_tmpl__-fc1
__policer_tmpl__-fc2
__policer_tmpl__-fc3
```

**show policer detail**

```
user@host> show policer detail
Policers:
Name Bytes Packets
__default_arp_policer__
 OOS 0 0
 Offered 0 496
 Transmitted 0 496
P1-xe-1/0/0.0-inet-i
 OOS 0 11329
 Offered 0 111188
 Transmitted 0 99859
```

## PART 4

# Index

- [Index on page 253](#)



# Index

## Symbols

|                                              |     |
|----------------------------------------------|-----|
| #, comments in configuration statements..... | xvi |
| ( ), in syntax descriptions.....             | xvi |
| < >, in syntax descriptions.....             | xvi |
| [ ], in configuration statements.....        | xvi |
| { }, in configuration statements.....        | xvi |
| (pipe), in syntax descriptions.....          | xvi |

## A

|                                       |          |
|---------------------------------------|----------|
| action statement.....                 | 186      |
| aggregate (logical interface) policer |          |
| configuration statement for.....      | 209      |
| example                               |          |
| single-rate two-color.....            | 140      |
| two-rate three-color.....             | 145, 164 |
| overview.....                         | 139      |

## B

|                                          |     |
|------------------------------------------|-----|
| bandwidth policer, logical               |     |
| example.....                             | 63  |
| overview.....                            | 62  |
| bandwidth-limit statement                |     |
| policer.....                             | 187 |
| bandwidth-percent statement              |     |
| policer.....                             | 189 |
| braces, in configuration statements..... | xvi |
| brackets                                 |     |
| angle, in syntax descriptions.....       | xvi |
| square, in configuration statements..... | xvi |
| burst-size-limit statement.....          | 191 |

## C

|                                            |     |
|--------------------------------------------|-----|
| class-of-service <i>See</i> CoS            |     |
| clear firewall command.....                | 234 |
| color markings                             |     |
| policers.....                              | 26  |
| color modes for three-color policer.....   | 124 |
| color-aware statement.....                 | 194 |
| color-blind statement.....                 | 195 |
| comments, in configuration statements..... | xvi |
| committed-burst-size statement.....        | 196 |

|                                                |      |
|------------------------------------------------|------|
| committed-information-rate statement.....      | 198  |
| configuration and application overview         |      |
| single-rate two-color policers.....            | 15   |
| three-color policers.....                      | 19   |
| conventions                                    |      |
| text and syntax.....                           | xv   |
| CoS                                            |      |
| forwarding classes.....                        | 97   |
| policer actions, overview.....                 | 3    |
| RED drop profiles.....                         | 97   |
| curly braces, in configuration statements..... | xvi  |
| customer support.....                          | xvii |
| contacting JTAC.....                           | xvii |

## D

|                                                  |        |
|--------------------------------------------------|--------|
| denial-of-service attacks, preventing.....       | 71     |
| diagnosis                                        |        |
| displaying stateless firewall filter             |        |
| configurations.....                              | 77     |
| verifying stateless firewall filter .....        | 77     |
| verifying stateless firewall filter DoS          |        |
| protection.....                                  | 80     |
| verifying stateless firewall filter flood        |        |
| protection.....                                  | 80     |
| verifying stateless firewall filter              |        |
| protection.....                                  | 78, 79 |
| documentation                                    |        |
| comments on.....                                 | xvii   |
| DoS (denial-of-service) attacks, preventing..... | 71     |
| dual token bucket algorithms.....                | 30     |

## E

|                                  |     |
|----------------------------------|-----|
| excess-burst-size statement..... | 200 |
|----------------------------------|-----|

## F

|                                 |            |
|---------------------------------|------------|
| filter-specific                 |            |
| counting and policing set.....  | 83         |
| policer.....                    | 70         |
| filter-specific policing option |            |
| configuration scenarios.....    | 91         |
| example.....                    | 84         |
| overview.....                   | 81         |
| filter-specific statement.....  | 201        |
| configuration scenarios.....    | 91         |
| example.....                    | 84         |
| overview.....                   | 70, 81, 83 |

|                                                                                           |          |
|-------------------------------------------------------------------------------------------|----------|
| firewall                                                                                  |          |
| filter version                                                                            |          |
| displaying.....                                                                           | 243      |
| statistics                                                                                |          |
| displaying.....                                                                           | 236      |
| firewall filters                                                                          |          |
| log information, displaying.....                                                          | 244      |
| physical interface filters.....                                                           | 217      |
| policed packets, displaying.....                                                          | 249      |
| statistics                                                                                |          |
| clearing.....                                                                             | 234      |
| displaying.....                                                                           | 247      |
| flooding, preventing.....                                                                 | 71       |
| font conventions.....                                                                     | xv       |
| forwarding class                                                                          |          |
| policer actions                                                                           |          |
| overview.....                                                                             | 3        |
| forwarding classes.....                                                                   | 97       |
| <b>H</b>                                                                                  |          |
| hierarchical policer                                                                      |          |
| bandwidth limit.....                                                                      | 25       |
| burst-size limit.....                                                                     | 25       |
| color markings and actions.....                                                           | 26       |
| overview.....                                                                             | 7        |
| single token bucket algorithm.....                                                        | 28       |
| hierarchical-policer statement.....                                                       | 202      |
| <b>I</b>                                                                                  |          |
| ICMP (Internet Control Message Protocol),<br>policers.....                                | 71       |
| if-exceeding statement                                                                    |          |
| single-rate two-color policer.....                                                        | 203      |
| input-hierarchical-policer statement.....                                                 | 204      |
| input-policer statement.....                                                              | 205      |
| input-three-color statement.....                                                          | 206      |
| Internet Control Message Protocol policers.....                                           | 71       |
| <b>L</b>                                                                                  |          |
| Layer 2 policer                                                                           |          |
| three-color policer                                                                       |          |
| overview.....                                                                             | 163      |
| two-color policer                                                                         |          |
| overview.....                                                                             | 161      |
| layer2-policer statement.....                                                             | 207      |
| Layer 2 policer                                                                           |          |
| three-color-policer                                                                       |          |
| example.....                                                                              | 145, 164 |
| load-balance-group statement.....                                                         | 208      |
| logical bandwidth policer                                                                 |          |
| example.....                                                                              | 63       |
| overview.....                                                                             | 62       |
| logical interface (aggregate) policer                                                     |          |
| configuration statement for.....                                                          | 209      |
| example                                                                                   |          |
| single-rate two-color.....                                                                | 140      |
| two-rate three-color.....                                                                 | 145, 164 |
| overview.....                                                                             | 139      |
| logical interface-policer statement.....                                                  | 209      |
| logical-bandwidth-policer statement.....                                                  | 208      |
| loopback interface, applying stateless firewall filters<br>to (configuration editor)..... | 71       |
| loss-priority statement                                                                   |          |
| stateless firewall filter action.....                                                     | 210      |
| <b>M</b>                                                                                  |          |
| manuals                                                                                   |          |
| comments on.....                                                                          | xvii     |
| multifield classification                                                                 |          |
| example.....                                                                              | 102      |
| limitations on M Series routers.....                                                      | 100      |
| overview.....                                                                             | 97       |
| requirements and restrictions.....                                                        | 99       |
| <b>N</b>                                                                                  |          |
| naming conventions                                                                        |          |
| three-color policer.....                                                                  | 125      |
| <b>O</b>                                                                                  |          |
| output-policer statement.....                                                             | 212      |
| output-three-color statement.....                                                         | 213      |
| <b>P</b>                                                                                  |          |
| packet loss priority                                                                      |          |
| policer actions                                                                           |          |
| overview.....                                                                             | 3        |
| parentheses, in syntax descriptions.....                                                  | xvi      |
| peak-burst-size statement.....                                                            | 214      |
| peak-information-rate statement.....                                                      | 216      |
| physical interface policer                                                                |          |
| configuration statement for.....                                                          | 218      |
| example.....                                                                              | 153      |
| overview.....                                                                             | 151      |
| physical-interface-filter statement.....                                                  | 217      |
| physical-interface-policer statement.....                                                 | 218      |
| ping command (stateless firewall filter).....                                             | 80       |
| explanation.....                                                                          | 80       |



|                                             |          |
|---------------------------------------------|----------|
| policer                                     |          |
| and firewall filter                         |          |
| order of operations.....                    | 10       |
| applying to a logical interface.....        | 219      |
| bandwidth limit.....                        | 25       |
| burst-size limit.....                       | 25       |
| color markings and actions.....             | 26       |
| filter-specific.....                        | 70       |
| guidelines for applying.....                | 23       |
| overview.....                               | 3        |
| prefix-specific action                      |          |
| configuration scenarios.....                | 91       |
| example.....                                | 84       |
| overview.....                               | 81       |
| statement hierarchy.....                    | 13       |
| supported standards.....                    | 231      |
| term-specific.....                          | 70       |
| traffic-limiting criteria.....              | 25       |
| types.....                                  | 7        |
| policer actions                             |          |
| forwarding class                            |          |
| overview.....                               | 3        |
| packet loss-priority                        |          |
| overview.....                               | 3        |
| policer overhead for rate shaping           |          |
| example.....                                | 115      |
| overview.....                               | 114      |
| policer statement                           |          |
| configuring.....                            | 220      |
| stateless firewall filter action.....       | 221      |
| policer, hierarchical                       |          |
| and firewall filter                         |          |
| order of operations.....                    | 10       |
| bandwidth limit.....                        | 25       |
| burst-size limit.....                       | 25       |
| color markings and actions.....             | 26       |
| configuration statement for.....            | 202      |
| overview.....                               | 7, 23    |
| single token bucket algorithm.....          | 28       |
| policer, Layer 2                            |          |
| three-color policer                         |          |
| overview.....                               | 163      |
| two-color policer                           |          |
| overview.....                               | 161      |
| policer, multifield classification          |          |
| example.....                                | 102      |
| limitations on M Series routers.....        | 100      |
| overview.....                               | 97       |
| requirements and restrictions.....          | 99       |
| policer, single-rate three-color            |          |
| bandwidth limit.....                        | 25       |
| burst-size limit.....                       | 25       |
| color markings and actions.....             | 26       |
| color modes.....                            | 124      |
| configuration and application overview..... | 19       |
| dual token bucket algorithm.....            | 30       |
| example.....                                | 127      |
| logical interface (aggregate)               |          |
| overview.....                               | 139      |
| naming conventions.....                     | 125      |
| overview.....                               | 7, 126   |
| physical interface policer                  |          |
| overview.....                               | 151      |
| supported platforms.....                    | 123      |
| policer, single-rate two-color              |          |
| bandwidth limit.....                        | 25       |
| burst-size limit.....                       | 25       |
| color markings and actions.....             | 26       |
| configuration and application overview..... | 15       |
| example.....                                | 46, 52   |
| logical bandwidth                           |          |
| example.....                                | 63       |
| overview.....                               | 62       |
| logical interface (aggregate)               |          |
| example.....                                | 140      |
| overview.....                               | 139      |
| overview.....                               | 7, 45    |
| physical interface policer                  |          |
| example.....                                | 153      |
| overview.....                               | 151      |
| prefix-specific action                      |          |
| configuration scenarios.....                | 91       |
| example.....                                | 84       |
| overview.....                               | 81       |
| single token bucket algorithm.....          | 28       |
| policer, two-rate three-color               |          |
| bandwidth limit.....                        | 25       |
| burst-size limit.....                       | 25       |
| color markings and actions.....             | 26       |
| color modes.....                            | 124      |
| configuration and application overview..... | 19       |
| dual-rate dual token bucket algorithm.....  | 30       |
| example.....                                | 133      |
| logical interface (aggregate)               |          |
| example.....                                | 145, 164 |
| overview.....                               | 139      |
| naming conventions.....                     | 125      |
| overview.....                               | 7, 132   |

|                                       |     |
|---------------------------------------|-----|
| physical interface policer            |     |
| overview.....                         | 151 |
| supported platforms.....              | 123 |
| policers                              |     |
| for stateless firewall filters.....   | 71  |
| policers, displaying.....             | 249 |
| prefix-action statement               |     |
| configuration scenarios.....          | 91  |
| configuring.....                      | 222 |
| example.....                          | 84  |
| firewall filter action.....           | 223 |
| overview.....                         | 81  |
| prefix-specific action                |     |
| filter-specific.....                  | 83  |
| term-specific.....                    | 83  |
| prefix-specific counting and policing |     |
| configuration scenarios.....          | 91  |
| example.....                          | 84  |
| overview.....                         | 81  |

## R

|                                     |     |
|-------------------------------------|-----|
| rate-shaping                        |     |
| configuring policer overhead for    |     |
| example.....                        | 115 |
| overview.....                       | 114 |
| RED drop profiles.....              | 97  |
| Routing Engine                      |     |
| protecting against DoS attacks..... | 71  |
| routing solutions                   |     |
| protecting against DoS attacks..... | 71  |

## S

|                                                |         |
|------------------------------------------------|---------|
| sample configurations                          |         |
| firewall filter configurations.....            | 77      |
| show firewall command.....                     | 77, 236 |
| show firewall filter version command.....      | 243     |
| show firewall log command.....                 | 244     |
| show firewall prefix-action-stats command..... | 247     |
| show interfaces lo0 command.....               | 71      |
| show interfaces policers command.....          | 140     |
| show policer command.....                      | 249     |
| single token bucket algorithm.....             | 28      |
| single-rate statement.....                     | 224     |
| single-rate three-color policer                |         |
| and firewall filter                            |         |
| order of operations.....                       | 10      |
| bandwidth limit.....                           | 25      |
| burst-size limit.....                          | 25      |
| color markings and actions.....                | 26      |

|                                             |            |
|---------------------------------------------|------------|
| color modes.....                            | 124        |
| configuration and application summary.....  | 19         |
| dual token bucket algorithm.....            | 30         |
| example.....                                | 127        |
| Layer 2 policer                             |            |
| overview.....                               | 163        |
| logical interface (aggregate)               |            |
| overview.....                               | 139        |
| naming conventions.....                     | 125        |
| overview.....                               | 7, 23, 126 |
| physical interface policer                  |            |
| overview.....                               | 151        |
| supported platforms.....                    | 123        |
| single-rate two-color policer               |            |
| and firewall filter                         |            |
| order of operations.....                    | 10         |
| at Layer 2                                  |            |
| overview.....                               | 161        |
| burst-size limit.....                       | 25         |
| color markings and actions.....             | 26         |
| configuration and application overview..... | 15         |
| example.....                                | 46, 52     |
| logical bandwidth                           |            |
| example.....                                | 63         |
| overview.....                               | 62         |
| logical interface (aggregate)               |            |
| example.....                                | 140        |
| overview.....                               | 139        |
| overview.....                               | 7, 23, 45  |
| physical interface policer                  |            |
| example.....                                | 153        |
| overview.....                               | 151        |
| prefix-specific action                      |            |
| configuration scenarios.....                | 91         |
| example.....                                | 84         |
| overview.....                               | 81         |
| single token bucket algorithm.....          | 28         |
| standard stateless firewall filters         |            |
| multifield classification                   |            |
| example.....                                | 102        |
| limitations on M Series routers.....        | 100        |
| overview.....                               | 97         |
| requirements and restrictions.....          | 99         |
| standards                                   |            |
| supported for policing.....                 | 231        |
| stateless firewall filters                  |            |
| applying to an interface (configuration     |            |
| editor).....                                | 71         |
| displaying configurations.....              | 77         |

- policers for.....71
  - protecting the Routing Engine against TCP
    - floods.....71
    - verifying configuration.....77
    - verifying flood protection.....77, 80
    - verifying protection.....78, 79
  - support, technical See technical support
  - supported platforms
    - three-color policer.....123
  - syntax conventions.....xv
- T**
- TCP policers.....71
- technical support
  - contacting JTAC.....xvii
- telnet command.....77, 78, 79, 80
- term-specific
  - counting and policing set.....83
  - policer.....70
- three-color policer
  - color modes.....124
  - naming conventions.....125
  - single-rate
    - example.....127
    - overview.....126
  - supported platforms.....123
  - two-rate.....126, 132
    - example.....133
    - overview.....132
    - See also policer, single-rate three-color
    - See also policer, two-rate three-color
- three-color-policer statement.....226
- token bucket algorithm
  - dual bucket.....30
  - dual-rate dual bucket.....30
  - single bucket.....28
- traffic-limiting criteria
  - policers.....25
- two-rate statement.....227
- two-rate three-color policer
  - bandwidth limit.....25
  - burst-size limit.....25
  - color markings and actions.....26
  - color modes.....124
  - configuration and application overview.....19
  - dual-rate dual token bucket algorithm.....30
  - example.....133
  - Layer 2 policer
    - overview.....163
  - logical interface (aggregate)
    - example.....145, 164
    - overview.....139
  - naming conventions.....125
  - overview.....7, 23, 132
  - physical interface policer
    - overview.....151
    - supported platforms.....123
  - two-rate three-color-policer
    - and firewall filter
      - order of operations.....10
- V**
- verification
  - stateless firewall filter flood protection.....77, 80
  - stateless firewall filter protection.....78, 79
  - stateless firewall filters.....77

