



E-series™ Routing Platforms

ERX™ Module Guide

Release 8.0.x

Juniper Networks, Inc.

1194 North Mathilda Avenue

Sunnyvale, California 94089

USA

408-745-2000

www.juniper.net

Part Number: 162-01540-00, Revision A00

This guide provides an overview and description of the line modules (LMs), switch route processor (SRP) modules, and I/O modules available for the following E-series routers: ERX-14xx models, ERX-7xx models, and the ERX-310 router.

Unless otherwise specified, all line modules pair with I/O modules to create a module combination. Each module combination provides particular capabilities and connections in an ERX router.



NOTE: A release may support multiple versions of a module. For information, see *Software Compatibility* in *JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules*.

Table 1 lists the module combinations supported by ERX routers.

This book also contains three appendixes:

- “Module Protocol Support” on page 113
- “Module LEDs” on page 139
- “Product Reclamation and Recycling Program” on page 145

For more information about ERX routers and modules, refer to the following books:

- Modules that have reached end-of-life—*ERX End-of-Life Module Guide*
- Module installation and maintenance—*ERX Hardware Guide*
- Managing ERX routers—*JUNOS System Basics Configuration Guide*
- Configuring ERX modules—*JUNOS Link Layer Configuration Guide*

Table 1: ERX Module Combinations

Combination Name and Type	Line Module Label	I/O Module Label	First JUNOS^e Support	Page
Channelized OC3/STM1				
cOC3/STM1 multimode	cOCx/STMx F0	cOC3 STM1 F0 I/O MULTIMODE	2.2.0	7
cOC3/STM1 single-mode intermediate reach	cOCx/STMx F0	cOC3 STM1 F0 I/O SINGLE MODE	2.2.0	9
cOC3/STM1 single-mode long reach	cOCx/STMx F0	cOC3 STM1 F0 I/O LONG HAUL	2.2.0	11
Channelized OC12/STM4				
cOC12/STM4 multimode without APS/MSP redundancy	cOCx/STMx F0	cOC12 STM4 F0 I/O MULTI MODE	2.2.0	13
cOC12/STM4 single-mode intermediate reach without APS/MSP redundancy	cOCx/STMx F0	cOC12 STM4 F0 I/O SINGLE MODE	2.2.0	15
cOC12/STM4 single-mode intermediate reach with APS/MSP redundancy	cOCx/STMx F0	COC12 F0 APS SINGLE MODE	6.1.3, 7.0.2, 7.2.0	17
cOC12/STM4 single-mode long reach	cOCx/STMx F0	cOC12 STM4 LONG HAUL	2.2.0	19
Channelized T1				
CT1	CT1	CT1 FULL I/O	1.1.0	21
Channelized T3				
CT3/T3 12 (12 ports)	CT3/T3-F0	CT3/T3 12 I/O	3.2.0	22
E3				
E3 Frame (12 ports)	COCX-F3	E3-12 FRAME I/O	4.0.2	24
Fast Ethernet				
FE-8 (8 ports) (256-MB memory)	GE/FE	FE-8 I/O	5.0.0	26
FE-8 SFP (8 ports) (256-MB memory)	GE/FE	FE-8 SFP I/O	6.0.0	28
Gigabit Ethernet (1-port)				
GE 1000Base-SX (256-MB memory)	GE/FE	GE I/O SFP	5.0.0	30
GE 1000Base-LH (256-MB memory)	GE/FE	GE I/O SFP	5.0.0	32
GE 1000Base-ZX (256-MB memory)	GE/FE	GE I/O SFP	5.0.0	34
GE multimode	GE/FE	GE I/O MULTI MODE	2.0.0	36

Combination Name and Type	Line Module Label	I/O Module Label	First JUNOS^e Support	Page
GE single-mode	GE/FE	GE I/O SINGLE MODE	2.0.0	38
Gigabit Ethernet (2-port)				
GE2 1000Base-SX	GE-2	2XGE APS I/O SFP <i>or</i> GE-2 APS I/O SFP	5.3.0	40
GE2 1000Base-LH	GE-2	2XGE APS I/O SFP <i>or</i> GE-2 APS I/O SFP	5.3.0	42
GE2 1000Base-ZX	GE-2	2XGE APS I/O SFP <i>or</i> GE-2 APS I/O SFP	5.3.0	44
GE High Density (HDE)				
GE High Density (2 ports)	GE-HDE	2XGE APS I/O SFP <i>or</i> GE-2 APS I/O SFP	7.0.0	46
GE High Density (8 ports)	GE-HDE	GE-8 I/O	7.0.0	48
HSSI				
HSSI	HSSI-3F	HSSI-3 I/O	3.1.0	50
IPSec Service				
IPSec Service	IPSEC SERVICE	No I/O module	4.0.2	51
OC3/STM1 ATM				
OC3/STM1 ATM multimode without APS/MSP redundancy (256-MB memory)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC3-4 I/O MULTI MODE	5.0.0, 5.3.0	52
OC3/STM1 ATM multimode with APS/MSP redundancy	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	4XOC3 APS I/O MULTI MODE	5.1.2 5.2.0 (APS/MSP)	54
OC3/STM1 ATM single-mode intermediate reach without APS/MSP redundancy (256-MB memory)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC3-4 I/O SINGLE MODE	5.0.0, 5.3.0	56
OC3/STM1 ATM single-mode intermediate reach with APS/MSP redundancy	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	4XOC3 APS I/O SINGLE MODE	5.1.2 5.2.0 (APS/MSP)	58
OC3/STM1 ATM single-mode long reach without APS/MSP redundancy (256-MB memory)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC3-4 I/O LONG HAUL	5.0.0, 5.3.0	60
OC3/STM1 GE/FE				
OC3/STM1 GE/FE	OC3/STM1 GE/FE	OC3-2 GE APS I/O	6.1.0	62
OC3/STM1 POS				
OC3/STM1 POS multimode without APS/MSP redundancy	OCx/STMx POS	OC3-4 I/O MULTI MODE	2.0.0	66

Combination Name and Type	Line Module Label	I/O Module Label	First JUNOS^e Support	Page
OC3/STM1 POS multimode with APS/MSP redundancy	OCx/STMx POS	4XOC3 APS I/O	5.1.2	68
		MULTI MODE	5.2.0 (APS/MSP)	
OC3/STM1 POS single-mode intermediate reach without APS/MSP redundancy	OCx/STMx POS	OC3-4 I/O	2.0.0	70
		SINGLE MODE		
OC3/STM1 POS single-mode intermediate reach with APS/MSP redundancy	OCx/STMx POS	4XOC3 APS I/O	5.1.2	72
		SINGLE MODE	5.2.0 (APS/MSP)	
OC3/STM1 POS single-mode long reach	OCx/STMx POS	OC3-4 I/O	2.0.0	74
		LONG HAUL		
OC12/STM4 ATM				
OC12/STM4 ATM multimode without APS/MSP redundancy (256-MB memory)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC12 STM4 I/O	5.0.0, 5.3.0	76
		MULTI MODE		
OC12/STM4 ATM multimode with APS/MSP redundancy	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC12 STM4 APS	2.0.0 (128 MB)	78
		MULTI MODE	5.0.0 (256 MB)	
OC12/STM4 ATM single-mode intermediate reach without APS/MSP redundancy (256-MB memory)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC12 STM4 I/O	5.0.0, 5.3.0	80
		SINGLE MODE		
OC12/STM4 ATM single-mode intermediate reach with APS/MSP redundancy	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC12 STM4 APS	2.0.0 (128 MB)	82
		SINGLE MODE	5.0.0 (256 MB)	
OC12/STM4 ATM single-mode long reach without APS/MSP redundancy (256-MB memory)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC12 STM4 I/O	5.0.0, 5.3.0	84
		LONG HAUL		
OC12/STM4 ATM single-mode long reach with APS/MSP redundancy	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	OC12 STM4 APS	2.0.0 (128 MB)	86
		LONG HAUL	5.0.0 (256 MB)	
OC12/STM4 POS				
OC12/STM4 POS multimode without APS/MSP redundancy	OCx/STMx POS	OC12 STM4 I/O	2.0.0	88
		MULTI MODE		
OC12/STM4 POS multimode with APS/MSP redundancy	OCx/STMx POS	OC12 STM4 APS	2.0.0	90
		MULTI MODE		
OC12/STM4 POS single-mode intermediate reach without APS/MSP redundancy	OCx/STMx POS	OC12 STM4 I/O	2.0.0	92
		SINGLE MODE		
OC12/STM4 POS single-mode intermediate reach with APS/MSP redundancy	OCx/STMx POS	OC12 STM4 APS	2.0.0	94
		SINGLE MODE		
OC12/STM4 POS single-mode long reach without APS/MSP redundancy	OCx/STMx POS	OC12 STM4 I/O	2.0.0	96
		LONG HAUL		

Combination Name and Type	Line Module Label	I/O Module Label	First JUNOS^e Support	Page
OC12/STM4 POS single-mode long reach with APS/MSP redundancy	OCx/STMx POS	OC12 STM4 APS LONG HAUL	2.0.0	98
OC48/STM16				
OC48/STM16 POS single-mode short reach	OC48	OC48 FRAME APS	4.1.x	100
Service Module (SM)				
SM	SERVICE MODULE	No I/O module	5.1.0	101
SRPs				
SRP-5G+ (1-GB memory)	SRP-5G+	SRP I/O	4.1.3, 5.0.4, 5.1.2, 5.2.0	102
SRP-5G+ (2-GB memory)	SRP-5G+	SRP I/O	4.1.3, 5.0.4, 5.1.2, 5.2.0	103
SRP-10G (1-GB memory)	SRP-10G	SRP I/O	4.1.3, 5.0.4, 5.1.2, 5.2.0	104
SRP-10G (2-GB memory)	SRP-10G	SRP I/O	4.1.3, 5.0.4, 5.1.2, 5.2.0	105
SRP-40G PLUS (2-GB memory)	SRP-40G PLUS	SRP I/O	4.0.0	106
SRP-SE10G (1-GB memory)	SRP-SE10G	SRP-SE I/O	5.3.0	107
T3				
T3 ATM (4 ports)	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM	4xDS3 ATM I/O	4.1.0 (128 MB) 5.0.0 (256 MB)	108
T3 Frame (12 ports)	COCX-F3	CT3/T3 12 I/O	4.0.2	109
X.21/V.35				
X.21/V.35	X.21/V.35	X.21/ V.35 I/O	2.10.1, 3.3.2	111

cOC3/STM1 Multimode Module Combination

Line module label	cOCx/STMx F0
I/O module label	cOC3 STM1 F0 I/O
	MULTI MODE
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 2.2.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ OC3/STM1 channelized to DS3, DS1, E1, and DS0 ■ Supports either E1 or T1 operation, but not E1 and T1 operation simultaneously
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ DS3 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none">■ Up to four SC full duplex connectors■ Tx power:<ul style="list-style-type: none">■ min: -19 dBm■ max: -14 dBm■ Center wavelength: 1310 nm■ Rx input power:<ul style="list-style-type: none">■ min: -30 dBm■ max: -14 dBm■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

cOC3/STM1 Single-Mode Intermediate Reach Module Combination

Line module label	cOCx/STMx F0
I/O module label	cOC3 STM1 F0 I/O SINGLE MODE
Number of I/O ports	■ 4
Software release	■ First supported: 2.2.0 ■ Final supported: Not applicable
Description	■ 130 W ■ OC3/STM1 channelized to DS3, DS1, E1, and DS0
Type	■ ASIC
Capability	■ OC3/STM1 ■ DS3, DS1 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

<p>Cables and connectors</p>	<ul style="list-style-type: none"> ■ Up to four SC full duplex connectors ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
<p>LEDs</p>	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
<p>Alarms, errors, and events</p>	<ul style="list-style-type: none"> ■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

cOC3/STM1 Single-Mode Long Reach Module Combination

Line module label	cOCx/STMx F0
I/O module label	cOC3 STM1 F0 I/O LONG HAUL
Number of I/O ports	■ 4
Software release	■ First supported: 2.2.0 ■ Final supported: Not applicable
Description	■ 130 W ■ OC3/STM1 channelized to DS3, DS1, E1, and DS0
Type	■ ASIC
Capability	■ OC3/STM1 ■ DS3, DS1 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none">■ Up to four SC full duplex connectors■ Tx power:<ul style="list-style-type: none">■ min: -5.0 dBm■ max: 0 dBm■ Center wavelength: 1310 nm■ Rx input power:<ul style="list-style-type: none">■ min: -34 dBm■ max: -7 dBm■ Fiber type: 9-micron core■ Rated for 40 km (24.8 miles) of 9-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

cOC12/STM4 Multimode Without APS/MSP Redundancy Module Combination

Line module label	cOCx/STMx F0
I/O module label	cOC12 STM4 F0 I/O
	MULTI MODE
Number of I/O ports	■ 1
Software release	■ First supported: 2.2.0 ■ Final supported: Not applicable
Description	■ 130 W ■ OC12/STM4 channelized to DS3, DS1, E1, and DS0
Type	■ ASIC
Capability	■ OC12/STM4 ■ OC3/STM1 ■ DS3, DS1 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex connector ■ Tx power: <ul style="list-style-type: none"> ■ min: -19 dBm ■ max: -14 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

cOC12/STM4 Single-Mode Intermediate Reach Without APS/MSP Redundancy Module Combination

Line module label	cOCx/STMx F0
I/O module label	cOC12 STM4 F0 I/O
	SINGLE MODE
Number of I/O ports	■ 1
Software release	■ First supported: 2.2.0 ■ Final supported: Not applicable
Description	■ 130 W ■ OC12/STM4 channelized to DS3, DS1, E1, and DS0
Type	■ ASIC
Capability	■ OC12/STM4 ■ OC3/STM1 ■ DS3, DS1 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none">■ SC full duplex connector■ Tx power:<ul style="list-style-type: none">■ min: -15 dBm■ max: -8 dBm■ Center wavelength: 1310 nm■ Rx input power:<ul style="list-style-type: none">■ min: -31 dBm■ max: -8 dBm■ Rated for 15 km (9.3 miles) of 9-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

cOC12/STM4 Single-Mode Intermediate Reach With APS/MSP Redundancy Module Combination

Line module label	cOCx/STMx F0
I/O module label	COC12 F0 APS SINGLE MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 2 ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 6.1.3 or later 6.1.x release, 7.0.2 or later 7.0.x release, 7.2.0 and higher-numbered release
Description	<ul style="list-style-type: none"> ■ 130 W ■ OC12/STM4 channelized to DS3, DS1, E1, and DS0
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ OC3/STM1 ■ DS3, DS1 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

<p>Cables and connectors</p>	<ul style="list-style-type: none"> ■ SC full duplex connector ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -7 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
<p>LEDs</p>	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
<p>Alarms, errors, and events</p>	<ul style="list-style-type: none"> ■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

cOC12/STM4 Single-Mode Long Reach Module Combination

Line module label	cOCx/STMx F0
I/O module label	cOC12 STM4 LONG HAUL
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.2.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ OC12/STM4 channelized to DS3, DS1, E1, and DS0
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ OC3/STM1 ■ DS3, DS1 ■ T1, E1 ■ DS0 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “Channelized OCx/STMx Modules” on page 114 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none">■ SC full duplex connector■ Tx power:<ul style="list-style-type: none">■ min: -5.0 dBm■ max: 0 dBm■ Center wavelength: 1310 nm■ Rx input power:<ul style="list-style-type: none">■ min: -34 dBm■ max: -7 dBm■ Fiber type: 9-micron core■ Rated for 40 km (24.8 miles) of 9-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 5, Configuring Channelized OCx/STMx Interfaces</i>.

CT1 Module Combination

Line module label	CT1
I/O module label	CT1 FULL I/O
Number of I/O ports	■ 24
Software release	<ul style="list-style-type: none"> ■ First supported: 1.1.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 40 W ■ Channelized T1
Type	■ Non-ASIC
Capability	<ul style="list-style-type: none"> ■ DS1, DS0 ■ HDLC Framing
Software features	■ See “Channelized T1 and E1 Modules” on page 115 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-1410 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G ■ SRP-5G+ ■ SRP-10G
Module redundancy support	■ 1:N redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ RJ-48C 100-ohm connector ■ Use shielded cables to maintain EMC compliance. ■ The line interface unit supports multiple line buildouts. ■ Signal strength is software controlled. ■ The transmitted signal complies with ANSI T1.102-1993 Digital Hierarchy - Electrical Interfaces (1999) for cable lengths up to 201 m (660 feet). ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 3, Configuring Channelized T1 and Channelized E1 Interfaces</i> .

CT3/T3 12 Module Combination (12 Ports)

Line module label	CT3/T3-F0
I/O module label	CT3/T3 12 I/O
Number of I/O ports	■ 12
Software release	■ First supported: 3.2.0 ■ Final supported: Not applicable
Description	■ 130 W ■ Channelized and unchannelized T3
Type	■ ASIC
Capability	■ DS5, DS1, DS0 ■ HDLC framing
Software features	■ See “Channelized T3 Modules” on page 117 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors

- BT43 SMB connector
- Cable that adapts to 75-ohm BNC is available.
- The line interface unit supports two line buildouts:
 - 0–68.5 m (0–225 feet)
 - 69–137 m (226–450 feet)
- Signal strength is software controlled.
- The transmitted signal complies with ANSI T1.102-1993 Digital Hierarchy - Electrical Interfaces (1999) for cable lengths up to 201 m (660 feet).
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Interfaces* in *JUNOS Physical Layer Configuration Guide, Chapter 1, Configuring Channelized T3 Interfaces*.
-

E3 Frame Module Combination (12 Ports)

Line module label	COCX-F3
I/O module label	E3-12
	FRAME I/O
Number of I/O ports	■ 12
Software release	■ First supported: 4.0.2 ■ Final supported: Not applicable
Description	■ 135 W ■ Unchannelized E3 for Frame
Type	■ ASIC
Capability	■ E3 ■ HDLC framing
Software features	■ See “Unchannelized E3 Modules” on page 132 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.
Cables and connectors	■ BT43 SMB connector ■ Cable that adapts to 75-ohm BNC is available. ■ The transmitted signal complies with ITUT G.703, Physical/electrical characteristics of hierarchical digital interfaces (November 2001) for cable lengths from 0–137 m (0–450 feet). ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.

LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 2, Configuring T3 and E3 Interfaces</i> .

FE-8 Module Combination (8 Ports) (256-MB Memory)

Line module label	GE/FE
I/O module label	FE-8 I/O
Number of I/O ports	■ 8
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0 ■ Final supported: Not applicable ■ The GE/FE line module must have a minimum of 256 MB of memory to be used with JUNOS Release 5.3.0 or a higher-numbered release.
Description	<ul style="list-style-type: none"> ■ 130 W ■ Fast Ethernet
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ IEEE 802.3 standards compliance ■ 10/100Base-T
Software features	■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ Not applicable
Cables and connectors	<ul style="list-style-type: none"> ■ RJ-45 connectors ■ For 10-Mbps operation, use CAT 3, 4, or 5 UTP cable. ■ For 100-Mbps operation, use only CAT 5 UTP cable. ■ The transmitted signal complies with IEEE 802.3/802.3u for cable lengths up to 100 m (328 feet). ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.

LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Ethernet Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i> .

FE-8 SFP Module Combination (8 Ports) (256-MB Memory)

Line module label	GE/FE
I/O module label	FE-8 SFP I/O
Number of I/O ports	■ 8
Software release	■ First supported: 6.0.0 ■ Final supported: Not applicable
Description	■ 130 W ■ Fast Ethernet ■ The FE-8 SFP I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cable lengths.
Type	■ ASIC
Capability	■ IEEE 802.3 standards compliance ■ 100Base-FX
Software features	■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ Not applicable

Cables and connectors (single-mode fiber)	<ul style="list-style-type: none"> ■ LC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1300 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -28 dBm ■ max: -14 dBm ■ Rated for 10 km (6.2 miles) over 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
Cables and connectors (multimode fiber)	<ul style="list-style-type: none"> ■ LC full duplex ■ Tx power: -20 dBm minimum and -14 dBm maximum ■ Center wavelength: 850 nm ■ Rx input power: -31 dBm minimum and -14 dBm maximum ■ Rated for 2 km (1.2 miles) over 62.5/125-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.

GE 1000Base-SX Module Combination (1 Port) (256-MB Memory)

Line module label	GE/FE
I/O module label	GE I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Gigabit Ethernet ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-SX compliant. ■ The copper transceivers are 1000Base-T compliant.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-SX
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (copper SFP)	<ul style="list-style-type: none"> ■ Maximum range is 100 meters on CAT5 cable.

Cables and connectors (SX)

- LC full duplex
- Tx power:
 - min: -9.5 dBm
 - max: -4 dBm
- Center wavelength: 850 nm
- Rx input power:
 - min: -20 dBm
 - max: -0 dBm
- Rated for 275 m (300 yards) over 62.5-micron core cable
- Rated for 550 m (601 yards) over 50-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE 1000Base-LH Module Combination (1 Port) (256-MB Memory)

Line module label	GE/FE
I/O module label	GE I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Gigabit Ethernet ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-LX/LH compliant. ■ The copper transceivers are 1000Base-T compliant.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-LH
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (copper SFP)	<ul style="list-style-type: none"> ■ Maximum range is 100 meters on CAT5 cable.

Cables and connectors (LX/LH)	<ul style="list-style-type: none"> ■ LC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -9.5 dBm ■ max: -3 dBm ■ Center wavelength: 1300 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -20 dBm ■ max: -3 dBm ■ Rated for 10 km (6.2 miles) over 10-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.

GE 1000Base-ZX Module Combination (1 Port) (256-MB Memory)

Line module label	GE/FE
I/O module label	GE I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Gigabit Ethernet ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-ZX compliant. ■ The copper transceivers are 1000Base-T compliant.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-ZX
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (copper SFP)	<ul style="list-style-type: none"> ■ Maximum range is 100 meters on CAT5 cable.

Cables and connectors (ZX)

- LC full duplex
- Tx power:
 - min: -2 dBm
 - max: 3 dBm
- Center wavelength: 1550 nm
- Rx input power:
 - min: -22 dBm
 - max: -3 dBm
- Rated for 70 km (43.4 miles) over 10-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces* in *JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE Multimode Module Combination (1 Port)

Line module label	GE/FE
I/O module label	GE I/O
	MULTI MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Gigabit Ethernet ■ This module combination has been superseded by a newer assembly; however, it is supported by current software.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z)
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable

Cables and connectors

- SC full duplex
- Tx power:
 - min: -9.5 dBm
 - max: -4 dBm
- Center wavelength: 850 nm
- Rx input power:
 - min: -17 dBm
 - max: -3 dBm
- Rated for 275 m (300 yards) over 62.5-micron core cable
- Rated for 550 m (601 yards) over 50-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE Single-Mode Module Combination (1 Port)

Line module label	GE/FE
I/O module label	GE I/O
	SINGLE MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Gigabit Ethernet ■ This module combination has been superseded by a newer assembly; however, it is supported by current software.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z)
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable

Cables and connectors

- SC full duplex
- Tx power:
 - min: -11 dBm
 - max: -3 dBm
- Center wavelength: 1300 nm
- Rx input power:
 - min: -20 dBm
 - max: -3 dBm
- Rated for 550 m (601 yards) over 62.5-micron core or 50-micron core MM fiber
- Rated for 5 km (3.1 miles) over 10-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE2 1000Base-SX Module Combination (2 Ports)

Line module label	GE-2
I/O module label	2XGE APS I/O SFP or GE-2 APS I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 2 active, 2 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.3.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 100 W ■ Gigabit Ethernet ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-SX compliant. ■ The copper transceivers are 1000Base-T compliant. ■ For information about bandwidth and line rate considerations for the GE2 1000Base-SX module combination, see <i>GE-2 APS I/O Module</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-SX
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-1440 router ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (copper SFP)	<ul style="list-style-type: none"> ■ Maximum range is 100 meters on CAT5 cable.

Cables and connectors (SX)

- LC full duplex
- Tx power:
 - min: -9.5 dBm
 - max: -4 dBm
- Center wavelength: 850 nm
- Rx input power:
 - min: -17 dBm
 - max: -3 dBm
- Rated for 275 m (300 yards) over 62.5-micron core cable
- Rated for 550 m (601 yards) over 50-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE2 1000Base-LH Module Combination (2 Ports)

Line module label	GE-2
I/O module label	2XGE APS I/O SFP or GE-2 APS I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 2 active, 2 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.3.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 100 W ■ Gigabit Ethernet ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-LX/LH compliant. ■ The copper transceivers are 1000Base-T compliant. ■ For information about bandwidth and line rate considerations for the GE2 1000Base-LH module combination, see <i>GE-2 APS I/O Module</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-LH
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-1440 router ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (copper SFP)	<ul style="list-style-type: none"> ■ Maximum range is 100 meters on CAT5 cable.

Cables and connectors (LX/LH)

- LC full duplex
- Tx power:
 - min: -9.5 dBm
 - max: -3 dBm
- Center wavelength: 1300 nm
- Rx input power:
 - min: -20 dBm
 - max: -3 dBm
- Rated for 10 km (6.2 miles) over 10-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE2 1000Base-ZX Module Combination (2 Ports)

Line module label	GE-2
I/O module label	2XGE APS I/O SFP or GE-2 APS I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 2 active, 2 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.3.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 100 W ■ Gigabit Ethernet ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-ZX compliant. ■ The copper transceivers are 1000Base-T compliant. ■ For information about bandwidth and line rate considerations for the GE2 1000Base-ZX module combination, see <i>GE-2 APS I/O Module</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-ZX
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-1440 router ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable

Cables and connectors

- LC full duplex
- Tx power:
 - min: -3 dBm
 - max: 2 dBm
- Center wavelength: 1550 nm
- Rx input power:
 - min: -23 dBm
 - max: -3 dBm
- Rated for 70 km (43.4 miles) over 10-micron core cable
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring Ethernet Interfaces* in *JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces*.
-

GE High Density (HDE) Module Combination (2 Ports)

Line module label	GE-HDE
I/O module label	2XGE APS I/O SFP or GE-2 APS I/O SFP
Number of I/O ports	<ul style="list-style-type: none"> ■ 2 active, 2 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 7.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 100 W ■ Gigabit Ethernet ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-LX/LH compliant. ■ The copper transceivers are 1000Base-T compliant. ■ For information about bandwidth and line rate considerations for the GE2 1000Base-LH module combination, see <i>GE-2 APS I/O Module</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-LH
Software features	<ul style="list-style-type: none"> ■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-1440 router ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (copper SFP)	<ul style="list-style-type: none"> ■ Maximum range is 100 meters on CAT5 cable.

Cables and connectors (LX/LH)	<ul style="list-style-type: none">■ LC full duplex■ Tx power:<ul style="list-style-type: none">■ min: -9.5 dBm■ max: -3 dBm■ Center wavelength: 1300 nm■ Rx input power:<ul style="list-style-type: none">■ min: -20 dBm■ max: -3 dBm■ Rated for 10 km (6.2 miles) over 10-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.

GE High Density (HDE) Module Combination (8 Ports)

Line module label	GE-HDE
I/O module label	GE-8 I/O
Number of I/O ports	■ 8
Software release	<ul style="list-style-type: none"> ■ First supported: 7.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 100 W ■ Gigabit Ethernet ■ The I/O module uses a range of small form-factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Uses either optical or copper SFPs. <ul style="list-style-type: none"> ■ The optical transceivers are 1000Base-LX/LH compliant. ■ The copper transceivers are 1000Base-T compliant. ■ For information about bandwidth and line rate considerations for the GE-8 1000Base-LH module combination, see <i>GE-8 I/O Module</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3z) ■ 1000Base-LH
Software features	■ See “Ethernet Modules” on page 119 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-1440 router ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ Not applicable

Cables and connectors	<ul style="list-style-type: none"> ■ LC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -9.5 dBm ■ max: -3 dBm ■ Center wavelength: 1300 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -20 dBm ■ max: -3 dBm ■ Rated for 10 km (6.2 miles) over 10-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring Ethernet Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 6, Configuring Ethernet Interfaces</i>.

HSSI Module Combination

Line module label	HSSI-3F
I/O module label	HSSI-3 I/O
Number of I/O ports	■ 3
Software release	<ul style="list-style-type: none"> ■ First supported: 3.1.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 60 W ■ High-speed serial interface
Type	■ Non-ASIC
Capability	<ul style="list-style-type: none"> ■ Up to 44.736 MHz data rate ■ HDLC Framing
Software features	■ See “HSSI Modules” on page 123 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-1410 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G ■ SRP-5G + ■ SRP-10G
Module redundancy support	■ Not applicable
Cables and connectors	<ul style="list-style-type: none"> ■ Standard HSSI connector: 2-row, 50-pin, receptacle header with rails and latch blocks ■ 50 feet (15.24 m) maximum cable length ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 7, Configuring HSSIs</i> .

IPSec Service Module Combination

Line module label	IPSEC SERVICE
I/O module label	No I/O module
Number of I/O ports	■ Not applicable
Software release	<ul style="list-style-type: none"> ■ First supported: 4.0.2 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ IPSec Tunnel Service
Type	■ ASIC
Capability	■ IPSec tunnels
Software features	■ See “Service Modules” on page 130 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ Multiple IPSec Service modules provide redundancy.
Cables and connectors	■ Not applicable
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Tunnel-Service Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 9</i> , <i>Managing Tunnel-Service and IPSec-Service Interfaces</i> .

OC3/STM1 ATM Multimode Without APS/MSP Redundancy Module Combination (256-MB Memory)

Line module label	OCx/STMx ATM or OCx/STMx /DS3-ATM
I/O module label	OC3-4 I/O
	MULTI MODE
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0, 5.3.0 or a higher-numbered release ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ Unchannelized, concatenated OC3/STM1 for ATM
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ ATM:AAL5
Software features	■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex connector ■ Tx power: <ul style="list-style-type: none"> ■ min: -19 dBm ■ max: -14 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 ATM Multimode With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	4XOC3 APS I/O MULTI MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 4 active, 4 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.1.2, 5.2.0 (APS/MSP) ■ Final supported: Not applicable ■ The OCx/STMx ATM line module or the OCx/STMx /DS3-ATM line module must have a minimum of 256 MB of memory to be used with JUNOS Release 5.3.0 or a higher-numbered release.
Description	<ul style="list-style-type: none"> ■ 130 W ■ Can use either the 128-MB OCx/STMx ATM line module or the 256-MB OCx/STMx /DS3-ATM line module. ■ Unchannelized, concatenated OC3/STM1 for ATM
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM-1 ■ ATM/AAL5
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors

- LC full duplex
- Tx power:
 - min: -19 dBm
 - max: -14 dBm
- Center wavelength: 1310 nm
- Rx input power:
 - min: -30 dBm
 - max: -14 dBm
- Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces*.
-

OC3/STM1 ATM Single-Mode Intermediate Reach Without APS/MSP Redundancy Module Combination (256-MB Memory)

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	OC3-4 I/O
	SINGLE MODE
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0, 5.3.0 or a higher-numbered release ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ Unchannelized, concatenated OC3/STM1 for ATM
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ ATM/AAL5
Software features	■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 ATM Single-Mode Intermediate Reach With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	4XOC3 APS I/O SINGLE MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 4 active, 4 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.1.2, 5.2.0 (APS/MSP) ■ Final supported: Not applicable ■ The OCx/STMx ATM line module or the OCx/STMx /DS3-ATM line module must have a minimum of 256 MB of memory to be used with JUNOS Release 5.3.0 or a higher-numbered release.
Description	<ul style="list-style-type: none"> ■ 130 W ■ Can use either the 128-MB OCx/STMx ATM line module or the 256-MB OCx/STMx /DS3-ATM line module. ■ Unchannelized, concatenated OC3/STM1 for ATM
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM-1 ■ ATM/AAL5
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ LC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 ATM Single-Mode Long Reach Without APS/MSP Redundancy Module Combination (256-MB Memory)

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	OC3-4 I/O LONG HAUL
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0, 5.3.0 or a higher-numbered release ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ Unchannelized, concatenated OC3/STM1 for ATM
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ ATM/AAL5
Software features	■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -5.0 dBm ■ max: 0 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -34 dBm ■ max: -7 dBm ■ Rated for 40 km (24.8 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 GE/FE Module Combination

Line module label	OC3/STM1 GE/FE
I/O module label	OC3-2 GE APS I/O
Number of I/O ports	<ul style="list-style-type: none"> ■ 3; one active and one redundant port per SFP <ul style="list-style-type: none"> ■ Ports 0 and 1—ATM interfaces ■ Port 2—GE interface ■ Port redundancy is not supported.
Software release	<ul style="list-style-type: none"> ■ First supported: 6.1.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 150 W ■ Unchannelized OC3/STM1 ATM operation via two line interfaces or ■ OC3/STM1 Gigabit Ethernet operation via one line interface ■ The I/O module uses a range of small form factor pluggable (SFP) transceivers to support different modes and cabling distances. ■ Depending on the configuration, a variety of SFP combinations can occur. ■ The OC3-2 GE APS I/O module accepts up to three LC-style fiber-optic or copper SFPs.
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ ATM/AAL5 ■ Ethernet (IEEE 802.3x) ■ 1000Base-LX/SX/ZX
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx GE/FE Modules” on page 124 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router

SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Not applicable
Cables and connectors (ATM LX)	<ul style="list-style-type: none"> ■ LC-style fiber-optic connectors ■ Tx power: <ul style="list-style-type: none"> ■ min: -19.0 dBm ■ max: -14dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0-9db or over 50-micron core cable with an optical loss of 7 db ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
Cables and connectors (ATM SX)	<ul style="list-style-type: none"> ■ LC-style fiber-optic connectors ■ Tx power: <ul style="list-style-type: none"> ■ min: -15.0 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.

Cables and connectors (ATM ZX)	<ul style="list-style-type: none">■ LC-style fiber-optic connectors■ Tx power:<ul style="list-style-type: none">■ min: -5.0 dBm■ max: 0 dBm■ Center wavelength: 1310 nm■ Rx input power:<ul style="list-style-type: none">■ min: -34 dBm■ max: -7 dBm■ Rated for 40 km (24.8 miles) of 9-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
Cables and connectors (GE LX)	<ul style="list-style-type: none">■ LC full duplex■ Tx power:<ul style="list-style-type: none">■ min: -9.5 dBm■ max: -3 dBm■ Center wavelength: 1300 nm■ Rx input power:<ul style="list-style-type: none">■ min: -20 dBm■ max: -3 dBm■ Rated for 10 km (6.2 miles) over 10-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
Cables and connectors (GE SX)	<ul style="list-style-type: none">■ LC full duplex■ Tx power:<ul style="list-style-type: none">■ min: -9.5 dBm■ max: -4 dBm■ Center wavelength: 850 nm■ Rx input power:<ul style="list-style-type: none">■ min: -17 dBm■ max: -3 dBm■ Rated for 275 m (300 yards) over 62.5-micron core cable■ Rated for 550 m (601 yards) over 50-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.

Cables and connectors (GE ZX)	<ul style="list-style-type: none">■ LC full duplex■ Tx power:<ul style="list-style-type: none">■ min: -3 dBm■ max: 2 dBm■ Center wavelength: 1550 nm■ Rx input power:<ul style="list-style-type: none">■ min: -23 dBm■ max: -3 dBm■ Rated for 70 km (43.4 miles) over 10-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 POS Multimode Without APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC3-4 I/O
	MULTI MODE
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC3/STM1 for POS
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors

- SC full duplex
- Tx power:
 - min: -19 dBm
 - max: -14 dBm
- Center wavelength: 1310 nm
- Rx input power:
 - min: -30 dBm
 - max: -14 dBm
- Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces*.
-

OC3/STM1 POS Multimode With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	4XOC3 APS I/O MULTI MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 4 active, 4 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.1.2, 5.2.0 (APS/MSP) ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC3/STM1 for POS
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM-1 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors

- LC full duplex
- Tx power:
 - min: -19 dBm
 - max: -14 dBm
- Center wavelength: 1310 nm
- Rx input power:
 - min: -30 dBm
 - max: -14 dBm
- Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB
- See *ERX Hardware Guide, Chapter 5, Cabling ERX Routers* for more information.

LEDs

- See “Module LEDs” on page 139.

Alarms, errors, and events

- See *Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces*.
-

OC3/STM1 POS Single-Mode Intermediate Reach Without APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC3-4 I/O
	SINGLE MODE
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC3/STM1 for POS
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

<p>Cables and connectors</p>	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
<p>LEDs</p>	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
<p>Alarms, errors, and events</p>	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 POS Single-Mode Intermediate Reach With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	4XOC3 APS I/O SINGLE MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 4 active, 4 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 5.1.2, 5.2.0 (APS/MSP) ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC3/STM1 for POS
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC3/STM1 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none">■ LC full duplex■ Tx power:<ul style="list-style-type: none">■ min: -15 dBm■ max: -8 dBm■ Center wavelength: 1310 nm■ Rx input power:<ul style="list-style-type: none">■ min: -31 dBm■ max: -8 dBm■ Rated for 15 km (9.3 miles) of 9-micron core cable■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none">■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none">■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC3/STM1 POS Single-Mode Long Reach Module Combination

Line module label	OCx/STMx POS
I/O module label	OC3-4 I/O LONG HAUL
Number of I/O ports	■ 4
Software release	■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	■ 120 W ■ Unchannelized, concatenated OC3/STM1 for POS
Type	■ ASIC
Capability	■ OC3/STM1 ■ HDLC framing
Software features	■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -5.0 dBm ■ max: 0 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -34 dBm ■ max: -7 dBm ■ Fiber type: 9-micron core ■ Rated for 40 km (24.8 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See "Module LEDs" on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 ATM Multimode Without APS/MSP Redundancy Module Combination (256-MB Memory)

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	OC12 STM4 I/O
	MULTI MODE
Number of I/O ports	■ 1
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0, 5.3.0 or a higher-numbered release ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ Unchannelized, concatenated OC12/STM4 for ATM
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ ATM/AAL5
Software features	■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -19 dBm ■ max: -14 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 ATM Multimode With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	OC12 STM4 APS MULTI MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 (128 MB), 5.0.0 (256 MB) ■ Final supported: Not applicable ■ The OCx/STMx ATM line module or the OCx/STMx /DS3-ATM line module must have a minimum of 256 MB of memory to be used with JUNOS Release 5.3.0 or a higher-numbered release.
Description	<ul style="list-style-type: none"> ■ 130 W ■ Can use either the 128-MB OCx/STMx ATM line module or the 256-MB OCx/STMx /DS3-ATM line module. ■ Unchannelized, concatenated OC12/STM4 for ATM
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ ATM/AAL5
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -19 dBm ■ max: -14 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 ATM Single-Mode Intermediate Reach Without APS/MSP Redundancy Module Combination (256-MB Memory)

Line module label	OCx/STMx ATM or OCx/STMx /DS3-ATM
I/O module label	OC12 STM4 I/O
	SINGLE MODE
Number of I/O ports	■ 1
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0, 5.3.0 or a higher-numbered release ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ Unchannelized, concatenated OC12/STM4 for ATM
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ ATM/AAL5
Software features	■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 ATM Single-Mode Intermediate Reach With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	OC12 STM4 APS SINGLE MODE
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 (128 MB), 5.0.0 (256 MB) ■ Final supported: Not applicable ■ The OCx/STMx ATM line module or the OCx/STMx/DS3-ATM line module must have a minimum of 256 MB of memory to be used with JUNOS Release 5.3.0 or a higher-numbered release.
Description	<ul style="list-style-type: none"> ■ 130 W ■ Can use either the 128-MB OCx/STMx ATM line module or the 256-MB OCx/STMx/DS3-ATM line module. ■ Unchannelized, concatenated OC12/STM4 for ATM
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ ATM/AAL5
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 ATM Single-Mode Long Reach Without APS/MSP Redundancy Module Combination (256-MB Memory)

Line module label	OCx/STMx ATM or OCx/STMx /DS3-ATM
I/O module label	OC12 STM4 I/O LONG HAUL
Number of I/O ports	■ 1
Software release	<ul style="list-style-type: none"> ■ First supported: 5.0.0, 5.3.0 or a higher-numbered release ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ 256 MB of memory ■ The 128-MB version has reached end-of-life. ■ Unchannelized, concatenated OC12/STM4 for ATM
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ ATM/AAL5
Software features	■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -5.0 dBm ■ max: 0 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -34 dBm ■ max: -7 dBm ■ Fiber type: 9-micron core ■ Rated for 40 km (24.8 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 ATM Single-Mode Long Reach With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx ATM <i>or</i> OCx/STMx /DS3-ATM
I/O module label	OC12 STM4 APS LONG HAUL
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 (128 MB), 5.0.0 (256 MB) ■ Final supported: Not applicable ■ The OCx/STMx ATM line module or the OCx/STMx /DS3-ATM line module must have a minimum of 256 MB of memory to be used with JUNOS Release 5.3.0 or a higher-numbered release.
Description	<ul style="list-style-type: none"> ■ 130 W ■ Can use either the 128-MB OCx/STMx ATM line module or the 256-MB OCx/STMx /DS3-ATM line module. ■ Unchannelized, concatenated OC12/STM4 for ATM
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ ATM/AAL5
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx ATM Modules” on page 126 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -5.0 dBm ■ max: 0 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -34 dBm ■ max: -7 dBm ■ Fiber type: 9-micron core ■ Rated for 40 km (24.8 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 POS Multimode Without APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC12 STM4 I/O
	MULTI MODE
Number of I/O ports	■ 1
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC12/STM4 for POS
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -19 dBm ■ max: -14 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0–9 dB or 50-micron core cable with an optical loss of 7 dB ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 POS Multimode With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC12 STM4 APS MULTI MODE
Number of I/O ports	■ 1 active, 1 redundant
Software release	■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	■ 120 W ■ Unchannelized, concatenated OC12/STM4 for POS
Type	■ ASIC
Capability	■ OC12/STM4 ■ HDLC framing
Software features	■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -19 dBm ■ max: -14 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -30 dBm ■ max: -14 dBm ■ Rated for 2 km (1.2 miles) over 62.5-micron core cable with an optical loss of 0-9 dB or 50-micron core cable with an optical loss of 7 dB ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
<hr/>	
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
<hr/>	
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 POS Single-Mode Intermediate Reach Without APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC12 STM4 I/O
	SINGLE MODE
Number of I/O ports	■ 1
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC12/STM4 for POS
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 POS Single-Mode Intermediate Reach With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC12 STM4 APS SINGLE MODE
Number of I/O ports	■ 1 active, 1 redundant
Software release	■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	■ 120 W ■ Unchannelized, concatenated OC12/STM4 for POS
Type	■ ASIC
Capability	■ OC12/STM4 ■ HDLC framing
Software features	■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -15 dBm ■ max: -8 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -31 dBm ■ max: -8 dBm ■ Rated for 15 km (9.3 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 POS Single-Mode Long Reach Without APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC12 STM4 I/O LONG HAUL
Number of I/O ports	■ 1
Software release	■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	■ 120 W ■ Unchannelized, concatenated OC12/STM4 for POS
Type	■ ASIC
Capability	■ OC12/STM4 ■ HDLC framing
Software features	■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -5.0 dBm ■ max: 0 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -34 dBm ■ max: -7 dBm ■ Rated for 40 km (24.8 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC12/STM4 POS Single-Mode Long Reach With APS/MSP Redundancy Module Combination

Line module label	OCx/STMx POS
I/O module label	OC12 STM4 APS LONG HAUL
Number of I/O ports	<ul style="list-style-type: none"> ■ 1 active, 1 redundant
Software release	<ul style="list-style-type: none"> ■ First supported: 2.0.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC12/STM4 for POS
Type	<ul style="list-style-type: none"> ■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC12/STM4 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.

Cables and connectors	<ul style="list-style-type: none"> ■ SC full duplex ■ Tx power: <ul style="list-style-type: none"> ■ min: -5.0 dBm ■ max: 0 dBm ■ Center wavelength: 1310 nm ■ Rx input power: <ul style="list-style-type: none"> ■ min: -34 dBm ■ max: -7 dBm ■ Rated for 40 km (24.8 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
<hr/>	
LEDs	<ul style="list-style-type: none"> ■ See “Module LEDs” on page 139.
<hr/>	
Alarms, errors, and events	<ul style="list-style-type: none"> ■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i>.

OC48/STM16 POS Single-Mode Short Reach Module Combination

Line module label	OC48
I/O module label	OC48 FRAME APS
Number of I/O ports	■ 1
Software release	<ul style="list-style-type: none"> ■ First supported: 4.1.x ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 120 W ■ Unchannelized, concatenated OC48/STM16 for POS
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ OC48/STM16 ■ HDLC framing
Software features	<ul style="list-style-type: none"> ■ See “OCx/STMx POS and OC48 Modules” on page 128 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-1440 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS
Module redundancy support	■ Not applicable
Cables and connectors	<ul style="list-style-type: none"> ■ LC full duplex connector ■ Transmit power: <ul style="list-style-type: none"> ■ min: -10 dBm ■ max: -3 dBm ■ Center wavelength: 1310 nm ■ Receive input power: <ul style="list-style-type: none"> ■ min: -18 dBm ■ max: -3 dBm ■ Rated for 2 km (1.2 miles) of 9-micron core cable ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring SONET/SDH Interfaces in JUNOS Physical Layer Configuration Guide, Chapter 4, Configuring Unchannelized OCx/STMx Interfaces</i> .

Service Module (SM) Module Combination

Line module label	SERVICE MODULE
I/O module label	No I/O module
Number of I/O ports	■ Not applicable
Software release	<ul style="list-style-type: none"> ■ First supported: 5.1.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Tunnel Service for IP tunnels, L2F tunnels, and LNS termination
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ IP tunnels ■ LNS termination ■ Network Address Translation ■ Stateful firewall
Software features	■ See “Service Modules” on page 130 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ Multiple SMs provide redundancy. ■ See <i>JUNOSe Physical Layer Configuration Guide, Chapter 9, Managing Tunnel-Service and IPSec-Service Interfaces</i>
Cables and connectors	■ Not applicable
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Tunnel-Service Interfaces</i> in <i>JUNOSe Physical Layer Configuration Guide, Chapter 9, Managing Tunnel-Service and IPSec-Service Interfaces</i> .

SRP-5G+ Module Combination (1-GB Memory)

Line module label	SRP-5G +
I/O module label	SRP I/O
Number of I/O ports	■ 7
Software release	<ul style="list-style-type: none"> ■ First supported: 4.1.3 or later 4.1.x release, 5.0.4 or later 5.0.x release, 5.1.2 or higher-numbered release, 5.2.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 125 W ■ Switch route processor (5 Gbps) ■ Has a minimum of 1 GB of error checking and correction (ECC) memory with a 1-GB nonvolatile storage (NVS) card. ■ The 512-MB version has reached end-of-life.
Type	■ Not applicable
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3) ■ 10/100Base-T ■ RS-232
Software features	■ Not applicable
Model compatibility	■ ERX-705 router
SRP module compatibility	■ SRP-5G +
Module redundancy support	■ 1:1 redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ Terminal blocks ■ BNC, 75-ohm ■ Wire wrap posts ■ RJ-45 ■ RS-232 (DB-9) ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Modules</i> in <i>JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules</i> .

SRP-5G+ Module Combination (2-GB Memory)

Line module label	SRP-5G +
I/O module label	SRP I/O
Number of I/O ports	■ 7
Software release	<ul style="list-style-type: none"> ■ First supported: 4.1.3 or later 4.1.x release, 5.0.4 or later 5.0.x release, 5.1.2 or higher-numbered release, 5.2.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 125 W ■ Switch route processor (5 Gbps) ■ Has a minimum of 2 GB of error checking and correction (ECC) memory with a 1-GB nonvolatile storage (NVS) card. ■ The 512-MB version has reached end-of-life.
Type	■ Not applicable
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3) ■ 10/100Base-T ■ RS-232
Software features	■ Not applicable
Model compatibility	■ ERX-705 router
SRP module compatibility	■ SRP-5G +
Module redundancy support	■ 1:1 redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ Terminal blocks ■ BNC, 75-ohm ■ Wire wrap posts ■ RJ-45 ■ RS-232 (DB-9) ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Modules</i> in <i>JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules</i> .

SRP-10G Module Combination (1-GB Memory)

Line module label	SRP-10G
I/O module label	SRP I/O
Number of I/O ports	■ 7
Software release	<ul style="list-style-type: none"> ■ First supported: 4.1.3 or later 4.1.x release, 5.0.4 or later 5.0.x release, 5.1.2 or higher-numbered release, 5.2.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 125 W ■ Switch route processor (10 Gbps) ■ Has a minimum of 1 GB of error checking and correction (ECC) memory with a 1-GB nonvolatile storage (NVS) card. ■ The 512-MB version has reached end-of-life.
Type	■ Not applicable
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3) ■ 10/100Base-T ■ RS-232
Software features	■ Not applicable
Model compatibility	<ul style="list-style-type: none"> ■ ERX-710 router ■ ERX-1410 router
SRP module compatibility	■ SRP-10G
Module redundancy support	■ 1:1 redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ Terminal blocks ■ BNC, 75-ohm ■ Wire wrap posts ■ RJ-45 ■ RS-232 (DB-9) ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Modules</i> in <i>JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules</i> .

SRP-10G Module Combination (2-GB Memory)

Line module label	SRP-10G
I/O module label	SRP I/O
Number of I/O ports	■ 7
Software release	<ul style="list-style-type: none"> ■ First supported: 4.1.3 or later 4.1.x release, 5.0.4 or later 5.0.x release, 5.1.2 or higher-numbered release, 5.2.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 125 W ■ Switch route processor (10 Gbps) ■ Has a minimum of 2 GB of error checking and correction (ECC) memory with a 1-GB nonvolatile storage (NVS) card. ■ The 512-MB version has reached end-of-life.
Type	■ Not applicable
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3) ■ 10/100Base-T ■ RS-232
Software features	■ Not applicable
Model compatibility	<ul style="list-style-type: none"> ■ ERX-710 router ■ ERX-1410 router
SRP module compatibility	■ SRP-10G
Module redundancy support	■ 1:1 redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ Terminal blocks ■ BNC, 75-ohm ■ Wire wrap posts ■ RJ-45 ■ RS-232 (DB-9) ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Modules</i> in <i>JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules</i> .

SRP-40G PLUS Module Combination (2-GB Memory)

Line module label	SRP-40G PLUS
I/O module label	SRP I/O
Number of I/O ports	■ 7
Software release	<ul style="list-style-type: none"> ■ First supported: 4.0.0 ■ Final supported: Not applicable ■ Has a minimum of 2 GB of error checking and correction (ECC) memory with a 1-GB nonvolatile storage (NVS) card.
Description	<ul style="list-style-type: none"> ■ 210 W ■ Switch route processor (40 Gbps)
Type	■ Not applicable
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3) ■ 10/100Base-T ■ RS-232
Software features	■ Not applicable
Model compatibility	■ ERX-1440 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-40G ■ SRP-40G PLUS
Module redundancy support	■ 1:1 redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ Terminal blocks ■ BNC ■ BNC, 75-ohm ■ Wire wrap posts ■ RJ-45 ■ RS-232 (DB-9) ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Modules</i> in <i>JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules</i> .

SRP-SE10G Module Combination (1-GB Memory)

Line module label	SRP-SE10G
I/O module label	SRP-SE I/O
Number of I/O ports	■ 2
Software release	<ul style="list-style-type: none"> ■ First supported: 5.3.0 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 35 W ■ Switch route processor for ERX-310 router only (10 Gbps)
Type	■ Not applicable
Capability	<ul style="list-style-type: none"> ■ Ethernet (IEEE 802.3) ■ 10/100Base-T ■ RS-232
Software features	■ Not applicable
Model compatibility	■ ERX-310 router
SRP module compatibility	■ SRP-SE10G
Module redundancy support	■ Not applicable
Cables and connectors	<ul style="list-style-type: none"> ■ RJ-45 ■ RS-232 (DB-9) ■ See <i>ERX Hardware Guide, Chapter 5, Cabling ERX Routers</i> for more information.
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Modules</i> in <i>JUNOS System Basics Configuration Guide, Chapter 6, Managing Modules</i> .

T3 ATM Module Combination (4 Ports)

Line module label	OCx/STMx ATM or OCx/STMx /DS3-ATM
I/O module label	4xDS3 ATM I/O
Number of I/O ports	■ 4
Software release	<ul style="list-style-type: none"> ■ First supported: 4.1.0 (128 MB), 5.0.0 (256 MB) ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 130 W ■ Can use either the 128-MB OCx/STMx ATM line module or the 256-MB OCx/STMx /DS3-ATM line module. ■ Unchannelized T3 for ATM
Type	■ ASIC
Capability	■ ATM/AAL5
Software features	■ See “Unchannelized T3 Modules” on page 134 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G + ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	■ 1:N redundancy
Cables and connectors	<ul style="list-style-type: none"> ■ 75-ohm connector ■ The line interface unit supports two line buildouts: <ul style="list-style-type: none"> ■ 0–68.5 m (0–225 feet) ■ 69–137 m (226–450 feet) ■ Signal strength is software controlled. ■ The transmitted signal complies with ANSI T1.102-1993 Digital Hierarchy - Electrical Interfaces (1999) for cable lengths up to 201 m (660 feet).
LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Interfaces</i> in <i>JUNOSe Physical Layer Configuration Guide, Chapter 2, Configuring T3 and E3 Interfaces</i> .

T3 Frame Module Combination (12 Ports)

Line module label	COCX-F3
I/O module label	CT3/T3 12 I/O
Number of I/O ports	■ 12
Software release	<ul style="list-style-type: none"> ■ First supported: 4.0.2 ■ Final supported: Not applicable
Description	<ul style="list-style-type: none"> ■ 135 W ■ Unchannelized T3 for Frame
Type	■ ASIC
Capability	<ul style="list-style-type: none"> ■ DS3 ■ Subrate DS3 ■ HDLC framing
Software features	■ See “Unchannelized T3 Modules” on page 134 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	<ul style="list-style-type: none"> ■ ERX-7xx models ■ ERX-14xx models ■ ERX-310 router
SRP module compatibility	<ul style="list-style-type: none"> ■ SRP-5G+ ■ SRP-10G ■ SRP-40G ■ SRP-40G PLUS ■ SRP-SE10G
Module redundancy support	<ul style="list-style-type: none"> ■ 1:N redundancy ■ NOTE: Line module redundancy is not supported on the ERX-310 router.
Cables and connectors	<ul style="list-style-type: none"> ■ BT43 SMB ■ Cable that adapts to 75-ohm BNC is available. ■ The line interface unit supports two line buildouts: <ul style="list-style-type: none"> ■ 0–68.5 m (0–225 feet) ■ 69–137 m (226–450 feet) ■ Signal strength is software controlled. ■ The transmitted signal complies with ANSI T1.102-1993 Digital Hierarchy - Electrical Interfaces (1999) for cable lengths up to 201 m (660 feet).

LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 2, Configuring T3 and E3 Interfaces</i> .

X.21/V.35 Module Combination

Line module label	X.21/V.35
I/O module label	X.21/ V.35 I/O
Number of I/O ports	■ 16
Software release	■ First supported: 2.10.1, 3.3.2 ■ Final supported: Not applicable
Description	■ 60 W ■ X.21/V.35 synchronous serial interface
Type	■ Non-ASIC
Capability	■ HDLC framing
Software features	■ See “X.21/V.35 Modules” on page 136 for information about the layer 2 and layer 3 protocols and applications that this module combination supports.
Model compatibility	■ ERX-7xx models ■ ERX-1410 router
SRP module compatibility	■ SRP-5G ■ SRP-5G + ■ SRP-10G
Module redundancy support	■ Not applicable
Cables and connectors	■ 200-pin proprietary socket on I/O module ■ DB15 X.21 or DB34 V.35 at remote end ■ Serial signals can travel a limited distance without significant degradation. Slower serial signals can travel farther without degradation than faster serial signals. See “Cable Lengths” row for the maximum cable lengths you can use to prevent signal degradation at various transmission speeds.
Cable Lengths	
Transmission Speed (Hz)	Cable Length (Meters/Feet)
■ 2400	■ 1250/4100
■ 4800	■ 625/2050
■ 9600	■ 312/1025
■ 19200	■ 156/513
■ 38400	■ 78/256
■ 56000	■ 31/102
■ 2048000	■ 8/25

LEDs	■ See “Module LEDs” on page 139.
Alarms, errors, and events	■ See <i>Monitoring Interfaces</i> in <i>JUNOS Physical Layer Configuration Guide, Chapter 8, Configuring X.21/V.35 Interfaces</i> .

Appendix A

Module Protocol Support

This appendix lists the layer 2 and layer 3 protocols and applications that line modules and their corresponding I/O modules support. Modules are identified by their physical labels. See Table 1 for a list of modules and their identifying labels.

The designation “not yet fully qualified” that appears in some tables in this appendix indicates that support for the protocol or application on the specified module has not yet been fully qualified by Juniper Networks. If you use a feature before it has been fully qualified, it is your responsibility to ensure that it operates correctly in your targeted configuration.

This appendix contains the following sections:

- Channelized OCx/STMx Modules on page 114
- Channelized T1 and E1 Modules on page 115
- Channelized T3 Modules on page 117
- Ethernet Modules on page 119
- HSSI Modules on page 123
- OCx/STMx GE/FE Modules on page 124
- OCx/STMx ATM Modules on page 126
- OCx/STMx POS and OC48 Modules on page 128
- Service Modules on page 130
- Unchannelized E3 Modules on page 132
- Unchannelized T3 Modules on page 134
- X.21/V.35 Modules on page 136

Channelized OCx/STMx Modules

Table 2: Channelized OCx/STMx Modules

Protocol or Application	cOCx FO Line Module with cOC3/STM1 Modules	cOCx FO Line Module with cOC12/STM4 FO I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes
APS/MSP	No	Yes (single-mode intermediate reach only)
ATM (point-to-point)	No	No
BERT	Yes	Yes
BGP	Yes	Yes
BGP/MPLS VPNs	Yes	Yes
Bridged Ethernet	No	No
Bridged IP	No	No
CBF	No	No
Cisco HDLC	Yes	Yes
DHCP external server	No	No
DHCP local server	No	No
Dynamic interfaces	No	No
DVMRP and GRE support—access side	Yes	No
DVMRP and GRE support—server side	Yes	No
F4 OAM and F5 OAM (ATM administration)	No	No
FDL (facilities data link)	Yes	Yes
Firewall	Yes	Yes
Frame Relay	Yes	Yes
IEEE 802.3ad link aggregation	No	No
IP	Yes	Yes
IP multicast	Yes	Yes
IP reassembly for tunneled packets	No	No
IPSec	No	No
IPv6	No	No
IPv6 multicast	Yes	Yes
IPv6 neighbor discovery	No	No
IS-IS	Yes	Yes
J-Flow Statistics	Yes	Yes
L2TP/IPSec	No	No
LAC support—access side	No	No

Protocol or Application	cOCx FO Line Module with cOC3/STM1 Modules	cOCx FO Line Module with cOC12/STM4 FO I/O Modules
LAC support—peer side	No	No
LNS support—peer side	No	No
Local loopback	Yes	Yes
MDL (maintenance data link)	Yes	Yes
MPLS	Yes	Yes
Multilink Frame Relay	Yes	Yes
Multilink PPP	Yes (with fragmentation and reassembly)	Yes (with fragmentation and reassembly)
Network Address Translation (NAT)	Yes	Yes
NBMA (multipoint ATM)	No	No
OSPF	Yes	Yes
Packet Mirroring	Yes	Yes
Packet over SONET	No	No
PPP	Yes	Yes
PPPoE	No	No
Remote loopback	Yes	Yes (T3 layer)
RIP	Yes	Yes
SMDS (trunk encapsulation)	No	No
Subscriber interfaces (static)	Yes	Yes
Subscriber interfaces (dynamic)	Yes	Yes
Transparent bridging	No	No
Tunnel-server ports	No	No
VPLS (network interfaces)	No	No
VPLS (virtual core interfaces)	Yes	Yes
VRRP	No	No

Channelized T1 and E1 Modules

Table 3: Channelized T1 and E1 Modules

Protocol or Application	CT1 Line Module with CT1 Full I/O Modules	CE1 Line Modules with CE1 Full I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes
APS/MSP	No	No
ATM (point-to-point)	No	No

Protocol or Application	CT1 Line Module with CT1 Full I/O Modules	CE1 Line Modules with CE1 Full I/O Modules
BERT	Yes	Yes
BGP	Yes	Yes
BGP/MPLS VPNs	Yes	Yes
Bridged Ethernet	No	No
Bridged IP	No	No
CBF	No	No
Cisco HDLC	Yes	Yes
DHCP external server	No	No
DHCP local server	No	No
DVMRP and GRE support—access side	Yes	Yes
DVMRP and GRE support—server side	No	No
Dynamic interfaces	No	No
F4 OAM and F5 OAM (ATM administration)	No	No
FDL (facilities data link)	Yes	No
Firewall	Yes	Yes
Frame Relay	Yes	Yes
IEEE 802.3ad link aggregation	No	No
IP	Yes	Yes
IP multicast	No	No
IP reassembly for tunneled packets	No	No
IPSec	No	No
IPv6	No	No
IPv6 multicast	No	No
IPv6 neighbor discovery	No	No
IS-IS	Yes	Yes
J-Flow Statistics	No	No
L2TP/IPSec	No	No
LAC support—access side	No	No
LAC support—peer side	No	No
LNS support—peer side	No	No
Local loopback	Yes (T1 layer with AIS)	No
MDL (maintenance data link)	Yes (T1 layer)	No
MPLS	No	No
Multilink Frame Relay	Yes	Yes
Multilink PPP	Yes	Yes

Protocol or Application	CT1 Line Module with CT1 Full I/O Modules	CE1 Line Modules with CE1 Full I/O Modules
Network Address Translation (NAT)	No	No
NBMA (multipoint ATM)	No	No
OSPF	Yes	Yes
Packet Mirroring	No	No
Packet over SONET	No	No
PPP	Yes	Yes
PPPoE	No	No
Remote loopback	Yes	No
RIP	Yes	Yes
SMDS (trunk encapsulation)	No	No
Subscriber interfaces (static)	No	No
Subscriber interfaces (dynamic)	No	No
Transparent bridging	No	No
Tunnel-server ports	No	No
VPLS (network interfaces)	No	No
VPLS (virtual core interfaces)	No	No
VRRP	No	No

Channelized T3 Modules

Table 4: Channelized T3 Modules

Protocol or Application	CT3/T3-F0 Line Modules with CT3/T3 12 I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes
APS/MSP	No
ATM	No
BERT	Yes
BGP	Yes
BGP/MPLS VPNs	Yes
Bridged Ethernet	No
Bridged IP	No
CBF	No
Cisco HDLC	Yes
DHCP external server	No

Protocol or Application	CT3/T3-F0 Line Modules with CT3/T3 12 I/O Modules
DHCP local server	No
DVMRP and GRE support—access side	Yes
DVMRP and GRE support—server side	No
Dynamic interfaces	No
F4 OAM and F5 OAM (ATM administration)	No
FDL (facilities data link)	Yes
Firewall	Yes
Frame Relay	Yes
IEEE 802.3ad link aggregation	No
IP	Yes
IP multicast	Yes
IP reassembly for tunneled packets	No
IPSec	No
IPv6	Yes
IPv6 multicast	Yes
IPv6 neighbor discovery	No
IS-IS	Yes
J-Flow Statistics	Yes
L2TP/IPSec	No
LAC support—access side	No
LAC support—peer side	No
LNS support—peer side	No
Local loopback	Yes
MDL (maintenance data link)	Yes
MPLS	Yes
Multilink Frame Relay	Yes
Multilink PPP	Yes
Network Address Translation (NAT)	Yes
NBMA (multipoint ATM)	No
OSPF	Yes
Packet Mirroring	No
Packet over SONET	No
PPP	Yes
PPPoE	No
Remote loopback	Yes
RIP	Yes

Protocol or Application	CT3/T3-F0 Line Modules with CT3/T3 12 I/O Modules
SMDS (trunk encapsulation)	No
Subscriber interfaces (static)	Yes
Subscriber interfaces (dynamic)	Yes
Transparent bridging	No
Tunnel-server ports	No
VPLS (network interfaces)	No
VPLS (virtual core interfaces)	Yes
VRRP	No

Ethernet Modules

Table 5: Fast Ethernet Modules

Protocol or Application	GE/FE Line Module with FE-8 I/O and FE-8 SFP I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes
APS/MSP	No
ATM	No
BERT	No
BGP	Yes
BGP/MPLS VPNs	Yes
Bridged Ethernet	No
Bridged IP	No
CBF	No
Cisco HDLC	No
DHCP external server	Yes
DHCP local server	Yes
DVMRP and GRE support—access side	Yes
DVMRP and GRE support—server side	No
Dynamic interfaces	Yes
F4 OAM and F5 OAM (ATM administration)	No
FDL (facilities data link)	No
Firewall	Yes
Frame Relay	No
IEEE 802.3ad link aggregation	Yes

Protocol or Application	GE/FE Line Module with FE-8 I/O and FE-8 SFP I/O Modules
IP	Yes
IP multicast	Yes
IP reassembly for tunneled packets	No
IPSec	No
IPv6	Yes
IPv6 multicast	Yes
IPv6 neighbor discovery	Yes
IS-IS	Yes
J-Flow Statistics	Yes
L2TP/IPSec	No
LAC support—access side	Yes
LAC support—peer side	Yes
LNS support—peer side	Yes
Local loopback	No
MDL (maintenance data link)	No
MPLS	Yes
Multilink Frame Relay	No
Multilink PPP	No
Network Address Translation (NAT)	Yes
NBMA (multipoint ATM)	No
OSPF	Yes
Packet Mirroring	Yes
Packet over SONET	No
PPP	No
PPPoE	Yes
Remote loopback	No
RIP	Yes
SMDS (trunk encapsulation)	No
Subscriber interfaces (static)	Yes
Subscriber interfaces (dynamic)	Yes
Transparent bridging	Yes
Tunnel-server ports	No
VPLS (network interfaces)	Yes
VPLS (virtual core interfaces)	Yes
VRRP	Yes

Table 6: Gigabit Ethernet Modules

Protocol or Application	GE/FE Line Modules with GE I/O Modules	GE-2 Line Module or GE-HDE Line Module with GE-2 APS SFP I/O Modules (formerly 2XGE APS I/O)	GE-HDE Line Module with GE-8 I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes	Yes
APS/MSP	No	No	No
ATM	No	No	No
BERT	No	No	No
BGP	Yes	Yes	Yes
BGP/MPLS VPNs	Yes	Yes	Yes
Bridged Ethernet	No	No	No
Bridged IP	No	No	No
CBF	No	No	No
Cisco HDLC	No	No	No
DHCP external server	Yes	Yes	Yes
DHCP local server	Yes	Yes	Yes
DVMRP and GRE support—access side	Yes	Yes	Yes
DVMRP and GRE support—server side	No	Yes	Yes
Dynamic interfaces	Yes	Yes	Yes
F4 OAM and F5 OAM (ATM administration)	No	No	No
FDL (facilities data link)	No	No	No
Firewall	Yes	Yes (not yet fully qualified)	No
Frame Relay	No	No	No
IEEE 802.3ad link aggregation	No	Yes	Yes
IP	Yes	Yes	Yes
IP multicast	Yes	Yes	Yes
IP reassembly for tunneled packets	No	Yes	Yes
IPSec	No	No	No
IPv6	Yes	Yes	Yes
IPv6 multicast	Yes	Yes	Yes
IPv6 neighbor discovery	Yes	Yes	Yes
IS-IS	Yes	Yes	Yes

Protocol or Application	GE/FE Line Modules with GE I/O Modules	GE-2 Line Module or GE-HDE Line Module with GE-2 APS SFP I/O Modules (formerly 2XGE APS I/O)	GE-HDE Line Module with GE-8 I/O Modules
J-Flow Statistics	Yes	Yes	Yes
L2TP/IPSec	No	No	No
LAC support—access side	Yes	Yes	Yes
LAC support—peer side	Yes	Yes	Yes
LNS support—peer side	Yes	Yes	Yes
Local loopback	No	No	No
MDL (maintenance data link)	No	No	No
MPLS	Yes	Yes	Yes
Multilink Frame Relay	No	No	No
Multilink PPP	No	Yes (with fragmentation and reassembly; dynamic only)	Yes (with fragmentation and reassembly; dynamic only)
Network Address Translation (NAT)	Yes	Yes (not yet fully qualified)	No
NBMA (multipoint ATM)	No	No	No
OSPF	Yes	Yes	Yes
Packet Mirroring	Yes	Yes	Yes
Packet over SONET	No	No	No
PPP	No	No	No
PPPoE	Yes	Yes	Yes
Remote loopback	No	No	No
RIP	Yes	Yes	Yes
SMDS (trunk encapsulation)	No	No	No
Subscriber interfaces (static)	Yes	Yes (GRE tunnels only)	Yes (GRE tunnels only)
Subscriber interfaces (dynamic)	Yes	Yes	Yes
Transparent bridging	Yes	Yes	Yes
Tunnel-server ports	No	Yes (shared only)	Yes (shared only)
VPLS (network interfaces)	Yes	Yes	Yes
VPLS (virtual core interfaces)	Yes	Yes	Yes
VRRP	Yes	Yes	Yes

HSSI Modules

Table 7: HSSI Modules

Protocol or Application	HSSI-3F Line Modules with HSSI-3F I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	No
APS/MSP	No
ATM	No
BERT	No
BGP	Yes
BGP/MPLS VPNs	No
Bridged Ethernet	No
Bridged IP	No
CBF	Yes
Cisco HDLC	Yes
DHCP external server	No
DHCP local server	No
DVMRP and GRE support—access side	No
DVMRP and GRE support—server side	No
Dynamic interfaces	No
F4 OAM and F5 OAM (ATM administration)	No
FDL (facilities data link)	No
Firewall	No
Frame Relay	Yes
IEEE 802.3ad link aggregation	No
IP	Yes
IP multicast	No
IP reassembly for tunneled packets	No
IPSec	No
IPv6	No
IPv6 multicast	No
IPv6 neighbor discovery	No
IS-IS	Yes
J-Flow Statistics	No
L2TP/IPSec	No
LAC support—access side	No
LAC support—peer side	No
LNS support—peer side	No

Protocol or Application	HSSI-3F Line Modules with HSSI-3F I/O Modules
Local loopback	No
MDL (maintenance data link)	No
MPLS	No
Multilink Frame Relay	No
Multilink PPP	No
Network Address Translation (NAT)	No
NBMA (multipoint ATM)	No
OSPF	Yes
Packet Mirroring	No
Packet over SONET	No
PPP	Yes
PPPoE	No
Remote loopback	No
RIP	Yes
SMDS (trunk encapsulation)	Yes
Subscriber interfaces (static)	No
Subscriber interfaces (dynamic)	No
Transparent bridging	No
Tunnel-server ports	No
VPLS (network interfaces)	No
VPLS (virtual core interfaces)	No
VRRP	No

OCx/STMx GE/FE Modules

Table 8: OCx/STMx GE/FE Modules

Protocol or Application	OCx/STMx GE/FE Line Modules with OC3-2 GE APS I/O Modules (OC3/STM1 ATM Interfaces)	OCx/STMx GE/FE Line Modules with OC3-2 GE APS I/O Modules (Gigabit Ethernet Interfaces)
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes
APS/MSP	No	No
ATM	Yes	No
BERT	No	No
BGP	Yes	Yes
BGP/MPLS VPNs	Yes	Yes

Protocol or Application	OCx/STMx GE/FE Line Modules with OC3-2 GE APS I/O Modules (OC3/STM1 ATM Interfaces)	OCx/STMx GE/FE Line Modules with OC3-2 GE APS I/O Modules (Gigabit Ethernet Interfaces)
Bridged Ethernet	Yes	No
Bridged IP	Yes	No
CBF	No	No
Cisco HDLC	No	No
DHCP external server	Yes	Yes
DHCP local server	Yes	Yes
DVMRP and GRE support—access side	Yes	Yes
DVMRP and GRE support—server side	No	No
Dynamic interfaces	Yes	Yes
F4 OAM and F5 OAM (ATM administration)	Yes	No
FDL (facilities data link)	No	No
Firewall	Yes	Yes
Frame Relay	No	No
IEEE 802.3ad link aggregation	No	No
IP	Yes	Yes
IP multicast	Yes	Yes
IP reassembly for tunneled packets	No	No
IPSec	No	No
IPv6	Yes	Yes
IPv6 multicast	Yes	Yes
IPv6 neighbor discovery	Yes	Yes
IS-IS	Yes	Yes
J-Flow Statistics	Yes	Yes
L2TP/IPSec	No	No
LAC support—access side	Yes	Yes
LAC support—peer side	Yes	Yes
LNS support—peer side	Yes	Yes
Local loopback	No	No
MDL (maintenance data link)	No	No
MPLS	Yes	Yes
Multilink Frame Relay	No	No
Multilink PPP	Yes (with fragmentation and reassembly)	No
Network Address Translation (NAT)	Yes	Yes
NBMA (multipoint ATM)	Yes	No

Protocol or Application	OCx/STMx GE/FE Line Modules with OC3-2 GE APS I/O Modules (OC3/STM1 ATM Interfaces)	OCx/STMx GE/FE Line Modules with OC3-2 GE APS I/O Modules (Gigabit Ethernet Interfaces)
OSPF	Yes	Yes
Packet Mirroring	Yes	Yes
Packet over SONET	No	No
PPP	Yes	No
PPPoE	Yes	Yes
Remote loopback	No	No
RIP	Yes	Yes
SMDS (trunk encapsulation)	No	No
Subscriber interfaces (static)	Yes (over bridged Ethernet and IPoA)	Yes
Subscriber interfaces (dynamic)	Yes (over bridged Ethernet)	Yes
Transparent bridging	Yes	Yes
Tunnel-server ports	No	No
VPLS (network interfaces)	Yes	Yes
VPLS (virtual core interfaces)	Yes	Yes
VRRP	No	Yes

OCx/STMx ATM Modules

Table 9: OCx/STMx ATM Modules

Protocol or Application	OCx/STMx ATM Line Modules with OC3-4 I/O Modules	OCx/STMx ATM Line Modules with OC12/STM4 I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes
APS/MSP	No	Yes
ATM	Yes	Yes
BERT	No	No
BGP	Yes	Yes
BGP/MPLS VPNs	Yes	Yes
Bridged Ethernet	Yes	Yes
Bridged IP	Yes	Yes
CBF	No	No
Cisco HDLC	No	No
DHCP external server	Yes	Yes
DHCP local server	Yes	Yes

Protocol or Application	OCx/STMx ATM Line Modules with OC3-4 I/O Modules	OCx/STMx ATM Line Modules with OC12/STM4 I/O Modules
DVMRP and GRE support—access side	Yes	Yes
DVMRP and GRE support—server side	No	No
Dynamic interfaces	Yes	Yes
F4 OAM and F5 OAM (ATM administration)	Yes	Yes
FDL (facilities data link)	No	No
Firewall	Yes	Yes
Frame Relay	No	No
IEEE 802.3ad link aggregation	No	No
IP	Yes	Yes
IP multicast	Yes	Yes
IP reassembly for tunneled packets	No	No
IPSec	No	No
IPv6	Yes	Yes
IPv6 multicast	Yes	Yes
IPv6 neighbor discovery	Yes	Yes
IS-IS	Yes	Yes
J-Flow Statistics	Yes	Yes
L2TP/IPSec	No	No
LAC support—access side	Yes	Yes
LAC support—peer side	Yes	Yes
LNS support—peer side	Yes	Yes
Local loopback	No	Yes
MDL (maintenance data link)	No	No
MPLS	Yes	Yes
Multilink Frame Relay	No	No
Multilink PPP	Yes (with fragmentation and reassembly)	Yes (with fragmentation and reassembly)
Network Address Translation (NAT)	Yes	Yes
NBMA (multipoint ATM)	Yes	Yes
OSPF	Yes	Yes
Packet Mirroring	Yes	Yes
Packet over SONET	No	No
PPP	Yes	Yes
PPPoE	Yes	Yes
Remote loopback	No	No
RIP	Yes	Yes

Protocol or Application	OCx/STMx ATM Line Modules with OC3-4 I/O Modules	OCx/STMx ATM Line Modules with OC12/STM4 I/O Modules
SMDS (trunk encapsulation)	No	No
Subscriber interfaces (static)	Yes (over bridged Ethernet and IPoA)	Yes (over bridged Ethernet and IPoA)
Subscriber interfaces (dynamic)	Yes (over bridged Ethernet)	Yes (over bridged Ethernet)
Transparent bridging	Yes	Yes
Tunnel-server ports	No	No
VPLS (network interfaces)	Yes	Yes
VPLS (virtual core interfaces)	Yes	Yes
VRRP	No	No

OCx/STMx POS and OC48 Modules

Table 10: OCx/STMx POS and OC48 Modules

Protocol or Application	OCx/STMx POS Line Modules with OC3-4 I/O Modules	OCx/STMx POS Line Modules with OC12/STM4 I/O Modules	OC48 Line Module with OC48 Frame APS I/O Module
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes	Yes
APS/MSP	No	Yes	No
ATM	No	No	No
BERT	No	No	No
BGP	Yes	Yes	Yes
BGP/MPLS VPNs	Yes	Yes	Yes
Bridged Ethernet	No	No	No
Bridged IP	No	No	No
CBF	No	No	No
Cisco HDLC	Yes	Yes	Yes
DHCP external server	No	No	No
DHCP local server	No	No	No
DVMRP and GRE support—access side	Yes	Yes	Yes
DVMRP and GRE support—access side	No	No	No
Dynamic interfaces	No	No	No
F4 OAM and F5 OAM (ATM administration)	No	No	No
FDL (facilities data link)	No	No	No

Protocol or Application	OCx/STMx POS Line Modules with OC3-4 I/O Modules	OCx/STMx POS Line Modules with OC12/STM4 I/O Modules	OC48 Line Module with OC48 Frame APS I/O Module
Firewall	Yes	Yes	Yes
Frame Relay	Yes	Yes	Yes
IEEE 802.3ad link aggregation	No	No	No
IP	Yes	Yes	Yes
IP multicast	Yes	Yes	Yes
IP reassembly for tunneled packets	No	No	No
IPSec	No	No	No
IPv6	Yes	Yes	Yes (PPP only)
IPv6 multicast	Yes	Yes	Yes
IPv6 neighbor discovery	No	No	No
IS-IS	Yes	Yes	Yes
J-Flow Statistics	Yes	Yes	Yes
L2TP/IPSec	No	No	No
LAC support—access side	No	No	No
LAC support—peer side	Yes	Yes	Yes
LNS support—peer side	Yes	Yes	Yes
Local loopback	No	No	No
MDL (maintenance data link)	No	No	No
MPLS	Yes	Yes (Layer 2 over MPLS is not supported)	Yes (Layer 2 over MPLS is not supported)
Multilink Frame Relay	No	No	No
Multilink PPP	No	No	No
Network Address Translation (NAT)	Yes	Yes	Yes
NBMA (multipoint ATM)	No	No	No
OSPF	Yes	Yes	Yes
Packet Mirroring	Yes	Yes	Yes
Packet over SONET	Yes	Yes	Yes
PPP	Yes	Yes	Yes
PPPoE	No	No	No
Remote loopback	No	No	No
RIP	Yes	Yes	Yes
SMDS (trunk encapsulation)	No	No	No
Subscriber interfaces (static)	Yes (over POS)	Yes (over POS)	No

Protocol or Application	OCx/STMx POS Line Modules with OC3-4 I/O Modules	OCx/STMx POS Line Modules with OC12/STM4 I/O Modules	OC48 Line Module with OC48 Frame APS I/O Module
Subscriber interfaces (dynamic)	No	No	No
Transparent bridging	No	No	No
Tunnel-server ports	No	No	No
VPLS (network interfaces)	No	No	No
VPLS (virtual core interfaces)	Yes	Yes	Yes
VRRP	No	No	No

Service Modules

Table 11: Service Modules

Protocol or Application	Tunnel Service Line Module (TSM)	Service Line Module (SM)	IPSec Service Line Module
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	No	No	No
APS/MSP	No	No	No
ATM	No	No	No
BERT	No	No	No
BGP	Yes	Yes	Yes
BGP/MPLS VPNs	No	No	No
Bridged Ethernet	No	No	No
Bridged IP	No	No	No
CBF	No	No	No
Cisco HDLC	No	No	No
DHCP external server	No	No	No
DHCP local server	No	No	No
DVMRP and GRE support—access side	No	No	No
DVMRP and GRE support—server side	Yes (over dedicated tunnel server ports)	Yes (over dedicated tunnel server ports)	Yes (over dedicated tunnel server ports; DVMRP over IPsec only; GRE over IPsec)
Dynamic interfaces	No	No	No
F4 OAM and F5 OAM (ATM administration)	No	No	No
FDL (facilities data link)	No	No	No

Protocol or Application	Tunnel Service Line Module (TSM)	Service Line Module (SM)	IPSec Service Line Module
Firewall	Yes	Yes	No
Frame Relay	No	No	No
IEEE 802.3ad link aggregation	No	No	No
IP	Yes	Yes	Yes
IP multicast	Yes	Yes	No
IP reassembly for tunneled packets	Yes	Yes	Yes
IPSec	No	No	Yes
IPv6	Yes	Yes	No
IPv6 multicast	Yes	Yes	No
IPv6 neighbor discovery	No	No	No
IS-IS	Yes	Yes	Yes
J-Flow Statistics	Yes	Yes	Yes
L2TP/IPSec	No	No	Yes
LAC support—access side	No	No	No
LAC support—peer side	No	No	No
LNS support—peer side	Yes	Yes	No
Local loopback	No	No	No
MDL (maintenance data link)	No	No	No
MPLS	No (over GRE only)	No (over GRE only)	No (over GRE only)
Multilink Frame Relay	No	No	No
Multilink PPP	Yes (with fragmentation and reassembly; dynamic only)	Yes (with fragmentation and reassembly; dynamic only)	No
Network Address Translation (NAT)	Yes	Yes	No
NBMA (multipoint ATM)	No	No	No
OSPF	Yes	Yes	Yes
Packet Mirroring	Yes	Yes	Yes
Packet over SONET	No	No	No
PPP	Yes (dynamic only)	Yes (dynamic only)	No
PPPoE	No	No	No
Remote loopback	No	No	No
RIP	Yes	Yes	Yes
SMDS (trunk encapsulation)	No	No	No
Subscriber interfaces (static)	Yes (GRE tunnels only)	Yes (GRE tunnels only)	No
Subscriber interfaces (dynamic)	Yes (over GRE tunnels only)	Yes (over GRE tunnels only)	No

Protocol or Application	Tunnel Service Line Module (TSM)	Service Line Module (SM)	IPSec Service Line Module
Transparent bridging	No	No	No
Tunnel-server ports	Yes (dedicated only)	Yes (dedicated only)	Yes (dedicated only)
VPLS (network interfaces)	No	No	No
VPLS (virtual core interfaces)	No	No	No
VRRP	No	No	No

Unchannelized E3 Modules

Table 12: Unchannelized E3 Modules

Protocol or Application	COCX-F3 Line Modules with E3-12 FRAME I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes
APS/MSP	No
ATM (point-to-point)	No
BERT	No
BGP	Yes
BGP/MPLS VPNs	Yes
Bridged Ethernet	No
Bridged IP	No
CBF	Yes
Cisco HDLC	Yes
DHCP external server	No
DHCP local server	No
DVMRP and GRE support—access side	Yes
DVMRP and GRE support—server side	No
Dynamic interfaces	No
F4 OAM and F5 OAM (ATM administration)	No
FDL (facilities data link)	No
Firewall	Yes
Frame Relay	Yes
IEEE 802.3ad link aggregation	No
IP	Yes
IP multicast	Yes
IP reassembly for tunneled packets	No

Protocol or Application	COCX-F3 Line Modules with E3-12 FRAME I/O Modules
IPSec	No
IPv6	Yes
IPv6 multicast	Yes
IPv6 neighbor discovery	No
IS-IS	Yes
J-Flow Statistics	Yes
L2TP/IPSec	No
LAC support—access side	No
LAC support—peer side	No
LNS support—peer side	No
Local loopback	No
MDL (maintenance data link)	No
MPLS	Yes (over PPP and Cisco HDLC; also supports Martini encapsulation of HDLC and Frame Relay over MPLS)
Multilink Frame Relay	Yes
Multilink PPP	Yes (with fragmentation and reassembly)
Network Address Translation (NAT)	Yes
NBMA (multipoint ATM)	No
OSPF	Yes
Packet Mirroring	Yes
Packet over SONET	No
PPP	Yes
PPPoE	No
Remote loopback	No
RIP	Yes
SMDS (trunk encapsulation)	Yes
Subscriber interfaces (static)	No
Subscriber interfaces (dynamic)	No
Transparent bridging	No
Tunnel-server ports	No
VPLS (network interfaces)	No
VPLS (virtual core interfaces)	Yes
VRRP	No

Unchannelized T3 Modules

Table 13: Unchannelized T3 Modules

Protocol or Application	COCX-F3 Line Modules with CT3/T3 12 I/O Modules	OCx/STMx ATM Line Modules with 4xDS3 ATM I/O Modules	CT3/T3-F0 Line Modules with CT3/T3 12 I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	Yes	Yes	Yes
APS/MSP	No	No	No
ATM (point-to-point)	No	Yes	No
BERT	Yes	No	Yes
BGP	Yes	Yes	Yes
BGP/MPLS VPNs	Yes	Yes	Yes
Bridged Ethernet	No	Yes	No
Bridged IP	No	Yes	No
CBF	Yes	No	No
Cisco HDLC	Yes	No	Yes
DHCP external server	No	Yes	No
DHCP local server	No	Yes	No
DVMRP and GRE support—access side	Yes	Yes	Yes
DVMRP and GRE support—access side	No	No	No
Dynamic interfaces	No	Yes	No
F4 OAM and F5 OAM (ATM administration)	No	Yes	No
FDL (facilities data link)	No	No	No
Firewall	Yes	Yes	Yes
Frame Relay	Yes	No	Yes
IEEE 802.3ad link aggregation	No	No	No
IP	Yes	Yes	Yes
IP multicast	No	No	No
IP reassembly for tunneled packets	No	No	No
IPSec	No	No	No
IPv6	No	No	No
IPv6 multicast	Yes	Yes	Yes
IPv6 neighbor discovery	No	No	No
IS-IS	Yes	Yes	Yes

Protocol or Application	COCX-F3 Line Modules with CT3/T3 12 I/O Modules	OCx/STMx ATM Line Modules with 4xDS3 ATM I/O Modules	CT3/T3-F0 Line Modules with CT3/T3 12 I/O Modules
J-Flow Statistics	Yes	Yes	Yes
L2TP/IPSec	No	No	No
LAC support—access side	No	Yes	No
LAC support—peer side	No	Yes	No
LNS support—peer side	No	Yes	No
Local loopback	Yes	No	Yes
MDL (maintenance data link)	Yes	No	Yes
MPLS	Yes (over PPP and Cisco HDLC; also supports Martini encapsulation of HDLC and Frame Relay over MPLS)	Yes	Yes (over PPP and Cisco HDLC; also supports Martini encapsulation of HDLC and Frame Relay over MPLS)
Multilink Frame Relay	Yes	No	Yes
Multilink PPP	Yes (with fragmentation and reassembly)	No	Yes
Network Address Translation (NAT)	Yes	Yes	Yes
NBMA (multipoint ATM)	No	Yes	No
OSPF	Yes	Yes	Yes
Packet Mirroring	Yes	Yes	Yes
Packet over SONET	No	No	No
PPP	Yes	Yes	Yes
PPPoE	No	Yes	No
Remote loopback	Yes	No	Yes
RIP	Yes	Yes	Yes
SMDS (trunk encapsulation)	Yes	No	No
Subscriber interfaces (static)	Yes	Yes (over bridged Ethernet and IPoA)	Yes
Subscriber interfaces (dynamic)	Yes	Yes (over bridged Ethernet)	Yes
Transparent bridging	No	Yes	No
Tunnel-server ports	No	No	No
VPLS (network interfaces)	No	Yes	No
VPLS (virtual core interfaces)	Yes	Yes	Yes
VRRP	No	No	No

X.21/V.35 Modules

Table 14: X.21/V.35 Modules

Protocol or Application	X.21/V.35-16 Line Modules with X.21/V.35-16 I/O Modules
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	No
APS/MSP	No
ATM	No
BERT	No
BGP	Yes
BGP/MPLS VPNs	No
Bridged Ethernet	No
Bridged IP	No
CBF	No
Cisco HDLC	Yes
DVMRP and GRE support—access side	No
DVMRP and GRE support—server side	No
DHCP external server	No
DHCP local server	No
Dynamic interfaces	No
F4 OAM and F5 OAM (ATM administration)	No
FDL (facilities data link)	No
Firewall	No
Frame Relay	Yes
IEEE 802.3ad link aggregation	No
IP	Yes
IP multicast	No
IP reassembly for tunneled packets	No
IPSec	No
IPv6	No
IPv6 multicast	No
IPv6 neighbor discovery	No
IS-IS	Yes
J-Flow Statistics	No
L2TP/IPSec	No
LAC support—access side	No
LAC support—peer side	No

Protocol or Application	X.21/V.35-16 Line Modules with X.21/V.35-16 I/O Modules
LNS support—peer side	No
Local loopback	No
MDL (maintenance data link)	No
MPLS	No
Multilink Frame Relay	Yes
Multilink PPP	Yes
Network Address Translation (NAT)	No
NBMA (multipoint ATM)	No
OSPF	Yes
Packet Mirroring	No
Packet over SONET	No
PPP	Yes
PPPoE	No
Remote loopback	No
RIP	Yes
SMDS (trunk encapsulation)	No
Subscriber interfaces (static)	No
Subscriber interfaces (dynamic)	No
Transparent bridging	No
Tunnel-server ports	No
VPLS (network interfaces)	No
VPLS (virtual core interfaces)	No
VRRP	No

Appendix B

Module LEDs

This appendix describes the LEDs found on ERX modules. Module LEDs can show you the current status of a module and alert you to a problem with the module or one of its ports. We recommend that you familiarize yourself with LED activity so that you can easily detect and correct a module-related problem with minimal or no system downtime. This appendix contains the following sections:

- LED Identification on page 139
- Redundancy Status on page 144

LED Identification

The system's modules have two sets of status LEDs. The top set indicates overall router and module status. The bottom set indicates module-specific status, such as port status (line modules) or fan status (SRP module).

The number next to the port status LED on a line module corresponds to the number of the port on the I/O module. Some line modules have more port status LEDs than the number of ports on the I/O module. In these cases, only the LEDs for the corresponding ports on the I/O modules are active.

For example, an OCx/STMx line module can pair with either an OC3-4 or an OC12/STM4 I/O module. Consequently, the line module has four port status LEDs for OC3/STM1 operation. However, only the top set of port status LEDs is active during OC12/STM4 operation.

Table 15 lists the functions of the module and port status LEDs.

Table 15: LED Identification and Activity Descriptions

LED Location	LED Label	LED Indicator	LED Color	OFF to ON	ON to OFF
All modules	OK	Module status	Green	Self-test passed	Failure detected
	FAIL	Module status	Red	Failure detected	Diagnostic test running
	ONLINE	Module status	Green	Module online	Module offline

LED Location	LED Label	LED Indicator	LED Color	OFF to ON	ON to OFF
All modules	REDUNDANT	Redundancy	Green	See <i>Redundancy Status</i> later in this appendix. NOTE: The REDUNDANT LED on the cOCx/STMx, FE-8, GE/FE, HSSI, OCx/STMx, and X.21/V.35 line modules is nonfunctional.	
SRP module	POWER A OK	Power	Green	Power online on source A	Power off
	POWER B OK	Power	Green	Power online on source B	Power off
	FAN OK	Fan	Green	Fan online	Critical fan failure
	FAN FAIL	Fan	Red	Critical fan failure	Fan online
NOTE: When the LED alternates between OK and FAIL at 10-second intervals, a non-critical fan failure exists.					
	LINK	Ethernet	Green	Ethernet link up	Ethernet link down
	ACTIVITY	Ethernet	Green	Blinks when Ethernet traffic on link	No Ethernet traffic on link
Ethernet line modules	LINK	Ethernet	Green	Ethernet link up	Ethernet link down
	ACTIVITY	Ethernet	Green	Blinks when Ethernet traffic on link	No Ethernet traffic on link


LED Location	LED Label	LED Indicator	LED Color	OFF to ON	ON to OFF
HSSI line module	SYNC	Port status	Green	If the port is configured as DTE, the LED lights when both the DCE and the clock source are available. If the port is configured as DCE, the LED lights when the DTE is available.	If the port is configured as DTE, the LED goes out when either the DCE or the clock source becomes unavailable. If the port is configured as DCE, the LED goes out when the DTE becomes unavailable.
	YEL ALM	NOTE: This LED is not functional on the HSSI line module.			
	RED ALM	Port status	Red	If the port is configured as DTE, the LED lights when either the DCE or the clock source becomes unavailable. If the port is configured as DCE, the LED lights when the DTE becomes unavailable.	If the port is configured as DTE, the LED goes out when both the DCE and the clock source are available. If the port is configured as DCE, the LED goes out when the DTE is available.
X.21/V.35 line module	ACTIVE	Port status	Green	Port configured	Port not configured
	LOOPBK	Port status	Yellow	Port in local loopback or remote loopback, depending on the type of connection.	Port not in loopback
	ERROR	Port status	Red	Port is enabled or comes online	Port is disabled or goes offline
	V.35	Port status	Green	V.35 cable connected	V.35 cable disconnected
	X.21	Port status	Green	X.21 cable connected	X.21 cable disconnected
	DCE	Port status	Green	DCE cable connected	DCE cable disconnected
	DTE	Port status	Green	DTE cable connected	DTE cable disconnected

LED Location	LED Label	LED Indicator	LED Color	OFF to ON	ON to OFF
Other line modules	SYNC	Port status	Green	In frame	Not in frame
	YEL ALM	Port status	Yellow	Far-end receive failure (FERF) exists	No FERF present
	RED ALM	Port status	Red	Loss of sync/frame	In frame

The following figures show a representative module for each of the three variations:

- SRP module (Figure 1)
- Ethernet line module (Figure 2)
- Other line modules (Figure 3)


Figure 1: SRP Module LEDs

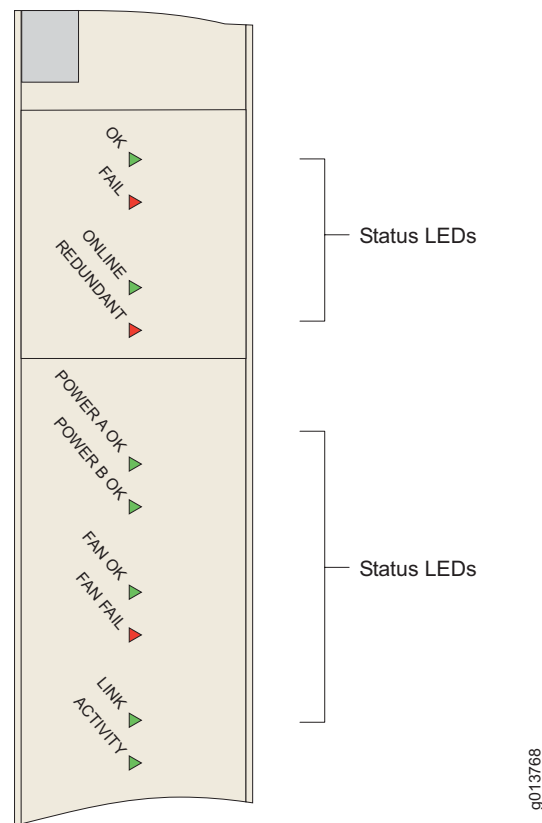

NOTE: The primary SRP module illuminates the REDUNDANT LED only when the SRP module detects that there is a secondary or standby SRP module online. The standby SRP module monitors an activity signal from the primary SRP module to determine its state; it does not shadow the operations of the primary SRP module.


If the standby SRP module detects that the primary SRP module is not active, it reboots the system and takes control. (ERX-7xx/14xx models only)

Figure 2: FE2 Module LEDs

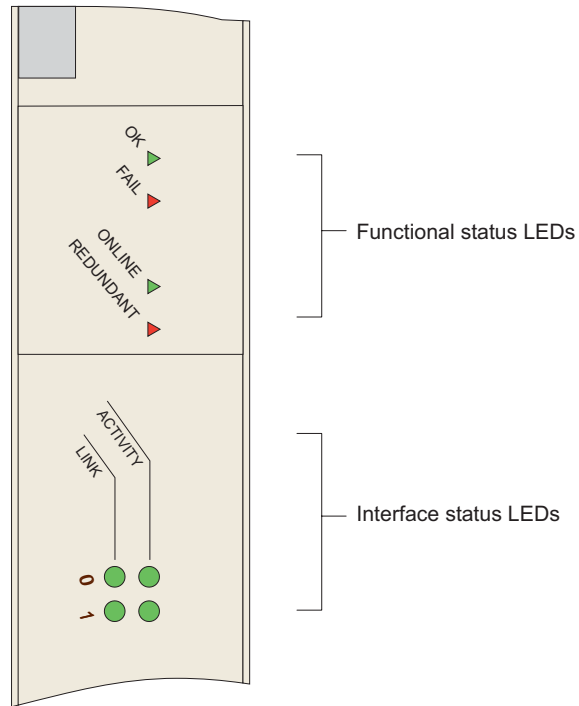

g013769

Figure 3: E3 and T3 Module LEDs

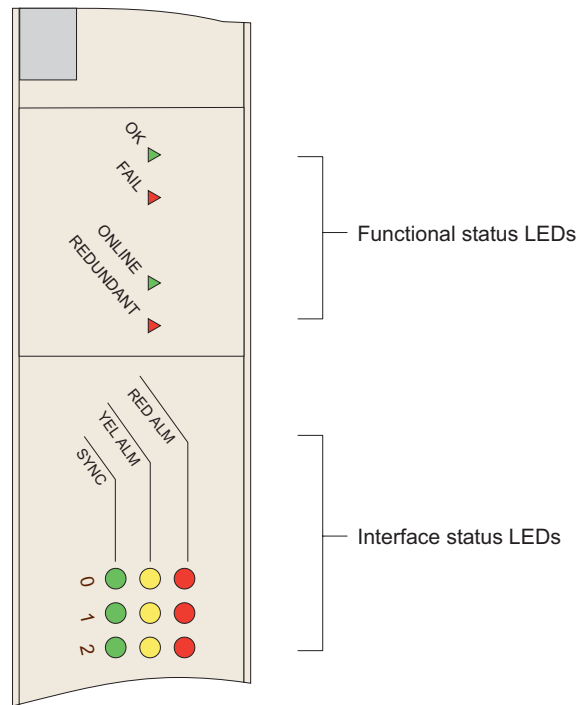

g013770

Redundancy Status

You can determine the redundancy state of line modules by examining the online and redundant status LEDs (ERX-7xx/14xx models only). See Table 16.



NOTE: The REDUNDANT LED on the cOCx/STMx, FE-8, GE/FE, HSSI, and OCx/STMx modules is nonfunctional.

Table 16: Redundancy Status of a Line Module

ONLINE LED	REDUNDANT LED	State of the Line Module
Off	Off	Module is booting or is an inactive primary line module.
On	Off	Module is active, but no standby module is available.
Off	On	Module is in standby state.
On	On	Module is active, and a standby module is available.

Appendix C

Product Reclamation and Recycling Program


- Product Reclamation and Recycling Program on page 145

Product Reclamation and Recycling Program

Juniper Networks is committed to environmentally responsible behavior. As part of this commitment, we continually work to comply with environmental standards such as the European Union's *Waste Electrical and Electronic Equipment (WEEE) Directive* and *Restriction of Hazardous Substances (RoHS) Directive*.

These directives and other similar regulations from countries outside the European Union regulate electronic waste management and the reduction or elimination of specific hazardous materials in electronic products. The WEEE Directive requires electrical and electronics manufacturers to provide mechanisms for the recycling and reuse of their products. The RoHS Directive restricts the use of certain substances that are commonly found in electronic products today. Restricted substances include heavy metals, including lead, and polybrominated materials. The RoHS Directive, with some exemptions, applies to all electrical and electronic equipment.

In accordance with Article 11(2) of Directive 2002/96/EC (WEEE), products put on the market after 13 August 2005 are marked with the following symbol or include it in their documentation: a crossed-out wheeled waste bin with a bar beneath.



Juniper Networks provides recycling support for our equipment worldwide to comply with the WEEE Directive. For recycling information, go to <http://www.juniper.net/environmental>, and indicate the type of Juniper Networks

equipment that you wish to dispose of and the country where it is currently located, or contact your Juniper Networks account representative.

Products returned through our reclamation process are recycled, recovered, or disposed of in a responsible manner. Our packaging is designed to be recycled and should be handled in accordance with your local recycling policies.

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, the Juniper Networks logo, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. JUNOS and JUNOSE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

Copyright © 2006, Juniper Networks, Inc. All rights reserved.

E-series™ Routing Platforms ERX™ Module Guide, Release 8.0.x
Copyright © 2006, Juniper Networks, Inc.
All rights reserved. Printed in USA.

Writing: John Borelli, Sarah Lesway-Ball, Fran Singer
Editing: Ben Mann
Illustration: John Borelli

Revision History
15 December 2006—Revision 1

The information in this document is current as of the date listed in the revision history.