

## Example: Setting Up DHCP Option 82 on an EX Series Switch with No Relay Agent Between Clients and DHCP Server

---

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the EX Series switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

This example describes how to configure DHCP option 82 on a switch with DHCP clients, DHCP server, and switch all on the same VLAN:

- Requirements on page 1
- Overview and Topology on page 1
- Configuration on page 2

### Requirements

This example uses the following hardware and software components:

- One EX3200-24P switch
- JUNOS Release 9.3 or later for EX Series switches
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP option 82 on the switch, be sure you have:

- Connected and configured the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If it is not configured for DHCP option 82, it does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

---

- Configured the **employee** VLAN on the switch and associated the interfaces on which the clients and the server connect to the switch with that VLAN. See *Configuring VLANs for EX Series Switches (CLI Procedure)*.

### Overview and Topology

If DHCP option 82 is enabled on the switch, then when a network device—a DHCP client—that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or other parameter for the client.


DHCP option 82 is enabled on an individual VLAN or on all VLANs on the switch.

When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch forwards the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.

Figure 1 illustrates the topology for this example.

**Figure 1: Network Topology for Configuring DHCP Option 82 on a Switch That Is on the Same VLAN as the DHCP Clients and the DHCP Server**

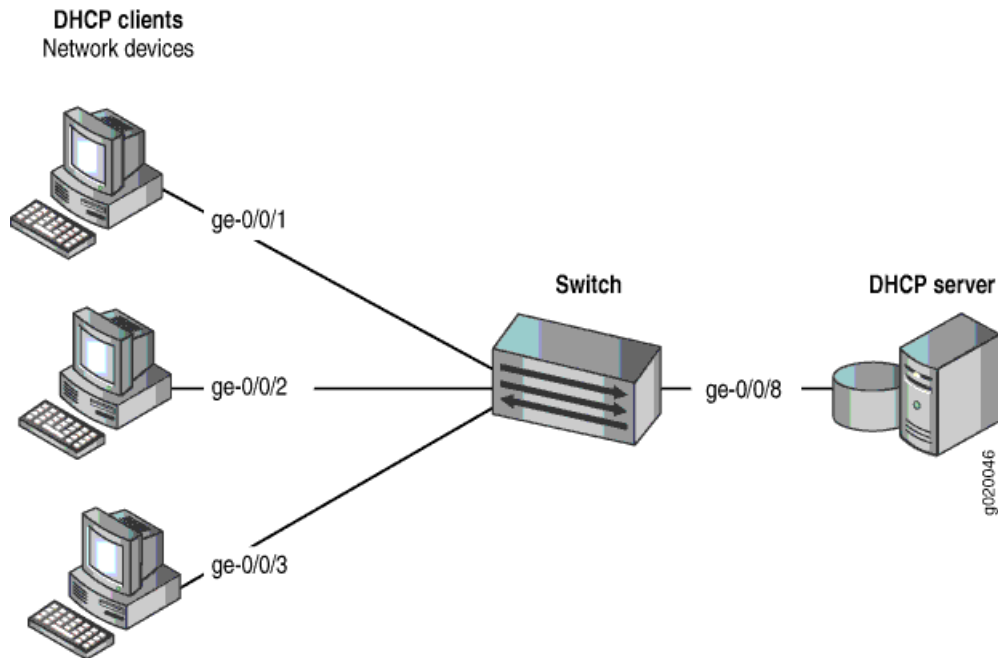

In this example, you configure DHCP option 82 on the EX Series switch. The switch connects to the DHCP server on interface `ge-0/0/8`. The DHCP clients connect to the switch on interfaces `ge-0/0/1`, `ge-0/0/2`, and `ge-0/0/3`. The switch, server, and clients are all members of the `employee` VLAN.

## Configuration

To configure DHCP option 82:

**CLI Quick Configuration** To quickly configure DHCP option 82, copy the following commands and paste them into the switch terminal window:

```

set ethernet-switching-options secure-access-port vlan employee dhcp-option82
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
circuit-id prefix hostname
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
circuit-id use-vlan-id
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
remote-id
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
remote-id prefix mac
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
remote-id use-string employee-switch1
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
vendor-id

```

**Step-by-Step Procedure** To configure DHCP option 82:

1. Specify DHCP option 82 for the employee VLAN:

```

[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82

```

2. Configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```

[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id prefix hostname

```

3. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):

```

[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-vlan-id

```

4. Specify that the remote ID suboption be included in the DHCP option 82 information:

```

[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id

```

5. Configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```

[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix mac

```

6. Specify that the remote ID suboption value contains a character string (here, the string is employee-switch1):

```

[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-string
employee-switch1

```

7. Configure a vendor ID suboption value, and use the default value. To use the default value, do not type a character string after the **vendor-id** option keyword:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 vendor-id
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show

vlan employee {
  dhcp-option82 {
    circuit-id {
      prefix hostname;
      use-vlan-id;
    }
    remote-id {
      prefix mac;
      use-string employee-switch1;
    }
    vendor-id;
  }
}
```

- Related Topics**
- Example: Setting Up DHCP Option 82 with an EX Series Switch as Relay Agent Between Clients and a DHCP Server
  - Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)
  - RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

---

Published: 2009-07-23