



Junos[®] OS for EX Series Ethernet Switches

Access and User Management on EX4300 Switches

Release

14.1X53



Modified: 2015-02-24

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Junos[®] OS for EX Series Ethernet Switches Access and User Management on EX4300 Switches
Release 14.1X53
Copyright © 2016, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xi
	Documentation and Release Notes	xi
	Supported Platforms	xi
	Using the Examples in This Manual	xi
	Merging a Full Example	xii
	Merging a Snippet	xii
	Documentation Conventions	xiii
	Documentation Feedback	xv
	Requesting Technical Support	xv
	Self-Help Online Tools and Resources	xv
	Opening a Case with JTAC	xvi
Part 1	Overview	
Chapter 1	Software Overview	3
	Understanding Software Infrastructure and Processes	3
	Routing Engine and Packet Forwarding Engine	3
	Junos OS Processes	4
Part 2	Configuration	
Chapter 2	Configuration Tasks	9
	Configuring Management Access for the EX Series Switch (J-Web Procedure)	9
	Generating SSL Certificates to Be Used for Secure Web Access	12
	Configuring MS-CHAPv2 to Provide Password-Change Support (CLI Procedure)	13
Chapter 3	Configuration Statements	15
	allow-commands	17
	allow-configuration	18
	announcement	19
	archive-sites	19
	authentication (Login)	20
	authentication-order	21
	change-type	22
	class (Assigning a Class to an Individual User)	22
	class (Defining Login Classes)	23
	class-usage-profile	24
	counters	25
	deny-commands	25
	deny-configuration	26

	destination-classes	27
	fields (for Interface Profiles)	28
	file (Associating with a Profile)	29
	file (Configuring a Log File)	30
	files	31
	filter-profile	32
	format	33
	full-name	34
	idle-timeout (System-Login)	35
	interface-profile	36
	interval (Accounting Options)	37
	login	38
	login-alarms	39
	login-tip	39
	maximum-length	40
	message	41
	mib-profile	42
	minimum-changes	43
	minimum-length	44
	object-names	45
	operation	45
	password (Login)	46
	permissions	47
	radius-options (edit system)	48
	retry-options	49
	root-authentication	50
	root-login	52
	routing-engine-profile	53
	size	54
	source-classes	54
	start-time (Log File Transfer)	55
	tacplus-options	56
	tacplus-server	57
	traceoptions (Address-Assignment Pool)	58
	transfer-interval	59
	uid	60
	user (Access)	61
Part 3	Administration	
Chapter 4	Routine Monitoring	65
	Managing Users (J-Web Procedure)	65
Chapter 5	Operational Commands	69
	request message	70
	show subscribers	71

Part 4	Troubleshooting	
Chapter 6	Troubleshooting Procedures	91
	Troubleshooting Loss of the Root Password	91

List of Figures

Part 4	Troubleshooting	
Chapter 6	Troubleshooting Procedures	91
	Figure 1: Connecting to the Console Port on the EX Series Switch	92

List of Tables

	About the Documentation	xi
	Table 1: Notice Icons	xiii
	Table 2: Text and Syntax Conventions	xiii
Part 1	Overview	
Chapter 1	Software Overview	3
	Table 3: Junos OS Processes	4
Part 2	Configuration	
Chapter 2	Configuration Tasks	9
	Table 4: Secure Management Access Configuration Summary	10
Part 3	Administration	
Chapter 4	Routine Monitoring	65
	Table 5: User Management Configuration Page Summary	66
	Table 6: Add an Authentication Server	67
Chapter 5	Operational Commands	69
	Table 7: show subscribers Output Fields	74

About the Documentation

- Documentation and Release Notes on page xi
- Supported Platforms on page xi
- Using the Examples in This Manual on page xi
- Documentation Conventions on page xiii
- Documentation Feedback on page xv
- Requesting Technical Support on page xv

Documentation and Release Notes

To obtain the most current version of all Juniper Networks[®] technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- EX Series

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the *CLI User Guide*.

Documentation Conventions

Table 1 on page xiii defines notice icons used in this guide.

Table 1: Notice Icons







Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xiii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> show chassis alarms No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none">Introduces or emphasizes important new terms.Identifies guide names.Identifies RFC and Internet draft titles.	<ul style="list-style-type: none">A policy <i>term</i> is a named structure that defines match conditions and actions.<i>Junos OS CLI User Guide</i>RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none">To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level.The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric metric>;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (string1 string2 string3)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [<i>community-ids</i>]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop address; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none">In the Logical Interfaces box, select All Interfaces.To cancel the configuration, click Cancel.

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page of the Juniper Networks TechLibrary site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>

- Download the latest versions of software and review release notes:
<http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications:
<http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum:
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

PART 1

Overview

- [Software Overview on page 3](#)

CHAPTER 1

Software Overview

- [Understanding Software Infrastructure and Processes on page 3](#)

Understanding Software Infrastructure and Processes

Each switch runs the Juniper Networks Junos operating system (Junos OS) for Juniper Networks EX Series Ethernet Switches on its general-purpose processors. Junos OS includes processes for Internet Protocol (IP) routing and for managing interfaces, networks, and the chassis.

The Junos OS runs on the Routing Engine. The Routing Engine kernel coordinates communication among the Junos OS processes and provides a link to the Packet Forwarding Engine.

With the J-Web interface and the command-line interface (CLI) to the Junos OS, you configure switching features and routing protocols and set the properties of network interfaces on your switch. After activating a software configuration, use either the J-Web or CLI user interface to monitor the switch, manage operations, and diagnose protocol and network connectivity problems.

- [Routing Engine and Packet Forwarding Engine on page 3](#)
- [Junos OS Processes on page 4](#)

Routing Engine and Packet Forwarding Engine

A switch has two primary software processing components:

- **Packet Forwarding Engine**—Processes packets; applies filters, routing policies, and other features; and forwards packets to the next hop along the route to their final destination.
- **Routing Engine**—Provides three main functions:
 - Creates the packet forwarding switch fabric for the switch, providing route lookup, filtering, and switching on incoming data packets, then directing outbound packets to the appropriate interface for transmission to the network
 - Maintains the routing tables used by the switch and controls the routing protocols that run on the switch.

- Provides control and monitoring functions for the switch, including controlling power and monitoring system status.

Junos OS Processes

The Junos OS running on the Routing Engine and Packet Forwarding Engine consists of multiple processes that are responsible for individual functions.

The separation of functions provides operational stability, because each process accesses its own protected memory space. In addition, because each process is a separate software package, you can selectively upgrade all or part of the Junos OS, for added flexibility.

[Table 3 on page 4](#) describes the primary Junos OS processes.

Table 3: Junos OS Processes

Process	Name	Description
Chassis process	chassisd	<p>Detects hardware on the system that is used to configure network interfaces.</p> <p>Monitors the physical status of hardware components and field-replaceable units (FRUs), detecting when environment sensors such as temperature sensors are triggered.</p> <p>Relays signals and interrupts—for example, when devices are taken offline, so that the system can close sessions and shut down gracefully.</p>
Ethernet switching process	eswd	<p>Handles Layer 2 switching functionality such as MAC address learning, Spanning Tree protocol and access port security. The process is also responsible for managing Ethernet switching interfaces, VLANs, and VLAN interfaces.</p> <p>Manages Ethernet switching interfaces, VLANs, and VLAN interfaces.</p>
Forwarding process	pfem	<p>Defines how routing protocols operate on the switch. The overall performance of the switch is largely determined by the effectiveness of the forwarding process.</p>
Interface process	dcd	<p>Configures and monitors network interfaces by defining physical characteristics such as link encapsulation, hold times, and keepalive timers.</p>
Management process	mgd	<p>Provides communication between the other processes and an interface to the configuration database.</p> <p>Populates the configuration database with configuration information and retrieves the information when queried by other processes to ensure that the system operates as configured.</p> <p>Interacts with the other processes when commands are issued through one of the user interfaces on the switch.</p> <p>If a process terminates or fails to start when called, the management process attempts to restart it a limited number of times to prevent thrashing and logs any failure information for further investigation.</p>
Routing protocol process	rpd	<p>Defines how routing protocols such as RIP, OSPF, and BGP operate on the device, including selecting routes and maintaining forwarding tables.</p>

- Related Documentation**
- For more information about processes, see *Junos OS Network Operations Guide*
 - For more information about basic system parameters, supported protocols, and software processes, see *Junos OS System Basics Configuration Guide*

PART 2

Configuration

- [Configuration Tasks on page 9](#)
- [Configuration Statements on page 15](#)

CHAPTER 2

Configuration Tasks

- [Configuring Management Access for the EX Series Switch \(J-Web Procedure\)](#) on page 9
- [Generating SSL Certificates to Be Used for Secure Web Access](#) on page 12
- [Configuring MS-CHAPv2 to Provide Password-Change Support \(CLI Procedure\)](#) on page 13

Configuring Management Access for the EX Series Switch (J-Web Procedure)

You can manage an EX Series switch remotely through the J-Web interface. To communicate with the switch, the J-Web interface uses HTTP. HTTP enables easy Web access, but uses no encryption. The data that is transmitted between the Web browser and the switch by means of HTTP is vulnerable to interception and attack. To enable secure Web access the switch supports HTTPS. You can enable HTTP or HTTPS access on specific interfaces and ports as needed.

Navigate to the Secure Access Configuration page by selecting **Configure > System Properties > Management Access**. On this page, you can enable HTTP and HTTPS access on interfaces for managing the EX Series switch through the J-Web interface. You can also install SSL certificates and enable Junos XML management protocol over SSL with the Secure Access page.

1. Click **Edit** to modify the configuration. Enter information into the Management Access Configuration page as described in [Table 4 on page 10](#).
2. To verify that Web access is enabled correctly, connect to the switch using the appropriate method:
 - For HTTP access—In your Web browser, type **http://URL** or **http://IP address**.
 - For HTTPS access—In your Web browser, type **https://URL** or **https://IP address**.
 - For SSL Junos XML management protocol access—To use this option, you must have a Junos XML management protocol client such as Junos Scope. For information about how to log in to Junos Scope, see the *Junos Scope Software User Guide*.



NOTE: After you make changes to the configuration on this page, you must commit the changes for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See [Using the Commit Options to Commit Configuration Changes](#) for details about all commit options.

Table 4: Secure Management Access Configuration Summary

Field	Function	Your Action
Management Access tab		
Management Port IP/Management Port IPv6	<p>Specifies the management port IP address. The software supports both IPv4 (displayed as IP) and IPv6 address.</p> <p>NOTE: IPv6 is not supported on EX2200 and EX 4500 switches.</p>	<p>To specify an IPv4 address:</p> <ol style="list-style-type: none"> 1. Select the check box IPv4 address. 2. Type an IP address—for example: 10.10.10.10. <p>NOTE: In J-Web Application package Release 14.1X53-A2, EX4600 switches display two management ports, em0 and em1. Type the IP address and subnet mask for any of the two management ports.</p> <ol style="list-style-type: none"> 3. Enter the subnet mask or address prefix. For example, 24 bits represents 255.255.255.0. 4. Click OK. <p>To specify an IPv6 address:</p> <ol style="list-style-type: none"> 1. Select the check box IPv6 address. 2. Type an IP address—for example: 2001:ab8:85a3::8a2e:370:7334. 3. Enter the subnet mask or address prefix. 4. Click OK.
Default Gateway	Defines a default gateway through which to direct packets addressed to networks that are not explicitly listed in the bridge table constructed by the switch.	For IPv4 address type a 32-bit IP address, in dotted decimal notation. Type a 128-bit IP address for IPv6 address type.
Loopback address	Specifies the IP address of the loopback interface.	Type an IP address.
Subnet Mask	Specifies the subnet mask for the loopback interface.	Enter the subnet mask or address prefix.
Services tab		
Services	Specifies services to be enabled: telnet and SSH.	Select to enable the required services.
Enable Junos XML management protocol over Clear Text	Enables clear text access to the Junos XML management protocol XML scripting API.	To enable clear text access, select the Enable Junos XML management protocol over Clear Text check box.

Table 4: Secure Management Access Configuration Summary (*continued*)

Field	Function	Your Action
Enable Junos XML protocol over SSL	Enables secure SSL access to the Junos XML management protocol XML scripting API.	To enable SSL access, select the Enable Junos XML management protocol over SSL check box.
Junos XML management protocol Certificate	Specifies SSL certificates to be used for encryption. This field is available only after you create at least one SSL certificate.	To enable an SSL certificate, select a certificate from the Junos XML management protocol SSL Certificate list—for example, new .
Enable HTTP	Enables HTTP access on interfaces.	<p>To enable HTTP access, select the Enable HTTP access check box.</p> <p>Select and clear interfaces by clicking the direction arrows:</p> <ul style="list-style-type: none"> To enable HTTP access on an interface, add the interface to the HTTP Interfaces list. You can either select either all interfaces or specific interfaces.
Enable HTTPS	Enables HTTPS access on interfaces.	<p>To enable HTTPS access, select the Enable HTTPS access check box.</p> <p>Select and deselect interfaces by clicking the direction arrows:</p> <ul style="list-style-type: none"> To enable HTTPS access on an interface, add the interface to the HTTPS Interfaces list. You can either select either all interfaces or specific interfaces. <p>NOTE: Specify the certificate to be used for HTTPS access.</p>

Certificates tab

Certificates	<p>Displays digital certificates required for SSL access to the switch.</p> <p>Allows you to add and delete SSL certificates.</p>	<p>To add a certificate:</p> <ol style="list-style-type: none"> Have a general SSL certificate available. See Generating SSL Certificates for more information. Click Add. The Add a Local Certificate page opens. Type a name in the Certificate Name box—for example, new. Open the certificate file and copy its contents. Paste the generated certificate and RSA private key in the Certificate box. <p>To edit a certificate, select it and click Edit.</p> <p>To delete a certificate, select it and click Delete.</p>
--------------	---	--

- Related Documentation**
- [Security Features for EX Series Switches Overview](#)
 - [Understanding J-Web User Interface Sessions](#)
 - [Enabling HTTPS and XNM-SSL Services on Switches Using Self-Signed Certificates \(CLI Procedure\)](#)

Generating SSL Certificates to Be Used for Secure Web Access

You can set up secure Web access for an EX Series switch. To enable secure Web access, you must generate a digital Secure Sockets Layer (SSL) certificate and then enable HTTPS access on the switch.

To generate an SSL certificate:

1. Enter the following **openssl** command in your SSH command-line interface on a BSD or Linux system on which **openssl** is installed. The **openssl** command generates a self-signed SSL certificate in the privacy-enhanced mail (PEM) format. It writes the certificate and an unencrypted 1024-bit RSA private key to the specified file.

```
% openssl req -x509 -nodes -newkey rsa:1024 -keyout filename.pem -out filename.pem
```

where **filename** is the name of a file in which you want the SSL certificate to be written—for example, **my-certificate**.

2. When prompted, type the appropriate information in the identification form. For example, type **US** for the country name.
3. Display the contents of the file that you created.

```
cat my-certificate.pem
```

You can use the J-Web Configuration page to install the SSL certificate on the switch. To do this, copy the file containing the certificate from the BSD or Linux system to the switch. Then open the file, copy its contents, and paste them into the Certificate box on the J-Web Secure Access Configuration page.

You can also use the following CLI statement to install the SSL certificate on the switch:

```
[edit]  
user@switch# set security certificates local my-signed-cert load-key-file my-certificate.pem
```

- Related Documentation**
- [Configuring Management Access for the EX Series Switch \(J-Web Procedure\) on page 9](#)
 - [Security Features for EX Series Switches Overview](#)

Configuring MS-CHAPv2 to Provide Password-Change Support (CLI Procedure)

Junos OS for EX Series switches enables you to configure the Microsoft Corporation implementation of the Challenge Handshake Authentication Protocol version 2 (MS-CHAPv2) on the switch to provide password-change support. Configuring MS-CHAPv2 on the switch provides users accessing a switch the option of changing the password when the password expires, is reset, or is configured to be changed at next login.

See RFC 2433, *Microsoft PPP CHAP Extensions*, for information about MS-CHAP.

Before you configure MS-CHAPv2 to provide password-change support, ensure that you have:

- Configured RADIUS server authentication. Configure users on the authentication server and set the first-tried option in the authentication order to radius. See *Example: Connecting a RADIUS Server for 802.1X to a Switch*.

To configure MS-CHAPv2, specify the following:

```
[edit system radius-options]
user@switch# set password-protocol mschap-v2
```

You must have the required access permission on the switch in order to change your password.

Related Documentation

- [Managing Users \(J-Web Procedure\) on page 65](#)
- For more about configuring user access, see the [Junos OS Access Privilege Configuration Guide](#).

CHAPTER 3

Configuration Statements

- [allow-commands](#) on page 17
- [allow-configuration](#) on page 18
- [announcement](#) on page 19
- [archive-sites](#) on page 19
- [authentication \(Login\)](#) on page 20
- [authentication-order](#) on page 21
- [change-type](#) on page 22
- [class \(Assigning a Class to an Individual User\)](#) on page 22
- [class \(Defining Login Classes\)](#) on page 23
- [class-usage-profile](#) on page 24
- [counters](#) on page 25
- [deny-commands](#) on page 25
- [deny-configuration](#) on page 26
- [destination-classes](#) on page 27
- [fields \(for Interface Profiles\)](#) on page 28
- [file \(Associating with a Profile\)](#) on page 29
- [file \(Configuring a Log File\)](#) on page 30
- [files](#) on page 31
- [filter-profile](#) on page 32
- [format](#) on page 33
- [full-name](#) on page 34
- [idle-timeout \(System-Login\)](#) on page 35
- [interface-profile](#) on page 36
- [interval \(Accounting Options\)](#) on page 37
- [login](#) on page 38
- [login-alarms](#) on page 39
- [login-tip](#) on page 39
- [maximum-length](#) on page 40

- [message](#) on page 41
- [mib-profile](#) on page 42
- [minimum-changes](#) on page 43
- [minimum-length](#) on page 44
- [object-names](#) on page 45
- [operation](#) on page 45
- [password \(Login\)](#) on page 46
- [permissions](#) on page 47
- [radius-options \(edit system\)](#) on page 48
- [retry-options](#) on page 49
- [root-authentication](#) on page 50
- [root-login](#) on page 52
- [routing-engine-profile](#) on page 53
- [size](#) on page 54
- [source-classes](#) on page 54
- [start-time \(Log File Transfer\)](#) on page 55
- [tacplus-options](#) on page 56
- [tacplus-server](#) on page 57
- [traceoptions \(Address-Assignment Pool\)](#) on page 58
- [transfer-interval](#) on page 59
- [uid](#) on page 60
- [user \(Access\)](#) on page 61

allow-commands

Syntax	<code>allow-commands "regular-expression";</code>
Hierarchy Level	[edit system login class <i>class-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the operational mode commands that members of a login class can use.
Default	If you omit this statement and the deny-commands statement, users can issue only those commands for which they have access privileges through the permissions statement.
Options	regular-expression —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
Required Privilege Level	<code>admin</code> —To view this statement in the configuration. <code>admin-control</code> —To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Specifying Access Privileges for Junos OS Operational Mode Commands</i>• deny-commands on page 25• user on page 61

allow-configuration

Syntax	<code>allow-configuration "regular-expression";</code>
Hierarchy Level	[edit system login class <i>class-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Explicitly allow configuration access to the specified levels in the hierarchy even if the permissions set with the permissions statement do not grant such access by default.
Default	If you omit this statement and the deny-configuration statement, users can edit only those commands for which they have access privileges through the permissions statement.
Options	regular-expression —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Specifying Access Privileges Using allow/deny-configuration Statements</i>• <i>Regular Expressions for Allowing and Denying Junos OS Configuration Mode Hierarchies</i>• deny-configuration on page 26• user on page 61

announcement

Syntax	announcement <i>text</i> ;
Hierarchy Level	[edit system login]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure a system login announcement. This announcement appears after a user logs in.
Options	<i>text</i> —Text of the announcement. If the text contains any spaces, enclose it in quotation marks.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Junos OS to Display a System Login Announcement</i> • message on page 41

archive-sites

Syntax	archive-sites { <i>site-name</i> ; }
Hierarchy Level	[edit accounting-options file filename]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure an archive site. If more than one site name is configured, an ordered list of archive sites for the accounting-data log files is created. When a file is archived, the router or switch attempts to transfer the file to the first URL in the list, moving to the next site only if the transfer does not succeed. The log file is stored at the archive site with a filename of the format <i>router-name_log-filename_timestamp</i> .
Options	<i>site-name</i> —Any valid FTP URL to a destination. For information about specifying valid FTP URLs, see the <i>Getting Started Guide for Routing Devices</i> .
Required Privilege Level	snmp—To view this statement in the configuration. snmp-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring Archive Sites</i>

authentication (Login)

Syntax	<pre>authentication { (encrypted-password "password" plain-text-password); load-key-file URL filename; ssh-dsa "public-key"; ssh-ecdsa "public-key"; ssh-rsa "public-key"; }</pre>
Hierarchy Level	[edit system login user <i>username</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Authentication methods that a user can use to log in to the router or switch. You can assign multiple authentication methods to a single user.
Options	<p>encrypted-password "password"—Message Digest 5 (MD5) or other encrypted authentication. Specify the MD5 or other password. You can specify only one encrypted password for each user.</p> <p>You cannot configure a blank password for encrypted-password using blank quotation marks (" "). You must configure a password whose number of characters range from 1 through 128 characters and enclose the password in quotation marks.</p> <p>load-key-file URL filename—Load previously-generated RSA (SSH version 1 and SSH version 2) and DSA (SSH version 2) public keys from a named file at a specified URL location. The file contains one or more SSH keys.</p> <p>plain-text-password—When using this option, the command-line interface (CLI) prompts you for the password and then encrypts it.</p> <p>ssh-dsa "public-key"—SSH version 2 authentication. Specify the DSA public key. You can specify one or more public keys for each user.</p> <p>ssh-ecdsa "public-key"—SSH version 2 authentication. Specify the ECDSA public key. You can specify one or more public keys for each user.</p> <p>ssh-rsa "public-key"—SSH version 1 and SSH version 2 authentication. Specify the RSA public key. You can specify one or more public keys for each user.</p>
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Configuring Junos OS User Accounts• root-authentication on page 50

authentication-order

Syntax	<code>authentication-order [<i>authentication-methods</i>];</code>
Hierarchy Level	<code>[edit system]</code>
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure the order in which the software tries different user authentication methods when attempting to authenticate a user. For each login attempt, the software tries the authentication methods in order, starting with the first one, until the password matches.
Default	If you do not include the authentication-order statement, users are verified based on their configured passwords.
Options	<p><i>authentication-methods</i>—One or more authentication methods, listed in the order in which they should be tried. The method can be one or more of the following:</p> <ul style="list-style-type: none"> • password—Use the password configured for the user with the authentication statement at the <code>[edit system login user]</code> hierarchy level. • radius—Use RADIUS authentication services. • tacplus—Use TACACS+ authentication services.
Required Privilege Level	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Junos OS Authentication Order for RADIUS, TACACS+, and Local Password Authentication</i> • authentication on page 20

change-type

Syntax	<code>change-type (character-sets set-transitions);</code>
Hierarchy Level	[edit system login password]
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Set requirements for using character sets in plain-text passwords. When you combine this statement with the minimum-changes statement, you can check for the total number of character sets included in the password or for the total number of character-set changes in the password. Newly created passwords must meet these requirements.
Options	Specify one of the following: <ul style="list-style-type: none">• character-sets—The number of character sets in the password. Valid character sets include uppercase letters, lowercase letters, numbers, punctuation, and other special characters.• set-transitions—The number of transitions between character sets.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Special Requirements for Junos OS Plain-Text Passwords</i>• minimum-changes on page 43

class (Assigning a Class to an Individual User)

Syntax	<code>class class-name;</code>
Hierarchy Level	[edit system login user username]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Assign a user to a login class. You must assign each user to a login class.
Options	class-name —One of the classes defined at the [edit system login class] hierarchy level.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Junos OS User Accounts</i>

class (Defining Login Classes)

Syntax	<pre> class <i>class-name</i> { allow-commands "<i>regular-expression</i>"; (allow-configuration allow-configuration-regexps) "<i>regular expression 1</i>" "<i>regular expression 2</i>"; configuration-breadcrumbs; deny-commands "<i>regular-expression</i>"; (deny-configuration deny-configuration-regexps) "<i>regular expression 1</i>" "<i>regular expression 2</i>"; idle-timeout <i>minutes</i>; login-script <i>filename</i>; login-tip; permissions [<i>permissions</i>]; } </pre>
Hierarchy Level	[edit system login]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Define a login class.
Options	<p><i>class-name</i>—A name you choose for the login class.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> Defining Junos OS Login Classes user on page 61

class-usage-profile

Syntax	<pre>class-usage-profile <i>profile-name</i> { file <i>filename</i>; interval <i>minutes</i>; source-classes { source-class-name; } destination-classes { destination-class-name; } }</pre>
Hierarchy Level	[edit accounting-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Create a class usage profile, which is used to log class usage statistics to a file in the <code>/var/log</code> directory. The class usage profile logs class usage statistics for the configured source classes on every interface that has destination-class-usage configured.</p> <p>For information about configuring source classes, see the Junos OS Routing Protocols Library for Routing Devices. For information about configuring source class usage, see Network Management Administration Guide for Routing Devices.</p>
Options	<p>profile-name—Name of the destination class profile.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Configuring Class Usage Profiles

counters

Syntax	<code>counters { counter-name; }</code>
Hierarchy Level	[edit accounting-options filter-profile <i>profile-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Names of counters for which filter profile statistics are collected. The packet and byte counts for the counters are logged to a file in the <code>/var/log</code> directory.
Options	<i>counter-name</i> —Name of the counter.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Counters</i>

deny-commands

Syntax	<code>deny-commands "regular-expression";</code>
Hierarchy Level	[edit system login class]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the operational mode commands that the user is denied permission to issue even though the permissions set with the permissions statement would allow it.
Default	If you omit this statement and the allow-commands statement, users can issue only those commands for which they have access privileges through the permissions statement.
Options	<i>regular-expression</i> —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Specifying Access Privileges for Junos OS Operational Mode Commands</i> • allow-commands on page 17 • user on page 61

deny-configuration

Syntax	deny-configuration " <i>regular-expression</i> ";
Hierarchy Level	[edit system login class]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Explicitly deny configuration access to the specified levels in the hierarchy even if the permissions set with the permissions statement grant such access by default. Note that the user cannot view a particular hierarchy if configuration access is denied for that hierarchy.
Default	If you omit this statement and the allow-configuration statement, users can edit those levels in the configuration hierarchy for which they have access privileges through the permissions statement.
Options	<i>regular-expression</i> —Extended (modern) regular expression as defined in POSIX 1003.2. If the regular expression contains any spaces, operators, or wildcard characters, enclose it in quotation marks.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Specifying Access Privileges Using allow/deny-configuration Statements</i>• allow-configuration on page 18• user on page 61

destination-classes

Syntax	<code>destination-classes { <i>destination-class-name</i>; }</code>
Hierarchy Level	[edit accounting-options class-usage-profile <i>profile-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the destination classes for which statistics are collected.
Options	<i>destination-class-name</i> —Name of the destination class to include in the source class usage profile.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring a Class Usage Profile</i>

fields (for Interface Profiles)

Syntax	<pre>fields { field-name; }</pre>
Hierarchy Level	[edit accounting-options interface-profile <i>profile-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Statistics to collect in an accounting-data log file for an interface.
Options	<p><i>field-name</i>—Name of the field:</p> <ul style="list-style-type: none">• input-bytes—Input bytes• input-errors—Generic input error packets• input-multicast—Input packets arriving by multicast• input-packets—Input packets• input-unicast—Input unicast packets• output-bytes—Output bytes• output-errors—Generic output error packets• output-multicast—Output packets sent by multicast• output-packets—Output packets• output-unicast—Output unicast packets
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">• <i>Configuring the Interface Profile</i>

file (Associating with a Profile)

Syntax	<code>file <i>filename</i>;</code>
Hierarchy Level	[edit accounting-options class-usage-profile <i>profile-name</i>], [edit accounting-options filter-profile <i>profile-name</i>], [edit accounting-options interface-profile <i>profile-name</i>], [edit accounting-options mib-profile <i>profile-name</i>], [edit accounting-options routing-engine-profile <i>profile-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. The [edit accounting-options mib-profile <i>profile-name</i>] hierarchy added in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series Switches.
Description	Specify the accounting log file associated with the profile.
Options	<i>filename</i> —Name of the log file. You must specify a filename already configured in the file statement at the [edit accounting-options] hierarchy level.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Configuring the Interface Profile • Configuring the Filter Profile • Configuring the MIB Profile • Configuring the Routing Engine Profile

file (Configuring a Log File)

Syntax	<pre>file <i>filename</i> { archive-sites { <i>site-name</i>; } files <i>number</i>; nonpersistent; size <i>bytes</i>; source-classes <i>time</i>; transfer-interval <i>minutes</i>; }</pre>
Hierarchy Level	[edit accounting-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify a log file to be used for accounting data.
Options	<p><i>filename</i>—Name of the file in which to write accounting data.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Accounting-Data Log Files</i>

files

Syntax	<code>files <i>number</i>;</code>
Hierarchy Level	[edit accounting-options file <i>filename</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the maximum number of log files to be used for accounting data.
Options	<i>number</i> —The maximum number of files. When a log file (for example, profilelog) reaches its maximum size, it is renamed profilelog.0 , then profilelog.1 , and so on, until the maximum number of log files is reached. Then the oldest log file is overwritten. The minimum value for <i>number</i> is 3 and the default value is 10.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Accounting-Data Log Files</i>

filter-profile

Syntax	<pre>filter-profile <i>profile-name</i> { counters { counter-name; } file <i>filename</i>; interval <i>minutes</i>; }</pre>
Hierarchy Level	[edit accounting-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Create a profile to filter and collect packet and byte count statistics and write them to a file in the <code>/var/log</code> directory. To apply the profile to a firewall filter, you include the accounting-profile statement at the [edit firewall filter <i>filter-name</i>] hierarchy level. For more information about firewall filters, see Firewall Filters Feature Guide for Routing Devices .
Options	<p><i>profile-name</i>—Name of the filter profile.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Configuring the Filter Profile

format

Syntax	<code>format (md5 sha1 sha256 sha512);</code>
Hierarchy Level	<code>[edit system login password]</code>
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure the authentication algorithm for plain-text passwords.
Default	For Junos OS, the default encryption format is md5 . For Junos-FIPS software, the default encryption format is sha1 .
Options	The hash algorithm that authenticates the password can be one of these algorithms: <ul style="list-style-type: none"> • md5—Produces a 128-bit digest. • sha1—Produces a 160-bit digest. • sha256—Produces a 256-bit digest. • sha512—Produces a 512-bit digest.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Special Requirements for Junos OS Plain-Text Passwords</i>

full-name

Syntax	<code>full-name <i>complete-name</i>;</code>
Hierarchy Level	[edit system login user]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 14.1X53-D20 for OCX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Configure the complete name of a user.
Options	<i>complete-name</i> —Full name of the user. If the name contains spaces, enclose it in quotation marks.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Junos OS User Accounts</i>• user on page 61• <i>user</i>

idle-timeout (System-Login)

Syntax	<code>idle-timeout <i>minutes</i>;</code>
Hierarchy Level	[edit system login class <i>class-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	For a login class, configure the maximum time that a session can be idle before the user is logged out of the router or switch. The session times out after remaining at the CLI operational mode prompt for the specified time.
Default	If you omit this statement, a user is never forced off the system after extended idle times.
Options	<i>minutes</i> —Maximum idle time. Range: 0 through 4294967295 minutes



NOTE: The timeout feature is disabled if the value of *minutes* is set to 0.

Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Timeout Value for Idle Login Sessions</i> • user on page 61

interface-profile

Syntax	<pre>interface-profile <i>profile-name</i> { fields { <i>field-name</i>; } file <i>filename</i>; interval <i>minutes</i>; }</pre>
Hierarchy Level	[edit accounting-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Create a profile to filter and collect error and packet statistics and write them to a file in the <code>/var/log</code> directory. You can specify an interface profile for either a physical or a logical interface.
Options	<p><i>profile-name</i>—Name of the interface profile.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">• <i>Configuring the Interface Profile</i>

interval (Accounting Options)

Syntax	<code>interval <i>minutes</i>;</code>
Hierarchy Level	[edit accounting-options class-usage-profile <i>profile-name</i>], [edit accounting-options filter-profile <i>profile-name</i>], [edit accounting-options interface-profile <i>profile-name</i>], [edit accounting-options mib-profile <i>profile-name</i>], [edit accounting-options routing-engine-profile <i>profile-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. The [edit accounting-options mib-profile <i>profile-name</i>] hierarchy level added in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify how often statistics are collected for the accounting profile.
Options	<i>minutes</i> —Length of time between each collection of statistics. Range: 1 through 2880 minutes Default: 30 minutes
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Interface Profile</i> • <i>Configuring the Filter Profile</i> • <i>Configuring the MIB Profile</i> • <i>Configuring the Routing Engine Profile</i>

login

```
Syntax login {
    announcement text;
    class class-name {
        allow-commands "regular-expression";
        allow-configuration-regexps "regular expression 1" "regular expression 2";
        configuration-breadcrumbs;
        deny-commands "regular-expression";
        ( deny-configuration | deny-configuration-regexps ) "regular expression 1" "regular
            expression 2 ";
        idle-timeout minutes;
        login-script filename;
        login-tip;
        permissions [ permissions ];
    }
    message text;
    password {
        change-type (set-transitions | character-set);
        format (md5 | sha1 | des);
        maximum-length length;
        minimum-changes number;
        minimum-length length;
    }
    retry-options {
        backoff-threshold number;
        backoff-factor seconds;
        minimum-time seconds;
        tries-before-disconnect number;
    }
    user username {
        full-name complete-name;
        uid uid-value;
        class class-name;
        authentication authentication;
        (encrypted-password "password" | plain-text-password);
        ssh-rsa "public-key";
        ssh-dsa "public-key";
    }
}
```

Hierarchy Level [edit system]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description Configure user access to the router or switch.



NOTE: The remaining statements are explained separately.

Required Privilege Level admin—To view this statement in the configuration.
admin-control—To add this statement to the configuration.

Related Documentation

- *Defining Junos OS Login Classes*

login-alarms

Syntax login-alarms;

Hierarchy Level [edit system login class *class-name*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.1 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Show system alarms automatically when an **admin** user logs in to the router or switch.

Options *class-name*—Login class name.

Required Privilege Level admin—To view this statement in the configuration.
admin-control—To add this statement to the configuration.

Related Documentation

- *Configuring System Alarms to Appear Automatically Upon Login*

login-tip

Syntax login-tip;

Hierarchy Level [edit system login class *class-name*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description Enable CLI tips at login.

Default Disabled.

Required Privilege Level system—To view this statement in the configuration.
system-control—To add this statement to the configuration.

Related Documentation

- *Configuring Login Tips*

maximum-length

Syntax	maximum-length <i>length</i> ;
Hierarchy Level	[edit system login passwords]
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the maximum number of characters allowed in plain-text passwords. Newly created passwords must meet this requirement.
Default	For Junos-FIPS software, the maximum number of characters for plain-text passwords is 20. For Junos OS, no maximum is set.
Options	length —The maximum number of characters the password can include. Range: 1 to 64 characters
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Special Requirements for Junos OS Plain-Text Passwords</i>• <i>Example: Changing the Requirements for Junos OS Plain-Text Passwords</i>• password (Login) on page 46

message

Syntax	<code>message <i>text</i>;</code>
Hierarchy Level	[edit system login]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Configure a system login message. This message appears before a user logs in.</p> <p>You can format the message using the following special characters:</p> <ul style="list-style-type: none"> • \n—New line • \t—Horizontal tab • \'—Single quotation mark • \"—Double quotation mark • \\—Backslash
Options	<i>text</i> —Text of the message.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Junos OS to Display a System Login Message</i> • announcement on page 19

mib-profile

Syntax `mib-profile profile-name {
 file filename;
 interval minutes;
 object-names {
 mib-object-name;
 }
 operation operation-name;
 }`

Hierarchy Level [edit accounting-options]

Release Information Statement introduced in Junos OS Release 8.2.
 Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description Create a MIB profile to collect selected MIB statistics and write them to a file in the `/var/log` directory.



NOTE: Do not configure MIB objects related to interface octets or packets for a MIB profile, because it can cause the SNMP walk or a CLI show command to time out.

Options *profile-name*—Name of the MIB statistics profile.

The remaining statements are explained separately.

Required Privilege Level interface—To view this statement in the configuration.
 interface-control—To add this statement to the configuration.

Related Documentation • *Configuring the MIB Profile*

minimum-changes

Syntax	<code>minimum-changes <i>number</i>;</code>
Hierarchy Level	[edit system login passwords]
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Specify the minimum number of character sets (or character set changes) required in plain-text passwords. Newly created passwords must meet this requirement.</p> <p>This statement is used in combination with the change-type statement. If the change-type is character-sets, then the number of character sets included in the password is checked against the specified minimum. If change-type is set-transitions, then the number of character set changes in the password is checked against the specified minimum.</p>
Default	For Junos OS, the minimum number of changes is 1. For Junos-FIPS Software, the minimum number of changes is 3.
Options	<i>number</i> —The minimum number of character sets (or character set changes) required for the password.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <i>Special Requirements for Junos OS Plain-Text Passwords</i> change-type on page 22

minimum-length

Syntax	minimum-length <i>length</i> ;
Hierarchy Level	[edit system login passwords]
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Specify the minimum number of characters required in plain-text passwords. Newly created passwords must meet this requirement.</p> <p>This statement can be used in combination with all of the other requirement options for plain-text passwords, such as minimum-upper-cases, minimum-punctuations, minimum-lower-cases, and so on.</p> <p>Using several password minimum requirement options will cause the minimum-length to be reset if the total sum of the required minimums exceeds the minimum-length setting.</p>
Default	For Junos OS, the minimum number of characters for plain-text passwords is six. For Junos-FIPS software, the minimum number of characters for plain-text passwords is 10.
Options	length —The minimum number of characters the password must include. Range: 6 to 20 characters
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Special Requirements for Junos OS Plain-Text Passwords</i>• <i>Example: Changing the Requirements for Junos OS Plain-Text Passwords</i>• maximum-length on page 40

object-names

Syntax	<code>object-names { <i>mib-object-name</i>; }</code>
Hierarchy Level	[edit accounting-options mib-profile <i>profile-name</i>]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the name of each MIB object for which MIB statistics are collected for an accounting-data log file.
Options	<i>mib-object-name</i> —Name of a MIB object. You can specify more than one MIB object name.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the MIB Profile</i>

operation

Syntax	<code>operation <i>operation-name</i>;</code>
Hierarchy Level	[edit accounting-options mib-profile <i>profile-name</i>]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the name of the operation used to collect MIB statistics for an accounting-data log file.
Options	<i>operation-name</i> —Name of the operation to use. You can specify a get , get-next , or walk operation. Default: walk
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the MIB Profile</i>


password (Login)

Syntax	<pre>password { change-type (set-transitions character-set); format (md5 sha1 sha256 sha512); maximum-length length; minimum-changes number; minimum-length length; minimum-lower-cases number; minimum-numeric number; minimum-punctuations number; minimum-upper-cases number; }</pre>
Hierarchy Level	[edit system login]
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Configure special requirements such as character length and encryption format for plain-text passwords. Newly created passwords must meet these requirements.</p> <p>Using several password minimum requirement options will cause the minimum-length to be reset if the total sum of the required minimums exceeds the minimum-length setting.</p> <p>The individual statements are explained separately.</p>
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Special Requirements for Junos OS Plain-Text Passwords</i>• <i>Example: Changing the Requirements for Junos OS Plain-Text Passwords</i>

permissions

Syntax	<code>permissions [<i>permissions</i>];</code>
Hierarchy Level	[edit system login class]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure the login access privileges to be provided on the router or switch.
Options	<i>permissions</i> —Privilege type. For a list of permission flag types, see <i>Understanding Junos OS Access Privilege Levels</i> .
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Access Privilege Levels</i>• user on page 61

radius-options (edit system)

Syntax	<pre>radius-options { attributes { nas-ip-address <i>ip-address</i>; } enhanced-accounting; password-protocol <i>mschap-v2</i>; }</pre>
Hierarchy Level	[edit system]
Release Information	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>MS-CHAPv2 password protocol configuration option introduced in Junos OS Release 9.2.</p> <p>MS-CHAPv2 password protocol configuration option introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for OCX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p>
<hr/>	
<div> NOTE: The <code>radius-options</code> statement is not available on QFabric systems.</div> <hr/>	
<p>enhanced-accounting statement introduced in Junos OS Release 14.1.</p>	
Description	Configure RADIUS options for the NAS-IP address for outgoing RADIUS packets and password protocol used in RADIUS packets.
Options	<p>enhanced-accounting—View the attribute values of a logged in user.</p> <p>nas-ip-address <i>ip-address</i>—IP address of the network access server (NAS) that requests user authentication.</p> <p>password-protocol <i>mschap-v2</i>—Protocol MS-CHAPv2, used for password authentication and password changing.</p>
Required Privilege Level	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">• <i>Configuring MS-CHAPv2 for Password-Change Support</i>• <i>Configuring RADIUS Authentication (QFX Series or OCX Series)</i>• <i>Configuring RADIUS System Accounting</i>• <i>enhanced-accounting</i>

retry-options

Syntax	<pre> retry-options { backoff-factor <i>seconds</i>; backoff-threshold <i>number</i>; maximum-time <i>seconds</i>; minimum-time <i>seconds</i>; tries-before-disconnect <i>number</i>; } </pre>
Hierarchy Level	[edit system login]
Release Information	<p>Statement introduced in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>maximum-time option introduced in Junos OS Release 9.6.</p> <p>maximum-time option introduced in Junos OS Release 9.6 for EX Series switches.</p>
Description	Maximum number of times a user can attempt to enter a password while logging in through SSH or Telnet before being disconnected.
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Limiting the Number of User Login Attempts for SSH and Telnet Sessions</i> • <i>rate-limit</i>

root-authentication

Syntax	<pre> root-authentication { (encrypted-password "password" plain-text-password); load-key-file URL filename; ssh-dsa "public-key"; ssh-ecdsa "public-key"; ssh-rsa "public-key"; } </pre>
Hierarchy Level	[edit system]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	<p>Configure the authentication methods for the root-level user, whose username is root.</p> <p>You can use the load-key-file <i>URL filename</i> statement to load an SSH key file that was previously generated using ssh-keygen. The <i>URL filename</i> is the path to the file's location and name. When using this option, the contents of the key file are copied into the configuration immediately after entering the load-key-file <i>URL</i> statement. This command loads RSA (SSH version 1 and SSH version 2) and DSA (SSH version 2) public keys.</p> <p>Optionally, you can use the ssh-dsa, ssh-ecdsa, or ssh-rsa statements to directly configure SSH RSA, DSA, or ECDSA keys to authenticate root logins. You can configure more than one public key for SSH authentication of root logins as well as for user accounts. When a user logs in as root, the public keys are referenced to determine whether the private key matches any of them.</p> <p>To view the SSH keys entries, use the configuration mode show command. For example:</p> <pre> [edit system] user@host# set root-authentication load-key-file my-host:.ssh/id_dsa.pub .file.19692 0 KB 0.3 kB/s ETA: 00:00:00 100% [edit system] user@host# show root-authentication { ssh-rsa "1024 35 9727638204084251055468226757249864241630322 20740496252839038203869014158453496417001961060835872296 15634757491827360336127644187426594689320773910834481012 68312595772262546166799927831612350043866091586628382248 97467326056611921489539813965561563786211940327687806538 16960202749164163735913269396344008443 boojum@juniper.net"; # SECRET-DATA } </pre>
Options	<p>encrypted-password "password"— MD5 or other encrypted authentication. Specify the MD5 or other password. You can specify only one encrypted password.</p> <p>You cannot configure a blank password for encrypted-password using blank quotation marks (" "). You must configure a password whose number of characters range from 1 through 128 characters and enclose the password in quotation marks.</p>

plain-text-password—Plain-text password. The CLI prompts you for the password and then encrypts it. The CLI displays the encrypted version, and the software places the encrypted version in its user database. You can specify only one plain-text password.

ssh-ecdsa "*public/private-key*"—SSH ECDSA (variant of DSA that uses elliptic curve cryptography) public key. You can specify one or more public keys.

ssh-dsa "*public-key*"—SSH version 2 authentication. Specify the DSA (SSH version 2) public key. You can specify one or more public keys.

ssh-rsa "*public-key*"—SSH version 1 authentication. Specify the RSA (SSH version 1 and SSH version 2) public key. You can specify one or more public keys.

Required Privilege	admin—To view this statement in the configuration.
Level	admin-control—To add this statement to the configuration.

Related Documentation	<ul style="list-style-type: none">• <i>Understanding User Accounts</i>• <i>Configuring the Root Password</i>• <i>Recovering the Root Password</i>• authentication on page 20
------------------------------	---

root-login

Syntax	root-login (allow deny deny-password);
Hierarchy Level	[edit system services ssh]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 14.1X53-D20 for OCX Series switches. Statement introduced in Junos OS Release 11.1 for the QFX Series.
Description	Control user access through SSH.
Default	Allow user access through SSH.
Options	allow —Allow users to log in to the router or switch as root through SSH. deny —Disable users from logging in to the router or switch as root through SSH. deny-password —Allow users to log in to the router or switch as root through SSH when the authentication method (for example, RSA authentication) does not require a password.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring SSH Service for Remote Access to the Router or Switch</i>

routing-engine-profile

Syntax	<pre> routing-engine-profile <i>profile-name</i> { fields { <i>field-name</i>; } file <i>filename</i>; interval <i>minutes</i>; } </pre>
Hierarchy Level	[edit accounting-options]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Create a Routing Engine profile to collect selected Routing Engine statistics and write them to a file in the <code>/var/log</code> directory.
Options	<p><i>profile-name</i>—Name of the Routing Engine statistics profile.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Routing Engine Profile</i>

size

Syntax	<code>size bytes;</code>
Hierarchy Level	[edit accounting-options file <i>filename</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify attributes of an accounting-data log file.
Options	bytes —Maximum size of each log file, in bytes, kilobytes (KB), megabytes (MB), or gigabytes (GB). When a log file (for example, profilelog) reaches its maximum size, it is renamed profilelog.0 , then profilelog.1 , and so on, until the maximum number of log files is reached. Then the oldest log file is overwritten. If you do not specify a size, the file is closed, archived, and renamed when the time specified for the transfer interval is exceeded. Syntax: <i>x</i> to specify bytes, <i>xk</i> to specify KB, <i>xm</i> to specify MB, <i>xg</i> to specify GB Range: 256 KB through 1 GB
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring the Maximum Size of the File</i>

source-classes

Syntax	<pre>source-classes { source-class-name; }</pre>
Hierarchy Level	[edit accounting-options class-usage-profile <i>profile-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the source classes for which statistics are collected.
Options	source-class-name —Name of the source class to include in the class usage profile.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring a Class Usage Profile</i>

start-time (Log File Transfer)

Syntax	<code>start-time <i>time</i>;</code>
Hierarchy Level	[edit accounting-options file <i>filename</i>]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the start time for transfer of an accounting-data log file.
Options	<i>time</i> —Start time for file transfer. Syntax: <i>YYYY-MM-DD.hh:mm</i>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring the Start Time for File Transfer</i>

tacplus-options

Syntax	<pre>tacplus-options { (exclude-cmd-attribute no-cmd-attribute-value); enhanced-accounting; service-name <i>service-name</i>; timestamp-and-timezone; }</pre>
Hierarchy Level	[edit system]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>no-cmd-attribute-value and exclude-cmd-attribute options introduced in Junos OS Release 9.3.</p> <p>Statement introduced in Junos OS Release 11.1 for QFX Series.</p> <p>timestamp-and-timezone option introduced in Junos OS Release 12.2.</p> <p>enhanced-accounting option introduced in Junos OS Release 14.1.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for OCX Series switches.</p>
Description	Configure TACACS+ options for authentication and accounting.
Options	<p>enhanced-accounting—View the attribute values of a logged in user.</p> <p>exclude-cmd-attribute—Exclude the cmd attribute value completely from start and stop accounting records to enable logging of accounting records in the correct log file on a TACACS+ server.</p> <p>no-cmd-attribute-value—Set the cmd attribute value to an empty string in the TACACS+ accounting start and stop requests to enable logging of accounting records in the correct log file on a TACACS+ server.</p> <p>service-name <i>service-name</i>—Name of the authentication service used when you configure multiple TACACS+ servers to use the same authentication service.</p> <p>Default: junos-exec</p> <p>timestamp-and-timezone—Include this statement if you want start time, stop time, and timezone attributes included in start/stop accounting records.</p>
Required Privilege Level	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">• <i>Configuring TACACS+ Authentication</i>• <i>Configuring TACACS+ System Accounting</i>• <i>Junos OS Authentication Order for RADIUS, TACACS+, and Password Authentication</i>• <i>enhanced-accounting</i>

tacplus-server

Syntax	<pre>tacplus-server server-address { secret password; single-connection; source-address source-address; timeout seconds; }</pre>
Hierarchy Level	[edit system]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Configure the IPv4 or IPv6 TACACS+ server.
Options	<p>server-address—Address of the IPv4 or IPv6 TACACS+ authentication server.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring TACACS+ Authentication</i>

traceoptions (Address-Assignment Pool)

Syntax	<pre>traceoptions { file <i>filename</i> { files <i>number</i>; size <i>maximum-file-size</i>; match <i>regex</i>; (world-readable no-world-readable); } flag address-assignment; flag all; flag configuration; flag framework; flag ldap; flag local-authentication; flag radius; }</pre>
Hierarchy Level	[edit system processes general-authentication-service]
Release Information	Flag for tracing address-assignment pool operations introduced in Junos OS Release 9.0. option-name option introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure tracing options.
Options	<p>file <i>filename</i>—Name of the file that receives the output of the tracing operation. Enclose the name in quotation marks. All files are placed in the directory /var/log.</p> <p>files <i>number</i>—(Optional) Maximum number of trace files. When a trace file named trace-file reaches its maximum size, it is renamed trace-file.0, then trace-file.1, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the size option and a filename.</p> <p>Range: 2 through 1000</p> <p>Default: 3 files</p> <p>flag <i>flag</i>—Tracing operation to perform. To specify more than one tracing operation, include multiple flag statements. You can include the following flags:</p> <ul style="list-style-type: none">• address-assignment—All address-assignment events• all—All tracing operations• configuration—Configuration events• framework—Authentication framework events• ldap—LDAP authentication events• local-authentication—Local authentication events

- **radius**—RADIUS authentication events

match *regex*—(Optional) Refine the output to include lines that contain the regular expression.

no-world-readable—(Optional) Restrict access to the originator of the trace operation only.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option and filename.

Syntax: **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

Range: 10 KB through 1 GB

Default: 128 KB

world-readable—(Optional) Enable unrestricted file access.

Required Privilege Level admin—To view this statement in the configuration.
admin-control—To add this statement to the configuration.

Related Documentation

- *Configuring Address-Assignment Pools*

transfer-interval

Syntax transfer-interval *minutes*;

Hierarchy Level [edit accounting-options **file** *filename*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description Specify the length of time the file remains open and receives new statistics before it is closed and transferred to an archive site.

Options ***minutes***—Time the file remains open and receives new statistics before it is closed and transferred to an archive site.

Range: 5 through 2880 minutes

Default: 30 minutes

Required Privilege Level interface—To view this statement in the configuration.
interface-control—To add this statement to the configuration.

Related Documentation

- *Configuring the Transfer Interval of the File*

uid

Syntax	<code>uid <i>uid-value</i>;</code>
Hierarchy Level	[edit system login user]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Numeric identifier associated with the user account name, either assigned by an administrator or assigned automatically when you commit the user configuration. It is used by applications that request numeric identifiers, such as some RADIUS queries or secure applications such as flow-tap monitoring.
Options	<i>uid-value</i> —Number associated with the login account. This value must be unique on the router or switch. Range: 100 through 64000
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Junos OS User Accounts</i>

user (Access)

Syntax	<pre> user username { authentication { class class-name; (encrypted-password "password" plain-text-password); full-name complete-name; load-key-file URL filename; ssh-dsa "public-key" <from hostname>; ssh-rsa "public-key" <from hostname>; uid uid-value; } } </pre>
Hierarchy Level	[edit system login]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Configure access permission for individual users.
Options	The remaining statements are explained separately.
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring Junos OS User Accounts</i> • class on page 22

PART 3

Administration

- [Routine Monitoring on page 65](#)
- [Operational Commands on page 69](#)

Routine Monitoring

- [Managing Users \(J-Web Procedure\) on page 65](#)

Managing Users (J-Web Procedure)

You can use the Users Configuration page for user information to add new users to an EX Series switch. For each account, you define a login name and password for the user and specify a login class for access privileges.

To configure users:

1. Select **Configure > System Properties > User Management**.

The User Management page displays details of users, the authentication order, the RADIUS servers and TACACS servers present.

2. Click **Edit**.
3. Click any of the following options on the **Users** tab:
 - **Add**—Select this option to add a user. Enter details as described in [Table 5 on page 66](#).
 - **Edit**—Select this option to edit an existing user's details. Enter details as described in [Table 5 on page 66](#).
 - **Delete**—Select this option to delete a user.
4. Click an option on the **Authentication Methods and Order** tab:
 - **Authentication Order**—Drag and drop the authentication type from the Available Methods section to the Selected Methods. Click the up or down buttons to modify the authentication order.
 - **RADIUS server**—Click one of the following options:
 - **Add**—Select this option to add an authentication server. Enter details as described in [Table 6 on page 67](#).
 - **Edit**—Select this option to modify the authentication server details. Enter details as described in [Table 6 on page 67](#).
 - **Delete**—Select this option to delete an authentication server from the list.
 - **TACACS server**—Click one of the following options:

- **Add**—Select this option to add an authentication server. Enter details as described in [Table 6 on page 67](#).
- **Edit**—Select this option to modify the authentication server details. Enter details as described in [Table 6 on page 67](#).
- **Delete**—Select this option to delete an authentication server from the list.



NOTE: After you make changes to the configuration on this page, you must commit the changes for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See [Using the Commit Options to Commit Configuration Changes](#) for details about all commit options.

Table 5: User Management Configuration Page Summary

Field	Function	Your Action
User Information		
Username (required)	Specifies the name that identifies the user.	Type the username. It must be unique within the switching platform. Do not include spaces, colons, or commas in the username.
User Id	Specifies the user identification.	Type the user's ID.
Full Name	Specifies the user's full name.	Type the user's full name. If the full name contains spaces, enclose it in quotation marks. Do not include colons or commas.
Login Class (required)	Defines the user's access privilege.	Select the user's login class from the list: <ul style="list-style-type: none"> • operator • read-only • super-user/superuser • unauthorized This list also includes any user-defined login classes.
Password	Specifies the login password for this user.	Type the login password for this user. The login password must meet these criteria: <ul style="list-style-type: none"> • The password must be at least 6 characters long. • It can include alphabetic, numeric, and special characters, but not control characters. • It must contain at least one change of case or character class.
Confirm Password	Verifies the login password for this user.	Retype the login password for this user.

Table 6: Add an Authentication Server

Field	Function	Your Action
IP Address	Specifies the IP address of the server.	Type the server's 32-bit IP address, in dotted decimal notation.
Password	Specifies the password of the server.	Type the password of the server.
Confirm Password	Verifies that the password of the server is entered correctly.	Retype the password of the server.
Server Port	Specifies the port with which the server is associated.	Type the port number.
Source Address	Specifies the source address of the server.	Type the server's 32-bit IP address, in dotted decimal notation.
Retry Attempts	Specifies the number of login retries allowed after a login failure.	Type the number. NOTE: Only 1 retry is permitted for a TACACS server.
Time out	Specifies the time interval to wait before the connection to the server is closed.	Type the interval in seconds.

**Related
Documentation**

- [Configuring Management Access for the EX Series Switch \(J-Web Procedure\) on page 9](#)

CHAPTER 5

Operational Commands

- request message
- show subscribers

request message

Syntax	<code>request message all message "text"</code> <code>request message message "text" (terminal <i>terminal-name</i> user <i>user-name</i>)</code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display a message on the screens of all users who are logged in to the router or switch or on specific screens.
Options	all —Display a message on the terminal of all users who are currently logged in. message "text" —Message to display. terminal <i>terminal-name</i> —Name of the terminal on which to display the message. user <i>user-name</i> —Name of the user to whom to direct the message.
Required Privilege Level	maintenance
List of Sample Output	request message message on page 70
Output Fields	When you enter this command, you are provided feedback on the status of your request.

Sample Output

request message message

```
user@host> request message message "Maintenance window in 10 minutes" user maria
Message from user@host on tty0 at 20:27 ...
Maintenance window in 10 minutes
EOF
```

show subscribers

Syntax show subscribers
 <detail | extensive | terse>
 <aci-interface-set-name *aci-interface-set-name*>
 <address *address*>
 <agent-circuit-identifier *agent-circuit-identifier-substring*>
 <client-type *client-type*>
 <count>
 <id>
 <interface *interface*>
 <logical-system *logical-system*>
 <mac-address *mac-address*>
 <physical-interface *physical-interface-name*>
 <profile-name *profile-name*>
 <routing-instance *routing-instance*>
 <stacked-vlan-id *stacked-vlan-id*>
 <subscriber-state *subscriber-state*>
 <user-name *user-name*>
 <vci *vci-identifier*>
 <vpi *vpi-identifier*>
 <vlan-id *vlan-id*>

Release Information Command introduced in Junos OS Release 9.3.
 Command introduced in Junos OS Release 9.3 for EX Series switches.
client-type, **mac-address**, **subscriber-state**, and **extensive** options introduced in Junos OS Release 10.2.
count option usage with other options introduced in Junos OS Release 10.2.
 Command introduced in Junos OS Release 11.1 for the QFX Series.
 Options **aci-interface-set-name** and **agent-circuit-identifier** introduced in Junos OS Release 12.2.
 The **physical-interface** and **user-name** options introduced in Junos OS Release 12.3.
 Options **vci** and **vpi** introduced in Junos OS Release 12.3R3 and supported in later 12.3Rx releases.
 Options **vci** and **vpi** supported in Junos OS Release 13.2 and later releases. (Not supported in Junos OS Release 13.1.)
 Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Display information for active subscribers.

Options **detail | extensive | terse**—(Optional) Display the specified level of output.

aci-interface-set-name—(Optional) Display all dynamic subscriber sessions that use the specified agent circuit identifier (ACI) interface set. Use the ACI interface set name generated by the router, such as aci-1003-ge-1/0/0.4001, and not the actual ACI value found in the DHCP or PPPoE control packets.

address—(Optional) Display subscribers whose IP address matches the specified address. You must specify the IPv4 or IPv6 address prefix without a netmask (for example, 192.168.17.1). If you specify the IP address as a prefix with a netmask (for example,

192.168.17.1/32), the router displays a message that the IP address is invalid, and rejects the command.

agent-circuit-identifier-substring—(Optional) Display all dynamic subscriber sessions whose ACI value matches the specified substring.

client-type—(Optional) Display subscribers whose client type matches the specified client type (DHCP, L2TP, PPP, PPPOE, VLAN, or static).

count—(Optional) Display the count of total subscribers and active subscribers for any specified option. You can use the **count** option alone or with the **address**, **client-type**, **interface**, **logical-system**, **mac-address**, **profile-name**, **routing-instance**, **stacked-vlan-id**, **subscriber-state**, or **vlan-id** options.

id—(Optional) Display a specific subscriber session whose session id matches the specified subscriber ID. You can display subscriber IDs by using the **show subscribers extensive** or the **show subscribers interface extensive** commands.

interface—(Optional) Display subscribers whose interface matches the specified interface.

logical-system—(Optional) Display subscribers whose logical system matches the specified logical system.

mac-address—(Optional) Display subscribers whose MAC address matches the specified MAC address.

physical-interface-name—(M120, M320, and MX Series routers only) (Optional) Display subscribers whose physical interface matches the specified physical interface.

profile-name—(Optional) Display subscribers whose dynamic profile matches the specified profile name.

routing-instance—(Optional) Display subscribers whose routing instance matches the specified routing instance.

stacked-vlan-id—(Optional) Display subscribers whose stacked VLAN ID matches the specified stacked VLAN ID.

subscriber-state—(Optional) Display subscribers whose subscriber state matches the specified subscriber state (ACTIVE, CONFIGURED, INIT, TERMINATED, or TERMINATING).

user-name—(M120, M320, and MX Series routers only) (Optional) Display subscribers whose username matches the specified subscriber name.

vci-identifier—(MX Series routers with MPCs and ATM MICs with SFP only) (Optional) Display active ATM subscribers whose ATM virtual circuit identifier (VCI) matches the specified VCI identifier. The range of values is **0** through **255**.

vpi-identifier—(MX Series routers with MPCs and ATM MICs with SFP only) (Optional) Display active ATM subscribers whose ATM virtual path identifier (VPI) matches the specified VPI identifier. The range of values is **0** through **65535**.

vlan-id—(Optional) Display subscribers whose VLAN ID matches the specified VLAN ID, regardless of whether the subscriber uses a single-tagged or double-tagged VLAN. For subscribers using a double-tagged VLAN, this option displays subscribers where the inner VLAN tag matches the specified VLAN ID. To display only subscribers where the specified value matches only double-tagged VLANs, use the **stacked-vlan-id** **stacked-vlan-id** option to match the outer VLAN tag.



NOTE: Due to display limitations, logical system and routing instance output values are truncated when necessary.

Required Privilege Level view

Related Documentation

- [show subscribers summary](#)
- [Verifying and Managing Agent Circuit Identifier-Based Dynamic VLAN Configuration](#)

List of Sample Output

- [show subscribers \(IPv4\) on page 77](#)
- [show subscribers \(IPv6\) on page 77](#)
- [show subscribers \(IPv4 and IPv6 Dual Stack\) on page 77](#)
- [show subscribers \(LNS on MX Series Routers\) on page 78](#)
- [show subscribers \(L2TP Switched Tunnels\) on page 78](#)
- [show subscribers client-type dhcp detail on page 78](#)
- [show subscribers count on page 78](#)
- [show subscribers address detail \(IPv6\) on page 79](#)
- [show subscribers detail \(IPv4\) on page 79](#)
- [show subscribers detail \(IPv6\) on page 79](#)
- [show subscribers detail \(IPv6 Static Demux Interface\) on page 80](#)
- [show subscribers detail \(L2TP LNS Subscribers on MX Series Routers\) on page 80](#)
- [show subscribers detail \(L2TP Switched Tunnels\) on page 80](#)
- [show subscribers detail \(Tunneled Subscriber\) on page 81](#)
- [show subscribers detail \(IPv4 and IPv6 Dual Stack\) on page 81](#)
- [show subscribers detail \(ACI Interface Set Session\) on page 82](#)
- [show subscribers detail \(PPPoE Subscriber Session with ACI Interface Set\) on page 82](#)
- [show subscribers extensive on page 82](#)
- [show subscribers extensive \(RPF Check Fail Filter\) on page 83](#)
- [show subscribers extensive \(L2TP LNS Subscribers on MX Series Routers\) on page 83](#)
- [show subscribers extensive \(IPv4 and IPv6 Dual Stack\) on page 83](#)
- [show subscribers extensive \(Effective Shaping-Rate\) on page 84](#)
- [show subscribers aci-interface-set-name detail \(Subscriber Sessions Using Specified ACI Interface Set\) on page 85](#)
- [show subscribers agent-circuit-identifier detail \(Subscriber Sessions Using Specified ACI Substring\) on page 85](#)
- [show subscribers interface extensive on page 86](#)
- [show subscribers logical-system terse on page 86](#)
- [show subscribers physical-interface count on page 87](#)
- [show subscribers routing-instance inst1 count on page 87](#)

[show subscribers stacked-vlan-id detail on page 87](#)
[show subscribers stacked-vlan-id vlan-id detail \(Combined Output\) on page 87](#)
[show subscribers stacked-vlan-id vlan-id interface detail \(Combined Output for a Specific Interface\) on page 87](#)
[show subscribers user-name detail on page 87](#)
[show subscribers vlan-id on page 88](#)
[show subscribers vlan-id detail on page 88](#)
[show subscribers vpi vci extensive \(PPPoE-over-ATM Subscriber Session\) on page 88](#)

Output Fields Table 7 on page 74 lists the output fields for the **show subscribers** command. Output fields are listed in the approximate order in which they appear.

Table 7: show subscribers Output Fields

Field Name	Field Description
Interface	Interface associated with the subscriber. The router or switch displays subscribers whose interface matches or begins with the specified interface. The * character indicates a continuation of addresses for the same session.
IP Address/VLAN ID	Subscriber IP address or VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> No IP address or VLAN ID is assigned to an L2TP tunnel-switched session. For these subscriber sessions the value is Tunnel-switched .
User Name	Name of subscriber.
LS:RI	Logical system and routing instance associated with the subscriber.
Type	Subscriber client type (DHCP, L2TP, PPP, PPPoE, STATIC-INTERFACE, VLAN).
IP Address	Subscriber IPv4 address.
IP Netmask	Subscriber IP netmask.
Primary DNS Address	IP address of primary DNS server.
Secondary DNS Address	IP address of secondary DNS server.
Primary WINS Address	IP address of primary WINS server.
Secondary WINS Address	IP address of secondary WINS server.
IPv6 Address	Subscriber IPv6 address, or multiple addresses.
IPv6 Prefix	Subscriber IPv6 prefix. If you are using DHCPv6 prefix delegation, this is the delegated prefix.
IPv6 User Prefix	IPv6 prefix obtained through ND/RA.
IPv6 Address Pool	Subscriber IPv6 address pool. The IPv6 address pool is used to allocate IPv6 prefixes to the DHCPv6 clients.

Table 7: show subscribers Output Fields (*continued*)

Field Name	Field Description
IPv6 Network Prefix Length	Length of the network portion of the IPv6 address.
IPv6 Prefix Length	Length of the subscriber IPv6 prefix.
Logical System	Logical system associated with the subscriber.
Routing Instance	Routing instance associated with the subscriber.
Interface Type	Whether the subscriber interface is Static or Dynamic .
Interface Set	Internally generated name of the dynamic ACI interface set used by the subscriber session.
Interface Set Type	Interface type of the ACI interface set: Dynamic . This is the only ACI interface set type currently supported.
Interface Set Session ID	Identifier of the dynamic ACI interface set entry in the session database.
Underlying Interface	Name of the underlying interface for the subscriber session.
Dynamic Profile Name	Dynamic profile used for the subscriber.
Dynamic Profile Version	Version number of the dynamic profile used for the subscriber.
MAC Address	MAC address associated with the subscriber.
State	Current state of the subscriber session (Init , Configured , Active , Terminating , Tunneled).
L2TP State	Current state of the L2TP session, Tunneled or Tunnel-switched . When the value is Tunnel-switched , two entries are displayed for the subscriber; the first entry is at the LNS interface on the LTS and the second entry is at the LAC interface on the LTS.
Tunnel switch Profile Name	Name of the L2TP tunnel switch profile that initiates tunnel switching.
Local IP Address	IP address of the local gateway (LAC).
Remote IP Address	IP address of the remote peer (LNS).
VLAN Id	VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> .
Stacked VLAN Id	Stacked VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> .
RADIUS Accounting ID	RADIUS accounting ID associated with the subscriber.
Agent Circuit ID	Option 82 agent circuit ID associated with the subscriber. The ID is displayed as an ASCII string unless the value has nonprintable characters, in which case it is displayed in hexadecimal format.

Table 7: show subscribers Output Fields (*continued*)

Field Name	Field Description
Agent Remote ID	Option 82 agent remote ID associated with the subscriber. The ID is displayed as an ASCII string unless the value has nonprintable characters, in which case it is displayed in hexadecimal format.
DHCP Relay IP Address	IP address used by the DHCP relay agent.
ATM VPI	(MX Series routers with MPCs and ATM MICs with SFP only) ATM virtual path identifier (VPI) on the subscriber's physical interface.
ATM VCI	(MX Series routers with MPCs and ATM MICs with SFP only) ATM virtual circuit identifier (VCI) for each VPI configured on the subscriber interface.
Login Time	Date and time at which the subscriber logged in.
Effective shaping-rate	Actual downstream traffic shaping rate for the subscriber, in kilobits per second.
IPv4 rpf-check Fail Filter Name	Name of the filter applied by the dynamic profile to IPv4 packets that fail the RPF check.
IPv6 rpf-check Fail Filter Name	Name of the filter applied by the dynamic profile to IPv6 packets that fail the RPF check.
DHCP Options	len = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCP options, as defined in RFC 2132.
Session ID	ID number for a subscriber service session.
Underlying Session ID	For DHCPv6 subscribers on a PPPoE network, displays the session ID of the underlying PPPoE interface.
Service Sessions	Number of service sessions (that is, a service activated using RADIUS CoA) associated with the subscribers.
Service Session Name	Service session profile name.
Session Timeout (seconds)	Number of seconds of access provided to the subscriber before the session is automatically terminated.
Idle Timeout (seconds)	Number of seconds subscriber can be idle before the session is automatically terminated.
IPv6 Delegated Address Pool	Name of the pool used for DHCPv6 prefix delegation.
IPv6 Delegated Network Prefix Length	Length of the prefix configured for the IPv6 delegated address pool.
IPv6 Interface Address	Address assigned by the Framed-lpv6-Prefix AAA attribute.
IPv6 Framed Interface Id	Interface ID assigned by the Framed-Interface-Id AAA attribute.

Table 7: show subscribers Output Fields (*continued*)

Field Name	Field Description
ADF IPv4 Input Filter Name	Name assigned to the Ascend-Data-Filter (ADF) interface IPv4 input filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
ADF IPv4 Output Filter Name	Name assigned to the Ascend-Data-Filter (ADF) interface IPv4 output filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
ADF IPv6 Input Filter Name	Name assigned to the Ascend-Data-Filter (ADF) interface IPv6 input filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
ADF IPv6 Output Filter Name	Name assigned to the Ascend-Data-Filter (ADF) interface IPv6 output filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
IPv4 Input Filter Name	Name assigned to the IPv4 input filter (client or service session).
IPv4 Output Filter Name	Name assigned to the IPv4 output filter (client or service session).
IPv6 Input Filter Name	Name assigned to the IPv6 input filter (client or service session).
IPv6 Output Filter Name	Name assigned to the IPv6 output filter (client or service session).
IFL Input Filter Name	Name assigned to the logical interface input filter (client or service session).
IFL Output Filter Name	Name assigned to the logical interface output filter (client or service session).

Sample Output

show subscribers (IPv4)

```

user@host> show subscribers
Interface      IP Address/VLAN ID  User Name      LS:RI
ge-1/3/0.1073741824  100                WHOLESALE-CLIENT default:default
demux0.1073741824    10.0.0.10          RETAILER1-CLIENT test1:retailer1
demux0.1073741825    11.0.0.3            RETAILER2-CLIENT test1:retailer2
demux0.1073741826    12.0.0.3

```

show subscribers (IPv6)

```

user@host> show subscribers
Interface      IP Address/VLAN ID  User Name      LS:RI
ge-1/0/0.0      2001:db8::c0:0:0:0/74 WHOLESALE-CLIENT default:default
*               2001:db8::1/128     subscriber-25   default:default

```

show subscribers (IPv4 and IPv6 Dual Stack)

```

user@host> show subscribers
Interface      IP Address/VLAN ID  User Name
LS:RI
demux0.1073741834  0x8100.1002 0x8100.1

```

```
default:default
demux0.1073741835 0x8100.1001 0x8100.1
default:default
pp0.1073741836 61.1.1.1 dualstackuser1@EXAMPLE1.com
default:ASP-1
* 2041:1:1::/48
* 2061:1:1:1::/64
pp0.1073741837 23.1.1.3 dualstackuser2@EXAMPLE1.com
default:ASP-1
* 2001:db8:1:2:5::/64
```

show subscribers (LNS on MX Series Routers)

```
user@host> show subscribers
Interface      IP Address/VLAN ID  User Name      LS:RI
si-4/0/0.1     192.168.4.1        xyz@example.com default:default
```

show subscribers (L2TP Switched Tunnels)

```
user@host> show subscribers
Interface      IP Address/VLAN ID  User Name      LS:RI
si-2/1/0.1073741842 Tunnel-switched    ap@example.com  default:default
si-2/1/0.1073741843 Tunnel-switched    ap@example.com  default:default
```

show subscribers client-type dhcp detail

```
user@host> show subscribers client-type dhcp detail
Type: DHCP
IP Address: 10.20.9.7
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073744127
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:10:95:00:00:98
State: Active
Radius Accounting ID: jnpr :2304
Login Time: 2009-08-25 14:43:52 PDT

Type: DHCP
IP Address: 10.20.10.7
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073744383
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:10:94:00:01:f3
State: Active
Radius Accounting ID: jnpr :2560
Login Time: 2009-08-25 14:43:56 PDT
```

show subscribers count

```
user@host> show subscribers count
Total Subscribers: 188, Active Subscribers: 188
```

show subscribers address detail (IPv6)

```

user@host> show subscribers address 10.16.12.137 detail
Type: PPPoE
User Name: pppoeTerV6User1Svc
IP Address: 10.16.12.137
IP Netmask: 255.0.0.0
IPv6 User Prefix: 1016:0:0:c88::/64
Logical System: default
Routing Instance: default
Interface: pp0.1073745151
Interface type: Dynamic
Underlying Interface: demux0.8201
Dynamic Profile Name: pppoe-client-profile
MAC Address: 00:0d:02:01:00:01
Session Timeout (seconds): 31622400
Idle Timeout (seconds): 86400
State: Active
Radius Accounting ID: jnpr demux0.8201:6544
Session ID: 6544
Agent Circuit ID: if13720
Agent Remote ID: if13720
Login Time: 2012-05-21 13:37:27 PDT
Service Sessions: 1

```

show subscribers detail (IPv4)

```

user@host> show subscribers detail
Type: DHCP
IP Address: 10.20.9.7
IP Netmask: 255.255.0.0
Primary DNS Address: 192.168.17.1
Secondary DNS Address: 192.168.17.2
Primary WINS Address: 192.168.22.1
Secondary WINS Address: 192.168.22.2
Logical System: default
Routing Instance: default
Interface: demux0.1073744127
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:10:95:00:00:98
State: Active
Radius Accounting ID: jnpr :2304
Idle Timeout (seconds): 600
Login Time: 2009-08-25 14:43:52 PDT
DHCP Options: len 52
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 08 33 04 00 00
00 3c 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 36 2f
33 2d 37 2d 30 37 05 01 06 0f 21 2c
Service Sessions: 2

```

show subscribers detail (IPv6)

```

user@host> show subscribers detail
Type: DHCP
User Name: pd-user1
IPv6 Prefix: 2001:db8:db2:ffff:1::/64
Logical System: default
Routing Instance: default
Interface: ge-3/1/3.2
Interface type: Static

```

```
MAC Address: 00:51:ff:ff:00:03
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-08-25 12:12:26 PDT
DHCP Options: len 42
00 08 00 02 00 00 00 01 00 0a 00 03 00 01 00 51 ff ff 00 03
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00
00 00
```

show subscribers detail (IPv6 Static Demux Interface)

```
user@host> show subscribers detail
Type: STATIC-INTERFACE
User Name: demux0.1@example.net
IPv6 Prefix: 1:2:3:4:5:6:7:aa/128
Logical System: default
Routing Instance: default
Interface: demux0.1
Interface type: Static
Dynamic Profile Name: junos-default-profile
State: Active
Radius Accounting ID: 185
Login Time: 2010-05-18 14:33:56 EDT
```

show subscribers detail (L2TP LNS Subscribers on MX Series Routers)

```
user@host> show subscribers detail
Type: L2TP
User Name: user1@example.net
IP Address: 10.1.32.58
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: si-5/2/0.1073749824
Interface type: Dynamic
Dynamic Profile Name: dyn-lns-profile2
Dynamic Profile Version: 1
State: Active
Radius Accounting ID: 8001
Session ID: 8001
Login Time: 2011-04-25 20:27:50 IST
```

show subscribers detail (L2TP Switched Tunnels)

```
user@host> show subscribers detail
Type: L2TP
User Name: ap@example.com
Logical System: default
Routing Instance: default
Interface: si-2/1/0.1073741842
Interface type: Dynamic
Dynamic Profile Name: dyn-lts-profile
State: Active
L2TP State: Tunnel-switched
Tunnel switch Profile Name: ce-lts-profile
Local IP Address: 10.50.1.1
Remote IP Address: 192.168.20.3
Radius Accounting ID: 21
Session ID: 21
Login Time: 2013-01-18 03:01:11 PST
```



```
Type: L2TP
User Name: ap@example.com
Logical System: default
Routing Instance: default
Interface: si-2/1/0.1073741843
Interface type: Dynamic
Dynamic Profile Name: dyn-lts-profile
State: Active
L2TP State: Tunnel-switched
Tunnel switch Profile Name: ce-lts-profile
Local IP Address: 10.30.1.1
Remote IP Address: 172.20.1.10
Session ID: 22
Login Time: 2013-01-18 03:01:14 PST
```

show subscribers detail (Tunneled Subscriber)

```
user@host> show subscribers detail
Type: PPPoE
User Name: user1@example.com
Logical System: default
Routing Instance: default
Interface: pp0.1
State: Active, Tunneled
Radius Accounting ID: 512
```

show subscribers detail (IPv4 and IPv6 Dual Stack)

```
user@host> show subscribers detail
Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlanProfile
State: Active
Session ID: 1
Stacked VLAN Id: 0x8100.1001
VLAN Id: 0x8100.1
Login Time: 2011-11-30 00:18:04 PST

Type: PPPoE
User Name: dualstackuser1@EXAMPLE1.com
IP Address: 61.1.1.1
IPv6 Prefix: 2041:1:1::/48
IPv6 User Prefix: 2061:1:1:1::/64
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Dynamic
Dynamic Profile Name: dualStack-Profile1
MAC Address: 00:00:64:03:01:02
State: Active
Radius Accounting ID: 2
Session ID: 2
Login Time: 2011-11-30 00:18:05 PST

Type: DHCP
IPv6 Prefix: 2041:1:1::/48
Logical System: default
Routing Instance: ASP-1
```

```
Interface: pp0.1073741825
Interface type: Static
MAC Address: 00:00:64:03:01:02
State: Active
Radius Accounting ID: jnpr :3
Session ID: 3
Underlying Session ID: 2
Login Time: 2011-11-30 00:18:35 PST
DHCP Options: len 42
00 08 00 02 0b b8 00 01 00 0a 00 03 00 01 00 00 64 03 01 02
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00 00
00 00
```

show subscribers detail (ACI Interface Set Session)

```
user@host> show subscribers detail
Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0
Interface Set: aci-1001-ge-1/0/0.2800
Interface Set Session ID: 0
Underlying Interface: ge-1/0/0.2800
Dynamic Profile Name: aci-vlan-set-profile-2
Dynamic Profile Version: 1
State: Active
Session ID: 1
Agent Circuit ID: aci-ppp-dhcp-20
Login Time: 2012-05-26 01:54:08 PDT
```

show subscribers detail (PPPoE Subscriber Session with ACI Interface Set)

```
user@host> show subscribers detail
Type: PPPoE
User Name: ppphint2
IP Address: 10.10.1.5
Logical System: default
Routing Instance: default
Interface: pp0.1073741825
Interface type: Dynamic
Interface Set: aci-1001-demux0.1073741824
Interface Set Type: Dynamic
Interface Set Session ID: 2
Underlying Interface: demux0.1073741824
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:64:39:01:02
State: Active
Radius Accounting ID: 3
Session ID: 3
Agent Circuit ID: aci-ppp-dhcp-dvlan-50
Login Time: 2012-03-07 13:46:53 PST
```

show subscribers extensive

```
user@host> show subscribers extensive
Type: DHCP
User Name: pd-user1
IPv6 Prefix: 2001:db8:db2:ffff:1::/64
Logical System: default
Routing Instance: default
```

```

Interface: ge-3/1/3.2
Interface type: Static
MAC Address: 00:51:ff:ff:00:03
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-08-25 12:12:26 PDT
DHCP Options: len 42
00 08 00 02 00 00 00 01 00 0a 00 03 00 01 00 51 ff ff 00 03
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00
00 00
IPv6 Address Pool: pd_pool
IPv6 Network Prefix Length: 48

```

show subscribers extensive (RPF Check Fail Filter)

```

user@host> show subscribers extensive
...
Type: VLAN
Logical System: default
Routing Instance: default
Interface: ae0.1073741824
Interface type: Dynamic
Dynamic Profile Name: vlan-prof
State: Active
Session ID: 9
VLAN Id: 100
Login Time: 2011-08-26 08:17:00 PDT
IPv4 rpf-check Fail Filter Name: rpf-allow-dhcp
IPv6 rpf-check Fail Filter Name: rpf-allow-dhcpv6
...

```

show subscribers extensive (L2TP LNS Subscribers on MX Series Routers)

```

user@host> show subscribers extensive
Type: L2TP
User Name: user1@example.net
IP Address: 10.1.32.58
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: si-5/2/0.1073749824
Interface type: Dynamic
Dynamic Profile Name: dyn-lns-profile2
Dynamic Profile Version: 1
State: Active
Radius Accounting ID: 8001
Session ID: 8001
Login Time: 2011-04-25 20:27:50 IST
IPv4 Input Filter Name: classify-si-5/2/0.1073749824-in
IPv4 Output Filter Name: classify-si-5/2/0.1073749824-out

```

show subscribers extensive (IPv4 and IPv6 Dual Stack)

```

user@host> show subscribers extensive
Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlanProfile
State: Active

```

```
Session ID: 1
Stacked VLAN Id: 0x8100.1001
VLAN Id: 0x8100.1
Login Time: 2011-11-30 00:18:04 PST

Type: PPPoE
User Name: dualstackuser1@EXAMPLE1.com
IP Address: 61.1.1.1
IPv6 Prefix: 2041:1:1::/48
IPv6 User Prefix: 2061:1:1:1::/64
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Dynamic
Dynamic Profile Name: dualStack-Profile1
MAC Address: 00:00:64:03:01:02
State: Active
Radius Accounting ID: 2
Session ID: 2
Login Time: 2011-11-30 00:18:05 PST
IPv6 Delegated Network Prefix Length: 48
IPv6 Interface Address: 2061:1:1:1::1/64
IPv6 Framed Interface Id: 1:1:2:2
IPv4 Input Filter Name: FILTER-IN-pp0.1073741825-in
IPv4 Output Filter Name: FILTER-OUT-pp0.1073741825-out
IPv6 Input Filter Name: FILTER-IN6-pp0.1073741825-in
IPv6 Output Filter Name: FILTER-OUT6-pp0.1073741825-out

Type: DHCP
IPv6 Prefix: 2041:1:1::/48
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Static
MAC Address: 00:00:64:03:01:02
State: Active
Radius Accounting ID: jnpr :3
Session ID: 3
Underlying Session ID: 2
Login Time: 2011-11-30 00:18:35 PST
DHCP Options: len 42
00 08 00 02 0b b8 00 01 00 0a 00 03 00 01 00 00 64 03 01 02
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00 00
00 00
IPv6 Delegated Network Prefix Length: 48
```

show subscribers extensive (Effective Shaping-Rate)

```
user@host> show subscribers extensive
Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741837
Interface type: Dynamic
Interface Set: ifset-1
Underlying Interface: ae1
Dynamic Profile Name: svlan-dhcp-test
State: Active
Session ID: 1
Stacked VLAN Id: 0x8100.201
```

```
VLAN Id: 0x8100.201
Login Time: 2011-11-30 00:18:04 PST
Effective shaping-rate: 31000000k
...
```

show subscribers aci-interface-set-name detail (Subscriber Sessions Using Specified ACI Interface Set)

```
user@host> show subscribers aci-interface-set-name aci-1003-ge-1/0/0.4001 detail
Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-set-profile
Dynamic Profile Version: 1
State: Active
Session ID: 13
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:56 PDT

Type: PPPoE
User Name: ppphint2
IP Address: 10.10.1.7
Logical System: default
Routing Instance: default
Interface: pp0.1073741834
Interface type: Dynamic
Interface Set: aci-1003-ge-1/0/0.4001
Interface Set Type: Dynamic
Interface Set Session ID: 13
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:65:26:01:02
State: Active
Radius Accounting ID: 14
Session ID: 14
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:57 PDT
```

show subscribers agent-circuit-identifier detail (Subscriber Sessions Using Specified ACI Substring)

```
user@host> show subscribers agent-circuit-identifier aci-ppp-vlan detail
Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-set-profile
Dynamic Profile Version: 1
State: Active
Session ID: 13
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:56 PDT

Type: PPPoE
User Name: ppphint2
IP Address: 10.10.1.7
Logical System: default
Routing Instance: default
Interface: pp0.1073741834
```

```
Interface type: Dynamic
Interface Set: aci-1003-ge-1/0/0.4001
Interface Set Type: Dynamic
Interface Set Session ID: 13
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:65:26:01:02
State: Active
Radius Accounting ID: 14
Session ID: 14
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:57 PDT
```

show subscribers interface extensive

```
user@host> show subscribers interface demux0.1073741826 extensive
Type: VLAN
User Name: test1@test.com
Logical System: default
Routing Instance: testnet
Interface: demux0.1073741826
Interface type: Dynamic
Dynamic Profile Name: profile-vdemux-relay-23qos
MAC Address: 00:00:6e:56:01:04
State: Active
Radius Accounting ID: 12
Session ID: 12
Stacked VLAN Id: 0x8100.1500
VLAN Id: 0x8100.2902
Login Time: 2011-10-20 16:21:59 EST

Type: DHCP
User Name: test1@test.com
IP Address: 172.16.200.6
IP Netmask: 255.255.255.0
Logical System: default
Routing Instance: testnet
Interface: demux0.1073741826
Interface type: Static
MAC Address: 00:00:6e:56:01:04
State: Active
Radius Accounting ID: 21
Session ID: 21
Login Time: 2011-10-20 16:24:33 EST
Service Sessions: 2

Service Session ID: 25
Service Session Name: SUB-QOS
State: Active

Service Session ID: 26
Service Session Name: service-cb-content
State: Active
IPv4 Input Filter Name: content-cb-in-demux0.1073741826-in
IPv4 Output Filter Name: content-cb-out-demux0.1073741826-out
```

show subscribers logical-system terse

```
user@host> show subscribers logical-system test1 terse
```

Interface	IP Address/VLAN ID	User Name	LS:RI
demux0.1073741825	11.0.0.3	RETAILER1-CLIENT	test1:retailer1
demux0.1073741826	12.0.0.3	RETAILER2-CLIENT	test1:retailer2

show subscribers physical-interface count

```
user@host> show subscribers physical-interface ge-1/0/0 count
Total subscribers: 3998, Active Subscribers: 3998
```

show subscribers routing-instance inst1 count

```
user@host> show subscribers routing-instance inst1 count
Total Subscribers: 188, Active Subscribers: 183
```

show subscribers stacked-vlan-id detail

```
user@host> show subscribers stacked-vlan-id 101 detail
Type: VLAN
Interface: ge-1/2/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT
```

show subscribers stacked-vlan-id vlan-id detail (Combined Output)

```
user@host> show subscribers stacked-vlan-id 101 vlan-id 100 detail
Type: VLAN
Interface: ge-1/2/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT
```

show subscribers stacked-vlan-id vlan-id interface detail (Combined Output for a Specific Interface)

```
user@host> show subscribers stacked-vlan-id 101 vlan-id 100 interface ge-1/2/0.* detail
Type: VLAN
Interface: ge-1/2/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT
```

show subscribers user-name detail

```
user@host> show subscribers user-name larry1 detail
Type: DHCP
User Name: larry1
IP Address: 100.0.0.37
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.1
Interface type: Static
Dynamic Profile Name: foo
```

```
MAC Address: 00:10:94:00:00:01
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-11-07 08:25:59 PST
DHCP Options: len 52
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 01 33 04 00 00
00 3c 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 32 2f
37 2d 30 2d 30 37 05 01 06 0f 21 2c
```

show subscribers vlan-id

```
user@host> show subscribers vlan-id 100
Interface          IP Address          User Name
ge-1/0/0.1073741824
ge-1/2/0.1073741825
```

show subscribers vlan-id detail

```
user@host> show subscribers vlan-id 100 detail
Type: VLAN
Interface: ge-1/0/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: vlan-prof-tpid
State: Active
VLAN Id: 100
Login Time: 2009-03-11 06:48:54 PDT

Type: VLAN
Interface: ge-1/2/0.1073741825
Interface type: Dynamic
Dynamic Profile Name: vlan-prof-tpid
State: Active
VLAN Id: 100
Login Time: 2009-03-11 06:48:54 PDT
```

show subscribers vpi vci extensive (PPPoE-over-ATM Subscriber Session)

```
user@host> show subscribers vpi 40 vci 50 extensive
Type: PPPoE
User Name: testuser
IP Address: 100.0.0.2
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: pp0.0
Interface type: Static
MAC Address: 00:00:65:23:01:02
State: Active
Radius Accounting ID: 2
Session ID: 2
ATM VPI: 40
ATM VCI: 50
Login Time: 2012-12-03 07:49:26 PST
IP Address Pool: pool_1
IPv6 Framed Interface Id: 200:65ff:fe23:102
```


PART 4

Troubleshooting

- [Troubleshooting Procedures on page 91](#)

Troubleshooting Procedures

- Troubleshooting Loss of the Root Password on page 91

Troubleshooting Loss of the Root Password

Problem **Description:** If you forget the root password for a switch, use the password recovery procedure to reset the root password.



NOTE: You need physical access to the switch to recover the root password.




TIP: For a video on recovering the root password for routers, see *Recovering the Root Password*. The procedure is similar for switches.

Solution To recover the root password:

1. Power off your switch by unplugging the power cord or turning off the power at the wall switch.
2. Insert one end of the Ethernet cable into the serial port on the management device and connect the other end to the console port on the back of the switch. See [Figure 1 on page 92](#).

Figure 1: Connecting to the Console Port on the EX Series Switch

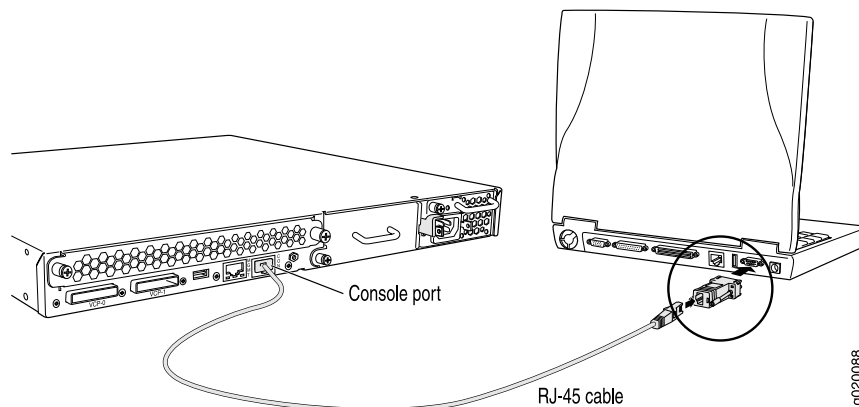

3. On the management device, start your asynchronous terminal emulation application (such as Microsoft Windows Hyperterminal) and select the appropriate COM port to use (for example, COM1).
4. Configure the port settings as follows:
 - Bits per second: 9600
 - Data bits: 8
 - Parity: None
 - Stop bits: 1
 - Flow control: None
5. Power on your switch by plugging in the power cord or turning on the power at the wall switch.
6. When the following prompt appears, press the Spacebar to access the switch's bootstrap loader command prompt:


```
Hit [Enter] to boot immediately, or space bar for command prompt.
Booting [kernel] in 1 second...
```



NOTE: If the switch is in unattended mode for U-Boot, access to the bootstrap loader command prompt is blocked. If the root password is lost, you must reset the switch to the factory default configuration using the LCD panel. For more information, see *Reverting to the Default Factory Configuration for the EX Series Switch*.

7. At the following prompt, type **boot -s** to start up the system in single-user mode:


```
loader> boot -s
```
8. At the following prompt, type **recovery** to start the root password recovery procedure:


```
Enter full path name of shell or 'recovery' for root password recovery or RETURN for /bin/sh: recovery
```

A series of messages describe consistency checks, mounting of filesystems, and initialization and checkout of management services. Then the CLI prompt appears.

9. Enter configuration mode in the CLI:

```
user@switch> configure
```

10. Set the root password. For example:

```
user@switch# set system root-authentication plain-text-password
```

11. At the following prompt, enter the new root password. For example, juniper1:

```
user@switch# juniper1
```

```
Retype new password:
```

12. At the second prompt, reenter the new root password.

13. If you are finished configuring the network, commit the configuration.

```
root@switch# commit
```

```
commit complete
```

14. Exit configuration mode in the CLI.

```
root@switch# exit
```

15. Exit operational mode in the CLI.

```
root@switch> exit
```

16. At the prompt, enter **y** to reboot the switch.

```
Reboot the system? [y/n] y
```

Related Documentation

- *Connecting and Configuring an EX Series Switch (CLI Procedure)*
- *Connecting and Configuring an EX Series Switch (J-Web Procedure)*
- For information about configuring an encrypted root password, configuring SSH keys to authenticate root logins, and configuring special requirements for plain-text passwords, see *Configuring the Root Password*.

