



Junos[®] OS

IPv6 Neighbor Discovery Feature Guide for Routing Devices

Release

14.1



Published: 2014-05-13

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Junos[®] OS IPv6 Neighbor Discovery Feature Guide for Routing Devices

14.1

Copyright © 2014, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	ix
	Documentation and Release Notes	ix
	Supported Platforms	ix
	Using the Examples in This Manual	x
	Merging a Full Example	x
	Merging a Snippet	xi
	Documentation Conventions	xi
	Documentation Feedback	xiii
	Requesting Technical Support	xiv
	Self-Help Online Tools and Resources	xiv
	Opening a Case with JTAC	xiv
Part 1	Overview	
Chapter 1	Introduction to Neighbor Discovery	3
	IPv6 Neighbor Discovery Overview	4
	Router Discovery	6
	Address Resolution	6
	Redirect	6
Chapter 2	IPv6 Neighbor Discovery Standards	9
	Supported ICMP Router Discovery and IPv6 Neighbor Discovery Standards	9
Part 2	Configuration	
Chapter 3	Concept and Example	13
	Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery	13
	Understanding IPv6 Neighbor Discovery	13
	SLAAC	13
	Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery	14
Chapter 4	Configuration Statements	23
	[edit protocols router-advertisement] Hierarchy Level	23
	autonomous	24
	current-hop-limit	25
	default-lifetime	25
	interface (Protocols IPv6 Neighbor Discovery)	26
	link-mtu	27
	managed-configuration	28
	max-advertisement-interval (Protocols IPv6 Neighbor Discovery)	29
	min-advertisement-interval (Protocols IPv6 Neighbor Discovery)	30
	on-link	31

	other-stateful-configuration	32
	preferred-lifetime	32
	prefix (Protocols IPv6 Neighbor Discovery)	33
	reachable-time	34
	retransmit-timer	34
	router-advertisement	35
	traceoptions (Protocols IPv6 Neighbor Discovery)	36
	valid-lifetime	38
Part 3	Administration	
Chapter 5	Operational Commands	41
	clear ipv6 neighbors	42
	clear ipv6 router-advertisement	43
	monitor interface	44
	monitor start	52
	monitor stop	54
	ping	55
	show ipv6 neighbors	59
	show ipv6 router-advertisement	61
	show log	64
	traceroute	67
Part 4	Troubleshooting	
Chapter 6	Routing Protocol Process Memory FAQs	73
	Routing Protocol Process Memory FAQs Overview	73
	Routing Protocol Process Memory FAQs	74
	Frequently Asked Questions: Routing Protocol Process Memory	74
	Frequently Asked Questions: Interpreting Routing Protocol Process-Related Command Outputs	75
	Frequently Asked Questions: Routing Protocol Process Memory Swapping	78
	Frequently Asked Questions: Troubleshooting the Routing Protocol Process	79
Part 5	Index	
	Index	83

List of Figures

Part 2	Configuration	
Chapter 3	Concept and Example	13
	Figure 1: ICMP Router Discovery Topology	16

List of Tables

	About the Documentation	ix
	Table 1: Notice Icons	xii
	Table 2: Text and Syntax Conventions	xii
Part 3	Administration	
Chapter 5	Operational Commands	41
	Table 3: Output Control Keys for the monitor interface Command	44
	Table 4: Output Control Keys for the monitor interface traffic Command	45
	Table 5: monitor interface Output Fields	46
	Table 6: monitor start Output Fields	52
	Table 7: show ipv6 neighbors Output Fields	59
	Table 8: show ipv6 router-advertisement Output Fields	61
	Table 9: traceroute Output Fields	69
Part 4	Troubleshooting	
Chapter 6	Routing Protocol Process Memory FAQs	73
	Table 10: show system processes extensive Output Fields	76
	Table 11: show task memory Output Fields	77

About the Documentation

- [Documentation and Release Notes on page ix](#)
- [Supported Platforms on page ix](#)
- [Using the Examples in This Manual on page x](#)
- [Documentation Conventions on page xi](#)
- [Documentation Feedback on page xiii](#)
- [Requesting Technical Support on page xiv](#)

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- [J Series](#)
- [SRX Series](#)
- [T Series](#)
- [MX Series](#)
- [M Series](#)
- [ACX Series](#)

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {  
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]  
user@host# edit system scripts  
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]  
user@host# load merge relative /var/tmp/ex-script-snippet.conf  
load complete
```

For more information about the **load** command, see the *CLI User Guide*.

Documentation Conventions

[Table 1 on page xii](#) defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> show chassis alarms No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none"> Introduces or emphasizes important new terms. Identifies guide names. Identifies RFC and Internet draft titles. 	<ul style="list-style-type: none"> A policy <i>term</i> is a named structure that defines match conditions and actions. <i>Junos OS CLI User Guide</i> RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none">To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level.The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric <i>metric</i>>;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (<i>string1</i> <i>string2</i> <i>string3</i>)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [<i>community-ids</i>]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	<pre>[edit] routing-options { static { route default { nexthop <i>address</i>; retain; } } }</pre>
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none">In the Logical Interfaces box, select All Interfaces.To cancel the configuration, click Cancel.
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to techpubs-comments@juniper.net, or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number

- Software release version (if applicable)

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

PART 1

Overview

- [Introduction to Neighbor Discovery on page 3](#)
- [IPv6 Neighbor Discovery Standards on page 9](#)

CHAPTER 1

Introduction to Neighbor Discovery

- [IPv6 Neighbor Discovery Overview on page 4](#)

IPv6 Neighbor Discovery Overview

Neighbor discovery is a protocol that allows different nodes on the same link to advertise their existence to their neighbors, and to learn about the existence of their neighbors.

Routers and hosts (nodes) use Neighbor Discovery (ND) messages to determine the link-layer addresses of neighbors that reside on attached links and to overwrite invalid cache entries. Hosts also use ND to find neighboring routers that can forward packets on their behalf.

In addition, nodes use ND to actively track the ability to reach neighbors. When a router (or the path to a router) fails, nodes actively search for alternatives to reach the destination.

IPv6 Neighbor Discovery corresponds to a number of the IPv4 protocols — ARP, ICMP Router Discovery, and ICMP Redirect. However, Neighbor Discovery provides many improvements over the IPv4 set of protocols. These improvements address the following:

- Router discovery—How a host locates routers residing on an attached link.
- Prefix discovery—How a host discovers address prefixes for destinations residing on an attached link. Nodes use prefixes to distinguish between destinations that reside on an attached link and those destinations that it can reach only through a router.
- Parameter discovery—How a node learns various parameters (link parameters or Internet parameters) that it places in outgoing packets.
- Address resolution—How a node uses only a destination IPv6 address to determine a link-layer address for destinations on an attached link.
- Next-hop determination—The algorithm that a node uses for mapping an IPv6 destination address into a neighbor IPv6 address (either the next router hop or the destination itself) to which it plans to send traffic for the destination.
- Neighbor unreachability detection—How a node determines that it can no longer reach a neighbor.
- Duplicate address detection—How a node determines whether an address is already in use by another node.

A router periodically multicasts a router advertisement from each of its multicast interfaces, announcing its availability. Hosts listen for these advertisements for address autoconfiguration and discovery of link-local addresses of the neighboring routers. When a host starts, it multicasts a router solicitation to ask for immediate advertisements.

The router discovery messages do not constitute a routing protocol. They enable hosts to discover the existence of neighboring routers, but are not used to determine which router is best to reach a particular destination.

Neighbor discovery uses the following Internet Control Message Protocol version 6 (ICMPv6) messages: router solicitation, router advertisement, neighbor solicitation, neighbor advertisement, and redirect.

Neighbor discovery for IPv6 replaces the following IPv4 protocols: router discovery (RDISC), Address Resolution Protocol (ARP), and ICMPv4 redirect.

Junos OS Release 9.3 and later supports Secure Neighbor Discovery (SEND). SEND enables you to secure Neighbor Discovery protocol (NDP) messages. It is applicable in environments where physical security on a link is not assured and attacks on NDP messages are a concern. The Junos OS secures NDP messages through cryptographically generated addresses (CGAs).

This section discusses the following topics:

- [Router Discovery on page 6](#)
- [Address Resolution on page 6](#)
- [Redirect on page 6](#)

Router Discovery

Router advertisements can contain a list of prefixes. These prefixes are used for address autoconfiguration, to maintain a database of onlink (on the same data link) prefixes, and for duplication address detection. If a node is onlink, the router forwards packets to that node. If the node is not onlink, the packets are sent to the next router for consideration. For IPv6, each prefix in the prefix list can contain a prefix length, a valid lifetime for the prefix, a preferred lifetime for the prefix, an onlink flag, and an autoconfiguration flag. This information enables address autoconfiguration and the setting of link parameters such as maximum transmission unit (MTU) size and hop limit.

Address Resolution

For IPv6, ICMPv6 neighbor discovery replaces Address Resolution Protocol (ARP) for resolving network addresses to link-level addresses. Neighbor discovery also handles changes in link-layer addresses, inbound load balancing, anycast addresses, and proxy advertisements.

Nodes requesting the link-layer address of a target node multicast a neighbor solicitation message with the target address. The target sends back a neighbor advertisement message containing its link-layer address.

Neighbor solicitation and advertisement messages are used for detecting duplicate unicast addresses on the same link. Autoconfiguration of an IP address depends on whether there is a duplicate address on that link. Duplicate address detection is a requirement for autoconfiguration.

Neighbor solicitation and advertisement messages are also used for neighbor unreachability detection. Neighbor unreachability detection involves detecting the presence of a target node on a given link.

Redirect

Redirect messages are sent to inform a host of a better next-hop router to a particular destination or an onlink neighbor. This is similar to ICMPv4 redirect. Very similar to the ICMPv4 Redirect feature, the ICMPv6 redirect message is used by routers to inform on-link hosts of a better next-hop for a given destination. The intent is to allow the routers to help hosts make the most efficient local routing decisions possible.

- Related Documentation**
- [Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 14](#)

CHAPTER 2

IPv6 Neighbor Discovery Standards

- [Supported ICMP Router Discovery and IPv6 Neighbor Discovery Standards on page 9](#)

Supported ICMP Router Discovery and IPv6 Neighbor Discovery Standards

Junos OS substantially supports the following RFCs, which define standards for the Internet Control Message Protocol (ICMP for IP version 4 [IPv4]) and neighbor discovery (for IP version 6 [IPv6]).

- RFC 1256, *ICMP Router Discovery Messages*
- RFC 4861, *Neighbor Discovery for IP version 6 (IPv6)*
- RFC 2462, *IPv6 Stateless Address Autoconfiguration*
- RFC 2463, *Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification*
- RFC 4443, *Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification*
- RFC 4861, *IPv6 Stateless Address Autoconfiguration*
- RFC 4862, *Neighbor Discovery for IP version 6 (IPv6)*
- RFC 6106, *IPv6 Router Advertisement Options for DNS Configuration*

Related Documentation

- [Supported IPv4, TCP, and UDP Standards](#)
- [Supported IPv6 Standards](#)
- [Accessing Standards Documents on the Internet](#)

PART 2

Configuration

- [Concept and Example on page 13](#)
- [Configuration Statements on page 23](#)

CHAPTER 3

Concept and Example

- [Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13](#)

Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery

- [Understanding IPv6 Neighbor Discovery on page 13](#)
- [Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 14](#)

Understanding IPv6 Neighbor Discovery

IPv6 Neighbor Discovery has many improvements when compared to the corresponding IPv4 protocols.

For instance, Neighbor Discovery moves address resolution to the ICMP layer, which makes it much less media dependent than ARP, as well as adding the ability to use IP layer security when needed.

Additionally, Neighbor Discovery uses link-local addresses. This allows all nodes to maintain their router associations even when the site is renumbered to a new global prefix.

Another improvement worth noting is that Neighbor Discovery messages carry link-layer address information, so a single message (or pair of messages) is all that is needed for nodes to resolve the others' addresses. No additional address resolution is needed.

Neighbor unreachability detection is built in, making packet delivery much more robust in a changing network. Using neighbor unreachability detection, Neighbor Discovery detects router failures, link failures, and partial link failures such as one-way communication.

And finally, IPv6 router advertisements carry prefixes (including network masks) and support multiple prefixes on the same link. Hosts can learn on-link prefixes from router advertisements or, when the router is configured to withhold them, from redirects as needed.

SLAAC

In addition to all the other improvements it brings to the networking world, Neighbor Discovery also enables address autoconfiguration, namely Stateless Address Autoconfiguration (SLAAC). IPv6 maintains the capability for stateful address assignment

through DHCPv6 (and static assignment), but SLAAC provides a lightweight address configuration method that might be desirable in many circumstances.

SLAAC provides plug-and-play IP connectivity in two phases: Phase 1: Link-local address assignment; and then, in Phase 2: Global address assignment.

- Phase 1—Steps for local connectivity:
 1. Link-Local Address Generation: Any time that a multicast-capable IPv6-enabled interface is turned up, the node generates a link-local address for that interface. This is done by appending an interface identifier to the link-local prefix (FE80::/10).
 2. Duplicate Detection: Before assigning the new link-local address to its interface, the node verifies that the address is unique. This is accomplished by sending a Neighbor Solicitation message destined to the new address. If there is a reply, then the address is a duplicate and the process stops, requiring operator intervention.
 3. Link-Local Address Assignment: If the address is unique, the node assigns it to the interface for which it was generated.

At this point, the node has IPv6 connectivity to all other nodes on the same link. Phase 2 can only be completed by hosts. The router's interface addresses must be configured by other means.

- Phase 2—Steps for global connectivity:
 1. Router Advertisement: The node sends a Router Solicitation to prompt all on-link routers to send it router advertisements. When the router is enabled to provide stateless autoconfiguration support, the router advertisement contains a subnet prefix for use by neighboring hosts.
 2. Global Address Generation: Once it receives a subnet prefix from a router, the host generates a global address by appending the interface id to the supplied prefix.
 3. Duplicate Address Detection: The host again performs Duplicate Address Detection (DAD), this time for the new global address.
 4. Global Address Assignment: Assuming that the address is not a duplicate, the host assigns it to the interface.

This process ensures full IPv6 global connectivity with no manual host configuration and very little router configuration.

Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery

This example shows how to configure the router to send IPv6 neighbor discovery messages.

- [Requirements on page 14](#)
- [Overview on page 15](#)
- [Configuration on page 16](#)
- [Verification on page 19](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

In this example, all of the interfaces in the sample topology are configured with IPv6 addresses. If you plan to extend IPv6 functionality into your LAN, datacenter, or customer networks, you might want to use Stateless Address Auto-Configuration (SLAAC) and that means configuring router advertisements. SLAAC is an IPv6 protocol that provides some similar functionality to DHCP in IPv4. Using SLAAC, network hosts can autoconfigure a globally unique IPv6 address based on the prefix provided by a nearby router in a router advertisement. This removes the need to explicitly configure every interface in a given section of the network. Router advertisement messages are disabled by default, and you must enable them to take advantage of SLAAC.

To configure the router to send router advertisement messages, you must include at least the following statements in the configuration. All other router advertisement configuration statements are optional.


```
protocols {
  router-advertisement {
    interface interface-name {
      prefix prefix;
    }
  }
}
```

To configure neighbor discovery, include the following statements. You configure router advertisement on a per-interface basis.

```
protocols {
  router-advertisement {
    interface interface-name {
      current-hop-limit number;
      default-lifetime seconds;
      (link-mtu | no-link-mtu);
      (managed-configuration | no-managed-configuration);
      max-advertisement-interval seconds;
      min-advertisement-interval seconds;
      (other-stateful-configuration | no-other-stateful-configuration);
      prefix prefix {
        (autonomous | no-autonomous);
        (on-link | no-on-link);
        preferred-lifetime seconds;
        valid-lifetime seconds;
      }
      reachable-time milliseconds;
      retransmit-timer milliseconds;
      virtual-router-only;
    }
    traceoptions {
      file filename <files number> <size maximum-file-size> <world-readable |
        no-world-readable>;
      flag flag;
    }
  }
}
```

Figure 1 on page 16 shows a simplified sample topology.

Figure 1: ICMP Router Discovery Topology

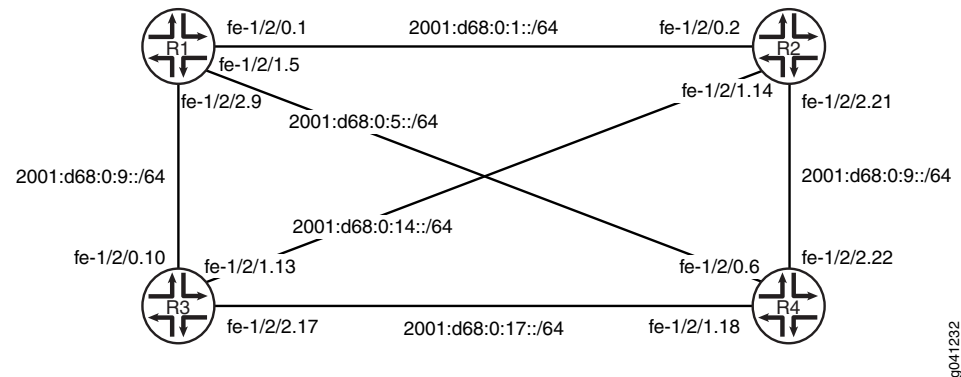

This example shows how to make sure that all of the IPv6 hosts attached to the subnets in the sample topology can auto-configure a local EUI-64 address.

“CLI Quick Configuration” on page 16 shows the configuration for all of the devices in Figure 1 on page 16. “Step-by-Step Procedure” on page 17 describes the steps on Device R1.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

- Device R1**
- ```

set interfaces fe-1/2/0 unit 1 description to-P2
set interfaces fe-1/2/0 unit 1 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces fe-1/2/1 unit 5 description to-P4
set interfaces fe-1/2/1 unit 5 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces fe-1/2/2 unit 9 description to-P3
set interfaces fe-1/2/2 unit 9 family inet6 address 2001:db8:0:9::/64 eui-64
set interfaces lo0 unit 1 family inet6 address 2001:db8::1/128
set protocols router-advertisement interface fe-1/2/0.1 prefix 2001:db8:0:1::/64
set protocols router-advertisement interface fe-1/2/1.5 prefix 2001:db8:0:5::/64
set protocols router-advertisement interface fe-1/2/2.9 prefix 2001:db8:0:9::/64

```
- Device R2**
- ```

set interfaces fe-1/2/0 unit 2 description to-P1
set interfaces fe-1/2/0 unit 2 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces fe-1/2/1 unit 14 description to-P3
set interfaces fe-1/2/1 unit 14 family inet6 address 2001:db8:0:14::/64 eui-64
set interfaces fe-1/2/2 unit 21 description to-P4
set interfaces fe-1/2/2 unit 21 family inet6 address 2001:db8:0:21::/64 eui-64
set interfaces lo0 unit 2 family inet6 address 2001:db8::2/128
set protocols router-advertisement interface fe-1/2/0.2 prefix 2001:db8:0:1::/64
set protocols router-advertisement interface fe-1/2/1.14 prefix 2001:db8:0:14::/64
set protocols router-advertisement interface fe-1/2/2.21 prefix 2001:db8:0:21::/64

```
- Device R3**
- ```

set interfaces fe-1/2/0 unit 10 description to-P1
set interfaces fe-1/2/0 unit 10 family inet6 address 2001:db8:0:9::/64 eui-64

```



```

set interfaces fe-1/2/1 unit 13 description to-P2
set interfaces fe-1/2/1 unit 13 family inet6 address 2001:db8:0:14::/64 eui-64
set interfaces fe-1/2/2 unit 17 description to-P4
set interfaces fe-1/2/2 unit 17 family inet6 address 2001:db8:0:17::/64 eui-64
set interfaces lo0 unit 3 family inet6 address 2001:db8::3/128
set protocols router-advertisement interface fe-1/2/0.10 prefix 2001:db8:0:9::/64
set protocols router-advertisement interface fe-1/2/1.13 prefix 2001:db8:0:14::/64
set protocols router-advertisement interface fe-1/2/2.17 prefix 2001:db8:0:17::/64

```

**Device R4**

```

set interfaces fe-1/2/0 unit 6 description to-P1
set interfaces fe-1/2/0 unit 6 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces fe-1/2/1 unit 18 description to-P3
set interfaces fe-1/2/1 unit 18 family inet6 address 2001:db8:0:17::/64 eui-64
set interfaces fe-1/2/2 unit 22 description to-P2
set interfaces fe-1/2/2 unit 22 family inet6 address 2001:db8:0:21::/64 eui-64
set interfaces lo0 unit 4 family inet6 address 2001:db8::4/128
set protocols router-advertisement interface fe-1/2/0.6 prefix 2001:db8:0:5::/64
set protocols router-advertisement interface fe-1/2/1.18 prefix 2001:db8:0:17::/64
set protocols router-advertisement interface fe-1/2/2.22 prefix 2001:db8:0:21::/64

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure a IPv6 neighbor discovery:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 1 description to-P2
user@R1# set fe-1/2/0 unit 1 family inet6 address 2001:db8:0:1::/64 eui-64

```

```

user@R1# set fe-1/2/1 unit 5 description to-P4
user@R1# set fe-1/2/1 unit 5 family inet6 address 2001:db8:0:5::/64 eui-64

```

```

user@R1# set fe-1/2/2 unit 9 description to-P3
user@R1# set fe-1/2/2 unit 9 family inet6 address 2001:db8:0:9::/64 eui-64

```

```

user@R1# set lo0 unit 1 family inet6 address 2001:db8::1/128

```

2. Enable neighbor discovery.

```

[edit protocols router-advertisement]
user@R1# set interface fe-1/2/0.1 prefix 2001:db8:0:1::/64
user@R1# set interface fe-1/2/1.5 prefix 2001:db8:0:5::/64
user@R1# set interface fe-1/2/2.9 prefix 2001:db8:0:9::/64

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```

user@R1# show interfaces

```

```
fe-1/2/0 {
 unit 1 {
 description to-P2;
 family inet6 {
 address 2001:db8:0:1::/64 {
 eui-64;
 }
 }
 }
}
fe-1/2/1 {
 unit 5 {
 description to-P4;
 family inet6 {
 address 2001:db8:0:5::/64 {
 eui-64;
 }
 }
 }
}
fe-1/2/2 {
 unit 9 {
 description to-P3;
 family inet6 {
 address 2001:db8:0:9::/64 {
 eui-64;
 }
 }
 }
}
lo0 {
 unit 1 {
 family inet6 {
 address 2001:db8::1/128;
 }
 }
}

user@R1# show protocols
router-advertisement {
 interface fe-1/2/0.1 {
 prefix 2001:db8:0:1::/64;
 }
 interface fe-1/2/1.5 {
 prefix 2001:db8:0:5::/64;
 }
 interface fe-1/2/2.9 {
 prefix 2001:db8:0:9::/64;
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

To confirm that the configuration is working properly, perform this task:

- [Checking the Interfaces on page 19](#)
- [Pinging the Interfaces on page 19](#)
- [Checking the IPv6 Neighbor Cache on page 20](#)
- [Verifying IPv6 Router Advertisements on page 20](#)
- [Tracing Neighbor Discovery Events on page 21](#)

### Checking the Interfaces

**Purpose** Verify that the interfaces are up, and view the assigned EUI-64 addresses.

**Action** From operational mode, enter the **show interfaces terse** command.

```
user@R1> show interfaces terse
Interface Admin Link Proto Local Remote
fe-1/2/0
fe-1/2/0.1 up up inet6 2001:db8:0:1:2a0:a514:0:14c/64
 fe80::2a0:a514:0:14c/64
fe-1/2/1.5 up up inet6 2001:db8:0:5:2a0:a514:0:54c/64
 fe80::2a0:a514:0:54c/64
fe-1/2/2.9 up up inet6 2001:db8:0:9:2a0:a514:0:94c/64
 fe80::2a0:a514:0:94c/64
lo0
lo0.1 up up inet6 2001:db8::1
 fe80::2a0:a50f:fc56:14c
```

**Meaning** The output shows that all interfaces are configured with the IPv6 (inet6) address family. Each IPv6-enabled interface has two IPv6 addresses; one link-local address, and one global address. The global addresses match those shown in [Figure 1 on page 16](#). Junos OS automatically creates a link-local address for any interface that is enabled for IPv6 operation. All link-local addresses begin with the fe80::/64 prefix. The host portion of the address is a full 64 bits long and matches the link-local interface identifier. When an interface address is configured using the **eui-64** statement, its interface identifier matches the interface identifier of the link-local address. This is because link-local addresses are coded according to the EUI-64 specification.

### Pinging the Interfaces

**Purpose** Verify connectivity between the directly connected interfaces.

**Action** 1. Determine the remote router's IPv6 interface address.

On Device R2, run the **show interfaces terse** command for the interface that is directly connected to Device R1, and copy the global address into the capture buffer of your terminal emulator.

```
user@R2> show interfaces fe-1/2/0.2 terse
Interface Admin Link Proto Local Remote
fe-1/2/0.2 up up inet6 2001:db8:0:1:2a0:a514:0:24c/64
 fe80::2a0:a514:0:24c/64
```

- On Device R1, run the **ping** command, using the global address that you copied.

```
user@R1> ping 2001:db8:0:1:2a0:a514:0:24c
PING6(56=40+8+8 bytes) 2001:db8:0:1:2a0:a514:0:14c -->
2001:db8:0:1:2a0:a514:0:24c
16 bytes from 2001:db8:0:1:2a0:a514:0:24c, icmp_seq=0 hlim=64 time=20.412 ms
16 bytes from 2001:db8:0:1:2a0:a514:0:24c, icmp_seq=1 hlim=64 time=18.897 ms
16 bytes from 2001:db8:0:1:2a0:a514:0:24c, icmp_seq=2 hlim=64 time=1.389 ms
```

**Meaning** Junos OS uses the same ping command for both IPv4 and IPv6 testing. The lack of any interior gateway protocol (IGP) in the network limits the ping testing to directly-connected neighbors. Repeat the ping test for other directly connected neighbors.

### *Checking the IPv6 Neighbor Cache*

**Purpose** Display information about the IPv6 neighbors.

After conducting ping testing, you can find an entries for interface addresses in the IPv6 neighbor cache.

**Action** From operational mode, enter the **show ipv6 neighbors** command.

```
user@R1> show ipv6 neighbors
IPv6 Address Linklayer Address State Exp Rtr Secure
Interface
2001:db8:0:1:2a0:a514:0:24c 00:05:85:8f:c8:bd stale 546 yes no
fe-1/2/0.1
fe80::2a0:a514:0:24c 00:05:85:8f:c8:bd stale 258 yes no
fe-1/2/0.1
fe80::2a0:a514:0:64c 00:05:85:8f:c8:bd stale 111 yes no
fe-1/2/1.5
fe80::2a0:a514:0:a4c 00:05:85:8f:c8:bd stale 327 yes no
fe-1/2/2.9
```

**Meaning** In IPv6, the Address Resolution Protocol (ARP) has been replaced by the Neighbor Discovery Protocol (NDP). The IPv4 command **show arp** is replaced by the IPv6 command **show ipv6 neighbors**. The key pieces of information displayed by this command are the IP address, the MAC (Link Layer) address, and the interface.

### *Verifying IPv6 Router Advertisements*

**Purpose** Confirm that devices can be added to the network using SLAAC by ensuring that router advertisements are working properly.

**Action** From operational mode, enter the **show ipv6 router-advertisement** command.

```
user@R1> show ipv6 router-advertisement
Interface: fe-1/2/0.1
 Advertisements sent: 37, last sent 00:01:41 ago
 Solicits received: 0
 Advertisements received: 38
 Advertisement from fe80::2a0:a514:0:24c, heard 00:05:46 ago
 Managed: 0
 Other configuration: 0
 Reachable time: 0 ms
 Default lifetime: 1800 sec
```

```

Retransmit timer: 0 ms
Current hop limit: 64
Prefix: 2001:db8:0:1::/64
 Valid lifetime: 2592000 sec
 Preferred lifetime: 604800 sec
 On link: 1
 Autonomous: 1
Interface: fe-1/2/1.5
 Advertisements sent: 36, last sent 00:05:49 ago
 Solicits received: 0
 Advertisements received: 37
 Advertisement from fe80::2a0:a514:0:64c, heard 00:00:54 ago
 Managed: 0
 Other configuration: 0
 Reachable time: 0 ms
 Default lifetime: 1800 sec
 Retransmit timer: 0 ms
 Current hop limit: 64
 Prefix: 2001:db8:0:5::/64
 Valid lifetime: 2592000 sec
 Preferred lifetime: 604800 sec
 On link: 1
 Autonomous: 1
Interface: fe-1/2/2.9
 Advertisements sent: 36, last sent 00:01:37 ago
 Solicits received: 0
 Advertisements received: 38
 Advertisement from fe80::2a0:a514:0:a4c, heard 00:01:00 ago
 Managed: 0
 Other configuration: 0
 Reachable time: 0 ms
 Default lifetime: 1800 sec
 Retransmit timer: 0 ms
 Current hop limit: 64
 Prefix: 2001:db8:0:9::/64
 Valid lifetime: 2592000 sec
 Preferred lifetime: 604800 sec
 On link: 1
 Autonomous: 1

```

**Meaning** The output shows that router advertisements are being sent and received on Device R1's interfaces, indicating that both Device R1 and its directly connected neighbors are configured to generate router-advertisements.

### *Tracing Neighbor Discovery Events*

**Purpose** Perform additional validation by tracing router advertisements.

- Action**
1. Configure trace operations.
 

```

[edit protocols router-advertisement traceoptions]
user@R1# set file ipv6-nd-trace
user@R1# set traceoptions flag all
user@R1# commit

```
  2. Run the **show log** command.
 

```

user@R1> show log ipv6-nd-trace

```

```

Mar 29 14:07:16 trace_on: Tracing to "/var/log/P1/ipv6-nd-trace" started
Mar 29 14:07:16.287229 background dispatch running job
ipv6_ra_delete_interface_config_job for task Router-Advertisement
Mar 29 14:07:16.287452 task_job_delete: delete background job
ipv6_ra_delete_interface_config_job for task Router-Advertisement
Mar 29 14:07:16.287505 background dispatch completed job
ipv6_ra_delete_interface_config_job for task Router-Advertisement
Mar 29 14:07:16.288288 ipv6_ra_iflchange(Router-Advertisement): ifl 0xb904378
ifl fe-1/2/2.9 104 change 0, intf 0xba140d8
Mar 29 14:07:16.288450 ipv6_ra_iflchange(Router-Advertisement): ifl 0xb904250
ifl fe-1/2/0.1 85 change 0, intf 0xba14000
Mar 29 14:07:16.288656 ipv6_ra_iflchange(Router-Advertisement): ifl 0xb9044a0
ifl fe-1/2/1.5 80 change 0, intf 0xba1406c
Mar 29 14:07:16.289293 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba002bc
fe80::2a0:a514:0:54c ifl fe-1/2/1.5 80 change 0, intf 0xba1406c
Mar 29 14:07:16.289358 -- nochange/add
Mar 29 14:07:16.289624 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba00230
2001:db8:0:5:2a0:a514:0:54c ifl fe-1/2/1.5 80 change 0, intf 0xba1406c
Mar 29 14:07:16.289682 -- nochange/add
Mar 29 14:07:16.289950 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba001a4
fe80::2a0:a514:0:14c ifl fe-1/2/0.1 85 change 0, intf 0xba14000
Mar 29 14:07:16.290009 -- nochange/add
Mar 29 14:07:16.290302 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba00118
2001:db8:0:1:2a0:a514:0:14c ifl fe-1/2/0.1 85 change 0, intf 0xba14000
Mar 29 14:07:16.290365 -- nochange/add
Mar 29 14:07:16.290634 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba003d4
fe80::2a0:a514:0:94c ifl fe-1/2/2.9 104 change 0, intf 0xba140d8
Mar 29 14:07:16.290694 -- nochange/add
Mar 29 14:07:16.290958 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba00348
2001:db8:0:9:2a0:a514:0:94c ifl fe-1/2/2.9 104 change 0, intf 0xba140d8
Mar 29 14:07:16.291017 -- nochange/add
Mar 29 14:07:20.808516 task_job_create_foreground: create job ipv6 ra for task
Router-Advertisement
Mar 29 14:07:20.808921 foreground dispatch running job ipv6 ra for task
Router-Advertisement
Mar 29 14:07:20.809027 ipv6_ra_send_advertisement: sending advertisement for
ifl 104 to ff02::1
Mar 29 14:07:20.809087 (4810916) sending advertisement for ifl 104
Mar 29 14:07:20.809170 ifa 0xba00348 2001:db8:0:9:2a0:a514:0:94c/64
Mar 29 14:07:20.809539 --> sent 56 bytes
Mar 29 14:07:20.809660 task_timer_reset: reset Router-Advertisement_ipv6ra
Mar 29 14:07:20.809725 task_timer_set_oneshot_latest: timer
Router-Advertisement_ipv6ra interval set to 7:07
Mar 29 14:07:20.809772 foreground dispatch completed job ipv6 ra for task
Router-Advertisement

```

**Related Documentation**

- *Example: Configuring ICMP Router Discovery*

## CHAPTER 4

# Configuration Statements

- [\[edit protocols router-advertisement\] Hierarchy Level](#) on page 23
- [autonomous](#) on page 24
- [current-hop-limit](#) on page 25
- [default-lifetime](#) on page 25
- [interface \(Protocols IPv6 Neighbor Discovery\)](#) on page 26
- [link-mtu](#) on page 27
- [managed-configuration](#) on page 28
- [max-advertisement-interval \(Protocols IPv6 Neighbor Discovery\)](#) on page 29
- [min-advertisement-interval \(Protocols IPv6 Neighbor Discovery\)](#) on page 30
- [on-link](#) on page 31
- [other-stateful-configuration](#) on page 32
- [preferred-lifetime](#) on page 32
- [prefix \(Protocols IPv6 Neighbor Discovery\)](#) on page 33
- [reachable-time](#) on page 34
- [retransmit-timer](#) on page 34
- [router-advertisement](#) on page 35
- [traceoptions \(Protocols IPv6 Neighbor Discovery\)](#) on page 36
- [valid-lifetime](#) on page 38

### [\[edit protocols router-advertisement\] Hierarchy Level](#)

---

The following statement hierarchy can also be included at the [\[edit logical-systems \*logical-system-name\*\]](#) hierarchy level.

```
protocols {
 router-advertisement {
 interface interface-name {
 current-hop-limit number;
 default-lifetime seconds;
 dns-server-address address;
 (link-mtu | no-link-mtu);
 (managed-configuration | no-managed-configuration);
 max-advertisement-interval seconds;
```

```
min-advertisement-interval seconds;
(other-stateful-configuration | no-other-stateful-configuration);
prefix prefix {
 (autonomous | no-autonomous);
 (on-link | no-on-link);
 preferred-lifetime seconds;
 valid-lifetime seconds;
}
reachable-time milliseconds;
retransmit-timer milliseconds;
virtual-router-only;
}
traceoptions {
 file filename <files number> <size maximum-file-size> <world-readable |
 no-world-readable>;
 flag flag;
}
}
```

- Related Documentation**
- [Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 14](#)
  - *Notational Conventions Used in Junos OS Configuration Hierarchies*
  - *[edit protocols] Hierarchy Level*

---

## autonomous

|                                 |                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (autonomous   no-autonomous);                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement interface <i>interface-name</i> <b>prefix</b> <i>prefix</i> ],<br>[edit protocols router-advertisement interface <i>interface-name</i> <b>prefix</b> <i>prefix</i> ]                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Specify whether prefixes in the router advertisement messages are used for stateless address autoconfiguration: <ul style="list-style-type: none"><li>• <b>autonomous</b>—Use prefixes for address autoconfiguration.</li><li>• <b>no-autonomous</b>—Do not use prefixes for address autoconfiguration.</li></ul> |
| <b>Default</b>                  | autonomous                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                               |
| <b>Related Documentation</b>    | • <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a>                                                                                                                                                                                                                 |



## current-hop-limit

|                                 |                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>current-hop-limit <i>number</i>;</code>                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <a href="#">interface</a> <i>interface-name</i> ],<br>[edit protocols router-advertisement <a href="#">interface</a> <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                            |
| <b>Description</b>              | Set the default value placed in the hop count field of the IP header for outgoing packets.                                                                                                                                   |
| <b>Options</b>                  | <b><i>number</i></b> —Hop limit. A value of 0 means the limit is unspecified by this router.<br><b>Range:</b> 0 through 255<br><b>Default:</b> 64                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li> </ul>                                                                          |

## default-lifetime

|                                 |                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>default-lifetime <i>seconds</i>;</code>                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <a href="#">interface</a> <i>interface-name</i> ],<br>[edit protocols router-advertisement <a href="#">interface</a> <i>interface-name</i> ]                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                     |
| <b>Description</b>              | Configure the lifetime associated with a default router.                                                                                                                                                                                              |
| <b>Options</b>                  | <b><i>seconds</i></b> —Default lifetime. A value of 0 means this router is not the default router.<br><b>Range:</b> Maximum advertisement interval value through 9000 seconds<br><b>Default:</b> Three times the maximum advertisement interval value |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">max-advertisement-interval on page 29</a></li> <li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li> </ul>                                  |

## interface (Protocols IPv6 Neighbor Discovery)

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>interface <i>interface-name</i> {<br/>    <i>current-hop-limit</i> <i>number</i>;<br/>    <i>default-lifetime</i> <i>seconds</i>;<br/>    (<i>link-mtu</i>   <i>no-link-mtu</i>);<br/>    (<i>managed-configuration</i>   <i>no-managed-configuration</i>);<br/>    <i>max-advertisement-interval</i> <i>seconds</i>;<br/>    <i>min-advertisement-interval</i> <i>seconds</i>;<br/>    (<i>other-stateful-configuration</i>   <i>no-other-stateful-configuration</i>);<br/>    prefix <i>prefix</i> {<br/>        (<i>autonomous</i>   <i>no-autonomous</i>);<br/>        (<i>on-link</i>   <i>no-on-link</i>);<br/>        <i>preferred-lifetime</i> <i>seconds</i>;<br/>        <i>valid-lifetime</i> <i>seconds</i>;<br/>    }<br/>    <i>reachable-time</i> <i>milliseconds</i>;<br/>    <i>retransmit-timer</i> <i>milliseconds</i>;<br/>}</pre> |
| Hierarchy Level          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">router-advertisement</a> ],<br>[edit protocols <a href="#">router-advertisement</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Release Information      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description              | <p>Configure router advertisement properties on an interface. To configure more than one interface, include the <b>interface</b> statement multiple times.</p> <p>The Junos OS enters the Neighbor Discovery Protocol (NDP) packets into the routing platform cache even if there is no known route to the source.</p> <p>If you are using Virtual Router Redundancy Protocol (VRRP) for IPv6, you must include the <b>virtual-router-only</b> statement on both the master and backup VRRP on the IPv6 router.</p>                                                                                                                                                                                                                                                                                                                                         |
| Options                  | <p><b><i>interface-name</i></b>—Name of an interface. Specify the full interface name, including the physical and logical address components.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

---

## link-mtu

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (link-mtu   no-link-mtu);                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <b>interface</b> <i>interface-name</i> ],<br>[edit protocols router-advertisement <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS 10.3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Specify whether to include the maximum transmission unit (MTU) option in router advertisement messages:</p> <ul style="list-style-type: none"><li>• <b>link-mtu</b>—Includes the MTU option in router advertisements.</li><li>• <b>no-link-mtu</b>—Does not include the MTU option in router advertisements.</li></ul> <p>The MTU option included in router advertisement messages ensures that all nodes on a link use the same MTU value in situations where the link MTU is not well known.</p> |
| <b>Default</b>                  | Router advertisement messages do not include the MTU option.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                                                                                                                                                                                                                                                                                                                                     |

## managed-configuration

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (managed-configuration   no-managed-configuration);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <b>interface</b> <i>interface-name</i> ],<br>[edit protocols router-advertisement <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Specify whether to enable the host to use a stateful autoconfiguration protocol for address autoconfiguration, along with any stateless autoconfiguration already configured:</p> <ul style="list-style-type: none"><li>• <b>managed-configuration</b>—Enable host to use stateful autoconfiguration.</li><li>• <b>no-managed-configuration</b>—Disable host from using stateful autoconfiguration.</li></ul> <p>You can set two fields in the router advertisement message to enable stateful autoconfiguration on a host: the managed configuration field and the other stateful configuration field. Setting the managed configuration field enables the host to use a stateful autoconfiguration protocol for address autoconfiguration, along with any stateless autoconfiguration already configured. Setting the other stateful configuration field enables autoconfiguration of other nonaddress-related information.</p> |
| <b>Default</b>                  | Stateful autoconfiguration is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li><li>• <a href="#">other-stateful-configuration on page 32</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## max-advertisement-interval (Protocols IPv6 Neighbor Discovery)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>max-advertisement-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <b>interface</b> <i>interface-name</i> ],<br>[edit protocols router-advertisement <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Set the maximum interval between each router advertisement message.</p> <p>The router sends router advertisements on each interface configured to transmit messages. The advertisements include route information and indicate to network hosts that the router is operational. The router sends these messages periodically, with a time range defined by minimum and maximum values.</p> |
| <b>Options</b>                  | <p><b>seconds</b>—Maximum interval.</p> <p><b>Range:</b> 4 through 1800 seconds</p> <p><b>Default:</b> 600 seconds</p>                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">min-advertisement-interval on page 30</a></li> <li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li> </ul>                                                                                                                                                                          |

## min-advertisement-interval (Protocols IPv6 Neighbor Discovery)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>min-advertisement-interval seconds;</code>                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <a href="#">interface interface-name</a> ],<br>[edit protocols router-advertisement <a href="#">interface interface-name</a> ]                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Set the minimum interval between each router advertisement message.</p> <p>The router sends router advertisements on each interface configured to transmit messages. The advertisements include route information and indicate to network hosts that the router is operational. The router sends these messages periodically, with a time range defined by minimum and maximum values.</p> |
| <b>Options</b>                  | <p><b>seconds</b>—Minimum interval.</p> <p><b>Range:</b> 3 seconds through three-quarter times the maximum advertisement interval value</p> <p><b>Default:</b> One-third the maximum advertisement interval valueBy default, the maximum advertisement interval is 600 seconds and the minimum advertisement interval is one-third the maximum interval, or 200 seconds.</p>                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">max-advertisement-interval on page 29</a></li><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                                                                                                                                                             |

## on-link

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (on-link   no-on-link);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement interface <i>interface-name</i> <b>prefix</b> <i>prefix</i> ],<br>[edit protocols router-advertisement interface <i>interface-name</i> <b>prefix</b> <i>prefix</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Specify whether to enable prefixes to be used for onlink determination:</p> <ul style="list-style-type: none"> <li>• <b>no-on-link</b>—Disable prefixes from being used for onlink determination.</li> <li>• <b>on-link</b>—Enable prefixes to be used for onlink determination.</li> </ul> <p>Router advertisement messages carry prefixes and information about them. A prefix is onlink when it is assigned to an interface on a specified link. The prefixes specify whether they are onlink or not onlink. A node considers a prefix to be onlink if it is represented by one of the link's prefixes, a neighboring router specifies the address as the target of a redirect message, a neighbor advertisement message is received for the (target) address, or any neighbor discovery message is received from the address. These prefixes are also used for address autoconfiguration. The information about the prefixes specifies the lifetime of the prefixes, whether the prefix is autonomous, and whether the prefix is onlink.</p> |
| <b>Default</b>                  | Prefixes are onlink unless explicitly disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## other-stateful-configuration

---

|                          |                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | (other-stateful-configuration   no-other-stateful-configuration);                                                                                                                                                                                                                                                                                                |
| Hierarchy Level          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <a href="#">interface interface-name</a> ],<br>[edit protocols router-advertisement <a href="#">interface interface-name</a> ]                                                                                                                                                   |
| Release Information      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                |
| Description              | Specify whether to enable autoconfiguration of other nonaddress-related information: <ul style="list-style-type: none"><li>• <b>no-other-stateful-configuration</b>—Disable autoconfiguration of other nonaddress-related information.</li><li>• <b>other-stateful-configuration</b>—Enable autoconfiguration of other nonaddress-related information.</li></ul> |
| Default                  | By default, stateful autoconfiguration is disabled.                                                                                                                                                                                                                                                                                                              |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                              |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li><li>• <a href="#">managed-configuration on page 28</a></li></ul>                                                                                                                                                     |

## preferred-lifetime

---

|                          |                                                                                                                                                                                                                                                          |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | preferred-lifetime <i>seconds</i> ;                                                                                                                                                                                                                      |
| Hierarchy Level          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement interface <i>interface-name</i> <a href="#">prefix prefix</a> ],<br>[edit protocols router-advertisement interface <i>interface-name</i> <a href="#">prefix prefix</a> ] |
| Release Information      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                        |
| Description              | Specify how long the prefix generated by stateless autoconfiguration remains preferred.                                                                                                                                                                  |
| Options                  | <b>seconds</b> —Preferred lifetime, in seconds. If you set the preferred lifetime to <b>0xffffffff</b> , the lifetime is infinite. The preferred lifetime is never greater than the valid lifetime.<br><b>Default:</b> 604,800 seconds                   |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                      |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">valid-lifetime on page 38</a></li><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                                    |



## prefix (Protocols IPv6 Neighbor Discovery)

---

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>prefix <i>prefix</i> {   (<a href="#">autonomous</a>   no-<a href="#">autonomous</a>);   (<a href="#">on-link</a>   no-<a href="#">on-link</a>);   <a href="#">preferred-lifetime</a> <i>seconds</i>;   <a href="#">valid-lifetime</a> <i>seconds</i>; }</pre> |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <a href="#">interface</a> <i>interface-name</i> ],<br>[edit protocols router-advertisement <a href="#">interface</a> <i>interface-name</i> ]                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure prefix properties in router advertisement messages.                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><i>prefix</i>—Prefix name.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li> </ul>                                                                                                                 |

## reachable-time

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>reachable-time <i>milliseconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <b>interface</b> <i>interface-name</i> ],<br>[edit protocols router-advertisement <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Set the length of time that a node considers a neighbor reachable until another reachability confirmation is received from that neighbor.</p> <p>After receiving a reachability confirmation from a neighbor, a node considers that neighbor reachable for a certain amount of time without receiving another confirmation. This mechanism is used for neighbor unreachability detection, a mechanism for finding link failures to a target node.</p> |
| <b>Options</b>                  | <p><b>milliseconds</b>—Reachability time limit.</p> <p><b>Range:</b> 0 through 3,600,000 milliseconds</p> <p><b>Default:</b> 0 milliseconds</p>                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                                                                                                                                                                                                                                                                                        |

## retransmit-timer

---

|                                 |                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>retransmit-timer <i>milliseconds</i>;</code>                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement <b>interface</b> <i>interface-name</i> ],<br>[edit protocols router-advertisement <b>interface</b> <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                          |
| <b>Description</b>              | Set the retransmission frequency of neighbor solicitation messages. This timer is used to detect when a neighbor has become unreachable and to resolve addresses.                                          |
| <b>Options</b>                  | <p><b>milliseconds</b>—Retransmission frequency.</p> <p><b>Default:</b> 0 milliseconds</p>                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                                          |

## router-advertisement

---

|                                 |                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | router-advertisement {...}                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit protocols]                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                 |
| <b>Description</b>              | Enable router advertisement.<br><br>The remaining statements are explained separately.                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul> |

## traceoptions (Protocols IPv6 Neighbor Discovery)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;<br/>    flag <i>flag</i> &lt;disable&gt;;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">router-advertisement</a> ],<br>[edit protocols <a href="#">router-advertisement</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>         | <p>For IPv6 neighbor discovery, specify router advertisement protocol-level tracing options.</p> <p>Trace IPv6 Neighbor Discovery protocol traffic to help debug Neighbor Discovery protocol issues.</p> <p>Global tracing options are inherited from the configuration set by the <b>traceoptions</b> statement at the [edit routing-options] hierarchy level. You can override the following global trace options for the IPv6 Neighbor Discovery protocol using the <b>traceoptions flag</b> statement included at the [edit protocols router-advertisement] hierarchy level:</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Default</b>             | The default trace options are inherited from the global <b>traceoptions</b> statement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>             | <p><b>disable</b>—(Optional) Disable the tracing operation. One use of this option is to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name in quotation marks. We recommend that you place router advertisement tracing output in the file <code>/var/log/router-advertisement-log</code>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum number of files, you must also specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 10 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <ul style="list-style-type: none"><li><b>all</b>—All tracing operations</li></ul> |



**NOTE:** Use the trace flag all with caution as this may cause the CPU to become very busy.

---

- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations.

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—IPv6 interface transactions and processing
- **timer**—IPv6 neighbor discovery protocol timer processing

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB) or megabytes (MB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum file size, you must also specify a maximum number of trace files with the **files** option.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li> </ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|

## valid-lifetime

---

|                                 |                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>valid-lifetime <i>seconds</i>;</code>                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols router-advertisement interface <i>interface-name</i> <b>prefix</b> <i>prefix</i> ],<br>[edit protocols router-advertisement interface <i>interface-name</i> <b>prefix</b> <i>prefix</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                    |
| <b>Description</b>              | Specify how long the prefix remains valid for onlink determination.                                                                                                                                                                                  |
| <b>Options</b>                  | <b><i>seconds</i></b> —Valid lifetime, in seconds. If you set the valid lifetime to <b>0xffffffff</b> , the lifetime is infinite.<br><b>Default:</b> 2,592,000 seconds                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">preferred-lifetime on page 32</a></li><li>• <a href="#">Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 13</a></li></ul>                                            |

## PART 3

# Administration

- [Operational Commands on page 41](#)





## CHAPTER 5

# Operational Commands

- `clear ipv6 neighbors`
- `clear ipv6 router-advertisement`
- `monitor interface`
- `monitor start`
- `monitor stop`
- `ping`
- `show ipv6 neighbors`
- `show ipv6 router-advertisement`
- `show log`
- `traceroute`

## clear ipv6 neighbors

---

|                                 |                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear ipv6 neighbors</code><br><code>&lt;all   host <i>hostname</i>&gt;</code>                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.3 for EX Series switches.<br>Command introduced in Junos OS Release 12.2 for the QFX Series.                                                |
| <b>Description</b>              | Clear IPv6 neighbor cache information.                                                                                                                                                                                                  |
| <b>Options</b>                  | <b>none</b> —Clear all IPv6 neighbor cache information.<br><br><b>all</b> —(Optional) Clear all IPv6 neighbor cache information.<br><br><b>host <i>hostname</i></b> —(Optional) Clear the information for the specified IPv6 neighbors. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show ipv6 neighbors on page 59</a></li></ul>                                                                                                                                        |
| <b>List of Sample Output</b>    | <a href="#">clear ipv6 neighbors on page 42</a>                                                                                                                                                                                         |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                   |

## Sample Output

### clear ipv6 neighbors

```
user@host> clear ipv6 neighbors
```

## clear ipv6 router-advertisement

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear ipv6 router-advertisement</code><br><code>&lt;interface <i>interface</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Clear IPv6 router advertisement counters.                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <b>none</b> —Clear IPv6 router advertisement counters for all interfaces.<br><br><b>interface <i>interface</i></b> —(Optional) Clear IPv6 router advertisement counters for the specified interface.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show ipv6 router-advertisement on page 61</a></li></ul>                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">clear ipv6 router-advertisement on page 43</a>                                                                                                                                                                                                                                                                                                        |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                             |

## Sample Output

### clear ipv6 router-advertisement

```
user@host> clear ipv6 router-advertisement
```

## monitor interface

**Syntax** `monitor interface`  
`<interface-name> | traffic <detail>>`

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Display real-time statistics about interfaces, updating the statistics every second. Check for and display common interface failures, such as SONET/SDH and T3 alarms, loopbacks detected, and increases in framing errors.



**NOTE:** This command is not supported on the QFX3000 QFabric system.

**Options** **none**—Display real-time statistics for all interfaces.

**detail**—(Optional) With traffic option only, display detailed output.

**interface-name**—(Optional) Display real-time statistics for the specified interface. In a TX Matrix or TX Matrix Plus router, display real-time statistics for the physical interfaces on the specified line-card chassis (LCC) only.

**traffic**—(Optional) Display traffic data for all active interfaces. In a TX Matrix or TX Matrix Plus router, display real-time statistics for the physical interfaces on the specified LCC only.

**Additional Information** The output of this command shows how much each field has changed since you started the command or since you cleared the counters by pressing the c key. For a description of the statistical information provided in the output of this command, see the **show interfaces extensive** command for a particular interface type in the [CLI Explorer](#). To control the output of the **monitor interface** command while it is running, use the keys listed in [Table 3 on page 44](#). The keys are not case-sensitive.

**Table 3: Output Control Keys for the monitor interface Command**

| Key | Action                                                                                                                                                                                                                     |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c   | Clears (returns to zero) the delta counters since <b>monitor interface</b> was started. This does not clear the accumulative counter. To clear the accumulative counter, use the <b>clear interfaces interval</b> command. |
| f   | Freezes the display, halting the display of updated statistics and delta counters.                                                                                                                                         |
| i   | Displays information about a different interface. The command prompts you for the name of a specific interface.                                                                                                            |

**Table 3: Output Control Keys for the monitor interface Command** *(continued)*

| Key      | Action                                                                                                                                                                                         |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n        | Displays information about the next interface. The <b>monitor interface</b> command displays the physical or logical interfaces in the same order as the <b>show interfaces terse</b> command. |
| q or Esc | Quits the command and returns to the command prompt.                                                                                                                                           |
| t        | Thaws the display, resuming the update of the statistics and delta counters.                                                                                                                   |

To control the output of the **monitor interface traffic** command while it is running, use the keys listed in [Table 4 on page 45](#). The keys are not case-sensitive.

**Table 4: Output Control Keys for the monitor interface traffic Command**

| Key      | Action                                                                                                               |
|----------|----------------------------------------------------------------------------------------------------------------------|
| b        | Displays the statistics in units of bits and bits per second (bps).                                                  |
| c        | Clears (return to 0) the delta counters in the <b>Current Delta</b> column. The statistics counters are not cleared. |
| d        | Displays the <b>Current Delta</b> column (instead of the rate column) in Bps or packets per second (pps).            |
| p        | Displays the statistics in units of packets and packets per second (pps).                                            |
| q or Esc | Quits the command and returns to the command prompt.                                                                 |
| r        | Displays the rate column (instead of the <b>Current Delta</b> column) in Bps and pps.                                |

**Required Privilege Level** trace

**List of Sample Output** [monitor interface \(Physical\) on page 47](#)  
[monitor interface \(OTN Interface\) on page 48](#)  
[monitor interface \(Logical\) on page 49](#)  
[monitor interface \(QFX3500 Switch\) on page 49](#)  
[monitor interface traffic on page 50](#)  
[monitor interface traffic \(QFX3500 Switch\) on page 50](#)  
[monitor interface traffic detail \(QFX3500 Switch\) on page 51](#)

**Output Fields** [Table 5 on page 46](#) describes the output fields for the **monitor interface** command. Output fields are listed in the approximate order in which they appear.

Table 5: monitor interface Output Fields

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Level of Output |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>routerl</b>           | Hostname of the router.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | All levels      |
| <b>Seconds</b>           | How long the monitor interface command has been running or how long since you last cleared the counters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | All levels      |
| <b>Time</b>              | Current time (UTC).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | All levels      |
| <b>Delay x/y/z</b>       | Time difference between when the statistics were displayed and the actual clock time. <ul style="list-style-type: none"> <li>• <b>x</b>—Time taken for the last polling (in milliseconds).</li> <li>• <b>y</b>—Minimum time taken across all pollings (in milliseconds).</li> <li>• <b>z</b>—Maximum time taken across all pollings (in milliseconds).</li> </ul>                                                                                                                                                                                                                                                                                                                        | All levels      |
| <b>Interface</b>         | Short description of the interface, including its name, status, and encapsulation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | All levels      |
| <b>Link</b>              | State of the link: <b>Up</b> , <b>Down</b> , or <b>Test</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | All levels      |
| <b>Current delta</b>     | Cumulative number for the counter in question since the time shown in the Seconds field, which is the time since you started the command or last cleared the counters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | All levels      |
| <b>Local Statistics</b>  | (Logical interfaces only) Number and rate of bytes and packets destined to the router or switch through the specified interface. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It usually takes less than 1 second for this counter to stabilize. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> | All levels      |
| <b>Remote Statistics</b> | (Logical interfaces only) Statistics for traffic transiting the router or switch. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It usually takes less than 1 second for this counter to stabilize. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>                                                | All levels      |

Table 5: monitor interface Output Fields (*continued*)

| Field Name         | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Level of Output |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Traffic statistics | <p>Total number of bytes and packets received and transmitted on the interface. These statistics are the sum of the local and remote statistics. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It usually takes less than 1 second for this counter to stabilize.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> | All levels      |
| Description        | With the <b>traffic</b> option, displays the interface description configured at the <b>[edit interfaces <i>interface-name</i>]</b> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>   |

## Sample Output

### monitor interface (Physical)

```

user@host> monitor interface so-0/0/0
router1 Seconds: 19 Time: 15:46:29

Interface: so-0/0/0, Enabled, Link is Up
Encapsulation: PPP, Keepalives, Speed: 0C48
Traffic statistics:
 Input packets: 6045 (0 pps)
 Input bytes: 6290065 (0 bps)
 Output packets: 10376 (0 pps)
 Output bytes: 10365540 (0 bps)
Encapsulation statistics:
 Input keepalives: 1901
 Output keepalives: 1901
 NCP state: Opened
 LCP state: Opened
Error statistics:
 Input errors: 0
 Input drops: 0
 Input framing errors: 0
 Policed discards: 0
 L3 incompletes: 0
 L2 channel errors: 0
 L2 mismatch timeouts: 0
 Carrier transitions: 1
 Output errors: 0
 Output drops: 0
 Aged packets: 0
Active alarms : None
Active defects: None
SONET error counts/seconds:
 LOS count 1
 LOF count 1
 SEF count 1
 ES-S 0
 SES-S 0
SONET statistics:
 BIP-B1 458871

```

```

BIP-B2 460072 [0]
REI-L 465610 [0]
BIP-B3 458978 [0]
REI-P 458773 [0]

```

## Received SONET overhead:

```

F1 : 0x00 J0 : 0x00 K1 : 0x00
K2 : 0x00 S1 : 0x00 C2 : 0x00
C2(cmp) : 0x00 F2 : 0x00 Z3 : 0x00
Z4 : 0x00 S1(cmp) : 0x00

```

## Transmitted SONET overhead:

```

F1 : 0x00 J0 : 0x01 K1 : 0x00
K2 : 0x00 S1 : 0x00 C2 : 0xcf
F2 : 0x00 Z3 : 0x00 Z4 : 0x00

```

Next='n', Quit='q' or ESC, Freeze='f', Thaw='t', Clear='c', Interface='i'

## monitor interface (OTN Interface)

```
user@host> monitor interface ge-7/0/0
```

```

Interface: ge-7/0/0, Enabled, Link is Up
Encapsulation: Ethernet, Speed: 10000mbps
Traffic statistics:
 Input bytes: 0 (0 bps)
 Output bytes: 0 (0 bps)
 Input packets: 0 (0 pps)
 Output packets: 0 (0 pps)
Error statistics:
 Input errors: 0
 Input drops: 0
 Input framing errors: 0
 Policed discards: 0
 L3 incompletes: 0
 L2 channel errors: 0
 L2 mismatch timeouts: 0
 Carrier transitions: 5
 Output errors: 0
 Output drops: 0
 Aged packets: 0
Active alarms : None
Active defects: None
Input MAC/Filter statistics:
 Unicast packets 0
 Broadcast packets 0
 Multicast packets 0
 Oversized frames 0
 Packet reject count 0
 DA rejects 0
 SA rejects 0
Output MAC/Filter Statistics:
 Unicast packets 0
 Broadcast packets 0
 Multicast packets 0
 Packet pad count 0
 Packet error count 0
OTN Link 0
 OTN Alarms: OTU_BDI, OTU_TTIM, ODU_BDI
 OTN Defects: OTU_BDI, OTU_TTIM, ODU_BDI, ODU_TTIM
 OTN OC - Seconds
 LOS 2

```



```

 LOF 9
OTN OTU - FEC Statistics
 Corr err ratio N/A
 Corr bytes 0
 Uncorr words 0
OTN OTU - Counters
 BIP 0
 BBE 0
 ES 0
 SES 0
 UAS 422
OTN ODU - Counters
 BIP 0
 BBE 0
 ES 0
 SES 0
 UAS 422
OTN ODU - Received Overhead APSGCC 0-3: 0

```

### monitor interface (Logical)

```

user@host> monitor interface so-1/0/0.0
host name Seconds: 16 Time: 15:33:39
 Delay: 0/0/1

Interface: so-1/0/0.0, Enabled, Link is Down
Flags: Hardware-Down Point-To-Point SNMP-Traps
Encapsulation: PPP
Local statistics:
 Input bytes: 0 Current delta [0]
 Output bytes: 0 [0]
 Input packets: 0 [0]
 Output packets: 0 [0]
Remote statistics:
 Input bytes: 0 (0 bps) [0]
 Output bytes: 0 (0 bps) [0]
 Input packets: 0 (0 pps) [0]
 Output packets: 0 (0 pps) [0]
Traffic statistics:
 Destination address: 192.168.8.193, Local: 192.168.8.21

Next='n', Quit='q' or ESC, Freeze='f', Thaw='t', Clear='c', Interface='i'

```

### monitor interface (QFX3500 Switch)

```

user@switch> monitor interface ge-0/0/0
Interface: ge-0/0/0, Enabled, Link is Down
Encapsulation: Ethernet, Speed: Unspecified
Traffic statistics:
 Input bytes: 0 (0 bps) Current delta [0]
 Output bytes: 0 (0 bps) [0]
 Input packets: 0 (0 pps) [0]
 Output packets: 0 (0 pps) [0]
Error statistics:
 Input errors: 0 [0]
 Input drops: 0 [0]
 Input framing errors: 0 [0]
 Policed discards: 0 [0]
 L3 incompletes: 0 [0]
 L2 channel errors: 0 [0]
 L2 mismatch timeouts: 0 [0]
 Carrier transitions: 0 [0]

```

```

Output errors: 0 [0]
Output drops: 0 [0]
Aged packets: 0 [0]
Active alarms : LINK
Active defects: LINK
Input MAC/Filter statistics:
 Unicast packets 0 [0]
 Broadcast packets 0 Multicast packet [0]

Interface warnings:
 o Outstanding LINK alarm

```

### monitor interface traffic

```

user@host> monitor interface traffic
host name Seconds: 15 Time: 12:31:09

Interface Link Input packets (pps) Output packets (pps)
so-1/0/0 Down 0 (0) 0 (0)
so-1/1/0 Down 0 (0) 0 (0)
so-1/1/1 Down 0 (0) 0 (0)
so-1/1/2 Down 0 (0) 0 (0)
so-1/1/3 Down 0 (0) 0 (0)
t3-1/2/0 Down 0 (0) 0 (0)
t3-1/2/1 Down 0 (0) 0 (0)
t3-1/2/2 Down 0 (0) 0 (0)
t3-1/2/3 Down 0 (0) 0 (0)
so-2/0/0 Up 211035 (1) 36778 (0)
so-2/0/1 Up 192753 (1) 36782 (0)
so-2/0/2 Up 211020 (1) 36779 (0)
so-2/0/3 Up 211029 (1) 36776 (0)
so-2/1/0 Up 189378 (1) 36349 (0)
so-2/1/1 Down 0 (0) 18747 (0)
so-2/1/2 Down 0 (0) 16078 (0)
so-2/1/3 Up 0 (0) 80338 (0)
at-2/3/0 Up 0 (0) 0 (0)
at-2/3/1 Down 0 (0) 0 (0)

Bytes=b, Clear=c, Delta=d, Packets=p, Quit=q or ESC, Rate=r, Up=^U, Down=^D

```

### monitor interface traffic (QFX3500 Switch)

```

user@switch> monitor interface traffic
switch Seconds: 7 Time: 16:04:37

Interface Link Input packets (pps) Output packets (pps)
ge-0/0/0 Down 0 (0) 0 (0)
ge-0/0/1 Up 392187 (0) 392170 (0)
ge-0/0/2 Down 0 (0) 0 (0)
ge-0/0/3 Down 0 (0) 0 (0)
ge-0/0/4 Down 0 (0) 0 (0)
ge-0/0/5 Down 0 (0) 0 (0)
ge-0/0/6 Down 0 (0) 0 (0)
ge-0/0/7 Down 0 (0) 0 (0)
ge-0/0/8 Down 0 (0) 0 (0)
ge-0/0/9 Up 392184 (0) 392171 (0)
ge-0/0/10 Down 0 (0) 0 (0)
ge-0/0/11 Down 0 (0) 0 (0)
ge-0/0/12 Down 0 (0) 0 (0)
ge-0/0/13 Down 0 (0) 0 (0)
ge-0/0/14 Down 0 (0) 0 (0)

```

|           |      |        |     |         |     |
|-----------|------|--------|-----|---------|-----|
| ge-0/0/15 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/16 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/17 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/18 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/19 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/20 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/21 | Down | 0      | (0) | 0       | (0) |
| ge-0/0/22 | Up   | 392172 | (0) | 392187  | (0) |
| ge-0/0/23 | Up   | 392185 | (0) | 392173  | (0) |
| vcp-0     | Down | 0      |     | 0       |     |
| vcp-1     | Down | 0      |     | 0       |     |
| ae0       | Down | 0      | (0) | 0       | (0) |
| bme0      | Up   | 0      |     | 1568706 |     |

#### monitor interface traffic detail (QFX3500 Switch)

```
user@switch> monitor interface traffic detail
switch
```

Seconds: 74

Time: 16:03:02

| Interface   | Link | Input packets | (pps) | Output packets | (pps) |
|-------------|------|---------------|-------|----------------|-------|
| Description |      |               |       |                |       |
| ge-0/0/0    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/1    | Up   | 392183        | (0)   | 392166         | (0)   |
| ge-0/0/2    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/3    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/4    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/5    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/6    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/7    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/8    | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/9    | Up   | 392181        | (0)   | 392168         | (0)   |
| ge-0/0/10   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/11   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/12   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/13   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/14   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/15   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/16   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/17   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/18   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/19   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/20   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/21   | Down | 0             | (0)   | 0              | (0)   |
| ge-0/0/22   | Up   | 392169        | (0)   | 392184         | (1)   |
| ge-0/0/23   | Up   | 392182        | (0)   | 392170         | (0)   |
| vcp-0       | Down | 0             |       | 0              |       |
| vcp-1       | Down | 0             |       | 0              |       |
| ae0         | Down | 0             | (0)   | 0              | (0)   |
| bme0        | Up   | 0             |       | 1568693        |       |

## monitor start

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                 | <code>monitor start <i>filename</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>    | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>            | Start displaying the system log or trace file and additional entries being added to those files.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                | <i>filename</i> —Specific log or trace file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Additional Information</b> | Log files are generated by the routing protocol process or by system logging. The log files generated by system logging are configured with the <b>syslog</b> statement at the <b>[edit system]</b> hierarchy level and the <b>options</b> statement at the <b>[edit routing-options]</b> hierarchy level. The trace files generated by the routing protocol process are configured with <b>traceoptions</b> statements at the <b>[edit routing-options]</b> , <b>[edit interfaces]</b> , and <b>[edit protocols protocol]</b> hierarchy levels. |



**NOTE:** To monitor a log file within a logical system, issue the `monitor start logical-system-name/filename` command.

|                                 |                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | trace                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">monitor list</a></li> <li><a href="#">monitor stop on page 54</a></li> </ul>                                              |
| <b>List of Sample Output</b>    | <a href="#">monitor start on page 53</a>                                                                                                                                     |
| <b>Output Fields</b>            | <a href="#">Table 6 on page 52</a> describes the output fields for the <b>monitor start</b> command. Output fields are listed in the approximate order in which they appear. |

**Table 6: monitor start Output Fields**

| Field Name                   | Field Description                                                                                                                          |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>***<i>filename</i>***</b> | Name of the file from which entries are being displayed. This line is displayed initially and when the command switches between log files. |
| <b><i>Date and time</i></b>  | Timestamp for the log entry.                                                                                                               |

## Sample Output

### monitor start

```
user@host> monitor start system-log
*** system-log***
Jul 20 15:07:34 hang sshd[5845]: log: Generating 768 bit RSA key.
Jul 20 15:07:35 hang sshd[5845]: log: RSA key generation complete.
Jul 20 15:07:35 hang sshd[5845]: log: Connection from 204.69.248.180 port 912
Jul 20 15:07:37 hang sshd[5845]: log: RSA authentication for root accepted.
Jul 20 15:07:37 hang sshd[5845]: log: ROOT LOGIN as 'root' from trip.jcmax.com
Jul 20 15:07:37 hang sshd[5845]: log: Closing connection to 204.69.248.180
```

## monitor stop

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>monitor stop <i>filename</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Stop displaying the system log or trace file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <i>filename</i> —Specific log or trace file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Additional Information</b>   | Log files are generated by the routing protocol process or by system logging. The log files generated by system logging are those configured with the <b>syslog</b> statement at the <b>[edit system]</b> hierarchy level and the <b>options</b> statement at the <b>[edit routing-options]</b> hierarchy level. The trace files generated by the routing protocol process are those configured with <b>traceoptions</b> statements at the <b>[edit routing-options]</b> , <b>[edit interfaces]</b> , and <b>[edit protocols <i>protocol</i>]</b> hierarchy levels. |
| <b>Required Privilege Level</b> | trace                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>monitor list</i></li><li>• <a href="#">monitor start on page 52</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>    | <a href="#">monitor stop on page 54</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Sample Output

### monitor stop

```
user@host> monitor stop
```

## ping

**Syntax**    `ping host`  
               `<bypass-routing>`  
               `<count requests>`  
               `<detail>`  
               `<do-not-fragment>`  
               `<inet | inet6>`  
               `<interface source-interface>`  
               `<interval seconds>`  
               `<logical-system logical-system-name>`  
               `<loose-source value>`  
               `<mac-address mac-address>`  
               `<no-resolve>`  
               `<pattern string>`  
               `<rapid>`  
               `<record-route>`  
               `<routing-instance routing-instance-name>`  
               `<size bytes>`  
               `<source source-address>`  
               `<strict >`  
               `<strict-source value.>`  
               `<tos type-of-service>`  
               `<ttl value>`  
               `<verbose>`  
               `<vpls instance-name>`  
               `<wait seconds>`

**Syntax (QFX Series)**    `ping host`  
                               `<bypass-routing>`  
                               `<count requests>`  
                               `<detail>`  
                               `<do-not-fragment>`  
                               `<inet>`  
                               `<interface source-interface>`  
                               `<interval seconds>`  
                               `<logical-system logical-system-name>`  
                               `<loose-source value>`  
                               `<mac-address mac-address>`  
                               `<no-resolve>`  
                               `<pattern string>`  
                               `<rapid>`  
                               `<record-route>`  
                               `<routing-instance routing-instance-name>`  
                               `<size bytes>`  
                               `<source source-address>`  
                               `<strict>`  
                               `< strict-source value>`  
                               `<tos type-of-service>`  
                               `<ttl value>`  
                               `<verbose>`  
                               `<wait seconds>`

**Release Information**    Command introduced before Junos OS Release 7.4.

Command introduced in Junos OS Release 9.0 for EX Series switches.

Command introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Check host reachability and network connectivity. The **ping** command sends Internet Control Message Protocol (ICMP) ECHO\_REQUEST messages to elicit ICMP ECHO\_RESPONSE messages from the specified host. Press Ctrl+c to interrupt a ping command.

**Options** *host*—IP address or hostname of the remote system to ping.

**bypass-routing**—(Optional) Bypass the normal routing tables and send ping requests directly to a system on an attached network. If the system is not on a directly attached network, an error is returned. Use this option to ping a local system through an interface that has no route through it.

**count requests**—(Optional) Number of ping requests to send. The range of values is 1 through 2,000,000,000. The default value is an unlimited number of requests.

**detail**—(Optional) Include in the output the interface on which the ping reply was received.

**do-not-fragment**—(Optional) Set the do-not-fragment (DF) flag in the IP header of the ping packets. For IPv6 packets, this option disables fragmentation.



**NOTE:** In Junos OS Release 11.1 and later, when issuing the **ping** command for an IPv6 route with the **do-not-fragment** option, the maximum ping packet size is calculated by subtracting 48 bytes (40 bytes for the IPV6 header and 8 bytes for the ICMP header) from the MTU. Therefore, if the ping packet size (including the 48-byte header) is greater than the MTU, the ping operation might fail.

**inet**—(Optional) Ping Packet Forwarding Engine IPv4 routes.

**inet6**—(Optional) Ping Packet Forwarding Engine IPv6 routes.

**interface source-interface**—(Optional) Interface to use to send the ping requests.

**interval seconds**—(Optional) How often to send ping requests. The range of values, in seconds, is 1 through infinity. The default value is 1.

**logical-system logical-system-name**—(Optional) Name of logical system from which to send the ping requests.

Alternatively, enter the **set cli logical-system logical-system-name** command and then run the **ping** command. To return to the main router or switch, enter the **clear cli logical-system** command.

**loose-source value**—(Optional) Intermediate loose source route entry (IPv4). Open a set of values.



**mac-address *mac-address***—(Optional) Ping the physical or hardware address of the remote system you are trying to reach.

**no-resolve**—(Optional) Do not attempt to determine the hostname that corresponds to the IP address.

**pattern *string***—(Optional) Specify a hexadecimal fill pattern to include in the ping packet.

**rapid**—(Optional) Send ping requests rapidly. The results are reported in a single message, not in individual messages for each ping request. By default, five ping requests are sent before the results are reported. To change the number of requests, include the **count** option.

**record-route**—(Optional) Record and report the packet's path (IPv4).

**routing-instance *routing-instance-name***—(Optional) Name of the routing instance for the ping attempt.

**size *bytes***—(Optional) Size of ping request packets. The range of values, in bytes, is **0** through **65,468**. The default value is **56**, which is effectively 64 bytes because 8 bytes of ICMP header data are added to the packet.

**source *source-address***—(Optional) IP address of the outgoing interface. This address is sent in the IP source address field of the ping request. If this option is not specified, the default address is usually the loopback interface (**lo.0**).

**strict**—(Optional) Use the strict source route option (IPv4).

**strict-source *value***—(Optional) Intermediate strict source route entry (IPv4). Open a set of values.

**tos *type-of-service***—(Optional) Set the type-of-service (ToS) field in the IP header of the ping packets. The range of values is **0** through **255**.

If the device configuration includes the **dscp-code-point *value*** statement at the **[edit class-of-service host-outbound-traffic]** hierarchy level, the configured DSCP value overrides the value specified in this command option. In this case, the ToS field of ICMP echo request packets sent on behalf of this command carries the DSCP value specified in the **dscp-code-point** configuration statement instead of the value you specify in this command option.

**ttl *value***—(Optional) Time-to-live (TTL) value to include in the ping request (IPv6). The range of values is **0** through **255**.

**verbose**—(Optional) Display detailed output.

**vpls *instance-name***—(Optional) Ping the instance to which this VPLS belongs.

**wait *seconds***—(Optional) Maximum wait time, in seconds, after the final packet is sent. If this option is not specified, the default delay is **10** seconds. If this option is used without the count option, a default count of **5** packets is used.

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Required Privilege Level | network                                                                                                                                                                                                                                                                                                                                                                                                            |
| Related Documentation    | <ul style="list-style-type: none"><li>• <i>Configuring the Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages</i></li></ul>                                                                                                                                                                                                                                                                             |
| List of Sample Output    | <a href="#">ping hostname on page 58</a><br><a href="#">ping hostname rapid on page 58</a><br><a href="#">ping hostname size count on page 58</a>                                                                                                                                                                                                                                                                  |
| Output Fields            | When you enter this command, you are provided feedback on the status of your request. An exclamation point (!) indicates that an echo reply was received. A period (.) indicates that an echo reply was not received within the timeout period. An x indicates that an echo reply was received with an error code. These packets are not counted in the received packets count. They are accounted for separately. |

## Sample Output

### ping hostname

```
user@host> ping skye
PING skye.net (192.168.169.254): 56 data bytes
64 bytes from 192.168.169.254: icmp_seq=0 ttl=253 time=1.028 ms
64 bytes from 192.168.169.254: icmp_seq=1 ttl=253 time=1.053 ms
64 bytes from 192.168.169.254: icmp_seq=2 ttl=253 time=1.025 ms
64 bytes from 192.168.169.254: icmp_seq=3 ttl=253 time=1.098 ms
64 bytes from 192.168.169.254: icmp_seq=4 ttl=253 time=1.032 ms
64 bytes from 192.168.169.254: icmp_seq=5 ttl=253 time=1.044 ms
^C [abort]
```

### ping hostname rapid

```
user@host> ping skye rapid
PING skye.net (192.168.169.254): 56 data bytes
!!!!
--- skye.net ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.956/0.974/1.025/0.026 ms
```

### ping hostname size count

```
user@host> ping skye size 200 count 5
PING skye.net (192.168.169.254): 200 data bytes
208 bytes from 192.168.169.254: icmp_seq=0 ttl=253 time=1.759 ms
208 bytes from 192.168.169.254: icmp_seq=1 ttl=253 time=2.075 ms
208 bytes from 192.168.169.254: icmp_seq=2 ttl=253 time=1.843 ms
208 bytes from 192.168.169.254: icmp_seq=3 ttl=253 time=1.803 ms
208 bytes from 192.168.169.254: icmp_seq=4 ttl=253 time=17.898 ms

--- skye.net ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.759/5.075/17.898 ms
```

## show ipv6 neighbors

|                                 |                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show ipv6 neighbors                                                                                                                                                                      |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.3 for EX Series switches.<br>Command introduced in Junos OS Release 12.2 for the QFX Series. |
| <b>Description</b>              | Display information about the IPv6 neighbor cache.                                                                                                                                       |
| <b>Options</b>                  | This command has no options.                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear ipv6 neighbors on page 42</a></li> </ul>                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">show ipv6 neighbors on page 59</a>                                                                                                                                           |
| <b>Output Fields</b>            | <a href="#">Table 7 on page 59</a> describes the output fields for the <b>show ipv6 neighbors</b> command. Output fields are listed in the approximate order in which they appear.       |

**Table 7: show ipv6 neighbors Output Fields**

| Field Name        | Field Description                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------|
| IPv6 Address      | Name of the IPv6 interface.                                                                                                |
| Linklayer Address | Link-layer address.                                                                                                        |
| State             | State of the link: <b>up</b> , <b>down</b> , <b>incomplete</b> , <b>reachable</b> , <b>stale</b> , or <b>unreachable</b> . |
| Exp               | Number of seconds until the entry expires.                                                                                 |
| Rtr               | Whether the neighbor is a routing device: <b>yes</b> or <b>no</b> .                                                        |
| Secure            | Whether this entry was created using the Secure Neighbor Discovery (SEND) protocol: <b>yes</b> or <b>no</b> .              |
| Interface         | Name of the interface.                                                                                                     |

## Sample Output

### show ipv6 neighbors

```

user@host> show ipv6 neighbors
IPv6 Address Linklayer Address State Exp Rtr Secure
Interface
2001:db8:0:1:2a0:a514:0:24c 00:05:85:8f:c8:bd stale 546 yes no
fe-1/2/0.1

```

|                                    |                   |       |     |     |    |
|------------------------------------|-------------------|-------|-----|-----|----|
| fe80::2a0:a514:0:24c<br>fe-1/2/0.1 | 00:05:85:8f:c8:bd | stale | 258 | yes | no |
| fe80::2a0:a514:0:64c<br>fe-1/2/1.5 | 00:05:85:8f:c8:bd | stale | 111 | yes | no |
| fe80::2a0:a514:0:a4c<br>fe-1/2/2.9 | 00:05:85:8f:c8:bd | stale | 327 | yes | no |

## show ipv6 router-advertisement

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show ipv6 router-advertisement &lt;conflicts&gt; &lt;interface <i>interface</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;prefix <i>prefix/prefix length</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 12.2 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Display information about IPv6 router advertisements, including statistics about messages sent and received on interfaces, and information received from advertisements from other routers.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>none</b>—Display all IPv6 router advertisement information for all interfaces.</p> <p><b>conflicts</b>—(Optional) Display only the IPv6 router advertisement information that is conflicting.</p> <p><b>interface <i>interface</i></b>—(Optional) Display IPv6 router advertisement information for the specified interface.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>prefix <i>prefix/prefix length</i></b>—(Optional) Display IPv6 router advertisement information for the specified prefix.</p> |
| <b>Additional Information</b>   | The display identifies conflicting information by enclosing the value the router is advertising in brackets.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear ipv6 router-advertisement on page 43</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <a href="#">show ipv6 router-advertisement on page 62</a><br><a href="#">show ipv6 router-advertisement conflicts on page 63</a><br><a href="#">show ipv6 router-advertisement prefix on page 63</a>                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Output Fields</b>            | <a href="#">Table 8 on page 61</a> describes the output fields for the <b>show ipv6 router-advertisement</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 8: show ipv6 router-advertisement Output Fields

| Field Name          | Field Description                                                               |
|---------------------|---------------------------------------------------------------------------------|
| Interface           | Name of the interface.                                                          |
| Advertisements sent | Number of router advertisements sent and the elapsed time since they were sent. |

Table 8: show ipv6 router-advertisement Output Fields (*continued*)

| Field Name              | Field Description                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Solicits received       | Number of solicitation messages received.                                                                                     |
| Advertisements received | Number of router advertisements received.                                                                                     |
| Advertisements from     | Names of interfaces from which router advertisements have been received and the elapsed time since the last one was received. |
| Managed                 | Managed address configuration flag: 0 (stateless) or 1 (stateful).                                                            |
| Other configuration     | Other stateful configuration flag: 0 (stateless) or 1 (stateful).                                                             |
| Reachable time          | Time that a node identifies a neighbor as reachable after receiving a reachability confirmation, in milliseconds.             |
| Default lifetime        | Default lifetime, in seconds: from 0 seconds to 18.2 hours. A setting of 0 indicates that the router is not a default router. |
| Retransmit timer        | Time between retransmitted Neighbor Solicitation messages, in milliseconds.                                                   |
| Current hop limit       | Configured current hop limit.                                                                                                 |
| Prefix                  | Name and length of the prefix.                                                                                                |
| Valid lifetime          | How long the prefix remains valid for onlink determination.                                                                   |
| Preferred lifetime      | How long the prefix generated by stateless autoconfiguration remains preferred.                                               |
| On link                 | Onlink flag: 0 (not onlink) or 1 (onlink).                                                                                    |
| Autonomous              | Autonomous address configuration flag: 0 (not autonomous) or 1 (autonomous).                                                  |

## Sample Output

### show ipv6 router-advertisement

```

user@host> show ipv6 router-advertisement
Interface: fe-0/1/1.0
 Advertisements sent: 0
 Solicits received: 0
 Advertisements received: 0
Interface: fxp0.0
 Advertisements sent: 0
 Solicits received: 0
 Advertisements received: 1
 Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:00:13 ago
 Managed: 0
 Other configuration: 0 [1]
 Reachable time: 0 ms
 Default lifetime: 1800 sec

```

```
Retransmit timer: 0 ms
Current hop limit: 64
```

#### show ipv6 router-advertisement conflicts

```
user@host> show ipv6 router-advertisement conflicts
Interface: fxp0.0
 Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:01:08 ago
 Other configuration: 0 [1]
```


#### show ipv6 router-advertisement prefix

```
user@host> show ipv6 router-advertisement prefix 8040::/16
Interface: fe-0/1/3.0
 Advertisements sent: 3, last sent 00:04:11 ago
 Solicits received: 0
 Advertisements received: 3
 Advertisement from fe80::290:69ff:fe9a:5403, heard 00:00:05 ago
 Managed: 0
 Other configuration: 0
 Reachable time: 0 ms
 Default lifetime: 180 sec [1800 sec]
 Retransmit timer: 0 ms
 Current hop limit: 64
 Prefix: 8040:1::/64
 Valid lifetime: 2592000 sec
 Preferred lifetime: 604800 sec
 On link: 1
 Autonomous: 1
```

## show log

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                     | show log<br><filename   user <username>>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Syntax (QFabric System)    | show log filename<br><device-type (device-id   device-alias)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Syntax (TX Matrix Routers) | show log<br><all-lcc   lcc number   scc><br><filename   user <username>>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Release Information        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.<br>Option <i>device-type (device-id   device-alias)</i> is introduced in Junos OS Release 13.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description                | List log files, display log file contents, or display information about users who have logged in to the router or switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Options                    | <b>none</b> —List all log files.<br><br><all-lcc   lcc number   scc>—(TX Matrix routers only) (Optional) Display logging information about all T640 routers (or line-card chassis) or a specific T640 router (replace <b>number</b> with a value from 0 through 3) connected to a TX Matrix router. Or, display logging information about the TX Matrix router (or switch-card chassis).<br><br><b>device-type</b> —(QFabric system only) (Optional) Display log messages for only one of the following device types: <ul style="list-style-type: none"><li>• <b>director-device</b>—Display logs for Director devices.</li><li>• <b>infrastructure-device</b>—Display logs for the logical components of the QFabric system infrastructure, including the diagnostic Routing Engine, fabric control Routing Engine, fabric manager Routing Engine, and the default network Node group and its backup (NW-NG-0 and NW-NG-0-backup).</li><li>• <b>interconnect-device</b>—Display logs for Interconnect devices.</li><li>• <b>node-device</b>—Display logs for Node devices.</li></ul> |

**NOTE:** If you specify the **device-type** optional parameter, you must also specify either the **device-id** or **device-alias** optional parameter.

**(device-id | device-alias)**—If a device type is specified, display logs for a device of that type. Specify either the device ID or the device alias (if configured).



**filename**—(Optional) Display the log messages in the specified log file. For the routing matrix, the filename must include the chassis information.



**NOTE:** The *filename* parameter is mandatory for the QFabric system. If you did not configure a syslog filename, specify the default filename of messages.

**user <username>**—(Optional) Display logging information about users who have recently logged in to the router or switch. If you include *username*, display logging information about the specified user.

**Required Privilege Level** trace

**List of Sample Output** [show log on page 65](#)  
[show log filename on page 65](#)  
[show log filename \(QFabric System\) on page 66](#)  
[show log user on page 66](#)

## Sample Output

### show log

```
user@host> show log
total 57518
-rw-r--r-- 1 root bin 211663 Oct 1 19:44 dcd
-rw-r--r-- 1 root bin 999947 Oct 1 19:41 dcd.0
-rw-r--r-- 1 root bin 999994 Oct 1 17:48 dcd.1
-rw-r--r-- 1 root bin 238815 Oct 1 19:44 rpd
-rw-r--r-- 1 root bin 1049098 Oct 1 18:00 rpd.0
-rw-r--r-- 1 root bin 1061095 Oct 1 12:13 rpd.1
-rw-r--r-- 1 root bin 1052026 Oct 1 06:08 rpd.2
-rw-r--r-- 1 root bin 1056309 Sep 30 18:21 rpd.3
-rw-r--r-- 1 root bin 1056371 Sep 30 14:36 rpd.4
-rw-r--r-- 1 root bin 1056301 Sep 30 10:50 rpd.5
-rw-r--r-- 1 root bin 1056350 Sep 30 07:04 rpd.6
-rw-r--r-- 1 root bin 1048876 Sep 30 03:21 rpd.7
-rw-rw-r-- 1 root bin 19656 Oct 1 19:37 wtmp
```

### show log filename

```
user@host> show log rpd
Oct 1 18:00:18 trace_on: Tracing to ?/var/log/rpd? started
Oct 1 18:00:18 EVENT <MTU> ds-5/2/0.0 index 24 <Broadcast PointToPoint Multicast
Oct 1 18:00:18
Oct 1 18:00:19 KRT rcv len 56 V9 seq 148 op add Type route/if af 2 addr
13.13.13.21 nhop type local nhop 13.13.13.21
Oct 1 18:00:19 KRT rcv len 56 V9 seq 149 op add Type route/if af 2 addr
13.13.13.22 nhop type unicast nhop 13.13.13.22
Oct 1 18:00:19 KRT rcv len 48 V9 seq 150 op add Type ifaddr index 24 devindex
43
Oct 1 18:00:19 KRT rcv len 144 V9 seq 151 op chnge Type ifdev devindex 44
Oct 1 18:00:19 KRT rcv len 144 V9 seq 152 op chnge Type ifdev devindex 45
Oct 1 18:00:19 KRT rcv len 144 V9 seq 153 op chnge Type ifdev devindex 46
```

```
Oct 1 18:00:19 KRT recv len 1272 V9 seq 154 op chnge Type ifdev devindex 47
...
```

### show log filename (QFabric System)

```
user@qfabric> show log messages
Mar 28 18:00:06 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:06 ED1486
 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 2159)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1486
 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 2191)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 242726)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07 ED1492
 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 242757)
Mar 28 18:00:16 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:16 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:27 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:27 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_REO_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_REO_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:55 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:55 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:01:10 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:01:10 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:02:37 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:02:37 ED1491
 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 33809)
```

### show log user

```
user@host> show log user
darius mg2546 Thu Oct 1 19:37 still logged in
darius mg2529 Thu Oct 1 19:08 - 19:36 (00:28)
darius mg2518 Thu Oct 1 18:53 - 18:58 (00:04)
root mg1575 Wed Sep 30 18:39 - 18:41 (00:02)
root ttyp2 jun.site.per Wed Sep 30 18:39 - 18:41 (00:02)
alex ttyp1 192.168.1.2 Wed Sep 30 01:03 - 01:22 (00:19)
```

## traceroute

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traceroute <i>host</i> &lt;as-number-lookup&gt; &lt;bypass-routing&gt; &lt;clns&gt; &lt;gateway <i>address</i>&gt; &lt;inet   inet6&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical system <i>logical-system-name</i>&gt; &lt;monitor <i>host</i>&gt; &lt;mpls (<i>ldp FEC address</i>   <i>rsvp label-switched-path-name</i>)&gt; &lt;no-resolve&gt; &lt;propagate-ttl&gt; &lt;routing-instance <i>routing-instance-name</i>&gt; &lt;source <i>source-address</i>&gt; &lt;tos <i>value</i>&gt; &lt;ttl <i>value</i>&gt; &lt;wait <i>seconds</i>&gt; </pre> |
| <b>Syntax (QFX Series)</b> | <pre> traceroute <i>host</i> &lt;as-number-lookup&gt; &lt;bypass-routing&gt; &lt;gateway <i>address</i>&gt; &lt;inet&gt; &lt;interface <i>interface-name</i>&gt; &lt;monitor <i>host</i>&gt; &lt;no-resolve&gt; &lt;routing-instance <i>routing-instance-name</i>&gt; &lt;source <i>source-address</i>&gt; &lt;tos <i>value</i>&gt; &lt;ttl <i>value</i>&gt; &lt;wait <i>seconds</i>&gt; </pre>                                                                                                                                                                           |
| <b>Release Information</b> | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>mpls</b> option introduced in Junos OS Release 9.2.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>propagate-ttl</b> option introduced in Junos OS Release 12.1.</p>                                                                                                                                                                                                                             |
| <b>Description</b>         | <p>Display the route that packets take to a specified network host. Use <b>traceroute</b> as a debugging tool to locate points of failure in a network.</p>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>             | <p><b>host</b>—IP address or name of remote host.</p> <p><b>as-number-lookup</b>—(Optional) Display the autonomous system (AS) number of each intermediate hop on the path from the host to the destination.</p> <p><b>bypass-routing</b>—(Optional) Bypass the normal routing tables and send requests directly to a system on an attached network. If the system is not on a directly attached network, an error is returned. Use this option to display a route to a local system through an interface that has no route through it.</p>                               |

**clns**—(Optional) Trace the route belonging to the Connectionless Network Service (CLNS).

**gateway address**—(Optional) Address of a router or switch through which the route transits.

**inet | inet6**—(Optional) Trace the route belonging to IPv4 or IPv6, respectively.

**interface *interface-name***—(Optional) Name of the interface over which to send packets.

**logical-system *logical-system-name***—(Optional) Perform this operation on all logical systems or on a particular logical system.

**monitor *host***—(Optional) Display real-time monitoring information for the specified host.

**mpls (*ldp FEC address* | *rsvp label-switched-path name*)**—(Optional) See *traceroute mpls ldp* and *traceroute mpls rsvp*.

**no-resolve**—(Optional) Do not attempt to determine the hostname that corresponds to the IP address.

**propagate-ttl**—(Optional) On the PE routing device, use this option to view locally generated Routing Engine transit traffic. This is applicable for MPLS L3VPN traffic only.

Use for troubleshooting, when you want to view hop-by-hop information from the local provider router to the remote provider router, when TTL decrementing is disabled on the core network using the **no-propagate-ttl** configuration statement.



**NOTE:** Using **propagate-ttl** with **traceroute** on the CE router does not show hop-by-hop information.

---

**routing-instance *routing-instance-name***—(Optional) Name of the routing instance for the traceroute attempt.

**source *source-address***—(Optional) Source address of the outgoing traceroute packets.

**tos *value***—(Optional) Value to include in the IP type-of-service (ToS) field. The range of values is 0 through 255.

**ttl *value***—(Optional) Maximum time-to-live value to include in the traceroute request. The range of values is 0 through 128.

**wait *seconds***—(Optional) Maximum time to wait for a response to the traceroute request.

**Required Privilege Level** network

**Related Documentation** • *traceroute monitor*

**List of Sample Output** [traceroute on page 69](#)

[traceroute as-number-lookup host on page 69](#)

[traceroute no-resolve on page 69](#)

[traceroute propagate-ttl on page 70](#)

[traceroute \(Between CE Routers, Layer 3 VPN\) on page 70](#)

[traceroute \(Through an MPLS LSP\) on page 70](#)

**Output Fields** [Table 9 on page 69](#) describes the output fields for the **traceroute** command. Output fields are listed in the approximate order in which they appear.

**Table 9: traceroute Output Fields**

| Field Name             | Field Description                                             |
|------------------------|---------------------------------------------------------------|
| <b>traceroute to</b>   | IP address of the receiver.                                   |
| <b>hops max</b>        | Maximum number of hops allowed.                               |
| <b>byte packets</b>    | Size of packets being sent.                                   |
| <b>number-of-hops</b>  | Number of hops from the source to the named router or switch. |
| <b>router-name</b>     | Name of the router or switch for this hop.                    |
| <b>address</b>         | Address of the router or switch for this hop.                 |
| <b>Round trip time</b> | Average round-trip time, in milliseconds (ms).                |

## Sample Output

### traceroute

```
user@host> traceroute santacruz
traceroute to green.company.net (10.156.169.254), 30 hops max, 40 byte packets
 1 blue23 (10.168.1.254) 2.370 ms 2.853 ms 0.367 ms
 2 red14 (10.168.255.250) 0.778 ms 2.937 ms 0.446 ms
 3 yellow (10.156.169.254) 7.737 ms 89.905 ms 0.834 ms
```

### traceroute as-number-lookup host

```
user@host> traceroute as-number-lookup 10.100.1.1
traceroute to 10.100.1.1 (10.100.1.1), 30 hops max, 40 byte packets
 1 10.39.1.1 (10.39.1.1) 0.779 ms 0.728 ms 0.562 ms
 2 10.39.1.6 (10.39.1.6) [AS 32] 0.657 ms 0.611 ms 0.617 ms
 3 10.100.1.1 (10.100.1.1) [AS 10, 40, 50] 0.880 ms 0.808 ms 0.774 ms
```

### traceroute no-resolve

```
user@host> traceroute santacruz no-resolve
traceroute to green.company.net (10.156.169.254), 30 hops max, 40 byte packets
 1 10.168.1.254 0.458 ms 0.370 ms 0.365 ms
 2 10.168.255.250 0.474 ms 0.450 ms 0.444 ms
 3 10.156.169.254 0.931 ms 0.876 ms 0.862 ms
```

### traceroute propagate-ttl

```
user@host> traceroute propagate-ttl 100.200.2.2 routing-instance VPN-A
traceroute to 100.200.2.2 (100.200.2.2) from 1.1.0.2, 30 hops max, 40 byte packets

 1 1.2.0.2 (1.2.0.2) 2.456 ms 1.753 ms 1.672 ms
 MPLS Label=299776 CoS=0 TTL=1 S=0
 MPLS Label=299792 CoS=0 TTL=1 S=1
 2 1.3.0.2 (1.3.0.2) 1.213 ms 1.225 ms 1.166 ms
 MPLS Label=299792 CoS=0 TTL=1 S=1
 3 100.200.2.2 (100.200.2.2) 1.422 ms 1.521 ms 1.443 ms
```

### traceroute (Between CE Routers, Layer 3 VPN)

```
user@host> traceroute vpn09
traceroute to vpn09.skybank.net (10.255.14.179), 30 hops max, 40
byte packets
 1 10.39.10.21 (10.39.10.21) 0.598 ms 0.500 ms 0.461 ms
 2 10.39.1.13 (10.39.1.13) 0.796 ms 0.775 ms 0.806 ms
 MPLS Label=100006 CoS=0 TTL=1 S=1
 3 vpn09.skybank.net (10.255.14.179) 0.783 ms 0.716 ms 0.686
```

### traceroute (Through an MPLS LSP)

```
user@host> traceroute mpls1
traceroute to 10.168.1.224 (10.168.1.224), 30 hops max, 40 byte packets
 1 mpls1-sr0.company.net (10.168.200.101) 0.555 ms 0.393 ms 0.367 ms
 MPLS Label=1024 CoS=0 TTL=1
 2 mpls5-lo0.company.net (10.168.1.224) 0.420 ms 0.394 ms 0.401 ms
```

## PART 4

# Troubleshooting

- [Routing Protocol Process Memory FAQs on page 73](#)





## CHAPTER 6

# Routing Protocol Process Memory FAQs

- [Routing Protocol Process Memory FAQs Overview on page 73](#)
- [Routing Protocol Process Memory FAQs on page 74](#)

## Routing Protocol Process Memory FAQs Overview

---

Junos OS is based on the FreeBSD Unix operating system. The open source software is modified and hardened to operate in the device's specialized environment. For example, some executables have been deleted, while other utilities were de-emphasized. Additionally, certain software processes were added to enhance the routing functionality. The result of this transformation is the kernel, the heart of the Junos OS software.

The kernel is responsible for operating multiple processes that perform the actual functions of the device. Each process operates in its own protected memory space, while the communication among all the processes is still controlled by the kernel. This separation provides isolation between the processes, and resiliency in the event of a process failure. This is important in a core routing platform because a single process failure does not cause the entire device to cease functioning.

Some of the common software processes include the routing protocol process (rpd) that controls the device's protocols, the device control process (dcd) that controls the device's interfaces, the management process (mgd) that controls user access to the device, the chassis process (chassisd) that controls the device's properties itself, and the Packet Forwarding Engine process (pfed) that controls the communication between the device's Packet Forwarding Engine and the Routing Engine. The kernel also generates specialized processes as needed for additional functionality, such as SNMP, the Virtual Router Redundancy Protocol (VRRP), and Class of Service (CoS).

The routing protocol process is a software process within the Routing Engine software, which controls the routing protocols that run on the device. Its functionality includes all protocol messages, routing table updates, and implementation of routing policies.

The routing protocol process starts all configured routing protocols and handles all routing messages. It maintains one or more routing tables, which consolidate the routing information learned from all routing protocols. From this routing information, the routing protocol process determines the active routes to network destinations and installs these routes into the Routing Engine's forwarding table. Finally, it implements routing policy, which allows you to control the routing information that is transferred between the routing

protocols and the routing table. Using routing policy, you can filter and limit the transfer of information as well as set properties associated with specific routes.

**Related Documentation**

- [Routing Protocol Process Memory FAQs on page 74](#)

---

## Routing Protocol Process Memory FAQs

The following sections present the most frequently asked questions and answers related to the routing protocol process memory utilization, operation, interpretation of related command outputs, and troubleshooting the software process.

### Frequently Asked Questions: Routing Protocol Process Memory

This section presents frequently asked questions and answers related to the memory usage of the routing protocol process.

#### Why does the routing protocol process use excessive memory?

The routing protocol process uses hundreds of megabytes of RAM in the Routing Engine to store information needed for the operation of routing and related protocols, such as BGP, OSPF, IS-IS, RSVP, LDP and MPLS. Such huge consumption of memory is common for the process, as the information it stores includes routes, next hops, interfaces, routing policies, labels, and label-switched paths (LSPs). Because access to the RAM memory is much faster than access to the hard disk, most of the routing protocol process information is stored in the RAM memory instead of using the hard disk space. This ensures that the performance of the routing protocol process is maximized.

#### How can I check the amount of memory the routing protocol process is using?

You can check routing protocol process memory usage by entering the **show system processes** and the **show task memory** Junos OS command-line interface (CLI) operational mode commands.

The **show system processes** command displays information about software processes that are running on the device and that have controlling terminals. The **show task memory** command displays memory utilization for routing protocol tasks on the Routing Engine.

You can check the routing protocol process memory usage by using the **show system processes** command with the **extensive** option. The **show task memory** command displays a report generated by the routing protocol process on its own memory usage. However, this report does not display all the memory used by the process. The value reported by the routing protocol process does not account for the memory used for the **TEXT** and **STACK** segments, or the memory used by the process's internal memory manager. Further, the Resident Set Size value includes shared library pages used by the routing protocol process.

For more information about checking the routing protocol process memory usage.

For more information, see the **show system processes** command and the **show task memory** command.

**I just deleted a large number of routes from the routing protocol process. Why is it still using so much memory?**

The **show system processes extensive** command displays a **RES** value measured in kilobytes. This value represents the amount of program memory resident in the physical memory. This is also known as RSS or Resident Set Size. The **RES** value includes shared library pages used by the process. Any amount of memory freed by the process might still be considered part of the **RES** value. Generally, the kernel delays the migrating of memory out of the **Inact** queue into the **Cache** or **Free** list unless there is a memory shortage. This can lead to large discrepancies between the values reported by the routing protocol process and the kernel, even after the routing protocol process has freed a large amount of memory.

## Frequently Asked Questions: Interpreting Routing Protocol Process-Related Command Outputs

This section presents frequently asked questions and answers about the routing protocol process-related Junos OS command-line interface (CLI) command outputs that are used to display the memory usage of the routing protocol process.

**How do I interpret memory numbers displayed in the show system processes extensive command output?**

The **show system processes extensive** command displays exhaustive system process information about software processes that are running on the device and have controlling terminals. This command is equivalent to the UNIX **top** command. However, the UNIX **top** command shows real-time memory usage, with the memory values constantly changing, while the **show system processes extensive** command provides a snapshot of memory usage in a given moment.

To check overall CPU and memory usage, enter the **show system processes extensive** command. Refer to [Table 10 on page 76](#) for information about the **show system processes extensive** commands output fields.

```
user@host> show system processes extensive
last pid: 544; load averages: 0.00, 0.00, 0.00 18:30:33
37 processes: 1 running, 36 sleeping

Mem: 25M Active, 3968K Inact, 19M Wired, 184K Cache, 8346K Buf, 202M Free
Swap: 528M Total, 64K Used, 528M Free

 PID USERNAME PRI NICE SIZE RES STATE TIME WCPU CPU COMMAND
 544 root 30 0 604K 768K RUN 0:00 0.00% 0.00% top
 3 root 28 0 0K 12K psleep 0:00 0.00% 0.00% vmdaemon
 4 root 28 0 0K 12K update 0:03 0.00% 0.00% update
 528 aviva 18 0 660K 948K pause 0:00 0.00% 0.00% tcsh
 204 root 18 0 300K 544K pause 0:00 0.00% 0.00% csh
 131 root 18 0 332K 532K pause 0:00 0.00% 0.00% cron
 186 root 18 0 196K 68K pause 0:00 0.00% 0.00% watchdog
 27 root 10 0 512M 16288K mfsidl 0:00 0.00% 0.00% mount_mfs
 1 root 10 0 620K 344K wait 0:00 0.00% 0.00% init
 304 root 3 0 884K 900K ttyin 0:00 0.00% 0.00% bash
 200 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 203 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 202 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 201 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 194 root 2 0 2248K 1640K select 0:11 0.00% 0.00% rpd
 205 root 2 0 964K 800K select 0:12 0.00% 0.00% tnp.chassisd
```

```

189 root 2 -12 352K 740K select 0:03 0.00% 0.00% xntpd
114 root 2 0 296K 612K select 0:00 0.00% 0.00% amd
188 root 2 0 780K 600K select 0:00 0.00% 0.00% dcd
527 root 2 0 176K 580K select 0:00 0.00% 0.00% rlogind
195 root 2 0 212K 552K select 0:00 0.00% 0.00% inetd
187 root 2 0 192K 532K select 0:00 0.00% 0.00% tnetd
 83 root 2 0 188K 520K select 0:00 0.00% 0.00% syslogd
538 root 2 0 1324K 516K select 0:00 0.00% 0.00% mgd
 99 daemon 2 0 176K 492K select 0:00 0.00% 0.00% portmap
163 root 2 0 572K 420K select 0:00 0.00% 0.00% nsrexecd
192 root 2 0 560K 400K select 0:10 0.00% 0.00% snmpd
191 root 2 0 1284K 376K select 0:00 0.00% 0.00% mgd
537 aviva 2 0 636K 364K select 0:00 0.00% 0.00% cli
193 root 2 0 312K 204K select 0:07 0.00% 0.00% mib2d
 5 root 2 0 0K 12K pfesel 0:00 0.00% 0.00% if_pfe
 2 root -18 0 0K 12K psleep 0:00 0.00% 0.00% pagedaemon
 0 root -18 0 0K 0K sched 0:00 0.00% 0.00% swapper

```

Table 10 on page 76 describes the output fields that represent the memory values for the **show system processes extensive** command. Output fields are listed in the approximate order in which they appear.

Table 10: show system processes extensive Output Fields

| Field Name    | Field Description                                                                                                                                                                                                                 |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mem</b>    | Information about physical and virtual memory allocation.                                                                                                                                                                         |
| <b>Active</b> | Memory allocated and actively used by the program.                                                                                                                                                                                |
| <b>Inact</b>  | Memory allocated but not recently used or memory freed by the programs. Inactive memory remains mapped in the address space of one or more processes and, therefore, counts toward the RSS value of those processes.              |
| <b>Wired</b>  | Memory that is not eligible to be swapped, usually used for in-kernel memory structures and/or memory physically locked by a process.                                                                                             |
| <b>Cache</b>  | Memory that is not associated with any program and does not need to be swapped before being reused.                                                                                                                               |
| <b>Buf</b>    | Size of memory buffer used to hold data recently called from the disk.                                                                                                                                                            |
| <b>Free</b>   | Memory that is not associated with any programs. Memory freed by a process can become <b>Inactive</b> , <b>Cache</b> , or <b>Free</b> , depending on the method used by the process to free the memory.                           |
| <b>Swap</b>   | Information about swap memory. <ul style="list-style-type: none"> <li>• Total—Total memory available to be swapped to disk.</li> <li>• Used—Memory swapped to disk.</li> <li>• Free—Memory available for further swap.</li> </ul> |

The rest of the command output displays information about the memory usage of each process. The **SIZE** field indicates the size of the virtual address space, and the **RES** field indicates the amount of the program in physical memory, which is also known as RSS or Resident Set Size. For more information, see the **show system processes** command.

### What is the difference between Active and Inact memory that is displayed by the show system processes extensive command?

When the system is under memory pressure, the pageout process reuses memory from the free, cache, inactive and, if necessary, active pages. When the pageout process runs, it scans memory to see which pages are good candidates to be unmapped and freed up. Thus, the distinction between **Active** and **Inact** memory is only used by the pageout process to determine which pool of pages to free first at the time of a memory shortage.

The pageout process first scans the **Inact** list, and checks whether the pages on this list have been accessed since the time they have been listed here. The pages that have been accessed are moved from the **Inact** list to the **Active** list. On the other hand, pages that have not been accessed become prime candidates to be freed by the pageout process. If the pageout process cannot produce enough free pages from the **Inact** list, pages from the **Active** list get freed up.

Because the pageout process runs only when the system is under memory pressure, the pages on the **Inact** list remain untouched – even if they have not been accessed recently – when the amount of **Free** memory is adequate.

### How do I interpret memory numbers displayed in the show task memory command output?

The **show task memory** command provides a comprehensive picture of the memory utilization for routing protocol tasks on the Routing Engine. The routing protocol process is the main task that uses Routing Engine memory.

To check routing process memory usage, enter the **show task memory** command. Refer to [Table 11 on page 77](#) for information about the **show task memory** command output fields.

```
user@host> show task memory
Memory Size (kB) %Available When
Currently In Use: 29417 3% now
Maximum Ever Used: 33882 4% 00/02/11 22:07:03
Available: 756281 100% now
```

[Table 11 on page 77](#) describes the output fields for the **show task memory** command. Output fields are listed in the approximate order in which they appear.

**Table 11: show task memory Output Fields**

| Field Name               | Field Description                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------------------------|
| Memory Currently In Use  | Memory currently in use. Dynamically allocated memory plus the <b>DATA</b> segment memory in kilobytes. |
| Memory Maximum Ever Used | Maximum memory ever used.                                                                               |
| Memory Available         | Memory currently available.                                                                             |

The **show task memory** command does not display all the memory used by the routing protocol process. This value does not account for the memory used for the **TEXT** and

**STACK** segments, or the memory used by the routing protocol process's internal memory manager.

#### Why is the Currently In Use value less than the RES value?

The **show task memory** command displays a **Currently In Use** value measured in kilobytes. This value represents the memory currently in use. It is the dynamically allocated memory plus the **DATA** segment memory. The **show system processes extensive** command displays a **RES** value measured in kilobytes. This value represents the amount of program memory resident in the physical memory. This is also known as RSS or Resident Set Size.

The **Currently In Use** value does not account for all of the memory that the routing protocol process uses. This value does not include the memory used for the **TEXT** and the **STACK** segments, and a small percentage of memory used by the routing protocol process's internal memory manager. Further, the **RES** value includes shared library pages used by the routing protocol process.

Any amount of memory freed by the routing protocol process might still be considered part of the **RES** value. Generally, the kernel delays the migrating of memory out of the **Inact** queue into the **Cache** or **Free** list unless there is a memory shortage. This can lead to large discrepancies between the **Currently In Use** value and the **RES** value.

## Frequently Asked Questions: Routing Protocol Process Memory Swapping

This section presents frequently asked questions and answers related to the memory swapping of the routing protocol process from the Routing Engine memory to the hard disk memory.

#### How do I monitor swap activity?

When the system is under memory pressure, the pageout process reuses memory from the free, cache, inact and, if necessary, active pages. You can monitor the swap activity by viewing the syslog message reported by the kernel during periods of high pageout activity.

The syslog message appears as follows:

```
Mar 3 20:08:02 olympic /kernel: High pageout rate!! 277 pages/sec.
```

You can use the **vmstat -s** command to print the statistics for the swapout activity. The displayed statistics appear as follows:

```
0 swap pager pageouts
0 swap pager pages paged out
```

The **swap pager pageouts** is the number of pageout operations to the swap device, and the **swap pager pages paged out** is the number of pages paged out to the swap device.

#### Why does the system start swapping when I try to dump core using the request system core-dumps command?

The **request system core-dumps** command displays a list of system core files created when the device has failed. This command can be useful for diagnostic purposes. Each list item includes the file permissions, number of links, owner, group, size, modification

date, path, and filename. You can use the **core-filename** option and the **core-file-info**, **brief**, and **detail** options to display more information about the specified core-dump files.

You can use the **request system core-dumps** command to perform a non-fatal core-dump without aborting the routing protocol process. To do this, the routing protocol process is forked, generating a second copy, and then aborted. This process can double the memory consumed by the two copies of the routing protocol processes, pushing the system into swap.

**Why does the show system processes extensive command show that memory is swapped to disk although there is plenty of free memory?**

Memory can remain swapped out indefinitely if it is not accessed again. Therefore, the **show system processes extensive** command shows that memory is swapped to disk even though there is plenty of free memory, and such a situation is not unusual.

## Frequently Asked Questions: Troubleshooting the Routing Protocol Process

This section presents frequently asked questions and answers related to a shortage of memory and memory leakage by the routing protocol process.

**What does the RPD\_OS\_MEMHIGH message mean?**

The **RPD\_OS\_MEMHIGH** message is written into the system message file if the routing protocol process is running out of memory. This message alerts you that the routing protocol process is using the indicated amount and percentage of Routing Engine memory, which is considered excessive. This message is generated either because the routing protocol process is leaking memory or the use of system resources is excessive, perhaps because routing filters are misconfigured or the configured network topology is very complex.

When the memory utilization for the routing protocol process is using all available Routing Engine DRAM memory (Routing Engines with maximum 2 GB DRAM) or reaches the limit of 2 GB of memory (Routing Engines with 4 GB DRAM), a message of the following form is written every minute in the syslog message file:

**RPD\_OS\_MEMHIGH: Using 188830 KB of memory, 100 percent of available**

This message includes the amount, in kilobytes and/or the percentage, of the available memory in use.

This message should not appear under normal conditions, as any further memory allocations usually require a portion of existing memory to be written to swap. As a recommended solution, increase the amount of RAM in the Routing Engine. For more information, go to <http://kb.juniper.net/InfoCenter/index?page=content&id=KB14186>.

**What can I do when there is a memory shortage even after a swap?**

It is not recommended for the system to operate in this state, notwithstanding the existence of swap. The protocols that run in the routing protocol process usually have a real-time requirement that cannot reliably withstand the latency of being swapped to hard disk. If the memory shortage has not resulted from a memory leak, then either a

reduction in the memory usage or an upgrade to a higher memory-capacity Routing Engine is required.

#### How do I determine whether there is a memory leak in the routing protocol process?

Memory leaks are typically the result of a seemingly unbounded growth in the memory usage of a process as reported by the **show system processes extensive** command.

There are two classes of memory leaks that the routing protocol process can experience.

- The first class occurs when the allocated memory that is no longer in use is not freed. This class of leak can usually be fixed by taking several samples of the **show task memory detail** command over a period of time and comparing the deltas.
- The second class occurs when there is a late access to freed memory. If the access is not outside the mapped address space, the kernel backfills the accessed page with real memory. This backfill is done without the knowledge of the routing protocol process's internal memory allocator, which makes this class of leak much more difficult to resolve. If a memory leak of this class is suspected, writing the state of the system to a disk file (creating a core file) is suggested.

A large discrepancy between the **RES** value and the **Currently In Use** value might indicate a memory leak. However, large discrepancies can also occur for legitimate reasons. For example, the memory used for the **TEXT** and **STACK** segments or the memory used by the routing protocol process's internal memory manager might not be displayed. Further, the **RES** value includes shared library pages used by the process.

#### What is the task\_timer?

The source of a routing protocol process memory leak can usually be identified by dumping the timers for each task. You can use the **show task task-name** command to display routing protocol tasks on the Routing Engine. Tasks can be baseline tasks performed regardless of the device's configuration, and other tasks that depend on the device configuration.

For more information, see the **show task** command.

#### Related Documentation

- [Routing Protocol Process Memory FAQs Overview on page 73](#)



## PART 5

# Index

- [Index on page 83](#)



# Index

## Symbols

|                                              |      |
|----------------------------------------------|------|
| #, comments in configuration statements..... | xiii |
| ( ), in syntax descriptions.....             | xiii |
| < >, in syntax descriptions.....             | xiii |
| [ ], in configuration statements.....        | xiii |
| { }, in configuration statements.....        | xiii |
| (pipe), in syntax descriptions.....          | xiii |

## A

|                           |    |
|---------------------------|----|
| autonomous statement..... | 24 |
|---------------------------|----|

## B

|                                          |      |
|------------------------------------------|------|
| braces, in configuration statements..... | xiii |
| brackets                                 |      |
| angle, in syntax descriptions.....       | xiii |
| square, in configuration statements..... | xiii |

## C

|                                                |      |
|------------------------------------------------|------|
| clear ipv6 neighbors command.....              | 42   |
| clear ipv6 router-advertisement command.....   | 43   |
| comments, in configuration statements.....     | xiii |
| connections                                    |      |
| testing                                        |      |
| general connections.....                       | 55   |
| conventions                                    |      |
| text and syntax.....                           | xii  |
| curly braces, in configuration statements..... | xiii |
| current-hop-limit statement.....               | 25   |
| customer support.....                          | xiv  |
| contacting JTAC.....                           | xiv  |

## D

|                                 |      |
|---------------------------------|------|
| default-lifetime statement..... | 25   |
| documentation                   |      |
| comments on.....                | xiii |

## E

|                           |    |
|---------------------------|----|
| error (tracing flag)      |    |
| neighbor discovery.....   | 36 |
| expiration (tracing flag) |    |
| neighbor discovery.....   | 36 |

## F

|                                      |        |
|--------------------------------------|--------|
| FAQs                                 |        |
| routing protocol process memory..... | 73, 74 |
| font conventions.....                | xii    |

## G

|                         |    |
|-------------------------|----|
| general (tracing flag)  |    |
| neighbor discovery..... | 36 |

## H

|                          |    |
|--------------------------|----|
| holddown (tracing flag)  |    |
| neighbor discovery.....  | 36 |
| hosts, reachability      |    |
| general connections..... | 55 |

## I

|                                                  |    |
|--------------------------------------------------|----|
| ICMP router discovery                            |    |
| supported software standards.....                | 9  |
| interface statement                              |    |
| neighbor discovery.....                          | 26 |
| interface statistics, real-time, displaying..... | 44 |
| IPv6                                             |    |
| neighbor cache information                       |    |
| clearing.....                                    | 42 |
| displaying.....                                  | 59 |
| router advertisements                            |    |
| clearing.....                                    | 43 |
| displaying.....                                  | 61 |

## K

|                                          |    |
|------------------------------------------|----|
| keyboard sequences                       |    |
| used with monitor interface command..... | 44 |
| used with monitor interface traffic      |    |
| command.....                             | 45 |

## L

|                           |    |
|---------------------------|----|
| link-mtu statement.....   | 27 |
| log files                 |    |
| contents, displaying..... | 64 |
| display of                |    |
| starting.....             | 52 |
| stopping.....             | 54 |

## M

|                                           |      |
|-------------------------------------------|------|
| managed-configuration statement.....      | 28   |
| manuals                                   |      |
| comments on.....                          | xiii |
| max-advertisement-interval statement..... | 29   |
| min-advertisement-interval statement..... | 30   |

|                                |    |
|--------------------------------|----|
| monitor interface command..... | 44 |
| monitor start command.....     | 52 |
| monitor stop command.....      | 54 |

## N

|                                         |        |
|-----------------------------------------|--------|
| neighbor discovery                      |        |
| autoconfiguration.....                  | 28, 32 |
| basics.....                             | 4      |
| configuration statements.....           | 14     |
| frequency.....                          | 29, 30 |
| hop limit.....                          | 25     |
| MTU option.....                         | 27     |
| neighbor solicitation, frequency.....   | 34     |
| preferred lifetime.....                 | 32     |
| reachable time.....                     | 34     |
| router advertisements.....              | 26     |
| router lifetime.....                    | 25     |
| supported software standards.....       | 9      |
| valid lifetime.....                     | 38     |
| no-autonomous statement.....            | 24     |
| no-link-mtu statement.....              | 27     |
| no-managed-configuration statement..... | 28     |
| normal (tracing flag)                   |        |
| neighbor discovery.....                 | 36     |

## O

|                                             |    |
|---------------------------------------------|----|
| on-link statement.....                      | 31 |
| other-stateful-configuration statement..... | 32 |
| output control keys                         |    |
| for monitor interface command.....          | 44 |
| for monitor interface traffic command.....  | 45 |

## P

|                                          |      |
|------------------------------------------|------|
| packets (tracing flag)                   |      |
| neighbor discovery.....                  | 36   |
| parentheses, in syntax descriptions..... | xiii |
| ping command.....                        | 55   |
| policy (tracing flag)                    |      |
| neighbor discovery.....                  | 36   |
| preferred-lifetime statement.....        | 32   |
| prefix statement                         |      |
| neighbor discovery.....                  | 33   |

## R

|                                 |    |
|---------------------------------|----|
| reachable-time statement.....   | 34 |
| real-time monitoring            |    |
| interfaces.....                 | 44 |
| retransmit-timer statement..... | 34 |

|                                     |        |
|-------------------------------------|--------|
| route (tracing flag)                |        |
| neighbor discovery.....             | 36     |
| router advertisements               |        |
| IPv6                                |        |
| clearing.....                       | 43     |
| displaying.....                     | 61     |
| router-advertisement statement..... | 35     |
| routes, displaying                  |        |
| to specified network host.....      | 67     |
| routing protocol process memory     |        |
| FAQ.....                            | 73, 74 |

## S

|                                             |     |
|---------------------------------------------|-----|
| show ipv6 neighbors command.....            | 59  |
| show ipv6 router-advertisement command..... | 61  |
| show log command.....                       | 64  |
| state (tracing flag)                        |     |
| neighbor discovery.....                     | 36  |
| statistics                                  |     |
| interfaces, real-time.....                  | 44  |
| support, technical See technical support    |     |
| syntax conventions.....                     | xii |

## T

|                         |     |
|-------------------------|-----|
| task (tracing flag)     |     |
| neighbor discovery..... | 36  |
| technical support       |     |
| contacting JTAC.....    | xiv |
| timer (tracing flag)    |     |
| neighbor discovery..... | 36  |
| trace files             |     |
| display of              |     |
| starting.....           | 52  |
| stopping.....           | 54  |
| traceoptions statement  |     |
| neighbor discovery..... | 36  |
| traceroute command..... | 67  |
| tracing flags           |     |
| error                   |     |
| neighbor discovery..... | 36  |
| expiration              |     |
| neighbor discovery..... | 36  |
| general                 |     |
| neighbor discovery..... | 36  |
| holddown                |     |
| neighbor discovery..... | 36  |
| normal                  |     |
| neighbor discovery..... | 36  |

---

|                               |    |
|-------------------------------|----|
| packets                       |    |
| neighbor discovery.....       | 36 |
| policy                        |    |
| neighbor discovery.....       | 36 |
| route                         |    |
| neighbor discovery.....       | 36 |
| state                         |    |
| neighbor discovery.....       | 36 |
| task                          |    |
| neighbor discovery.....       | 36 |
| timer                         |    |
| neighbor discovery.....       | 36 |
| trigger                       |    |
| neighbor discovery.....       | 36 |
| update                        |    |
| neighbor discovery.....       | 36 |
| tracing operations            |    |
| neighbor discovery.....       | 36 |
| trigger (tracing flag)        |    |
| neighbor discovery.....       | 36 |
| <br><b>U</b>                  |    |
| update (tracing flag)         |    |
| neighbor discovery.....       | 36 |
| users                         |    |
| logs, displaying.....         | 64 |
| <br><b>V</b>                  |    |
| valid-lifetime statement..... | 38 |

