

## IPsec Properties



---

Published: 2012-02-28

Juniper Networks, Inc.  
1194 North Mathilda Avenue  
Sunnyvale, California 94089  
USA  
408-745-2000  
www.juniper.net

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

*IPsec Properties*  
Copyright © 2012, Juniper Networks, Inc.  
All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	xi
	Documentation and Release Notes . . . . .	xi
	Supported Platforms . . . . .	xi
	Using the Examples in This Manual . . . . .	xi
	Merging a Full Example . . . . .	xii
	Merging a Snippet . . . . .	xii
	Documentation Conventions . . . . .	xiii
	Documentation Feedback . . . . .	xv
	Requesting Technical Support . . . . .	xv
	Self-Help Online Tools and Resources . . . . .	xv
	Opening a Case with JTAC . . . . .	xvi
<b>Part 1</b>	<b>Overview</b>	
<b>Chapter 1</b>	<b>IPsec . . . . .</b>	<b>3</b>
	IPsec Overview . . . . .	3
	IPsec . . . . .	3
	Security Associations . . . . .	3
	IKE . . . . .	4
	Comparison of IPsec Services and ES Interface Configuration . . . . .	4
<b>Part 2</b>	<b>Configuration</b>	
<b>Chapter 2</b>	<b>IPsec Services Configuration Guidelines . . . . .</b>	<b>9</b>
	Minimum Security Association Configurations . . . . .	9
	Minimum Manual SA Configuration . . . . .	9
	Minimum Dynamic SA Configuration . . . . .	9
<b>Chapter 3</b>	<b>Configuration Tasks for IPsec Services . . . . .</b>	<b>11</b>
	Configuring Security Associations . . . . .	11
	Configuring Manual Security Associations . . . . .	12
	Configuring the Direction for IPsec Processing . . . . .	12
	Configuring the Protocol for a Manual IPsec SA . . . . .	13
	Configuring the Security Parameter Index . . . . .	14
	Configuring the Auxiliary Security Parameter Index . . . . .	14
	Configuring Authentication for a Manual IPsec SA . . . . .	14
	Configuring Encryption for a Manual IPsec SA . . . . .	15
	Configuring Dynamic Security Associations . . . . .	16
	Clearing Security Associations . . . . .	16
	Configuring IKE Proposals . . . . .	17
	Configuring the Authentication Algorithm for an IKE Proposal . . . . .	17
	Configuring the Authentication Method for an IKE Proposal . . . . .	18

Configuring the Diffie-Hellman Group for an IKE Proposal . . . . .	18
Configuring the Encryption Algorithm for an IKE Proposal . . . . .	19
Configuring the Lifetime for an IKE SA . . . . .	19
Example: Configuring an IKE Proposal . . . . .	20
Configuring IKE Policies . . . . .	20
Configuring the IKE Phase . . . . .	21
Configuring the Mode for an IKE Policy . . . . .	21
Configuring the Proposals in an IKE Policy . . . . .	22
Configuring the Preshared Key for an IKE Policy . . . . .	22
Configuring the Local Certificate for an IKE Policy . . . . .	22
Configuring a Certificate Revocation List . . . . .	23
Configuring the Description for an IKE Policy . . . . .	24
Configuring Local and Remote IDs for IKE Phase 1 Negotiation . . . . .	24
Example: Configuring an IKE Policy . . . . .	24
Configuring IPsec Proposals . . . . .	25
Configuring the Authentication Algorithm for an IPsec Proposal . . . . .	26
Configuring the Description for an IPsec Proposal . . . . .	26
Configuring the Encryption Algorithm for an IPsec Proposal . . . . .	26
Configuring the Lifetime for an IPsec SA . . . . .	27
Configuring the Protocol for a Dynamic SA . . . . .	27
Configuring IPsec Policies . . . . .	28
Configuring the Description for an IPsec Policy . . . . .	28
Configuring Perfect Forward Secrecy . . . . .	29
Configuring the Proposals in an IPsec Policy . . . . .	29
Example: Configuring an IPsec Policy . . . . .	29
Configuring IPsec Rules . . . . .	30
Configuring Match Direction for IPsec Rules . . . . .	31
Configuring Match Conditions in IPsec Rules . . . . .	32
Configuring Actions in IPsec Rules . . . . .	33
Enabling IPsec Packet Fragmentation . . . . .	34
Configuring Destination Addresses for Dead Peer Detection . . . . .	34
Configuring or Disabling IPsec Anti-Replay . . . . .	36
Enabling System Log Messages . . . . .	36
Specifying the MTU for IPsec Tunnels . . . . .	36
Configuring IPsec Rule Sets . . . . .	37
Configuring Dynamic Endpoints for IPsec Tunnels . . . . .	37
Authentication Process . . . . .	38
Implicit Dynamic Rules . . . . .	38
Reverse Route Insertion . . . . .	39
Configuring an IKE Access Profile . . . . .	39
Referencing the IKE Access Profile in a Service Set . . . . .	41
Configuring the Interface Identifier . . . . .	41
Default IKE and IPsec Proposals . . . . .	42
Tracing IPsec Operations . . . . .	42
Disabling IPsec Tunnel Endpoint in Traceroute . . . . .	43
Tracing IPsec PKI Operations . . . . .	44
Configuring IPsec on the Services SDK . . . . .	44

<b>Chapter 4</b>	<b>Examples</b>	<b>47</b>
	Example: Configuring Statically Assigned Tunnels	47
	Example: Configuring Dynamically Assigned Tunnels	50
<b>Chapter 5</b>	<b>Configuration Statements</b>	<b>55</b>
	anti-replay-window-size	55
	authentication	56
	authentication-algorithm (IKE)	57
	authentication-algorithm (IPsec)	57
	authentication-method	58
	auxiliary-spi	58
	backup-remote-gateway	59
	clear-dont-fragment-bit	59
	clear-ike-sas-on-pic-restart	60
	clear-ipsec-sas-on-pic-restart	60
	description	61
	destination-address	61
	dh-group	62
	direction	63
	dynamic	64
	encryption	65
	encryption-algorithm	66
	from	67
	ike	68
	initiate-dead-peer-detection	69
	ipsec	69
	ipsec-inside-interface	70
	lifetime-seconds	70
	local-certificate	71
	local-id	71
	manual	72
	match-direction	72
	mode	73
	no-anti-replay	73
	no-ipsec-tunnel-in-traceroute	74
	perfect-forward-secrecy	74
	policy (IKE)	75
	policy (IPsec)	76
	pre-shared-key	76
	proposal (IKE)	77
	proposal (IPsec)	77
	proposals	78
	protocol	78
	remote-gateway	79
	remote-id	79
	rule	80
	rule-set	81
	services	81
	source-address	82

	spi .....	82
	syslog .....	83
	term .....	84
	then .....	85
	traceoptions .....	86
	traceoptions (PKI) .....	88
	tunnel-mtu .....	89
	version (IKE) .....	89
<b>Part 3</b>	<b>Administration</b>	
<b>Chapter 6</b>	<b>IP Security Operational Mode Commands .....</b>	<b>93</b>
	clear security pki ca-certificate .....	94
	clear security pki certificate-request .....	95
	clear security pki crl .....	96
	clear security pki key-pair .....	97
	clear security pki local-certificate .....	98
	clear services ipsec-vpn certificates .....	99
	clear services ipsec-vpn ike security-associations .....	100
	clear services ipsec-vpn ipsec statistics .....	101
	clear services ipsec-vpn ipsec security-associations .....	102
	request security pki ca-certificate enroll .....	103
	request security pki ca-certificate load .....	104
	request security pki ca-certificate verify .....	105
	request security pki crl load .....	106
	request security pki generate-certificate-request .....	107
	request security pki generate-key-pair .....	109
	request security pki local-certificate enroll .....	110
	request security pki local-certificate generate-self-signed .....	112
	request security pki local-certificate load .....	113
	request security pki local-certificate verify .....	114
	request services ipsec-vpn ipsec switch tunnel .....	115
	show security pki ca-certificate .....	116
	show security pki certificate-request .....	120
	show security pki crl .....	122
	show security pki local-certificate .....	124
	show services ipsec-vpn certificates .....	127
	show services ipsec-vpn ike security-associations .....	130
	show services ipsec-vpn ipsec security-associations .....	134
	show services ipsec-vpn ipsec statistics .....	137
<b>Part 4</b>	<b>Index</b>	
	Index .....	143

# List of Figures

Part 2	Configuration	
Chapter 4	Examples .....	47
	Figure 1: IPsec Dynamic Endpoint Tunneling Topology .....	50





# List of Tables

	<b>About the Documentation . . . . .</b>	<b>xi</b>
	Table 1: Notice Icons . . . . .	xiii
	Table 2: Text and Syntax Conventions . . . . .	xiii
<b>Part 1</b>	<b>Overview</b>	
<b>Chapter 1</b>	<b>IPsec . . . . .</b>	<b>3</b>
	Table 3: Statement Equivalents for ES and AS Interfaces . . . . .	4
<b>Part 2</b>	<b>Configuration</b>	
<b>Chapter 3</b>	<b>Configuration Tasks for IPsec Services . . . . .</b>	<b>11</b>
	Table 4: Default IKE and IPsec Proposals for Dynamic Negotiations . . . . .	42
<b>Part 3</b>	<b>Administration</b>	
<b>Chapter 6</b>	<b>IP Security Operational Mode Commands . . . . .</b>	<b>93</b>
	Table 5: show security pki ca-certificate Output Fields . . . . .	116
	Table 6: show security pki certificate-request Output Fields . . . . .	120
	Table 7: show security pki crl Output Fields . . . . .	122
	Table 8: show security pki local-certificate Output Fields . . . . .	124
	Table 9: show services ipsec-vpn certificates Output Fields . . . . .	127
	Table 10: show services ipsec-vpn ike security-associations Output Fields . . . . .	130
	Table 11: show services ipsec-vpn ipsec security-associations Output Fields . . . . .	134
	Table 12: show services ipsec-vpn ipsec statistics Output Fields . . . . .	137



# About the Documentation

- Documentation and Release Notes on page xi
- Supported Platforms on page xi
- Using the Examples in This Manual on page xi
- Documentation Conventions on page xiii
- Documentation Feedback on page xv
- Requesting Technical Support on page xv

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

## Supported Platforms

---

For the features described in this document, the following platforms are supported:

- M Series
- T Series
- MX Series
- J Series

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the [Junos OS CLI User Guide](#).

## Documentation Conventions

Table 1 on page xiii defines notice icons used in this guide.

Table 1: Notice Icons





Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xiii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b> No alarms currently active

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces important new terms.</li> <li>Identifies book names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS System Basics Configuration Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
<b>Text like this</b>	Represents names of configuration statements, commands, files, and directories; interface names; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit <b>protocols ospf area area-id</b>] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Enclose optional keywords or variables.	<b>stub</b> <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast   multicast</b>  ( <i>string1</i>   <i>string2</i>   <i>string3</i> )
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Enclose a variable for which you can substitute one or more values.	<b>community name members [</b> <i>community-ids</i> <b>]</b>
Indentation and braces ( { } )	Identify a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
<b>J-Web GUI Conventions</b>		
<b>Bold text like this</b>	Represents J-Web graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
> (bold right angle bracket)	Separates levels in a hierarchy of J-Web selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

---

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net), or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

## Requesting Technical Support

---

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>

- Join and participate in the Juniper Networks Community Forum:  
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/> .
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html> .



## PART 1

# Overview

- [IPsec on page 3](#)



## CHAPTER 1

# IPsec

- [IPsec Overview on page 3](#)

## IPsec Overview

---

The Juniper Networks Junos OS supports IPsec. This section discusses the following topics, which provide background information about configuring IPsec.

For a list of the IPsec and IKE standards supported by the Junos OS, see the *Junos OS Hierarchy and RFC Reference*.

- [IPsec on page 3](#)
- [Security Associations on page 3](#)
- [IKE on page 4](#)
- [Comparison of IPsec Services and ES Interface Configuration on page 4](#)

## IPsec

The IPsec architecture provides a security suite for the IP version 4 (IPv4) and IP version 6 (IPv6) network layers. The suite provides such functionality as authentication of origin, data integrity, confidentiality, replay protection, and nonrepudiation of source. In addition to IPsec, the Junos OS also supports the Internet Key Exchange (IKE), which defines mechanisms for key generation and exchange, and manages security associations (SAs).

IPsec also defines a security association and key management framework that can be used with any network layer protocol. The SA specifies what protection policy to apply to traffic between two IP-layer entities. IPsec provides secure tunnels between two peers.

## Security Associations

To use IPsec security services, you create SAs between hosts. An SA is a simplex connection that allows two hosts to communicate with each other securely by means of IPsec. There are two types of SAs:

- Manual SAs require no negotiation; all values, including the keys, are static and specified in the configuration. Manual SAs statically define the security parameter index (SPI) values, algorithms, and keys to be used, and require matching configurations on both ends of the tunnel. Each peer must have the same configured options for communication to take place.

- Dynamic SAs require additional configuration. With dynamic SAs, you configure IKE first and then the SA. IKE creates dynamic security associations; it negotiates SAs for IPsec. The IKE configuration defines the algorithms and keys used to establish the secure IKE connection with the peer security gateway. This connection is then used to dynamically agree upon keys and other data used by the dynamic IPsec SA. The IKE SA is negotiated first and then used to protect the negotiations that determine the dynamic IPsec SAs.

## IKE

IKE is a key management protocol that creates dynamic SAs; it negotiates SAs for IPsec. An IKE configuration defines the algorithms and keys used to establish a secure connection with a peer security gateway.

IKE performs the following tasks:

- Negotiates and manages IKE and IPsec parameters.
- Authenticates secure key exchange.
- Provides mutual peer authentication by means of shared secrets (not passwords) and public keys.
- Provides identity protection (in main mode).

Two versions of the IKE protocol (IKEv1 and IKEv2) are supported now. IKE negotiates security attributes and establishes shared secrets to form the bidirectional IKE SA. In IKE, inbound and outbound IPsec SAs are established and the IKE SA secures the exchanges. Starting with Junos OS Release 11.4, both IKEv1 and IKEv2 are supported by default on all M Series, MX Series, and T Series routers. IKE also generates keying material, provides Perfect Forward Secrecy, and exchanges identities.

## Comparison of IPsec Services and ES Interface Configuration

Table 3 on page 4 compares the top-level configuration of IPsec features on the ES PIC interfaces and on the AS or MultiServices PIC interfaces.

**Table 3: Statement Equivalents for ES and AS Interfaces**

ES PIC Configuration	AS and MultiServices PIC IPsec Configuration
[edit security ipsec] proposal {...}	[edit services ipsec-vpn ipsec] proposal {...}
[edit security ipsec] policy {...}	[edit services ipsec-vpn ipsec] policy {...}
[edit security ipsec] security-association sa-dynamic {...}	[edit services ipsec-vpn rule <i>rule-name</i> ] term <i>term-name</i> match-conditions {...} then dynamic {...}
[edit security ipsec] security-association sa-manual {...}	[edit services ipsec-vpn rule <i>rule-name</i> ] term <i>term-name</i> match-conditions {...} then manual {...}

Table 3: Statement Equivalents for ES and AS Interfaces (*continued*)

ES PIC Configuration	AS and MultiServices PIC IPsec Configuration
[edit security ike] proposal {...}	[edit services ipsec-vpn ike] proposal {...}
[edit security ike] policy {...}	[edit services ipsec-vpn ike] policy {...}
Not available	[edit services ipsec-vpn] rule-set {...}
Not available	[edit services ipsec-vpn] service-set {...}
[edit interfaces es- <i>fpc/pic/port</i> ] tunnel source <i>address</i>	[edit services ipsec-vpn service-set <i>set-name</i> ipsec-vpn local-gateway <i>address</i> ]
[edit interfaces es- <i>fpc/pic/port</i> ] tunnel destination <i>address</i>	[edit services ipsec-vpn rule <i>rule-name</i> ] remote-gateway <i>address</i>

For more information about configuring IPsec services on an AS or MultiServices PIC, see IPsec Properties. For more information about configuring encryption services on an ES PIC, see Configuring Encryption Interfaces.



**NOTE:** Although many of the same statements and properties are valid on both platforms, the configurations are not interchangeable. You must commit a complete configuration for the PIC type that is installed in your router.



## PART 2

# Configuration

- [IPsec Services Configuration Guidelines on page 9](#)
- [Configuration Tasks for IPsec Services on page 11](#)
- [Examples on page 47](#)
- [Configuration Statements on page 55](#)





## CHAPTER 2

# IPsec Services Configuration Guidelines

- [Minimum Security Association Configurations on page 9](#)

## Minimum Security Association Configurations

---

The following sections show the minimum configurations necessary to set up security associations (SAs) for IPsec services:

- [Minimum Manual SA Configuration on page 9](#)
- [Minimum Dynamic SA Configuration on page 9](#)

### Minimum Manual SA Configuration

To define a manual SA configuration, you must include at least the following statements at the `[edit services ipsec-vpn rule rule-name term term-name then manual]` hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual]
direction (inbound | outbound | bidirectional) {
  authentication {
    algorithm (hmac-md5-96 | hmac-sha1-96);
    key (ascii-text key | hexadecimal key);
  }
  encryption {
    algorithm algorithm;
    key (ascii-text key | hexadecimal key);
  }
  protocol (ah | esp | bundle);
  spi spi-value;
}
```

### Minimum Dynamic SA Configuration

To define a dynamic SA configuration, you must include at least the following statements at the `[edit services ipsec-vpn]` hierarchy level:

```
[edit services ipsec-vpn]
ike {
  proposal proposal-name {
    authentication-algorithm (md5 | sha1 | sha-256);
    authentication-method pre-shared-keys;
    dh-group (group1 | group2 | group5 | group14);
```

```
        encryption-algorithm algorithm;  
    }  
    policy policy-name {  
        proposals [ ike-proposal-names ];  
        pre-shared-key (ascii-text key | hexadecimal key);  
        version (1 | 2);  
        mode (aggressive | main);  
    }  
}  
ipsec {  
    policy policy-name {  
        proposals [ ipsec-proposal-names ];  
    }  
    proposal proposal-name {  
        authentication-algorithm (hmac-md5-96 | hmac-sha1-96);  
        encryption-algorithm algorithm;  
        protocol (ah | esp | bundle);  
    }  
}
```



---

**NOTE:**

- Starting with Junos OS Release 11.4, both IKEv1 and IKEv2 are supported by default on all M Series, MX Series, and T Series routers. The version statement under the [edit services ipsec-vpn ike policy *name*] hierarchy allows you to configure the specific IKE version to be supported.
- The mode statement under the [edit services ipsec-vpn ike policy *name*] hierarchy is required only if the version option is set to 1.

---

You must also include the **ipsec-policy** statement at the [edit services ipsec-vpn rule *rule-name* term *term-name* then dynamic] hierarchy level.

## CHAPTER 3

# Configuration Tasks for IPsec Services

- [Configuring Security Associations on page 11](#)
- [Configuring IKE Proposals on page 17](#)
- [Configuring IKE Policies on page 20](#)
- [Configuring IPsec Proposals on page 25](#)
- [Configuring IPsec Policies on page 28](#)
- [Configuring IPsec Rules on page 30](#)
- [Configuring IPsec Rule Sets on page 37](#)
- [Configuring Dynamic Endpoints for IPsec Tunnels on page 37](#)
- [Tracing IPsec Operations on page 42](#)
- [Configuring IPsec on the Services SDK on page 44](#)

## Configuring Security Associations

---

To use IPsec services, you create an SA between hosts. An SA is a simplex connection that allows two hosts to communicate with each other securely by means of IPsec. You can configure two types of SAs:

- **Manual**—Requires no negotiation; all values, including the keys, are static and specified in the configuration. As a result, each peer must have the same configured options for communication to take place. For information about how to configure a manual SA, see [“Configuring Manual Security Associations” on page 12](#).
- **Dynamic**—Specifies proposals to be negotiated with the tunnel peer. The keys are generated as part of the negotiation and therefore do not need to be specified in the configuration. The dynamic SA includes one or more **proposal** statements, which allow you to prioritize a list of protocols and algorithms to be negotiated with the peer. For information about how to configure a dynamic SA, see [“Configuring Dynamic Security Associations” on page 16](#).

This section includes the following topics:

- [Configuring Manual Security Associations on page 12](#)
- [Configuring Dynamic Security Associations on page 16](#)
- [Clearing Security Associations on page 16](#)



**NOTE:** Both OSPFv2 and OSPFv3 support IPsec authentication. However, dynamic or tunnel mode IPsec SAs are not supported for OSPFv3. If you add SAs into OSPFv3 by including the `ipsec-sa` statement at the `[edit protocols ospf3 area area-number interface interface-name]` hierarchy level, your configuration fails to commit. For more information about OSPF authentication and other OSPF properties, see the [Junos OS Routing Protocols Configuration Guide](#).

## Configuring Manual Security Associations

Manual SAs require no negotiation; all values, including the keys, are static and specified in the configuration. As a result, each peer must have the same configured options for communication to take place.

To configure a manual IPsec security association, include statements at the `[edit services ipsec-vpn rule rule-name term term-name then manual]` hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual]
direction (inbound | outbound | bidirectional) {
  authentication {
    algorithm (hmac-md5-96 | hmac-sha1-96);
    key (ascii-text key | hexadecimal key);
  }
  auxiliary-spi auxiliary-spi-value;
  encryption {
    algorithm algorithm;
    key (ascii-text key | hexadecimal key);
  }
  protocol (ah | esp | bundle);
  spi spi-value;
}
```

To configure manual SA statements, do the following:

- [Configuring the Direction for IPsec Processing on page 12](#)
- [Configuring the Protocol for a Manual IPsec SA on page 13](#)
- [Configuring the Security Parameter Index on page 14](#)
- [Configuring the Auxiliary Security Parameter Index on page 14](#)
- [Configuring Authentication for a Manual IPsec SA on page 14](#)
- [Configuring Encryption for a Manual IPsec SA on page 15](#)

### Configuring the Direction for IPsec Processing

The **direction** statement specifies inbound or outbound IPsec processing. If you want to define different algorithms, keys, or security parameter index (SPI) values for each direction, you configure the **inbound** and **outbound** options. If you want the same attributes in both directions, use the **bidirectional** option.

To configure the direction of IPsec processing, include the **direction** statement at the `[edit services ipsec-vpn rule rule-name term term-name then manual]` hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual]
  direction (inbound | outbound | bidirectional) {
    ...
  }
```

#### *Example: Using Different Configuration for the Inbound and Outbound Directions*

Define different algorithms, keys, and security parameter index values for each direction:

```
[edit services ipsec-vpn rule rule-name term term-name then manual]
direction inbound {
  protocol esp;
  spi 16384;
  encryption {
    algorithm 3des-cbc;
    key ascii-text 23456789012345678901234;
  }
}
direction outbound {
  protocol esp;
  spi 24576;
  encryption {
    algorithm 3des-cbc;
    key ascii-text 12345678901234567890abcd;
  }
}
```

#### *Example: Using the Same Configuration for the Inbound and Outbound Directions*

Define one set of algorithms, keys, and security parameter index values that is valid in both directions:

```
[edit services ipsec-vpn rule rule-name term term-name then manual]
direction bidirectional {
  protocol ah;
  spi 20001;
  authentication {
    algorithm hmac-md5-96;
    key ascii-text 123456789012abcd;
  }
}
```

### Configuring the Protocol for a Manual IPsec SA

IPsec uses two protocols to protect IP traffic: Encapsulating Security Payload (ESP) and authentication header (AH). The AH protocol is used for strong authentication. A third option, **bundle**, uses AH authentication and ESP encryption; it does not use ESP authentication because AH provides stronger authentication of IP packets.

To configure the IPsec protocol, include the **protocol** statement and specify the **ah**, **esp**, or **bundle** option at the `[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]` hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]
  protocol (ah | bundle | esp);
```

### Configuring the Security Parameter Index

An SPI is an arbitrary value that uniquely identifies which SA to use at the receiving host. The sending host uses the SPI to identify and select which SA to use to secure every packet. The receiving host uses the SPI to identify and select the encryption algorithm and key used to decrypt packets.



**NOTE:** Each manual SA must have a unique SPI and protocol combination. Use the auxiliary SPI when you configure the protocol statement to use the **bundle** option.

To configure the SPI, include the **spi** statement and specify a value (from 256 through 16,639) at the **[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]
spi spi-value;
```

### Configuring the Auxiliary Security Parameter Index

Use the auxiliary SPI when you configure the **protocol** statement to use the **bundle** option.



**NOTE:** Each manual SA must have a unique SPI and protocol combination.

To configure the auxiliary SPI, include the **auxiliary-spi** statement and specify a value (from 256 through 16,639) at the **[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]
auxiliary-spi auxiliary-spi-value;
```

### Configuring Authentication for a Manual IPsec SA

To configure an authentication algorithm, include the **authentication** statement and specify an authentication algorithm and a key at the **[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]
authentication {
  algorithm (hmac-md5-96 | hmac-sha1-96);
  key (ascii-text key | hexadecimal key);
}
```

The algorithm can be one of the following:

- **hmac-md5-96**—Hash algorithm that authenticates packet data. It produces a 128-bit authenticator value and a 96-bit digest.
- **hmac-sha1-96**—Hash algorithm that authenticates packet data. It produces a 160-bit authenticator value and a 96-bit digest.

The key can be one of the following:

- **ascii-text**—ASCII text key. With the **hmac-md5-96** option, the key contains 16 ASCII characters. With the **hmac-sha1-96** option, the key contains 20 ASCII characters.
- **hexadecimal**—Hexadecimal key. With the **hmac-md5-96** option, the key contains 32 hexadecimal characters. With the **hmac-sha1-96** option, the key contains 40 hexadecimal characters.

### Configuring Encryption for a Manual IPsec SA

To configure IPsec encryption, include the **encryption** statement and specify an algorithm and key at the **[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then manual direction direction]
  encryption {
    algorithm algorithm;
    key (ascii-text key | hexadecimal key);
  }
```

The algorithm can be one of the following:

- **des-cbc**—Encryption algorithm that has a block size of 8 bytes; its key size is 64 bits long.
- **3des-cbc**—Encryption algorithm that has a block size of 24 bytes; its key size is 192 bits long.
- **aes-128-cbc**—Advanced Encryption Standard (AES) 128-bit encryption algorithm.
- **aes-192-cbc**—Advanced Encryption Standard (AES) 192-bit encryption algorithm.
- **aes-256-cbc**—Advanced Encryption Standard (AES) 256-bit encryption algorithm.



**NOTE:** For a list of Data Encryption Standard (DES) encryption algorithm weak and semiweak keys, see RFC 2409, *The Internet Key Exchange (IKE)*. The AES encryption algorithms use a software implementation that has much lower throughput, so DES remains the recommended option. For reference information on AES encryption, see RFC 3602, *The AES-CBC Cipher Algorithm and Its Use with IPsec*.

For 3des-cbc, the first 8 bytes should differ from the second 8 bytes, and the second 8 bytes should be the same as the third 8 bytes.

If you configure an authentication proposal but do not include the encryption statement, the result is NULL encryption. Certain applications expect this result. If you configure no specific authentication or encryption values, the Junos OS uses the default values of sha1 for the authentication and 3des-cbc for the encryption.

The key can be one of the following:

- **ascii-text**—ASCII text key. With the **des-cbc** option, the key contains 8 ASCII characters. With the **3des-cbc** option, the key contains 24 ASCII characters.
- **hexadecimal**—Hexadecimal key. With the **des-cbc** option, the key contains 16 hexadecimal characters. With the **3des-cbc** option, the key contains 48 hexadecimal characters.



**NOTE:** You cannot configure encryption when you use the AH protocol.

## Configuring Dynamic Security Associations

You configure dynamic SAs with a set of proposals that are negotiated by the security gateways. The keys are generated as part of the negotiation and therefore do not need to be specified in the configuration. The dynamic SA includes one or more proposals, which allow you to prioritize a list of protocols and algorithms to be negotiated with the peer.

To enable a dynamic SA, follow these steps:

1. Configure Internet Key Exchange (IKE) proposals and IKE policies associated with these proposals.
2. Configure IPsec proposals and an IPsec policy associated with these proposals.
3. Associate an SA with an IPsec policy by configuring the **dynamic** statement.

For more information about IKE policies and proposals, see [“Configuring IKE Policies” on page 20](#) and [“Configuring IKE Proposals” on page 17](#). For more information about IPsec policies and proposals, see [“Configuring IPsec Policies” on page 28](#).

To configure a dynamic SA, include the **dynamic** statement and specify an IPsec policy name at the **[edit services ipsec-vpn rule rule-name term term-name then]** hierarchy level. The **ike-policy** statement is optional unless you use the preshared key authentication method.

```
[edit services ipsec-vpn rule rule-name term term-name then]
dynamic {
  ike-policy policy-name;
  ipsec-policy policy-name;
}
```



**NOTE:** If you want to establish a dynamic SA, the attributes in at least one configured IPsec and IKE proposal must match those of its peer.

## Clearing Security Associations

You can set up the router software to clear IKE or IPsec SAs automatically when the corresponding services PIC restarts or is taken offline. To configure this property, include



the `clear-ike-sas-on-pic-restart` or `clear-ipsec-sas-on-pic-restart` statement at the `[edit services ipsec-vpn]` hierarchy level:

```
[edit services ipsec-vpn]
clear-ike-sas-on-pic-restart;
clear-ipsec-sas-on-pic-restart;
```

After you add this statement to the configuration, all the IKE or IPsec SAs corresponding to the tunnels in the PIC will be cleared when the PIC restarts or goes offline.

## Configuring IKE Proposals

Dynamic security associations (SAs) require IKE configuration. With dynamic SAs, you configure IKE first, and then the SA. IKE creates the dynamic SAs and negotiates them for IPsec. The IKE configuration defines the algorithms and keys used to establish the secure IKE connection with the peer security gateway.

You can configure one or more IKE proposals. Each proposal is a list of IKE attributes to protect the IKE connection between the IKE host and its peer.

To configure an IKE proposal, include the `proposal` statement and specify a name at the `[edit services ipsec-vpn ike]` hierarchy level:

```
[edit services ipsec-vpn ike]
proposal proposal-name {
  authentication-algorithm (md5 | sha1 | sha-256);
  authentication-method (dsa-signatures | pre-shared-key | rsa-signatures);
  dh-group (group1 | group2 | group5 | group14);
  encryption-algorithm algorithm;
  lifetime-seconds seconds;
}
```

This section includes the following topics:

- [Configuring the Authentication Algorithm for an IKE Proposal on page 17](#)
- [Configuring the Authentication Method for an IKE Proposal on page 18](#)
- [Configuring the Diffie-Hellman Group for an IKE Proposal on page 18](#)
- [Configuring the Encryption Algorithm for an IKE Proposal on page 19](#)
- [Configuring the Lifetime for an IKE SA on page 19](#)
- [Example: Configuring an IKE Proposal on page 20](#)

## Configuring the Authentication Algorithm for an IKE Proposal

To configure the authentication algorithm for an IKE proposal, include the `authentication-algorithm` statement at the `[edit services ipsec-vpn ike proposal proposal-name]` hierarchy level:

```
[edit services ipsec-vpn ike proposal proposal-name]
authentication-algorithm (md5 | sha1 | sha-256);
```

The authentication algorithm can be one of the following:

- **md5**—Produces a 128-bit digest.

- **sha1**—Produces a 160-bit digest.
- **sha-256**—Produces a 256-bit digest.



**NOTE:** For reference information on Secure Hash Algorithms (SHAs), see Internet draft [draft-eastlake-sha2-02.txt](#), *Secure Hash Algorithms (SHA and HMAC-SHA)* (expires July 2006).

## Configuring the Authentication Method for an IKE Proposal

To configure the authentication method for an IKE proposal, include the **authentication-method** statement at the **[edit services ipsec-vpn ike proposal proposal-name]** hierarchy level:

```
[edit services ipsec-vpn ike proposal proposal-name]
authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
```

The authentication method can be one of the following:

- **dsa-signatures**—Digital Signature Algorithm
- **pre-shared-keys**—A key derived from an out-of-band mechanism; the key authenticates the exchanges
- **rsa-signatures**—Public key algorithm (supports encryption and digital signatures)

## Configuring the Diffie-Hellman Group for an IKE Proposal

Diffie-Hellman is a public-key cryptography scheme that allows two parties to establish a shared secret over an insecure communications channel. It is also used within IKE to establish session keys.

To configure the Diffie-Hellman group for an IKE proposal, include the **dh-group** statement at the **[edit services ipsec-vpn ike proposal proposal-name]** hierarchy level:

```
[edit services ipsec-vpn ike proposal proposal-name]
dh-group (group1 | group2 | group5 | group14);
```

The group can be one of the following:

- **group1**—Specifies that IKE use the 768-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group2**—Specifies that IKE use the 1024-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group5**—Specifies that IKE use the 1536-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group14**—Specifies that IKE use the 2048-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.

Using a Diffie-Hellman group based on a greater number of bits results a more secure IKE tunnel than using a group based on fewer bits. However, this additional security entails additional processing time.

## Configuring the Encryption Algorithm for an IKE Proposal

To configure the encryption algorithm for an IKE proposal, include the **encryption-algorithm** statement at the **[edit services ipsec-vpn ike proposal *proposal-name*]** hierarchy level:

```
[edit services ipsec-vpn ike proposal proposal-name]  
  encryption-algorithm algorithm;
```

The encryption algorithm can be one of the following:

- **3des-cbc**—Cipher block chaining encryption algorithm with a key size of 24 bytes; its key size is 192 bits long.
- **des-cbc**—Cipher block chaining encryption algorithm with a key size of 8 bytes; its key size is 56 bits long.
- **aes-128-cbc**—Advanced Encryption Standard (AES) 128-bit encryption algorithm.
- **aes-192-cbc**—Advanced Encryption Standard (AES) 192-bit encryption algorithm.
- **aes-256-cbc**—Advanced Encryption Standard (AES) 256-bit encryption algorithm.



**NOTE:** For a list of Data Encryption Standard (DES) encryption algorithm weak and semiweak keys, see RFC 2409, *The Internet Key Exchange (IKE)*. The AES encryption algorithms use a software implementation that has much lower throughput, so DES remains the recommended option.

For 3des-cbc, the first 8 bytes should differ from the second 8 bytes, and the second 8 bytes should be the same as the third 8 bytes.

If you configure an authentication proposal but do not include the encryption statement, the result is NULL encryption. Certain applications expect this result. If you configure no specific authentication or encryption values, the Junos OS uses the default values of sha1 for the authentication and 3des-cbc for the encryption.

## Configuring the Lifetime for an IKE SA

The **lifetime-seconds** statement sets the lifetime of an IKE SA. When the IKE SA expires, it is replaced by a new SA (and SPI) or the IPsec connection is terminated.

To configure the lifetime for an IKE SA, include the **lifetime-seconds** statement at the **[edit services ipsec-vpn ike proposal *proposal-name*]** hierarchy level:

```
[edit services ipsec-vpn ike proposal proposal-name]  
  lifetime-seconds seconds;
```

By default, the IKE SA lifetime is 3600 seconds. The range is from 180 through 86,400 seconds.



**NOTE:** For IKE proposals, there is only one SA lifetime value, specified by the Junos OS. IPsec proposals use a different mechanism; for more information, see [“Configuring the Lifetime for an IPsec SA” on page 27](#).

---

## Example: Configuring an IKE Proposal

Configure an IKE proposal:

```
[edit services ipsec-vpn ike]
proposal ike-proposal {
  authentication-method pre-shared-keys;
  dh-group group1;
  authentication-algorithm sha1;
  encryption-algorithm 3des-cbc;
}
```

---

## Configuring IKE Policies

An IKE policy defines a combination of security parameters (IKE proposals) to be used during IKE negotiation. It defines a peer address and the proposals needed for that connection. Depending on which authentication method is used, it defines the preshared key for the given peer or the local certificate. During the IKE negotiation, IKE looks for an IKE policy that is the same on both peers. The peer that initiates the negotiation sends all its policies to the remote peer, and the remote peer tries to find a match.

A match is made when both policies from the two peers have a proposal that contains the same configured attributes. If the lifetimes are not identical, the shorter lifetime between the two policies (from the host and peer) is used. The configured preshared key must also match its peer.

Starting with Junos OS Release 11.4, both IKEv1 and IKEv2 are supported by default on all M Series, MX Series, and T Series routers. You can configure the specific IKE phase to be supported for the negotiation. However, if only IKEv1 is supported, the Junos OS rejects IKEv2 negotiations. Similarly, if only IKEv2 is supported, the Junos OS rejects all IKEv1 negotiations.

The key management process (kmd) daemon determines which version of IKE is used in a negotiation. If kmd is the IKE initiator, it uses IKEv1 by default and retains the configured version for negotiations. If kmd is the IKE responder, it accepts connections from both IKEv1 and IKEv2.

You can create multiple, prioritized proposals at each peer to ensure that at least one proposal matches a remote peer's proposal.

First, you configure one or more IKE proposals; then you associate these proposals with an IKE policy. You can also prioritize a list of proposals used by IKE in the **policy** statement by listing the proposals you want to use, from first to last.

To configure an IKE policy, include the **policy** statement and specify a policy name at the **[edit services ipsec-vpn ike]** hierarchy level:

```
[edit services ipsec-vpn ike]
policy policy-name {
  description description;
  local-certificate identifier;
  local-id (ipv4_addr ipv4-address | ipv6_addr ipv6-address | key-id identifier);
  version (1 | 2);
  mode (aggressive | main);
  pre-shared-key (ascii-text key | hexadecimal key);
  proposals [ proposal-names ];
  remote-id {
    any-remote-id;
    ipv4_addr [ values ];
    ipv6_addr [ values ];
    key_id [ values ];
  }
}
```

This section includes the following topics:

- [Configuring the IKE Phase on page 21](#)
- [Configuring the Mode for an IKE Policy on page 21](#)
- [Configuring the Proposals in an IKE Policy on page 22](#)
- [Configuring the Preshared Key for an IKE Policy on page 22](#)
- [Configuring the Local Certificate for an IKE Policy on page 22](#)
- [Configuring the Description for an IKE Policy on page 24](#)
- [Configuring Local and Remote IDs for IKE Phase 1 Negotiation on page 24](#)
- [Example: Configuring an IKE Policy on page 24](#)

For an example of an IKE policy configuration, see “[Example: Configuring an IKE Policy](#)” on page 24.

## Configuring the IKE Phase

Starting with Junos OS Release 11.4, both IKEv1 and IKEv2 are supported by default on all M Series, MX Series, and T Series routers. You can configure the specific IKE phase to be supported for the negotiation. However, if only IKEv1 is supported, the Junos OS rejects IKEv2 negotiations. Similarly, if only IKEv2 is supported, the Junos OS rejects all IKEv1 negotiations.

To configure the IKE phase used, include the **version** statement at the **[edit services ipsec-vpn ike policy *policy-name*]** hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]
version (1 | 2);
```

## Configuring the Mode for an IKE Policy

IKE policy has two modes: aggressive and main. By default, main mode is enabled. Main mode uses six messages, in three exchanges, to establish the IKE SA. (These three steps are IKE SA negotiation, a Diffie-Hellman exchange, and authentication of the peer.) Main mode also allows a peer to hide its identity.

Aggressive mode also establishes an authenticated IKE SA and keys. However, aggressive mode uses half the number of messages, has less negotiation power, and does not provide identity protection. The peer can use the aggressive or main mode to start IKE negotiation; the remote peer accepts the mode sent by the peer.



**NOTE:** The mode configuration is required only if the `version` option is set to 1.

To configure the mode for an IKE policy, include the `mode` statement and specify `aggressive` or `main` at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]  
mode (aggressive | main);
```

## Configuring the Proposals in an IKE Policy

The IKE policy includes a list of one or more proposals associated with an IKE policy.

To configure the proposals in an IKE policy, include the `proposals` statement and specify one or more proposal names at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level:

```
proposals [ proposal-names ];
```

## Configuring the Preshared Key for an IKE Policy

When you include the `authentication-method pre-shared-keys` statement at the `[edit services ipsec-vpn ike proposal proposal-name]` hierarchy level, IKE policy preshared keys authenticate peers; for more information, see [“Configuring the Authentication Method for an IKE Proposal” on page 18](#). You must manually configure a preshared key, which must match that of its peer. The preshared key can be an ASCII text (alphanumeric) key or a hexadecimal key.

To configure the preshared key in an IKE policy, include the `pre-shared-key` statement and a key at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]  
pre-shared-key (ascii-text key | hexadecimal key);
```

The key can be one of the following:

- **ascii-text**—ASCII text key. With the `des-cbc` option, the key contains 8 ASCII characters. With the `3des-cbc` option, the key contains 24 ASCII characters.
- **hexadecimal**—Hexadecimal key. With the `des-cbc` option, the key contains 16 hexadecimal characters. With the `3des-cbc` option, the key contains 48 hexadecimal characters.

## Configuring the Local Certificate for an IKE Policy

When you include the `authentication-method rsa-signatures` statement at the `[edit services ipsec-vpn ike proposal proposal-name]` hierarchy level, public key infrastructure (PKI)

digital certificates authenticate peers; for more information, see [“Configuring the Authentication Method for an IKE Proposal” on page 18](#). You must identify a local certificate that is sent to the peer during the IKE authentication phase.

To configure the local certificate for an IKE policy, include the **local-certificate** statement at the **[edit services ipsec-vpn ike policy *policy-name*]** hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]
  local-certificate identifier;
```

The **local-certificate** statement specifies the identifier used to obtain the end entity’s certificate from the certification authority. Configuring it in an IKE policy allows you the flexibility of using a separate certificate with each remote peer if that is needed. You must also specify the identity of the certification authority by configuring the **ca-profile** statement at the **[edit security pki]** hierarchy level; for more information, see the [Junos OS System Basics Configuration Guide](#). For complete examples of digital certificate configuration, see the [Junos OS Feature Guides](#).

You can use the configured profiles to establish a set of trusted certification authorities for use with a particular service set. This enables you to configure separate service sets for individual clients to whom you are providing IP services; the distinct service sets provide logical separation of one set of IKE sessions from another, using different local gateway addresses, or *virtualization*. To configure the set of trusted certification authorities, include the **trusted-ca** statement at the **[edit services service-set *service-set-name* ipsec-vpn-options]** hierarchy level:

```
[edit services service-set service-set-name ipsec-vpn-options]
  trusted-ca ca-profile;
```

For more information, see [Configuring IPsec Service Sets](#).

### Configuring a Certificate Revocation List

A certificate revocation list (CRL) contains a list of digital certificates that have been cancelled before their expiration date. When a participating peer uses a digital certificate, it checks the certificate signature and validity. It also acquires the most recently issued CRL and checks that the certificate serial number is not on that CRL.



**NOTE:** By default, certificate revocation list verification is enabled. You can disable CRL verification by including the **disable** statement at the **[edit security pki ca-profile *ca-profile-name* revocation-check]** hierarchy level.

By default, if the router either cannot access the Lightweight Directory Access Protocol (LDAP) URL or retrieve a valid certificate revocation list, certificate verification fails and the IPsec tunnel is not established. To override this behavior and permit the authentication of the IPsec peer when the CRL is not downloaded, include the **disable on-download-failure** statement at the **[edit security pki ca-profile *ca-profile-name* revocation-check crl]** hierarchy level.

To use the CA certificate revocation list, you include statements at the `[edit security pki ca-profile ca-profile-name revocation-check]` hierarchy level. For details, see the [Junos OS System Basics Configuration Guide](#).

## Configuring the Description for an IKE Policy

To specify an optional text description for an IKE policy, include the **description** statement at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]  
description description;
```

## Configuring Local and Remote IDs for IKE Phase 1 Negotiation

You can optionally specify local identifiers for use in IKE phase 1 negotiation. If the **local-id** statement is omitted, the local gateway address is used.

To specify one or more local IDs, include the **local-id** statement at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]  
local-id (ipv4_addr ipv4-address | ipv6_addr ipv6-address | key-id identifier);
```

You can also specify remote gateway identifiers for which the IKE policy is used. The remote gateway address in which this policy is defined is added by default.

To specify one or more remote IDs, include the **remote-id** statement at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level:

```
[edit services ipsec-vpn ike policy policy-name]  
remote-id {  
  any-remote-id;  
  ipv4_addr [ values ];  
  ipv6_addr [ values ];  
  key_id [ values ];  
}
```

The **any-remote-id** option allows any remote address to connect. This option is supported only in dynamic endpoints configurations and cannot be configured along with specific values. For more information about dynamic endpoint configurations, see [“Configuring Dynamic Endpoints for IPsec Tunnels” on page 37](#).

## Example: Configuring an IKE Policy

Define two IKE policies: **policy 10.1.1.2** and **policy 10.1.1.1**. Each policy is associated with **proposal-1** and **proposal-2**. The following configuration uses only IKEv1 for negotiation.

```
[edit services ipsec-vpn]  
ike {  
  proposal proposal-1 {  
    authentication-method pre-shared-keys;  
    dh-group group1;  
    authentication-algorithm sha1;  
    encryption-algorithm 3des-cbc;  
    lifetime-seconds 1000;  
  }  
}
```



```

proposal proposal-2 {
  authentication-method pre-shared-keys;
  dh-group group2;
  authentication-algorithm md5;
  encryption-algorithm des-cbc;
  lifetime-seconds 10000;
}
proposal proposal-3 {
  authentication-method rsa-signatures;
  dh-group group2;
  authentication-algorithm md5;
  encryption-algorithm des-cbc;
  lifetime-seconds 10000;
}
policy 10.1.1.2 {
  mode main;
  proposals [ proposal-1 proposal-2 ];
  pre-shared-key ascii-text example-pre-shared-key;
}
policy 10.1.1.1 {
  local-certificate certificate-file-name;
  local-key-pair private-public-key-file;
  mode aggressive;
  proposals [ proposal-2 proposal-3 ]
  pre-shared-key hexadecimal 0102030abbcd;
}
}

```



**NOTE:** Updates to the current IKE proposal and policy configuration are not applied to the current IKE SA; updates are applied to new IKE SAs.

If you want the new updates to take immediate effect, you must clear the existing IKE security associations so that they will be reestablished with the changed configuration. For information about how to clear the current IKE security association, see the [Junos OS System Basics and Services Command Reference](#).

## Configuring IPsec Proposals

An IPsec proposal lists protocols and algorithms (security services) to be negotiated with the remote IPsec peer.

To configure an IPsec proposal, include the **proposal** statement and specify an IPsec proposal name at the **[edit services ipsec-vpn ipsec]** hierarchy level:

```

[edit services ipsec-vpn ipsec]
proposal proposal-name {
  authentication-algorithm (hmac-md5-96 | hmac-sha1-96);
  description description;
  encryption-algorithm algorithm;
  lifetime-seconds seconds;
  protocol (ah | esp | bundle);
}

```

```
}
```

This section discusses the following topics:

- [Configuring the Authentication Algorithm for an IPsec Proposal on page 26](#)
- [Configuring the Description for an IPsec Proposal on page 26](#)
- [Configuring the Encryption Algorithm for an IPsec Proposal on page 26](#)
- [Configuring the Lifetime for an IPsec SA on page 27](#)
- [Configuring the Protocol for a Dynamic SA on page 27](#)

## Configuring the Authentication Algorithm for an IPsec Proposal

To configure the authentication algorithm for an IPsec proposal, include the **authentication-algorithm** statement at the **[edit services ipsec-vpn ipsec proposal *proposal-name*]** hierarchy level:

```
[edit services ipsec-vpn ipsec proposal proposal-name]  
  authentication-algorithm (hmac-md5-96 | hmac-sha1-96);
```

The authentication algorithm can be one of the following:

- **hmac-md5-96**—Hash algorithm that authenticates packet data. It produces a 128-bit digest. Only 96 bits are used for authentication.
- **hmac-sha1-96**—Hash algorithm that authenticates packet data. It produces a 160-bit digest. Only 96 bits are used for authentication.

## Configuring the Description for an IPsec Proposal

To specify an optional text description for an IPsec proposal, include the **description** statement at the **[edit services ipsec-vpn ipsec proposal *proposal-name*]** hierarchy level:

```
[edit services ipsec-vpn ipsec proposal proposal-name]  
  description description;
```

## Configuring the Encryption Algorithm for an IPsec Proposal

To configure encryption algorithm for an IPsec proposal, include the **encryption-algorithm** statement at the **[edit services ipsec-vpn ipsec proposal *proposal-name*]** hierarchy level:

```
[edit services ipsec-vpn ipsec proposal proposal-name]  
  encryption-algorithm algorithm;
```

The encryption algorithm can be one of the following:

- **3des-cbc**—Encryption algorithm that has a block size of 24 bytes; its key size is 192 bits long.
- **des-cbc**—Encryption algorithm that has a block size of 8 bytes; its key size is 48 bits long.
- **aes-128-cbc**—Advanced Encryption Standard (AES) 128-bit encryption algorithm.

- **aes-192-cbc**—Advanced Encryption Standard (AES) 192-bit encryption algorithm.
- **aes-256-cbc**—Advanced Encryption Standard (AES) 256-bit encryption algorithm.



**NOTE:** For a list of Data Encryption Standard (DES) encryption algorithm weak and semiweak keys, see RFC 2409, *The Internet Key Exchange (IKE)*. The AES encryption algorithms use a software implementation that has much lower throughput, so DES remains the recommended option.

For **3des-cbc**, the first 8 bytes should differ from the second 8 bytes, and the second 8 bytes should be the same as the third 8 bytes.

If you configure an authentication proposal but do not include the encryption statement, the result is NULL encryption. Certain applications expect this result. If you configure no specific authentication or encryption values, the Junos OS uses the default values of **sha1** for the authentication and **3des-cbc** for the encryption.

## Configuring the Lifetime for an IPsec SA

When a dynamic IPsec SA is created, two types of lifetimes are used: hard and soft. The hard lifetime specifies the lifetime of the SA. The soft lifetime, which is derived from the hard lifetime, informs the IPsec key management system that the SA is about to expire. This allows the key management system to negotiate a new SA before the hard lifetime expires.

To configure the hard lifetime value, include the **lifetime-seconds** statement and specify the number of seconds at the **[edit services ipsec-vpn ipsec proposal proposal-name]** hierarchy level:

```
[edit services ipsec-vpn ipsec proposal proposal-name]
lifetime-seconds seconds;
```

The default lifetime is 28,800 seconds. The range is from 180 through 86,400 seconds.

The soft lifetime values are as follows:

- Initiator: Soft lifetime = Hard lifetime – 135 seconds.
- Responder: Soft lifetime = Hard lifetime – 90 seconds.

## Configuring the Protocol for a Dynamic SA

The **protocol** statement sets the protocol for a dynamic SA. IPsec uses two protocols to protect IP traffic: ESP and AH. The ESP protocol can support authentication, encryption, or both. The AH protocol is used for strong authentication. AH also authenticates the IP packet. The **bundle** option uses AH authentication and ESP encryption; it does not use ESP authentication because AH provides stronger authentication of IP packets.

To configure the protocol for a dynamic SA, include the **protocol** statement and specify the **ah**, **esp**, or **bundle** option at the `[edit services ipsec-vpn ipsec proposal proposal-name]` hierarchy level:

```
[edit services ipsec-vpn ipsec proposal proposal-name]  
protocol (ah | esp | bundle);
```

## Configuring IPsec Policies

---

An IPsec policy defines a combination of security parameters (IPsec proposals) used during IPsec negotiation. It defines Perfect Forward Secrecy (PFS) and the proposals needed for the connection. During the IPsec negotiation, IPsec looks for a proposal that is the same on both peers. The peer that initiates the negotiation sends all its policies to the remote peer, and the remote peer tries to find a match.

A match is made when both policies from the two peers have a proposal that contains the same configured attributes. If the lifetimes are not identical, the shorter lifetime between the two policies (from the host and peer) is used.

You can create multiple, prioritized IPsec proposals at each peer to ensure that at least one proposal matches a remote peer's proposal.

First, you configure one or more IPsec proposals; then you associate these proposals with an IPsec policy. You can prioritize a list of proposals used by IPsec in the **policy** statement by listing the proposals you want to use, from first to last.

To configure an IPsec policy, include the **policy** statement, and specify the policy name and one or more proposals to associate with the policy, at the `[edit services ipsec-vpn ipsec]` hierarchy level:

```
[edit services ipsec-vpn ipsec]  
policy policy-name {  
  description description;  
  perfect-forward-secrecy {  
    keys (group1 | group2 | group5 | group14);  
  }  
  proposals [ proposal-names ];  
}
```

This section includes the following topics related to configuring an IPsec policy:

- [Configuring the Description for an IPsec Policy on page 28](#)
- [Configuring Perfect Forward Secrecy on page 29](#)
- [Configuring the Proposals in an IPsec Policy on page 29](#)
- [Example: Configuring an IPsec Policy on page 29](#)

### Configuring the Description for an IPsec Policy

To specify an optional text description for an IPsec policy, include the **description** statement at the `[edit services ipsec-vpn ipsec policy policy-name]` hierarchy level:

```
[edit services ipsec-vpn ipsec policy policy-name]  
description description;
```

## Configuring Perfect Forward Secrecy

PFS provides additional security by means of a Diffie-Hellman shared secret value. With PFS, if one key is compromised, previous and subsequent keys are secure because they are not derived from previous keys. This statement is optional.

To configure PFS, include the **perfect-forward-secrecy** statement and specify a Diffie-Hellman group at the **[edit services ipsec-vpn ipsec policy *policy-name*]** hierarchy level:

```
[edit services ipsec-vpn ipsec policy policy-name]
perfect-forward-secrecy {
  keys (group1 | group2 | group5 | group14);
}
```

The key can be one of the following:

- **group1**—Specifies that IKE use the 768-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group2**—Specifies that IKE use the 1024-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group5**—Specifies that IKE use the 1536-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group14**—Specifies that IKE use the 2048-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.

The higher numbered groups provide more security than the lowered numbered groups,, but require more processing time.

## Configuring the Proposals in an IPsec Policy

The IPsec policy includes a list of one or more proposals associated with an IPsec policy.

To configure the proposals in an IPsec policy, include the **proposals** statement and specify one or more proposal names at the **[edit services ipsec-vpn ipsec policy *policy-name*]** hierarchy level:

```
[edit services ipsec-vpn ipsec policy policy-name]
proposals [ proposal-names ];
```

## Example: Configuring an IPsec Policy

Define an IPsec policy, **dynamic policy-1**, that is associated with two proposals (**dynamic-1** and **dynamic-2**):

```
[edit services ipsec-vpn ipsec]
proposal dynamic-1 {
  protocol esp;
  authentication-algorithm hmac-md5-96;
  encryption-algorithm 3des-cbc;
  lifetime-seconds 6000;
}
```

```
proposal dynamic-2 {
  protocol esp;
  authentication-algorithm hmac-sha1-96;
  encryption-algorithm 3des-cbc;
  lifetime-seconds 6000;
}
policy dynamic-policy-1 {
  perfect-forward-secrecy {
    keys group1;
  }
  proposals [ dynamic-1 dynamic-2 ];
}
```



**NOTE:** Updates to the current IPsec proposal and policy configuration are not applied to the current IPsec SA; updates are applied to new IPsec SAs.

If you want the new updates to take immediate effect, you must clear the existing IPsec security associations so that they will be reestablished with the changed configuration. For information about how to clear the current IPsec security association, see the [Junos OS System Basics and Services Command Reference](#).

---

## Configuring IPsec Rules

---

To configure an IPsec rule, include the **rule** statement and specify a rule name at the **[edit services ipsec-vpn]** hierarchy level:

```
[edit services ipsec-vpn]
rule rule-name {
  match-direction (input | output);
  term term-name {
    from {
      destination-address address;
      ipsec-inside-interface interface-name;
      source-address address;
    }
    then {
      anti-replay-window-size bits;
      backup-remote-gateway address;
      clear-dont-fragment-bit;
      dynamic {
        ike-policy policy-name;
        ipsec-policy policy-name;
      }
      initiate-dead-peer-detection;
      manual {
        direction (inbound | outbound | bidirectional) {
          authentication {
            algorithm (hmac-md5-96 | hmac-sha1-96);
            key (ascii-text key | hexadecimal key);
          }
          auxiliary-spi spi-value;
        }
      }
    }
  }
}
```

```

    encryption {
        algorithm algorithm;
        key (ascii-text key | hexadecimal key);
    }
    protocol (ah | bundle | esp);
    spi spi-value;
}
}
no-anti-replay;
remote-gateway address;
syslog;
tunnel-mtu bytes;
}
}

```

Each IPsec rule consists of a set of terms, similar to a firewall filter. A term consists of the following:

- **from** statement—Specifies the match conditions and applications that are included and excluded.
- **then** statement—Specifies the actions and action modifiers to be performed by the router software.

The following sections explain how to configure the components of IPsec rules:

- [Configuring Match Direction for IPsec Rules on page 31](#)
- [Configuring Match Conditions in IPsec Rules on page 32](#)
- [Configuring Actions in IPsec Rules on page 33](#)

## Configuring Match Direction for IPsec Rules

Each rule must include a **match-direction** statement that specifies whether the match is applied on the input or output side of the interface. To configure where the match is applied, include the **match-direction (input | output)** statement at the **[edit services ipsec-vpn rule *rule-name*]** hierarchy level:

```

[edit services ipsec-vpn rule-name]
  match-direction (input | output);

```

The match direction is used with respect to the traffic flow through the AS or Multiservices PIC. When a packet is sent to the PIC, direction information is carried along with it.

With an interface service set, packet direction is determined by whether a packet is entering or leaving the interface on which the service set is applied.

With a next-hop service set, packet direction is determined by the interface used to route the packet to the AS or Multiservices PIC. If the inside interface is used to route the packet, the packet direction is input. If the outside interface is used to direct the packet to the PIC, the packet direction is output. For more information on inside and outside interfaces, see [Configuring Service Sets to be Applied to Services Interfaces](#).

On the AS or Multiservices PIC, a flow lookup is performed. If no flow is found, rule processing is performed. All rules in the service set are considered. During rule processing, the packet direction is compared against rule directions. Only rules with direction information that match the packet direction are considered.

## Configuring Match Conditions in IPsec Rules

To configure the match conditions in an IPsec rule, include the **from** statement at the **[edit services ipsec-vpn rule rule-name term term-name]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name]
from {
  destination-address address;
  ipsec-inside-interface interface-name;
  source-address address;
}
```

You can use either the source address or the destination address as a match condition, in the same way that you would configure a firewall filter; for more information, see the [Junos OS Policy Framework Configuration Guide](#).

IPsec services support both IPv4 and IPv6 address formats. If you do not specifically configure either the source address or destination address, the default value **0.0.0.0/0** (IPv4 ANY) is used. To use IPv6 ANY (**0::0/128**) as either source or destination address, you must configure it explicitly.

For next-hop-style service sets only, the **ipsec-inside-interface** statement allows you to assign a logical interface to the tunnels established as a result of this match condition. The **inside-service-interface** statement that you can configure at the **[edit services service-set name next-hop-service]** hierarchy level allows you to specify **.1** and **.2** as inside and outside interfaces. However, you can configure multiple adaptive services logical interfaces with the **service-domain inside** statement and use one of them to configure the **ipsec-inside-interface** statement. For more information, see [Configuring Service Sets to be Applied to Services Interfaces and Interface Properties](#).

The Junos OS evaluates the criteria you configure in the **from** statement. If multiple link-type tunnels are configured within the same next-hop-style service set, the **ipsec-inside-interface** value enables the rule lookup module to distinguish a particular tunnel from other tunnels in case the source and destination addresses for all of them are **0.0.0.0/0** (ANY-ANY).



**NOTE:** When you configure the **ipsec-inside-interface** statement, interface-style service sets are not supported.

---

A special situation is provided by a term containing an “any-any” match condition (usually because the **from** statement is omitted). If there is an any-any match in a tunnel, a flow is not needed, because all flows within this tunnel use the same security association (SA) and packet selectors do not play a significant role. As a result, these tunnels will use packet-based IPsec. This strategy saves some flow resources on the PIC, which can be used for other tunnels that need a flow-based service.



The following configuration example shows an any-any tunnel configuration with no **from** statement in **term-1**. Missing selectors in the **from** clause result in a packet-based IPsec service.

```
services {
  ipsec-vpn {
    rule rule-1 {
      term term-1 {
        then {
          remote-gateway 10.1.0.1;
          dynamic {
            ike-policy ike_policy;
            ipsec-policy ipsec_policy;
          }
        }
      }
    }
    match-direction input;
  }
  .....
}
```

Flowless IPsec service is provided to link-type tunnels with an any-any matching, as well as to dynamic tunnels with any-any matching in both dedicated and shared mode.

For link-type tunnels, a mixture of flowless and flow-based IPsec is supported within a service set. If a service set includes some terms with any-any matching and some terms with selectors in the **from** clause, packet-based service is provided for the any-any tunnels and flow-based service is provided for the other tunnels with selectors.

For non link-type tunnels, if a service set contains both any-any terms and selector-based terms, flow-based service is provided to all the tunnels.

## Configuring Actions in IPsec Rules

To configure actions in an IPsec rule, include the **then** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name*]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name]
then {
  anti-replay-window-size bits;
  backup-remote-gateway address;
  clear-dont-fragment-bit;
  dynamic {
    ike-policy policy-name;
    ipsec-policy policy-name;
  }
  initiate-dead-peer-detection;
  manual {
    direction (inbound | outbound | bidirectional) {
      authentication {
        algorithm (hmac-md5-96 | hmac-sha1-96);
        key (ascii-text key | hexadecimal key);
      }
    }
    auxiliary-spi spi-value;
    encryption {
```

```
        algorithm algorithm;  
        key (ascii-text key | hexadecimal key);  
    }  
    protocol (ah | bundle | esp);  
    spi spi-value;  
} }  
no-anti-replay;  
remote-gateway address;  
syslog;  
tunnel-mtu bytes;  
}
```

The principal IPsec actions are to configure a dynamic or manual SA:

- You configure a dynamic SA by including the **dynamic** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level and referencing policies you have configured at the **[edit services ipsec-vpn ipsec]** and **[edit services ipsec-vpn ike]** hierarchy levels; for more information, see [“Configuring Dynamic Security Associations” on page 16](#).
- You configure a manual SA by including the **manual** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level; for more information, see [“Configuring Manual Security Associations” on page 12](#).

You can configure the following additional properties:

- [Enabling IPsec Packet Fragmentation on page 34](#)
- [Configuring Destination Addresses for Dead Peer Detection on page 34](#)
- [Configuring or Disabling IPsec Anti-Replay on page 36](#)
- [Enabling System Log Messages on page 36](#)
- [Specifying the MTU for IPsec Tunnels on page 36](#)

---

### Enabling IPsec Packet Fragmentation

To enable fragmentation of IP version 4 (IPv4) packets in IPsec tunnels, include the **clear-dont-fragment-bit** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]  
clear-dont-fragment-bit;
```

Setting the **clear-dont-fragment-bit** statement clears the Don't Fragment (DF) bit in the packet header, regardless of the packet size. If the packet size exceeds the tunnel maximum transmission unit (MTU) value, the packet is fragmented before encapsulation. For IPsec tunnels, the default MTU value is 1500 regardless of the interface MTU setting.

---

### Configuring Destination Addresses for Dead Peer Detection

To specify the remote address to which the IPsec traffic is directed, include the **remote-gateway** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
```

**remote-gateway** *address*;

To specify a backup remote address, include the **backup-remote-gateway** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
  backup-remote-gateway address;
```

These two statements support both IPv4 and IPv6 address formats.

Configuring the **backup-remote-gateway** statement enables the dead peer detection (DPD) protocol, which monitors the tunnel state and remote peer availability. When the primary tunnel defined by the **remote-gateway** statement is active, the backup tunnel is in standby mode. If the DPD protocol determines that the primary remote gateway address is no longer reachable, a new tunnel is established to the backup address.

If there is no incoming traffic from a peer during a defined interval of 10 seconds, the router detects a tunnel as inactive. A global timer polls all tunnels every 10 seconds and the Adaptive Services (AS) or Multiservices Physical Interface Card (PIC) sends a message listing any inactive tunnels. If a tunnel becomes inactive, the router takes the following steps to failover to the backup address:

1. The adaptive services message triggers the DPD protocol to send a hello message to the peer.
2. If no acknowledgment is received, two retries are sent at 2-second intervals, and then the tunnel is declared dead.
3. Failover takes place if the tunnel is declared dead or there is an IPsec Phase 1 negotiation timeout. The primary tunnel is put in standby mode and the backup becomes active.
4. If the negotiation to the backup tunnel times out, the router switches back to the primary tunnel. If both peers are down, it tries the failover six times. It then stops failing over and reverts to the original configuration, with the primary tunnel active and the backup in standby mode.

You can also enable triggering of DPD Hello messages without configuring a backup remote gateway by including the **initiate-dead-peer-detection** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
  initiate-dead-peer-detection;
```

The monitoring behavior is the same as described for the **backup-remote-gateway** statement. This configuration enables the router to initiate DPD Hellos when a backup IPsec gateway does not exist and clean up the IKE and IPsec SAs in case the IKE peer is not reachable.

If the DPD protocol determines that the primary remote gateway address is no longer reachable, a new tunnel is established to the backup address. However, when you configure **initiate-dead-peer-detection** without a backup remote gateway address and the DPD protocol determines that the primary remote gateway address is no longer reachable, the tunnel is declared dead and IKE and IPsec SAs are cleaned up.

For more information on the DPD protocol, see RFC 3706, *A Traffic-Based Method of Detecting Dead Internet Key Exchange (IKE) Peers*.

### Configuring or Disabling IPsec Anti-Replay

---

To configure the size of the IPsec antireplay window, include the **anti-replay-window-size** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
  anti-replay-window-size bits;
```

**anti-replay-window-size** can take values in the range from 64 through 4096 bits. The default value is 64 bits for AS PICs and 128 bits for Multiservices PICs and DPCs. AS PICs can support a maximum replay window size of 1024 bits, whereas Multiservices PICs and DPCs can support a maximum replay window size of 4096 bits. When the software is committing an IPsec configuration, the key management process (kmd) is unable to differentiate between the service interface types. As a result, if the maximum antireplay window size exceeds 1024 for AS PICs, the commit succeeds and no error message is produced. However, the software internally sets the antireplay window size for AS PICs to 1024 bits even if the configured value of the **anti-replay-window-size** is larger.

To disable the IPsec antireplay feature, include the **no-anti-replay** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
  no-anti-replay;
```

By default, antireplay service is enabled. Occasionally this can cause interoperability issues with other vendors' equipment.

### Enabling System Log Messages

---

To record an alert in the system logging facility, include the **syslog** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
  syslog;
```

### Specifying the MTU for IPsec Tunnels

---

To configure a specific maximum transmission unit (MTU) value for IPsec tunnels, include the **tunnel-mtu** statement at the **[edit services ipsec-vpn rule *rule-name* term *term-name* then]** hierarchy level:

```
[edit services ipsec-vpn rule rule-name term term-name then]
  tunnel-mtu bytes;
```



**NOTE:** The **tunnel-mtu** setting is the only place you need to configure an MTU value for IPsec tunnels. Inclusion of an **mtu** setting at the **[edit interfaces *sp-fpc/pic/port* unit *logical-unit-number* family inet]** hierarchy level is not supported.

---

## Configuring IPsec Rule Sets

---

The **rule-set** statement defines a collection of IPsec rules that determine what actions the router software performs on packets in the data stream. You define each rule by specifying a rule name and configuring terms. Then, you specify the order of the rules by including the **rule-set** statement at the **[edit services ipsec-vpn]** hierarchy level with a **rule** statement for each rule:

```
[edit services ipsec-vpn]
rule-set rule-set-name {
  rule rule-name;
}
```

The router software processes the rules in the order in which you specify them in the configuration. If a term in a rule matches the packet, the router performs the corresponding action and the rule processing stops. If no term in a rule matches the packet, processing continues to the next rule in the rule set. If none of the rules matches the packet, the packet is dropped by default.

## Configuring Dynamic Endpoints for IPsec Tunnels

---

IPsec tunnels can also be established using *dynamic peer* security gateways, in which the remote ends of tunnels do not have a statically assigned IP address. Since the remote address is not known and might be pulled from an address pool each time the remote host reboots, establishment of the tunnel relies on using IKE **main** mode with either preshared global keys or digital certificates that accept any remote identification value. For more information on IKE policy modes, see [“Configuring the Mode for an IKE Policy” on page 21](#). Both policy-based and link-type tunnels are supported:

- Policy-based tunnels used shared mode.
- Link-type or routed tunnels use dedicated mode. Each tunnel allocates a service interface from a pool of interfaces configured for the dynamic peers. Routing protocols can be configured to run on these service interfaces to learn routes over the IPsec tunnel that is used as a link in this scenario.

This section includes the following topics:

- [Authentication Process on page 38](#)
- [Implicit Dynamic Rules on page 38](#)
- [Reverse Route Insertion on page 39](#)
- [Configuring an IKE Access Profile on page 39](#)
- [Referencing the IKE Access Profile in a Service Set on page 41](#)
- [Configuring the Interface Identifier on page 41](#)
- [Default IKE and IPsec Proposals on page 42](#)

## Authentication Process

The remote (dynamic peer) initiates the negotiations with the local (Juniper Networks) router. The local router uses the default IKE and IPsec policies to match the proposals sent by the remote peer to negotiate the security association (SA) values. Implicit proposals contain a list of all the supported transforms that the local router expects from all the dynamic peers.

If preshared key authentication is used, the preshared key is global for a service set. When seeking the preshared key for the peer, the local router matches the peer's source address against any explicitly configured preshared keys in that service set. If a match is not found, the local router uses the global preshared key for authentication. This key is the one configured in the IKE access profile referenced by the service set.

Phase 2 of the authentication matches the *proxy identities* of the protected hosts and networks sent by the peer against a list of configured proxy identities. The accepted proxy identity is used to create the dynamic rules for encrypting the traffic. You can configure proxy identities by including the **allowed-proxy-pair** statement in the IKE access profile. If no entry matches, the negotiation is rejected.

If you do not configure the **allowed-proxy-pair** statement, the default value **ANY(0.0.0.0/0)-ANY** is applied, and the local router accepts any proxy identities sent by the peer. Both IPv4 and IPv6 addresses are accepted, but you must configure all IPv6 addresses manually.

Once the phase 2 negotiation completes successfully, the router builds the dynamic rules and inserts the reverse route into the routing table using the accepted proxy identity.

## Implicit Dynamic Rules

After successful negotiation with the dynamic peer, the key management process (kmd) creates a dynamic rule for the accepted phase 2 proxy and applies it on the local AS or Multiservices PIC. The source and destination addresses are specified by the accepted proxy. This rule is used to encrypt traffic directed to one of the end hosts in the phase 2 proxy identity.

The dynamic rule includes an **ipsec-inside-interface** value, which is the interface name assigned to the dynamic tunnel. The **source-address** and **destination-address** values are accepted from the proxy ID. The **match-direction** value is **input** for next-hop-style service sets.



**NOTE:** You do not configure this rule; it is created by the key management process (kmd).

---

Rule lookup for static tunnels is unaffected by the presence of a dynamic rule; it is performed in the order configured. When a packet is received for a service set, static rules are always matched first.

Dynamic rules are matched after the rule match for static rules has failed.

Response to dead peer detection (DPD) hello messages takes place the same way with dynamic peers as with static peers. Initiating DPD hello messages from dynamic peers is not supported. For more information on DPD, see [“Configuring Destination Addresses for Dead Peer Detection” on page 34](#).

## Reverse Route Insertion

Static routes are automatically inserted into the route table for those networks and hosts protected by a remote tunnel endpoint. These protected hosts and networks are known as remote proxy identities.

Each route is created based on the remote proxy network and mask sent by the peer and is inserted in the relevant route table after successful phase 1 and phase 2 negotiations.

The route preference for each static reverse route is 1. This value is necessary to avoid conflict with similar routes that might be added by the routing protocol process (rpd).

No routes are added if the accepted remote proxy address is the default (**0.0.0.0/0**). In this case you can run routing protocols over the IPsec tunnel to learn routes and add static routes for the traffic you want to be protected over this tunnel.

For next-hop-style service sets, the reverse routes include next hops pointing to the locations specified by the **inside-service-interface** statement.

The route table in which to insert these routes depends on where the **inside-service-interface** location is listed. If these interfaces are present in a VPN routing and forwarding (VRF) instance, then routes are added to the corresponding VRF table; otherwise, the routes are added to **inet.0**.



**NOTE:** Reverse route insertion takes place only for tunnels to dynamic peers. These routes are added only for next-hop-style service sets.

## Configuring an IKE Access Profile

You can configure only one tunnel profile per service set for all dynamic peers. The configured preshared key in the profile is used for IKE authentication of all dynamic peers terminating in that service set. Alternatively, you can include the **ike-policy** statement to reference an IKE policy you define with either specific identification values or a wildcard (the **any-remote-id** option). You configure the IKE policy at the **[edit services ipsec-vpn ike]** hierarchy level; for more information, see [“Configuring IKE Policies” on page 20](#).

The IKE tunnel profile specifies all the information needed to complete the IKE negotiation. Each protocol has its own statement hierarchy within the client statement to configure protocol-specific attribute value pairs, but only one client configuration is allowed for each profile. The following is the configuration at the **[edit access]** hierarchy level; for more information on access profiles, see the [Junos OS System Basics Configuration Guide](#).

```
[edit access]
profile profile-name {
  client * {
    ike {
```

```
allowed-proxy-pair {  
    remote remote-proxy-address local local-proxy-address;  
}  
pre-shared-key (ascii-text key-string | hexadecimal key-string);  
ike-policy policy-name;  
interface-id <string-value>;  
ipsec-policy ipsec-policy;  
}  
}
```



**NOTE:** For dynamic peers, the Junos OS supports the IKE main mode with either the preshared key method of authentication or an IKE access profile that uses a local digital certificate.

- In preshared key mode, the IP address is used to identify a tunnel peer to get the preshared key information. The client value \* (wildcard) means that configuration within this profile is valid for all dynamic peers terminating within the service set accessing this profile.
- In digital certificate mode, the IKE policy defines which remote identification values are allowed; for more information, see [“Configuring IKE Policies” on page 20](#).

---

The following statements make up the IKE profile:

- **allowed-proxy-pair**—During phase 2 IKE negotiation, the remote peer supplies its network address (**remote**) and its peer’s network address (**local**). Since multiple dynamic tunnels are authenticated through the same mechanism, this statement must include the list of possible combinations. If the dynamic peer does not present a valid combination, the phase 2 IKE negotiation fails.

By default, **remote 0.0.0.0/0 local 0.0.0.0/0** is used if no values are configured. Both IPv4 and IPv6 address formats are supported in this configuration, but there are no default IPv6 addresses. You must specify even **0::0/0**.

- **pre-shared-key**—Key used to authenticate the dynamic peer during IKE phase 1 negotiation. This key is known to both ends through an out-of-band secure mechanism. You can configure the value either in **hexadecimal** or **ascii-text** format. It is a mandatory value.
- **ike-policy**—Policy that defines the remote identification values corresponding to the allowed dynamic peers; can contain a wildcard value **any-remote-id** for use in dynamic endpoint configurations only.
- **interface-id**—Interface identifier, a mandatory attribute used to derive the logical service interface information for the session.
- **ipsec-policy**—Name of the IPsec policy that defines the IPsec policy information for the session. You define the IPsec policy at the **[edit services ipsec-vpn ipsec policy *policy-name*]** hierarchy level. If no policy is set, any policy proposed by the dynamic peer is accepted.



## Referencing the IKE Access Profile in a Service Set

To complete the configuration, you need to reference the IKE access profile configured at the **[edit access]** hierarchy level. To do this, include the **ike-access-profile** statement at the **[edit services service-set name ipsec-vpn-options]** hierarchy level:

```
[edit services service-set name]
ipsec-vpn-options {
  local-gateway address;
  ike-access-profile profile-name;
}
next-hop-service {
  inside-service-interface interface-name;
  outside-service-interface interface-name;
}
```

The **ike-access-profile** statement must reference the same name as the **profile** statement you configured for IKE access at the **[edit access]** hierarchy level. You can reference only one access profile in each service set. This profile is used to negotiate IKE and IPsec security associations with dynamic peers only.



**NOTE:** If you configure an IKE access profile in a service set, no other service set can share the same local-gateway address.

Also, you must configure a separate service set for each VRF instance. All interfaces referenced by the **ipsec-inside-interface** statement within a service set must belong to the same VRF instance.

## Configuring the Interface Identifier

You can configure an interface identifier for a group of dynamic peers, which specifies which adaptive services logical interface(s) take part in the dynamic IPsec negotiation. By assigning the same interface identifier to multiple logical interfaces, you can create a pool of interfaces for this purpose. To configure an interface identifier, include the **ipsec-interface-id** statement and the **dedicated** or **shared** statement at the **[edit interfaces interface-name unit logical-unit-number dial-options]** hierarchy level:

```
[edit interfaces interface-name unit logical-unit-number dial-options]
ipsec-interface-id identifier;
(dedicated | shared);
```

Specifying the interface identifier in the **dial-options** statement makes this logical interface part of the pool identified by the **ipsec-interface-id** statement.



**NOTE:** Only one interface identifier can be specified at a time. You can include the **ipsec-interface-id** statement or the **l2tp-interface-id** statement, but not both.

If you configure **shared** mode, it enables one logical interface to be shared across multiple tunnels. The **dedicated** statement specifies that the logical interface is used in a dedicated mode, which is necessary when you are configuring an IPsec link-type tunnel. You must include the **dedicated** statement when you specify an **ipsec-interface-id** value.

## Default IKE and IPsec Proposals

The software includes implicit default IKE and IPsec proposals to match the proposals sent by the dynamic peers. The values are shown in [Table 4 on page 42](#); if more than one value is shown, the first value is the default. For more information on IKE proposals, see [“Configuring IKE Proposals” on page 17](#); for more information on IPsec proposals, see [“Configuring IPsec Proposals” on page 25](#).



**NOTE:** RSA certificates are not supported with dynamic endpoint configuration.

**Table 4: Default IKE and IPsec Proposals for Dynamic Negotiations**

Statement Name	Values
Implicit IKE Proposal	
authentication-method	pre-shared keys
dh-group	group1, group2, group5, group14
authentication-algorithm	sha1, md5, sha-256
encryption-algorithm	3des-cbc, des-cbc, aes-128, aes-192, aes-256
lifetime-seconds	3600 seconds
Implicit IPsec Proposal	
protocol	esp, ah, bundle
authentication-algorithm	hmac-sha1-96, hmac-md5-96
encryption-algorithm	3des-cbc, des-cbc, aes-128, aes-192, aes-256
lifetime-seconds	28,800 seconds (8 hours)

## Tracing IPsec Operations

Trace operations track IPsec events and record them in a log file in the **/var/log** directory. By default, this file is named **/var/log/kmd**.

To trace IPsec operations, include the **traceoptions** statement at the **[edit services ipsec-vpn]** hierarchy level:

```
[edit services ipsec-vpn]
traceoptions {
  file <filename> <files number> <match regular-expression> <size bytes> <world-readable |
    no-world-readable>;
  flag <flag>;
  level <level>;
  no-remote-trace;
}
```

You can specify the following IPsec tracing flags:

- **all**—Trace everything.
- **certificates**—Trace certificates events.
- **database**—Trace security associations database events.
- **general**—Trace general events.
- **ike**—Trace IKE module processing.
- **parse**—Trace configuration processing.
- **policy-manager**—Trace policy manager processing.
- **routing-socket**—Trace routing socket messages.
- **snmp**—Trace SNMP operations.
- **timer**—Trace internal timer events.

The **level** statement sets the key management process (kmd) tracing level. The following values are supported:

- **all**—Match all levels.
- **error**—Match error conditions.
- **info**—Match informational messages.
- **notice**—Match conditions that should be handled specially.
- **verbose**—Match verbose messages.
- **warning**—Match warning messages.

## Disabling IPsec Tunnel Endpoint in Traceroute

If you include the **no-ipsec-tunnel-in-traceroute** statement at the **[edit services ipsec-vpn]** hierarchy level, the IPsec tunnel is not treated as a next hop and TTL is not decremented. Also, if the TTL reaches zero, an ICMP time exceeded message is not generated.

```
[edit services ipsec-vpn]
no-ipsec-tunnel-in-traceroute;
```



**NOTE:** This functionality is also provided by the **passive-mode-tunneling** statement described in Configuring IPsec Service Sets. You can use the **no-ipsec-tunnel-in-traceroute** statement in specific scenarios in which the IPsec tunnel should not be treated as a next hop and passive mode is not desired.

## Tracing IPsec PKI Operations

Trace operations track IPsec PKI events and record them in a log file in the **/var/log** directory. By default, this file is named **/var/log/pkid**.

To trace IPsec PKI operations, include the **traceoptions** statement at the **[edit security pki]** hierarchy level:

```
[edit security pki]
traceoptions {
  file filename <files number> <match regular-expression> <size maximum-file-size>
    <world-readable | no-world-readable>;
  flag flag (all | certificate-verification | enrollment | online-crl-check);
}
```

You can specify the following PKI tracing flags:

- **all**—Trace everything.
- **certificates**—Trace certificates events.
- **database**—Trace security associations database events.
- **general**—Trace general events.
- **ike**—Trace IKE module processing.
- **parse**—Trace configuration processing.
- **policy-manager**—Trace policy manager processing.
- **routing-socket**—Trace routing socket messages.
- **snmp**—Trace SNMP operations.
- **timer**—Trace internal timer events.

## Configuring IPsec on the Services SDK

---

Starting with Junos OS Release 11.4, IPsec is supported by the Services SDK. IPsec on the Services SDK is supported on all M Series, T Series and MX Series routers with Multiservices 100, Multiservices 400 PICs, and Multiservices DPCs.

IPsec on the Services SDK has the following limitations:

- IPsec on the Services SDK supports only policies negotiated between dynamic peer security gateways in which the remote ends of tunnels do not have a statically assigned IP address (Dynamic Endpoints).

- Encapsulating Security Payload (ESP) is the only protocol that is supported for protecting IP traffic.
- IPsec on the Services SDK does not support IPv6.

To enable IPsec for the Services SDK on the adaptive services interface, configure the **object-cache-size**, **policy-db-size**, and **package** statements at the **[edit chassis fpc slot-number pic pic-number adaptive-services service-package extension-provider]** hierarchy level. For the IPsec plugin on the Services SDK, **package-name** in the **package package-name** statement is **jservices-ipsec**.

For more information about the Services SDK, see the *SDK Applications Configuration Guide and Command Reference*.

The following example shows how to enable IPsec for the Services SDK on the adaptive services interface:

```
chassis fpc 1 {
  pic 2 {
    adaptive-services {
      service-package {
        extension-provider {
          control-cores 1;
          data-cores 7;
          object-cache-size 1280;
          policy-db-size 64;
          package jservices-crypto-base;
          package jservices-ipsec;
        }
      }
    }
  }
}
```

Configure the inside and outside interfaces for next-hop-style service sets:

```
service-set abc {
  next-hop-service {
    inside-service-interface ms-0/2/0.1; # Name and logical unit number of the service
    interface associated with the service set applied inside the network.
    outside-service-interface ms-0/2/0.2; # Name and logical unit number of the service
    interface associated with the service set applied outside the network.
  }
}
```



## CHAPTER 4

# Examples

- [Example: Configuring Statically Assigned Tunnels on page 47](#)
- [Example: Configuring Dynamically Assigned Tunnels on page 50](#)

### Example: Configuring Statically Assigned Tunnels

---

Following is the configuration of the provider edge (PE) router, demonstrating the usage of next-hop service sets and dynamic SA configuration:

```
[edit interfaces]
so-0/0/0 {
  no-keepalives;
  encapsulation cisco-hdlc;
  unit 0 {
    family inet {
      address 10.6.6.6/32;
    }
  }
}
so-2/2/0 {
  description "teller so-0/2/0";
  no-keepalives;
  encapsulation cisco-hdlc;
  unit 0 {
    family inet {
      address 10.21.1.1/16;
    }
  }
}
sp-3/1/0 {
  unit 0 {
    family inet {
      address 10.7.7.7/32;
    }
  }
  unit 1 {
    family inet;
    service-domain inside;
  }
  unit 2 {
    family inet;
    service-domain outside;
  }
}
```

```
    }
  }
  [edit policy-options]
  policy-statement vpn-export {
    then {
      community add vpn-comm;
      accept;
    }
  }
  policy-statement vpn-import {
    term a {
      from community vpn-comm;
      then accept;
    }
  }
  community vpn-comm members target:100:20;
  [edit routing-instances]
  vrf {
    instance-type vrf;
    interface sp-3/1/0.1; # Inside sp interface
    interface so-0/0/0.0;
    route-distinguisher 192.168.0.1:1;
    vrf-import vpn-import;
    vrf-export vpn-export;
    routing-options {
      static {
        route 10.0.0.0/0 next-hop so-0/0/0.0;
        route 10.11.11.1/32 next-hop so-0/0/0.0;
        route 10.8.8.1/32 next-hop sp-3/1/0.1;
      }
    }
  }
  [edit services]
  ipsec-vpn {
    rule rule-1 {
      term term-1 {
        then {
          remote-gateway 10.21.2.1;
          dynamic {
            ike-policy ike-policy;
          }
        }
      }
      match-direction input;
    }
    ike {
      policy ike-policy {
        pre-shared-key ascii-text "$9$ExmcSeMWxdVYBI";
      }
    }
  }
  service-set service-set-1 {
    ipsec-vpn {
      local-gateway 10.21.1.1;
    }
    ipsec-vpn-rules rule-1;
```



```

next-hop-service {
  inside-service-interface sp-3/1/0.1;
  outside-service-interface sp-3/1/0.2;
}

```

Following is an example for configuring multiple link-type tunnels to static peers using a single next-hop style service set:

```

services ipsec-vpn {
  rule demo-rule {
    term term-0 {
      from {
        ipsec-inside-interface sp-0/0/0.1;
      }
      then {
        remote-gateway 10.2.2.2;
        dynamic {
          ike-policy demo-ike-policy;
        }
      }
    }
    term term-1 {
      from {
        ipsec-inside-interface sp-0/0/0.3;
      }
      then {
        remote-gateway 10.3.3.3;
        dynamic {
          ike-policy demo-ike-policy;
        }
      }
    }
  }
  match-direction input;
}
services {
  service-set demo-service-set {
    next-hop-service {
      inside-service-interface sp-0/0/0.1;
      outside-service-interface sp-0/0/0.2;
    }
    ipsec-vpn-options {
      local-gateway 10.1.1.1;
    }
    ipsec-rules demo-rule;
  }
}
interfaces sp-0/0/0 {
  unit 0 {
    family inet;
  }
  unit 1 {
    family inet;
    service-domain inside;
  }
}

```

```

unit 2 {
    family inet;
    service-domain outside;
}
unit 3 {
    family inet;
    service-domain inside;
}
unit 4 {
    family inet;
    service-domain inside;
}
}


```

## Example: Configuring Dynamically Assigned Tunnels

The following examples are based on this network configuration (see [Figure 1 on page 50](#)):

- A local network N-1 behind security gateway SG-1, a Juniper Networks router terminating static as well as dynamic peer endpoints. The tunnel termination address on SG-1 is 10.1.1.1 and the local network address is 172.16.1.0/24.
- Two remote peer routers that obtain addresses from an ISP pool and run RFC-compliant IKE. Remote network N-2 has address 172.16.2.0/24 and resides behind security gateway SG-2 with tunnel termination address 10.2.2.2. Remote network N-3 has address 172.16.3.0/24 and resides behind security gateway SG-3 with tunnel termination address 10.3.3.3.

**Figure 1: IPsec Dynamic Endpoint Tunneling Topology**

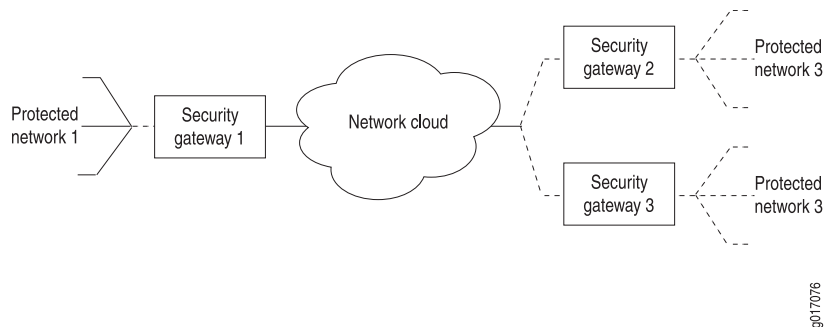

The examples in this section show the following configurations:

- [Configuring a Next-Hop Style Service Set with Link-Type Tunnels on page 50](#)
- [Configuring a Next-Hop Style Service-Set with Policy-Based Tunnels on page 52](#)



**NOTE:** All the configurations are given for the Juniper Networks router terminating dynamic endpoint connections.

**Configuring a  
Next-Hop Style Service**

```

access {
    profile demo-access-profile client * {

```

### Set with Link-Type Tunnels

```

ike {
  allowed-proxy-pair {
    remote 0.0.0.0/0 local 0.0.0.0/0; # ANY to ANY
  }
  pre-shared-key {
    ascii-text keyfordynamicpeers;
  }
  interface-id demo-ipsec-interface-id;
}
}
services {
  service-set demo-service-set {
    next-hop-service {
      inside-service-interface sp-1/0/0.1;
      outside-service-interface sp-1/0/0.2;
    }
    ipsec-vpn-options {
      local-gateway 10.1.1.1;
      ike-access-profile demo-ike-access-profile;
    }
  }
}
}

```



**NOTE:** Including the `ike-access-profile` statement enables the software to incorporate implicit proposals for dynamic endpoint authentication. You do not need to configure IKE or IPsec proposals explicitly.

```

interfaces {
  sp-0/0/0 {
    unit 0 {
      family inet;
    }
    unit 1 {
      family inet;
      service-domain inside;
    }
    unit 2 {
      family inet;
      service-domain outside;
    }
    unit 3 {
      family inet;
      service-domain inside;
      dial-options {
        ipsec-interface-id demo-ipsec-interface-id;
        dedicated;
      }
    }
    unit 4 {
      family inet;
      service-domain inside;
      dial-options {

```

```
        ipsec-interface-id demo-ipsec-interface-id;  
        dedicated;  
    }  
}  
}
```

The following results are obtained:

- Reverse routes inserted after successful negotiation:

None

- Routes learned by routing protocol:

172.16.2.0/24

172.16.3.0/24

- Dynamic implicit rules created after successful negotiation:

```
rule: junos-dynamic-rule-0  
term: term-0  
    local-gateway-address : 10.1.1.1 #Tunnel termination address on SG-1  
    remote-gateway-address: 10.2.2.2 #Tunnel termination address on SG-2  
    source-address : 0.0.0.0/0  
    destination-address : 0.0.0.0/0  
    ipsec-inside-interface: sp-0/0/0.3  
term: term-1  
    local-gateway-address : 10.1.1.1 #Tunnel termination address on SG-1  
    remote-gateway-address: 10.3.3.3 #Tunnel termination address on SG-3  
    source-address : 0.0.0.0/0  
    destination-address : 0.0.0.0/0  
    ipsec-inside-interface: sp-0/0/0.4  
    match-direction: input
```

#### Configuring a Next-Hop Style Service-Set with Policy-Based Tunnels

```
access {  
    profile demo-access-profile client * {  
        ike {  
            allowed-proxy-pair {  
                remote 172.16.2.0/24 local 172.16.1.0/24; #N-2 <==> #N-1  
                remote 172.16.3.0/24 local 172.16.1.0/24; #N-3 <==> #N-1  
            }  
            pre-shared-key {  
                ascii-text keyfordynamicpeers;  
            }  
            interface-id demo-ipsec-interface-id;  
        }  
    }  
}  
services {  
    service-set demo-service-set {  
        next-hop-service {  
            inside-service-interface sp-1/0/0.1;  
            outside-service-interface sp-1/0/0.2;  
        }  
        ipsec-vpn-options {  
            local-gateway 10.1.1.1;  
        }  
    }  
}
```

```

    }
    ike-access-profile demo-ike-access-profile;
  }
}

```



**NOTE:** Including the `ike-access-profile` statement enables the software to incorporate implicit proposals for dynamic endpoint authentication. You do not need to configure IKE or IPsec proposals explicitly.

```

interfaces {
  sp-0/0/0 {
    unit 0 {
      family inet;
    }
    unit 1 {
      family inet;
      service-domain inside;
    }
    unit 2 {
      family inet;
      service-domain outside;
    }
    unit 3 {
      family inet;
      service-domain inside;
      dial-options {
        ipsec-interface-id demo-ipsec-interface-id;
        mode shared;
      }
    }
  }
}
# VRF configuration, if not inet.0
routing-instances {
  demo-vrf {
    instance-type vrf;
    interface sp-0/0/0.1;
    interface sp-0/0/0.3;
    .....
  }
}

```

The following results are obtained:

- Reverse routes injected after successful negotiation:

```

demo-vrf.inet.0: .... # Routing instance
172.11.0.0/24 *[Static/1]..
> via sp-0/0/0.3
172.12.0.0/24 *[Static/1]..
> via sp-0/0/0.3

```

- Dynamic implicit rules created after successful negotiation:

```
rule: junos-dynamic-rule-0
```

```
term: term-0
  local-gateway-address : 10.1.1.1 #Tunnel termination address on SG-1
  remote-gateway-address: 10.2.2.2 #Tunnel termination address on SG-2
  source-address : 172.16.1.0/24
  destination-address : 172.16.2.0/24
  ipsec-inside-interface: sp-0/0/0.3
term: term-1
  local-gateway-address : 10.1.1.1 #Tunnel termination address on SG-1
  remote-gateway-address: 10.3.3.3 #Tunnel termination address on SG-3
  source-address : 172.16.1.0/24
  destination-address : 172.16.3.0/24
  ipsec-inside-interface: sp-0/0/0.3
match-direction: input
```

## CHAPTER 5

# Configuration Statements

### anti-replay-window-size

---

<b>Syntax</b>	anti-replay-window-size <i>bits</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0.
<b>Description</b>	Specify the size of the IPsec antireplay window.
<b>Options</b>	<b>bits</b> —Size of the antireplay window, in bits. <b>Default:</b> 64 bits (AS PICs), 128 bits (Multiservices PICs and DPCs) <b>Range:</b> 64 through 4096 bits
<b>Usage Guidelines</b>	See <a href="#">“Configuring or Disabling IPsec Anti-Replay”</a> on page 36.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## authentication

---

<b>Syntax</b>	<pre>authentication {     algorithm (hmac-md5-96   hmac-sha1-96);     key (ascii-text key   hexadecimal key); }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> rule-name <a href="#">term</a> term-name <a href="#">then</a> <a href="#">manual</a> <a href="#">direction</a> direction]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure IPsec authentication parameters for a manual security association (SA).
<b>Options</b>	<p><b>algorithm</b>—Hash algorithm that authenticates packet data. The algorithm can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>hmac-md5-96</b>—Produces a 128-bit digest.</li><li>• <b>hmac-sha1-96</b>—Produces a 160-bit digest.</li></ul> <p><b>key</b>—Type of authentication key. The key can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>ascii-text key</b>—ASCII text key. For <b>hmac-md5-96</b>, the key is 16 ASCII characters; for <b>hmac-sha1-96</b>, the key is 20 ASCII characters.</li><li>• <b>hexadecimal key</b>—Hexadecimal key. For <b>hmac-md5-96</b>, the key is 32 hexadecimal characters; for <b>hmac-sha1-96</b>, the key is 40 hexadecimal characters.</li></ul>
<b>Usage Guidelines</b>	See <a href="#">“Configuring Authentication for a Manual IPsec SA” on page 14</a> .
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.



## authentication-algorithm (IKE)

<b>Syntax</b>	authentication-algorithm (md5   sha1   sha-256);
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike proposal</a> <i>proposal-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. sha-256 option added in Junos OS Release 7.6.
<b>Description</b>	Configure the Internet Key Exchange (IKE) hash algorithm that authenticates packet data.
<b>Options</b>	<b>md5</b> —Produces a 128-bit digest. <b>sha1</b> —Produces a 160-bit digest. <b>sha-256</b> —Produces a 256-bit digest.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Authentication Algorithm for an IKE Proposal</a> ” on page 17.
<b>Required Privilege Level</b>	<b>admin</b> —To view this statement in the configuration. <b>admin-control</b> —To add this statement to the configuration.

## authentication-algorithm (IPsec)

<b>Syntax</b>	authentication-algorithm (hmac-md5-96   hmac-sha1-96);
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec proposal</a> <i>ipsec-proposal-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the IPsec hash algorithm that authenticates packet data.
<b>Options</b>	<b>hmac-md5-96</b> —Produces a 128-bit digest. <b>hmac-sha1-96</b> —Produces a 160-bit digest.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Authentication Algorithm for an IPsec Proposal</a> ” on page 26.
<b>Required Privilege Level</b>	<b>admin</b> —To view this statement in the configuration. <b>admin-control</b> —To add this statement to the configuration.

## authentication-method

---

Syntax	authentication-method (dsa-signatures   pre-shared-keys   rsa-signatures);
Hierarchy Level	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike proposal</a> <i>proposal-name</i> ]
Release Information	Statement introduced before Junos OS Release 7.4.
Description	Configure an IKE authentication method.
Options	<b>dsa-signatures</b> —Digital signature algorithm (DSA).  <b>rsa-signatures</b> —Public key algorithm (supports encryption and digital signatures).  <b>pre-shared-keys</b> —A key derived from an out-of-band mechanism; the key authenticates the exchange.
Usage Guidelines	See “ <a href="#">Configuring the Authentication Method for an IKE Proposal</a> ” on page 18.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## auxiliary-spi

---

Syntax	auxiliary-spi <i>spi-value</i> ;
Hierarchy Level	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then manual direction</a> <i>direction</i> ]
Release Information	Statement introduced before Junos OS Release 7.4.
Description	Configure an auxiliary Security Parameter Index (SPI) for a manual SA. Use the auxiliary SPI when you configure the <b>protocol</b> statement to use the <b>bundle</b> option.
Options	<b>spi-value</b> —An arbitrary value that uniquely identifies which SA to use at the receiving host (the destination address in the packet). <b>Range:</b> 256 through 16,639
Usage Guidelines	See “ <a href="#">Configuring the Auxiliary Security Parameter Index</a> ” on page 14. For information about SPI, see “ <a href="#">Configuring the Security Parameter Index</a> ” on page 14 and <a href="#">spi</a> .
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## backup-remote-gateway

---

<b>Syntax</b>	<code>backup-remote-gateway <i>address</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define the backup remote address to which the IPsec traffic is directed when the primary remote gateway is down. Configuring this statement also enables the dead peer detection (DPD) protocol.
<b>Options</b>	<i>address</i> —Backup remote IPv4 or IPv6 address.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Destination Addresses for Dead Peer Detection</a> ” on page 34.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## clear-dont-fragment-bit

---

<b>Syntax</b>	<code>clear-dont-fragment-bit;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Clear the Don't Fragment (DF) bit on all IP version 4 (IPv4) packets entering the IPsec tunnel. If the encapsulated packet size exceeds the tunnel maximum transmission unit (MTU), the packet is fragmented before encapsulation.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Actions in IPsec Rules</a> ” on page 33.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## clear-ike-sas-on-pic-restart

---

<b>Syntax</b>	clear-ike-sas-on-pic-restart;
<b>Hierarchy Level</b>	[edit services ipsec-vpn]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5.
<b>Description</b>	Clear IKE security associations (SAs) when the corresponding PIC restarts or is taken offline.
<b>Usage Guidelines</b>	See <a href="#">“Clearing Security Associations” on page 16</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## clear-ipsec-sas-on-pic-restart

---

<b>Syntax</b>	clear-ipsec-sas-on-pic-restart;
<b>Hierarchy Level</b>	[edit services ipsec-vpn]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2.
<b>Description</b>	Clear IPsec security associations (SAs) when the corresponding PIC restarts or is taken offline.
<b>Usage Guidelines</b>	See <a href="#">“Clearing Security Associations” on page 16</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## description

---

<b>Syntax</b>	<code>description <i>description</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn ike <a href="#">policy</a> <i>policy-name</i> ], [edit <a href="#">services</a> ipsec-vpn ike <a href="#">proposal</a> <i>proposal-name</i> ], [edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec</a> <a href="#">policy</a> <i>policy-name</i> ], [edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec</a> <a href="#">proposal</a> <i>proposal-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the text description for an IKE or IPsec policy or proposal.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Description for an IKE Policy</a> ” on page 24, “ <a href="#">Configuring the Description for an IPsec Proposal</a> ” on page 26, and “ <a href="#">Configuring the Description for an IPsec Policy</a> ” on page 28.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## destination-address

---

<b>Syntax</b>	<code>destination-address <i>address</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">from</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the destination address for rule matching.
<b>Options</b>	<i>address</i> —Destination IP address.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Match Conditions in IPsec Rules</a> ” on page 32.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## dh-group

---

<b>Syntax</b>	dh-group (group1   group2   group5  group14);
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn ike <a href="#">proposal</a> <i>proposal-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the IKE Diffie-Hellman prime modulus group to use for performing the new Diffie-Hellman exchange.
<b>Options</b>	<p>group1—768-bit.</p> <p>group2—1024-bit.</p> <p>group5—1536-bit.</p> <p>group14—2048-bit.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Diffie-Hellman Group for an IKE Proposal</a> ” on page 18.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## direction

<b>Syntax</b>	<pre> direction (inbound   outbound   bidirectional) {   protocol (ah   bundle   esp);   spi spi-value;   auxiliary-spi spi-value;   authentication {     algorithm (hmac-md5-96   hmac-sha1-96);     key (ascii-text key   hexadecimal key);   }   encryption {     algorithm algorithm;     key (ascii-text key   hexadecimal key);   } } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> rule-name <a href="#">term</a> term-name <a href="#">then</a> manual]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the direction in which manual SAs are applied.
<b>Options</b>	<p><b>bidirectional</b>—Apply the SA in both directions.</p> <p><b>inbound</b>—Apply the SA on inbound traffic.</p> <p><b>outbound</b>—Apply the SA on outbound traffic.</p> <p>The remaining statements are explained separately.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Match Direction for IPsec Rules</a> ” on page 31.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>

## dynamic

---

<b>Syntax</b>	<pre>dynamic {     ike-policy <i>policy-name</i>;     ipsec-policy <i>policy-name</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define a dynamic IPsec SA.
<b>Options</b>	<p><b>ike-policy <i>policy-name</i></b>—Name of the IKE policy. This statement is optional for the non-preshared-key authentication method. For digital signature-based authentication, this statement is optional and the default policy is used if none is supplied.</p> <p><b>ipsec-policy <i>policy-name</i></b>—Name of the IPsec policy. This statement is optional and the default policy is used if none is supplied.</p>
<b>Usage Guidelines</b>	See <a href="#">“Configuring Dynamic Security Associations” on page 16</a> .
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.



## encryption

<b>Syntax</b>	<pre> encryption {     algorithm <i>algorithm</i>;     key (ascii-text <i>key</i>   hexadecimal <i>key</i>); } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> <a href="#">manual</a> direction <i>direction</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. <a href="#">aes-128-cbc</a> , <a href="#">aes-192-cbc</a> , and <a href="#">aes-256-cbc</a> options added in Junos OS Release 7.6.
<b>Description</b>	Configure an encryption algorithm and key for manual SA.

**Options** **algorithm**—Type of encryption algorithm. The algorithm can be one of the following:

- **des-cbc**—Has a block size of 8 bytes (64 bits); the key size is 48 bits long.
- **3des-cbc**—Has a block size of 8 bytes (64 bits); the key size is 192 bits long.
- **aes-128-cbc**—Advanced Encryption Standard (AES) 128-bit encryption algorithm.
- **aes-192-cbc**—Advanced Encryption Standard (AES) 192-bit encryption algorithm.
- **aes-256-cbc**—Advanced Encryption Standard (AES) 256-bit encryption algorithm.



**NOTE:** For **3des-cbc**, the first 8 bytes should differ from the second 8 bytes, and the second 8 bytes should be the same as the third 8 bytes.

**key**—Type of encryption key. The key can be one of the following:

- **ascii-text**—ASCII text key. Following are the key lengths, in ASCII characters, for the different encryption options:
  - **des-cbc** option, 8 ASCII characters
  - **3des-cbc** option, 24 ASCII characters
  - **aes-128-cbc** option, 16 ASCII characters
  - **aes-192-cbc** option, 24 ASCII characters
  - **aes-256-cbc** option, 32 ASCII characters
- **hexadecimal**—Hexadecimal key. Following are the key lengths, in hexadecimal characters, for the different encryption options:
  - **des-cbc** option, 16 hexadecimal characters
  - **3des-cbc** option, 48 hexadecimal characters
  - **aes-128-cbc** option, 32 hexadecimal characters

- **aes-192-cbc** option, 48 hexadecimal characters
- **aes-256-cbc** option, 64 hexadecimal characters

**Usage Guidelines** See [“Configuring Encryption for a Manual IPsec SA” on page 15.](#)

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

---

## encryption-algorithm

---

**Syntax** encryption-algorithm *algorithm*;

**Hierarchy Level** [edit [services](#) ipsec-vpn [ike proposal](#) *proposal-name*],  
[edit [services](#) ipsec-vpn [ipsec proposal](#) *proposal-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
**aes-128-cbc**, **aes-192-cbc**, and **aes-256-cbc** options added in Junos OS Release 7.6.

**Description** Configure an IKE or IPsec encryption algorithm.

**Options** **3des-cbc**—Has a block size of 24 bytes; the key size is 192 bits long.  
**des-cbc**—Has a block size of 8 bytes; the key size is 48 bits long.  
**aes-128-cbc**—Advanced Encryption Standard (AES) 128-bit encryption algorithm.  
**aes-192-cbc**—Advanced Encryption Standard (AES) 192-bit encryption algorithm.  
**aes-256-cbc**—Advanced Encryption Standard (AES) 256-bit encryption algorithm.

**Usage Guidelines** See [“Configuring the Encryption Algorithm for an IKE Proposal” on page 19](#) and [“Configuring the Encryption Algorithm for an IPsec Proposal” on page 26.](#)

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

## from

---

<b>Syntax</b>	<pre>from {     destination-address address;     ipsec-inside-interface interface-name;     source-address address; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> rule-name <a href="#">term</a> term-name]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify input conditions for the IPsec term.
<b>Options</b>	<p>For information on match conditions, see the description of firewall filter match conditions in the <i>Junos OS Policy Framework Configuration Guide</i>.</p> <p>The remaining statements are explained separately.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Match Direction for IPsec Rules</a> ” on page 31.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## ike

```

Syntax  ike {
        proposal proposal-name {
            authentication-algorithm (md5 | sha1 | sha-256);
            authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
            description description;
            dh-group (group1 | group2 | group5 | group14);
            encryption-algorithm algorithm;
            lifetime-seconds seconds;
        }
        policy policy-name {
            description description;
            local-certificate identifier;
            local-id (ipv4_addr ipv4-address | ipv6_addr ipv6-address | key-id identifier);
            version (1 | 2);
            mode (aggressive | main);
            pre-shared-key (ascii-text key | hexadecimal key);
            proposals [ proposal-names ];
            remote-id {
                any-remote-id;
                ipv4_addr [ values ];
                ipv6_addr [ values ];
                key_id [ values ];
            }
        }
    }

```

**Hierarchy Level** [edit [services](#) ipsec-vpn]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Configure IKE.

The statements are explained separately.

**Usage Guidelines** See “[Configuring IKE Proposals](#)” on page 17 and “[Configuring IKE Policies](#)” on page 20.

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

## initiate-dead-peer-detection

<b>Syntax</b>	<code>initiate-dead-peer-detection;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services ipsec-vpn</a> rule <i>rule-name</i> term <i>term-name</i> then]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2.
<b>Description</b>	Enable triggering of dead peer detection (DPD) Hello messages to the remote peer for the specified tunnel.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Destination Addresses for Dead Peer Detection</a> ” on page 34.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">backup-remote-gateway</a> on page 59</li> </ul>

## ipsec

<b>Syntax</b>	<pre> ipsec {   <a href="#">proposal</a> <i>proposal-name</i> {     <a href="#">authentication-algorithm</a> (hmac-md5-96   hmac-sha1-96);     <a href="#">description</a> <i>description</i>;     <a href="#">encryption-algorithm</a> <i>algorithm</i>;     <a href="#">lifetime-seconds</a> <i>seconds</i>;     <a href="#">protocol</a> (ah   esp   bundle);   }   <a href="#">policy</a> <i>policy-name</i> {     <a href="#">description</a> <i>description</i>;     <a href="#">perfect-forward-secrecy</a> {       keys (group1   group2);     }     <a href="#">proposals</a> [ <i>proposal-names</i> ];   } } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	<p>Configure IPsec.</p> <p>The statements are explained separately.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Security Associations</a> ” on page 11.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.

## ipsec-inside-interface

---

<b>Syntax</b>	<code>ipsec-inside-interface <i>interface-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">from</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.4.
<b>Description</b>	Specify the interface name for next-hop-style service sets. This value is also implicitly generated in dynamic endpoint tunneling.
<b>Options</b>	<i>interface-name</i> —Service interface for internal network.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Match Conditions in IPsec Rules</a> ” on page 32 or “ <a href="#">Configuring Dynamic Endpoints for IPsec Tunnels</a> ” on page 37.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## lifetime-seconds

---

<b>Syntax</b>	<code>lifetime-seconds <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike proposal</a> <i>proposal-name</i> ], [edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec proposal</a> <i>proposal-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the lifetime of an IKE or IPsec SA. This statement is optional.
<b>Options</b>	<i>seconds</i> —Lifetime <b>Default:</b> 3600 seconds (IKE); 28,800 seconds (IPsec) <b>Range:</b> 180 through 86,400
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Lifetime for an IKE SA</a> ” on page 19 and “ <a href="#">Configuring the Lifetime for an IPsec SA</a> ” on page 27.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.

## local-certificate

---

<b>Syntax</b>	<code>local-certificate <i>identifier</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike policy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.5.
<b>Description</b>	Name of the certificate that needs to be sent to the peer during the IKE authentication phase.
<b>Options</b>	<i>identifier</i> —Name of certificate.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Local Certificate for an IKE Policy</a> ” on page 22.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.

## local-id

---

<b>Syntax</b>	<code>local-id (ipv4_addr <i>ipv4-address</i>   ipv6_addr <i>ipv6-address</i>   key-id <i>identifier</i>);</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike policy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. <code>ipv6_addr</code> option added in Junos OS Release 7.6.
<b>Description</b>	Specify local identifiers for IKE Phase 1 negotiation. This statement is optional.
<b>Options</b>	<code>ipv4_addr <i>ipv4-address</i></code> —IPv4 address identification value. <code>ipv6_addr <i>ipv6-address</i></code> —IPv6 address identification value. <code>key_id <i>identifier</i></code> —Key identification value.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Local and Remote IDs for IKE Phase 1 Negotiation</a> ” on page 24.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.

## manual

---

Syntax	<pre>manual {   direction (inbound   outbound   bidirectional) {     authentication {       algorithm (hmac-md5-96   hmac-sha1-96);       key (ascii-text <i>key</i>   hexadecimal <i>key</i>);     }     auxiliary-spi <i>spi-value</i>;     encryption {       algorithm <i>algorithm</i>;       key (ascii-text <i>key</i>   hexadecimal <i>key</i>);     }     spi <i>spi-value</i>;     protocol (ah   esp   bundle);   } }</pre>
Hierarchy Level	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
Release Information	Statement introduced before Junos OS Release 7.4.
Description	Define a manual IPsec SA.  The remaining statements are explained separately.
Usage Guidelines	See “ <a href="#">Configuring Manual Security Associations</a> ” on page 12.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## match-direction

---

Syntax	<pre>match-direction (input   output);</pre>
Hierarchy Level	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> ]
Release Information	Statement introduced before Junos OS Release 7.4.
Description	Specify the direction in which the rule match is applied.
Options	<b>input</b> —Apply the rule match on input.  <b>output</b> —Apply the rule match on output.
Usage Guidelines	See “ <a href="#">Configuring Match Direction for IPsec Rules</a> ” on page 31.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## mode

---

<b>Syntax</b>	mode (aggressive   main);
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike policy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define an IKE policy mode.
<b>Default</b>	main
<b>Options</b>	<p><b>aggressive</b>—Takes half the number of messages of main mode, has less negotiation power, and does not provide identity protection.</p> <p><b>main</b>—Uses six messages, in three peer-to-peer exchanges, to establish the IKE SA. These three steps include the IKE SA negotiation, a Diffie-Hellman exchange, and authentication of the peer. Also provides identity protection.</p>
<b>Usage Guidelines</b>	See <a href="#">“Configuring the Mode for an IKE Policy” on page 21</a> .
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>

## no-anti-replay

---

<b>Syntax</b>	no-anti-replay;
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Disable IPsec antireplay service, which occasionally causes interoperability issues for security associations.
<b>Usage Guidelines</b>	See <a href="#">“Configuring or Disabling IPsec Anti-Replay” on page 36</a> .
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>

## no-ipsec-tunnel-in-traceroute

---

<b>Syntax</b>	no-ipsec-tunnel-in-traceroute;
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0.
<b>Description</b>	Disables displaying the IPsec tunnel endpoint in the trace route output. The IPsec tunnel is not treated as a next hop and TTL is not decremented. If the TTL becomes zero, the ICMP time exceeded message will not be generated.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring or Disabling IPsec Anti-Replay</a> ” on <a href="#">page 36</a> .
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## perfect-forward-secrecy

---

<b>Syntax</b>	perfect-forward-secrecy { keys (group1   group2  group5  group14); }
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec policy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define Perfect Forward Secrecy (PFS). Creates single-use keys. This statement is optional.
<b>Options</b>	<b>keys</b> —Type of Diffie-Hellman prime modulus group that IKE uses when performing the new Diffie-Hellman exchange. The key can be one of the following: <ul style="list-style-type: none"><li>• <b>group1</b>—768-bit.</li><li>• <b>group2</b>—1024-bit.</li><li>• <b>group5</b>—1536-bit.</li><li>• <b>group14</b>—2048-bit.</li></ul>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Perfect Forward Secrecy</a> ” on <a href="#">page 29</a> .
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## policy (IKE)

**Syntax**    `policy policy-name {  
                   description description;  
                   local-certificate identifier;  
                   local-id (ipv4_addr ipv4-address | ipv6_addr ipv6-address | key-id identifier);  
                   version (1 | 2);  
                   mode (aggressive | main);  
                   pre-shared-key (ascii-text key | hexadecimal key);  
                   proposals [ proposal-names ];  
                   remote-id {  
                     any-remote-id;  
                     ipv4_addr [ values ];  
                     ipv6_addr [ values ];  
                     key_id [ values ];  
                   }  
                 }`

**Hierarchy Level**    [edit [services ipsec-vpn ike](#)]

**Release Information**    Statement introduced before Junos OS Release 7.4.

**Description**    Define an IKE policy.

**Options**    *policy-name*—IKE policy name.

The remaining statements are explained separately.

**Usage Guidelines**    See “[Configuring IKE Policies](#)” on page 20.

**Required Privilege**    admin—To view this statement in the configuration.  
**Level**    admin-control—To add this statement to the configuration.

## policy (IPsec)

---

<b>Syntax</b>	<pre>policy <i>policy-name</i> {     <i>description</i> <i>description</i>;     perfect-forward-secrecy {         keys (group1   group2);     }     proposals [ <i>proposal-names</i> ]; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define an IPsec policy.
<b>Options</b>	<i>policy-name</i> —IPsec policy name.  The remaining statements are explained separately.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring IPsec Policies</a> ” on page 28.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## pre-shared-key

---

<b>Syntax</b>	<pre>pre-shared-key (ascii-text <i>key</i>   hexadecimal <i>key</i>);</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> <a href="#">ike</a> <a href="#">policy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define a preshared key for an IKE policy.
<b>Options</b>	<i>key</i> —Value of preshared key. The key can be one of the following: <ul style="list-style-type: none"><li>• <b>ascii-text</b>—ASCII text key.</li><li>• <b>hexadecimal</b>—Hexadecimal key.</li></ul>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring IKE Policies</a> ” on page 20.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## proposal (IKE)

---

<b>Syntax</b>	<pre>proposal <i>proposal-name</i> {   authentication-algorithm (md5   sha1   sha-256);   authentication-method (dsa-signatures   pre-shared-keys   rsa-signatures);   description <i>description</i>;   dh-group (group1   group2   group5   group14);   encryption-algorithm <i>algorithm</i>;   lifetime-seconds <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services ipsec-vpn ike</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define an IKE proposal for a dynamic SA.
<b>Options</b>	<p><b><i>proposal-name</i></b>—IKE proposal name.</p> <p>The remaining statements are explained separately.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring IKE Proposals</a> ” on page 17.
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>

## proposal (IPsec)

---

<b>Syntax</b>	<pre>proposal <i>proposal-name</i> {   authentication-algorithm (hmac-md5-96   hmac-sha1-96);   description <i>description</i>;   encryption-algorithm <i>algorithm</i>;   lifetime-seconds <i>seconds</i>;   protocol (ah   esp   bundle); }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services ipsec-vpn ipsec</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define an IPsec proposal for a dynamic SA.
<b>Options</b>	<p><b><i>proposal-name</i></b>—IPsec proposal name.</p> <p>The remaining statements are explained separately.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring IPsec Proposals</a> ” on page 25.
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>

## proposals

---

<b>Syntax</b>	<code>proposals [ <i>proposal-names</i> ];</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike</a> <a href="#">policy</a> <i>policy-name</i> ], [edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec</a> <a href="#">policy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define a list of proposals to include in the IKE or IPsec policy.
<b>Options</b>	<i>proposal-names</i> —List of IKE or IPsec proposal names.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Proposals in an IKE Policy</a> ” on page 22 and “ <a href="#">Configuring the Proposals in an IPsec Policy</a> ” on page 29.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## protocol

---

<b>Syntax</b>	<code>protocol (ah   esp   bundle);</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ipsec</a> <a href="#">proposal</a> <i>proposal-name</i> ], [edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> manual direction <i>direction</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define an IPsec protocol for a dynamic or manual SA.
<b>Options</b>	<i>ah</i> —Authentication Header protocol. <i>esp</i> —Encapsulating Security Payload protocol. <i>bundle</i> —AH and ESP protocol.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Protocol for a Manual IPsec SA</a> ” on page 13.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## remote-gateway

---

<b>Syntax</b>	<code>remote-gateway address;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Define the remote address to which the IPsec traffic is directed.
<b>Options</b>	<i>address</i> —Remote IPv4 or IPv6 address.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Actions in IPsec Rules</a> ” on page 33.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## remote-id

---

<b>Syntax</b>	<pre>remote-id {   any-remote-id;   ipv4_addr [ values ];   ipv6_addr [ values ];   key_id [ values ]; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ikepolicy</a> <i>policy-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. <i>ipv6_addr</i> option added in Junos OS Release 7.6. <i>any-remote-id</i> option added in Junos OS Release 8.2.
<b>Description</b>	Define the remote identification values to which the IKE policy applies.
<b>Options</b>	<p><i>any-remote-id</i>—Allow any remote address to connect. This option is supported only in dynamic endpoints configurations and cannot be configured along with specific values.</p> <p><i>ipv4_addr [ values ]</i>—Define one or more IPv4 address identification values.</p> <p><i>ipv6_addr [ values ]</i>—Define one or more IPv6 address identification values.</p> <p><i>key_id [ values ]</i>—Define one or more key identification values.</p>
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Local and Remote IDs for IKE Phase 1 Negotiation</a> ” on page 24.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.

## rule

```

Syntax  rule rule-name {
        match-direction (input | output);
        term term-name {
            from {
                destination-address address;
                ipsec-inside-interface interface-name;
                source-address address;
            }
            then {
                anti-replay-window-size bits;
                backup-remote-gateway address;
                clear-dont-fragment-bit;
                dynamic {
                    ike-policy policy-name;
                    ipsec-policy policy-name;
                }
                initiate-dead-peer-detection;
                manual {
                    direction (inbound | outbound | bidirectional) {
                        authentication {
                            algorithm (hmac-md5-96 | hmac-sha1-96);
                            key (ascii-text key | hexadecimal key);
                        }
                        auxiliary-spi spi-value;
                        encryption {
                            algorithm algorithm;
                            key (ascii-text key | hexadecimal key);
                        }
                        protocol (ah | bundle | esp);
                        spi spi-value;
                    }
                }
                no-anti-replay;
                remote-gateway address;
                syslog;
                tunnel-mtu bytes;
            }
        }
    }

```

**Hierarchy Level** [edit [services](#) ipsec-vpn],  
[edit [services](#) ipsec-vpn [rule-set](#) *rule-set-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Specify the rule the router uses when applying this service.

**Options** *rule-name*—Identifier for the collection of terms that comprise this rule.

The remaining statements are explained separately.



**Usage Guidelines** See “[Configuring Match Direction for IPsec Rules](#)” on page 31.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

## rule-set

---

**Syntax** `rule-set rule-set-name {  
[ rule rule-names ];  
}`

**Hierarchy Level** [edit [services](#) ipsec-vpn]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Specify the rule set the router uses when applying this service.

**Options** *rule-set-name*—Identifier for the collection of rules that constitute this rule set.

**Usage Guidelines** See “[Configuring IPsec Rule Sets](#)” on page 37.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

## services

---

**Syntax** `services ipsec-vpn { ... }`

**Hierarchy Level** [edit]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define the service rules to be applied to traffic.

**Options** *ipsec-vpn*—IPsec set of rules statements.

**Usage Guidelines** See IPsec Properties.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.


## source-address

---

<b>Syntax</b>	<code>source-address <i>address</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">from</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the source address for rule matching.
<b>Options</b>	<i>address</i> —Source IP address.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Match Conditions in IPsec Rules</a> ” on page 32.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## spi

---

<b>Syntax</b>	<code>spi <i>spi-value</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> manual direction <i>direction</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the SPI for an SA.
<b>Options</b>	<i>spi-value</i> —An arbitrary value that uniquely identifies which SA to use at the receiving host (the destination address in the packet). <b>Range:</b> 256 through 16,639
<div> <b>NOTE:</b> Use the auxiliary SPI when you configure the protocol statement to use the <code>bundle</code> option.</div>	
<b>Usage Guidelines</b>	See “ <a href="#">Configuring the Security Parameter Index</a> ” on page 14.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.

## syslog

---

<b>Syntax</b>	syslog;
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Enable system logging. The system log information for the Adaptive Services or Multiservices Physical Interface Card (PIC) is passed to the kernel for logging in the <code>/var/log</code> directory.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Actions in IPsec Rules</a> ” on page 33.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## term

---

**Syntax**    `term term-name {`  
              `from {`  
                  `destination-address address;`  
                  `ipsec-inside-interface interface-name;`  
                  `source-address address;`  
              `}`  
              `then {`  
                  `anti-replay-window-size bits;`  
                  `backup-remote-gateway address;`  
                  `clear-dont-fragment-bit;`  
                  `dynamic {`  
                      `ike-policy policy-name;`  
                      `ipsec-policy policy-name;`  
                  `}`  
                  `initiate-dead-peer-detection;`  
                  `manual {`  
                      `direction (inbound | outbound | bidirectional) {`  
                          `authentication {`  
                              `algorithm (hmac-md5-96 | hmac-sha1-96);`  
                              `key (ascii-text key | hexadecimal key);`  
                          `}`  
                          `auxiliary-spi spi-value;`  
                          `encryption {`  
                              `algorithm algorithm;`  
                              `key (ascii-text key | hexadecimal key);`  
                          `}`  
                          `protocol (ah | bundle | esp);`  
                          `spi spi-value;`  
                      `}`  
                  `}`  
                  `no-anti-replay;`  
                  `remote-gateway address;`  
                  `syslog;`  
                  `tunnel-mtu bytes;`  
              `}`  
              `}`

**Hierarchy Level**    [edit [services](#) ipsec-vpn [rule](#) *rule-name*]

**Release Information**    Statement introduced before Junos OS Release 7.4.

**Description**    Define the IPsec term properties.

**Options**    *term-name*—Identifier for the term.

The remaining statements are explained separately.

**Usage Guidelines**    See “[Configuring Match Direction for IPsec Rules](#)” on page 31.

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

## then

```
Syntax  then {
    anti-replay-window-size bits;
    backup-remote-gateway address;
    clear-dont-fragment-bit;
    dynamic {
        ike-policy policy-name;
        ipsec-policy policy-name;
    }
    initiate-dead-peer-detection;
    manual {
        direction (inbound | outbound | bidirectional) {
            authentication {
                algorithm (hmac-md5-96 | hmac-sha1-96);
                key (ascii-text key | hexadecimal key);
            }
            auxiliary-spi spi-value;
            encryption {
                algorithm algorithm;
                key (ascii-text key | hexadecimal key);
            }
            protocol (ah | bundle | esp);
            spi spi-value;
        }
    }
    no-anti-replay;
    remote-gateway address;
    syslog;
    tunnel-mtu bytes;
}
```

**Hierarchy Level** [edit [services](#) ipsec-vpn [rule](#) *rule-name* [term](#) *term-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define the IPsec term actions.

**Options** The remaining statements are explained separately.

**Usage Guidelines** See “[Configuring Match Direction for IPsec Rules](#)” on page 31.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

## traceoptions

---

<b>Syntax</b>	<pre>traceoptions {     file &lt;filename&gt; &lt;files number&gt; &lt;match regular-expression&gt; &lt;size bytes&gt; &lt;world-readable           no-world-readable&gt;;     flag flag;     level level;     no-remote-trace; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.5. level option added in Junos OS Release 10.0.
<b>Description</b>	Configure IPsec tracing operations. By default, messages are written to <code>/var/log/kmd</code> .
<b>Options</b>	<p><b>files <i>number</i></b>—Maximum number of trace data files. <b>Range:</b> 2 through 1000</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform:</p> <ul style="list-style-type: none"><li>• <b>all</b>—Trace everything.</li><li>• <b>certificates</b>—Trace certificates that apply to the IPsec service set.</li><li>• <b>database</b>—Trace security associations database events.</li><li>• <b>general</b>—Trace general events.</li><li>• <b>ike</b>—Trace IKE module processing.</li><li>• <b>parse</b>—Trace configuration processing.</li><li>• <b>policy-manager</b>—Trace policy manager processing.</li><li>• <b>routing-socket</b>—Trace routing socket messages.</li><li>• <b>snmp</b>—Trace SNMP operations.</li><li>• <b>timer</b>—Trace internal timer events.</li></ul> <p><b>level <i>level</i></b>—Key management process (kmd) tracing level. The following values are supported:</p> <ul style="list-style-type: none"><li>• <b>all</b>—Match all levels.</li><li>• <b>error</b>—Match error conditions.</li><li>• <b>info</b>—Match informational messages.</li><li>• <b>notice</b>—Match conditions that should be handled specially.</li><li>• <b>verbose</b>—Match verbose messages.</li><li>• <b>warning</b>—Match warning messages.</li></ul>

**size bytes**—Maximum trace file size.

**Usage Guidelines** See [“Tracing IPsec Operations” on page 42](#).

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

## traceoptions (PKI)

---

<b>Syntax</b>	<pre>traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>maximum-file-size</i>&gt;     &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>; }</pre>
<b>Hierarchy Level</b>	[edit security pki]
<b>Description</b>	Configure security public key infrastructure (PKI) trace options. To specify more than one trace option, include multiple <b>flag</b> statements. Trace option output is recorded in the <code>/var/log/pkid</code> file.
<b>Options</b>	<p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. To include the <b>file</b> statement, you must specify a filename.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file (for example, <b>pkid</b>) reaches its maximum size, it is renamed <b>pkid.0</b>, then <b>pkid.1</b>, and so on, until the maximum number of trace files is reached. When the maximum number is reached, the oldest trace file is overwritten. If you specify a maximum number of files, you must also specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 2 files</p> <p><b>flag</b>—Trace operation to perform. To specify more than one trace operation, include multiple flag statements:</p> <ul style="list-style-type: none"><li><b>all</b>—Trace with all flags enabled.</li><li><b>certificate-verification</b>—Trace PKI certificate verification events.</li><li><b>online-crl-check</b>—Trace PKI online certificate revocation list (CRL) events.</li><li><b>enrollment</b>—PKI certificate enrollment tracing.</li></ul> <p><b>match <i>regular-expression</i></b>—(Optional) Refine the output to include lines that contain the regular expression.</p> <p><b>size <i>maximum-file-size</i></b>—(Optional) Maximum size of each trace file, in kilobytes (KB). If you specify a maximum file size, you also must specify a maximum number of trace files with the <b>files <i>number</i></b> option.</p> <p><b>Default:</b> 1024 KB</p> <p><b>world-readable   no-world-readable</b>—(Optional) By default, log files can be accessed only by the user who configures the tracing operation. The <b>world-readable</b> option enables any user to read the file. To explicitly set the default behavior, use the <b>no-world-readable</b> option.</p>



<b>Required Privilege</b>	trace—To view this statement in the configuration.
<b>Level</b>	trace-control—To add this statement to the configuration.

## tunnel-mtu

---

<b>Syntax</b>	tunnel-mtu <i>bytes</i> ;
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">rule</a> <i>rule-name</i> <a href="#">term</a> <i>term-name</i> <a href="#">then</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.5.
<b>Description</b>	Maximum transmission unit (MTU) size for IPsec tunnels.
<b>Options</b>	<i>bytes</i> —MTU size. <b>Default:</b> 1500 bytes <b>Range:</b> 256 through 9192 bytes
<b>Usage Guidelines</b>	See “ <a href="#">Specifying the MTU for IPsec Tunnels</a> ” on page 36.
<b>Required Privilege</b>	interface—To view this statement in the configuration.
<b>Level</b>	interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• mtu</li> </ul>

## version (IKE)

---

<b>Syntax</b>	version ( 1   2 );
<b>Hierarchy Level</b>	[edit <a href="#">services</a> ipsec-vpn <a href="#">ike</a> <a href="#">policy</a> <i>policy-name</i> ],
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Configure the Internet Key Exchange (IKE) version that is used to negotiate dynamic SAs for IPSec.
<b>Options</b>	1—Uses IKEv1.  2—Uses IKEv2.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring IKE Policies</a> ” on page 20.
<b>Required Privilege</b>	admin—To view this statement in the configuration.
<b>Level</b>	admin-control—To add this statement to the configuration.



## PART 3

# Administration

- [IP Security Operational Mode Commands on page 93](#)



## CHAPTER 6

# IP Security Operational Mode Commands

## clear security pki ca-certificate

---

<b>Syntax</b>	clear security pki ca-certificate (all   ca-profile <i>ca-profile-name</i> )
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Delete certificate authority (CA) digital certificates from the router.
<b>Options</b>	<b>all</b> —Delete all CA digital certificates from the router. <b>ca-profile <i>ca-profile-name</i></b> —Delete the specified CA profile.
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request security pki ca-certificate enroll on page 103</a></li><li>• <a href="#">request security pki ca-certificate load on page 104</a></li><li>• <a href="#">show security pki ca-certificate on page 116</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear security pki ca-certificate all on page 94</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

clear security pki ca-certificate all	user@host> clear security pki ca-certificate all
--	--

## clear security pki certificate-request

---

<b>Syntax</b>	clear security pki certificate-request (all   certificate-id <i>certificate-id-name</i> )
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Delete manually generated local digital certificate requests from the router.
<b>Options</b>	<p><b>all</b>—Delete all local digital certificate requests from the router.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—Delete the specified local digital certificate and corresponding public/private key pair.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show security pki certificate-request on page 120</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear security pki certificate-request all on page 95</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```
clear security pki certificate-request all
user@host> clear security pki certificate-request all
```

## clear security pki crt

---

<b>Syntax</b>	clear security pki crt (all   ca-profile <i>ca-profile-name</i> )
<b>Release Information</b>	Command introduced in Junos 8.1
<b>Description</b>	Delete certificate revocation lists (CRLs) from the router.
<b>Options</b>	<b>all</b> —Delete all CRLs from the router.  <b>ca-profile <i>ca-profile-name</i></b> —Delete CRLs associated with the specified CA profile.
<b>Required Privilege Level</b>	clear
<b>List of Sample Output</b>	<a href="#">clear security pki crt ca-profile all on page 96</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

clear security pki crt ca-profile all	user@host> clear security pki crt ca-profile all
--	--



---

## clear security pki key-pair

---

<b>Syntax</b>	clear security pki key-pair (all   certificate-id <i>certificate-id-name</i> )
<b>Release Information</b>	Command introduced in Junos OS Release 8.5.
<b>Description</b>	Clear public key infrastructure (PKI) key pair information for local digital certificates from the router.
<b>Options</b>	<p><b>all</b>—Delete all local digital certificates, certificate requests, and the corresponding public and private key pairs from the router.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—Delete the specified local digital certificate and corresponding public/private key pair.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request security pki local-certificate enroll on page 110</a></li><li>• <a href="#">show security pki local-certificate on page 124</a></li></ul>
<b>Output Fields</b>	This command produces no output.

## Sample Output

```
clear security pki key pair

user@host> clear security pki key pair
```

## clear security pki local-certificate

---

<b>Syntax</b>	clear security pki local-certificate <all   certificate-id <i>certificate-id-name</i>   system-generated>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Delete local digital certificates, certificate requests, and the corresponding public/private key pairs from the router.
<b>Options</b>	<p><b>all</b>—(Optional) Delete all local digital certificates, certificate requests, and the corresponding public and private key pairs from the router.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—(Optional) Delete the specified local digital certificate and corresponding public and private key pair.</p> <p><b>system-generated</b>—(Optional) Auto-generated self-signed certificate.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">request security pki local-certificate enroll on page 110</a></li><li>• <a href="#">show security pki local-certificate on page 124</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear security pki local-certificate all on page 98</a>
<b>Output Fields</b>	This command produces no output.

### Sample Output

clear security pki local-certificate all	user@host> clear security pki local-certificate all
---	---

## clear services ipsec-vpn certificates

<b>Syntax</b>	clear services ipsec-vpn certificates (all   service-set <i>service-set</i> ) <certificate-cache-entry <i>number</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	(Adaptive services interfaces only) Delete digital certificates from the IPsec configuration memory cache. Issuing this command also clears the certificate revocation list (CRL) from the cache along with the certificates.
<b>Options</b>	<p><b>all</b>—Delete digital certificates for all service sets.</p> <p><b>service-set <i>service-set</i></b>—Delete digital certificates for the specified service set.</p> <p><b>certificate-cache-entry <i>number</i></b>—(Optional) Delete digital certificates matching a specified cache entry number. To view the certificate cache entry numbers, issue the <b>show services ipsec-vpn certificates</b> command.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show services ipsec-vpn certificates on page 127</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear services ipsec-vpn certificates all on page 99</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```
clear services ipsec-vpn certificates
all
user@host> clear services ipsec-vpn certificates all
```

## clear services ipsec-vpn ike security-associations

---

<b>Syntax</b>	<code>clear services ipsec-vpn ike security-associations</code> <code>&lt;peer-address-name&gt;</code> <code>&lt;service-set service-set-name&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. <b>service-set</b> option added in Junos OS Release 8.5.
<b>Description</b>	(Adaptive services interfaces only) Clear Internet Key Exchange (IKE) security associations.
<b>Options</b>	<b>peer-address-name</b> —(Optional) Clear only the security association specified by the peer address.  <b>service-set service-set-name</b> —(Optional) Clear only the security association specified by the service-set name.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show services ipsec-vpn ike security-associations on page 130</a></li></ul>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

<code>clear services</code> <code>ipsec-vpn ike</code> <code>security-associations</code>	<code>user@host&gt; clear services ipsec-vpn ike security-associations</code>
---	---

## clear services ipsec-vpn ipsec statistics

---

<b>Syntax</b>	clear services ipsec-vpn ipsec statistics <remote-gateway <i>address</i> > <service-set <i>service-set-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.1.
<b>Description</b>	(Adaptive services interface only) Clear IP Security (IPsec) statistics.
<b>Options</b>	<b>remote-gateway <i>address</i></b> —(Optional) Clear statistics for the specified remote system.  <b>service-set <i>service-set-name</i></b> —(Optional) Clear statistics for the specified service set.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show services ipsec-vpn ipsec statistics on page 137</a></li></ul>
<b>List of Sample Output</b>	<a href="#">clear services ipsec-vpn ipsec statistics on page 101</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

clear services ipsec-vpn ipsec statistics	user@host> clear services ipsec-vpn ipsec statistics
---	--

## clear services ipsec-vpn ipsec security-associations

---

<b>Syntax</b>	<code>clear services ipsec-vpn security-associations</code> <code>&lt;peer-address-name&gt;</code> <code>&lt;remote-gateway remote-gateway-address&gt;</code> <code>&lt;service-set-name&gt;</code> <code>&lt;tunnel-index tunnel-index-number&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. <b>remote-gateway</b> , <b>service-set-name</b> , and <b>tunnel-index</b> options added in Junos OS Release 8.4.
<b>Description</b>	(Adaptive services interfaces only) Clear IP Security (IPsec) security associations. You can combine the options for greater specificity.
<b>Options</b>	<p><b>peer-address-name</b>—(Optional) Clear only the security association specified by the peer address.</p> <p><b>remote-gateway remote-gateway-address</b>—(Optional) Clear only the security association specified by the remote gateway address.</p> <p><b>service-set-name</b>—(Optional) Clear only the security association specified by the service-set name.</p> <p><b>tunnel-index tunnel-index-number</b>—(Optional) Clear only the security association specified by the tunnel index number.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show services ipsec-vpn ipsec security-associations on page 134</a></li></ul>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<code>clear services</code>	<code>user@host&gt; clear services ipsec-vpn ipsec security-associations</code>
<code>ipsec-vpn ipsec</code>	
<code>security-associations</code>	

## request security pki ca-certificate enroll

<b>Syntax</b>	<code>request security pki ca-certificate enroll ca-profile <i>ca-profile-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Request a digital certificate from a certificate authority (CA) online by using the Simple Certificate Enrollment Protocol (SCEP).
<b>Options</b>	<code>ca-profile <i>ca-profile-name</i></code> —CA profile name.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear security pki ca-certificate on page 94</a></li> <li>• <a href="#">show security pki ca-certificate on page 116</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request security pki ca-certificate enroll on page 103</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```

request security pki user@host> request security pki ca-certificate enroll ca-profile entrust
ca-certificate enroll Received following certificates:
                        Certificate: C=us, O=juniper, CN=First Officer
                        Fingerprint: 46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f
                        Certificate: C=us, O=juniper, CN=First Officer
                        Fingerprint: bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17
                        Certificate: C=us, O=juniper
                        Fingerprint: 00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10
Do you want to load the above CA certificate ? [yes,no] (no) yes

```

## request security pki ca-certificate load

---

<b>Syntax</b>	<code>request security pki ca-certificate load ca-profile <i>ca-profile-name</i> filename <i>path/filename</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Manually load a certificate authority (CA) digital certificate from a specified location.
<b>Options</b>	<p><b>ca-profile <i>ca-profile-name</i></b>—Load the specified CA profile.</p> <p><b>filename <i>path/filename</i></b>—Directory location and filename of the CA digital certificate.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">clear security pki ca-certificate on page 94</a></li><li>• <a href="#">show security pki ca-certificate on page 116</a></li></ul>
<b>List of Sample Output</b>	<a href="#">request security pki ca-certificate load on page 104</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<code>request security pki ca-certificate load</code>	<code>user@host&gt; request security pki ca-certificate load ca-profile ca-private filename pki-file</code>
---	---



## request security pki ca-certificate verify

---

<b>Syntax</b>	<code>request security pki ca-certificate verify ca-profile <i>ca-profile-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 8.5.
<b>Description</b>	Verify the digital certificate installed for the specified certificate authority (CA).
<b>Options</b>	<code>ca-profile <i>ca-profile-name</i></code> —Name of the local digital certificate identifier.
<b>Required Privilege Level</b>	maintenance
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

You receive the following response before the certificate revocation list (CRL) is downloaded:

```
request security pki ca-certificate verify ca-profile ca1 (CRL not downloaded)
user@host> request security pki ca-certificate verify ca-profile ca1
```

```
CA certificate ca1: CRL verification in progress. Please check the PKId debug
logs for completion status
```

## request security pki crl load

---

<b>Syntax</b>	<code>request security pki crl load ca-profile <i>ca-profile-name</i> filename <i>path/filename</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 8.1.
<b>Description</b>	Manually install a certificate revocation list (CRL) on the router from a specified location.
<b>Options</b>	<b><code>ca-profile <i>ca-profile-name</i></code></b> —Load the specified certificate authority (CA) profile. <b><code>filename <i>path/filename</i></code></b> —Directory location and filename of the CRL.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">request security pki crl load on page 106</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<code>request security pki crl load</code>	<code>user@host&gt; request security pki crl load ca-profile ca-private filename pki-file</code>
--	--

## request security pki generate-certificate-request

<b>Syntax</b>	request security pki generate-certificate-request certificate-id <i>certificate-id-name</i> domain-name <i>domain-name</i> subject <i>subject-distinguished-name</i> <email <i>email-address</i> > <filename ( <i>path</i>   terminal)> <ip-address <i>ip-address</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Manually generate a local digital certificate request in the Public-Key Cryptography Standards #10 (PKCS-10) format.
<b>Options</b>	<p><b>certificate-id</b> <i>certificate-id-name</i>—Name of the local digital certificate and the public/private key pair.</p> <p><b>domain-name</b> <i>domain-name</i>—Fully qualified domain name (FQDN). The FQDN provides the identity of the certificate owner for Internet Key Exchange (IKE) negotiations and provides an alternative to the subject name.</p> <p><b>subject</b> <i>subject-distinguished-name</i>—Distinguished name format that contains the common name, department, company name, state, and country:</p> <ul style="list-style-type: none"> <li>• <b>CN</b>—Common name</li> <li>• <b>OU</b>—Organizational unit name</li> <li>• <b>O</b>—Organization name</li> <li>• <b>ST</b>—State</li> <li>• <b>C</b>—Country</li> </ul> <p><b>email</b> <i>email-address</i>—(Optional) E-mail address of the certificate holder.</p> <p><b>filename</b> (<i>path</i>   terminal)—(Optional) Location where the local digital certificate request should be placed or the login terminal.</p> <p><b>ip-address</b> <i>ip-address</i>—(Optional) IP address of the router.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear security pki certificate-request on page 95</a></li> <li>• <a href="#">show security pki certificate-request on page 120</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request security pki generate-certificate-request on page 108</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
request security pki user@host> request security pki generate-certificate-request certificate-id local-entrust2
generate-certificate-request domain-name router2.juniper.net filename entrust-req2 subject cn=router2.juniper.net
```

```
Generated certificate request
-----BEGIN CERTIFICATE REQUEST-----
MIIBoTCCAQoCAQAwGjEYMBYGA1UEAxMPdHxLmp1bm1wZXIubmV0MIGfMA0GCSqG
SIb3DQEBAQUAA4GNADCBiQKBgQCiuFklQws1Ud+AqN5DDxRs2kVyKEhh9qoVFnz+
Hz4c9vsy3B8ElwTJlkmIt2cB3yifB6zePd+6wYpf57Crwre7YqPkiXM31F6z3YjX
H+1BPNbCxNWYvyrnSyVYDbFj8o0Xyqog8ACDfVL2JBWrPNBYy7imq/K9soDBbAs6
5hZqqwIDAQABoEcwRQYJKoZIhvcNAQkOMTgwNjA0BGNVHQ8BAf8EBAMCB4AwJAYD
VR0RAQH/BBowGIIWdHxLmVuZ2xhYi5qdW5pcGVyLm5ldDANBgkqhkiG9w0BAQQF
AA0BgQBc2rq1v5S0QXH7LCb/FdqAL8ZM6GoaN5d6cGwq4bB6a7UQFgtoH406gQ3G
3iH0Zfz4xMIBpJYuGd1dkqgvcDoH3AgTsLkfn7Wi3x5H2qeQVs9bvL4P5nvEZLND
EIMUHwteo1ZCiZ70f09Fer9cXWHSQs1UtXtgPqQJy2xIeImLgw==
-----END CERTIFICATE REQUEST-----
Fingerprint:
0d:90:b8:d2:56:74:fc:84:59:62:b9:78:71:9c:e4:9c:54:ba:16:97 (sha1)
1b:08:d4:f7:90:f1:c4:39:08:c9:de:76:00:86:62:b8 (md5)
```

## request security pki generate-key-pair

---

<b>Syntax</b>	request security pki generate-key-pair certificate-id <i>certificate-id-name</i> <size (512   1024   2048) >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Generate a Public Key Infrastructure (PKI) public and private key pair for a local digital certificate.
<b>Options</b>	<b>certificate-id</b> <i>certificate-id-name</i> —Name of the local digital certificate and the public/private key pair.  <b>size</b> —(Optional) Key pair size. The key pair size can be <b>512</b> , <b>1024</b> , or <b>2048</b> bits.
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">request security pki generate-key-pair on page 109</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

request security pki generate-key-pair	user@host> request security pki generate-key-pair certificate-id billy size 2048 Generated key pair billy, key size 2048 bits
---	--

## request security pki local-certificate enroll

---

<b>Syntax</b>	<code>request security pki local-certificate enroll ca-profile <i>ca-profile-name</i> certificate-id <i>certificate-id-name</i> challenge-password <i>password</i> domain-name <i>domain-name</i> subject <i>subject-distinguished-name</i> &lt;email <i>email-address</i>&gt; &lt;ip-address <i>ip-address</i>&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Request that a certificate authority (CA) enroll and install a local digital certificate online by using the Simple Certificate Enrollment Protocol (SCEP).
<b>Options</b>	<p><b>ca-profile <i>ca-profile-name</i></b>—CA profile name.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—Name of the local digital certificate and the public/private key pair.</p> <p><b>challenge-password <i>password</i></b>—Password set by the administrator and normally obtained from the SCEP enrollment webpage of the CA. The password is 16 characters in length.</p> <p><b>domain-name <i>domain-name</i></b>—Fully qualified domain name (FQDN). The FQDN provides the identity of the certificate owner for Internet Key Exchange (IKE) negotiations and provides an alternative to the subject name.</p> <p><b>subject <i>subject-distinguished-name</i></b>—Distinguished name format that contains the common name, department, company name, state, and country:</p> <ul style="list-style-type: none"><li>• <b>CN</b>—Common name</li><li>• <b>OU</b>—Organizational unit name</li><li>• <b>O</b>—Organization name</li><li>• <b>ST</b>—State</li><li>• <b>C</b>—Country</li></ul> <p><b>email <i>email-address</i></b>—(Optional) E-mail address of the certificate holder.</p> <p><b>ip-address <i>ip-address</i></b>—(Optional) IP address of the router.</p>
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show security pki local-certificate on page 124</a></li></ul>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

```
user@host> request security pki local-certificate enroll certificate-id r3-entrust-scep ca-profile  
entrust domain-name router3.juniper.net subject "CN=router3,OU=Engineering,O=juniper,C=US"  
challenge-password 123
```

Certificate enrollment has started. To view the status of your enrollment, check the public key infrastructure log (pkid) log file at /var/log/pkid. Please save the challenge-password for revoking this certificate in future. Note that this password is not stored on the router.

## request security pki local-certificate generate-self-signed

---

<b>Syntax</b>	<code>request security pki local-certificate generate-self-signed certificate-id <i>certificate-id-name</i> domain-name <i>domain-name</i> ip-address <i>ip-address</i> email <i>email-address</i> subject <i>subject-distinguished-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.1.
<b>Description</b>	Manually generate a self-signed certificate for the given distinguished name.
<b>Options</b>	<p><b>certificate-id <i>certificate-id-name</i></b>—Name of the local digital certificate and the public/private key pair.</p> <p><b>domain-name <i>domain-name</i></b>—Fully qualified domain name (FQDN). The FQDN provides the identity of the certificate owner for Internet Key Exchange (IKE) negotiations and provides an alternative to the subject name.</p> <p><b>email <i>email-address</i></b>—E-mail address of the certificate holder.</p> <p><b>ip-address <i>ip-address</i></b>—IP address of the router.</p> <p><b>subject <i>subject-distinguished-name</i></b>—Distinguished name format that contains the common name, department, company name, state, and country:</p> <ul style="list-style-type: none"><li>• <b>CN</b>—Common name</li><li>• <b>OU</b>—Organizational unit name</li><li>• <b>O</b>—Organization name</li><li>• <b>ST</b>—State</li><li>• <b>C</b>—Country</li></ul>
<b>Required Privilege Level</b>	<code>maintenance</code> <code>security</code>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show security pki local-certificate on page 124</a></li></ul>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```
user@host> request security pki local-certificate generate-self-signed certificate-id self-cert  
subject cn=abc domain-name juniper.net email mholmes@juniper.net  
Self-signed certificate generated and loaded successfully
```



## request security pki local-certificate load

<b>Syntax</b>	<code>request security pki local-certificate load certificate-id <i>certificate-id-name</i> filename <i>path</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Manually load a local digital certificate from a specified location.
<b>Options</b>	<p><b>certificate-id <i>certificate-id-name</i></b>—Name of the public/private key pair mapped to the local digital certificate.</p> <p><b>filename <i>path/filename</i></b>—Directory location and filename of the local digital certificate provided by the CA.</p>
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">request security pki local-certificate load on page 113</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```
request security pki user@host> request security pki local-certificate load filename /tmp/router2-cert certificate-id
local-certificate load local-entrust2
Local certificate local-entrust2 loaded successfully
```

## request security pki local-certificate verify

---

<b>Syntax</b>	request security pki local-certificate verify certificate-id <i>certificate-id-name</i>
<b>Release Information</b>	Command introduced in Junos OS Release 8.5.
<b>Description</b>	Verify the validity of the local digital certificate identifier.
<b>Options</b>	<b>certificate-id</b> <i>certificate-id-name</i> —Display the specified certificate identifier name.
<b>Required Privilege Level</b>	maintenance
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show security pki local-certificate on page 124</a></li></ul>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

## Sample Output

You receive the following response before the certificate revocation list (CRL) is downloaded:

```
request security pki local-certificate verify certificate-id bme1 (not downloaded)
user@host> request security pki local-certificate verify certificate-id bme1
```

```
Local certificate bme1: CRL verification in progress. Please check the PKId debug
logs for completion status
```

You receive the following response after the certificate revocation list (CRL) is downloaded

```
request security pki local-certificate verify certificate bme1 (downloaded)
user@host> request security pki local-certificate verify certificate-id bme1
Local certificate bme1 verification success
```

## request services ipsec-vpn ipsec switch tunnel

<b>Syntax</b>	<code>request services ipsec-vpn ipsec switch tunnel local-gateway <i>address</i> remote-gateway <i>address</i></code> <code>&lt;routing-instance <i>instance-name</i>&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. <b>routing-instance</b> option added in Release 8.1.
<b>Description</b>	(Adaptive services interface only) Manually switch between primary and backup IP Security (IPsec) tunnels.
<b>Options</b>	<b>local-gateway <i>address</i></b> —Gateway address of the local system.  <b>remote-gateway <i>address</i></b> —Gateway address of the remote system.  <b>routing-instance <i>instance-name</i></b> —(Optional) VRF instance associated with local gateway address.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show services ipsec-vpn ipsec security-associations on page 134</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request services ipsec-vpn ipsec switch tunnel on page 115</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

request services ipsec-vpn ipsec switch tunnel	user@host> request services ipsec-vpn ipsec switch tunnel local-gateway 10.1.1.1 remote gateway 10.100.10.1
--	---

## show security pki ca-certificate

<b>Syntax</b>	show security pki ca-certificate <brief   detail> <ca-profile <i>ca-profile-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Display information about certificate authority (CA) digital certificates installed in the router.
<b>Options</b>	<p><b>none</b>—(Same as brief) Display information about all CA digital certificates.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>ca-profile <i>ca-profile-name</i></b>—(Optional) Display information about only the specified CA profile.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show security pki ca-certificate on page 117</a> <a href="#">show security pki ca-certificate detail on page 118</a>
<b>Output Fields</b>	<p><a href="#">Table 5 on page 116</a> lists the output fields for the <b>show security pki ca-certificate</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 5: show security pki ca-certificate Output Fields**

Field Name	Field Description	Level of Output
<b>Certificate identifier</b>	Name of the digital certificate.	All levels
<b>Certificate version</b>	Revision number of the digital certificate.	<b>detail</b>
<b>Serial number</b>	Unique serial number of the digital certificate.	<b>detail</b>
<b>Issued by</b>	Authority that issued the digital certificate.	<b>none brief</b>
<b>Issued to</b>	Device that was issued the digital certificate.	<b>none brief</b>
<b>Issuer</b>	<p>Authority that issued the digital certificate, including details of the authority organized using the distinguished name format. Possible subfields are:</p> <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul>	<b>detail</b>

Table 5: show security pki ca-certificate Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Subject</b>	Details of the digital certificate holder organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the requestor.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul>	<b>detail</b>
<b>Validity</b>	Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Start time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul>	All levels
<b>Public key algorithm</b>	Encryption algorithm used with the private key, such as <b>rsaEncryption(1024 bits)</b> .	All levels
<b>Signature algorithm</b>	Encryption algorithm that the CA used to sign the digital certificate, such as <b>sha1WithRSAEncryption</b> .	<b>detail</b>
<b>Fingerprint</b>	Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.	<b>detail</b>
<b>Distribution CRL</b>	Distinguished name information and the URL for the certificate revocation list (CRL) server.	<b>detail</b>
<b>Use for key</b>	Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .	<b>detail</b>

## Sample Output

```

show security pki ca-certificate user@host> show security pki ca-certificate
Certificate identifier: entrust
  Issued to: juniper, Issued by: juniper
  Validity:
    Not before: 2005 Oct 18th, 23:54:22 GMT
    Not after: 2025 Oct 19th, 00:24:22 GMT
  Public key algorithm: rsaEncryption(1024 bits)

Certificate identifier: entrust
  Issued to: First Officer, Issued by: juniper
  Validity:
    Not before: 2005 Oct 18th, 23:55:59 GMT
    Not after: 2008 Oct 19th, 00:25:59 GMT
  Public key algorithm: rsaEncryption(1024 bits)

Certificate identifier: entrust
  Issued to: First Officer, Issued by: juniper
  Validity:
    Not before: 2005 Oct 18th, 23:55:59 GMT

```

Not after: 2008 Oct 19th, 00:25:59 GMT  
Public key algorithm: rsaEncryption(1024 bits)

**show security pki  
ca-certificate detail**

```

user@host> show security pki ca-certificate detail
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 9235
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us
Validity:
  Not before: 2005 Oct 18th, 23:54:22 GMT
  Not after: 2025 Oct 19th, 00:24:22 GMT
Public key algorithm: rsaEncryption(1024 bits)
cb:9e:2d:c0:70:f8:ea:3c:f2:b5:f0:02:48:87:dc:68:99:a3:57:4f
0e:b9:98:0b:95:47:0d:1f:97:7c:53:17:dd:1a:f8:da:e5:08:d1:1c
78:68:1f:2f:72:9f:a2:cf:81:e3:ce:c5:56:89:ce:f0:97:93:fa:36
19:3e:18:7d:8c:9d:21:fe:1f:c3:87:8d:b3:5d:f3:03:66:9d:16:a7
bf:18:3f:f0:7a:80:f0:62:50:43:83:4f:0e:d7:c6:42:48:c0:8a:b2
c7:46:30:38:df:9b:dc:bc:b5:08:7a:f3:cd:64:db:2b:71:67:fe:d8
04:47:08:07:de:17:23:13
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10 (sha1)
  71:6f:6a:76:17:9b:d6:2a:e7:5a:72:97:82:6d:26:86 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: CRL signing, Certificate signing
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925c
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us, Common name: First Officer
Validity:
  Not before: 2005 Oct 18th, 23:55:59 GMT
  Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)
c0:a4:21:32:95:0a:cd:ec:12:03:d1:a2:89:71:8e:ce:4e:a6:f9:2f
1a:9a:13:8c:f6:a0:3d:c9:bd:9d:c2:a0:41:77:99:1b:1e:ed:5b:80
34:46:f8:5b:28:34:38:2e:91:7d:4e:ad:14:86:78:67:e7:02:1d:2e
19:11:b7:fa:0d:ba:64:20:e1:28:4e:3e:bb:6e:64:dc:cd:b1:b4:7a
ca:8f:47:dd:40:69:c2:35:95:ce:b8:85:56:d7:0f:2d:04:4d:5d:d8
42:e1:4f:6b:bf:38:c0:45:1e:9e:f0:b4:7f:74:6f:e9:70:fd:4a:78
da:eb:10:27:bd:46:34:33
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17 (sha1)
  23:79:40:c9:6d:a6:f0:ca:e0:13:30:d4:29:6f:86:79 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Key encipherment
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925b
Issuer:
  Organization: juniper, Country: us

```

Subject:  
Organization: juniper, Country: us, Common name: First Officer  
Validity:  
Not before: 2005 Oct 18th, 23:55:59 GMT  
Not after: 2008 Oct 19th, 00:25:59 GMT  
Public key algorithm: rsaEncryption(1024 bits)  
ea:75:c4:f3:58:08:ea:65:5c:7e:b3:de:63:0a:cf:cf:ec:9a:82:e2  
d7:e8:b9:2f:bd:4b:cd:86:2f:f1:dd:d8:a2:95:af:ab:51:a5:49:4e  
00:10:c6:25:ff:b5:49:6a:99:64:74:69:e5:8c:23:5b:b4:70:62:8e  
e4:f9:a2:28:d4:54:e2:0b:1f:50:a2:92:cf:6c:8f:ae:10:d4:69:3c  
90:e2:1f:04:ea:ac:05:9b:3a:93:74:d0:59:24:e9:d2:9d:c2:ef:22  
b9:32:c7:2c:29:4f:91:cb:5a:26:fe:1d:c0:36:dc:f4:9c:8b:f5:26  
af:44:bf:53:aa:d4:5f:67  
Signature algorithm: sha1WithRSAEncryption  
Fingerprint:  
46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f (sha1)  
ee:cc:c7:f4:5d:ac:65:33:0a:55:db:59:72:2c:dd:16 (md5)  
Distribution CRL:  
C=us, O=juniper, CN=CRL1  
[http://CA-1/CRL/juniper\\_us\\_crlfile.crl](http://CA-1/CRL/juniper_us_crlfile.crl)  
Use for key: Digital signature

## show security pki certificate-request

<b>Syntax</b>	show security pki certificate-request <brief   detail> <certificate-id <i>certificate-id-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Display information about manually generated local digital certificate requests that are stored in the router.
<b>Options</b>	<p><b>none</b>—(same as brief) Display information about all local digital certificate requests.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—(Optional) Display information about only the specified local digital certificate request</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">clear security pki certificate-request on page 95</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show security pki certificate-request on page 121</a> <a href="#">show security pki certificate-request detail on page 121</a>
<b>Output Fields</b>	<a href="#">Table 6 on page 120</a> lists the output fields for the <b>show security pki certificate-request</b> command. Output fields are listed in the approximate order in which they appear.

**Table 6: show security pki certificate-request Output Fields**

Field Name	Field Description	Level of Output
<b>Certificate identifier</b>	Name of the digital certificate.	All levels
<b>Certificate version</b>	Revision number of the digital certificate.	<b>detail</b>
<b>Issued to</b>	Device that was issued the digital certificate.	<b>none brief</b>
<b>Subject</b>	Details of the digital certificate holder organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li><b>Common name</b>—Name of the authority.</li> <li><b>Organization</b>—Organization of origin.</li> <li><b>Organizational unit</b>—Department within an organization.</li> <li><b>State</b>—State of origin.</li> <li><b>Country</b>—Country of origin.</li> </ul>	<b>detail</b>
<b>Alternate subject</b>	Domain name or IP address of the device related to the digital certificate.	<b>detail</b>



Table 6: show security pki certificate-request Output Fields (*continued*)

Field Name	Field Description	Level of Output
Validity	Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul>	All levels
Public key algorithm	Encryption algorithm used with the private key, such as <b>rsaEncryption(1024 bits)</b> .	All levels
Public key verification status	Public key verification status: <b>Failed</b> or <b>Passed</b> . The <b>detail</b> output also provides the verification hash.	All levels
Fingerprint	Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.	<b>detail</b>
Use for key	Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .	<b>detail</b>

## Sample Output

```

show security pki certificate-request user@host> show security pki certificate-request
Certificate identifier: local-microsoft-2
Issued to: router2.juniper.net
Public key algorithm: rsaEncryption(1024 bits)
Public key verification status: Passed

show security pki certificate-request detail user@host> show security pki certificate-request detail
Certificate identifier: local-entrust3
Certificate version: 3
Subject:
Common name: router3.juniper.net
Alternate subject: router3.juniper.net
Public key algorithm: rsaEncryption(1024 bits)
Public key verification status: Passed
fb:79:df:d4:a9:03:0f:d3:69:7e:c1:e4:27:35:9c:d9:b1:a2:47:78
d2:6d:f3:e5:f4:68:4f:b3:04:45:88:57:99:82:39:a6:51:9e:5f:42
23:3f:d7:6e:3d:a5:54:a9:b1:2d:6e:90:dd:12:8a:bf:ef:2b:20:50
ba:f0:da:d9:0c:ad:5e:d6:c6:98:3a:ae:3f:90:dd:94:78:c1:ea:2e
7c:f0:2d:d4:79:d4:cd:f0:52:df:5e:72:f2:e7:ae:66:f7:61:f4:bc
72:57:3e:6c:6d:d3:24:58:8b:f4:ef:da:2a:6a:fa:eb:98:f8:34:84
79:54:da:4f:d3:6f:52:1f
Fingerprint:
7c:e8:f9:45:93:8d:a3:92:7f:18:29:02:f1:c8:e2:85:3d:ad:df:1f (sha1)
00:4e:df:a0:6b:ad:8c:50:da:7c:a1:cf:5d:37:b0:ea (md5)
Use for key: Digital signature

```

## show security pki crt

<b>Syntax</b>	show security pki crt <brief   detail> <ca-profile <i>ca-profile-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.1.
<b>Description</b>	Display information about the certificate revocation lists (CRLs) that are stored in the router.
<b>Options</b>	<p><b>none</b>—(same as brief) Display information about all CRLs.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>ca-profile <i>ca-profile-name</i></b>—(Optional) Display CRL information about only the specified CA profile.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear security pki crt on page 96</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show security pki crt on page 123</a> <a href="#">show security pki crt detail on page 123</a>
<b>Output Fields</b>	<a href="#">Table 7 on page 122</a> shows the output fields for the <b>show security pki crt</b> command. Output fields are listed in the approximate order in which they appear.

Table 7: show security pki crt Output Fields

Field Name	Field Description	Level of Output
CA profile	Name of the configured CA profile.	All levels
CRL version	Revision number of the certificate revocation list.	All levels
CRL number	Number of the certificate revocation list	All levels
CRL issuer	Device that was issued the certificate revocation list.	All levels
Issuer	<p>Details of the digital certificate holder organized using the distinguished name format. Possible subfields are:</p> <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul>	<b>detail</b>
Effective date	Date and time the certificate revocation list becomes valid.	All levels

Table 7: show security pki crl Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Next update</b>	Date and time the router will download the latest version of the certificate revocation list.	All levels
<b>Revocation List</b>	<p>List of digital certificates that have been revoked before their expiration date. Values are:</p> <ul style="list-style-type: none"> <li>• <b>Serial number</b>—Unique serial number of the digital certificate</li> <li>• <b>Revocation date</b>—Date and time that the digital certificate was revoked.</li> </ul>	<b>detail</b>

## Sample Output

```

show security pki crl  CA profile entrust
                        CRL version: V2
                        CRL number: 24
                        CRL issuer: C=CA, O=juniper
                        Effective date: 2006 May 31st, 05:35:25 GMT
                        Next update: 2006 Jun 1st, 06:35:25 GMT

show security pki crl  CA profile: entrust
detail                 CRL version: V2
                        CRL number: 24
                        Issuer:
                        Organization: juniper, Country: ca
                        Validity:
                        Effective date: 2006 May 31st, 05:35:25 GMT
                        Next update: 2006 Jun 1st, 06:35:25 GMT
                        Revocation List:
                        Serial number      Revocation date
                        4451aca3 2006      May 25th, 09:13:38 GMT
                        4451aca4 2006      May 25th, 10:11:33 GMT
                        4451acb4 2006      May 29th, 11:28:54 GMT
                        4451aceb 2006      May 29th, 11:29:01 GMT
                        4451acfe 2006      May 29th, 11:29:17 GMT
                        4451acff 2006      May 31st, 05:29:55 GMT

```

## show security pki local-certificate

<b>Syntax</b>	show security pki local-certificate <brief   detail> <certificate-id <i>certificate-id-name</i> > <system-generated>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Display information about the local digital certificates and the corresponding public keys installed in the router.
<b>Options</b>	<p><b>none</b>—(same as brief) Display information about all local digital certificates and corresponding public keys.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—(Optional) Display information about only the specified the local digital certificate and corresponding public keys.</p> <p><b>system-generated</b>—(Optional) Auto-generated self-signed certificate.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear security pki local-certificate on page 98</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show security pki local-certificate on page 125</a> <a href="#">show security pki local-certificate detail on page 126</a>
<b>Output Fields</b>	<a href="#">Table 8 on page 124</a> lists the output fields for the <b>show security pki local-certificate</b> command. Output fields are listed in the approximate order in which they appear.

**Table 8: show security pki local-certificate Output Fields**

Field Name	Field Description	Level of Output
<b>Certificate identifier</b>	Name of the digital certificate.	All levels
<b>Certificate version</b>	Revision number of the digital certificate.	<b>detail</b>
<b>Serial number</b>	Unique serial number of the digital certificate.	<b>detail</b>
<b>Issued by</b>	Authority that issued the digital certificate.	<b>none brief</b>
<b>Issued to</b>	Device that was issued the digital certificate.	<b>none brief</b>

Table 8: show security pki local-certificate Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Issuer</b>	Authority that issued the digital certificate, including details of the authority organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul>	<b>detail</b>
<b>Subject</b>	Details of the digital certificate holder organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul>	<b>detail</b>
<b>Alternate subject</b>	Domain name or IP address of the device related to the digital certificate.	<b>detail</b>
<b>Validity</b>	Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Start time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul>	All levels
<b>Public key algorithm</b>	Encryption algorithm used with the private key, such as <b>rsaEncryption (1024 bits)</b> .	All levels
<b>Public key verification status</b>	Public key verification status: <b>Failed</b> or <b>Passed</b> . The <b>detail</b> output also provides the verification hash.	All levels
<b>Signature algorithm</b>	Encryption algorithm that the CA used to sign the digital certificate, such as <b>sha1WithRSAEncryption</b> .	<b>detail</b>
<b>Fingerprint</b>	Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.	<b>detail</b>
<b>Distribution CRL</b>	Distinguished name information and URL for the certificate revocation list (CRL) server.	<b>detail</b>
<b>Use for key</b>	Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .	<b>detail</b>

## Sample Output

```

show security pki  user@host> show security pki local-certificate
local-certificate  Certificate identifier: local-entrust2
                   Issued to: router2.juniper.net, Issued by: juniper
                   Validity:

```

Not before: 2005 Nov 21st, 23:28:22 GMT  
Not after: 2008 Nov 21st, 23:58:22 GMT  
Public key algorithm: rsaEncryption(1024 bits)  
Public key verification status: Passed

**show security pki  
local-certificate detail**

```
user@host> show security pki local-certificate detail
Certificate identifier: local-entrust3
Certificate version: 3
Serial number: 4355 94f9
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us, Common name: router3.juniper.net
Alternate subject: router3.juniper.net
Validity:
  Not before: 2005 Nov 21st, 23:33:58 GMT
  Not after: 2008 Nov 22nd, 00:03:58 GMT
Public key algorithm: rsaEncryption(1024 bits)
Public key verification status: Passed
fb:79:df:d4:a9:03:0f:d3:69:7e:c1:e4:27:35:9c:d9:b1:a2:47:78
d2:6d:f3:e5:f4:68:4f:b3:04:45:88:57:99:82:39:a6:51:9e:5f:42
23:3f:d7:6e:3d:a5:54:a9:b1:2d:6e:90:dd:12:8a:bf:ef:2b:20:50
ba:f0:da:d9:0c:ad:5e:d6:c6:98:3a:ae:3f:90:dd:94:78:c1:ea:2e
7c:f0:2d:d4:79:d4:cd:f0:52:df:5e:72:f2:e7:ae:66:f7:61:f4:bc
72:57:3e:6c:6d:d3:24:58:8b:f4:ef:da:2a:6a:fa:eb:98:f8:34:84
79:54:da:4f:d3:6f:52:1f
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  61:3a:d0:b4:7a:16:9b:39:ba:81:3f:9d:ab:34:e5:c8:be:3b:a1:6d (sha1)
  60:a0:ff:58:05:4a:65:73:9d:74:3a:e1:83:6f:1b:c8 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Digital signature
```

## show services ipsec-vpn certificates

<b>Syntax</b>	show services ipsec-vpn certificates <brief   detail> <service-set <i>service-set</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	(Adaptive services interfaces only) Display local and remote certificates installed in the IPsec configuration memory cache that are used for the IKE negotiation.
<b>Options</b>	<p><b>none</b>—(same as brief) Display information about local and remote certificates associated with all service sets.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>service-set <i>service-set</i></b>—(Optional) Display information about local and remote certificates associated with only the specified service set.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show security ipsec-vpn certificates on page 128</a> <a href="#">show security ipsec-vpn certificates detail on page 128</a>
<b>Output Fields</b>	Table 9 on page 127 lists the output fields for the <b>show services ipsec-vpn certificates</b> command. Output fields are listed in the approximate order in which they appear.

**Table 9: show services ipsec-vpn certificates Output Fields**

Field Name	Field Description	Level of Output
<b>Service set</b>	Name of the IPsec service set.	All levels
<b>Total entries</b>	Number of certificate cache entries.	All levels
<b>Certificate cache entry</b>	Identification number of the certificate cache entry.	All levels
<b>Flags</b>	Information about the digital certificate, including whether the certificate is a root certificate and trusted.	none <b>brief</b>
<b>Issued to</b>	Device that was issued the digital certificate.	none <b>brief</b>
<b>Issued by</b>	Authority that issued the digital certificate.	none <b>brief</b>
<b>Certificate version</b>	Revision number of the digital certificate.	<b>detail</b>
<b>Serial number</b>	Unique serial number of the digital certificate.	<b>detail</b>
<b>Alternate subject</b>	Domain name or IP address of the device related to the digital certificate.	All levels

Table 9: show services ipsec-vpn certificates Output Fields (*continued*)

Field Name	Field Description	Level of Output
Validity	Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Start time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul>	none <b>brief</b>
Public key algorithm	Specifies the encryption algorithm used with the private key, such as <b>rsaEncryption (1024 bits)</b> .	<b>detail</b>
Signature algorithm	Encryption algorithm that the CA used to sign the digital certificate, such as <b>sha1WithRSAEncryption</b> .	<b>detail</b>
Fingerprint	Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.	<b>detail</b>
Distribution CRL	Distinguished name information and the URL for the certificate revocation list (CRL) server.	<b>detail</b>
Use for key	Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .	<b>detail</b>

## Sample Output

```

show security ipsec-vpn certificates user@host> show services ipsec-vpn certificates
Service set: serviceset-dynamic-BiEspsha3des, Total entries: 3
Certificate cache entry: 3
  Flags: Non-root Trusted
  Issued to: router3.juniper.net, Issued by: juniper
  Alternate subject: router3.juniper.net
  Validity:
    Not before: 2005 Nov 21st, 23:33:58 GMT
    Not after: 2008 Nov 22nd, 00:03:58 GMT

Certificate cache entry: 2
  Flags: Non-root Trusted
  Issued to: router2.juniper.net, Issued by: juniper
  Alternate subject: router2.juniper.net
  Validity:
    Not before: 2005 Nov 21st, 23:28:22 GMT
    Not after: 2008 Nov 21st, 23:58:22 GMT

Certificate cache entry: 1
  Flags: Root Trusted
  Issued to: juniper, Issued by: juniper
  Validity:
    Not before: 2005 Oct 18th, 23:54:22 GMT
    Not after: 2025 Oct 19th, 00:24:22 GMT

show security ipsec-vpn certificates detail user@host> show services ipsec-vpn certificates detail
Service set: serviceset-dynamic-BiEspsha3des, Total entries: 3
Certificate cache entry: 3
  Certificate version: 3
  Serial number: 4355 94f9
  Alternate subject: router3.juniper.net

```



```
Public key algorithm: rsaEncryption
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  61:3a:d0:b4:7a:16:9b:39:ba:81:3f:9d:ab:34:e5:c8:be:3b:a1:6d (sha1)
  60:a0:ff:58:05:4a:65:73:9d:74:3a:e1:83:6f:1b:c8 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Digital signature

Certificate cache entry: 2
Certificate version: 3
Serial number: 4355 94f8
Alternate subject: router2.juniper.net
Public key algorithm: rsaEncryption
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  30:c3:a4:04:da:33:9d:60:23:5a:48:75:48:2c:f0:c6:96:6c:31:fa (sha1)
  9a:a2:ce:ef:7e:10:80:a0:c8:4d:2f:e7:e1:d3:69:9d (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Digital signature

Certificate cache entry: 1
Certificate version: 3
Flags: Root
Serial number: 4355 9235
Public key algorithm: rsaEncryption
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10 (sha1)
  71:6f:6a:76:17:9b:d6:2a:e7:5a:72:97:82:6d:26:86 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: CRL signing, Certificate signing
```

## show services ipsec-vpn ike security-associations

<b>Syntax</b>	show services ipsec-vpn ike security-associations <brief   detail> <peer-address>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Statistics for Internet Key Exchange (IKE) security associations for each services PIC introduced in Junos OS Release 12.1.
<b>Description</b>	(Adaptive services interface only) Display information for Internet Key Exchange (IKE) security associations. If no security association is specified, the information for all security associations is displayed.
<b>Options</b>	<b>none</b> —(same as brief) Display standard information for all IPsec security associations.  <b>brief   detail</b> —(Optional) Display the specified level of output.  <b>peer-address</b> —(Optional) Display information about a particular security association address.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show services ipsec-vpn ike security-associations on page 132</a> <a href="#">show services ipsec-vpn ike security-associations detail on page 133</a>
<b>Output Fields</b>	<a href="#">Table 10 on page 130</a> lists the output fields for the <b>show services ipsec-vpn ike security-associations</b> command. Output fields are listed in the approximate order in which they appear.

Table 10: show services ipsec-vpn ike security-associations Output Fields

Field Name	Field Description	Level of Output
<b>IKE peer</b>	Remote end of the IKE negotiation.	<b>detail</b>
<b>Role</b>	Part played in the IKE session. The router triggering the IKE negotiation is the initiator, and the router accepting the first IKE exchange packets is the responder.	<b>detail</b>
<b>Remote Address</b>	Responder's address.	none specified
<b>State</b>	State of the IKE security association: <ul style="list-style-type: none"> <li>• <b>Matched</b>—IKE security association is established.</li> <li>• <b>Not matched</b>—The IKE security association is in the process of negotiation.</li> </ul>	none specified
<b>Initiator cookie</b>	When the IKE negotiation is triggered, a random number is sent to the remote node.	All levels

Table 10: show services ipsec-vpn ike security-associations Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Responder cookie</b>	<p>The remote node generates its own random number and sends it back to the initiator as a verification that the packets were received.</p> <p>Of the numerous security services available, protection against denial of service (DoS) is one of the most difficult to address. A “cookie” or anticlogging token (ACT) is aimed at protecting the computing resources from attack without spending excessive CPU resources to determine the cookie's authenticity. An exchange prior to CPU-intensive public key operations can thwart some DoS attempts (such as simple flooding with invalid IP source addresses).</p>	All levels
<b>Exchange type</b>	<p>Specifies the number of messages in an IKE exchange, and the payload types that are contained in each message. Each exchange type provides a particular set of security services, such as anonymity of the participants, perfect forward secrecy of the keying material, and authentication of the participants. Junos OS supports two types of exchanges:</p> <ul style="list-style-type: none"> <li>• <b>Main</b>—The exchange is done with six messages. <b>Main</b> encrypts the payload, protecting the identity of the neighbor.</li> <li>• <b>Aggressive</b>—The exchange is done with three messages. <b>Aggressive</b> does not encrypt the payload, leaving the identity of the neighbor unprotected.</li> <li>• <b>IKEv2</b>—The exchange is negotiated using IKE version 2.</li> </ul>	All levels
<b>PIC</b>	The services PIC for which the IKE security associations are displayed.	All levels
<b>Authentication method</b>	Type of authentication determines which payloads are exchanged and when they are exchanged. The Junos OS supports only <b>pre-shared keys</b> .	<b>detail</b>
<b>Local</b>	Prefix and port number of the local end.	<b>detail</b>
<b>Remote</b>	Prefix and port number of the remote end.	<b>detail</b>
<b>Lifetime</b>	Number of seconds remaining until the IKE security association expires.	<b>detail</b>
<b>Algorithms</b>	<p>Header for the IKE algorithms output.</p> <ul style="list-style-type: none"> <li>• <b>Authentication</b>—(<b>detail</b> output only) Type of authentication algorithm used: <b>md5</b> or <b>sha1</b></li> <li>• <b>Encryption</b>—(<b>detail</b> output only) Type of encryption algorithm used: <b>des-cbc</b>, <b>3des-cbc</b>, or <b>None</b>.</li> <li>• <b>Pseudo random function</b>—Function that generates highly unpredictable random numbers: <b>hmac-md5</b> or <b>hmac-sha1</b>.</li> </ul>	<b>detail</b>
<b>Traffic statistics</b>	<p>Number of bytes and packets received and transmitted on the IKE security association.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the IKE security association.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the IKE security association.</li> </ul>	<b>detail</b>

Table 10: show services ipsec-vpn ike security-associations Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Flags</b>	Notification to the key management process of the status of the IKE negotiation: <ul style="list-style-type: none"> <li><b>caller notification sent</b>—Caller program notified about the completion of the IKE negotiation.</li> <li><b>waiting for done</b>—Negotiation is done. The library is waiting for the remote end retransmission timers to expire.</li> <li><b>waiting for remove</b>—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation.</li> <li><b>waiting for policy manager</b>—Negotiation is waiting for a response from the policy manager.</li> </ul>	<b>detail</b>
<b>IPsec security associates</b>	Number of IPsec security associations created and deleted with this IKE security association.	<b>detail</b>
<b>Phase 2 negotiations in progress</b>	Number of phase 2 negotiations in progress and status information: <ul style="list-style-type: none"> <li>Negotiation type—Type of phase 2 negotiation. The Junos OS currently supports <b>quick mode</b>.</li> <li>Message ID—Unique identifier for a phase 2 negotiation.</li> <li>Local identity—Identity of the local phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</i>.</li> <li>Remote identity—Identity of the remote phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</i>.</li> <li>Flags—Notification to the key management process of the status of the IKE negotiation: <ul style="list-style-type: none"> <li><b>caller notification sent</b>—Caller program notified about the completion of the IKE negotiation.</li> <li><b>waiting for done</b>—Negotiation is done. The library is waiting for the remote end retransmission timers to expire.</li> <li><b>waiting for remove</b>—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation.</li> <li><b>waiting for policy manager</b>—Negotiation is waiting for a response from the policy manager.</li> </ul> </li> </ul>	<b>detail</b>

### Sample Output

```

show services ipsec-vpn ike security-associations
user@host> show services ipsec-vpn ike security-associations
Remote Address  State      Initiator cookie  Responder cookie  Exchange type
6.6.6.1         Matured    062d291d21275fc7  82ef00e3d1f1c981  Main
6.6.6.2         Matured    cd6d581d7bb1664d  88a707779f3ad8d1  Main
6.6.6.3         Matured    86621051e3e78360  6bc5cc83fd67baa4  IKEv2
PIC: sp-0/3/0
6.6.6.7         Matured    565e2813075e6fdb  67886757a74edcd6  IKEv2

```

```

show services ipsec-vpn ike security-associations detail
user@host> show services ipsec-vpn ike security-associations detail
IKE peer 3.1.0.2
  Role: Responder, State: Matured
  Initiator cookie: d91c9f20f78e1d4e, Responder cookie: 727a04ed8d5021a1
  Exchange type: IKEv2, Authentication method: Pre-shared-keys
  Local: 4.1.0.2:500, Remote: 3.1.0.2:500
  Lifetime: Expires in 1357 seconds
  Algorithms:
    Authentication      : sha1
    Encryption          : 3des-cbc
    Pseudo random function: hmac-sha1
  Traffic statistics:
    Input bytes  : 22244
    Output bytes : 22236
    Input packets: 263
    Output packets: 263
  Flags: Caller notification sent
  IPsec security associations: 0 created, 0 deleted
  Phase 2 negotiations in progress: 0

IKE peer 4.4.4.4
  Role: Initiator, State: Matured
  Initiator cookie: cf22bd81a7000001, Responder cookie: fe83795c2800002e
  Exchange type: Main, Authentication method: Pre-shared-keys
  Local: 4.4.4.5:500, Remote: 4.4.4.4:500
  Lifetime: Expires in 187 seconds
  Algorithms:
    Authentication      : md5
    Encryption          : 3des-cbc
    Pseudo random function: hmac-md5
  Traffic statistics:
    Input bytes  : 1000
    Output bytes : 1280
    Input packets: 5
    Output packets: 9
  Flags: Caller notification sent
  IPsec security associations: 2 created, 0 deleted
  Phase 2 negotiations in progress: 1

Negotiation type: Quick mode, Role: Initiator, Message ID: 3582889153
  Local: 4.4.4.5:500, Remote: 4.4.4.4:500
  Local identity: ipv4_subnet(tcp:80,[0..7]=10.1.1.0/24)
  Remote identity: ipv4_subnet(tcp:100,[0..7]=10.1.2.0/24)
  Flags: Caller notification sent, Waiting for done

```

## show services ipsec-vpn ipsec security-associations

<b>Syntax</b>	show services ipsec-vpn ipsec security-associations <brief   detail   extensive> <service-set <i>service-set-name</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(Adaptive services interface only) Display IPsec security associations for the specified service set. If no service set is specified, the security associations for all service sets are displayed.
<b>Options</b>	<p><b>none</b>—Display standard information about IPsec security associations for all service sets.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>service-set <i>service-set-name</i></b>—(Optional) Display information about a particular service set.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show services ipsec-vpn ipsec security associations extensive on page 136</a>
<b>Output Fields</b>	<a href="#">Table 11 on page 134</a> lists the output fields for the <b>show services ipsec-vpn ipsec security-associations</b> command. Output fields are listed in the approximate order in which they appear.

Table 11: show services ipsec-vpn ipsec security-associations Output Fields

Field Name	Field Description	Level of Output
<b>Service set</b>	Name of the service set for which the IPsec security associations are defined. If appropriate, includes the outside service interface VRF name.	All levels
<b>Rule</b>	Name of the rule set applied to the security association.	<b>detail extensive</b>
<b>Term</b>	Name of the IPsec term applied to the security association.	<b>detail extensive</b>
<b>Tunnel index</b>	Numeric identifier of the specific IPsec tunnel for the security association.	<b>detail extensive</b>
<b>Local gateway</b>	Gateway address of the local system.	All levels
<b>Remote gateway</b>	Gateway address of the remote system.	All levels
<b>IPsec inside interface</b>	Name of the logical interface hosting the IPsec tunnels.	All levels
<b>Local identity</b>	Prefix and port number of the local end	All levels
<b>Remote identity</b>	Prefix and port number of the remote end.	All levels

Table 11: show services ipsec-vpn ipsec security-associations Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Primary remote gateway</b>	IP address of the configured primary remote peer.	All levels
<b>Backup remote gateway</b>	IP address of the configured backup remote peer.	All levels
<b>State</b>	State of the primary or backup interface: <b>Active</b> , <b>Offline</b> , or <b>Standby</b> . Both ES PICs are initialized to <b>Offline</b> . For primary and backup peers, <b>State</b> can be <b>Active</b> or <b>Standby</b> . If both peers are in a state of <b>Standby</b> , no connection exists yet between the two peers.	All levels
<b>Failover counter</b>	Number of times a PIC switched between primary and backup interfaces, or the number of times the tunnel switched between the primary and remote peers since the software has been activated.	All levels
<b>Direction</b>	Direction of the security association: <b>inbound</b> or <b>outbound</b> .	All levels
<b>SPI</b>	Value of the security parameter index.	All levels
<b>AUX-SPI</b>	Value of the auxiliary security parameter index. <ul style="list-style-type: none"> <li>When the value of <b>Protocol</b> is <b>AH</b> or <b>ESP</b>, <b>AUX-SPI</b> is always 0.</li> <li>When the value of <b>Protocol</b> is <b>AH+ESP</b>, <b>AUX-SPI</b> is always a positive integer.</li> </ul>	All levels
<b>Mode</b>	Mode of the security association: <ul style="list-style-type: none"> <li><b>transport</b>—Protects single host-to-host protections.</li> <li><b>tunnel</b>—Protects connections between security gateways.</li> </ul>	<b>detail extensive</b>
<b>Type</b>	Type of security association: <ul style="list-style-type: none"> <li><b>manual</b>—Security parameters require no negotiation. They are static, and are configured by the user.</li> <li><b>dynamic</b>—Security parameters are negotiated by the IKE protocol. Dynamic security associations are not supported in transport mode.</li> </ul>	<b>detail extensive</b>
<b>State</b>	Status of the security association: <ul style="list-style-type: none"> <li><b>Installed</b>—The security association is installed in the security association database. (For transport mode security associations, the value of State must always be Installed)</li> <li><b>Not installed</b>—The security association is not installed in the security association database.</li> </ul>	<b>detail extensive</b>
<b>Protocol</b>	Protocol supported: <ul style="list-style-type: none"> <li><b>transport</b> mode supports Encapsulation Security Protocol (<b>ESP</b>) or Authentication Header (<b>AH</b>).</li> <li><b>tunnel</b> mode supports <b>ESP</b> or <b>AH+ESP</b>.</li> </ul>	All levels
<b>Authentication</b>	Type of authentication used: <b>hmac-md5-96</b> , <b>hmac-sha1-96</b> , or <b>none</b> .	<b>detail extensive</b>

Table 11: show services ipsec-vpn ipsec security-associations Output Fields (*continued*)

Field Name	Field Description	Level of Output
Encryption	Type of encryption algorithm used: can be <b>aes-cbc (128 bits)</b> , <b>aes-cbc (192 bits)</b> , <b>aes-cbc (256 bits)</b> , <b>des-cbc</b> , <b>3des-cbc</b> , or <b>None</b> .	<b>detail</b>
Soft lifetime	Each lifetime of a security association has two display options, hard and soft, one of which must be present for a dynamic security association. The hard lifetime specifies the lifetime of the SA. The soft lifetime, which is derived from the hard lifetime, informs the IPsec key management system that the SA is about to expire. This information allows the key management system to negotiate a new SA before the hard lifetime expires.	<b>detail extensive</b>
Hard lifetime		
	<ul style="list-style-type: none"> <li>• <b>Expires in seconds seconds</b>—Number of seconds left until the security association expires.</li> <li>• <b>Expires in kilobytes kilobytes</b>—Number of kilobytes left until the security association expires.</li> </ul>	
Anti-replay service	State of the service that prevents packets from being replayed: <b>Enabled</b> or <b>Disabled</b> .	<b>detail extensive</b>
Replay window size	Configured size, in packets, of the antireplay service window: <b>32</b> or <b>64</b> . The antireplay window size protects the receiver against replay attacks by rejecting old or duplicate packets. If the replay window size is <b>0</b> , antireplay service is disabled.	<b>detail</b>

## Sample Output

```

show services ipsec-vpn ipsec security associations extensive
user@host> show services ipsec-vpn ipsec security-associations extensive
Service set: service-set-1
  Rule: _junos_, Term: term-1, Tunnel index: 1
  Local gateway: 101.101.101.2, Remote gateway: 14.14.14.4
  IPSec inside interface: sp-2/0/0.1 Local identity:
  ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Primary remote gateway: 101.101.101.1, State: Standby
  Backup remote gateway: 14.14.14.4, State: Active
  Failover counter: 1

  Direction: inbound, SPI: 3743521590, AUX-SPI: 0
  Mode: tunnel, Type: dynamic, State: Installed
  Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
  Soft lifetime: Expires in 23043 seconds
  Hard lifetime: Expires in 23178 seconds
  Anti-replay service: Enabled, Replay window size: 64

  Direction: outbound, SPI: 2551045240, AUX-SPI: 0
  Mode: tunnel, Type: dynamic, State: Installed
  Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
  Soft lifetime: Expires in 23043 seconds
  Hard lifetime: Expires in 23178 seconds
  Anti-replay service: Enabled, Replay window size: 64

```



## show services ipsec-vpn ipsec statistics

<b>Syntax</b>	show services ipsec-vpn ipsec statistics <brief   detail> <remote-gw remote-peer-address> <service-set service-set-name>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. New fields added in Junos OS Release 10.0.
<b>Description</b>	(Adaptive services interface only) Display IPsec statistics for the specified service set. If no service set is specified, the statistics for all service sets are displayed.
<b>Options</b>	<p><b>none</b>—Display standard IPsec statistics for all service sets.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>remote-gw remote-peer-address</b>—(Optional) Display IPsec statistics for an individual IPsec tunnel and an individual remote host.</p> <p><b>service-set service-set-name</b>—(Optional) Display information about a particular service set.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show services ipsec-vpn ipsec statistics detail on page 139</a> <a href="#">show services ipsec-vpn ipsec statistics remote-gw on page 139</a>
<b>Output Fields</b>	Table 12 on page 137 lists the output fields for the <b>show services ipsec-vpn ipsec statistics</b> command. Output fields are listed in the approximate order in which they appear.

Table 12: show services ipsec-vpn ipsec statistics Output Fields

Field Name	Field Description	Level of Output
PIC	The physical interface on which the IPsec tunnel is configured.	All levels
Service set	Name of the service set for which the IPsec tunnel is defined.	All levels
Local gateway	Gateway address of the local system.	All levels
Remote gateway	Gateway address of the remote system.	All levels
Tunnel index	Numeric identifier of the specific IPsec tunnel for the security association.	All levels

Table 12: show services ipsec-vpn ipsec statistics Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>ESP statistics</b>	Encapsulation Security Payload (ESP) statistics: <ul style="list-style-type: none"> <li>• <b>Encrypted bytes</b>—Total number of bytes encrypted by the local system across the IPsec tunnel.</li> <li>• <b>Decrypted bytes</b>—Total number of bytes decrypted by the local system across the IPsec tunnel.</li> <li>• <b>Encrypted packets</b>—Total number of packets encrypted by the local system across the IPsec tunnel.</li> <li>• <b>Decrypted packets</b>—Total number of packets decrypted by the local system across the IPsec tunnel.</li> </ul>	All levels
<b>AH Statistics</b>	Authentication Header statistics: <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Total number of bytes received by the local system across the IPsec tunnel.</li> <li>• <b>Output bytes</b>—Total number of bytes transmitted by the local system across the IPsec tunnel.</li> <li>• <b>Input packets</b>—Total number of packets received by the local system across the IPsec tunnel.</li> <li>• <b>Output packets</b>—Total number of packets transmitted by the local system across the IPsec tunnel.</li> </ul>	All levels
<b>Errors</b>	<ul style="list-style-type: none"> <li>• <b>AH authentication failures</b>—Number of authentication header (AH) failures. An AH failure occurs when there is a mismatch of the authentication header in a packet transmitted across an IPsec tunnel.</li> <li>• <b>ESP authentication failures</b>—Number of Encapsulation Security Payload (ESP) failures. An ESP failure occurs when there is an authentication mismatch in ESP packets.</li> <li>• <b>ESP Decryption failures</b>—Number of ESP decryption failures.</li> <li>• <b>Bad headers</b>—Number of invalid headers detected.</li> <li>• <b>Bad trailers</b>—Number of invalid trailers detected.</li> <li>• <b>Replay before window drops</b>—Number of replay errors. A replay error is generated when a duplicate packet is received within the replay window.</li> <li>• <b>Replayed pkts</b>—Number of packets replayed.</li> <li>• <b>IP integrity errors</b>—Number of IP integrity errors.</li> <li>• <b>Exceeds tunnel MTU</b>—Number of times the tunnel maximum transmission unit (MTU) value was exceeded.</li> <li>• <b>Rule lookup failures</b>—Number of rule lookup failures.</li> <li>• <b>No SA errors</b>—Number of errors resulting from a missing security association (SA).</li> <li>• <b>Flow errors</b>—Number of flow errors.</li> <li>• <b>Misc errors</b>—Number of miscellaneous errors.</li> </ul>	All levels

## Sample Output

```

show services      user@host> show services ipsec-vpn ipsec statistics
ipsec-vpn ipsec    PIC: sp-0/2/0, Service set: ss0
statistics detail

  ESP Statistics:
    Encrypted bytes:          0
    Decrypted bytes:          0
    Encrypted packets:        0
    Decrypted packets:        0
  AH Statistics:
    Input bytes:              168
    Output bytes:             168
    Input packets:            2
    Output packets:           2
  Errors:
    AH authentication failures: 0
    ESP authentication failures: 0
    ESP decryption failures:    0
    Bad headers: 0, Bad trailers: 0
    Replay before window drops: 0, Replayed pkts: 0
    IP integrity errors: 0, Exceeds tunnel MTU: 0
    Rule lookup failures: 0, No SA errors: 0
    Flow errors: 0, Misc errors: 0


show services      user@host> show services ipsec-vpn ipsec statistics remote-gw 22.22.2.1
ipsec-vpn ipsec    PIC: sp-3/1/0, Service set: service-set-2
statistics remote-gw Local gateway: 22.22.1.1, Remote gateway: 22.22.2.1, Tunnel index: 2
  ESP Statistics:
    Encrypted bytes:          0
    Decrypted bytes:          0
    Encrypted packets:        0
    Decrypted packets:        0
  AH Statistics:
    Input bytes:              0
    Output bytes:             0
    Input packets:            0
    Output packets:           0
  Errors:
    AH authentication failures: 0
    ESP authentication failures: 0
    ESP decryption failures:    0
    Bad headers: 0, Bad trailers: 0
    Replay before window drops: 0, Replayed pkts: 0
    IP integrity errors: 0, Exceeds tunnel MTU: 0
    Rule lookup failures: 0, No SA errors: 0
    Flow errors: 0, Misc errors: 0

```



## PART 4

# Index

- [Index on page 143](#)



# Index

## Symbols

#, comments in configuration statements.....	xiv
( ), in syntax descriptions.....	xiv
< >, in syntax descriptions.....	xiv
[ ], in configuration statements.....	xiv
{ }, in configuration statements.....	xiv
(pipe), in syntax descriptions.....	xiv

## A

anti-replay-window-size statement.....	55
usage guidelines.....	36
any-any match condition	
ipsec.....	32
associations, clearing.....	102
authentication statement.....	56
usage guidelines.....	14
authentication-algorithm statement	
IKE.....	57
usage guidelines.....	17
IPsec.....	57
usage guidelines.....	26
authentication-method statement.....	58
usage guidelines.....	18
auxiliary-spi statement.....	58
usage guidelines.....	14

## B

backup-remote-gateway statement.....	59
usage guidelines.....	34
braces, in configuration statements.....	xiv
brackets	
angle, in syntax descriptions.....	xiv
square, in configuration statements.....	xiv

## C

certificates	
for IKE negotiation, displaying.....	127
PKI	
CA certificates, clearing.....	94
CA certificates, displaying.....	116
CA certificates, loading manually.....	104

certificate revocation lists, clearing.....	96
certificate revocation lists, displaying.....	122
certificate revocation lists, loading	
manually.....	106
key pair, generating.....	109
local certificates, clearing.....	97, 98
local certificates, displaying.....	124
local certificates, loading manually.....	113
local certificates, requesting	
manually.....	107, 112
local certificates, requesting online.....	103
local certificates, requesting that CA	
install.....	110
local certificates, requests, clearing.....	95
local certificates, requests,	
displaying.....	120
clear security pki ca-certificate command.....	94
clear security pki certificate-request command.....	95
clear security pki crl command.....	96
clear security pki key-pair.....	97
clear security pki local-certificate command.....	98
clear services ipsec-vpn certificates command.....	99
clear services ipsec-vpn ike security-associations	
command.....	100
clear services ipsec-vpn ipsec security-associations	
command.....	102
clear services ipsec-vpn ipsec statistics	
command.....	101
clear-dont-fragment-bit statement	
IPsec.....	59
usage guidelines.....	33
usage guidelines.....	34
clear-ike-sas-on-pic-restart statement.....	60
usage guidelines.....	16
clear-ipsec-sas-on-pic-restart statement.....	60
usage guidelines.....	16
comments, in configuration statements.....	xiv
conventions	
text and syntax.....	xiii
curly braces, in configuration statements.....	xiv
customer support.....	xv
contacting JTAC.....	xv

## D

dead peer detection (DPD) protocol.....	34
---	----

description statement		dynamic SAs.....	17
IKE.....	61	encryption-algorithm statement	
usage guidelines.....	24	usage guidelines.....	19
IPsec.....	61	lifetime	
usage guidelines.....	26, 28	usage guidelines.....	19
destination-address statement		mode statement	
IPsec.....	61	usage guidelines.....	21
usage guidelines.....	32	policy.....	20
dh-group statement.....	62	example.....	24
usage guidelines.....	18	policy statement	
direction statement.....	63	usage guidelines.....	20
usage guidelines.....	12	pre-shared-key statement	
documentation		usage guidelines.....	22
comments on.....	xv	proposals statement	
dynamic authentication.....	38	usage guidelines.....	22
dynamic route insertion.....	39	version statement	
dynamic rules.....	38	usage guidelines.....	21
dynamic security associations		IKE security associations	
usage guidelines.....	16, 17	clearing.....	16
dynamic statement.....	64	ike statement.....	68
usage guidelines.....	16	usage guidelines.....	17
<b>E</b>		ike-access-profile statement	
encryption statement.....	65	usage guidelines.....	41
usage guidelines.....	15	initiate-dead-peer-detection statement.....	69
encryption-algorithm statement		usage guidelines.....	35
IKE.....	66	Internet Key Exchange See IKE	
usage guidelines.....	19	IPsec	
IPsec.....	66	action statements.....	33
usage guidelines.....	26	authentication statement	
<b>F</b>		usage guidelines.....	14
font conventions.....	xiii	authentication-algorithm statement	
from statement		usage guidelines.....	26
IPsec.....	67	direction	
usage guidelines.....	30, 32	usage guidelines.....	12
<b>I</b>		dynamic authentication.....	38
IKE.....	4, 17	dynamic endpoints interface configuration.....	41
adaptive services interfaces		dynamic rules.....	38
security associations, clearing.....	100	dynamic security associations	
security associations, displaying.....	130	usage guidelines.....	16
statistics, clearing.....	101	encryption	
authentication algorithm		usage guidelines.....	15
usage guidelines.....	17	encryption-algorithm statement	
authentication-method statement		usage guidelines.....	26
usage guidelines.....	18	IKE.....	4
DH (Diffie-Hellman) group		lifetime of SA.....	27
usage guidelines.....	18	lifetime-seconds statement.....	27
		match conditions.....	32



minimum configurations	
dynamic SA .....	9
manual SA .....	9
overview.....	3
perfect-forward-secrecy statement	
usage guidelines.....	29
policy	
overview.....	28
policy statement	
usage guidelines.....	28
proposal statement	
usage guidelines.....	25
proposals statement	
usage guidelines.....	29
protocol statement (dynamic SA)	
usage guidelines.....	27
protocol statement (manual SA)	
usage guidelines.....	13
rule sets.....	37
security associations.....	3
security parameter index	
usage guidelines.....	14
service set dynamic endpoints	
configuration.....	41
IPSec	
Services SDK	
configuration.....	44
IPsec services	
adaptive services interfaces	
backup and primary, switching	
tunnels.....	115
IKE security associations, clearing.....	100
IKE security associations, displaying.....	130
IPSec security associations, clearing.....	102
IPSec security associations,	
displaying.....	134
IPSec statistics, clearing.....	101
IPSec statistics, displaying.....	137
ipsec statement.....	69
usage guidelines.....	25
ipsec-inside-interface	
usage guidelines.....	38
ipsec-inside-interface statement.....	70
usage guidelines.....	32
ipsec-interface-id statement	
usage guidelines.....	41
<b>L</b>	
lifetime-seconds statement	
IKE.....	70
usage guidelines.....	19
IPsec.....	70
usage guidelines.....	27
local-certificate statement.....	71
usage guidelines.....	22
local-id statement.....	71
usage guidelines.....	24
<b>M</b>	
manual security association.....	12
manual statement.....	72
usage guidelines.....	12
manuals	
comments on.....	xv
match-direction statement	
IPsec.....	72
usage guidelines.....	30
mode statement.....	73
usage guidelines.....	21
<b>N</b>	
no-anti-replay statement.....	73
usage guidelines.....	36
no-ipsec-tunnel-in-traceroute statement.....	74
usage guidelines.....	42
<b>P</b>	
packet-based IPsec.....	32
parentheses, in syntax descriptions.....	xiv
perfect-forward-secrecy statement.....	74
usage guidelines.....	29
PKI See certificates, PKI	
policy statement	
IKE.....	75
usage guidelines.....	20
IPsec.....	76
usage guidelines.....	28
pre-shared-key statement.....	76
usage guidelines.....	22
proposal statement	
IKE.....	77
usage guidelines.....	17
IPsec.....	77
usage guidelines.....	25

proposals statement		
IKE.....	78	
usage guidelines.....	22	
IPsec.....	78	
usage guidelines.....	29	
protocol statement		
IPsec.....	78	
usage guidelines.....	13, 27	
<b>R</b>		
remote-gateway statement.....	79	
usage guidelines.....	34	
remote-id statement.....	79	
usage guidelines.....	24	
request security pki ca-certificate enroll		
command.....	103	
request security pki ca-certificate load		
command.....	104	
request security pki ca-certificate verify		
command.....	105	
request security pki crt load command.....	106	
request security pki generate-certificate-request		
command.....	107	
request security pki generate-key-pair		
command.....	109	
request security pki local-certificate enroll		
command.....	110	
request security pki local-certificate		
generate-self-signed command.....	112	
request security pki local-certificate load		
command.....	113	
request security pki local-certificate verify		
command.....	114	
request services ipsec-vpn ipsec switch tunnel		
command.....	115	
rule statement		
IPsec.....	80	
usage guidelines.....	30	
rule-set statement		
IPsec.....	81	
usage guidelines.....	37	
<b>S</b>		
security associations		
clearing.....	16	
services statement		
IPsec.....	81	
show security pki ca-certificate command.....	116	
show security pki certificate-request		
command.....	120	
show security pki crt command.....	122	
show security pki local-certificate command.....	124	
show services ipsec-vpn certificates		
command.....	127	
show services ipsec-vpn ike security-associations		
command.....	130	
show services ipsec-vpn ipsec security-associations		
command.....	134	
show services ipsec-vpn ipsec statistics		
command.....	137	
source-address statement		
IPsec.....	82	
usage guidelines.....	32	
spi statement.....	82	
usage guidelines.....	14	
statement		
IPsec		
usage guidelines.....	42	
support, technical See technical support		
syntax conventions.....	xiii	
syslog statement		
IPsec.....	83	
usage guidelines.....	33, 36	
<b>T</b>		
technical support		
contacting JTAC.....	xv	
term statement		
IPsec.....	84	
usage guidelines.....	30	
then statement		
IPsec.....	85	
usage guidelines.....	30	
traceoptions statement		
IPsec.....	86	
security.....	88	
tunnel-mtu statement.....	89	
usage guidelines.....	36	
<b>V</b>		
version statement		
IKE.....	89	
usage guidelines.....	21	