JUNIPER NETWORKS

Junos® OS

BGP Configuration Guide

Release
13.1

Published: 2013-02-19

Copyright © 2013, Juniper Networks, Inc.

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

Junos® OS BGP Configuration Guide
13.1
Copyright © 2013, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at http://www.juniper.net/support/eula.html. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

About the Documentation xvii
Documentation and Release Notes xvii
Supported Platforms xvii
Using the Examples in This Manual xviii
Merging a Full Example xviii
Merging a Snippet xix
Documentation Conventions xix
Documentation Feedback xxi
Requesting Technical Support xxi
Self-Help Online Tools and Resources xxi
Opening a Case with JTAC xxii

Part 1 Overview

Chapter 1 **Introduction to BGP 3**

Understanding BGP 3
Autonomous Systems 4
AS Paths and Attributes 4
External and Internal BGP 4
Multiple Instances of BGP 5
BGP Routes Overview 6
BGP Messages Overview 7
Open Messages 7
Update Messages 7
Keepalive Messages 8
Notification Messages 8
Understanding BGP Path Selection 8
Routing Table Path Selection 10
Effects of Advertising Multiple Paths to a Destination 11

Chapter 2 **BGP Standards 13**

Supported BGP Standards 13

Copyright © 2013, Juniper Networks, Inc.

Part 2 Configuration

Chapter 3 Basic BGP Configuration 19

Examples: Configuring External BGP Peering 19
Understanding External BGP Peering Sessions 19
Example: Configuring External BGP Point-to-Point Peer Sessions 20
Example: Configuring External BGP on Logical Systems with IPv6 Interfaces 27
Examples: Configuring Internal BGP Peering 42
Understanding Internal BGP Peering Sessions 42
Example: Configuring Internal BGP Peer Sessions 43
Example: Configuring Internal BGP Peering Sessions on Logical Systems . . 54

Chapter 4 BGP Path Attribute Configuration 65

Example: Configuring BGP Local Preference 65
Understanding the BGP Local Preference 65
Example: Configuring the Local Preference Value for BGP Routes 66
Examples: Configuring BGP MED 78
Understanding the MED Attribute 78
Example: Configuring the MED Attribute Directly 81
Example: Configuring the MED Using Route Filters 93
Example: Configuring the MED Using Communities 106
Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates 106
Examples: Configuring BGP Local AS 116
Understanding the BGP Local AS Attribute 116
Example: Configuring a Local AS for EBGP Sessions 121
Example: Configuring a Private Local AS for EBGP Sessions 131
Example: Configuring the Accumulated IGP Attribute for BGP 136
Understanding the Accumulated IGP Attribute for BGP 137
Example: Configuring the Accumulated IGP Attribute for BGP 137
Example: Configuring AS Override 175
Understanding AS Override 175
Example: Configuring a Layer 3 VPN with Route Reflection and AS Override 176

Chapter 5 BGP Policy Configuration 187

Example: Configuring BGP Interactions with IGPs 187
Understanding Routing Policies 187
Example: Injecting OSPF Routes into the BGP Routing Table 188
Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS 191
Understanding BGP Communities and Extended Communities as Routing Policy Match Conditions 191
Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS 192
Example: Configuring BGP Route Advertisement 200
Understanding Route Advertisement 200
Applying Routing Policy 201
Setting BGP to Advertise Inactive Routes 202

Copyright © 2013, Juniper Networks, Inc.

Configuring BGP to Advertise the Best External Route to Internal Peers . . . 202
Configuring How Often BGP Exchanges Routes with the Routing Table . . . 203
Disabling Suppression of Route Advertisements . . . 204
Example: Configuring BGP Prefix-Based Outbound Route Filtering . . . 205
Example: Configuring EBGP Multihop . . . 208
Understanding BGP Multihop . . . 208
Example: Configuring EBGP Multihop Sessions . . . 208
Example: Configuring BGP Route Preference (Administrative Distance) . . . 217
Understanding Route Preference Values . . . 217
Example: Configuring the Preference Value for BGP Routes . . . 219
Example: Configuring BGP Path Selection . . . 224
Understanding BGP Path Selection . . . 224
Routing Table Path Selection . . . 226
Effects of Advertising Multiple Paths to a Destination . . . 228
Example: Ignoring the AS Path Attribute When Selecting the Best Path . . . 228
Example: Removing Private AS Numbers . . . 235
Understanding Private AS Number Removal from AS Paths . . . 235
Example: Removing Private AS Numbers from AS Paths . . . 236
Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches . . . 241
Understanding the Default BGP Routing Policy on Packet Transport Switches . . . 242
Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches . . . 243
Example: Configuring Conditional Installation of Prefixes in a Routing Table . . . 246
Understanding Conditional Installation of Prefixes in a Routing Table . . . 247
Example: Configuring Conditional Installation of Prefixes in a Routing Table . . . 249

Chapter 6 BGP BFD Configuration . . . 261

Example: Configuring BFD for BGP . . . 261
Understanding BFD for BGP . . . 261
Example: Configuring BFD on Internal BGP Peer Sessions . . . 262
Example: Configuring BFD Authentication for BGP . . . 270
Understanding BFD Authentication for BGP . . . 270
BFD Authentication Algorithms . . . 271
Security Authentication Keychains . . . 272
Strict Versus Loose Authentication . . . 272
Example: Configuring BFD Authentication for BGP . . . 272
Configuring BFD Authentication Parameters . . . 272
Viewing Authentication Information for BFD Sessions . . . 274

Copyright © 2013, Juniper Networks, Inc.

Chapter 7 BGP Load Balancing Configuration 277
Examples: Configuring BGP Multipath 277
Understanding BGP Multipath 277
Example: Load Balancing BGP Traffic 278
Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops 282
Example: Advertising Multiple BGP Paths to a Destination 293
Understanding the Advertisement of Multiple Paths to a Single Destination in BGP 293
Example: Advertising Multiple Paths in BGP 294
Chapter 8 IBGP Scaling Configuration 321
Example: Configuring BGP Route Reflectors 321
Understanding BGP Route Reflectors 321
Example: Configuring a Route Reflector 323
Example: Configuring a Route Reflector that Belongs to Two Different Clusters 338
Understanding a Route Reflector that Belongs to Two Different Clusters . . 338
Example: Configuring a Route Reflector that Belongs to Two Different Clusters 339
Example: Configuring BGP Confederations 343
Understanding BGP Confederations 343
Example: Configuring BGP Confederations 344
Chapter 9 BGP Security Configuration 351
Example: Configuring BGP Route Authentication 351
Understanding Route Authentication 351
Example: Configuring Route Authentication for BGP 352
Example: Configuring IPsec Protection for BGP 358
Understanding IPsec for BGP 358
Example: Using IPsec to Protect BGP Traffic 358
Examples: Configuring TCP and BGP Security 361
Understanding Security Options for BGP with TCP 362
Example: Configuring a Filter to Block TCP Access to a Port Except from Specified BGP Peers 362
Example: Configuring a Filter to Limit TCP Access to a Port Based On a Prefix List 367
Example: Limiting TCP Segment Size for BGP 371
Example: Configuring Origin Validation for BGP 375
Use Case and Benefit of Origin Validation 376
Understanding Origin Validation for BGP 377
Supported Standards 377
How Origin Validation Works 378
BGP Interaction with the Route Validation Database 380
Community Attribute to Announce RPKI Validation State to IBGP Neighbors 381
Nonstop Active Routing and Origin Validation 382
Marking a Prefix Range as Never Allowed 382
Example: Configuring Origin Validation for BGP 383

Copyright © 2013, Juniper Networks, Inc.

Chapter 10 BGP Flap Configuration 399
Example: Preventing BGP Session Resets 399
Understanding BGP Session Resets 399
Example: Preventing BGP Session Flaps When VPN Families Are Configured 399
Examples: Configuring BGP Flap Damping 406
Understanding Damping Parameters 406
Example: Configuring Damping Parameters 407
Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family 410
Chapter 11 Multiprotocol BGP Configuration 421
Examples: Configuring Multiprotocol BGP 421
Understanding Multiprotocol BGP 421
Limiting the Number of Prefixes Received on a BGP Peer Session 425
Limiting the Number of Prefixes Accepted on a BGP Peer Session 425
Configuring BGP Routing Table Groups 426
Resolving Routes to PE Routing Devices Located in Other ASs 426
Allowing Labeled and Unlabeled Routes 427
Example: Configuring IPv6 BGP Routes over IPv4 Transport 427
Enabling Layer 2 VPN and VPLS Signaling 433
Example: Configuring Flow Routes 434
Understanding Flow Routes 434
Match Conditions for Flow Routes 434
Actions for Flow Routes 436
Validating Flow Routes 437
Support for BGP Flow-Specification Algorithm Version 7 and Later . . . 437
Example: Enabling BGP to Carry Flow-Specification Routes 438
Chapter 12 BGP CLNS Configuration 453
Example: Configuring BGP and CLNS 453
Understanding BGP for CLNS VPNs 453
Example: Configuring BGP for CLNS VPNs 453
Enabling BGP to Carry CLNS Routes 455
Example: Enabling CLNS Between Two Routers 456
Example: Configuring CLNS Within a VPN 458
Chapter 13 BGP Monitoring Configuration 461
Example: Configuring BGP Monitoring Protocol 461
Understanding the BGP Monitoring Protocol 461
Example: Configuring the BGP Monitoring Protocol 461
Example: Configuring BGP Trace Operations 464
Understanding Trace Operations for BGP Protocol Traffic 464
Example: Viewing BGP Trace Files on Logical Systems 465

Copyright © 2013, Juniper Networks, Inc.

Chapter 14 BGP Configuration Statements 471

[edit protocols bgp] Hierarchy Level 471
Common BGP Family Options 471
Complete [edit protocols bgp] Hierarchy 472
accept-remote-nexthop 477
accepted-prefix-limit 478
add-path 480
advertise-external 481
advertise-from-main-vpn-tables 482
advertise-inactive 483
advertise-peer-as 484
aggregate-label 485
aigp 486
aigp-originate 488
algorithm (BGP BFD Authentication) 489
allow 491
as-override 492
authentication (BGP BFD Liveness Detection) 493
authentication-algorithm 495
authentication-key (Protocols BGP) 496
authentication-key-chain (Protocols BGP) 497
auto-discovery-only 498
bfd-liveness-detection (Protocols BGP) 499
bgp 503
bgp-orf-cisco-mode 504
bmp 505
cluster 506
damping (Protocols BGP) 508
description (Protocols BGP) 510
detection-time (BFD for BGP) 511
disable (Protocols BGP) 512
disable (BGP Graceful Restart) 513
explicit-null (Protocols BGP) 514
export (Protocols BGP) 515
family (Protocols BGP) 516
file (Tracing for Origin AS Validation) 520
flag (Tracing for Origin AS Validation) 521
flow 522
graceful-restart (Protocols BGP) 523
group (Protocols BGP) 525
group (Origin Validation for BGP) 528
hold-down-interval (BGP BFD Liveness Detection) 529
hold-time (Protocols BGP) 531
hold-time (Origin Validation for BGP) 533
idle-after-switch-over 534
import (Protocols BGP) 535
include-mp-next-hop 536
inet-mdt (Signaling) 537
ipsec-sa (Protocols BGP) 538

Copyright © 2013, Juniper Networks, Inc.

iso-vpn . . . 539
keep . . . 540
key-chain (BGP BFD Authentication) . . . 541
labeled-unicast (Protocols BGP) . . . 543
local-address (Protocols BGP) . . . 545
local-address (Origin Validation for BGP) . . . 547
local-as . . . 548
local-interface (IPv6) . . . 550
local-preference . . . 551
log-updown (Protocols BGP) . . . 552
logical-systems . . . 553
loops . . . 554
loose-check (BGP BFD Authentication) . . . 556
max-sessions (Origin Validation for BGP) . . . 557
maximum-length (Origin Validation for BGP) . . . 558
metric-out (Protocols BGP) . . . 559
minimum-interval (BGP BFD Liveness Detection) . . . 561
minimum-interval (BGP BFD Transmit Interval) . . . 562
minimum-receive-interval (BGP BFD Liveness Detection) . . . 564
mtu-discovery . . . 565
multihop . . . 567
multipath (Protocols BGP) . . . 569
multiplier (BGP BFD Liveness Detection) . . . 570
neighbor (Protocols BGP) . . . 571
no-adaptation (BGP BFD Liveness Detection) . . . 574
no advertise-peer-as . . . 575
no-aggregator-id . . . 576
no-client-reflect . . . 577
no-nexthop-change (BGP multihop) . . . 578
no-validate . . . 580
origin-autonomous-system (Origin Validation for BGP) . . . 581
out-delay . . . 582
outbound-route-filter . . . 583
passive (Protocols BGP) . . . 584
path-count . . . 585
path-selection . . . 586
peer-as (Protocols BGP) . . . 588
port (Origin Validation for BGP) . . . 590
precision-timers . . . 591
preference (Protocols BGP) . . . 592
preference (Origin Validation for BGP) . . . 593
prefix-limit . . . 594
prefix-policy . . . 595
protocols . . . 596
receive (Protocols BGP) . . . 598
record (Origin Validation for BGP) . . . 599
record-lifetime (Origin Validation for BGP) . . . 600
refresh-time (Origin Validation for BGP) . . . 601
remove-private . . . 602

Copyright © 2013, Juniper Networks, Inc.

resolve-vpn . . . 604
restart-time (BGP Graceful Restart) . . . 605
rib (Protocols BGP) . . . 606
rib-group (Protocols BGP) . . . 607
route-target (Protocols BGP) . . . 608
routing-instances (Multiple Routing Entities) . . . 609
send (Logical Systems Add-Path) . . . 610
session (Origin Validation for BGP) . . . 611
session-mode . . . 612
stale-routes-time . . . 613
static (Origin Validation for BGP) . . . 614
tcp-mss (Protocols BGP) . . . 615
threshold (BGP BFD Detection Time) . . . 616
threshold (BGP BFD Transmit Interval) . . . 618
topology (Protocols BGP) . . . 619
traceoptions (Protocols BGP) . . . 621
traceoptions (Origin Validation for BGP) . . . 624
traffic-statistics (Protocols BGP) . . . 625
transmit-interval (BGP BFD Liveness Detection) . . . 626
ttl (BGP Multihop) . . . 627
type (Protocols BGP) . . . 628
validation (Origin Validation for BGP) . . . 629
validation-state (Origin Validation for BGP) . . . 630
version (BGP BFD Liveness Detection) . . . 631
vpn-apply-export . . . 632

Part 3 Administration

Chapter 15 **BGP Operational Commands . . . 635**

clear bgp damping . . . 636
clear bgp neighbor . . . 637
clear bgp table . . . 639
clear validation database . . . 641
clear validation session . . . 642
clear validation statistics . . . 643
request validation policy . . . 644
restart . . . 645
show bgp bmp . . . 655
show bgp group . . . 656
show bgp group traffic-statistics . . . 663
show bgp neighbor . . . 665
show bgp replication . . . 679
show bgp summary . . . 681
show policy damping . . . 686
show policy . . . 688
show policy conditions . . . 690
show policy damping . . . 692
show route . . . 694
show route active-path . . . 700

Copyright © 2013, Juniper Networks, Inc.

show route advertising-protocol . . . 705
show route all . . . 710
show route aspath-regex . . . 712
show route best . . . 714
show route brief . . . 717
show route community . . . 719
show route community-name . . . 721
show route damping . . . 723
show route detail . . . 729
show route exact . . . 744
show route export . . . 746
show route extensive . . . 748
show route flow validation . . . 763
show route forwarding-table . . . 765
show route hidden . . . 779
show route inactive-path . . . 782
show route inactive-prefix . . . 786
show route instance . . . 788
show route next-hop . . . 795
show route no-community . . . 801
show route output . . . 804
show route protocol . . . 808
show route receive-protocol . . . 820
show route table . . . 829
show route terse . . . 840
show validation database . . . 843
show validation group . . . 845
show validation replication database . . . 847
show validation session . . . 849
show validation statistics . . . 852
test policy . . . 854

Part 4 Troubleshooting

Chapter 16 BGP Troubleshooting . . . 859

Checklist for Verifying the BGP Protocol and Peers . . . 859
Checklist for Checking the BGP Layer . . . 860
Checking the BGP Layer . . . 861
Check That BGP Traffic Is Using the LSP . . . 863
Check BGP Sessions . . . 864
Verify the BGP Configuration . . . 866
Examine BGP Routes . . . 872
Verify Received BGP Routes . . . 873
Take Appropriate Action . . . 874
Check That BGP Traffic Is Using the LSP Again . . . 875
Check BGP Sessions . . . 876
Verify BGP Peers . . . 878
Verify the BGP Protocol . . . 879

Copyright © 2013, Juniper Networks, Inc.

Verify the BGP Configuration 881
Display Sent or Received BGP Packets 887
Diagnose BGP Session Establishment Problems 888
Examine BGP Routes and Route Selection 889
Examine the Local Preference Selection 891
Examine the Multiple Exit Discriminator Route Selection 892
Examine the EBGP over IBGP Selection 892
Examine the IGP Cost Selection 894
Examine Routes in the Forwarding Table 895
Log BGP State Transition Events 896
Display Detailed BGP Protocol Information 898
Verify Received BGP Routes 900
Verify That a Particular BGP Route Is Received on Your Router 900
Check That BGP Traffic Is Using the LSP 901
Check That BGP Traffic Is Using the LSP Again 902
Examine the EBGP over IBGP Selection 903
Verify BGP on an Internal Router 904
Verify BGP on a Border Router 907

Chapter 17 **Routing Protocol Process Memory FAQs 913**

Routing Protocol Process Memory FAQs Overview 913
Routing Protocol Process Memory FAQs 914
Frequently Asked Questions: Routing Protocol Process Memory 914
Frequently Asked Questions: Interpreting Routing Protocol Process-Related Command Outputs 915
Frequently Asked Questions: Routing Protocol Process Memory Swapping 918
Frequently Asked Questions: Troubleshooting the Routing Protocol Process 919

Part 5 Index

Index 923

Copyright © 2013, Juniper Networks, Inc.

List of Figures

Part 1 Overview

Chapter 1 Introduction to BGP . . . 3

Figure 1: ASs, EBGP, and IBGP . . . 4

Part 2 Configuration

Chapter 3 Basic BGP Configuration . . . 19

Figure 2: BGP Peering Session . . . 19
Figure 3: Typical Network with BGP Peer Sessions . . . 21
Figure 4: Typical Network with BGP Peer Sessions . . . 28
Figure 5: Internal and External BGP . . . 42
Figure 6: Typical Network with IBGP Sessions . . . 45
Figure 7: Typical Network with IBGP Sessions . . . 55

Chapter 4 BGP Path Attribute Configuration . . . 65

Figure 8: Typical Network with IBGP Sessions and Multiple Exit Points . . . 66
Figure 9: Default MED Example . . . 79
Figure 10: Typical Network with IBGP Sessions and Multiple Exit Points . . . 82
Figure 11: Typical Network with IBGP Sessions and Multiple Exit Points . . . 94
Figure 12: Topology for Delaying the MED Update . . . 108
Figure 13: Local AS Configuration . . . 119
Figure 14: Topology for Configuring the Local AS . . . 122
Figure 15: Topology for Configuring a Private Local AS . . . 132
Figure 16: Advertisement of Multiple Paths in BGP . . . 139
Figure 17: AS Override Topology . . . 176

Chapter 5 BGP Policy Configuration . . . 187

Figure 18: Redistributing BGP Routes with a Specific Community Tag into IS-IS . . . 192
Figure 19: BGP Prefix-Based Outbound Route Filtering . . . 206
Figure 20: Typical Network with EBGP Multihop Sessions . . . 209
Figure 21: BGP Preference Value Topology . . . 221
Figure 22: Topology for Ignoring the AS-Path Lengh . . . 229
Figure 23: Topology for Removing a Private AS from the Advertised AS Path . . . 237
Figure 24: BGP Import and Export Policies . . . 248
Figure 25: Conditional Installation of Prefixes . . . 250

Chapter 6 BGP BFD Configuration . . . 261

Figure 26: Typical Network with IBGP Sessions . . . 263

Chapter 7 BGP Load Balancing Configuration . . . 277

Figure 27: BGP Load Balancing . . . 279

Copyright © 2013, Juniper Networks, Inc.

Figure 28: Topology for Accepting a Remote Next Hop 283
Figure 29: Advertisement of Multiple Paths in BGP 296

Chapter 8 IBGP Scaling Configuration 321

Figure 30: Simple Route Reflector Topology (One Cluster) 322
Figure 31: Basic Route Reflection (Multiple Clusters) 322
Figure 32: Hierarchical Route Reflection (Clusters of Clusters) 323
Figure 33: IBGP Network Using a Route Reflector 325
Figure 34: Route Reflector in Two Different Clusters 340
Figure 35: BGP Confederations 344
Figure 36: Typical Network Using BGP Confederations 345

Chapter 9 BGP Security Configuration 351

Figure 37: Authentication for BGP 354
Figure 38: IPsec for BGP 359
Figure 39: Typical Network with BGP Peer Sessions 363
Figure 40: TCP Maximum Segment Size for BGP 372
Figure 41: Sample Topology for Origin Validation 377
Figure 42: BGP and Route Validation 380
Figure 43: Importing and Exporting Routing Policies 381
Figure 44: Topology for Origin Validation 384

Chapter 10 BGP Flap Configuration 399

Figure 45: Topology for the EBGP Case 402
Figure 46: Topology for the RR Case 402
Figure 47: MBGP MVPN with BGP Route Flap Damping 411

Chapter 11 Multiprotocol BGP Configuration 421

Figure 48: Topology for Configuring IPv6 BGP Routes over IPv4 Transport 428

Chapter 13 BGP Monitoring Configuration 461

Figure 49: BMP Topology 462

Part 4 Troubleshooting

Chapter 16 BGP Troubleshooting 859

Figure 50: Checking the BGP Layer 862
Figure 51: MPLS Network Broken at the BGP Layer 863
Figure 52: BGP Network Topology 878
Figure 53: BGP Configuration Topology 880
Figure 54: BGP Network Topology 889

Copyright © 2013, Juniper Networks, Inc.

List of Tables

About the Documentation xvii

Table 1: Notice Icons xix
Table 2: Text and Syntax Conventions xx

Part 2 Configuration

Chapter 4 BGP Path Attribute Configuration 65

Table 3: MED Options for Routing Table Path Selection 80

Chapter 5 BGP Policy Configuration 187

Table 4: Default Route Preference Values 218

Chapter 8 IBGP Scaling Configuration 321

Table 5: Rules for Route Reflectors 339

Chapter 10 BGP Flap Configuration 399

Table 6: Damping Parameters 407

Chapter 11 Multiprotocol BGP Configuration 421

Table 7: Flow Route Match Conditions 435
Table 8: Flow Route Action Modifiers 436

Part 3 Administration

Chapter 15 BGP Operational Commands 635

Table 9: show bgp bmp Output Fields 655
Table 10: show bgp group Output Fields 657
Table 11: show bgp group traffic-statistics Output Fields 663
Table 12: show bgp neighbor Output Fields 666
Table 13: show bgp replication Output Fields 679
Table 14: show bgp summary Output Fields 681
Table 15: show policy damping Output Fields 686
Table 16: show policy Output Fields 688
Table 17: show policy conditions Output Fields 690
Table 18: show policy damping Output Fields 692
Table 19: show route Output Fields 695
Table 20: show route advertising-protocol Output Fields 706
Table 21: show route damping Output Fields 723
Table 22: show route detail Output Fields 729
Table 23: Next-hop Types Output Field Values 733
Table 24: State Output Field Values 735
Table 25: Communities Output Field Values 737

Copyright © 2013, Juniper Networks, Inc.

Table 26: show route export Output Fields 746
Table 27: show route extensive Output Fields 748
Table 28: show route flow validation Output Fields 763
Table 29: show route forwarding-table Output Fields 767
Table 30: show route instance Output Fields 788
Table 31: show route receive-protocol Output Fields 820
Table 32: show route terse Output Fields 840
Table 33: show validation database Output Fields 844
Table 34: show validation group Output Fields 845
Table 35: show validation replication database Output Fields 848
Table 36: show validation session Output Fields 849
Table 37: show validation statistics Output Fields 852

Part 4 Troubleshooting

Chapter 16 BGP Troubleshooting 859

Table 38: Checklist for Verifying the BGP Protocol and Peers 860
Table 39: Checklist for Checking the BGP Layer 860
Table 40: Six States of a BGP Session 896
Table 41: BGP Protocol Tracing Flags 899

Chapter 17 Routing Protocol Process Memory FAQs 913

Table 42: show system processes extensive Output Fields 916
Table 43: show task memory Output Fields 917

Copyright © 2013, Juniper Networks, Inc.

About the Documentation

- Documentation and Release Notes on page xvii
- Supported Platforms on page xvii
- Using the Examples in This Manual on page xviii
- Documentation Conventions on page xix
- Documentation Feedback on page xxi
- Requesting Technical Support on page xxi

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at http://www.juniper.net/techpubs/.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at http://www.juniper.net/books.

Supported Platforms

For the features described in this document, the following platforms are supported:

- ACX Series
- J Series
- SRX Series
- T Series
- MX Series
- M Series

Copyright © 2013, Juniper Networks, Inc.

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

   For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

   ```
   system {
     scripts {
       commit {
         file ex-script.xsl;
       }
     }
   }
   interfaces {
     fxp0 {
       disable;
       unit 0 {
         family inet {
           address 10.0.0.1/24;
         }
       }
     }
   }
   ```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

   ```
   [edit]
   user@host# load merge /var/tmp/ex-script.conf
   load complete
   ```


Copyright © 2013, Juniper Networks, Inc.

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

   For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

   ```
   commit {
     file ex-script-snippet.xsl; }
   ```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

   ```
   [edit]
   user@host# edit system scripts
   [edit system scripts]
   ```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

   ```
   [edit system scripts]
   user@host# load merge relative /var/tmp/ex-script-snippet.conf
   load complete
   ```

For more information about the **load** command, see the CLI User Guide.

Documentation Conventions

Table 1 on page xix defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xx defines the text and syntax conventions used in this guide.

Copyright © 2013, Juniper Networks, Inc.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the**configure** command: user@host> **configure**
`Fixed-width text like this`	Represents output that appears on the terminal screen.	`user@host>` **show chassis alarms** `No alarms currently active`
Italic text like this	• Introduces or emphasizes important new terms. • Identifies book names. • Identifies RFC and Internet draft titles.	• A policy *term* is a named structure that defines match conditions and actions. • *Junos OS System Basics Configuration Guide* • RFC 1997, *BGP Communities Attribute*
Italic text like this	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# **set system domain-name** *domain-name*
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	• To configure a stub area, include the **stub** statement at the**[edit protocols ospf area area-id]** hierarchy level. • The console port is labeled **CONSOLE**.
< > (angle brackets)	Enclose optional keywords or variables.	**stub <default-metric** ***metric*****>;**
| (pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	**broadcast | multicast** **(*string1* | *string2* | *string3*)**
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	**rsvp { # Required for dynamic MPLS only**
[ ] (square brackets)	Enclose a variable for which you can substitute one or more values.	**community name members [** ***community-ids*** **]**

Indention and braces ({ })	Identify a level in the configuration hierarchy.	[edit]
		routing-options {
		  static {
		  route default {
		  nexthop *address*;
		  retain;
		  }
		  }
		}

; (semicolon)	Identifies a leaf statement at a configuration hierarchy level.	

J-Web GUI Conventions

Copyright © 2013, Juniper Networks, Inc.

Table 2: Text and Syntax Conventions *(continued)*

Convention	Description	Examples
Bold text like this	Represents J-Web graphical user interface (GUI) items you click or select.	• In the Logical Interfaces box, select **All Interfaces**. • To cancel the configuration, click **Cancel**.
> (bold right angle bracket)	Separates levels in a hierarchy of J-Web selections.	In the configuration editor hierarchy, select **Protocols>Ospf**.

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to techpubs-comments@juniper.net, or fill out the documentation feedback form at https://www.juniper.net/cgi-bin/docbugreport/ . If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf.
- Product warranties—For product warranty information, visit http://www.juniper.net/support/warranty/.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: http://www.juniper.net/customers/support/
- Search for known bugs: http://www2.juniper.net/kb/

Copyright © 2013, Juniper Networks, Inc.

- Find product documentation: http://www.juniper.net/techpubs/
- Find solutions and answer questions using our Knowledge Base: http://kb.juniper.net/
- Download the latest versions of software and review release notes: http://www.juniper.net/customers/csc/software/
- Search technical bulletins for relevant hardware and software notifications: https://www.juniper.net/alerts/
- Join and participate in the Juniper Networks Community Forum: http://www.juniper.net/company/communities/
- Open a case online in the CSC Case Management tool: http://www.juniper.net/cm/

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: https://tools.juniper.net/SerialNumberEntitlementSearch/

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at http://www.juniper.net/cm/.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see http://www.juniper.net/support/requesting-support.html.

Copyright © 2013, Juniper Networks, Inc.

PART 1

Overview

- Introduction to BGP on page 3
- BGP Standards on page 13

Copyright © 2013, Juniper Networks, Inc.

 Copyright © 2013, Juniper Networks, Inc.

CHAPTER 1

Introduction to BGP

- Understanding BGP on page 3
- BGP Routes Overview on page 6
- BGP Messages Overview on page 7
- Understanding BGP Path Selection on page 8

Understanding BGP

BGP is an exterior gateway protocol (EGP) that is used to exchange routing information among routers in different autonomous systems (ASs). BGP routing information includes the complete route to each destination. BGP uses the routing information to maintain a database of network reachability information, which it exchanges with other BGP systems. BGP uses the network reachability information to construct a graph of AS connectivity, which enables BGP to remove routing loops and enforce policy decisions at the AS level.

Multiprotocol BGP (MBGP) extensions enable BGP to support IP version 6 (IPv6). MBGP defines the attributes MP_REACH_NLRI and MP_UNREACH_NLRI, which are used to carry IPv6 reachability information. Network layer reachability information (NLRI) update messages carry IPv6 address prefixes of feasible routes.

BGP allows for policy-based routing. You can use routing policies to choose among multiple paths to a destination and to control the redistribution of routing information.

BGP uses TCP as its transport protocol, using port 179 for establishing connections. Running over a reliable transport protocol eliminates the need for BGP to implement update fragmentation, retransmission, acknowledgment, and sequencing.

The Junos OS routing protocol software supports BGP version 4. This version of BGP adds support for Classless Interdomain Routing (CIDR), which eliminates the concept of network classes. Instead of assuming which bits of an address represent the network by looking at the first octet, CIDR allows you to explicitly specify the number of bits in the network address, thus providing a means to decrease the size of the routing tables. BGP version 4 also supports aggregation of routes, including the aggregation of AS paths.

This section discusses the following topics:

- Autonomous Systems on page 4
- AS Paths and Attributes on page 4

Copyright © 2013, Juniper Networks, Inc.

- External and Internal BGP on page 4
- Multiple Instances of BGP on page 5

Autonomous Systems

An *autonomous system* (AS) is a set of routers that are under a single technical administration and normally use a single interior gateway protocol and a common set of metrics to propagate routing information within the set of routers. To other ASs, an AS appears to have a single, coherent interior routing plan and presents a consistent picture of what destinations are reachable through it.

AS Paths and Attributes

The routing information that BGP systems exchange includes the complete route to each destination, as well as additional information about the route. The route to each destination is called the *AS path*, and the additional route information is included in *path attributes*. BGP uses the AS path and the path attributes to completely determine the network topology. Once BGP understands the topology, it can detect and eliminate routing loops and select among groups of routes to enforce administrative preferences and routing policy decisions.

External and Internal BGP

BGP supports two types of exchanges of routing information: exchanges among different ASs and exchanges within a single AS. When used among ASs, BGP is called *external BGP* (EBGP) and BGP sessions perform *inter-AS routing*. When used within an AS, BGP is called *internal BGP* (IBGP) and BGP sessions perform *intra-AS routing*. Figure 1 on page 4 illustrates ASs, IBGP, and EBGP.

Figure 1: ASs, EBGP, and IBGP

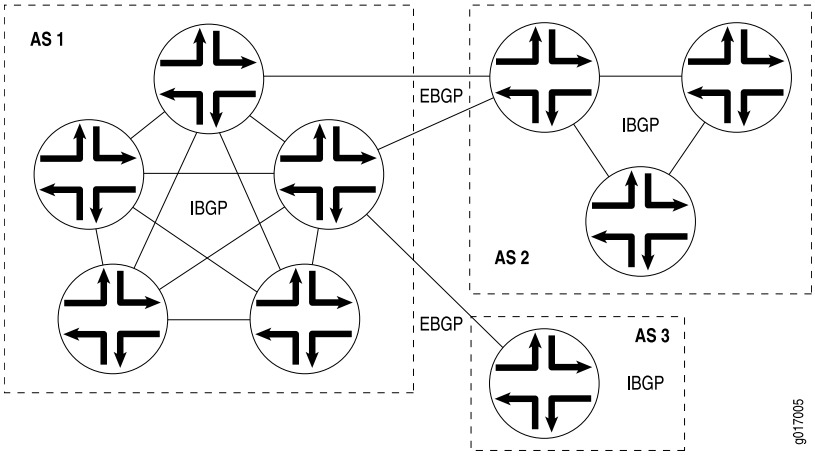

A BGP system shares network reachability information with adjacent BGP systems, which are referred to as *neighbors* or *peers*.

BGP systems are arranged into *groups*. In an IBGP group, all peers in the group—called *internal peers*—are in the same AS. Internal peers can be anywhere in the local AS and do not have to be directly connected to one another. Internal groups use routes from an

Copyright © 2013, Juniper Networks, Inc.

IGP to resolve forwarding addresses. They also propagate external routes among all other internal routers running IBGP, computing the next hop by taking the BGP next hop received with the route and resolving it using information from one of the interior gateway protocols.

In an EBGP group, the peers in the group—called *external peers*—are in different ASs and normally share a subnet. In an external group, the next hop is computed with respect to the interface that is shared between the external peer and the local router.

Multiple Instances of BGP

You can configure multiple instances of BGP at the following hierarchy levels:

- **[edit routing-instances *routing-instance-name* protocols]**
- **[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols]**

Multiple instances of BGP are primarily used for Layer 3 VPN support.

IGP peers and external BGP (EBGP) peers (both nonmultihop and multihop) are all supported for routing instances. BGP peering is established over one of the interfaces configured under the **routing-instances** hierarchy.

NOTE: When a BGP neighbor sends BGP messages to the local routing device, the incoming interface on which these messages are received must be configured in the same routing instance that the BGP neighbor configuration exists in. This is true for neighbors that are a single hop away or multiple hops away.

Routes learned from the BGP peer are added to the **instance-name.inet.0** table by default. You can configure import and export policies to control the flow of information into and out of the instance routing table.

For Layer 3 VPN support, configure BGP on the provider edge (PE) router to receive routes from the customer edge (CE) router and to send the instances' routes to the CE router if necessary. You can use multiple instances of BGP to maintain separate per-site forwarding tables for keeping VPN traffic separate on the PE router.

You can configure import and export policies that allow the service provider to control and rate-limit traffic to and from the customer.

You can configure an EBGP multihop session for a VRF routing instance. Also, you can set up the EBGP peer between the PE and CE routers by using the loopback address of the CE router instead of the interface addresses.

Related Documentation

- BGP Routes Overview on page 6
- BGP Messages Overview on page 7

Copyright © 2013, Juniper Networks, Inc.

BGP Routes Overview

A BGP route is a destination, described as an IP address prefix, and information that describes the path to the destination.

The following information describes the path:

- AS path, which is a list of numbers of the ASs that a route passes through to reach the local router. The first number in the path is that of the last AS in the path—the AS closest to the local router. The last number in the path is the AS farthest from the local router, which is generally the origin of the path.
- Path attributes, which contain additional information about the AS path that is used in routing policy.

BGP peers advertise routes to each other in update messages.

BGP stores its routes in the Junos OS routing table (**inet.0**). The routing table stores the following information about BGP routes:

- Routing information learned from update messages received from peers
- Local routing information that BGP applies to routes because of local policies
- Information that BGP advertises to BGP peers in update messages

For each prefix in the routing table, the routing protocol process selects a single best path, called the active path. Unless you configure BGP to advertise multiple paths to the same destination, BGP advertises only the active path.

The BGP router that first advertises a route assigns it one of the following values to identify its origin. During route selection, the lowest origin value is preferred.

- **0**—The router originally learned the route through an IGP (OSPF, IS-IS, or a static route).
- **1**—The router originally learned the route through an EGP (most likely BGP).
- **2**—The route's origin is unknown.

Related Documentation

- Understanding BGP Path Selection on page 8
- Example: Advertising Multiple Paths in BGP on page 294

Copyright © 2013, Juniper Networks, Inc.

BGP Messages Overview

All BGP messages have the same fixed-size header, which contains a marker field that is used for both synchronization and authentication, a length field that indicates the length of the packet, and a type field that indicates the message type (for example, open, update, notification, keepalive, and so on).

This section discusses the following topics:

- Open Messages on page 7
- Update Messages on page 7
- Keepalive Messages on page 8
- Notification Messages on page 8

Open Messages

After a TCP connection is established between two BGP systems, they exchange BGP open messages to create a BGP connection between them. Once the connection is established, the two systems can exchange BGP messages and data traffic.

Open messages consist of the BGP header plus the following fields:

- Version—The current BGP version number is 4.
- Local AS number—You configure this by including the **autonomous-system** statement at the **[edit routing-options]** or **[edit logical-systems *logical-system-name* routing-options]** hierarchy level.
- Hold time—Proposed hold-time value. You configure the local hold time with the BGP **hold-time** statement.
- BGP identifier—IP address of the BGP system. This address is determined when the system starts and is the same for every local interface and every BGP peer. You can configure the BGP identifier by including the **router-id** statement at the **[edit routing-options]** or **[edit logical-systems *logical-system-name* routing-options]** hierarchy level. By default, BGP uses the IP address of the first interface it finds in the router.
- Parameter field length and the parameter itself—These are optional fields.

Update Messages

BGP systems send update messages to exchange network reachability information. BGP systems use this information to construct a graph that describes the relationships among all known ASs.

Update messages consist of the BGP header plus the following optional fields:

- Unfeasible routes length—Length of the withdrawn routes field
- Withdrawn routes—IP address prefixes for the routes being withdrawn from service because they are no longer deemed reachable

Copyright © 2013, Juniper Networks, Inc.

- Total path attribute length—Length of the path attributes field; it lists the path attributes for a feasible route to a destination
- Path attributes—Properties of the routes, including the path origin, the multiple exit discriminator (MED), the originating system's preference for the route, and information about aggregation, communities, confederations, and route reflection
- Network layer reachability information (NLRI)—IP address prefixes of feasible routes being advertised in the update message

Keepalive Messages

BGP systems exchange keepalive messages to determine whether a link or host has failed or is no longer available. Keepalive messages are exchanged often enough so that the hold timer does not expire. These messages consist only of the BGP header.

Notification Messages

BGP systems send notification messages when an error condition is detected. After the message is sent, the BGP session and the TCP connection between the BGP systems are closed. Notification messages consist of the BGP header plus the error code and subcode, and data that describes the error.

Related Documentation

- Understanding BGP on page 3
- BGP Routes Overview on page 6

Understanding BGP Path Selection

For each prefix in the routing table, the routing protocol process selects a single best path. After the best path is selected, the route is installed in the routing table. The best path becomes the active route if the same prefix is not learned by a protocol with a lower (more preferred) global preference value, also known as the administrative distance. The algorithm for determining the active route is as follows:

1. Verify that the next hop can be resolved.
2. Choose the path with the lowest preference value (routing protocol process preference).

   Routes that are not eligible to be used for forwarding (for example, because they were rejected by routing policy or because a next hop is inaccessible) have a preference of –1 and are never chosen.
3. Prefer the path with higher local preference.

   For non-BGP paths, choose the path with the lowest **preference2** value.
4. If the accumulated interior gateway protocol (AIGP) attribute is enabled, prefer the path with the lower AIGP attribute.
5. Prefer the path with the shortest autonomous system (AS) path value (skipped if the **as-path-ignore** statement is configured).

Copyright © 2013, Juniper Networks, Inc.

A confederation segment (sequence or set) has a path length of 0. An AS set has a path length of 1.

6. Prefer the route with the lower origin code.

   Routes learned from an IGP have a lower origin code than those learned from an exterior gateway protocol (EGP), and both have lower origin codes than incomplete routes (routes whose origin is unknown).

7. Prefer the path with the lowest multiple exit discriminator (MED) metric.

   Depending on whether nondeterministic routing table path selection behavior is configured, there are two possible cases:

   - If nondeterministic routing table path selection behavior is not configured (that is, if the **path-selection cisco-nondeterministic** statement is not included in the BGP configuration), for paths with the same neighboring AS numbers at the front of the AS path, prefer the path with the lowest MED metric. To always compare MEDs whether or not the peer ASs of the compared routes are the same, include the **path-selection always-compare-med** statement.
   - If nondeterministic routing table path selection behavior is configured (that is, the **path-selection cisco-nondeterministic** statement is included in the BGP configuration), prefer the path with the lowest MED metric.

   Confederations are not considered when determining neighboring ASs. A missing MED metric is treated as if a MED were present but zero.

   NOTE: MED comparison works for single path selection within an AS (when the route does not include an AS path), though this usage Is uncommon.

   By default, only the MEDs of routes that have the same peer autonomous systems (ASs) are compared. You can configure routing table path selection options to obtain different behaviors.

8. Prefer strictly internal paths, which include IGP routes and locally generated routes (static, direct, local, and so forth).

9. Prefer strictly external BGP (EBGP) paths over external paths learned through internal BGP (IBGP) sessions.

10. Prefer the path whose next hop is resolved through the IGP route with the lowest metric.

Copyright © 2013, Juniper Networks, Inc.

NOTE: A path is considered a BGP equal-cost path (and will be used for forwarding) if a tie-break is performed after the previous step. All paths with the same neighboring AS, learned by a multipath-enabled BGP neighbor, are considered.

BGP multipath does not apply to paths that share the same MED-plus-IGP cost yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

11. If both paths are external, prefer the currently active path to minimize route-flapping. This rule is not used if any one of the following conditions is true:
    - **path-selection external-router-id** is configured.
    - Both peers have the same router ID.
    - Either peer is a confederation peer.
    - Neither path is the current active path.
12. Prefer a primary route over a secondary route. A primary route is one that belongs to the routing table. A secondary route is one that is added to the routing table through an export policy.
13. Prefer the path from the peer with the lowest router ID. For any path with an originator ID attribute, substitute the originator ID for the router ID during router ID comparison.
14. Prefer the path with the shortest cluster list length. The length is 0 for no list.
15. Prefer the path from the peer with the lowest peer IP address.

Routing Table Path Selection

The third step of the algorithm, by default, evaluates the length of the AS path and determines the active path. You can configure an option that enables Junos OS to skip this third step of the algorithm by including the **as-path-ignore** option.

NOTE: The **as-path-ignore** option is not supported for routing instances.

To configure routing table path selection behavior, include the **path-selection** statement:

```
path-selection {
   (always-compare-med | cisco-non-deterministic | external-router-id);
   as-path-ignore;
   med-plus-igp {
      igp-multiplier number;
      med-multiplier number;
   }
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Copyright © 2013, Juniper Networks, Inc.

Routing table path selection can be configured in one of the following ways:

- Emulate the Cisco IOS default behavior (**cisco-non-deterministic**). This mode evaluates routes in the order that they are received and does not group them according to their neighboring AS. With **cisco-non-deterministic** mode, the active path is always first. All inactive, but eligible, paths follow the active path and are maintained in the order in which they were received, with the most recent path first. Ineligible paths remain at the end of the list.

  As an example, suppose you have three path advertisements for the 192.168.1.0 /24 route:

  - Path 1—learned through EBGP; AS Path of 65010; MED of 200
  - Path 2—learned through IBGP; AS Path of 65020; MED of 150; IGP cost of 5
  - Path 3—learned through IBGP; AS Path of 65010; MED of 100; IGP cost of 10

  These advertisements are received in quick succession, within a second, in the order listed. Path 3 is received most recently, so the routing device compares it against path 2, the next most recent advertisement. The cost to the IBGP peer is better for path 2, so the routing device eliminates path 3 from contention. When comparing paths 1 and 2, the routing device prefers path 1 because it is received from an EBGP peer. This allows the routing device to install path 1 as the active path for the route.

  NOTE: **We do not recommend using this configuration option in your network. It is provided solely for interoperability to allow all routing devices in the network to make consistent route selections.**

- Always comparing MEDs whether or not the peer ASs of the compared routes are the same (**always-compare-med**).
- Override the rule that If both paths are external, the currently active path is preferred (**external-router-id**). Continue with the next step (Step 12) in the path-selection process.
- Adding the IGP cost to the next-hop destination to the MED value before comparing MED values for path selection (**med-plus-igp**).

  BGP multipath does not apply to paths that share the same MED-plus-IGP cost, yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

Effects of Advertising Multiple Paths to a Destination

BGP advertises only the active path, unless you configure BGP to advertise multiple paths to a destination.

Suppose a routing device has in its routing table four paths to a destination and is configured to advertise up to three paths (**add-path send path-count 3**). The three paths are chosen based on path selection criteria. That is, the three best paths are chosen in path-selection order. The best path is the active path. This path is removed from

Copyright © 2013, Juniper Networks, Inc.

consideration and a new best path is chosen. This process is repeated until the specified number of paths is reached.

Related Documentation

- Example: Ignoring the AS Path Attribute When Selecting the Best Path on page 228
- Examples: Configuring BGP MED on page 78
- Example: Advertising Multiple BGP Paths to a Destination on page 293

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 2

BGP Standards

- Supported BGP Standards on page 13

Supported BGP Standards

Junos OS substantially supports the following RFCs and Internet drafts, which define standards for IP version 4 (IPv4) BGP.

For a list of supported IP version 6 (IPv6) BGP standards, see Supported IPv6 Standards.

Junos OS BGP supports authentication for protocol exchanges (MD5 authentication).

- RFC 1745, *BGP4/IDRP for IP—OSPF Interaction*
- RFC 1772, *Application of the Border Gateway Protocol in the Internet*
- RFC 1997, *BGP Communities Attribute*
- RFC 2283, *Multiprotocol Extensions for BGP-4*
- RFC 2385, *Protection of BGP Sessions via the TCP MD5 Signature Option*
- RFC 2439, *BGP Route Flap Damping*
- RFC 2545, *Use of BGP-4 Multiprotocol Extensions for IPv6 Inter-Domain Routing*
- RFC 2796, *BGP Route Reflection – An Alternative to Full Mesh IBGP*
- RFC 2858, *Multiprotocol Extensions for BGP-4*
- RFC 2918, *Route Refresh Capability for BGP-4*
- RFC 3065, *Autonomous System Confederations for BGP*
- RFC 3107, *Carrying Label Information in BGP-4*
- RFC 3392, *Capabilities Advertisement with BGP-4*
- RFC 4271, *A Border Gateway Protocol 4 (BGP-4)*
- RFC 4273, *Definitions of Managed Objects for BGP-4*
- RFC 4360, *BGP Extended Communities Attribute*
- RFC 4364, *BGP/MPLS IP Virtual Private Networks (VPNs)*
- RFC 4456, *BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP)*

Copyright © 2013, Juniper Networks, Inc.

- RFC 4486, *Subcodes for BGP Cease Notification Message*
- RFC 4659, *BGP-MPLS IP Virtual Private Network (VPN) Extension for IPv6 VPN*
- RFC 4632, *Classless Inter-domain Routing (CIDR): The Internet Address Assignment and Aggregation Plan*
- RFC 4684, *Constrained Route Distribution for Border Gateway Protocol/MultiProtocol Label Switching (BGP/MPLS) Internet Protocol (IP) Virtual Private Networks (VPNs)*
- RFC 4724, *Graceful Restart Mechanism for BGP*
- RFC 4760, *Multiprotocol Extensions for BGP-4*
- RFC 4781, *Graceful Restart Mechanism for BGP with MPLS*
- RFC 4798, *Connecting IPv6 Islands over IPv4 MPLS Using IPv6 Provider Edge Routers (6PE)*

  Option 4b (eBGP redistribution of labeled IPv6 routes from AS to neighboring AS) is not supported.
- RFC 4893, *BGP Support for Four-octet AS Number Space*
- RFC 5004, *Avoid BGP Best Path Transitions from One External to Another*
- RFC 5065, *Autonomous System Confederations for BGP*
- RFC 5291, *Outbound Route Filtering Capability for BGP-4 (partial support)*
- RFC 5292, *Address-Prefix-Based Outbound Route Filter for BGP-4 (partial support)*

  Devices running Junos OS can receive prefix-based ORF messages.
- RFC 5396, *Textual Representation of Autonomous System (AS) Numbers*
- RFC 5492, *Capabilities Advertisement with BGP-4*
- RFC 5668, *4-Octet AS Specific BGP Extended Community*
- RFC 6368, *Internal BGP as the Provider/Customer Edge Protocol for BGP/MPLS IP Virtual Private Networks (VPNs)*
- RFC 6810, *The Resource Public Key Infrastructure (RPKI) to Router Protocol*
- RFC 6811, *BGP Prefix Origin Validation*
- Internet draft draft-ietf-idr-add-paths-04.txt, *Advertisement of Multiple Paths in BGP* (expires February 2011)
- Internet draft draft-ietf-idr-aigp-06, *The Accumulated IGP Metric Attribute for BGP* (expires December 2011)
- Internet draft draft-ietf-idr-flow-spec-00.txt, *Dissemination of flow specification rules*
- Internet draft draft-ietf-idr-link-bandwidth-01.txt, *BGP Link Bandwidth Extended Community* (expires August 2010)
- Internet draft draft-ietf-sidr-origin-validation-signaling-00, *BGP Prefix Origin Validation State Extended Community (partial support)* (expires May 2011)

 Copyright © 2013, Juniper Networks, Inc.

The extended community (origin validation state) is supported in Junos OS routing policy. The specified change in the route selection procedure is not supported.

- Internet draft draft-kato-bgp-ipv6-link-local-00.txt, *BGP4+ Peering Using IPv6 Link-local Address*

The following RFCs and Internet draft do not define standards, but provide information about BGP and related technologies. The IETF classifies them variously as "Experimental" or "Informational."

- RFC 1965, *Autonomous System Confederations for BGP*
- RFC 1966, *BGP Route Reflection—An alternative to full mesh IBGP*
- RFC 2270, *Using a Dedicated AS for Sites Homed to a Single Provider*
- Internet draft draft-ietf-ngtrans-bgp-tunnel-04.txt, *Connecting IPv6 Islands across IPv4 Clouds with BGP* (expires July 2002)

Related Documentation

- Supported IPv6 Standards
- Accessing Standards Documents on the Internet

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

PART 2

Configuration

- Basic BGP Configuration on page 19
- BGP Path Attribute Configuration on page 65
- BGP Policy Configuration on page 187
- BGP BFD Configuration on page 261
- BGP Load Balancing Configuration on page 277
- IBGP Scaling Configuration on page 321
- BGP Security Configuration on page 351
- BGP Flap Configuration on page 399
- Multiprotocol BGP Configuration on page 421
- BGP CLNS Configuration on page 453
- BGP Monitoring Configuration on page 461
- BGP Configuration Statements on page 471

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 3

Basic BGP Configuration

- Examples: Configuring External BGP Peering on page 19
- Examples: Configuring Internal BGP Peering on page 42

Examples: Configuring External BGP Peering

- Understanding External BGP Peering Sessions on page 19
- Example: Configuring External BGP Point-to-Point Peer Sessions on page 20
- Example: Configuring External BGP on Logical Systems with IPv6 Interfaces on page 27

Understanding External BGP Peering Sessions

To establish point-to-point connections between peer autonomous systems (ASs), you configure a BGP session on each interface of a point-to-point link. Generally, such sessions are made at network exit points with neighboring hosts outside the AS. Figure 2 on page 19 shows an example of a BGP peering session.

Figure 2: BGP Peering Session

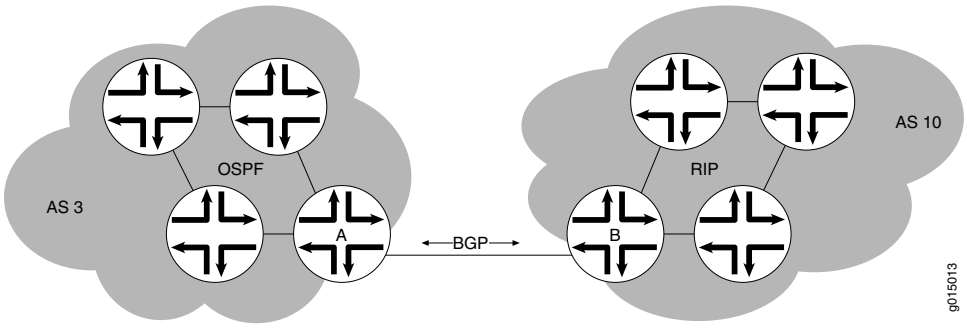

In Figure 2 on page 19, Router A is a gateway router for AS 3, and Router B is a gateway router for AS 10. For traffic internal to either AS, an interior gateway protocol (IGP) is used (OSPF, for instance). To route traffic between peer ASs, a BGP session is used.

You arrange BGP routing devices into groups of peers. Different peer groups can have different group types, AS numbers, and route reflector cluster identifiers.

To define a BGP group that recognizes only the specified BGP systems as peers, statically configure all the system's peers by including one or more **neighbor** statements. The peer neighbor's address can be either an IPv6 or IPv4 address.

Copyright © 2013, Juniper Networks, Inc.

As the number of external BGP (EBGP) groups increases, the ability to support a large number of BGP sessions might become a scaling issue. The preferred way to configure a large number of BGP neighbors is to configure a few groups consisting of multiple neighbors per group. Supporting fewer EBGP groups generally scales better than supporting a large number of EBGP groups. This becomes more evident in the case of hundreds of EBGP groups when compared with a few EBGP groups with multiple peers in each group.

After the BGP peers are established, BGP routes are not automatically advertised by the BGP peers. At each BGP-enabled device, policy configuration is required to export the local, static, or IGP-learned routes into the BGP RIB and then advertise them as BGP routes to the other peers. BGP's advertisement policy, by default, does not advertise any non-BGP routes (such as local routes) to peers.

Example: Configuring External BGP Point-to-Point Peer Sessions

This example shows how to configure BGP point-to-point peer sessions.

- Requirements on page 20
- Overview on page 20
- Configuration on page 21
- Verification on page 23

Requirements

Before you begin, if the default BGP policy is not adequate for your network, configure routing policies to filter incoming BGP routes and to advertise BGP routes.

Overview

Figure 3 on page 21 shows a network with BGP peer sessions. In the sample network, Device E in AS 17 has BGP peer sessions to a group of peers called **external-peers**. Peers A, B, and C reside in AS 22 and have IP addresses 10.10.10.2, 10.10.10.6, and 10.10.10.10. Peer D resides in AS 79, at IP address 10.21.7.2. This example shows the configuration on Device E.

Copyright © 2013, Juniper Networks, Inc.

Figure 3: Typical Network with BGP Peer Sessions

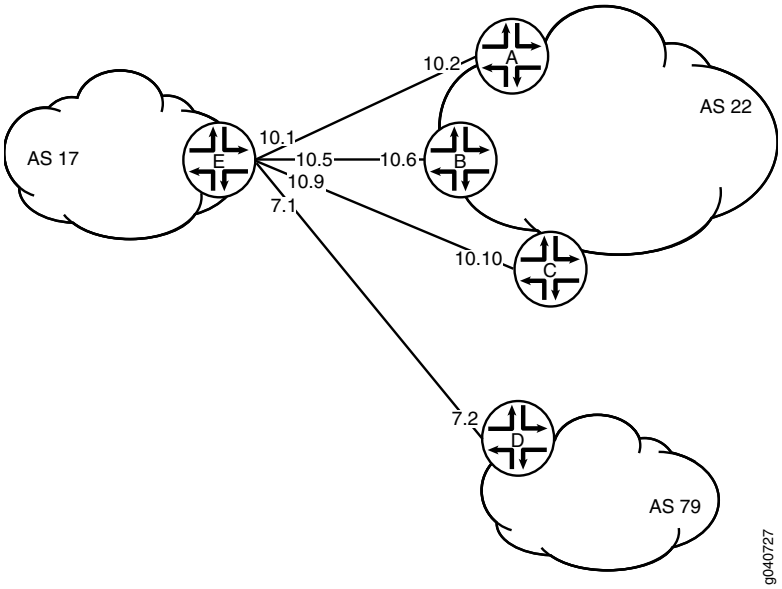

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/2/0 unit 0 description to-A
set interfaces ge-1/2/0 unit 0 family inet address 10.10.10.1/30
set interfaces ge-0/0/1 unit 5 description to-B
set interfaces ge-0/0/1 unit 5 family inet address 10.10.10.5/30
set interfaces ge-0/1/0 unit 9 description to-C
set interfaces ge-0/1/0 unit 9 family inet address 10.10.10.9/30
set interfaces ge-1/2/1 unit 21 description to-D
set interfaces ge-1/2/1 unit 21 family inet address 10.21.7.1/30
set protocols bgp group external-peers type external
set protocols bgp group external-peers peer-as 22
set protocols bgp group external-peers neighbor 10.10.10.2
set protocols bgp group external-peers neighbor 10.10.10.6
set protocols bgp group external-peers neighbor 10.10.10.10
set protocols bgp group external-peers neighbor 10.21.7.2 peer-as 79
set routing-options autonomous-system 17
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the interfaces to Peers A, B, C, and D.

   [edit interfaces]

Copyright © 2013, Juniper Networks, Inc.

```
user@E# set ge-1/2/0 unit 0 description to-A
user@E# set ge-1/2/0 unit 0 family inet address 10.10.10.1/30
user@E# set ge-0/0/1 unit 5 description to-B
user@E# set ge-0/0/1 unit 5 family inet address 10.10.10.5/30
user@E# set ge-0/1/0 unit 9 description to-C
user@E# set ge-0/1/0 unit 9 family inet address 10.10.10.9/30
user@E# set ge-1/2/1 unit 21 description to-D
user@E# set ge-1/2/1 unit 21 family inet address 10.21.7.1/30
```

2. Set the autonomous system (AS) number.

```
[edit routing-options]
user@E# set autonomous-system 17
```

3. Create the BGP group, and add the external neighbor addresses.

```
[edit protocols bgp group external-peers]
user@E# set neighbor 10.10.10.2
user@E# set neighbor 10.10.10.6
user@E# set neighbor 10.10.10.10
```

4. Specify the autonomous system (AS) number of the external AS.

```
[edit protocols bgp group external-peers]
user@E# set peer-as 22
```

5. Add Peer D, and set the AS number at the individual neighbor level.

   The neighbor configuration overrides the group configuration. So, while **peer-as 22** is set for all the other neighbors in the group, **peer-as 79** is set for neighbor 10.21.7.2.

```
[edit protocols bgp group external-peers]
user@E# set neighbor 10.21.7.2 peer-as 79
```

6. Set the peer type to external BGP (EBGP).

```
[edit protocols bgp group external-peers]
user@E# set type external
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@E# show interfaces
ge-1/2/0 {
    unit 0 {
        description to-A;
        family inet {
            address 10.10.10.1/30;
        }
    }
}
ge-0/0/1 {
    unit 5 {
        description to-B;
        family inet {
            address 10.10.10.5/30;
        }
```

 Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  ge-0/1/0 {
    unit 9 {
      description to-C;
      family inet {
        address 10.10.10.9/30;
      }
    }
  }
  ge-1/2/1 {
    unit 21 {
      description to-D;
      family inet {
        address 10.21.7.1/30;
      }
    }
  }

  [edit]
  user@E# show protocols
  bgp {
    group external-peers {
      type external;
      peer-as 22;
      neighbor 10.10.10.2;
      neighbor 10.10.10.6;
      neighbor 10.10.10.10;
      neighbor 10.21.7.2 {
        peer-as 79;
      }
    }
  }

  [edit]
  user@E# show routing-options
  autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying BGP Neighbors on page 23
- Verifying BGP Groups on page 26
- Verifying BGP Summary Information on page 26

Verifying BGP Neighbors

Purpose Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

Action From operational mode, run the **show bgp neighbor** command.

```
user@E> show bgp neighbor
```

```
Peer: 10.10.10.2+179 AS 22     Local: 10.10.10.1+65406 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.10.2       Local ID: 10.10.10.1       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  Local Interface: ge-1/2/0.0
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 10   Sent 6    Checked 1
  Input messages:  Total 8522   Updates 1       Refreshes 0     Octets 161922
  Output messages: Total 8433   Updates 0       Refreshes 0     Octets 160290
  Output Queue[0]: 0

Peer: 10.10.10.6+54781 AS 22   Local: 10.10.10.5+179 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.10.6       Local ID: 10.10.10.1       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  Local Interface: ge-0/0/1.5
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
```


Copyright © 2013, Juniper Networks, Inc.

```
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 12   Sent 6    Checked 33
  Input messages:  Total 8527   Updates 1       Refreshes 0     Octets 162057
  Output messages: Total 8430   Updates 0       Refreshes 0     Octets 160233
  Output Queue[0]: 0

Peer: 10.10.10.10+55012 AS 22  Local: 10.10.10.9+179 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.10.10      Local ID: 10.10.10.1       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 2
  BFD: disabled, down
  Local Interface: fe-0/1/0.9
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 15   Sent 6    Checked 37
  Input messages:  Total 8527   Updates 1       Refreshes 0     Octets 162057
  Output messages: Total 8429   Updates 0       Refreshes 0     Octets 160214
  Output Queue[0]: 0

Peer: 10.21.7.2+61867 AS 79    Local: 10.21.7.1+179 AS 17
  Type: External    State: Established    Flags: <ImportEval Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.21.7.2        Local ID: 10.10.10.1       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 3
  BFD: disabled, down
  Local Interface: ge-1/2/1.21
```

Copyright © 2013, Juniper Networks, Inc.

```
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 79)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 28   Sent 24   Checked 47
  Input messages:  Total 8521   Updates 1       Refreshes 0     Octets 161943
  Output messages: Total 8427   Updates 0       Refreshes 0     Octets 160176
  Output Queue[0]: 0
```

Verifying BGP Groups

Purpose Verify that the BGP groups are configured correctly.

Action From operational mode, run the **show bgp group** command.

```
user@E> show bgp group
Group Type: External                              Local AS: 17
  Name: external-peers  Index: 0                  Flags: <>
  Holdtime: 0
  Total peers: 4        Established: 4
  10.10.10.2+179
  10.10.10.6+54781
  10.10.10.10+55012
  10.21.7.2+61867
  inet.0: 0/0/0/0

Groups: 1  Peers: 4    External: 4    Internal: 0    Down peers: 0   Flaps: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 0          0          0          0          0          0
```

Verifying BGP Summary Information

Purpose Verify that the BGP configuration is correct.

Action From operational mode, run the **show bgp summary** command.

```
user@E> show bgp summary
Groups: 1 Peers: 4 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 0          0          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
10.10.10.2               22       8559       8470       0       0 2d 16:12:56
```


Copyright © 2013, Juniper Networks, Inc.

```
0/0/0/0                0/0/0/0
10.10.10.6               22       8566       8468       0       0 2d 16:12:12
0/0/0/0                0/0/0/0
10.10.10.10              22       8565       8466       0       0 2d 16:11:31
0/0/0/0                0/0/0/0
10.21.7.2                79       8560       8465       0       0 2d 16:10:58
0/0/0/0                0/0/0/0
```

Example: Configuring External BGP on Logical Systems with IPv6 Interfaces

This example shows how to configure external BGP (EBGP) point-to-point peer sessions on logical systems with IPv6 interfaces.

- Requirements on page 27
- Overview on page 27
- Configuration on page 28
- Verification on page 37

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

Junos OS supports EBGP peer sessions by means of IPv6 addresses. An IPv6 peer session can be configured when an IPv6 address is specified in the **neighbor** statement. This example uses EUI-64 to generate IPv6 addresses that are automatically applied to the interfaces. An EUI-64 address is an IPv6 address that uses the IEEE EUI-64 format for the interface identifier portion of the address (the last 64 bits).

NOTE: Alternatively, you can configure EBGP sessions using manually assigned 128-bit IPv6 addresses.

If you use 128-bit link-local addresses for the interfaces, you must include the **local-interface** statement. This statement is valid only for 128-bit IPv6 link-local addresses and is mandatory for configuring an IPv6 EBGP link-local peer session.

Configuring EBGP peering using link-local addresses is only applicable for directly connected interfaces. There is no support for multihop peering.

After your interfaces are up, you can use the **show interfaces terse** command to view the EUI-64-generated IPv6 addresses on the interfaces. You must use these generated addresses in the BGP **neighbor** statements. This example demonstrates the full end-to-end procedure.

In this example, Frame Relay interface encapsulation is applied to the logical tunnel (**lt**) interfaces. This is a requirement because only Frame Relay encapsulation is supported when IPv6 addresses are configured on the **lt** interfaces.

Copyright © 2013, Juniper Networks, Inc.

Figure 4 on page 28 shows a network with BGP peer sessions. In the sample network, Router R1 has five logical systems configured. Device E in autonomous system (AS) 17 has BGP peer sessions to a group of peers called **external-peers**. Peers A, B, and C reside in AS 22. This example shows the step-by-step configuration on Logical System A and Logical System E.

Figure 4: Typical Network with BGP Peer Sessions

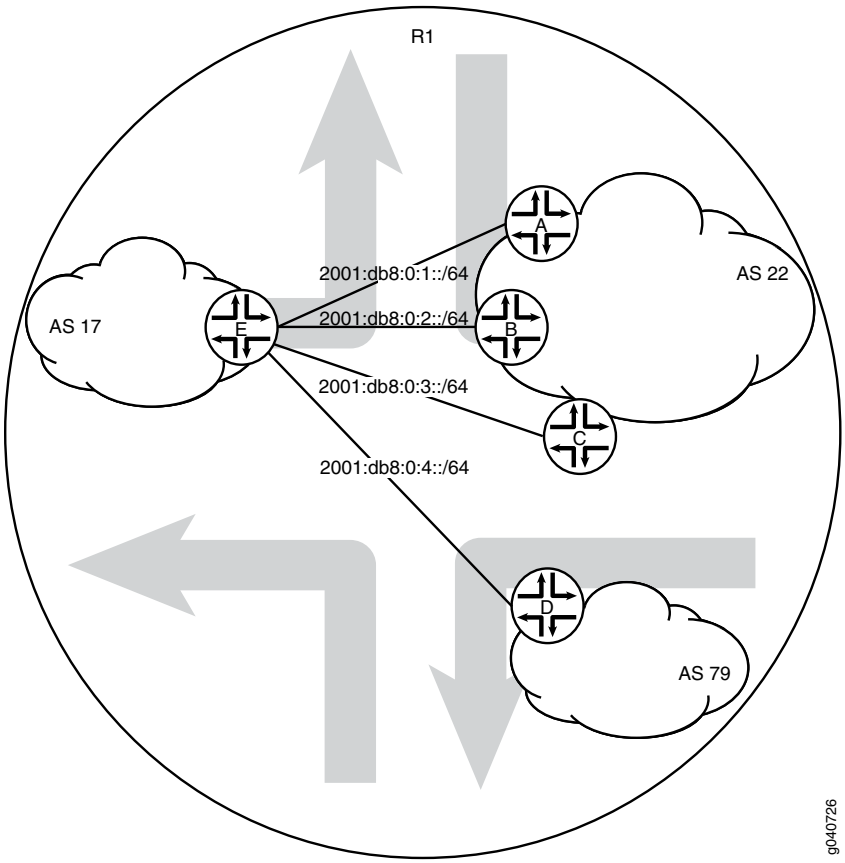

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set logical-systems A interfaces lt-0/1/0 unit 1 description to-E
set logical-systems A interfaces lt-0/1/0 unit 1 encapsulation frame-relay
set logical-systems A interfaces lt-0/1/0 unit 1 dlci 1
set logical-systems A interfaces lt-0/1/0 unit 1 peer-unit 25
set logical-systems A interfaces lt-0/1/0 unit 1 family inet6 address 2001:db8:0:1::/64
    eui-64
set logical-systems A interfaces lo0 unit 1 family inet6 address 2001:db8::1/128
set logical-systems A protocols bgp group external-peers type external
set logical-systems A protocols bgp group external-peers peer-as 17
```


Copyright © 2013, Juniper Networks, Inc.

```
set logical-systems A protocols bgp group external-peers neighbor
  2001:db8:0:1:2a0:a502:0:19da
set logical-systems A routing-options router-id 1.1.1.1
set logical-systems A routing-options autonomous-system 22
```

Device B

```
set logical-systems B interfaces lt-0/1/0 unit 6 description to-E
set logical-systems B interfaces lt-0/1/0 unit 6 encapsulation frame-relay
set logical-systems B interfaces lt-0/1/0 unit 6 dlci 6
set logical-systems B interfaces lt-0/1/0 unit 6 peer-unit 5
set logical-systems B interfaces lt-0/1/0 unit 6 family inet6 address 2001:db8:0:2::/64
  eui-64
set logical-systems B interfaces lo0 unit 2 family inet6 address 2001:db8::2/128
set logical-systems B protocols bgp group external-peers type external
set logical-systems B protocols bgp group external-peers peer-as 17
set logical-systems B protocols bgp group external-peers neighbor
  2001:db8:0:2:2a0:a502:0:5da
set logical-systems B routing-options router-id 2.2.2.2
set logical-systems B routing-options autonomous-system 22
```

Device C

```
set logical-systems C interfaces lt-0/1/0 unit 10 description to-E
set logical-systems C interfaces lt-0/1/0 unit 10 encapsulation frame-relay
set logical-systems C interfaces lt-0/1/0 unit 10 dlci 10
set logical-systems C interfaces lt-0/1/0 unit 10 peer-unit 9
set logical-systems C interfaces lt-0/1/0 unit 10 family inet6 address 2001:db8:0:3::/64
  eui-64
set logical-systems C interfaces lo0 unit 3 family inet6 address 2001:db8::3/128
set logical-systems C protocols bgp group external-peers type external
set logical-systems C protocols bgp group external-peers peer-as 17
set logical-systems C protocols bgp group external-peers neighbor
  2001:db8:0:3:2a0:a502:0:9da
set logical-systems C routing-options router-id 3.3.3.3
set logical-systems C routing-options autonomous-system 22
```

Device D

```
set logical-systems D interfaces lt-0/1/0 unit 7 description to-E
set logical-systems D interfaces lt-0/1/0 unit 7 encapsulation frame-relay
set logical-systems D interfaces lt-0/1/0 unit 7 dlci 7
set logical-systems D interfaces lt-0/1/0 unit 7 peer-unit 21
set logical-systems D interfaces lt-0/1/0 unit 7 family inet6 address 2001:db8:0:4::/64
  eui-64
set logical-systems D interfaces lo0 unit 4 family inet6 address 2001:db8::4/128
set logical-systems D protocols bgp group external-peers type external
set logical-systems D protocols bgp group external-peers peer-as 17
set logical-systems D protocols bgp group external-peers neighbor
  2001:db8:0:4:2a0:a502:0:15da
set logical-systems D routing-options router-id 4.4.4.4
set logical-systems D routing-options autonomous-system 79
```

Device E

```
set logical-systems E interfaces lt-0/1/0 unit 5 description to-B
set logical-systems E interfaces lt-0/1/0 unit 5 encapsulation frame-relay
set logical-systems E interfaces lt-0/1/0 unit 5 dlci 6
set logical-systems E interfaces lt-0/1/0 unit 5 peer-unit 6
set logical-systems E interfaces lt-0/1/0 unit 5 family inet6 address 2001:db8:0:2::/64
  eui-64
set logical-systems E interfaces lt-0/1/0 unit 9 description to-C
set logical-systems E interfaces lt-0/1/0 unit 9 encapsulation frame-relay
```

Copyright © 2013, Juniper Networks, Inc.

```
set logical-systems E interfaces lt-0/1/0 unit 9 dlci 10
set logical-systems E interfaces lt-0/1/0 unit 9 peer-unit 10
set logical-systems E interfaces lt-0/1/0 unit 9 family inet6 address 2001:db8:0:3::/64
  eui-64
set logical-systems E interfaces lt-0/1/0 unit 21 description to-D
set logical-systems E interfaces lt-0/1/0 unit 21 encapsulation frame-relay
set logical-systems E interfaces lt-0/1/0 unit 21 dlci 7
set logical-systems E interfaces lt-0/1/0 unit 21 peer-unit 7
set logical-systems E interfaces lt-0/1/0 unit 21 family inet6 address 2001:db8:0:4::/64
  eui-64
set logical-systems E interfaces lt-0/1/0 unit 25 description to-A
set logical-systems E interfaces lt-0/1/0 unit 25 encapsulation frame-relay
set logical-systems E interfaces lt-0/1/0 unit 25 dlci 1
set logical-systems E interfaces lt-0/1/0 unit 25 peer-unit 1
set logical-systems E interfaces lt-0/1/0 unit 25 family inet6 address 2001:db8:0:1::/64
  eui-64
set logical-systems E interfaces lo0 unit 5 family inet6 address 2001:db8::5/128
set logical-systems E protocols bgp group external-peers type external
set logical-systems E protocols bgp group external-peers peer-as 22
set logical-systems E protocols bgp group external-peers neighbor
  2001:db8:0:1:2a0:a502:0:1da
set logical-systems E protocols bgp group external-peers neighbor
  2001:db8:0:2:2a0:a502:0:6da
set logical-systems E protocols bgp group external-peers neighbor
  2001:db8:0:3:2a0:a502:0:ada
set logical-systems E protocols bgp group external-peers neighbor
  2001:db8:0:4:2a0:a502:0:7da peer-as 79
set logical-systems E routing-options router-id 5.5.5.5
set logical-systems E routing-options autonomous-system 17
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Run the **show interfaces terse** command to verify that the physical router has a logical tunnel (**lt**) interface.

   ```
   user@R1> show interfaces terse
   Interface               Admin Link Proto    Local                 Remote
   ...
   lt-0/1/0                up    up
   ...
   ```

2. On Logical System A, configure the interface encapsulation, peer-unit number, and DLCI to reach Logical System E.

   ```
   user@R1> set cli logical-system A
   Logical system: A
   [edit]
   user@R1:A> edit
   Entering configuration mode
   [edit]
   user@R1:A# edit interfaces
   [edit interfaces]
   user@R1:A# set lt-0/1/0 unit 1 encapsulation frame-relay
   ```


Copyright © 2013, Juniper Networks, Inc.

```
user@R1:A# set lt-0/1/0 unit 1 dlci 1
user@R1:A# set lt-0/1/0 unit 1 peer-unit 25
```

3. On Logical System A, configure the network address for the link to Peer E, and configure a loopback interface.

```
[edit interfaces]
user@R1:A# set lt-0/1/0 unit 1 description to-E
user@R1:A# set lt-0/1/0 unit 1 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1:A# set lo0 unit 1 family inet6 address 2001:db8::1/128
```

4. On Logical System E, configure the interface encapsulation, peer-unit number, and DLCI to reach Logical System A.

```
user@R1> set cli logical-system E
Logical system: E
[edit]
user@R1:E> edit
Entering configuration mode
[edit]
user@R1:E# edit interfaces
[edit interfaces]
user@R1:E# set lt-0/1/0 unit 25 encapsulation frame-relay
user@R1:E# set lt-0/1/0 unit 25 dlci 1
user@R1:E# set lt-0/1/0 unit 25 peer-unit 1
```

5. On Logical System E, configure the network address for the link to Peer A, and configure a loopback interface.

```
[edit interfaces]
user@R1:E# set lt-0/1/0 unit 25 description to-A
user@R1:E# set lt-0/1/0 unit 25 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1:E# set lo0 unit 5 family inet6 address 2001:db8::5/128
```

6. Run the **show interfaces terse** command to see the IPv6 addresses that are generated by EUI-64.

   The 2001 addresses are used in this example in the BGP **neighbor** statements.

NOTE: The fe80 addresses are link-local addresses and are not used in this example.

```
user@R1:A> show interfaces terse
Interface               Admin Link Proto    Local                 Remote
Logical system: A

betsy@tp8:A> show interfaces terse
Interface               Admin Link Proto    Local                 Remote
lt-0/1/0
lt-0/1/0.1              up    up   inet6    2001:db8:0:1:2a0:a502:0:1da/64
                                            fe80::2a0:a502:0:1da/64
lo0
lo0.1                   up    up   inet6    2001:db8::1
                                            fe80::2a0:a50f:fc56:1da

user@R1:E> show interfaces terse
```

Copyright © 2013, Juniper Networks, Inc.

```
Interface               Admin Link Proto    Local                 Remote
lt-0/1/0
lt-0/1/0.25             up    up   inet6    2001:db8:0:1:2a0:a502:0:19da/64

                                            fe80::2a0:a502:0:19da/64
lo0
lo0.5                   up    up   inet6    2001:db8::5
                                            fe80::2a0:a50f:fc56:1da
```

7. Repeat the interface configuration on the other logical systems.

Configuring the External BGP Sessions

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. On Logical System A, create the BGP group, and add the external neighbor address.

   ```
   [edit protocols bgp group external-peers]
   user@R1:A# set neighbor 2001:db8:0:1:2a0:a502:0:19da
   ```

2. On Logical System E, create the BGP group, and add the external neighbor address.

   ```
   [edit protocols bgp group external-peers]
   user@R1:E# set neighbor 2001:db8:0:1:2a0:a502:0:1da
   ```

3. On Logical System A, specify the autonomous system (AS) number of the external AS.

   ```
   [edit protocols bgp group external-peers]
   user@R1:A# set peer-as 17
   ```

4. On Logical System E, specify the autonomous system (AS) number of the external AS.

   ```
   [edit protocols bgp group external-peers]
   user@R1:E# set peer-as 22
   ```

5. On Logical System A, set the peer type to EBGP.

   ```
   [edit protocols bgp group external-peers]
   user@R1:A# set type external
   ```

6. On Logical System E, set the peer type to EBGP.

   ```
   [edit protocols bgp group external-peers]
   user@R1:E# set type external
   ```

7. On Logical System A, set the autonomous system (AS) number and router ID.

   ```
   [edit routing-options]
   user@R1:A# set router-id 1.1.1.1
   user@R1:A# set autonomous-system 22
   ```

8. On Logical System E, set the AS number and router ID.

   ```
   [edit routing-options]
   user@R1:E# set router-id 5.5.5.5
   ```


Copyright © 2013, Juniper Networks, Inc.

```
user@R1:E# set autonomous-system 17
```

9. Repeat these steps for Peers A, B, C, and D.

Results From configuration mode, confirm your configuration by entering the **show logical-systems** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R1# show logical-systems
A {
    interfaces {
        lt-0/1/0 {
            unit 1 {
                description to-E;
                encapsulation frame-relay;
                dlci 1;
                peer-unit 25;
                family inet6 {
                    address 2001:db8:0:1::/64 {
                        eui-64;
                    }
                }
            }
        }
        lo0 {
            unit 1 {
                family inet6 {
                    address 2001:db8::1/128;
                }
            }
        }
    }
    protocols {
        bgp {
            group external-peers {
                type external;
                peer-as 17;
                neighbor 2001:db8:0:1:2a0:a502:0:19da;
            }
        }
        routing-options {
            router-id 1.1.1.1;
            autonomous-system 22;
        }
    }
    B {
        interfaces {
            lt-0/1/0 {
                unit 6 {
                    description to-E;
                    encapsulation frame-relay;
                    dlci 6;
                    peer-unit 5;
                    family inet6 {
```

Copyright © 2013, Juniper Networks, Inc.

```
            address 2001:db8:0:2::/64 {
              eui-64;
            }
          }
        }
      }
      lo0 {
        unit 2 {
          family inet6 {
            address 2001:db8::2/128;
          }
        }
      }
    }
    protocols {
      bgp {
        group external-peers {
          type external;
          peer-as 17;
          neighbor 2001:db8:0:2:2a0:a502:0:5da;
        }
      }
      routing-options {
        router-id 2.2.2.2;
        autonomous-system 22;
      }
    }
    C {
      interfaces {
        lt-0/1/0 {
          unit 10 {
            description to-E;
            encapsulation frame-relay;
            dlci 10;
            peer-unit 9;
            family inet6 {
              address 2001:db8:0:3::/64 {
                eui-64;
              }
            }
          }
        }
        lo0 {
          unit 3 {
            family inet6 {
              address 2001:db8::3/128;
            }
          }
        }
      }
      protocols {
        bgp {
          group external-peers {
            type external;
            peer-as 17;
            neighbor 2001:db8:0:3:2a0:a502:0:9da;
```


Copyright © 2013, Juniper Networks, Inc.

```
        }
      }
    }
    routing-options {
      router-id 3.3.3.3;
      autonomous-system 22;
    }
  }
  D {
    interfaces {
      lt-0/1/0 {
        unit 7 {
          description to-E;
          encapsulation frame-relay;
          dlci 7;
          peer-unit 21;
          family inet6 {
            address 2001:db8:0:4::/64 {
              eui-64;
            }
          }
        }
      }
      lo0 {
        unit 4 {
          family inet6 {
            address 2001:db8::4/128;
          }
        }
      }
    }
    protocols {
      bgp {
        group external-peers {
          type external;
          peer-as 17;
          neighbor 2001:db8:0:4:2a0:a502:0:15da;
        }
      }
      routing-options {
        router-id 4.4.4.4;
        autonomous-system 79;
      }
    }
    E {
      interfaces {
        lt-0/1/0 {
          unit 5 {
            description to-B;
            encapsulation frame-relay;
            dlci 6;
            peer-unit 6;
            family inet6 {
              address 2001:db8:0:2::/64 {
                eui-64;
              }
```

```
        }
      }
      unit 9 {
        description to-C;
        encapsulation frame-relay;
        dlci 10;
        peer-unit 10;
        family inet6 {
          address 2001:db8:0:3::/64 {
            eui-64;
          }
        }
      }
      unit 21 {
        description to-D;
        encapsulation frame-relay;
        dlci 7;
        peer-unit 7;
        family inet6 {
          address 2001:db8:0:4::/64 {
            eui-64;
          }
        }
      }
      unit 25 {
        description to-A;
        encapsulation frame-relay;
        dlci 1;
        peer-unit 1;
        family inet6 {
          address 2001:db8:0:1::/64 {
            eui-64;
          }
        }
      }
    }
    lo0 {
      unit 5 {
        family inet6 {
          address 2001:db8::5/128;
        }
      }
    }
  }
  protocols {
    bgp {
      group external-peers {
        type external;
        peer-as 22;
        neighbor 2001:db8:0:1:2a0:a502:0:1da;
        neighbor 2001:db8:0:2:2a0:a502:0:6da;
        neighbor 2001:db8:0:3:2a0:a502:0:ada;
        neighbor 2001:db8:0:4:2a0:a502:0:7da {
          peer-as 79;
        }
      }
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  routing-options {
    router-id 5.5.5.5;
    autonomous-system 17;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying BGP Neighbors on page 37
- Verifying BGP Groups on page 40
- Verifying BGP Summary Information on page 40
- Checking the Routing Table on page 40

Verifying BGP Neighbors

Purpose Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

Action From operational mode, run the **show bgp neighbor** command.

```
user@R1:E> show bgp neighbor
Peer: 2001:db8:0:1:2a0:a502:0:1da+54987 AS 22 Local:
2001:db8:0:1:2a0:a502:0:19da+179 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: Open Message Error
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Error: 'Open Message Error' Sent: 20 Recv: 0
  Peer ID: 1.1.1.1         Local ID: 5.5.5.5          Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  Local Interface: lt-0/1/0.25
  NLRI for restart configured on peer: inet6-unicast
  NLRI advertised by peer: inet6-unicast
  NLRI for this session: inet6-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet6-unicast
  NLRI of received end-of-rib markers: inet6-unicast
  NLRI of all end-of-rib markers sent: inet6-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet6.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
```

Copyright © 2013, Juniper Networks, Inc.

```
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 7    Sent 18   Checked 81
  Input messages:  Total 1611   Updates 1       Refreshes 0     Octets 30660
  Output messages: Total 1594   Updates 0       Refreshes 0     Octets 30356
  Output Queue[0]: 0

Peer: 2001:db8:0:2:2a0:a502:0:6da+179 AS 22 Local:
2001:db8:0:2:2a0:a502:0:5da+55502 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: Open Message Error
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Error: 'Open Message Error' Sent: 26 Recv: 0
  Peer ID: 2.2.2.2         Local ID: 5.5.5.5           Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 2
  BFD: disabled, down
  Local Interface: lt-0/1/0.5
  NLRI for restart configured on peer: inet6-unicast
  NLRI advertised by peer: inet6-unicast
  NLRI for this session: inet6-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet6-unicast
  NLRI of received end-of-rib markers: inet6-unicast
  NLRI of all end-of-rib markers sent: inet6-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet6.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 15   Sent 8    Checked 8
  Input messages:  Total 1610   Updates 1       Refreshes 0     Octets 30601
  Output messages: Total 1645   Updates 0       Refreshes 0     Octets 32417
  Output Queue[0]: 0

Peer: 2001:db8:0:3:2a0:a502:0:ada+55983 AS 22 Local:
2001:db8:0:3:2a0:a502:0:9da+179 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 3.3.3.3         Local ID: 5.5.5.5           Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 3
  BFD: disabled, down
  Local Interface: lt-0/1/0.9
  NLRI for restart configured on peer: inet6-unicast
  NLRI advertised by peer: inet6-unicast
  NLRI for this session: inet6-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
```


Copyright © 2013, Juniper Networks, Inc.

```
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet6-unicast
  NLRI of received end-of-rib markers: inet6-unicast
  NLRI of all end-of-rib markers sent: inet6-unicast
  Peer supports 4 byte AS extension (peer-as 22)
  Peer does not support Addpath
  Table inet6.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 21   Sent 21   Checked 67
  Input messages:  Total 1610   Updates 1       Refreshes 0     Octets 30641
  Output messages: Total 1587   Updates 0       Refreshes 0     Octets 30223
  Output Queue[0]: 0

Peer: 2001:db8:0:4:2a0:a502:0:7da+49255 AS 79 Local:
2001:db8:0:4:2a0:a502:0:15da+179 AS 17
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 4.4.4.4         Local ID: 5.5.5.5           Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  Local Interface: lt-0/1/0.21
  NLRI for restart configured on peer: inet6-unicast
  NLRI advertised by peer: inet6-unicast
  NLRI for this session: inet6-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet6-unicast
  NLRI of received end-of-rib markers: inet6-unicast
  NLRI of all end-of-rib markers sent: inet6-unicast
  Peer supports 4 byte AS extension (peer-as 79)
  Peer does not support Addpath
  Table inet6.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 6    Sent 17   Checked 25
  Input messages:  Total 1615   Updates 1       Refreshes 0     Octets 30736
  Output messages: Total 1593   Updates 0       Refreshes 0     Octets 30337
  Output Queue[0]: 0
```

Meaning IPv6 unicast network layer reachability information (NLRI) is being exchanged between the neighbors.

Copyright © 2013, Juniper Networks, Inc.

Verifying BGP Groups

Purpose Verify that the BGP groups are configured correctly.

Action From operational mode, run the **show bgp group** command.

```
user@R1:E> show bgp group
Group Type: External                                Local AS: 17
  Name: external-peers  Index: 0                    Flags: <>
  Holdtime: 0
  Total peers: 4        Established: 4
  2001:db8:0:1:2a0:a502:0:1da+54987
  2001:db8:0:2:2a0:a502:0:6da+179
  2001:db8:0:3:2a0:a502:0:ada+55983
  2001:db8:0:4:2a0:a502:0:7da+49255
  inet6.0: 0/0/0/0

Groups: 1  Peers: 4    External: 4    Internal: 0    Down peers: 0   Flaps: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet6.0                0          0          0          0          0          0
inet6.2                0          0          0          0          0          0
```

Meaning The group type is external, and the group has four peers.

Verifying BGP Summary Information

Purpose Verify that the BGP that the peer relationships are established.

Action From operational mode, run the **show bgp summary** command.

```
user@R1:E> show bgp summary
Groups: 1 Peers: 4 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet6.0                0          0          0          0          0          0
inet6.2                0          0          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
2001:db8:0:1:2a0:a502:0:1da          22       1617       1600       0       0
 12:07:00 Establ
  inet6.0: 0/0/0/0
2001:db8:0:2:2a0:a502:0:6da          22       1616       1651       0       0
 12:06:56 Establ
  inet6.0: 0/0/0/0
2001:db8:0:3:2a0:a502:0:ada          22       1617       1594       0       0
 12:04:32 Establ
  inet6.0: 0/0/0/0
2001:db8:0:4:2a0:a502:0:7da          79       1621       1599       0       0
 12:07:00 Establ
  inet6.0: 0/0/0/0
```

Meaning The Down peers: 0 output shows that the BGP peers are in the established state.

Checking the Routing Table

Purpose Verify that the inet6.0 routing table is populated with local and direct routes.

Copyright © 2013, Juniper Networks, Inc.

Action From operational mode, run the **show route** command.

```
user@R1:E> show route
inet6.0: 15 destinations, 18 routes (15 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::5/128    *[Direct/0] 12:41:18
                    > via lo0.5
2001:db8:0:1::/64  *[Direct/0] 14:40:01
                    > via lt-0/1/0.25
2001:db8:0:1:2a0:a502:0:19da/128
                   *[Local/0] 14:40:01
                      Local via lt-0/1/0.25
2001:db8:0:2::/64  *[Direct/0] 14:40:02
                    > via lt-0/1/0.5
2001:db8:0:2:2a0:a502:0:5da/128
                   *[Local/0] 14:40:02
                      Local via lt-0/1/0.5
2001:db8:0:3::/64  *[Direct/0] 14:40:02
                    > via lt-0/1/0.9
2001:db8:0:3:2a0:a502:0:9da/128
                   *[Local/0] 14:40:02
                      Local via lt-0/1/0.9
2001:db8:0:4::/64  *[Direct/0] 14:40:01
                    > via lt-0/1/0.21
2001:db8:0:4:2a0:a502:0:15da/128
                   *[Local/0] 14:40:01
                      Local via lt-0/1/0.21
fe80::/64          *[Direct/0] 14:40:02
                    > via lt-0/1/0.5
                    [Direct/0] 14:40:02
                    > via lt-0/1/0.9
                    [Direct/0] 14:40:01
                    > via lt-0/1/0.21
                    [Direct/0] 14:40:01
                    > via lt-0/1/0.25
fe80::2a0:a502:0:5da/128
                   *[Local/0] 14:40:02
                      Local via lt-0/1/0.5
fe80::2a0:a502:0:9da/128
                   *[Local/0] 14:40:02
                      Local via lt-0/1/0.9
fe80::2a0:a502:0:15da/128
                   *[Local/0] 14:40:01
                      Local via lt-0/1/0.21
fe80::2a0:a502:0:19da/128
                   *[Local/0] 14:40:01
                      Local via lt-0/1/0.25
fe80::2a0:a50f:fc56:1da/128
                   *[Direct/0] 12:41:18
                    > via lo0.5
```

Meaning The inet6.0 routing table contains local and direct routes. To populate the routing table with other types of routes, you must configure routing policies.

Related Documentation

- Examples: Configuring Internal BGP Peering on page 42
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

Examples: Configuring Internal BGP Peering

- Understanding Internal BGP Peering Sessions on page 42
- Example: Configuring Internal BGP Peer Sessions on page 43
- Example: Configuring Internal BGP Peering Sessions on Logical Systems on page 54

Understanding Internal BGP Peering Sessions

When two BGP-enabled devices are in the same autonomous system (AS), the BGP session is called an *internal* BGP session, or IBGP session. BGP uses the same message types on IBGP and external BGP (EBGP) sessions, but the rules for when to send each message and how to interpret each message differ slightly. For this reason, some people refer to IBGP and EBGP as two separate protocols.

Figure 5: Internal and External BGP

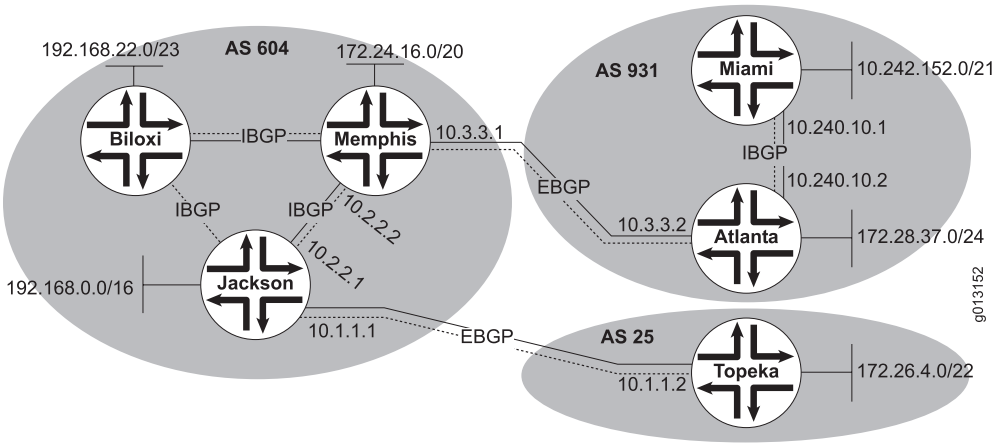

In Figure 5 on page 42, Device Jackson, Device Memphis, and Device Biloxi have IBGP peer sessions with each other. Likewise, Device Miami and Device Atlanta have IBGP peer sessions between each other.

The purpose of IBGP is to provide a means by which EBGP route advertisements can be forwarded throughout the network. In theory, to accomplish this task you could redistribute all of your EBGP routes into an interior gateway protocol (IGP), such as OSPF or IS-IS. This, however, is not recommended in a production environment because of the large number of EBGP routes in the Internet and because of the way that IGPs operate. In short, with that many routes the IGP churns or crashes.

Generally, the loopback interface (lo0) is used to establish connections between IBGP peers. The loopback interface is always up as long as the device is operating. If there is a route to the loopback address, the IBGP peering session stays up. If a physical interface address is used instead and that interface goes up and down, the IBGP peering session also goes up and down. Thus the loopback interface provides fault tolerance in case the physical interface or the link goes down, if the device has link redundancy.

While IBGP neighbors do not need to be directly connected, they do need to be fully meshed. In this case, fully meshed means that each device is logically connected to every

Copyright © 2013, Juniper Networks, Inc.

other device through neighbor peer relationships. The **neighbor** statement creates the mesh. Because of the full mesh requirement of IBGP, you must configure individual peering sessions between all IBGP devices in the AS. The full mesh need not be physical links. Rather, the configuration on each routing device must create a full mesh of peer sessions (using multiple **neighbor** statements).

NOTE: **The requirement for a full mesh is waived if you configure a confederation or route reflection.**

To understand the full-mesh requirement, consider that an IBGP-learned route cannot be readvertised to another IBGP peer. The reason for preventing the readvertisement of IBGP routes and requiring the full mesh is to avoid routing loops within an AS. The AS path attribute is the means by which BGP routing devices avoid loops. The path information is examined for the local AS number only when the route is received from an EBGP peer. Because the attribute is only modified across AS boundaries, this system works well. However, the fact that the attribute is only modified across AS boundaries presents an issue inside the AS. For example, suppose that routing devices A, B, and C are all in the same AS. Device A receives a route from an EBGP peer and sends the route to Device B, which installs it as the active route. The route is then sent to Device C, which installs it locally and sends it back to Device A. If Device A installs the route, a loop is formed within the AS. The routing devices are not able to detect the loop because the AS path attribute is not modified during these advertisements. Therefore, the BGP protocol designers decided that the only assurance of never forming a routing loop was to prevent an IBGP peer from advertising an IBGP-learned route within the AS. For route reachability, the IBGP peers are fully meshed.

IBGP supports multihop connections, so IBGP neighbors can be located anywhere within the AS and often do not share a link. A recursive route lookup resolves the loopback peering address to an IP forwarding next hop. The lookup service is provided by static routes or an IGP, such as OSPF.

Example: Configuring Internal BGP Peer Sessions

This example shows how to configure internal BGP peer sessions.

- Requirements on page 43
- Overview on page 43
- Configuration on page 45
- Verification on page 52

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

In this example, you configure internal BGP (IBGP) peer sessions. The loopback interface (lo0) is used to establish connections between IBGP peers. The loopback interface is

Copyright © 2013, Juniper Networks, Inc.

always up as long as the device is operating. If there is a route to the loopback address, the IBGP peer session stays up. If a physical interface address is used instead and that interface goes up and down, the IBGP peer session also goes up and down. Thus, if the device has link redundancy, the loopback interface provides fault tolerance in case the physical interface or one of the links goes down.

When a device peers with a remote device's loopback interface address, the local device expects BGP update messages to come from (be sourced by) the remote device's loopback interface address. The **local-address** statement enables you to specify the source information in BGP update messages. If you omit the **local-address** statement, the expected source of BGP update messages is based on the device's source address selection rules, which normally results in the egress interface address being the expected source of update messages. When this happens, the peer session is not established because a mismatch exists between the expected source address (the egress interface of the peer) and the actual source (the loopback interface of the peer). To make sure that the expected source address matches the actual source address, specify the loopback interface address in the **local-address** statement.

Because IBGP supports multihop connections, IBGP neighbors can be located anywhere within the autonomous system (AS) and often do not share a link. A recursive route lookup resolves the loopback peer address to an IP forwarding next hop. In this example, this service is provided by OSPF. Although interior gateway protocol (IGP) neighbors do not need to be directly connected, they do need to be fully meshed. In this case, fully meshed means that each device is logically connected to every other device through neighbor peer relationships. The **neighbor** statement creates the mesh.

NOTE: **The requirement for a full mesh is waived if you configure a confederation or route reflection.**

After the BGP peers are established, BGP routes are not automatically advertised by the BGP peers. At each BGP-enabled device, policy configuration is required to export the local, static, or IGP-learned routes into the BGP routing information base (RIB) and then advertise them as BGP routes to the other peers. BGP's advertisement policy, by default, does not advertise any non-BGP routes (such as local routes) to peers.

In the sample network, the devices in AS 17 are fully meshed in the group **internal-peers**. The devices have loopback addresses 192.168.6.5, 192.163.6.4, and 192.168.40.4.

Figure 6 on page 45 shows a typical network with internal peer sessions.

Copyright © 2013, Juniper Networks, Inc.

Figure 6: Typical Network with IBGP Sessions

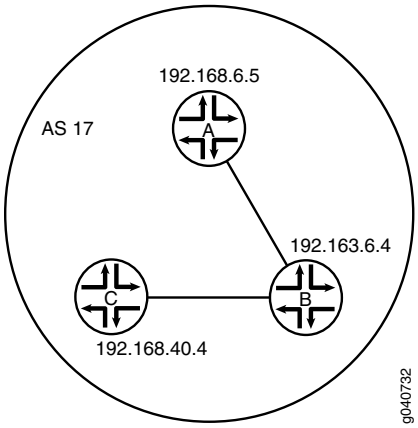

Configuration

- Configuring Device A on page 46
- Configuring Device B on page 48
- Configuring Device C on page 50

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set interfaces ge-0/1/0 unit 1 description to-B
set interfaces ge-0/1/0 unit 1 family inet address 10.10.10.1/30
set interfaces lo0 unit 1 family inet address 192.168.6.5/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers description “connections to B and C”
set protocols bgp group internal-peers local-address 192.168.6.5
set protocols bgp group internal-peers export send-direct
set protocols bgp group internal-peers neighbor 192.163.6.4
set protocols bgp group internal-peers neighbor 192.168.40.4
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface ge-0/1/0.1
set policy-options policy-statement send-direct term 2 from protocol direct
set policy-options policy-statement send-direct term 2 then accept
set routing-options router-id 192.168.6.5
set routing-options autonomous-system 17
```

Device B

```
set interfaces ge-0/1/0 unit 2 description to-A
set interfaces ge-0/1/0 unit 2 family inet address 10.10.10.2/30
set interfaces ge-0/1/1 unit 5 description to-C
set interfaces ge-0/1/1 unit 5 family inet address 10.10.10.5/30
set interfaces lo0 unit 2 family inet address 192.163.6.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers description “connections to A and C”
set protocols bgp group internal-peers local-address 192.163.6.4
set protocols bgp group internal-peers export send-direct
set protocols bgp group internal-peers neighbor 192.168.40.4
set protocols bgp group internal-peers neighbor 192.168.6.5
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface ge-0/1/0.2
set protocols ospf area 0.0.0.0 interface ge-0/1/1.5
set policy-options policy-statement send-direct term 2 from protocol direct
set policy-options policy-statement send-direct term 2 then accept
set routing-options router-id 192.163.6.4
set routing-options autonomous-system 17
```

Device C

```
set interfaces ge-0/1/0 unit 6 description to-B
set interfaces ge-0/1/0 unit 6 family inet address 10.10.10.6/30
set interfaces lo0 unit 3 family inet address 192.168.40.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers description “connections to A and B”
set protocols bgp group internal-peers local-address 192.168.40.4
set protocols bgp group internal-peers export send-direct
set protocols bgp group internal-peers neighbor 192.163.6.4
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface ge-0/1/0.6
set policy-options policy-statement send-direct term 2 from protocol direct
set policy-options policy-statement send-direct term 2 then accept
set routing-options router-id 192.168.40.4
set routing-options autonomous-system 17
```

Configuring Device A

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure internal BGP peer sessions on Device A:

1. Configure the interfaces.

```
[edit interfaces ge-0/1/0 unit 1]
user@A# set description to-B
user@A# set family inet address 10.10.10.1/30

[edit interfaces]
user@A# set lo0 unit 1 family inet address 192.168.6.5/32
```

2. Configure BGP.

   The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]
user@A# set type internal
user@A# set description “connections to B and C”
user@A# set local-address 192.168.6.5
user@A# set export send-direct
user@A# set neighbor 192.163.6.4
user@A# set neighbor 192.168.40.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
```


Copyright © 2013, Juniper Networks, Inc.

```
user@A# set interface lo0.1 passive
user@A# set interface ge-0/1/0.1
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 2]
user@A# set from protocol direct
user@A# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@A# set router-id 192.168.6.5
user@A# set autonomous-system 17
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@A# show interfaces
ge-0/1/0 {
  unit 1 {
    description to-B;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.6.5/32;
    }
  }
}
```

```
user@A# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}
```

```
user@A# show protocols
bgp {
  group internal-peers {
    type internal;
    description “connections to B and C”;
    local-address 192.168.6.5;
    export send-direct;
    neighbor 192.163.6.4;
    neighbor 192.168.40.4;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  ospf {
    area 0.0.0.0 {
      interface lo0.1 {
        passive;
      }
      interface ge-0/1/0.1;
    }
  }
```

```
user@A# show routing-options
router-id 192.168.6.5;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device B

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode.

To configure internal BGP peer sessions on Device B:

1. Configure the interfaces.

```
[edit interfaces ge-0/1/0 unit 2]
user@B# set description to-A
user@B# set family inet address 10.10.10.2/30

[edit interfaces ge-0/1/1]
user@B# set unit 5 description to-C
user@B# set unit 5 family inet address 10.10.10.5/30

[edit interfaces]
user@B# set lo0 unit 2 family inet address 192.163.6.4/32
```

2. Configure BGP.

   The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]
user@B# set type internal
user@B# set description "connections to A and C"
user@B# set local-address 192.163.6.4
user@B# set export send-direct
user@B# set neighbor 192.168.40.4
user@B# set neighbor 192.168.6.5
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@B# set interface lo0.2 passive
user@B# set interface ge-0/1/0.2
user@B# set interface ge-0/1/1.5
```


Copyright © 2013, Juniper Networks, Inc.

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

   ```
   [edit policy-options policy-statement send-direct term 2]
   user@B# set from protocol direct
   user@B# set then accept
   ```

5. Configure the router ID and the AS number.

   ```
   [edit routing-options]
   user@B# set router-id 192.163.6.4
   user@B# set autonomous-system 17
   ```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
ge-0/1/0 {
  unit 2 {
    description to-A;
    family inet {
      address 10.10.10.2/30;
    }
  }
}
ge-0/1/1 {
  unit 5 {
    description to-C;
    family inet {
      address 10.10.10.5/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.163.6.4/32;
    }
  }
}
```

```
user@B# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}
```

```
user@B# show protocols
bgp {
  group internal-peers {
    type internal;
```

Copyright © 2013, Juniper Networks, Inc.

```
        description “connections to A and C”;
        local-address 192.163.6.4;
        export send-direct;
        neighbor 192.168.40.4;
        neighbor 192.168.6.5;
      }
    }
    ospf {
      area 0.0.0.0 {
        interface lo0.2 {
          passive;
        }
        interface ge-0/1/0.2;
        interface ge-0/1/1.5;
      }
    }

    user@B# show routing-options
    router-id 192.163.6.4;
    autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device C

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure internal BGP peer sessions on Device C:

1. Configure the interfaces.

   ```
   [edit interfaces ge-0/1/0 unit 6]
   user@C# set description to-B
   user@C# set family inet address 10.10.10.6/30


   [edit interfaces]
   user@C# set lo0 unit 3 family inet address 192.168.40.4/32
   ```

2. Configure BGP.

   The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

   ```
   [edit protocols bgp group internal-peers]
   user@C# set type internal
   user@C# set description “connections to A and B”
   user@C# set local-address 192.168.40.4
   user@C# set export send-direct
   user@C# set neighbor 192.163.6.4
   user@C# set neighbor 192.168.6.5
   ```

3. Configure OSPF.

   ```
   [edit protocols ospf area 0.0.0.0]
   user@C# set interface lo0.3 passive
   user@C# set interface ge-0/1/0.6
   ```


Copyright © 2013, Juniper Networks, Inc.

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

   ```
   [edit policy-options policy-statement send-direct term 2]
   user@C# set from protocol direct
   user@C# set then accept
   ```

5. Configure the router ID and the AS number.

   ```
   [edit routing-options]
   user@C# set router-id 192.168.40.4
   user@C# set autonomous-system 17
   ```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@C# show interfaces
ge-0/1/0 {
  unit 6 {
    description to-B;
    family inet {
      address 10.10.10.6/30;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 192.168.40.4/32;
    }
  }
}
```

```
user@C# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}
```

```
user@C# show protocols
bgp {
  group internal-peers {
    type internal;
    description “connections to A and B”;
    local-address 192.168.40.4;
    export send-direct;
    neighbor 192.163.6.4;
    neighbor 192.168.6.5;
  }
}
ospf {
```

Copyright © 2013, Juniper Networks, Inc.

```
    area 0.0.0.0 {
      interface lo0.3 {
        passive;
      }
      interface ge-0/1/0.6;
    }
  }
```

```
user@C# show routing-options
router-id 192.168.40.4;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying BGP Neighbors on page 52
- Verifying BGP Groups on page 53
- Verifying BGP Summary Information on page 54
- Verifying That BGP Routes Are Installed in the Routing Table on page 54

Verifying BGP Neighbors

Purpose Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

Action From operational mode, enter the **show bgp neighbor** command.

```
user@A> show bgp neighbor
Peer: 192.163.6.4+179 AS 17    Local: 192.168.6.5+58852 AS 17
  Type: Internal    State: Established    Flags: Sync
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct ]
  Options: Preference LocalAddress Refresh
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.163.6.4     Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
```


Copyright © 2013, Juniper Networks, Inc.

```
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            3
    Accepted prefixes:            3
    Suppressed due to damping:    0
    Advertised prefixes:          2
  Last traffic (seconds): Received 25   Sent 19   Checked 67
  Input messages:  Total 2420   Updates 4       Refreshes 0     Octets 46055
  Output messages: Total 2411   Updates 2       Refreshes 0     Octets 45921
  Output Queue[0]: 0

Peer: 192.168.40.4+179 AS 17   Local: 192.168.6.5+56466 AS 17
  Type: Internal    State: Established    Flags: Sync
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct ]
  Options: Preference LocalAddress Refresh
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.40.4    Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            2
    Accepted prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          2
  Last traffic (seconds): Received 7    Sent 21   Checked 24
  Input messages:  Total 2412   Updates 2       Refreshes 0     Octets 45867
  Output messages: Total 2409   Updates 2       Refreshes 0     Octets 45883
  Output Queue[0]: 0
```

Verifying BGP Groups

Purpose Verify that the BGP groups are configured correctly.

Action From operational mode, enter the **show bgp group** command.

```
user@A> show bgp group
Group Type: Internal    AS: 17                     Local AS: 17
  Name: internal-peers  Index: 0                   Flags: <Export Eval>
  Export: [ send-direct ]
  Holdtime: 0
  Total peers: 2        Established: 2
  192.163.6.4+179
```

```
  192.168.40.4+179
  inet.0: 0/5/5/0

Groups: 1  Peers: 2    External: 0    Internal: 2    Down peers: 0   Flaps: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 5          0          0          0          0          0
```

Verifying BGP Summary Information

Purpose Verify that the BGP configuration is correct.

Action From operational mode, enter the **show bgp summary** command.

```
user@A> show bgp summary
Groups: 1 Peers: 2 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 5          0          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.163.6.4              17       2441       2432       0       0    18:18:52
0/3/3/0             0/0/0/0
192.168.40.4             17       2432       2430       0       0    18:18:48
0/2/2/0             0/0/0/0
```

Verifying That BGP Routes Are Installed in the Routing Table

Purpose Verify that the export policy configuration is causing the BGP routes to be installed in the routing tables of the peers.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@A> show route protocol bgp
inet.0: 7 destinations, 12 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30       [BGP/170] 07:09:57, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via ge-0/1/0.1
10.10.10.4/30       [BGP/170] 07:09:57, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via ge-0/1/0.1
                    [BGP/170] 07:07:12, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via ge-0/1/0.1
192.163.6.4/32      [BGP/170] 07:09:57, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via ge-0/1/0.1
192.168.40.4/32     [BGP/170] 07:07:12, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via ge-0/1/0.1
```

Example: Configuring Internal BGP Peering Sessions on Logical Systems

This example shows how to configure internal BGP peer sessions on logical systems.

- Requirements on page 55
- Overview on page 55

 Copyright © 2013, Juniper Networks, Inc.

- Configuration on page 55
- Verification on page 62

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

In this example, you configure internal BGP (IBGP) peering sessions.

In the sample network, the devices in AS 17 are fully meshed in the group **internal-peers**. The devices have loopback addresses 192.168.6.5, 192.163.6.4, and 192.168.40.4.

Figure 7 on page 55 shows a typical network with internal peer sessions.

Figure 7: Typical Network with IBGP Sessions

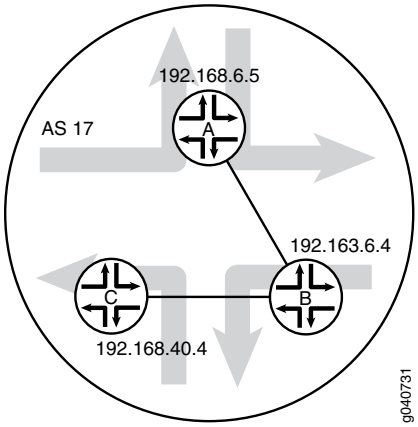

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set logical-systems A interfaces lt-0/1/0 unit 1 description to-B
set logical-systems A interfaces lt-0/1/0 unit 1 encapsulation ethernet
set logical-systems A interfaces lt-0/1/0 unit 1 peer-unit 2
set logical-systems A interfaces lt-0/1/0 unit 1 family inet address 10.10.10.1/30
set logical-systems A interfaces lo0 unit 1 family inet address 192.168.6.5/32
set logical-systems A protocols bgp group internal-peers type internal
set logical-systems A protocols bgp group internal-peers local-address 192.168.6.5
set logical-systems A protocols bgp group internal-peers export send-direct
set logical-systems A protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems A protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems A protocols ospf area 0.0.0.0 interface lo0.1 passive
set logical-systems A protocols ospf area 0.0.0.0 interface lt-0/1/0.1
set logical-systems A policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems A policy-options policy-statement send-direct term 2 then accept
```

Copyright © 2013, Juniper Networks, Inc.

```
set logical-systems A routing-options router-id 192.168.6.5
set logical-systems A routing-options autonomous-system 17
set logical-systems B interfaces lt-0/1/0 unit 2 description to-A
set logical-systems B interfaces lt-0/1/0 unit 2 encapsulation ethernet
set logical-systems B interfaces lt-0/1/0 unit 2 peer-unit 1
set logical-systems B interfaces lt-0/1/0 unit 2 family inet address 10.10.10.2/30
set logical-systems B interfaces lt-0/1/0 unit 5 description to-C
set logical-systems B interfaces lt-0/1/0 unit 5 encapsulation ethernet
set logical-systems B interfaces lt-0/1/0 unit 5 peer-unit 6
set logical-systems B interfaces lt-0/1/0 unit 5 family inet address 10.10.10.5/30
set logical-systems B interfaces lo0 unit 2 family inet address 192.163.6.4/32
set logical-systems B protocols bgp group internal-peers type internal
set logical-systems B protocols bgp group internal-peers local-address 192.163.6.4
set logical-systems B protocols bgp group internal-peers export send-direct
set logical-systems B protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems B protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems B protocols ospf area 0.0.0.0 interface lo0.2 passive
set logical-systems B protocols ospf area 0.0.0.0 interface lt-0/1/0.2
set logical-systems B protocols ospf area 0.0.0.0 interface lt-0/1/0.5
set logical-systems B policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems B policy-options policy-statement send-direct term 2 then accept
set logical-systems B routing-options router-id 192.163.6.4
set logical-systems B routing-options autonomous-system 17
set logical-systems C interfaces lt-0/1/0 unit 6 description to-B
set logical-systems C interfaces lt-0/1/0 unit 6 encapsulation ethernet
set logical-systems C interfaces lt-0/1/0 unit 6 peer-unit 5
set logical-systems C interfaces lt-0/1/0 unit 6 family inet address 10.10.10.6/30
set logical-systems C interfaces lo0 unit 3 family inet address 192.168.40.4/32
set logical-systems C protocols bgp group internal-peers type internal
set logical-systems C protocols bgp group internal-peers local-address 192.168.40.4
set logical-systems C protocols bgp group internal-peers export send-direct
set logical-systems C protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems C protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems C protocols ospf area 0.0.0.0 interface lo0.3 passive
set logical-systems C protocols ospf area 0.0.0.0 interface lt-0/1/0.6
set logical-systems C policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems C policy-options policy-statement send-direct term 2 then accept
set logical-systems C routing-options router-id 192.168.40.4
set logical-systems C routing-options autonomous-system 17
```

Device A

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure internal BGP peer sessions on Device A:

1. Configure the interfaces.

```
[edit logical-systems A interfaces lt-0/1/0 unit 1]
user@R1# set description to-B
user@R1# set encapsulation ethernet
user@R1# set peer-unit 2
```


Copyright © 2013, Juniper Networks, Inc.

```
user@R1# set family inet address 10.10.10.1/30
user@R1# set family inet address 192.168.6.5/32
user@R1# up
user@R1# up
[edit logical-systems A interfaces]
user@R1# set lo0 unit 1 family inet address 192.168.6.5/32
user@R1# exit
[edit]
user@R1# edit logical-systems B interfaces lt-0/1/0
[edit logical-systems B interfaces lt-0/1/0]
user@R1# set unit 2 description to-A
user@R1# set unit 2 encapsulation ethernet
user@R1# set unit 2 peer-unit 1
user@R1# set unit 2 family inet address 10.10.10.2/30
user@R1# set unit 5 description to-C
user@R1# set unit 5 encapsulation ethernet
user@R1# set unit 5 peer-unit 6
user@R1# set family inet address 10.10.10.5/30
user@R1# up
[edit logical-systems B interfaces]
user@R1# set lo0 unit 2 family inet address 192.163.6.4/32
user@R1# exit
[edit]
user@R1# edit logical-systems C interfaces lt-0/1/0 unit 6
[edit logical-systems C interfaces lt-0/1/0 unit 6]
set description to-B
set encapsulation ethernet
set peer-unit 5
set family inet address 10.10.10.6/30
user@R1# up
user@R1# up
[edit logical-systems C interfaces]
set lo0 unit 3 family inet address 192.168.40.4/32
```

2. Configure BGP.

   On Logical System A, the **neighbor** statements are included for both Device B and Device C, even though Logical System A is not directly connected to Device C.

```
[edit logical-systems A protocols bgp group internal-peers]
user@R1# set type internal
user@R1# set local-address 192.168.6.5
user@R1# set export send-direct
user@R1# set neighbor 192.163.6.4
user@R1# set neighbor 192.168.40.4

[edit logical-systems B protocols bgp group internal-peers]
user@R1# set type internal
user@R1# set local-address 192.163.6.4
user@R1# set export send-direct
user@R1# set neighbor 192.168.40.4
user@R1# set neighbor 192.168.6.5

[edit logical-systems C protocols bgp group internal-peers]
user@R1# set type internal
user@R1# set local-address 192.168.40.4
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R1# set export send-direct
user@R1# set neighbor 192.163.6.4
user@R1# set neighbor 192.168.6.5
```

3. Configure OSPF.

```
[edit logical-systems A protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface lt-0/1/0.1

[edit logical-systems A protocols ospf area 0.0.0.0]
user@R1# set interface lo0.2 passive
user@R1# set interface lt-0/1/0.2
user@R1# set interface lt-0/1/0.5

[edit logical-systems A protocols ospf area 0.0.0.0]
user@R1# set interface lo0.3 passive
user@R1# set interface lt-0/1/0.6
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit logical-systems A policy-options policy-statement send-direct term 2]
user@R1# set from protocol direct
user@R1# set then accept

[edit logical-systems B policy-options policy-statement send-direct term 2]
user@R1# set from protocol direct
user@R1# set then accept

[edit logical-systems C policy-options policy-statement send-direct term 2]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and the autonomous system (AS) number.

```
[edit logical-systems A routing-options]
user@R1# set router-id 192.168.6.5
user@R1# set autonomous-system 17

[edit logical-systems B routing-options]
user@R1# set router-id 192.163.6.4
user@R1# set autonomous-system 17

[edit logical-systems C routing-options]
user@R1# set router-id 192.168.40.4
user@R1# set autonomous-system 17
```

Results From configuration mode, confirm your configuration by entering the **show logical-systems** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show logical-systems
```


Copyright © 2013, Juniper Networks, Inc.

```
A {
    interfaces {
        lt-0/1/0 {
            unit 1 {
                description to-B;
                encapsulation ethernet;
                peer-unit 2;
                family inet {
                    address 10.10.10.1/30;
                }
            }
        }
        lo0 {
            unit 1 {
                family inet {
                    address 192.168.6.5/32;
                }
            }
        }
    }
    protocols {
        bgp {
            group internal-peers {
                type internal;
                local-address 192.168.6.5;
                export send-direct;
                neighbor 192.163.6.4;
                neighbor 192.168.40.4;
            }
        }
        ospf {
            area 0.0.0.0 {
                interface lo0.1 {
                    passive;
                }
                interface lt-0/1/0.1;
            }
        }
    }
    policy-options {
        policy-statement send-direct {
            term 2 {
                from protocol direct;
                then accept;
            }
        }
    }
    routing-options {
        router-id 192.168.6.5;
        autonomous-system 17;
    }
}
B {
    interfaces {
        lt-0/1/0 {
            unit 2 {
```

Copyright © 2013, Juniper Networks, Inc.

```
        description to-A;
        encapsulation ethernet;
        peer-unit 1;
        family inet {
          address 10.10.10.2/30;
        }
      }
      unit 5 {
        description to-C;
        encapsulation ethernet;
        peer-unit 6;
        family inet {
          address 10.10.10.5/30;
        }
      }
    }
    lo0 {
      unit 2 {
        family inet {
          address 192.163.6.4/32;
        }
      }
    }
}
protocols {
    bgp {
      group internal-peers {
        type internal;
        local-address 192.163.6.4;
        export send-direct;
        neighbor 192.168.40.4;
        neighbor 192.168.6.5;
      }
    }
    ospf {
      area 0.0.0.0 {
        interface lo0.2 {
          passive;
        }
        interface lt-0/1/0.2;
        interface lt-0/1/0.5;
      }
    }
}
policy-options {
    policy-statement send-direct {
      term 2 {
        from protocol direct;
        then accept;
      }
    }
}
routing-options {
    router-id 192.163.6.4;
    autonomous-system 17;
}
```


Copyright © 2013, Juniper Networks, Inc.

```
}
C {
    interfaces {
        lt-0/1/0 {
            unit 6 {
                description to-B;
                encapsulation ethernet;
                peer-unit 5;
                family inet {
                    address 10.10.10.6/30;
                }
            }
        }
        lo0 {
            unit 3 {
                family inet {
                    address 192.168.40.4/32;
                }
            }
        }
    }
    protocols {
        bgp {
            group internal-peers {
                type internal;
                local-address 192.168.40.4;
                export send-direct;
                neighbor 192.163.6.4;
                neighbor 192.168.6.5;
            }
        }
        ospf {
            area 0.0.0.0 {
                interface lo0.3 {
                    passive;
                }
                interface lt-0/1/0.6;
            }
        }
    }
    policy-options {
        policy-statement send-direct {
            term 2 {
                from protocol direct;
                then accept;
            }
        }
    }
    routing-options {
        router-id 192.168.40.4;
        autonomous-system 17;
    }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Verification

Confirm that the configuration is working properly.

- Verifying BGP Neighbors on page 62
- Verifying BGP Groups on page 63
- Verifying BGP Summary Information on page 63
- Verifying That BGP Routes Are Installed in the Routing Table on page 64

Verifying BGP Neighbors

Purpose Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

Action From the operational mode, enter the **show bgp neighbor** command.

```
user@R1> show bgp neighbor logical-system A
Peer: 192.163.6.4+179 AS 17    Local: 192.168.6.5+58852 AS 17
  Type: Internal    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct ]
  Options: <Preference LocalAddress Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.163.6.4     Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            3
    Accepted prefixes:            3
    Suppressed due to damping:    0
    Advertised prefixes:          2
  Last traffic (seconds): Received 16   Sent 1    Checked 63
  Input messages:  Total 15713  Updates 4       Refreshes 0     Octets 298622
  Output messages: Total 15690  Updates 2       Refreshes 0     Octets 298222
  Output Queue[0]: 0

Peer: 192.168.40.4+179 AS 17   Local: 192.168.6.5+56466 AS 17
  Type: Internal    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
```


Copyright © 2013, Juniper Networks, Inc.

```
  Export: [ send-direct ]
  Options: <Preference LocalAddress Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.40.4    Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            2
    Accepted prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          2
  Last traffic (seconds): Received 15   Sent 22   Checked 68
  Input messages:  Total 15688  Updates 2       Refreshes 0     Octets 298111
  Output messages: Total 15688  Updates 2       Refreshes 0     Octets 298184
  Output Queue[0]: 0
```

Verifying BGP Groups

Purpose Verify that the BGP groups are configured correctly.

Action From the operational mode, enter the **show bgp group** command.

```
user@A> show bgp group logical-system A
Group Type: Internal    AS: 17                     Local AS: 17
  Name: internal-peers  Index: 0                   Flags: <Export Eval>
  Export: [ send-direct ]
  Holdtime: 0
  Total peers: 2        Established: 2
  192.163.6.4+179
  192.168.40.4+179
  inet.0: 0/5/5/0

Groups: 1  Peers: 2    External: 0    Internal: 2    Down peers: 0   Flaps: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 5          0          0          0          0          0
```

Verifying BGP Summary Information

Purpose Verify that the BGP configuration is correct.

Action From the operational mode, enter the **show bgp summary** command.

```
user@A> show bgp summary logical-system A
```

```
Groups: 1 Peers: 2 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 5          0          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.163.6.4              17      15723      15700       0       0 4d 22:13:15
0/3/3/0             0/0/0/0
192.168.40.4             17      15698      15699       0       0 4d 22:13:11
0/2/2/0             0/0/0/0
```

Verifying That BGP Routes Are Installed in the Routing Table

Purpose Verify that the export policy configuration is working.

Action From the operational mode, enter the **show route protocol bgp** command.

```
user@A> show route protocol bgp logical-system A
inet.0: 7 destinations, 12 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30       [BGP/170] 4d 11:05:55, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via lt-0/1/0.1
10.10.10.4/30       [BGP/170] 4d 11:05:55, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via lt-0/1/0.1
                    [BGP/170] 4d 11:03:10, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via lt-0/1/0.1
192.163.6.4/32      [BGP/170] 4d 11:05:55, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via lt-0/1/0.1
192.168.40.4/32     [BGP/170] 4d 11:03:10, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via lt-0/1/0.1
```

Related Documentation

- Examples: Configuring External BGP Peering on page 19

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 4

BGP Path Attribute Configuration

- Example: Configuring BGP Local Preference on page 65
- Examples: Configuring BGP MED on page 78
- Examples: Configuring BGP Local AS on page 116
- Example: Configuring the Accumulated IGP Attribute for BGP on page 136
- Example: Configuring AS Override on page 175

Example: Configuring BGP Local Preference

- Understanding the BGP Local Preference on page 65
- Example: Configuring the Local Preference Value for BGP Routes on page 66

Understanding the BGP Local Preference

Internal BGP (IBGP) sessions use a metric called the *local preference*, which is carried in IBGP update packets in the path attribute LOCAL_PREF. When an autonomous system (AS) has multiple routes to another AS, the local preference indicates the degree of preference for one route over the other routes. The route with the highest local preference value is preferred.

The LOCAL_PREF path attribute is always advertised to IBGP peers and to neighboring confederations. It is never advertised to external BGP (EBGP) peers. The default behavior is to not modify the LOCAL_PREF path attribute if it is present.

The LOCAL_PREF path attribute applies at export time only, when the routes are exported from the routing table into BGP.

If a BGP route is received without a LOCAL_PREF attribute, the route is stored in the routing table and advertised by BGP as if it were received with a LOCAL_PREF value of 100. A non-BGP route that is advertised by BGP is advertised with a LOCAL_PREF value of 100 by default.

Copyright © 2013, Juniper Networks, Inc.

Example: Configuring the Local Preference Value for BGP Routes

This example shows how to configure local preference in internal BGP (IBGP) peer sessions.

- Requirements on page 66
- Overview on page 66
- Configuration on page 67
- Verification on page 76

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

To change the local preference metric advertised in the path attribute, you must include the **local-preference** statement, specifying a value from 0 through 4,294,967,295 ($2^{32}-1$).

There are several reasons you might want to prefer one path over another. For example, compared to other paths, one path might be less expensive to use, might have higher bandwidth, or might be more stable.

Figure 8 on page 66 shows a typical network with internal peer sessions and multiple exit points to a neighboring AS.

Figure 8: Typical Network with IBGP Sessions and Multiple Exit Points

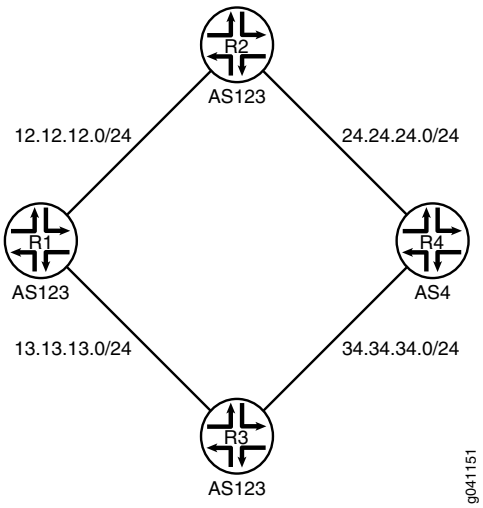

To reach Device R4, Device R1 can take a path through either Device R2 or Device R3. By default, the local preference is 100 for either route. When the local preferences are equal, Junos OS has rules for breaking the tie and choosing a path. (See "Understanding BGP Path Selection" on page 8.) In this example, the active route is through Device R2 because the router ID of Device R2 is lower than the router ID of Device R3. The following example shows how to override the default behavior with an explicit setting for the local preference.

Copyright © 2013, Juniper Networks, Inc.

The example configures a local preference of 300 on Device R3, thereby making Device R3 the preferred path to reach Device R4.

Configuration

- Configuring Device R1 on page 68
- Configuring Device R2 on page 70
- Configuring Device R3 on page 72
- Configuring Device R4 on page 75

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 12.12.12.1/24
set interfaces fe-1/2/1 unit 2 family inet address 13.13.13.1/24
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.1.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.1.1
```

Device R2

```
set interfaces fe-1/2/0 unit 3 family inet address 12.12.12.2/24
set interfaces fe-1/2/1 unit 4 family inet address 24.24.24.2/24
set interfaces lo0 unit 2 family inet address 192.168.2.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.2.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 24.24.24.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.2.1
```

Device R3

```
set interfaces fe-1/2/0 unit 5 family inet address 13.13.13.3/24
set interfaces fe-1/2/1 unit 6 family inet address 34.34.34.3/24
set interfaces lo0 unit 3 family inet address 192.168.3.1/32
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.3.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 34.34.34.4
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.5
set protocols ospf area 0.0.0.0 interface fe-1/2/1.6
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.3.1
```

Device R4

```
set interfaces fe-1/2/0 unit 7 family inet address 24.24.24.4/24
set interfaces fe-1/2/1 unit 8 family inet address 34.34.34.4/24
set interfaces lo0 unit 4 family inet address 192.168.4.1/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 123
set protocols bgp group external neighbor 34.34.34.3
set protocols bgp group external neighbor 24.24.24.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 4
set routing-options router-id 192.168.4.1
```

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 1]
user@R1# set family inet address 12.12.12.1/24

[edit interfaces fe-1/2/1 unit 2]
user@R1# set family inet address 13.13.13.1/24

[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.1.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.1.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.2.1
```


Copyright © 2013, Juniper Networks, Inc.

```
user@R1# set neighbor 192.168.3.1
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface fe-1/2/0.1
user@R1# set interface fe-1/2/1.2
```

4. Configure a policy that accepts direct routes.

NOTE: Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 123
user@R1# set router-id 192.168.1.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 12.12.12.1/24;
    }
  }
}
fe-1/2/1 {
  unit 2 {
    family inet {
      address 13.13.13.1/24;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.1.1/32;
    }
  }
}
```

```
user@R1# show policy-options
policy-statement send-direct {
```

```
    term 1 {
      from protocol direct;
      then accept;
    }
}

user@R1# show protocols
bgp {
    group internal {
      type internal;
      local-address 192.168.1.1;
      export send-direct;
      neighbor 192.168.2.1;
      neighbor 192.168.3.1;
    }
}
ospf {
    area 0.0.0.0 {
      interface lo0.1 {
        passive;
      }
      interface fe-1/2/0.1;
      interface fe-1/2/1.2;
    }
}

user@R1# show routing-options
autonomous-system 123;
router-id 192.168.1.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R2# set family inet address 12.12.12.21/24

[edit interfaces fe-1/2/1 unit 4]
user@R2# set family inet address 24.24.24.2/24

[edit interfaces lo0 unit 2]
user@R2# set family inet address 192.168.2.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R2# set type internal
user@R2# set local-address 192.168.2.1
user@R2# set export send-direct
```


Copyright © 2013, Juniper Networks, Inc.

```
user@R2# set neighbor 192.168.1.1
user@R2# set neighbor 192.168.3.1

[edit protocols bgp group external]
user@R2# set type external
user@R2# set export send-direct
user@R2# set peer-as 4
user@R2# set neighbor 24.24.24.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface lo0.2 passive
user@R2# set interface fe-1/2/0.3
user@R2# set interface fe-1/2/1.4
```

4. Configure a policy that accepts direct routes.

NOTE: Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R2# set from protocol direct
user@R2# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R2# set autonomous-system 123
user@R2# set router-id 192.168.2.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
    unit 3 {
        family inet {
            address 12.12.12.2/24;
        }
    }
}
fe-1/2/1 {
    unit 4 {
        family inet {
            address 24.24.24.2/24;
        }
    }
}
lo0 {
    unit 2 {
        family inet {
```

Copyright © 2013, Juniper Networks, Inc.

```
        address 192.168.2.1/32;
      }
    }
  }
```

```
user@R2# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
```

```
user@R2# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.2.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.3.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 24.24.24.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.2 {
      passive;
    }
    interface fe-1/2/0.3;
    interface fe-1/2/1.4;
  }
}
```

```
user@R2# show routing-options
autonomous-system 123;
router-id 192.168.2.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R3

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 5]
user@R3# set family inet address 13.13.13.3/24
```


Copyright © 2013, Juniper Networks, Inc.

```
[edit interfaces fe-1/2/1 unit 6]
user@R3# set family inet address 34.34.34.3/24

[edit interfaces lo0 unit 3]
user@R3# set family inet address 192.168.3.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R3# set type internal
user@R3# set local-address 192.168.3.1
user@R3# set export send-direct
user@R3# set neighbor 192.168.1.1
user@R3# set neighbor 192.168.2.1

[edit protocols bgp group external]
user@R3# set type external
user@R3# set export send-direct
user@R3# set peer-as 4
user@R3# set neighbor 34.34.34.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R3# set interface lo0.3 passive
user@R3# set interface fe-1/2/0.5
user@R3# set interface fe-1/2/1.6
```

4. Configure a policy that accepts direct routes.

NOTE: Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R3# set from protocol direct
user@R3# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 123
user@R3# set router-id 192.168.3.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
   unit 5 {
      family inet {
         address 13.13.13.3/24;
      }
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  fe-1/2/1 {
    unit 6 {
      family inet {
        address 34.34.34.3/24;
      }
    }
  }
  lo0 {
    unit 3 {
      family inet {
        address 192.168.3.1/32;
      }
    }
  }
```

```
user@R3# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
```

```
user@R3# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.3.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.2.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 34.34.34.4;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.3 {
      passive;
    }
    interface fe-1/2/0.5;
    interface fe-1/2/1.6;
  }
}
```

```
user@R3# show routing-options
autonomous-system 123;
router-id 192.168.3.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R4

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 7]
user@R4# set family inet address 24.24.24.4/24

[edit interfaces fe-1/2/1 unit 8]
user@R4# set family inet address 34.34.34.4/24

[edit interfaces lo0 unit 4]
user@R4# set family inet address 192.168.4.1/32
```

2. Configure BGP.

```
[edit protocols bgp group external]
user@R4# set type external
user@R4# set export send-direct
user@R4# set peer-as 123
user@R4# set neighbor 34.34.34.3
user@R4# set neighbor 24.24.24.2
```

3. Configure a policy that accepts direct routes.

NOTE: Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R4# set from protocol direct
user@R4# set then accept
```

4. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R4# set autonomous-system 4
user@R4# set router-id 192.168.4.1
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
fe-1/2/0 {
  unit 7 {
    family inet {
      address 24.24.24.4/24;
```

Copyright © 2013, Juniper Networks, Inc.

```
        }
      }
    }
    fe-1/2/1 {
      unit 8 {
        family inet {
          address 34.34.34.4/24;
        }
      }
    }
    lo0 {
      unit 4 {
        family inet {
          address 192.168.4.1/32;
        }
      }
    }
```

```
user@R4# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
```

```
user@R4# show protocols
bgp {
  group external {
    type external;
    export send-direct;
    peer-as 123;
    neighbor 34.34.34.3;
    neighbor 24.24.24.2;
  }
}
```

```
user@R4# show routing-options
autonomous-system 4;
router-id 192.168.4.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Checking the Active Path From Device R1 to Device R4 on page 76
- Altering the Local Preference to Change the Path Selection on page 77
- Rechecking the Active Path From Device R1 to Device R4 on page 77

Checking the Active Path From Device R1 to Device R4

Purpose Verify that the active path from Device R1 to Device R4 goes through Device R2.

Copyright © 2013, Juniper Networks, Inc.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 11 destinations, 18 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24       [BGP/170] 00:11:48, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24       [BGP/170] 00:11:48, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24       [BGP/170] 00:11:48, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24       [BGP/170] 00:11:48, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.2.1/32      [BGP/170] 00:11:48, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32      [BGP/170] 00:11:48, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 00:05:14, localpref 100, from 192.168.2.1
                      AS path: 4 I
                    > to 12.12.12.2 via fe-1/2/0.1
                    [BGP/170] 00:05:14, localpref 100, from 192.168.3.1
                      AS path: 4 I
                    > to 13.13.13.3 via fe-1/2/1.2
```

Meaning The asterisk (*) shows that the preferred path is through Device R2. In the default configuration, Device R2 has a lower router ID than Device R3. The router ID is controlling the path selection.

Altering the Local Preference to Change the Path Selection

Purpose Change the path so that it goes through Device R3.

Action From configuration mode, enter the **set local-preference 300** command.

```
[edit protocols bgp group internal]
user@R3# set local-preference 300
user@R3# commit
```

Rechecking the Active Path From Device R1 to Device R4

Purpose Verify that the active path from Device R1 to Device R4 goes through Device R3.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 11 destinations, 17 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24       [BGP/170] 00:16:48, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24       [BGP/170] 00:00:22, localpref 300, from 192.168.3.1
```

Copyright © 2013, Juniper Networks, Inc.

```
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24       [BGP/170] 00:16:48, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24       [BGP/170] 00:00:22, localpref 300, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.2.1/32      [BGP/170] 00:16:48, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32      [BGP/170] 00:00:22, localpref 300, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 00:00:21, localpref 300, from 192.168.3.1
                      AS path: 4 I
                    > to 13.13.13.3 via fe-1/2/1.2
```

Meaning The asterisk (*) shows that the preferred path is through Device R3. In the altered configuration, Device R3 has a higher local preference than Device R2. The local preference is controlling the path selection.

Related Documentation

- Examples: Configuring Internal BGP Peering on page 42
- BGP Configuration Overview

Examples: Configuring BGP MED

- Understanding the MED Attribute on page 78
- Example: Configuring the MED Attribute Directly on page 81
- Example: Configuring the MED Using Route Filters on page 93
- Example: Configuring the MED Using Communities on page 106
- Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates on page 106

Understanding the MED Attribute

The BGP multiple exit discriminator (MED, or MULTI_EXIT_DISC) is a non-transitive attribute, meaning that it is not propagated throughout the Internet, but only to adjacent autonomous systems (ASs). The MED attribute is optional, meaning that it is not always sent with the BGP updates. The purpose of MED is to influence how other ASs enter your AS to reach a certain prefix.

The MED attribute has a value that is referred to as a *metric*. If all other factors in determining an exit point are equal, the exit point with the lowest metric is preferred.

If a MED is received over an external BGP link, it is propagated over internal links to other BGP-enabled devices within the AS.

BGP update messages include a MED metric if the route was learned from BGP and already had a MED metric associated with it, or if you configure the MED metric in the configuration file.

Copyright © 2013, Juniper Networks, Inc.

A MED metric is advertised with a route according to the following general rules:

- A more specific metric overrides a less specific metric. That is, a group-specific metric overrides a global BGP metric, and a peer-specific metric overrides a global BGP or group-specific metric.
- A metric defined with a routing policy overrides a metric defined with the **metric-out** statement.
- If any metric is defined, it overrides a metric received in a route.
- If the received route does not have an associated MED metric, and if you do not explicitly configure a metric value, no metric is advertised. When you do not explicitly configure a metric value, the MED value is equivalent to zero (0) when advertising an active route.

Because the AS path rather than the number of hops between hosts is the primary criterion for BGP route selection, an AS with multiple connections to a peer AS can have multiple equivalent AS paths. When the routing table contains two routes to the same host in a neighboring AS, an MED metric assigned to each route can determine which to include in the forwarding table. The MED metric you assign can force traffic through a particular exit point in an AS.

Figure 9 on page 79 illustrates how MED metrics are used to determine route selection.

Figure 9: Default MED Example

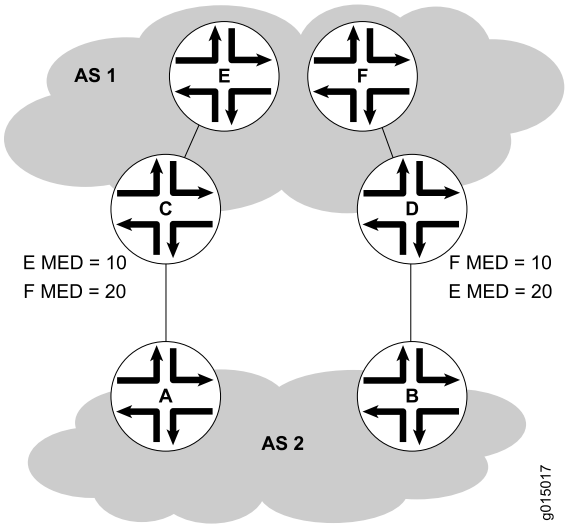

Figure 9 on page 79 shows AS 1 and AS 2 connected by two separate BGP links to Routers C and D. Host E in AS 1 is located nearer to Router C. Host F, also in AS 1, is located nearer to Router D. Because the AS paths are equivalent, two routes exist for each host, one through Router C and one through Router D. To force all traffic destined for Host E through Router C, the network administrator for AS 2 assigns an MED metric for each router to Host E at its exit point. An MED metric of 10 is assigned to the route to Host E through Router C, and an MED metric of 20 is assigned to the route to Host E through Router D. BGP routers in AS 2 then select the route with the lower MED metric for the forwarding table.

Copyright © 2013, Juniper Networks, Inc.

By default, only the MEDs of routes that have the same peer ASs are compared. However, you can configure the routing table path selection options listed in Table 3 on page 80 to compare MEDs in different ways. The MED options are not mutually exclusive and can be configured in combination or independently. For the MED options to take effect, you must configure them uniformly all through your network. The MED option or options you configure determine the route selected. Thus we recommend that you carefully evaluate your network for preferred routes before configuring the MED options.

Table 3: MED Options for Routing Table Path Selection

Option (Name)	Function	Use
Always comparing MEDs (**always-compare-med**)	Ensures that the MEDs for paths from peers in different ASs are always compared in the route selection process.	Useful when all enterprises participating in a network agree on a uniform policy for setting MEDs. For example, in a network shared by two ISPs, both must agree that a certain path is the better path to configure the MED values correctly.
Adding IGP cost to MED (**med-plus-igp**)	Before comparing MED values for path selection, adds to the MED the cost of the IGP route to the BGP next-hop destination. This option replaces the MED value for the router, but does not affect the IGP metric comparison. As a result, when multiple routes have the same value after the MED-plus-IPG comparison, and route selection continues, the IGP route metric is also compared, even though it was added to the MED value and compared earlier in the selection process.	Useful when the downstream AS requires the complete cost of a certain route that is received across multiple ASs.
Applying Cisco IOS nondeterministic behavior (**cisco-non-deterministic**)	Specifies the nondeterministic behavior of the Cisco IOS software: • The active path is always first. All nonactive but eligible paths follow the active path and are maintained in the order in which they were received. Ineligible paths remain at the end of the list. • When a new path is added to the routing table, path comparisons are made among all routes, including those paths that must never be selected because they lose the MED tie-breaking rule.	We recommend that you do not configure this option, because the nondeterministic behavior sometimes prevents the system from properly comparing the MEDs between paths.

Copyright © 2013, Juniper Networks, Inc.

Example: Configuring the MED Attribute Directly

This example shows how to configure a multiple exit discriminator (MED) metric to advertise in BGP update messages.

- Requirements on page 81
- Overview on page 81
- Configuration on page 82
- Verification on page 92

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

To directly configure a MED metric to advertise in BGP update messages, include the **metric-out** statement:

```
metric-out (metric | minimum-igp offset | igp delay-med-update | offset);
```

metric is the primary metric on all routes sent to peers. It can be a value in the range from 0 through 4,294,967,295 ($2^{32} - 1$).

The following optional settings are also supported:

- **minimum-igp**—Sets the metric to the minimum metric value calculated in the interior gateway protocol (IGP) to get to the BGP next hop. If a newly calculated metric is greater than the minimum metric value, the metric value remains unchanged. If a newly calculated metric is lower, the metric value is lowered to that value.
- **igp**—Sets the metric to the most recent metric value calculated in the IGP to get to the BGP next hop.
- **delay-med-update**—Delays sending MED updates when the MED value increases. Include the **delay-med-update** statement when you configure the **igp** statement. The default interval to delay sending updates, unless the MED is lower or another attribute associated with the route has changed is 10 minutes. Include the **med-igp-update-interval *minutes*** statement at the **[edit routing-options]** hierarchy level to modify the default interval.
- ***offset***—Specifies a value for ***offset*** to increase or decrease the metric that is used from the metric value calculated in the IGP. The metric value is offset by the value specified. The metric calculated in the IGP (by specifying either **igp** or **igp-minimum**) is increased if the ***offset*** value is positive. The metric calculated in the IGP (by specifying either **igp** or **igp-minimum**) is decreased if the ***offset*** value is negative.

  offset can be a value in the range from -2^{31} through $2^{31} - 1$. Note that the adjusted metric can never go below 0 or above $2^{32} - 1$.

Figure 10 on page 82 shows a typical network with internal peer sessions and multiple exit points to a neighboring autonomous system (AS).

Copyright © 2013, Juniper Networks, Inc.

Figure 10: Typical Network with IBGP Sessions and Multiple Exit Points

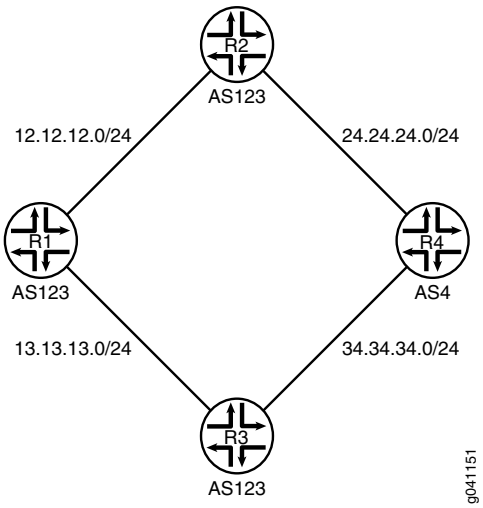

Device R4 has multiple loopback interfaces configured to simulate advertised prefixes. The extra loopback interface addresses are 44.44.44.44/32 and 144.144.144.144/32. This example shows how to configure Device R4 to advertise a MED value of 30 to Device R3 and a MED value of 20 to Device R2. This causes all of the devices in AS 123 to prefer the path through Device R2 to reach AS 4.

Configuration

- Configuring Device R1 on page 84
- Configuring Device R2 on page 86
- Configuring Device R3 on page 88
- Configuring Device R4 on page 90

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 12.12.12.1/24
set interfaces fe-1/2/1 unit 2 family inet address 13.13.13.1/24
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.1.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.1.1
```


Copyright © 2013, Juniper Networks, Inc.

Device R2
```
set interfaces fe-1/2/0 unit 3 family inet address 12.12.12.2/24
set interfaces fe-1/2/1 unit 4 family inet address 24.24.24.2/24
set interfaces lo0 unit 2 family inet address 192.168.2.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.2.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 24.24.24.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.2.1
```

Device R3
```
set interfaces fe-1/2/0 unit 5 family inet address 13.13.13.3/24
set interfaces fe-1/2/1 unit 6 family inet address 34.34.34.3/24
set interfaces lo0 unit 3 family inet address 192.168.3.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.3.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 34.34.34.4
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.5
set protocols ospf area 0.0.0.0 interface fe-1/2/1.6
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.3.1
```

Device R4
```
set interfaces fe-1/2/0 unit 7 family inet address 24.24.24.4/24
set interfaces fe-1/2/1 unit 8 family inet address 34.34.34.4/24
set interfaces lo0 unit 4 family inet address 192.168.4.1/32
set interfaces lo0 unit 4 family inet address 44.44.44.44/32
set interfaces lo0 unit 4 family inet address 144.144.144.144/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 123
set protocols bgp group external neighbor 34.34.34.3 metric-out 30
set protocols bgp group external neighbor 24.24.24.2 metric-out 20
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 4
set routing-options router-id 192.168.4.1
```

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 1]
user@R1# set family inet address 12.12.12.1/24

[edit interfaces fe-1/2/1 unit 2]
user@R1# set family inet address 13.13.13.1/24

[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.1.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.1.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.2.1
user@R1# set neighbor 192.168.3.1
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface fe-1/2/0.1
user@R1# set interface fe-1/2/1.2
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 123
user@R1# set router-id 192.168.1.1
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
```


Copyright © 2013, Juniper Networks, Inc.

```
    unit 1 {
      family inet {
        address 12.12.12.1/24;
      }
    }
}
fe-1/2/1 {
    unit 2 {
      family inet {
        address 13.13.13.1/24;
      }
    }
}
lo0 {
    unit 1 {
      family inet {
        address 192.168.1.1/32;
      }
    }
}
```

```
user@R1# show policy-options
policy-statement send-direct {
    term 1 {
      from protocol direct;
      then accept;
    }
}
```

```
user@R1# show protocols
bgp {
    group internal {
      type internal;
      local-address 192.168.1.1;
      export send-direct;
      neighbor 192.168.2.1;
      neighbor 192.168.3.1;
    }
}
ospf {
    area 0.0.0.0 {
      interface lo0.1 {
        passive;
      }
      interface fe-1/2/0.1;
      interface fe-1/2/1.2;
    }
}
```

```
user@R1# show routing-options
autonomous-system 123;
router-id 192.168.1.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R2# set family inet address 12.12.12.21/24

[edit interfaces fe-1/2/1 unit 4]
user@R2# set family inet address 24.24.24.2/24

[edit interfaces lo0 unit 2]
user@R2# set family inet address 192.168.2.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R2# set type internal
user@R2# set local-address 192.168.2.1
user@R2# set export send-direct
user@R2# set neighbor 192.168.1.1
user@R2# set neighbor 192.168.3.1

[edit protocols bgp group external]
user@R2# set type external
user@R2# set export send-direct
user@R2# set peer-as 4
user@R2# set neighbor 24.24.24.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface lo0.2 passive
user@R2# set interface fe-1/2/0.3
user@R2# set interface fe-1/2/1.4
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R2# set from protocol direct
user@R2# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R2# set autonomous-system 123
user@R2# set router-id 192.168.2.1
```


Copyright © 2013, Juniper Networks, Inc.

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
    unit 3 {
        family inet {
            address 12.12.12.2/24;
        }
    }
}
fe-1/2/1 {
    unit 4 {
        family inet {
            address 24.24.24.2/24;
        }
    }
}
lo0 {
    unit 2 {
        family inet {
            address 192.168.2.1/32;
        }
    }
}
```

```
user@R2# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
```

```
user@R2# show protocols
bgp {
    group internal {
        type internal;
        local-address 192.168.2.1;
        export send-direct;
        neighbor 192.168.1.1;
        neighbor 192.168.3.1;
    }
    group external {
        type external;
        export send-direct;
        peer-as 4;
        neighbor 24.24.24.4;
    }
}
ospf {
    area 0.0.0.0 {
        interface lo0.2 {
            passive;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
    interface fe-1/2/0.3;
    interface fe-1/2/1.4;
  }
}
```

```
user@R2# show routing-options
autonomous-system 123;
router-id 192.168.2.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R3

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 5]
user@R3# set family inet address 13.13.13.3/24

[edit interfaces fe-1/2/1 unit 6]
user@R3# set family inet address 34.34.34.3/24

[edit interfaces lo0 unit 3]
user@R3# set family inet address 192.168.3.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R3# set type internal
user@R3# set local-address 192.168.3.1
user@R3# set export send-direct
user@R3# set neighbor 192.168.1.1
user@R3# set neighbor 192.168.2.1

[edit protocols bgp group external]
user@R3# set type external
user@R3# set export send-direct
user@R3# set peer-as 4
user@R3# set neighbor 34.34.34.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R3# set interface lo0.3 passive
user@R3# set interface fe-1/2/0.5
user@R3# set interface fe-1/2/1.6
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

Copyright © 2013, Juniper Networks, Inc.

```
[edit policy-options policy-statement send-direct term 1]
user@R3# set from protocol direct
user@R3# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 123
user@R3# set router-id 192.168.3.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
  unit 5 {
    family inet {
      address 13.13.13.3/24;
    }
  }
}
fe-1/2/1 {
  unit 6 {
    family inet {
      address 34.34.34.3/24;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 192.168.3.1/32;
    }
  }
}
```

```
user@R3# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
```

```
user@R3# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.3.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.2.1;
  }
  group external {
```

Copyright © 2013, Juniper Networks, Inc.

```
      type external;
      export send-direct;
      peer-as 4;
      neighbor 34.34.34.4;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface lo0.3 {
        passive;
      }
      interface fe-1/2/0.5;
      interface fe-1/2/1.6;
    }
  }
```

```
user@R3# show routing-options
autonomous-system 123;
router-id 192.168.3.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R4

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 7]
user@R4# set family inet address 24.24.24.4/24

[edit interfaces fe-1/2/1 unit 8]
user@R4# set family inet address 34.34.34.4/24

[edit interfaces lo0 unit 4]
user@R4# set family inet address 192.168.4.1/32
user@R4# set family inet address 44.44.44.44/32
user@R4# set family inet address 144.144.144.144/32
```

   Device R4 has multiple loopback interface addresses to simulate advertised prefixes.

2. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R4# set from protocol direct
user@R4# set then accept
```

3. Configure BGP.

```
[edit protocols bgp group external]
user@R4# set type external
```


Copyright © 2013, Juniper Networks, Inc.

```
user@R4# set export send-direct
user@R4# set peer-as 123
```

4. Configure a MED value of 30 for neighbor Device R3, and a MED value of 20 for neighbor Device R2.

```
[edit protocols bgp group external]
user@R4# set neighbor 34.34.34.3 metric-out 30
user@R4# set neighbor 24.24.24.2 metric-out 20
```

This configuration causes autonomous system (AS) 123 (of which Device R1, Device R2, and Device R3 are members) to prefer the path through Device R2 to reach AS 4.

5. Configure the router ID and AS number.

```
[edit routing-options]
user@R4# set autonomous-system 4
user@R4# set router-id 192.168.4.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
fe-1/2/0 {
    unit 7 {
        family inet {
            address 24.24.24.4/24;
        }
    }
}
fe-1/2/1 {
    unit 8 {
        family inet {
            address 34.34.34.4/24;
        }
    }
}
lo0 {
    unit 4 {
        family inet {
            address 192.168.4.1/32;
            address 44.44.44.44/32;
            address 144.144.144.144/32;
        }
    }
}
```

```
user@R4# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R4# show protocols
bgp {
  group external {
    type external;
    export send-direct;
    peer-as 123;
    neighbor 34.34.34.3 {
      metric-out 30;
    }
    neighbor 24.24.24.2 {
      metric-out 20;
    }
  }
}

user@R4# show routing-options
autonomous-system 4;
router-id 192.168.4.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Checking the Active Path From Device R1 to Device R4 on page 92
- Verifying That Device R4 Is Sending Its Routes Correctly on page 93

Checking the Active Path From Device R1 to Device R4

Purpose Verify that the active path goes through Device R2.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 13 destinations, 19 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24       [BGP/170] 3d 22:52:38, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24       [BGP/170] 3d 03:15:16, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24       [BGP/170] 3d 22:52:38, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24       [BGP/170] 3d 03:15:16, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
44.44.44.44/32     *[BGP/170] 01:41:11, MED 20, localpref 100, from 192.168.2.1
                      AS path: 4 I
                    > to 12.12.12.2 via fe-1/2/0.1
144.144.144.144/32 *[BGP/170] 00:08:13, MED 20, localpref 100, from 192.168.2.1
                      AS path: 4 I
                    > to 12.12.12.2 via fe-1/2/0.1
192.168.2.1/32      [BGP/170] 3d 22:52:38, localpref 100, from 192.168.2.1
                      AS path: I
```


Copyright © 2013, Juniper Networks, Inc.

```
                    > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32      [BGP/170] 3d 03:15:16, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 01:41:11, MED 20, localpref 100, from 192.168.2.1
                      AS path: 4 I
                    > to 12.12.12.2 via fe-1/2/0.1
```

Meaning The asterisk (*) shows that the preferred path is through Device R2. The reason for the path selection is listed as MED 20.

Verifying That Device R4 Is Sending Its Routes Correctly

Purpose Make sure that Device R4 is sending update messages with a value of 20 to Device R2 and a value of 30 to Device R3.

Action From operational mode, enter the **show route advertising-protocol bgp 24.24.24.2** command.

```
user@R4> show route advertising-protocol bgp 24.24.24.2
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 24.24.24.0/24           Self                 20                 I
* 34.34.34.0/24           Self                 20                 I
* 44.44.44.44/32          Self                 20                 I
* 144.144.144.144/32      Self                 20                 I
* 192.168.4.1/32          Self                 20                 I

user@R4> show route advertising-protocol bgp 34.34.34.3
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 24.24.24.0/24           Self                 30                 I
* 34.34.34.0/24           Self                 30                 I
* 44.44.44.44/32          Self                 30                 I
* 144.144.144.144/32      Self                 30                 I
* 192.168.4.1/32          Self                 30                 I
```

Meaning The MED column shows that Device R4 is sending the correct MED values to its two external BGP (EBGP) neighbors.

Example: Configuring the MED Using Route Filters

This example shows how to configure a policy that uses route filters to modify the multiple exit discriminator (MED) metric to advertise in BGP update messages.

- Requirements on page 93
- Overview on page 94
- Configuration on page 94
- Verification on page 104

Requirements

No special configuration beyond device initialization is required before you configure this example.

Copyright © 2013, Juniper Networks, Inc.

Overview

To configure a route-filter policy that modifies the advertised MED metric in BGP update messages, include the **metric** statement in the policy action.

Figure 11 on page 94 shows a typical network with internal peer sessions and multiple exit points to a neighboring autonomous system (AS).

Figure 11: Typical Network with IBGP Sessions and Multiple Exit Points

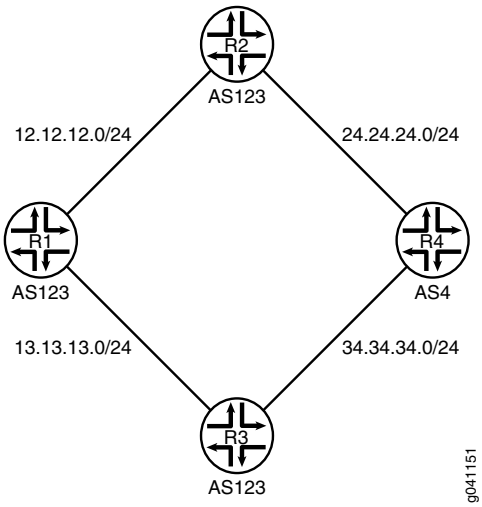

Device R4 has multiple loopback interfaces configured to simulate advertised prefixes. The extra loopback interface addresses are 44.44.44.44/32 and 144.144.144.144/32. This example shows how to configure Device R4 to advertise a MED value of 30 to Device R3 for all routes except 144.144.144.144. For 144.144.144.144, a MED value of 10 is advertised to Device 3. A MED value of 20 is advertised to Device R2, regardless of the route prefix.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 12.12.12.1/24
set interfaces fe-1/2/1 unit 2 family inet address 13.13.13.1/24
set interfaces lo0 unit 1 family inet address 192.168.1.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.1.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
```


Copyright © 2013, Juniper Networks, Inc.

```
set routing-options router-id 192.168.1.1
```

Device R2

```
set interfaces fe-1/2/0 unit 3 family inet address 12.12.12.2/24
set interfaces fe-1/2/1 unit 4 family inet address 24.24.24.2/24
set interfaces lo0 unit 2 family inet address 192.168.2.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.2.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.3.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 24.24.24.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.2.1
```

Device R3

```
set interfaces fe-1/2/0 unit 5 family inet address 13.13.13.3/24
set interfaces fe-1/2/1 unit 6 family inet address 34.34.34.3/24
set interfaces lo0 unit 3 family inet address 192.168.3.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.3.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.1.1
set protocols bgp group internal neighbor 192.168.2.1
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 4
set protocols bgp group external neighbor 34.34.34.4
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.5
set protocols ospf area 0.0.0.0 interface fe-1/2/1.6
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 123
set routing-options router-id 192.168.3.1
```

Device R4

```
set interfaces fe-1/2/0 unit 7 family inet address 24.24.24.4/24
set interfaces fe-1/2/1 unit 8 family inet address 34.34.34.4/24
set interfaces lo0 unit 4 family inet address 192.168.4.1/32
set interfaces lo0 unit 4 family inet address 44.44.44.44/32
set interfaces lo0 unit 4 family inet address 144.144.144.144/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 123
set protocols bgp group external neighbor 34.34.34.3 export med-10
set protocols bgp group external neighbor 34.34.34.3 export med-30
set protocols bgp group external neighbor 24.24.24.2 metric-out 20
set policy-options policy-statement med-10 from route-filter 144.144.144.144/32 exact
set policy-options policy-statement med-10 then metric 10
```

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement med-10 then accept
set policy-options policy-statement med-30 from route-filter 0.0.0.0/0 longer
set policy-options policy-statement med-30 then metric 30
set policy-options policy-statement med-30 then accept
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 4
set routing-options router-id 192.168.4.1
```

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 1]
user@R1# set family inet address 12.12.12.1/24

[edit interfaces fe-1/2/1 unit 2]
user@R1# set family inet address 13.13.13.1/24

[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.1.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.1.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.2.1
user@R1# set neighbor 192.168.3.1
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface lo0.1 passive
user@R1# set interface fe-1/2/0.1
user@R1# set interface fe-1/2/1.2
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 123
user@R1# set router-id 192.168.1.1
```


Copyright © 2013, Juniper Networks, Inc.

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
    unit 1 {
        family inet {
            address 12.12.12.1/24;
        }
    }
}
fe-1/2/1 {
    unit 2 {
        family inet {
            address 13.13.13.1/24;
        }
    }
}
lo0 {
    unit 1 {
        family inet {
            address 192.168.1.1/32;
        }
    }
}
```

```
user@R1# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
```

```
user@R1# show protocols
bgp {
    group internal {
        type internal;
        local-address 192.168.1.1;
        export send-direct;
        neighbor 192.168.2.1;
        neighbor 192.168.3.1;
    }
}
ospf {
    area 0.0.0.0 {
        interface lo0.1 {
            passive;
        }
        interface fe-1/2/0.1;
        interface fe-1/2/1.2;
    }
}
```

```
user@R1# show routing-options
```

Copyright © 2013, Juniper Networks, Inc.

```
autonomous-system 123;
router-id 192.168.1.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R2# set family inet address 12.12.12.21/24

[edit interfaces fe-1/2/1 unit 4]
user@R2# set family inet address 24.24.24.2/24

[edit interfaces lo0 unit 2]
user@R2# set family inet address 192.168.2.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R2# set type internal
user@R2# set local-address 192.168.2.1
user@R2# set export send-direct
user@R2# set neighbor 192.168.1.1
user@R2# set neighbor 192.168.3.1

[edit protocols bgp group external]
user@R2# set type external
user@R2# set export send-direct
user@R2# set peer-as 4
user@R2# set neighbor 24.24.24.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface lo0.2 passive
user@R2# set interface fe-1/2/0.3
user@R2# set interface fe-1/2/1.4
```

4. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R2# set from protocol direct
user@R2# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
```


Copyright © 2013, Juniper Networks, Inc.

```
user@R2# set autonomous-system 123
user@R2# set router-id 192.168.2.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 12.12.12.2/24;
    }
  }
}
fe-1/2/1 {
  unit 4 {
    family inet {
      address 24.24.24.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.2.1/32;
    }
  }
}
```

```
user@R2# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
```

```
user@R2# show protocols
bgp {
  group internal {
    type internal;
    local-address 192.168.2.1;
    export send-direct;
    neighbor 192.168.1.1;
    neighbor 192.168.3.1;
  }
  group external {
    type external;
    export send-direct;
    peer-as 4;
    neighbor 24.24.24.4;
  }
}
ospf {
```

Copyright © 2013, Juniper Networks, Inc.

```
    area 0.0.0.0 {
      interface lo0.2 {
        passive;
      }
      interface fe-1/2/0.3;
      interface fe-1/2/1.4;
    }
  }
```

```
user@R2# show routing-options
autonomous-system 123;
router-id 192.168.2.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R3

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 5]
user@R3# set family inet address 13.13.13.3/24

[edit interfaces fe-1/2/1 unit 6]
user@R3# set family inet address 34.34.34.3/24

[edit interfaces lo0 unit 3]
user@R3# set family inet address 192.168.3.1/32
```

2. Configure BGP.

```
[edit protocols bgp group internal]
user@R3# set type internal
user@R3# set local-address 192.168.3.1
user@R3# set export send-direct
user@R3# set neighbor 192.168.1.1
user@R3# set neighbor 192.168.2.1

[edit protocols bgp group external]
user@R3# set type external
user@R3# set export send-direct
user@R3# set peer-as 4
user@R3# set neighbor 34.34.34.4
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R3# set interface lo0.3 passive
user@R3# set interface fe-1/2/0.5
user@R3# set interface fe-1/2/1.6
```

4. Configure a policy that accepts direct routes.

Copyright © 2013, Juniper Networks, Inc.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R3# set from protocol direct
user@R3# set then accept
```

5. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 123
user@R3# set router-id 192.168.3.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
    unit 5 {
        family inet {
            address 13.13.13.3/24;
        }
    }
}
fe-1/2/1 {
    unit 6 {
        family inet {
            address 34.34.34.3/24;
        }
    }
}
lo0 {
    unit 3 {
        family inet {
            address 192.168.3.1/32;
        }
    }
}
```

```
user@R3# show policy-options
policy-statement send-direct {
    term 1 {
        from protocol direct;
        then accept;
    }
}
```

```
user@R3# show protocols
bgp {
    group internal {
        type internal;
        local-address 192.168.3.1;
        export send-direct;
        neighbor 192.168.1.1;
        neighbor 192.168.2.1;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
    group external {
      type external;
      export send-direct;
      peer-as 4;
      neighbor 34.34.34.4;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface lo0.3 {
        passive;
      }
      interface fe-1/2/0.5;
      interface fe-1/2/1.6;
    }
  }

  user@R3# show routing-options
  autonomous-system 123;
  router-id 192.168.3.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R4

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

   ```
   [edit interfaces fe-1/2/0 unit 7]
   user@R4# set family inet address 24.24.24.4/24

   [edit interfaces fe-1/2/1 unit 8]
   user@R4# set family inet address 34.34.34.4/24

   [edit interfaces lo0 unit 4]
   user@R4# set family inet address 192.168.4.1/32
   user@R4# set family inet address 44.44.44.44/32
   user@R4# set family inet address 144.144.144.144/32
   ```

   Device R4 has multiple loopback interface addresses to simulate advertised prefixes.

2. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

   ```
   [edit policy-options policy-statement send-direct term 1]
   user@R4# set from protocol direct
   user@R4# set then accept
   ```

3. Configure BGP.

Copyright © 2013, Juniper Networks, Inc.

```
[edit protocols bgp group external]
user@R4# set type external
user@R4# set export send-direct
user@R4# set peer-as 123
```

4. Configure the two MED policies.

```
[edit policy-options]
set policy-statement med-10 from route-filter 144.144.144.144/32 exact
set policy-statement med-10 then metric 10
set policy-statement med-10 then accept
set policy-statement med-30 from route-filter 0.0.0.0/0 longer
set policy-statement med-30 then metric 30
set policy-statement med-30 then accept
```

5. Configure the two EBGP neighbors, applying the two MED policies to Device R3, and a MED value of 20 to Device R2.

```
[edit protocols bgp group external]
user@R4# set neighbor 34.34.34.3 export med-10
user@R4# set neighbor 34.34.34.3 export med-30
user@R4# set neighbor 24.24.24.2 metric-out 20
```

6. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R4# set autonomous-system 4
user@R4# set router-id 192.168.4.1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
fe-1/2/0 {
  unit 7 {
    family inet {
      address 24.24.24.4/24;
    }
  }
}
fe-1/2/1 {
  unit 8 {
    family inet {
      address 34.34.34.4/24;
    }
  }
}
lo0 {
  unit 4 {
    family inet {
      address 192.168.4.1/32;
      address 44.44.44.44/32;
      address 144.144.144.144/32;
    }
  }
```

Copyright © 2013, Juniper Networks, Inc.

```
}

user@R4# show policy-options
policy-statement med-10 {
   from {
      route-filter 144.144.144.144/32 exact;
   }
   then {
      metric 10;
      accept;
   }
}
policy-statement med-30 {
   from {
      route-filter 0.0.0.0/0 longer;
   }
   then {
      metric 30;
      accept;
   }
}
policy-statement send-direct {
   term 1 {
      from protocol direct;
      then accept;
   }
}

user@R4# show protocols
bgp {
   group external {
      type external;
      export send-direct;
      peer-as 123;
      neighbor 24.24.24.2 {
         metric-out 20;
      }
      neighbor 34.34.34.3 {
         export [ med-10 med-30 ];
      }
   }
}

user@R4# show routing-options
autonomous-system 4;
router-id 192.168.4.1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Checking the Active Path From Device R1 to Device R4 on page 105
- Verifying That Device R4 Is Sending Its Routes Correctly on page 105

 Copyright © 2013, Juniper Networks, Inc.

Checking the Active Path From Device R1 to Device R4

Purpose Verify that the active path goes through Device R2.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 13 destinations, 19 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

12.12.12.0/24       [BGP/170] 4d 01:13:32, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
13.13.13.0/24       [BGP/170] 3d 05:36:10, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
24.24.24.0/24       [BGP/170] 4d 01:13:32, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
34.34.34.0/24       [BGP/170] 3d 05:36:10, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
44.44.44.44/32     *[BGP/170] 00:06:03, MED 20, localpref 100, from 192.168.2.1
                      AS path: 4 I
                    > to 12.12.12.2 via fe-1/2/0.1
144.144.144.144/32 *[BGP/170] 00:06:03, MED 10, localpref 100, from 192.168.3.1
                      AS path: 4 I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.2.1/32      [BGP/170] 4d 01:13:32, localpref 100, from 192.168.2.1
                      AS path: I
                    > to 12.12.12.2 via fe-1/2/0.1
192.168.3.1/32      [BGP/170] 3d 05:36:10, localpref 100, from 192.168.3.1
                      AS path: I
                    > to 13.13.13.3 via fe-1/2/1.2
192.168.4.1/32     *[BGP/170] 00:06:03, MED 20, localpref 100, from 192.168.2.1
                      AS path: 4 I
                    > to 12.12.12.2 via fe-1/2/0.1
```

Meaning The output shows that the preferred path to the routes advertised by Device R4 is through Device R2 for all routes except 144.144.144.144/32. For 144.144.144.144/32, the preferred path is through Device R3.

Verifying That Device R4 Is Sending Its Routes Correctly

Purpose Make sure that Device R4 is sending update messages with a value of 20 to Device R2 and a value of 30 to Device R3.

Action From operational mode, enter the **show route advertising-protocol bgp 24.24.24.2** command.

```
user@R4> show route advertising-protocol bgp 24.24.24.2
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 24.24.24.0/24           Self                 20                 I
* 34.34.34.0/24           Self                 20                 I
* 44.44.44.44/32          Self                 20                 I
* 144.144.144.144/32      Self                 20                 I
* 192.168.4.1/32          Self                 20                 I
```

```
user@R4> show route advertising-protocol bgp 34.34.34.3
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 24.24.24.0/24           Self                 30                 I
* 34.34.34.0/24           Self                 30                 I
* 44.44.44.44/32          Self                 30                 I
* 144.144.144.144/32      Self                 10                 I
* 192.168.4.1/32          Self                 30                 I
```

Meaning The MED column shows that Device R4 is sending the correct MED values to its two EBGP neighbors.

Example: Configuring the MED Using Communities

Set the multiple exit discriminator (MED) metric to 20 for all routes from a particular community.

```
[edit]
routing-options {
   router-id 10.0.0.1;
   autonomous-system 23;
}
policy-options {
   policy-statement from-otago {
      from community otago;
      then metric 20;
   }
   community otago members [56:2379 23:46944];
}
protocols {
   bgp {
      import from-otago;
      group 23 {
         type external;
         peer-as 56;
         neighbor 192.168.0.1 {
            traceoptions {
               file bgp-log-peer;
               flag packets;
            }
            log-updown;
         }
      }
   }
}
```

Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates

This example shows how to associate the multiple exit discriminator (MED) path attribute with the interior gateway protocol (IGP) metric, and configure a timer to delay update of the MED attribute.

- Requirements on page 107
- Overview on page 107

 Copyright © 2013, Juniper Networks, Inc.

- Configuration on page 108
- Verification on page 114

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

BGP can be configured to advertise the MED attribute for a route based on the IGP distance of its internal BGP (IBGP) route next-hop. The IGP metric enables internal routing to follow the shortest path according to the administrative setup. In some deployments, it might be ideal to communicate IGP shortest-path knowledge to external BGP (EBGP) peers in a neighboring autonomous system (AS). This allows those EBGP peers to forward traffic into your AS using the shortest paths possible.

Routes learned from an EBGP peer usually have a next hop on a directly connected interface, and thus the IGP value is equal to zero. Zero is the value advertised. The IGP metric is a nonzero value when a BGP peer sends third-party next hops that require the local system to perform next-hop resolution—IBGP configurations, configurations within confederation peers, or EBGP configurations that include the **multihop** command. In these scenarios, it might make sense to associate the MED value with the IGP metric by including the metric-out **minimum-igp** or metric-out **igp** option.

The drawback of associating the MED with the IGP metric is the risk of excessive route advertisements when there are IGP instabilities in the network. Configuring a delay for the MED update provides a mechanism to reduce route advertisements in such scenarios. The delay works by slowing down MED updates when the IGP metric for the next hop changes. The approach uses a timer to periodically advertise MED updates. When the timer expires, the MED attribute for routes with **metric-out igp delay-updates** configured is updated to the current IGP metric of the next hop. The BGP-enabled device sends out advertisements for routes for which the MED attribute has changed.

The **delay-updates** option identifies the BGP groups (or peers) for which the MED updates must be suppressed. The time for advertising MED updates is set to 10 minutes by default. You can increase the interval up to 600 minutes by including the **med-igp-update-interval** statement in the **routing-options** configuration.

NOTE: **If you have nonstop active routing (NSR) enabled and a switchover occurs, the delayed MED updates might be advertised as soon as the switchover occurs.**

When you configure the **metric-out igp** option, the IGP metric directly tracks the IGP cost to the IBGP peer. When the IGP cost goes down, so does the advertised MED value. Conversely, when the IGP cost goes up, the MED value goes up as well.

When you configure the **metric-out minimum-igp** option, the advertised MED value changes only when the IGP cost to the IBGP peer goes down. An increase in the IGP cost does not affect the MED value. The router monitors and remembers the lowest IGP cost until the

Copyright © 2013, Juniper Networks, Inc.

routing process (rpd) is restarted. The BGP peer sends an update only if the MED is lower than the previously advertised value or another attribute associated with the route has changed, or if the BGP peer is responding to a refresh route request.

This example uses the **metric** statement in the OSPF configuration to demonstrate that when the IGP metric changes, the MED also changes after the configured delay interval. The OSPF metric can range from 1 through 65,535.

Figure 12 on page 108 shows the sample topology.

Figure 12: Topology for Delaying the MED Update

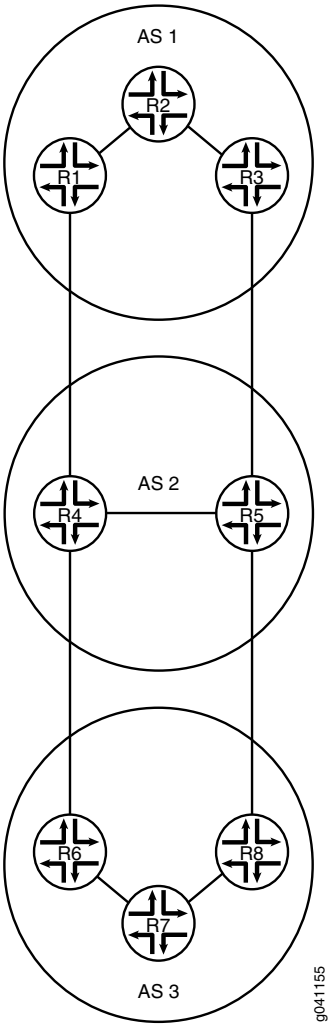

In this example, the MED value advertised by Device R1 is associated with the IGP running in AS 1. The MED value advertised by Device R1 impacts the decisions of the neighboring AS (AS 2) when AS 2 is forwarding traffic into AS 1.

Configuration

- Configuring Device R1 on page 112

Copyright © 2013, Juniper Networks, Inc.

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 2 description R1->R2
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.1/30
set interfaces fe-1/2/1 unit 7 description R1->R4
set interfaces fe-1/2/1 unit 7 family inet address 172.16.0.1/30
set interfaces lo0 unit 1 family inet address 192.168.0.1/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.1
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.2
set protocols bgp group internal neighbor 192.168.0.3
set protocols bgp group external type external
set protocols bgp group external metric-out igp delay-med-update
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 2
set protocols bgp group external neighbor 172.16.0.2
set protocols ospf area 0.0.0.0 interface fe-1/2/0.2 metric 600
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options med-igp-update-interval 12
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 1
```

Device R2

```
set interfaces fe-1/2/0 unit 1 description R2->R1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 4 description R2->R3
set interfaces fe-1/2/1 unit 4 family inet address 10.0.2.2/30
set interfaces lo0 unit 2 family inet address 192.168.0.2/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.2
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.1
set protocols bgp group internal neighbor 192.168.0.3
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.2
set routing-options autonomous-system 1
```

Device R3

```
set interfaces fe-1/2/0 unit 3 description R3->R2
set interfaces fe-1/2/0 unit 3 family inet address 10.0.2.1/30
set interfaces fe-1/2/1 unit 5 description R3->R5
set interfaces fe-1/2/1 unit 5 family inet address 172.16.0.5/30
set interfaces lo0 unit 3 family inet address 192.168.0.3/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.3
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.1
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group internal neighbor 192.168.0.2
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 2
set protocols bgp group external neighbor 172.16.0.6
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.3
set routing-options autonomous-system 1
```

Device R4

```
set interfaces fe-1/2/0 unit 8 description R4->R1
set interfaces fe-1/2/0 unit 8 family inet address 172.16.0.2/30
set interfaces fe-1/2/1 unit 9 description R4->R5
set interfaces fe-1/2/1 unit 9 family inet address 10.0.4.1/30
set interfaces fe-1/2/2 unit 13 description R4->R6
set interfaces fe-1/2/2 unit 13 family inet address 172.16.0.9/30
set interfaces lo0 unit 4 family inet address 192.168.0.4/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.4
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.5
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external neighbor 172.16.0.10 peer-as 3
set protocols bgp group external neighbor 172.16.0.1 peer-as 1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.9
set protocols ospf area 0.0.0.0 interface lo0.4 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.4
set routing-options autonomous-system 2
```

Device R5

```
set interfaces fe-1/2/0 unit 6 description R5->R3
set interfaces fe-1/2/0 unit 6 family inet address 172.16.0.6/30
set interfaces fe-1/2/1 unit 10 description R5->R4
set interfaces fe-1/2/1 unit 10 family inet address 10.0.4.2/30
set interfaces fe-1/2/2 unit 11 description R5->R8
set interfaces fe-1/2/2 unit 11 family inet address 172.16.0.13/30
set interfaces lo0 unit 5 family inet address 192.168.0.5/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.5
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.4
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external neighbor 172.16.0.5 peer-as 1
set protocols bgp group external neighbor 172.16.0.14 peer-as 3
set protocols ospf area 0.0.0.0 interface fe-1/2/1.10
set protocols ospf area 0.0.0.0 interface lo0.5 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.5
set routing-options autonomous-system 2
```


Copyright © 2013, Juniper Networks, Inc.

Device R6
```
set interfaces fe-1/2/0 unit 14 description R6->R4
set interfaces fe-1/2/0 unit 14 family inet address 172.16.0.10/30
set interfaces fe-1/2/1 unit 15 description R6->R7
set interfaces fe-1/2/1 unit 15 family inet address 10.0.6.1/30
set interfaces lo0 unit 6 family inet address 192.168.0.6/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.6
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.7
set protocols bgp group internal neighbor 192.168.0.8
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 2
set protocols bgp group external neighbor 172.16.0.9 peer-as 2
set protocols ospf area 0.0.0.0 interface fe-1/2/1.15
set protocols ospf area 0.0.0.0 interface lo0.6 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.6
set routing-options autonomous-system 3
```

Device R7
```
set interfaces fe-1/2/0 unit 16 description R7->R6
set interfaces fe-1/2/0 unit 16 family inet address 10.0.6.2/30
set interfaces fe-1/2/1 unit 17 description R7->R8
set interfaces fe-1/2/1 unit 17 family inet address 10.0.7.2/30
set interfaces lo0 unit 7 family inet address 192.168.0.7/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.7
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.6
set protocols bgp group internal neighbor 192.168.0.8
set protocols ospf area 0.0.0.0 interface fe-1/2/0.16
set protocols ospf area 0.0.0.0 interface fe-1/2/1.17
set protocols ospf area 0.0.0.0 interface lo0.7 passive
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.7
set routing-options autonomous-system 3
```

Device R8
```
set interfaces fe-1/2/0 unit 12 description R8->R5
set interfaces fe-1/2/0 unit 12 family inet address 172.16.0.14/30
set interfaces fe-1/2/1 unit 18 description R8->R7
set interfaces fe-1/2/1 unit 18 family inet address 10.0.7.1/30
set interfaces lo0 unit 8 family inet address 192.168.0.8/32
set protocols bgp group internal type internal
set protocols bgp group internal local-address 192.168.0.8
set protocols bgp group internal export send-direct
set protocols bgp group internal neighbor 192.168.0.6
set protocols bgp group internal neighbor 192.168.0.7
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 2
set protocols bgp group external neighbor 172.16.0.13 peer-as 2
set protocols ospf area 0.0.0.0 interface fe-1/2/1.18
set protocols ospf area 0.0.0.0 interface lo0.8 passive
```

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options router-id 192.168.0.8
set routing-options autonomous-system 3
```

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 2]
user@R1# set description R1->R2
user@R1# set family inet address 10.0.0.1/30

[edit interfaces fe-1/2/1 unit 7]
user@R1# set description R1->R4
user@R1# set family inet address 172.16.0.1/30

[edit interfaces lo0 unit 1]
user@R1# set family inet address 192.168.0.1/32
```

2. Configure IBGP.

```
[edit protocols bgp group internal]
user@R1# set type internal
user@R1# set local-address 192.168.0.1
user@R1# set export send-direct
user@R1# set neighbor 192.168.0.2
user@R1# set neighbor 192.168.0.3
```

3. Configure EBGP.

```
[edit protocols bgp group external]
user@R1# set type external
user@R1# set export send-direct
user@R1# set peer-as 2
user@R1# set neighbor 172.16.0.2
```

4. Associate the MED value with the IGP metric.

```
[edit protocols bgp group external]
user@R1# set metric-out igp delay-med-update
```

   The default for the MED update is 10 minutes when you include the **delay-med-update** option. When you exclude the **delay-med-update** option, the MED update occurs immediately after the IGP metric changes.

5. (Optional) Configure the update interval for the MED update.

```
[edit routing-options]
user@R1# set med-igp-update-interval 12
```

   You can configure the interval from 10 minutes through 600 minutes.

Copyright © 2013, Juniper Networks, Inc.

6. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface fe-1/2/0.2 metric 600
user@R1# set interface lo0.1 passive
```

The **metric** statement is used here to demonstrate what happens when the IGP metric changes.

7. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

8. Configure the router ID and autonomous system (AS) number.

```
[edit routing-options]
user@R1# set router-id 192.168.0.1
user@R1# set autonomous-system 1
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 2 {
    description R1->R2;
    family inet {
      address 10.0.0.1/30;
    }
  }
}
fe-1/2/1 {
  unit 7 {
    description R1->R4;
    family inet {
      address 172.16.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}
```

```
user@R1# show policy-options
policy-statement send-direct {
  term 1 {
```

Copyright © 2013, Juniper Networks, Inc.

```
        from protocol direct;
        then accept;
    }
}

user@R1# show protocols
bgp {
    group internal {
        type internal;
        local-address 192.168.0.1;
        export send-direct;
        neighbor 192.168.0.2;
        neighbor 192.168.0.3;
    }
    group external {
        type external;
        metric-out igp delay-med-update;
        export send-direct;
        peer-as 2;
        neighbor 172.16.0.2;
    }
}
ospf {
    area 0.0.0.0 {
        interface fe-1/2/0.2 {
            metric 600;
        }
        interface lo0.1 {
            passive;
        }
    }
}

user@R1# show routing-options
med-igp-update-interval 12;
router-id 192.168.0.1;
autonomous-system 1;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration steps on the other devices in the topology, as needed for your network.

Verification

Confirm that the configuration is working properly.

- Checking the BGP Advertisements on page 114
- Verifying That the MED Value Changes When the OSPF Metric Changes on page 115
- Testing the minimum-igp Setting on page 115

Checking the BGP Advertisements

Purpose Verify that Device R1 is advertising to Device R4 a BGP MED value that reflects the IGP metric.

Copyright © 2013, Juniper Networks, Inc.

Action From operational mode, enter the **show route advertising-protocol bgp** command.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.0.0.0/30             Self                 0                  I
* 172.16.0.0/30           Self                 0                  I
* 172.16.0.4/30           Self                 601                I
* 192.168.0.1/32          Self                 0                  I
```

Meaning The 601 value in the MED column shows that the MED value has been updated to reflect the configured OSPF metric.

Verifying That the MED Value Changes When the OSPF Metric Changes

Purpose Make sure that when you raise the OSPF metric to 700, the MED value is updated to reflect this change.

Action From configuration mode, enter the **set protocols ospf area 0 interface fe-1/2/0.2 metric 700** command.

```
user@R1# set protocols ospf area 0 interface fe-1/2/0.2 metric 700
user@R1# commit
```

After waiting 12 minutes (the configured delay period), enter the **show route advertising-protocol bgp** command from operational mode.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.0.0.0/30             Self                 0                  I
* 172.16.0.0/30           Self                 0                  I
* 172.16.0.4/30           Self                 701                I
* 192.168.0.1/32          Self                 0                  I
```

Meaning The 701 value in the MED column shows that the MED value has been updated to reflect the configured OSPF metric.

Testing the minimum-igp Setting

Purpose Change the configuration to use the **minimum-igp** statement instead of the **igp** statement. When you increase the OSPF metric, the MED value remains unchanged, but when you decrease the OSPF metric, the MED value reflects the new OSPF metric.

Action From configuration mode, delete the **igp** statement, add the **minimum-igp** statement, and increase the OSPF metric.

```
user@R1# delete protocols bgp group external metric-out igp
user@R1# set protocols bgp group external metric-out minimum-igp
user@R1# set protocols ospf area 0 interface fe-1/2/0.2 metric 800
user@R1# commit
```

From operational mode, enter the **show route advertising-protocol bgp** command to make sure that the MED value does not change.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
```

Copyright © 2013, Juniper Networks, Inc.

```
* 10.0.0.0/30              Self                0                  I
* 172.16.0.0/30            Self                0                  I
* 172.16.0.4/30            Self                701                I
* 192.168.0.1/32           Self                0                  I
```

From configuration mode, decrease the OSPF metric.

```
user@R1# set protocols ospf area 0 interface fe-1/2/0.2 metric 20
user@R1# commit
```

From operational mode, enter the **show route advertising-protocol bgp** command to make sure that the MED value does change.

```
user@R1> show route advertising-protocol bgp 172.16.0.2
inet.0: 19 destinations, 33 routes (19 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop             MED     Lclpref    AS path
* 10.0.0.0/30             Self                0                  I
* 172.16.0.0/30           Self                0                  I
* 172.16.0.4/30           Self                21                 I
* 192.168.0.1/32          Self                0                  I
```

Meaning When the **minimum-igp** statement is configured, the MED value changes only when a shorter path is available.

Related Documentation

- Examples: Configuring External BGP Peering on page 19
- BGP Configuration Overview

Examples: Configuring BGP Local AS

- Understanding the BGP Local AS Attribute on page 116
- Example: Configuring a Local AS for EBGP Sessions on page 121
- Example: Configuring a Private Local AS for EBGP Sessions on page 131

Understanding the BGP Local AS Attribute

When an Internet service provider (ISP) acquires a network that belongs to a different autonomous system (AS), there is no seamless method for moving the BGP peers of the acquired network to the AS of the acquiring ISP. The process of configuring the BGP peers with the new AS number can be time-consuming and cumbersome. Sometimes customers do not want to or are not immediately able to modify their peer arrangements or configuration. During this kind of transition period, it can be useful to configure BGP-enabled devices in the new AS to use the former AS number in BGP updates. This former AS number is called a *local AS*.

Using a local AS number permits the routing devices in an acquired network to appear to belong to the former AS.

For example, ISP A, with an AS of 200, acquires ISP B, with an AS of 250. ISP B has a customer, ISP C, that does not want to change its configuration. After ISP B becomes part of ISP A, a local AS number of 250 is configured for use in EBGP peer sessions with ISP C. Consequently, the local AS number of 250 is either prepended before or used

Copyright © 2013, Juniper Networks, Inc.

instead of the global AS number of 200 in the AS path used to export routes to direct external peers in ISP C.

If the route is received from an internal BGP (IBGP) peer, the AS path includes the local AS number prepended before the global AS number.

The local AS number is used instead of the global AS number if the route is an external route, such as a static route or an interior gateway protocol (IGP) route that is imported into BGP. If the route is external and you want the global AS number to be included in the AS path, you can apply a routing policy that uses **as-path-expand** or **as-path-prepend**. Use the **as-path-expand** policy action to place the global AS number behind the local AS number. Use the **as-path-prepend** policy action to place the global AS number in front of the local AS number.

For example:

```
user@R2# show policy-options
policy-statement prepend-global {
    term 1 {
        from protocol static;
        then {
            as-path-prepend 200; # or use as-path-expand
            accept;
        }
    }
}

user@R2# show protocols bgp
group ext {
    export prepend-global;
    type external;
    local-as 250;
    neighbor 10.0.0.1 {
        peer-as 100;
    }
    neighbor 10.1.0.2 {
        peer-as 300;
    }
}

user@R2# show routing-options
static {
    route 1.1.1.1/32 next-hop 10.0.0.1;
}
autonomous-system 200;
```

```
user@R3#  run show route 1.1.1.1 protocol bgp
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.1/32          *[BGP/170] 00:05:11, localpref 100
                       AS path: 200 250 I, validation-state: unverified
                     > to 10.1.0.1 via lt-1/2/0.4
```

In a Layer 3 VPN scenario, in which a provider edge (PE) device uses external BGP (EBGP) to peer with a customer edge (CE) device, the **local-as** statement behaves differently

Copyright © 2013, Juniper Networks, Inc.

than in the non-VPN scenario. In the VPN scenario, the global AS number defined in the master instance is prepended to the AS path by default. To override this behavior, you can configure the **no-prepend-global-as** in the routing-instance BGP configuration on the PE device, as shown here:

```
user@R2# show routing-instances
red {
    instance-type vrf;
    interface fe-1/2/0.2;
    route-distinguisher 2:1;
    vrf-target target:2:1;
    protocols {
        bgp {
            group toR1 {
                type external;
                peer-as 1;
                local-as 200 no-prepend-global-as;
                neighbor 10.1.1.1;
            }
        }
    }
}
```

The Junos operating system (Junos OS) implementation of the local AS attribute supports the following options:

Copyright © 2013, Juniper Networks, Inc.

- **Local AS with private option**—When you use the **private** option, the local AS is used during the establishment of the BGP session with an EBGP neighbor but is hidden in the AS path sent to other EBGP peers. Only the global AS is included in the AS path sent to external peers.

  The **private** option is useful for establishing local peering with routing devices that remain configured with their former AS or with a specific customer that has not yet modified its peer arrangements. The local AS is used to establish the BGP session with the EBGP neighbor but is hidden in the AS path sent to external peers in another AS.

  Include the **private** option so that the local AS is not prepended before the global AS in the AS path sent to external peers. When you specify the **private** option, the local AS is prepended only in the AS path sent to the EBGP neighbor.

  For example, in Figure 13 on page 119, Router 1 and Router 2 are in AS 64496, Router 4 is in AS 64511, and Router 3 is in AS 64510. Router 2 formerly belonged to AS 64497, which has merged with another network and now belongs to AS 64496. Because Router 3 still peers with Router 2 using its former AS (64497), Router 2 needs to be configured with a local AS of 64497 in order to maintain peering with Router 3. Configuring a local AS of 64497 permits Router 2 to add AS 64497 when advertising routes to Router 3. Router 3 sees an AS path of 64497 64496 for the prefix 10/8.

Figure 13: Local AS Configuration

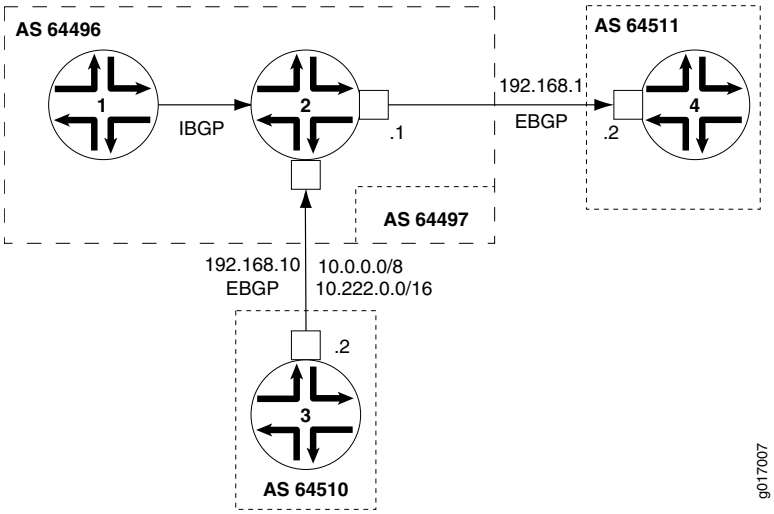

  To prevent Router 2 from adding the local AS number in its announcements to other peers, use the **local-as 64497 private** statement. This statement configures Router 2 to not include local AS 64497 when announcing routes to Router 1 and to Router 4. In this case, Router 4 sees an AS path of 64496 64510 for the prefix 10.222/16.

- **Local AS with alias option**—In Junos OS Release 9.5 and later, you can configure a local AS as an alias. During the establishment of the BGP open session, the AS used in the open message alternates between the local AS and the global AS. If the local AS is used to connect with the EBGP neighbor, then only the local AS is prepended to the AS path when the BGP peer session is established. If the global AS is used to connect with the EBGP neighbor, then only the global AS is prepended to the AS path when the BGP peer session is established. The use of the **alias** option also means that

Copyright © 2013, Juniper Networks, Inc.

the local AS is not prepended to the AS path for any routes learned from that EBGP neighbor. Therefore, the local AS remains hidden from other external peers.

Configuring a local AS with the **alias** option is especially useful when you are migrating the routing devices in an acquired network to the new AS. During the migration process, some routing devices might be configured with the new AS while others remain configured with the former AS. For example, it is good practice to start by first migrating to the new AS any routing devices that function as route reflectors. However, as you migrate the route reflector clients incrementally, each route reflector has to peer with routing devices configured with the former AS, as well as peer with routing devices configured with the new AS. To establish local peer sessions, it can be useful for the BGP peers in the network to use both the local AS and the global AS. At the same time, you want to hide this local AS from external peers and use only the global AS in the AS path when exporting routes to another AS. In this kind of situation, configure the **alias** option.

Include the **alias** option to configure the local AS as an alias to the global AS configured at the **[edit routing-options]** hierarchy level. When you configure a local AS as an alias, during the establishment of the BGP open session, the AS used in the open message alternates between the local AS and the global AS. The local AS is prepended to the AS path only when the peer session with an EBGP neighbor is established using that local AS. The local AS is hidden in the AS path sent to any other external peers. Only the global AS is prepended to the AS path when the BGP session is established using the global AS.

NOTE: The private and alias options are mutually exclusive. You cannot configure both options with the same local-as statement.

- **Local AS with option not to prepend the global AS**—In Junos OS Release 9.6 and later, you can configure a local AS with the option not to prepend the global AS. Only the local AS is included in the AS path sent to external peers.

  Use the **no-prepend-global-as** option when you want to strip the global AS number from outbound BGP updates in a virtual private network (VPN) scenario. This option is useful in aVPN scenario in which you want to hide the global AS from the VPN.

  Include the **no-prepend-global-as** option to have the global AS configured at the **[edit routing-options]** hierarchy level removed from the AS path sent to external peers. When you use this option, only the local AS is included in the AS path for the routes sent to a customer edge (CE) device.

- **Number of loops option**—The local AS feature also supports specifying the number of times that detection of the AS number in the AS_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

  For the **loops *number*** statement, you can configure 1 through 10.

Copyright © 2013, Juniper Networks, Inc.

NOTE: If you configure the local AS values for any BGP group, the detection of routing loops is performed using both the AS and the local AS values for all BGP groups.

If the local AS for the EBGP or IBGP peer is the same as the current AS, do not use the local-as statement to specify the local AS number.

When you configure the local AS within a VRF, this impacts the AS path loop-detection mechanism. All of the local-as statements configured on the device are part of a single AS domain. The AS path loop-detection mechanism is based on looking for a matching AS present in the domain.

Example: Configuring a Local AS for EBGP Sessions

This example shows how to configure a local autonomous system (AS) for a BGP peer so that both the global AS and the local AS are used in BGP inbound and outbound updates.

- Requirements on page 121
- Overview on page 121
- Configuration on page 122
- Verification on page 128

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

Use the **local-as** statement when ISPs merge and want to preserve a customer's configuration, particularly the AS with which the customer is configured to establish a peer relationship. The **local-as** statement simulates the AS number already in place in customer routers, even if the ISP's router has moved to a different AS.

This example shows how to use the **local-as** statement to configure a local AS. The **local-as** statement is supported for BGP at the global, group, and neighbor hierarchy levels.

When you configure the **local-as** statement, you must specify an AS number. You can specify a number from 1 through 4,294,967,295 in plain-number format. In Junos OS Release 9.1 and later, the range for AS numbers is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*. In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: *<16-bit high-order value in decimal>.<16-bit low-order value in decimal>*. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value from 0.0 through 65535.65535 in AS-dot notation format. Junos

Copyright © 2013, Juniper Networks, Inc.

OS continues to support 2-byte AS numbers. The 2-byte AS number range is 1 through 65,535 (this is a subset of the 4-byte range).

Figure 14 on page 122 shows the sample topology.

Figure 14: Topology for Configuring the Local AS

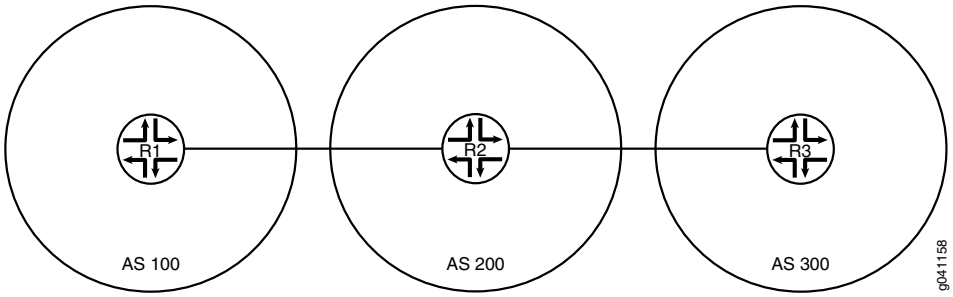

In this example, Device R2 formerly belonged to AS 250 and now is in AS 200. Device R1 and Device R3 are configured to peer with AS 250 instead of with the new AS number (AS 200). Device R2 has the new AS number configured with the **autonomous-system 200** statement. To enable the peering sessions to work, the **local-as 250** statement is added in the BGP configuration. Because **local-as 250** is configured, Device R2 includes both the global AS (200) and the local AS (250) in its BGP inbound and outbound updates.

Configuration

- Configuring Device R1 on page 123
- Configuring Device R2 on page 125
- Configuring Device R3 on page 127

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 192.168.0.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 250
set protocols bgp group ext neighbor 10.0.0.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 10.1.0.0/30 next-hop 10.0.0.2
set routing-options autonomous-system 100
```

Device R2

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 3 family inet address 10.1.0.1/30
set interfaces lo0 unit 2 family inet address 192.168.0.2/32
```


Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext local-as 250
set protocols bgp group ext neighbor 10.0.0.1 peer-as 100
set protocols bgp group ext neighbor 10.1.0.2 peer-as 300
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options autonomous-system 200
```

Device R3

```
set interfaces fe-1/2/0 unit 4 family inet address 10.1.0.2/30
set interfaces lo0 unit 3 family inet address 192.168.0.3/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 250
set protocols bgp group ext neighbor 10.1.0.1
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 10.0.0.0/30 next-hop 10.1.0.1
set routing-options autonomous-system 300
```

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30


user@R1# set lo0 unit 1 family inet address 192.168.0.1/32
```

2. Configure external BGP (EBGP).

```
[edit protocols bgp group ext]
user@R1# set type external
user@R1# set export send-direct
user@R1# set export send-static
user@R1# set peer-as 250
user@R1# set neighbor 10.0.0.2
```

3. Configure the routing policy.

```
[edit policy-options]
user@R1# set policy-statement send-direct term 1 from protocol direct
user@R1# set policy-statement send-direct term 1 then accept
user@R1# set policy-statement send-static term 1 from protocol static
user@R1# set policy-statement send-static term 1 then accept
```

Copyright © 2013, Juniper Networks, Inc.

4. Configure a static route to the remote network between Device R2 and Device R3.

```
[edit routing-options]
user@R1# set static route 10.1.0.0/30 next-hop 10.0.0.2
```

5. Configure the global AS number.

```
[edit routing-options]
user@R1# set autonomous-system 100
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}
```

```
user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}
```

```
user@R1# show protocols
bgp {
  group ext {
    type external;
    export [ send-direct send-static ];
    peer-as 250;
    neighbor 10.0.0.2;
  }
}
```

```
user@R1# show routing-options
static {
```


Copyright © 2013, Juniper Networks, Inc.

```
    route 10.1.0.0/30 next-hop 10.0.0.2;
}
autonomous-system 100;
```

When you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces]
user@R2# set fe-1/2/0 unit 2 family inet address 10.0.0.2/30

user@R2# set fe-1/2/1 unit 3 family inet address 10.1.0.1/30

user@R2# set lo0 unit 2 family inet address 192.168.0.2/32
```

2. Configure EBGP.

```
[edit protocols bgp group ext]
user@R2# set type external
user@R2# set export send-direct
user@R2# set export send-static
user@R2# set neighbor 10.0.0.1 peer-as 100
user@R2# set neighbor 10.1.0.2 peer-as 300
```

3. Configure the local autonomous system (AS) number.

```
[edit protocols bgp group ext]
user@R2# set local-as 250
```

4. Configure the global AS number.

```
[edit routing-options]
user@R2# set autonomous-system 200
```

5. Configure the routing policy.

```
[edit policy-options]
user@R2# set policy-statement send-direct term 1 from protocol direct
user@R2# set policy-statement send-direct term 1 then accept
user@R2# set policy-statement send-static term 1 from protocol static
user@R2# set policy-statement send-static term 1 then accept
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
    unit 2 {
```

Copyright © 2013, Juniper Networks, Inc.

```
      family inet {
        address 10.0.0.2/30;
      }
    }
  }
  fe-1/2/1 {
    unit 3 {
      family inet {
        address 10.1.0.1/30;
      }
    }
  }
  lo0 {
    unit 2 {
      family inet {
        address 192.168.0.2/32;
      }
    }
  }
```

```
user@R2# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}
```

```
user@R2# show protocols
bgp {
  group ext {
    type external;
    export [ send-direct send-static ];
    local-as 250;
    neighbor 10.0.0.1 {
      peer-as 100;
    }
    neighbor 10.1.0.2 {
      peer-as 300;
    }
  }
}
```

```
user@R2# show routing-options
autonomous-system 200;
```

When you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R3

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R3:

1. Configure the interfaces.

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 4 family inet address 10.1.0.2/30

user@R3# set lo0 unit 3 family inet address 192.168.0.3/32
```

2. Configure EBGP.

```
[edit protocols bgp group ext]
user@R3# set type external
user@R3# set export send-direct
user@R3# set export send-static
user@R3# set peer-as 250
user@R3# set neighbor 10.1.0.1
```

3. Configure the global autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 300
```

4. Configure a static route to the remote network between Device R1 and Device R2.

```
[edit routing-options]
user@R3# set static route 10.0.0.0/30 next-hop 10.1.0.1
```

5. Configure the routing policy.

```
[edit policy-options]
user@R3# set policy-statement send-direct term 1 from protocol direct
user@R3# set policy-statement send-direct term 1 then accept
user@R3# set policy-statement send-static term 1 from protocol static
user@R3# set policy-statement send-static term 1 then accept
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/2/0 {
   unit 4 {
      family inet {
         address 10.1.0.2/30;
      }
   }
}
lo0 {
   unit 3 {
```

Copyright © 2013, Juniper Networks, Inc.

```
      family inet {
        address 192.168.0.3/32;
      }
    }
  }
```

```
user@R3# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}
```

```
user@R3# show protocols
bgp {
  group ext {
    type external;
    export [ send-direct send-static ];
    peer-as 250;
    neighbor 10.1.0.1;
  }
}
```

```
user@R3# show routing-options
static {
  route 10.0.0.0/30 next-hop 10.1.0.1;
}
autonomous-system 300;
```

When you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Checking the Local and Global AS Settings on page 128
- Checking the BGP Peering Sessions on page 130
- Verifying the BGP AS Paths on page 130

Checking the Local and Global AS Settings

Purpose Make sure that Device R2 has the local and global AS settings configured.

Action From operational mode, enter the **show bgp neighbors** command.

```
user@R2> show bgp neighbors
Peer: 10.0.0.1+179 AS 100      Local: 10.0.0.2+61036 AS 250
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
```


Copyright © 2013, Juniper Networks, Inc.

```
  Export: [ send-direct send-static ]
  Options: <Preference PeerAS LocalAS Refresh>
  Holdtime: 90 Preference: 170 Local AS: 250 Local System AS: 200
  Number of flaps: 0
  Peer ID: 192.168.0.1     Local ID: 192.168.0.2       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  Local Interface: fe-1/2/0.2
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 100)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              1
    Received prefixes:            3
    Accepted prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          4
  Last traffic (seconds): Received 6    Sent 14   Checked 47
  Input messages:  Total 258    Updates 3       Refreshes 0     Octets 4969
  Output messages: Total 258    Updates 2       Refreshes 0     Octets 5037
  Output Queue[0]: 0

Peer: 10.1.0.2+179 AS 300      Local: 10.1.0.1+52296 AS 250
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct send-static ]
  Options: <Preference PeerAS LocalAS Refresh>
  Holdtime: 90 Preference: 170 Local AS: 250 Local System AS: 200
  Number of flaps: 0
  Peer ID: 192.168.0.3     Local ID: 192.168.0.2       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  Local Interface: fe-1/2/1.3
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 300)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              1
    Received prefixes:            3
    Accepted prefixes:            2
```

```
  Suppressed due to damping:    0
  Advertised prefixes:          4
Last traffic (seconds): Received 19   Sent 26   Checked 9
Input messages:  Total 256    Updates 3       Refreshes 0     Octets 4931
Output messages: Total 256    Updates 2       Refreshes 0     Octets 4999
Output Queue[0]: 0
```

Meaning The Local AS: 250 and Local System AS: 200 output shows that Device R2 has the expected settings. Additionally, the output shows that the options list includes LocalAS.

Checking the BGP Peering Sessions

Purpose Ensure that the sessions are established and that the local AS number 250 is displayed.

Action From operational mode, enter the **show bgp summary** command.

```
user@R1> show bgp summary
Groups: 1 Peers: 1 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 4          2          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
10.0.0.2                250        232        233       0       4     1:42:37
2/4/4/0              0/0/0/0

user@R3> show bgp summary
Groups: 1 Peers: 1 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 4          2          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
10.1.0.1                250        235        236       0       4     1:44:25
2/4/4/0              0/0/0/0
```

Meaning Device R1 and Device R3 appear to be peering with a device in AS 250, even though Device R2 is actually in AS 200.

Verifying the BGP AS Paths

Purpose Make sure that the routes are in the routing tables and that the AS paths show the local AS number 250.

Action From configuration mode, enter the **set route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 6 destinations, 8 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30         [BGP/170] 01:46:44, localpref 100
                      AS path: 250 I
                    > to 10.0.0.2 via fe-1/2/0.1
10.1.0.0/30         [BGP/170] 01:46:44, localpref 100
                      AS path: 250 I
                    > to 10.0.0.2 via fe-1/2/0.1
192.168.0.2/32     *[BGP/170] 01:46:44, localpref 100
                      AS path: 250 I
                    > to 10.0.0.2 via fe-1/2/0.1
```

 Copyright © 2013, Juniper Networks, Inc.

```
192.168.0.3/32     *[BGP/170] 01:46:40, localpref 100
                      AS path: 250 300 I
                    > to 10.0.0.2 via fe-1/2/0.1

user@R3> show route protocol bgp

inet.0: 6 destinations, 8 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30         [BGP/170] 01:47:10, localpref 100
                      AS path: 250 I
                    > to 10.1.0.1 via fe-1/2/0.4
10.1.0.0/30         [BGP/170] 01:47:10, localpref 100
                      AS path: 250 I
                    > to 10.1.0.1 via fe-1/2/0.4
192.168.0.1/32     *[BGP/170] 01:47:10, localpref 100
                      AS path: 250 100 I
                    > to 10.1.0.1 via fe-1/2/0.4
192.168.0.2/32     *[BGP/170] 01:47:10, localpref 100
                      AS path: 250 I
                    > to 10.1.0.1 via fe-1/2/0.4
```

Meaning The output shows that Device R1 and Device R3 appear to have routes with AS paths that include AS 250, even though Device R2 is actually in AS 200.

Example: Configuring a Private Local AS for EBGP Sessions

This example shows how to configure a private local autonomous system (AS) number. The local AS is considered to be private because it is advertised to peers that use the local AS number for peering, but is hidden in the announcements to peers that can use the global AS number for peering.

- Requirements on page 131
- Overview on page 131
- Configuration on page 133
- Verification on page 135

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

Use the **local-as** statement when ISPs merge and want to preserve a customer's configuration, particularly the AS with which the customer is configured to establish a peer relationship. The **local-as** statement simulates the AS number already in place in customer routers, even if the ISP's router has moved to a different AS.

When you use the **private** option, the local AS is used during the establishment of the BGP session with an external BGP (EBGP) neighbor, but is hidden in the AS path sent to other EBGP peers. Only the global AS is included in the AS path sent to external peers.

Copyright © 2013, Juniper Networks, Inc.

The **private** option is useful for establishing local peering with routing devices that remain configured with their former AS or with a specific customer that has not yet modified its peer arrangements. The local AS is used to establish the BGP session with the EBGP neighbor, but is hidden in the AS path sent to external peers in another AS.

Include the **private** option so that the local AS is not prepended before the global AS in the AS path sent to external peers. When you specify the **private** option, the local AS is prepended only in the AS path sent to the EBGP neighbor.

Figure 15 on page 132 shows the sample topology.

Figure 15: Topology for Configuring a Private Local AS

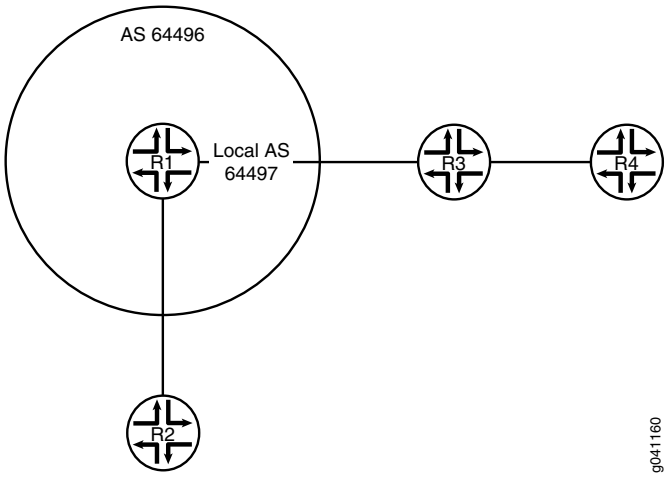

Device R1 is in AS 64496. Device R2 is in AS 64510. Device R3 is in AS 64511. Device R4 is in AS 64512. Device R1 formerly belonged to AS 64497, which has merged with another network and now belongs to AS 64496. Because Device R3 still peers with Device R1, using its former AS, 64497, Device R1 needs to be configured with a local AS of 64497 in order to maintain peering with Device R3. Configuring a local AS of 64497 permits Device R1 to add AS 64497 when advertising routes to Device R3. Device R3 sees an AS path of 64497 64496 for the prefix 10.1.1.2/32, which is Device R2's loopback interface. Device R4, which is behind Device R3, sees an AS path of 64511 64497 64496 64510 to Device R2's loopback interface. To prevent Device R1 from adding the local AS number in its announcements to other peers, this example includes the **local-as 64497 private** statement. The **private** option configures Device R1 to not include the local AS 64497 when announcing routes to Device R2. Device R2 sees an AS path of 64496 64511 to Device R3 and an AS path of 64496 64511 64512 to Device R4. The **private** option in Device R1's configuration causes the AS number 64497 to be missing from the AS paths that Device R1 readvertises to Device R2.

Device R2 is hiding the private local AS from all the routers, except Device R3. The **private** option applies to the routes that Device R1 receives (learns) from Device R3 and that Device R1, in turn, readvertises to other routers. When these routes learned from Device R3 are readavertised by Device R1 to Device R2, the private local AS is missing from the AS path advertised to Device R2.

Copyright © 2013, Juniper Networks, Inc.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 3 family inet address 192.168.1.1/24
set interfaces fe-1/2/1 unit 5 family inet address 192.168.10.1/24
set interfaces lo0 unit 2 family inet address 10.1.1.1/32
set protocols bgp group external-AS64511 type external
set protocols bgp group external-AS64511 peer-as 64511
set protocols bgp group external-AS64511 local-as 64497
set protocols bgp group external-AS64511 local-as private
set protocols bgp group external-AS64511 neighbor 192.168.1.2
set protocols bgp group external-AS64510 type external
set protocols bgp group external-AS64510 peer-as 64510
set protocols bgp group external-AS64510 neighbor 192.168.10.2
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 64496
```

Device R2

```
set interfaces fe-1/2/0 unit 6 family inet address 192.168.10.2/24
set interfaces lo0 unit 3 family inet address 10.1.1.2/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 64496
set protocols bgp group external neighbor 192.168.10.1
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 64510
```

Device R3

```
set interfaces fe-1/2/0 unit 4 family inet address 192.168.1.2/24
set interfaces fe-1/2/1 unit 7 family inet address 192.168.5.1/24
set interfaces lo0 unit 4 family inet address 10.1.1.3/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external neighbor 192.168.1.1 peer-as 64497
set protocols bgp group external neighbor 192.168.5.2 peer-as 64512
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 64511
```

Device R4

```
set interfaces fe-1/2/0 unit 8 family inet address 192.168.5.2/24
set interfaces lo0 unit 5 family inet address 10.1.1.4/32
set protocols bgp group external type external
set protocols bgp group external export send-direct
set protocols bgp group external peer-as 64511
set protocols bgp group external neighbor 192.168.5.1
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 64512
```

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R1# set family inet address 192.168.1.1/24

[edit interfaces fe-1/2/1 unit 5]
user@R1# set family inet address 192.168.10.1/24

[edit interfaces lo0 unit 2]
user@R1# set family inet address 10.1.1.1/32
```

2. Configure the EBGP peering session with Device R2.

```
[edit protocols bgp group external-AS64510]
user@R1# set type external
user@R1# set peer-as 64510
user@R1# set neighbor 192.168.10.2
```

3. Configure the EBGP peering session with Device R3.

```
[edit protocols bgp group external-AS64511]
user@R1# set type external
user@R1# set peer-as 64511
user@R1# set local-as 64497
user@R1# set local-as private
user@R1# set neighbor 192.168.1.2
```

4. Configure the routing policy.

```
[edit policy-options policy-statement send-direct term 1]
user@R1# set from protocol direct
user@R1# set then accept
```

5. Configure the global autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 64496
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
   unit 3 {
      family inet {
         address 192.168.1.1/24;
      }
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  fe-1/2/1 {
    unit 5 {
      family inet {
        address 192.168.10.1/24;
      }
    }
  }
  lo0 {
    unit 2 {
      family inet {
        address 10.1.1.1/32;
      }
    }
  }
```

```
user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
```

```
user@R1# show protocols
bgp {
  group external-AS64511 {
    type external;
    peer-as 64511;
    local-as 64497 private;
    neighbor 192.168.1.2;
  }
  group external-AS64510 {
    type external;
    peer-as 64510;
    neighbor 192.168.10.2;
  }
}
```

```
user@R1# show routing-options
autonomous-system 64496;
```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the configuration as needed for the other devices in the topology.

Verification

Confirm that the configuration is working properly.

- Checking Device R2's AS Paths on page 136
- Checking Device R3's AS Paths on page 136

Copyright © 2013, Juniper Networks, Inc.

Checking Device R2's AS Paths

Purpose Make sure that Device R2 does not have AS 64497 in its AS paths to Device R3 and Device R4.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R2> show route protocol bgp
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.3/32        *[BGP/170] 01:33:11, localpref 100
                      AS path: 64496 64511 I
                    > to 192.168.10.1 via fe-1/2/0.6
10.1.1.4/32        *[BGP/170] 01:33:11, localpref 100
                      AS path: 64496 64511 64512 I
                    > to 192.168.10.1 via fe-1/2/0.6
192.168.5.0/24     *[BGP/170] 01:49:15, localpref 100
                      AS path: 64496 64511 I
                    > to 192.168.10.1 via fe-1/2/0.6
```

Meaning Device R2's AS paths do not include AS 64497.

Checking Device R3's AS Paths

Purpose Make sure that Device R3 does not have AS 64497 in its AS path to Device R4.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R3> show route protocol bgp
inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.2/32        *[BGP/170] 01:35:11, localpref 100
                      AS path: 64497 64496 64510 I
                    > to 192.168.1.1 via fe-1/2/0.4
10.1.1.4/32        *[BGP/170] 01:35:11, localpref 100
                      AS path: 64512 I
                    > to 192.168.5.2 via fe-1/2/1.7
192.168.5.0/24      [BGP/170] 01:51:15, localpref 100
                      AS path: 64512 I
                    > to 192.168.5.2 via fe-1/2/1.7
```

Meaning Device R3's route to Device R2 (prefix 10.1.1.2) includes both the local and the global AS configured on Device R1 (64497 and 64496, respectively).

Related Documentation

- Examples: Configuring External BGP Peering on page 19
- BGP Configuration Overview

Example: Configuring the Accumulated IGP Attribute for BGP

- Understanding the Accumulated IGP Attribute for BGP on page 137
- Example: Configuring the Accumulated IGP Attribute for BGP on page 137

Copyright © 2013, Juniper Networks, Inc.

Understanding the Accumulated IGP Attribute for BGP

The interior gateway protocols (IGPs) are designed to handle routing within a single domain or an autonomous system (AS). Each link is assigned a particular value called a metric. The distance between the two nodes is calculated as a sum of all the metric values of links along the path. The IGP selects the shortest path between two nodes based on distance.

BGP is designed to provide routing over a large number of independent ASs with limited or no coordination among respective administrations. BGP does not use metrics in the path selection decisions.

The accumulated IGP (AIGP) metric attribute for BGP enables deployment in which a single administration can run several contiguous BGP ASs. Such deployments allow BGP to make routing decisions based on the IGP metric. In such networks, it is possible for BGP to select paths based on metrics as is done by IGPs. In this case, BGP chooses the shortest path between two nodes, even though the nodes might be in two different ASs.

The AIGP attribute is particularly useful in networks that use tunneling to deliver a packet to its BGP next hop. The Juniper Networks® Junos® operating system (Junos OS) currently supports the AIGP attribute for two BGP address families, **family inet labeled-unicast** and **family inet6 labeled-unicast**.

AIGP impacts the BGP best-route decision process. The AIGP attribute preference rule is applied after the local-preference rule. The AIGP distance is compared to break a tie. The BGP best-route decision process also impacts the way the interior cost rule is applied if the resolving next hop has an AIGP attribute. Without AIGP enabled, the interior cost of a route is based on the calculation of the metric to the next hop for the route. With AIGP enabled, the resolving AIGP distance is added to the interior cost.

The AIGP attribute is an optional non-transitive BGP path attribute and is specified in Internet draft draft-ietf-idr-aigp-06, *The Accumulated IGP Metric Attribute for BGP*.

Example: Configuring the Accumulated IGP Attribute for BGP

This example shows how to configure the accumulated IGP (AIGP) metric attribute for BGP.

- Requirements on page 137
- Overview on page 138
- Configuration on page 139
- Verification on page 169

Requirements

This example uses the following hardware and software components:

- Seven BGP-speaking devices.
- Junos OS Release 12.1 or later.

Copyright © 2013, Juniper Networks, Inc.

Overview

The AIGP attribute enables deployments in which a single administration can run several contiguous BGP autonomous systems (ASs). Such deployments allow BGP to make routing decisions based on the IGP metric. With AIGP enabled, BGP can select paths based on IGP metrics. This enables BGP to choose the shortest path between two nodes, even though the nodes might be in different ASs. The AIGP attribute is particularly useful in networks that use tunneling to deliver a packet to its BGP next hop. This example shows AIGP configured with MPLS label-switched paths.

To enable AIGP, you include the aigp statement in the BGP configuration on a protocol family basis. Configuring AIGP on a particular family enables sending and receiving of the AIGP attribute on that family. By default, AIGP is disabled. An AIGP-disabled neighbor does not send an AIGP attribute and silently discards a received AIGP attribute.

Junos OS supports AIGP for **family inet labeled-unicast** and **family inet6 labeled-unicast**. The **aigp** statement can be configured for a given family at the global BGP, group, or neighbor level.

By default, the value of the AIGP attribute for a local prefix is zero. An AIGP-enabled neighbor can originate an AIGP attribute for a given prefix by export policy, using the aigp-originate policy action. The value of the AIGP attribute reflects the IGP distance to the prefix. Alternatively, you can specify a value, by using the **aigp-originate distance *distance*** policy action. The configurable range is 0 through 4,294,967,295. Only one node needs to originate an AIGP attribute. The AIGP attribute is retained and readvertised if the neighbors are AIGP enabled with the **aigp** statement in the BGP configuration.

The policy action to originate the AIGP attribute has the following requirements:

- Neighbor must be AIGP enabled.
- Policy must be applied as an export policy.
- Prefix must have no current AIGP attribute.
- Prefix must export with next-hop self.
- Prefix must reside within the AIGP domain. Typically, a loopback IP address is the prefix to originate.

The policy is ignored if these requirements are not met.

Topology Diagram

Figure 16 on page 139 shows the topology used in this example. OSPF is used as the interior gateway protocol (IGP). Internal BGP (IBGP) is configured between Device PE1 and Device PE4. External BGP (EBGP) is configured between Device PE7 and Device PE1, between Device PE4 and Device PE3, and between Device PE4 and Device PE2. Devices PE4, PE2, and PE3 are configured for multihop. Device PE4 selects a path based on the AIGP value and then readvertises the AIGP value based on the AIGP and policy configuration. Device PE1 readvertises the AIGP value to Device PE7, which is in another administrative domain. Every device has two loopback interface addresses: 10.9.9.x is used for BGP peering and the router ID, and 10.100.1.x is used for the BGP next hop.

Copyright © 2013, Juniper Networks, Inc.

The network between Device PE1 and PE3 has IBGP peering and multiple OSPF areas. The external link to Device PE7 is configured to show that the AIGP attribute is readvertised to a neighbor outside of the administrative domain, if that neighbor is AIGP enabled.

Figure 16: Advertisement of Multiple Paths in BGP

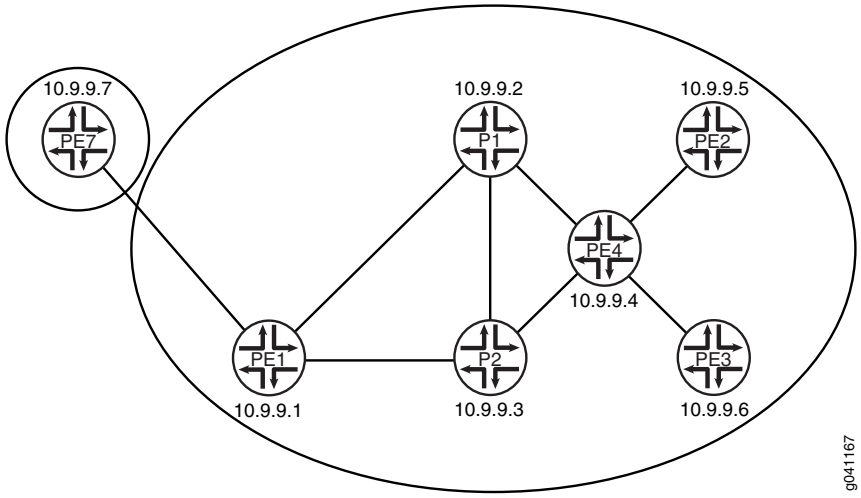

For origination of an AIGP attribute, the BGP next hop is required to be itself. If the BGP next hop remains unchanged, the received AIGP attribute is readvertised, as is, to another AIGP neighbor. If the next hop changes, the received AIGP attribute is readvertised with an increased value to another AIGP neighbor. The increase in value reflects the IGP distance to the previous BGP next hop. To demonstrate, this example uses loopback interface addresses for Device PE4's EBGP peering sessions with Device PE2 and Device PE3. Multihop is enabled on these sessions so that a recursive lookup is performed to determine the point-to-point interface. Because the next hop changes, the IGP distance is added to the AIGP distance.

Configuration

- Configuring Device P1 on page 145
- Configuring Device P2 on page 148
- Configuring Device PE4 on page 151
- Configuring Device PE1 on page 156
- Configuring Device PE2 on page 160
- Configuring Device PE3 on page 164
- Configuring Device PE7 on page 167

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device P1

```
set interfaces fe-1/2/0 unit 1 description P1-to-PE1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.2/30
set interfaces fe-1/2/0 unit 1 family mpls
```

Copyright © 2013, Juniper Networks, Inc.

```
set interfaces fe-1/2/1 unit 4 description P1-to-P2
set interfaces fe-1/2/1 unit 4 family inet address 10.0.0.29/30
set interfaces fe-1/2/1 unit 4 family mpls
set interfaces fe-1/2/2 unit 8 description P1-to-PE4
set interfaces fe-1/2/2 unit 8 family inet address 10.0.0.17/30
set interfaces fe-1/2/2 unit 8 family mpls
set interfaces lo0 unit 3 family inet address 10.9.9.2/32
set interfaces lo0 unit 3 family inet address 10.100.1.2/32
set protocols rsvp interface fe-1/2/0.1
set protocols rsvp interface fe-1/2/2.8
set protocols rsvp interface fe-1/2/1.4
set protocols mpls label-switched-path P1-to-P2 to 10.9.9.3
set protocols mpls label-switched-path P1-to-PE1 to 10.9.9.1
set protocols mpls label-switched-path P1-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/0.1
set protocols mpls interface fe-1/2/2.8
set protocols mpls interface fe-1/2/1.4
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.2
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal neighbor 10.9.9.1
set protocols bgp group internal neighbor 10.9.9.3
set protocols bgp group internal neighbor 10.9.9.4
set protocols ospf area 0.0.0.1 interface fe-1/2/0.1 metric 1
set protocols ospf area 0.0.0.1 interface fe-1/2/1.4 metric 1
set protocols ospf area 0.0.0.0 interface fe-1/2/2.8 metric 1
set protocols ospf area 0.0.0.0 interface 10.9.9.2 passive
set protocols ospf area 0.0.0.0 interface 10.9.9.2 metric 1
set protocols ospf area 0.0.0.0 interface 10.100.1.2 passive
set protocols ospf area 0.0.0.0 interface 10.100.1.2 metric 1
set routing-options router-id 10.9.9.2
set routing-options autonomous-system 13979
```

Device P2

```
set interfaces fe-1/2/0 unit 3 description P2-to-PE1
set interfaces fe-1/2/0 unit 3 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 3 family mpls
set interfaces fe-1/2/1 unit 5 description P2-to-P1
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.30/30
set interfaces fe-1/2/1 unit 5 family mpls
set interfaces fe-1/2/2 unit 6 description P2-to-PE4
set interfaces fe-1/2/2 unit 6 family inet address 10.0.0.13/30
set interfaces fe-1/2/2 unit 6 family mpls
set interfaces lo0 unit 5 family inet address 10.9.9.3/32
set interfaces lo0 unit 5 family inet address 10.100.1.3/32
set protocols rsvp interface fe-1/2/1.5
set protocols rsvp interface fe-1/2/2.6
set protocols rsvp interface fe-1/2/0.3
set protocols mpls label-switched-path P2-to-PE1 to 10.9.9.1
set protocols mpls label-switched-path P2-to-P1 to 10.9.9.2
set protocols mpls label-switched-path P2-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/1.5
set protocols mpls interface fe-1/2/2.6
set protocols mpls interface fe-1/2/0.3
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.3
set protocols bgp group internal family inet labeled-unicast aigp
```


Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group internal neighbor 10.9.9.1
set protocols bgp group internal neighbor 10.9.9.2
set protocols bgp group internal neighbor 10.9.9.4
set protocols ospf area 0.0.0.0 interface fe-1/2/2.6 metric 1
set protocols ospf area 0.0.0.0 interface 10.9.9.3 passive
set protocols ospf area 0.0.0.0 interface 10.9.9.3 metric 1
set protocols ospf area 0.0.0.0 interface 10.100.1.3 passive
set protocols ospf area 0.0.0.0 interface 10.100.1.3 metric 1
set routing-options router-id 10.9.9.3
set routing-options autonomous-system 13979
```

Device PE4

```
set interfaces fe-1/2/0 unit 7 description PE4-to-P2
set interfaces fe-1/2/0 unit 7 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 7 family mpls
set interfaces fe-1/2/1 unit 9 description PE4-to-P1
set interfaces fe-1/2/1 unit 9 family inet address 10.0.0.18/30
set interfaces fe-1/2/1 unit 9 family mpls
set interfaces fe-1/2/2 unit 10 description PE4-to-PE2
set interfaces fe-1/2/2 unit 10 family inet address 10.0.0.21/30
set interfaces fe-1/2/2 unit 10 family mpls
set interfaces fe-1/0/2 unit 12 description PE4-to-PE3
set interfaces fe-1/0/2 unit 12 family inet address 10.0.0.25/30
set interfaces fe-1/0/2 unit 12 family mpls
set interfaces lo0 unit 7 family inet address 10.9.9.4/32
set interfaces lo0 unit 7 family inet address 10.100.1.4/32
set protocols rsvp interface fe-1/2/0.7
set protocols rsvp interface fe-1/2/1.9
set protocols rsvp interface fe-1/2/2.10
set protocols rsvp interface fe-1/0/2.12
set protocols mpls label-switched-path PE4-to-PE2 to 10.9.9.5
set protocols mpls label-switched-path PE4-to-PE3 to 10.9.9.6
set protocols mpls label-switched-path PE4-to-P1 to 10.9.9.2
set protocols mpls label-switched-path PE4-to-P2 to 10.9.9.3
set protocols mpls interface fe-1/2/0.7
set protocols mpls interface fe-1/2/1.9
set protocols mpls interface fe-1/2/2.10
set protocols mpls interface fe-1/0/2.12
set protocols bgp export next-hop
set protocols bgp export aigp
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.4
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal neighbor 10.9.9.1
set protocols bgp group internal neighbor 10.9.9.3
set protocols bgp group internal neighbor 10.9.9.2
set protocols bgp group external type external
set protocols bgp group external multihop ttl 2
set protocols bgp group external local-address 10.9.9.4
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external peer-as 7018
set protocols bgp group external neighbor 10.9.9.5
set protocols bgp group external neighbor 10.9.9.6
set protocols ospf area 0.0.0.0 interface fe-1/2/1.9 metric 1
set protocols ospf area 0.0.0.0 interface fe-1/2/0.7 metric 1
set protocols ospf area 0.0.0.0 interface 10.9.9.4 passive
set protocols ospf area 0.0.0.0 interface 10.9.9.4 metric 1
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols ospf area 0.0.0.0 interface 10.100.1.4 passive
set protocols ospf area 0.0.0.0 interface 10.100.1.4 metric 1
set protocols ospf area 0.0.0.2 interface fe-1/2/2.10 metric 1
set protocols ospf area 0.0.0.3 interface fe-1/0/2.12 metric 1
set policy-options policy-statement aigp term 10 from protocol static
set policy-options policy-statement aigp term 10 from route-filter 44.0.0.0/24 exact
set policy-options policy-statement aigp term 10 then aigp-originate distance 200
set policy-options policy-statement aigp term 10 then next-hop 10.100.1.4
set policy-options policy-statement aigp term 10 then accept
set policy-options policy-statement next-hop term 10 from protocol bgp
set policy-options policy-statement next-hop term 10 then next-hop 10.100.1.4
set policy-options policy-statement next-hop term 10 then accept
set policy-options policy-statement next-hop term 20 from protocol direct
set policy-options policy-statement next-hop term 20 from route-filter 10.9.9.4/32 exact
set policy-options policy-statement next-hop term 20 from route-filter 10.100.1.4/32
  exact
set policy-options policy-statement next-hop term 20 then next-hop 10.100.1.4
set policy-options policy-statement next-hop term 20 then accept
set routing-options static route 44.0.0.0/24 discard
set routing-options router-id 10.9.9.4
set routing-options autonomous-system 13979
```

Device PE1

```
set interfaces fe-1/2/0 unit 0 description PE1-to-P1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 2 description PE1-to-P2
set interfaces fe-1/2/1 unit 2 family inet address 10.0.0.5/30
set interfaces fe-1/2/1 unit 2 family mpls
set interfaces fe-1/2/2 unit 14 description PE1-to-PE7
set interfaces fe-1/2/2 unit 14 family inet address 10.0.0.9/30
set interfaces lo0 unit 1 family inet address 10.9.9.1/32
set interfaces lo0 unit 1 family inet address 10.100.1.1/32
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.2
set protocols rsvp interface fe-1/2/2.14
set protocols mpls label-switched-path PE1-to-P1 to 10.9.9.2
set protocols mpls label-switched-path PE1-to-P2 to 10.9.9.3
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.2
set protocols mpls interface fe-1/2/2.14
set protocols bgp group internal type internal
set protocols bgp group internal local-address 10.9.9.1
set protocols bgp group internal family inet labeled-unicast aigp
set protocols bgp group internal export SET_EXPORT_ROUTES
set protocols bgp group internal vpn-apply-export
set protocols bgp group internal neighbor 10.9.9.4
set protocols bgp group internal neighbor 10.9.9.2
set protocols bgp group internal neighbor 10.9.9.3
set protocols bgp group external type external
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external peer-as 7019
set protocols bgp group external neighbor 10.0.0.10
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0 metric 1
set protocols ospf area 0.0.0.1 interface fe-1/2/1.2 metric 1
set protocols ospf area 0.0.0.1 interface 10.9.9.1 passive
```


Copyright © 2013, Juniper Networks, Inc.

```
set protocols ospf area 0.0.0.1 interface 10.9.9.1 metric 1
set protocols ospf area 0.0.0.1 interface 10.100.1.1 passive
set protocols ospf area 0.0.0.1 interface 10.100.1.1 metric 1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set routing-options router-id 10.9.9.1
set routing-options autonomous-system 13979
```

Device PE2

```
set interfaces fe-1/2/0 unit 11 description PE2-to-PE4
set interfaces fe-1/2/0 unit 11 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 11 family mpls
set interfaces lo0 unit 9 family inet address 10.9.9.5/32 primary
set interfaces lo0 unit 9 family inet address 10.100.1.5/32
set protocols rsvp interface fe-1/2/0.11
set protocols mpls label-switched-path PE2-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/0.11
set protocols bgp group external type external
set protocols bgp group external multihop ttl 2
set protocols bgp group external local-address 10.9.9.5
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export next-hop
set protocols bgp group external export aigp
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external vpn-apply-export
set protocols bgp group external peer-as 13979
set protocols bgp group external neighbor 10.9.9.4
set protocols ospf area 0.0.0.2 interface 10.9.9.5 passive
set protocols ospf area 0.0.0.2 interface 10.9.9.5 metric 1
set protocols ospf area 0.0.0.2 interface 10.100.1.5 passive
set protocols ospf area 0.0.0.2 interface 10.100.1.5 metric 1
set protocols ospf area 0.0.0.2 interface fe-1/2/0.11 metric 1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol static
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.5
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set policy-options policy-statement aigp term 10 from route-filter 55.0.0.0/24 exact
set policy-options policy-statement aigp term 10 then aigp-originate distance 20
set policy-options policy-statement aigp term 10 then next-hop 10.100.1.5
set policy-options policy-statement aigp term 10 then accept
set policy-options policy-statement aigp term 20 from route-filter 99.0.0.0/24 exact
set policy-options policy-statement aigp term 20 then aigp-originate distance 30
set policy-options policy-statement aigp term 20 then next-hop 10.100.1.5
set policy-options policy-statement aigp term 20 then accept
set policy-options policy-statement next-hop term 10 from protocol bgp
set policy-options policy-statement next-hop term 10 then next-hop 10.100.1.5
set policy-options policy-statement next-hop term 10 then accept
set policy-options policy-statement next-hop term 20 from protocol direct
set policy-options policy-statement next-hop term 20 from route-filter 10.9.9.5/32 exact
set policy-options policy-statement next-hop term 20 from route-filter 10.100.1.5/32
  exact
set policy-options policy-statement next-hop term 20 then next-hop 10.100.1.5
```

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement next-hop term 20 then accept
set routing-options static route 99.0.0.0/24 discard
set routing-options static route 55.0.0.0/24 discard
set routing-options router-id 10.9.9.5
set routing-options autonomous-system 7018
```

Device PE3

```
set interfaces fe-1/2/0 unit 13 description PE3-to-PE4
set interfaces fe-1/2/0 unit 13 family inet address 10.0.0.26/30
set interfaces fe-1/2/0 unit 13 family mpls
set interfaces lo0 unit 11 family inet address 10.9.9.6/32
set interfaces lo0 unit 11 family inet address 10.100.1.6/32
set protocols rsvp interface fe-1/2/0.13
set protocols mpls label-switched-path PE3-to-PE4 to 10.9.9.4
set protocols mpls interface fe-1/2/0.13
set protocols bgp group external type external
set protocols bgp group external multihop ttl 2
set protocols bgp group external local-address 10.9.9.6
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export next-hop
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external vpn-apply-export
set protocols bgp group external peer-as 13979
set protocols bgp group external neighbor 10.9.9.4
set protocols ospf area 0.0.0.3 interface 10.9.9.6 passive
set protocols ospf area 0.0.0.3 interface 10.9.9.6 metric 1
set protocols ospf area 0.0.0.3 interface 10.100.1.6 passive
set protocols ospf area 0.0.0.3 interface 10.100.1.6 metric 1
set protocols ospf area 0.0.0.3 interface fe-1/2/0.13 metric 1
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol static
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.6
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set policy-options policy-statement next-hop term 10 from protocol bgp
set policy-options policy-statement next-hop term 10 then next-hop 10.100.1.6
set policy-options policy-statement next-hop term 10 then accept
set policy-options policy-statement next-hop term 20 from protocol direct
set policy-options policy-statement next-hop term 20 from route-filter 10.9.9.6/32 exact
set policy-options policy-statement next-hop term 20 from route-filter 10.100.1.6/32
  exact
set policy-options policy-statement next-hop term 20 then next-hop 10.100.1.6
set policy-options policy-statement next-hop term 20 then accept
set routing-options router-id 10.9.9.6
set routing-options autonomous-system 7018
```

Device PE7

```
set interfaces fe-1/2/0 unit 15 description PE7-to-PE1
set interfaces fe-1/2/0 unit 15 family inet address 10.0.0.10/30
set interfaces lo0 unit 13 family inet address 10.9.9.7/32
set interfaces lo0 unit 13 family inet address 10.100.1.7/32
set protocols bgp group external type external
set protocols bgp group external family inet labeled-unicast aigp
set protocols bgp group external export SET_EXPORT_ROUTES
set protocols bgp group external peer-as 13979
set protocols bgp group external neighbor 10.0.0.9
```


Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol direct
set policy-options policy-statement SET_EXPORT_ROUTES term 10 from protocol bgp
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.7
set policy-options policy-statement SET_EXPORT_ROUTES term 10 then accept
set routing-options router-id 10.9.9.7
set routing-options autonomous-system 7019
```

Configuring Device P1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device P1:

1. Configure the interfaces.

```
[edit interfaces]
user@P1# set fe-1/2/0 unit 1 description P1-to-PE1
user@P1# set fe-1/2/0 unit 1 family inet address 10.0.0.2/30
user@P1# set fe-1/2/0 unit 1 family mpls
user@P1# set fe-1/2/1 unit 4 description P1-to-P2
user@P1# set fe-1/2/1 unit 4 family inet address 10.0.0.29/30
user@P1# set fe-1/2/1 unit 4 family mpls
user@P1# set fe-1/2/2 unit 8 description P1-to-PE4
user@P1# set fe-1/2/2 unit 8 family inet address 10.0.0.17/30
user@P1# set fe-1/2/2 unit 8 family mpls
user@P1# set lo0 unit 3 family inet address 10.9.9.2/32
user@P1# set lo0 unit 3 family inet address 10.100.1.2/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@P1# set rsvp interface fe-1/2/0.1
user@P1# set rsvp interface fe-1/2/2.8
user@P1# set rsvp interface fe-1/2/1.4
user@P1# set mpls label-switched-path P1-to-P2 to 10.9.9.3
user@P1# set mpls label-switched-path P1-to-PE1 to 10.9.9.1
user@P1# set mpls label-switched-path P1-to-PE4 to 10.9.9.4
user@P1# set mpls interface fe-1/2/0.1
user@P1# set mpls interface fe-1/2/2.8
user@P1# set mpls interface fe-1/2/1.4
```

3. Configure BGP.

```
[edit protocols bgp group internal]
user@P1# set type internal
user@P1# set local-address 10.9.9.2
user@P1# set neighbor 10.9.9.1
user@P1# set neighbor 10.9.9.3
user@P1# set neighbor 10.9.9.4
```

4. Enable AIGP.

```
[edit protocols bgp group internal]
user@P1# set family inet labeled-unicast aigp
```

Copyright © 2013, Juniper Networks, Inc.

5. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf]
user@P1# set area 0.0.0.1 interface fe-1/2/0.1 metric 1
user@P1# set area 0.0.0.1 interface fe-1/2/1.4 metric 1
user@P1# set area 0.0.0.0 interface fe-1/2/2.8 metric 1
user@P1# set area 0.0.0.0 interface 10.9.9.2 passive
user@P1# set area 0.0.0.0 interface 10.9.9.2 metric 1
user@P1# set area 0.0.0.0 interface 10.100.1.2 passive
user@P1# set area 0.0.0.0 interface 10.100.1.2 metric 1
```

6. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@P1# set router-id 10.9.9.2
user@P1# set autonomous-system 13979
```

7. If you are done configuring the device, commit the configuration.

```
user@P1# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P1# show interfaces
fe-1/2/0 {
    unit 1 {
        description P1-to-PE1;
        family inet {
            address 10.0.0.2/30;
        }
        family mpls;
    }
}
fe-1/2/1 {
    unit 4 {
        description P1-to-P2;
        family inet {
            address 10.0.0.29/30;
        }
        family mpls;
    }
}
fe-1/2/2 {
    unit 8 {
        description P1-to-PE4;
        family inet {
            address 10.0.0.17/30;
        }
        family mpls;
    }
}
lo0 {
    unit 3 {
        family inet {
```


Copyright © 2013, Juniper Networks, Inc.

```
        address 10.9.9.2/32;
        address 10.100.1.2/32;
      }
    }
}
```

```
user@P1# show protocols
rsvp {
    interface fe-1/2/0.1;
    interface fe-1/2/2.8;
    interface fe-1/2/1.4;
}
mpls {
    label-switched-path P1-to-P2 {
        to 10.9.9.3;
    }
    label-switched-path P1-to-PE1 {
        to 10.9.9.1;
    }
    label-switched-path P1-to-PE4 {
        to 10.9.9.4;
    }
    interface fe-1/2/0.1;
    interface fe-1/2/2.8;
    interface fe-1/2/1.4;
}
bgp {
    group internal {
        type internal;
        local-address 10.9.9.2;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        neighbor 10.9.9.1;
        neighbor 10.9.9.3;
        neighbor 10.9.9.4;
    }
}
ospf {
    area 0.0.0.1 {
        interface fe-1/2/0.1 {
            metric 1;
        }
        interface fe-1/2/1.4 {
            metric 1;
        }
    }
    area 0.0.0.0 {
        interface fe-1/2/2.8 {
            metric 1;
        }
        interface 10.9.9.2 {
            passive;
            metric 1;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
    interface 10.100.1.2 {
      passive;
      metric 1;
    }
  }
}
```

```
user@P1# show routing-options
router-id 10.9.9.2;
autonomous-system 13979;
```

Configuring Device P2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device P2:

1. Configure the interfaces.

```
[edit interfaces]
user@P2# set fe-1/2/0 unit 3 description P2-to-PE1
user@P2# set fe-1/2/0 unit 3 family inet address 10.0.0.6/30
user@P2# set fe-1/2/0 unit 3 family mpls
user@P2# set fe-1/2/1 unit 5 description P2-to-P1
user@P2# set fe-1/2/1 unit 5 family inet address 10.0.0.30/30
user@P2# set fe-1/2/1 unit 5 family mpls
user@P2# set fe-1/2/2 unit 6 description P2-to-PE4
user@P2# set fe-1/2/2 unit 6 family inet address 10.0.0.13/30
user@P2# set fe-1/2/2 unit 6 family mpls
user@P2# set lo0 unit 5 family inet address 10.9.9.3/32
user@P2# set lo0 unit 5 family inet address 10.100.1.3/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@P2# set rsvp interface fe-1/2/1.5
user@P2# set rsvp interface fe-1/2/2.6
user@P2# set rsvp interface fe-1/2/0.3
user@P2# set mpls label-switched-path P2-to-PE1 to 10.9.9.1
user@P2# set mpls label-switched-path P2-to-P1 to 10.9.9.2
user@P2# set mpls label-switched-path P2-to-PE4 to 10.9.9.4
user@P2# set mpls interface fe-1/2/1.5
user@P2# set mpls interface fe-1/2/2.6
user@P2# set mpls interface fe-1/2/0.3
```

3. Configure BGP.

```
[edit protocols bgp group internal]
user@P2# set type internal
user@P2# set local-address 10.9.9.3
user@P2# set neighbor 10.9.9.1
user@P2# set neighbor 10.9.9.2
user@P2# set neighbor 10.9.9.4
```


Copyright © 2013, Juniper Networks, Inc.

4. Enable AIGP.

```
[edit protocols bgp group internal]
user@P2# set family inet labeled-unicast aigp
```

5. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf]
user@P2# set area 0.0.0.0 interface fe-1/2/2.6 metric 1
user@P2# set area 0.0.0.0 interface 10.9.9.3 passive
user@P2# set area 0.0.0.0 interface 10.9.9.3 metric 1
user@P2# set area 0.0.0.0 interface 10.100.1.3 passive
user@P2# set area 0.0.0.0 interface 10.100.1.3 metric 1
```

6. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@P2# set router-id 10.9.9.3
user@P2# set autonomous-system 13979
```

7. If you are done configuring the device, commit the configuration.

```
user@P2# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P2# show interfaces
fe-1/2/0 {
    unit 3 {
        description P2-to-PE1;
        family inet {
            address 10.0.0.6/30;
        }
        family mpls;
    }
}
fe-1/2/1 {
    unit 5 {
        description P2-to-P1;
        family inet {
            address 10.0.0.30/30;
        }
        family mpls;
    }
}
fe-1/2/2 {
    unit 6 {
        description P2-to-PE4;
        family inet {
            address 10.0.0.13/30;
        }
        family mpls;
    }
}
lo0 {
```

Copyright © 2013, Juniper Networks, Inc.

```
    unit 5 {
      family inet {
        address 10.9.9.3/32;
        address 10.100.1.3/32;
      }
    }
}
user@P2# show protocols
rsvp {
    interface fe-1/2/1.5;
    interface fe-1/2/2.6;
    interface fe-1/2/0.3;
}
mpls {
    label-switched-path P2-to-PE1 {
      to 10.9.9.1;
    }
    label-switched-path P2-to-P1 {
      to 10.9.9.2;
    }
    label-switched-path P2-to-PE4 {
      to 10.9.9.4;
    }
    interface fe-1/2/1.5;
    interface fe-1/2/2.6;
    interface fe-1/2/0.3;
}
bgp {
    group internal {
      type internal;
      local-address 10.9.9.3;
      family inet {
        labeled-unicast {
          aigp;
        }
      }
      neighbor 10.9.9.1;
      neighbor 10.9.9.2;
      neighbor 10.9.9.4;
    }
}
ospf {
    area 0.0.0.0 {
      interface fe-1/2/2.6 {
        metric 1;
      }
      interface 10.9.9.3 {
        passive;
        metric 1;
      }
      interface 10.100.1.3 {
        passive;
        metric 1;
      }
    }
```


Copyright © 2013, Juniper Networks, Inc.

```
}

user@P2# show routing-options
router-id 10.9.9.3;
autonomous-system 13979;
```

Configuring Device PE4

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE4:

1. Configure the interfaces.

```
[edit interfaces]
user@PE4# set fe-1/2/0 unit 7 description PE4-to-P2
user@PE4# set fe-1/2/0 unit 7 family inet address 10.0.0.14/30
user@PE4# set fe-1/2/0 unit 7 family mpls
user@PE4# set fe-1/2/1 unit 9 description PE4-to-P1
user@PE4# set fe-1/2/1 unit 9 family inet address 10.0.0.18/30
user@PE4# set fe-1/2/1 unit 9 family mpls
user@PE4# set fe-1/2/2 unit 10 description PE4-to-PE2
user@PE4# set fe-1/2/2 unit 10 family inet address 10.0.0.21/30
user@PE4# set fe-1/2/2 unit 10 family mpls
user@PE4# set fe-1/0/2 unit 12 description PE4-to-PE3
user@PE4# set fe-1/0/2 unit 12 family inet address 10.0.0.25/30
user@PE4# set fe-1/0/2 unit 12 family mpls
user@PE4# set lo0 unit 7 family inet address 10.9.9.4/32
user@PE4# set lo0 unit 7 family inet address 10.100.1.4/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@PE4# set rsvp interface fe-1/2/0.7
user@PE4# set rsvp interface fe-1/2/1.9
user@PE4# set rsvp interface fe-1/2/2.10
user@PE4# set rsvp interface fe-1/0/2.12
user@PE4# set mpls label-switched-path PE4-to-PE2 to 10.9.9.5
user@PE4# set mpls label-switched-path PE4-to-PE3 to 10.9.9.6
user@PE4# set mpls label-switched-path PE4-to-P1 to 10.9.9.2
user@PE4# set mpls label-switched-path PE4-to-P2 to 10.9.9.3
user@PE4# set mpls interface fe-1/2/0.7
user@PE4# set mpls interface fe-1/2/1.9
user@PE4# set mpls interface fe-1/2/2.10
user@PE4# set mpls interface fe-1/0/2.12
```

3. Configure BGP.

```
[edit protocols bgp]
user@PE4# set export next-hop
user@PE4# set export aigp
user@PE4# set group internal type internal
user@PE4# set group internal local-address 10.9.9.4
user@PE4# set group internal neighbor 10.9.9.1
user@PE4# set group internal neighbor 10.9.9.3
```

Copyright © 2013, Juniper Networks, Inc.

```
user@PE4# set group internal neighbor 10.9.9.2
user@PE4# set group external type external
user@PE4# set group external multihop ttl 2
user@PE4# set group external local-address 10.9.9.4
user@PE4# set group external peer-as 7018
user@PE4# set group external neighbor 10.9.9.5
user@PE4# set group external neighbor 10.9.9.6
```

4. Enable AIGP.

```
[edit protocols bgp]
user@PE4# set group external family inet labeled-unicast aigp
user@PE4# set group internal family inet labeled-unicast aigp
```

5. Originate a prefix, and configure an AIGP distance.

   By default, a prefix is originated using the current IGP distance. Optionally, you can configure a distance for the AIGP attribute, using the **distance** option, as shown here.

```
[edit policy-options policy-statement aigp term 10]
user@PE4# set from protocol static
user@PE4# set from route-filter 44.0.0.0/24 exact
user@PE4# set then aigp-originate distance 200
user@PE4# set then next-hop 10.100.1.4
user@PE4# set then accept
```

6. Enable the policies.

```
[edit policy-options policy-statement next-hop]
user@PE4# set term 10 from protocol bgp
user@PE4# set term 10 then next-hop 10.100.1.4
user@PE4# set term 10 then accept
user@PE4# set term 20 from protocol direct
user@PE4# set term 20 from route-filter 10.9.9.4/32 exact
user@PE4# set term 20 from route-filter 10.100.1.4/32 exact
user@PE4# set term 20 then next-hop 10.100.1.4
user@PE4# set term 20 then accept
```

7. Configure a static route.

```
[edit routing-options]
user@PE4# set static route 44.0.0.0/24 discard
```

8. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf]
user@PE4# set area 0.0.0.0 interface fe-1/2/1.9 metric 1
user@PE4# set area 0.0.0.0 interface fe-1/2/0.7 metric 1
user@PE4# set area 0.0.0.0 interface 10.9.9.4 passive
user@PE4# set area 0.0.0.0 interface 10.9.9.4 metric 1
user@PE4# set area 0.0.0.0 interface 10.100.1.4 passive
user@PE4# set area 0.0.0.0 interface 10.100.1.4 metric 1
user@PE4# set area 0.0.0.2 interface fe-1/2/2.10 metric 1
user@PE4# set area 0.0.0.3 interface fe-1/0/2.12 metric 1
```

9. Configure the router ID and the autonomous system number.

```
[edit routing-options]
```


Copyright © 2013, Juniper Networks, Inc.

```
user@PE4# set router-id 10.9.9.4
user@PE4# set autonomous-system 13979
```

10. If you are done configuring the device, commit the configuration.

```
user@PE4# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE4# show interfaces
fe-1/0/2 {
    unit 12 {
        description PE4-to-PE3;
        family inet {
            address 10.0.0.25/30;
        }
        family mpls;
    }
}
fe-1/2/0 {
    unit 7 {
        description PE4-to-P2;
        family inet {
            address 10.0.0.14/30;
        }
        family mpls;
    }
}
fe-1/2/1 {
    unit 9 {
        description PE4-to-P1;
        family inet {
            address 10.0.0.18/30;
        }
        family mpls;
    }
}
fe-1/2/2 {
    unit 10 {
        description PE4-to-PE2;
        family inet {
            address 10.0.0.21/30;
        }
        family mpls;
    }
}
lo0 {
    unit 7 {
        family inet {
            address 10.9.9.4/32;
            address 10.100.1.4/32;
        }
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
}

user@PE4# show policy-options
policy-statement aigp {
    term 10 {
        from {
            protocol static;
            route-filter 44.0.0.0/24 exact;
        }
        then {
            aigp-originate distance 200;
            next-hop 10.100.1.4;
            accept;
        }
    }
}
policy-statement next-hop {
    term 10 {
        from protocol bgp;
        then {
            next-hop 10.100.1.4;
            accept;
        }
    }
    term 20 {
        from {
            protocol direct;
            route-filter 10.9.9.4/32 exact;
            route-filter 10.100.1.4/32 exact;
        }
        then {
            next-hop 10.100.1.4;
            accept;
        }
    }
}

user@PE4# show protocols
rsvp {
    interface fe-1/2/0.7;
    interface fe-1/2/1.9;
    interface fe-1/2/2.10;
    interface fe-1/0/2.12;
}
mpls {
    label-switched-path PE4-to-PE2 {
        to 10.9.9.5;
    }
    label-switched-path PE4-to-PE3 {
        to 10.9.9.6;
    }
    label-switched-path PE4-to-P1 {
        to 10.9.9.2;
    }
    label-switched-path PE4-to-P2 {
        to 10.9.9.3;
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
    interface fe-1/2/0.7;
    interface fe-1/2/1.9;
    interface fe-1/2/2.10;
    interface fe-1/0/2.12;
}
bgp {
    export [ next-hop aigp ];
    group internal {
        type internal;
        local-address 10.9.9.4;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        neighbor 10.9.9.1;
        neighbor 10.9.9.3;
        neighbor 10.9.9.2;
    }
    group external {
        type external;
        multihop {
            ttl 2;
        }
        local-address 10.9.9.4;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        peer-as 7018;
        neighbor 10.9.9.5;
        neighbor 10.9.9.6;
    }
}
ospf {
    area 0.0.0.0 {
        interface fe-1/2/1.9 {
            metric 1;
        }
        interface fe-1/2/0.7 {
            metric 1;
        }
        interface 10.9.9.4 {
            passive;
            metric 1;
        }
        interface 10.100.1.4 {
            passive;
            metric 1;
        }
    }
    area 0.0.0.2 {
        interface fe-1/2/2.10 {
            metric 1;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  area 0.0.0.3 {
    interface fe-1/0/2.12 {
      metric 1;
    }
  }
}
```

```
user@PE4# show routing-options
static {
  route 44.0.0.0/24 discard;
}
router-id 10.9.9.4;
autonomous-system 13979;
```

Configuring Device PE1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE1:

1. Configure the interfaces.

```
[edit interfaces]
user@PE1# set fe-1/2/0 unit 0 description PE1-to-P1
user@PE1# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30
user@PE1# set fe-1/2/0 unit 0 family mpls
user@PE1# set fe-1/2/1 unit 2 description PE1-to-P2
user@PE1# set fe-1/2/1 unit 2 family inet address 10.0.0.5/30
user@PE1# set fe-1/2/1 unit 2 family mpls
user@PE1# set fe-1/2/2 unit 14 description PE1-to-PE7
user@PE1# set fe-1/2/2 unit 14 family inet address 10.0.0.9/30
user@PE1# set lo0 unit 1 family inet address 10.9.9.1/32
user@PE1# set lo0 unit 1 family inet address 10.100.1.1/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@PE1# set rsvp interface fe-1/2/0.0
user@PE1# set rsvp interface fe-1/2/1.2
user@PE1# set rsvp interface fe-1/2/2.14
user@PE1# set mpls label-switched-path PE1-to-P1 to 10.9.9.2
user@PE1# set mpls label-switched-path PE1-to-P2 to 10.9.9.3
user@PE1# set mpls interface fe-1/2/0.0
user@PE1# set mpls interface fe-1/2/1.2
user@PE1# set mpls interface fe-1/2/2.14
```

3. Configure BGP.

```
[edit protocols bgp]
user@PE1# set group internal type internal
user@PE1# set group internal local-address 10.9.9.1
user@PE1# set group internal export SET_EXPORT_ROUTES
user@PE1# set group internal vpn-apply-export
```


Copyright © 2013, Juniper Networks, Inc.

```
user@PE1# set group internal neighbor 10.9.9.4
user@PE1# set group internal neighbor 10.9.9.2
user@PE1# set group internal neighbor 10.9.9.3
user@PE1# set group external type external
user@PE1# set group external export SET_EXPORT_ROUTES
user@PE1# set group external peer-as 7019
user@PE1# set group external neighbor 10.0.0.10
```

4. Enable AIGP.

```
[edit protocols bgp]
user@PE1# set group internal family inet labeled-unicast aigp
user@PE1# set group external family inet labeled-unicast aigp
```

5. Enable the policies.

```
[edit policy-options policy-statement SET_EXPORT_ROUTES term 10]
user@PE1# set from protocol direct
user@PE1# set from protocol bgp
user@PE1# set then next-hop 10.100.1.1
user@PE1# set then accept
```

6. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf area 0.0.0.1]
user@PE1# set interface fe-1/2/0.0 metric 1
user@PE1# set interface fe-1/2/1.2 metric 1
user@PE1# set interface 10.9.9.1 passive
user@PE1# set interface 10.9.9.1 metric 1
user@PE1# set interface 10.100.1.1 passive
user@PE1# set interface 10.100.1.1 metric 1
```

7. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@PE1# set router-id 10.9.9.1
user@PE1# set autonomous-system 13979
```

8. If you are done configuring the device, commit the configuration.

```
user@PE1# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show interfaces
fe-1/2/0 {
  unit 0 {
    description PE1-to-P1;
    family inet {
      address 10.0.0.1/30;
    }
    family mpls;
  }
}
fe-1/2/1 {
```

Copyright © 2013, Juniper Networks, Inc.

```
    unit 2 {
      description PE1-to-P2;
      family inet {
        address 10.0.0.5/30;
      }
      family mpls;
    }
  }
  fe-1/2/2 {
    unit 14 {
      description PE1-to-PE7;
      family inet {
        address 10.0.0.9/30;
      }
    }
  }
  lo0 {
    unit 1 {
      family inet {
        address 10.9.9.1/32;
        address 10.100.1.1/32;
      }
    }
  }
```

```
user@PE1# show policy-options
policy-statement SET_EXPORT_ROUTES {
  term 10 {
    from protocol [ direct bgp ];
    then {
      next-hop 10.100.1.1;
      accept;
    }
  }
}
```

```
user@PE1# show protocols
rsvp {
  interface fe-1/2/0.0;
  interface fe-1/2/1.2;
  interface fe-1/2/2.14;
}
mpls {
  label-switched-path PE1-to-P1 {
    to 10.9.9.2;
  }
  label-switched-path PE1-to-P2 {
    to 10.9.9.3;
  }
  interface fe-1/2/0.0;
  interface fe-1/2/1.2;
  interface fe-1/2/2.14;
}
bgp {
  group internal {
    type internal;
    local-address 10.9.9.1;
```


Copyright © 2013, Juniper Networks, Inc.

```
    family inet {
      labeled-unicast {
        aigp;
      }
    }
    export SET_EXPORT_ROUTES;
    vpn-apply-export;
    neighbor 10.9.9.4;
    neighbor 10.9.9.2;
    neighbor 10.9.9.3;
  }
  group external {
    type external;
    family inet {
      labeled-unicast {
        aigp;
      }
    }
    export SET_EXPORT_ROUTES;
    peer-as 7019;
    neighbor 10.0.0.10;
  }
}
ospf {
  area 0.0.0.1 {
    interface fe-1/2/0.0 {
      metric 1;
    }
    interface fe-1/2/1.2 {
      metric 1;
    }
    interface 10.9.9.1 {
      passive;
      metric 1;
    }
    interface 10.100.1.1 {
      passive;
      metric 1;
    }
  }
}
```

```
user@PE1# show routing-options
router-id 10.9.9.1;
autonomous-system 13979;
```

Copyright © 2013, Juniper Networks, Inc.

Configuring Device PE2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE2:

1. Configure the interfaces.

```
[edit interfaces]
user@PE2# set fe-1/2/0 unit 11 description PE2-to-PE4
user@PE2# set fe-1/2/0 unit 11 family inet address 10.0.0.22/30
user@PE2# set fe-1/2/0 unit 11 family mpls
user@PE2# set lo0 unit 9 family inet address 10.9.9.5/32 primary
user@PE2# set lo0 unit 9 family inet address 10.100.1.5/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@PE2# set rsvp interface fe-1/2/0.11
user@PE2# set mpls label-switched-path PE2-to-PE4 to 10.9.9.4
user@PE2# set mpls interface fe-1/2/0.11
```

3. Configure BGP.

```
[edit protocols bgp]
user@PE2# set group external type external
user@PE2# set group external multihop ttl 2
user@PE2# set group external local-address 10.9.9.5
user@PE2# set group external export next-hop
user@PE2# set group external export aigp
user@PE2# set group external export SET_EXPORT_ROUTES
user@PE2# set group external vpn-apply-export
user@PE2# set group external peer-as 13979
user@PE2# set group external neighbor 10.9.9.4
```

4. Enable AIGP.

```
[edit protocols bgp]
user@PE2# set group external family inet labeled-unicast aigp
```

5. Originate a prefix, and configure an AIGP distance.

   By default, a prefix is originated using the current IGP distance. Optionally, you can configure a distance for the AIGP attribute, using the **distance** option, as shown here.

```
[edit policy-options policy-statement aigp]
user@PE2# set term 10 from route-filter 55.0.0.0/24 exact
user@PE2# set term 10 then aigp-originate distance 20
user@PE2# set term 10 then next-hop 10.100.1.5
user@PE2# set term 10 then accept
user@PE2# set term 20 from route-filter 99.0.0.0/24 exact
user@PE2# set term 20 then aigp-originate distance 30
user@PE2# set term 20 then next-hop 10.100.1.5
user@PE2# set term 20 then accept
```


Copyright © 2013, Juniper Networks, Inc.

6. Enable the policies.

```
[edit policy-options]
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
  direct
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
  static
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
  bgp
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.5
user@PE2# set policy-statement SET_EXPORT_ROUTES term 10 then accept
user@PE2# set policy-statement next-hop term 10 from protocol bgp
user@PE2# set policy-statement next-hop term 10 then next-hop 10.100.1.5
user@PE2# set policy-statement next-hop term 10 then accept
user@PE2# set policy-statement next-hop term 20 from protocol direct
user@PE2# set policy-statement next-hop term 20 from route-filter 10.9.9.5/32
  exact
user@PE2# set policy-statement next-hop term 20 from route-filter 10.100.1.5/32
  exact
user@PE2# set policy-statement next-hop term 20 then next-hop 10.100.1.5
user@PE2# set policy-statement next-hop term 20 then accept
```

7. Enable some static routes.

```
[edit routing-options]
user@PE2# set static route 99.0.0.0/24 discard
user@PE2# set static route 55.0.0.0/24 discard
```

8. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf area 0.0.0.2]
user@PE2# set interface 10.9.9.5 passive
user@PE2# set interface 10.9.9.5 metric 1
user@PE2# set interface 10.100.1.5 passive
user@PE2# set interface 10.100.1.5 metric 1
user@PE2# set interface fe-1/2/0.11 metric 1
```

9. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@PE2# set router-id 10.9.9.5
user@PE2# set autonomous-system 7018
```

10. If you are done configuring the device, commit the configuration.

```
user@PE2# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE2# show interfaces
fe-1/2/0 {
  unit 11 {
    description PE2-to-PE4;
```

Copyright © 2013, Juniper Networks, Inc.

```
      family inet {
        address 10.0.0.22/30;
      }
      family mpls;
    }
  }
  lo0 {
    unit 9 {
      family inet {
        address 10.9.9.5/32 {
          primary;
        }
        address 10.100.1.5/32;
      }
    }
  }

user@PE2# show policy-options
policy-statement SET_EXPORT_ROUTES {
  term 10 {
    from protocol [ direct static bgp ];
    then {
      next-hop 10.100.1.5;
      accept;
    }
  }
}
policy-statement aigp {
  term 10 {
    from {
      route-filter 55.0.0.0/24 exact;
    }
    then {
      aigp-originate distance 20;
      next-hop 10.100.1.5;
      accept;
    }
  }
  term 20 {
    from {
      route-filter 99.0.0.0/24 exact;
    }
    then {
      aigp-originate distance 30;
      next-hop 10.100.1.5;
      accept;
    }
  }
}
policy-statement next-hop {
  term 10 {
    from protocol bgp;
    then {
      next-hop 10.100.1.5;
      accept;
    }
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
    term 20 {
      from {
        protocol direct;
        route-filter 10.9.9.5/32 exact;
        route-filter 10.100.1.5/32 exact;
      }
      then {
        next-hop 10.100.1.5;
        accept;
      }
    }
}
```

```
user@PE2# show protocols
rsvp {
    interface fe-1/2/0.11;
}
mpls {
    label-switched-path PE2-to-PE4 {
        to 10.9.9.4;
    }
    interface fe-1/2/0.11;
}
bgp {
    group external {
        type external;
        multihop {
            ttl 2;
        }
        local-address 10.9.9.5;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        export [ next-hop aigp SET_EXPORT_ROUTES ];
        vpn-apply-export;
        peer-as 13979;
        neighbor 10.9.9.4;
    }
}
ospf {
    area 0.0.0.2 {
        interface 10.9.9.5 {
            passive;
            metric 1;
        }
        interface 10.100.1.5 {
            passive;
            metric 1;
        }
        interface fe-1/2/0.11 {
            metric 1;
        }
    }
```

Copyright © 2013, Juniper Networks, Inc.

```
}
user@PE2# show routing-options
static {
   route 99.0.0.0/24 discard;
   route 55.0.0.0/24 discard;
}
router-id 10.9.9.5;
autonomous-system 7018;
```

Configuring Device PE3

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE3:

1. Configure the interfaces.

```
[edit interfaces]
user@PE3# set fe-1/2/0 unit 13 description PE3-to-PE4
user@PE3# set fe-1/2/0 unit 13 family inet address 10.0.0.26/30
user@PE3# set fe-1/2/0 unit 13 family mpls
user@PE3# set lo0 unit 11 family inet address 10.9.9.6/32
user@PE3# set lo0 unit 11 family inet address 10.100.1.6/32
```

2. Configure MPLS and a signaling protocol, such as RSVP or LDP.

```
[edit protocols]
user@PE3# set rsvp interface fe-1/2/0.13
user@PE3# set mpls label-switched-path PE3-to-PE4 to 10.9.9.4
user@PE3# set mpls interface fe-1/2/0.13
```

3. Configure BGP.

```
[edit protocols bgp group external]
user@PE3# set type external
user@PE3# set multihop ttl 2
user@PE3# set local-address 10.9.9.6
user@PE3# set export next-hop
user@PE3# set export SET_EXPORT_ROUTES
user@PE3# set vpn-apply-export
user@PE3# set peer-as 13979
user@PE3# set neighbor 10.9.9.4
```

4. Enable AIGP.

```
[edit protocols bgp group external]
user@PE3# set family inet labeled-unicast aigp
```

5. Enable the policies.

```
[edit policy-options]
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
   direct
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
   static
```


Copyright © 2013, Juniper Networks, Inc.

```
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 from protocol
  bgp
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 then next-hop
  10.100.1.6
user@PE3# set policy-statement SET_EXPORT_ROUTES term 10 then accept
user@PE3# set policy-statement next-hop term 10 from protocol bgp
user@PE3# set policy-statement next-hop term 10 then next-hop 10.100.1.6
user@PE3# set policy-statement next-hop term 10 then accept
user@PE3# set policy-statement next-hop term 20 from protocol direct
user@PE3# set policy-statement next-hop term 20 from route-filter 10.9.9.6/32
  exact
user@PE3# set policy-statement next-hop term 20 from route-filter 10.100.1.6/32
  exact
user@PE3# set policy-statement next-hop term 20 then next-hop 10.100.1.6
user@PE3# set policy-statement next-hop term 20 then accept
```

6. Configure an IGP, such as OSPF, RIP, or IS-IS.

```
[edit protocols ospf area 0.0.0.3]
user@PE3# set interface 10.9.9.6 passive
user@PE3# set interface 10.9.9.6 metric 1
user@PE3# set interface 10.100.1.6 passive
user@PE3# set interface 10.100.1.6 metric 1
user@PE3# set interface fe-1/2/0.13 metric 1
```

7. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@PE3# set router-id 10.9.9.6
user@PE3# set autonomous-system 7018
```

8. If you are done configuring the device, commit the configuration.

```
user@PE3# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE3# show interfaces
fe-1/2/0 {
   unit 13 {
      description PE3-to-PE4;
      family inet {
         address 10.0.0.26/30;
      }
      family mpls;
   }
}
lo0 {
   unit 11 {
      family inet {
         address 10.9.9.6/32;
         address 10.100.1.6/32;
      }
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
}

user@PE3# show policy-options
policy-statement SET_EXPORT_ROUTES {
    term 10 {
        from protocol [ direct static bgp ];
        then {
            next-hop 10.100.1.6;
            accept;
        }
    }
}
policy-statement next-hop {
    term 10 {
        from protocol bgp;
        then {
            next-hop 10.100.1.6;
            accept;
        }
    }
    term 20 {
        from {
            protocol direct;
            route-filter 10.9.9.6/32 exact;
            route-filter 10.100.1.6/32 exact;
        }
        then {
            next-hop 10.100.1.6;
            accept;
        }
    }
}

user@PE3# show protocols
rsvp {
    interface fe-1/2/0.13;
}
mpls {
    label-switched-path PE3-to-PE4 {
        to 10.9.9.4;
    }
    interface fe-1/2/0.13;
}
bgp {
    group external {
        type external;
        multihop {
            ttl 2;
        }
        local-address 10.9.9.6;
        family inet {
            labeled-unicast {
                aigp;
            }
        }
        export [ next-hop SET_EXPORT_ROUTES ];
```


Copyright © 2013, Juniper Networks, Inc.

```
      vpn-apply-export;
      peer-as 13979;
      neighbor 10.9.9.4;
    }
  }
  ospf {
    area 0.0.0.3 {
      interface 10.9.9.6 {
        passive;
        metric 1;
      }
      interface 10.100.1.6 {
        passive;
        metric 1;
      }
      interface fe-1/2/0.13 {
        metric 1;
      }
    }
  }
```

```
user@PE3# show routing-options
router-id 10.9.9.6;
autonomous-system 7018;
```

Configuring Device PE7

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device PE7:

1. Configure the interfaces.

```
[edit interfaces]
user@PE7# set fe-1/2/0 unit 15 description PE7-to-PE1
user@PE7# set fe-1/2/0 unit 15 family inet address 10.0.0.10/30
user@PE7# set lo0 unit 13 family inet address 10.9.9.7/32
user@PE7# set lo0 unit 13 family inet address 10.100.1.7/32
```

2. Configure BGP.

```
[edit protocols bgp group external]
user@PE7# set type external
user@PE7# set export SET_EXPORT_ROUTES
user@PE7# set peer-as 13979
user@PE7# set neighbor 10.0.0.9
```

3. Enable AIGP.

```
[edit protocols bgp group external]
user@PE7# set family inet labeled-unicast aigp
```

4. Configure the routing policy.

```
[edit policy-options policy-statement SET_EXPORT_ROUTES term 10]
user@PE7# set from protocol direct
```

Copyright © 2013, Juniper Networks, Inc.

```
user@PE7# set from protocol bgp
user@PE7# set then next-hop 10.100.1.7
user@PE7# set then accept
```

5. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@PE7# set router-id 10.9.9.7
user@PE7# set autonomous-system 7019
```

6. If you are done configuring the device, commit the configuration.

```
user@PE7# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE7# show interfaces
interfaces {
  fe-1/2/0 {
    unit 15 {
      description PE7-to-PE1;
      family inet {
        address 10.0.0.10/30;
      }
    }
  }
  lo0 {
    unit 13 {
      family inet {
        address 10.9.9.7/32;
        address 10.100.1.7/32;
      }
    }
  }
}
```

```
user@PE7# show policy-options
policy-statement SET_EXPORT_ROUTES {
  term 10 {
    from protocol [ direct bgp ];
    then {
      next-hop 10.100.1.7;
      accept;
    }
  }
}
```

```
user@PE7# show protocols
bgp {
  group external {
    type external;
    family inet {
      labeled-unicast {
        aigp;
```

 Copyright © 2013, Juniper Networks, Inc.

```
        }
      }
      export SET_EXPORT_ROUTES;
      peer-as 13979;
      neighbor 10.0.0.9;
    }
  }
```

```
user@PE7# show routing-options
router-id 10.9.9.7;
autonomous-system 7019;
```

Verification

Confirm that the configuration is working properly.

- Verifying That Device PE4 Is Receiving the AIGP Attribute from Its EBGP Neighbor PE2 on page 169
- Checking the IGP Metric on page 169
- Verifying That Device PE4 Adds the IGP Metric to the AIGP Attribute on page 170
- Verifying That Device PE7 Is Receiving the AIGP Attribute from Its EBGP Neighbor PE1 on page 170
- Verifying the Resolving AIGP Metric on page 171
- Verifying the Presence of AIGP Attributes in BGP Updates on page 174

Verifying That Device PE4 Is Receiving the AIGP Attribute from Its EBGP Neighbor PE2

Purpose Make sure that the AIGP policy on Device PE2 is working.

Action

```
user@PE4> show route receive-protocol bgp 10.9.9.5 extensive
* 55.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 299888
     Nexthop: 10.100.1.5
     AS path: 7018 I
     AIGP: 20

* 99.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 299888
     Nexthop: 10.100.1.5
     AS path: 7018 I
     AIGP: 30
```

Meaning On Device PE2, the **aigp-originate** statement is configured with a distance of 20 (**aigp-originate distance 20**). This statement is applied to route 55.0.0.0/24. Likewise, the **aigp-originate distance 30** statement is applied to route 99.0.0.0/24. Thus, when Device PE4 receives these routes, the AIGP attribute is attached with the configured metrics.

Checking the IGP Metric

Purpose From Device PE4, check the IGP metric to the BGP next hop 10.100.1.5.

Copyright © 2013, Juniper Networks, Inc.

Action

```
user@PE4> show route 10.100.1.5
inet.0: 30 destinations, 40 routes (30 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.100.1.5/32      *[OSPF/10] 05:35:50, metric 2
                    > to 10.0.0.22 via fe-1/2/2.10
                    [BGP/170] 03:45:07, localpref 100, from 10.9.9.5
                      AS path: 7018 I
                    > to 10.0.0.22 via fe-1/2/2.10
```

Meaning The IGP metric for this route is 2.

Verifying That Device PE4 Adds the IGP Metric to the AIGP Attribute

Purpose Make sure that Device PE4 adds the IGP metric to the AIGP attribute when it readvertises routes to its IBGP neighbor, Device PE1.

Action

```
user@PE4> show route advertising-protocol bgp 10.9.9.1 extensive

* 55.0.0.0/24 (1 entry, 1 announced)
 BGP group internal type Internal
     Route Label: 300544
     Nexthop: 10.100.1.4
     Flags: Nexthop Change
     Localpref: 100
     AS path: [13979] 7018 I
     AIGP: 22

* 99.0.0.0/24 (1 entry, 1 announced)
 BGP group internal type Internal
     Route Label: 300544
     Nexthop: 10.100.1.4
     Flags: Nexthop Change
     Localpref: 100
     AS path: [13979] 7018 I
     AIGP: 32
```

Meaning The IGP metric is added to the AIGP metric (20 + 2 = 22 and 30 + 2 = 32), because the next hop is changed for these routes.

Verifying That Device PE7 Is Receiving the AIGP Attribute from Its EBGP Neighbor PE1

Purpose Make sure that the AIGP policy on Device PE1 is working.

 Copyright © 2013, Juniper Networks, Inc.

Action

```
user@PE7> show route receive-protocol bgp 10.0.0.9 extensive
* 44.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300096
     Nexthop: 10.0.0.9
     AS path: 13979 I
     AIGP: 203

* 55.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300112
     Nexthop: 10.0.0.9
     AS path: 13979 7018 I
     AIGP: 25

* 99.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300112
     Nexthop: 10.0.0.9
     AS path: 13979 7018 I
     AIGP: 35
```

Meaning The 44.0.0.0/24 route is originated at Device PE4. The 55.0.0.0/24 and 99.0.0.0/24 routes are originated at Device PE2. The IGP distances are added to the configured AIGP distances.

Verifying the Resolving AIGP Metric

Purpose Confirm that if the prefix is resolved through recursion and the recursive next hops have AIGP metrics, the prefix has the sum of the AIGP values that are on the recursive BGP next hops.

Action

1. Add a static route to 66.0.0.0/24.

   ```
   [edit routing-options]
   user@PE2# set static route 66.0.0.0/24 discard
   ```

2. Delete the existing terms in the **aigp** policy statement on Device PE2.

   ```
   [edit policy-options policy-statement aigp]
   user@PE2# delete term 10
   user@PE2# delete term 20
   ```

3. Configure a recursive route lookup for the route to 66.0.0.0.

   The policy shows the AIGP metric for prefix 66.0.0.0/24 (none) and its recursive next hop. Prefix 66.0.0.0/24 is resolved by 55.0.0.1. Prefix 66.0.0.0/24 does not have its own AIGP metric being originated, but its recursive next hop, 55.0.0.1, has an AIGP value.

   ```
   [edit policy-options policy-statement aigp]
   user@PE2# set term 10 from route-filter 55.0.0.1/24 exact
   user@PE2# set term 10 then aigp-originate distance 20
   user@PE2# set term 10 then next-hop 10.100.1.5
   user@PE2# set term 10 then accept
   user@PE2# set term 20 from route-filter 66.0.0.0/24 exact
   user@PE2# set term 20 then next-hop 55.0.0.1
   user@PE2# set term 20 then accept
   ```

Copyright © 2013, Juniper Networks, Inc.

4. On Device PE4, run the **show route 55.0.0.0 extensive** command.

   The value of Metric2 is the IGP metric to the BGP next hop. When Device PE4 readvertises these routes to its IBGP peer, Device PE1, the AIGP metric is the sum of AIGP + its Resolving AIGP metric + Metric2.

   Prefix 55.0.0.0 shows its own IGP metric 20, as defined and advertised by Device PE2. It does not show a resolving AIGP value because it does not have a recursive BGP next hop. The value of Metric2 is 2.

```
user@PE4> show route 55.0.0.0 extensive
inet.0: 31 destinations, 41 routes (31 active, 0 holddown, 0 hidden)
55.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 55.0.0.0/24 -> {indirect(262151)}
Page 0 idx 0 Type 1 val 928d1b8
    Flags: Nexthop Change
    Nexthop: 10.100.1.4
    Localpref: 100
    AS path: [13979] 7018 I
    Communities:
    AIGP: 22
Path 55.0.0.0 from 10.9.9.5 Vector len 4.  Val: 0
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Address: 0x925da38
                Next-hop reference count: 4
                Source: 10.9.9.5
                Next hop type: Router, Next hop index: 1004
                Next hop: 10.0.0.22 via fe-1/2/2.10, selected
                Label operation: Push 299888
                Label TTL action: prop-ttl
                Protocol next hop: 10.100.1.5
                Push 299888
                Indirect next hop: 93514d8 262151
                State: <Active Ext>
                Local AS: 13979 Peer AS:  7018
                Age: 22:03:26   Metric2: 2
                AIGP: 20
                Task: BGP_7018.10.9.9.5+58560
                Announcement bits (3): 3-KRT 4-BGP_RT_Background 5-Resolve
tree 1
                AS path: 7018 I
                Accepted
                Route Label: 299888
                Localpref: 100
                Router ID: 10.9.9.5
                Indirect next hops: 1
                        Protocol next hop: 10.100.1.5 Metric: 2
                        Push 299888
                        Indirect next hop: 93514d8 262151
                        Indirect path forwarding next hops: 1
                                Next hop type: Router
                                Next hop: 10.0.0.22 via fe-1/2/2.10
                        10.100.1.5/32 Originating RIB: inet.0
                          Metric: 2                     Node path count: 1
                          Forwarding nexthops: 1
                                Nexthop: 10.0.0.22 via fe-1/2/2.10
```

5. On Device PE4, run the **show route 66.0.0.0 extensive** command.

Copyright © 2013, Juniper Networks, Inc.

Prefix 66.0.0.0/24 shows the Resolving AIGP, which is the sum of its own AIGP metric and its recursive BGP next hop:

66.0.0.1 = 0, 55.0.0.1 = 20, 0+20 = 20

```
user@PE4> show route 66.0.0.0 extensive
inet.0: 31 destinations, 41 routes (31 active, 0 holddown, 0 hidden)
66.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 66.0.0.0/24 -> {indirect(262162)}
Page 0 idx 0 Type 1 val 928cefc
    Flags: Nexthop Change
    Nexthop: 10.100.1.4
    Localpref: 100
    AS path: [13979] 7018 I
    Communities:
Path 66.0.0.0 from 10.9.9.5 Vector len 4.  Val: 0
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Address: 0x925d4e0
                Next-hop reference count: 4
                Source: 10.9.9.5
                Next hop type: Router, Next hop index: 1006
                Next hop: 10.0.0.22 via fe-1/2/2.10, selected
                Label operation: Push 299888, Push 299888(top)
                Label TTL action: prop-ttl, prop-ttl(top)
                Protocol next hop: 55.0.0.1
                Push 299888
                Indirect next hop: 9353e88 262162
                State: <Active Ext>
                Local AS: 13979 Peer AS:  7018
                Age: 31:42      Metric2: 2
                Resolving-AIGP: 20
                Task: BGP_7018.10.9.9.5+58560
                Announcement bits (3): 3-KRT 4-BGP_RT_Background 5-Resolve
tree 1
                AS path: 7018 I
                Accepted
                Route Label: 299888
                Localpref: 100
                Router ID: 10.9.9.5
                Indirect next hops: 1
                        Protocol next hop: 55.0.0.1 Metric: 2 AIGP: 20
                        Push 299888
                        Indirect next hop: 9353e88 262162
                        Indirect path forwarding next hops: 1
                                Next hop type: Router
                                Next hop: 10.0.0.22 via fe-1/2/2.10
                        55.0.0.0/24 Originating RIB: inet.0
                          Metric: 2                     Node path count: 1
                          Indirect nexthops: 1
                                Protocol Nexthop: 10.100.1.5 Metric: 2 Push
299888
                                Indirect nexthop: 93514d8 262151
                                Indirect path forwarding nexthops: 1
                                        Nexthop: 10.0.0.22 via fe-1/2/2.10
                                10.100.1.5/32 Originating RIB: inet.0
                                  Metric: 2                             Node
 path count: 1
                                   Forwarding nexthops: 1
                                        Nexthop: 10.0.0.22 via fe-1/2/2.10
```

Copyright © 2013, Juniper Networks, Inc.

Verifying the Presence of AIGP Attributes in BGP Updates

Purpose If the AIGP attribute is not enabled under BGP (or the **group** or **neighbor** hierarchies), the AIGP attribute is silently discarded. Enable **traceoptions** and include the **packets** flag in the **detail** option in the configuration to confirm the presence of the AIGP attribute in transmitted or received BGP updates. This is useful when debugging AIGP issues.

Action

1. Configure Device PE2 and Device PE4 for **traceoptions**.

```
user@host> show protocols bgp
  traceoptions {
    file bgp size 1m files 5;
    flag packets detail;
  }
```

2. Check the **traceoptions** file on Device PE2.

   The following sample shows Device PE2 advertising prefix 99.0.0.0/24 to Device PE4 (10.9.9.4) with an AIGP metric of 20:

```
user@PE2> show log bgp
Mar 22 09:27:18.982150 BGP SEND 10.9.9.5+49652 -> 10.9.9.4+179
Mar 22 09:27:18.982178 BGP SEND message type 2 (Update) length 70
Mar 22 09:27:18.982198 BGP SEND Update PDU length 70
Mar 22 09:27:18.982248 BGP SEND flags 0x40 code Origin(1): IGP
Mar 22 09:27:18.982273 BGP SEND flags 0x40 code ASPath(2) length 6: 7018
Mar 22 09:27:18.982295 BGP SEND flags 0x80 code AIGP(26): AIGP: 20
Mar 22 09:27:18.982316 BGP SEND flags 0x90 code MP_reach(14): AFI/SAFI 1/4
Mar 22 09:27:18.982341 BGP SEND         nhop 10.100.1.5 len 4
Mar 22 09:27:18.982372 BGP SEND     99.0.0.0/24 (label 301664)
Mar 22 09:27:33.665412 bgp_send: sending 19 bytes to abcd::10:255:170:84
(External AS 13979)
```

3. Verify that the route was received on Device PE4 using the **show route receive-protocol** command.

   AIGP is not enabled on Device PE4, so the AIGP attribute is silently discarded for prefix 99.0.0.0/24 and does not appear in the following output:

```
user@PE4> show route receive-protocol bgp 10.9.9.5 extensive | find 55.0.0.0
* 99.0.0.0/24 (2 entries, 1 announced)
     Accepted
     Route Label: 301728
     Nexthop: 10.100.1.5
     AS path: 7018 I
```

4. Check the **traceoptions** file on Device PE4.

   The following output from the **traceoptions** log shows that the 99.0.0.0/24 prefix was received with the AIGP attribute attached:

```
user@PE4> show log bgp
Mar 22 09:41:39.650295 BGP RECV 10.9.9.5+64690 -> 10.9.9.4+179
Mar 22 09:41:39.650331 BGP RECV message type 2 (Update) length 70
Mar 22 09:41:39.650350 BGP RECV Update PDU length 70
Mar 22 09:41:39.650370 BGP RECV flags 0x40 code Origin(1): IGP
Mar 22 09:41:39.650394 BGP RECV flags 0x40 code ASPath(2) length 6: 7018
Mar 22 09:41:39.650415 BGP RECV flags 0x80 code AIGP(26): AIGP: 20
Mar 22 09:41:39.650436 BGP RECV flags 0x90 code MP_reach(14): AFI/SAFI 1/4
Mar 22 09:41:39.650459 BGP RECV         nhop 10.100.1.5 len 4
```

 Copyright © 2013, Juniper Networks, Inc.

```
Mar 22 09:41:39.650495 BGP RECV      99.0.0.0/24 (label 301728)
Mar 22 09:41:39.650574 bgp_rcv_nlri: 99.0.0.0/24
Mar 22 09:41:39.650607 bgp_rcv_nlri: 99.0.0.0/24 belongs to meshgroup
Mar 22 09:41:39.650629 bgp_rcv_nlri: 99.0.0.0/24 qualified bnp->ribact 0x0
l2afcb 0x0
```

Meaning Performing this verification helps with AIGP troubleshooting and debugging issues. It enables you to verify which devices in your network send and receive AIGP attributes.

Related Documentation

- Understanding BGP Path Selection on page 8
- Examples: Configuring Internal BGP Peering on page 42

Example: Configuring AS Override

- Understanding AS Override on page 175
- Example: Configuring a Layer 3 VPN with Route Reflection and AS Override on page 176

Understanding AS Override

The AS override feature allows a provider edge (PE) router to change the private autonomous system (AS) number used by a customer edge (CE) device on an external BGP (EBGP) session running on a VPN routing and forwarding (VRF) access link. The private AS number is changed to the PE AS number. Another CE device connected to another PE device sees the EBGP route coming from the first site with an AS path of provider-ASN provider-ASN, instead of provider-ASN site1-ASN. This allows enterprise networks to use the same private ASN on all sites.

The AS override feature offers a clear management advantage to the service provider because BGP by default does not accept BGP routes with an AS path attribute that contains the local AS number.

In an enterprise network with multiple sites, you might wish to use a single AS number across sites. Suppose, for example that two CE devices are in AS 64512 and that the provider network is in AS 65534.

When the service provider configures a Layer 3 VPN with this setup, even if the MPLS network has routes towards Device CE1 and Device CE2, Device CE1 and Device CE2 do not have routes to each other because the AS path attribute would appear as 64512 65534 64512. BGP uses the AS path attribute as its loop avoidance mechanism. If a site sees its own AS number more than once in the AS path, the route is considered invalid.

One way to overcome this difficulty is with the as-override statement, which is applied to the PE devices. The **as-override** statement replaces the CE device's AS number with that of the PE device, thus preventing the customer AS number from appearing more than once in the AS path attribute.

If a customer uses AS path prepending to make certain paths less desirable and the service provider uses AS override, each CE AS number occurrence in the AS-path is changed to the service provider AS number. For example, suppose that all customer sites

Copyright © 2013, Juniper Networks, Inc.

use the same AS number, say 64512. If the ISP uses AS number 65534, one customer site sees the path to another site as 65534 65534. If the customer prepends 64512 on a particular path to make it less desirable, another customer site sees that path as 65534 65534 65534.

Example: Configuring a Layer 3 VPN with Route Reflection and AS Override

Suppose that you are a service provider providing a managed MPLS-based Layer 3 VPN service. Your customer has several sites and requires BGP routing to customer edge (CE) devices at each site.

- Requirements on page 176
- Overview on page 176
- Configuration on page 177
- Verification on page 184

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

This example has two CE devices, two provider edge (PE) devices, and several provider core devices. The provider network is also using IS-IS to support LDP and BGP loopback reachability Device P2 is acting as a route reflector (RR). Both CE devices are in autonomous system (AS) 64512. The provider network is in AS 65534.

The as-override statement is applied to the PE devices, thus replacing the CE device's AS number with that of the PE device. This prevents the customer AS number from appearing more than once in the AS path attribute.

Figure 17 on page 176 shows the topology used in this example.

Figure 17: AS Override Topology

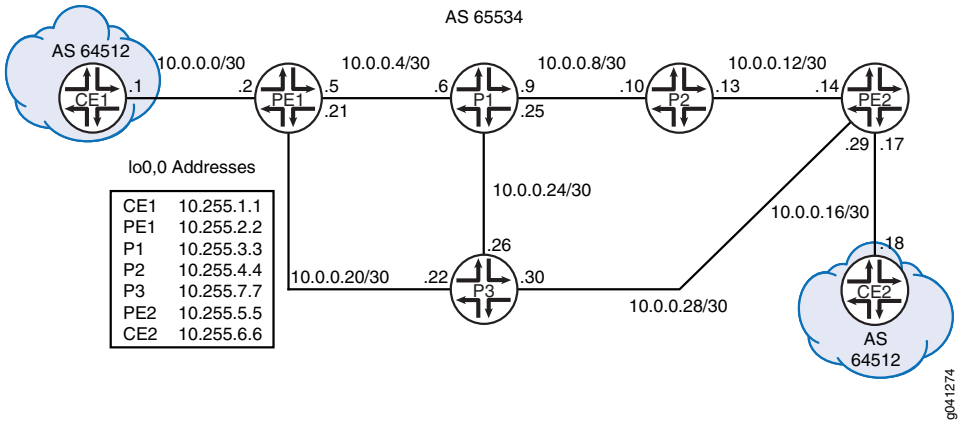

Copyright © 2013, Juniper Networks, Inc.

"CLI Quick Configuration" on page 177 shows the configuration for all of the devices in Figure 17 on page 176. The section "Step-by-Step Procedure" on page 180 describes the steps on Device PE1.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device CE1

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 10.255.1.1/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0101.00
set protocols bgp group PE type external
set protocols bgp group PE family inet unicast
set protocols bgp group PE export ToBGP
set protocols bgp group PE peer-as 65534
set protocols bgp group PE neighbor 10.0.0.2
set policy-options policy-statement ToBGP term Direct from protocol direct
set policy-options policy-statement ToBGP term Direct then accept
set routing-options router-id 10.255.1.1
set routing-options autonomous-system 64512
```

Device P1

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces ge-1/2/0 unit 0 family mpls
set interfaces ge-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces ge-1/2/1 unit 0 family iso
set interfaces ge-1/2/1 unit 0 family mpls
set interfaces ge-1/2/2 unit 0 family inet address 10.0.0.25/30
set interfaces ge-1/2/2 unit 0 family iso
set interfaces ge-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.3.3/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0303.00
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols bgp group l3vpn type internal
set protocols bgp group l3vpn local-address 10.255.3.3
set protocols bgp group l3vpn family inet-vpn unicast
set protocols bgp group l3vpn peer-as 65534
set protocols bgp group l3vpn local-as 65534
set protocols bgp group l3vpn neighbor 10.255.4.4
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set routing-options router-id 10.255.3.3
```

Device P2

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces ge-1/2/0 unit 0 family iso
```

Copyright © 2013, Juniper Networks, Inc.

```
set interfaces ge-1/2/0 unit 0 family mpls
set interfaces ge-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces ge-1/2/1 unit 0 family iso
set interfaces ge-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.4.4/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0404.00
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols bgp group Core-RRClients type internal
set protocols bgp group Core-RRClients local-address 10.255.4.4
set protocols bgp group Core-RRClients family inet-vpn unicast
set protocols bgp group Core-RRClients cluster 10.255.4.4
set protocols bgp group Core-RRClients peer-as 65534
set protocols bgp group Core-RRClients neighbor 10.255.3.3
set protocols bgp group Core-RRClients neighbor 10.255.7.7
set protocols bgp group Core-RRClients neighbor 10.255.2.2
set protocols bgp group Core-RRClients neighbor 10.255.5.5
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set routing-options router-id 10.255.4.4
set routing-options autonomous-system 65534
```

Device P3

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.22/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces ge-1/2/0 unit 0 family mpls
set interfaces ge-1/2/1 unit 0 family inet address 10.0.0.26/30
set interfaces ge-1/2/1 unit 0 family iso
set interfaces ge-1/2/1 unit 0 family mpls
set interfaces ge-1/2/2 unit 0 family inet address 10.0.0.30/30
set interfaces ge-1/2/2 unit 0 family iso
set interfaces ge-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.7.7/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0707.00
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols bgp group l3vpn type internal
set protocols bgp group l3vpn local-address 10.255.7.7
set protocols bgp group l3vpn family inet-vpn unicast
set protocols bgp group l3vpn peer-as 65534
set protocols bgp group l3vpn local-as 65534
set protocols bgp group l3vpn neighbor 10.255.4.4
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set routing-options router-id 10.255.7.7
```


Copyright © 2013, Juniper Networks, Inc.

Device PE1

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces ge-1/2/0 unit 0 family mpls
set interfaces ge-1/2/1 unit 0 family inet address 10.0.0.5/30
set interfaces ge-1/2/1 unit 0 family iso
set interfaces ge-1/2/1 unit 0 family mpls
set interfaces ge-1/2/2 unit 0 family inet address 10.0.0.21/30
set interfaces ge-1/2/2 unit 0 family iso
set interfaces ge-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.2.2/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0202.00
set protocols mpls interface ge-1/2/2.0
set protocols mpls interface ge-1/2/1.0
set protocols mpls interface lo0.0
set protocols mpls interface fxp0.0 disable
set protocols bgp group l3vpn type internal
set protocols bgp group l3vpn local-address 10.255.2.2
set protocols bgp group l3vpn family inet-vpn unicast
set protocols bgp group l3vpn peer-as 65534
set protocols bgp group l3vpn local-as 65534
set protocols bgp group l3vpn neighbor 10.255.4.4
set protocols isis interface ge-1/2/1.0 level 2 metric 10
set protocols isis interface ge-1/2/1.0 level 1 disable
set protocols isis interface ge-1/2/2.0 level 2 metric 10
set protocols isis interface ge-1/2/2.0 level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface ge-1/2/1.0
set protocols ldp interface ge-1/2/2.0
set protocols ldp interface fxp0.0 disable
set protocols ldp interface lo0.0
set routing-instances VPN-A instance-type vrf
set routing-instances VPN-A interface ge-1/2/0.0
set routing-instances VPN-A route-distinguisher 65534:1234
set routing-instances VPN-A vrf-target target:65534:1234
set routing-instances VPN-A protocols bgp group CE type external
set routing-instances VPN-A protocols bgp group CE family inet unicast
set routing-instances VPN-A protocols bgp group CE neighbor 10.0.0.1 peer-as 64512
set routing-instances VPN-A protocols bgp group CE neighbor 10.0.0.1 as-override
set routing-options router-id 10.255.2.2
set routing-options autonomous-system 65534
```

Device PE2

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces ge-1/2/0 unit 0 family mpls
set interfaces ge-1/2/1 unit 0 family inet address 10.0.0.17/30
set interfaces ge-1/2/1 unit 0 family iso
set interfaces ge-1/2/2 unit 0 family inet address 10.0.0.29/30
set interfaces ge-1/2/2 unit 0 family iso
set interfaces ge-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.5.5/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0505.00
set protocols mpls interface ge-1/2/0.0
set protocols mpls interface ge-1/2/2.0
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols mpls interface lo0.0
set protocols mpls interface fxp0.0 disable
set protocols bgp group l3vpn type internal
set protocols bgp group l3vpn local-address 10.255.5.5
set protocols bgp group l3vpn family inet-vpn unicast
set protocols bgp group l3vpn peer-as 65534
set protocols bgp group l3vpn local-as 65534
set protocols bgp group l3vpn neighbor 10.255.4.4
set protocols isis interface ge-1/2/0.0 level 2 metric 10
set protocols isis interface ge-1/2/0.0 level 1 disable
set protocols isis interface ge-1/2/2.0 level 2 metric 10
set protocols isis interface ge-1/2/2.0 level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface ge-1/2/0.0
set protocols ldp interface ge-1/2/2.0
set protocols ldp interface fxp0.0 disable
set protocols ldp interface lo0.0
set routing-instances VPN-A instance-type vrf
set routing-instances VPN-A interface ge-1/2/1.0
set routing-instances VPN-A route-distinguisher 65534:1234
set routing-instances VPN-A vrf-target target:65534:1234
set routing-instances VPN-A protocols bgp group CE type external
set routing-instances VPN-A protocols bgp group CE family inet unicast
set routing-instances VPN-A protocols bgp group CE neighbor 10.0.0.18 peer-as 64512
set routing-instances VPN-A protocols bgp group CE neighbor 10.0.0.18 as-override
set routing-options router-id 10.255.5.5
set routing-options autonomous-system 65534
```

Device CE2

```
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 10.255.6.6/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0606.00
set protocols bgp group PE type external
set protocols bgp group PE family inet unicast
set protocols bgp group PE export ToBGP
set protocols bgp group PE peer-as 65534
set protocols bgp group PE neighbor 10.0.0.17
set policy-options policy-statement ToBGP term Direct from protocol direct
set policy-options policy-statement ToBGP term Direct then accept
set routing-options router-id 10.255.6.6
set routing-options autonomous-system 64512
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure AS override:

1. Configure the interfaces.

   To enable MPLS, include the protocol family on the interface so that the interface does not discard incoming MPLS traffic.

   ```
   [edit interfaces]
   ```


Copyright © 2013, Juniper Networks, Inc.

```
user@PE1# set ge-1/2/0 unit 0 family inet address 10.0.0.2/30
user@PE1# set ge-1/2/0 unit 0 family iso
user@PE1# set ge-1/2/0 unit 0 family mpls
user@PE1# set ge-1/2/1 unit 0 family inet address 10.0.0.5/30
user@PE1# set ge-1/2/1 unit 0 family iso
user@PE1# set ge-1/2/1 unit 0 family mpls
user@PE1# set ge-1/2/2 unit 0 family inet address 10.0.0.21/30
user@PE1# set ge-1/2/2 unit 0 family iso
user@PE1# set ge-1/2/2 unit 0 family mpls
user@PE1# set lo0 unit 0 family inet address 10.255.2.2/32
user@PE1# set lo0 unit 0 family iso address 49.0001.0010.0000.0202.00
```

2. Add the interface to the MPLS protocol to establish the control plane level connectivity.

   Set up the IGP so that the provider devices can communicate with each other.

   To establish a mechanism to distribute MPLS labels, enable LDP. Optionally, for LDP, enable forwarding equivalence class (FEC) deaggregation, which results in faster global convergence.

   ```
   [edit protocols]
   user@PE1# set mpls interface ge-1/2/2.0
   user@PE1# set mpls interface ge-1/2/1.0
   user@PE1# set mpls interface lo0.0
   user@PE1# set mpls interface fxp0.0 disable
   user@PE1# set isis interface ge-1/2/1.0 level 2 metric 10
   user@PE1# set isis interface ge-1/2/1.0 level 1 disable
   user@PE1# set isis interface ge-1/2/2.0 level 2 metric 10
   user@PE1# set isis interface ge-1/2/2.0 level 1 disable
   user@PE1# set isis interface fxp0.0 disable
   user@PE1# set isis interface lo0.0 level 2 metric 0
   user@PE1# set ldp deaggregate
   user@PE1# set ldp interface ge-1/2/1.0
   user@PE1# set ldp interface ge-1/2/2.0
   user@PE1# set ldp interface fxp0.0 disable
   user@PE1# set ldp interface lo0.0
   ```

3. Enable the internal BGP (IBGP) connection to peer with the RR only, using the IPv4 VPN unicast address family.

   ```
   [edit protocols bgp group l3vpn]
   user@PE1# set type internal
   user@PE1# set local-address 10.255.2.2
   user@PE1# set family inet-vpn unicast
   user@PE1# set peer-as 65534
   user@PE1# set local-as 65534
   user@PE1# set neighbor 10.255.4.4
   ```

4. Configure the routing instance, including the **as-override** statement.

   Create the routing-Instance (VRF) on the PE device, setting up the BGP configuration to peer with Device CE1.

   ```
   [edit routing-instances VPN-A]
   user@PE1# set instance-type vrf
   user@PE1# set interface ge-1/2/0.0
   user@PE1# set route-distinguisher 65534:1234
   ```

Copyright © 2013, Juniper Networks, Inc.

```
user@PE1# set vrf-target target:65534:1234
user@PE1# set protocols bgp group CE type external
user@PE1# set protocols bgp group CE family inet unicast
user@PE1# set protocols bgp group CE neighbor 10.0.0.1 peer-as 64512
user@PE1# set protocols bgp group CE neighbor 10.0.0.1 as-override
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@PE1# set router-id 10.255.2.2
user@PE1# set autonomous-system 65534
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show routing-instances**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@PE1# show interfaces
ge-1/2/0 {
    unit 2 {
        family inet {
            address 10.0.0.2/30;
        }
        family iso;
        family mpls;
    }
}
ge-1/2/1 {
    unit 5 {
        family inet {
            address 10.0.0.5/30;
        }
        family iso;
        family mpls;
    }
}
ge-1/2/2 {
    unit 21 {
        family inet {
            address 10.0.0.21/30;
        }
        family iso;
        family mpls;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.255.2.2/32;
        }
        family iso {
            address 49.0001.0010.0000.0202.00;
        }
    }
}
```


Copyright © 2013, Juniper Networks, Inc.

```
user@PE1# show protocols
mpls {
   interface ge-1/2/2.0;
   interface ge-1/2/1.0;
   interface lo0.0;
   interface fxp0.0 {
      disable;
   }
}
bgp {
   group l3vpn {
      type internal;
      local-address 10.255.2.2;
      family inet-vpn {
         unicast;
      }
      peer-as 65534;
      local-as 65534;
      neighbor 10.255.4.4;
   }
}
isis {
   interface ge-1/2/1.0 {
      level 2 metric 10;
      level 1 disable;
   }
   interface ge-1/2/2.0 {
      level 2 metric 10;
      level 1 disable;
   }
   interface fxp0.0 {
      disable;
   }
   interface lo0.0 {
      level 2 metric 0;
   }
}
ldp {
   deaggregate;
   interface ge-1/2/1.0;
   interface ge-1/2/2.0;
   interface fxp0.0 {
      disable;
   }
   interface lo0.0;
}
```

```
user@PE1# show routing-instances
VPN-A {
   instance-type vrf;
   interface ge-1/2/0.0;
   route-distinguisher 65534:1234;
   vrf-target target:65534:1234;
   protocols {
      bgp {
         group CE {
```

Copyright © 2013, Juniper Networks, Inc.

```
            type external;
            family inet {
              unicast;
            }
            neighbor 10.0.0.1 {
              peer-as 64512;
              as-override;
            }
          }
        }
      }
    }
```

```
user@PE1# show routing-options
router-id 10.255.2.2;
autonomous-system 65534;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Checking AS Path to the CE Devices on page 184
- Checking How the Route to Device CE2 Is Advertised on page 184
- Checking the Route on Device CE1 on page 185

Checking AS Path to the CE Devices

Purpose Display information on Device PE1 about the AS path attribute for the route to Device CE2's loopback interface.

Action On Device PE1, from operational mode, enter the **show route table VPN-A.inet.0 10.255.6.6** command.

```
user@PE1> show route table VPN-A.inet.0 10.255.6.6

VPN-A.inet.0: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.6.6/32       *[BGP/170] 02:19:35, localpref 100, from 10.255.4.4
                       AS path: 64512 I, validation-state: unverified
                     > to 10.0.0.22 via ge-1/2/2.0, Push 300032, Push 299776(top)
```

Meaning The output shows that Device PE1 has an AS path for 10.255.6.6/32 as coming from AS 64512.

Checking How the Route to Device CE2 Is Advertised

Purpose Make sure the route to Device CE2 is advertised to Device CE1 as if it is coming from the MPLS core.

Copyright © 2013, Juniper Networks, Inc.

Action On Device PE1, from operational mode, enter the **show route advertising-protocol bgp 10.0.0.1** command.

```
user@PE1> show route advertising-protocol bgp 10.0.0.1

VPN-A.inet.0: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.0.0.16/30            Self                                    I
* 10.255.1.1/32           10.0.0.1                                65534 I
* 10.255.6.6/32           Self                                    65534 I
```

Meaning The output indicates that Device PE1 is advertising only its own AS number in the AS path.

Checking the Route on Device CE1

Purpose Make sure that Device CE1 contains only the provider AS number in the AS path for the route to Device CE2.

Action From operational mode, enter the **show route table inet.0 terse 10.255.6.6** command.

```
user@CE1> show route table inet.0 terse 10.255.6.6

inet.0: 5 destinations, 6 routes (5 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A V Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* ? 10.255.6.6/32      B 170        100                           65534 65534
I
  unverified                                      >10.0.0.2
```

Meaning The output indicates that Device CE1 has a route to Device CE2. The loop issue is resolved with the use of the **as-override** statement.

One route is hidden on the CE device. This is because Junos OS does not perform a BGP split horizon. Generally, split horizon in BGP is unnecessary, because any routes that might be received back by the originator are less preferred due to AS path length (for EBGP), AS path loop detection (IBGP), or other BGP metrics. Advertising routes back to the neighbor from which they were learned has a negligible effect on the router's performance, and is the correct thing to do.

Related Documentation

- Examples: Configuring BGP Local AS on page 116

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 5

BGP Policy Configuration

- Example: Configuring BGP Interactions with IGPs on page 187
- Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS on page 191
- Example: Configuring BGP Route Advertisement on page 200
- Example: Configuring EBGP Multihop on page 208
- Example: Configuring BGP Route Preference (Administrative Distance) on page 217
- Example: Configuring BGP Path Selection on page 224
- Example: Removing Private AS Numbers on page 235
- Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches on page 241
- Example: Configuring Conditional Installation of Prefixes in a Routing Table on page 246

Example: Configuring BGP Interactions with IGPs

- Understanding Routing Policies on page 187
- Example: Injecting OSPF Routes into the BGP Routing Table on page 188

Understanding Routing Policies

Each routing policy is identified by a policy name. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose the entire name in double quotation marks. Each routing policy name must be unique within a configuration.

Once a policy is created and named, it must be applied before it is active. You apply routing policies using the **import** and **export** statements at the **protocols>*protocol-name*** level in the configuration hierarchy.

In the **import** statement, you list the name of the routing policy to be evaluated when routes are imported into the routing table from the routing protocol.

In the **export** statement, you list the name of the routing policy to be evaluated when routes are being exported from the routing table into a dynamic routing protocol. Only active routes are exported from the routing table.

Copyright © 2013, Juniper Networks, Inc.

To specify more than one policy and create a policy chain, you list the policies using a space as a separator. If multiple policies are specified, the policies are evaluated in the order in which they are specified. As soon as an accept or reject action is executed, the policy chain evaluation ends.

Example: Injecting OSPF Routes into the BGP Routing Table

This example shows how to create a policy that injects OSPF routes into the BGP routing table.

- Requirements on page 188
- Overview on page 188
- Configuration on page 188
- Verification on page 190
- Troubleshooting on page 191

Requirements

Before you begin:

- Configure network interfaces.
- Configure external peer sessions. See "Example: Configuring External BGP Point-to-Point Peer Sessions" on page 20.
- Configure interior gateway protocol (IGP) sessions between peers.

Overview

In this example, you create a routing policy called **injectpolicy1** and a routing term called **injectterm1**. The policy injects OSPF routes into the BGP routing table.

Configuration

- Configuring the Routing Policy on page 188
- Configuring Tracing for the Routing Policy on page 189

Configuring the Routing Policy

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement injectpolicy1 term injectterm1 from protocol ospf
set policy-options policy-statement injectpolicy1 term injectterm1 from area 0.0.0.1
set policy-options policy-statement injectpolicy1 term injectterm1 then accept
set protocols bgp export injectpolicy1
```


Copyright © 2013, Juniper Networks, Inc.

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To inject OSPF routes into a BGP routing table:

1. Create the policy term.

```
[edit policy-options policy-statement injectpolicy1]
user@host# set term injectterm1
```

2. Specify OSPF as a match condition.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set from protocol ospf
```

3. Specify the routes from an OSPF area as a match condition.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set from area 0.0.0.1
```

4. Specify that the route is to be accepted if the previous conditions are matched.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# set then accept
```

5. Apply the routing policy to BGP.

```
[edit]
user@host# set protocols bgp export injectpolicy1
```

Results

Confirm your configuration by entering the **show policy-options** and **show protocols bgp** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement injectpolicy1 {
  term injectterm1 {
    from {
      protocol ospf;
      area 0.0.0.1;
    }
    then accept;
  }
}

user@host# show protocols bgp
export injectpolicy1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Tracing for the Routing Policy

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement injectpolicy1 term injectterm1 then trace
set routing-options traceoptions file ospf-bgp-policy-log
set routing-options traceoptions file size 5m
set routing-options traceoptions file files 5
set routing-options traceoptions flag policy
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

1. Include a trace action in the policy.

```
[edit policy-options policy-statement injectpolicy1 term injectterm1]
user@host# then trace
```

2. Configure the tracing file for the output.

```
[edit routing-options traceoptions]
user@host# set file ospf-bgp-policy-log
user@host# set file size 5m
user@host# set file files 5
user@host# set flag policy
```

Results

Confirm your configuration by entering the **show policy-options** and **show routing-options** commands from configuration mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
policy-statement injectpolicy1 {
   term injectterm1 {
      then {
         trace;
      }
   }
}
```

```
user@host# show routing-options
traceoptions {
   file ospf-bgp-policy-log size 5m files 5;
   flag policy;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

Verifying That the Expected BGP Routes Are Present

Purpose

Verify the effect of the export policy.

Action

From operational mode, enter the **show route** command.

Copyright © 2013, Juniper Networks, Inc.

Troubleshooting

- Using the show log Command to Examine the Actions of the Routing Policy on page 191

Using the show log Command to Examine the Actions of the Routing Policy

Problem The routing table contains unexpected routes, or routes are missing from the routing table.

Solution If you configure policy tracing as shown in this example, you can run the **show log ospf-bgp-policy-log** command to diagnose problems with the routing policy. The **show log ospf-bgp-policy-log** command displays information about the routes that the **injectpolicy1** policy term analyzes and acts upon.

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS

- Understanding BGP Communities and Extended Communities as Routing Policy Match Conditions on page 191
- Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS on page 192

Understanding BGP Communities and Extended Communities as Routing Policy Match Conditions

A *BGP community* is a group of destinations that share a common property. Community information is included as a path attribute in BGP update messages. This information identifies community members and enables you to perform actions on a group without having to elaborate upon each member. You can create a named community and include it in a routing policy with the **community** match condition, which is described in Configuring Match Conditions in Routing Policy Terms. For a list of the actions that can be configured for communities, see Configuring Actions That Manipulate Route Characteristics.

You can configure the standard community attribute and the extended communities attribute for inclusion in BGP update messages. The standard community attribute is four octets whereas the extended communities attribute is eight octets, providing a larger range for grouping or categorizing communities. You can use community and extended communities attributes to trigger routing decisions, such as acceptance, rejection, preference, or redistribution.

The BGP community attribute format is ***as-number*:*community-value***. The BGP extended communities attribute format has three fields: ***type*:*administrator*:*assigned-number***.

When specifying community IDs for the standard community attribute, you can use UNIX-style regular expressions. Regular expressions are also supported for the extended communities attribute. The only exception is for VPN import policies (**vrf-import**), which do not support regular expressions for the extended communities attribute.

Copyright © 2013, Juniper Networks, Inc.

NOTE: You can assign community tags to non-BGP routes through configuration (for static, aggregate, or generated routes) or an import routing policy. These tags can then be matched when BGP exports the routes.

To use a BGP community or extended community as a routing policy match condition, you define the community and its members and then include the community in a match condition.

Junos OS supports the following standard:

- RFC 1997, *BGP Communities Attribute*

Example: Redistributing BGP Routes with a Specific Community Tag into IS-IS

This example defines a policy that takes BGP routes from the **Edu** community and places them into IS-IS with a metric of 63.

- Requirements on page 192
- Overview on page 192
- Configuration on page 193
- Verification on page 199

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

Figure 18 on page 192 shows the topology used in this example.

Figure 18: Redistributing BGP Routes with a Specific Community Tag into IS-IS

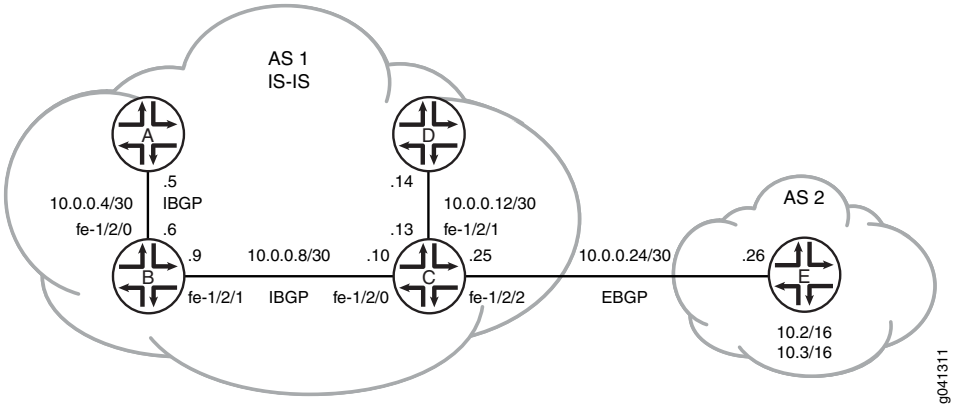

In this example, Device A, Device B, Device C, and Device D are in autonomous system (AS) 1 and are running IS-IS. All of the AS 1 devices, except Device D, are running internal BGP (IBGP).

Copyright © 2013, Juniper Networks, Inc.

Device E is in AS 2 and has an external BGP (EBGP) peering session with Device C. Device E has two static routes, 10.2.0.0/16 and 10.3.0.0/16. These routes are tagged with the Edu 2:5 community attribute and are advertised by way of EBGP to Device C.

Device C accepts the BGP routes that are tagged with the Edu 2:5 community attribute, redistributes the routes into IS-IS, and applies an IS-IS metric of 63 to these routes.

"CLI Quick Configuration" on page 193 shows the configuration for all of the devices in Figure 18 on page 192. The section "Step-by-Step Procedure" on page 195 describes the steps on Device C and Device E.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.5/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.1
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 1
```

Device B

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.2
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.2
set routing-options autonomous-system 1
```

Device C

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.3
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group external-peers type external
set protocols bgp group external-peers export send-isis-and-direct
set protocols bgp group external-peers peer-as 2
set protocols bgp group external-peers neighbor 10.0.0.26
set protocols isis export Edu-to-isis
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 2 passive
set protocols isis interface lo0.0
set policy-options policy-statement Edu-to-isis term 1 from protocol bgp
set policy-options policy-statement Edu-to-isis term 1 from community Edu
set policy-options policy-statement Edu-to-isis term 1 then metric 63
set policy-options policy-statement Edu-to-isis term 1 then accept
set policy-options policy-statement send-isis-and-direct term 1 from protocol isis
set policy-options policy-statement send-isis-and-direct term 1 from protocol direct
set policy-options policy-statement send-isis-and-direct term 1 from route-filter
  10.0.0.0/16 orlonger
set policy-options policy-statement send-isis-and-direct term 1 from route-filter
  192.168.0.0/16 orlonger
set policy-options policy-statement send-isis-and-direct term 1 then accept
set policy-options community Edu members 2:5
set routing-options router-id 192.168.0.3
set routing-options autonomous-system 1
```

Device D

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.4
set routing-options autonomous-system 1
```

Device E

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.26/30
set interfaces lo0 unit 7 family inet address 192.168.0.5/32 primary
set interfaces lo0 unit 7 family inet address 10.2.0.1/32
set interfaces lo0 unit 7 family inet address 10.3.0.1/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers export statics
set protocols bgp group external-peers peer-as 1
set protocols bgp group external-peers neighbor 10.0.0.25
set policy-options policy-statement statics from protocol static
set policy-options policy-statement statics then community add Edu
set policy-options policy-statement statics then accept
set policy-options community Edu members 2:5
set routing-options static route 10.2.0.0/16 reject
set routing-options static route 10.2.0.0/16 install
set routing-options static route 10.3.0.0/16 reject
set routing-options static route 10.3.0.0/16 install
set routing-options router-id 192.168.0.5
```


Copyright © 2013, Juniper Networks, Inc.

```
set routing-options autonomous-system 2
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device E:

1. Configure the interfaces.

```
[edit interfaces]
user@E# set fe-1/2/0 unit 0 family inet address 10.0.0.26/30
user@E# set lo0 unit 7 family inet address 192.168.0.5/32 primary
user@E# set lo0 unit 7 family inet address 10.2.0.1/32
user@E# set lo0 unit 7 family inet address 10.3.0.1/32
```

2. Configure the **statics** policy, which adds the **Edu** community attribute to the static routes.

```
[edit policy-options]
user@E# set policy-statement statics from protocol static
user@E# set policy-statement statics then community add Edu
user@E# set policy-statement statics then accept
user@E# set community Edu members 2:5
```

3. Configure EBGP and apply the **statics** policy.

```
[edit protocols bgp group external-peers]
user@E# set type external
user@E# set export statics
user@E# set peer-as 1
user@E# set protocols bgp group external-peers neighbor 10.0.0.25
```

4. Configure the static routes.

```
[edit routing-options static]
user@E# set route 10.2.0.0/16 reject
user@E# set route 10.2.0.0/16 install
user@E# set route 10.3.0.0/16 reject
user@E# set route 10.3.0.0/16 install
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@E# set router-id 192.168.0.5
user@E# set autonomous-system 2
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device C:

1. Configure the interfaces.

```
[edit interfaces]
user@C# set fe-1/2/0 unit 0 family inet address 10.0.0.10/30
user@C# set fe-1/2/0 unit 0 family iso
```

Copyright © 2013, Juniper Networks, Inc.

```
user@C# set fe-1/2/1 unit 0 family inet address 10.0.0.13/30
user@C# set fe-1/2/1 unit 0 family iso
user@C# set fe-1/2/2 unit 0 family inet address 10.0.0.25/30
user@C# set fe-1/2/2 unit 0 family iso
user@C# set lo0 unit 0 family inet address 192.168.0.3/32
user@C# set lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
```

2. Configure IBGP.

```
[edit protocols bgp group int]
user@C# set type internal
user@C# set local-address 192.168.0.3
user@C# set neighbor 192.168.0.1
user@C# set neighbor 192.168.0.2
```

3. Configure the Edu-to-isis policy, which redistributes the Edu-tagged BGP routes learned from Device E and applies a metric of 63.

```
[edit policy-options]
user@C# set policy-statement Edu-to-isis term 1 from protocol bgp
user@C# set policy-statement Edu-to-isis term 1 from community Edu
user@C# set policy-statement Edu-to-isis term 1 then metric 63
user@C# set policy-statement Edu-to-isis term 1 then accept
user@C# set community Edu members 2:5
```

4. Enable IS-IS on the interfaces, and apply the Edu-to-isis policy.

```
[edit protocols isis]
user@C# set export Edu-to-isis
user@C# set interface fe-1/2/0.0 level 1 disable
user@C# set interface fe-1/2/1.0 level 1 disable
user@C# set interface fe-1/2/2.0 level 1 disable
user@C# set interface fe-1/2/2.0 level 2 passive
user@C# set interface lo0.0
```

5. Configure the send-isis-and-direct policy, which redistributes routes to Device E, through EBGP.

   Without this policy, Device E would not have connectivity to the networks in AS 1.

```
[edit policy-options policy-statement send-isis-and-direct term 1]
user@C# set from protocol isis
user@C# set from protocol direct
user@C# set from route-filter 10.0.0.0/16 orlonger
user@C# set from route-filter 192.168.0.0/16 orlonger
user@C# set then accept
```

6. Configure EBGP and apply the send-isis-and-direct policy.

```
[edit protocols bgp group external-peers]
user@C# set type external
user@C# set export send-isis-and-direct
user@C# set peer-as 2
user@C# set neighbor 10.0.0.26
```

7. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@C# set router-id 192.168.0.3
user@C# set autonomous-system 1
```


Copyright © 2013, Juniper Networks, Inc.

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Device E

```
user@E# show interfaces
fe-1/2/0 {
    unit 0 {
        family inet {
            address 10.0.0.26/30;
        }
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.0.5/32 {
                primary;
            }
            address 10.2.0.1/32;
            address 10.3.0.1/32;
        }
    }
}

user@E# show protocols
bgp {
    group external-peers {
        type external;
        export statics;
        peer-as 1;
        neighbor 10.0.0.25;
    }
}

user@E# show policy-options
policy-statement statics {
    from protocol static;
    then {
        community add Edu;
        accept;
    }
}
community Edu members 2:5;

user@E# show routing-options
static {
    route 10.2.0.0/16 {
        reject;
        install;
    }
    route 10.3.0.0/16 {
        reject;
        install;
    }
}
```

Copyright © 2013, Juniper Networks, Inc.

```
router-id 192.168.0.5;
autonomous-system 2;
```

Device C

```
user@C# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.10/30;
    }
    family iso;
  }
}
fe-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.13/30;
    }
    family iso;
  }
}
fe-1/2/2 {
  unit 0 {
    family inet {
      address 10.0.0.25/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.3/32;
    }
    family iso {
      address 49.0002.0192.0168.0003.00;
    }
  }
}

user@C# show protocols
bgp {
  group int {
    type internal;
    local-address 192.168.0.3;
    neighbor 192.168.0.1;
    neighbor 192.168.0.2;
  }
  group external-peers {
    type external;
    export send-isis-and-direct;
    peer-as 2;
    neighbor 10.0.0.26;
  }
}
isis {
  export Edu-to-isis;
```


Copyright © 2013, Juniper Networks, Inc.

```
    interface fe-1/2/0.0 {
      level 1 disable;
    }
    interface fe-1/2/1.0 {
      level 1 disable;
    }
    interface fe-1/2/2.0 {
      level 1 disable;
      level 2 passive;
    }
    interface lo0.0;
  }
```

```
user@C# show policy-options
policy-statement Edu-to-isis {
  term 1 {
    from {
      protocol bgp;
      community Edu;
    }
    then {
      metric 63;
      accept;
    }
  }
}
policy-statement send-isis-and-direct {
  term 1 {
    from {
      protocol [ isis direct ];
      route-filter 10.0.0.0/16 orlonger;
      route-filter 192.168.0.0/16 orlonger;
    }
    then accept;
  }
}
community Edu members 2:5;
```

```
user@C# show routing-options
router-id 192.168.0.3;
autonomous-system 1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

Verifying the IS-IS Neighbor

Purpose Verify that the BGP routes from Device E are communicated on the IS-IS network in AS 1.

Action From operational mode, enter the **show route protocol isis** command.

```
user@D> show route protocol isis
```

Copyright © 2013, Juniper Networks, Inc.

```
inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.4/30        *[IS-IS/18] 22:30:53, metric 30
                    > to 10.0.0.13 via fe-1/2/0.0
10.0.0.8/30        *[IS-IS/18] 22:30:53, metric 20
                    > to 10.0.0.13 via fe-1/2/0.0
10.0.0.24/30       *[IS-IS/18] 03:31:21, metric 20
                    > to 10.0.0.13 via fe-1/2/0.0
10.2.0.0/16        *[IS-IS/165] 02:36:31, metric 73
                    > to 10.0.0.13 via fe-1/2/0.0
10.3.0.0/16        *[IS-IS/165] 02:36:31, metric 73
                    > to 10.0.0.13 via fe-1/2/0.0
192.168.0.1/32     *[IS-IS/18] 03:40:28, metric 30
                    > to 10.0.0.13 via fe-1/2/0.0
192.168.0.2/32     *[IS-IS/18] 22:30:53, metric 20
                    > to 10.0.0.13 via fe-1/2/0.0
192.168.0.3/32     *[IS-IS/18] 22:30:53, metric 10
                    > to 10.0.0.13 via fe-1/2/0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Meaning As expected, the 10.2.0.0/16 and 10.3.0.0/16 routes are in Device D's routing table as IS-IS external routes with a metric of 73. If Device C had not added 63 to the metric, Device D would have a metric of 10 for these routes.

Related Documentation

- Example: Redistributing OSPF Routes into IS-IS

Example: Configuring BGP Route Advertisement

- Understanding Route Advertisement on page 200
- Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 205

Understanding Route Advertisement

All routing protocols use the Junos OS routing table to store the routes that they learn and to determine which routes they should advertise in their protocol packets. Routing policy allows you to control which routes the routing protocols store in and retrieve from the routing table. For information about routing policy, see the Routing Policy Configuration Guide.

When configuring BGP routing policy, you can perform the following tasks:

- Applying Routing Policy on page 201
- Setting BGP to Advertise Inactive Routes on page 202
- Configuring BGP to Advertise the Best External Route to Internal Peers on page 202
- Configuring How Often BGP Exchanges Routes with the Routing Table on page 203
- Disabling Suppression of Route Advertisements on page 204

 Copyright © 2013, Juniper Networks, Inc.

Applying Routing Policy

You define routing policy at the **[edit policy-options]** hierarchy level. To apply policies you have defined for BGP, include the **import** and **export** statements within the BGP configuration. For information about defining policy, see the Routing Policy Configuration Guide.

You can apply policies as follows:

- BGP global **import** and **export** statements—Include these statements at the **[edit protocols bgp]** hierarchy level (for routing instances, include these statements at the **[edit routing-instances *routing-instance-name* protocols bgp]** hierarchy level).
- Group **import** and **export** statements—Include these statements at the **[edit protocols bgp group *group-name*]** hierarchy level (for routing instances, include these statements at the **[edit routing-instances *routing-instance-name* protocols bgp group *group-name*]** hierarchy level).
- Peer **import** and **export** statements—Include these statements at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level (for routing instances, include these statements at the **[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]** hierarchy level).

A peer-level **import** or **export** statement overrides a group **import** or **export** statement. A group-level **import** or **export** statement overrides a global BGP **import** or **export** statement.

To apply policies, see the following sections:

- Applying Policies to Routes Being Imported into the Routing Table from BGP on page 201
- Applying Policies to Routes Being Exported from the Routing Table into BGP on page 201

Applying Policies to Routes Being Imported into the Routing Table from BGP

To apply policy to routes being imported into the routing table from BGP, include the **import** statement, listing the names of one or more policies to be evaluated:

```
import [ policy-names ];
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

If you specify more than one policy, they are evaluated in the order specified, from first to last, and the first matching filter is applied to the route. If no match is found, BGP places into the routing table only those routes that were learned from BGP routing devices.

Applying Policies to Routes Being Exported from the Routing Table into BGP

To apply policy to routes being exported from the routing table into BGP, include the **export** statement, listing the names of one or more policies to be evaluated:

```
export [ policy-names ];
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Copyright © 2013, Juniper Networks, Inc.

If you specify more than one policy, they are evaluated in the order specified, from first to last, and the first matching filter is applied to the route. If no routes match the filters, the routing table exports into BGP only the routes that it learned from BGP.

Setting BGP to Advertise Inactive Routes

By default, BGP stores the route information it receives from update messages in the Junos OS routing table, and the routing table exports only active routes into BGP, which BGP then advertises to its peers. To have the routing table export to BGP the best route learned by BGP even if Junos OS did not select it to be an active route, include the **advertise-inactive** statement:

```
advertise-inactive;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Configuring BGP to Advertise the Best External Route to Internal Peers

In general, deployed BGP implementations do not advertise the external route with the highest local preference value to internal peers unless it is the best route. Although this behavior was required by an earlier version of the BGP version 4 specification, RFC 1771, it was typically not followed in order to minimize the amount of advertised information and to prevent routing loops. However, there are scenarios in which advertising the best external route is beneficial, in particular, situations that can result in IBGP route oscillation.

In Junos OS Release 9.3 and later, you can configure BGP to advertise the best external route into an internal BGP (IBGP) mesh group, a route reflector cluster, or an autonomous system (AS) confederation, even when the best route is an internal route.

NOTE: **In order to configure the advertise-external statement on a route reflector, you must disable intracluster reflection with the no-client-reflect statement.**

When a routing device is configured as a route reflector for a cluster, a route advertised by the route reflector is considered internal if it is received from an internal peer with the same cluster identifier or if both peers have no cluster identifier configured. A route received from an internal peer that belongs to another cluster, that is, with a different cluster identifier, is considered external.

In a confederation, when advertising a route to a confederation border router, any route from a different confederation sub-AS is considered external.

You can also configure BGP to advertise the external route only if the route selection process reaches the point where the multiple exit discriminator (MED) metric is evaluated. As a result, an external route with an AS path worse (that is, longer) than that of the active path is not advertised.

Junos OS also provides support for configuring a BGP export policy that matches on the state of an advertised route. You can match on either active or inactive routes. For more information, see the Routing Policy Configuration Guide.

Copyright © 2013, Juniper Networks, Inc.

To configure BGP to advertise the best external path to internal peers, include the **advertise-external** statement:

```
advertise-external;
```

NOTE: The **advertise-external** statement is supported at both the group and neighbor level. If you configure the statement at the neighbor level, you must configure it for all neighbors in a group. Otherwise, the group is automatically split into different groups.

For a complete list of hierarchy levels at which you can configure this statement, see the statement summary section for this statement.

To configure BGP to advertise the best external path only if the route selection process reaches the point where the MED value is evaluated, include the **conditional** statement:

```
advertise-external {
  conditional;
}
```

For a complete list of hierarchy levels at which you can configure this statement, see the statement summary section for this statement.

Configuring How Often BGP Exchanges Routes with the Routing Table

BGP stores the route information it receives from update messages in the routing table, and the routing table exports active routes from the routing table into BGP. BGP then advertises the exported routes to its peers. By default, the exchange of route information between BGP and the routing table occurs immediately after the routes are received. This immediate exchange of route information might cause instabilities in the network reachability information. To guard against this, you can delay the time between when BGP and the routing table exchange route information.

To configure how often BGP and the routing table exchange route information, include the **out-delay** statement:

```
out-delay seconds;
```

By default, the routing table retains some of the route information learned from BGP. To have the routing table retain all or none of this information, include the **keep** statement:

```
keep (all | none);
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

The routing table can retain the route information learned from BGP in one of the following ways:

- Default (omit the **keep** statement)—Keep all route information that was learned from BGP, except for routes whose AS path is looped and whose loop includes the local AS.
- **keep all**—Keep all route information that was learned from BGP.

Copyright © 2013, Juniper Networks, Inc.

- **keep none**—Discard routes that were received from a peer and that were rejected by import policy or other sanity checking, such as AS path or next hop. When you configure **keep none** for the BGP session and the inbound policy changes, Junos OS forces readvertisement of the full set of routes advertised by the peer.

In an AS path healing situation, routes with looped paths theoretically could become usable during a soft reconfiguration when the AS path loop limit is changed. However, there is a significant memory usage difference between the default and **keep all**.

Consider the following scenarios:

- A peer readvertises routes back to the peer from which it learned them.

  This can happen in the following cases:

  - Another vendor's routing device advertises the routes back to the sending peer.
  - The Junos OS peer's default behavior of not readvertising routes back to the sending peer is overridden by configuring **advertise-peer-as**.

- A provider edge (PE) routing device discards any VPN route that does not have any of the expected route targets.

When **keep all** is configured, the behavior of discarding routes received in the above scenarios is overridden.

Disabling Suppression of Route Advertisements

Junos OS does not advertise the routes learned from one EBGP peer back to the same external BGP (EBGP) peer. In addition, the software does not advertise those routes back to any EBGP peers that are in the same AS as the originating peer, regardless of the routing instance. You can modify this behavior by including the **advertise-peer-as** statement in the configuration. To disable the default advertisement suppression, include the **advertise-peer-as** statement:

```
advertise-peer-as;
```

NOTE: **The route suppression default behavior is disabled if the as-override statement is included in the configuration.**

If you include the **advertise-peer-as** statement in the configuration, BGP advertises the route regardless of this check.

To restore the default behavior, include the **no-advertise-peer-as** statement in the configuration:

```
no-advertise-peer-as;
```

If you include both the as-override and **no-advertise-peer-as** statements in the configuration, the **no-advertise-peer-as** statement is ignored. You can include these statements at multiple hierarchy levels.

Copyright © 2013, Juniper Networks, Inc.

For a list of hierarchy levels at which you can include these statements, see the statement summary section for these statements.

Example: Configuring BGP Prefix-Based Outbound Route Filtering

This example shows how to configure a Juniper Networks router to accept route filters from remote peers and perform outbound route filtering using the received filters.

- Requirements on page 205
- Overview on page 205
- Configuration on page 206
- Verification on page 207

Requirements

Before you begin:

- Configure the router interfaces.
- Configure an interior gateway protocol (IGP).

Overview

You can configure a BGP peer to accept route filters from remote peers and perform outbound route filtering using the received filters. By filtering out unwanted updates, the sending peer saves resources needed to generate and transmit updates, and the receiving peer saves resources needed to process updates. This feature can be useful, for example, in a virtual private network (VPN) in which subsets of customer edge (CE) devices are not capable of processing all the routes in the VPN. The CE devices can use prefix-based outbound route filtering to communicate to the provider edge (PE) routing device to transmit only a subset of routes, such as routes to the main data centers only.

The maximum number of prefix-based outbound route filters that a BGP peer can accept is 5000. If a remote peer sends more than 5000 outbound route filters to a peer address, the additional filters are discarded, and a system log message is generated.

You can configure interoperability for the routing device as a whole or for specific BGP groups or peers only.

Topology

In the sample network, Device CE1 is a router from another vendor. The configuration shown in this example is on Juniper Networks Router PE1.

Figure 19 on page 206 shows the sample network.

Copyright © 2013, Juniper Networks, Inc.

Figure 19: BGP Prefix-Based Outbound Route Filtering

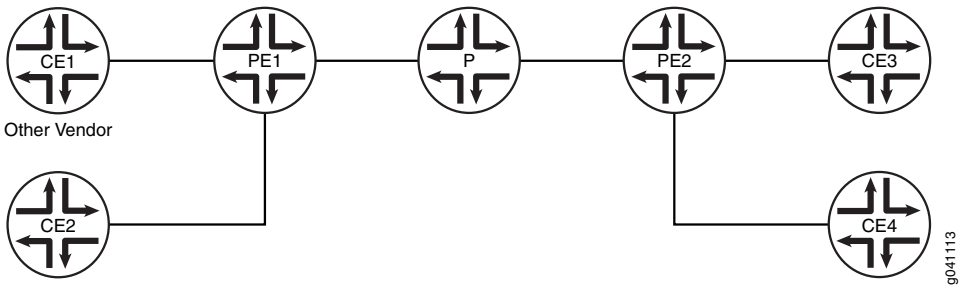

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

PE1

```
set protocols bgp group cisco-peers type external
set protocols bgp group cisco-peers description “to CE1”
set protocols bgp group cisco-peers local-address 192.168.165.58
set protocols bgp group cisco-peers peer-as 35
set protocols bgp group cisco-peers outbound-route-filter bgp-orf-cisco-mode
set protocols bgp group cisco-peers outbound-route-filter prefix-based accept inet
set protocols bgp group cisco-peers neighbor 192.168.165.56
set routing-options autonomous-system 65500
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router PE1 to accept route filters from Device CE1 and perform outbound route filtering using the received filters:

1. Configure the local autonomous system.

   ```
   [edit routing-options]
   user@PE1# set autonomous-system 65500
   ```

2. Configure external peering with Device CE1.

   ```
   [edit protocols bgp group cisco-peers]
   user@PE1# set type external
   user@PE1# set description “to CE1”
   user@PE1# set local-address 192.168.165.58
   user@PE1# set peer-as 35
   user@PE1# set neighbor 192.168.165.56
   ```

3. Configure Router PE1 to accept IPv4 route filters from Device CE1 and perform outbound route filtering using the received filters.

   ```
   [edit protocols bgp group cisco-peers]
   user@PE1# set outbound-route-filter prefix-based accept inet
   ```

4. (Optional) Enable interoperability with routing devices that use the vendor-specific compatibility code of 130 for outbound route filters and the code type of 128.

Copyright © 2013, Juniper Networks, Inc.

The IANA standard code is 3, and the standard code type is 64.

```
[edit protocols bgp group cisco-peers]
user@PE1# set outbound-route-filter bgp-orf-cisco-mode
```

Results From configuration mode, confirm your configuration by entering the **show protocols** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show protocols
group cisco-peers {
  type external;
  description “to CE1”;
  local-address 192.168.165.58;
  peer-as 35;
  outbound-route-filter {
    bgp-orf-cisco-mode;
    prefix-based {
      accept {
        inet;
      }
    }
  }
  neighbor 192.168.165.56;
}

user@PE1# show routing-options
autonomous-system 65500;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying the Outbound Route Filter on page 207
- Verifying the BGP Neighbor Mode on page 208

Verifying the Outbound Route Filter

Purpose Display information about the prefix-based outbound route filter received from Device CE1.

Action From operational mode, enter the **show bgp neighbor orf detail** command.

```
user@PE1> show bgp neighbor orf 192.168.165.56 detail
   Peer: 192.168.165.56 Type: External
   Group: cisco-peers

   inet-unicast
    Filter updates recv:          4 Immediate:          0
    Filter: prefix-based            receive
            Updates recv:          4
      Received filter entries:
        seq 10 2.2.0.0/16 deny minlen 0 maxlen 0
        seq 20 3.3.0.0/16 deny minlen 24 maxlen 0
```

Copyright © 2013, Juniper Networks, Inc.

```
seq 30 4.4.0.0/16 deny minlen 0 maxlen 28
seq 40 5.5.0.0/16 deny minlen 24 maxlen 28
```

Verifying the BGP Neighbor Mode

Purpose Verify that the **bgp-orf-cisco-mode** setting is enabled for the peer by making sure that the **ORFCiscoMode** option is displayed in the **show bgp neighbor** command output.

Action From operational mode, enter the show bgp neighbor command.

```
user@PE1> show bgp neighbor
Peer: 192.168.165.56 AS 35       Local: 192.168.165.58 AS 65500
  Type: External    State: Active         Flags: <>
  Last State: Idle          Last Event: Start
  Last Error: None
  Export: [ adv_stat ]
  Options: <Preference LocalAddress AddressFamily PeerAS Refresh>
  Options: <ORF ORFCiscoMode>
  Address families configured: inet-unicast
  Local Address: 192.168.165.58 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Trace options: detail open detail refresh
  Trace file: /var/log/orf size 5242880 files 20
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Configuring EBGP Multihop

- Understanding BGP Multihop on page 208
- Example: Configuring EBGP Multihop Sessions on page 208

Understanding BGP Multihop

When external BGP (EBGP) peers are not directly connected to each other, they must cross one or more non-BGP routers to reach each other. Configuring multihop EBGP enables the peers to pass through the other routers to form peer relationships and exchange update messages. This type of configuration is typically used when a Juniper Networks routing device needs to run EBGP with a third-party router that does not allow direct connection of the two EBGP peers. EBGP multihop enables a neighbor connection between two EBGP peers that do not have a direct connection.

Example: Configuring EBGP Multihop Sessions

This example shows how to configure an external BGP (EBGP) peer that is more than one hop away from the local router. This type of session is called a *multihop* BGP session.

- Requirements on page 209
- Overview on page 209
- Configuration on page 209
- Verification on page 216

Copyright © 2013, Juniper Networks, Inc.

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

The configuration to enable multihop EBGP sessions requires connectivity between the two EBGP peers. This example uses static routes to provide connectivity between the devices.

Unlike directly connected EBGP sessions in which physical address are typically used in the **neighbor** statements, you must use loopback interface addresses for multihop EBGP by specifying the loopback interface address of the indirectly connected peer. In this way, EBGP multihop is similar to internal BGP (IBGP).

Finally, you must add the multihop statement. Optionally, you can set a maximum time-to-live (TTL) value with the **ttl** statement. The TTL is carried in the IP header of BGP packets. If you do not specify a TTL value, the system's default maximum TTL value is used. The default TTL value is 64 for multihop EBGP sessions. Another option is to retain the BGP next-hop value for route advertisements by including the **no-nexthop-change** statement.

Figure 20 on page 209 shows a typical EBGP multihop network.

Device C and Device E have an established EBGP session. Device D is not a BGP-enabled device. All of the devices have connectivity via static routes.

Figure 20: Typical Network with EBGP Multihop Sessions

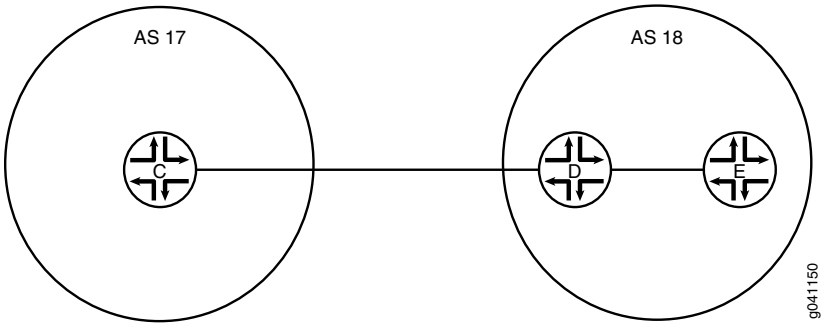

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device C

```
set interfaces fe-1/2/0 unit 9 description to-D
set interfaces fe-1/2/0 unit 9 family inet address 10.10.10.9/30
set interfaces lo0 unit 3 family inet address 192.168.40.4/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers multihop ttl 2
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group external-peers local-address 192.168.40.4
set protocols bgp group external-peers export send-static
set protocols bgp group external-peers peer-as 18
set protocols bgp group external-peers neighbor 192.168.6.7
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 10.10.10.14/32 next-hop 10.10.10.10
set routing-options static route 192.168.6.7/32 next-hop 10.10.10.10
set routing-options router-id 192.168.40.4
set routing-options autonomous-system 17
```

Device D

```
set interfaces fe-1/2/0 unit 10 description to-C
set interfaces fe-1/2/0 unit 10 family inet address 10.10.10.10/30
set interfaces fe-1/2/1 unit 13 description to-E
set interfaces fe-1/2/1 unit 13 family inet address 10.10.10.13/30
set interfaces lo0 unit 4 family inet address 192.168.6.6/32
set routing-options static route 192.168.40.4/32 next-hop 10.10.10.9
set routing-options static route 192.168.6.7/32 next-hop 10.10.10.14
set routing-options router-id 192.168.6.6
```

Device E

```
set interfaces fe-1/2/0 unit 14 description to-D
set interfaces fe-1/2/0 unit 14 family inet address 10.10.10.14/30
set interfaces lo0 unit 5 family inet address 192.168.6.7/32
set protocols bgp group external-peers multihop ttl 2
set protocols bgp group external-peers local-address 192.168.6.7
set protocols bgp group external-peers export send-static
set protocols bgp group external-peers peer-as 17
set protocols bgp group external-peers neighbor 192.168.40.4
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 10.10.10.8/30 next-hop 10.10.10.13
set routing-options static route 192.168.40.4/32 next-hop 10.10.10.13
set routing-options router-id 192.168.6.7
set routing-options autonomous-system 18
```

Device C

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device C:

1. Configure the interface to the directly connected device (to-D), and configure the loopback interface.

   ```
   [edit interfaces fe-1/2/0 unit 9]
   user@C# set description to-D
   user@C# set family inet address 10.10.10.9/30

   [edit interfaces lo0 unit 3]
   user@C# set family inet address 192.168.40.4/32
   ```

2. Configure an EBGP session with Device E.

   The **neighbor** statement points to the loopback interface on Device E.

Copyright © 2013, Juniper Networks, Inc.

```
[edit protocols bgp group external-peers]
user@C# set type external
user@C# set local-address 192.168.40.4
user@C# set export send-static
user@C# set peer-as 18
user@C# set neighbor 192.168.6.7
```

3. Configure the multihop statement to enable Device C and Device E to become EBGP peers.

   Because the peers are two hops away from each other, the example uses the **ttl 2** statement.

   ```
   [edit protocols bgp group external-peers]
   user@C# set multihop ttl 2
   ```

4. Configure connectivity to Device E, using static routes.

   You must configure a route to both the loopback interface address and to the address on the physical interface.

   ```
   [edit routing-options]
   user@C# set static route 10.10.10.14/32 next-hop 10.10.10.10
   user@C# set static route 192.168.6.7/32 next-hop 10.10.10.10
   ```

5. Configure the local router ID and the autonomous system (AS) number.

   ```
   [edit routing-options]
   user@C# set router-id 192.168.40.4
   user@C# set autonomous-system 17
   ```

6. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

   ```
   [edit policy-options policy-statement send-static term 1]
   user@C# set from protocol static
   user@C# set then accept
   ```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@C# show interfaces
fe-1/2/0 {
    unit 9 {
        description to-D;
        family inet {
            address 10.10.10.9/30;
        }
    }
}
lo0 {
    unit 3 {
        family inet {
            address 192.168.40.4/32;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
}
```

```
user@C# show protocols
bgp {
  group external-peers {
    type external;
    multihop {
      ttl 2;
    }
    local-address 192.168.40.4;
    export send-static;
    peer-as 18;
    neighbor 192.168.6.7;
  }
}
```

```
user@C# show policy-options
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}
```

```
user@C# show routing-options
static {
  route 10.10.10.14/32 next-hop 10.10.10.10;
  route 192.168.6.7/32 next-hop 10.10.10.10;
}
router-id 192.168.40.4;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps for all BFD sessions in the topology.

Configuring Device D

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device D:

1. Set the CLI to Device D.

   ```
   user@host> set cli logical-system D
   ```

2. Configure the interfaces to the directly connected devices, and configure a loopback interface.

   ```
   [edit interfaces fe-1/2/0 unit 10]
   user@D# set description to-C
   user@D# set family inet address 10.10.10.10/30


   [edit interfaces fe-1/2/1 unit 13]
   ```


Copyright © 2013, Juniper Networks, Inc.

```
user@D# set description to-E
user@D# set family inet address 10.10.10.13/30

[edit interfaces lo0 unit 4]
user@D# set family inet address 192.168.6.6/32
```

3. Configure connectivity to the other devices using static routes to the loopback interface addresses.

   On Device D, you do not need static routes to the physical addresses because Device D is directly connected to Device C and Device E.

```
[edit routing-options]
user@D# set static route 192.168.40.4/32 next-hop 10.10.10.9
user@D# set static route 192.168.6.7/32 next-hop 10.10.10.14
```

4. Configure the local router ID.

```
[edit routing-options]
user@D# set router-id 192.168.6.6
```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@D# show interfaces
fe-1/2/0 {
    unit 10 {
        description to-C;
        family inet {
            address 10.10.10.10/30;
        }
    }
}
fe-1/2/1 {
    unit 13 {
        description to-E;
        family inet {
            address 10.10.10.13/30;
        }
    }
}
lo0 {
    unit 4 {
        family inet {
            address 192.168.6.6/32;
        }
    }
}

user@D# show protocols

user@D# show routing-options
static {
    route 192.168.40.4/32 next-hop 10.10.10.9;
    route 192.168.6.7/32 next-hop 10.10.10.14;
}
```

Copyright © 2013, Juniper Networks, Inc.

```
router-id 192.168.6.6;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps for all BFD sessions in the topology.

Configuring Device E

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device E:

1. Set the CLI to Device E.

   ```
   user@host> set cli logical-system E
   ```

2. Configure the interface to the directly connected device (to-D), and configure the loopback interface.

   ```
   [edit interfaces fe-1/2/0 unit 14]
   user@E# set description to-D
   user@E# set family inet address 10.10.10.14/30

   [edit interfaces lo0 unit 5]
   user@E# set family inet address 192.168.6.7/32
   ```

3. Configure an EBGP session with Device E.

   The **neighbor** statement points to the loopback interface on Device C.

   ```
   [edit protocols bgp group external-peers]
   user@E# set local-address 192.168.6.7
   user@E# set export send-static
   user@E# set peer-as 17
   user@E# set neighbor 192.168.40.4
   ```

4. Configure the **multihop** statement to enable Device C and Device E to become EBGP peers.

   Because the peers are two hops away from each other, the example uses the **ttl 2** statement.

   ```
   [edit protocols bgp group external-peers]
   user@E# set multihop ttl 2
   ```

5. Configure connectivity to Device E, using static routes.

   You must configure a route to both the loopback interface address and to the address on the physical interface.

   ```
   [edit routing-options]
   user@E# set static route 10.10.10.8/30 next-hop 10.10.10.13
   user@E# set static route 192.168.40.4/32 next-hop 10.10.10.13
   ```

6. Configure the local router ID and the autonomous system (AS) number.

   ```
   [edit routing-options]
   user@E# set router-id 192.168.6.7
   user@E# set autonomous-system 18
   ```


Copyright © 2013, Juniper Networks, Inc.

7. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

   ```
   [edit policy-options policy-statement send-static term 1]
   user@E# set from protocol static
   user@E# set then accept
   ```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@E# show interfaces
fe-1/2/0 {
  unit 14 {
    description to-D;
    family inet {
      address 10.10.10.14/30;
    }
  }
}
lo0 {
  unit 5 {
    family inet {
      address 192.168.6.7/32;
    }
  }
}
```

```
user@E# show protocols
bgp {
  group external-peers {
    multihop {
      ttl 2;
    }
    local-address 192.168.6.7;
    export send-static;
    peer-as 17;
    neighbor 192.168.40.4;
  }
}
```

```
user@E# show policy-options
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}
```

```
user@E# show routing-options
static {
  route 10.10.10.8/30 next-hop 10.10.10.13;
  route 192.168.40.4/32 next-hop 10.10.10.13;
}
```

Copyright © 2013, Juniper Networks, Inc.

```
router-id 192.168.6.7;
autonomous-system 18;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying Connectivity on page 216
- Verifying That BGP Sessions Are Established on page 216
- Viewing Advertised Routes on page 217

Verifying Connectivity

Purpose Make sure that Device C can ping Device E, specifying the loopback interface address as the source of the ping request.

The loopback interface address is the source address that BGP will use.

Action From operational mode, enter the **ping 10.10.10.14 source 192.168.40.4** command from Device C, and enter the **ping 10.10.10.9 source 192.168.6.7** command from Device E.

```
user@C> ping 10.10.10.14 source 192.168.40.4

PING 10.10.10.14 (10.10.10.14): 56 data bytes
64 bytes from 10.10.10.14: icmp_seq=0 ttl=63 time=1.262 ms
64 bytes from 10.10.10.14: icmp_seq=1 ttl=63 time=1.202 ms
^C
--- 10.10.10.14 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.202/1.232/1.262/0.030 ms

user@E> ping 10.10.10.9 source 192.168.6.7

PING 10.10.10.9 (10.10.10.9): 56 data bytes
64 bytes from 10.10.10.9: icmp_seq=0 ttl=63 time=1.255 ms
64 bytes from 10.10.10.9: icmp_seq=1 ttl=63 time=1.158 ms
^C
--- 10.10.10.9 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.158/1.206/1.255/0.049 ms
```

Meaning The static routes are working if the pings work.

Verifying That BGP Sessions Are Established

Purpose Verify that the BGP sessions are up.

Action From operational mode, enter the show bgp summary command.

```
user@C> show bgp summary

Groups: 1 Peers: 1 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 2          0          0          0          0          0
```


Copyright © 2013, Juniper Networks, Inc.

```
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.168.6.7              18        147        147       0       1     1:04:27
0/2/2/0              0/0/0/0

user@E> show bgp summary

Groups: 1 Peers: 1 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 2          0          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.168.40.4             17        202        202       0       1     1:02:18
0/2/2/0              0/0/0/0
```

Meaning The output shows that both devices have one peer each. No peers are down.

Viewing Advertised Routes

Purpose Check to make sure that routes are being advertised by BGP.

Action From operational mode, enter the show route advertising-protocol **bgp** ***neighbor*** command.

```
user@C> show route advertising-protocol bgp 192.168.6.7

inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.10.10.14/32          Self                                    I
* 192.168.6.7/32          Self                                    I

user@E> show route advertising-protocol bgp 192.168.40.4

inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.10.10.8/30           Self                                    I
* 192.168.40.4/32         Self                                    I
```

Meaning The **send-static** routing policy is exporting the static routes from the routing table into BGP. BGP is advertising these routes between the peers because the BGP peer session is established.

Related Documentation

- Examples: Configuring External BGP Peering on page 19
- BGP Configuration Overview

Example: Configuring BGP Route Preference (Administrative Distance)

- Understanding Route Preference Values on page 217
- Example: Configuring the Preference Value for BGP Routes on page 219

Understanding Route Preference Values

The Junos OS routing protocol process assigns a default preference value (also known as an *administrative distance*) to each route that the routing table receives. The default

Copyright © 2013, Juniper Networks, Inc.

value depends on the source of the route. The preference value is a value from 0 through 4,294,967,295 ($2^{32} - 1$), with a lower value indicating a more preferred route. Table 4 on page 218 lists the default preference values.

Table 4: Default Route Preference Values

How Route Is Learned	Default Preference	Statement to Modify Default Preference
Directly connected network	0	–
System routes	4	–
Static and Static LSPs	5	static
RSVP-signaled LSPs	7	RSVP **preference** as described in the Junos OS MPLS Applications Configuration Guide
LDP-signaled LSPs	9	LDP **preference**, as described in the Junos OS MPLS Applications Configuration Guide
OSPF internal route	10	OSPF preference
IS-IS Level 1 internal route	15	IS-IS preference
IS-IS Level 2 internal route	18	IS-IS preference
Redirects	30	–
Kernel	40	–
SNMP	50	–
Router discovery	55	–
RIP	100	RIP preference
RIPng	100	RIPng preference
PIM	105	Multicast Protocols Configuration Guide
DVMRP	110	Multicast Protocols Configuration Guide
Aggregate	130	aggregate
OSPF AS external routes	150	OSPF external-preference
IS-IS Level 1 external route	160	IS-IS external-preference
IS-IS Level 2 external route	165	IS-IS external-preference

Copyright © 2013, Juniper Networks, Inc.

Table 4: Default Route Preference Values *(continued)*

How Route Is Learned	Default Preference	Statement to Modify Default Preference
BGP	170	BGP preference, export, import
MSDP	175	Multicast Protocols Configuration Guide

In general, the narrower the scope of the statement, the higher precedence its preference value is given, but the smaller the set of routes it affects. To modify the default preference value for routes learned by routing protocols, you generally apply routing policy when configuring the individual routing protocols. You also can modify some preferences with other configuration statements, which are indicated in the table.

Example: Configuring the Preference Value for BGP Routes

This example shows how to specify the preference for routes learned from BGP. Routing information can be learned from multiple sources. To break ties among equally specific routes learned from multiple sources, each source has a preference value. Routes that are learned through explicit administrative action, such as static routes, are preferred over routes learned from a routing protocol, such as BGP or OSPF. This concept is called *administrative distance* by some vendors.

- Requirements on page 219
- Overview on page 219
- Configuration on page 221
- Verification on page 223

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

Routing information can be learned from multiple sources, such as through static configuration, BGP, or an interior gateway protocol (IGP). When Junos OS determines a route's preference to become the active route, it selects the route with the lowest preference as the active route and installs this route into the forwarding table. By default, the routing software assigns a preference of 170 to routes that originated from BGP. Of all the routing protocols, BGP has the highest default preference value, which means that routes learned by BGP are the least likely to become the active route.

Some vendors have a preference (distance) of 20 for external BGP (EBGP) and a distance of 200 for internal BGP (IGBP). Junos OS uses the same value (170) for both EBGP and IBGP. However, this difference between vendors has no operational impact because Junos OS always prefers EBGP routes over IBGP routes.

Another area in which vendors differ is in regard to IGP distance compared to BGP distance. For example, some vendors assign a distance of 110 to OSPF routes. This is

Copyright © 2013, Juniper Networks, Inc.

higher than the EBGP distance of 20 , and results in the selection of an EBGP route over an equivalent OSPF route. In the same scenario, Junos OS chooses the OSPF route, because of the default preference 10 for an internal OSPF route and 150 for an external OSPF route, which are both lower than the 170 preference assigned to all BGP routes.

In a multivendor environment, you might want to change the preference value for BGP routes so that Junos OS chooses an EBGP route instead of an OSPF route. To accomplish this goal, one option is to include the preference statement in the EBGP configuration. To modify the default BGP preference value, include the **preferece** statement, specifying a value from 0 through 4,294,967,295 ($2^{32} - 1$).

TIP: Another way to achieve multivendor compatibility is to include the advertise-inactive statement in the EBGP configuration. This causes the routing table to export to BGP the best route learned by BGP even if Junos OS did not select it to be an active route. By default, BGP stores the route information it receives from update messages in the Junos OS routing table, and the routing table exports only active routes into BGP, which BGP then advertises to its peers. The advertise-inactive statement causes Junos OS to advertise the best BGP route that is inactive because of IGP preference. When you use the advertise-inactive statement, the Junos OS device uses the OSPF route for forwarding, and the other vendor's device uses the EBGP route for forwarding. However, from the perspective of an EBGP peer in a neighboring AS, both vendors' devices appear to behave the same way.

Topology

In the sample network, Device R1 and Device R2 have EBGP routes to each other and also OSPF routes to each other.

This example shows the routing tables in the following cases:

- Accept the default preference values of 170 for BGP and 10 for OSPF.
- Change the BGP preference to 8.

Figure 21 on page 221 shows the sample network.

Copyright © 2013, Juniper Networks, Inc.

Figure 21: BGP Preference Value Topology

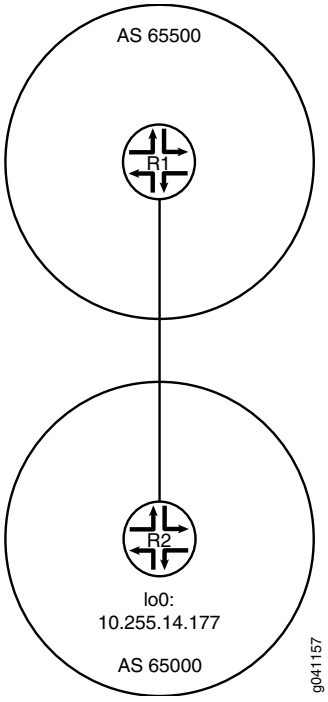

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 4 family inet address 1.12.0.1/30
set interfaces lo0 unit 2 family inet address 10.255.71.24/32
set protocols bgp export send-direct
set protocols bgp group ext type external
set protocols bgp group ext preference 8
set protocols bgp group ext peer-as 65000
set protocols bgp group ext neighbor 1.12.0.2
set protocols ospf area 0.0.0.0 interface fe-1/2/0.4
set protocols ospf area 0.0.0.0 interface 10.255.71.24
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 65500
```

Device R2

```
set interfaces fe-1/2/0 unit 6 family inet address 1.12.0.2/30
set interfaces lo0 unit 3 family inet address 10.255.14.177/32
set protocols bgp export send-direct
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65500
set protocols bgp group ext neighbor 1.12.0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/0.6
set protocols ospf area 0.0.0.0 interface 10.255.14.177
set policy-options policy-statement send-direct term 1 from protocol direct
```

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement send-direct term 1 then accept
set routing-options autonomous-system 65000
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

   ```
   [edit interfaces]
   user@R1# set fe-1/2/0 unit 4 family inet address 1.12.0.1/30
   user@R1# set lo0 unit 2 family inet address 10.255.71.24/32
   ```

2. Configure the local autonomous system.

   ```
   [edit routing-options]
   user@R1# set autonomous-system 65500
   ```

3. Configure the external peering with Device R2.

   ```
   [edit protocols bgp]
   user@R1# set export send-direct
   user@R1# set group ext type external
   user@R1# set group ext preference 8
   user@R1# set group ext peer-as 65000
   user@R1# set group ext neighbor 1.12.0.2
   ```

4. Configure OSPF.

   ```
   [edit protocols ospf area 0.0.0.0]
   user@R1# set interface fe-1/2/0.4
   user@R1# set interface 10.255.71.24
   ```

5. Configure the routing policy.

   ```
   [edit policy-options policy-statement send-direct term 1]
   user@R1# set from protocol direct
   user@R1# set then accept
   ```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
   unit 4 {
      family inet {
         address 1.12.0.1/30;
      }
   }
}
lo0 {
   unit 2 {
      family inet {
         address 10.255.71.24/32;
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
}

user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}

user@R1# show protocols
protocols {
  bgp {
    export send-direct;
    group ext {
      type external;
      preference 8;
      peer-as 65000;
      neighbor 1.12.0.2;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface fe-1/2/0.4;
      interface 10.255.71.24;
    }
  }
}

user@R1# show routing-options
autonomous-system 65500;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps on Device R2.

Verification

Confirm that the configuration is working properly.

Verifying the Preference

Purpose Make sure that the routing tables on Device R1 and Device R2 reflect the fact that Device R1 is using the configured EBGP preference of 8, and Device R2 is using the default EBGP preference of 170.

Action From operational mode, enter the **show route** command.

```
user@R1> show route
inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.12.0.0/30        *[Direct/0] 3d 07:03:01
                    > via fe-1/2/0.4
                    [BGP/8] 01:04:49, localpref 100
                      AS path: 65000 I
                    > to 1.12.0.2 via fe-1/2/0.4
```

Copyright © 2013, Juniper Networks, Inc.

```
1.12.0.1/32        *[Local/0] 3d 07:03:01
                      Local via fe-1/2/0.4
10.255.14.177/32   *[BGP/8] 01:04:49, localpref 100
                      AS path: 65000 I
                    > to 1.12.0.2 via fe-1/2/0.4
                    [OSPF/10] 3d 07:02:16, metric 1
                    > to 1.12.0.2 via fe-1/2/0.4
10.255.71.24/32    *[Direct/0] 3d 07:03:01
                    > via lo0.2
224.0.0.5/32       *[OSPF/10] 5d 03:42:16, metric 1
                      MultiRecv

user@R2> show route
inet.0: 5 destinations, 7 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.12.0.0/30        *[Direct/0] 3d 07:03:30
                    > via fe-1/2/0.6
                    [BGP/170] 00:45:36, localpref 100
                      AS path: 65500 I
                    > to 1.12.0.1 via fe-1/2/0.6
1.12.0.2/32        *[Local/0] 3d 07:03:30
                      Local via fe-1/2/0.6
10.255.14.177/32   *[Direct/0] 3d 07:03:30
                    > via lo0.3
10.255.71.24/32    *[OSPF/10] 3d 07:02:45, metric 1
                    > to 1.12.0.1 via fe-1/2/0.6
                    [BGP/170] 00:45:36, localpref 100
                      AS path: 65500 I
                    > to 1.12.0.1 via fe-1/2/0.6
224.0.0.5/32       *[OSPF/10] 5d 03:42:45, metric 1
                      MultiRecv
```

Meaning The output shows that on Device R1, the active path to Device R2's loopback interface (10.255.14.177/32) is a BGP route. The output also shows that on Device R2, the active path to Device R1's loopback interface (10.255.71.24/32) is an OSPF route.

Related Documentation

- Route Preferences Overview
- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Configuring BGP Path Selection

- Understanding BGP Path Selection on page 224
- Example: Ignoring the AS Path Attribute When Selecting the Best Path on page 228

Understanding BGP Path Selection

For each prefix in the routing table, the routing protocol process selects a single best path. After the best path is selected, the route is installed in the routing table. The best path becomes the active route if the same prefix is not learned by a protocol with a lower (more preferred) global preference value, also known as the administrative distance. The algorithm for determining the active route is as follows:

Copyright © 2013, Juniper Networks, Inc.

1. Verify that the next hop can be resolved.
2. Choose the path with the lowest preference value (routing protocol process preference).

   Routes that are not eligible to be used for forwarding (for example, because they were rejected by routing policy or because a next hop is inaccessible) have a preference of –1 and are never chosen.
3. Prefer the path with higher local preference.

   For non-BGP paths, choose the path with the lowest **preference2** value.
4. If the accumulated interior gateway protocol (AIGP) attribute is enabled, prefer the path with the lower AIGP attribute.
5. Prefer the path with the shortest autonomous system (AS) path value (skipped if the **as-path-ignore** statement is configured).

   A confederation segment (sequence or set) has a path length of 0. An AS set has a path length of 1.
6. Prefer the route with the lower origin code.

   Routes learned from an IGP have a lower origin code than those learned from an exterior gateway protocol (EGP), and both have lower origin codes than incomplete routes (routes whose origin is unknown).
7. Prefer the path with the lowest multiple exit discriminator (MED) metric.

   Depending on whether nondeterministic routing table path selection behavior is configured, there are two possible cases:

   - If nondeterministic routing table path selection behavior is not configured (that is, if the **path-selection cisco-nondeterministic** statement is not included in the BGP configuration), for paths with the same neighboring AS numbers at the front of the AS path, prefer the path with the lowest MED metric. To always compare MEDs whether or not the peer ASs of the compared routes are the same, include the **path-selection always-compare-med** statement.
   - If nondeterministic routing table path selection behavior is configured (that is, the **path-selection cisco-nondeterministic** statement is included in the BGP configuration), prefer the path with the lowest MED metric.

   Confederations are not considered when determining neighboring ASs. A missing MED metric is treated as if a MED were present but zero.

NOTE: **MED comparison works for single path selection within an AS (when the route does not include an AS path), though this usage Is uncommon.**

By default, only the MEDs of routes that have the same peer autonomous systems (ASs) are compared. You can configure routing table path selection options to obtain different behaviors.

Copyright © 2013, Juniper Networks, Inc.

8. Prefer strictly internal paths, which include IGP routes and locally generated routes (static, direct, local, and so forth).
9. Prefer strictly external BGP (EBGP) paths over external paths learned through internal BGP (IBGP) sessions.
10. Prefer the path whose next hop is resolved through the IGP route with the lowest metric.

NOTE: A path is considered a BGP equal-cost path (and will be used for forwarding) if a tie-break is performed after the previous step. All paths with the same neighboring AS, learned by a multipath-enabled BGP neighbor, are considered.

BGP multipath does not apply to paths that share the same MED-plus-IGP cost yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

11. If both paths are external, prefer the currently active path to minimize route-flapping. This rule is not used if any one of the following conditions is true:
    - **path-selection external-router-id** is configured.
    - Both peers have the same router ID.
    - Either peer is a confederation peer.
    - Neither path is the current active path.
12. Prefer a primary route over a secondary route. A primary route is one that belongs to the routing table. A secondary route is one that is added to the routing table through an export policy.
13. Prefer the path from the peer with the lowest router ID. For any path with an originator ID attribute, substitute the originator ID for the router ID during router ID comparison.
14. Prefer the path with the shortest cluster list length. The length is 0 for no list.
15. Prefer the path from the peer with the lowest peer IP address.

Routing Table Path Selection

The third step of the algorithm, by default, evaluates the length of the AS path and determines the active path. You can configure an option that enables Junos OS to skip this third step of the algorithm by including the **as-path-ignore** option.

NOTE: The as-path-ignore option is not supported for routing instances.

To configure routing table path selection behavior, include the **path-selection** statement:

```
path-selection {
  (always-compare-med | cisco-non-deterministic | external-router-id);
  as-path-ignore;
```


Copyright © 2013, Juniper Networks, Inc.

```
    med-plus-igp {
      igp-multiplier number;
      med-multiplier number;
    }
  }
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Routing table path selection can be configured in one of the following ways:

- Emulate the Cisco IOS default behavior (**cisco-non-deterministic**). This mode evaluates routes in the order that they are received and does not group them according to their neighboring AS. With **cisco-non-deterministic** mode, the active path is always first. All inactive, but eligible, paths follow the active path and are maintained in the order in which they were received, with the most recent path first. Ineligible paths remain at the end of the list.

  As an example, suppose you have three path advertisements for the 192.168.1.0 /24 route:

  - Path 1—learned through EBGP; AS Path of 65010; MED of 200
  - Path 2—learned through IBGP; AS Path of 65020; MED of 150; IGP cost of 5
  - Path 3—learned through IBGP; AS Path of 65010; MED of 100; IGP cost of 10

  These advertisements are received in quick succession, within a second, in the order listed. Path 3 is received most recently, so the routing device compares it against path 2, the next most recent advertisement. The cost to the IBGP peer is better for path 2, so the routing device eliminates path 3 from contention. When comparing paths 1 and 2, the routing device prefers path 1 because it is received from an EBGP peer. This allows the routing device to install path 1 as the active path for the route.

  NOTE: We do not recommend using this configuration option in your network. It is provided solely for interoperability to allow all routing devices in the network to make consistent route selections.

- Always comparing MEDs whether or not the peer ASs of the compared routes are the same (**always-compare-med**).
- Override the rule that If both paths are external, the currently active path is preferred (**external-router-id**). Continue with the next step (Step 12) in the path-selection process.
- Adding the IGP cost to the next-hop destination to the MED value before comparing MED values for path selection (**med-plus-igp**).

  BGP multipath does not apply to paths that share the same MED-plus-IGP cost, yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

Copyright © 2013, Juniper Networks, Inc.

Effects of Advertising Multiple Paths to a Destination

BGP advertises only the active path, unless you configure BGP to advertise multiple paths to a destination.

Suppose a routing device has in its routing table four paths to a destination and is configured to advertise up to three paths (**add-path send path-count 3**). The three paths are chosen based on path selection criteria. That is, the three best paths are chosen in path-selection order. The best path is the active path. This path is removed from consideration and a new best path is chosen. This process is repeated until the specified number of paths is reached.

Example: Ignoring the AS Path Attribute When Selecting the Best Path

If multiple BGP routes to the same destination exist, BGP selects the best path based on the route attributes of the paths. One of the route attributes that affects the best-path decision is the length of the AS paths of each route. Routes with shorter AS paths are preferred over those with longer AS paths. Although not typically practical, some scenarios might require that the AS path length be ignored in the route selection process. This example shows how to configure a routing device to ignore the AS path attribute.

- Requirements on page 228
- Overview on page 228
- Configuration on page 229
- Verification on page 234

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

On externally connected routing devices, the purpose of skipping the AS path comparison might be to force an external BGP (EBGP) versus internal BGP (IBGP) decision to remove traffic from your network as soon as possible. On internally connected routing devices, you might want your IBGP-only routers to default to the local externally connected gateway. The local IBGP-only (internal) routers skip the AS path comparison and move down the decision tree to use the closest interior gateway protocol (IGP) gateway (lowest IGP metric). Doing this might be an effective way to force these routers to use a LAN connection instead of their WAN connection.

CAUTION: When you include the as-path-ignore statement on a routing device in your network, you might need to include it on all other BGP-enabled devices in your network to prevent routing loops and convergence issues. This is especially true for IBGP path comparisons.

In this example, Device R2 is learning about the loopback interface address on Device R4 (4.4.4.4/32) from Device R1 and Device R3. Device R1 is advertising 4.4.4.4/32 with

Copyright © 2013, Juniper Networks, Inc.

an AS-path of 1 5 4, and Device R3 is advertising 4.4.4.4/32 with an AS-path of 3 4. Device R2 selects the path for 4.4.4.4/32 from Device R3 as the best path because the AS path is shorter than the AS path from Device R1.

This example modifies the BGP configuration on Device R2 so that the AS-path length is not used in the best-path selection.

Device R1 has a lower router ID (1.1.1.1) than Device R3 (1.1.1.1). If all other path selection criteria are equal (or, as in this case, ignored), the route learned from Device R1 is used. Because the AS-path attribute is being ignored, the best path is toward Device R1 because of its lower router ID value.

Figure 22 on page 229 shows the sample topology.

Figure 22: Topology for Ignoring the AS-Path Lengh

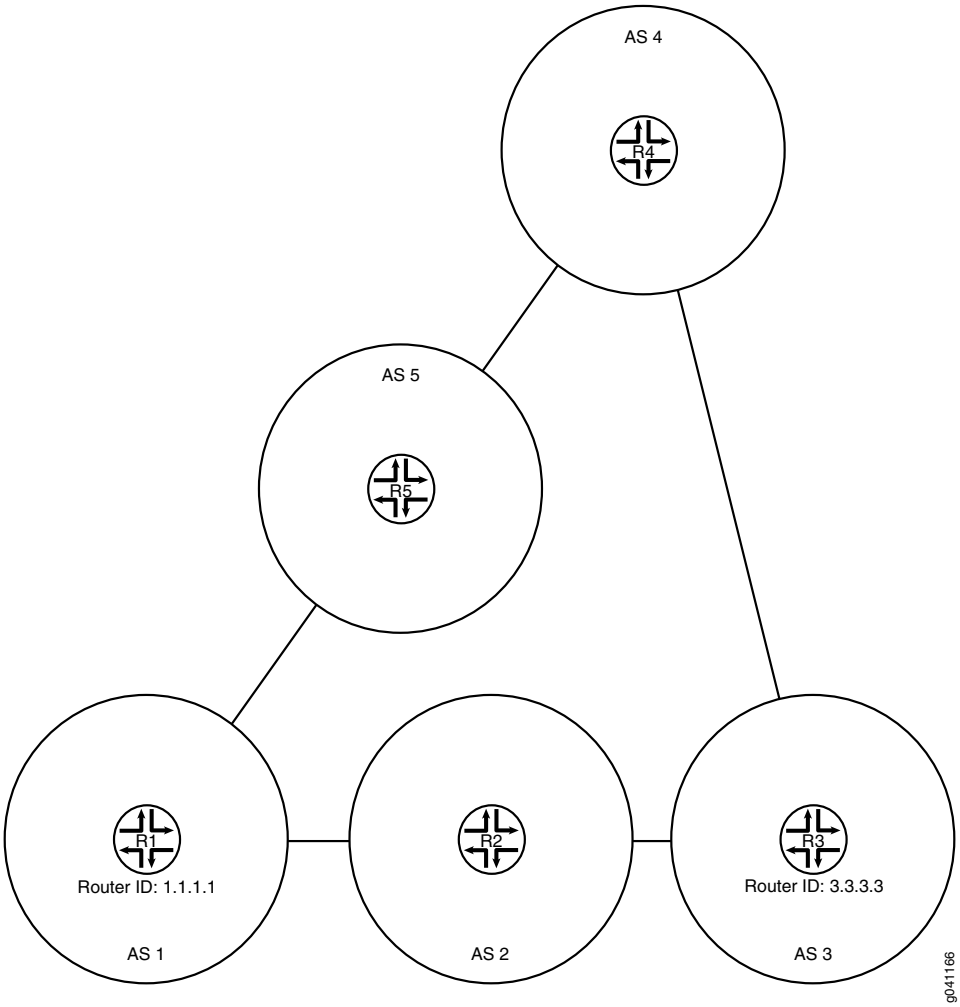

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network

configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 192.168.10.1/24
set interfaces fe-1/2/1 unit 10 family inet address 192.168.50.2/24
set interfaces lo0 unit 1 family inet address 1.1.1.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.10.2 peer-as 2
set protocols bgp group ext neighbor 192.168.50.1 peer-as 5
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.20.0/24 next-hop 192.168.10.2
set routing-options static route 192.168.30.0/24 next-hop 192.168.10.2
set routing-options static route 192.168.40.0/24 next-hop 192.168.50.1
set routing-options router-id 1.1.1.1
set routing-options autonomous-system 1
```

Device R2

```
set interfaces fe-1/2/0 unit 2 family inet address 192.168.10.2/24
set interfaces fe-1/2/1 unit 3 family inet address 192.168.20.2/24
set interfaces lo0 unit 2 family inet address 2.2.2.2/32
set protocols bgp path-selection as-path-ignore
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.10.1 peer-as 1
set protocols bgp group ext neighbor 192.168.20.1 peer-as 3
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.50.0/24 next-hop 192.168.10.1
set routing-options static route 192.168.40.0/24 next-hop 192.168.10.1
set routing-options static route 192.168.30.0/24 next-hop 192.168.20.1
set routing-options router-id 2.2.2.2
set routing-options autonomous-system 2
```

Device R3

```
set interfaces fe-1/2/0 unit 4 family inet address 192.168.20.1/24
set interfaces fe-1/2/1 unit 5 family inet address 192.168.30.1/24
set interfaces lo0 unit 3 family inet address 1.1.1.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.20.2 peer-as 2
set protocols bgp group ext neighbor 192.168.30.2 peer-as 4
```

 Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.20.2
set routing-options static route 192.168.50.0/24 next-hop 192.168.20.2
set routing-options static route 192.168.40.0/24 next-hop 192.168.30.2
set routing-options router-id 3.3.3.3
set routing-options autonomous-system 3
```

Device R4

```
set interfaces fe-1/2/0 unit 6 family inet address 192.168.30.2/24
set interfaces fe-1/2/1 unit 7 family inet address 192.168.40.1/24
set interfaces lo0 unit 4 family inet address 4.4.4.4/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.30.1 peer-as 3
set protocols bgp group ext neighbor 192.168.40.2 peer-as 5
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.40.2
set routing-options static route 192.168.50.0/24 next-hop 192.168.40.2
set routing-options static route 192.168.40.0/24 next-hop 192.168.30.1
set routing-options router-id 4.4.4.4
set routing-options autonomous-system 4
```

Device R5

```
set interfaces fe-1/2/0 unit 8 family inet address 192.168.40.2/24
set interfaces fe-1/2/1 unit 9 family inet address 192.168.50.1/24
set interfaces lo0 unit 5 family inet address 5.5.5.5/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext export send-local
set protocols bgp group ext neighbor 192.168.40.1 peer-as 4
set protocols bgp group ext neighbor 192.168.50.2 peer-as 1
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-local term 1 from protocol local
set policy-options policy-statement send-local term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.50.2
set routing-options static route 192.168.20.0/24 next-hop 192.168.50.2
set routing-options static route 192.168.30.0/24 next-hop 192.168.40.1
set routing-options router-id 5.5.5.5
set routing-options autonomous-system 5
```

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces]
user@R2# set fe-1/2/0 unit 2 family inet address 192.168.10.2/24
user@R2# set fe-1/2/1 unit 3 family inet address 192.168.20.2/24
user@R2# set lo0 unit 2 family inet address 2.2.2.2/32
```

2. Configure EBGP.

```
[edit protocols bgp group ext]
user@R2# set type external
user@R2# set export send-direct
user@R2# set export send-static
user@R2# set export send-local
user@R2# set neighbor 192.168.10.1 peer-as 1
user@R2# set neighbor 192.168.20.1 peer-as 3
```

3. Configure the autonomous system (AS) path attribute to be ignored in the Junos OS path selection algorithm.

```
[edit protocols bgp]
user@R2# set path-selection as-path-ignore
```

4. Configure the routing policy.

```
[edit policy-options]
user@R2# set policy-statement send-direct term 1 from protocol direct
user@R2# set policy-statement send-direct term 1 then accept
user@R2# set policy-statement send-local term 1 from protocol local
user@R2# set policy-statement send-local term 1 then accept
user@R2# set policy-statement send-static term 1 from protocol static
user@R2# set policy-statement send-static term 1 then accept
```

5. Configure some static routes.

```
[edit routing-options static]
user@R2# set route 192.168.50.0/24 next-hop 192.168.10.1
user@R2# set route 192.168.40.0/24 next-hop 192.168.10.1
user@R2# set route 192.168.30.0/24 next-hop 192.168.20.1
```

6. Configure the autonomous system (AS) number and the router ID.

```
[edit routing-options]
user@R2# set router-id 2.2.2.2
user@R2# set autonomous-system 2
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Copyright © 2013, Juniper Networks, Inc.

```
user@R2# show interfaces
fe-1/2/0 {
   unit 2 {
      family inet {
         address 192.168.10.2/24;
      }
   }
}
fe-1/2/1 {
   unit 3 {
      family inet {
         address 192.168.20.2/24;
      }
   }
}
lo0 {
   unit 2 {
      family inet {
         address 2.2.2.2/32;
      }
   }
}
```

```
user@R2# show policy-options
policy-statement send-direct {
   term 1 {
      from protocol direct;
      then accept;
   }
}
policy-statement send-local {
   term 1 {
      from protocol local;
      then accept;
   }
}
policy-statement send-static {
   term 1 {
      from protocol static;
      then accept;
   }
}
```

```
user@R2# show protocols
bgp {
   path-selection as-path-ignore;
   group ext {
      type external;
      export [ send-direct send-static send-local ];
      neighbor 192.168.10.1 {
         peer-as 1;
      }
      neighbor 192.168.20.1 {
         peer-as 3;
      }
   }
}
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R21# show routing-options
static {
   route 192.168.50.0/24 next-hop 192.168.10.1;
   route 192.168.40.0/24 next-hop 192.168.10.1;
   route 192.168.30.0/24 next-hop 192.168.20.1;
}
router-id 2.2.2.2;
autonomous-system 2;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on the other devices in the network, changing the interface names and IP addresses, as needed.

Verification

Confirm that the configuration is working properly.

- Checking the Neighbor Status on page 234

Checking the Neighbor Status

Purpose Make sure that from Device R2, the active path to get to AS 4 is through AS 1 and AS 5, not through AS 3.

NOTE: To verify the functionality of the **as-path-ignore** statement, you might need to run the **restart routing** command to force reevaluation of the active path. This is because for BGP, if both paths are external, the Junos OS behavior is to prefer the currently active path. This behavior helps to minimize route-flapping. Use caution when restarting the routing protocol process in a production network.

Action From operational mode, enter the **restart routing** command.

```
user@R2> restart routing
Routing protocols process started, pid 49396
```

From operational mode, enter the **show route 4.4.4.4 protocol bgp** command.

```
user@R2> show route 4.4.4.4 protocol bgp
inet.0: 12 destinations, 25 routes (12 active, 0 holddown, 4 hidden)
+ = Active Route, - = Last Active, * = Both

4.4.4.4/32          *[BGP/170] 00:00:12, localpref 100
                      AS path: 1 5 4 I
                     > to 192.168.10.1 via fe-1/2/0.2
                     [BGP/170] 00:00:08, localpref 100
                      AS path: 3 4 I
                     > to 192.168.20.1 via fe-1/2/1.3
```

Meaning The asterisk (*) is next to the path learned from R1, meaning that this is the active path. The AS path for the active path is 1 5 4, which is longer than the AS path (3 4) for the nonactive path learned from Router R3.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Removing Private AS Numbers

- Understanding Private AS Number Removal from AS Paths on page 235
- Example: Removing Private AS Numbers from AS Paths on page 236

Understanding Private AS Number Removal from AS Paths

By default, when BGP advertises AS paths to remote systems, it includes all AS numbers, including private AS numbers. You can configure the software so that it removes private AS numbers from AS paths. Doing this is useful when any of the following circumstances are true:

- A remote AS for which you provide connectivity is multihomed, but only to the local AS.
- The remote AS does not have an officially allocated AS number.
- It is not appropriate to make the remote AS a confederation member AS of the local AS.

Most companies acquire their own AS number. Some companies also use private AS numbers to connect to their public AS network. These companies might use a different private AS number for each region in which their company does business. In any implementation, announcing a private AS number to the Internet must be avoided. Service providers can use the remove-private statement to prevent advertising private AS numbers to the Internet.

In an enterprise scenario, suppose that you have multiple AS numbers in your company, some of which are private AS numbers, and one with a public AS number. The one with a public AS number has a direct connection to the service provider. In the AS that connects directly to the service provider, you can use the **remove-private** statement to filter out any private AS numbers in the advertisements that are sent to the service provider.

CAUTION: **Changing configuration statements that affect BGP peers, such as enabling or disabling remove-private or renaming a BGP group, resets the BGP sessions. Changes that affect BGP peers should only be made when resetting a BGP session is acceptable.**

The AS numbers are stripped from the AS path starting at the left end of the AS path (the end where AS paths have been most recently added). The routing device stops searching for private ASs when it finds the first nonprivate AS or a peer's private AS. If the AS path contains the AS number of the external BGP (EBGP) neighbor, BGP does not remove the private AS number.

Copyright © 2013, Juniper Networks, Inc.

NOTE: As of Junos OS 10.0R2 and later, if there is a need to send prefixes to an EBGP peer that has an AS number that matches an AS number in the AS path, consider using the **as-override** statement instead of the **remove-private** statement.

The operation takes place after any confederation member ASs have already been removed from the AS path, if applicable.

The software is preconfigured with knowledge of the set of AS numbers that is considered private, a range that is defined in the Internet Assigned Numbers Authority (IANA) assigned numbers document. The set of AS numbers reserved as private are in the range from 64,512 through 65,534, inclusive.

Example: Removing Private AS Numbers from AS Paths

This example demonstrates the removal of a private AS number from the advertised AS path to avoid announcing the private AS number to the Internet.

- Requirements on page 236
- Overview on page 236
- Configuration on page 237
- Verification on page 239

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

Service providers and enterprise networks use the remove-private statement to prevent advertising private AS numbers to the Internet. The **remove-private** statement works in the outbound direction. You configure the **remove-private** statement on a device that has a public AS number and that is connected to one or more devices that have private AS numbers. Generally, you would not configure this statement on a device that has a private AS number.

Figure 23 on page 237 shows the sample topology.

Copyright © 2013, Juniper Networks, Inc.

Figure 23: Topology for Removing a Private AS from the Advertised AS Path

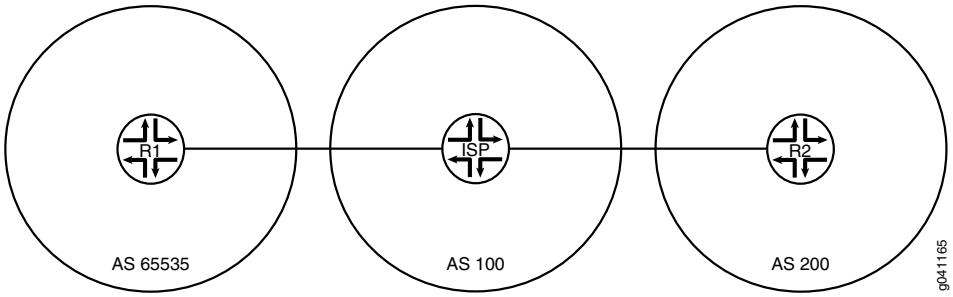

In this example, Device R1 is connected to its service provider using private AS number 65535. The example shows the **remove-private** statement configured on Device ISP to prevent Device R1's private AS number from being announced to Device R2. Device R2 sees only the AS number of the service provider.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 192.168.10.1/24
set interfaces lo0 unit 1 family inet address 10.10.10.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 100
set protocols bgp group ext neighbor 192.168.10.10
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.20.0/24 next-hop 192.168.10.10
set routing-options autonomous-system 65535
```

Device ISP

```
set interfaces fe-1/2/0 unit 2 family inet address 192.168.10.10/24
set interfaces fe-1/2/1 unit 3 family inet address 192.168.20.20/24
set interfaces lo0 unit 2 family inet address 10.10.0.1/32
set protocols bgp group ext type external
set protocols bgp group ext neighbor 192.168.10.1 peer-as 65535
set protocols bgp group ext neighbor 192.168.20.1 remove-private
set protocols bgp group ext neighbor 192.168.20.1 peer-as 200
set routing-options autonomous-system 100
```

Device R2

```
set interfaces fe-1/2/0 unit 4 family inet address 192.168.20.1/24
set interfaces lo0 unit 3 family inet address 10.10.20.1/32
set protocols bgp group ext type external
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 100
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group ext neighbor 192.168.20.20
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options static route 192.168.10.0/24 next-hop 192.168.20.20
set routing-options autonomous-system 200
```

Device ISP

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device ISP:

1. Configure the interfaces.

```
[edit interfaces]
user@ISP# set fe-1/2/0 unit 2 family inet address 192.168.10.10/24
user@ISP# set fe-1/2/1 unit 3 family inet address 192.168.20.20/24
user@ISP# set lo0 unit 2 family inet address 10.10.0.1/32
```

2. Configure EBGP.

```
[edit protocols bgp group ext]
user@ISP# set type external
user@ISP# set neighbor 192.168.10.1 peer-as 65535
user@ISP# set neighbor 192.168.20.1 peer-as 200
```

3. For the neighbor in autonomous system (AS) 200 (Device R2), remove private AS numbers from the advertised AS paths.

```
[edit protocols bgp group ext]
user@ISP# set neighbor 192.168.20.1 remove-private
```

4. Configure the AS number.

```
[edit routing-options]
user@ISP# set autonomous-system 100
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@ISP# show interfaces
fe-1/2/0 {
    unit 2 {
        family inet {
            address 192.168.10.10/24;
        }
    }
}
fe-1/2/1 {
    unit 3 {
        family inet {
            address 192.168.20.20/24;
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 10.10.0.1/32;
    }
  }
}
```

```
user@ISP# show protocols
bgp {
  group ext {
    type external;
    neighbor 192.168.10.1 {
      peer-as 65535;
    }
    neighbor 192.168.20.1 {
      remove-private;
      peer-as 200;
    }
  }
}
```

```
user@ISP# show routing-options
autonomous-system 100;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Device R1 and Device R2, changing the interface names and IP address, as needed, and adding the routing policy configuration.

Verification

Confirm that the configuration is working properly.

- Checking the Neighbor Status on page 239
- Checking the Routing Tables on page 240
- Checking the AS Path When the remove-private Statement Is Deactivated on page 241

Checking the Neighbor Status

Purpose Make sure that Device ISP has the **remove-private** setting enabled in its neighbor session with Device R2.

Action From operational mode, enter the **show bgp neighbor 192.168.20.1** command.

```
user@ISP> show bgp neighbor 192.168.20.1
Peer: 192.168.20.1+179 AS 200  Local: 192.168.20.20+60216 AS 100
  Type: External    State: Established    Flags: <ImportEval Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference RemovePrivateAS PeerAS Refresh>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.20.1      Local ID: 10.10.0.1         Active Holdtime: 90
```

Copyright © 2013, Juniper Networks, Inc.

```
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  Local Interface: fe-1/2/1.3
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 200)
  Peer does not support Addpath
  Table inet.0 Bit: 10001
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              1
    Received prefixes:            3
    Accepted prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          1
  Last traffic (seconds): Received 10   Sent 16   Checked 55
  Input messages:  Total 54     Updates 3       Refreshes 0     Octets 1091
  Output messages: Total 54     Updates 1       Refreshes 0     Octets 1118
  Output Queue[0]: 0
```

Meaning The **RemovePrivateAS** option shows that Device ISP has the expected setting.

Checking the Routing Tables

Purpose Make sure that the devices have the expected routes and AS paths.

Action From operational mode, enter the **show route protocol bgp** command.

```
user@R1> show route protocol bgp
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.20.1/32      *[BGP/170] 00:28:57, localpref 100
                      AS path: 100 200 I
                    > to 192.168.10.10 via fe-1/2/0.1
```

```
user@ISP> show route protocol bgp

inet.0: 7 destinations, 11 routes (7 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.1/32      *[BGP/170] 00:29:40, localpref 100
                      AS path: 65535 I
                    > to 192.168.10.1 via fe-1/2/0.2
10.10.20.1/32      *[BGP/170] 00:29:36, localpref 100
                      AS path: 200 I
                    > to 192.168.20.1 via fe-1/2/1.3
192.168.10.0/24     [BGP/170] 00:29:40, localpref 100
                      AS path: 65535 I
                    > to 192.168.10.1 via fe-1/2/0.2
192.168.20.0/24     [BGP/170] 00:29:36, localpref 100
                      AS path: 200 I
                    > to 192.168.20.1 via fe-1/2/1.3
```

 Copyright © 2013, Juniper Networks, Inc.

```
user@R2> show route protocol bgp
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.1/32      *[BGP/170] 00:29:53, localpref 100
                      AS path: 100 I
                    > to 192.168.20.20 via fe-1/2/0.4
```

Meaning Device ISP has the private AS number 65535 in its AS path to Device R1. However, Device ISP does not advertise this private AS number to Device R2. This is shown in the routing table of Device R2. Device R2's path to Device R1 contains only the AS number for Device ISP.

Checking the AS Path When the remove-private Statement Is Deactivated

Purpose Verify that without the **remove-private** statement, the private AS number appears in Device R2's routing table.

Action From configuration mode on Device ISP, enter the **deactivate remove-private** command and then recheck the routing table on Device R2.

```
[protocols bgp group ext neighbor 192.168.20.1]
user@ISP# deactivate remove-private
user@ISP# commit
```

```
user@R2> show route protocol bgp
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.1/32      *[BGP/170] 00:00:54, localpref 100
                      AS path: 100 65535 I
                    > to 192.168.20.20 via fe-1/2/0.4
```

Meaning Private AS number 65535 appears in Device R2's AS path to Device R1.

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches

- Understanding the Default BGP Routing Policy on Packet Transport Switches on page 242
- Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches on page 243

Copyright © 2013, Juniper Networks, Inc.

Understanding the Default BGP Routing Policy on Packet Transport Switches

On PTX Series Packet Transport Switches, the default BGP routing policy differs from that of other Junos OS routing devices.

The PTX Series switches are MPLS transit platforms that do IP forwarding, typically using interior gateway protocol (IGP) routes. The PTX Series Packet Forwarding Engine (PFE) can accommodate a relatively small number of variable-length prefixes.

NOTE: A PTX Series switch can support full BGP routes in the control plane so that it can be used as a route reflector (RR). It can do exact-length lookup multicast forwarding and can build the multicast forwarding plane for use by the unicast control plane (for example. to perform a reverse-path forwarding lookup for multicast).

Given the PFE limitation, the default routing policy for PTX Series switches is for BGP routes not to be installed in the forwarding table. You can override the default routing policy and select certain BGP routes to install in the forwarding table.

The default behavior for load balancing and BGP routes on PTX Series switches is as follows. It has the following desirable characteristics:

- Allows you to override the default behavior without needing to alter the default policy directly
- Reduces the chance of accidental changes that nullify the defaults
- Sets no flow-control actions, such as accept and reject

The default routing policy on the PTX Series switches is as follows:

```
user@host# show policy-options | display inheritance defaults no-comments
policy-options {
    policy-statement junos-ptx-series-default {
        term t1 {
            from {
                protocol bgp;
                rib inet.0;
            }
            then no-install-to-fib;
        }
        term t2 {
            from {
                protocol bgp;
                rib inet6.0;
            }
            then no-install-to-fib;
        }
        term t3 {
            then load-balance per-packet;
        }
    }
```


Copyright © 2013, Juniper Networks, Inc.

```
}
routing-options {
  forwarding-table {
    default-export junos-ptx-series-default;
  }
}
user@host# show routing-options forwarding-table default-export | display inheritance
  defaults no-comments
default-export junos-ptx-series-default;
```

As shown here, the **junos-ptx-series-default** policy is defined in **[edit policy-options]**. The policy is applied in **[edit routing-options forwarding-table]**, using the **default-export** statement. You can view these default configurations by using the **| display inheritance** flag.

Also, you can use the **show policy** command to view the default policy.

```
user@host> show policy junos-ptx-series-default
Policy junos-ptx-series-default:
    Term t1:
        from proto BGP
         inet.0
        then install-to-fib no
    Term t2:
        from proto BGP
         inet6.0
        then install-to-fib no
    Term t3:
        then load-balance per-packet
```

CAUTION: We strongly recommend that you do not alter the **junos-ptx-series-default** routing policy directly.

Junos OS chains the **junos-ptx-series-default** policy and any user-configured export policy. Because the **junos-ptx-series-default** policy does not use flow-control actions, any export policy that you configure is executed (by way of the implicit next-policy action) for every route. Thus you can override any actions set by the **junos-ptx-series-default** policy. If you do not configure an export policy, the actions set by **junos-ptx-series-default** policy are the only actions.

You can use the policy action **install-to-fib** to override the **no-install-to-fib** action.

Similarly, you can set the **load-balance per-prefix** action to override the **load-balance per-packet** action.

Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches

This example shows how to override the default routing policy on packet transport switches, such as the PTX Series Packet Transport Switches.

- Requirements on page 244
- Overview on page 244

Copyright © 2013, Juniper Networks, Inc.

- Configuration on page 244
- Verification on page 245

Requirements

This example requires Junos OS Release 12.1 or later.

Overview

By default, the PTX Series switches do not install BGP routes in the forwarding table.

For PTX Series switches, the configuration of the **from protocols bgp** condition with the **then accept** action does not have the usual result that it has on other Junos OS routing devices. With the following routing policy on PTX Series switches, BGP routes do not get installed in the forwarding table.

```
user@host# show policy-options
policy-statement accept-no-install {
  term 1 {
    from protocol bgp;
    then accept;
  }
}
user@host# show routing-options
forwarding-table {
  export accept-no-install
}
```

```
user@host> show route forwarding-table
Routing table: default.inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    36     2
```

No BGP routes are installed in the forwarding table. This is the expected behavior.

This example shows how to use the **then install-to-fib** action to effectively override the default BGP routing policy.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options prefix-list install-bgp 66.0.0.1/32
set policy-options policy-statement override-ptx-series-default term 1 from prefix-list
  install-bgp
set policy-options policy-statement override-ptx-series-default term 1 then load-balance
  per-prefix
set policy-options policy-statement override-ptx-series-default term 1 then install-to-fib
set routing-options forwarding-table export override-ptx-series-default
```


Copyright © 2013, Juniper Networks, Inc.

Installing Selected BGP Routes in the Forwarding Table

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To install selected BGP routes in the forwarding table:

1. Configure a list of prefixes to install in the forwarding table.

```
[edit policy-options prefix-list install-bgp]
user@host# set 66.0.0.1/32
```

2. Configure the routing policy, applying the prefix list as a condition.

```
[edit policy-options policy-statement override-ptx-series-default term 1]
user@host# set from prefix-list install-bgp
user@host# set then install-to-fib
user@host# set then load-balance per-prefix
```

3. Apply the routing policy to the forwarding table.

```
[edit routing-options forwarding-table]
user@host# set export override-ptx-series-default
```

Results

From configuration mode, confirm your configuration by entering the **show policy-options** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show policy-options
prefix-list install-bgp {
   66.0.0.1/32;
}
policy-statement override-ptx-series-default {
   term 1 {
      from {
         prefix-list install-bgp;
      }
      then {
         load-balance per-prefix;
         install-to-fib;
      }
   }
}
```

```
user@host# show routing-options
forwarding-table {
   export override-ptx-series-default;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

Copyright © 2013, Juniper Networks, Inc.

Verifying That the Selected Route Is Installed in the Forwarding Table

Purpose Make sure that the configured policy overrides the default policy

Action From operational mode, enter the show route forwarding-table command.

```
user@host> show route forwarding-table destination 66.0.0.1
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
66.0.0.1/32        user     0                    indr 2097159     3
                                                 ulst 2097156     2
                                 5.1.0.2         ucst   574     1 et-6/0/0.1
                                 5.2.0.2         ucst   575     1 et-6/0/0.2
```

Meaning This output shows that the route to 66.0.0.1/32 is installed in the forwarding table.

Related Documentation

- Default Routing Policies and Actions
- Default Import and Export Policies for Protocols
- Examples: Configuring BGP Multipath on page 277

Example: Configuring Conditional Installation of Prefixes in a Routing Table

- Understanding Conditional Installation of Prefixes in a Routing Table on page 247
- Example: Configuring Conditional Installation of Prefixes in a Routing Table on page 249

Copyright © 2013, Juniper Networks, Inc.

Understanding Conditional Installation of Prefixes in a Routing Table

BGP accepts all non-looped routes learned from neighbors and imports them into the RIB-In table. If these routes are accepted by the BGP import policy, they are then imported into the inet.0 routing table. In cases where only certain routes are required to be imported, provisions can be made such that the import takes place based on a condition or a set of conditions.

The condition for importing a route can be based on:

- The peer the route was learned from
- The interface the route was learned on
- Some other required attribute

This is known as conditional installation of prefixes and is described in "Example: Configuring Conditional Installation of Prefixes in a Routing Table" on page 249.

The Juniper Networks® Junos® Operating System (Junos OS) supports conditional import or export of routes based on the existence of another route in the routing table. It is also important to understand that in Junos OS, although an import policy (inbound route filter) might reject a route, not use it for traffic forwarding, and not include it in an advertisement to other peers, the router retains these routes as hidden routes. These hidden routes are not available for policy or routing purposes. However, they do occupy memory space on the router. A service provider filtering routes to control the amount of information being kept in memory and processed by a router might want the router to entirely drop the routes being rejected by the import policy.

The rules of BGP route retention are as follows:

- By default, all routes learned from BGP are retained, except those where the AS path is looped. (The AS path includes the local AS.)
- By configuring the **keep all** statement, all routes learned from BGP are retained, even those with the local AS in the AS path.
- By configuring the **keep none** statement, all routes received are discarded. When this statement is configured and the inbound policy changes, Junos OS re-advertises all the routes advertised by the peer.

To enable conditional installation of prefixes, an import policy must be configured on the device where the prefix import has to take place. The import policy evaluates each received route to verify that it satisfies all the match conditions under the **from** statement. It also searches for the existence of the route defined under the **condition** statement (also configured under the **from** statement).

If the received route does not match the entire set of required conditions defined in the policy, or if the route defined under the **condition** statement does not exist in the routing table, the received route is not installed in the table, and becomes a hidden route (by default). Thus, a conditional import policy matches the received routes for the desired route or prefix you want installed in the routing table.

Copyright © 2013, Juniper Networks, Inc.

Hidden routes can be viewed by using the **show route receive-protocol bgp *neighbor-address* hidden** command. The hidden routes can then be retained or dropped from the routing table by configuring the **keep all | none** statement at the **[edit protocols bgp]** or **[edit protocols bgp group *group-name*]** hierarchy level.

Figure 24 on page 248 illustrates where BGP import and export policies are applied. An import policy is applied to inbound routes that are visible in the output of the **show route receive-protocol bgp *neighbor-address*** command. An export policy is applied to outbound routes that are visible in the output of the **show route advertising-protocol bgp *neighbor-address*** command.

Figure 24: BGP Import and Export Policies

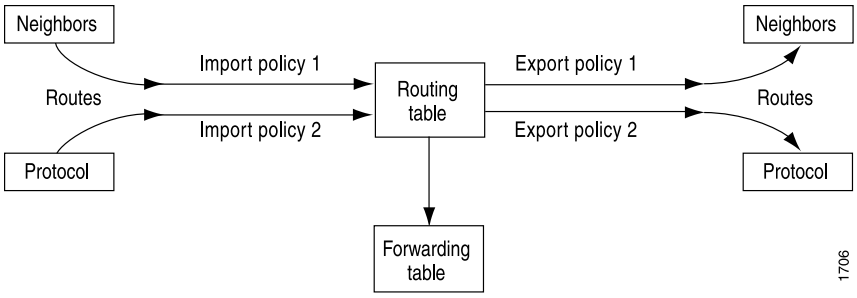

To configure the conditional installation of prefixes with the help of an import policy:

1. Create a **condition** statement to check prefixes.

```
[edit]
policy-options {
  condition condition-name {
    if-route-exists address table table-name;
  }
}
```

2. Create an import policy with the newly created condition using the **condition** statement.

```
[edit]
policy-options {
  policy-statement policy-name {
    term 1 {
      from {
        protocols bgp;
        condition condition-name;
      }
      then {
        accept;
      }
    }
  }
}
```

3. Apply the import policy to the device that requires only selected prefixes to be imported into the routing table.

```
[edit]
protocols bgp {
```


Copyright © 2013, Juniper Networks, Inc.

```
    group group-name {
      import policy-name;
    }
}
```

Example: Configuring Conditional Installation of Prefixes in a Routing Table

This example shows how to configure conditional installation of prefixes in a routing table using BGP import policy.

- Requirements on page 249
- Overview on page 249
- Configuration on page 250
- Verification on page 255

Requirements

This example uses the following hardware and software components:

- M Series Multiservice Edge Routers, MX Series 3D Universal Edge Routers, or T Series Core Routers
- Junos OS Release 9.0 or later

Overview

The following example shows how a router sorts through the received BGP routes with the help of an import policy, and selects the preferred routes to be installed in the routing table.

Topology

In this example, three routers in three different autonomous systems are connected and configured with the BGP protocol. Router Internet, which is the upstream router, has five addresses configured on its lo0.0 loopback interface (11.1.1.1/32, 12.1.1.1/32, 13.1.1.1, 14.1.1.1/32, and 15.1.1.1/32), and an extra loopback address (192.168.9.1/32) to be configured as the router ID. These six addresses are exported into BGP to emulate the contents of a BGP routing table of a router connected to the Internet, and advertised to Router North.

Router North exports a default route into BGP, and advertises the default route and the six BGP routes to Router South, which is the downstream router. Router South receives all seven routes, searches for the required route (in this example, 11.1.1.1/32), and installs this route and the default route in its routing table.

NOTE: In this example, the sixth loopback address, 192.168.9.1/32, is configured as the router ID on Router Internet. You can also configure any of the first five loopback addresses or a non-loopback address as the router ID.

Figure 25 on page 250 shows the topology used in this example.

Copyright © 2013, Juniper Networks, Inc.

Figure 25: Conditional Installation of Prefixes

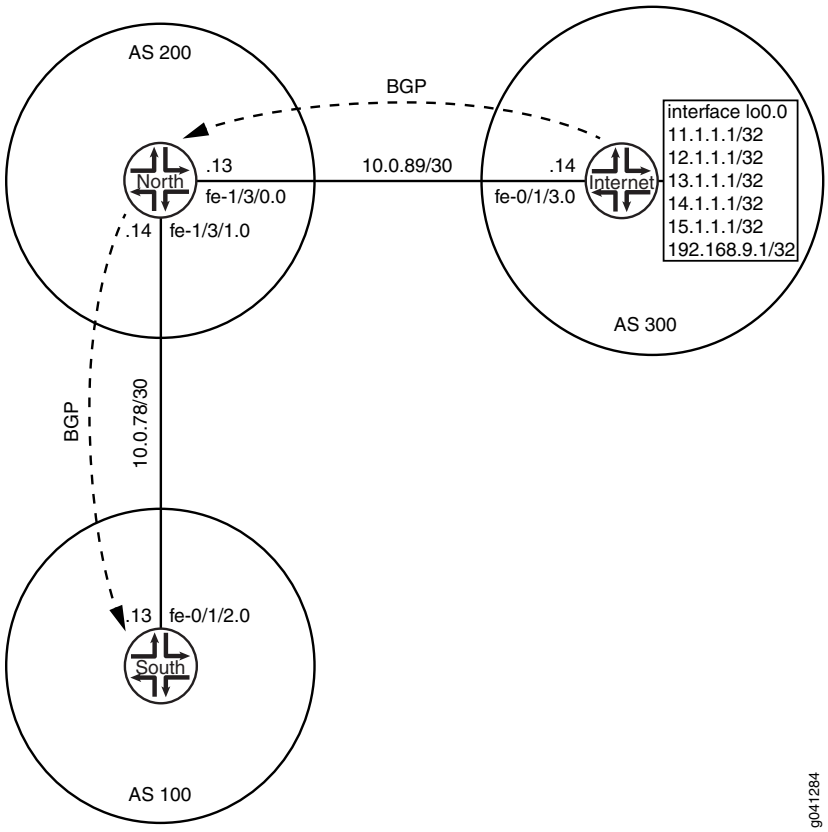

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Router Internet

```
set interfaces lo0 unit 0 family inet address 11.1.1.1/32
set interfaces lo0 unit 0 family inet address 12.1.1.1/32
set interfaces lo0 unit 0 family inet address 13.1.1.1/32
set interfaces lo0 unit 0 family inet address 14.1.1.1/32
set interfaces lo0 unit 0 family inet address 15.1.1.1/32
set interfaces lo0 unit 0 family inet address 192.168.9.1/32
set interfaces fe-0/1/3 unit 0 family inet address 10.0.89.14/30
set protocols bgp group toNorth local-address 10.0.89.14
set protocols bgp group toNorth peer-as 200
set protocols bgp group toNorth neighbor 10.0.89.13
set protocols bgp group toNorth export into-bgp
set policy-options policy-statement into-bgp term 1 from interface lo0.0
set policy-options policy-statement into-bgp term 1 then accept
set routing-options router-id 192.168.9.1
set routing-options autonomous-system 300
```

Router North

```
set interfaces fe-1/3/1 unit 0 family inet address 10.0.78.14/30
```


Copyright © 2013, Juniper Networks, Inc.

```
set interfaces fe-1/3/0 unit 0 family inet address 10.0.89.13/30
set interfaces lo0 unit 0 family inet address 192.168.8.1/32
set protocols bgp group toInternet local-address 10.0.89.13
set protocols bgp group toInternet peer-as 300
set protocols bgp group toInternet neighbor 10.0.89.14
set protocols bgp group toSouth local-address 10.0.78.14
set protocols bgp group toSouth peer-as 100
set protocols bgp group toSouth neighbor 10.0.78.13
set protocols bgp group toSouth export default_route
set policy-options policy-statement default_route term 1 from route-filter 0/0 exact
set policy-options policy-statement default_route term 1 then accept
set routing-options static route 0/0 reject
set routing-options router-id 192.168.8.1
set routing-options autonomous-system 200
```

Router South

```
set interfaces fe-0/1/2 unit 0 family inet address 10.0.78.13/30
set interfaces lo0 unit 0 family inet address 192.168.7.1/32
set policy-options condition prefix_11 if-route-exists 11.1.1.1/32
set policy-options condition prefix_11 if-route-exists table inet.0
set policy-options policy-statement conditional-import-bgp term conditional-default
    from route-filter 0.0.0.0/0 exact
set policy-options policy-statement conditional-import-bgp term conditional-default
    from condition prefix_11
set policy-options policy-statement conditional-import-bgp term conditional-default
    then accept
set policy-options policy-statement conditional-import-bgp term prefix_11 from route-filter
    11.0.0.0/8 orlonger
set policy-options policy-statement conditional-import-bgp term prefix_11 then accept
set policy-options policy-statement conditional-import-bgp term others then reject
set protocols bgp group toNorth local-address 10.0.78.13
set protocols bgp group toNorth peer-as 200
set protocols bgp group toNorth neighbor 10.0.78.14
set protocols bgp group toNorth import conditional-import-bgp
set routing-options router-id 192.168.7.1
set routing-options autonomous-system 100
```

Configuring Conditional Installation of Prefixes

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the Junos OS CLI User Guide.

To configure conditional installation of prefixes:

1. Configure the router interfaces forming the links between the three routers.

   Router Internet

   ```
   [edit interfaces]
   user@Internet# set fe-0/1/3 unit 0 family inet address 10.0.89.14/30
   ```

   Router North

   ```
   [edit interfaces]
   user@North# set fe-1/3/1 unit 0 family inet address 10.0.78.14/30
   user@North# set fe-1/3/0 unit 0 family inet address 10.0.89.13/30
   ```

   Router South

   ```
   [edit interfaces]
   ```

Copyright © 2013, Juniper Networks, Inc.

user@South# **set fe-0/1/2 unit 0 family inet address 10.0.78.13/30**

2. Configure five loopback interface addresses on Router Internet to emulate BGP routes learned from the Internet that are to be imported into the routing table of Router South, and configure an additional address (192.168.9.1/32) that will be configured as the router ID.

   Router Internet
   [edit interfaces lo0 unit 0 family inet]
   user@Internet# **set address 11.1.1.1/32**
   user@Internet# **set address 12.1.1.1/32**
   user@Internet# **set address 13.1.1.1/32**
   user@Internet# **set address 14.1.1.1/32**
   user@Internet# **set address 15.1.1.1/32**
   user@Internet# **set address 192.168.9.1/32**

   Also, configure the loopback interface addresses on Routers North and South.

   Router North
   [edit interfaces lo0 unit 0 family inet]
   user@North# **set address 192.168.8.1/32**

   Router South
   [edit interfaces lo0 unit 0 family inet]
   user@North# **set address 192.168.7.1/32**

3. Configure the static default route on Router North to be advertised to Router South.

   [edit routing-options]
   user@North# **set static route 0/0 reject**

4. Define the condition for importing prefixes into the routing table on Router South.

   [edit policy-options condition prefix_11 if-route-exists]
   user@South# **set 11.1.1.1/32**
   user@South# **set table inet.0**

5. Define export policies (**into-bgp** and **default_route**) on Routers Internet and North respectively, to advertise routes to BGP.

   Router Internet
   [edit policy-options policy-statement into-bgp]
   user@Internet# **set term 1 from interface lo0.0**
   user@Internet# **set term 1 then accept**

   Router North
   [edit policy-options policy-statement default_route]
   user@North# **set term 1 from route-filter 0/0 exact**
   user@North# **set term 1 then accept**

6. Define an import policy (**conditional-import-bgp**) on Router South to import the routes advertised by Router North into its routing table.

   NOTE: Ensure that you reference the condition, **prefix_11** (configured in Step 4), in the import policy.

   [edit policy-options policy-statement conditional-import-bgp]

Copyright © 2013, Juniper Networks, Inc.

```
user@South# set term conditional-default from route-filter 0.0.0.0/0 exact
user@South# set term conditional-default from condition prefix_11
user@South# set term conditional-default then accept
user@South# set term prefix_11 from route-filter 11.0.0.0/8 orlonger
user@South# set term prefix_11 then accept
user@South# set term others then reject
```

7. Configure BGP on all three routers to enable the flow of prefixes between the autonomous systems.

NOTE: Ensure that you apply the defined import and export policies to the respective BGP groups for prefix advertisement to take place.

```
Router Internet
[edit protocols bgp group toNorth]
user@Internet# set local-address 10.0.89.14
user@Internet# set peer-as 200
user@Internet# set neighbor 10.0.89.13
user@Internet# set export into-bgp

Router North
[edit protocols bgp group toInternet]
user@North# set local-address 10.0.89.13
user@North# set peer-as 300
user@North# set local-as 200
user@North# set neighbor 10.0.89.14

[edit protocols bgp group toSouth]
user@North# set local-address 10.0.78.14
user@North# set peer-as 100
user@North# set neighbor 10.0.78.13
user@North# set export default_route

Router South
[edit protocols bgp group toNorth]
user@South# set local-address 10.0.78.13
user@South# set peer-as 200
user@South# set neighbor 10.0.78.14
user@South# set import conditional-import-bgp
```

8. Configure the router ID and autonomous system number for all three routers.

NOTE: In this example, the router ID is configured based on the IP address configured on the lo0.0 interface of the router.

```
Router Internet
[edit routing options]
user@Internet# set router-id 192.168.9.1
user@Internet# set autonomous-system 300

Router North
[edit routing options]
```

Copyright © 2013, Juniper Networks, Inc.

```
user@North# set router-id 192.168.8.1
user@North# set autonomous-system 200

Router South
[edit routing options]
user@South# set router-id 192.168.7.1
user@South# set autonomous-system 100
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces** *interface-name*, **show protocols bgp** , **show policy-options**, and **show routing-options** commands.

If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@South# show interfaces fe-0/1/2
unit 0 {
    family inet {
        address 10.0.78.13/30;
    }
}

user@South# show protocols bgp
group toNorth {
    local-address 10.0.78.13;
    import conditional-import-bgp;
    peer-as 200;
    neighbor 10.0.78.14;
}

user@South# show policy-options
policy-statement conditional-import-bgp {
    term conditional-default {
        from {
            route-filter 0.0.0.0/0 exact;
            condition prefix_11;
        }
        then accept;
    }
    term prefix_11 {
        from {
            route-filter 11.0.0.0/8 orlonger;
        }
        then accept;
    }
    term others {
        then reject;
    }
}
condition prefix_11 {
    if-route-exists {
        11.1.1.1/32;
        table inet.0;
    }
}

user@South# show routing-options
```


Copyright © 2013, Juniper Networks, Inc.

```
router-id 192.168.7.1;
autonomous-system 100;
```

Run these commands on Routers Internet and North to confirm the configurations. If you are done configuring the routers, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying BGP on page 255
- Verifying Prefix Advertisement From Router Internet to Router North on page 256
- Verifying Prefix Advertisement From Router North to Router South on page 257
- Verifying BGP Import Policy for Conditional Installation of Prefixes on page 258
- Verifying the Presence of Routes Hidden by Policy (Optional) on page 258

Verifying BGP

Purpose Verify that BGP sessions have been established between the three routers.

Action From operational mode, run the **show bgp neighbor** *neighbor-address* command.

1. Check the BGP session on Router Internet to verify that Router North is a neighbor.

```
user@Internet> show bgp neighbor 10.0.89.13
Peer: 10.0.89.13+179 AS 200   Local: 10.0.89.14+56187 AS 300
  Type: External    State: Established    Flags: [ImportEval Sync]
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ into-bgp ]
  Options: [Preference LocalAddress PeerAS Refresh]
  Local Address: 10.0.89.14 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.8.1     Local ID: 192.168.9.1       Active Holdtime: 90
  Keepalive Interval: 30         Group index: 0    Peer index: 0
  BFD: disabled, down
  Local Interface: fe-0/1/3.0
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 200)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          6
  Last traffic (seconds): Received 9    Sent 18   Checked 28
```

Copyright © 2013, Juniper Networks, Inc.

```
  Input messages:  Total 12     Updates 1       Refreshes 0     Octets 232
  Output messages: Total 14     Updates 1       Refreshes 0     Octets 383
  Output Queue[0]: 0
```

2. Check the BGP session on Router North to verify that Router Internet is a neighbor.

```
user@North> show bgp neighbor 10.0.89.14
Peer: 10.0.89.14+56187 AS 300  Local: 10.0.89.13+179 AS 200
  Type: External    State: Established    Flags: [ImportEval Sync]
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: [Preference LocalAddress PeerAS Refresh]
  Local Address: 10.0.89.13 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.9.1     Local ID: 192.168.8.1       Active Holdtime: 90
  Keepalive Interval: 30         Group index: 0    Peer index: 0
  BFD: disabled, down
  Local Interface: fe-1/3/0.0
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 300)
  Peer does not support Addpath
  Table inet.0 Bit: 10001
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              6
    Received prefixes:            6
    Accepted prefixes:            6
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 14   Sent 3    Checked 3
  Input messages:  Total 16     Updates 2       Refreshes 0     Octets 402
  Output messages: Total 15     Updates 0       Refreshes 0     Octets 348
  Output Queue[0]: 0
```

Check the following fields in these outputs to verify that BGP sessions have been established:

- **Peer**—Check if the peer AS number is listed.
- **Local**—Check if the local AS number is listed.
- **State**—Ensure that the value is **Established**. If not, check the configuration again and see show bgp neighbor for more details on the output fields.

Similarly, verify that Routers North and South form peer relationships with each other.

Meaning BGP sessions are established between the three routers.

Verifying Prefix Advertisement From Router Internet to Router North

Purpose Verify that the routes sent from Router Internet are received by Router North.

Copyright © 2013, Juniper Networks, Inc.

Action

1. From operational mode on Router Internet, run the **show route advertising-protocol bgp *neighbor-address*** command.

```
user@Internet> show route advertising-protocol bgp 10.0.89.13
inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 11.1.1.1/32             Self                                    I
* 12.1.1.1/32             Self                                    I
* 13.1.1.1/32             Self                                    I
* 14.1.1.1/32             Self                                    I
* 15.1.1.1/32             Self                                    I
* 192.168.9.1/32          Self                                    I
```

   The output verifies that Router Internet advertises the routes 11.1.1.1/32, 12.1.1.1/32, 13.1.1.1/32, 14.1.1.1/32, 15.1.1.1/32, and 192.168.9.1/32 (the loopback address used as router ID) to Router North.

2. From operational mode on Router North, run the **show route receive-protocol bgp *neighbor-address*** command.

```
user@North> show route receive-protocol bgp 10.0.89.14
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 11.1.1.1/32             10.0.89.14                              300 I
* 12.1.1.1/32             10.0.89.14                              300 I
* 13.1.1.1/32             10.0.89.14                              300 I
* 14.1.1.1/32             10.0.89.14                              300 I
* 15.1.1.1/32             10.0.89.14                              300 I
* 192.168.9.1/32          10.0.89.14                              300 I
```

   The output verifies that Router North has received all the routes advertised by Router Internet.

Meaning Prefixes sent by Router Internet have been successfully installed into the routing table on Router North.

Verifying Prefix Advertisement From Router North to Router South

Purpose Verify that the routes received from Router Internet and the static default route are advertised by Router North to Router South.

Action

1. From operational mode on Router North, run the **show route 0/0 exact** command.

```
user@North> show route 0/0 exact
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 00:10:22
                       Reject
```

   The output verifies the presence of the static default route (0.0.0.0/0) in the routing table on Router North.

2. From operational mode on Router North, run the **show route advertising-protocol bgp *neighbor-address*** command.

```
user@North> show route advertising-protocol bgp 10.0.78.13
```

```
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 0.0.0.0/0               Self                                    I
* 11.1.1.1/32             Self                                    300 I
* 12.1.1.1/32             Self                                    300 I
* 13.1.1.1/32             Self                                    300 I
* 14.1.1.1/32             Self                                    300 I
* 15.1.1.1/32             Self                                    300 I
* 192.168.9.1/32          Self                                    300 I
```

The output verifies that Router North is advertising the static route and the routes received from Router Internet, to Router South.

Verifying BGP Import Policy for Conditional Installation of Prefixes

Purpose Verify that the BGP import policy successfully installs the required prefixes.

Action See if the import policy on Router South is operational by checking if only the static default route from Router North and the 11.1.1.1/32 route from Router Internet are installed in the routing table.

From operational mode, run the **show route receive-protocol bgp** *neighbor-address* command.

```
user@South> show route receive-protocol bgp 10.0.78.14
inet.0: 10 destinations, 10 routes (5 active, 0 holddown, 5 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 0.0.0.0/0               10.0.78.14                              200 I
* 11.1.1.1/32             10.0.78.14                              200 300 I
```

The output verifies that the BGP import policy is operational on Router South, and only the static default route of 0.0.0.0/0 from Router North and the 11.1.1.1/32 route from Router Internet have leaked into the routing table on Router South. The remaining routes are hidden.

Meaning The conditional installation of prefixes is successful because of the configured BGP import policy.

Verifying the Presence of Routes Hidden by Policy (Optional)

Purpose Verify the presence of routes hidden by the import policy configured on Router South.

NOTE: This section demonstrates the effects of various changes you can make to the configuration depending on your needs.

Action View routes hidden from the routing table of Router South by:

- Using the **hidden** option for the **show route receive-protocol bgp** *neighbor-address* command.
- Deactivating the import policy.

Copyright © 2013, Juniper Networks, Inc.

1. From operational mode, run the **show route receive-protocol bgp *neighbor-address* hidden** command to view hidden routes.

```
user@South> show route receive-protocol bgp 10.0.78.14 hidden
inet.0: 10 destinations, 10 routes (5 active, 0 holddown, 5 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
  12.1.1.1/32             10.0.78.14                              200 300 I
  13.1.1.1/32             10.0.78.14                              200 300 I
  14.1.1.1/32             10.0.78.14                              200 300 I
  15.1.1.1/32             10.0.78.14                              200 300 I
  192.168.9.1/32          10.0.78.14                              200 300 I
```

   The output verifies the presence of routes hidden by the import policy (12.1.1.1/32, 13.1.1.1/32, 14.1.1.1/32, 15.1.1.1/32, and 192.168.9.1/32) on Router South.

2. Deactivate the BGP import policy by configuring the **deactivate import** statement at the **[edit protocols bgp group *group-name*]** hierarchy level.

```
[edit protocols bgp group toNorth]
user@South# deactivate import
user@South# commit
```

3. Run the **show route receive-protocol bgp *neighbor-address*** operational mode command to check the routes after deactivating the import policy.

```
user@South> show route receive-protocol bgp 10.0.78.14
inet.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 0.0.0.0/0               10.0.78.14                              200 I
* 11.1.1.1/32             10.0.78.14                              200 300 I
* 12.1.1.1/32             10.0.78.14                              200 300 I
* 13.1.1.1/32             10.0.78.14                              200 300 I
* 14.1.1.1/32             10.0.78.14                              200 300 I
* 15.1.1.1/32             10.0.78.14                              200 300 I
* 192.168.9.1/32          10.0.78.14                              200 300 I
```

   The output verifies the presence of previously hidden routes (12.1.1.1/32, 13.1.1.1/32, 14.1.1.1/32, 15.1.1.1/32, and 192.168.9.1/32).

4. Activate the BGP import policy and remove the hidden routes from the routing table by configuring the **activate import** and **keep none** statements respectively at the **[edit protocols bgp group *group-name*]** hierarchy level.

```
[edit protocols bgp group toNorth]
user@South# activate import
user@South# set keep none
user@South# commit
```

5. From operational mode, run the **show route receive-protocol bgp *neighbor-address* hidden** command to check the routes after activating the import policy and configuring the **keep none** statement.

```
user@South> show route receive-protocol bgp 10.0.78.14 hidden
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
```

   The output verifies that the hidden routes are not maintained in the routing table because of the configured **keep none** statement.

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 6

BGP BFD Configuration

- Example: Configuring BFD for BGP on page 261
- Example: Configuring BFD Authentication for BGP on page 270

Example: Configuring BFD for BGP

- Understanding BFD for BGP on page 261
- Example: Configuring BFD on Internal BGP Peer Sessions on page 262

Understanding BFD for BGP

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. The failure detection timers for BFD have shorter time limits than default failure detection mechanisms for BGP, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

In Junos OS Release 8.3 and later, BFD is supported on internal BGP (IBGP) and multihop external BGP (EBGP) sessions as well as on single-hop EBGP sessions. In Junos OS Release 9.1 through Junos OS Release 11.1, BFD supports IPv6 interfaces in static routes only. In Junos OS Release 11.2 and later, BFD supports IPv6 interfaces with BGP.

Copyright © 2013, Juniper Networks, Inc.

Example: Configuring BFD on Internal BGP Peer Sessions

This example shows how to configure internal BGP (IBGP) peer sessions with the Bidirectional Forwarding Detection (BFD) protocol to detect failures in a network.

- Requirements on page 262
- Overview on page 262
- Configuration on page 263
- Verification on page 267

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

The minimum configuration to enable BFD on IBGP sessions is to include the bfd-liveness-detection **minimum-interval** statement in the BGP configuration of all neighbors participating in the BFD session. The **minimum-interval** statement specifies the minimum transmit and receive intervals for failure detection. Specifically, this value represents the minimum interval after which the local routing device transmits hello packets as well as the minimum interval that the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value from 1 through 255,000 milliseconds.

Optionally, you can specify the minimum transmit and receive intervals separately using the **transmit-interval minimum-interval** and **minimum-receive-interval** statements. For information about these and other optional BFD configuration statements, see bfd-liveness-detection.

Copyright © 2013, Juniper Networks, Inc.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 ms for Routing Engine-based sessions and less than 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

BFD is supported on the default routing instance (the main router), routing instances, and logical systems. This example shows BFD on logical systems.

Figure 26 on page 263 shows a typical network with internal peer sessions.

Figure 26: Typical Network with IBGP Sessions

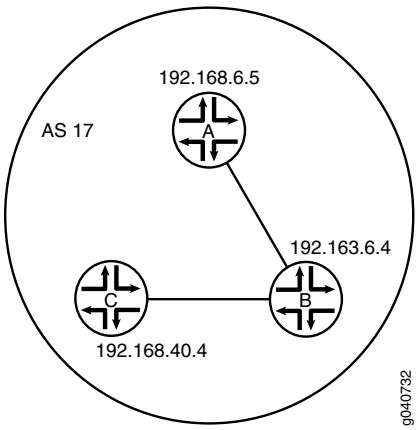

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set logical-systems A interfaces lt-1/2/0 unit 1 description to-B
set logical-systems A interfaces lt-1/2/0 unit 1 encapsulation ethernet
set logical-systems A interfaces lt-1/2/0 unit 1 peer-unit 2
```

Copyright © 2013, Juniper Networks, Inc.

```
set logical-systems A interfaces lt-1/2/0 unit 1 family inet address 10.10.10.1/30
set logical-systems A interfaces lo0 unit 1 family inet address 192.168.6.5/32
set logical-systems A protocols bgp group internal-peers type internal
set logical-systems A protocols bgp group internal-peers traceoptions file bgp-bfd
set logical-systems A protocols bgp group internal-peers traceoptions flag bfd detail
set logical-systems A protocols bgp group internal-peers local-address 192.168.6.5
set logical-systems A protocols bgp group internal-peers export send-direct
set logical-systems A protocols bgp group internal-peers bfd-liveness-detection
    minimum-interval 1000
set logical-systems A protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems A protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems A protocols ospf area 0.0.0.0 interface lo0.1 passive
set logical-systems A protocols ospf area 0.0.0.0 interface lt-1/2/0.1
set logical-systems A policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems A policy-options policy-statement send-direct term 2 then accept
set logical-systems A routing-options router-id 192.168.6.5
set logical-systems A routing-options autonomous-system 17
```

Device B

```
set logical-systems B interfaces lt-1/2/0 unit 2 description to-A
set logical-systems B interfaces lt-1/2/0 unit 2 encapsulation ethernet
set logical-systems B interfaces lt-1/2/0 unit 2 peer-unit 1
set logical-systems B interfaces lt-1/2/0 unit 2 family inet address 10.10.10.2/30
set logical-systems B interfaces lt-1/2/0 unit 5 description to-C
set logical-systems B interfaces lt-1/2/0 unit 5 encapsulation ethernet
set logical-systems B interfaces lt-1/2/0 unit 5 peer-unit 6
set logical-systems B interfaces lt-1/2/0 unit 5 family inet address 10.10.10.5/30
set logical-systems B interfaces lo0 unit 2 family inet address 192.163.6.4/32
set logical-systems B protocols bgp group internal-peers type internal
set logical-systems B protocols bgp group internal-peers local-address 192.163.6.4
set logical-systems B protocols bgp group internal-peers export send-direct
set logical-systems B protocols bgp group internal-peers bfd-liveness-detection
    minimum-interval 1000
set logical-systems B protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems B protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems B protocols ospf area 0.0.0.0 interface lo0.2 passive
set logical-systems B protocols ospf area 0.0.0.0 interface lt-1/2/0.2
set logical-systems B protocols ospf area 0.0.0.0 interface lt-1/2/0.5
set logical-systems B policy-options policy-statement send-direct term 2 from protocol
    direct
set logical-systems B policy-options policy-statement send-direct term 2 then accept
set logical-systems B routing-options router-id 192.163.6.4
set logical-systems B routing-options autonomous-system 17
```

Device C

```
set logical-systems C interfaces lt-1/2/0 unit 6 description to-B
set logical-systems C interfaces lt-1/2/0 unit 6 encapsulation ethernet
set logical-systems C interfaces lt-1/2/0 unit 6 peer-unit 5
set logical-systems C interfaces lt-1/2/0 unit 6 family inet address 10.10.10.6/30
set logical-systems C interfaces lo0 unit 3 family inet address 192.168.40.4/32
set logical-systems C protocols bgp group internal-peers type internal
set logical-systems C protocols bgp group internal-peers local-address 192.168.40.4
set logical-systems C protocols bgp group internal-peers export send-direct
set logical-systems C protocols bgp group internal-peers bfd-liveness-detection
    minimum-interval 1000
set logical-systems C protocols bgp group internal-peers neighbor 192.163.6.4
```


Copyright © 2013, Juniper Networks, Inc.

```
set logical-systems C protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems C protocols ospf area 0.0.0.0 interface lo0.3 passive
set logical-systems C protocols ospf area 0.0.0.0 interface lt-1/2/0.6
set logical-systems C policy-options policy-statement send-direct term 2 from protocol
  direct
set logical-systems C policy-options policy-statement send-direct term 2 then accept
set logical-systems C routing-options router-id 192.168.40.4
set logical-systems C routing-options autonomous-system 17
```

Configuring Device A

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device A:

1. Set the CLI to Logical System A.

   ```
   user@host> set cli logical-system A
   ```

2. Configure the interfaces.

   ```
   [edit interfaces lt-1/2/0 unit 1]
   user@host:A# set description to-B
   user@host:A# set encapsulation ethernet
   user@host:A# set peer-unit 2
   user@host:A# set family inet address 10.10.10.1/30


   [edit interfaces lo0 unit 1]
   user@host:A# set family inet address 192.168.6.5/32
   ```

3. Configure BGP.

   The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

   ```
   [edit protocols bgp group internal-peers]
   user@host:A# set type internal
   user@host:A# set local-address 192.168.6.5
   user@host:A# set export send-direct
   user@host:A# set neighbor 192.163.6.4
   user@host:A# set neighbor 192.168.40.4
   ```

4. Configure BFD.

   ```
   [edit protocols bgp group internal-peers]
   user@host:A# set bfd-liveness-detection minimum-interval 1000
   ```

   You must configure the same minimum interval on the connecting peer.

5. (Optional) Configure BFD tracing.

   ```
   [edit protocols bgp group internal-peers]
   user@host:A# set traceoptions file bgp-bfd
   user@host:A# set traceoptions flag bfd detail
   ```

6. Configure OSPF.

   ```
   [edit protocols ospf area 0.0.0.0]
   ```

Copyright © 2013, Juniper Networks, Inc.

```
user@host:A# set interface lo0.1 passive
user@host:A# set interface lt-1/2/0.1
```

7. Configure a policy that accepts direct routes.

   Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

   ```
   [edit policy-options policy-statement send-direct term 2]
   user@host:A# set from protocol direct
   user@host:A# set then accept
   ```

8. Configure the router ID and the autonomous system (AS) number.

   ```
   [edit routing-options]
   user@host:A# set router-id 192.168.6.5
   user@host:A# set autonomous-system 17
   ```

9. If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps to configure Device B and Device C.

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host:A# show interfaces
lt-1/2/0 {
  unit 1 {
    description to-B;
    encapsulation ethernet;
    peer-unit 2;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.6.5/32;
    }
  }
}
```

```
user@host:A# show policy-options
policy-statement send-direct {
  term 2 {
    from protocol direct;
    then accept;
  }
}
```

```
user@host:A# show protocols
bgp {
  group internal-peers {
    type internal;
    traceoptions {
```

 Copyright © 2013, Juniper Networks, Inc.

```
        file bgp-bfd;
        flag bfd detail;
      }
      local-address 192.168.6.5;
      export send-direct;
      bfd-liveness-detection {
        minimum-interval 1000;
      }
      neighbor 192.163.6.4;
      neighbor 192.168.40.4;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface lo0.1 {
        passive;
      }
      interface lt-1/2/0.1;
    }
  }
```

```
user@host:A# show routing-options
router-id 192.168.6.5;
autonomous-system 17;
```

Verification

Confirm that the configuration is working properly.

- Verifying That BFD Is Enabled on page 267
- Verifying That BFD Sessions Are Up on page 268
- Viewing Detailed BFD Events on page 268
- Viewing Detailed BFD Events After Deactivating and Reactivating a Loopback Interface on page 269

Verifying That BFD Is Enabled

Purpose Verify that BFD is enabled between the IBGP peers.

Action From operational mode, enter the **show bgp neighbor** command. You can use the **| match bfd** filter to narrow the output.

```
user@host:A> show bgp neighbor | match bfd
Options: <BfdEnabled>
  BFD: enabled, up
  Trace file: /var/log/A/bgp-bfd size 131072 files 10
  Options: <BfdEnabled>
  BFD: enabled, up
  Trace file: /var/log/A/bgp-bfd size 131072 files 10
```

Meaning The output shows that Logical System A has two neighbors with BFD enabled. When BFD is not enabled, the output displays **BFD: disabled, down**, and the **<BfdEnabled>** option is absent. If BFD is enabled and the session is down, the output displays **BFD: enabled,**

Copyright © 2013, Juniper Networks, Inc.

down. The output also shows that BFD-related events are being written to a log file because trace operations are configured.

Verifying That BFD Sessions Are Up

Purpose Verify that the BFD sessions are up, and view details about the BFD sessions.

Action From operational mode, enter the **show bfd session extensive** command.

```
user@host:A> show bfd session extensive
                                                  Detect   Transmit
Address                 State     Interface       Time     Interval  Multiplier
192.163.6.4             Up                        3.000     1.000        3
 Client BGP, TX interval 1.000, RX interval 1.000
 Session up time 00:54:40
 Local diagnostic None, remote diagnostic None
 Remote state Up, version 1
 Logical system 12, routing table index 25
 Min async interval 1.000, min slow interval 1.000
 Adaptive async TX interval 1.000, RX interval 1.000
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
 Local discriminator 10, remote discriminator 9
 Echo mode disabled/inactive
 Multi-hop route table 25, local-address 192.168.6.5

                                                  Detect   Transmit
Address                 State     Interface       Time     Interval  Multiplier
192.168.40.4            Up                        3.000     1.000        3
 Client BGP, TX interval 1.000, RX interval 1.000
 Session up time 00:48:03
 Local diagnostic None, remote diagnostic None
 Remote state Up, version 1
 Logical system 12, routing table index 25
 Min async interval 1.000, min slow interval 1.000
 Adaptive async TX interval 1.000, RX interval 1.000
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
 Local discriminator 14, remote discriminator 13
 Echo mode disabled/inactive
 Multi-hop route table 25, local-address 192.168.6.5

2 sessions, 2 clients
Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps
```

Meaning The **TX interval 1.000, RX interval 1.000** output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the bfd-liveness-detection statement.

Viewing Detailed BFD Events

Purpose View the contents of the BFD trace file to assist in troubleshooting, if needed.

Action From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```
user@host:A> file show /var/log/A/bgp-bfd
```


Copyright © 2013, Juniper Networks, Inc.

```
Aug 15 17:07:25 trace_on: Tracing to "/var/log/A/bgp-bfd" started
Aug 15 17:07:26.492190 bgp_peer_init: BGP peer 192.163.6.4 (Internal AS 17) local
 address 192.168.6.5 not found.  Leaving peer idled
Aug 15 17:07:26.493176 bgp_peer_init: BGP peer 192.168.40.4 (Internal AS 17) local
 address 192.168.6.5 not found.  Leaving peer idled
Aug 15 17:07:32.597979 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:07:32.599623 bgp_connect_start: connect 192.163.6.4 (Internal AS 17):
No route to host
Aug 15 17:07:36.869394 task_connect: task BGP_17.192.168.40.4+179 addr
192.168.40.4+179: No route to host
Aug 15 17:07:36.870624 bgp_connect_start: connect 192.168.40.4 (Internal AS 17):
 No route to host
Aug 15 17:08:04.599220 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:08:04.601135 bgp_connect_start: connect 192.163.6.4 (Internal AS 17):
No route to host
Aug 15 17:08:08.869717 task_connect: task BGP_17.192.168.40.4+179 addr
192.168.40.4+179: No route to host
Aug 15 17:08:08.869934 bgp_connect_start: connect 192.168.40.4 (Internal AS 17):
 No route to host
Aug 15 17:08:36.603544 advertising receiving-speaker only capabilty to neighbor
192.163.6.4 (Internal AS 17)
Aug 15 17:08:36.606726 bgp_read_message: 192.163.6.4 (Internal AS 17): 0 bytes
buffered
Aug 15 17:08:36.609119 Initiated BFD session to peer 192.163.6.4 (Internal AS
17): address=192.163.6.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:08:36.734033 advertising receiving-speaker only capabilty to neighbor
192.168.40.4 (Internal AS 17)
Aug 15 17:08:36.738436 Initiated BFD session to peer 192.168.40.4 (Internal AS
17): address=192.168.40.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:08:40.537552 BFD session to peer 192.163.6.4 (Internal AS 17) up
Aug 15 17:08:40.694410 BFD session to peer 192.168.40.4 (Internal AS 17) up
```

Meaning Before the routes are established, the **No route to host** message appears in the output. After the routes are established, the last two lines show that both BFD sessions come up.

Viewing Detailed BFD Events After Deactivating and Reactivating a Loopback Interface

Purpose Check to see what happens after bringing down a router or switch and then bringing it back up. To simulate bringing down a router or switch, deactivate the loopback interface on Logical System B.

Action

1. From configuration mode, enter the **deactivate logical-systems B interfaces lo0 unit 2 family inet** command.

   ```
   user@host:A# deactivate logical-systems B interfaces lo0 unit 2 family inet
   user@host:A# commit
   ```

2. From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

   ```
   user@host:A> file show /var/log/A/bgp-bfd
   ...
   Aug 15 17:20:55.995648 bgp_read_v4_message:9747: NOTIFICATION received from
   192.163.6.4 (Internal AS 17): code 6 (Cease) subcode 6 (Other Configuration
   Change)
   ```

Copyright © 2013, Juniper Networks, Inc.

```
Aug 15 17:20:56.004508 Terminated BFD session to peer 192.163.6.4 (Internal
AS 17)
Aug 15 17:21:28.007755 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:21:28.008597 bgp_connect_start: connect 192.163.6.4 (Internal AS
17): No route to host
```

3. From configuration mode, enter the **activate logical-systems B interfaces lo0 unit 2 family inet** command.

```
user@host:A# activate logical-systems B interfaces lo0 unit 2 family inet
user@host:A# commit
```

4. From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```
user@host:A> file show /var/log/A/bgp-bfd
...
Aug 15 17:25:53.623743 advertising receiving-speaker only capabilty to neighbor
 192.163.6.4 (Internal AS 17)
Aug 15 17:25:53.631314 Initiated BFD session to peer 192.163.6.4 (Internal AS
 17): address=192.163.6.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
 ver=255
Aug 15 17:25:57.570932 BFD session to peer 192.163.6.4 (Internal AS 17) up
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Configuring BFD Authentication for BGP

- Understanding BFD Authentication for BGP on page 270
- Example: Configuring BFD Authentication for BGP on page 272

Understanding BFD Authentication for BGP

Bidirectional Forwarding Detection protocol (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over BGP. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

Copyright © 2013, Juniper Networks, Inc.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- BFD Authentication Algorithms on page 271
- Security Authentication Keychains on page 272
- Strict Versus Loose Authentication on page 272

BFD Authentication Algorithms

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.

NOTE: Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

Copyright © 2013, Juniper Networks, Inc.

Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

Strict Versus Loose Authentication

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

Example: Configuring BFD Authentication for BGP

Beginning with Junos OS Release 9.6, you can configure authentication for BFD sessions running over BGP. Only three steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the BGP protocol.
2. Associate the authentication keychain with the BGP protocol.
3. Configure the related security authentication keychain.

The following sections provide instructions for configuring and viewing BFD authentication on BGP:

- Configuring BFD Authentication Parameters on page 272
- Viewing Authentication Information for BFD Sessions on page 274

Configuring BFD Authentication Parameters

BFD authentication can be configured for the entire BGP protocol, or a specific BGP group, neighbor, or routing instance.

Copyright © 2013, Juniper Networks, Inc.

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure BFD authentication:

1. Specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use.

   ```
   [edit]
   user@host# set protocols bgp bfd-liveness-detection authentication algorithm
     keyed-sha-1
   user@host# set protocols bgp group bgp-gr1 bfd-liveness-detection authentication
     algorithm keyed-sha-1
   user@host# set protocols bgp group bgp-gr1 neighbor 10.10.10.7 bfd-liveness-detection
     authentication algorithm keyed-sha-1
   ```

   NOTE: Nonstop active routing is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

2. Specify the keychain to be used to associate BFD sessions on BGP with the unique security authentication keychain attributes.

   The keychain name you specify must match a keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

   ```
   [edit]
   user@host# set protocols bgp bfd-liveness-detection authentication keychain bfd-bgp
   user@host# set protocols bgp group bgp-gr1 bfd-liveness-detection authentication
     keychain bfd-bgp
   user@host# set protocols bgp group bgp-gr1 neighbor 10.10.10.7 bfd-liveness-detection
     authentication keychain bfd-bgp
   ```

   NOTE: The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

3. Specify the unique security authentication information for BFD sessions:

   - The matching keychain name as specified in Step 2.
   - At least one key, a unique integer between **0** and **63**. Creating multiple keys allows multiple clients to use the BFD session.
   - The secret data used to allow access to the session.
   - The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

   ```
   [edit security]
   ```

Copyright © 2013, Juniper Networks, Inc.

```
user@host# set authentication-key-chains key-chain bfd-bgp key 53 secret
  $9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm start-time 2009-06-14.10:00:00
```

4. (Optional) Specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

```
[edit]
user@host# set protocols bgp bfd-liveness-detection authentication loose-check
user@host# set protocols bgp group bgp-gr1 bfd-liveness-detection authentication
  loose-check
user@host# set protocols bgp group bgp-gr1 neighbor 10.10.10.7 bfd-liveness-detection
  authentication loose-check
```

5. (Optional) View your configuration using the **show bfd session detail** or **show bfd session extensive** command.

6. Repeat these steps to configure the other end of the BFD session.

NOTE: BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

Viewing Authentication Information for BFD Sessions

You can view the existing BFD authentication configuration using the **show bfd session detail** and **show bfd session extensive** commands.

The following example shows BFD authentication configured for the **bgp-gr1** BGP group. It specifies the keyed SHA-1 authentication algorithm and a keychain name of **bfd-bgp**. The authentication keychain is configured with two keys. Key **1** contains the secret data "**9ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm**" and a start time of June 1, 2009, at 9:46:02 AM PST. Key **2** contains the secret data "**9a5jiKW9l.reP38ny.TszF2/9**" and a start time of June 1, 2009, at 3:29:20 PM PST.

```
[edit protocols bgp]
group bgp-gr1 {
  bfd-liveness-detection {
    authentication {
      algorithm keyed-sha-1;
      key-chain bfd-bgp;
    }
  }
}
[edit security]
authentication key-chains {
  key-chain bfd-bgp {
    key 1 {
      secret "$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm";
      start-time "2009-6-1.09:46:02 -0700";
    }
    key 2 {
      secret "$9$a5jiKW9l.reP38ny.TszF2/9";
      start-time "2009-6-1.15:29:20 -0700";
    }
  }
```


Copyright © 2013, Juniper Networks, Inc.

```
}
```

If you commit these updates to your configuration, you see output similar to the following. In the output for the **show bfd session detail** command, **Authenticate** is displayed to indicate that BFD authentication is configured. For more information about the configuration, use the **show bfd session extensive** command. The output for this command provides the keychain name, the authentication algorithm and mode for each client in the session, and the overall BFD authentication configuration status, keychain name, and authentication algorithm and mode.

show bfd session detail

```
user@host# show bfd session detail

                                                 Detect   Transmit
Address                 State     Interface      Time     Interval  Multiplier
50.0.0.2                Up        ge-0/1/5.0     0.900     0.300        3
 Client BGP, TX interval 0.300, RX interval 0.300, Authenticate
 Session up time 3d 00:34
 Local diagnostic None, remote diagnostic NbrSignal
 Remote state Up, version 1
 Replicated
```

show bfd session extensive

```
user@host# show bfd session extensive
                                                 Detect   Transmit
Address                 State     Interface      Time     Interval  Multiplier
50.0.0.2                Up        ge-0/1/5.0     0.900     0.300        3
 Client BGP, TX interval 0.300, RX interval 0.300, Authenticate
        keychain bfd-bgp, algo keyed-sha-1, mode strict
 Session up time 00:04:42
 Local diagnostic None, remote diagnostic NbrSignal
 Remote state Up, version 1
 Replicated
 Min async interval 0.300, min slow interval 1.000
 Adaptive async TX interval 0.300, RX interval 0.300
 Local min TX interval 0.300, minimum RX interval 0.300, multiplier 3
 Remote min TX interval 0.300, min RX interval 0.300, multiplier 3
 Local discriminator 2, remote discriminator 2
 Echo mode disabled/inactive
 Authentication enabled/active, keychain bfd-bgp, algo keyed-sha-1, mode strict
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 7

BGP Load Balancing Configuration

- Examples: Configuring BGP Multipath on page 277
- Example: Advertising Multiple BGP Paths to a Destination on page 293

Examples: Configuring BGP Multipath

- Understanding BGP Multipath on page 277
- Example: Load Balancing BGP Traffic on page 278
- Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops on page 282

Understanding BGP Multipath

The Junos OS BGP multipath feature supports the following applications:

- Load balancing across multiple links between two routing devices belonging to different autonomous systems (ASs)
- Load balancing across a common subnet or multiple subnets to different routing devices belonging to the same peer AS
- Load balancing across multiple links between two routing devices belonging to different external confederation peers
- Load balancing across a common subnet or multiple subnets to different routing devices belonging to external confederation peers

In a common scenario for load balancing, a customer is multihomed to multiple routers in a point of presence (POP). The default behavior is to send all traffic across only one of the available links. Load balancing causes traffic to use two or more of the links.

BGP multipath does not apply to paths that share the same MED-plus-IGP cost, yet differ in IGP cost. Multipath path selection is based on the IGP cost metric, even if two paths have the same MED-plus-IGP cost.

Copyright © 2013, Juniper Networks, Inc.

Example: Load Balancing BGP Traffic

This example shows how to configure BGP to select multiple equal-cost external BGP (EBGP) or internal BGP (IBGP) paths as active paths.

- Requirements on page 278
- Overview on page 278
- Configuration on page 279
- Verification on page 281

Requirements

Before you begin:

- Configure the device interfaces.
- Configure an interior gateway protocol (IGP).
- Configure BGP.
- Configure a routing policy that exports routes (such as direct routes or IGP routes) from the routing table into BGP.

Overview

The following steps shows how to configure per-packet load balancing:

1. Define a load-balancing routing policy by including one or more **policy-statement** statements at the **[edit policy-options]** hierarchy level, defining an action of **load-balance per-packet**:

   ```
   policy-statement policy-name {
     from {
       match-conditions;
       route-filter destination-prefix match-type <actions>;
       prefix-list name;
     }
     then {
       load-balance per-packet;
     }
   }
   ```

2. Apply the policy to routes exported from the routing table to the forwarding table. To do this, include the **forwarding-table** and **export** statements:

   ```
   forwarding-table {
     export policy-name;
   }
   ```

   You cannot apply the export policy to VRF routing instances.

3. Specify all next-hops of that route, if more than one exists, when allocating a label corresponding to a route that is being advertised.

4. Configure the forwarding-options hash key for MPLS to include the IP payload.

Copyright © 2013, Juniper Networks, Inc.

In this example, Device R1 is in AS 65000 and is connected to both Device R2 and Device R3, which are in AS 65001. This example shows the configuration on Device R1.

Topology

Figure 27 on page 279 shows the topology used in this example.

Figure 27: BGP Load Balancing

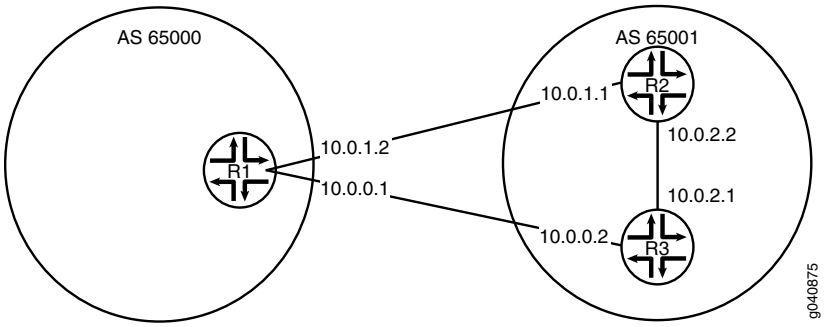

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group external type external
set protocols bgp group external peer-as 65001
set protocols bgp group external multipath
set protocols bgp group external neighbor 10.0.1.1
set protocols bgp group external neighbor 10.0.0.2
set policy-options policy-statement loadbal from route-filter 10.0.0.0/16 orlonger
set policy-options policy-statement loadbal then load-balance per-packet
set routing-options forwarding-table export loadbal
set routing-options autonomous-system 65000
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the BGP group.

```
[edit protocols bgp group external]
user@R1# set type external
user@R1# set peer-as 65001
user@R1# set neighbor 10.0.1.1
user@R1# set neighbor 10.0.0.2
```

2. Enable the BGP group to use multiple paths.

Copyright © 2013, Juniper Networks, Inc.

NOTE: To disable the default check requiring that paths accepted by BGP multipath must have the same neighboring autonomous system (AS), include the **multiple-as** option.

```
[edit protocols bgp group external]
user@R1# set multipath
```

3. Configure the load-balancing policy.

```
[edit policy-options policy-statement loadbal]
user@R1# set from route-filter 10.0.0.0/16 orlonger
user@R1# set then load-balance per-packet
```

4. Apply the load-balancing policy.

```
[edit routing-options]
user@R1# set forwarding-table export loadbal
```

5. Configure the local autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 65000
```

Results From configuration mode, confirm your configuration by entering the **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R1# show protocols
bgp {
  group external {
    type external;
    peer-as 65001;
    multipath;
    neighbor 10.0.1.1;
    neighbor 10.0.0.2;
  }
}
```

```
[edit]
user@R1# show policy-options
policy-statement loadbal {
  from {
    route-filter 10.0.0.0/16 orlonger;
  }
  then {
    load-balance per-packet;
  }
}
```

```
[edit]
user@R1# show routing-options
autonomous-system 65000;
forwarding-table {
```


Copyright © 2013, Juniper Networks, Inc.

```
    export loadbal;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly:

- Verifying Routes on page 281
- Verifying Forwarding on page 282

Verifying Routes

Purpose Verify that routes are learned from both routers in the neighboring AS.

Action From operational mode, run the **show route** command.

```
user@R1> show route 10.0.2.0
inet.0: 12 destinations, 15 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.2.0/30        *[BGP/170] 03:12:32, localpref 100
                      AS path: 65001 I
                      to 10.0.1.1 via ge-1/2/0.0
                    > to 10.0.0.2 via ge-1/2/1.0
                    [BGP/170] 03:12:32, localpref 100
                      AS path: 65001 I
                    > to 10.0.1.1 via ge-1/2/0.0

user@R1> show route 10.0.2.0 detail
inet.0: 12 destinations, 15 routes (12 active, 0 holddown, 0 hidden)
10.0.2.0/30 (2 entries, 1 announced)
        *BGP    Preference: 170/-101
                Next hop type: Router, Next hop index: 262142
                Next-hop reference count: 3
                Source: 10.0.0.2
                Next hop: 10.0.1.1 via ge-1/2/0.0
                Next hop: 10.0.0.2 via ge-1/2/1.0, selected
                State: <Active Ext>
                Local AS: 65000 Peer AS: 65001
                Age: 3:18:30
                Task: BGP_65001.10.0.0.2+55402
                Announcement bits (1): 2-KRT
                AS path: 65001 I
                Accepted Multipath
                Localpref: 100
                Router ID: 192.168.2.1
         BGP    Preference: 170/-101
                Next hop type: Router, Next hop index: 602
                Next-hop reference count: 5
                Source: 10.0.1.1
                Next hop: 10.0.1.1 via ge-1/2/0.0, selected
                State: <NotBest Ext>
                Inactive reason: Not Best in its group - Active preferred
                Local AS: 65000 Peer AS: 65001
                Age: 3:18:30
                Task: BGP_65001.10.0.1.1+53135
                AS path: 65001 I
```

Copyright © 2013, Juniper Networks, Inc.

```
                    Accepted
                    Localpref: 100
                    Router ID: 192.168.3.1
```

Meaning The active path, denoted with an asterisk (*), has two next hops: 10.0.1.1 and 10.0.0.2 to the 10.0.2.0 destination. The 10.0.1.1 next hop is copied from the inactive path to the active path.

Verifying Forwarding

Purpose Verify that both next hops are installed in the forwarding table.

Action From operational mode, run the **show route forwarding-table** command.

```
user@R1> show route forwarding-table destination 10.0.2.0
Routing table: default.inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
10.0.2.0/30        user     0                    ulst 262142     2
                              10.0.1.1           ucst   602     5 ge-1/2/0.0
                              10.0.0.2           ucst   522     6 ge-1/2/1.0
```

Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops

This example shows how to configure a single-hop external BGP (EBGP) peer to accept a remote next hop with which it does not share a common subnet.

- Requirements on page 282
- Overview on page 282
- Configuration on page 284
- Verification on page 291

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

In some situations, it is necessary to configure a single-hop EBGP peer to accept a remote next hop with which it does not share a common subnet. The default behavior is for any next-hop address received from a single-hop EBGP peer that is not recognized as sharing a common subnet to be discarded. The ability to have a single-hop EBGP peer accept a remote next hop to which it is not directly connected also prevents you from having to configure the single-hop EBGP neighbor as a multihop session. When you configure a multihop session in this situation, all next-hop routes learned through this EBGP peer are labeled indirect even when they do share a common subnet. This situation breaks multipath functionality for routes that are recursively resolved over routes that include these next-hop addresses. Configuring the accept-remote-nexthop statement allows a single-hop EBGP peer to accept a remote next hop, which restores multipath functionality for routes that are resolved over these next-hop addresses. You can configure this statement at the global, group, and neighbor hierarchy levels for BGP. The statement is

 Copyright © 2013, Juniper Networks, Inc.

also supported on logical systems and the VPN routing and forwarding (VRF) routing instance type. Both the remote next-hop and the EBGP peer must support BGP route refresh as defined in RFC 2918, *Route Refresh Capability in BGP-4*. If the remote peer does not support BGP route refresh, the session is reset.

NOTE: You cannot configure both the **multihop** and **accept-remote-nexthop** statements for the same EBGP peer.

When you enable a single-hop EBGP peer to accept a remote next hop, you must also configure an import routing policy on the EBGP peer that specifies the remote next-hop address.

This example includes an import routing policy, **agg_route**, that enables a single-hop external BGP peer (Device R1) to accept the remote next-hop 1.1.10.10 for the route to the 1.1.230.0/23 network. At the **[edit protocols bgp]** hierarchy level, the example includes the **import agg_route** statement to apply the policy to the external BGP peer and includes the **accept-remote-nexthop** statement to enable the single-hop EBGP peer to accept the remote next hop.

Figure 28 on page 283 shows the sample topology.

Figure 28: Topology for Accepting a Remote Next Hop

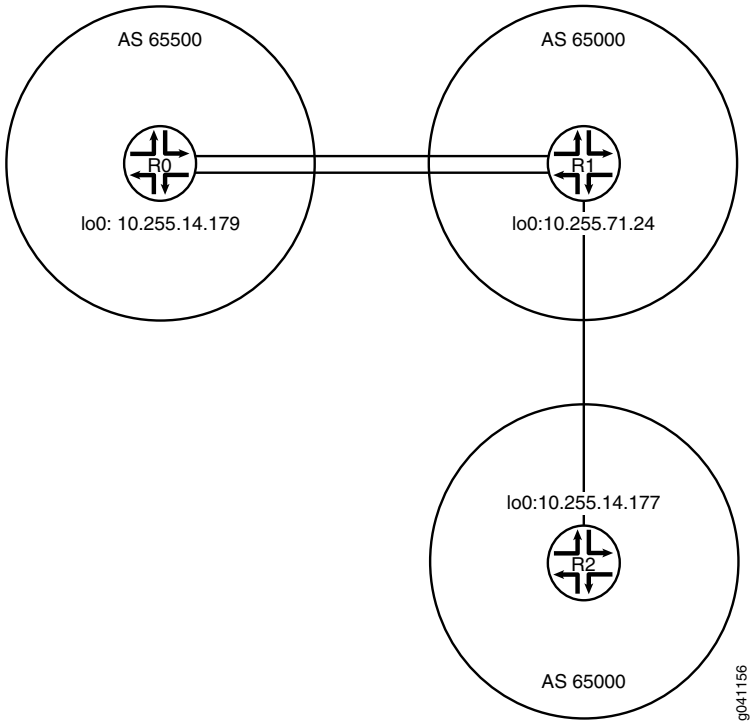

Configuration

- Device R0 on page 285
- Configuring Device R1 on page 287
- Configuring Device R2 on page 290

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R0

```
set interfaces fe-1/2/0 unit 1 family inet address 1.1.0.1/30
set interfaces fe-1/2/1 unit 2 family inet address 1.1.1.1/30
set interfaces lo0 unit 1 family inet address 10.255.14.179/32
set protocols bgp group ext type external
set protocols bgp group ext export test_route
set protocols bgp group ext export agg_route
set protocols bgp group ext peer-as 65000
set protocols bgp group ext multipath
set protocols bgp group ext neighbor 1.1.0.2
set protocols bgp group ext neighbor 1.1.1.2
set policy-options policy-statement agg_route term 1 from protocol static
set policy-options policy-statement agg_route term 1 from route-filter 1.1.230.0/23 exact
set policy-options policy-statement agg_route term 1 then accept
set policy-options policy-statement test_route term 1 from protocol static
set policy-options policy-statement test_route term 1 from route-filter 1.1.10.10/32 exact
set policy-options policy-statement test_route term 1 then accept
set routing-options static route 1.1.10.10/32 reject
set routing-options static route 1.1.230.0/23 reject
set routing-options autonomous-system 65500
```

Device R1

```
set interfaces fe-1/2/0 unit 3 family inet address 1.1.0.2/30
set interfaces fe-1/2/1 unit 4 family inet address 1.12.0.1/30
set interfaces fe-1/2/2 unit 5 family inet address 1.1.1.2/30
set interfaces lo0 unit 2 family inet address 10.255.71.24/32
set protocols bgp accept-remote-nexthop
set protocols bgp group ext type external
set protocols bgp group ext import agg_route
set protocols bgp group ext peer-as 65500
set protocols bgp group ext multipath
set protocols bgp group ext neighbor 1.1.0.1
set protocols bgp group ext neighbor 1.1.1.1
set protocols bgp group int type internal
set protocols bgp group int local-address 10.255.71.24
set protocols bgp group int neighbor 10.255.14.177
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set protocols ospf area 0.0.0.0 interface 10.255.71.24
set policy-options policy-statement agg_route term 1 from protocol bgp
set policy-options policy-statement agg_route term 1 from route-filter 1.1.230.0/23 exact
set policy-options policy-statement agg_route term 1 then next-hop 1.1.10.10
set policy-options policy-statement agg_route term 1 then accept
set routing-options autonomous-system 65000
```

Device R2

```
set interfaces fe-1/2/0 unit 6 family inet address 1.12.0.2/30
```


Copyright © 2013, Juniper Networks, Inc.

```
set interfaces lo0 unit 3 family inet address 10.255.14.177/32
set protocols bgp group int type internal
set protocols bgp group int local-address 10.255.14.177
set protocols bgp group int neighbor 10.255.71.24
set protocols ospf area 0.0.0.0 interface fe-1/2/0.6
set protocols ospf area 0.0.0.0 interface 10.255.14.177
set routing-options autonomous-system 65000
```

Device R0

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R0:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 1]
user@R0# set family inet address 1.1.0.1/30

[edit interfaces fe-1/2/1 unit 2]
user@R0# set family inet address 1.1.1.1/30

[edit interfaces lo0 unit 1]
user@R0# set family inet address 10.255.14.179/32
```

2. Configure EBGP.

```
[edit protocols bgp group ext]
user@R0# set type external
user@R0# set peer-as 65000
user@R0# set neighbor 1.1.0.2
user@R0# set neighbor 1.1.1.2
```

3. Enable multipath BGP between Device R0 and Device R1.

```
[edit protocols bgp group ext]
user@R0# set multipath
```

4. Configure static routes to remote networks.
   These routes are not part of the topology. The purpose of these routes is to demonstrate the functionality in this example.

```
[edit routing-options]
user@R0# set static route 1.1.10.10/32 reject
user@R0# set static route 1.1.230.0/23 reject
```

5. Configure routing policies that accept the static routes.

```
[edit policy-options policy-statement agg_route term 1]
user@R0# set from protocol static
user@R0# set from route-filter 1.1.230.0/23 exact
user@R0# set then accept

[edit policy-options policy-statement test_route term 1]
user@R0# set from protocol static
user@R0# set from route-filter 1.1.10.10/32 exact
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R0# set then accept
```

6. Export the **agg_route** and **test_route** policies from the routing table into BGP.

```
[edit protocols bgp group ext]
user@R0# set export test_route
user@R0# set export agg_route
```

7. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R0# set autonomous-system 65500
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 1.1.0.1/30;
    }
  }
}
fe-1/2/1 {
  unit 2 {
    family inet {
      address 1.1.1.1/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 10.255.14.179/32;
    }
  }
}
```

```
user@R0# show policy-options
policy-statement agg_route {
  term 1 {
    from {
      protocol static;
      route-filter 1.1.230.0/23 exact;
    }
    then accept;
  }
}
policy-statement test_route {
  term 1 {
    from {
      protocol static;
      route-filter 1.1.10.10/32 exact;
    }
```


Copyright © 2013, Juniper Networks, Inc.

```
      then accept;
    }
  }
```

```
user@R0# show protocols
bgp {
  group ext {
    type external;
    export [ test_route agg_route ];
    peer-as 65000;
    multipath;
    neighbor 1.1.0.2;
    neighbor 1.1.1.2;
  }
}
```

```
user@R0# show routing-options
static {
  route 1.1.10.10/32 reject;
  route 1.1.230.0/23 reject;
}
autonomous-system 65500;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 3]
user@R1# set family inet address 1.1.0.2/30

[edit interfaces fe-1/2/1 unit 4]
user@R1# set family inet address 1.12.0.1/30

[edit interfaces fe-1/2/2 unit 5]
user@R1# set family inet address 1.1.1.2/30

[edit interfaces lo0 unit 2]
user@R1# set family inet address 10.255.71.24/32
```

2. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface fe-1/2/1.4
user@R1# set interface 10.255.71.24
```

3. Enable Device R1 to accept the remote next hop.

```
[edit protocols bgp]
user@R1# set accept-remote-nexthop
```

Copyright © 2013, Juniper Networks, Inc.

4. Configure IBGP.

   ```
   [edit protocols bgp group int]
   user@R1# set type internal
   user@R1# set local-address 10.255.71.24
   user@R1# set neighbor 10.255.14.177
   ```

5. Configure EBGP.

   ```
   [edit protocols bgp group ext]
   user@R1# set type external
   user@R1# set peer-as 65500
   user@R1# set neighbor 1.1.0.1
   user@R1# set neighbor 1.1.1.1
   ```

6. Enable multipath BGP between Device R0 and Device R1.

   ```
   [edit protocols bgp group ext]
   user@R1# set multipath
   ```

7. Configure a routing policy that enables a single-hop external BGP peer (Device R1) to accept the remote next-hop 1.1.10.10 for the route to the 1.1.230.0/23 network.

   ```
   [edit policy-options policy-statement agg_route term 1]
   user@R1# set from protocol bgp
   user@R1# set from route-filter 1.1.230.0/23 exact
   user@R1# set then next-hop 1.1.10.10
   user@R1# set then accept
   ```

8. Import the **agg_route** policy into the routing table on Device R1.

   ```
   [edit protocols bgp group ext]
   user@R1# set import agg_route
   ```

9. Configure the autonomous system (AS) number.

   ```
   [edit routing-options]
   user@R1# set autonomous-system 65000
   ```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 3 {
    family inet {
      address 1.1.0.2/30;
    }
  }
}
fe-1/2/1 {
  unit 4 {
    family inet {
      address 1.12.0.1/30;
    }
  }
}
```

 Copyright © 2013, Juniper Networks, Inc.

```
fe-1/2/2 {
  unit 5 {
    family inet {
      address 1.1.1.2/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 10.255.71.24/32;
    }
  }
}
```

```
user@R1# show policy-options
policy-statement agg_route {
  term 1 {
    from {
      protocol bgp;
      route-filter 1.1.230.0/23 exact;
    }
    then {
      next-hop 1.1.10.10;
      accept;
    }
  }
}
```

```
user@R1# show protocols
bgp {
  accept-remote-nexthop;
  group ext {
    type external;
    import agg_route;
    peer-as 65500;
    multipath;
    neighbor 1.1.0.1;
    neighbor 1.1.1.1;
  }
  group int {
    type internal;
    local-address 10.255.71.24;
    neighbor 10.255.14.177;
  }
}
ospf {
  area 0.0.0.0 {
    interface fe-1/2/1.4;
    interface 10.255.71.24;
  }
}
```

```
user@R1# show routing-options
autonomous-system 65000;
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

```
[edit interfaces fe-1/2/0 unit 6]
user@R2# set family inet address 1.12.0.2/30

[edit interfaces lo0 unit 3]
user@R2# set family inet address 10.255.14.177/32
```

2. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R2# set interface fe-1/2/0.6
user@R2# set interface 10.255.14.177
```

3. Configure IBGP.

```
[edit protocols bgp group int]
user@R2# set type internal
user@R2# set local-address 10.255.14.177
user@R2# set neighbor 10.255.71.24
```

4. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 65000
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
  unit 6 {
    family inet {
      address 1.12.0.2/30;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 10.255.14.177/32;
    }
  }
}

user@R2# show protocols
bgp {
  group int {
```


Copyright © 2013, Juniper Networks, Inc.

```
      type internal;
      local-address 10.255.14.177;
      neighbor 10.255.71.24;
    }
  }
  ospf {
    area 0.0.0.0 {
      interface fe-1/2/0.6;
      interface 10.255.14.177;
    }
  }
```

```
user@R2# show routing-options
autonomous-system 65000;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying That the Multipath Route with the Indirect Next Hop Is in the Routing Table on page 291
- Deactivating and Reactivating the accept-remote-nexthop Statement on page 292

Verifying That the Multipath Route with the Indirect Next Hop Is in the Routing Table

Purpose Verify that Device R1 has a route to the 1.1.230.0/23 network.

Action From operational mode, enter the **show route 1.1.230.0 extensive** command.

```
user@R1> show route 1.1.230.0 extensive
inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
Restart Complete
1.1.230.0/23 (2 entries, 1 announced)
TSI:
KRT in-kernel 1.1.230.0/23 -> {indirect(262142)}
Page 0 idx 1 Type 1 val 9168f6c
    Nexthop: 1.1.10.10
    Localpref: 100
    AS path: [65000] 65500 I
    Communities:
Path 1.1.230.0 from 1.1.0.1 Vector len 4.  Val: 1
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Address: 0x90c44d8
                Next-hop reference count: 4
                Source: 1.1.0.1
                Next hop type: Router, Next hop index: 262143
                Next hop: 1.1.0.1 via fe-1/2/0.3, selected
                Next hop: 1.1.1.1 via fe-1/2/2.5
                Protocol next hop: 1.1.10.10
                Indirect next hop: 91c0000 262142
                State: <Active Ext>
                Local AS: 65000 Peer AS: 65500
                Age: 2:55:31    Metric2: 0
                Task: BGP_65500.1.1.0.1+64631
                Announcement bits (3): 2-KRT 3-BGP_RT_Background 4-Resolve tree
```

Copyright © 2013, Juniper Networks, Inc.

```
1
                AS path: 65500 I
                Accepted Multipath
                Localpref: 100
                Router ID: 10.255.14.179
                Indirect next hops: 1
                        Protocol next hop: 1.1.10.10
                        Indirect next hop: 91c0000 262142
                        Indirect path forwarding next hops: 2
                                Next hop type: Router
                                Next hop: 1.1.0.1 via fe-1/2/0.3
                                Next hop: 1.1.1.1 via fe-1/2/2.5
                        1.1.10.10/32 Originating RIB: inet.0
                          Node path count: 1
                          Forwarding nexthops: 2
                                Nexthop: 1.1.0.1 via fe-1/2/0.3
                                Nexthop: 1.1.1.1 via fe-1/2/2.5
        BGP     Preference: 170/-101
                Next hop type: Indirect
                Address: 0x90c44d8
                Next-hop reference count: 4
                Source: 1.1.1.1
                Next hop type: Router, Next hop index: 262143
                Next hop: 1.1.0.1 via fe-1/2/0.3, selected
                Next hop: 1.1.1.1 via fe-1/2/2.5
                Protocol next hop: 1.1.10.10
                Indirect next hop: 91c0000 262142
                State: <NotBest Ext>
                Inactive reason: Not Best in its group - Update source
                Local AS: 65000 Peer AS: 65500
                Age: 2:55:27    Metric2: 0
                Task: BGP_65500.1.1.1.1+53260
                AS path: 65500 I
                Accepted
                Localpref: 100
                Router ID: 10.255.14.179
                Indirect next hops: 1
                        Protocol next hop: 1.1.10.10
                        Indirect next hop: 91c0000 262142
                        Indirect path forwarding next hops: 2
                                Next hop type: Router
                                Next hop: 1.1.0.1 via fe-1/2/0.3
                                Next hop: 1.1.1.1 via fe-1/2/2.5
                        1.1.10.10/32 Originating RIB: inet.0
                          Node path count: 1
                          Forwarding nexthops: 2
                                Nexthop: 1.1.0.1 via fe-1/2/0.3
                                Nexthop: 1.1.1.1 via fe-1/2/2.5
```

Meaning The output shows that Device R1 has a route to the 1.1.230.0 network with the multipath feature enabled (**Accepted Multipath**). The output also shows that the route has an indirect next hop of 1.1.10.10.

Deactivating and Reactivating the accept-remote-nexthop Statement

Purpose Make sure that the multipath route with the indirect next hop is removed from the routing table when you deactivate the **accept-remote-nexthop** statement.

 Copyright © 2013, Juniper Networks, Inc.

Action

1. From configuration mode, enter the **deactivate protocols bgp accept-remote-nexthop** command.

   ```
   user@R1# deactivate protocols bgp accept-remote-nexthop
   user@R1# commit
   ```

2. From operational mode, enter the **show route 1.1.230.0** command.

   ```
   user@R1> show route 1.1.230.0
   ```

3. From configuration mode, reactivate the statement by entering the **activate protocols bgp accept-remote-nexthop** command.

   ```
   user@R1# activate protocols bgp accept-remote-nexthop
   user@R1# commit
   ```

4. From operational mode, reenter the **show route 1.1.230.0** command.

   ```
   user@R1> show route 1.1.230.0

   inet.0: 11 destinations, 13 routes (11 active, 0 holddown, 0 hidden)
   Restart Complete
   + = Active Route, - = Last Active, * = Both

   1.1.230.0/23       *[BGP/170] 03:13:19, localpref 100
                        AS path: 65500 I
                      > to 1.1.0.1 via fe-1/2/0.3
                        to 1.1.1.1 via fe-1/2/2.5
                       [BGP/170] 03:13:15, localpref 100, from 1.1.1.1
                        AS path: 65500 I
                      > to 1.1.0.1 via fe-1/2/0.3
                        to 1.1.1.1 via fe-1/2/2.5
   ```

Meaning When the **accept-remote-nexthop** statement is deactivated, the multipath route to the 1.1.230.0 network is removed from the routing table .

Related Documentation

- Example: Overriding the Default BGP Routing Policy on PTX Series Packet Transport Switches on page 241

Example: Advertising Multiple BGP Paths to a Destination

- Understanding the Advertisement of Multiple Paths to a Single Destination in BGP on page 293
- Example: Advertising Multiple Paths in BGP on page 294

Understanding the Advertisement of Multiple Paths to a Single Destination in BGP

BGP peers advertise routes to each other in update messages. BGP stores its routes in the Junos OS routing table (**inet.0**). For each prefix in the routing table, the routing protocol process selects a single best path, called the active path. Unless you configure BGP to advertise multiple paths to the same destination, BGP advertises only the active path.

Copyright © 2013, Juniper Networks, Inc.

Instead of advertising only the active path to a destination, you can configure BGP to advertise multiple paths to the destination. Within an autonomous system (AS), the availability of multiple exit points to reach a destination provides the following benefits:

- Fault tolerance—Path diversity leads to reduction in restoration time after failure. For instance, a border router after receiving multiple paths to the same destination can precompute a backup path and have it ready so that when the primary path becomes invalid, the border router can use the backup to quickly restore connectivity. Without a backup path, the restoration time depends on BGP reconvergence, which includes withdraw and advertisement messages in the network before a new best path can be learned.
- Load balancing—The availability of multiple paths to reach the same destination enables load balancing of traffic, if the routing within the AS meets certain constraints.
- Maintenance—The availability of alternate exit points allows for graceful maintenance operation of routers.

The following limitations apply to advertising multiple routes in BGP:

- Address families supported:
  - IPv4 unicast (**family inet unicast**)
  - IPv6 unicast (**family inet6 unicast**)
  - IPv4 labeled unicast (**family inet labeled-unicast**)
  - IPv6 labeled unicast (**family inet6 labeled-unicast**)
- Internal BGP (IBGP) peers only. No support on external BGP (EBGP) peers.
- Master instance only. No support for routing instances.
- Graceful restart supported, but not nonstop active routing (NSR).
- No BGP Monitoring Protocol (BMP) support.
- No support for EBGP sessions between confederations.
- Prefix policies enable you to filter routes on a router that is configured to advertise multiple paths to a destination. However, prefix policies can only match routes. Prefix policies cannot change the attributes of routes.

Example: Advertising Multiple Paths in BGP

In this example, BGP routers are configured to advertise multiple paths instead of advertising only the active path. Advertising multiple paths in BGP is specified in Internet draft draft-ietf-idr-add-paths-04.txt, *Advertisement of Multiple Paths in BGP*.

- Requirements on page 295
- Overview on page 295
- Configuration on page 296
- Verification on page 314

Copyright © 2013, Juniper Networks, Inc.

Requirements

This example uses the following hardware and software components:

- Eight BGP-speaking devices.
- Five of the BGP-enabled devices do not necessarily need to be routers. For example, they can be EX Series Ethernet Switches.
- Three of the BGP-enabled devices are configured to send multiple paths or receive multiple paths (or both send and receive multiple paths). These three BGP-enabled devices must be M Series Multiservice Edge Routers, MX Series 3D Universal Edge Routers, or T Series Core Routers.
- The three routers must be running Junos OS Release 11.4 or later.

Overview

The following statements are used for configuring multiple paths to a destination:

```
[edit protocols bgp group group-name family family],
add-path {
  receive;
  send {
    path-count number;
    prefix-policy [ policy-names ];
  }
}
```

In this example, Router R5, Router R6, and Router R7 redistribute static routes into BGP. Router R1 and Router R4 are route reflectors. Router R2 and Router R3 are clients to Route Reflector R1. Router R8 is a client to Route Reflector R4.

Route reflection is optional when multiple-path advertisement is enabled in BGP.

With the **add-path send path-count 6** configuration, Router R1 is configured to send up to six paths (per destination) to Router R4.

With the **add-path receive** configuration, Router R4 is configured to receive multiple paths from Router R1.

With the **add-path send path-count 6** configuration, Router R4 is also configured to send up to six paths to Router R8.

With the **add-path receive** configuration, Router R8 is configured to receive multiple paths from Router R4.

The **add-path send prefix-policy allow_199** policy configuration (along with the corresponding route filter) limits Router R4 to sending multiple paths for only the 199.1.1.1/32 route.

Topology Diagram

Figure 29 on page 296 shows the topology used in this example.

Copyright © 2013, Juniper Networks, Inc.

Figure 29: Advertisement of Multiple Paths in BGP

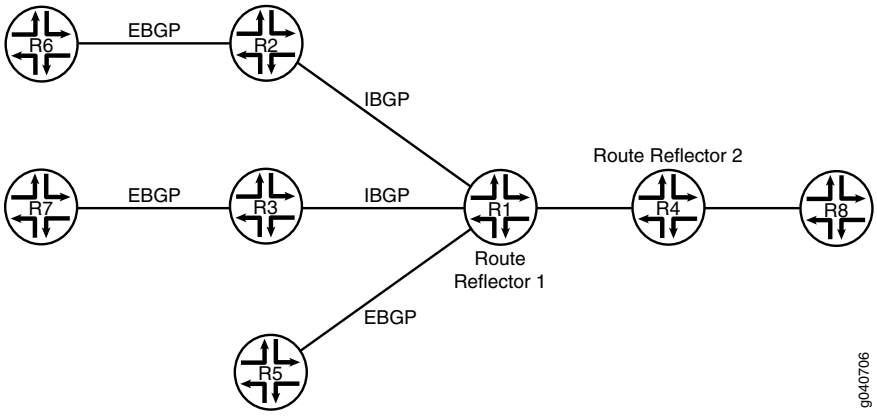

Configuration

- Configuring Router R1 on page 299
- Configuring Router R2 on page 301
- Configuring Router R3 on page 303
- Configuring Router R4 on page 305
- Configuring Router R5 on page 308
- Configuring Router R6 on page 309
- Configuring Router R7 on page 311
- Configuring Router R8 on page 312
- Results on page 313

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Router R1

```
set interfaces fe-0/0/0 unit 12 family inet address 10.0.12.1/24
set interfaces fe-0/0/1 unit 13 family inet address 10.0.13.1/24
set interfaces fe-1/0/0 unit 14 family inet address 10.0.14.1/24
set interfaces fe-1/2/0 unit 15 family inet address 10.0.15.1/24
set interfaces lo0 unit 10 family inet address 10.0.0.10/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.10
set protocols bgp group rr cluster 10.0.0.10
set protocols bgp group rr neighbor 10.0.0.20
set protocols bgp group rr neighbor 10.0.0.30
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.15.2 local-address 10.0.15.1
set protocols bgp group e1 neighbor 10.0.15.2 peer-as 2
set protocols bgp group rr_rr type internal
set protocols bgp group rr_rr local-address 10.0.0.10
set protocols bgp group rr_rr neighbor 10.0.0.40 family inet unicast add-path send
    path-count 6
set protocols ospf area 0.0.0.0 interface lo0.10 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.12
```


Copyright © 2013, Juniper Networks, Inc.

```
set protocols ospf area 0.0.0.0 interface fe-0/0/1.13
set protocols ospf area 0.0.0.0 interface fe-1/0/0.14
set protocols ospf area 0.0.0.0 interface fe-1/2/0.15
set routing-options router-id 10.0.0.10
set routing-options autonomous-system 1
```

Router R2

```
set interfaces fe-1/2/0 unit 21 family inet address 10.0.12.2/24
set interfaces fe-1/2/1 unit 26 family inet address 10.0.26.1/24
set interfaces lo0 unit 20 family inet address 10.0.0.20/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.20
set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.26.2 peer-as 2
set protocols ospf area 0.0.0.0 interface lo0.20 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.21
set protocols ospf area 0.0.0.0 interface fe-1/2/1.28
set policy-options policy-statement set_nh_self then next-hop self
set routing-options autonomous-system 1
```

Router R3

```
set interfaces fe-1/0/1 unit 31 family inet address 10.0.13.2/24
set interfaces fe-1/0/2 unit 37 family inet address 10.0.37.1/24
set interfaces lo0 unit 30 family inet address 10.0.0.30/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.30
set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.37.2 peer-as 2
set protocols ospf area 0.0.0.0 interface lo0.30 passive
set protocols ospf area 0.0.0.0 interface fe-1/0/1.31
set protocols ospf area 0.0.0.0 interface fe-1/0/2.37
set policy-options policy-statement set_nh_self then next-hop self
set routing-options autonomous-system 1
```

Router R4

```
set interfaces fe-1/2/0 unit 41 family inet address 10.0.14.2/24
set interfaces fe-1/2/1 unit 48 family inet address 10.0.48.1/24
set interfaces lo0 unit 40 family inet address 10.0.0.40/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.40
set protocols bgp group rr family inet unicast add-path receive
set protocols bgp group rr neighbor 10.0.0.10
set protocols bgp group rr_client type internal
set protocols bgp group rr_client local-address 10.0.0.40
set protocols bgp group rr_client cluster 10.0.0.40
set protocols bgp group rr_client neighbor 10.0.0.80 family inet unicast add-path send
  path-count 6
set protocols bgp group rr_client neighbor 10.0.0.80 family inet unicast add-path send
  prefix-policy allow_199
set protocols ospf area 0.0.0.0 interface fe-1/2/0.41
set protocols ospf area 0.0.0.0 interface lo0.40 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/1.48
set routing-options autonomous-system 1
set policy-options policy-statement allow_199 from route-filter 199.1.1.1/32 exact
set policy-options policy-statement allow_199 then accept
```

Copyright © 2013, Juniper Networks, Inc.

Router R5
```
set interfaces fe-1/2/0 unit 51 family inet address 10.0.15.2/24
set interfaces lo0 unit 50 family inet address 10.0.0.50/32
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.15.1 export s2b
set protocols bgp group e1 neighbor 10.0.15.1 peer-as 1
set policy-options policy-statement s2b from protocol static
set policy-options policy-statement s2b from protocol direct
set policy-options policy-statement s2b then as-path-expand 2
set policy-options policy-statement s2b then accept
set routing-options autonomous-system 2
set routing-options static route 199.1.1.1/32 reject
set routing-options static route 198.1.1.1/32 reject
```

Router R6
```
set interfaces fe-1/2/0 unit 62 family inet address 10.0.26.2/24
set interfaces lo0 unit 60 family inet address 10.0.0.60/32
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.26.1 export s2b
set protocols bgp group e1 neighbor 10.0.26.1 peer-as 1
set policy-options policy-statement s2b from protocol static
set policy-options policy-statement s2b from protocol direct
set policy-options policy-statement s2b then accept
set routing-options autonomous-system 2
set routing-options static route 199.1.1.1/32 reject
set routing-options static route 198.1.1.1/32 reject
```

Router R7
```
set interfaces fe-1/2/0 unit 73 family inet address 10.0.37.2/24
set interfaces lo0 unit 70 family inet address 10.0.0.70/32
set policy-options policy-statement s2b from protocol static
set policy-options policy-statement s2b from protocol direct
set policy-options policy-statement s2b then accept
set protocols bgp group e1 type external
set protocols bgp group e1 neighbor 10.0.37.1 export s2b
set protocols bgp group e1 neighbor 10.0.37.1 peer-as 1
set routing-options autonomous-system 2
set routing-options static route 199.1.1.1/32 reject
```

Router R8
```
set interfaces fe-1/2/0 unit 84 family inet address 10.0.48.2/24
set interfaces lo0 unit 80 family inet address 10.0.0.80/32
set protocols bgp group rr type internal
set protocols bgp group rr local-address 10.0.0.80
set protocols bgp group rr neighbor 10.0.0.40 family inet unicast add-path receive
set protocols ospf area 0.0.0.0 interface lo0.80 passive
set protocols ospf area 0.0.0.0 interface fe-1/2/0.84
set routing-options autonomous-system 1
```


Copyright © 2013, Juniper Networks, Inc.

Configuring Router R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router R1:

1. Configure the interfaces to Router R2, Router R3, Router R4, and Router R5, and configure the loopback (lo0) interface.

```
[edit interfaces]
user@R1# set fe-0/0/0 unit 12 family inet address 10.0.12.1/24

user@R1# set fe-0/0/1 unit 13 family inet address 10.0.13.1/24

user@R1# set fe-1/0/0 unit 14 family inet address 10.0.14.1/24

user@R1# set fe-1/2/0 unit 15 family inet address 10.0.15.1/24

user@R1#set lo0 unit 10 family inet address 10.0.0.10/32
```

2. Configure BGP on the interfaces, and configure IBGP route reflection.

```
[edit protocols bgp]
user@R1# set group rr type internal
user@R1# set group rr local-address 10.0.0.10
user@R1# set group rr cluster 10.0.0.10
user@R1# set group rr neighbor 10.0.0.20
user@R1# set group rr neighbor 10.0.0.30

user@R1# set group rr_rr type internal
user@R1# set group rr_rr local-address 10.0.0.10

user@R1# set group e1 type external
user@R1# set group e1 neighbor 10.0.15.2 local-address 10.0.15.1
user@R1# set group e1 neighbor 10.0.15.2 peer-as 2
```

3. Configure Router R1 to send up to six paths to its neighbor, Router R4.

   The destination of the paths can be any destination that Router R1 can reach through multiple paths.

```
[edit protocols bgp]
user@R1# set group rr_rr neighbor 10.0.0.40 family inet unicast add-path send
  path-count 6
```

4. Configure OSPF on the interfaces.

```
[edit protocols ospf]
user@R1# set area 0.0.0.0 interface lo0.10 passive
user@R1# set area 0.0.0.0 interface fe-0/0/0.12
user@R1# set area 0.0.0.0 interface fe-0/0/1.13
user@R1# set area 0.0.0.0 interface fe-1/0/0.14
user@R1# set area 0.0.0.0 interface fe-1/2/0.15
```

Copyright © 2013, Juniper Networks, Inc.

5. Configure the router ID and the autonomous system number.

```
[edit routing-options]
user@R1# set router-id 10.0.0.10
user@R1# set autonomous-system 1
```

6. If you are done configuring the device, commit the configuration.

```
user@R1# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-0/0/0 {
  unit 12 {
    family inet {
      address 10.0.12.1/24;
    }
  }
}
fe-0/0/1 {
  unit 13 {
    family inet {
      address 10.0.13.1/24;
    }
  }
}
fe-1/0/0 {
  unit 14 {
    family inet {
      address 10.0.14.1/24;
    }
  }
}
fe-1/2/0 {
  unit 15 {
    family inet {
      address 10.0.15.1/24;
    }
  }
}
lo0 {
  unit 10 {
    family inet {
      address 10.0.0.10/32;
    }
  }
}
```

```
user@R1# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.10;
```

 Copyright © 2013, Juniper Networks, Inc.

```
    cluster 10.0.0.10;
    neighbor 10.0.0.20;
    neighbor 10.0.0.30;
  }
  group e1 {
    type external;
    neighbor 10.0.15.2 {
      local-address 10.0.15.1;
      peer-as 2;
    }
  }
  group rr_rr {
    type internal;
    local-address 10.0.0.10;
    neighbor 10.0.0.40 {
      family inet {
        unicast {
          add-path {
            send {
              path-count 6;
            }
          }
        }
      }
    }
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.10 {
      passive;
    }
    interface fe-0/0/0.12;
    interface fe-0/0/1.13;
    interface fe-1/0/0.14;
    interface fe-1/2/0.15;
  }
}
```

```
user@R1# show routing-options
router-id 10.0.0.10;
autonomous-system 1;
```

Configuring Router R2

Step-by-Step Procedure

To configure Router R2:

1. Configure the loopback (**lo0**) interface and the interfaces to Router R6 and Router R1.

```
[edit interfaces]
user@R2# set fe-1/2/0 unit 21 family inet address 10.0.12.2/24

user@R2# set fe-1/2/1 unit 26 family inet address 10.0.26.1/24

user@R2# set lo0 unit 20 family inet address 10.0.0.20/32
```

2. Configure BGP and OSPF on Router R2's interfaces.

```
[edit protocols]
user@R2# set bgp group rr type internal
user@R2# set bgp group rr local-address 10.0.0.20

user@R2# set bgp group e1 type external
user@R2# set bgp group e1 neighbor 10.0.26.2 peer-as 2

user@R2# set ospf area 0.0.0.0 interface lo0.20 passive
user@R2# set ospf area 0.0.0.0 interface fe-1/2/0.21
user@R2# set ospf area 0.0.0.0 interface fe-1/2/1.28
```

3. For routes sent from Router R2 to Router R1, advertise Router R2 as the next hop, because Router R1 does not have a route to Router R6's address on the 10.0.26.0/24 network.

```
[edit]
user@R2# set policy-options policy-statement set_nh_self then next-hop self
user@R2# set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
```

4. Configure the autonomous system number.

```
[edit]
user@R2# set routing-options autonomous-system 1
```

5. If you are done configuring the device, commit the configuration.

```
user@R2# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
fe-1/2/0 {
    unit 21 {
        family inet {
            address 10.0.12.2/24;
        }
    }
}
fe-1/2/1 {
    unit 26 {
        family inet {
            address 10.0.26.1/24;
        }
    }
}
lo0 {
    unit 20 {
        family inet {
            address 10.0.0.20/32;
        }
    }
```

 Copyright © 2013, Juniper Networks, Inc.

```
}

user@R2# show policy-options
policy-statement set_nh_self {
  then {
    next-hop self;
  }
}

user@R2# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.20;
    neighbor 10.0.0.10 {
      export set_nh_self;
    }
  }
  group e1 {
    type external;
    neighbor 10.0.26.2 {
      peer-as 2;
    }
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.20 {
      passive;
    }
    interface fe-1/2/0.21;
    interface fe-1/2/1.28;
  }
}

user@R2# show routing-options
autonomous-system 1;
```

Configuring Router R3

Step-by-Step Procedure

To configure Router R3:

1. Configure the loopback (**lo0**) interface and the interfaces to Router R7 and Router R1.

```
[edit interfaces]
user@R3# set fe-1/0/1 unit 31 family inet address 10.0.13.2/24

user@R3# set fe-1/0/2 unit 37 family inet address 10.0.37.1/24

user@R3# set lo0 unit 30 family inet address 10.0.0.30/32
```

2. Configure BGP and OSPF on Router R3's interfaces.

```
[edit protocols]
user@R3# set bgp group rr type internal
user@R3# set bgp group rr local-address 10.0.0.30
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R3# set bgp group e1 type external
user@R3# set bgp group e1 neighbor 10.0.37.2 peer-as 2


user@R3# set ospf area 0.0.0.0 interface lo0.30 passive
user@R3# set ospf area 0.0.0.0 interface fe-1/0/1.31
user@R3# set ospf area 0.0.0.0 interface fe-1/0/2.37
```

3. For routes sent from Router R3 to Router R1, advertise Router R3 as the next hop, because Router R1 does not have a route to Router R7's address on the 10.0.37.0/24 network.

```
[edit]
user@R3# set policy-options policy-statement set_nh_self then next-hop self
user@R3# set protocols bgp group rr neighbor 10.0.0.10 export set_nh_self
```

4. Configure the autonomous system number.

```
[edit]
user@R3# set routing-options autonomous-system 1
```

5. If you are done configuring the device, commit the configuration.

```
user@R3# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
fe-1/0/1 {
    unit 31 {
        family inet {
            address 10.0.13.2/24;
        }
    }
}
fe-1/0/2 {
    unit 37 {
        family inet {
            address 10.0.37.1/24;
        }
    }
}
lo0 {
    unit 30 {
        family inet {
            address 10.0.0.30/32;
        }
    }
}
```

```
user@R3# show policy-options
policy-statement set_nh_self {
    then {
        next-hop self;
    }
```


Copyright © 2013, Juniper Networks, Inc.

```
}
user@R3# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.30;
    neighbor 10.0.0.10 {
      export set_nh_self;
    }
  }
  group e1 {
    type external;
    neighbor 10.0.37.2 {
      peer-as 2;
    }
  }
}
  ospf {
    area 0.0.0.0 {
      interface lo0.30 {
        passive;
      }
      interface fe-1/0/1.31;
      interface fe-1/0/2.37;
    }
  }
user@R3# show routing-options
autonomous-system 1;
```

Configuring Router R4

Step-by-Step Procedure

To configure Router R4:

1. Configure the interfaces to Router R1 and Router R8, and configure the loopback (**lo0**) interface.

```
[edit interfaces]
user@R4# set fe-1/2/0 unit 41 family inet address 10.0.14.2/24

user@R4# set fe-1/2/1 unit 48 family inet address 10.0.48.1/24

user@R4# set lo0 unit 40 family inet address 10.0.0.40/32
```

2. Configure BGP on the interfaces, and configure IBGP route reflection.

```
[edit protocols bgp]
user@R4# set group rr type internal
user@R4# set group rr local-address 10.0.0.40
user@R4# set group rr neighbor 10.0.0.10

user@R4# set group rr_client type internal
user@R4# set group rr_client local-address 10.0.0.40
user@R4# set group rr_client cluster 10.0.0.40
```

Copyright © 2013, Juniper Networks, Inc.

3. Configure Router R4 to send up to six paths to its neighbor, Router R8.

   The destination of the paths can be any destination that Router R4 can reach through multiple paths.

   ```
   [edit protocols bgp]
   user@R4# set group rr_client neighbor 10.0.0.80 family inet unicast add-path send
     path-count 6
   ```

4. Configure Router R4 to receive multiple paths from its neighbor, Router R1.

   The destination of the paths can be any destination that Router R1 can reach through multiple paths.

   ```
   [edit protocols bgp]
   user@R4# set group rr family inet unicast add-path receive
   ```

5. Configure OSPF on the interfaces.

   ```
   [edit protocols ospf]
   user@R4# set area 0.0.0.0 interface fe-1/2/0.41
   user@R4# set area 0.0.0.0 interface lo0.40 passive
   user@R4# set area 0.0.0.0 interface fe-1/2/1.48
   ```

6. Configure a policy that allows Router R4 to send Router R8 multiple paths to the 199.1.1.1/32 route.

   Router R4 receives multiple paths for the 198.1.1.1/32 route and the 199.1.1.1/32 route. However, because of this policy, Router R4 only sends multiple paths for the 199.1.1.1/32 route.

   ```
   [edit]
   user@R4# set protocols bgp group rr_client neighbor 10.0.0.80 family inet unicast
     add-path send prefix-policy allow_199
   user@R4# set policy-options policy-statement allow_199 from route-filter 199.1.1.1/32
     exact
   user@R4# set policy-options policy-statement allow_199 then accept
   ```

7. Configure the autonomous system number.

   ```
   [edit routing-options]
   user@R4# set autonomous-system 1
   ```

8. If you are done configuring the device, commit the configuration.

   ```
   user@R4# commit
   ```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
fe-1/2/0 {
  unit 41 {
    family inet {
      address 10.0.14.2/24;
    }
```

 Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  fe-1/2/1 {
    unit 48 {
      family inet {
        address 10.0.48.1/24;
      }
    }
  }
  lo0 {
    unit 40 {
      family inet {
        address 10.0.0.40/32;
      }
    }
  }
```

```
user@R4# show policy-options
policy-statement allow_199 {
  from {
    route-filter 199.1.1.1/32 exact;
  }
  then accept;
}
```

```
user@R4# show protocols
bgp {
  group rr {
    type internal;
    local-address 10.0.0.40;
    family inet {
      unicast {
        add-path {
          receive;
        }
      }
    }
    neighbor 10.0.0.10;
  }
  group rr_client {
    type internal;
    local-address 10.0.0.40;
    cluster 10.0.0.40;
    neighbor 10.0.0.80 {
      family inet {
        unicast {
          add-path {
            send {
              path-count 6;
              prefix-policy allow_199;
            }
          }
        }
      }
    }
  }
}
```

Copyright © 2013, Juniper Networks, Inc.

```
ospf {
  area 0.0.0.0 {
    interface lo0.40 {
      passive;
    }
    interface fe-1/2/0.41;
    interface fe-1/2/1.48;
  }
}
```

```
user@R4# show routing-options
autonomous-system 1;
```

Configuring Router R5

Step-by-Step Procedure

To configure Router R5:

1. Configure the loopback (**lo0**) interface and the interface to Router R1.

   ```
   [edit interfaces]
   user@R5# set fe-1/2/0 unit 51 family inet address 10.0.15.2/24


   user@R5# set lo0 unit 50 family inet address 10.0.0.50/32
   ```

2. Configure BGP on Router R5's interface.

   ```
   [edit protocols]
   user@R5# set bgp group e1 type external
   user@R5# set bgp group e1 neighbor 10.0.15.1 peer-as 1
   ```

3. Create static routes for redistribution into BGP.

   ```
   [edit]
   user@R5# set routing-options static route 199.1.1.1/32 reject
   user@R5# set routing-options static route 198.1.1.1/32 reject
   ```

4. Redistribute static and direct routes into BGP.

   ```
   [edit]
   user@R5# set protocols bgp group e1 neighbor 10.0.15.1 export s2b
   user@R5# set policy-options policy-statement s2b from protocol static
   user@R5# set policy-options policy-statement s2b from protocol direct
   user@R5# set policy-options policy-statement s2b then as-path-expand 2
   user@R5# set policy-options policy-statement s2b then accept
   ```

5. Configure the autonomous system number.

   ```
   [edit]
   user@R5# set routing-options autonomous-system 2
   ```

6. If you are done configuring the device, commit the configuration.

   ```
   user@R5# commit
   ```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Copyright © 2013, Juniper Networks, Inc.

```
user@R5# show interfaces
fe-1/2/0 {
    unit 51 {
        family inet {
            address 10.0.15.2/24;
        }
    }
}
lo0 {
    unit 50 {
        family inet {
            address 10.0.0.50/32;
        }
    }
}
```

```
user@R5# show policy-options
policy-statement s2b {
    from protocol [ static direct ];
    then {
        as-path-expand 2;
        accept;
    }
}
```

```
user@R5# show protocols
bgp {
    group e1 {
        type external;
        neighbor 10.0.15.1 {
            export s2b;
            peer-as 1;
        }
    }
}
```

```
user@R5# show routing-options
static {
    route 198.1.1.1/32 reject;
    route 199.1.1.1/32 reject;
}
autonomous-system 2;
```

Configuring Router R6

Step-by-Step Procedure

To configure Router R6:

1. Configure the loopback (**lo0**) interface and the interface to Router R2.

```
[edit interfaces]
user@R6# set fe-1/2/0 unit 62 family inet address 10.0.26.2/24

user@R6# set lo0 unit 60 family inet address 10.0.0.60/32
```

2. Configure BGP on Router R6's interface.

```
[edit protocols]
user@R6# set bgp group e1 type external
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R6# set bgp group e1 neighbor 10.0.26.1 peer-as 1
```

3. Create static routes for redistribution into BGP.

```
[edit]
user@R6# set routing-options static route 199.1.1.1/32 reject
user@R6# set routing-options static route 198.1.1.1/32 reject
```

4. Redistribute static and direct routes from Router R6's routing table into BGP.

```
[edit]
user@R6# set protocols bgp group e1 neighbor 10.0.26.1 export s2b
user@R6# set policy-options policy-statement s2b from protocol static
user@R6# set policy-options policy-statement s2b from protocol direct
user@R6# set policy-options policy-statement s2b then accept
```

5. Configure the autonomous system number.

```
[edit]
user@R6# set routing-options autonomous-system 2
```

6. If you are done configuring the device, commit the configuration.

```
user@R6# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R6# show interfaces
fe-1/2/0 {
    unit 62 {
        family inet {
            address 10.0.26.2/24;
        }
    }
}
lo0 {
    unit 60 {
        family inet {
            address 10.0.0.60/32;
        }
    }
}
```

```
user@R6# show policy-options
policy-statement s2b {
    from protocol [ static direct ];
    then accept;
}
```

```
user@R6# show protocols
bgp {
    group e1 {
        type external;
        neighbor 10.0.26.1 {
            export s2b;
```

 Copyright © 2013, Juniper Networks, Inc.

```
        peer-as 1;
      }
    }
  }
user@R6# show routing-options
static {
  route 198.1.1.1/32 reject;
  route 199.1.1.1/32 reject;
}
autonomous-system 2;
```

Configuring Router R7

Step-by-Step Procedure

To configure Router R7:

1. Configure the loopback (**lo0**) interface and the interface to Router R3.

```
[edit interfaces]
user@R7# set fe-1/2/0 unit 73 family inet address 10.0.37.2/24

user@R7# set lo0 unit 70 family inet address 10.0.0.70/32
```

2. Configure BGP on Router R7's interface.

```
[edit protocols]
user@R7# set bgp group e1 type external
user@R7# set bgp group e1 neighbor 10.0.37.1 peer-as 1
```

3. Create a static route for redistribution into BGP.

```
[edit]
user@R7# set routing-options static route 199.1.1.1/32 reject
```

4. Redistribute static and direct routes from Router R7's routing table into BGP.

```
[edit]
user@R7# set protocols bgp group e1 neighbor 10.0.37.1 export s2b
user@R7# set policy-options policy-statement s2b from protocol static
user@R7# set policy-options policy-statement s2b from protocol direct
user@R7# set policy-options policy-statement s2b then accept
```

5. Configure the autonomous system number.

```
[edit]
user@R7# set routing-options autonomous-system 2
```

6. If you are done configuring the device, commit the configuration.

```
user@R7# commit
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R7# show interfaces
fe-1/2/0 {
```

Copyright © 2013, Juniper Networks, Inc.

```
    unit 73 {
      family inet {
        address 10.0.37.2/24;
      }
    }
  }
  lo0 {
    unit 70 {
      family inet {
        address 10.0.0.70/32;
      }
    }
  }
```

```
user@R7# show policy-options
policy-statement s2b {
  from protocol [ static direct ];
  then accept;
}
```

```
user@R7# show protocols
bgp {
  group e1 {
    type external;
    neighbor 10.0.37.1 {
      export s2b;
      peer-as 1;
    }
  }
}
```

```
user@R7# show routing-options
static {
  route 199.1.1.1/32 reject;
}
autonomous-system 2;
```

Configuring Router R8

Step-by-Step Procedure

To configure Router R8:

1. Configure the loopback (**lo0**) interface and the interface to Router R4.

```
[edit interfaces]
user@R8# set fe-1/2/0 unit 84 family inet address 10.0.48.2/24

user@R8# set lo0 unit 80 family inet address 10.0.0.80/32
```

2. Configure BGP and OSPF on Router R8's interface.

```
[edit protocols]
user@R8# set bgp group rr type internal
user@R8# set bgp group rr local-address 10.0.0.80

user@R8# set ospf area 0.0.0.0 interface lo0.80 passive
user@R8# set ospf area 0.0.0.0 interface fe-1/2/0.84
```


Copyright © 2013, Juniper Networks, Inc.

3. Configure Router R8 to receive multiple paths from its neighbor, Router R4.

   The destination of the paths can be any destination that Router R4 can reach through multiple paths.

   ```
   [edit protocols]
   user@R8# set bgp group rr neighbor 10.0.0.40 family inet unicast add-path receive
   ```

4. Configure the autonomous system number.

   ```
   [edit]
   user@R8# set routing-options autonomous-system 1
   ```

5. If you are done configuring the device, commit the configuration.

   ```
   user@R8# commit
   ```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R8# show interfaces
fe-1/2/0 {
   unit 84 {
      family inet {
         address 10.0.48.2/24;
      }
   }
}
lo0 {
   unit 80 {
      family inet {
         address 10.0.0.80/32;
      }
   }
}
```

```
user@R8# show protocols
bgp {
   group rr {
      type internal;
      local-address 10.0.0.80;
      neighbor 10.0.0.40 {
         family inet {
            unicast {
               add-path {
                  receive;
               }
            }
         }
      }
   }
}
ospf {
   area 0.0.0.0 {
```

```
        interface lo0.80 {
          passive;
        }
        interface fe-1/2/0.84;
      }
    }
```

```
user@R8# show routing-options
autonomous-system 1;
```

Verification

Confirm that the configuration is working properly.

- Verifying That the BGP Peers Have the Ability to Send and Receive Multiple Paths on page 314
- Verifying That Router R1 Is Advertising Multiple Paths on page 315
- Verifying That Router R4 Is Receiving and Advertising Multiple Paths on page 315
- Verifying That Router R8 Is Receiving Multiple Paths on page 316
- Checking the Path ID on page 317

Verifying That the BGP Peers Have the Ability to Send and Receive Multiple Paths

Purpose Make sure that one or both of the following strings appear in the output of the **show bgp neighbor** command:

- **NLRI's for which peer can receive multiple paths: inet-unicast**
- **NLRI's for which peer can send multiple paths: inet-unicast**

Copyright © 2013, Juniper Networks, Inc.

Action

```
user@R1> show bgp neighbor 10.0.0.40
Peer: 10.0.0.40+179 AS 1       Local: 10.0.0.10+65237 AS 1
  Type: Internal    State: Established    Flags: <Sync>
...  NLRI's for which peer can receive multiple paths: inet-unicast
...

user@R4> show bgp neighbor 10.0.0.10
Peer: 10.0.0.10+65237 AS 1     Local: 10.0.0.40+179 AS 1
  Type: Internal    State: Established    Flags: <Sync>
...
  NLRI's for which peer can send multiple paths: inet-unicast
...

user@R4> show bgp neighbor 10.0.0.80
Peer: 10.0.0.80+55416 AS 1     Local: 10.0.0.40+179 AS 1
  Type: Internal    State: Established  (route reflector client)Flags: <Sync>
  ,,,
  NLRI's for which peer can receive multiple paths: inet-unicast
  ...

user@R8> show bgp neighbor 10.0.0.40
Peer: 10.0.0.40+179 AS 1       Local: 10.0.0.80+55416 AS 1
  Type: Internal    State: Established    Flags: <Sync>
  ...
  NLRI's for which peer can send multiple paths: inet-unicast
  ...
```

Verifying That Router R1 Is Advertising Multiple Paths

Purpose Make sure that multiple paths to the 198.1.1.1/32 destination and multiple paths to the 199.1.1.1/32 destination are advertised to Router R4.

Action

```
user@R1> show route advertising-protocol bgp 10.0.0.40
inet.0: 21 destinations, 25 routes (21 active, 0 holddown, 0 hidden)
  Prefix                 Nexthop              MED     Lclpref    AS path
* 10.0.0.50/32           10.0.15.2                    100        2 2 I
* 10.0.0.60/32           10.0.0.20                    100        2 I
* 10.0.0.70/32           10.0.0.30                    100        2 I
* 198.1.1.1/32           10.0.0.20                    100        2 I
                         10.0.15.2                    100        2 2 I
* 199.1.1.1/32           10.0.0.20                    100        2 I
                         10.0.0.30                    100        2 I
                         10.0.15.2                    100        2 2 I
* 200.1.1.0/30           10.0.0.20                    100        2 I
```

Meaning When you see one prefix and more than one next hop, it means that multiple paths are advertised to Router R4.

Verifying That Router R4 Is Receiving and Advertising Multiple Paths

Purpose Make sure that multiple paths to the 199.1.1.1/32 destination are received from Router R1 and advertised to Router R8. Make sure that multiple paths to the 198.1.1.1/32 destination are received from Router R1, but only one path to this destination is advertised to Router R8.

Copyright © 2013, Juniper Networks, Inc.

Action

```
user@R4> show route receive-protocol bgp 10.0.0.10
inet.0: 19 destinations, 22 routes (19 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.0.0.50/32            10.0.15.2                    100        2 2 I
* 10.0.0.60/32            10.0.0.20                    100        2 I
* 10.0.0.70/32            10.0.0.30                    100        2 I
* 198.1.1.1/32            10.0.0.20                    100        2 I
                          10.0.15.2                    100        2 2 I
* 199.1.1.1/32            10.0.0.20                    100        2 I
                          10.0.0.30                    100        2 I
                          10.0.15.2                    100        2 2 I
* 200.1.1.0/30            10.0.0.20                    100        2 I
```

```
user@R4> show route advertising-protocol bgp 10.0.0.80
inet.0: 19 destinations, 22 routes (19 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.0.0.50/32            10.0.15.2                    100        2 2 I
* 10.0.0.60/32            10.0.0.20                    100        2 I
* 10.0.0.70/32            10.0.0.30                    100        2 I
* 198.1.1.1/32            10.0.0.20                    100        2 I
* 199.1.1.1/32            10.0.0.20                    100        2 I
                          10.0.0.30                    100        2 I
                          10.0.15.2                    100        2 2 I
* 200.1.1.0/30            10.0.0.20                    100        2 I
```

Meaning The **show route receive-protocol** command shows that Router R4 receives two paths to the 198.1.1.1/32 destination and three paths to the 199.1.1.1/32 destination. The **show route advertising-protocol** command shows that Router R4 advertises only one path to the 198.1.1.1/32 destination and advertises all three paths to the 199.1.1.1/32 destination.

Because of the prefix policy that is applied to Router R4, Router R4 does not advertise multiple paths to the 198.1.1.1/32 destination. Router R4 advertises only one path to the 198.1.1.1/32 destination even though it receives multiple paths to this destination.

Verifying That Router R8 Is Receiving Multiple Paths

Purpose Make sure that Router R8 receives multiple paths to the 199.1.1.1/32 destination through Router R4. Make sure that Router R8 receives only one path to the 198.1.1.1/32 destination through Router R4.

Copyright © 2013, Juniper Networks, Inc.

Action

```
user@R8> show route receive-protocol bgp 10.0.0.40
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 10.0.0.50/32            10.0.15.2                    100        2 2 I
* 10.0.0.60/32            10.0.0.20                    100        2 I
* 10.0.0.70/32            10.0.0.30                    100        2 I
* 198.1.1.1/32            10.0.0.20                    100        2 I
* 199.1.1.1/32            10.0.0.20                    100        2 I
                          10.0.0.30                    100        2 I
                          10.0.15.2                    100        2 2 I
* 200.1.1.0/30            10.0.0.20                    100        2 I
```

Checking the Path ID

Purpose On the downstream devices, Router R4 and Router R8, verify that a path ID uniquely identifies the path. Look for the **Addpath Path ID:** string.

Copyright © 2013, Juniper Networks, Inc.

Action `user@R4>` **show route 199.1.1.1/32 detail**

```
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
199.1.1.1/32 (3 entries, 3 announced)
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 9
                Source: 10.0.0.10
                Next hop type: Router, Next hop index: 676
                Next hop: 10.0.14.1 via lt-1/2/0.41, selected
                Protocol next hop: 10.0.0.20
                Indirect next hop: 92041c8 262146
                State: <Active Int Ext>
                Local AS:     1 Peer AS:     1
                Age: 1:44:37    Metric2: 2
                Task: BGP_1.10.0.0.10+65237
                Announcement bits (3): 2-KRT 3-BGP RT Background 4-Resolve tree
1
                AS path: 2 I (Originator) Cluster list:  10.0.0.10
                AS path:  Originator ID: 10.0.0.20
                Accepted
                Localpref: 100
                Router ID: 10.0.0.10
                Addpath Path ID: 1
         BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 4
                Source: 10.0.0.10
                Next hop type: Router, Next hop index: 676
                Next hop: 10.0.14.1 via lt-1/2/0.41, selected
                Protocol next hop: 10.0.0.30
                Indirect next hop: 92042ac 262151
                State: <NotBest Int Ext>
                Inactive reason: Not Best in its group - Router ID
                Local AS:     1 Peer AS:     1
                Age: 1:44:37    Metric2: 2
                Task: BGP_1.10.0.0.10+65237
                Announcement bits (1): 3-BGP RT Background
                AS path: 2 I (Originator) Cluster list:  10.0.0.10
                AS path:  Originator ID: 10.0.0.30
                Accepted
                Localpref: 100
                Router ID: 10.0.0.10
                Addpath Path ID: 2
         BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 4
                Source: 10.0.0.10
                Next hop type: Router, Next hop index: 676
                Next hop: 10.0.14.1 via lt-1/2/0.41, selected
                Protocol next hop: 10.0.15.2
                Indirect next hop: 92040e4 262150
                State: <Int Ext>
                Inactive reason: AS path
                Local AS:     1 Peer AS:     1
                Age: 1:44:37    Metric2: 2
                Task: BGP_1.10.0.0.10+65237
                Announcement bits (1): 3-BGP RT Background
                AS path: 2 2 I
                Accepted
                Localpref: 100
```


Copyright © 2013, Juniper Networks, Inc.

```
                Router ID: 10.0.0.10
                Addpath Path ID: 3

user@R8> show route 199.1.1.1/32 detail

inet.0: 17 destinations, 19 routes (17 active, 0 holddown, 0 hidden)
199.1.1.1/32 (3 entries, 1 announced)
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 9
                Source: 10.0.0.40
                Next hop type: Router, Next hop index: 1045
                Next hop: 10.0.48.1 via lt-1/2/0.84, selected
                Protocol next hop: 10.0.0.20
                Indirect next hop: 91fc0e4 262148
                State: <Active Int Ext>
                Local AS:     1 Peer AS:     1
                Age: 1:56:51    Metric2: 3
                Task: BGP_1.10.0.0.40+179
                Announcement bits (2): 2-KRT 4-Resolve tree 1
                AS path: 2 I (Originator) Cluster list:  10.0.0.40 10.0.0.10
                AS path:  Originator ID: 10.0.0.20
                Accepted
                Localpref: 100
                Router ID: 10.0.0.40
                Addpath Path ID: 1
         BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 4
                Source: 10.0.0.40
                Next hop type: Router, Next hop index: 1045
                Next hop: 10.0.48.1 via lt-1/2/0.84, selected
                Protocol next hop: 10.0.0.30
                Indirect next hop: 91fc1c8 262152
                State: <NotBest Int Ext>
                Inactive reason: Not Best in its group - Router ID
                Local AS:     1 Peer AS:     1
                Age: 1:56:51    Metric2: 3
                Task: BGP_1.10.0.0.40+179
                AS path: 2 I (Originator) Cluster list:  10.0.0.40 10.0.0.10
                AS path:  Originator ID: 10.0.0.30
                Accepted
                Localpref: 100
                Router ID: 10.0.0.40
                Addpath Path ID: 2
         BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 4
                Source: 10.0.0.40
                Next hop type: Router, Next hop index: 1045
                Next hop: 10.0.48.1 via lt-1/2/0.84, selected
                Protocol next hop: 10.0.15.2
                Indirect next hop: 91fc2ac 262153
                State: <Int Ext>
                Inactive reason: AS path
                Local AS:     1 Peer AS:     1
                Age: 1:56:51    Metric2: 3
                Task: BGP_1.10.0.0.40+179
                AS path: 2 2 I (Originator) Cluster list:  10.0.0.40
                AS path:  Originator ID: 10.0.0.10
                Accepted
```

Copyright © 2013, Juniper Networks, Inc.

```
Localpref: 100
Router ID: 10.0.0.40
Addpath Path ID: 3
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 8

IBGP Scaling Configuration

- Example: Configuring BGP Route Reflectors on page 321
- Example: Configuring a Route Reflector that Belongs to Two Different Clusters on page 338
- Example: Configuring BGP Confederations on page 343

Example: Configuring BGP Route Reflectors

- Understanding BGP Route Reflectors on page 321
- Example: Configuring a Route Reflector on page 323

Understanding BGP Route Reflectors

Because of the internal BGP (IBGP) full-mesh requirement, most networks use route reflectors to simplify configuration. The formula to compute the number of sessions required for a full mesh is v * (v - 1)/2, where v is the number of BGP-enabled devices. The full-mesh model does not scale well. Using a route reflector, you group routers into clusters, which are identified by numeric identifiers unique to the autonomous system (AS). Within the cluster, you must configure a BGP session from a single router (the route reflector) to each internal peer. With this configuration, the IBGP full-mesh requirement is met.

To use route reflection in an AS, you designate one or more routers as a route reflector—typically, one per point of presence (POP). Route reflectors have the special BGP ability to readvertise routes learned from an internal peer to other internal peers. So rather than requiring all internal peers to be fully meshed with each other, route reflection requires only that the route reflector be fully meshed with all internal peers. The route reflector and all of its internal peers form a cluster, as shown in Figure 30 on page 322.

NOTE: For some Juniper Networks devices, you must have an Advanced BGP Feature license installed on each device that uses a route reflector. For license details, see the *Junos OS Initial Configuration Guide for Security Devices*.

Copyright © 2013, Juniper Networks, Inc.

Figure 30: Simple Route Reflector Topology (One Cluster)

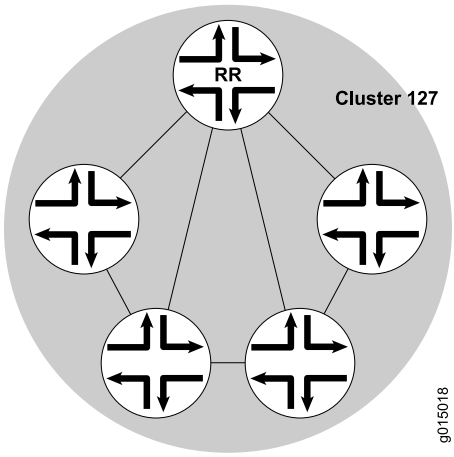

Figure 30 on page 322 shows Router RR configured as the route reflector for Cluster 127. The other routers are designated internal peers within the cluster. BGP routes are advertised to Router RR by any of the internal peers. RR then readvertises those routes to all other peers within the cluster.

You can configure multiple clusters and link them by configuring a full mesh of route reflectors (see Figure 31 on page 322).

Figure 31: Basic Route Reflection (Multiple Clusters)

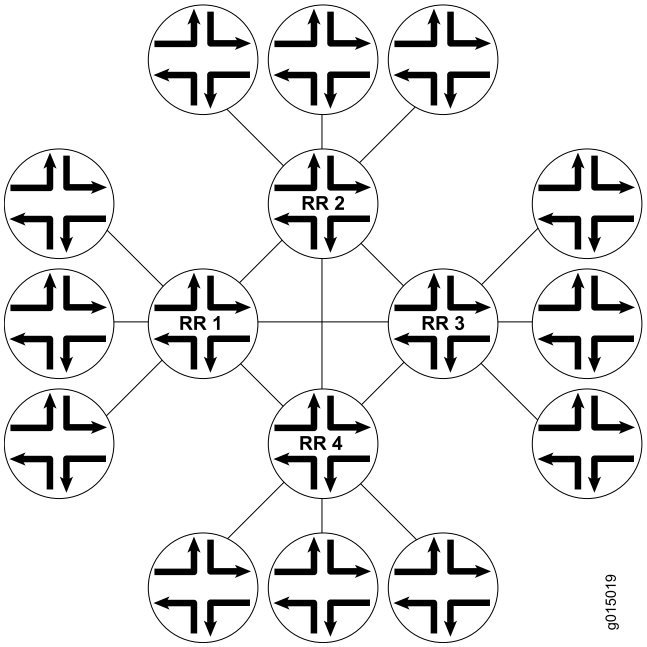

Figure 31 on page 322 shows Route Reflectors RR 1, RR 2, RR 3, and RR 4 as fully meshed internal peers. When a router advertises a route to RR 1, RR 1 readvertises the route to the other route reflectors, which, in turn, readvertise the route to the remaining routers within the AS. Route reflection allows the route to be propagated throughout the AS without the scaling problems created by the full mesh requirement.

Copyright © 2013, Juniper Networks, Inc.

However, as clusters become large, a full mesh with a route reflector becomes difficult to scale, as does a full mesh between route reflectors. To help offset this problem, you can group clusters of routers together into clusters of clusters for hierarchical route reflection (see Figure 32 on page 323).

Figure 32: Hierarchical Route Reflection (Clusters of Clusters)

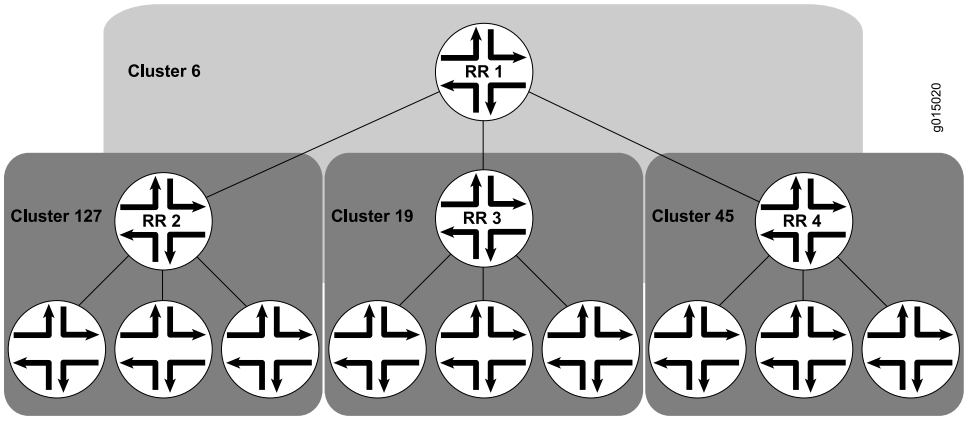

Figure 32 on page 323 shows RR 2, RR 3, and RR 4 as the route reflectors for Clusters 127, 19, and 45, respectively. Rather than fully mesh those route reflectors, the network administrator has configured them as part of another cluster (Cluster 6) for which RR 1 is the route reflector. When a router advertises a route to RR 2, RR 2 readvertises the route to all the routers within its own cluster, and then readvertises the route to RR 1. RR 1 readvertises the route to the routers in its cluster, and those routers propagate the route down through their clusters.

Example: Configuring a Route Reflector

This example shows how to configure a route reflector.

- Requirements on page 323
- Overview on page 323
- Configuration on page 325
- Verification on page 333

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

Generally, internal BGP (IBGP)-enabled devices need to be fully meshed, because IBGP does not readvertise updates to other IBGP-enabled devices. The full mesh is a logical mesh achieved through configuration of multiple **neighbor** statements on each IBGP-enabled device. The full mesh is not necessarily a physical full mesh. Maintaining a full mesh (logical or physical) does not scale well in large deployments.

Copyright © 2013, Juniper Networks, Inc.

Figure 33 on page 325 shows an IBGP network with Device A acting as a route reflector. Device B and Device C are clients of the route reflector. Device D and Device E are outside the cluster, so they are nonclients of the route reflector.

On Device A (the route reflector), you must form peer relationships with all of the IBGP-enabled devices by including the **neighbor** statement for the clients (Device B and Device C) and the nonclients (Device D and Device E). You must also include the **cluster** statement and a cluster identifier. The cluster identifier can be any 32-bit value. This example uses the loopback interface IP address of the route reflector.

On Device B and Device C, the route reflector clients, you only need one **neighbor** statement that forms a peer relationship with the route reflector, Device A.

On Device D and Device E, the nonclients, you need a **neighbor** statement for each nonclient device (D-to-E and E-to-D). You also need a **neighbor** statement for the route reflector (D-to-A and E-to-A). Device D and Device E do not need **neighbor** statements for the client devices (Device B and Device C).

TIP: Device D and Device E are considered to be nonclients because they have explicitly configured peer relationships with each other. To make them RRroute reflector clients, remove the neighbor 192.168.5.5 statement from the configuration on Device D, and remove the neighbor 192.168.0.1 statement from the configuration on Device E.

Copyright © 2013, Juniper Networks, Inc.

Figure 33: IBGP Network Using a Route Reflector

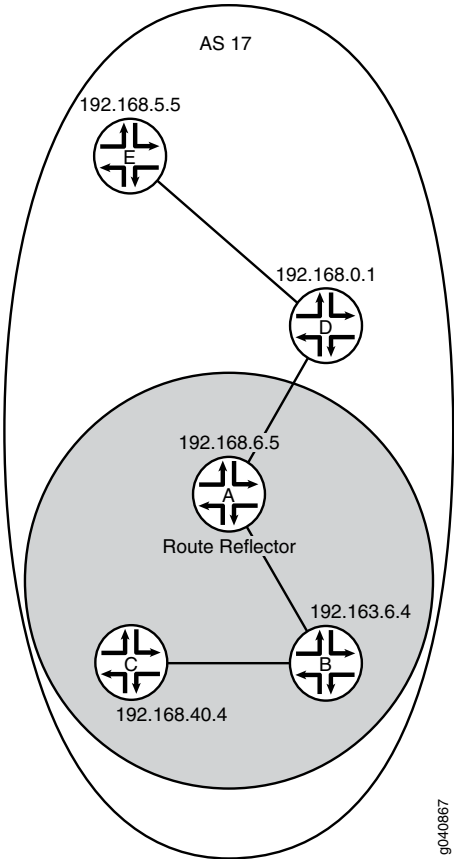

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set interfaces fe-0/0/0 unit 1 description to-B
set interfaces fe-0/0/0 unit 1 family inet address 10.10.10.1/30
set interfaces fe-0/0/1 unit 3 description to-D
set interfaces fe-0/0/1 unit 3 family inet address 10.10.10.9/30
set interfaces lo0 unit 1 family inet address 192.168.6.5/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.6.5
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers cluster 192.168.6.5
set protocols bgp group internal-peers neighbor 192.163.6.4
set protocols bgp group internal-peers neighbor 192.168.40.4
set protocols bgp group internal-peers neighbor 192.168.0.1
set protocols bgp group internal-peers neighbor 192.168.5.5
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.1
set protocols ospf area 0.0.0.0 interface fe-0/0/1.3
set policy-options policy-statement send-ospf term 2 from protocol ospf
```

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.6.5
set routing-options autonomous-system 17
```

Device B

```
set interfaces fe-0/0/0 unit 2 description to-A
set interfaces fe-0/0/0 unit 2 family inet address 10.10.10.2/30
set interfaces fe-0/0/1 unit 5 description to-C
set interfaces fe-0/0/1 unit 5 family inet address 10.10.10.5/30
set interfaces lo0 unit 2 family inet address 192.163.6.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.163.6.4
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.2
set protocols ospf area 0.0.0.0 interface fe-0/0/1.5
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.163.6.4
set routing-options autonomous-system 17
```

Device C

```
set interfaces fe-0/0/0 unit 6 description to-B
set interfaces fe-0/0/0 unit 6 family inet address 10.10.10.6/30
set interfaces lo0 unit 3 family inet address 192.168.40.4/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.40.4
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.6
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.40.4
set routing-options autonomous-system 17
```

Device D

```
set interfaces fe-0/0/0 unit 4 description to-A
set interfaces fe-0/0/0 unit 4 family inet address 10.10.10.10/30
set interfaces fe-0/0/1 unit 7 description to-E
set interfaces fe-0/0/1 unit 7 family inet address 10.10.10.13/30
set interfaces lo0 unit 4 family inet address 192.168.0.1/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.0.1
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols bgp group internal-peers neighbor 192.168.5.5
set protocols ospf area 0.0.0.0 interface lo0.4 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.4
set protocols ospf area 0.0.0.0 interface fe-0/0/1.7
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 17
```

Device E

```
set interfaces fe-0/0/0 unit 8 description to-D
set interfaces fe-0/0/0 unit 8 family inet address 10.10.10.14/30
```


Copyright © 2013, Juniper Networks, Inc.

```
set interfaces lo0 unit 5 family inet address 192.168.5.5/32
set protocols bgp group internal-peers type internal
set protocols bgp group internal-peers local-address 192.168.5.5
set protocols bgp group internal-peers export send-ospf
set protocols bgp group internal-peers neighbor 192.168.0.1
set protocols bgp group internal-peers neighbor 192.168.6.5
set protocols ospf area 0.0.0.0 interface lo0.5 passive
set protocols ospf area 0.0.0.0 interface fe-0/0/0.8
set policy-options policy-statement send-ospf term 2 from protocol ospf
set policy-options policy-statement send-ospf term 2 then accept
set routing-options router-id 192.168.5.5
set routing-options autonomous-system 17
```

Configuring the Route Reflector

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure IBGP in the network using Juniper Networks Device A as a route reflector:

1. Configure the interfaces.

```
[edit interfaces]
user@A# set fe-0/0/0 unit 1 description to-B
user@A# set fe-0/0/0 unit 1 family inet address 10.10.10.1/30
user@A# set fe-0/0/1 unit 3 description to-D
user@A# set fe-0/0/1 unit 3 family inet address 10.10.10.9/30
user@A# set lo0 unit 1 family inet address 192.168.6.5/32
```

2. Configure BGP, including the cluster identifier and neighbor relationships with all IBGP-enabled devices in the autonomous system (AS).

   Also apply the policy that redistributes OSPF routes into BGP.

```
[edit protocols bgp group internal-peers]
user@A# set type internal
user@A# set local-address 192.168.6.5
user@A# set export send-ospf
user@A# set cluster 192.168.6.5
user@A# set neighbor192.163.6.4
user@A# set neighbor 192.168.40.4
user@A# set neighbor 192.168.0.1
user@A# set neighbor 192.168.5.5
```

3. Configure static routing or an interior gateway protocol (IGP).

   This example uses OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@A# set interface lo0.1 passive
user@A# set interface fe-0/0/0.1
user@A# set interface fe-0/0/1.3
```

4. Configure the policy that redistributes OSPF routes into BGP.

```
[edit policy-options policy-statement send-ospf term 2]
user@A# set from protocol ospf
user@A# set then accept
```

Copyright © 2013, Juniper Networks, Inc.

5. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@A# set router-id 192.168.6.5
user@A# set autonomous-system 17
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@A# show interfaces
fe-0/0/0 {
  unit 1 {
    description to-B;
    family inet {
      address 10.10.10.1/30;
    }
  }
}
fe-0/0/1 {
  unit 3 {
    description to-D;
    family inet {
      address 10.10.10.9/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 192.168.6.5/32;
    }
  }
}
```

```
user@A# show protocols
bgp {
  group internal-peers {
    type internal;
    local-address 192.168.6.5;
    export send-ospf;
    cluster 192.168.6.5;
    neighbor 192.163.6.4;
    neighbor 192.168.40.4;
    neighbor 192.168.0.1;
    neighbor 192.168.5.5;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.1 {
      passive;
    }
    interface fe-0/0/0.1;
    interface fe-0/0/1.3;
```

 Copyright © 2013, Juniper Networks, Inc.

```
  }
}
```

```
user@A# show policy-options
policy-statement send-ospf {
  term 2 {
    from protocol ospf;
    then accept;
  }
}
```

```
user@A# show routing-options
router-id 192.168.6.5;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

NOTE: Repeat these steps for each nonclient BGP peer within the cluster that you are configuring, if the other nonclient devices are from Juniper Networks. Otherwise, consult the device's documentation for instructions.

Configuring Client Peers

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure client peers:

1. Configure the interfaces.

   ```
   [edit interfaces]
   user@B# set fe-0/0/0 unit 2 description to-A
   user@B# set fe-0/0/0 unit 2 family inet address 10.10.10.2/30
   user@B# set fe-0/0/1 unit 5 description to-C
   user@B# set fe-0/0/1 unit 5 family inet address 10.10.10.5/30
   user@B# set lo0 unit 2 family inet address 192.163.6.4/32
   ```

2. Configure the BGP neighbor relationship with the route reflector.

   Also apply the policy that redistributes OSPF routes into BGP.

   ```
   [edit protocols bgp group internal-peers]
   user@B# set type internal
   user@B# set local-address 192.163.6.4
   user@B# set export send-ospf
   user@B# set neighbor 192.168.6.5
   ```

3. Configure OSPF.

   ```
   [edit protocols ospf area 0.0.0.0]
   user@B# set interface lo0.2 passive
   user@B# set interface fe-0/0/0.2
   user@B# set interface fe-0/0/1.5
   ```

4. Configure the policy that redistributes OSPF routes into BGP.

Copyright © 2013, Juniper Networks, Inc.

```
[edit policy-options policy-statement send-ospf term 2]
user@B# set from protocol ospf
user@B# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@B# set router-id 192.163.6.4
user@B# set autonomous-system 17
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
fe-0/0/0 {
  unit 2 {
    description to-A;
    family inet {
      address 10.10.10.2/30;
    }
  }
}
fe-0/0/1 {
  unit 5 {
    description to-C;
    family inet {
      address 10.10.10.5/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.163.6.4/32;
    }
  }
}
```

```
user@B# show protocols
bgp {
  group internal-peers {
    type internal;
    local-address 192.163.6.4;
    export send-ospf;
    neighbor 192.168.6.5;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.2 {
      passive;
    }
    interface fe-0/0/0.2;
    interface fe-0/0/1.5;
```

 Copyright © 2013, Juniper Networks, Inc.

```
  }
}
```

```
user@B# show policy-options
policy-statement send-ospf {
  term 2 {
    from protocol ospf;
    then accept;
  }
}
```

```
user@B# show routing-options
router-id 192.163.6.4;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

NOTE: Repeat these steps for each client BGP peer within the cluster that you are configuring if the other client devices are from Juniper Networks. Otherwise, consult the device's documentation for instructions.

Configuring Nonclient Peers

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure nonclient peers:

1. Configure the interfaces.

   ```
   [edit interfaces]
   user@D# set fe-0/0/0 unit 4 description to-A
   user@D# set fe-0/0/0 unit 4 family inet address 10.10.10.10/30
   user@D# set fe-0/0/1 unit 7 description to-E
   user@D# set fe-0/0/1 unit 7 family inet address 10.10.10.13/30
   user@D# set lo0 unit 4 family inet address 192.168.0.1/32
   ```

2. Configure the BGP neighbor relationships with the RRroute reflector and with the other nonclient peers.

   Also apply the policy that redistributes OSPF routes into BGP.

   ```
   [edit protocols bgp group internal-peers]
   user@D# set type internal
   user@D# set local-address 192.168.0.1
   user@D# set export send-ospf
   user@D# set neighbor 192.168.6.5
   user@D# set neighbor 192.168.5.5
   ```

3. Configure OSPF.

   ```
   [edit protocols ospf area 0.0.0.0]
   user@D# set interface lo0.4 passive
   user@D# set interface fe-0/0/0.4
   ```

Copyright © 2013, Juniper Networks, Inc.

```
user@D# set interface fe-0/0/1.7
```

4. Configure the policy that redistributes OSPF routes into BGP.

```
[edit policy-options policy-statement send-ospf term 2]
user@D# set from protocol ospf
user@D# set then accept
```

5. Configure the router ID and the AS number.

```
[edit routing-options]
user@D# set router-id 192.168.0.1
user@D# set autonomous-system 17
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@D# show interfaces
fe-0/0/0 {
  unit 4 {
    description to-A;
    family inet {
      address 10.10.10.10/30;
    }
  }
}
fe-0/0/1 {
  unit 7 {
    description to-E;
    family inet {
      address 10.10.10.13/30;
    }
  }
}
lo0 {
  unit 4 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}
```

```
user@D# show protocols
bgp {
  group internal-peers {
    type internal;
    local-address 192.168.0.1;
    export send-ospf;
    neighbor 192.168.6.5;
    neighbor 192.168.5.5;
  }
}
ospf {
  area 0.0.0.0 {
    interface lo0.4 {
```

 Copyright © 2013, Juniper Networks, Inc.

```
        passive;
      }
      interface fe-0/0/0.4;
      interface fe-0/0/1.7;
    }
  }
```

```
user@D# show policy-options
policy-statement send-ospf {
  term 2 {
    from protocol ospf;
    then accept;
  }
}
```

```
user@D# show routing-options
router-id 192.168.0.1;
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

NOTE: Repeat these steps for each nonclient BGP peer within the cluster that you are configuring if the other nonclient devices are from Juniper Networks. Otherwise, consult the device's documentation for instructions.

Verification

Confirm that the configuration is working properly.

- Verifying BGP Neighbors on page 333
- Verifying BGP Groups on page 336
- Verifying BGP Summary Information on page 336
- Verifying Routing Table Information on page 336

Verifying BGP Neighbors

Purpose Verify that BGP is running on configured interfaces and that the BGP session is established for each neighbor address.

Action From operational mode, enter the **show bgp neighbor** command.

```
user@A> show bgp neighbor
Peer: 192.163.6.4+179 AS 17    Local: 192.168.6.5+62857 AS 17
  Type: Internal    State: Established  (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-ospf ]
  Options: <Preference LocalAddress Cluster Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.163.6.4     Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
```

Copyright © 2013, Juniper Networks, Inc.

```
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            6
    Accepted prefixes:            1
    Suppressed due to damping:    0
    Advertised prefixes:          6
  Last traffic (seconds): Received 5    Sent 3    Checked 19
  Input messages:  Total 2961   Updates 7       Refreshes 0     Octets 56480
  Output messages: Total 2945   Updates 6       Refreshes 0     Octets 56235
  Output Queue[0]: 0

Peer: 192.168.0.1+179 AS 17    Local: 192.168.6.5+60068 AS 17
  Type: Internal    State: Established  (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-ospf ]
  Options: <Preference LocalAddress Cluster Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.0.1     Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 3
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            6
    Accepted prefixes:            1
    Suppressed due to damping:    0
    Advertised prefixes:          6
  Last traffic (seconds): Received 18   Sent 20   Checked 12
  Input messages:  Total 15     Updates 5       Refreshes 0     Octets 447
  Output messages: Total 554    Updates 4       Refreshes 0     Octets 32307
```


Copyright © 2013, Juniper Networks, Inc.

```
  Output Queue[0]: 0

Peer: 192.168.5.5+57458 AS 17  Local: 192.168.6.5+179 AS 17
  Type: Internal    State: Established  (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-ospf ]
  Options: <Preference LocalAddress Cluster Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.5.5     Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 2
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            7
    Accepted prefixes:            7
    Suppressed due to damping:    0
    Advertised prefixes:          6
  Last traffic (seconds): Received 17   Sent 3    Checked 9
  Input messages:  Total 2967   Updates 7       Refreshes 0     Octets 56629
  Output messages: Total 2943   Updates 6       Refreshes 0     Octets 56197
  Output Queue[0]: 0

Peer: 192.168.40.4+53990 AS 17 Local: 192.168.6.5+179 AS 17
  Type: Internal    State: Established  (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-ospf ]
  Options: <Preference LocalAddress Cluster Refresh>
  Local Address: 192.168.6.5 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 192.168.40.4    Local ID: 192.168.6.5       Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-unicast
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
```

Copyright © 2013, Juniper Networks, Inc.

```
  Peer supports 4 byte AS extension (peer-as 17)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            7
    Accepted prefixes:            7
    Suppressed due to damping:    0
    Advertised prefixes:          6
  Last traffic (seconds): Received 5    Sent 23   Checked 52
  Input messages:  Total 2960   Updates 7       Refreshes 0     Octets 56496
  Output messages: Total 2943   Updates 6       Refreshes 0     Octets 56197
  Output Queue[0]: 0
```

Verifying BGP Groups

Purpose Verify that the BGP groups are configured correctly.

Action From operational mode, enter the **show bgp group** command.

```
user@A> show bgp group
Group Type: Internal    AS: 17                     Local AS: 17
  Name: internal-peers  Index: 0                   Flags: <>
  Export: [ send-ospf ]
  Options: <Cluster>
  Holdtime: 0
  Total peers: 4        Established: 4
  192.163.6.4+179
  192.168.40.4+53990
  192.168.0.1+179
  192.168.5.5+57458
  inet.0: 0/26/16/0

Groups: 1  Peers: 4    External: 0    Internal: 4    Down peers: 0   Flaps: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                26          0          0          0          0          0
```

Verifying BGP Summary Information

Purpose Verify that the BGP configuration is correct.

Action From operational mode, enter the **show bgp summary** command.

```
user@A> show bgp summary

Groups: 1 Peers: 4 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                26          0          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
192.163.6.4              17       2981       2965       0       0    22:19:15 0/6/1/0              0/0/0/0
192.168.0.1              17         36        575       0       0       13:43 0/6/1/0              0/0/0/0
192.168.5.5              17       2988       2964       0       0    22:19:10 0/7/7/0              0/0/0/0
192.168.40.4             17       2980       2964       0       0    22:19:14 0/7/7/0              0/0/0/0
```

Verifying Routing Table Information

Purpose Verify that the routing table contains the IBGP routes.

Copyright © 2013, Juniper Networks, Inc.

Action From operational mode, enter the **show route** command.

```
user@A> show route
inet.0: 12 destinations, 38 routes (12 active, 0 holddown, 10 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30      *[Direct/0] 22:22:03
                    > via fe-0/0/0.1
                    [BGP/170] 22:20:55, MED 2, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
                    [BGP/170] 22:20:51, MED 3, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
10.10.10.1/32      *[Local/0] 22:22:03
                      Local via fe-0/0/0.1
10.10.10.4/30      *[OSPF/10] 22:21:13, metric 2
                    > to 10.10.10.2 via fe-0/0/0.1
                    [BGP/170] 22:20:51, MED 4, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
10.10.10.8/30      *[Direct/0] 22:22:03
                    > via fe-0/0/1.3
                    [BGP/170] 22:20:51, MED 2, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 22:20:55, MED 3, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
10.10.10.9/32      *[Local/0] 22:22:03
                      Local via fe-0/0/1.3
10.10.10.12/30     *[OSPF/10] 22:21:08, metric 2
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 22:20:55, MED 4, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
192.163.6.4/32     *[OSPF/10] 22:21:13, metric 1
                    > to 10.10.10.2 via fe-0/0/0.1
                    [BGP/170] 22:20:55, MED 1, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
                    [BGP/170] 22:20:51, MED 3, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
192.168.0.1/32     *[OSPF/10] 22:21:08, metric 1
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 22:20:51, MED 1, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 22:20:55, MED 3, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
192.168.5.5/32     *[OSPF/10] 22:21:08, metric 2
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 00:15:24, MED 1, localpref 100, from 192.168.0.1
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 22:20:55, MED 4, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
192.168.6.5/32     *[Direct/0] 22:22:04
```

Copyright © 2013, Juniper Networks, Inc.

```
                    > via lo0.1
                    [BGP/170] 22:20:51, MED 2, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
                    [BGP/170] 22:20:55, MED 2, localpref 100, from 192.168.40.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
192.168.40.4/32    *[OSPF/10] 22:21:13, metric 2
                    > to 10.10.10.2 via fe-0/0/0.1
                    [BGP/170] 22:20:55, MED 1, localpref 100, from 192.163.6.4
                      AS path: I
                    > to 10.10.10.2 via fe-0/0/0.1
                    [BGP/170] 22:20:51, MED 4, localpref 100, from 192.168.5.5
                      AS path: I
                    > to 10.10.10.10 via fe-0/0/1.3
224.0.0.5/32       *[OSPF/10] 22:22:07, metric 1
                      MultiRecv
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Configuring a Route Reflector that Belongs to Two Different Clusters

- Understanding a Route Reflector that Belongs to Two Different Clusters on page 338
- Example: Configuring a Route Reflector that Belongs to Two Different Clusters on page 339

Understanding a Route Reflector that Belongs to Two Different Clusters

The purpose of route reflection is loop prevention when the internal BGP (IBGP) routing devices are not fully meshed. To accomplish this, RRs break one of the rules of normal BGP operation: They readvertise routes learned from an internal BGP peer to other internal BGP peers.

Normally, a single RR is a member of only one cluster. Consider, for example, that in a hierarchical RR design, a tier-two RR can be the client of a tier-1 RR, but they can not be clients of each other.

However, when two RRs are clients of each other and the routes are being reflected from one cluster to another, only one of the cluster IDs is included in the cluster list. This is because having one cluster ID in the cluster list is adequate for loop prevention in this case.

Table 5 on page 339 summarizes the rules that route reflectors use when filling in a reflected route's cluster list with cluster IDs.

Copyright © 2013, Juniper Networks, Inc.

Table 5: Rules for Route Reflectors

Route Reflection Scenario	Configuration
When reflecting a route from one of the clients to a non-client router client -> RR -> non-client	The RR fills the cluster ID associated with that client in the cluster list of the reflected route.
When reflecting a route from a non-client router to a client router non-client -> RR -> client	The RR fills the cluster ID associated with that client in the cluster list of the reflected route.
When reflecting a route from a client router to another client router that is in a different cluster client1 -> RR -> client2 (different cluster)	The RR fills the cluster ID associated with client1 in the cluster list before reflecting the cluster ID to client2. The cluster ID associated with client 2 is not added.

Example: Configuring a Route Reflector that Belongs to Two Different Clusters

This example shows how to configure a route reflector (RRs) that belongs to two different clusters. This is not a common scenario, but it might be useful in some situations.

- Requirements on page 339
- Overview on page 339
- Configuration on page 340
- Verification on page 342

Requirements

Configure the device interfaces and an internal gateway protocol (IGP). For an example of an RR setup that includes the interface and IGP configuration, see "Example: Configuring a Route Reflector" on page 323.

Overview

In this example, Device RR1 is a route reflector for both Device R2 and Device RR2.

Device RR2 is a route reflector for Device R4.

Consider figure Figure 34 on page 340.

Copyright © 2013, Juniper Networks, Inc.

Figure 34: Route Reflector in Two Different Clusters

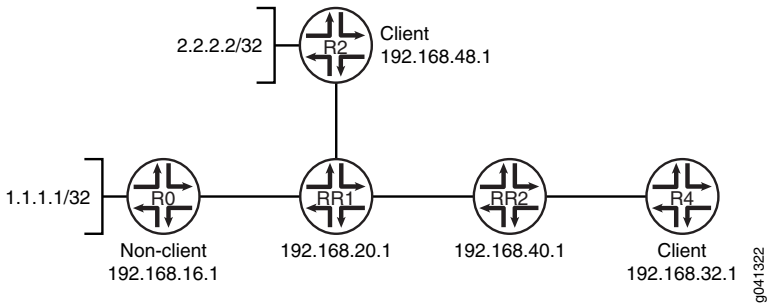

This example shows the BGP configuration on Device RR1 and Device RR2.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device RR1

```
set protocols bgp group RR1_client type internal
set protocols bgp group RR1_client local-address 192.168.20.1
set protocols bgp group RR1_client cluster 5.5.5.5
set protocols bgp group RR1_client neighbor 192.168.48.1
set protocols bgp group Non_client type internal
set protocols bgp group Non_client local-address 192.168.20.1
set protocols bgp group Non_client neighbor 192.168.16.1
set protocols bgp group RR1_to_RR2 type internal
set protocols bgp group RR1_to_RR2 local-address 192.168.20.1
set protocols bgp group RR1_to_RR2 cluster 6.6.6.6
set protocols bgp group RR1_to_RR2 neighbor 192.168.40.1
```

Device RR2

```
set protocols bgp group RR2_client type internal
set protocols bgp group RR2_client local-address 192.168.40.1
set protocols bgp group RR2_client cluster 7.7.7.7
set protocols bgp group RR2_client neighbor 192.168.32.1
set protocols bgp group RR2_to_RR1 type internal
set protocols bgp group RR2_to_RR1 local-address 192.168.40.1
set protocols bgp group RR2_to_RR1 neighbor 192.168.20.1
```

Configuring Device RR1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device RR1:

1. Configure the peering relationship with Device R2.

```
[edit protocols bgp group RR1_client]
user@RR1# set type internal
user@RR1# set local-address 192.168.20.1
user@RR1# set cluster 5.5.5.5
```


Copyright © 2013, Juniper Networks, Inc.

```
user@RR1# set neighbor 192.168.48.1
```

2. Configure the peering relationship with Device R0.

```
[edit protocols bgp group Non_client]
user@RR1# set type internal
user@RR1# set local-address 192.168.20.1
user@RR1# set neighbor 192.168.16.1
```

3. Configure the peering relationship with Device RR2.

```
[edit protocols bgp group RR1_to_RR2]
user@RR1# set type internal
user@RR1# set local-address 192.168.20.1
user@RR1# set cluster 6.6.6.6
user@RR1# set neighbor 192.168.40.1
```

Results From configuration mode, confirm your configuration by entering the **show protocols** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@RR1# show protocols
bgp {
  group RR1_client {
    type internal;
    local-address 192.168.20.1;
    cluster 5.5.5.5;
    neighbor 192.168.48.1;
  }
  group Non_client {
    type internal;
    local-address 192.168.20.1;
    neighbor 192.168.16.1;
  }
  group RR1_to_RR2 {
    type internal;
    local-address 192.168.20.1;
    cluster 6.6.6.6;
    neighbor 192.168.40.1;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device RR2

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device RR2:

1. Configure the peering relationship with Device R2.

```
[edit protocols bgp group RR2_client]
user@RR2# set type internal
user@RR2# set local-address 192.168.40.1
```

Copyright © 2013, Juniper Networks, Inc.

```
user@RR2# set cluster 7.7.7.7
user@RR2# set neighbor 192.168.32.1
```

2. Configure the peering relationship with Device R0.

```
[edit protocols bgp group RR2_to_RR1]
user@RR2# set type internal
user@RR2# set local-address 192.168.40.1
user@RR2# set neighbor 192.168.20.1
```

Results From configuration mode, confirm your configuration by entering the **show protocols** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@RR2# show protocols
bgp {
  group RR2_client {
    type internal;
    local-address 192.168.40.1;
    cluster 7.7.7.7;
    neighbor 192.168.32.1;
  }
  group RR2_to_RR1 {
    type internal;
    local-address 192.168.40.1;
    neighbor 192.168.20.1;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Checking the Cluster ID Advertised for Route 2.2.2.2 on page 342
- Checking the Cluster ID Advertised for Route 1.1.1.1 on page 343

Checking the Cluster ID Advertised for Route 2.2.2.2

Purpose Verify that BGP is running on configured interfaces and that the BGP session is established for each neighbor address.

Action From operational mode, enter the **show bgp neighbor** command.

```
user@RR1> show route advertising-protocol bgp 192.168.40.1 active-path 2.2.2.2 extensive

inet.0: 61 destinations, 61 routes (60 active, 0 holddown, 1 hidden)
* 2.2.2.2/32 (1 entry, 1 announced)
 BGP group RR1_to_RR2 type Internal
     Nexthop: 192.168.48.1
     Localpref: 100
     AS path: [100] I
     Cluster ID: 5.5.5.5
     Originator ID: 192.168.48.1
```


Copyright © 2013, Juniper Networks, Inc.

Meaning The 2.2.2.2/32 route originates from the Device RR1's client peer, Device R2. When this route is sent to RR1's client, Device RR2, the route has the 5.5.5.5 cluster ID attached, which is the cluster ID for RR1-R2.

Checking the Cluster ID Advertised for Route 1.1.1.1

Purpose Check the route advertisement from Device RR1 to Device RR2.

Action From operational mode, enter the **show bgp group** command.

```
user@RR1> show route advertising-protocol bgp 192.168.40.1 active-path 1.1.1.1/32 extensive
inet.0: 61 destinations, 61 routes (60 active, 0 holddown, 1 hidden)
* 1.1.1.1/32 (1 entry, 1 announced)
 BGP group RR1_to_RR2 type Internal
     Nexthop: 192.168.16.1
     Localpref: 100
     AS path: [100] I
     Cluster ID: 6.6.6.6
     Originator ID: 192.168.16.1
```

Meaning The 1.1.1.1/32 route originates from the Device RR1's non-client peer, Device R0. When this route is sent to RR1's client, Device RR2, the route has the 6.6.6.6 cluster ID attached, which is the cluster ID for RR1-RR2.

Device RR1 preserves the inbound cluster ID from Device R2 when advertising to another client in a different cluster (Device R4).

Related Documentation
- Example: Configuring BGP Route Reflectors on page 321

Example: Configuring BGP Confederations

- Understanding BGP Confederations on page 343
- Example: Configuring BGP Confederations on page 344

Understanding BGP Confederations

BGP confederations are another way to solve the scaling problems created by the BGP full mesh requirement. BGP confederations effectively break up a large autonomous system (AS) into subautonomous systems (sub-ASs). Each sub-AS must be uniquely identified within the confederation AS by a sub-AS number. Typically, sub-AS numbers are taken from the private AS numbers between 64,512 and 65,535.

Within a sub-AS, the same internal BGP (IBGP) full mesh requirement exists. Connections to other confederations are made with standard external BGP (EBGP), and peers outside the sub-AS are treated as external. To avoid routing loops, a sub-AS uses a confederation sequence, which operates like an AS path but uses only the privately assigned sub-AS numbers.

The confederation AS appears whole to other confederation ASs. The AS path received by other ASs shows only the globally assigned AS number. It does not include the confederation sequence or the privately assigned sub-AS numbers. The sub-AS numbers

Copyright © 2013, Juniper Networks, Inc.

are removed when the route is advertised out of the confederation AS. Figure 35 on page 344 shows an AS divided into four confederations.

Figure 35: BGP Confederations

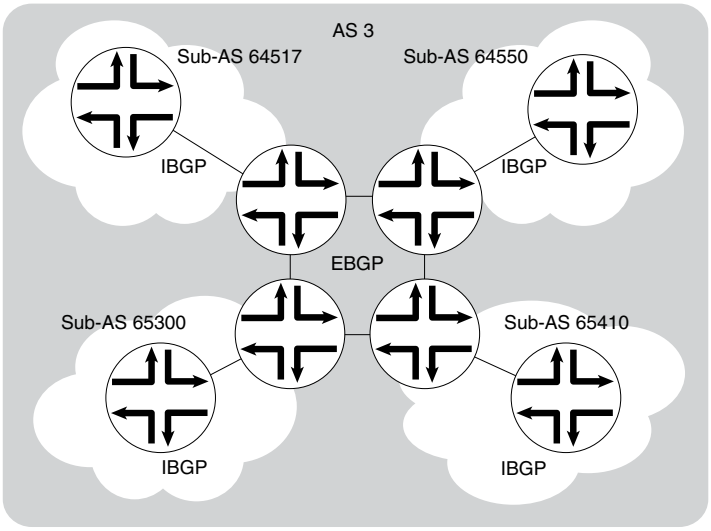

Figure 35 on page 344 shows AS 3 divided into four sub-ASs, 64517, 64550, 65300, and 65410, which are linked through EBGP sessions. Because the confederations are connected by EBGP, they do not need to be fully meshed. EBGP routes are readvertised to other sub-ASs.

Example: Configuring BGP Confederations

This example shows how to configure BGP confederations.

- Requirements on page 344
- Overview on page 344
- Configuration on page 345
- Verification on page 347

Requirements

- Configure network interfaces.
- Configure external peer sessions. See "Example: Configuring External BGP Point-to-Point Peer Sessions" on page 20.
- Configure interior gateway protocol (IGP) sessions between peers.
- Configure a routing policy to advertise the BGP routes.

Overview

Within a BGP confederation, the links between the confederation member autonomous systems (ASs) must be external BGP (EBGP) links, not internal BGP (IBGP) links.

Copyright © 2013, Juniper Networks, Inc.

Similar to route reflectors, BGP confederations reduce the number of peer sessions and TCP sessions to maintain connections between IBGP routing devices. BGP confederation is one method used to solve the scaling problems created by the IBGP full mesh requirement. BGP confederations effectively break up a large AS into subautonomous systems. Each sub-AS must be uniquely identified within the confederation AS by a sub-AS number. Typically, sub-AS numbers are taken from the private AS numbers between 64512 and 65535. Within a sub-AS, the same IBGP full mesh requirement exists. Connections to other confederations are made with standard EBGP, and peers outside the sub-AS are treated as external. To avoid routing loops, a sub-AS uses a confederation sequence, which operates like an AS path but uses only the privately assigned sub-AS numbers.

Figure 36 on page 345 shows a sample network in which AS 17 has two separate confederations: sub-AS 64512 and sub-AS 64513, each of which has multiple routers. Within a sub-AS, an IGP is used to establish network connectivity with internal peers. Between sub-ASs, an EBGP peer session is established.

Figure 36: Typical Network Using BGP Confederations

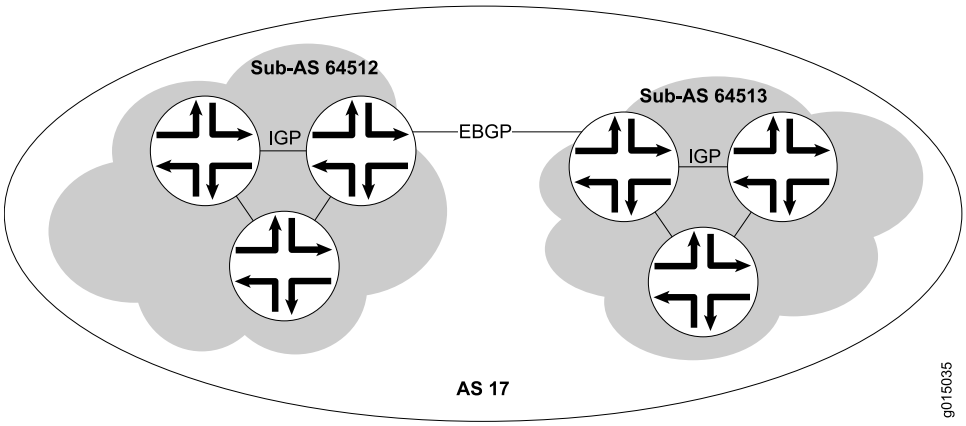

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

All Devices in Sub-AS 64512

```
set routing-options autonomous-system 64512
set routing-options confederation 17 members 64512
set routing-options confederation 17 members 64513
set protocols bgp group sub-AS-64512 type internal
set protocols bgp group sub-AS-64512 local-address 192.168.5.1
set protocols bgp group sub-AS-64512 neighbor 192.168.8.1
set protocols bgp group sub-AS-64512 neighbor 192.168.15.1
```

Border Device in Sub-AS 64512

```
set protocols bgp group to-sub-AS-64513 type external
set protocols bgp group to-sub-AS-64513 peer-as 64513
set protocols bgp group to-sub-AS-64513 neighbor 192.168.5.2
```

Copyright © 2013, Juniper Networks, Inc.

All Devices in Sub-AS 64513

```
set routing-options autonomous-system 64513
set routing-options confederation 17 members 64512
set routing-options confederation 17 members 64513
set protocols bgp group sub-AS-64513 type internal
set protocols bgp group sub-AS-64513 local-address 192.168.5.2
set protocols bgp group sub-AS-64513 neighbor 192.168.9.1
set protocols bgp group sub-AS-64513 neighbor 192.168.16.1
```

Border Device in Sub-AS 64513

```
set protocols bgp group to-sub-AS-64512 type external
set protocols bgp group to-sub-AS-64512 peer-as 64512
set protocols bgp group to-sub-AS-64512 neighbor 192.168.5.1
```

Step-by-Step Procedure

This procedure shows the steps for the devices that are in sub-AS 64512.

The **autonomous-system** statement sets the sub-AS number of the device.

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure BGP confederations:

1. Set the sub-AS number for the device.

   ```
   [edit routing-options]
   user@host# set autonomous-system 64512
   ```

2. In the confederation, include all sub-ASs in the main AS.

   The number 17 represents the main AS. The **members** statement lists all the sub-ASs in the main AS.

   ```
   [edit routing-options confederation]
   user@host# set 17 members 64512
   user@host# set 17 members 64513
   ```

3. On the border device in sub-AS 64512, configure an EBGP connection to the border device in AS 64513.

   ```
   [edit protocols bgp group to-sub-AS-64513]
   user@host# set type external
   user@host# set neighbor 192.168.5.2
   user@host# set peer-as 64513
   ```

4. Configure an IBGP group for peering with the devices within sub-AS 64512.

   ```
   [edit protocols bgp group sub-AS-64512]
   user@host# set type internal
   user@host# set local-address 192.168.5.1
   user@host# neighbor 192.168.8.1
   user@host# neighbor 192.168.15.1
   ```

Results

From configuration mode, confirm your configuration by entering the **show routing-options** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options
```


Copyright © 2013, Juniper Networks, Inc.

```
autonomous-system 64512;
confederation 17 members [ 64512 64513 ];

user@host# show protocols
bgp {
  group to-sub-AS-64513 { # On the border devices only
    type external;
    peer-as 64513;
    neighbor 192.168.5.2;
  }
  group sub-AS-64512 {
    type internal;
    local-address 192.168.5.1;
    neighbor 192.168.8.1;
    neighbor 192.168.15.1;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat these steps for sSub-AS 64513.

Verification

Confirm that the configuration is working properly.

- Verifying BGP Neighbors on page 347
- Verifying BGP Groups on page 349
- Verifying BGP Summary Information on page 349

Verifying BGP Neighbors

Purpose Verify that BGP is running on configured interfaces and that the BGP session is active for each neighbor address.

Action From the CLI, enter the **show bgp neighbor** command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

```
user@host> show bgp neighbor
Peer: 10.255.245.12+179 AS 35  Local: 10.255.245.13+2884 AS 35
  Type: Internal    State: Established  (route reflector client)Flags: Sync
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: Preference LocalAddress HoldTime Cluster AddressFamily Rib-group Refresh

  Address families configured: inet-vpn-unicast inet-labeled-unicast
  Local Address: 10.255.245.13 Holdtime: 90 Preference: 170
  Flags for NLRI inet-vpn-unicast: AggregateLabel
  Flags for NLRI inet-labeled-unicast: AggregateLabel
  Number of flaps: 0
  Peer ID: 10.255.245.12    Local ID: 10.255.245.13    Active Holdtime: 90
  Keepalive Interval: 30
  NLRI advertised by peer: inet-vpn-unicast inet-labeled-unicast
  NLRI for this session: inet-vpn-unicast inet-labeled-unicast
  Peer supports Refresh capability (2)
Restart time configured on the peer: 300
  Stale routes from peer are kept for: 60
  Restart time requested by this peer: 300
  NLRI that peer supports restart for: inet-unicast inet6-unicast
  NLRI that restart is negotiated for: inet-unicast inet6-unicast
  NLRI of received end-of-rib markers: inet-unicast inet6-unicast
  NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
  Table inet.0 Bit: 10000
    RIB State: restart is complete
    Send state: in sync
    Active prefixes: 4
    Received prefixes: 6
    Suppressed due to damping: 0
  Table inet6.0 Bit: 20000
    RIB State: restart is complete
    Send state: in sync
    Active prefixes: 0
    Received prefixes: 2
    Suppressed due to damping: 0
  Last traffic (seconds): Received 3    Sent 3    Checked 3
  Input messages:  Total 9      Updates 6       Refreshes 0     Octets 403
  Output messages: Total 7      Updates 3       Refreshes 0     Octets 365
  Output Queue[0]: 0
  Output Queue[1]: 0
  Trace options: detail packets
  Trace file: /var/log/bgpgr size 131072 files 10
```

Meaning The output shows a list of the BGP neighbors with detailed session information. Verify the following information:

- Each configured peering neighbor is listed.
- For **State**, each BGP session is **Established**.
- For **Type**, each peer is configured as the correct type (either internal or external).
- For **AS**, the AS number of the BGP neighbor is correct.

Copyright © 2013, Juniper Networks, Inc.

Verifying BGP Groups

Purpose Verify that the BGP groups are configured correctly.

Action From the CLI, enter the **show bgp group** command.

Sample Output

```
user@host> show bgp group
Group Type: Internal    AS: 10045       Local AS: 10045
  Name: pe-to-asbr2                                  Flags: Export Eval
  Export: [ match-all ]
  Total peers: 1        Established: 1
  10.0.0.4+179
  bgp.l3vpn.0: 1/1/0
  vpn-green.inet.0: 1/1/0

Groups: 1   Peers: 1    External: 0    Internal: 1    Down peers: 0   Flaps: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
bgp.l3vpn.0            1          1          0          0          0          0
```

Meaning The output shows a list of the BGP groups with detailed group information. Verify the following information:

- Each configured group is listed.
- For **AS**, each group's remote AS is configured correctly.
- For **Local AS**, each group's local AS is configured correctly.
- For **Group Type**, each group has the correct type (either internal or external).
- For **Total peers**, the expected number of peers within the group is shown.
- For **Established**, the expected number of peers within the group have BGP sessions in the **Established** state.
- The IP addresses of all the peers within the group are present.

Verifying BGP Summary Information

Purpose Verify that the BGP configuration is correct.

Action From the CLI, enter the **show bgp summary** command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

```
user@host> show bgp summary
Groups: 1 Peers: 3 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 6          4          0          0          0          0
Peer               AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65002      88675      88652       0       2       42:38 2/4/0
            0/0/0
10.0.0.3        65002      54528      54532       0       1     2w4d22h 0/0/0
            0/0/0
10.0.0.4        65002      51597      51584       0       0     2w3d22h 2/2/0
            0/0/0
```

Meaning The output shows a summary of BGP session information. Verify the following information:

- For **Groups**, the total number of configured groups is shown.
- For **Peers**, the total number of BGP peers is shown.
- For **Down Peers**, the total number of unestablished peers is 0. If this value is not zero, one or more peering sessions are not yet established.
- Under **Peer**, the IP address for each configured peer is shown.
- Under **AS**, the peer AS for each configured peer is correct.
- Under **Up/Dwn State**, the BGP state reflects the number of paths received from the neighbor, the number of these paths that have been accepted, and the number of routes being damped (such as 0/0/0). If the field is **Active**, it indicates a problem in the establishment of the BGP session.

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 9

BGP Security Configuration

- Example: Configuring BGP Route Authentication on page 351
- Example: Configuring IPsec Protection for BGP on page 358
- Examples: Configuring TCP and BGP Security on page 361
- Example: Configuring Origin Validation for BGP on page 375

Example: Configuring BGP Route Authentication

- Understanding Route Authentication on page 351
- Example: Configuring Route Authentication for BGP on page 352

Understanding Route Authentication

The use of router and route authentication and route integrity greatly mitigates the risk of being attacked by a machine or router that has been configured to share incorrect routing information with another router. In this kind of attack, the attacked router can be tricked into creating a routing loop, or the attacked router's routing table can be greatly increased thus impacting performance, or routing information can be redirected to a place in the network for the attacker to analyze it. Bogus route advertisements can be sent out on a segment. These updates can be accepted into the routing tables of neighbor routers unless an authentication mechanism is in place to verify the source of the routes.

Router and route authentication enables routers to share information only if they can verify that they are talking to a trusted source, based on a password (key). In this method, a hashed key is sent along with the route being sent to another router. The receiving router compares the sent key to its own configured key. If they are the same, it accepts the route. By using a hashing algorithm, the key is not sent over the wire in plain text. Instead, a hash is calculated using the configured key. The routing update is used as the input text, along with the key, into the hashing function. This hash is sent along with the route update to the receiving router. The receiving router compares the received hash with a hash it generates on the route update using the preshared key configured on it. If the two hashes are the same, the route is assumed to be from a trusted source. The key is known only to the sending and receiving routers.

To further strengthen security, you can configure a series of authentication keys (a *keychain*). Each key has a unique start time within the keychain. Keychain authentication allows you to change the password information periodically without bringing down peering sessions. This keychain authentication method is referred to as *hitless* because

Copyright © 2013, Juniper Networks, Inc.

the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol.

The sending peer uses the following rules to identify the active authentication key:

- The start time is less than or equal to the current time (in other words, not in the future).
- The start time is greater than that of all other keys in the chain whose start time is less than the current time (in other words, closest to the current time).

The receiving peer determines the key with which it authenticates based on the incoming key identifier.

The sending peer identifies the current authentication key based on a configured start time and then generates a hash value using the current key. The sending peer then inserts a TCP-enhanced authentication option object into the BGP update message. The object contains an object ID (assigned by IANA), the object length, the current key, and a hash value.

The receiving peer examines the incoming TCP-enhanced authentication option, looks up the received authentication key, and determines whether the key is acceptable based on the start time, the system time, and the tolerance parameter. If the key is accepted, the receiving peer calculates a hash and authenticates the update message.

Initial application of a keychain to a TCP session causes the session to reset. However, once the keychain is applied, the addition or removal of a password from the keychain does not cause the TCP session to reset. Also, the TCP session does not reset when the keychain changes from one authentication algorithm to another.

Example: Configuring Route Authentication for BGP

All BGP protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in autonomous system (AS) routing updates. By default, authentication is disabled.

- Requirements on page 352
- Overview on page 352
- Configuration on page 354
- Verification on page 356

Requirements

Before you begin:

- Configure the router interfaces.
- Configure an interior gateway protocol (IGP).

Overview

When you configure authentication, the algorithm creates an encoded checksum that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet's checksum.

Copyright © 2013, Juniper Networks, Inc.

This example includes the following statements for configuring and applying the keychain:

- **key**—A keychain can have multiple keys. Each key within a keychain must be identified by a unique integer value. The range of valid identifier values is from 0 through 63.

  The key can be up to 126 characters long. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (“ ”).

- **tolerance**—(Optional) For each keychain, you can configure a clock-skew tolerance value in seconds. The clock-skew tolerance is applicable to the receiver accepting keys for BGP updates. The configurable range is 0 through 999,999,999 seconds. During the tolerance period, either the current or previous password is acceptable.

- **key-chain**—For each keychain, you must specify a name. This example defines one keychain: **bgp-auth**. You can have multiple keychains on a routing device. For example, you can have a keychain for BGP, a keychain for OSPF, and a keychain for LDP.

- **secret**—For each key in the keychain, you must set a secret password. This password can be entered in either encrypted or plain text format in the **secret** statement. It is always displayed in encrypted format.

- **start-time**—Each key must specify a start time in UTC format. Control gets passed from one key to the next. When a configured start time arrives (based on the routing device’s clock), the key with that start time becomes active. Start times are specified in the local time zone for a routing device and must be unique within the keychain.

- **authentication-key-chain**—Enables you to apply a keychain at the global BGP level for all peers, for a group, or for a neighbor. This example applies the keychain to the peers defined in the external BGP (EBGP) group called **ext**.

- **authentication-algorithm**—For each keychain, you can specify a hashing algorithm. The algorithm can be AES-128, MD5, or SHA-1.

  You associate a keychain and an authentication algorithm with a BGP neighboring session.

This example configures a keychain named **bgp-auth**. Key 0 will be sent and accepted starting at 2011-6-23.20:19:33 -0700, and will stop being sent and accepted when the next key in the keychain (key 1) becomes active. Key 1 becomes active one year later at 2012-6-23.20:19:33 -0700, and will not stop being sent and accepted unless another key is configured with a start time that is later than the start time of key 1. A clock-skew tolerance of 30 seconds applies to the receiver accepting the keys. During the tolerance period, either the current or previous key is acceptable. The keys are shared-secret passwords. This means that the neighbors receiving the authenticated routing updates must have the same authentication keychain configuration, including the same keys (passwords). So Router R0 and Router R1 must have the same authentication-key-chain configuration if they are configured as peers. This example shows the configuration on only one of the routing devices.

Topology Diagram

Figure 37 on page 354 shows the topology used in this example.

Copyright © 2013, Juniper Networks, Inc.

Figure 37: Authentication for BGP

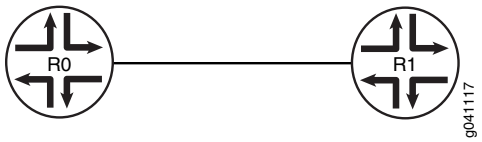

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65530
set protocols bgp group ext neighbor 172.16.2.1
set routing-options autonomous-system 65533
set protocols bgp group ext authentication-key-chain bgp-auth
set protocols bgp group ext authentication-algorithm md5
set security authentication-key-chains key-chain bgp-auth tolerance 30
set security authentication-key-chains key-chain bgp-auth key 0 secret
  this-is-the-secret-password
set security authentication-key-chains key-chain bgp-auth key 0 start-time
  2011-6-23.20:19:33-0700
set security authentication-key-chains key-chain bgp-auth key 1 secret
  this-is-another-secret-password
set security authentication-key-chains key-chain bgp-auth key 1 start-time
  2012-6-23.20:19:33-0700
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router R1 to accept route filters from Device CE1 and perform outbound route filtering using the received filters:

1. Configure the local autonomous system.

   ```
   [edit routing-options]
   user@R1# set autonomous-system 65533
   ```

2. Configure one or more BGP groups.

   ```
   [edit protocols bgp group ext]
   user@R1# set type external
   user@R1# set peer-as 65530
   user@R1# set neighbor 172.16.2.1
   ```

3. Configure authentication with multiple keys.

   ```
   [edit security authentication-key-chains key-chain bgp-auth]
   user@R1# set key 0 secret this-is-the-secret-password
   user@R1# set key 0 start-time 2011-6-23.20:19:33-0700
   user@R1# set key 1 secret this-is-another-secret-password
   user@R1# set key 1 start-time 2012-6-23.20:19:33-0700
   ```


Copyright © 2013, Juniper Networks, Inc.

The start time of each key must be unique within the keychain.

4. Apply the authentication keychain to BGP, and set the hashing algorithm.

```
[edit protocols bgp group ext]
user@R1# set authentication-key-chain bgp-auth
user@R1# set authentication-algorithm md5
```

5. (Optional) Apply a clock-skew tolerance value in seconds.

```
[edit security authentication-key-chains key-chain bgp-auth]
user@R1# set tolerance 30
```

Results From configuration mode, confirm your configuration by entering the **show protocols**, **show routing-options**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
bgp {
  group ext {
    type external;
    peer-as 65530;
    neighbor 172.16.2.1;
    authentication-key-chain bgp-auth;
    authentication-algorithm md5;
  }
}

user@R1# show routing-options
autonomous-system 65533;

user@R1# show security
authentication-key-chains {
  key-chain bgp-auth {
    tolerance 30;
      key 0 {
      secret
        "$9$5T6AREylK8RhxNdwaJn/CtO1cyKvWx9AylMWdVgoJDjqP5FCA0z3lEhcMWLxNbgJDiF6A";
        ## SECRET-DATA
      start-time “2011-6-23.20:19:33 -0700”;
    }
    key 1 {
      secret "$9$UyD.59CuO1h9AylKW-dqmfT369CuRhSP5hrvMN-JGDiqfu0IleWpuh.";
        ## SECRET-DATA
      start-time “2012-6-23.20:19:33 -0700”;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure for every BGP-enabled device in the network, using the appropriate interface names and addresses for each BGP-enabled device.

Copyright © 2013, Juniper Networks, Inc.

Verification

Confirm that the configuration is working properly.

- Verifying Authentication for the Neighbor on page 356
- Verifying That Authorization Messages Are Sent on page 356
- Checking Authentication Errors on page 357
- Verifying the Operation of the Keychain on page 357

Verifying Authentication for the Neighbor

Purpose Make sure that the **AutheKeyChain** option appears in the output of the **show bgp neighbor** command.

Action From operational mode, enter the **show bgp neighbor** command.

```
user@R1> show bgp neighbor
Peer: 172.16.2.1+179 AS 65530  Local: 172.16.2.2+1222 AS 65533
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ direct-lo0 ]
  Options: <Preference PeerAS Refresh>
  Options: <AutheKeyChain>
  Authentication key is configured
  Authentication key chain: jni
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 172.16.2.1       Local ID: 10.255.124.35    Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  Local Interface: fe-0/0/1.0
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              2
    Received prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          1
  Last traffic (seconds): Received 2    Sent 2    Checked 2
  Input messages:  Total 21     Updates 2       Refreshes 0     Octets 477
  Output messages: Total 22     Updates 1       Refreshes 0     Octets 471
  Output Queue[0]: 0
```

Verifying That Authorization Messages Are Sent

Purpose Confirm that BGP has the enhanced authorization option.

Action From operational mode, enter the **monitor traffic interface fe-0/0/1** command.

```
user@R1> monitor traffic interface fe-0/0/1
verbose output suppressed, use <detail> or <extensive> for full protocol decode
Listening on fe-0/0/1, capture size 96 bytes

13:08:00.618402  In arp who-has 172.16.2.66 tell 172.16.2.69
```


Copyright © 2013, Juniper Networks, Inc.

```
13:08:02.408249 Out IP 172.16.2.2.1122 > 172.16.2.1.646: P
1889289217:1889289235(18) ack 2215740969 win 58486 <nop,nop,timestamp 167557
1465469,nop,Enhanced Auth keyid 0 diglen 12 digest: fe3366001f45767165f17037>:
13:08:02.418396  In IP 172.16.2.1.646 > 172.16.2.2.1122: P 1:19(18) ack 18 win
57100 <nop,nop,timestamp 1466460 167557,nop,Enhanced Auth keyid 0 diglen 12
digest: a18c31eda1b14b2900921675>:
13:08:02.518146 Out IP 172.16.2.2.1122 > 172.16.2.1.646: . ack 19 win 58468
<nop,nop,timestamp 167568 1466460,nop,Enhanced Auth keyid 0 diglen 12 digest:
c3b6422eb6bd3fd9cf79742b>
13:08:28.199557 Out IP 172.16.2.2.nerv > 172.16.2.1.bgp: P
286842489:286842508(19) ack 931203976 win 57200 <nop,Enhanced Auth keyid 0
diglen 12 digest: fc0e42900a73736bcc07c1a4>: BGP, length: 19
13:08:28.209661  In IP 172.16.2.1.bgp > 172.16.2.2.nerv: P 1:20(19) ack 19 win
56835 <nop,Enhanced Auth keyid 0 diglen 12 digest: 0fc8578c489fabce63aeb2c3>:
BGP, length: 19
13:08:28.309525 Out IP 172.16.2.2.nerv > 172.16.2.1.bgp: . ack 20 win 57181
<nop,Enhanced Auth keyid 0 diglen 12 digest: ef03f282fb2ece0039491df8>
13:08:32.439708 Out IP 172.16.2.2.1122 > 172.16.2.1.646: P 54:72(18) ack 55 win
58432 <nop,nop,timestamp 170560 1468472,nop,Enhanced Auth keyid 0 diglen 12
digest: 76e0cf926f348b726c631944>:
13:08:32.449795  In IP 172.16.2.1.646 > 172.16.2.2.1122: P 55:73(18) ack 72 win
57046 <nop,nop,timestamp 1469463 170560,nop,Enhanced Auth keyid 0 diglen 12
digest: dae3eec390d18a114431f4d8>:
13:08:32.549726 Out IP 172.16.2.2.1122 > 172.16.2.1.646: . ack 73 win 58414
<nop,nop,timestamp 170571 1469463,nop,Enhanced Auth keyid 0 diglen 12 digest:
851df771aee2ea7a43a0c46c>
13:08:33.719880  In arp who-has 172.16.2.66 tell 172.16.2.69
^C
35 packets received by filter
0 packets dropped by kernel
```

Checking Authentication Errors

Purpose Check the number of packets dropped by TCP because of authentication errors.

Action From operational mode, enter the **show system statistics tcp | match auth** command.

```
user@R1> show system statistics tcp | match auth
        0 send packets dropped by TCP due to auth errors
        58 rcv packets dropped by TCP due to auth errors
```

Verifying the Operation of the Keychain

Purpose Check the number of packets dropped by TCP because of authentication errors.

Action From operational mode, enter the **show security keychain detail** command.

```
user@R1> show security keychain detail
keychain                Active-ID       Next-ID       Transition  Tolerance
                      Send  Receive   Send  Receive
 bgp-auth               3     3        1     1        1d 23:58    30
  Id 3, Algorithm hmac-md5, State send-receive, Option basic
  Start-time Wed Aug 11 16:28:00 2010, Mode send-receive
  Id 1, Algorithm hmac-md5, State inactive, Option basic
  Start-time Fri Aug 20 11:30:57 2010, Mode send-receive
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

Example: Configuring IPsec Protection for BGP

- Understanding IPsec for BGP on page 358
- Example: Using IPsec to Protect BGP Traffic on page 358

Understanding IPsec for BGP

You can apply the IP security (IPsec) to BGP traffic. IPsec is a protocol suite used for protecting IP traffic at the packet level. IPsec is based on security associations (SAs). An SA is a simplex connection that provides security services to the packets carried by the SA. After configuring the SA, you can apply it to BGP peers.

The Junos OS implementation of IPsec supports two types of security: host to host and gateway to gateway. Host-to-host security protects BGP sessions with other routers. An SA to be used with BGP must be configured manually and use transport mode. Static values must be configured on both ends of the security association. To apply host protection, you configure manual SAs in transport mode and then reference the SA by name in the BGP configuration to protect a session with a given peer.

Manual SAs require no negotiation between the peers. All values, including the keys, are static and specified in the configuration. Manual SAs statically define the security parameter index values, algorithms, and keys to be used and require matching configurations on both end points of the tunnel (on both peers). As a result, each peer must have the same configured options for communication to take place.

In transport mode, IPsec headers are inserted after the original IP header and before the transport header.

The security parameter index is an arbitrary value used in combination with a destination address and a security protocol to uniquely identify the SA.

Example: Using IPsec to Protect BGP Traffic

IPsec is a suite of protocols used to provide secure network connections at the IP layer. It is used to provide data source authentication, data integrity, confidentiality and packet replay protection. This example shows how to configure IPsec functionality to protect Routing Engine-to-Routing Engine BGP sessions. Junos OS supports IPsec Authentication Header (AH) and Encapsulating Security Payload (ESP) in transport and tunnel mode, as well as a utility for creating policies and manually configuring keys.

- Requirements on page 358
- Overview on page 359
- Configuration on page 359
- Verification on page 361

Requirements

Before you begin:

- Configure the router interfaces.

Copyright © 2013, Juniper Networks, Inc.

- Configure an interior gateway protocol (IGP).
- Configure BGP.

For transport mode, no PIC is necessary.

Overview

The SA is configured at the **[edit security ipsec security-association name]** hierarchy level with the **mode** statement set to transport. In transport mode, Junos OS does not support authentication header (AH) or encapsulating security payload (ESP) header bundles. Junos OS supports only the BGP protocol in transport mode.

This example specifies bidirectional IPsec to decrypt and authenticate the incoming and outgoing traffic using the same algorithm, keys, and SPI in both directions, unlike inbound and outbound SAs that use different attributes in both directions.

A more specific SA overrides a more general SA. For example, if a specific SA is applied to a specific peer, that SA overrides the SA applied to the whole peer group.

Topology Diagram

Figure 38 on page 359 shows the topology used in this example.

Figure 38: IPsec for BGP

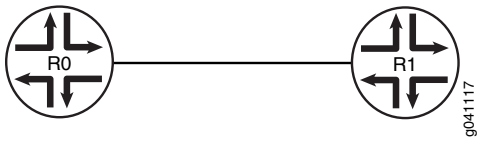

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

```
[edit]
set security ipsec security-association test-sa mode transport
set security ipsec security-association test-sa manual direction bidirectional protocol
    esp
set security ipsec security-association test-sa manual direction bidirectional spi 1000
set security ipsec security-association test-sa manual direction bidirectional encryption
    algorithm 3des-cbc
set security ipsec security-association test-sa manual direction bidirectional encryption
    key ascii-text
    "$9$kPT3AtO1hr6/u1IhvM8X7Vb2JGimfz.PtuB1hcs2goGDkqf5Qndb.5QzCA0BIRrvx7VsgJ"
set protocols bgp group 1 neighbor 1.1.1.1 ipsec-sa test-sa
```

Copyright © 2013, Juniper Networks, Inc.

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router R1:

1. Configure the SA mode.

```
[edit security ipsec security-association test-sa]
user@R1# set mode transport
```

2. Configure the IPsec protocol to be used.

```
[edit security ipsec security-association test-sa]
user@R1# set manual direction bidirectional protocol esp
```

3. Configure to security parameter index to uniquely identify the SA.

```
[edit security ipsec security-association test-sa]
user@R1# set manual direction bidirectional spi 1000
```

4. Configure the encryption algorithm.

```
[edit security ipsec security-association test-sa]
user@R1# set manual direction bidirectional encryption algorithm 3des-cbc
```

5. Configure the encryption key.

```
[edit security ipsec security-association test-sa]
user@R1# set manual direction bidirectional encryption key ascii-text
    "$9$kPT3AtO1hr6/u1IhvM8X7Vb2JGimfz.PtuB1hcs2goGDkqf5Qndb.5QzCA0BlRrvx7VsgJ"
```

When you use an ASCII text key, the key must contain exactly 24 characters.

6. Apply the SA to the BGP peer.

```
[edit protocols bgp group 1 neighbor 1.1.1.1]
user@R1# set ipsec-sa test-sa
```

Results

From configuration mode, confirm your configuration by entering the **show protocols** and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
bgp {
  group 1 {
    neighbor 1.1.1.1 {
      ipsec-sa test-sa;
    }
  }
}
```

```
user@R1# show security
ipsec {
  security-association test-sa {
    mode transport;
    manual {
      direction bidirectional {
        protocol esp;
        spi 1000;
```


Copyright © 2013, Juniper Networks, Inc.

```
            encryption {
              algorithm 3des-cbc;
              key ascii-text
                "$9$kPT3AtO1hr6/u1IhvM8X7Vb2JGimfz.PtuB1hcs2goGDkqf5Qndb.5QzCA0BIRrvx7VsgJ";
                ## SECRET-DATA
            }
          }
        }
      }
    }
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Router R0, changing only the neighbor address.

Verification

Confirm that the configuration is working properly.

- Verifying the Security Associaton on page 361

Verifying the Security Associaton

Purpose Make sure that the correct settings appear in the output of the **show ipsec security-associations** command.

Action From operational mode, enter the **show ipsec security-associations** command.

```
user@R1> show ipsec security-associations
Security association: test-sa
    Direction SPI         AUX-SPI     Mode       Type     Protocol
    inbound   1000        0           transport  manual   ESP
    outbound  1000        0           transport  manual   ESP
```

Meaning The output is straighforward for most fields except the AUX-SPI field. The AUX-SPI is the value of the auxiliary security parameter index. When the value is AH or ESP, AUX-SPI is always 0. When the value is AH+ESP, AUX-SPI is always a positive integer.

Related Documentation

- Configuring Manual IPsec Security Associations for an ES PIC

Examples: Configuring TCP and BGP Security

- Understanding Security Options for BGP with TCP on page 362
- Example: Configuring a Filter to Block TCP Access to a Port Except from Specified BGP Peers on page 362
- Example: Configuring a Filter to Limit TCP Access to a Port Based On a Prefix List on page 367
- Example: Limiting TCP Segment Size for BGP on page 371

Copyright © 2013, Juniper Networks, Inc.

Understanding Security Options for BGP with TCP

Among routing protocols, BGP is unique in using TCP as its transport protocol. BGP peers are established by manual configuration between routing devices to create a TCP session on port 179. A BGP-enabled device periodically sends keepalive messages to maintain the connection.

Over time, BGP has become the dominant interdomain routing protocol on the Internet. However, it has limited guarantees of stability and security. Configuring security options for BGP must balance suitable security measures with acceptable costs. No one method has emerged as superior to other methods. Each network administrator must configure security measures that meet the needs of the network being used.

For detailed information about the security issues associated with BGP's use of TCP as a transport protocol, see RFC 4272, *BGP Security Vulnerabilities Analysis*.

Example: Configuring a Filter to Block TCP Access to a Port Except from Specified BGP Peers

This example shows how to configure a standard stateless firewall filter that blocks all TCP connection attempts to port 179 from all requesters except from specified BGP peers.

- Requirements on page 362
- Overview on page 362
- Configuration on page 363
- Verification on page 366

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

In this example, you create a stateless firewall filter that blocks all TCP connection attempts to port 179 from all requesters except the specified BGP peers.

The stateless firewall filter **filter_bgp179** matches all packets from the directly connected interfaces on Device A and Device B to the destination port number 179.

Figure 39 on page 363 shows the topology used in this example. Device C attempts to make a TCP connection to Device E. Device E blocks the connection attempt. This example shows the configuration on Device E.

Copyright © 2013, Juniper Networks, Inc.

Figure 39: Typical Network with BGP Peer Sessions

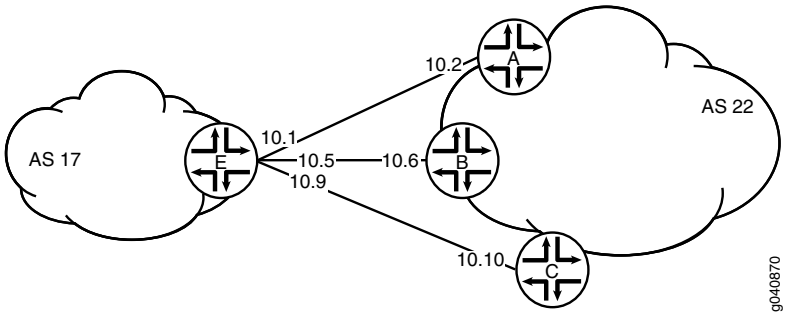

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device C

```
set interfaces ge-1/2/0 unit 10 description to-E
set interfaces ge-1/2/0 unit 10 family inet address 10.10.10.10/30
set protocols bgp group external-peers type external
set protocols bgp group external-peers peer-as 17
set protocols bgp group external-peers neighbor 10.10.10.9
set routing-options autonomous-system 22
```

Device E

```
set interfaces ge-1/2/0 unit 0 description to-A
set interfaces ge-1/2/0 unit 0 family inet address 10.10.10.1/30
set interfaces ge-1/2/1 unit 5 description to-B
set interfaces ge-1/2/1 unit 5 family inet address 10.10.10.5/30
set interfaces ge-1/0/0 unit 9 description to-C
set interfaces ge-1/0/0 unit 9 family inet address 10.10.10.9/30
set interfaces lo0 unit 2 family inet filter input filter_bgp179
set interfaces lo0 unit 2 family inet address 192.168.0.1/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers peer-as 22
set protocols bgp group external-peers neighbor 10.10.10.2
set protocols bgp group external-peers neighbor 10.10.10.6
set protocols bgp group external-peers neighbor 10.10.10.10
set routing-options autonomous-system 17
set firewall family inet filter filter_bgp179 term 1 from source-address 10.10.10.2/32
set firewall family inet filter filter_bgp179 term 1 from source-address 10.10.10.6/32
set firewall family inet filter filter_bgp179 term 1 from destination-port bgp
set firewall family inet filter filter_bgp179 term 1 then accept
set firewall family inet filter filter_bgp179 term 2 then reject
```

Copyright © 2013, Juniper Networks, Inc.

Configuring Device E

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device E with a stateless firewall filter that blocks all TCP connection attempts to port 179 from all requestors except specified BGP peers:

1. Configure the interfaces.

```
user@E# set interfaces ge-1/2/0 unit 0 description to-A
user@E# set interfaces ge-1/2/0 unit 0 family inet address 10.10.10.1/30

user@E# set interfaces ge-1/2/1 unit 5 description to-B
user@E# set interfaces ge-1/2/1 unit 5 family inet address 10.10.10.5/30

user@E# set interfaces ge-1/0/0 unit 9 description to-C
user@E# set interfaces ge-1/0/0 unit 9 family inet address 10.10.10.9/30
```

2. Configure BGP.

```
[edit protocols bgp group external-peers]
user@E# set type external
user@E# set peer-as 22
user@E# set neighbor 10.10.10.2
user@E# set neighbor 10.10.10.6
user@E# set neighbor 10.10.10.10
```

3. Configure the autonomous system number.

```
[edit routing-options]
user@E# set autonomous-system 17
```

4. Define the filter term that accepts TCP connection attempts to port 179 from the specified BGP peers.

```
[edit firewall family inet filter filter_bgp179]
user@E# set term 1 from source-address 10.10.10.2/32
user@E# set term 1 from source-address 10.10.10.6/32
user@E# set term 1 from destination-port bgp
user@E# set term 1 then accept
```

5. Define the other filter term to reject packets from other sources.

```
[edit firewall family inet filter filter_bgp179]
user@E# set term 2 then reject
```

6. Apply the firewall filter to the loopback interface.

```
[edit interfaces lo0 unit 2 family inet]
user@E# set filter input filter_bgp179
user@E# set address 192.168.0.1/32
```

Results

From configuration mode, confirm your configuration by entering the **show firewall**, **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not

Copyright © 2013, Juniper Networks, Inc.

display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@E# show firewall
family inet {
    filter filter_bgp179 {
        term 1 {
            from {
                source-address {
                    10.10.10.2/32;
                    10.10.10.6/32;
                }
                destination-port bgp;
            }
            then accept;
        }
        term 2 {
            then {
                reject;
            }
        }
    }
}
user@E# show interfaces
lo0 {
    unit 2 {
        family inet {
            filter {
                input filter_bgp179;
            }
            address 192.168.0.1/32;
        }
    }
}
ge-1/2/0 {
    unit 0 {
        description to-A;
        family inet {
            address 10.10.10.1/30;
        }
    }
}
ge-1/2/1 {
    unit 5 {
        description to-B;
        family inet {
            address 10.10.10.5/30;
        }
    }
}
ge-1/0/0 {
    unit 9 {
        description to-C;
        family inet {
            address 10.10.10.9/30;
```

Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
}

user@E# show protocols
bgp {
  group external-peers {
    type external;
    peer-as 22;
    neighbor 10.10.10.2;
    neighbor 10.10.10.6;
    neighbor 10.10.10.10;
  }
}

user@E# show routing-options
autonomous-system 17;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying That the Filter Is Configured on page 366
- Verifying the TCP Connections on page 366
- Monitoring Traffic on the Interfaces on page 367

Verifying That the Filter Is Configured

Purpose Make sure that the filter is listed in output of the **show firewall filter** command.

Action

```
user@E> show firewall filter filter_bgp179
Filter: filter_bgp179
```

Verifying the TCP Connections

Purpose Verify the TCP connections.

Action From operational mode, run the **show system connections extensive** command on Device C and Device E.

The output on Device C shows the attempt to establish a TCP connection. The output on Device E shows that connections are established with Device A and Device B only.

```
user@C> show system connections extensive | match 10.10.10

tcp4       0      0  10.10.10.9.51872     10.10.10.10.179        SYN_SENT

user@E> show system connections extensive | match 10.10.10

tcp4       0      0  10.10.10.5.179       10.10.10.6.62096       ESTABLISHED
tcp4       0      0  10.10.10.6.62096     10.10.10.5.179         ESTABLISHED
```


Copyright © 2013, Juniper Networks, Inc.

```
tcp4       0      0  10.10.10.1.179         10.10.10.2.61506      ESTABLISHED
tcp4       0      0  10.10.10.2.61506       10.10.10.1.179        ESTABLISHED
```

Monitoring Traffic on the Interfaces

Purpose Use the **monitor traffic** command to compare the traffic on an interface that establishes a TCP connection with the traffic on an interface that does not establish a TCP connection.

Action From operational mode, run the **monitor traffic** command on the Device E interface to Device B and on the Device E interface to Device C. The following sample output verifies that in the first example, acknowledgment (**ack**) messages are received. In the second example, **ack** messages are not received.

```
user@E> monitor traffic size 1500 interface ge-1/2/1.5
19:02:49.700912 Out IP 10.10.10.5.bgp > 10.10.10.6.62096: P
3330573561:3330573580(19) ack 915601686 win 16384 <nop,nop,timestamp 1869518816
1869504850>: BGP, length: 19
19:02:49.801244  In IP 10.10.10.6.62096 > 10.10.10.5.bgp: . ack 19 win 16384
<nop,nop,timestamp 1869518916 1869518816>
19:03:03.323018  In IP 10.10.10.6.62096 > 10.10.10.5.bgp: P 1:20(19) ack 19 win
16384 <nop,nop,timestamp 1869532439 1869518816>: BGP, length: 19
19:03:03.422418 Out IP 10.10.10.5.bgp > 10.10.10.6.62096: . ack 20 win 16384
<nop,nop,timestamp 1869532539 1869532439>
19:03:17.220162 Out IP 10.10.10.5.bgp > 10.10.10.6.62096: P 19:38(19) ack 20 win
 16384 <nop,nop,timestamp 1869546338 1869532439>: BGP, length: 19
19:03:17.320501  In IP 10.10.10.6.62096 > 10.10.10.5.bgp: . ack 38 win 16384
<nop,nop,timestamp 1869546438 1869546338>
```

```
user@E> monitor traffic size 1500 interface ge-1/0/0.9

18:54:20.175471 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
 win 16384 <mss 1460,nop,wscale 0,nop,nop,timestamp 1869009240 0,sackOK,eol>
18:54:23.174422 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
 win 16384 <mss 1460,nop,wscale 0,nop,nop,timestamp 1869012240 0,sackOK,eol>
18:54:26.374118 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
 win 16384 <mss 1460,nop,wscale 0,nop,nop,timestamp 1869015440 0,sackOK,eol>
18:54:29.573799 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
 win 16384 <mss 1460,sackOK,eol>
18:54:32.773493 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
 win 16384 <mss 1460,sackOK,eol>
18:54:35.973185 Out IP 10.10.10.9.61335 > 10.10.10.10.bgp: S 573929123:573929123(0)
 win 16384 <mss 1460,sackOK,eol>
```

Example: Configuring a Filter to Limit TCP Access to a Port Based On a Prefix List

This example shows how to configure a standard stateless firewall filter that limits certain TCP and Internet Control Message Protocol (ICMP) traffic destined for the Routing Engine by specifying a list of prefix sources that contain allowed BGP peers.

- Requirements on page 368
- Overview on page 368
- Configuration on page 368
- Verification on page 370

Copyright © 2013, Juniper Networks, Inc.

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

In this example, you create a stateless firewall filter that blocks all TCP connection attempts to port 179 from all requesters except BGP peers that have a specified prefix.

A source prefix list, **plist_bgp179**, is created that specifies the list of source prefixes that contain allowed BGP peers.

The stateless firewall filter **filter_bgp179** matches all packets from the source prefix list **plist_bgp179** to the destination port number 179.

Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode.

- Configure the Filter on page 368
- Results on page 369

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options prefix-list plist_bgp179 apply-path "protocols bgp group <*> neighbor
  <*>"
set firewall family inet filter filter_bgp179 term 1 from source-address 0.0.0.0/0
set firewall family inet filter filter_bgp179 term 1 from source-prefix-list plist_bgp179 except
set firewall family inet filter filter_bgp179 term 1 from destination-port bgp
set firewall family inet filter filter_bgp179 term 1 then reject
set firewall family inet filter filter_bgp179 term 2 then accept
set interfaces lo0 unit 0 family inet filter input filter_bgp179
set interfaces lo0 unit 0 family inet address 127.0.0.1/32
```

Configure the Filter

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the filter:

1. Expand the prefix list **bgp179** to include all prefixes pointed to by the BGP peer group defined by **protocols bgp group <*> neighbor <*>**.

   ```
   [edit policy-options prefix-list plist_bgp179]
   user@host# set apply-path "protocols bgp group <*> neighbor <*>"
   ```


Copyright © 2013, Juniper Networks, Inc.

2. Define the filter term that rejects TCP connection attempts to port 179 from all requesters except the specified BGP peers.

```
[edit firewall family inet filter filter_bgp179]
user@host# set term term1 from source-address 0.0.0.0/0
user@host# set term term1 from source-prefix-list bgp179 except
user@host# set term term1 from destination-port bgp
user@host# set term term1 then reject
```

3. Define the other filter term to accept all packets.

```
[edit firewall family inet filter filter_bgp179]
user@host# set term term2 then accept
```

4. Apply the firewall filter to the loopback interface.

```
[edit interfaces lo0 unit 0 family inet]
user@host# set filter input filter_bgp179
user@host# set address 127.0.0.1/32
```

Results

From configuration mode, confirm your configuration by entering the **show firewall**, **show interfaces**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show firewall
family inet {
   filter filter_bgp179 {
      term 1 {
         from {
            source-address {
               0.0.0.0/0;
            }
            source-prefix-list {
               plist_bgp179 except;
            }
            destination-port bgp;
         }
         then {
            reject;
         }
      }
      term 2 {
         then {
            accept;
         }
      }
   }
}
```

```
user@host# show interfaces
lo0 {
   unit 0 {
      family inet {
         filter {
            input filter_bgp179;
```

```
        }
        address 127.0.0.1/32;
      }
    }
  }
```

```
user@host# show policy-options
prefix-list plist_bgp179 {
  apply-path "protocols bgp group <*> neighbor <*>";
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure, where appropriate, for every BGP-enabled device in the network, using the appropriate interface names and addresses for each BGP-enabled device.

Verification

Confirm that the configuration is working properly.

Displaying the Firewall Filter Applied to the Loopback Interface

Purpose Verify that the firewall filter **filter_bgp179** is applied to the IPv4 input traffic at logical interface **lo0.0**.

Action Use the **show interfaces statistics** operational mode command for logical interface **lo0.0**, and include the **detail** option. Under the **Protocol inet** section of the command output section, the **Input Filters** field displays the name of the stateless firewall filter applied to the logical interface in the input direction:

```
[edit]
user@host> show interfaces statistics lo0.0 detail
  Logical interface lo0.0 (Index 321) (SNMP ifIndex 16) (Generation 130)
    Flags: SNMP-Traps Encapsulation: Unspecified
    Traffic statistics:
     Input  bytes  :                   0
     Output bytes  :                   0
     Input  packets:                   0
     Output packets:                   0
    Local statistics:
     Input  bytes  :                   0
     Output bytes  :                   0
     Input  packets:                   0
     Output packets:                   0
    Transit statistics:
     Input  bytes  :                   0                   0 bps
     Output bytes  :                   0                   0 bps
     Input  packets:                   0                   0 pps
     Output packets:                   0                   0 pps
    Protocol inet, MTU: Unlimited, Generation: 145, Route table: 0
      Flags: Sendbcast-pkt-to-re
      Input Filters: filter_bgp179
      Addresses, Flags: Primary
        Destination: Unspecified, Local: 127.0.0.1, Broadcast: Unspecified,
Generation: 138
```


Copyright © 2013, Juniper Networks, Inc.

Example: Limiting TCP Segment Size for BGP

This example shows how to avoid Internet Control Message Protocol (ICMP) vulnerability issues by limiting TCP segment size when you are using maximum transmission unit (MTU) discovery. Using MTU discovery on TCP paths is one method of avoiding BGP packet fragmentation.

- Requirements on page 371
- Overview on page 371
- Configuration on page 372
- Verification on page 374
- Troubleshooting on page 374

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

TCP negotiates a maximum segment size (MSS) value during session connection establishment between two peers. The MSS value negotiated is primarily based on the maximum transmission unit (MTU) of the interfaces to which the communicating peers are directly connected. However, due to variations in link MTU on the path taken by the TCP packets, some packets in the network that are well within the MSS value might be fragmented when the packet size exceeds the link's MTU.

To configure the TCP MSS value, include the tcp-mss statement with a segment size from 1 through 4096.

If the router receives a TCP packet with the SYN bit and the MSS option set, and the MSS option specified in the packet is larger than the MSS value specified by the **tcp-mss** statement, the router replaces the MSS value in the packet with the lower value specified by the **tcp-mss** statement.

The configured MSS value is used as the maximum segment size for the sender. The assumption is that the TCP MSS value used by the sender to communicate with the BGP neighbor is the same as the TCP MSS value that the sender can accept from the BGP neighbor. If the MSS value from the BGP neighbor is less than the MSS value configured, the MSS value from the BGP neighbor is used as the maximum segment size for the sender.

This feature is supported with TCP over IPv4 and TCP over IPv6.

Topology Diagram

Figure 40 on page 372 shows the topology used in this example.

Copyright © 2013, Juniper Networks, Inc.

Figure 40: TCP Maximum Segment Size for BGP

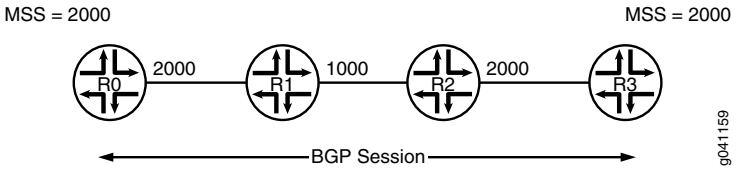

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

R0

```
set interfaces fe-1/2/0 unit 1 family inet address 1.1.0.1/30
set interfaces lo0 unit 1 family inet address 10.255.14.179/32
set protocols bgp group-int tcp-mss 2020
set protocols bgp group int type internal
set protocols bgp group int local-address 10.255.14.179
set protocols bgp group int mtu-discovery
set protocols bgp group int neighbor 10.255.71.24 tcp-mss 2000
set protocols bgp group int neighbor 10.255.14.177
set protocols bgp group int neighbor 10.0.14.4 tcp-mss 4000
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface 10.255.14.179
set routing-options autonomous-system 65000
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Router R0:

1. Configure the interfaces.

   ```
   [edit interfaces]
   user@R0# set fe-1/2/0 unit 1 family inet address 1.1.0.1/30
   user@R0# set lo0 unit 1 family inet address 10.255.14.179/32
   ```

2. Configure an interior gateway protocol (IGP), OSPF in this example.

   ```
   [edit protocols ospf area 0.0.0.0]
   user@R0# set interface fe-1/2/0.1
   user@R0# set interface 10.255.14.179
   ```

3. Configure one or more BGP groups.

   ```
   [edit protocols bgp group int]
   user@R0# set type internal
   user@R0# set local-address 10.255.14.179
   ```

4. Configure MTU discovery to prevent packet fragmentation.

   ```
   [edit protocols bgp group int]
   user@R0# set mtu-discovery
   ```


Copyright © 2013, Juniper Networks, Inc.

5. Configure the BGP neighbors, with the TCP MSS set globally for the group or specifically for the various neighbors.

```
[edit protocols bgo group int]
user@R0# set tcp-mss 2020
user@R0# set neighbor 10.255.14.177
user@R0# set neighbor 10.255.71.24 tcp-mss 2000
user@R0# set neighbor 10.0.14.4 tcp-mss 4000
```

NOTE: The TCP MSS neighbor setting overrides the group setting.

6. Configure the local autonomous system.

```
[edit routing-options]
user@R0# set autonomous-system 65000
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0# show interfaces
fe-1/2/0 {
    unit 1 {
        family inet {
            address 1.1.0.1/30;
        }
    }
}
lo0 {
    unit 1 {
        family inet {
            address 10.255.14.179/32;
        }
    }
}
```

```
user@R0# show protocols
bgp {
    group int {
        type internal;
        local-address 10.255.14.179;
        mtu-discovery;
        tcp-mss 2020;
        neighbor 10.255.71.24 {
            tcp-mss 2000;
        }
        neighbor 10.255.14.177;
        neighbor 10.0.14.4 {
            tcp-mss 4000;
        }
    }
}
ospf {
```

Copyright © 2013, Juniper Networks, Inc.

```
    area 0.0.0.0 {
      interface fe-1/2/0.1;
      interface 10.255.14.179;
    }
  }

  user@R0# show routing-options
  autonomous-system 65000;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

To confirm that the configuration is working properly, run the following commands:

- **show system connections extensive | find <neighbor-address>**, to check the negotiated TCP MSS value.
- **monitor traffic interface**, to monitor BGP traffic and to make sure that the configured TCP MSS value is used as the MSS option in the TCP SYN packet.

Troubleshooting

- MSS Calculation with MTU Discovery on page 374

MSS Calculation with MTU Discovery

Problem Consider an example in which two routing devices (R1 and R2) have an internal BGP (IBGP) connection. On both of the routers, the connected interfaces have 4034 as the IPv4 MTU.

```
user@R1# show protocols bgp | display set
[edit]
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 45.45.45.2
set protocols bgp group ibgp mtu-discovery
set protocols bgp group ibgp neighbor 45.45.45.1

user@R1# run show interfaces xe-0/0/3 extensive | match mtu

  Link-level type: Ethernet, MTU: 4048, LAN-PHY mode, Speed: 10Gbps,
    FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
    Protocol inet, MTU: 4034, Generation: 180, Route table: 0
    Protocol multiservice, MTU: Unlimited, Generation: 181, Route table: 0
```

In the following packet capture on Device R1, the negotiated MSS is 3994. In the **show system connections extensive** information for MSS, it is set to 2048.

```
05:50:01.575218 Out
        Juniper PCAP Flags [Ext], PCAP Extension(s) total length 16
          Device Media Type Extension TLV #3, length 1, value: Ethernet (1)
          Logical Interface Encapsulation Extension TLV #6, length 1, value:
Ethernet (14)
          Device Interface Index Extension TLV #1, length 2, value: 137
          Logical Interface Index Extension TLV #4, length 4, value: 69
        -----original packet-----
        00:21:59:e1:e8:03 > 00:19:e2:20:79:01, ethertype IPv4 (0x0800), length
78: (tos 0xc0, ttl 64, id 53193, offset 0, flags [DF], proto: TCP (6), length:
```


Copyright © 2013, Juniper Networks, Inc.

```
64) 45.45.45.2.62840 > 45.45.45.1.bgp: S 2939345813:2939345813(0) win 16384 **mss
 3994,nop,wscale 0,nop,nop,timestamp 70559970 0,sackOK,eol>
05:50:01.575875 In
        Juniper PCAP Flags [Ext, no-L2, In], PCAP Extension(s) total length 16
          Device Media Type Extension TLV #3, length 1, value: Ethernet (1)
          Logical Interface Encapsulation Extension TLV #6, length 1, value:
Ethernet (14)
          Device Interface Index Extension TLV #1, length 2, value: 137
          Logical Interface Index Extension TLV #4, length 4, value: 69
        -----original packet-----
  PFE proto 2 (ipv4): (tos 0xc0, ttl 255, id 37709, offset 0, flags [DF], proto:
 TCP (6), length: 64) 45.45.45.1.bgp > 45.45.45.2.62840: S 2634967984:2634967984(0)
 ack 2939345814 win 16384 **mss 3994,nop,wscale 0,nop,nop,timestamp 174167273
70559970,sackOK,eol>

user@R1# run show system connections extensive | find 45.45

tcp4       0      0  45.45.45.2.62840                         45.45.45.1.179
                                ESTABLISHED
   sndsbcc:          0 sndsbmbcnt:          0  sndsbmbmax:     131072
sndsblowat:       2048 sndsbhiwat:      16384
   rcvsbcc:          0 rcvsbmbcnt:          0  rcvsbmbmax:     131072
rcvsblowat:          1 rcvsbhiwat:      16384
   proc id:      19725  proc name:        rpd
       iss: 2939345813      sndup: 2939345972
    snduna: 2939345991     sndnxt: 2939345991      sndwnd:      16384
    sndmax: 2939345991    sndcwnd:      10240 sndssthresh: 1073725440
       irs: 2634967984      rcvup: 2634968162
    rcvnxt: 2634968162     rcvadv: 2634984546      rcvwnd:      16384
       rtt:          0       srtt:       1538        rttv:       1040
    rxtcur:       1200   rxtshift:          0       rtseq: 2939345972
    rttmin:       1000  mss:        2048
```

Solution This is expected behavior with Junos OS. The MSS value is equal to the MTU value minus the IP or IPv6 and TCP headers. This means that the MSS value is generally 40 bytes less than the MTU (for IPv4) and 60 bytes less than the MTU (for IPv6). This value is negotiated between the peers. In this example, it is 4034 - 40 = 3994. Junos OS then rounds this value to a multiple of 2 KB. The value is 3994 / 2048 * 2048=2048. So it is not necessary to see same MSS value with in the **show system connections** output.

3994 / 2048 = 1.95

1.95 is rounded to 1.

1 * 2048 = 2048

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Configuring Origin Validation for BGP

- Use Case and Benefit of Origin Validation on page 376
- Understanding Origin Validation for BGP on page 377
- Example: Configuring Origin Validation for BGP on page 383

Copyright © 2013, Juniper Networks, Inc.

Use Case and Benefit of Origin Validation

If an administrator of an autonomous system (AS) begins advertising all or part of another company's assigned network, BGP has no built-in method to recognize the error and respond in a way that would avoid service interruptions.

Suppose, for example, that an administrator in a customer network mistakenly advertises a route (let's say 10.65.153.0/24) directing traffic to the customer's service provider AS 1. This /24 route is a more specific route than the one used by the actual content provider (10.65.152.0/22) which directs traffic to AS 2. Because of the way routers work, most routers select the more specific route and send traffic to AS 1 instead of AS 2.

The hijacked prefix is seen widely across the Internet as transit routers propagate the updated path information. The invalid routes can be distributed broadly across the Internet as the routers in the default free zone (DFZ) carry the hijacked route. Eventually the correct AS path is restored to BGP peers, but in the meantime service interruptions are to be expected.

Because BGP relies on a transitive trust model, validation between customer and provider is important. In the example above, the service provider AS 1 did not validate the faulty advertisement for 10.65.153.0/24. By accepting this advertisement and readvertising it to its peers and providers, AS 1 was propagating the wrong route. The routers that received this route from AS 1 selected it because it was a more specific route. The actual content provider was advertising 10.65.152.0/22 before the mistake occurred. The /24 was a smaller (and more specific) advertisement. According to the usual BGP route selection process, the /24 was then chosen, effectively completing the hijack.

Even with fast detection and reaction of the content provider and cooperation with other providers, service for their prefix can be interrupted for many minutes up to several hours. The exact duration of the outage depends on your vantage point on the Internet. When these sorts of events occur, there is renewed interest in solutions to this vulnerability. BGP is fundamental to provider relationships and will not be going away anytime soon. This example demonstrates a solution that uses origin validation. This solution relies on cryptographic extensions to BGP and a distributed client-server model that avoids overtaxing router CPUs.

Origin validation helps to overcome the vulnerability of transitive trust by enabling a provider to limit the advertisements it accepts from a customer. The mechanics involve the communication of routing policies based on an extended BGP community attribute.

Copyright © 2013, Juniper Networks, Inc.

Understanding Origin Validation for BGP

Origin validation helps to prevent the unintentional advertisement of routes. Sometimes network administrators mistakenly advertise routes to networks that they do not control. You can resolve this security issue by configuring origin validation (also known as secure interdomain routing). Origin validation is a mechanism by which route advertisements can be authenticated as originating from an expected autonomous system (AS). Origin validation uses one or more resource public key infrastructure (RPKI) cache servers to perform authentication for specified BGP prefixes. To authenticate a prefix, the router (BGP speaker) queries the database of validated prefix-to-AS mappings, which are downloaded from the cache server, and ensures that the prefix originated from an expected AS.

Junos OS supports origin validation for IPv4 and IPv6 prefixes.

Figure 41 on page 377 shows a sample topology.

Figure 41: Sample Topology for Origin Validation

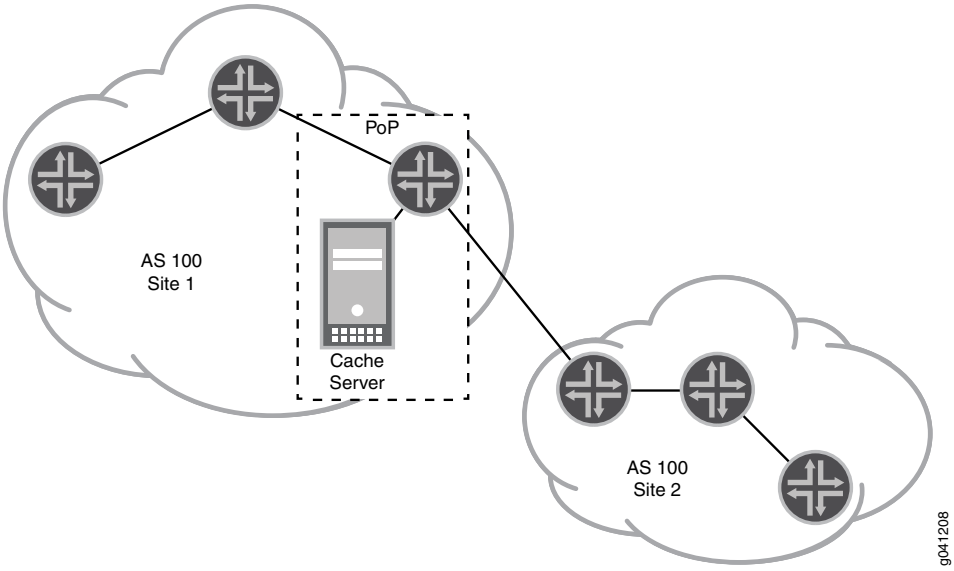

Supported Standards

The Junos OS implementation of origin validation supports the following RFCs and draft:

- RFC 6810, *The Resource Public Key Infrastructure (RPKI) to Router Protocol*
- RFC 6811, *BGP Prefix Origin Validation*
- Internet draft draft-ietf-sidr-origin-validation-signaling-00, *BGP Prefix Origin Validation State Extended Community* (partial support)

  The extended community (origin validation state) is supported in Junos OS routing policy. The specified change in the route selection procedure is not supported.

Copyright © 2013, Juniper Networks, Inc.

How Origin Validation Works

The RPKI and origin validation use X.509 certificates with extensions specified in RFC 3779, *X.509 Extensions for IP Addresses and AS Identifiers*.

The RPKI consists of a distributed collection of information. Each Certification Authority publishes its end-entity (EE) certificates, certificate revocation lists (CRLs), and signed objects at a particular location. All of these repositories form a complete set of information that is available to every RPKI cache server.

Each RPKI cache server maintains a local cache of the entire distributed repository collection by regularly synchronizing each element in the local cache against the original repository publication point.

On the router, the database entries are formatted as route validation (RV) records. An RV record is a (prefix, maximum length, origin AS) triple. It matches any route whose prefix matches the RV prefix, whose prefix length does not exceed the maximum length given in the RV record, and whose origin AS equals the origin AS given in the RV record.

An RV record is a simplified version of a route origin authorization (ROA). An ROA is a digitally signed object that provides a means of verifying that an IP address block holder has authorized an AS to originate routes to one or more prefixes within the address block. ROAs are not directly used in route validation. The cache server exports a simplified version of the ROA to the router as an RV record.

The maximum length value must be greater than or equal to the length of the authorized prefix and less than or equal to the length (in bits) of an IP address in the address family (32 for IPv4 and 128 for IPv6). The maximum length defines the IP address prefix that the AS is authorized to advertise.

For example, if the IP address prefix is 200.4.66/24, and the maximum length is 26, the AS is authorized to advertise 200.4.66.0/24, 200.4.66.0/25, 200.4.66.128/25, 200.4.66.0/26, 200.4.66.64/26, 200.4.66.128/26, and 200.4.66.192/26. When the maximum length is not present, the AS is only authorized to advertise exactly the prefix specified in the RV.

As another example, an RV can contain the prefix 200.4.66/24 with a maximum length of 26, as well as the prefix 200.4.66.0/28 with a maximum length of 28. This RV would authorize the AS to advertise any prefix beginning with 200.4.66 with a length of at least 24 and no greater than 26, as well as the specific prefix 200.4.66.0/28.

The origin of a route is represented by the right-most AS number in the AS_PATH attribute. Origin validation operates by comparing the origin AS in a routing update with the authorized source AS published in RV records.

The security provided by origin validation alone is known to be weak against a determined attacker because there is no protection against such an attacker spoofing the source AS. That said, origin validation provides useful protection against accidental announcements.

Although origin validation could be implemented by having each router directly participate in the RPKI, this is seen as too resource intensive (because many public-key cryptography

Copyright © 2013, Juniper Networks, Inc.

operations are required to validate the RPKI data) as well as operationally intensive to set up and maintain an RPKI configuration on each router. For this reason, a separate RPKI cache server performs public-key validations, and generates a validated database of prefix-to-AS mappings. The validated database is downloaded to a client router over a secure TCP connection. The router thus requires little information about the RPKI infrastructure and has no public-key cryptography requirements, other than the encrypted transport password. The router subsequently uses the downloaded data to validate received route updates.

When you configure server sessions, you can group the sessions together and configure session parameters for each session in the group. The router tries periodically to set up a configurable maximum number of connections to cache servers. If connection setup fails, a new connection attempt is made periodically.

In the meantime, after the validation import policy is applied to the BGP session, route-validation is performed irrespective of cache session state (up or down) and RV database (empty or not empty). If the RV database is empty or none of the cache server sessions are up, the validation state for each route is set to unknown, because no RV record exists to evaluate a received BGP prefix.

The retry-attempt period is configurable. After successfully connecting to a cache server, the router queries for the latest database serial number and requests that the RPKI cache transmits all of the RV entries belonging to that version of the database.

Each inbound message resets a liveliness timer for the RPKI cache server. After all updates are learned, the router performs periodic liveliness checks based on a configurable interval. This is done by sending a serial query protocol data unit (PDU) with the same serial number that the cache server reported in its latest notification PDU. The cache server responds with zero or more updates and an end-of-data (EOD) PDU, which also refreshes the liveliness state of the cache server and resets a record-lifetime timer.

When a prefix is received from an external BGP (EBGP) peer, it is examined by an import policy and marked as Valid, Invalid, or Unknown:

- Valid—Indicates that the prefix and AS pair are found in the database.
- Invalid—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.
- Unknown—Indicates that the prefix is not among the prefixes or prefix ranges in the database.

If there are any potential matches for the route in the validation database, the route has to match one of them to be valid. Otherwise, it is invalid. Any match is adequate to make the route valid. It does not need to be a best match. Only if there are no potential matches is the route considered to be unknown. For more information about the prefix-to-AS mapping database logic, see Section 2 of Internet draft draft-ietf-sidr-pfx-validate-01, *BGP Prefix Origin Validation*.

Copyright © 2013, Juniper Networks, Inc.

BGP Interaction with the Route Validation Database

The route validation (RV) database contains a collection of RV records that the router downloads from the RPKI cache server. After the RV database is populated with RV records, the RV database scans the RIB-Local routing table to determine if there are any prefixes in RIB-Local that might be affected by the RV records in the database. (RIB-Local contains the IPv4 and IPv6 routes shown in the output of the **show route protocol bgp** command.)

This process triggers a BGP reevaluation of BGP import policies (not export policies).

Figure 42 on page 380 shows the process.

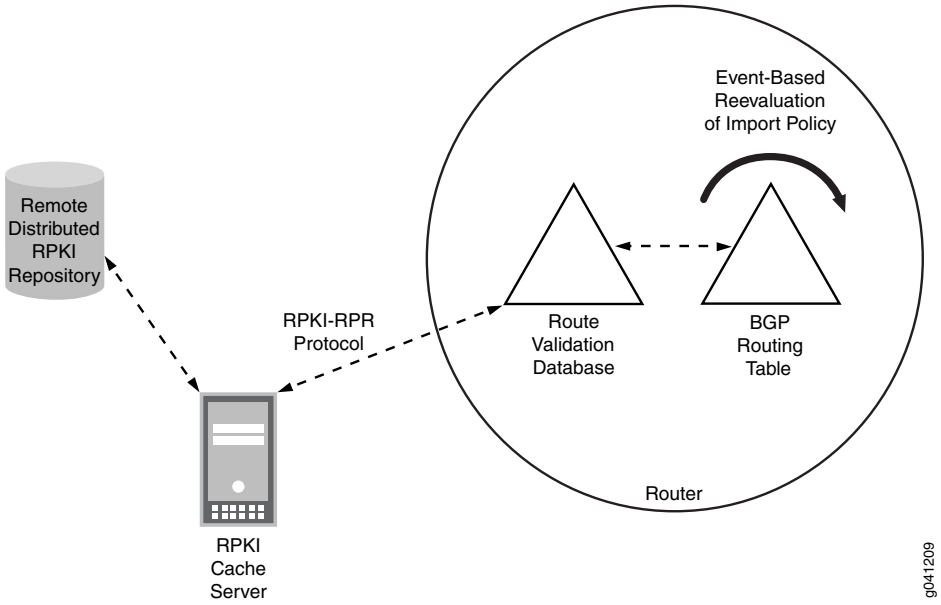

Import policies are applied to RIB-In. Another way to understand this is that Import policies are applied to the routes that are shown in the output of the **show route receive-protocol bgp** command, while export policies are applied to routes that are shown by the **show route advertising-protocol bgp** command.

As shown in Figure 43 on page 381, you use import routing policies to control which routes BGP places in the routing table, and export routing policies to control which routes BGP advertises from the routing table to its neighbors.

Copyright © 2013, Juniper Networks, Inc.

Figure 43: Importing and Exporting Routing Policies

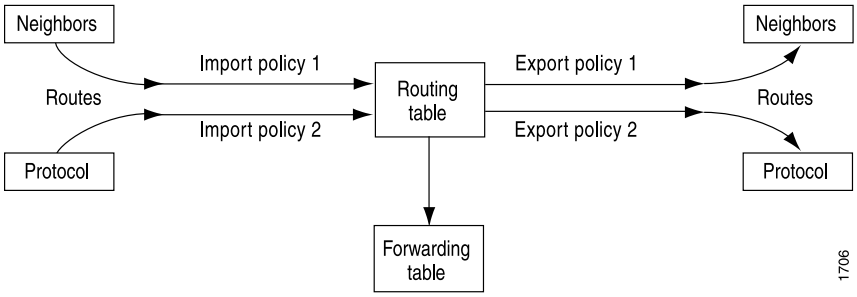

When you configure a route-validation import policy, the policy configuration uses a **validation-database** match condition. This match condition triggers a query in the RV database for the validation state of a prefix in a given routing instance. The default operation is to query the validation database matching the routing instance. If no route validation instance is found, the master instance is queried.

In the following BGP import policy, the **from validation-database** condition triggers a lookup in the router's RV database. An action is taken if the validation state is valid. The action is to accept the route and set the **validation-state** in the routing table to valid.

```
[edit protocols bgp]
import validation;

[edit policy-options]
policy-statement validation-1 {
  term valid {
    from {
      protocol bgp;
      validation-database valid; # Triggers a lookup in the RV database
    }
    then {
      validation-state valid; # Sets the validation state in the routing table
      accept;
    }
  }
}
```

Community Attribute to Announce RPKI Validation State to IBGP Neighbors

Prefix validation is done only for external BGP (EBGP) updates. Within an AS, you likely do not want to have an RPKI session running on every internal BGP (IBGP) router. Instead, you need a way to carry the validation state across the IBGP mesh so that all IBGP speakers have consistent information. This is accomplished by carrying the validation state in a non-transitive extended community. The community attribute announces and receives the validation state of a prefix between IBGP neighbors.

Junos OS supports the following well-known extended communities for route validation:

- origin-validation-state-valid
- origin-validation-state-invalid
- origin-validation-state-unknown

Copyright © 2013, Juniper Networks, Inc.

The following sample BGP import policy is configured on the router that has a session with an RPKI server.

Router With RPKI Session

```
policy-statement validation-1 {
  term valid {
    from {
      protocol bgp;
      validation-database valid;
    }
    then {
      validation-state valid;
      commi add origin-validation-state-valid;
      accept;
    }
  }
}
```

The following sample BGP import policy is configured on an IBGP peer router that does not have a session with an RPKI server.

IBGP Peer Router Without RPKI Session

```
policy-statement validation-2 {
  term valid {
    from community origin-validation-state-valid;
    then validation-state valid;
  }
}
```

Nonstop Active Routing and Origin Validation

When you configure origin validation on a router that has dual Routing Engines and nonstop active routing is enabled, both the master and the standby Routing Engines have a copy of the RV database. These two RV databases remain synchronized with each other.

The router does not maintain two identical sessions with the RPKI server. The RPKI-RTR protocol runs on the master Routing Engine only. On the standby Routing Engine, the RPKI cache server session is always down.

The RV database is actively maintained by the master Routing Engine through its session with the RPKI server. This database is replicated on the standby Routing Engine. Though the session is down on the standby Routing Engine , the replicated RV database does contain RV records. When the standby Routing Engine switches over and becomes the master Routing Engine, it already has a fully populated RV database.

To view the contents of the two databases, use the show validation database and show validation replication database commands.

Marking a Prefix Range as Never Allowed

The route validation model has one major shortcoming: It only provides positive updates. It can declare which AS is the legitimate owner of a prefix. However, it cannot explicitly convey a negative update, as in: This prefix is never originated by a given AS. This functionality can be provided to some extent using an AS 0 workaround.

Copyright © 2013, Juniper Networks, Inc.

The Junos OS implementation does not attempt to restrict its inputs from the cache. For example, an RV record with origin AS 0 is installed and matched upon just like any other. This enables a workaround to mark a prefix range as never allowed to be announced because AS 0 is not a valid AS. The AS in the RV record never matches the AS received from the EBGP peer. Thus, any matching prefix is marked invalid.

Example: Configuring Origin Validation for BGP

This example shows how to configure origin validation between BGP peers by ensuring that received route advertisements are sent (originated) from the expected autonomous system (AS). If the origin AS is validated, a policy can specify that the prefixes are, in turn, advertised.

- Requirements on page 383
- Overview on page 383
- Configuration on page 385
- Verification on page 394

Requirements

This example has the following hardware and software requirements:

- Resource public key infrastructure (RPKI) cache server, using third-party software to authenticate BGP prefixes.
- Junos OS Release 12.2 or later running on the routing device that communicates with the cache server over a TCP connection.

Overview

Sometimes routes are unintentionally advertised due to operator error. To prevent this security issue, you can configure BGP to validate the originating AS. This feature uses a cache server to authenticate prefixes or prefix ranges.

The following configuration statements enable origin AS validation:

```
[edit routing-options]
validation {
  group group-name {
    max-sessions number;
    session address {
      hold-time seconds;
      local-address local-ip-address;
      port port-number;
      preference number;
      record-lifetime seconds;
      refresh-time seconds;
    }
  }
  static {
    record destination {
      maximum-length prefix-length {
        origin-autonomous-system as-number {
```

Copyright © 2013, Juniper Networks, Inc.

```
            validation-state (invalid | valid);
          }
        }
      }
    }
    traceoptions {
      file filename <files number> <size size> <world-readable | no-world-readable>;
      flag flag;
    }
  }
```

This example uses default settings for the validation parameters.

Most of the available configuration statements are optional. The required settings are as follows:

```
validation {
  group group-name {
    session address {
    }
  }
}
```

The **[edit routing-options validation static]** hierarchy level enables you to configure static records on a routing device, thus overwriting records received from an RPKI cache server.

For example:

```
[edit routing-options validation]
user@R0# set static record 10.0.0.0/16 maximum-length 24 origin-autonomous-system
  200 validation-state valid
```

You can configure a routing policy that operates based on the validation state of a route prefix. You can use a community attribute to announce and receive the validation state of a prefix between external BGP (EBGP) and internal BGP (IBGP) peers. Using a routing policy might be more convenient on some routers than configuring a session with an RPKI server. This example demonstrates the use of the validation-state community attribute between IBGP peers.

Figure 44 on page 384 shows the sample topology.

Figure 44: Topology for Origin Validation

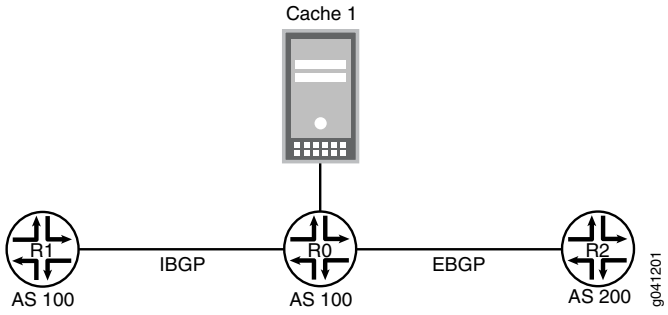

In this example, Device R0 has an IBGP connection to Device R1 and an EBGP connection to Device R2. Device R0 receives route validation (RV) records from the cache server

Copyright © 2013, Juniper Networks, Inc.

using the protocol defined in Internet draft draft-ietf-sidr-rpki-rtr-19, *The RPKI/Router Protocol* to send the RV records. The RPKI-Router Protocol runs over TCP. The RV records are used by Device R0 to build a local RV database. On Device R1, the validation state is set based on the BGP community called validation-state, which is received with the route.

Configuration

- Configuring Device R0 on page 386
- Configuring Device R1 on page 390
- Configuring Device R2 on page 393

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R0

```
set interfaces ge-1/2/0 unit 2 description to-R1
set interfaces ge-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces ge-1/2/1 unit 5 description to-R2
set interfaces ge-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces ge-1/2/2 unit 9 description to-cache
set interfaces ge-1/2/2 unit 9 family inet address 10.0.0.9/30
set interfaces lo0 unit 1 family inet address 1.0.1.1/32
set protocols bgp group int type internal
set protocols bgp group int local-address 1.0.1.1
set protocols bgp group int export send-direct
set protocols bgp group int neighbor 1.1.1.1
set protocols bgp group ext type external
set protocols bgp group ext import validation
set protocols bgp group ext export send-direct
set protocols bgp group ext peer-as 200
set protocols bgp group ext neighbor 10.0.0.6
set protocols ospf area 0.0.0.0 interface ge-1/2/0.2
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set policy-options policy-statement send-direct from protocol direct
set policy-options policy-statement send-direct then accept
set policy-options policy-statement validation term valid from protocol bgp
set policy-options policy-statement validation term valid from validation-database valid
set policy-options policy-statement validation term valid then local-preference 110
set policy-options policy-statement validation term valid then validation-state valid
set policy-options policy-statement validation term valid then community add
  origin-validation-state-valid
set policy-options policy-statement validation term valid then accept
set policy-options policy-statement validation term invalid from protocol bgp
set policy-options policy-statement validation term invalid from validation-database
  invalid
set policy-options policy-statement validation term invalid then local-preference 90
set policy-options policy-statement validation term invalid then validation-state invalid
set policy-options policy-statement validation term invalid then community add
  origin-validation-state-invalid
set policy-options policy-statement validation term invalid then accept
set policy-options policy-statement validation term unknown from protocol bgp
set policy-options policy-statement validation term unknown then validation-state
  unknown
```

Copyright © 2013, Juniper Networks, Inc.

```
set policy-options policy-statement validation term unknown then community add
  origin-validation-state-unknown
set policy-options policy-statement validation term unknown then accept
set policy-options community origin-validation-state-invalid members 0x43:100:2
set policy-options community origin-validation-state-unknown members 0x43:100:1
set policy-options community origin-validation-state-valid members 0x43:100:0
set routing-options autonomous-system 100
set routing-options validation group test session 10.0.0.10
```

Device R1

```
set interfaces ge-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 2 family inet address 1.1.1.1/32
set protocols bgp group int type internal
set protocols bgp group int local-address 1.1.1.1
set protocols bgp group int import validation-ibgp
set protocols bgp group int neighbor 1.0.1.1
set protocols ospf area 0.0.0.0 interface ge-1/2/0.1
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set policy-options policy-statement validation-ibgp term valid from community
  origin-validation-state-valid
set policy-options policy-statement validation-ibgp term valid then validation-state valid
set policy-options policy-statement validation-ibgp term invalid from community
  origin-validation-state-invalid
set policy-options policy-statement validation-ibgp term invalid then validation-state
  invalid
set policy-options policy-statement validation-ibgp term unknown from community
  origin-validation-state-unknown
set policy-options policy-statement validation-ibgp term unknown then validation-state
  unknown
set policy-options community origin-validation-state-invalid members 0x43:100:2
set policy-options community origin-validation-state-unknown members 0x43:100:1
set policy-options community origin-validation-state-valid members 0x43:100:0
set routing-options autonomous-system 100
```

Device R2

```
set interfaces ge-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces lo0 unit 5 family inet address 172.16.1.1/32
set interfaces lo0 unit 5 family inet address 192.168.2.3/32
set interfaces lo0 unit 5 family inet address 2.2.0.2/32
set protocols bgp group ext export send-direct
set protocols bgp group ext peer-as 100
set protocols bgp group ext neighbor 10.0.0.5
set policy-options policy-statement send-direct from protocol direct
set policy-options policy-statement send-direct from protocol local
set policy-options policy-statement send-direct then accept
set routing-options autonomous-system 200
```

Configuring Device R0

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R0:

1. Configure the interfaces.

   ```
   [edit interfaces]
   ```


Copyright © 2013, Juniper Networks, Inc.

```
user@R0# set ge-1/2/0 unit 2 description to-R1
user@R0# set ge-1/2/0 unit 2 family inet address 10.0.0.2/30

user@R0# set ge-1/2/1 unit 5 description to-R2
user@R0# set ge-1/2/1 unit 5 family inet address 10.0.0.5/30

user@R0# set ge-1/2/2 unit 9 description to-cache
user@R0# set ge-1/2/2 unit 9 family inet address 10.0.0.9/30

user@R0# set lo0 unit 1 family inet address 1.0.1.1/32
```

2. Configure BGP.

   Apply the **send-direct** export policy so that direct routes are exported from the routing table into BGP.

   Apply the **validation** import policy to set the validation-state and BGP community attributes for all the routes imported (or received) from Device R0's EBGP peers.

   Configure an IBGP session with Device R1. Configure an EBGP session with Device R2.

   ```
   [edit protocols bgp]
   user@R0# set group int type internal
   user@R0# set group int local-address 1.0.1.1
   user@R0# set group int export send-direct
   user@R0# set group int neighbor 1.1.1.1

   user@R0# set group ext type external
   user@R0# set group ext import validation
   user@R0# set group ext export send-direct
   user@R0# set group ext peer-as 200
   user@R0# set group ext neighbor 10.0.0.6
   ```

3. Configure OSPF (or another interior gateway protocol [IGP]) on the interface that faces the IBGP peer and on the loopback interface.

   NOTE: If you use the loopback interface address in the IBGP neighbor statement, you must enable an IGP on the loopback interface. Otherwise, the IBGP session is not established.

   ```
   [edit protocols ospf area 0.0.0.0]
   user@R0# set interface ge-1/2/0.2
   user@R0# set interface lo0.1 passive
   ```

4. Configure the routing policy that exports direct routes from the routing table into BGP.

   ```
   [edit policy-options policy-statement send-direct]
   user@R0# set from protocol direct
   user@R0# set then accept
   ```

5. Configure the routing policy that specifies attributes to be modified based on the validation state of each BGP route.

Copyright © 2013, Juniper Networks, Inc.

```
[edit policy-options policy-statement validation]
user@R0# set term valid from protocol bgp
user@R0# set term valid from validation-database valid
user@R0# set term valid then local-preference 110
user@R0# set term valid then validation-state valid
user@R0# set term valid then community add origin-validation-state-valid
user@R0# set term valid then accept

user@R0# set term invalid from protocol bgp
user@R0# set term invalid from validation-database invalid
user@R0# set term invalid then local-preference 90
user@R0# set term invalid then validation-state invalid
user@R0# set term invalid then community add origin-validation-state-invalid
user@R0# set term invalid then accept

user@R0# set term unknown from protocol bgp
user@R0# set term unknown then validation-state unknown
user@R0# set term unknown then community add origin-validation-state-unknown
user@R0# set term unknown then accept

[edit policy-options]
user@R0# set community origin-validation-state-invalid members 0x43:100:2
user@R0# set community origin-validation-state-unknown members 0x43:100:1
user@R0# set community origin-validation-state-valid members 0x43:100:0
```

6. Configure the session with the RPKI cache server.

```
[edit routing-options validation]
user@R0# set group test session 10.0.0.10
```

7. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R0# set autonomous-system 100
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0# show interfaces
ge-1/2/0 {
    unit 2 {
        description to-R1;
        family inet {
            address 10.0.0.2/30;
        }
    }
}
ge-1/2/1 {
    unit 5 {
        description to-R2;
        family inet {
            address 10.0.0.5/30;
        }
```

 Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  ge-1/2/2 {
    unit 9 {
      description to-cache;
      family inet {
        address 10.0.0.9/30;
      }
    }
  }
  lo0 {
    unit 1 {
      family inet {
        address 1.0.1.1/32;
      }
    }
  }
```

```
user@R0# show protocols
bgp {
  group int {
    type internal;
    local-address 1.0.1.1;
    export send-direct;
    neighbor 1.1.1.1;
  }
  group ext {
    type external;
    import validation;
    export send-direct;
    peer-as 200;
    neighbor 10.0.0.6;
  }
}
ospf {
  area 0.0.0.0 {
    interface ge-1/2/0.2;
    interface lo0.1 {
      passive;
    }
  }
}
```

```
user@R0# show policy-options
policy-statement send-direct {
  from protocol direct;
  then accept;
}
  policy-statement validation {
    term valid {
      from {
        protocol bgp;
        validation-database valid;
      }
      then {
        local-preference 110;
        validation-state valid;
```

```
            community add origin-validation-state-valid;
            accept;
          }
        }
        term invalid {
          from {
            protocol bgp;
            validation-database invalid;
          }
          then {
            local-preference 90;
            validation-state invalid;
            community add origin-validation-state-invalid;
            accept;
          }
        }
        term unknown {
          from protocol bgp;
          then {
            validation-state unknown;
            community add origin-validation-state-unknown;
            accept;
          }
        }
      }
    community origin-validation-state-invalid members 0x43:100:2;
    community origin-validation-state-unknown members 0x43:100:1;
    community origin-validation-state-valid members 0x43:100:0;

    user@R0# show routing-options
    autonomous-system 100;
    validation {
      group test {
        session 10.0.0.10;
      }
    }
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces]
user@R1# set ge-1/2/0 unit 1 family inet address 10.0.0.1/30


user@R1# set lo0 unit 2 family inet address 1.1.1.1/32
```

2. Configure BGP.

Copyright © 2013, Juniper Networks, Inc.

Apply the **validation-ibgp** import policy to set the validation-state and BGP community attributes for all the routes received from Device R1's IBGP peers.

Configure an IBGP session with Device R0.

```
[edit protocols bgp group int]
user@R1# set type internal
user@R1# set local-address 1.1.1.1
user@R1# set import validation-ibgp
user@R1# set neighbor 1.0.1.1
```

3. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R1# set interface ge-1/2/0.1
user@R1# set interface lo0.2 passive
```

4. Configure the routing policy that specifies attributes to be modified based on the validation-state BGP community attribute of the BGP routes received from Device R0.

```
[edit policy-options policy-statement validation-ibgp]
user@R1# set term valid from community origin-validation-state-valid
user@R1# set term valid then validation-state valid

user@R1# set term invalid from community origin-validation-state-invalid
user@R1# set term invalid then validation-state invalid

user@R1# set term unknown from community origin-validation-state-unknown
user@R1# set term unknown then validation-state unknown

[edit policy-options]
user@R1# set community origin-validation-state-invalid members 0x43:100:2
user@R1# set community origin-validation-state-unknown members 0x43:100:1
user@R1# set community origin-validation-state-valid members 0x43:100:0
```

5. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 100
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
ge-1/2/0 {
   unit 1 {
      family inet {
         address 10.0.0.1/30;
      }
   }
}
lo0 {
   unit 2 {
```

Copyright © 2013, Juniper Networks, Inc.

```
      family inet {
        address 1.1.1.1/32;
      }
    }
}
```

```
user@R1# show protocols
bgp {
  group int {
    type internal;
    local-address 1.1.1.1;
    import validation-ibgp;
    neighbor 1.0.1.1;
  }
}
ospf {
  area 0.0.0.0 {
    interface ge-1/2/0.1;
    interface lo0.2 {
      passive;
    }
  }
}
```

```
user@R1# show policy-options
policy-statement validation-ibgp {
  term valid {
    from community origin-validation-state-valid;
    then validation-state valid;
  }
  term invalid {
    from community origin-validation-state-invalid;
    then validation-state invalid;
  }
  term unknown {
    from community origin-validation-state-unknown;
    then validation-state unknown;
  }
}
community origin-validation-state-invalid members 0x43:100:2;
community origin-validation-state-unknown members 0x43:100:1;
community origin-validation-state-valid members 0x43:100:0;
}
```

```
user@R1# show routing-options
autonomous-system 100;
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Configuring Device R2

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R2:

1. Configure the interfaces.

   Several addresses are configured on the loopback interface to serve as routes for demonstration purposes.

   ```
   [edit interfaces]
   user@R2# set ge-1/2/0 unit 6 family inet address 10.0.0.6/30

   user@R2# set lo0 unit 5 family inet address 172.16.1.1/32
   user@R2# set lo0 unit 5 family inet address 192.168.2.3/32
   user@R2# set lo0 unit 5 family inet address 2.2.0.2/32
   ```

2. Configure BGP.

   ```
   [edit protocols bgp]
   user@R2# set group ext export send-direct
   user@R2# set group ext peer-as 100
   user@R2# set group ext neighbor 10.0.0.5
   ```

3. Configure the routing policy.

   ```
   [edit policy-options policy-statement send-direct]
   user@R2# set from protocol direct
   user@R2# set from protocol local
   user@R2# set then accept
   ```

4. Configure the autonomous system (AS) number.

   ```
   [edit routing-options]
   user@R2# set autonomous-system 200
   ```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show interfaces
ge-1/2/0 {
    unit 6 {
        family inet {
            address 10.0.0.6/30;
        }
    }
}
lo0 {
    unit 5 {
        family inet {
            address 172.16.1.1/32;
            address 192.168.2.3/32;
```

Copyright © 2013, Juniper Networks, Inc.

```
        address 2.2.0.2/32;
      }
    }
  }
```

```
user@R2# show protocols
bgp {
  group ext {
    export send-direct;
    peer-as 100;
    neighbor 10.0.0.5;
  }
}
```

```
user@R2# show policy-options
policy-statement send-direct {
  from protocol [ direct local ];
  then accept;
}
```

```
user@R2# show routing-options
autonomous-system 200;
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- Verifying That the Modified Attributes Are Displayed in the Routing Tables on page 394
- Using Trace Operations on page 395
- Displaying Validation Information on page 396

Verifying That the Modified Attributes Are Displayed in the Routing Tables

Purpose Verify that the BGP routes on Device R0 and Device R1 have the expected validation states and the expected local preferences.

Action From operational mode, enter the **show route** command.

```
user@R0> show route
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.0.1.1/32          *[Direct/0] 04:53:39
                     >    via lo0.1
1.1.1.1/32          *[OSPF/10] 04:50:53, metric 1
                     > to 10.0.0.1 via lt-1/2/0.2
2.2.0.2/32          *[BGP/170] 01:30:37, localpref 110
                       AS path: 200 I, validation-state: valid
                     > to 10.0.0.6 via lt-1/2/0.5
10.0.0.0/30         *[Direct/0] 04:51:44
                     >    via lt-1/2/0.2
10.0.0.2/32         *[Local/0] 04:51:45
                          Local via lt-1/2/0.2
10.0.0.4/30         *[Direct/0] 04:51:44
                     >    via lt-1/2/0.5
                     [BGP/170] 02:24:57, localpref 110
```


Copyright © 2013, Juniper Networks, Inc.

```
                      AS path: 200 I, validation-state: valid
                    > to 10.0.0.6 via lt-1/2/0.5
10.0.0.5/32         *[Local/0] 04:51:45
                         Local via lt-1/2/0.5
10.0.0.8/30         *[Direct/0] 03:01:28
                    >    via lt-1/2/0.9
10.0.0.9/32         *[Local/0] 04:51:45
                         Local via lt-1/2/0.9
172.16.1.1/32       *[BGP/170] 02:24:57, localpref 90
                      AS path: 200 I, validation-state: invalid
                    > to 10.0.0.6 via lt-1/2/0.5
192.168.2.3/32      *[BGP/170] 02:24:57, localpref 100
                      AS path: 200 I, validation-state: validation-state: unknown
                    > to 10.0.0.6 via lt-1/2/0.5
224.0.0.5/32        *[OSPF/10] 04:53:46, metric 1
                         MultiRecv

user@R1> show route
inet.0: 10 destinations, 12 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2.2.0.2/32          *[BGP/170] 01:06:58, localpref 110, from 1.0.1.1
                      AS path: 200 I, validation-state: valid
                    > to 10.0.0.2 via lt-1/2/0.1
172.16.1.1/32       *[BGP/170] 00:40:52, localpref 90, from 1.0.1.1
                      AS path: 200 I, validation-state: invalid
                    > to 10.0.0.2 via lt-1/2/0.1
192.168.2.3/32      *[BGP/170] 01:06:58, localpref 100, from 1.0.1.1
                      AS path: 200 I, validation-state: unknown
                    > to 10.0.0.2 via lt-1/2/0.1
224.0.0.5/32        *[OSPF/10] 04:57:09, metric 1
                         MultiRecv
```

Meaning The routes have the expected validation states and local-preference values, based on information received from the RPKI cache server.

Using Trace Operations

Purpose Configure trace operations for origin validation, and monitor the results of a newly advertised route.

Action

- On Device R0, configure tracing.

  ```
  [edit routing-options validation traceoptions]
  user@R0# set file rv-tracing
  user@R0# set flag all

  user@R0# commit
  ```

- On Device R2, add a route by adding another address on the loopback interface.

  ```
  [edit interfaces lo0 unit 5 family inet]
  user@R2# set address 10.4.4.4/32

  user@R2# commit
  ```

- On Device R0, check the trace file.

```
user@R0> file show /var/log/rv-tracing
Jan 27 11:27:43.804803 rv_get_policy_state: rt 10.4.4.4/32 origin-as 200,
validation result valid
Jan 27 11:27:43.944037 task_job_create_background: create prio 7 job
Route-validation GC for task Route Validation
Jan 27 11:27:43.986580 background dispatch running job Route-validation GC for
 task Route Validation
Jan 27 11:27:43.987374 task_job_delete: delete background job Route-validation
 GC for task Route Validation
Jan 27 11:27:43.987463 background dispatch completed job Route-validation GC
for task Route Validation
```

Meaning Route validation is operating as expected.

Displaying Validation Information

Purpose Run the various validation commands.

Copyright © 2013, Juniper Networks, Inc.

Action

```
user@R0> show validation statistics
Total RV records: 3
Total Replication RV records: 3
  Prefix entries: 3
  Origin-AS entries: 3
Memory utilization: 9789 bytes
Policy origin-validation requests: 114
  Valid: 32
  Invalid: 54
  Unknown: 28
BGP import policy reevaluation notifications: 156
  inet.0, 156
  inet6.0, 0

user@R0> show validation database
RV database for instance master

Prefix                Origin-AS Session                                   State
 Mismatch
2.0.0.0/8-32                200 10.0.0.10                                valid
10.0.0.0/8-32               200 10.0.0.10                                valid
172.0.0.0/8-12              200 10.0.0.10                                invalid


  IPv4 records: 3
  IPv6 records: 0

user@R0> show validation replication database
RRV replication database for instance master

Prefix                Origin-AS Session                                    State
2.0.0.0/8-32                200 10.0.0.10                                valid
10.0.0.0/8-32               200 10.0.0.10                                valid
172.0.0.0/8-12              200 10.0.0.10                                invalid


  IPv4 records: 3
  IPv6 records: 0

user@R0> show validation group
master
  Group: test, Maximum sessions: 2
    Session 10.0.0.10, State: Connect, Preference: 100

user@R0> show validation session
Session                                 State   Flaps     Uptime #IPv4/IPv6
records
10.0.0.10                               Up          0   00:02:28 1/0

user@R0> request validation policy
  Enqueued 3 IPv4 records
  Enqueued 0 IPv6 records
```

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 10

BGP Flap Configuration

- Example: Preventing BGP Session Resets on page 399
- Examples: Configuring BGP Flap Damping on page 406

Example: Preventing BGP Session Resets

- Understanding BGP Session Resets on page 399
- Example: Preventing BGP Session Flaps When VPN Families Are Configured on page 399

Understanding BGP Session Resets

Certain configuration actions and events cause BGP sessions to be reset (dropped and then reestablished).

If you configure both route reflection and VPNs on the same routing device, the following modifications to the route reflection configuration cause current BGP sessions to be reset:

- Adding a cluster ID—If a BGP session shares the same autonomous system (AS) number with the group where you add the cluster ID, all BGP sessions are reset regardless of whether the BGP sessions are contained in the same group.
- Creating a new route reflector—If you have an internal BGP (IBGP) group with an AS number and create a new route reflector group with the same AS number, all BGP sessions in the IBGP group and the new route reflector group are reset.
- Changing configuration statements that affect BGP peers, such as renaming a BGP group, resets the BGP sessions.
- If you change the address family specified in the **[edit protocols bgp family]** hierarchy level, all current BGP sessions on the routing device are dropped and then reestablished.

Example: Preventing BGP Session Flaps When VPN Families Are Configured

This example shows a workaround for a known issue in which BGP sessions sometimes go down and then come back up (in other words, flap) when virtual private network (VPN) families are configured. If any VPN family (for example, **inet-vpn**, **inet6-vpn**, **inet-mpvn**, **inet-mdt**, **inet6-mpvn**, **l2vpn**, **iso-vpn**, and so on) is configured on a BGP master instance, a flap of either a route reflector (RR) internal BGP (IBGP) session or an external

Copyright © 2013, Juniper Networks, Inc.

BGP (EBGP) session causes flaps of other BGP sessions configured with the same VPN family.

- Requirements on page 400
- Overview on page 401
- Configuration on page 402
- Verification on page 405

Requirements

Before you begin:

- Configure router interfaces.
- Configure an interior gateway protocol (IGP).
- Configure BGP.
- Configure VPNs.

Copyright © 2013, Juniper Networks, Inc.

Overview

When a router or switch is configured as either a route reflector (RR) or an AS boundary router (an external BGP peer) and a VPN family (for example, the **family inet-vpn unicast** statement) is configured, a flap of either the RR IBGP session or the EBGP session causes flaps of all other BGP sessions that are configured with the **family inet-vpn unicast** statement. This example shows how to prevent these unnecessary session flaps.

The reason for the flapping behavior is related to BGP operation in Junos OS when originating VPN routes.

BGP has the following two modes of operation with respect to originating VPN routes:

- If BGP does not need to propagate VPN routes because the session has no EBGP peer and no RR clients, BGP exports VPN routes directly from the ***instance***.**inet.0** routing table to other PE routers. This behavior is efficient in that it avoids the creation of two copies of many routes (one in the ***instance***.**inet.0** table and one in the **bgp.l3vpn.0** table).
- If BGP does need to propagate VPN routes because the session has an EBGP peer or RR clients, BGP first exports the VPN routes from the ***instance***.**inet.0** table to the **bgp.l3vpn.0** table. Then BGP exports the routes to other PE routers. In this scenario, two copies of the route are needed to enable best-route selection. A PE router might receive the same VPN route from a CE device and also from an RR client or EBGP peer.

When, because of a configuration change, BGP transitions from needing two copies of a route to not needing two copies of a route (or the reverse), all sessions over which VPN routes are exchanged go down and then come back up. Although this example focuses on the **family inet-vpn unicast** statement, the concept applies to all VPN network layer reachability information (NLRI) families. This issue impacts logical systems as well. All BGP sessions in the master instance related to the VPN NLRI family are brought down to implement the table advertisement change for the VPN NLRI family. Changing an RR to a non-RR or the reverse (by adding or removing the **cluster** statement) causes the table advertisement change. Also, configuring the first EBGP session or removing the EBGP session from the configuration in the master instance for a VPN NLRI family causes the table advertisement change.

The way to prevent these unnecessary session flaps is to configure an extra RR client or EBGP session as a passive session with a neighbor address that does not exist. This example focuses on the EBGP case, but the same workaround works for the RR case.

When a session is passive, the routing device does not send Open requests to a peer. Once you configure the routing device to be passive, the routing device does not originate the TCP connection. However, when the routing device receives a connection from the peer and an Open message, it replies with another BGP Open message. Each routing device declares its own capabilities.

Figure 45 on page 402 shows the topology for the EBGP case. Router R1 has an IBGP session with Routers R2 and R3 and an EBGP session with Router R4. All sessions have the **family inet-vpn unicast** statement configured. If the R1-R4 EBGP session flaps, the R1-R2 and R1-R3 BGP sessions flap also.

Copyright © 2013, Juniper Networks, Inc.

Figure 45: Topology for the EBGP Case

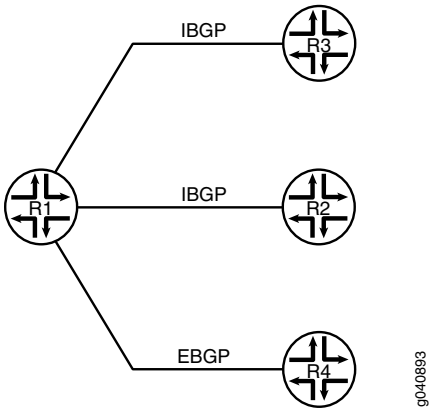

Figure 46 on page 402 shows the topology for the RR case. Router R1 is the RR, and Router R3 is the client. Router R1 has IBGP sessions with Routers R2 and R3. All sessions have the **family inet-vpn unicast** statement configured. If the R1-R3 session flaps, the R1-R2 and R1-R4 sessions flap also.

Figure 46: Topology for the RR Case

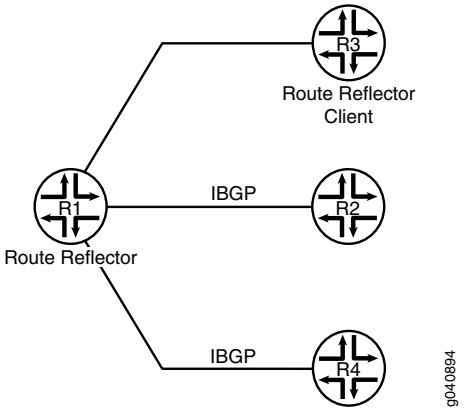

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp family inet-vpn unicast
set protocols bgp family l2vpn signaling
set protocols bgp group R1-R4 type external
set protocols bgp group R1-R4 local-address 4.4.4.2
set protocols bgp group R1-R4 neighbor 4.4.4.1 peer-as 200
set protocols bgp group R1-R2-R3 type internal
set protocols bgp group R1-R2-R3 log-updown
set protocols bgp group R1-R2-R3 local-address 15.15.15.15
set protocols bgp group R1-R2-R3 neighbor 12.12.12.12
set protocols bgp group R1-R2-R3 neighbor 13.13.13.13
```


Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group Fake type external
set protocols bgp group Fake passive
set protocols bgp group Fake neighbor 100.100.100.100 peer-as 500
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the EBGP scenario:

1. Configure one or more VPN families.

   ```
   [edit protocols bgp]
   user@R1# set family inet-vpn unicast
   user@R1# set family l2vpn signaling
   ```

2. Configure the EBGP session.

   ```
   [edit protocols bgp]
   user@R1# set group R1-R4 type external
   user@R1# set group R1-R4 local-address 4.4.4.2
   user@R1# set group R1-R4 neighbor 4.4.4.1 peer-as 200
   ```

3. Configure the IBGP sessions.

   ```
   [edit protocols bgp]
   user@R1# set group R1-R2-R3 type internal
   user@R1# set group R1-R2-R3 local-address 15.15.15.15
   user@R1# set group R1-R2-R3 neighbor 12.12.12.12
   user@R1# set group R1-R2-R3 neighbor 13.13.13.13
   ```

4. (Optional) Configure BGP so that it generates a **syslog** message whenever a BGP peer makes a state transition.

   ```
   [edit protocols bgp]
   user@R1# set group R1-R2-R3 log-updown
   ```

   Enabling the **log-updown** statement causes BGP state transitions to be logged at **warning** level.

Step-by-Step Procedure

To verify that unnecessary session flaps are occurring:

1. Run the **show bgp summary** command to verify that the sessions have been established.

   ```
   user@R1> show bgp summary
   Groups: 2 Peers: 3 Down peers: 0
   Table       Tot Paths Act Paths Suppressed History Damp State Pending
   bgp.l3vpn.0 0         0         0          0       0          0
   bgp.l2vpn.0 0         0         0          0       0          0
   inet.0      0         0         0          0       0          0
   Peer        AS  InPkt OutPkt OutQ Flaps Last Up/Dwn
   State|#Active/Received/Accepted/Damped...
   4.4.4.1     200 6     5      0    0     1:08 Establ
   bgp.l3vpn.0: 0/0/0/0
   bgp.l2vpn.0: 0/0/0/0
   12.12.12.12 100 3     7      0    0     1:18 Establ
   bgp.l3vpn.0: 0/0/0/0
   bgp.l2vpn.0: 0/0/0/0
   ```

Copyright © 2013, Juniper Networks, Inc.

```
13.13.13.13 100 3     6      0    0     1:14 Establ
bgp.l3vpn.0: 0/0/0/0
bgp.l2vpn.0: 0/0/0/0
```

2. Deactivate the EBGP session.

```
user@R1# deactivate group R1-R4
user@R1# commit
```

```
Mar 10 18:27:40 R1: rpd[1464]: bgp_peer_delete:6589: NOTIFICATION sent to
4.4.4.1 (External AS 200): code 6 (Cease) subcode 3 (Peer Unconfigured),
Reason: Peer Deletion
Mar 10 18:27:40 R1: rpd[1464]: bgp_adv_main_update:7253: NOTIFICATION sent
to 12.12.12.12 (Internal AS 100): code 6 (Cease) subcode 6 (Other
Configuration Change), Reason: Configuration change - VPN table advertise
Mar 10 18:27:40 R1: rpd[1464]: bgp_adv_main_update:7253: NOTIFICATION sent
to 13.13.13.13 (Internal AS 100): code 6 (Cease) subcode 6 (Other
Configuration Change), Reason: Configuration change - VPN table advertise
```

3. Run the **show bgp summary** command to view the session flaps.

```
user@R1> show bgp summary
Groups: 1 Peers: 2 Down peers: 2
Table       Tot Paths Act Paths Suppressed History Damp State Pending
bgp.l3vpn.0 0         0         0          0       0          0
bgp.l2vpn.0 0         0         0          0       0          0
inet.0      0         0         0          0       0          0
Peer        AS   InPkt  OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
12.12.12.12 100  4      9      0    1     19   Active
13.13.13.13 100  4      8      0    1     19   Active
```

```
user@R1> show bgp summary
Groups: 1 Peers: 2 Down peers: 0
Table       Tot Paths Act Paths Suppressed History Damp State Pending
bgp.l3vpn.0 0         0         0          0       0          0
bgp.l2vpn.0 0         0         0          0       0          0
inet.0      0         0         0          0       0          0
Peer        AS  InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
12.12.12.12 100 2     3      0    1     0    Establ
bgp.l3vpn.0: 0/0/0/0
bgp.l2vpn.0: 0/0/0/0
13.13.13.13 100 2     3      0    1     0    Establ
bgp.l3vpn.0: 0/0/0/0
bgp.l2vpn.0: 0/0/0/0
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To prevent unnecessary BGP session flaps:

1. Add a passive EBGP session with a neighbor address that does not exist in the peer autonomous system (AS).

```
[edit protocols bgp]
user@R1# set group Fake type external
user@R1# set group Fake passive
user@R1# set neighbor 100.100.100.100 peer-as 500
```


Copyright © 2013, Juniper Networks, Inc.

2. Run the **show bgp summary** command to verify that the real sessions have been established and the passive session is idle.

```
user@R1> show bgp summary
Groups: 3 Peers: 4 Down peers: 1
Table       Tot Paths Act Paths Suppressed History Damp State Pending
bgp.l3vpn.0 0         0         0          0       0          0
bgp.l2vpn.0 0         0         0          0       0          0
Peer            AS  InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
4.4.4.1         200 9500  9439   0    0     2d   23:14:23 Establ
bgp.l3vpn.0: 0/0/0/0
bgp.l2vpn.0: 0/0/0/0
12.12.12.12     100 10309 10239  0    0     3d    5:17:49 Establ
bgp.l3vpn.0: 0/0/0/0
13.13.13.13     100 10306 10241  0    0     3d    5:18:25 Establ
bgp.l3vpn.0: 0/0/0/0
100.100.100.100 500 0     0      0    0     2d   23:38:52 Idle
```

Verification

Confirm that the configuration is working properly.

- Bringing Down the EBGP Session on page 405
- Verifying That the IBGP Sessions Remain Up on page 405

Bringing Down the EBGP Session

Purpose Try to cause the flap issue after the workaround is configured.

Action

```
user@R1# deactivate group R1-R4
user@R1# commit
```

Verifying That the IBGP Sessions Remain Up

Purpose Make sure that the IBGP sessions do not flap after the EBGP session is deactivated.

Copyright © 2013, Juniper Networks, Inc.

Action

```
user@R1> show bgp summary
Groups: 2 Peers: 3 Down peers: 1
Table       Tot Paths Act Paths Suppressed History Damp State Pending
bgp.l3vpn.0 0         0         0          0       0          0
bgp.l2vpn.0 0         0         0          0       0          0
Peer            AS  InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
12.12.12.12     100 10312 10242  0    0     3d    5:19:01  Establ
bgp.l3vpn.0: 0/0/0/0
13.13.13.13     100 10309 10244  0    0     3d    5:19:37  Establ
bgp.l3vpn.0: 0/0/0/0
100.100.100.100 500 0     0      0    0     2d   23:40:04  Idle

user@R1> show bgp summary
Groups: 3 Peers: 4 Down peers: 1
Table       Tot Paths Act Paths Suppressed History Damp State Pending
bgp.l3vpn.0 0         0         0          0       0          0
bgp.l2vpn.0 0         0         0          0       0          0
Peer            AS  InPkt OutPkt OutQ Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
4.4.4.1         200 5     4      0    0     28             Establ
bgp.l3vpn.0: 0/0/0/0
bgp.l2vpn.0: 0/0/0/0
12.12.12.12     100 10314 10244  0    0     3d    5:19:55  Establ
bgp.l3vpn.0: 0/0/0/0
13.13.13.13     100 10311 10246  0    0     3d    5:20:31  Establ
bgp.l3vpn.0: 0/0/0/0
100.100.100.100 500 0     0      0    0     2d   23:40:58  Idle
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Examples: Configuring BGP Flap Damping

- Understanding Damping Parameters on page 406
- Example: Configuring Damping Parameters on page 407
- Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family on page 410

Understanding Damping Parameters

BGP *route flapping* describes the situation in which BGP systems send an excessive number of update messages to advertise network reachability information. BGP *flap damping* is a method of reducing the number of update messages sent between BGP peers, thereby reducing the load on these peers, without adversely affecting the route convergence time for stable routes.

Flap damping reduces the number of update messages by marking routes as ineligible for selection as the active or preferable route. Marking routes in this way leads to some delay, or *suppression*, in the propagation of route information, but the result is increased network stability. You typically apply flap damping to external BGP (EBGP) routes (routes in different ASs). You can also apply flap damping within a confederation, between confederation member ASs. Because routing consistency within an AS is important, do

Copyright © 2013, Juniper Networks, Inc.

not apply flap damping to internal BGP (IBGP) routes. (If you do, it is ignored.) The exception to this rule is when flap damping is applied at the address family level, which is supported in Junos OS Release 12.2 and later. When you apply flap damping at the address family level, it works for both IBGP and EBGP.

By default, route flap damping is not enabled. Damping is applied to external peers and to peers at confederation boundaries.

When you enable damping, default parameters are applied, as summarized in Table 6 on page 407.

Table 6: Damping Parameters

Damping Parameter	Description	Default Value	Possible Values
half-life ***minutes***	Decay half-life—Number of minutes after which an arbitrary value is halved if a route stays stable.	**15** (minutes)	**1** through **4**
max-suppress ***minutes***	Maximum hold-down time for a route, in minutes.	**60** (minutes)	**1** through **720**
reuse	Reuse threshold—Arbitrary value below which a suppressed route can be used again.	**750**	**1** through **20,000**
suppress	Cutoff (suppression) threshold—Arbitrary value above which a route can no longer be used or included in advertisements.	**3000**	**1** through **20,000**

To change the default BGP flap damping values, you define actions by creating a named set of damping parameters and including it in a routing policy with the damping action. For the damping routing policy to work, you also must enable BGP route flap damping.

Example: Configuring Damping Parameters

This example shows how to configure damping parameters.

- Requirements on page 407
- Overview on page 407
- Configuration on page 408
- Verification on page 410

Requirements

Before you begin, configure router interfaces and configure routing protocols, as explained in Routing Policies Configuration Overview.

Overview

In this example, you configure a routing policy called policy1 and a corresponding routing term called term1. Within the term, you configure the route filter to include source routes greater than or equal to 10.210.0.0/16 and destination routes greater than or equal to 10.215.0.0/16. Then you group the source and destination prefixes into a forwarding class called forwarding-class1 and apply policy1 to the forwarding table. The routing policy is

Copyright © 2013, Juniper Networks, Inc.

evaluated when routes are being exported from the routing table into the forwarding table. Only the active routes are exported from the routing table.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set policy-options policy-statement dampenpolicy1 term dampenterm1 from route-filter
  172.16.0.0/12 orlonger damping group1
set policy-options policy-statement dampenpolicy1 term dampenterm1 from route-filter
  192.168.0.0/16 orlonger
set policy-options policy-statement dampenpolicy1 term dampenterm1 from route-filter
  10.0.0.0/8 orlonger
set policy-options policy-statement test term 1 from protocol direct
set policy-options damping group1 half-life 30
set policy-options damping group1 reuse 750
set policy-options damping group1 suppress 3000
set policy-options damping group1 max-suppress 60
set policy-options damping group2 half-life 40
set policy-options damping group2 reuse 1000
set policy-options damping group2 suppress 400
set policy-options damping group2 max-suppress 45
set policy-options damping group3 disable
set protocols bgp damping
set protocols bgp group groupA neighbor 172.16.15.14 import dampenpolicy1
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure damping parameters:

1. Specify the routes to dampen and associate each group of routes with a group name.

   ```
   [edit policy-options policy-statement dampenpolicy1 term dampenterm1]
   user@host# set from route-filter 172.16.0.0/12 orlonger damping group1
   user@host# set from route-filter 192.168.0.0/16 orlonger
   user@host# set from route-filter 10.0.0.0/8 orlonger
   ```

2. Create and configure the damping parameter groups.

   ```
   [edit policy-options damping]
   user@host# set group1 half-life 30 max-suppress 60 reuse 750 suppress 3000
   user@host# set group2 half-life 40 max-suppress 45 reuse 1000 suppress 400
   user@host# set group3 disable
   ```

3. Enable damping for BGP.

   ```
   [edit]
   user@host# set protocols bgp damping
   ```


Copyright © 2013, Juniper Networks, Inc.

4. Apply the policy as an import policy for the BGP neighbor.

```
[edit ]
user@host# set protocols bgp group groupA neighbor 172.16.15.14 import
  dampenpolicy1
```

NOTE: You can refer to the same routing policy one or more times in the same or different import statement.

Results Confirm your configuration by entering the **show policy-options** and **show protocols bgp** commands from configuration mode. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@host# show policy-options
policy-statement dampenpolicy1 {
  term dampenterm1 {
    from {
      route-filter 172.16.0.0/12 orlonger damping group1;
      route-filter 192.168.0.0/16 orlonger;
      route-filter 10.0.0.0/8 orlonger;
    }
  }
}
  damping group1 {
    half-life 30;
    reuse 750;
    suppress 3000;
    max-suppress 60;
  }
  damping group2 {
    half-life 40;
    reuse 1000;
    suppress 400;
    max-suppress 45;
  }
  damping group3 {
    disable;
  }
```

```
user@host# show protocols bgp
damping;
group groupA {
  neighbor 172.16.15.14 {
    import dampenpolicy1;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Verification

Confirm that the configuration is working properly.

- Verifying the Damping Parameters on page 410
- Verifying the Routing Policy on page 410

Verifying the Damping Parameters

Purpose Verify that the policy and term are configured on the device and that the appropriate damping parameters are specified within the term.

Action From operational mode, enter the **show policy-options** command.

Verifying the Routing Policy

Purpose Verify that damping is enabled for BGP and that the routing policy is applied to the routing protocol.

Action From operational mode, enter the **show protocols bgp** command.

Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family

This example shows how to configure an multiprotocol BGP multicast VPN (also called Next-Generation MVPN) with BGP route flap damping.

- Requirements on page 410
- Overview on page 410
- Configuration on page 411
- Verification on page 419

Requirements

This example uses Junos OS Release 12.2. BGP route flap damping support for MBGP MVPN, specifically, and on an address family basis, in general, is introduced in Junos OS Release 12.2.

Overview

BGP route flap damping helps to diminish route instability caused by routes being repeatedly withdrawn and readvertised when a link is intermittently failing.

This example uses the default damping parameters and demonstrates an MBGP MVPN scenario with three provider edge (PE) routing devices, three customer edge (CE) routing devices, and one provider (P) routing device.

Figure 47 on page 411 shows the topology used in this example.

Copyright © 2013, Juniper Networks, Inc.

Figure 47: MBGP MVPN with BGP Route Flap Damping

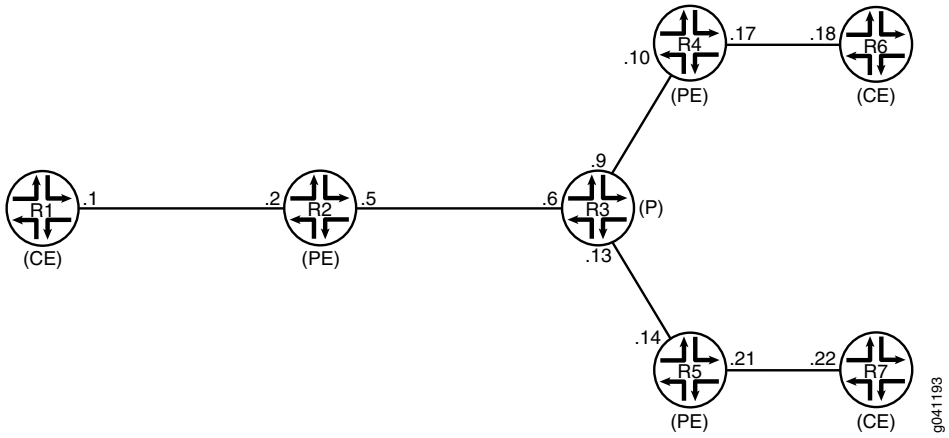

On PE Device R4, BGP route flap damping is configured for address family **inet-mvpn**. A routing policy called **dampPolicy** uses the **nlri-route-type** match condition to damp only MVPN route types 3, 4, and 5. All other MVPN route types are not damped.

This example shows the full configuration on all devices in the "CLI Quick Configuration" on page 411 section. The "Configuring Device R4" on page 414 section shows the step-by-step configuration for PE Device R4.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces ge-1/2/0 unit 1 family inet address 10.1.1.1/30
set interfaces ge-1/2/0 unit 1 family mpls
set interfaces lo0 unit 1 family inet address 1.1.1.1/32
set protocols ospf area 0.0.0.0 interface lo0.1 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.1
set protocols pim rp static address 100.1.1.2
set protocols pim interface all
set routing-options router-id 1.1.1.1
```

Device R2

```
set interfaces ge-1/2/0 unit 2 family inet address 10.1.1.2/30
set interfaces ge-1/2/0 unit 2 family mpls
set interfaces ge-1/2/1 unit 5 family inet address 10.1.1.5/30
set interfaces ge-1/2/1 unit 5 family mpls
set interfaces vt-1/2/0 unit 2 family inet
set interfaces lo0 unit 2 family inet address 1.1.1.2/32
set interfaces lo0 unit 102 family inet address 100.1.1.2/32
set protocols mpls interface ge-1/2/1.5
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 1.1.1.2
set protocols bgp group ibgp family inet-vpn any
set protocols bgp group ibgp family inet-mvpn signaling
set protocols bgp group ibgp neighbor 1.1.1.4
set protocols bgp group ibgp neighbor 1.1.1.5
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/1.5
set protocols ldp interface ge-1/2/1.5
set protocols ldp p2mp
set policy-options policy-statement parent_vpn_routes from protocol bgp
set policy-options policy-statement parent_vpn_routes then accept
set routing-instances vpn-1 instance-type vrf
set routing-instances vpn-1 interface ge-1/2/0.2
set routing-instances vpn-1 interface vt-1/2/0.2
set routing-instances vpn-1 interface lo0.102
set routing-instances vpn-1 route-distinguisher 100:100
set routing-instances vpn-1 provider-tunnel ldp-p2mp
set routing-instances vpn-1 vrf-target target:1:1
set routing-instances vpn-1 protocols ospf export parent_vpn_routes
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface lo0.102 passive
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface ge-1/2/0.2
set routing-instances vpn-1 protocols pim rp static address 100.1.1.2
set routing-instances vpn-1 protocols pim interface ge-1/2/0.2 mode sparse
set routing-instances vpn-1 protocols mvpn
set routing-options router-id 1.1.1.2
set routing-options autonomous-system 1001
```

Device R3

```
set interfaces ge-1/2/0 unit 6 family inet address 10.1.1.6/30
set interfaces ge-1/2/0 unit 6 family mpls
set interfaces ge-1/2/1 unit 9 family inet address 10.1.1.9/30
set interfaces ge-1/2/1 unit 9 family mpls
set interfaces ge-1/2/2 unit 13 family inet address 10.1.1.13/30
set interfaces ge-1/2/2 unit 13 family mpls
set interfaces lo0 unit 3 family inet address 1.1.1.3/32
set protocols mpls interface ge-1/2/0.6
set protocols mpls interface ge-1/2/1.9
set protocols mpls interface ge-1/2/2.13
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.6
set protocols ospf area 0.0.0.0 interface ge-1/2/1.9
set protocols ospf area 0.0.0.0 interface ge-1/2/2.13
set protocols ldp interface ge-1/2/0.6
set protocols ldp interface ge-1/2/1.9
set protocols ldp interface ge-1/2/2.13
set protocols ldp p2mp
set routing-options router-id 1.1.1.3
```

Device R4

```
set interfaces ge-1/2/0 unit 10 family inet address 10.1.1.10/30
set interfaces ge-1/2/0 unit 10 family mpls
set interfaces ge-1/2/1 unit 17 family inet address 10.1.1.17/30
set interfaces ge-1/2/1 unit 17 family mpls
set interfaces vt-1/2/0 unit 4 family inet
set interfaces lo0 unit 4 family inet address 1.1.1.4/32
set interfaces lo0 unit 104 family inet address 100.1.1.4/32
set protocols rsvp interface all aggregate
set protocols mpls interface all
set protocols mpls interface ge-1/2/0.10
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 1.1.1.4
set protocols bgp group ibgp family inet-vpn unicast
```


Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group ibgp family inet-vpn any
set protocols bgp group ibgp family inet-mvpn signaling damping
set protocols bgp group ibgp neighbor 1.1.1.2 import dampPolicy
set protocols bgp group ibgp neighbor 1.1.1.5
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface all
set protocols ospf area 0.0.0.0 interface lo0.4 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.10
set protocols ldp interface ge-1/2/0.10
set protocols ldp p2mp
set policy-options policy-statement dampPolicy term term1 from family inet-mvpn
set policy-options policy-statement dampPolicy term term1 from nlri-route-type 3
set policy-options policy-statement dampPolicy term term1 from nlri-route-type 4
set policy-options policy-statement dampPolicy term term1 from nlri-route-type 5
set policy-options policy-statement dampPolicy term term1 then accept
set policy-options policy-statement dampPolicy then damping no-damp
set policy-options policy-statement dampPolicy then accept
set policy-options policy-statement parent_vpn_routes from protocol bgp
set policy-options policy-statement parent_vpn_routes then accept
set policy-options damping no-damp disable
set routing-instances vpn-1 instance-type vrf
set routing-instances vpn-1 interface vt-1/2/0.4
set routing-instances vpn-1 interface ge-1/2/1.17
set routing-instances vpn-1 interface lo0.104
set routing-instances vpn-1 route-distinguisher 100:100
set routing-instances vpn-1 vrf-target target:1:1
set routing-instances vpn-1 protocols ospf export parent_vpn_routes
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface lo0.104 passive
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface ge-1/2/1.17
set routing-instances vpn-1 protocols pim rp static address 100.1.1.2
set routing-instances vpn-1 protocols pim interface ge-1/2/1.17 mode sparse
set routing-instances vpn-1 protocols mvpn
set routing-options router-id 1.1.1.4
set routing-options autonomous-system 1001
```

Device R5

```
set interfaces ge-1/2/0 unit 14 family inet address 10.1.1.14/30
set interfaces ge-1/2/0 unit 14 family mpls
set interfaces ge-1/2/1 unit 21 family inet address 10.1.1.21/30
set interfaces ge-1/2/1 unit 21 family mpls
set interfaces vt-1/2/0 unit 5 family inet
set interfaces lo0 unit 5 family inet address 1.1.1.5/32
set interfaces lo0 unit 105 family inet address 100.1.1.5/32
set protocols mpls interface ge-1/2/0.14
set protocols bgp group ibgp type internal
set protocols bgp group ibgp local-address 1.1.1.5
set protocols bgp group ibgp family inet-vpn any
set protocols bgp group ibgp family inet-mvpn signaling
set protocols bgp group ibgp neighbor 1.1.1.2
set protocols bgp group ibgp neighbor 1.1.1.4
set protocols ospf area 0.0.0.0 interface lo0.5 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.14
set protocols ldp interface ge-1/2/0.14
set protocols ldp p2mp
set policy-options policy-statement parent_vpn_routes from protocol bgp
set policy-options policy-statement parent_vpn_routes then accept
set routing-instances vpn-1 instance-type vrf
```

Copyright © 2013, Juniper Networks, Inc.

```
set routing-instances vpn-1 interface vt-1/2/0.5
set routing-instances vpn-1 interface ge-1/2/1.21
set routing-instances vpn-1 interface lo0.105
set routing-instances vpn-1 route-distinguisher 100:100
set routing-instances vpn-1 vrf-target target:1:1
set routing-instances vpn-1 protocols ospf export parent_vpn_routes
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface lo0.105 passive
set routing-instances vpn-1 protocols ospf area 0.0.0.0 interface ge-1/2/1.21
set routing-instances vpn-1 protocols pim rp static address 100.1.1.2
set routing-instances vpn-1 protocols pim interface ge-1/2/1.21 mode sparse
set routing-instances vpn-1 protocols mvpn
set routing-options router-id 1.1.1.5
set routing-options autonomous-system 1001
```

Device R6

```
set interfaces ge-1/2/0 unit 18 family inet address 10.1.1.18/30
set interfaces ge-1/2/0 unit 18 family mpls
set interfaces lo0 unit 6 family inet address 1.1.1.6/32
set protocols sap listen 224.1.1.1
set protocols ospf area 0.0.0.0 interface lo0.6 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.18
set protocols pim rp static address 100.1.1.2
set protocols pim interface all
set routing-options router-id 1.1.1.6
```

Device R7

```
set interfaces ge-1/2/0 unit 22 family inet address 10.1.1.22/30
set interfaces ge-1/2/0 unit 22 family mpls
set interfaces lo0 unit 7 family inet address 1.1.1.7/32
set protocols ospf area 0.0.0.0 interface lo0.7 passive
set protocols ospf area 0.0.0.0 interface ge-1/2/0.22
set protocols pim rp static address 100.1.1.2
set protocols pim interface all
set routing-options router-id 1.1.1.7
```

Configuring Device R4

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R4:

1. Configure the interfaces.

```
[edit interfaces]
user@R4# set ge-1/2/0 unit 10 family inet address 10.1.1.10/30
user@R4# set ge-1/2/0 unit 10 family mpls
user@R4# set ge-1/2/1 unit 17 family inet address 10.1.1.17/30
user@R4# set ge-1/2/1 unit 17 family mpls
user@R4# set vt-1/2/0 unit 4 family inet
user@R4# set lo0 unit 4 family inet address 1.1.1.4/32
user@R4# set lo0 unit 104 family inet address 100.1.1.4/32
```

2. Configure MPLS and the signaling protocols on the interfaces.

```
[edit protocols]
user@R4# set mpls interface all
```


Copyright © 2013, Juniper Networks, Inc.

```
user@R4# set mpls interface ge-1/2/0.10
user@R4# set rsvp interface all aggregate
user@R4# set ldp interface ge-1/2/0.10
user@R4# set ldp p2mp
```

3. Configure BGP.

   The BGP configuration enables BGP route flap damping for the **inet-mvpn** address family. The BGP configuration also imports into the routing table the routing policy called **dampPolicy**. This policy is applied to neighbor PE Device R2.

```
[edit protocols bgp group ibgp]
user@R4# set type internal
user@R4# set local-address 1.1.1.4
user@R4# set family inet-vpn unicast
user@R4# set family inet-vpn any
user@R4# set family inet-mvpn signaling damping
user@R4# set neighbor 1.1.1.2 import dampPolicy
user@R4# set neighbor 1.1.1.5
```

4. Configure an interior gateway protocol.

```
[edit protocols ospf]
user@R4# set traffic-engineering
[edit protocols ospf area 0.0.0.0]
user@R4# set interface all
user@R4# set interface lo0.4 passive
user@R4# set interface ge-1/2/0.10
```

5. Configure a damping policy that uses the **nlri-route-type** match condition to damp only MVPN route types 3, 4, and 5.

```
[edit policy-options policy-statement dampPolicy term term1]
user@R4# set from family inet-mvpn
user@R4# set from nlri-route-type 3
user@R4# set from nlri-route-type 4
user@R4# set from nlri-route-type 5
user@R4# set then accept
```

6. Configure the **damping** policy to disable BGP route flap damping.

   The **no-damp** policy (**damping no-damp disable**) causes any damping state that is present in the routing table to be deleted. The **then damping no-damp** statement applies the **no-damp** policy as an action and has no **from** match conditions. Therefore, all routes that are not matched by **term1** are matched by this term, with the result that all other MVPN route types are not damped.

```
[edit policy-options policy-statement dampPolicy]
user@R4# set then damping no-damp
user@R4# set then accept
[edit policy-options]
user@R4# set damping no-damp disable
```

7. Configure the **parent_vpn_routes** to accept all other BGP routes that are not from the **inet-mvpn** address family.

   This policy is applied as an OSPF export policy in the routing instance.

```
[edit policy-options policy-statement parent_vpn_routes]
```

Copyright © 2013, Juniper Networks, Inc.

```
user@R4# set from protocol bgp
user@R4# set then accept
```

8. Configure the VPN routing and forwarding (VRF) instance.

```
[edit routing-instances vpn-1]
user@R4# set instance-type vrf
user@R4# set interface vt-1/2/0.4
user@R4# set interface ge-1/2/1.17
user@R4# set interface lo0.104
user@R4# set route-distinguisher 100:100
user@R4# set vrf-target target:1:1
user@R4# set protocols ospf export parent_vpn_routes
user@R4# set protocols ospf area 0.0.0.0 interface lo0.104 passive
user@R4# set protocols ospf area 0.0.0.0 interface ge-1/2/1.17
user@R4# set protocols pim rp static address 100.1.1.2
user@R4# set protocols pim interface ge-1/2/1.17 mode sparse
user@R4# set protocols mvpn
```

9. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-instances vpn-A]
user@R4# set routing-options router-id 1.1.1.4
user@R4# set routing-options autonomous-system 1001
```

10. If you are done configuring the device, commit the configuration.

```
user@R4# commit
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show routing-instances**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show interfaces
ge-1/2/0 {
    unit 10 {
        family inet {
            address 10.1.1.10/30;
        }
        family mpls;
    }
}
ge-1/2/1 {
    unit 17 {
        family inet {
            address 10.1.1.17/30;
        }
        family mpls;
    }
}
vt-1/2/0 {
    unit 4 {
        family inet;
    }
```


Copyright © 2013, Juniper Networks, Inc.

```
}
lo0 {
  unit 4 {
    family inet {
      address 1.1.1.4/32;
    }
  }
  unit 104 {
    family inet {
      address 100.1.1.4/32;
    }
  }
}
```

```
user@R4# show policy-options
policy-statement dampPolicy {
  term term1 {
    from {
      family inet-mvpn;
      nlri-route-type [ 3 4 5 ];
    }
    then accept;
  }
  then {
    damping no-damp;
    accept;
  }
}
policy-statement parent_vpn_routes {
  from protocol bgp;
  then accept;
}
damping no-damp {
  disable;
}
```

```
user@R4# show protocols
rsvp {
  interface all {
    aggregate;
  }
}
mpls {
  interface all;
  interface ge-1/2/0.10;
}
bgp {
  group ibgp {
    type internal;
    local-address 1.1.1.4;
    family inet-vpn {
      unicast;
      any;
    }
    family inet-mvpn {
      signaling {
        damping;
```

Copyright © 2013, Juniper Networks, Inc.

```
        }
      }
      neighbor 1.1.1.2 {
        import dampPolicy;
      }
      neighbor 1.1.1.5;
    }
  }
  ospf {
    traffic-engineering;
    area 0.0.0.0 {
      interface all;
      interface lo0.4 {
        passive;
      }
      interface ge-1/2/0.10;
    }
  }
  ldp {
    interface ge-1/2/0.10;
    p2mp;
  }
```

```
user@R4# show routing-instances
vpn-1 {
  instance-type vrf;
  interface vt-1/2/0.4;
  interface ge-1/2/1.17;
  interface lo0.104;
  route-distinguisher 100:100;
  vrf-target target:1:1;
  protocols {
    ospf {
      export parent_vpn_routes;
      area 0.0.0.0 {
        interface lo0.104 {
          passive;
        }
        interface ge-1/2/1.17;
      }
    }
    pim {
      rp {
        static {
          address 100.1.1.2;
        }
      }
      interface ge-1/2/1.17 {
        mode sparse;
      }
    }
    mvpn;
  }
}
```

```
user@R4# show routing-optons
router-id 1.1.1.4;
```


Copyright © 2013, Juniper Networks, Inc.

```
autonomous-system 1001;
```

Verification

Confirm that the configuration is working properly.

- Verifying That Route Flap Damping Is Disabled on page 419
- Verifying Route Flap Damping on page 419

Verifying That Route Flap Damping Is Disabled

Purpose Verify the presence of the **no-damp** policy, which disables damping for MVPN route types other than 3, 4, and 5.

Action From operational mode, enter the **show policy damping** command.

```
user@R4> show policy damping
Default damping information:
  Halflife: 15 minutes
  Reuse merit: 750 Suppress/cutoff merit: 3000
  Maximum suppress time: 60 minutes
  Computed values:
    Merit ceiling: 12110
    Maximum decay: 6193
Damping information for "no-damp":
 Damping disabled
```

Meaning The output shows that the default damping parameters are in effect and that the **no-damp** policy is also in effect for the specified route types.

Verifying Route Flap Damping

Purpose Check whether BGP routes have been damped.

Action From operational mode, enter the **show bgp summary** command.

```
user@R4> show bgp summary
Groups: 1 Peers: 2 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State     Pending
bgp.l3vpn.0
                       6          6          0          0          0          0
bgp.l3vpn.2
                       0          0          0          0          0          0
bgp.mvpn.0
                       2          2          0          0          0          0
Peer                     AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Accepted/Damped...
1.1.1.2                1001       3159       3155       0       0    23:43:47
Establ
  bgp.l3vpn.0: 3/3/3/0
  bgp.l3vpn.2: 0/0/0/0
  bgp.mvpn.0: 1/1/1/0
  vpn-1.inet.0: 3/3/3/0
  vpn-1.mvpn.0: 1/1/1/0
1.1.1.5                1001       3157       3154       0       0    23:43:40
Establ
  bgp.l3vpn.0: 3/3/3/0
```

Copyright © 2013, Juniper Networks, Inc.

```
bgp.l3vpn.2: 0/0/0/0
bgp.mvpn.0: 1/1/1/0
vpn-1.inet.0: 3/3/3/0
vpn-1.mvpn.0: 1/1/1/0
```

Meaning When **Damp State** field shows that zero routes in the bgp.mvpn.0 routing table have been damped. Further down, the last number in the State field shows that zero routes have been damped for BGP peer 1.1.1.2.

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 11

Multiprotocol BGP Configuration

- Examples: Configuring Multiprotocol BGP on page 421
- Example: Configuring Flow Routes on page 434

Examples: Configuring Multiprotocol BGP

- Understanding Multiprotocol BGP on page 421
- Example: Configuring IPv6 BGP Routes over IPv4 Transport on page 427
- Enabling Layer 2 VPN and VPLS Signaling on page 433

Understanding Multiprotocol BGP

Multiprotocol BGP (MP-BGP) is an extension to BGP that enables BGP to carry routing information for multiple network layers and address families. MP-BGP can carry the unicast routes used for multicast routing separately from the routes used for unicast IP forwarding.

To enable MP-BGP, you configure BGP to carry network layer reachability information (NLRI) for address families other than unicast IPv4 by including the **family inet** statement:

```
family inet {
    (any | flow | labeled-unicast | multicast | unicast) {
        accepted-prefix-limit {
            maximum number;
            teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        <loops number>;
        prefix-limit {
            maximum number;
            teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        rib-group group-name;
        topology name {
            community {
                target identifier;
            }
        }
    }
}
```

Copyright © 2013, Juniper Networks, Inc.

To enable MP-BGP to carry NLRI for the IPv6 address family, include the **family inet6** statement:

```
family inet6 {
  (any | labeled-unicast | multicast | unicast) {
    accepted-prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    <loops number>;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    rib-group group-name;
  }
}
```

On routers only, to enable MP-BGP to carry Layer 3 virtual private network (VPN) NLRI for the IPv4 address family, include the **family inet-vpn** statement:

```
family inet-vpn {
  (any | flow | multicast | unicast) {
    accepted-prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    <loops number>;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    rib-group group-name;
  }
}
```

On routers only, to enable MP-BGP to carry Layer 3 VPN NLRI for the IPv6 address family, include the **family inet6-vpn** statement:

```
family inet6-vpn {
  (any | multicast | unicast) {
    accepted-prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    <loops number>;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    rib-group group-name;
  }
}
```

On routers only, to enable MP-BGP to carry multicast VPN NLRI for the IPv4 address family and to enable VPN signaling, include the **family inet-mvpn** statement:

Copyright © 2013, Juniper Networks, Inc.

```
family inet-mvpn {
  signaling {
    accepted-prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    <loops number>;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
  }
}
```

To enable MP-BGP to carry multicast VPN NLRI for the IPv6 address family and to enable VPN signaling, include the **family inet6-mvpn** statement:

```
family inet6-mvpn {
  signaling {
    accepted-prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    <loops number>;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout <forever | minutes>;
    }
  }
}
```

For more information about multiprotocol BGP-based multicast VPNs, see the Multicast Protocols Configuration Guide.

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

NOTE: **If you change the address family specified in the [edit protocols bgp family] hierarchy level, all current BGP sessions on the routing device are dropped and then reestablished.**

In Junos OS Release 9.6 and later, you can specify a loops value for a specific BGP address family.

By default, BGP peers carry only unicast routes used for unicast forwarding purposes. To configure BGP peers to carry only multicast routes, specify the **multicast** option. To configure BGP peers to carry both unicast and multicast routes, specify the **any** option.

When MP-BGP is configured, BGP installs the MP-BGP routes into different routing tables. Each routing table is identified by the protocol family or address family indicator (AFI) and a subsequent address family identifier (SAFI).

The following list shows all possible AFI and SAFI combinations:

Copyright © 2013, Juniper Networks, Inc.

- AFI=1, SAFI=1, IPv4 unicast
- AFI=1, SAFI=2, IPv4 multicast
- AFI=1, SAFI=128, L3VPN IPv4 unicast
- AFI=1, SAFI=129, L3VPN IPv4 multicast
- AFI=2, SAFI=1, IPv6 unicast
- AFI=2, SAFI=2, IPv6 multicast
- AFI=25, SAFI=65, BGP-VPLS/BGP-L2VPN
- AFI=2, SAFI=128, L3VPN IPv6 unicast
- AFI=2, SAFI=129, L3VPN IPv6 multicast
- AFI=1, SAFI=132, RT-Constrain
- AFI=1, SAFI=133, Flow-spec
- AFI=1, SAFI=134, Flow-spec
- AFI=3, SAFI=128, CLNS VPN
- AFI=1, SAFI=5, NG-MVPN IPv4
- AFI=2, SAFI=5, NG-MVPN IPv6
- AFI=1, SAFI=66, MDT-SAFI
- AFI=1, SAFI=4, labeled IPv4
- AFI=2, SAFI=4, labeled IPv6 (6PE)

Routes installed in the inet.2 routing table can only be exported to MP-BGP peers because they use the SAFI, identifying them as routes to multicast sources. Routes installed in the inet.0 routing table can only be exported to standard BGP peers.

The inet.2 routing table should be a subset of the routes that you have in inet.0, since it is unlikely that you would have a route to a multicast source to which you could not send unicast traffic. The inet.2 routing table stores the unicast routes that are used for multicast reverse-path-forwarding checks and the additional reachability information learned by MP-BGP from the NLRI multicast updates. An inet.2 routing table is automatically created when you configure MP-BGP (by setting NLRI to **any**).

When you enable MP-BGP, you can do the following:

- Limiting the Number of Prefixes Received on a BGP Peer Session on page 425
- Limiting the Number of Prefixes Accepted on a BGP Peer Session on page 425
- Configuring BGP Routing Table Groups on page 426
- Resolving Routes to PE Routing Devices Located in Other ASs on page 426
- Allowing Labeled and Unlabeled Routes on page 427

Copyright © 2013, Juniper Networks, Inc.

Limiting the Number of Prefixes Received on a BGP Peer Session

You can limit the number of prefixes received on a BGP peer session, and log rate-limited messages when the number of injected prefixes exceeds a set limit. You can also tear down the peering when the number of prefixes exceeds the limit.

To configure a limit to the number of prefixes that can be received on a BGP session, include the **prefix-limit** statement:

```
prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

For **maximum** ***number***, specify a value in the range from 1 through 4,294,967,295. When the specified maximum number of prefixes is exceeded, a system log message is sent.

If you include the **teardown** statement, the session is torn down when the maximum number of prefixes is exceeded. If you specify a percentage, messages are logged when the number of prefixes exceeds that percentage of the specified maximum limit. After the session is torn down, it is reestablished in a short time (unless you include the **idle-timeout** statement). If you include the **idle-timeout** statement, the session can be kept down for a specified amount of time, or forever. If you specify **forever**, the session is reestablished only after the you issue a **clear bgp neighbor** command.

NOTE: In Junos OS Release 9.2 and later, you can alternatively configure a limit to the number of prefixes that can be accepted on a BGP peer session. For more information, see "Understanding Multiprotocol BGP" on page 421.

Limiting the Number of Prefixes Accepted on a BGP Peer Session

In Junos OS Release 9.2 and later, you can limit the number of prefixes that can be accepted on a BGP peer session. When that specified limit is exceeded, a system log message is sent. You can also specify to reset the BGP session if the limit to the number of specified prefixes is exceeded.

To configure a limit to the number of prefixes that can be accepted on a BGP peer session, include the **accepted-prefix-limit** statement:

```
accepted-prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

For **maximum** ***number***, specify a value in the range from 1 through 4,294,967,295.

Copyright © 2013, Juniper Networks, Inc.

Include the **teardown** statement to reset the BGP peer session when the number of accepted prefixes exceeds the configured limit. You can also include a percentage value from 1 through 100 to have a system log message sent when the number of accepted prefixes exceeds that percentage of the maximum limit. By default, a BGP session that is reset is reestablished within a short time. Include the **idle-timeout** statement to prevent the BGP session from being reestablished for a specified period of time. You can configure a timeout value from 1 through 2400 minutes. Include the **forever** option to prevent the BGP session from being reestablished until you issue the **clear bgp neighbor** command.

NOTE: When nonstop active routing (NSR) is enabled and a switchover to a backup Routing Engine occurs, BGP peers that are down are automatically restarted. The peers are restarted even if the **idle-timeout forever** statement is configured.

NOTE: Alternatively, you can configure a limit to the number of prefixes that can be *received* (as opposed to accepted) on a BGP peer session. For more information, see "Limiting the Number of Prefixes Received on a BGP Peer Session" on page 425.

Configuring BGP Routing Table Groups

When a BGP session receives a unicast or multicast NLRI, it installs the route in the appropriate table (**inet.0** or **inet6.0** for unicast, and **inet.2** or **inet6.2** for multicast). To add unicast prefixes to both the unicast and multicast tables, you can configure BGP routing table groups. This is useful if you cannot perform multicast NLRI negotiation.

To configure BGP routing table groups, include the **rib-group** statement:

```
rib-group group-name;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Resolving Routes to PE Routing Devices Located in Other ASs

You can allow labeled routes to be placed in the **inet.3** routing table for route resolution. These routes are then resolved for provider edge (PE) routing device connections where the remote PE is located across another autonomous system (AS). For a PE routing device to install a route in the VPN routing and forwarding (VRF) routing instance, the next hop must resolve to a route stored within the **inet.3** table.

To resolve routes into the **inet.3** routing table, include the **resolve-vpn** statement:

```
resolve-vpn group-name;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Copyright © 2013, Juniper Networks, Inc.

Allowing Labeled and Unlabeled Routes

You can allow both labeled and unlabeled routes to be exchanged in a single session. The labeled routes are placed in the inet.3 or inet6.3 routing table, and both labeled and unlabeled unicast routes can be sent to or received by the routing device.

To allow both labeled and unlabeled routes to be exchanged, include the **rib** statement:

```
rib (inet.3 | inet6.3);
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Example: Configuring IPv6 BGP Routes over IPv4 Transport

This example demonstrates how to export both IPv6 and IPv4 prefixes over an IPv4 connection where both sides are configured with an IPv4 interface.

- Requirements on page 427
- Overview on page 427
- Configuration on page 428
- Verification on page 431

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

Keep the following in mind when exporting IPv6 BGP prefixes:

- BGP derives next-hop prefixes using the IPv4-compatible IPv6 prefix. For example, the IPv4 next-hop prefix **10.19.1.1** translates to the IPv6 next-hop prefix ::ffff:10.19.1.1.

  NOTE: **There must be an active route to the IPv4-compatible IPv6 next hop to export IPv6 BGP prefixes.**

- An IPv6 connection must be configured over the link. The connection must be either an IPv6 tunnel or a dual-stack configuration. Dual stacking is used in this example.
- When configuring IPv4-compatible IPv6 prefixes, use a mask that is longer than 96 bits.
- Configure a static route if you want to use normal IPv6 prefixes. This example uses static routes.

Figure 48 on page 428 shows the sample topology.

Copyright © 2013, Juniper Networks, Inc.

Figure 48: Topology for Configuring IPv6 BGP Routes over IPv4 Transport

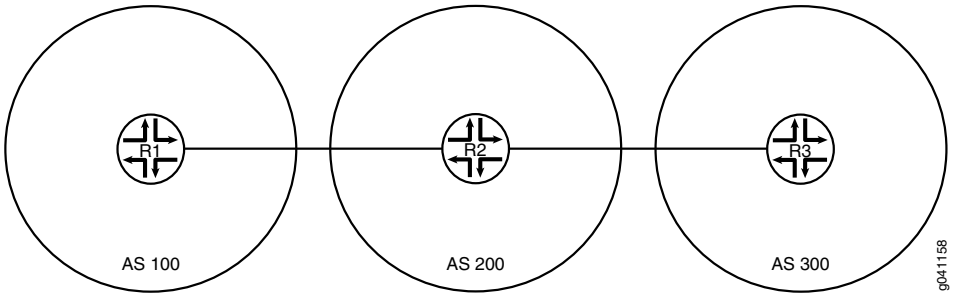

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 192.168.10.1/24
set interfaces fe-1/2/0 unit 1 family inet6 address ::ffff:192.168.10.1/120
set interfaces lo0 unit 1 family inet address 10.10.10.1/32
set protocols bgp group ext type external
set protocols bgp group ext family inet unicast
set protocols bgp group ext family inet6 unicast
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 200
set protocols bgp group ext neighbor 192.168.10.10
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options rib inet6.0 static route ::ffff:192.168.20.0/120 next-hop
  ::ffff:192.168.10.10
set routing-options static route 192.168.20.0/24 next-hop 192.168.10.10
set routing-options autonomous-system 100
```

Device R2

```
set interfaces fe-1/2/0 unit 2 family inet address 192.168.10.10/24
set interfaces fe-1/2/0 unit 2 family inet6 address ::ffff:192.168.10.10/120
set interfaces fe-1/2/1 unit 3 family inet address 192.168.20.21/24
set interfaces fe-1/2/1 unit 3 family inet6 address ::ffff:192.168.20.21/120
set interfaces lo0 unit 2 family inet address 10.10.0.1/32
set protocols bgp group ext type external
set protocols bgp group ext family inet unicast
set protocols bgp group ext family inet6 unicast
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext neighbor 192.168.10.1 peer-as 100
set protocols bgp group ext neighbor 192.168.20.1 peer-as 300
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options autonomous-system 200
```


Copyright © 2013, Juniper Networks, Inc.

Device R3

```
set interfaces fe-1/2/0 unit 4 family inet address 192.168.20.1/24
set interfaces fe-1/2/0 unit 4 family inet6 address ::ffff:192.168.20.1/120
set interfaces lo0 unit 3 family inet address 10.10.20.1/32
set protocols bgp group ext type external
set protocols bgp group ext family inet unicast
set protocols bgp group ext family inet6 unicast
set protocols bgp group ext export send-direct
set protocols bgp group ext export send-static
set protocols bgp group ext peer-as 200
set protocols bgp group ext neighbor 192.168.20.21
set policy-options policy-statement send-direct term 1 from protocol direct
set policy-options policy-statement send-direct term 1 then accept
set policy-options policy-statement send-static term 1 from protocol static
set policy-options policy-statement send-static term 1 then accept
set routing-options rib inet6.0 static route ::ffff:192.168.10.0/120 next-hop
  ::ffff:192.168.20.21
set routing-options static route 192.168.10.0/24 next-hop 192.168.20.21
set routing-options autonomous-system 300
```

Configuring Device R1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure Device R1:

1. Configure the interfaces, including both an IPv4 address and an IPv6 address.

   ```
   [edit interfaces]
   user@R1# set fe-1/2/0 unit 1 family inet address 192.168.10.1/24
   user@R1# set fe-1/2/0 unit 1 family inet6 address ::ffff:192.168.10.1/120
   user@R1# set lo0 unit 1 family inet address 10.10.10.1/32
   ```

2. Configure EBGP.

   ```
   [edit protocols bgp group ext]
   user@R1# set type external
   user@R1# set export send-direct
   user@R1# set export send-static
   user@R1# set peer-as 200
   user@R1# set neighbor 192.168.10.10
   ```

3. Enable BGP to carry IPv4 unicast and IPv6 unicast routes. .

   ```
   [edit protocols bgp group ext]
   user@R1# set family inet unicast
   user@R1# set family inet6 unicast
   ```

   IPv4 unicast routes are enabled by default. The configuration is shown here for completeness.

4. Configure the routing policy.

   ```
   [edit policy-options]
   user@R1# set policy-statement send-direct term 1 from protocol direct
   user@R1# set policy-statement send-direct term 1 then accept
   user@R1# set policy-statement send-static term 1 from protocol static
   ```

Copyright © 2013, Juniper Networks, Inc.

```
user@R1# set policy-statement send-static term 1 then accept
```

5. Configure some static routes.

```
[edit routing-options]
user@R1# set rib inet6.0 static route ::ffff:192.168.20.0/120 next-hop
  ::ffff:192.168.10.10
user@R1# set static route 192.168.20.0/24 next-hop 192.168.10.10
```

6. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R1# set autonomous-system 100
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 192.168.10.1/24;
    }
    family inet6 {
      address ::ffff:192.168.10.1/120;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 10.10.10.1/32;
    }
  }
}
```

```
user@R1# show policy-options
policy-statement send-direct {
  term 1 {
    from protocol direct;
    then accept;
  }
}
policy-statement send-static {
  term 1 {
    from protocol static;
    then accept;
  }
}
```

```
user@R1# show protocols
bgp {
  group ext {
    type external;
    family inet {
```

 Copyright © 2013, Juniper Networks, Inc.

```
        unicast;
      }
      family inet6 {
        unicast;
      }
      export [ send-direct send-static ];
      peer-as 200;
      neighbor 192.168.10.10;
    }
  }
```

```
user@R1# show routing-options
rib inet6.0 {
  static {
    route ::ffff:192.168.20.0/120 next-hop ::ffff:192.168.10.10;
  }
}
static {
  route 192.168.20.0/24 next-hop 192.168.10.10;
}
autonomous-system 100;
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Device R2 and Device R3, changing the interface names and IP addresses, as needed.

Verification

Confirm that the configuration is working properly.

- Checking the Neighbor Status on page 431
- Checking the Routing Table on page 433

Checking the Neighbor Status

Purpose Make sure that BGP is enabled to carry IPv6 unicast routes.

Action From operational mode, enter the **show bgp neighbor** command.

```
user@R2> show bgp neighbor
Peer: 192.168.10.1+179 AS 100  Local: 192.168.10.10+54226 AS 200
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct send-static ]
  Options: <Preference AddressFamily PeerAS Refresh>
  Address families configured: inet-unicast inet6-unicast
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.10.1      Local ID: 10.10.0.1         Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 0
  BFD: disabled, down
  Local Interface: fe-1/2/0.2
  NLRI for restart configured on peer: inet-unicast inet6-unicast
  NLRI advertised by peer: inet-unicast inet6-unicast
  NLRI for this session: inet-unicast inet6-unicast
  Peer supports Refresh capability (2)
```

Copyright © 2013, Juniper Networks, Inc.

```
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast inet6-unicast
  NLRI of received end-of-rib markers: inet-unicast inet6-unicast
  NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
  Peer supports 4 byte AS extension (peer-as 100)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              1
    Received prefixes:            3
    Accepted prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          4
  Table inet6.0 Bit: 20000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            1
    Accepted prefixes:            1
    Suppressed due to damping:    0
    Advertised prefixes:          2
  Last traffic (seconds): Received 24   Sent 12   Checked 60
  Input messages:  Total 132    Updates 6       Refreshes 0     Octets 2700
  Output messages: Total 133    Updates 3       Refreshes 0     Octets 2772
  Output Queue[0]: 0
  Output Queue[1]: 0

Peer: 192.168.20.1+179 AS 300  Local: 192.168.20.21+54706 AS 200
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ send-direct send-static ]
  Options: <Preference AddressFamily PeerAS Refresh>
  Address families configured: inet-unicast inet6-unicast
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.10.20.1      Local ID: 10.10.0.1         Active Holdtime: 90
  Keepalive Interval: 30         Peer index: 1
  BFD: disabled, down
  Local Interface: fe-1/2/1.3
  NLRI for restart configured on peer: inet-unicast inet6-unicast
  NLRI advertised by peer: inet-unicast inet6-unicast
  NLRI for this session: inet-unicast inet6-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast inet6-unicast
  NLRI of received end-of-rib markers: inet-unicast inet6-unicast
  NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
  Peer supports 4 byte AS extension (peer-as 300)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              1
    Received prefixes:            3
    Accepted prefixes:            2
    Suppressed due to damping:    0
    Advertised prefixes:          4
```


Copyright © 2013, Juniper Networks, Inc.

```
Table inet6.0 Bit: 20000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:              0
  Received prefixes:            1
  Accepted prefixes:            1
  Suppressed due to damping:    0
  Advertised prefixes:          2
Last traffic (seconds): Received 1    Sent 15   Checked 75
Input messages:  Total 133    Updates 6       Refreshes 0     Octets 2719
Output messages: Total 131    Updates 3       Refreshes 0     Octets 2734
Output Queue[0]: 0
Output Queue[1]: 0
```

Meaning The various occurrences of **inet6-unicast** in the output shows that BGP is enabled to carry IPv6 unicast routes.

Checking the Routing Table

Purpose Make sure that Device R2 has BGP routes in its inet6.0 routing table.

Action From operational mode, enter the **show route protocol bgp inet6.0** command.

```
user@R2> show route protocol bgp table inet6.0
inet6.0: 7 destinations, 10 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::ffff:192.168.10.0/120  [BGP/170] 01:03:49, localpref 100, from 192.168.20.1
                      AS path: 300 I
                    > to ::ffff:192.168.20.21 via fe-1/2/1.3
::ffff:192.168.20.0/120  [BGP/170] 01:03:53, localpref 100, from 192.168.10.1
                      AS path: 100 I
                    > to ::ffff:192.168.10.10 via fe-1/2/0.2
```

Enabling Layer 2 VPN and VPLS Signaling

You can enable BGP to carry Layer 2 VPN and VPLS NLRI messages.

To enable VPN and VPLS signaling, include the **family** statement:

```
family {
  l2vpn {
    signaling {
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
    }
  }
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure a maximum number of prefixes, include the **prefix-limit** statement:

```
prefix-limit {
```

Copyright © 2013, Juniper Networks, Inc.

```
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

When you set the maximum number of prefixes, a message is logged when that number is reached. If you include the **teardown** statement, the session is torn down when the maximum number of prefixes is reached. If you specify a percentage, messages are logged when the number of prefixes reaches that percentage. Once the session is torn down, it is reestablished in a short time. Include the **idle-timeout** statement to keep the session down for a specified amount of time, or forever. If you specify **forever**, the session is reestablished only after you use the **clear bgp neighbor** command.

Related Documentation

- Example: Configuring Flow Routes on page 434
- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Example: Configuring Flow Routes

- Understanding Flow Routes on page 434
- Example: Enabling BGP to Carry Flow-Specification Routes on page 438

Understanding Flow Routes

A flow route is an aggregation of match conditions for IP packets. Flow routes are propagated through the network using flow-specification network-layer reachability information (NLRI) messages and installed into the flow routing table ***instance-name*.inetflow.0**. Packets can travel through flow routes only if specific match conditions are met.

Flow routes and firewall filters are similar in that they filter packets based on their components and perform an action on the packets that match. Flow routes provide traffic filtering and rate-limiting capabilities much like firewall filters. In addition, you can propagate flow routes across different autonomous systems.

Flow routes are propagated by BGP through flow-specification NLRI messages. You must enable BGP to propagate these NLRIs.

Match Conditions for Flow Routes

You specify conditions that the packet must match before the action in the **then** statement is taken for a flow route. All conditions in the **from** statement must match for the action to be taken. The order in which you specify match conditions is not important, because a packet must match all the conditions in a term for a match to occur.

To configure a match condition, include the **match** statement at the **[edit routing-options flow]** hierarchy level.

Table 7 on page 435 describes the flow route match conditions.

Copyright © 2013, Juniper Networks, Inc.

Table 7: Flow Route Match Conditions

Match Condition	Description
destination *prefix*	IP destination address field.
destination-port *number*	TCP or User Datagram Protocol (UDP) destination port field. You cannot specify both the **port** and **destination-port** match conditions in the same term. In place of the numeric value, you can specify one of the following text synonyms (the port numbers are also listed): **afs** (1483), **bgp** (179), **biff** (512), **bootpc** (68), **bootps** (67), **cmd** (514), **cvspserver** (2401), **dhcp** (67), **domain** (53), **eklogin** (2105), **ekshell** (2106), **exec** (512), **finger** (79), **ftp** (21), **ftp-data** (20), **http** (80), **https** (443), **ident** (113), **imap** (143), **kerberos-sec** (88), **klogin** (543), **kpasswd** (761), **krb-prop** (754), **krbupdate** (760), **kshell** (544), **ldap** (389), **login** (513), **mobileip-agent** (434), **mobilip-mn** (435), **msdp** (639), **netbios-dgm** (138), **netbios-ns** (137), **netbios-ssn** (139), **nfsd** (2049), **nntp** (119), **ntalk** (518), **ntp** (123), **pop3** (110), **pptp** (1723), **printer** (515), **radacct** (1813), **radius** (1812), **rip** (520), **rkinit** (2108), **smtp** (25), **snmp** (161), **snmptrap** (162), **snpp** (444), **socks** (1080), **ssh** (22), **sunrpc** (111), **syslog** (514), **tacacs-ds** (65), **talk** (517), **telnet** (23), **tftp** (69), **timed** (525), **who** (513), **xdmcp** (177), **zephyr-clt** (2103), or **zephyr-hm** (2104).
dscp *number*	Differentiated Services code point (DSCP). The DiffServ protocol uses the type-of-service (ToS) byte in the IP header. The most significant six bits of this byte form the DSCP. You can specify DSCP in hexadecimal or decimal form.
fragment *type*	Fragment type field. The keywords are grouped by the fragment type with which they are associated: • **dont-fragment** • **first-fragment** • **is-fragment** • **last-fragment** • **not-a-fragment**
icmp-code *number*	ICMP code field. This value or keyword provides more specific information than **icmp-type**. Because the value's meaning depends upon the associated **icmp-type** value, you must specify **icmp-type** along with **icmp-code**. In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed). The keywords are grouped by the ICMP type with which they are associated: • parameter-problem: **ip-header-bad** (0), **required-option-missing** (1) • redirect: **redirect-for-host** (1), **redirect-for-network** (0), **redirect-for-tos-and-host** (3), **redirect-for-tos-and-net** (2) • time-exceeded: **ttl-eq-zero-during-reassembly** (1), **ttl-eq-zero-during-transit** (0) • unreachable: **communication-prohibited-by-filtering** (13), **destination-host-prohibited** (10), **destination-host-unknown** (7), **destination-network-prohibited** (9), **destination-network-unknown** (6), **fragmentation-needed** (4), **host-precedence-violation** (14), **host-unreachable** (1), **host-unreachable-for-TOS** (12), **network-unreachable** (0), **network-unreachable-for-TOS** (11), **port-unreachable** (3), **precedence-cutoff-in-effect** (15), **protocol-unreachable** (2), **source-host-isolated** (8), **source-route-failed** (5)

Copyright © 2013, Juniper Networks, Inc.

Table 7: Flow Route Match Conditions *(continued)*

Match Condition	Description
icmp-type *number*	ICMP packet type field. Normally, you specify this match in conjunction with the **protocol** match statement to determine which protocol is being used on the port. In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed): **echo-reply** (0), **echo-request** (8), **info-reply** (16), **info-request** (15), **mask-request** (17), **mask-reply** (18), **parameter-problem** (12), **redirect** (5), **router-advertisement** (9), **router-solicit** (10), **source-quench** (4), **time-exceeded** (11), **timestamp** (13), **timestamp-reply** (14), or **unreachable** (3).
packet-length *number*	Total IP packet length.
port *number*	TCP or UDP source or destination port field. You cannot specify both the **port** match and either the **destination-port** or **source-port** match condition in the same term. In place of the numeric value, you can specify one of the text synonyms listed under **destination-port**.
protocol *number*	IP protocol field. In place of the numeric value, you can specify one of the following text synonyms (the field values are also listed): **ah, egp** (8), **esp** (50), **gre** (47), **icmp** (1), **igmp** (2), **ipip** (4), **ipv6** (41), **ospf** (89), **pim** (103), **rsvp** (46), **tcp** (6), or **udp** (17).
source *prefix*	IP source address field.
source-port *number*	TCP or UDP source port field. You cannot specify the **port** and **source-port** match conditions in the same term. In place of the numeric field, you can specify one of the text synonyms listed under **destination-port**.
tcp-flag type	TCP header format.

Actions for Flow Routes

You can specify the action to take if the packet matches the conditions you have configured in the flow route. To configure an action, include the **then** statement at the **[edit routing-options flow]** hierarchy level.

Table 8 on page 436 describes the flow route actions.

Table 8: Flow Route Action Modifiers

Action or Action Modifier	Description
Actions	
accept	Accept a packet. This is the default.
discard	Discard a packet silently, without sending an Internet Control Message Protocol (ICMP) message.
community	Replace any communities in the route with the specified communities.
next-term	Continue to the next match condition for evaluation.

Copyright © 2013, Juniper Networks, Inc.

Table 8: Flow Route Action Modifiers *(continued)*

Action or Action Modifier	Description
routing-instance *extended-community*	Specify a routing instance to which packets are forwarded.
rate-limit *bytes-per-second*	Limit the bandwidth on the flow route. Express the limit in bytes per second (Bps).
sample	Sample the traffic on the flow route.

Validating Flow Routes

The Junos OS installs flow routes into the flow routing table only if they have been validated using the validation procedure. The Routing Engine does the validation before the installing routes into the flow routing table.

Flow routes received using the BGP network layer reachability information (NLRI) messages are validated before they are installed into the flow primary instance routing table **instance.inetflow.0**. The validation procedure is described in the draft-ietf-idr-flow-spec-09.txt, *Dissemination of Flow Specification Rules*. You can bypass the validation process for flow routes using BGP NLRI messages and use your own specific import policy.

To trace validation operations, include the **validation** statement at the **[edit routing-options flow]** hierarchy level.

Support for BGP Flow-Specification Algorithm Version 7 and Later

By default, the Junos OS uses the term-ordering algorithm defined in version 6 of the BGP flow specification draft. In Junos OS Release 10.0 and later, you can configure the router to comply with the term-ordering algorithm first defined in version 7 of the BGP flow specification and supported through RFC 5575, *Dissemination of Flow Specification Routes*.

BEST PRACTICE: **We recommend that you configure the Junos OS to use the term-ordering algorithm first defined in version 7 of the BGP flow specification draft. We also recommend that you configure the Junos OS to use the same term-ordering algorithm on all routing instances configured on a router.**

To configure BGP to use the flow-specification algorithm first defined in version 7 of the Internet draft, include the **standard** statement at the **[edit routing-options flow term-order]** hierarchy level.

To revert to using the term-ordering algorithm defined in version 6, include the **legacy** statement at the **[edit routing-options flow term-order]** hierarchy level.

Copyright © 2013, Juniper Networks, Inc.

NOTE: The configured term order has only local significance. That is, the term order does not propagate with flow routes sent to the remote BGP peers, whose term order is completely determined by their own term order configuration. Therefore, you should be careful when configuring the order-dependent action **next term** when you are not aware of the term order configuration of the remote peers. The local **next term** might differ from the **next term** configured on the remote peer.

Example: Enabling BGP to Carry Flow-Specification Routes

This example shows how to allow BGP to carry flow-specification network layer reachability information (NLRI) messages.

- Requirements on page 438
- Overview on page 438
- Configuration on page 440
- Verification on page 448

Requirements

Before you begin:

- Configure the device interfaces.
- Configure an interior gateway protocol (IGP).
- Configure BGP.
- Configure a routing policy that exports routes (such as direct routes or IGP routes) from the routing table into BGP.

Overview

Propagating firewall filter information as part of BGP enables you to propagate firewall filters against denial-of-service (DOS) attacks dynamically across autonomous systems. Flow routes are encapsulated into the flow-specification NLRI and propagated through a network or virtual private networks (VPNs), sharing filter-like information. Flow routes are an aggregation of match conditions and resulting actions for packets. They provide you with traffic filtering and rate-limiting capabilities much like firewall filters. Unicast flow routes are supported for the default instance, VPN routing and forwarding (VRF) instances, and virtual-router instances.

Import and export policies can be applied to the family **inet flow** or family **inet-vpn flow** NLRI, affecting the flow routes accepted or advertised, similar to the way import and export policies are applied to other BGP families. The only difference is that the flow policy configuration must include the from **rib inetflow.0** statement. This statement causes the policy to be applied to the flow routes. An exception to this rule occurs if the policy has only the **then reject** or the **then accept** statement and no **from** statement. Then, the policy affects all routes, including IP unicast and IP flow.

Copyright © 2013, Juniper Networks, Inc.

The flow route filters are first configured on a router statically, with a set of matching criteria followed by the actions to be taken. Then, in addition to **family inet unicast**, **family inet flow** (or **family inet-vpn flow**) is configured between this BGP-enabled device and its peers.

By default, statically configured flow routes (firewall filters) are advertised to other BGP-enabled devices that support the **family inet flow** or **family inet-vpn flow** NLRI.

The receiving BGP-enabled device performs a validation process before installing the firewall filter into the flow routing table ***instance-name*.inetflow.0**. The validation procedure is described in Internet draft draft-ietf-idr-flow-spec-09.txt, *Dissemination of Flow Specification Rules*.

The receiving BGP-enabled device accepts a flow route if it passes the following criteria:

- The originator of a flow route matches the originator of the best match unicast route for the destination address that is embedded in the route.
- There are no more specific unicast routes, when compared to the destination address of the flow route, for which the active route has been received from a different next-hop autonomous system.

The first criterion ensures that the filter is being advertised by the next-hop used by unicast forwarding for the destination address embedded in the flow route. For example, if a flow route is given as 10.1.1.1, proto=6, port=80, the receiving BGP-enabled device selects the more specific unicast route in the unicast routing table that matches the destination prefix 10.1.1.1/32. On a unicast routing table containing 10.1/16 and 10.1.1/24, the latter is chosen as the unicast route to compare against. Only the active unicast route entry is considered. This follows the concept that a flow route is valid if advertised by the originator of the best unicast route.

The second criterion addresses situations in which a given address block is allocated to different entities. Flows that resolve to a best-match unicast route that is an aggregate route are only accepted if they do not cover more specific routes that are being routed to different next-hop autonomous systems.

You can bypass the validation process and use your own specific import policy. To disable the validation procedure and use an import policy instead, include the **no-validate** statement at the **[edit protocols bgp group *group-name* family inet flow]** hierarchy level.

After a flow route is installed in the **inetflow.0** table, it is also added to the list of firewall filters in the kernel.

On routers only, flow-specification NLRI messages are supported in VPNs. The VPN compares the route target extended community in the NLRI to the import policy. If there is a match, the VPN can start using the flow routes to filter and rate-limit packet traffic. Received flow routes are installed into the flow routing table ***instance-name*.inetflow.0**. Flow routes can also be propagated throughout a VPN network and shared among VPNs. To enable multiprotocol BGP (MP-BGP) to carry flow-specification NLRI for the **inet-vpn** address family, include the **flow** statement at the **[edit protocols bgp group *group-name* family inet-vpn]** hierarchy level. VPN flow routes are supported for the default instance only. Flow routes configured for VPNs with family **inet-vpn** are not automatically validated,

Copyright © 2013, Juniper Networks, Inc.

so the **no-validate** statement is not supported at the **[edit protocols bgp group *group-name* family inet-vpn]** hierarchy level. No validation is needed if the flow routes are configured locally between devices in a single AS.

Import and export policies can be applied to the **family inet flow** or **family inet-vpn flow** NLRI, affecting the flow routes accepted or advertised, similar to the way import and export policies are applied to other BGP families. The only difference is that the flow policy configuration must include the **from rib inetflow.0** statement. This statement causes the policy to be applied to the flow routes. An exception to this rule occurs if the policy has only the **then reject** or the **then accept** statement and no **from** statement. Then, the policy affects all routes, including IP unicast and IP flow.

This example shows how to configure the following export policies:

- A policy that allows the advertisement of flow routes specified by a route-filter. Only the flow routes covered by the 10.13/16 block are advertised. This policy does not affect unicast routes.
- A policy that allows all unicast and flow routes to be advertised to the neighbor.
- A policy that disallows all routes (unicast or flow) to be advertised to the neighbor.

Configuration

- Configuring a Static Flow Route on page 440
- Advertising Flow Routes Specified by a Route Filter on page 441
- Advertising All Unicast and Flow Routes on page 443
- Advertising No Unicast or Flow Routes on page 444
- Limiting the Number of Flow Routes Installed in a Routing Table on page 446
- Limiting the Number of Prefixes Received on a BGP Peering Session on page 446

Configuring a Static Flow Route

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options flow route block-10.131.1.1 match destination 10.131.1.1/32
set routing-options flow route block-10.131.1.1 match protocol icmp
set routing-options flow route block-10.131.1.1 match icmp-type echo-request
set routing-options flow route block-10.131.1.1 then discard
set routing-options flow term-order standard
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the match conditions.

Copyright © 2013, Juniper Networks, Inc.

```
[edit routing-options flow route block-10.131.1.1]
user@host# set match destination 10.131.1.1/32
user@host# set match protocol icmp
user@host# set match icmp-type echo-request
```

2. Configure the action.

```
[edit routing-options flow route block-10.131.1.1]
user@host# set then discard
```

3. (Recommended) For the flow specification algorithm, configure the standard-based term order.

```
[edit routing-options flow]
user@host# set term-order standard
```

In the default term ordering algorithm, as specified in the flowspec RFC draft Version 6, a term with less specific matching conditions is always evaluated before a term with more specific matching conditions. This causes the term with more specific matching conditions to never be evaluated. Version 7 of RFC 5575 made a revision to the algorithm so that the more specific matching conditions are evaluated before the less specific matching conditions. For backward compatibility, the default behavior is not altered in Junos OS, even though the newer algorithm makes more sense. To use the newer algorithm, include the **term-order standard** statement in the configuration. This statement is supported in Junos OS Release 10.0 and later.

Results From configuration mode, confirm your configuration by entering the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@host# show routing-options
flow {
   term-order standard;
   route block-10.131.1.1 {
      match {
         destination 10.131.1.1/32;
         protocol icmp;
         icmp-type echo-request;
      }
      then discard;
   }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Advertising Flow Routes Specified by a Route Filter

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group core family inet unicast
set protocols bgp group core family inet flow
```

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group core export p1
set protocols bgp group core peer-as 65000
set protocols bgp group core neighbor 10.12.99.5
set policy-options policy-statement p1 term a from rib inetflow.0
set policy-options policy-statement p1 term a from route-filter 10.13.0.0/16 orlonger
set policy-options policy-statement p1 term a then accept
set policy-options policy-statement p1 term b then reject
set routing-options autonomous-system 65001
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the BGP group.

```
[edit protocols bgp group core]
user@host# set family inet unicast
user@host# set family inet flow
user@host# set export p1
user@host# set peer-as 65000
user@host# set neighbor 10.12.99.5
```

2. Configure the flow policy.

```
[edit policy-options policy-statement p1]
user@host# set term a from rib inetflow.0
user@host# set term a from route-filter 10.13.0.0/16 orlonger
user@host# set term a then accept
user@host# set term b then reject
```

3. Configure the local autonomous system (AS) number.

```
[edit routing-options]
user@host# set autonomous-system 65001
```

Results

From configuration mode, confirm your configuration by entering the **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@host# show protocols
bgp {
  group core {
    family inet {
      unicast;
      flow;
    }
    export p1;
    peer-as 65000;
    neighbor 10.12.99.5;
  }
}

[edit]
```


Copyright © 2013, Juniper Networks, Inc.

```
user@host# show policy-options
policy-statement p1 {
  term a {
    from {
      rib inetflow.0;
      route-filter 10.13.0.0/16 orlonger;
    }
    then accept;
  }
  term b {
    then reject;
  }
}

[edit]
user@host# show routing-options
autonomous-system 65001;
```

If you are done configuring the device, enter **commit** from configuration mode.

Advertising All Unicast and Flow Routes

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group core family inet unicast
set protocols bgp group core family inet flow
set protocols bgp group core export p1
set protocols bgp group core peer-as 65000
set protocols bgp group core neighbor 10.12.99.5
set policy-options policy-statement p1 term a then accept
set routing-options autonomous-system 65001
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the BGP group.

   ```
   [edit protocols bgp group core]
   user@host# set family inet unicast
   user@host# set family inet flow
   user@host# set export p1
   user@host# set peer-as 65000
   user@host# set neighbor 10.12.99.5
   ```

2. Configure the flow policy.

   ```
   [edit policy-options policy-statement p1]
   user@host# set term a then accept
   ```

3. Configure the local autonomous system (AS) number.

   ```
   [edit routing-options]
   ```

Copyright © 2013, Juniper Networks, Inc.

```
user@host# set autonomous-system 65001
```

Results From configuration mode, confirm your configuration by entering the **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@host# show protocols
bgp {
  group core {
    family inet {
      unicast;
      flow;
    }
    export p1;
    peer-as 65000;
    neighbor 10.12.99.5;
  }
}
```

```
[edit]
user@host# show policy-options
policy-statement p1 {
  term a {
    then accept;
  }
}
```

```
[edit]
user@host# show routing-options
autonomous-system 65001;
```

If you are done configuring the device, enter **commit** from configuration mode.

Advertising No Unicast or Flow Routes

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group core family inet unicast
set protocols bgp group core family inet flow
set protocols bgp group core export p1
set protocols bgp group core peer-as 65000
set protocols bgp group core neighbor 10.12.99.5
set policy-options policy-statement p1 term a then reject
set routing-options autonomous-system 65001
```


Copyright © 2013, Juniper Networks, Inc.

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the BGP peer sessions:

1. Configure the BGP group.

```
[edit protocols bgp group core]
user@host# set family inet unicast
user@host# set family inet flow
user@host# set export p1
user@host# set peer-as 65000
user@host# set neighbor 10.12.99.5
```

2. Configure the flow policy.

```
[edit policy-options policy-statement p1]
user@host# set term a then reject
```

3. Configure the local autonomous system (AS) number.

```
[edit routing-options]
user@host# set autonomous-system 65001
```

Results

From configuration mode, confirm your configuration by entering the **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@host# show protocols
bgp {
  group core {
    family inet {
      unicast;
      flow;
    }
    export p1;
    peer-as 65000;
    neighbor 10.12.99.5;
  }
}
```

```
[edit]
user@host# show policy-options
policy-statement p1 {
  term a {
    then reject;
  }
}
```

```
[edit]
user@host# show routing-options
autonomous-system 65001;
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Limiting the Number of Flow Routes Installed in a Routing Table

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options rib inetflow.0 maximum-prefixes 1000
set routing-options rib inetflow.0 maximum-prefixes threshold 50
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

NOTE: Application of a route limit might result in unpredictable dynamic route protocol behavior. For example, once the limit is reached and routes are being rejected, BGP does not necessarily attempt to reinstall the rejected routes after the number of routes drops below the limit. BGP sessions might need to be cleared to resolve this issue.

To limit the flow routes:

1. Set an upper limit for the number of prefixes installed in **inetflow.0** table.

   ```
   [edit routing-options rib inetflow.0]
   user@host# set maximum-prefixes 1000
   ```

2. Set a threshold value of 50 percent, where when 500 routes are installed, a warning is logged in the system log.

   ```
   [edit routing-options rib inetflow.0]
   user@host# set maximum-prefixes threshold 50
   ```

Results

From configuration mode, confirm your configuration by entering the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@host# show routing-options
rib inetflow.0 {
   maximum-prefixes 1000 threshold 50;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Limiting the Number of Prefixes Received on a BGP Peering Session

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Copyright © 2013, Juniper Networks, Inc.

```
set protocols bgp group x1 neighbor 10.12.99.2 family inet flow prefix-limit maximum 1000
set protocols bgp group x1 neighbor 10.12.99.2 family inet flow prefix-limit teardown 50
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

Configuring a prefix limit for a specific neighbor provides more predictable control over which peer can advertise how many flow routes.

To limit the number of prefixes:

1. Set a limit of 1000 BGP routes from neighbor 10.12.99.2.

   ```
   [edit protocols bgp group x1]
   user@host# set neighbor 10.12.99.2 family inet flow prefix-limit maximum 1000
   ```

2. Configure the neighbor session to be brought down when the maximum number of prefixes is reached.

   ```
   [edit routing-options rib inetflow.0]
   user@host# set neighbor 10.12.99.2 family inet flow prefix-limit teardown 50
   ```

   If you specify a percentage, as shown here, messages are logged when the number of prefixes reaches that percentage.

   After the session is brought down, the session reestablishes in a short time unless you include the **idle-timeout** statement.

Results

From configuration mode, confirm your configuration by entering the **show protocols** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@host# show protocols
bgp {
  group x1 {
    neighbor 10.12.99.2 {
        flow {
          prefix-limit {
            maximum 1000;
            teardown 50;
          }
        }
      }
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Copyright © 2013, Juniper Networks, Inc.

Verification

Confirm that the configuration is working properly.

- Verifying the NLRI on page 448
- Verifying Routes on page 449
- Verifying Flow Validation on page 450
- Verifying Firewall Filters on page 450
- Verifying System Logging When Exceeding the Number of Allowed Flow Routes on page 451
- Verifying System Logging When Exceeding the Number of Prefixes Received on a BGP Peering Session on page 451

Verifying the NLRI

Purpose Look at the NLRI enabled for the neighbor.

Action From operational mode, run the **show bgp neighbor 10.12.99.5** command. Look for **inet-flow** in the output.

```
user@host> show bgp neighbor 10.12.99.5
Peer: 10.12.99.5+3792 AS 65000 Local: 10.12.99.6+179 AS 65002
Type: External State: Established Flags: <Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Export: [ direct ]
Options: <Preference HoldTime AddressFamily PeerAS Refresh>
Address families configured: inet-unicast inet-multicast inet-flow
Holdtime: 90 Preference: 170
Number of flaps: 1
Error: 'Cease' Sent: 0 Recv: 1
Peer ID: 10.255.71.161 Local ID: 10.255.124.107 Active Holdtime: 90
Keepalive Interval: 30 Peer index: 0
Local Interface: e1-3/0/0.0
NLRI advertised by peer: inet-unicast inet-multicast inet-flow
NLRI for this session: inet-unicast inet-multicast inet-flow
Peer supports Refresh capability (2)
Table inet.0 Bit: 10000
RIB State: BGP restart is complete
Send state: in sync
Active prefixes: 2
Received prefixes: 2
Suppressed due to damping: 0
Advertised prefixes: 3
Table inet.2 Bit: 20000
RIB State: BGP restart is complete
Send state: in sync
Active prefixes: 0
Received prefixes: 0
Suppressed due to damping: 0
Advertised prefixes: 0
Table inetflow.0 Bit: 30000
RIB State: BGP restart is complete
Send state: in sync
Active prefixes: 0
Received prefixes: 0
```


Copyright © 2013, Juniper Networks, Inc.

```
Suppressed due to damping: 0
Advertised prefixes: 0
Last traffic (seconds): Received 29 Sent 15 Checked 15
Input messages: Total 5549 Updates 2618 Refreshes 0 Octets 416486
Output messages: Total 2943 Updates 1 Refreshes 0 Octets 55995
Output Queue[0]: 0
Output Queue[1]: 0
Output Queue[2]: 0
```

Verifying Routes

Purpose Look at the flow routes. The sample output shows a flow route learned from BGP and a statically configured flow route.

For locally configured flow routes (configured at the **[edit routing-options flow]** hierarchy level), the routes are installed by the flow protocol. Therefore, you can display the flow routes by specifying the table, as in **show route table inetflow.0** or **show route table *instance-name*.inetflow.0**, where ***instance-name*** is the routing instance name. Or, you can display all locally configured flow routes across multiple routing instances by running the **show route protocol flow** command.

If a flow route is not locally configured, but received from the router's BGP peer, this flow route is installed in the routing table by BGP. You can display the flow routes by specifying the table or by running **show route protocol bgp**, which displays all BGP routes (flow and non-flow).

Action From operational mode, run the **show route table inetflow.0** command.

```
user@host> show route table inetflow.0
inetflow.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.12.44.1,*/term:1
                   *[Flow/5] 00:04:22
                      Fictitious
*,10.12.44.1/term:2
                   *[Flow/5] 00:09:34
                      Fictitious


user@host> show route table inetflow.0 extensive
inetflow.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
7.7.7.7,8.8.8.8/term:1 (1 entry, 1 announced)
TSI:
KRT in dfwd;
Action(s): accept,count
        *Flow   Preference: 5
                Next hop type: Fictitious
                Address: 0x8d383a4
                Next-hop reference count: 3
                State: <Active>
                Local AS: 65000
                Age: 9:50
                Task: RT Flow
                Announcement bits (1): 0-Flow
                AS path: I
```

Copyright © 2013, Juniper Networks, Inc.

Meaning A flow route represents a term of a firewall filter. When you configure a flow route, you specify the match conditions and the actions. In the match attributes, you can match a source address, a destination address, and other qualifiers such as the port and the protocol. For a single flow route that contains multiple match conditions, all the match conditions are encapsulated in the prefix field of the route. When you issue the **show route** command on a flow route, the prefix field of the route is displayed with all of the match conditions. **10.12.44.1,*** means that the matching condition is **match destination 10.12.44.1/32**. If the prefix in the output were ***,10.12.44.1**, this would mean that the match condition was **match source 10.12.44.1/32**. If the matching conditions contain both a source and a destination, the asterisk is replaced with the address.

The term-order numbers indicate the sequence of the terms (flow routes) being evaluated in the firewall filter. The **show route extensive** command displays the actions for each term (route).

Verifying Flow Validation

Purpose Display flow route information.

Action From operational mode, run the show route flow validation **detail** command.

```
user@host> show route flow validation detail
inet.0:
0.0.0.0/0
                Internal node: best match, inconsistent
10.0.0.0/8
                Internal node: no match, inconsistent
10.12.42.0/24
                Internal node: no match, consistent, next-as: 65003
                Active unicast route
                    Dependent flow destinations: 1
                    Origin: 10.255.124.106, Neighbor AS: 65003
10.12.42.1/32
                Flow destination (1 entries, 1 match origin)
                    Unicast best match: 10.12.42.0/24
                    Flags: Consistent
10.131.0.0/16
                Internal node: no match, consistent, next-as: 65001
                Active unicast route
                    Dependent flow destinations: 5000
                    Origin: 10.12.99.2, Neighbor AS: 65001
10.131.0.0/19
                Internal node: best match
10.131.0.0/20
                Internal node: best match
10.131.0.0/21
```

Verifying Firewall Filters

Purpose Display the firewall filters that are installed in the kernel.

Copyright © 2013, Juniper Networks, Inc.

Action From operational mode, run the **show firewall** command.

```
user@host> show firewall
Filter: __default_bpdu_filter__
Filter: __dynamic_default_inet__
Counters:
Name                                                Bytes              Packets
10.12.42.1,*                                            0                    0
196.1.28/23,*                                           0                    0
196.1.30/24,*                                           0                    0
196.1.31/24,*                                           0                    0
196.1.32/24,*                                           0                    0
196.1.56/21,*                                           0                    0
196.1.68/24,*                                           0                    0
196.1.69/24,*                                           0                    0
196.1.70/24,*                                           0                    0
196.1.75/24,*                                           0                    0
196.1.76/24,*                                           0                    0
```

Verifying System Logging When Exceeding the Number of Allowed Flow Routes

Purpose If you configure a limit on the number of flow routes installed, as described in "Limiting the Number of Flow Routes Installed in a Routing Table" on page 446, view the system log message when the threshold is reached.

Action From operational mode, run the **show log <log-filename>** command.

```
user@host> show log flow-routes-log-file
Jul 12 08:19:01  host rpd[2748]: RPD_RT_MAXROUTES_WARN: Number of routes (1000)
in
table inetflow.0 exceeded warning threshold (50 percent of configured maximum
1000)
```

Verifying System Logging When Exceeding the Number of Prefixes Received on a BGP Peering Session

Purpose If you configure a limit on the number of flow routes installed, as described in "Limiting the Number of Prefixes Received on a BGP Peering Session" on page 446, view the system log message when the threshold is reached.

Action From operational mode, run the **show log <log-filename>** command.

```
user@host> show log flow-routes-log-file
Jul 12 08:44:47  host rpd[2748]: 10.12.99.2 (External AS 65001): Shutting down
peer due to
exceeding configured maximum  prefix-limit(1000) for inet-flow nlri: 1001
```

Related Documentation

- Examples: Configuring Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 12

BGP CLNS Configuration

- Example: Configuring BGP and CLNS on page 453

Example: Configuring BGP and CLNS

- Understanding BGP for CLNS VPNs on page 453
- Example: Configuring BGP for CLNS VPNs on page 453
- Enabling BGP to Carry CLNS Routes on page 455

Understanding BGP for CLNS VPNs

BGP extensions allow BGP to carry Connectionless Network Service (CLNS) virtual private network (VPN) network layer reachability information (NLRI) between provider edge (PE) routers. Each CLNS route is encapsulated into a CLNS VPN NLRI and propagated between remote sites in a VPN.

CLNS is a Layer 3 protocol similar to IP version 4 (IPv4). CLNS uses network service access points (NSAPs) to address end systems. This allows for a seamless autonomous system (AS) based on International Organization for Standardization (ISO) NSAPs.

A single routing domain consisting of ISO NSAP devices are considered to be CLNS islands. CLNS islands are connected together by VPNs.

You can configure BGP to exchange ISO CLNS routes between PE routers connecting various CLNS islands in a VPN using multiprotocol BGP extensions. These extensions are the ISO VPN NLRIs.

Each CLNS network island is treated as a separate VPN routing and forwarding instance (VRF) instance on the PE router.

You can configure CLNS on the global level, group level, and neighbor level.

Example: Configuring BGP for CLNS VPNs

This example shows how to create a BGP group for CLNS VPNs, define the BGP peer neighbor address for the group, and define the family.

- Requirements on page 454
- Overview on page 454

Copyright © 2013, Juniper Networks, Inc.

- Configuration on page 454
- Verification on page 454

Requirements

Before you begin, configure the network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.

Overview

In this example, you create the BGP group called pedge-pedge, define the BGP peer neighbor address for the group as 10.255.245.215, and define the BGP family.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set protocols bgp group pedge-pedge neighbor 10.255.245.213
set protocols bgp family iso-vpn unicast
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure BGP for CLNS VPNs:

1. Configure the BGP group and define the BGP peer neighbor address.

   ```
   [edit protocols bgp]
   user@host# set group pedge-pedge neighbor 10.255.245.213
   ```

2. Define the family.

   ```
   [edit protocols bgp]
   user@host# set family iso-vpn unicast
   ```

3. If you are done configuring the device, commit the configuration.

   ```
   [edit]
   user@host# commit
   ```

Verification

Confirm that the configuration is working properly.

Verifying the Neighbor Status

Purpose Display information about the BGP peer.

Action From operational mode, run the **show bgp neighbor 10.255.245.213** command. Look for **iso-vpn-unicast** in the output.

```
user@host> show bgp neighbor 10.255.245.213
```


Copyright © 2013, Juniper Networks, Inc.

```
Peer: 10.255.245.213+179 AS 200 Local: 10.255.245.214+3770 AS 100
Type: External State: Established Flags: <ImportEval Sync>
Last State: OpenConfirm Last Event: RecvKeepAlive
Last Error: None
Options: <Multihop Preference LocalAddress HoldTime AddressFamily PeerAS
Rib-group Refresh>
Address families configured: iso-vpn-unicast
Local Address: 10.255.245.214 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 10.255.245.213 Local ID: 10.255.245.214 Active Holdtime: 90
Keepalive Interval: 30 Peer index: 0
NLRI advertised by peer: iso-vpn-unicast
NLRI for this session: iso-vpn-unicast
Peer supports Refresh capability (2)
Table bgp.isovpn.0 Bit: 10000
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Send state: in sync
Active prefixes: 3
Received prefixes: 3
Suppressed due to damping: 0
Advertised prefixes: 3
Table aaaa.iso.0
RIB State: BGP restart is complete
RIB State: VPN restart is complete
Send state: not advertising
Active prefixes: 3
Received prefixes: 3
Suppressed due to damping: 0
Last traffic (seconds): Received 6 Sent 5 Checked 5
Input messages: Total 1736 Updates 4 Refreshes 0 Octets 33385
Output messages: Total 1738 Updates 3 Refreshes 0 Octets 33305
Output Queue[0]: 0
Output Queue[1]: 0
```

Enabling BGP to Carry CLNS Routes

Connectionless Network Service (CLNS) is a Layer 3 protocol similar to IP version 4 (IPv4). CLNS uses network service access points (NSAPs) to address end systems. This allows for a seamless autonomous system (AS) based on International Organization for Standardization (ISO) NSAPs.

A single routing domain consisting of ISO NSAP devices are considered to be CLNS islands. CLNS islands are connected together by VPNs.

You can configure BGP to exchange ISO CLNS routes between provider edge (PE) routers connecting various CLNS islands in a virtual private network (VPN) using multiprotocol BGP extensions. These extensions are the ISO VPN NLRIs.

To enable multiprotocol BGP (MP-BGP) to carry CLNS VPN NLRIs, include the **iso-vpn** statement:

```
iso-vpn {
  unicast {
    prefix-limit number;
    rib-group group-name;
  }
}
```

Copyright © 2013, Juniper Networks, Inc.

To limit the number of prefixes from a peer, include the **prefix-limit** statement. To specify a routing table group, include the **rib-group** statement.

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Each CLNS network island is treated as a separate VRF instance on the PE router.

You can configure CLNS on the global level, group level, and neighbor level.

For sample configurations, see the following sections:

- Example: Enabling CLNS Between Two Routers on page 456
- Example: Configuring CLNS Within a VPN on page 458

Example: Enabling CLNS Between Two Routers

Configure CLNS between two routers through a route reflector:

```
On Router 1:
protocols {
   bgp {
      local-address 10.255.245.195;
      group pe-pe {
         type internal;
         neighbor 10.255.245.194 {
            family iso-vpn {
               unicast;
            }
         }
      }
   }
}
routing-instances {
   aaaa {
      instance-type vrf;
      interface fe-0/0/0.0;
      interface so-1/1/0.0;
      interface lo0.1;
      route-distinguisher 10.255.245.194:1;
      vrf-target target:11111:1;
      protocols {
         isis {
            export dist-bgp;
            no-ipv4-routing;
            no-ipv6-routing;
            clns-routing;
            interface all;
         }
      }
   }
}
On Router 2:
protocols {
   bgp {
```


Copyright © 2013, Juniper Networks, Inc.

```
    group pe-pe {
      type internal;
      local-address 10.255.245.198;
      family route-target;
      neighbor 10.255.245.194 {
        family iso-vpn {
          unicast;
        }
      }
    }
  }
}
routing-instances {
  aaaa {
    instance-type vrf;
    interface lo0.1;
    interface so-0/1/2.0;
    interface so-0/1/3.0;
    route-distinguisher 10.255.245.194:1;
    vrf-target target:11111:1;
    routing-options {
      rib aaaa.iso.0 {
        static {
          iso-route 47.0005.80ff.f800.0000.bbbb.1022/104 next-hop
            47.0005.80ff.f800.0000.aaaa.1000.1921.6800.4196.00;
        }
      }
    }
    protocols {
      isis {
        export dist-bgp;
        no-ipv4-routing;
        no-ipv6-routing;
        clns-routing;
        interface all;
      }
    }
  }
}
```

On Route Reflector:

```
protocols {
  bgp {
    group pe-pe {
      type internal;
      local-address 10.255.245.194;
      family route-target;
      neighbor 10.255.245.195 {
        cluster 0.0.0.1;
      }
      neighbor 10.255.245.198 {
        cluster 0.0.0.1;
      }
    }
  }
}
```

Copyright © 2013, Juniper Networks, Inc.

Example: Configuring CLNS Within a VPN

Configure CLNS on three PE routers within a VPN:

```
On PE Router 1:
protocols {
    mpls {
        interface all;
    }
    bgp {
        group asbr {
            type external;
            local-address 10.245.245.3;
            neighbor 10.245.245.1 {
                multihop;
                family iso-vpn {
                    unicast;
                }
                peer-as 200;
            }
        }
    }
}
routing-instances {
    aaaa {
        instance-type vrf;
        interface lo0.1;
        interface t1-3/0/0.0;
        interface fe-5/0/1.0;
        route-distinguisher 10.245.245.1:1;
        vrf-target target:11111:1;
        protocols {
            isis {
                export dist-bgp;
                no-ipv4-routing;
                no-ipv6-routing;
                clns-routing;
                interface all;
            }
        }
    }
}
On PE Router 2:
protocols {
    bgp {
        group asbr {
            type external;
            multihop;
            family iso-vpn {
                unicast;
            }
            neighbor 10.245.245.2 {
                peer-as 300;
            }
            neighbor 10.245.245.3 {
```


Copyright © 2013, Juniper Networks, Inc.

```
            peer-as 100;
          }
        }
      }
    }
    routing-instances {
      aaaa {
        instance-type vrf;
        interface lo0.1;
        route-distinguisher 10.245.245.1:1;
        vrf-target target:11111:1;
      }
    }
```

On PE Router 3:

```
    protocols {
      bgp {
        group asbr {
          type external;
          multihop;
          local-address 10.245.245.2;
          neighbor 10.245.245.1 {
            family iso-vpn {
              unicast;
            }
            peer-as 200;
          }
        }
      }
    }
    routing-instances {
      aaaa {
        instance-type vrf;
        interface lo0.1;
        interface fe-0/0/1.0;
        interface t1-3/0/0.0;
        route-distinguisher 10.245.245.1:1;
        vrf-target target:11111:1;
        protocols {
          isis {
            export dist-bgp;
            no-ipv6-routing;
            clns-routing;
            interface all;
          }
        }
      }
    }
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 13

BGP Monitoring Configuration

- Example: Configuring BGP Monitoring Protocol on page 461
- Example: Configuring BGP Trace Operations on page 464

Example: Configuring BGP Monitoring Protocol

- Understanding the BGP Monitoring Protocol on page 461
- Example: Configuring the BGP Monitoring Protocol on page 461

Understanding the BGP Monitoring Protocol

The BGP Monitoring Protocol (BMP) is a protocol to allow a monitoring station to receive routes from a BGP-enabled device. The monitoring station receives all routes, not just the active routes. BMP uses route monitoring messages (which are essentially encapsulated BGP update messages) and a few other message types for statistics and state changes. All messages flow from the router to the monitoring station.

The data is collected from the **Adjacency-RIB-In** routing tables. The **Adjacency-RIB-In** tables are the pre-policy tables, meaning that the routes in these tables have not been filtered or modified by routing policies.

NOTE: **The Local-RIB tables are the post-policy tables.**

Example: Configuring the BGP Monitoring Protocol

This example shows how to enable the BGP Monitoring Protocol (BMP). The Junos OS implementation of BMP is based on Internet draft draft-scudder-bmp-01.txt, *BGP Monitoring Protocol*.

- Requirements on page 462
- Overview on page 462
- Configuration on page 462
- Verification on page 463

Copyright © 2013, Juniper Networks, Inc.

Requirements

- Configure the router interfaces.
- Configure an interior gateway protocol (IGP).
- Configure BGP and routing policies.
- Configure a monitoring station to listen on a particular TCP port.

Overview

To configure the monitoring station to which BMP data is sent, you must configure both the **station-address** and **station-port** statements. For the station address, you can specify either the IP address or the name of the monitoring station. For ***name***, specify a valid URL. For the station port, specify a TCP port. BMP operates over TCP. The monitoring station is configured to listen on a particular TCP port, and the router is configured to establish an active connection to that port and to send messages on that TCP connection. You configure BMP in the default routing instance only. However, BMP applies to routes in the default routing instance and to routes in other routing instances.

You can optionally specify how often to send data to the monitoring station. The default is 1 hour. To modify this interval, include the **statistics-timeout *seconds*** statement. For ***seconds***, you can specify a value from 15 through 65,535. By default, the routing device stops collecting BMP data when it exceeds a threshold of 10 MB. You can modify the value of this threshold by including the **memory-limit *bytes*** statement. For ***bytes***, specify a value from 1,048,576 to 52,428,800. If the routing device stops collecting BMP data after exceeding the configured memory threshold, the router waits 10 minutes before attempting to resume the BMP session.

Figure 49 on page 462 shows a sample topology. In this example, BMP is configured on Router PE1. The server address is 192.168.64.180. The listening TCP port on the server is port 11019.

Figure 49: BMP Topology

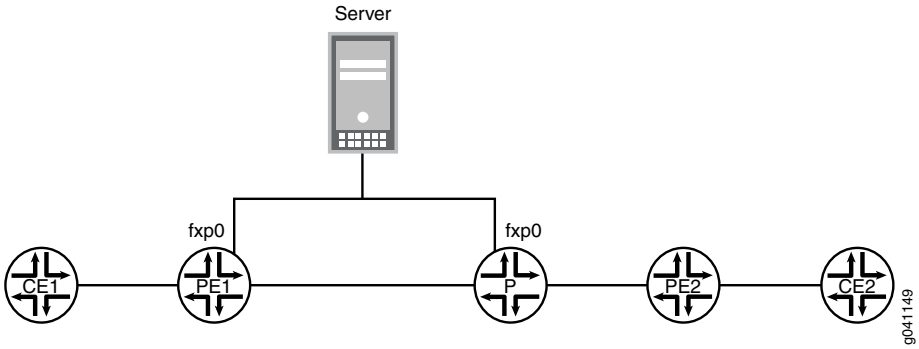

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network

Copyright © 2013, Juniper Networks, Inc.

configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options bmp station-address 192.168.64.180
set routing-options bmp station-port 11019
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure BMP:

1. Configure the receiving station address.

```
[edit routing-options]
user@PE1# set bmp station-address 192.168.64.180
```

2. Configure the receiving station port.

```
[edit routing-options]
user@PE1# set bmp station-port 11019
```

Results

From configuration mode, confirm your configuration by entering the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show routing-options
bmp {
  station-address 192.168.64.180;
  station-port 11019;
}
```

Verification

Verifying That BMP is Operating

Purpose

Run the show bgp bmp command to display a set of statistics and the current BMP session state on the router.

Action

```
user@PE1> show bgp bmp
  BMP station address/port: 192.168.64.180+11019
  BMP session state: DOWN
  Memory consumed by BMP: 0
  Statistics timeout: 15
  Memory limit: 10485760
  Memory connect retry timeout: 600
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

Example: Configuring BGP Trace Operations

- Understanding Trace Operations for BGP Protocol Traffic on page 464
- Example: Viewing BGP Trace Files on Logical Systems on page 465

Understanding Trace Operations for BGP Protocol Traffic

You can trace various BGP protocol traffic to help you debug BGP protocol issues. To trace BGP protocol traffic, include the **traceoptions** statement at the **[edit protocols bgp]** hierarchy level. For routing instances, include the **traceoptions** statement at the **[edit routing-instances *routing-instance-name* protocols bgp]** hierarchy level.

```
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
```

You can specify the following BGP protocol-specific trace options using the **flag** statement:

- **4byte-as**—4-byte AS events.
- **bfd**—BFD protocol events.
- **damping**—Damping operations.
- **graceful-restart**—Graceful restart events.
- **keepalive**—BGP keepalive messages.
- **nsr-synchronization**—Nonstop active routing synchronization events.
- **open**—BGP open packets. These packets are sent between peers when they are establishing a connection.
- **packets**—All BGP protocol packets.
- **refresh**—BGP refresh packets.
- **update**—BGP update packets. These packets provide routing updates to BGP systems.

Global tracing options are inherited from the configuration set by the **traceoptions** statement at the **[edit routing-options]** hierarchy level. You can override the following global trace options for the BGP protocol using the **traceoptions flag** statement included at the **[edit protocols bgp]** hierarchy level:

- **all**—All tracing operations
- **general**—All normal operations and routing table changes (a combination of the normal and route trace operations)
- **normal**—Normal events
- **policy**—Policy processing
- **route**—Routing information

Copyright © 2013, Juniper Networks, Inc.

- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

You can optionally specify one or more of the following flag modifiers:

- **detail**—Detailed trace information.
- **filter**—Filter trace information. Applies only to **route** and **damping** tracing flags.
- **receive**—Packets being received.
- **send**—Packets being transmitted.

NOTE: Use the **all** trace flag and the **detail** flag modifier with caution because these might cause the CPU to become very busy.

NOTE: If you only enable the **update** flag, received keepalive messages do not generate a trace message.

You can filter trace statements and display only the statement information that passes through the filter by specifying the **filter** flag modifier. The **filter** modifier is only supported for the **route** and **damping** tracing flags.

The **match-on** statement specifies filter matches based on prefixes. It is used to match on route filters.

NOTE: Per-neighbor trace filtering is not supported on a BGP per-neighbor level for **route** and **damping** flags. Trace option filtering support is on a peer group level.

Example: Viewing BGP Trace Files on Logical Systems

This example shows how to list and view files that are stored on a logical system.

- Requirements on page 465
- Overview on page 466
- Configuration on page 466
- Verification on page 470

Requirements

- You must have the **view** privilege for the logical system.
- Configure a network, such as the BGP network shown in "Example: Configuring Internal BGP Peering Sessions on Logical Systems" on page 54.

Copyright © 2013, Juniper Networks, Inc.

Overview

Logical systems have their individual directory structure created in the **/var/logical-systems/*logical-system-name*** directory. It contains the following subdirectories:

- **/config**—Contains the active configuration specific to the logical system.
- **/log**—Contains system log and tracing files specific to the logical system.

  To maintain backward compatibility for the log files with previous versions of Junos OS, a symbolic link (symlink) from the **/var/logs/*logical-system-name*** directory to the **/var/logical-systems/*logical-system-name*** directory is created when a logical system is configured.
- **/tmp**—Contains temporary files specific to the logical system.

The file system for each logical system enables logical system users to view trace logs and modify logical system files. Logical system administrators have full access to view and modify all files specific to the logical system.

Logical system users and administrators can save and load configuration files at the logical-system level using the **save** and **load** configuration mode commands. In addition, they can also issue the **show log**, **monitor**, and **file** operational mode commands at the logical-system level.

This example shows how to configure and view a BGP trace file on a logical system. The steps can be adapted to apply to trace operations for any Junos OS hierarchy level that supports trace operations.

TIP: To view a list of hierarchy levels that support tracing operations, enter the **help apropos traceoptions** command in configuration mode.

Configuration

- Configuring Trace Operations on page 467
- Viewing the Trace File on page 467
- Deactivating and Reactivating Trace Logging on page 469
- Results on page 470

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set logical-systems A protocols bgp group internal-peers traceoptions file bgp-log
set logical-systems A protocols bgp group internal-peers traceoptions file size 10k
set logical-systems A protocols bgp group internal-peers traceoptions file files 2
set logical-systems A protocols bgp group internal-peers traceoptions flag update detail
```


Copyright © 2013, Juniper Networks, Inc.

Configuring Trace Operations

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the CLI User Guide.

To configure the trace operations:

1. Configure trace operations on the logical system.

```
[edit logical-systems A protocols bgp group internal-peers]
user@host# set traceoptions file bgp-log
user@host# set traceoptions file size 10k
user@host# set traceoptions file files 2
user@host# set traceoptions flag update detail
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

Viewing the Trace File

Step-by-Step Procedure

To view the trace file:

1. In operational mode on the main router, list the directories on the logical system.

```
user@host> file list /var/logical-systems/A
/var/logical-systems/A:
config/
log/
tmp/
```

2. In operational mode on the main router, list the log files on the logical system.

```
user@host> file list /var/logical-systems/A/log/
/var/logical-systems/A/log:
bgp-log
```

3. View the contents of the **bgp-log** file.

```
user@host> file show /var/logical-systems/A/log/bgp-log
Aug 10 17:12:01 trace_on: Tracing to "/var/log/A/bgp-log" started
Aug 10 17:14:22.826182 bgp_peer_mgmt_clear:5829: NOTIFICATION sent to
192.163.6.4 (Internal AS 17): code 6 (Cease) subcode 4 (Administratively
Reset), Reason: Management session cleared BGP neighbor
Aug 10 17:14:22.826445 bgp_send: sending 21 bytes to 192.163.6.4 (Internal
AS 17)
Aug 10 17:14:22.826499
Aug 10 17:14:22.826499 BGP SEND 192.168.6.5+64965 -> 192.163.6.4+179
Aug 10 17:14:22.826559 BGP SEND message type 3 (Notification) length 21
Aug 10 17:14:22.826598 BGP SEND Notification code 6 (Cease) subcode 4
(Administratively Reset)
Aug 10 17:14:22.831756 bgp_peer_mgmt_clear:5829: NOTIFICATION sent to
192.168.40.4 (Internal AS 17): code 6 (Cease) subcode 4 (Administratively
Reset), Reason: Management session cleared BGP neighbor
Aug 10 17:14:22.831851 bgp_send: sending 21 bytes to 192.168.40.4 (Internal
 AS 17)
Aug 10 17:14:22.831901
Aug 10 17:14:22.831901 BGP SEND 192.168.6.5+53889 -> 192.168.40.4+179
```

Copyright © 2013, Juniper Networks, Inc.

```
Aug 10 17:14:22.831959 BGP SEND message type 3 (Notification) length 21
Aug 10 17:14:22.831999 BGP SEND Notification code 6 (Cease) subcode 4
(Administratively Reset)
...
```

4. Filter the output of the log file.

```
user@host> file show /var/logical-systems/A/log/bgp-log | match "flags 0x40"
Aug 10 17:14:54.867460 BGP SEND flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.867595 BGP SEND flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.867650 BGP SEND flags 0x40 code NextHop(3): 192.168.6.5
Aug 10 17:14:54.867692 BGP SEND flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.884529 BGP RECV flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.884581 BGP RECV flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.884628 BGP RECV flags 0x40 code NextHop(3): 192.163.6.4
Aug 10 17:14:54.884667 BGP RECV flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.911377 BGP RECV flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.911422 BGP RECV flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.911466 BGP RECV flags 0x40 code NextHop(3): 192.168.40.4
Aug 10 17:14:54.911507 BGP RECV flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.916008 BGP SEND flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.916054 BGP SEND flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.916100 BGP SEND flags 0x40 code NextHop(3): 192.168.6.5
Aug 10 17:14:54.916143 BGP SEND flags 0x40 code LocalPref(5): 100
Aug 10 17:14:54.920304 BGP RECV flags 0x40 code Origin(1): IGP
Aug 10 17:14:54.920348 BGP RECV flags 0x40 code ASPath(2) length 0: <null>
Aug 10 17:14:54.920393 BGP RECV flags 0x40 code NextHop(3): 10.0.0.10
Aug 10 17:14:54.920434 BGP RECV flags 0x40 code LocalPref(5): 100
```

5. View the tracing operations in real time.

```
user@host> clear bgp neighbor logical-system A
Cleared 2 connections
```

CAUTION: Clearing the BGP neighbor table is disruptive in a production environment.

6. Run the **monitor start** command with an optional **match** condition.

```
user@host> monitor start A/bgp-log | match 0.0.0.0/0
Aug 10 19:21:40.773467 BGP RECV         0.0.0.0/0
Aug 10 19:21:40.773685 bgp_rcv_nlri: 0.0.0.0/0
Aug 10 19:21:40.773778 bgp_rcv_nlri: 0.0.0.0/0 belongs to meshgroup
Aug 10 19:21:40.773832 bgp_rcv_nlri: 0.0.0.0/0 qualified bnp->ribact 0x0
12afcb 0x0
```

7. Pause the **monitor** command by pressing Esc-Q.
   To unpause the output, press Esc-Q again.

8. Halt the **monitor** command by pressing Enter and typing **monitor stop**.

```
[Enter]
user@host> monitor stop
```

9. When you are finished troubleshooting, consider deactivating trace logging to avoid any unnecessary impact to system resources.

```
[edit protocols bgp group internal-peers]
user@host:A# deactivate traceoptions
user@host:A# commit
```


Copyright © 2013, Juniper Networks, Inc.

When configuration is deactivated, it appears in the configuration with the **inactive** tag.To reactivate trace operations, use the **activate** configuration-mode statement.

```
[edit protocols bgp group internal-peers]
user@host:A# show

type internal;
inactive: traceoptions {
    file bgp-log size 10k files 2;
    flag update detail;
    flag all;
}
local-address 192.168.6.5;
export send-direct;
neighbor 192.163.6.4;
neighbor 192.168.40.4;
```

10. To reactivate trace operations, use the **activate** configuration-mode statement.

```
[edit protocols bgp group internal-peers]
user@host:A# activate traceoptions
user@host:A# commit
```

Deactivating and Reactivating Trace Logging

Step-by-Step Procedure

To deactivate and reactivate the trace file:

1. When you are finished troubleshooting, consider deactivating trace logging to avoid an unnecessary impact to system resources.

```
[edit protocols bgp group internal-peers]
user@host:A# deactivate traceoptions
user@host:A# commit
```

When configuration is deactivated, the statement appears in the configuration with the **inactive** tag.

```
[edit protocols bgp group internal-peers]
user@host:A# show

type internal;
inactive: traceoptions {
    file bgp-log size 10k files 2;
    flag update detail;
    flag all;
}
local-address 192.168.6.5;
export send-direct;
neighbor 192.163.6.4;
neighbor 192.168.40.4;
```

2. To reactivate logging, use the **activate** configuration-mode statement.

```
[edit protocols bgp group internal-peers]
user@host:A# activate traceoptions
user@host:A# commit
```

Copyright © 2013, Juniper Networks, Inc.

Results

From configuration mode, confirm your configuration by entering the **show logical-systems A protocols bgp group internal-peers** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show logical-systems A protocols bgp group internal-peers
traceoptions {
    file bgp-log size 10k files 2;
    flag update detail;
}
```

Verification

Confirm that the configuration is working properly.

Verifying That the Trace Log File Is Operating

Purpose Make sure that events are being written to the log file.

Action

```
user@host:A> show log bgp-log
Aug 12 11:20:57 trace_on: Tracing to "/var/log/A/bgp-log" started
```

Related Documentation

- Understanding External BGP Peering Sessions on page 19
- BGP Configuration Overview

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 14

BGP Configuration Statements

- [edit protocols bgp] Hierarchy Level on page 471

[edit protocols bgp] Hierarchy Level

Several statements in the **[edit protocols mpls]** hierarchy are valid at numerous locations within it. To make the complete hierarchy easier to read, the repeated statements are listed in "Common BGP Family Options" on page 471 and that section is referenced at the appropriate locations in "Complete [edit protocols bgp] Hierarchy" on page 472.

- Common BGP Family Options on page 471
- Complete [edit protocols bgp] Hierarchy on page 472

Common BGP Family Options

This section lists statements that are valid at the following hierarchy levels, and is referenced at those levels in "Complete [edit protocols bgp] Hierarchy" on page 472 instead of the statements being repeated.

- **[edit protocols bgp family inet (any | flow | labeled-unicast | multicast | unicast)]**
- **[edit protocols bgp family inet6 (any | labeled-unicast | multicast | unicast)]**
- **[edit protocols bgp family (inet-mdt | inet-mvpn | inet6-mvpn | l2vpn) signaling]**
- **[edit protocols bgp family inet-vpn (any | flow | multicast | unicast)]**
- **[edit protocols bgp family inet6-vpn (any | multicast | unicast)]**
- **[edit protocols bgp family iso-vpn unicast]**

The common BGP family options are as follows:

```
accepted-prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
}
damping;
loops number;
prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
```

Copyright © 2013, Juniper Networks, Inc.

```
}
rib-group group-name;
topology name {
  community {
    target identifier;
  }
}
```

Complete [edit protocols bgp] Hierarchy

The statement hierarchy listed in this section can also be included at the **[edit logical-systems *logical-system-name*]** hierarchy level.

```
protocols {
  bgp {
    disable;
    accept-remote-nexthop;
    advertise-external <conditional>;
    advertise-from-main-vpn-tables;
    advertise-inactive;
    (advertise-peer-as | no-advertise-peer-as);
    authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
    authentication-key key;
    authentication-key-chain key-chain;
    bfd-liveness-detection {
      authentication {
        algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
          meticulous-keyed-sha-1 | simple-password);
        key-chain key-chain-name;
        loose-check;
      }
      detection-time {
        threshold milliseconds;
      }
      holddown-interval milliseconds;
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      session-mode (automatic | multihop | single-hop);
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      version (1 | automatic);
    }
    cluster cluster-identifier;
    damping;
    description text-description;
    export [ policy-names ];
    family family-name {
      ... the family subhierarchies appear after the main [edit protocols bgp] hierarchy ...
    }
    graceful-restart {
      disable;
      restart-time seconds;
```


Copyright © 2013, Juniper Networks, Inc.

```
    stale-routes-time seconds;
  }
  group group-name {
    ... the group subhierarchy appears after the main [edit protocols bgp] hierarchy ...
  }
  hold-time seconds;
  idle-after-switch-over (seconds | forever);
  import [ policy-names ];
  include-mp-next-hop;
  ipsec-sa ipsec-sa;
  keep (all | none);
  local-address address;
  local-as autonomous-system <loops number> < alias> <private>;
  local-interface interface-name;
  local-preference local-preference;
  log-updown;
  metric-out (metric | igp (delay-med-update | offset) | minimum-igp offset);
  mtu-discovery;
  multihop {
    no-nexthop-change;
    ttl ttl-value;
  }
  no-aggregator-id;
  no-client-reflect;
  out-delay seconds;
  outbound-route-filter {
    bgp-orf-cisco-mode;
    prefix-based {
      accept {
        inet;
        inet6;
      }
    }
  }
  passive;
  path-selection {
    always-compare-med;
    as-path-ignore;
    cisco-non-deterministic;
    external-router-id;
    med-plus-igp {
      igp-multiplier number;
      med-multiplier number;
    }
  }
  peer-as autonomous-system;
  preference preference;
  remove-private;
  tcp-mss segment-size;
  traceoptions {
    file filename <files number> <size maximum-file-size> <world-readable |
      no-world-readable>;
    flag flag <flag-modifier> <disable>;
  }
  vpn-apply-export;
}
```

Copyright © 2013, Juniper Networks, Inc.

```
bgp {
  family inet {
    (any | multicast) {
      ... statements in Common BGP Family Options on page 471 ...
    }
    flow {
      ... statements in Common BGP Family Options on page 471 PLUS ...
      no-validate [ validation-procedure-names ];
    }
    labeled-unicast {
      ... statements in Common BGP Family Options on page 471 PLUS ...
      add-path {
        receive;
        send {
          path-count number;
          prefix-policy [ policy-names ];
        }
      }
      aggregate-label {
        community community-name;
      }
      aigp [disable];
      explicit-null connected-only;
      per-group-label;
      per-prefix-label;
      resolve-vpn;
      rib (inet.3 | inet6.3);
      traffic-statistics {
        file filename <files number> <size maximum-file-size> <world-readable |
          no-world-readable>;
        interval seconds;
      }
    }
    unicast {
      ... statements in Common BGP Family Options on page 471 PLUS ...
      add-path {
        receive;
        send {
          path-count number;
          prefix-policy [ policy-names ];
        }
      }
      topology name {
        community target identifier;
      }
    }
  }
}

bgp {
  family inet6 {
    (any | multicast) {
      ... statements in Common BGP Family Options on page 471 ...
    }
    labeled-unicast {
```


Copyright © 2013, Juniper Networks, Inc.

```
        ... statements in Common BGP Family Options on page 471 PLUS ...
        add-path {
          receive;
          send {
            path-count number;
            prefix-policy [ policy-names ];
          }
        }
        aggregate-label {
          community community-name:
        }
        aigp [disable];
        explicit-null;
        per-group-label;
        traffic-statistics {
          file filename <files number> <size maximum-file-size> <world-readable |
            no-world-readable>;
          interval seconds;
        }
      }
      unicast {
        ... statements in Common BGP Family Options on page 471 PLUS ...
        topology name {
          community target identifier;
        }
      }
    }
}

bgp {
  family (inet-mdt | inet-mvpn | inet6-mvpn | l2vpn) {
    signaling {
      ... statements in Common BGP Family Options on page 471 ...
    }
  }
}

bgp {
  family inet-vpn {
    (any | multicast | unicast) {
      ... statements in Common BGP Family Options on page 471 PLUS ...
      aggregate-label <community community-name>;
    }
    flow {
      ... statements in Common BGP Family Options on page 471 ...
    }
  }
}

bgp {
  family inet6-vpn {
    (any | multicast | unicast) {
      ... statements in Common BGP Family Options on page 471 PLUS ...
      aggregate-label <community community-name>;
    }
  }
```

```
}

bgp {
  family iso-vpn {
    unicast {
      ... statements in Common BGP Family Options on page 471 PLUS ...
      aggregate-label <community community-name>;
    }
  }
}

bgp {
  family route-target {
    accepted-prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    advertise-default;
    external-paths number;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    proxy-generate <route-target-policy route-target-policy-name>;
  }
}

bgp {
  group group-name {
    ... same statements as at the [edit protocols bgp] hierarchy level PLUS ...
      allow [ all ip-prefix</prefix-length> ];
      as-override;
      multipath <multiple-as>;
      neighbor address {
        ... the neighbor subhierarchy appears after the main [edit protocols bgp group
          group-name] hierarchy ...
      }
      type (external | internal);
    ... BUT NOT ...
      disable;  # NOT valid at this level
      group group-name { ... }  # NOT valid at this level
      path-selection { ... }  # NOT valid at this level
  }

  group group-name {
    neighbor address {
      ... same statements as at the [edit protocols bgp] hierarchy level PLUS ...
        as-override;
        multipath <multiple-as>;
      ... BUT NOT ...
        disable;  # NOT valid at this level
        group group-name { ... }  # NOT valid at this level
        neighbor address { ... }  # NOT valid at this level
        path-selection { ... }  # NOT valid at this level
    }
  }
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
}
```

Related Documentation

- Notational Conventions Used in Junos OS Configuration Hierarchies
- [edit protocols] Hierarchy Level

accept-remote-nexthop

Syntax

accept-remote-nexthop;

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced in Junos OS Release 8.5.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Specify that a single-hop EBGP peer accepts a remote next hop with which it does not share a common subnet. Configure a separate import policy on the EBGP peer to specify the remote next hop. You cannot configure **multihop** and **accept-remote-nexthop** statements for the same EPBG peer.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Single-Hop EBGP Peers to Accept Remote Next Hops on page 282
- Understanding Route Advertisement on page 200
- multipath on page 569

Copyright © 2013, Juniper Networks, Inc.

accepted-prefix-limit

Syntax

```
accepted-prefix-limit {
    maximum number;
    teardown <percentage-threshold> idle-timeout (forever | minutes);
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* protocols bgp family route-target],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family route-target],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family route-target],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family route-target],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family route-target],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family route-target],
[edit protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit protocols bgp family route-target],
[edit protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit protocols bgp group *group-name* family route-target],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit protocols bgp group *group-name* neighbor *address* family route-target],
[edit routing-instances *routing-instance-name* protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit routing-instances *routing-instance-name* protocols bgp family route-target],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family route-target],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family route-target]

Release Information

Statement introduced in Junos OS Release 9.2.
Statement introduced in Junos OS Release 9.2 for EX Series switches.

Copyright © 2013, Juniper Networks, Inc.

Description Configure a limit to the number of prefixes that can be accepted on a BGP peer session. When that limit is exceeded, a system log message is sent. You can optionally specify to reset the BGP session when the number of accepted prefixes exceeds the specified limit.

This statement provides the ability to log a message, reset the BGP session, or do both when the number of prefixes received from the peer and accepted by policy exceeds a preset limit. This functionality is identical to the **prefix-limit** functionality except that it operates against accepted prefixes rather than received prefixes.

Options

idle-timeout (forever | *minutes*)—Specify that a BGP session that has been reset is not reestablished until after the specified timeout period. Specify **forever** to prevent the BGP session from being reestablished until the **clear bgp neighbor** command is issued.

maximum *number*—Limit the number of prefixes that can be accepted on a BGP peer session. A system log message is sent when that number is exceeded.

Range: 1 through 4,294,967,295 ($2^{32} - 1$)

teardown <*percentage* 1/n threshold>—Specify to reset the BGP peer session when the specified limit to the number of prefixes that can be accepted is exceeded. If you specify a percentage, a system log message is sent when the accepted number of prefixes on the BGP session exceeds the specified percentage of the configured limit. After a BGP session is reset, it is reestablished within a short time unless you include the **idle-timeout** statement.

Range: 1 through 100

Range: 1 through 2400

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- prefix-limit on page 594
- Understanding Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

add-path

Syntax

```
add-path {
  receive;
  send {
    path-count number;
    prefix-policy [ policy-names ];
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp group *group-name* family *family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor address family *family*],
[edit protocols bgp group *group-name* family *family*],
[edit protocols bgp group *group-name* neighbor address family *family*]

Release Information

Statement introduced in Junos OS Release 11.3.

Description

Enable advertisement of multiple paths to a destination, instead of advertising only the active path.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Advertising Multiple BGP Paths to a Destination on page 293

Copyright © 2013, Juniper Networks, Inc.

advertise-external

Syntax advertise-external {*conditional*};

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *neighbor-address*]

Release Information
Statement introduced in Junos OS Release 9.3.
Statement introduced in Junos OS Release 9.3 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify BGP to advertise the best external route into an IBGP mesh group, a route reflector cluster, or an AS confederation even if the best route is an internal route. In order to configure the **advertise-external** statement on a route reflector, you must disable intracluster reflection with the **no-client-reflect** statement. The **advertise-external** statement is supported at both the group and neighbor level. If you configure the statement at the neighbor level, you must configure it for all neighbors in a group. Otherwise, the group is automatically split into different groups.

NOTE: When configuring the **advertise-external** statement for an AS confederation, it is recommended that EBGP peers belonging to different autonomous systems are configured in a separate EBGP peer group. This ensures consistency while BGP sends the best external route to peers in the configured peer group.

Options
conditional—(Optional) Advertise the best external path only if the route selection process reaches the point at which the multiple exit discriminator (MED) metric is evaluated. The **conditional** option restricts advertisement to when the best external path and the active path are equal until the MED step of the route selection process. This implies that external routes with a longer AS path length than the active path, for instance, are not advertised. The criteria used for selecting the best external path is the same whether or not the **conditional** option is configured.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BGP Route Advertisement on page 200
- Understanding Route Advertisement on page 200

Copyright © 2013, Juniper Networks, Inc.

- advertise-inactive on page 483

advertise-from-main-vpn-tables

Syntax advertise-from-main-vpn-tables;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp],

Release Information Statement introduced in Junos OS Release 12.3.

Description Advertise VPN routes from the main VPN tables in the master routing instance (for example, bgp.l3vpn.0, bgp.mvpn.0) instead of advertising VPN routes from the tables in the VPN routing instances (for example, *instance-name*.inet.0, *instance-name*.mvpn.0).

When this statement is enabled, before advertising a route for a VPN prefix, the path selection algorithm is run on all routes (local and received) that have the same route distinguisher (RD).

NOTE: Adding or removing this statement causes all BGP sessions that have VPN address families to be removed and then added again. On the other hand, having this statement in the configuration prevents BGP sessions from going down when route reflector (RR) or autonomous system border router (ASBR) functionality is enabled or disabled on a routing device that has VPN address families configured.

Default If you do not include this statement, VPN routes are advertised from the tables in the VPN routing instances.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Understanding Junos OS Routing Tables
- Types of VPNs

Copyright © 2013, Juniper Networks, Inc.

advertise-inactive

Syntax advertise-inactive;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description BGP will be the best advertised route even if the routing table does not select it as an active route.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring the Preference Value for BGP Routes on page 219
- Example: Configuring BGP Route Preference (Administrative Distance) on page 217
- Understanding Route Advertisement on page 200
- advertise-external on page 481

Copyright © 2013, Juniper Networks, Inc.

advertise-peer-as

Syntax advertise-peer-as;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Disable the default behavior of suppressing AS routes.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BGP Route Advertisement on page 200
- Understanding Route Advertisement on page 200
- no-advertise-peer-as on page 575

Copyright © 2013, Juniper Networks, Inc.

aggregate-label

Syntax

```
aggregate-label {
  community community-name;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp family inet-vpn unicast],
[edit logical-systems *logical-system-name* protocols bgp family inet-vpn6 unicast],
[edit protocols bgp family inet labeled-unicast],
[edit protocols bgp family inet6 labeled-unicast],
[edit protocols bgp family inet-vpn unicast],
[edit protocols bgp family inet6-vpn unicast]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description

Specify matching criteria (in the form of a community) such that all routes which match are assigned the same VPN label, selected from one of the several routes in the set defined by this criteria. This reduces the number of VPN labels that the router must consider, and aggregates the received labels.

Options

community *community-name*—Specify the name of the community to which to apply the aggregate label.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Configuring Aggregate Labels for VPNs

Copyright © 2013, Juniper Networks, Inc.

aigp

Syntax aigp [disable];

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit protocols bgp family inet labeled-unicast],
[edit protocols bgp family inet6 labeled-unicast],
[edit protocols bgp group *group-name* family inet labeled-unicast] ,
[edit protocols bgp group *group-name* family inet6 labeled-unicast] ,
[edit protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp family inet labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp family inet6 labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family inet6 labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast]

Release Information Statement introduced in Junos OS Release 12.1.

Description Enable the accumulated interior gateway protocol (AIGP) BGP attribute on a protocol family. Configuring AIGP on a particular family enables sending and receiving of the AIGP attribute on that family.

The AIGP attribute enables deployments in which a single administration can run several contiguous BGP autonomous systems (ASs). Such deployments allow BGP to make routing decisions based on the IGP metric. With AIGP enabled, BGP can select paths based on IGP metrics. This enables BGP to choose the shortest path between two nodes,

Copyright © 2013, Juniper Networks, Inc.

even though the nodes might be in different ASs. The AIGP attribute is particularly useful in networks that use tunneling to deliver a packet to its BGP next hop. Such is the case with MPLS label-switched paths.

Options

disable—Explicitly disables AIGP.

Default: Disabled, meaning that the device does not send an AIGP attribute and silently discards a received AIGP attribute.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring the Accumulated IGP Attribute for BGP on page 136
- aigp-originate on page 488

aigp-originate

Syntax aigp-originate *distance*;

Hierarchy Level
[edit logical-systems *logical-system-name* policy-options policy-statement *policy-name* term *term-name* then],
[edit logical-systems *logical-system-name* policy-options policy-statement *policy-name* then],
[edit policy-options policy-statement *policy-name* term *term-name* then],
[edit policy-options policy-statement *policy-name* then]

Release Information Statement introduced in Junos OS Release 12.1.

Description Originate an accumulated interior gateway protocol (AIGP) BGP attribute for a given prefix by export policy, using the **aigp-originate** policy action.

To originate an AIGP attribure, you need configure the policy action on only one node. The AIGP attribute is readvertised if the neighbors are AIGP enabled with the **aigp** statement in the BGP configuration.

Default If you omit the **aigp-originate** policy action, the node still readvertises the AIGP BGP attribute if AIGP is enabled in the BGP configuration. However, the node does not originate its own AIGP attribute for local prefixes.

As the route is readvertised by downstream nodes, the cost of the AIGP attribute reflects the IGP distance to the prefix (zero + IGP distance or configured distance + IGP distance).

Options ***distance***—(Optional) Associate an initial cost when advertising a local prefix with the AIGP BGP attribute.

Range: 0 through 4,294,967,295

Default: The initial cost associated with the AIGP attribute for a local prefix is zero. The ***distance*** option overrides the default zero value for the initial cost.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring the Accumulated IGP Attribute for BGP on page 136
- aigp on page 486

Copyright © 2013, Juniper Networks, Inc.

algorithm (BGP BFD Authentication)

Syntax algorithm *algorithm-name*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit protocols bgp bgp bfd-liveness-detection authentication],
[edit protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp bgp bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication]

Release Information
Statement introduced in Junos OS Release 8.1.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure the algorithm used to authenticate the specified BFD session.

Options *algorithm-name*—Authentication algorithm name: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**.

simple-password—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.

keyed-md5—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.

Copyright © 2013, Juniper Networks, Inc.

meticulous-keyed-md5—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method can take additional time to authenticate the session.

keyed-sha-1—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.

meticulous-keyed-sha-1—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method can take additional time to authenticate the session.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD Authentication for Static Routes
- Example: Configuring BGP Route Authentication on page 351
- Example: Configuring EBGP Multihop Sessions on page 208
- Understanding Route Authentication on page 351
- authentication on page 493
- bfd-liveness-detection on page 499
- key-chain on page 541
- loose-check on page 556

Copyright © 2013, Juniper Networks, Inc.

allow

Syntax allow (all | [*network/mask-length*]);

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Implicitly configure BGP peers, allowing peer connections from any of the specified networks or hosts. To configure multiple BGP peers, configure one or more networks and hosts within a single **allow** statement or include multiple **allow** statements.

NOTE: You cannot define a BGP group with dynamic peers with BGP authentication enabled.

Options **all**—Allow all addresses, which is equivalent to **0.0.0.0/0** (or **::/0**).

network/mask-length—IPv6 or IPv4 network number of a single address or a range of allowable addresses for BGP peers, followed by the number of significant bits in the subnet mask.

NOTE: You cannot define a BGP group with dynamic peers with authentication enabled.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- neighbor on page 571

Copyright © 2013, Juniper Networks, Inc.

as-override

Syntax as-override;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Compare the AS path of an incoming advertised route with the AS number of the BGP peer under the group and replace all occurrences of the peer AS number in the AS path with its own AS number before advertising the route to the peer.

NOTE: The **as-override** statement is specific to a particular BGP group. This statement does not affect peers from the same remote AS configured in different groups.

Enabling the AS override feature allows routes originating from an AS to be accepted by a router residing in the same AS. Without AS override enabled, the routing device refuses the route advertisement once the AS path shows that the route originated from its own AS. This is done by default to prevent route loops. The **as-override** statement overrides this default behavior.

Note that enabling the AS override feature may result in routing loops. Use this feature only for specific applications that require this type of behavior, and in situations with strict network control. One application is the IGP protocol between the provider edge routing device and the customer edge routing device in a virtual private network.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring a Layer 3 VPN with Route Reflection and AS Override on page 176
- Understanding Route Advertisement on page 200
- Junos OS VPNs Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

authentication (BGP BFD Liveness Detection)

Syntax

```
authentication {
  algorithm algorithm-name;
  key-chain key-chain-name;
  loose-check ;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information

Statement introduced in Junos OS Release 8.1.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description

Specify the router and route authentication to mitigate the risk of being attacked by a machine or router that has been configured to share incorrect routing information with another router. Router and route authentication enables routers to share information only if they can verify that they are talking to a trusted source, based on a password (key). In this method, a hashed key is sent along with the route being sent to another router. The receiving router compares the sent key to its own configured key. If they are the same, the receiving router accepts the route.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD for Static Routes
- Example: Configuring BFD Authentication for Static Routes
- Example: Configuring BGP Route Authentication on page 351
- Understanding Route Authentication on page 351

Copyright © 2013, Juniper Networks, Inc.

- algorithm on page 489
- bfd-liveness-detection on page 499
- key-chain on page 541
- loose-check on page 556

Copyright © 2013, Juniper Networks, Inc.

authentication-algorithm

Syntax authentication-algorithm *algorithm*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* protocols ldp session *session-address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols ldp session *session-address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit protocols ldp session *session-address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols ldp session *session-address*]

Release Information
Statement introduced in Junos OS Release 7.6.
Statement introduced for BGP in Junos OS Release 8.0.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Configure an authentication algorithm type.

Options ***algorithm***—Specify one of the following types of authentication algorithms:

- **aes-128-cmac-96**—Cipher-based message authentication code (AES128, 96 bits).
- **hmac-sha-1-96**—Hash-based message authentication code (SHA1, 96 bits).
- **md5**—Message digest 5.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Understanding Route Authentication on page 351
- Example: Configuring Route Authentication for BGP on page 352

Copyright © 2013, Juniper Networks, Inc.

authentication-key (Protocols BGP)

Syntax authentication-key *key*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Configure an MD5 authentication key (password). Neighboring routing devices use the same password to verify the authenticity of BGP packets sent from this system.

Options ***key***—Authentication password. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (“ ”).

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Route Authentication for BGP on page 352

Copyright © 2013, Juniper Networks, Inc.

authentication-key-chain (Protocols BGP)

Syntax authentication-key-chain *key-chain*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced in Junos OS Release 8.0.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Apply and enable an authentication keychain to the routing device. Note that the referenced key chain must be defined. When configuring the authentication key update mechanism for BGP, you cannot commit the **0.0.0.0/allow** statement with authentication keys or key chains. The CLI issues a warning and fails to commit such configurations.

Options
key-chain—Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (“ ”).

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Route Authentication for BGP on page 352
- Example: Configuring BFD Authentication for Static Routes
- Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols

Copyright © 2013, Juniper Networks, Inc.

auto-discovery-only

Syntax auto-discovery-only;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp family l2vpn],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family l2vpn],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family l2vpn],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp family l2vpn],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp group *group-name* family l2vpn],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp group *group-name* neighbor *address* family l2vpn],
[edit protocols bgp family l2vpn],
[edit protocols bgp group *group-name* family l2vpn],
[edit protocols bgp group *group-name* neighbor *address* family l2vpn],
[edit routing-instances *instance-name* protocols bgp family l2vpn],
[edit routing-instances *instance-name* protocols bgp group *group-name* family l2vpn],
[edit routing-instances *instance-name* protocols bgp group *group-name* neighbor *address* family l2vpn]

Release Information Statement introduced in Junos OS Release 10.4R2.

Description Enable the router to process only the autodiscovery network layer reachability information (NLRI) update messages for LDP-based Layer 2 VPN and VPLS update messages (BGP_L2VPN_AD_NLRI) (FEC 129).

Specifically, the **auto-discovery-only** statement notifies the routing process (rpd) to expect autodiscovery-related NLRI messages so that information can be deciphered and used by LDP and VPLS.

The **auto-discovery-only** statement must be configured on all provider edge (PE) routers in a VPLS. If you configure route reflection, the **auto-discovery-only** statement is also required on provider (P) routers that act as the route reflector in supporting FEC 129-related updates.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BGP Autodiscovery for LDP VPLS
- Example: Configuring BGP Autodiscovery for LDP VPLS with User-Defined Mesh Groups

Copyright © 2013, Juniper Networks, Inc.

bfd-liveness-detection (Protocols BGP)

Syntax

```
bfd-liveness-detection {
  authentication {
    algorithm algorithm-name;
    key-chain key-chain-name;
    loose-check;
  }
  detection-time {
    threshold milliseconds;
  }
  hold-down-interval milliseconds;
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  multiplier number;
  no-adaptation;
  session-mode (automatic | multihop | single-hop);
  transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
  }
  version (1 | automatic);
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced in Junos OS Release 8.1.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
detection-time threshold and **transmit-interval threshold** options introduced in Junos OS Release 8.2
Support for logical routers introduced in Junos OS Release 8.3.
Support for IBGP and multihop EBGP sessions introduced in Junos OS Release 8.3.
holddown-interval statement introduced in Junos OS Release 8.5. You can configure this statement only for EBGP peers at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level.
no-adaptation statement introduced in Junos OS Release 9.0.
Support for BFD authentication introduced in Junos OS Release 9.6.

Copyright © 2013, Juniper Networks, Inc.

Support for BFD on IPv6 interfaces with BGP introduced in Junos OS Release 11.2. Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure bidirectional failure detection (BFD) timers and authentication for BGP.

For IBGP and multihop EBGP support, configure the **bfd-liveness-detection** statement at the global **[edit bgp protocols]** hierarchy level. You can also configure IBGP and multihop support for a routing instance or a logical system.

Copyright © 2013, Juniper Networks, Inc.

Options

authentication algorithm *algorithm-name* (Optional)—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**.

authentication key-chain *key-chain-name* (Optional)—Associate a security key with the specified BFD session using the name of the security keychain. The keychain name must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

authentication loose-check—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.

detection-time threshold *milliseconds* (Optional)—Configure a threshold. When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

holddown-interval *milliseconds* (Optional)—Configure an interval specifying how long a BFD session must remain up before a state change notification is sent. When you configure the hold-down interval for the BFD protocol for EBGP, the BFD session is unaware of the BGP session during this time. In this case, if the BGP session goes down during the configured hold-down interval, BFD already assumes it is down and does not send a state change notification. The **holddown-interval** statement is supported only for EBGP peers at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level. If the BFD session goes down and then comes back up during the configured hold-down interval, the timer is restarted. You must configure the hold-down interval on both EBGP peers. If you configure the hold-down interval for a multihop EBGP session, you must also configure a local IP address by including the **local-address** statement at the **[edit protocols bgp group *group-name*]** hierarchy level.

Range: 0 through 255,000

Default: 0

minimum-interval *milliseconds* (Required)—Configure the minimum intervals at which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session. This value represents the minimum interval at which the local routing device transmits hello packets as well as the minimum interval that the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately (using the **minimum-receive-interval** and **transmit-interval minimal-interval** statements).

Range: 1 through 255,000

minimum-receive-interval *milliseconds* (Optional)— Configure only the minimum interval at which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session.

Range: 1 through 255,000

Copyright © 2013, Juniper Networks, Inc.

multiplier ***number*** (Optional)—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

Range: 1 through 255

Default: 3

no-adaptation (Optional)—Configure BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable to not to have BFD adaptation enabled in your network.

transmit-interval threshold ***milliseconds*** (Optional)—Configure a threshold. When the BFD session transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

Range: 0 through 4,294,967,295 ($2^{32} - 1$)

transmit-interval minimum-interval ***milliseconds*** (Optional)—Configure only the minimum interval at which the local routing device transmits hello packets to a neighbor with which it has established a BFD session.

Range: 1 through 255,000

version (Optional)—Configure the BFD version to detect.

Range: **1** or **automatic** (autodetect the BFD version)

Default: **automatic**

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD for Static Routes
- Example: Configuring BFD Authentication for Static Routes
- Example: Configuring BFD on Internal BGP Peer Sessions on page 262
- Example: Configuring BFD Authentication for BGP on page 272
- Understanding BFD for BGP on page 261

Copyright © 2013, Juniper Networks, Inc.

bgp

Syntax bgp { ... }

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit protocols],
[edit routing-instances *routing-instance-name* protocols]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Enable BGP on the routing device or for a routing instance.

Default BGP is disabled.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- BGP Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

bgp-orf-cisco-mode

Syntax bgp-orf-cisco-mode;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp outbound-route-filter],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* outbound-route-filter],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* outbound-route-filter],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp outbound-route-filter],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* outbound-route-filter,
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* outbound-route-filter],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options outbound-route-filter],
[edit logical-systems *logical-system-name* routing-options outbound-route-filter],
[edit protocols bgp outbound-route-filter],
[edit protocols bgp group *group-name* outbound-route-filter],
[edit protocols bgp group *group-name* neighbor *address* outbound-route-filter],
[edit routing-instances *routing-instance-name* protocols bgp outbound-route-filter],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* outbound-route-filter],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* outbound-route-filter],
[edit routing-instances *routing-instance-name* routing-options outbound-route-filter],
[edit routing-options outbound-route-filter]

Release Information
Statement introduced in Junos OS Release 9.2.
Statement introduced in Junos OS Release 9.2 for EX Series switches.
Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.2.
Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.3 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description Enable interoperability with routing devices that use the vendor-specific outbound route filter compatibility code of 130 and code type of 128.

NOTE: To enable interoperability for all BGP peers configured on the routing device, include the statement at the **[edit routing-options outbound-route-filter]** hierarchy level.

Default Disabled

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 205

bmp

Syntax

```
bmp {
  memory limit bytes;
  station-address (ip-address | name);
  station-port port-number;
  statistics-timeout seconds;
}
```

Hierarchy Level [edit routing-options]

Release Information Statement introduced in Junos OS Release 9.5.
Statement introduced in Junos OS Release 9.5 for EX Series switches.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description Configure the BGP Monitoring Protocol (BMP), which enables the routing device to collect data from the BGP **Adjacency-RIB-In** routing tables and periodically send that data to a monitoring station.

Options

memory-limit *bytes*—(Optional) Specify a threshold at which to stop collecting BMP data if the limit is exceeded.

Default: 10 MB

Range: 1,048,576 through 52,428,800

station-address (*ip-address* | *name*)—Specify the IP address or a valid URL for the monitoring where BMP data should be sent.

station-port *port-number*—Specify the port number of the monitoring station to use when sending BMP data.

statistics-timeout *seconds*—(Optional) Specify how often to send BMP data to the monitoring station.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring the BGP Monitoring Protocol on page 461

Copyright © 2013, Juniper Networks, Inc.

cluster

Syntax cluster *cluster-identifier*;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify the cluster identifier to be used by the route reflector cluster in an internal BGP group.

CAUTION:

If you configure both route reflection and VPNs on the same routing device, the following modifications to the route reflection configuration cause current BGP sessions to be reset:

- Adding a cluster ID—If a BGP session shares the same AS number with the group where you add the cluster ID, all BGP sessions are reset regardless of whether the BGP sessions are contained in the same group.
- Creating a new route reflector—If you have an IBGP group with an AS number and create a new route reflector group with the same AS number, all BGP sessions in the IBGP group and the new route reflector group are reset.

NOTE: If you change the address family specified in the **[edit protocols bgp family]** hierarchy level, all current BGP sessions on the routing device are dropped and then reestablished.

Copyright © 2013, Juniper Networks, Inc.

Options ***cluster-identifier***—IPv6 or IPv4 address to use as the cluster identifier.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BGP Route Reflectors on page 321
- Understanding External BGP Peering Sessions on page 19
- no-client-reflect on page 577

Copyright © 2013, Juniper Networks, Inc.

damping (Protocols BGP)

Syntax damping;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp family *family*],
[edit logical-systems *logical-system-name* protocols bgp family *family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family *family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family *family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family *family*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family *family*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family *family*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family *family*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family *family*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family *family*],
[edit protocols bgp],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* family *family*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp group *group-name* neighbor *address* family *family*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp family *family*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family *family*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family *family*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Support for flap damping at the address family level introduced in Junos OS Release 12.2.

Description Enable route flap damping. BGP route flapping describes the situation in which BGP systems send an excessive number of update messages to advertise network reachability information. Flap damping reduces the number of update messages sent between BGP

Copyright © 2013, Juniper Networks, Inc.

peers, thereby reducing the load on these peers, without adversely affecting the route convergence time for stable routes.

You typically apply flap damping to external BGP (EBGP) routes (that is, to routes in different ASs). You can also apply it within a confederation, between confederation member ASs. Because routing consistency within an AS is important, do not apply flap damping to internal BGP (IBGP) routes. (If you do, it is ignored.) The exception to this rule is when flap damping is applied at the address family level. When you apply flap damping at the address family level, it works for both IBGP and EBGP.

Default Flap damping is disabled on the routing device.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Examples: Configuring BGP Flap Damping on page 406
- Example: Configuring BGP Route Flap Damping Based on the MBGP MVPN Address Family on page 410

Copyright © 2013, Juniper Networks, Inc.

description (Protocols BGP)

Syntax description *text-description*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Provide a description of the global, group, or neighbor configuration. If the text includes one or more spaces, enclose it in quotation marks (" "). The test is displayed in the output of the **show** command and has no effect on the configuration.

Options ***text-description***—Text description of the configuration. It is limited to 255 characters.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- BGP Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

detection-time (BFD for BGP)

Syntax

```
detection-time {
  threshold milliseconds;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information

Statement introduced in Junos OS Release 8.2.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description

Enable BFD failure detection. The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

The remaining statement is explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD for BGP on page 261
- bfd-liveness-detection on page 499

Copyright © 2013, Juniper Networks, Inc.

- threshold on page 616

disable (Protocols BGP)

Syntax disable;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Disable BGP on the system.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- BGP Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

disable (BGP Graceful Restart)

Syntax disable;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp graceful-restart],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* graceful-restart],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* graceful-restart],
[edit protocols bgp graceful-restart],
[edit protocols bgp group *group-name* graceful-restart],
[edit protocols bgp group *group-name* neighbor *address* graceful-restart]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Disable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition.

NOTE: If you disable graceful restart at a higher level in the configuration statement hierarchy, it is disabled at lower levels in the hierarchy also. For example, if you disable graceful restart at the **[edit protocols bgp group *group-name*]** hierarchy level, it is disabled for all the peers in the group. Therefore, if you want to enable graceful restart for some peers in a group and disable it for other peers in the group, enable graceful restart at the **[edit protocols bgp group *group-name*]** hierarchy level and disable graceful restart for each peer at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Configuring Graceful Restart Options for BGP
- Configuring Graceful Restart for QFabric Systems
- graceful-restart on page 523

Copyright © 2013, Juniper Networks, Inc.

explicit-null (Protocols BGP)

Syntax explicit-null;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols mpls],
[edit logical-systems *logical-system-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* protocols ldp],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp group *group-name* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *instance-name* protocols ldp],
[edit protocols mpls],
[edit protocols bgp family inet labeled-unicast],
[edit protocols bgp family inet6 labeled-unicast],
[edit protocols bgp group *group-name* family inet labeled-unicast],
[edit protocols bgp group *group-name* family inet6 labeled-unicast],
[edit protocols bgp group *group-name* neighbor *address* family inet labeled-unicast]
[edit protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit protocols ldp],
[edit routing-instances *instance-name* protocols bgp family inet labeled-unicast],
[edit routing-instances *instance-name* protocols bgp family inet6 labeled-unicast],
[edit routing-instances *instance-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit routing-instances *instance-name* protocols bgp group *group-name* family inet6 labeled-unicast],
[edit routing-instances *instance-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit routing-instances *instance-name* protocols bgp group *group-name* neighbor *address* family inet6 labeled-unicast],
[edit routing-instances *instance-name* protocols ldp]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description Advertise label 0 to the egress routing device of an LSP.

Copyright © 2013, Juniper Networks, Inc.

Default If you do not include the **explicit-null** statement in the configuration, label 3 (implicit null) is advertised.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Advertising Explicit Null Labels to BGP Peers

export (Protocols BGP)

Syntax export [*policy-names*];

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Apply one or more policies to routes being exported from the routing table into BGP.

Options ***policy-names***—Name of one or more policies.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Understanding Route Advertisement on page 200
- Routing Policy Configuration Guide
- import on page 535

family (Protocols BGP)

Syntax

```
family {
  (inet | inet6 | inet-vpn | inet6-vpn | iso-vpn) {
    (any | flow | labeled-unicast | multicast | unicast) {
      accepted-prefix-limit {
        maximum number;
        teardown <percentage-threshold> idle-timeout (forever | minutes);
      }
      add-path {
        send {
          path-count number;
          prefix-policy [ policy-names ];
          }
        receive;
      }
      aigp [disable];
      loops number;
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
      protection;
    rib-group group-name;
      topology name {
        community {
          target identifier;
        }
      }
    flow {
      no-validate policy-name;
    }
    labeled-unicast {
      accepted-prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
      aggregate-label {
        community community-name:
      }
      explicit-null {
        connected-only;
      }
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
      resolve-vpn;
      rib (inet.3 | inet6.3);
      rib-group group-name;
      traffic-statistics {
        file filename <world-readable | no-world-readable>;
        interval seconds;
      }
```


Copyright © 2013, Juniper Networks, Inc.

```
    }
  }
  route-target {
    accepted-prefix-limit {
      maximum number;
      proxy-generate <route-target-policy route-target-policy-name>;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
    advertise-default;
    external-paths number;
    prefix-limit {
      maximum number;
      teardown <percentage> <idle-timeout (forever | minutes)>;
    }
  }
  (inet-mdt | inet-mvpn | inet6-mvpn | l2vpn) {
    signaling {
      accepted-prefix-limit {
        maximum number;
        teardown <percentage-threshold> idle-timeout (forever | minutes);
      }
      add-path {
        send {
          path-count number;
          prefix-policy [ policy-names ];
          }
        receive;
      }
      aigp [disable];
      damping;
      loops number;
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
      rib-group group-name;
    }
  }
}
```

Copyright © 2013, Juniper Networks, Inc.

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
inet-mvpn and **inet6-mpvn** statements introduced in Junos OS Release 8.4.
inet-mdt statement introduced in Junos OS Release 9.4.
Support for the **loops** statement introduced in Junos OS Release 9.6.

Description

Enable multiprotocol BGP (MP-BGP) by configuring BGP to carry network layer reachability information (NLRI) for address families other than unicast IPv4, to specify MP-BGP to carry NLRI for the IPv6 address family, or to carry NLRI for VPNs.

Copyright © 2013, Juniper Networks, Inc.

Options

any—Configure the family type to be both unicast and multicast.

inet—Configure NLRI parameters for IPv4.

inet6—Configure NLRI parameters for IPv6.

inet-mdt—Configure NLRI parameters for the multicast distribution tree (MDT) subaddress family identifier (SAFI) for IPv4 traffic in Layer 3 VPNs.

inet-mvpn—Configure NLRI parameters for IPv4 for multicast VPNs.

inet6-mvpn—Configure NLRI parameters for IPv6 for multicast VPNs.

inet-vpn—Configure NLRI parameters for IPv4 for Layer 3 VPNs.

inet6-vpn—Configure NLRI parameters for IPv6 for Layer 3 VPNs.

iso-vpn—Configure NLRI parameters for IS-IS for Layer 3 VPNs.

l2vpn—Configure NLRI parameters for IPv4 for MPLS-based Layer 2 VPNs and VPLS.

labeled-unicast—Configure the family type to be labeled-unicast. This means that the BGP peers are being used only to carry the unicast routes that are being used by labeled-unicast for resolving the labeled-unicast routes. This statement is supported only with **inet** and **inet6**.

multicast—Configure the family type to be multicast. This means that the BGP peers are being used only to carry the unicast routes that are being used by multicast for resolving the multicast routes.

unicast—Configure the family type to be unicast. This means that the BGP peers only carry the unicast routes that are being used for unicast forwarding purposes. The default family type is **unicast**.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- autonomous-system
- local-as on page 548
- Understanding Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

file (Tracing for Origin AS Validation)

Syntax file *filename* <files *number*> <size *size*> <world-readable | no-world-readable>;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation traceoptions],
[edit logical-systems *logical-system-name* routing-options validation traceoptions],
[edit routing-instances *instance-name* routing-options validation traceoptions],
[edit routing-options validation traceoptions]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure the file settings for tracing resource public key infrastructure (RPKI) BGP route validation.

Options ***filename*** —Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**.

files *number*—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached (***x*k** to specify KB, ***x*m** to specify MB, or ***x*g** to specify gigabytes), at which point the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

Range: 2 through 1000 files

Default: 3 files

no-world-readable—(Optional) Restrict file access to the user who created the file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **files** option.

Syntax: ***x*k** to specify KB, ***x*m** to specify MB, or ***x*g** to specify GB

Range: 10 KB through 1 GB

Default: 128 KB

world-readable—(Optional) Enable unrestricted file access.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

 Copyright © 2013, Juniper Networks, Inc.

flag (Tracing for Origin AS Validation)

Syntax flag *flag*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation traceoptions],
[edit logical-systems *logical-system-name* routing-options validation traceoptions],
[edit routing-instances *instance-name* routing-options validation traceoptions],
[edit routing-options validation traceoptions]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure the flags for tracing resource public key infrastructure (RPKI) BGP route validation.

Options ***flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements.

RPKI BGP Route Validation Tracing Flags

- **all**—Trace all events.
- **error**—Trace errored packets.
- **keepalive**—RPKI-to-router protocol keepalive messages. If you enable the BGP **update** flag only, received keepalive messages do not generate a trace message.
- **nsr-synchronization**—Nonstop routing synchronization events.
- **packets**—All incoming and outgoing packets.
- **state**—State transitions.
- **task**—Routing protocol task processing.
- **timer**—Routing protocol timer processing.
- **update**—Update packets. These packets provide routing updates to BGP systems. If you enable only this flag, received keepalive messages do not generate a trace message. Use the **keepalive** flag to generate a trace message for keepalive messages.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

flow

Syntax

```
flow {
  no-validate policy-name;
}
```

Hierarchy Level

[edit protocols bgp group *group-name* family (inet | inet-vpn)],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet-vpn)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet-vpn)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet-vpn)]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description

Enables BGP to support flow routes.

NOTE: This statement is supported for the default instance, VRF instance, and virtual-router instance only. It is configured with the **instance-type** statement at the **[edit routing-instance *instance-name*]** hierarchy level. For VPNs, this statement is supported for the default instance only.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Enabling BGP to Carry Flow-Specification Routes on page 438

Copyright © 2013, Juniper Networks, Inc.

graceful-restart (Protocols BGP)

Syntax

```
graceful-restart {
  disable;
  restart-time seconds;
  stale-routes-time seconds;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*
neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description

Enable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition. Graceful restart is disabled by default.

To configure the duration of the BGP graceful restart period, include the **restart-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the **stale-routes-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

NOTE: If you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.

For graceful restart to function properly, graceful restart must be enabled at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level as well as in the protocol level.

For example:

```
protocols {
  bgp {
    group ext {
      graceful-restart;
    }
  }
}
routing-options {
  graceful-restart;
}
```

Copyright © 2013, Juniper Networks, Inc.

Graceful restart is enabled both at the **[edit routing-options]** hierarchy level, as well as at the routing protocol level. If graceful restart is not configured in both sections, the peer might have its route removed after a restart, which is not the intended behavior.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Configuring Graceful Restart Options for BGP
- Configuring Graceful Restart for QFabric Systems
- Junos OS High Availability Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

group (Protocols BGP)

Syntax

```
group group-name {
  advertise-inactive;
  allow [ network/mask-length ];
  authentication-key key;
  cluster cluster-identifier;
  damping;
  description text-description;
  export [ policy-names ];
  family {
    (inet | inet6 | inet-vpn | inet6-vpn | l2-vpn) {
      (any | multicast | unicast | signaling) {
        accepted-prefix-limit {
          maximum number;
          teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        add-path {
          send {
            path-count number;
            prefix-policy [ policy-names ];
            }
          receive;
        }
        aigp [disable];
        damping;
        prefix-limit {
          maximum number;
          teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        rib-group group-name;
        topology name {
          community {
            target identifier;
          }
        }
      }
      flow {
        no-validate policy-name;
      }
      labeled-unicast {
        accepted-prefix-limit {
          maximum number;
          teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        explicit-null {
          connected-only;
        }
        prefix-limit {
          maximum number;
          teardown <percentage> <idle-timeout (forever | minutes)>;
        }
        resolve-vpn;
        rib inet.3;
```

Copyright © 2013, Juniper Networks, Inc.

```
            rib-group group-name;
          }
        }
        route-target {
          accepted-prefix-limit {
            maximum number;
            teardown <percentage> <idle-timeout (forever | minutes)>;
          }
          advertise-default;
          external-paths number;
          prefix-limit {
            maximum number;
            teardown <percentage> <idle-timeout (forever | minutes)>;
          }
        }
      }
      hold-time seconds;
      import [ policy-names ];
      ipsec-sa ipsec-sa;
      keep (all | none);
      local-address address;
      local-as autonomous-system <private>;
      local-preference local-preference;
      log-updown;
      metric-out metric;
      multihop <ttl-value>;
      multipath {
        multiple-as;
      }
      no-aggregator-id;
      no-client-reflect;
      out-delay seconds;
      passive;
      peer-as autonomous-system;
      preference preference;
      remove-private;
      tcp-mss segment-size;
      traceoptions {
        file filename <files number> <size size> <world-readable | no-world-readable>;
        flag flag <flag-modifier> <disable>;
      }
      type type;
      neighbor address {
        ... peer-specific-options ...
      }
    }
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp]

Copyright © 2013, Juniper Networks, Inc.

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Define a BGP peer group. BGP peer groups share a common type, peer autonomous system (AS) number, and cluster ID, if present. To configure multiple BGP groups, include multiple **group** statements.

By default, the group's options are identical to the global BGP options. To override the global options, include group-specific options within the **group** statement.

The **group** statement is one of the statements you must include in the configuration to run BGP on the routing device.

Each group must contain at least one peer.

Options

group-name—Name of the BGP group.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- BGP Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

group (Origin Validation for BGP)

Syntax

```
group group-name {
  max-sessions number;
  session address {
    hold-time seconds;
    local-address local-ip-address;
    port port-number;
    preference number;
    record-lifetime seconds;
    refresh-time seconds;
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation],
[edit logical-systems *logical-system-name* routing-options validation],
[edit routing-instances *instance-name* routing-options validation],
[edit routing-options validation]

Release Information

Statement introduced in Junos OS Release 12.2.

Description

Configure the number of concurrent sessions for each group.

Caches are organized in groups. The Junos OS implementation supports up to 63 sessions per group and both IPv4 and IPv6 address families.

If the number of sessions in a group exceeds the **max-sessions** value, the connections are established in order by preference value. A numerically higher preference results in a higher probability for session establishment. The order of session establishment is random among sessions with equal preferences.

Options

group-name—Name of the validation group.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

hold-down-interval (BGP BFD Liveness Detection)

Syntax holddown-interval *milliseconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 8.5.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure an interval specifying how long a BFD session must remain up before a state change notification is sent.

When you configure the hold-down interval for the BFD protocol for EBGP, the BFD session is unaware of the BGP session during this time. In this case, if the BGP session goes down during the configured hold-down interval, BFD already assumes the BGP session is down and does not send a state change notification. The **holddown-interval** statement is supported only for EBGP peers at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level. If the BFD session goes down and then comes back up during the configured hold-down interval, the timer is restarted. You must configure the hold-down interval on both EBGP peers. If you configure the hold-down interval for a multihop EBGP session, you must also configure a local IP address by including the **local-address** statement at the **[edit protocols bgp group *group-name*]** hierarchy level.

Options ***milliseconds***—Specify the hold-down interval value.

Range: 0 through 255,000

Default: 0

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499

Copyright © 2013, Juniper Networks, Inc.

hold-time (Protocols BGP)

Syntax hold-time *seconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify the hold-time value to use when negotiating a connection with the peer. The hold-time value is advertised in open packets and indicates to the peer the length of time that it should consider the sender valid. If the peer does not receive a keepalive, update, or notification message within the specified hold time, the BGP connection to the peer is closed and routing devices through that peer become unavailable.

The hold time is three times the interval at which keepalive messages are sent.

BGP on the local routing device uses the smaller of either the local hold-time value or the peer's hold-time value received in the open message as the hold time for the BGP connection between the two peers.

Starting in Junos OS Release 12.3, the BGP hold-time value can be zero (0). This implies that the speaker does not expect keepalive messages from its peer to maintain the BGP session. When negotiating between two peers, if one side requests a nonzero hold time and the other requests a zero hold time, the negotiation settles on the nonzero value and keepalive intervals are determined accordingly. Both sides must be set to zero for keepalive messages to stop being sent.

Options *seconds*—Hold time.

Range: 10 through 65,535 seconds (or 0 for infinite hold time)

Default: 90 seconds

Copyright © 2013, Juniper Networks, Inc.

TIP: When you set a hold-time value of 1 though 19 seconds, we recommend that you also configure the BGP **precision-timers** statement. The **precision-timers** statement ensures that if scheduler slip messages occur, the routing device continues to send keepalive messages. When the **precision-timers** statement is included, keepalive message generation is performed in a dedicated kernel thread, which helps to prevent BGP session flaps.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- BGP Messages Overview on page 7
- precision-timers on page 591

Copyright © 2013, Juniper Networks, Inc.

hold-time (Origin Validation for BGP)

Syntax hold-time *seconds*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*][edit routing-options validation group *group-name* session *server-ip-address*]

Release Information Statement introduced in Junos OS Release 12.2.

Description Specify the length of time in seconds that the session between the routing device and the cache server is to be considered operational without any activity. After the hold time expires, the session is dropped.

Reception of any protocol data unit (PDU) from the cache server resets the hold timer. The hold time must be configured to be at least 2 x the refresh-time. If the hold time expires, the session is considered to be down. This, in turn, triggers a session restart event. During a session restart, the routing device attempts to start a session with the cache server that has the numerically highest preference.

Options ***seconds***—Time after which the session is declared down.

Range: 10 through 3600

Default: 600

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

idle-after-switch-over

Syntax idle-after-switch-over (forever | *seconds*);

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced in Junos OS Release 9.5.
Statement introduced in Junos OS Release 9.5 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Configure the routing device so that it does not automatically reestablish BGP peer sessions after a nonstop active routing (NSR) switchover. This feature is particularly useful if you are using dynamic routing policies because the dynamic database is not synchronized with the backup Routing Engine when NSR is enabled.

Options **forever**—Do not reestablish a BGP peer session after an non-stop routing switchover until the **clear bgp neighbor** command is issued.

seconds—Do not reestablish a BGP peer session after an non-stop routing switchover until after the specified period.

Range: 1 through 4,294,967,295 ($2^{32} - 1$)

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Preventing Automatic Reestablishment of BGP Peer Sessions After NSR Switchovers
- Routing Policy Configuration Guide
- Junos OS High Availability Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

import (Protocols BGP)

Syntax

import [*policy-names*];

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Apply one or more routing policies to routes being imported into the Junos OS routing table from BGP.

Options

policy-names—Name of one or more policies.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BGP Interactions with IGPs on page 187
- Understanding Route Advertisement on page 200
- Importing and Exporting Routes
- Routing Policy Configuration Guide
- export on page 515

Copyright © 2013, Juniper Networks, Inc.

include-mp-next-hop

Syntax include-mp-next-hop;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Enable multiprotocol updates to contain next-hop reachability information.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Examples: Configuring Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

inet-mdt (Signaling)

Syntax

```
signaling {
  accepted-prefix-limit {
    maximum number;
    teardown <percentage-threshold> idle-timeout (forever | minutes);
  }
  add-path {
    send {
      path-count number;
      prefix-policy [ policy-names ];
      }
    receive;
  }
  aigp [disable];
  loops number;
  prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
  }
  rib-group group-name;
}
```

Hierarchy Level

[edit logical-systems logical-system-name protocols bgp family],
[edit logical-systems logical-system-name protocols bgp group group-name family],
[edit logical-systems logical-system-name protocols bgp group group-name neighbor address family],
[edit protocols bgp family],
[edit protocols bgp group group-name family],
[edit protocols bgp group group-name neighbor address family],
[edit routing-instances instance-name protocols bgp family],
[edit routing-instances instance-name protocols bgp group group-name family],
[edit routing-instances instance-name protocols bgp group group-name neighbor address family]

Release Information

Statement introduced in Junos OS Release 9.4.

Description

For draft-rosen 7, on the provider edge router enable BGP intra-AS auto-discovery using MDT-SAFI.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Source-Specific Multicast for Draft-Rosen Multicast VPNs

Copyright © 2013, Juniper Networks, Inc.

ipsec-sa (Protocols BGP)

Syntax ipsec-sa *ipsec-sa*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced before Junos OS Release 7.4.

Description Specify a security association to BGP peers. You can apply the security association globally for all BGP peers, to a group of peers, or to an individual peer.

Options ***ipsec-sa***—Security association name.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Using IPsec to Protect BGP Traffic on page 358

Copyright © 2013, Juniper Networks, Inc.

iso-vpn

Syntax

```
iso-vpn {
  unicast {
    prefix-limit number;
    rib-group group-name;
  }
}
```

Hierarchy Level

[edit protocols bgp family],
[edit protocols bgp group *group-name* family],
[edit protocols bgp group *group-name* neighbor *address*family],
[edit routing-instances *routing-instance-name* protocols bgp family],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family]

Release Information

Statement introduced before Junos OS Release 7.4.

Description

Enable BGP to carry ISO VPN NLRI messages between PE routes connecting a VPN.

The remaining statements are explained separately in this chapter.

Default

Disabled.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BGP and CLNS on page 453

keep

Syntax keep (all | none);

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify whether routes learned from a BGP peer are retained in the routing table even if they contain an AS number that was exported from the local AS.

Default If you do not include this statement, most routes are retained in the routing table.

Options
all—Retain all routes.

none—Retain none of the routes. When **keep none** is configured for the BGP session and the inbound policy changes, Junos OS forces readvertisement of the full set of routes advertised by the peer.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Understanding Route Advertisement on page 200
- out-delay on page 582

Copyright © 2013, Juniper Networks, Inc.

key-chain (BGP BFD Authentication)

Syntax key-chain *key-chain-name*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit protocols bgp bgp bfd-liveness-detection authentication],
[edit protocols bgp group *group-name* bgp bfd-liveness-detection authentication],
[edit protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication]

Release Information
Statement introduced in Junos OS Release 8.1.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Associate a security key with the specified BFD session using the name of the security keychain. Each key has a unique start time within the keychain. Keychain authentication allows you to change the password information periodically without bringing down peering sessions. This keychain authentication method is referred to as *hitless* because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol.

Options
key-chain-name—Name of the authentication keychain. The keychain name must match one of the keychains configured with the **key-chain *key-chain-name*** statement at the **[edit security authentication-key-chain]** hierarchy level.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD for Static Routes
- Example: Configuring BFD Authentication for Static Routes
- Example: Configuring BFD on Internal BGP Peer Sessions on page 262
- Example: Configuring BGP Route Authentication on page 351

Copyright © 2013, Juniper Networks, Inc.

- Example: Configuring EBGP Multihop Sessions on page 208
- Understanding Route Authentication on page 351

Copyright © 2013, Juniper Networks, Inc.

labeled-unicast (Protocols BGP)

Syntax

```
labeled-unicast {
  accepted-prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
  }
  aggregate-label {
    community community-name;
  }
  explicit-null {
    connected-only;
  }
  prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
  }
  resolve-vpn;
  rib (inet.3 | inet6.3);
  rib-group group-name;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family (inet | inet6)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family (inet | inet6)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family (inet | inet6)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6)],
[edit protocols bgp family (inet | inet6)],
[edit protocols bgp group *group-name* family (inet | inet6)],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet6)],
[edit routing-instances *routing-instance-name* protocols bgp family (inet | inet6)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6)]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Configure the family type to be labeled-unicast.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Examples: Configuring Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

local-address (Protocols BGP)

Syntax local-address *address*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description
Specify the address of the local end of a BGP session. This address is used to accept incoming connections to the peer and to establish connections to the remote peer. When none of the operational interfaces are configured with the specified local address, a session with a BGP peer is placed in the idle state.

You generally configure a local address to explicitly configure the system's IP address from BGP's point of view. This IP address can be either an IPv6 or IPv4 address. Typically, an IP address is assigned to a loopback interface, and that IP address is configured here.

For internal BGP (IBGP) peering sessions, generally the loopback interface (lo0) is used to establish connections between the IBGP peers. The loopback interface is always up as long as the device is operating. If there is a route to the loopback address, the IBGP peering session stays up. If a physical interface address is used instead and that interface goes up and down, the IBGP peering session also goes up and down. Thus, the loopback interface provides fault tolerance in case the physical interface or the link goes down, if the device has link redundancy.

When a device peers with a remote device's loopback interface address, the local device expects BGP update messages to come from (be sourced by) the remote device's loopback interface address. The **local-address** statement enables you to specify the source information in BGP update messages. If you omit the **local-address** statement, the expected source of BGP update messages is based on the device's source address selection rules, which normally result in the egress interface address being the expected source of update messages. When this happens, the peering session is not established because a mismatch exists between the expected source address (the egress interface

Copyright © 2013, Juniper Networks, Inc.

of the peer) and the actual source (the loopback interface of the peer). To ensure that the expected source address matches the actual source address, specify the loopback interface address in the **local-address** statement.

NOTE: Although a BGP session can be established when only one of the paired routers has local-address configured, we strongly recommend that you configure local-address on both paired routers for IBGP and multihop EBGP sessions. The local-address statement ensures that deterministic fixed addresses are used for the BGP session end-points.

If you include the **default-address-selection** statement in the configuration, the software chooses the system default address as the source for most locally generated IP packets. For protocols in which the local address is unconstrained by the protocol specification, for example IBGP and multihop EBGP, if you do not configure a specific local address when configuring the protocol, the local address is chosen using the same methods as other locally generated IP packets.

Default If you do not configure a local address, BGP uses the routing device's source address selection rules to set the local address.

Options ***address***—IPv6 or IPv4 address of the local end of the connection.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Internal BGP Peering Sessions on Logical Systems on page 54
- Example: Configuring Internal BGP Peer Sessions on page 43
- Understanding Internal BGP Peering Sessions on page 42
- router-id

Copyright © 2013, Juniper Networks, Inc.

local-address (Origin Validation for BGP)

Syntax local-address *local-ip-address*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-options validation group *group-name* session *server-ip-address*]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure a local IP address of the session. If the local cache server has inbound firewall filtering, it might be necessary to specify a local IP address to use for this session.

Options ***local-ip-address***—Local IP address to be used for the outgoing connection to the cache server.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

local-as

Syntax local-as *autonomous-system* <loops *number*> <private | alias> <no-prepend-global-as>;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
alias option introduced in Junos OS Release 9.5.
no-prepend-global-as option introduced in Junos OS Release 9.6.

Description Specify the local autonomous system (AS) number. An AS is a set of routing devices that are under a single technical administration and generally use a single interior gateway protocol (IGP) and metrics to propagate routing information within the set of routing devices.

Internet service providers (ISPs) sometimes acquire networks that belong to a different AS. When this occur, there is no seamless method for moving the BGP peers of the acquired network to the AS of the acquiring ISP. The process of configuring the BGP peers with the new AS number can be time-consuming and cumbersome. In this case, it might not be desirable to modify peer arrangements or configuration. During this kind of transition period, it can be useful to configure BGP-enabled devices in the new AS to use the former AS number in BGP updates. This former AS number is called a *local AS*.

NOTE: If you are using BGP on the routing device, you must configure an AS number before you specify the local as number.

In Junos OS Release 9.1 and later, the AS numeric range in plain-number format is extended to provide BGP support for 4-byte AS numbers, as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*.

In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: *<16-bit high-order value in decimal>.<16-bit low-order value in decimal>*. For

Copyright © 2013, Juniper Networks, Inc.

example, the 4-byte AS number of 65546 in plain-number format is represented as 1.10 in the AS-dot notation format.

Options

alias—(Optional) Configure the local AS as an alias of the global AS number configured for the router at the **[edit routing-options]** hierarchy level. As a result, a BGP peer considers any local AS to which it is assigned as equivalent to the primary AS number configured for the routing device. When you use the **alias** option, only the AS (global or local) used to establish the BGP session is prepended in the AS path sent to the BGP neighbor.

autonomous-system—AS number.

Range: 1 through 4,294,967,295 ($2^{32} - 1$) in plain-number format

Range: 0.0 through 65535.65535 in AS-dot notation format

loops *number*—(Optional) Specify the number of times detection of the AS number in the AS_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

NOTE: If you configure the local AS values for any BGP group, the detection of routing loops is performed using both the AS and the local AS values for all BGP groups.

If the local AS for the EBGP or IBGP peer is the same as the current AS, do not use the **local-as** statement to specify the local AS number.

When you configure the local AS within a VRF, this impacts the AS path loop-detection mechanism. All of the **local-as** statements configured on the device are part of a single AS domain. The AS path loop-detection mechanism is based on looking for a matching AS present in the domain.

Range: 1 through 10

Default: 1

no-prepend-global-as—(Optional) Specify to strip the global AS and to prepend only the local AS in AS paths sent to external peers.

private—(Optional) Configure to use the local AS only during the establishment of the BGP session with a BGP neighbor but to hide it in the AS path sent to external BGP peers. Only the global AS is included in the AS path sent to external peers.

NOTE: The **private** and **alias** options are mutually exclusive. You cannot configure both options with the same **local-as** statement.

Copyright © 2013, Juniper Networks, Inc.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Examples: Configuring BGP Local AS on page 116
- Example: Configuring a Local AS for EBGP Sessions on page 121
- autonomous-system
- family on page 516

local-interface (IPv6)

Syntax
local-interface *interface-name*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *ipv6-link-local-address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *ipv6-link-local-address*],
[edit protocols bgp group *group-name* neighbor *ipv6-link-local-address*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *ipv6-link-local-address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.

Description
Specify the interface name of the EBGP peer that uses IPv6 link-local addresses. This peer is link-local in scope.

Options
interface-name—Interface name of the EBGP IPv6 peer.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Internal BGP Peering Sessions on Logical Systems on page 54
- Example: Configuring Internal BGP Peer Sessions on page 43
- Example: Configuring External BGP on Logical Systems with IPv6 Interfaces on page 27
- Understanding Internal BGP Peering Sessions on page 42

Copyright © 2013, Juniper Networks, Inc.

local-preference

Syntax local-preference *local-preference*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Modify the value of the **LOCAL_PREF** path attribute, which is a metric used by IBGP sessions to indicate the degree of preference for an external route. The route with the highest local preference value is preferred.

The **LOCAL_PREF** path attribute always is advertised to internal BGP peers and to neighboring confederations. It is never advertised to external BGP peers.

Default If you omit this statement, the **LOCAL_PREF** path attribute, if present, is not modified.

Options
local-preference—Preference to assign to routes learned from BGP or from the group or peer.

Range: 0 through 4,294,967,295 ($2^{32} - 1$)

Default: If the **LOCAL_PREF** path attribute is present, do not modify its value. If a BGP route is received without a **LOCAL_PREF** attribute, the route is handled locally (it is stored in the routing table and advertised by BGP) as if it were received with a **LOCAL_PREF** value of 100. By default, non-BGP routes that are advertised by BGP are advertised with a **LOCAL_PREF** value of 100.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring the Local Preference Value for BGP Routes on page 66
- Understanding Internal BGP Peering Sessions on page 42

Copyright © 2013, Juniper Networks, Inc.

- preference on page 592

log-updown (Protocols BGP)

Syntax log-updown;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify to generate a log a message whenever a BGP peer makes a state transition. Messages are logged using the system logging mechanism located at the **[edit system syslog]** hierarchy level.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Preventing BGP Session Resets on page 399
- Junos OS System Basics Configuration Guide
- traceoptions on page 621

Copyright © 2013, Juniper Networks, Inc.

logical-systems

Syntax

```
logical-systems {
  logical-system-name {
    ...logical-system-configuration...
  }
}
```

Hierarchy Level [edit]

Release Information Statement introduced before Junos OS Release 7.4.
Statement name changed from **logical-routers** in Junos OS Release 9.3.

Description Configure a logical system.

Options ***logical-system-name***—Name of the logical system.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Logical Systems Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

loops

Syntax loops *number*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp family *address-family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family *address-family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* local-as],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family *address-family*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* local-as]
[edit logical-systems *logical-system-name* protocols bgp local-as],
[edit logical-systems *logical-system-name* routing-options autonomous-system *as-number*],
[edit protocols bgp family *address-family*],
[edit protocols bgp group *group-name* family *address-family*],
[edit protocols bgp group *group-name* local-as],
[edit protocols bgp group *group-name* neighbor *address* family *address-family*],
[edit protocols bgp group *group-name* neighbor *address* local-as]
[edit protocols bgp local-as],
[edit routing-options autonomous-system *as-number*]

Release Information Statement introduced in Junos OS Release 9.6.

Description Globally, for the local-AS BGP attribute, or the specified address family, allow the local device's AS number to be in the received AS paths, and specify the number of times detection of the local device's AS number in the AS_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the local device's AS number is detected in the path one or more times. This prevents routing loops and is the default behavior. If you configure **loops 2**, the route is hidden if the local device's AS number is detected in the path two or more times.

Some examples of BGP address families are as follows:

- **inet unicast**
- **inet-vpn multicast**
- **inet6 any**
- **l2vpn auto-discovery-only**
- ...

This list is truncated for brevity. For a complete list of protocol families for which you can specify the **loops** statement, enter the **help apropos loops** configuration command at the **[edit protcols bgp]** hierarchy level on your device.

```
[edit protocols bgp]
user@host# help apropos loops
set family inet unicast loops
    Allow local AS in received AS paths
set family inet unicast loops <loops>
    AS-Path loop count
set family inet multicast loops
```


Copyright © 2013, Juniper Networks, Inc.

```
    Allow local AS in received AS paths
set family inet multicast loops <loops>
    AS-Path loop count
set family inet flow loops
    Allow local AS in received AS paths
set family inet flow loops <loops>
    AS-Path loop count
set family inet any loops
    Allow local AS in received AS paths
set family inet any loops <loops>
    AS-Path loop count
set family inet labeled-unicast loops
    Allow local AS in received AS paths
...
```

NOTE: When you configure the **loops** statement for a specific BGP address family, that value is used to evaluate the AS path for routes received by a BGP peer for the specified address family, rather than the loops value configured for the global AS number with the **loops** statement at the **[edit routing-options autonomous-system *as-number*]** hierarchy level.

Options

number—Number of times detection of the AS number in the AS_PATH attribute causes the route to be discarded or hidden.

Range: 1 through 10

Default: 1

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- autonomous-system
- family on page 516
- local-as on page 548

Copyright © 2013, Juniper Networks, Inc.

loose-check (BGP BFD Authentication)

Syntax loose-check ;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit protocols bgp bgp bfd-liveness-detection authentication],
[edit protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection authentication],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection authentication]

Release Information
Statement introduced in Junos OS Release 8.1.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Specify loose authentication checking on the BFD session. Use loose authentication for transitional periods only when authentication might not be configured at both ends of the BFD session.

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD for Static Routes
- Example: Configuring BFD Authentication for Static Routes
- Example: Configuring BFD on Internal BGP Peer Sessions on page 262
- Example: Configuring BGP Route Authentication on page 351
- Example: Configuring EBGP Multihop Sessions on page 208

 Copyright © 2013, Juniper Networks, Inc.

- Understanding Route Authentication on page 351

max-sessions (Origin Validation for BGP)

Syntax max-sessions *number*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name*],
[edit routing-instances *instance-name* routing-options validation group *group-name*],
[edit routing-options validation group *group-name*]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure the number of concurrent sessions for each group.

If the number of sessions in a group exceeds the **max-sessions** value, the connections are established in order by preference value. A numerically higher preference results in a higher probability for session establishment. The order of session establishment is random among sessions with equal preferences.

Options *number*—Maximum number of sessions per group.

Range: 1 through 63

Default: 2

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

maximum-length (Origin Validation for BGP)

Syntax

```
maximum-length prefix-length {
  origin-autonomous-system as-number {
    validation-state (invalid | valid);
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation static record *destination*],
[edit logical-systems *logical-system-name* routing-options validation static record *destination*],
[edit routing-instances *instance-name* routing-options validation static record *destination*],
[edit routing-options validation static record *destination*]

Release Information

Statement introduced in Junos OS Release 12.2.

Description

Configure the maximum prefix-length for a route validation (RV) record. This is a required statement.

Options

prefix-length—Maximum prefix-length range for a given RV entry.

Range: 1 through 128

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

metric-out (Protocols BGP)

Syntax metric-out (*metric* | minimum-igp *offset* | igp (delay-med-update | *offset*);

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Option **delay-med-update** introduced in Junos OS Release 9.0.

Description Specify the metric for all routes sent using the multiple exit discriminator (MED, or **MULTI_EXIT_DISC**) path attribute in update messages. This path attribute is used to discriminate among multiple exit points to a neighboring AS. If all other factors are equal, the exit point with the lowest metric is preferred.

You can specify a constant metric value by including the ***metric*** option. For configurations in which a BGP peer sends third-party next hops that require the local system to perform next-hop resolution—IBGP configurations, configurations within confederation peers, or EBGP configurations that include the **multihop** command—you can specify a variable metric by including the **minimum-igp** or **igp** option.

You can increase or decrease the variable metric calculated from the IGP metric (either from the **igp** or **minimum-igp** statement) by specifying a value for ***offset***. The metric is increased by specifying a positive value for ***offset***, and decreased by specifying a negative value for ***offset***.

In Junos OS Release 9.0 and later, you can specify that a BGP group or peer not advertise updates for the MED path attributes used to calculate IGP costs for BGP next hops unless the MED is lower. You can also configure an interval to delay when MED updates are sent by including the **med-igp-update-interval** ***minutes*** statement at the **[edit routing-options]** hierarchy level.

Options **delay-med-update**—Specify that a BGP group or peer configured with the **metric-out igp** statement not advertise MED updates unless the current MED value is lower than

Copyright © 2013, Juniper Networks, Inc.

the previously advertised MED value, or another attribute associated with the route has changed, or the BGP peer is responding to a refresh route request.

NOTE: **You cannot configure the delay-med–update statement at the global BGP level.**

igp—Set the metric to the most recent metric value calculated in the IGP to get to the BGP next hop. Routes learned from an EBGP peer usually have a next hop on a directly connected interface and thus the IGP value is equal to zero. This is the value advertised.

metric—Primary metric on all routes sent to peers.

Range: 0 through 4,294,967,295 ($2^{32} - 1$)

Default: No metric is sent.

minimum-igp—Set the metric to the minimum metric value calculated in the IGP to get to the BGP next hop. If a newly calculated metric is greater than the minimum metric value, the metric value remains unchanged. If a newly calculated metric is lower, the metric value is lowered to that value. When you change a neighbor's export policy from any configuration to a configuration that sets the minimum IGP offset on an exported route, the advertised MED is not updated if the value would increase as a result, even if the previous configuration does not use a minimum IGP-based MED value. This behavior helps to prevent unnecessary route flapping when an IGP cost changes, by not forcing a route update if the metric value increases past the previous lowest known value.

offset—Increases or decreases the metric by this value.

Range: -2^{31} through $2^{31} - 1$

Default: None

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates on page 106
- Examples: Configuring BGP MED on page 78
- Example: Configuring the MED Attribute Directly on page 81
- Understanding the MED Attribute on page 78
- med-igp-update-interval

Copyright © 2013, Juniper Networks, Inc.

minimum-interval (BGP BFD Liveness Detection)

Syntax minimum-interval *milliseconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 8.5.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure the minimum interval after which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the **transmit-interval minimum-interval** and **minimum-receive-interval** statements.

Options ***milliseconds***—Specify the minimum interval value for BGP BFD liveliness detection.

Range: 1 through 255,000

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499
- minimum-receive-interval on page 564
- transmit-interval on page 626

Copyright © 2013, Juniper Networks, Inc.

minimum-interval (BGP BFD Transmit Interval)

Syntax minimum-interval *milliseconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection transmit-interval],
[edit protocols bgp bfd-liveness-detection transmit-interval],
[edit protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection transmit-interval],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection transmit-interval],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection transmit-interval]

Release Information
Statement introduced in Junos OS Release 8.2.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure the minimum interval at which the local routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

Options ***milliseconds***—Minimum transmit interval value.

Range: 1 through 255,000

NOTE: The threshold value specified in the **threshold** statement must be greater than the value specified in the **minimum-interval** statement for the **transmit-interval** statement.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499
- minimum-interval on page 561
- threshold on page 618

Copyright © 2013, Juniper Networks, Inc.

minimum-receive-interval (BGP BFD Liveness Detection)

Syntax minimum-receive-interval *milliseconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 8.5.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure the minimum interval after which the local routing device must receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

Options ***milliseconds***—Specify the minimum receive interval value.

Range: 1 through 255,000

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499
- minimum-interval on page 561
- transmit-interval on page 626

Copyright © 2013, Juniper Networks, Inc.

mtu-discovery

Syntax mtu-discovery;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Configure TCP path maximum transmission unit (MTU) discovery.

TCP path MTU discovery enables BGP to automatically discover the best TCP path MTU for each BGP session. In Junos OS, TCP path MTU discovery is disabled by default for all BGP neighbor sessions.

When MTU discovery is disabled, TCP sessions that are not directly connected transmit packets of 512-byte maximum segment size (MSS). These small packets minimize the chances of packet fragmentation at a device along the path to the destination. However, because most links use an MTU of at least 1500 bytes, 512-byte packets do not result in the most efficient use of link bandwidth. For directly connected EBGP sessions, MTU mismatches prevent the BGP session from being established. As a workaround, enable path MTU discovery within the EBGP group.

Path MTU discovery dynamically determines the MTU size on the network path between the source and the destination, with the goal of avoiding IP fragmentation. Path MTU discovery works by setting the Don't Fragment (DF) bit in the IP headers of outgoing packets. When a device along the path has an MTU that is smaller than the packet, the device drops the packet. The device also sends back an ICMP Fragmentation Needed (Type 3, Code 4) message that contains the device's MTU, thus allowing the source to reduce its path MTU appropriately. The process repeats until the MTU is small enough to traverse the entire path without fragmentation.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Limiting TCP Segment Size for BGP on page 371
- Configuring the Junos OS for IPv6 Path MTU Discovery
- Configuring the Junos OS for Path MTU Discovery on Outgoing GRE Tunnel Connections

Copyright © 2013, Juniper Networks, Inc.

multihop

Syntax

```
multihop {
  no-nexthop-change;
  ttl ttl-value;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Configure an EBGP multihop session.

For Layer 3 VPNs, you configure the EBGP multihop session between the PE and CE routers. This allows you to configure one or more routers between the PE and CE routers.

An external confederation peer is a special case that allows unconnected third-party next hops. You do not need to configure multihop sessions explicitly in this particular case because multihop behavior is implied.

If you have external BGP confederation peer-to-loopback addresses, you still need the multihop configuration.

NOTE: You cannot configure the accept-remote-nexthop statement at the same time.

Default

If you omit this statement, all EBGP peers are assumed to be directly connected (that is, you are establishing a nonmultihop, or “regular,” BGP session), and the default time-to-live (TTL) value is 1.

The remaining statements are explained separately.

Copyright © 2013, Juniper Networks, Inc.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring EBGP Multihop Sessions on page 208
- Configuring EBGP Multihop Sessions Between PE and CE Routers in Layer 3 VPNs
- accept-remote-nexthop on page 477
- no-nexthop-change on page 578
- ttl on page 627

Copyright © 2013, Juniper Networks, Inc.

multipath (Protocols BGP)

Syntax

```
multipath {
  multiple-as;
  vpn-unequal-cost equal-external-internal;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Allow load sharing among multiple EBGP paths and multiple IBGP paths. A path is considered a BGP equal-cost path (and will be used for forwarding) if a tie-break is performed. The tie-break is performed after the BGP route path selection step that chooses the next-hop path that is resolved through the IGP route with the lowest metric. All paths with the same neighboring AS, learned by a multipath-enabled BGP neighbor, are considered.

Options

multiple-as—Disable the default check requiring that paths accepted by BGP multipath must have the same neighboring AS.

vpn-unequal-cost equal-external-internal—Enable load-balancing in a Layer 3 VPN with unequal cost paths.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Understanding BGP Path Selection on page 8
- Example: Load Balancing BGP Traffic on page 278

Copyright © 2013, Juniper Networks, Inc.

multiplier (BGP BFD Liveness Detection)

Syntax multiplier *number*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 8.5.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

Options *number*—Number of hello packets.

Range: 1 through 255

Default: 3

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499

Copyright © 2013, Juniper Networks, Inc.

neighbor (Protocols BGP)

Syntax

```
neighbor address {
    accept-remote-nexthop;
    advertise-external <conditional>;
    advertise-inactive;
    (advertise-peer-as | no-advertise-peer-as);
    as-override;
    authentication-algorithm algorithm;
    authentication-key key;
    authentication-key-chain key-chain;
    cluster cluster-identifier;
    damping;
    description text-description;
    export [ policy-names ];
    family {
        (inet | inet6 | inet-mvpn | inet6-mpvn | inet-vpn | inet6-vpn | iso-vpn | l2-vpn) {
            (any | flow | multicast | unicast | signaling) {
                accepted-prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
                damping;
                prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
                rib-group group-name;
                topology name {
                    community {
                        target identifier;
                    }
                }
            }
            flow {
                no-validate policy-name;
            }
            labeled-unicast {
                accepted-prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
                aggregate-label {
                    community community-name:
                }
                explicit-null {
                    connected-only;
                }
                prefix-limit {
                    maximum number;
                    teardown <percentage> <idle-timeout (forever | minutes)>;
                }
                resolve-vpn;
                rib inet.3;
```

```
        rib-group group-name;
        topology name {
          community {
            target identifier;
          }
        }
      }
    }
    route-target {
      advertise-default;
      external-paths number;
      accepted-prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
    }
    signaling {
      prefix-limit {
        maximum number;
        teardown <percentage> <idle-timeout (forever | minutes)>;
      }
    }
  }
  graceful-restart {
    disable;
    restart-time seconds;
    stale-routes-time seconds;
  }
  hold-time seconds;
  import [ policy-names ];
  ipsec-sa ipsec-sa;
  keep (all | none);
  local-address address;
  local-as autonomous-system <private>;
  local-interface interface-name;
  local-preference preference;
  log-updown;
  metric-out (metric | minimum-igp <offset> | igp <offset>);
  mtu-discovery;
  multihop <ttl-value>;
  multipath {
    multiple-as;
  }
  no-aggregator-id;
  no-client-reflect;
  out-delay seconds;
  passive;
  peer-as autonomous-system;
  preference preference;
  tcp-mss segment-size;
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
```


Copyright © 2013, Juniper Networks, Inc.

```
    flag flag <flag-modifier> <disable>;
  }
  vpn-apply-export;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Explicitly configure a neighbor (peer). To configure multiple BGP peers, include multiple **neighbor** statements.

By default, the peer's options are identical to those of the group. You can override these options by including peer-specific option statements within the **neighbor** statement.

The **neighbor** statement is one of the statements you can include in the configuration to define a minimal BGP configuration on the routing device. (You can include an **allow all** statement in place of a **neighbor** statement.)

Options

address—IPv6 or IPv4 address of a single peer.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- BGP Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

no-adaptation (BGP BFD Liveness Detection)

Syntax no-adaptation;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 9.0
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure BFD sessions not to adapt to changing network conditions. We recommend that you *do not* disable BFD adaptation unless it is preferable to have BFD adaptation disabled in your network.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499

Copyright © 2013, Juniper Networks, Inc.

no advertise-peer-as

Syntax no-advertise-peer-as;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Enable the default behavior of suppressing AS routes.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BGP Route Advertisement on page 200
- Understanding Route Advertisement on page 200
- advertise-peer-as on page 484

no-aggregator-id

Syntax no-aggregator-id;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Prevent different routers within an AS from creating aggregate routes that contain different AS paths.

Junos OS performs route aggregation, which is the process of combining the characteristics of different routes so that only a single route is advertised. Aggregation reduces the amount of information that BGP must store and exchange with other BGP systems. When aggregation occurs, the local routing device adds the local AS number and the router ID to the aggregator path attiribute. The **no-aggregator-id** statement causes Junos OS to place a 0 in the router ID field and thus eliminate the possibility of having multiple aggregate advertisements in the network, each with different path information.

Default If you omit this statement, the router ID is included in the BGP aggregator path attribute.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Update Messages on page 7

Copyright © 2013, Juniper Networks, Inc.

no-client-reflect

Syntax no-client-reflect;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Disable intracluster route redistribution by the system acting as the route reflector. Include this statement when the client cluster is fully meshed to prevent the sending of redundant route advertisements. Route reflection provides a way to decrease BGP control traffic and minimizing the number of update messages sent within the AS.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BGP Route Reflectors on page 321
- cluster on page 506

no-nexthop-change (BGP multihop)

Syntax no-nexthop-change; *no-nexthop-self*

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp multihop],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* multihop],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* multihop],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp multihop],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* multihop],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* multihop],
[edit protocols bgp],
[edit protocols bgp group *group-name* multihop],
[edit protocols bgp group *group-name* neighbor *address* multihop],
[edit routing-instances *routing-instance-name* protocols bgp multihop],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* multihop],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* multihop]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify that the BGP next-hop value not be changed. For route advertisements, specify the **no-nexthop-self** option.

An external confederation peer is a special case that allows unconnected third-party next hops. You do not need to configure multihop sessions explicitly in this particular case; multihop behavior is implied.

If you have external BGP confederation peer-to-loopback addresses, you still need the multihop configuration.

NOTE: You cannot configure the **accept-remote-nexthop** statement at the same time.

Default If you omit this statement, all EBGP peers are assumed to be directly connected (that is, you are establishing a nonmultihop, or "regular," BGP session), and the default time-to-live (TTL) value is 1.

Options **no-nexthop-self**— Specify ....

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Configuring EBGP Multihop Sessions on page 208
- accept-remote-nexthop on page 477
- ttl on page 627

Copyright © 2013, Juniper Networks, Inc.

no-validate

Syntax no-validate *policy-name*;

Hierarchy Level [edit protocols bgp group *group-name* family (inet | inet flow)],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet flow)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet flow)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet flow)]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description When BGP is carrying flow-specification network layer reachability information (NLRI) messages, the **no-validate** statement omits the flow route validation procedure after packets are accepted by a policy.

The receiving BGP-enabled device accepts a flow route if it passes the following criteria:

- The originator of a flow route matches the originator of the best match unicast route for the destination address that is embedded in the route.
- There are no more specific unicast routes, when compared to the destination address of the flow route, for which the active route has been received from a different next-hop autonomous system.

The first criterion ensures that the filter is being advertised by the next-hop used by unicast forwarding for the destination address embedded in the flow route. For example, if a flow route is given as 10.1.1.1, proto=6, port=80, the receiving BGP-enabled device selects the more specific unicast route in the unicast routing table that matches the destination prefix 10.1.1.1/32. On a unicast routing table containing 10.1/16 and 10.1.1/24, the latter is chosen as the unicast route to compare against. Only the active unicast route entry is considered. This follows the concept that a flow route is valid if advertised by the originator of the best unicast route.

The second criterion addresses situations in which a given address block is allocated to different entities. Flows that resolve to a best-match unicast route that is an aggregate route are only accepted if they do not cover more specific routes that are being routed to different next-hop autonomous systems.

You can bypass the validation process and use your own specific import policy. To disable the validation procedure and use an import policy instead, include the **no-validate** statement in the configuration.

Flow routes configured for VPNs with family **inet-vpn** are not automatically validated, so the **no-validate** statement is not supported at the **[edit protocols bgp group *group-name* family inet-vpn]** hierarchy level. No validation is needed if the flow routes are configured locally between devices in a single AS.

Copyright © 2013, Juniper Networks, Inc.

Options ***policy-name***—Import policy to match NLRI messages.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Flow Routes on page 434

origin-autonomous-system (Origin Validation for BGP)

Syntax
```
origin-autonomous-system as-number {
  validation-state (invalid | valid);
}
```

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation static record *destination* maximum-length *prefix-length*],
[edit logical-systems *logical-system-name* routing-options validation static record *destination* maximum-length *prefix-length*],
[edit routing-instances *instance-name* routing-options validation static record *destination* maximum-length *prefix-length*],
[edit routing-options validation static record *destination* maximum-length *prefix-length*]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure the legitimate originator autonomous system (AS). This is a required statement.

Options ***as-number***—Legitimate originator AS number.

The remaining statement is explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

out-delay

Syntax out-delay *seconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify how long a route must be present in the Junos OS routing table before it is exported to BGP. Use this time delay to help bundle routing updates.

When configured, the **out-delay** value displays as **Outbound Timer** when using **show bgp group** or **show bgp group neighbor** commands.

Default If you omit this statement, routes are exported to BGP immediately after they have been added to the routing table.

Options ***seconds***—Output delay time.

Range: 0 through 65,535 seconds

Default: 0 seconds

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Understanding Route Advertisement on page 200

Copyright © 2013, Juniper Networks, Inc.

outbound-route-filter

Syntax

```
outbound-route-filter {
  bgp-orf-cisco-mode;
  prefix-based {
    accept {
      (inet | inet6);
    }
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced in Junos OS Release 9.2.
Statement introduced in Junos OS Release 9.2 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Configure a BGP peer to accept outbound route filters from a remote peer.

Options

accept—Specify that outbound route filters from a BGP peer be accepted.

inet—Specify that IPv4 prefix-based outbound route filters be accepted.

inet6—Specify that IPv6 prefix-based outbound route filters be accepted.

NOTE: You can specify that both IPv4 and IPv6 outbound route filters be accepted.

prefix-based—Specify that prefix-based filters be accepted.

The **bgp-orf-cisco-mode** statement is explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation
- Example: Configuring BGP Prefix-Based Outbound Route Filtering on page 205

passive (Protocols BGP)

Syntax
passive;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description
Configure the router so that active open messages are not sent to the peer. Once you configure the routing device to be passive, the routing device will wait for the peer to issue an open request before a message is sent.

Default
If you omit this statement, all explicitly configured peers are active, and each peer periodically sends open requests until its peer responds.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Preventing BGP Session Flaps When VPN Families Are Configured on page 399

Copyright © 2013, Juniper Networks, Inc.

path-count

Syntax path-count *number*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family *family* add-path send],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor address family *family* add-path send],
[edit protocols bgp group *group-name* family *family* add-path send],
[edit protocols bgp group *group-name* family *family* add-path neighbor address family *family* add-path send]

Release Information Statement introduced in Junos OS Release 11.3.

Description Specify the number of paths to a destination to advertise.

Suppose a routing device has in its routing table four paths to a destination and is configured to advertise up to three paths (**add-path send path-count 3**). The three paths are chosen based on path selection criteria. That is, the three best paths are chosen in path-selection order. The best path is the active path. This path is removed from consideration and a new best path is chosen. This process is repeated until the specified number of paths is reached.

Options ***number***—Number of paths to a destination to advertise.

Range: 2 through 6

Default: 1

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Advertising Multiple BGP Paths to a Destination on page 293

Copyright © 2013, Juniper Networks, Inc.

path-selection

Syntax

```
path-selection {
  (always-compare-med | cisco-non-deterministic | external-router-id);
  as-path-ignore;
  l2vpn-use-bgp-rules;
  med-plus-igp {
    igp-multiplier number;
    med-multiplier number;
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
med-plus-igp option introduced in Junos OS Release 8.1.
as-path-ignore and **l2vpn-use-bgp-rules** options introduced in Junos OS Release 10.2.

Description

Configure BGP path selection.

Default

If the **path-selection** statement is not included in the configuration, only the multiple exit discriminators (MEDs) of routes that have the same peer ASs are compared.

Options

always-compare-med—Always compare MEDs whether or not the peer ASs of the compared routes are the same.

NOTE: We recommend that you configure the **always-compare-med** option.

as-path-ignore—In the best-path algorithm, skip the step that compares the autonomous system (AS) path lengths. By default, the best-path algorithm evaluates the length of the AS paths and prefers the route with the shortest AS path length.

NOTE: The **as-path-ignore** statement is not supported with routing instances.

cisco-non-deterministic—Emulate the Cisco IOS default behavior. This mode evaluates routes in the order that they are received and does not group them according to their neighboring AS. With **cisco-non-deterministic** mode, the active path is always first. All inactive, but eligible, paths follow the active path and are maintained in the order

Copyright © 2013, Juniper Networks, Inc.

in which they were received, with the most recent path first. Ineligible paths remain at the end of the list.

As an example, suppose you have three path advertisements for the 192.168.1.0 /24 route:

- Path 1—learned through EBGP; AS Path of 65010; MED of 200
- Path 2—learned through IBGP; AS Path of 65020; MED of 150; IGP cost of 5
- Path 3—learned through IBGP; AS Path of 65010; MED of 100; IGP cost of 10

These advertisements are received in quick succession, within a second, in the order listed. Path 3 is received most recently, so the routing device compares it against path 2, the next most recent advertisement. The cost to the IBGP peer is better for path 2, so the routing device eliminates path 3 from contention. When comparing paths 1 and 2, the routing device prefers path 1 because it is received from an EBGP peer. This allows the routing device to install path 1 as the active path for the route.

NOTE: We do not recommend using this configuration option in your network. It is provided solely for interoperability to allow all routing devices in the network to make consistent route selections.

external-router-id—Compare the router ID between external BGP paths to determine the active path.

igp-multiplier ***number***—The multiplier value for the IGP cost to a next-hop address. This option is useful for making the MED and IGP cost comparable.

Range: 1 through 1000

Default: 1

med-multiplier ***number***—The multiplier value for the MED calculation. This option is useful for making the MED and IGP cost comparable.

Range: 1 through 1000

Default: 1

med-plus-igp—Add the IGP cost to the indirect next-hop destination to the MED before comparing MED values for path selection. This statement only affects best-path selection. It does not affect the advertised MED.

The other option is explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Understanding BGP Path Selection on page 8
- Example: Ignoring the AS Path Attribute When Selecting the Best Path on page 228

Copyright © 2013, Juniper Networks, Inc.

peer-as (Protocols BGP)

Syntax peer-as *autonomous-system*;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify the neighbor (peer) autonomous system (AS) number.

For EBGP, the peer is in another AS, so the AS number you specify in the **peer-as** statement must be different from the local router's AS number, which you specify in the **autonomous-system** statement. For IBGP, the peer is in the same AS, so the two AS numbers that you specify in the **autonomous-system** and **peer-as** statements must be the same.

The AS numeric range in plain-number format has been extended in Junos OS Release 9.1 to provide BGP support for 4-byte AS numbers, as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of the Junos OS support 2-byte AS numbers.

In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: *<16-bit high-order value in decimal>.<16-bit low-order value in decimal>*. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format.

With the introduction of 4-byte AS numbers, you might have a combination of routers that support 4-byte AS numbers and 2-byte AS numbers. For more information about what happens when establishing BGP peer relationships between 4-byte and 2-byte capable routers, see the following topics:

 Copyright © 2013, Juniper Networks, Inc.

- Establishing a Peer Relationship Between a 4-Byte Capable Router and a 2-Byte Capable Router Using a 2-Byte AS Number in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*.
- Establishing a Peer Relationship Between a 4-Byte Capable Router and a 2-Byte Capable Router Using a 4-Byte AS Number in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*.

Options

autonomous-system—AS number.

Range: 1 through 4,294,967,295 ($2^{32} - 1$) in plain-number format for 4-byte AS numbers

Range: 1 through 65,535 in plain-number format for 2-byte AS numbers (this is a subset of the 4-byte range)

Range: 0.0 through 65535.65535 in AS-dot notation format for 4-byte AS numbers

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- 4-Byte Autonomous System Numbers Overview in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*
- Juniper Networks Implementation of 4-Byte Autonomous System Numbers in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*

Copyright © 2013, Juniper Networks, Inc.

port (Origin Validation for BGP)

Syntax port *port-number*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-options validation group *group-name* session *server-ip-address*]

Release Information Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description Configure an alternative TCP port number to be used for the outgoing connection with the cache server. The well-known resource public key infrastructure (RPKI) port is TCP port 2222. For a given deployment, an RPKI cache server might listen on some other TCP port number. If so, configure the alternative port number with this statement.

Options ***port-number***—TCP port number to be used for the outgoing connection to the cache server.

Default: 2222

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

 Copyright © 2013, Juniper Networks, Inc.

precision-timers

Syntax precision-timers;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit protocols bgp]

Release Information Statement introduced in Junos OS Release 11.4.

Description Enable BGP sessions to send frequent keepalive messages with a hold time as short as 10 seconds.

NOTE: The hold time is three times the interval at which keepalive messages are sent, and the hold time is the maximum number of seconds allowed to elapse between successive keepalive messages that BGP receives from a peer. When establishing a BGP connection with the local routing device, a peer sends an open message, which contains a hold-time value. BGP on the local routing device uses the smaller of either the local hold-time value or the peer's hold-time value as the hold time for the BGP connection between the two peers.

The default hold-time is 90 seconds, meaning that the default frequency for keepalive messages is 30 seconds. More frequent keepalive messages and shorter hold times might be desirable in large-scale deployments with many active sessions (such as edge or large VPN deployments). To configure the hold time and the frequency of keepalive messages, include the **hold-time** statement at the **[edit protocols bgp]** hierarchy level. You can configure the hold time at a logical system, routing instance, global, group, or neighbor level. When you set a hold time value to less than 20 seconds, we recommend that you also configure the BGP **precision-timers** statement. The **precision-timers** statement ensures that if scheduler slip messages occur, the routing device continues to send keepalive messages. When the **precision-timers** statement is included, keepalive message generation is performed in a dedicated kernel thread, which helps to prevent BGP session flaps.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- hold-time on page 531

Copyright © 2013, Juniper Networks, Inc.

preference (Protocols BGP)

Syntax preference *preference*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify the preference for routes learned from BGP.

At the BGP global level, the preference statement sets the preference for routes learned from BGP. You can override this preference in a BGP group or peer preference statement.

At the group or peer level, the preference statement sets the preference for routes learned from the group or peer. Use this statement to override the preference set in the BGP global preference statement when you want to favor routes from one group or peer over those of another.

Options ***preference***—Preference to assign to routes learned from BGP or from the group or peer.

Range: 0 through 4,294,967,295 ($2^{32} - 1$)

Default: 170 for the primary preference

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- local-preference on page 551
- Example: Configuring the Preference Value for BGP Routes on page 219

Copyright © 2013, Juniper Networks, Inc.

preference (Origin Validation for BGP)

Syntax preference *number*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-options validation group *group-name* session *server-ip-address*]

Release Information Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description Each resource public key infrastructure (RPKI) cache server has a static preference. Higher preferences are preferred. During a session start or restart, the routing device attempts to start a session with the cache server that has the numerically highest preference. The routing device connects to multiple cache servers in preference order.

Options *number*—Preference number for the cache server.

Range: 1 through 255

Default: 100

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

prefix-limit

Syntax

```
prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | minutes)>;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit protocols bgp group *group-name* family (inet | inet6) (any | labeled-unicast | multicast | unicast)],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit routing-instances *routing-instance-name* protocols bgp family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) (any | flow | labeled-unicast | multicast | unicast)]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Limit the number of prefixes received on a BGP peer session and a rate-limit logging when injected prefixes exceed a set limit.

Options

maximum *number*—When you set the maximum number of prefixes, a message is logged when that number is exceeded.

Range: 1 through 4,294,967,295 ($2^{32} - 1$)

teardown <*percentage*>—If you include the **teardown** statement, the session is torn down when the maximum number of prefixes is reached. If you specify a percentage, messages are logged when the number of prefixes exceeds that percentage. After the session is torn down, it is reestablished in a short time unless you include the **idle-timeout** statement. Then the session can be kept down for a specified amount of time, or forever. If you specify **forever**, the session is reestablished only after you issue a **clear bgp neighbor** command.

Range: 1 through 100

Copyright © 2013, Juniper Networks, Inc.

idle-timeout (forever | *timeout-in-minutes*)—(Optional) If you include the **idle-timeout** statement, the session is torn down for a specified amount of time, or forever. If you specify a period of time, the session is allowed to reestablish after this timeout period. If you specify **forever**, the session is reestablished only after you intervene with a **clear bgp neighbor** command.

Range: 1 through 2400

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- accepted-prefix-limit on page 478
- Understanding Multiprotocol BGP on page 421

prefix-policy

Syntax
prefix-policy [*policy-names*];

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family *family* add-path send],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor address family *family* add-path send],
[edit protocols bgp group *group-name* family *family* add-path send],
[edit protocols bgp group *group-name* family *family* add-path neighbor address family *family* add-path send]

Release Information
Statement introduced in Junos OS Release 11.3.

Description
Filter the paths to a destination to advertise.

Options
policy-names—Name of a policy (or a set of policies) configured at the **[edit policy-options]** hierarchy level. The policy can match routes, but cannot change route attributes.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Advertising Multiple BGP Paths to a Destination on page 293

Copyright © 2013, Juniper Networks, Inc.

protocols

Syntax

```
protocols {
  bgp {
    ... bgp-configuration ...
  }
  isis {
    ... isis-configuration ...
  }
  ldp {
    ... ldp-configuration ...
  }
  msdp {
    ... msdp-configuration ...
  }
  mstp {
    ... mstp-configuration ...
  }
  ospf {
    domain-id domain-id;
    domain-vpn-tag number;
    route-type-community (iana | vendor);
    ... ospf-configuration ...
  }
  ospf3 {
    domain-id domain-id;
    domain-vpn-tag number;
    route-type-community (iana | vendor);
    ... ospf3-configuration ...
  }
  pim {
    ... pim-configuration ...
  }
  rip {
    ... rip-configuration ...
  }
  ripng {
    ... ripng-configuration ...
  }
  rstp {
    rstp-configuration;
  }
  vstp {
    vstp configuration;
  }
  vpls {
    vpls configuration;
  }
}
```

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*], [edit routing-instances *routing-instance-name*]

Release Information Statement introduced before Junos OS Release 7.4.

Copyright © 2013, Juniper Networks, Inc.

Support for RIPng introduced in Junos OS Release 9.0.
Statement introduced in Junos OS Release 11.1 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify the protocol for a routing instance. You can configure multiple instances of many protocol types. Not all protocols are supported on the switches. See the switch CLI.

Options

bgp—Specify BGP as the protocol for a routing instance.

isis—Specify IS-IS as the protocol for a routing instance.

ldp—Specify LDP as the protocol for a routing instance.

l2vpn—Specify Layer 2 VPN as the protocol for a routing instance.

msdp—Specify the Multicast Source Discovery Protocol (MSDP) for a routing instance.

mstp—Specify the Multiple Spanning Tree Protocol (MSTP) for a virtual switch routing instance.

ospf—Specify OSPF as the protocol for a routing instance.

ospf3—Specify OSPF version 3 (OSPFv3) as the protocol for a routing instance.

NOTE: **OSPFv3 supports the no-forwarding, virtual-router, and vrf routing instance types only.**

pim—Specify the Protocol Independent Multicast (PIM) protocol for a routing instance.

rip—Specify RIP as the protocol for a routing instance.

ripng—Specify RIP next generation (RIPng) as the protocol for a routing instance.

rstp—Specify the Rapid Spanning Tree Protocol (RSTP) for a virtual switch routing instance.

vstp—Specify the VLAN Spanning Tree Protocol (VSTP) for a virtual switch routing instance.

vpls—Specify VPLS as the protocol for a routing instance.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Multiple Routing Instances of OSPF

Copyright © 2013, Juniper Networks, Inc.

receive (Protocols BGP)

Syntax receive;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family *family* add-path],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor address family *family* add-path],
[edit protocols bgp group *group-name* family *family* add-path],
[edit protocols bgp group *group-name* family *family* add-path neighbor address family family add-path]

Release Information Statement introduced in Junos OS Release 11.3.

Description Enable the router to receive multiple paths to a destination. You can enable the router to receive multiple paths from specified neighbors or from all neighbors.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Advertising Multiple BGP Paths to a Destination on page 293

Copyright © 2013, Juniper Networks, Inc.

record (Origin Validation for BGP)

Syntax

```
record destination {
  maximum-length prefix-length {
    origin-autonomous-system as-number {
      validation-state (invalid | valid);
    }
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation static],
[edit logical-systems *logical-system-name* routing-options validation static],
[edit routing-instances *instance-name* routing-options validation static],
[edit routing-options validation static]

Release Information

Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description

Configure the network prefix for the route validation (RV) record.

An RV record matches any route whose prefix matches the RV prefix, whose prefix length does not exceed the maximum-length given in the RV record, and whose origin AS equals the origin-autonomous-system given in the RV record. RV records are received from the cache server using the protocol defined in Internet draft draft-ietf-sidr-rpki-rtr-19, *The RPKI/Router Protocol*, and can also be configured statically, as shown here.

Options

destination—Network prefix for the RV record.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

record-lifetime (Origin Validation for BGP)

Syntax record-lifetime *seconds*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-options validation group *group-name* session *server-ip-address*]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure the amount of time that route validation (RV) records learned from a cache server are valid. RV records expire if the session to the cache server goes down and remains down for the **record-lifetime** (seconds).

Options ***seconds***—Amount of time that an RV remains valid after the session to the cache server goes down.

Range: 60 (one minute) through 604800 (one week)

Default: 3600 seconds (one hour)

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

 Copyright © 2013, Juniper Networks, Inc.

refresh-time (Origin Validation for BGP)

Syntax refresh-time *seconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-instances *instance-name* routing-options validation group *group-name* session *server-ip-address*],
[edit routing-options validation group *group-name* session *server-ip-address*]

Release Information Statement introduced in Junos OS Release 12.2.

Description Configure a liveliness check interval for a configured resource public key infrastructure (RPKI) cache server. Every **refresh-time** (seconds), a serial query protocol data unit (PDU) with the last known serial number is transmitted. The **refresh-time** cannot be longer than half of the hold-time.

Options ***seconds***—Interval at which serial query PDUs are sent.

Range: 1 through 1800

Default: 300

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

remove-private

Syntax remove-private all replace nearest;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description When advertising AS paths to remote systems, have the local system strip private AS numbers from the AS path. The numbers are stripped from the AS path starting at the left end of the AS path (the end where AS paths have been most recently added). The routing device stops searching for private ASs when it finds the first nonprivate AS or a peer's private AS. If the AS path contains the AS number of the external BGP (EBGP) neighbor, BGP does not remove the private AS number.

NOTE: As of Junos OS 10.0R2 and higher, if there is a need to send prefixes to an EBGP peer that has an AS number that matches an AS number in the AS path, consider using the **as-override** statement instead of the **remove-private** statement.

The operation takes place after any confederation member ASs have already been removed from the AS path, if applicable.

The Junos OS recognizes the set of AS numbers that is considered private, a range that is defined in the Internet Assigned Numbers Authority (IANA) assigned numbers document.

The set of reserved AS numbers is in the range from 64,512 through 65,535.

Options **all**—Remove all private AS numbers from the original path. Do not stop the process of removing private AS numbers, even if a public AS number is encountered.

Copyright © 2013, Juniper Networks, Inc.

nearest—When you use the **all** and **replace** options, choose the last (right-most) public AS number encountered in the original AS path for the replacement value, as the AS path is processed from left to right. If no public AS number is encountered, the default replacement value is used. (See the **replace** option for information about the default replacement value.)

replace—When you use the **all** option, instead of a removing private AS numbers, perform a replace operation. The default replacement value for the private AS number is the local AS number at the BGP group level for the BGP peer. If you are unsure about the replacement value, check the local AS value displayed in the output of the **show bgp group *group-name*** command.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Removing Private AS Numbers from AS Paths on page 236

Copyright © 2013, Juniper Networks, Inc.

resolve-vpn

Syntax resolve-vpn;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit protocols bgp family inet labeled-unicast],
[edit protocols bgp group *group-name* family inet labeled-unicast],
[edit protocols bgp group *group-name* neighbor *address* family inet labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp family inet labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family inet labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet labeled-unicast]

Release Information Statement introduced before Junos OS Release 7.4.

Description Allow labeled routes to be placed in the inet.3 routing table for route resolution. These routes are then resolved for PE router connections where the remote PE is located across another AS. For a PE router to install a route in the VRF, the next hop must resolve to a route stored within the inet.3 table.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Understanding Multiprotocol BGP on page 421

 Copyright © 2013, Juniper Networks, Inc.

restart-time (BGP Graceful Restart)

Syntax restart-time *seconds*;

Hierarchy Level
[edit protocols (bgp | rip | ripng) graceful-restart],
[edit logical-systems *logical-system-name* protocols (bgp | rip | ripng) graceful-restart (Enabling Globally)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp graceful-restart],
[edit routing-instances *routing-instance-name* protocols bgp graceful-restart]

Release Information
Statement introduced in Junos OS Release 8.3.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Configure the duration of the BGP, RIP, or next-generation RIP (RIPng) graceful restart period.

Options ***seconds***—Length of time for the graceful restart period.

Range: 1 through 600 seconds

Default: Varies by protocol:

- BGP—120 seconds
- RIP and RIPng—60 seconds

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Configuring Graceful Restart Options for BGP
- Configuring Graceful Restart Options for RIP and RIPng
- Configuring Graceful Restart for QFabric Systems
- stale-routes-time on page 613

Copyright © 2013, Juniper Networks, Inc.

rib (Protocols BGP)

Syntax rib (inet.3 | inet6.3) ;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp family (inet | inet6) labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family (inet | inet6) labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family (inet | inet6) labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) labeled-unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) labeled-unicast],
[edit protocols bgp family (inet | inet6) labeled-unicast],
[edit protocols bgp group *group-name* family (inet | inet6) labeled-unicast],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet6) labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp family (inet | inet6) labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) labeled-unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* (inet | inet6) labeled-unicast]

Release Information Statement introduced before Junos OS Release 7.4.

Description You can allow both labeled and unlabeled routes to be exchanged in a single session. The labeled routes are placed in the inet.3 or inet6.3 routing table, and both labeled and unlabeled unicast routes can be sent or received by the router.

Options **inet.3**—Name of the routing table for IPv4.

inet6.3—Name of the routing table for IPv6.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Examples: Configuring Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

rib-group (Protocols BGP)

Syntax

rib-group *group-name*;

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family inet (labeled-unicast | unicast | multicast)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet (labeled-unicast | unicast | multicast)],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family inet (labeled-unicast | unicast | multicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family inet (labeled-unicast | unicast | multicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family inet (labeled-unicast | unicast | multicast)],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet (labeled-unicast | unicast | multicast)],
[edit protocols bgp family inet (labeled-unicast | unicast | multicast)],
[edit protocols bgp group *group-name* family inet (labeled-unicast | unicast | multicast)],
[edit protocols bgp group *group-name* neighbor *address* family inet (labeled-unicast | unicast | multicast)],
[edit routing-instances *routing-instance-name* protocols bgp family inet (labeled-unicast | unicast | multicast)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family inet (labeled-unicast | unicast | multicast)],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family inet (labeled-unicast | unicast | multicast)]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Add unicast prefixes to unicast and multicast tables.

Options

group-name—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens. You generally specify only one routing table group.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Exporting Specific Routes from One Routing Table Into Another Routing Table
- Example: Importing Direct and Static Routes Into a Routing Instance
- Understanding Multiprotocol BGP on page 421

Copyright © 2013, Juniper Networks, Inc.

route-target (Protocols BGP)

Syntax

```
route-target {
  accepted-prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | time-in-minutes)>;
  }
  advertise-default;
  external-paths number;
  prefix-limit {
    maximum number;
    teardown <percentage> <idle-timeout (forever | time-in-minutes)>;
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family],
[edit protocols bgp family],
[edit protocols bgp group *group-name* family],
[edit protocols bgp group *group-name* neighbor *address* family],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family]

Release Information

Statement introduced before Junos OS Release 7.4.

Description

Limit the number of prefixes advertised on BGP peers specifically to the peers that need the updates.

Options

advertise-default—Advertise default routes and suppress more specific routes.

external-paths *number*—Number of external paths accepted for route filtering.

Range: 1 through 256 paths

Default: 1 path

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring an Export Policy for BGP Route Target Filtering
- Example: Configuring Proxy BGP Route Target Filtering

Copyright © 2013, Juniper Networks, Inc.

routing-instances (Multiple Routing Entities)

Syntax routing-instances *routing-instance-name* { ... }

Hierarchy Level [edit],
[edit logical-systems *logical-system-name*]

Release Information Statement introduced before Junos OS Release 7.4.

Description Configure an additional routing entity for a router. You can create multiple instances of BGP, IS-IS, OSPF, OSPFv3, and RIP for a router. You can also create multiple routing instances for separating routing tables, routing policies, and interfaces for individual wholesale subscribers (retailers) in a Layer 3 wholesale network.

Each routing instance consist of the following:

- A set of routing tables
- A set of interfaces that belong to these routing tables
- A set of routing option configurations

Each routing instance has a unique name and a corresponding IP unicast table. For example, if you configure a routing instance with the name **my-instance**, its corresponding IP unicast table is my-instance.inet.0. All routes for **my-instance** are installed into my-instance.inet.0.

Routes are installed into the default routing instance inet.0 by default, unless a routing instance is specified.

In Junos OS Release 9.0 and later, you can no longer specify a routing-instance name of *master*, *default*, or *bgp* or include special characters within the name of a routing instance.

In Junos OS Release 9.6 and later, you can include a slash (/) in a routing-instance name only if a logical system is not configured. That is, you cannot include the slash character in a routing-instance name if a logical system other than the default is explicitly configured. Routing-instance names, further, are restricted from having the form **__.*__** (beginning and ending with underscores). The colon **:** character cannot be used when multitopology routing (MTR) is enabled.

Default Routing instances are disabled for the router.

Options ***routing-instance-name***—Name of the routing instance. This must be a non-reserved string of not more than 128 characters.

The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Configuring Interprovider Layer 3 VPN Option A
- Example: Configuring Interprovider Layer 3 VPN Option B
- Example: Configuring Interprovider Layer 3 VPN Option C
- Example: Configuring E-LINE and E-LAN Services for a PBB Network on MX Series Routers

send (Logical Systems Add-Path)

Syntax

```
send {
  path-count number;
  prefix-policy [ policy-names ];
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp group *group-name* family inet unicast add-path],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor address family inet unicast add-path],
[edit protocols bgp group *group-name* family inet unicast add-path],
[edit protocols bgp group *group-name* family inet unicast add-path neighbor address family inet unicast add-path]

Release Information

Statement introduced in Junos OS Release 11.3.

Description

Enable advertisement of multiple paths to a destination, instead of advertising only the active path.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Advertising Multiple BGP Paths to a Destination on page 293

Copyright © 2013, Juniper Networks, Inc.

session (Origin Validation for BGP)

Syntax

```
session address {
  hold-time seconds;
  local-address local-ip-address;
  port port-number;
  preference number;
  record-lifetime seconds;
  refresh-time seconds;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation group *group-name*],
[edit logical-systems *logical-system-name* routing-options validation group *group-name*],
[edit routing-instances *instance-name* routing-options validation group *group-name*],
[edit routing-options validation group *group-name*]

Release Information

Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description

Configure a secure shell (SSH) session with a resource public key infrastructure (RPKI) cache server. The router-to-cache transport protocol is carried using a TCP session to a configurable port. Caches are organized in groups. The Junos OS implementation supports up to 63 sessions per group and both IPv4 and IPv6 address families.

The maximum number of sessions in a group is two, by default, and is configurable. If the number of sessions in a group exceeds the max-sessions value, the connections are established in order by preference value. A numerically higher preference results in a higher probability for session establishment. The order of session establishment is random among sessions with equal preferences.

Options

address—IP address of the cache server.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

session-mode

Syntax session-mode (automatic | multihop | single-hop);

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 11.1.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description
Configure BFD session mode to be single-hop or multihop. By default, BGP uses single-hop BFD sessions if the peer is directly connected to the router's interface. BGP uses multihop BFD sessions if the peer is not directly connected to the router's interface. If the peer session's **local-address** option is configured, the directly connected check is based partly on the source address that would be used for BGP and BFD.

For backward compatibility, you can override the default behavior by configuring the **single-hop** or **multihop** option. Before Junos OS Release 11.1, the behavior was to assume that IBGP peer sessions were multihop.

Options
automatic—Configure BGP to use single-hop BFD sessions if the peer is directly connected to the router's interface, and multihop BFD sessions if the peer is not directly connected to the router's interface

multihop—Configure BGP to use multihop BFD sessions.

single-hop—Configure BGP to use single-hop BFD sessions.

Default: automatic

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD Authentication for BGP on page 272
- Example: Configuring BFD on Internal BGP Peer Sessions on page 262

Copyright © 2013, Juniper Networks, Inc.

- Example: Configuring BFD Authentication for BGP on page 272
- Understanding BFD Authentication for BGP on page 270

stale-routes-time

Syntax stale-routes-time *seconds*;

Hierarchy Level
[edit logical-systems *logical-routing-name* protocols bgp graceful-restart],
[edit logical-systems *logical-routing-name* routing-instances *routing-instance-name* protocols bgp graceful-restart],
[edit protocols bgp graceful-restart],
[edit routing-instances *routing-instance-name* protocols bgp graceful-restart]

Release Information
Statement introduced in Junos OS Release 8.3.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Specify the maximum time that stale routes are kept during a restart. The **stale-routes-time** statement allows you to set the length of time the routing device waits to receive messages from restarting neighbors before declaring them down.

Options
seconds—Time the router waits to receive messages from restarting neighbors before declaring them down.

Range: 1 through 600 seconds

Default: 300 seconds

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Configuring Graceful Restart Options for BGP
- Configuring Graceful Restart for QFabric Systems
- restart-time (BGP Graceful Restart) on page 605

Copyright © 2013, Juniper Networks, Inc.

static (Origin Validation for BGP)

Syntax

```
static {
  record destination {
    maximum-length prefix-length {
      origin-autonomous-system as-number {
        validation-state (invalid | valid);
      }
    }
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation],
[edit logical-systems *logical-system-name* routing-options validation],
[edit routing-instances *instance-name* routing-options validation],
[edit routing-options validation]

Release Information

Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description

Configure a static route validation (RV) record.

RV records are received from the cache server using the protocol defined in Internet draft draft-ietf-sidr-rpki-rtr-19, *The RPKI/Router Protocol*, and can also be configured statically, as shown here.

Static records are useful for overwriting the information received from an RPKI cache server.

An RV record matches any route whose prefix matches the RV prefix record, whose prefix length does not exceed the maximum-length given in the RV record, and whose origin AS equals the origin-autonomous-system number given in the RV record.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

tcp-mss (Protocols BGP)

Syntax tcp-mss *segment-size*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *neighbor-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *neighbor-name*],
[edit protocols bgp],
[edit protocol bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *neighbor-name*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *neighbor-name*]

Release Information
Statement introduced in Junos OS Release 8.1.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Configure the maximum segment size (MSS) for the TCP connection for BGP neighbors.

The MSS is only valid in increments of 2 KB. The value used is based on the value set, but is rounded down to the nearest multiple of 2048.

Options ***segment-size***—MSS for the TCP connection.

Range: 1 through 4096

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Limiting TCP Segment Size for BGP on page 371

Copyright © 2013, Juniper Networks, Inc.

threshold (BGP BFD Detection Time)

Syntax threshold *milliseconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection detection-time],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection detection-time],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection detection-time],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection detection-time],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection detection-time],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection detection-time],
[edit protocols bgp bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection detection-time],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection detection-time],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection detection-time],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection detection-time],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection detection-time]

Release Information
Statement introduced in Junos OS Release 8.2.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Specify the threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

NOTE: The threshold value must be equal to or greater than the transmit interval.

The threshold time must be equal to or greater than the value specified in the **minimum-interval** or the **minimum-receive-interval** statement.

Options ***milliseconds***—Value for the detection time adaptation threshold.

Range: 1 through 255,000

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Copyright © 2013, Juniper Networks, Inc.

Related Documentation

- Example: Configuring BFD for Static Routes

Copyright © 2013, Juniper Networks, Inc.

threshold (BGP BFD Transmit Interval)

Syntax threshold *milliseconds*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection transmit-interval],
[edit protocols bgp bfd-liveness-detection transmit-interval],
[edit protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection transmit-interval],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection transmit-interval],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection transmit-interval],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection transmit-interval]

Release Information
Statement introduced in Junos OS Release 8.2.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Specify the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent.

Options ***milliseconds***—Value for the transmit interval adaptation threshold.
Range: 0 through 4,294,967,295 ($2^{32} - 1$)

NOTE: The threshold value specified in the **threshold** statement must be greater than the value specified in the **minimum-interval** statement for the **transmit-interval** statement.

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499

Copyright © 2013, Juniper Networks, Inc.

topology (Protocols BGP)

Syntax

```
topology name {
  community {
    target identifier;
  }
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family (inet | inet6) unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family (inet | inet6) unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp family (inet | inet6) unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) unicast],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6) unicast],
[edit protocols bgp family (inet | inet6) unicast],
[edit protocols bgp group *group-name* family (inet | inet6) unicast],
[edit protocols bgp group *group-name* neighbor *address* family (inet | inet6) unicast],
[edit routing-instances *routing-instance-name* protocols bgp family (inet | inet6) unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* family (inet | inet6) unicast],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* family (inet | inet6)]

Release Information

Statement introduced in Junos OS Release 9.0.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description

Enable a topology for BGP multitopology routing. You must first configure one or more topologies under the **[edit routing-options]** hierarchy level.

Apply the community tags to identify the application topologies by configuring a routing topology name and BGP community value.

In Junos OS, multitopology support for BGP is based on the community value in a BGP route. This configuration determines the association between a topology and one or more community values and populates the topology routing tables. Arriving BGP updates that have a matching community value are replicated in the associated topology routing table. You decide which BGP community values are associated with a given topology.

For example, you can create a configuration that causes BGP updates that are received with community value **target:40:40** to be added into topology routing table **:voice.inet.0** (in addition to the default routing table **inet.0**). Likewise, you configuration can specify that updates that are received with community value **target:50:50** are added into topology routing table **:video.inet.0** (in addition to the default routing table **inet.0**).

Options

name—Name of a topology you configured at the **[edit routing-options]** hierarchy level to create a topology for a specific type of traffic, such as voice or video.

Copyright © 2013, Juniper Networks, Inc.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Multitopology Routing Based on Applications
- Example: Configuring Multitopology Routing Based on a Multicast Source

Copyright © 2013, Juniper Networks, Inc.

traceoptions (Protocols BGP)

Syntax

```
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-instances *routing-instance-name* protocols bgp],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address*]

Release Information

Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
4byte-as statement introduced in Junos OS Release 9.2.
4byte-as statement introduced in Junos OS Release 9.2 for EX Series switches.

Description

Configure BGP protocol-level tracing options. To specify more than one tracing operation, include multiple flag statements.

NOTE: The **traceoptions** statement is not supported on QFabric systems.

Default

The default BGP protocol-level tracing options are inherited from the routing protocols **traceoptions** statement included at the **[edit routing-options]** hierarchy level. The default group-level trace options are inherited from the BGP protocol-level **traceoptions** statement. The default peer-level trace options are inherited from the group-level **traceoptions** statement.

Options

disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

file *name*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. We recommend that you place BGP tracing output in the file **bgp-log**.

Copyright © 2013, Juniper Networks, Inc.

files ***number***—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file*.0**, then ***trace-file*.1**, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

Range: 2 through 1000 files

Default: 10 files

flag—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements.

BGP Tracing Flags

- **4byte-as**—4-byte AS events.
- **bfd**—BFD protocol events.
- **damping**—Damping operations.
- **graceful-restart**—Graceful restart events.
- **keepalive**—BGP keepalive messages. If you enable the the BGP **update** flag only, received keepalive messages do not generate a trace message.
- **nsr-synchronization**—Nonstop routing synchronization events.
- **open**—Open packets. These packets are sent between peers when they are establishing a connection.
- **packets**—All BGP protocol packets.
- **refresh**—BGP refresh packets.
- **update**—Update packets. These packets provide routing updates to BGP systems. If you enable only this flag, received keepalive messages do not generate a trace message. Use the **keepalive** flag to generate a trace message for keepalive messages.

Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations

Default: If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

Copyright © 2013, Juniper Networks, Inc.

flag-modifier—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **filter**—Provide filter trace information. Applies only to **route**, **damping**, and **update** tracing flags.
- **receive**—Trace the packets being received.
- **send**—Trace the packets being transmitted.

no-world-readable—(Optional) Prevent any user from reading the log file.

size ***size***—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file*.0**. When the ***trace-file*** again reaches its maximum size, ***trace-file*.0** is renamed ***trace-file*.1** and ***trace-file*** is renamed ***trace-file*.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

Syntax: ***x*k** to specify KB, ***x*m** to specify MB, or ***x*g** to specify GB

Range: 10 KB through the maximum file size supported on your system

Default: 128 KB

world-readable—(Optional) Allow any user to read the log file.

Required Privilege Level

routing and trace—To view this statement in the configuration.
routing-control and trace-control—To add this statement to the configuration.

Related Documentation

- log-updown on page 552 statement
- Understanding Trace Operations for BGP Protocol Traffic on page 464
- Configuring OSPF Refresh and Flooding Reduction in Stable Topologies

Copyright © 2013, Juniper Networks, Inc.

traceoptions (Origin Validation for BGP)

Syntax

```
traceoptions {
  file filename <files number> <size size> <world-readable | no-world-readable>;
  flag flag;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation],
[edit logical-systems *logical-system-name* routing-options validation],
[edit routing-instances *instance-name* routing-options validation],
[edit routing-options validation]

Release Information

Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description

Configure tracing operations for resource public key infrastructure (RPKI) BGP route validation.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

Copyright © 2013, Juniper Networks, Inc.

traffic-statistics (Protocols BGP)

Syntax

```
traffic-statistics {
  file filename <world-readable | no-world-readable>;
  interval seconds;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp family (inet | inet6) labeled-unicast],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* family (inet | inet6) labeled-unicast],
[edit protocols bgp family (inet | inet6) labeled-unicast],
[edit protocols bgp group *group-name* family (inet | inet6) labeled-unicast]

Release Information

Statement introduced before Junos OS Release 7.4.

Description

Enable the collection of traffic statistics for interprovider or carrier-of-carriers VPNs.

Options

file *filename*—Specify a filename for the BGP labeled–unicast traffic statistics file. If you do not specify a filename, statistics are still collected but can only be viewed by using the **show bgp group traffic statistics *group-name*** command.

interval *seconds*—Specify how often BGP labeled-unicast traffic statistics are collected.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Configuring BGP to Gather Interprovider and Carrier-of-Carriers VPNs Statistics

Copyright © 2013, Juniper Networks, Inc.

transmit-interval (BGP BFD Liveness Detection)

Syntax

```
transmit-interval {
  minimum-interval milliseconds;
  threshold milliseconds;
}
```

Hierarchy Level

[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information

Statement introduced in Junos OS Release 8.2.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Support for BFD authentication introduced in Junos OS Release 9.6.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description

Specify the transmit interval for the **bfd-liveness-detection** statement. The negotiated transmit interval for a peer is the interval between the sending of BFD packets to peers. The receive interval for a peer is the minimum time that it requires between packets sent from its peer; the receive interval is not negotiated between peers. To determine the transmit interval, each peer compares its configured minimum transmit interval with its peer's minimum receive interval. The larger of the two numbers is accepted as the transmit interval for that peer.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring BFD for Static Routes
- bfd-liveness-detection on page 499
- threshold on page 618
- minimum-interval on page 562
- minimum-receive-interval on page 564

Copyright © 2013, Juniper Networks, Inc.

ttl (BGP Multihop)

Syntax ttl *ttl-value*;

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp multihop],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* multihop],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* multihop],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp multihop],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* multihop],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* multihop],
[edit protocols bgp],
[edit protocols bgp group *group-name* multihop],
[edit protocols bgp group *group-name* neighbor *address* multihop],
[edit routing-instances *routing-instance-name* protocols bgp multihop],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* multihop],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* multihop]

Release Information
Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Configure the maximum time-to-live (TTL) value for the TTL in the IP header of BGP packets.

Options
ttl-value—TTL value for BGP packets.

Range: 1 through 255

Default: 64 (for multihop EBGP sessions, confederations, and IBGP sessions)

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring EBGP Multihop Sessions on page 208
- multihop on page 567
- no-nexthop-change on page 578

Copyright © 2013, Juniper Networks, Inc.

type (Protocols BGP)

Syntax type *type*;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name*],
[edit protocols bgp group *group-name*],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.

Description Specify the type of BGP peer group.

When configuring a BGP group, you can indicate whether the group is an IBGP group or an EBGP group. All peers in an IBGP group are in the same AS, while peers in an EBGP group are in different ASs and normally share a subnet.

Options *type*—Type of group:

- **external**—External group, which allows inter-AS BGP routing
- **internal**—Internal group, which allows intra-AS BGP routing

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- BGP Configuration Guide

Copyright © 2013, Juniper Networks, Inc.

validation (Origin Validation for BGP)

Syntax

```
validation {
  group group-name {
    max-sessions number;
    session address {
      hold-time seconds;
      local-address local-ip-address;
      port port-number;
      preference number;
      record-lifetime seconds;
      refresh-time seconds;
    }
  }
  static {
    record destination {
      maximum-length prefix-length {
        origin-autonomous-system as-number {
          validation-state (invalid | valid);
        }
      }
    }
  }
  traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag;
  }
```

Hierarchy Level

[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options],
[edit logical-systems *logical-system-name* routing-options],
[edit routing-instances *instance-name* routing-options],
[edit routing-options]

Release Information

Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description

Configure resource public key infrastructure (RPKI) BGP route validation.

The remaining statements are explained separately.

Required Privilege Level

routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

validation-state (Origin Validation for BGP)

Syntax validation-state (invalid | valid);

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options validation static record *destination* maximum-length *prefix-length* origin-autonomous-system *as-number*],
[edit logical-systems *logical-system-name* routing-options validation static record *destination* maximum-length *prefix-length* origin-autonomous-system *as-number*],
[edit routing-instances *instance-name* routing-options validation static record *destination* maximum-length *prefix-length* origin-autonomous-system *as-number*],
[edit routing-options validation static record *destination* maximum-length *prefix-length* origin-autonomous-system *as-number*]

Release Information Statement introduced in Junos OS Release 12.2.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

Description Configure the validation state for a route validation record.

Options

invalid—A negative (invalid) validation state. Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.

valid—A positive (valid) validation state. Indicates that the prefix and AS pair are found in the database.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

 Copyright © 2013, Juniper Networks, Inc.

version (BGP BFD Liveness Detection)

Syntax version (1 | automatic);

Hierarchy Level
[edit logical-systems *logical-system-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit protocols bgp group *group-name* bfd-liveness-detection],
[edit protocols bgp group *group-name* neighbor *address* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* bfd-liveness-detection],
[edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* bfd-liveness-detection]

Release Information
Statement introduced in Junos OS Release 8.1
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Specify the BFD version for detection. You can explicitly configure BFD version 1, or the routing device can automatically detect the BFD version. By default, the routing device automatically detects the BFD version, which is either 0 or 1.

Options
Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version)

Default: automatic

Required Privilege Level
routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation
- Example: Configuring BFD Authentication for BGP on page 272
- Example: Configuring BFD on Internal BGP Peer Sessions on page 262
- Example: Configuring BFD Authentication for BGP on page 272
- Understanding BFD Authentication for BGP on page 270

Copyright © 2013, Juniper Networks, Inc.

vpn-apply-export

Syntax vpn-apply-export;

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *neighbor*],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *neighbor*]

Release Information Statement introduced before Junos OS Release 7.4.

Description Apply both the VRF export and BGP group or neighbor export policies (VRF first, then BGP) before routes from the **vrf** or **l2vpn** routing tables are advertised to other PE routers.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- Configuring Policies for the VRF Table on PE Routers in VPNs

Copyright © 2013, Juniper Networks, Inc.

PART 3

Administration

- BGP Operational Commands on page 635

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 15

BGP Operational Commands

Copyright © 2013, Juniper Networks, Inc.

clear bgp damping

Syntax
clear bgp damping
<logical-system (all | *logical-system-name*)>
<*prefix*>

Syntax (EX Series Switch and QFX Series)
clear bgp damping
<*prefix*>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description
Clear BGP route flap damping information.

Options
none—Clear all BGP route flap damping information.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

prefix—(Optional) Clear route flap damping information for only the specified destination prefix.

Required Privilege Level
clear

Related Documentation
- show policy damping on page 686
- show route damping on page 723

List of Sample Output
clear bgp damping on page 636

Output Fields
When you enter this command, you are provided feedback on the status of your request.

Sample Output

clear bgp damping

```
user@host> clear bgp damping
```


Copyright © 2013, Juniper Networks, Inc.

clear bgp neighbor

Syntax

clear bgp neighbor
<as *as-number*>
<instance *instance-name*>
<logical-system (all | *logical-system-name*)>
<*neighbor*>
<soft | soft-inbound>
<soft-minimum-igp>

Syntax (EX Series Switch and QFX Series)

clear bgp neighbor
<as *as-number*>
<instance *instance-name*>
<*neighbor*>
<soft | soft-inbound>
<soft-minimum-igp>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description

Perform one of the following tasks:

- Change the state of one or more BGP neighbors to **IDLE**. For neighbors in the **ESTABLISHED** state, this command drops the TCP connection to the neighbors and then reestablishes the connection.
- (**soft** or **soft-inbound** keyword only) Reapply export policies or import policies, respectively, and send refresh updates to one or more BGP neighbors without changing their state.

Options

none—Change the state of all BGP neighbors to **IDLE**.

as *as-number*—(Optional) Apply this command only to neighbors in the specified autonomous system (AS).

instance *instance-name*—(Optional) Apply this command only to neighbors for the specified routing instance.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

neighbor—(Optional) IP address of a BGP peer. Apply this command only to the specified neighbor.

soft—(Optional) Reapply any export policies and send refresh updates to neighbors without clearing the state.

soft-inbound—(Optional) Reapply any import policies and send refresh updates to neighbors without clearing the state.

Copyright © 2013, Juniper Networks, Inc.

soft-minimum-igp—(Optional) Provides soft refresh of the outbound state when the interior gateway protocol (IGP) metric is reset.

Required Privilege Level clear

Related Documentation
- show bgp neighbor on page 665

List of Sample Output clear bgp neighbor on page 638

Output Fields When you enter this command, you are provided feedback on the status of your request.

Sample Output

clear bgp neighbor

```
user@host> clear bgp neighbor
```


Copyright © 2013, Juniper Networks, Inc.

clear bgp table

Syntax
clear bgp table *table-name*
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switch and QFX Series)
clear bgp table *table-name*

Release Information
Command introduced in Junos OS Release 9.0.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description
Request that BGP refresh routes in a specified routing table.

Options
logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

table-name—Request that BGP refresh routes in the specified table.

Additional Information
In some cases, a prefix limit is associated with a routing table for a VPN instance. When this limit is exceeded (for example, because of a network misconfiguration), some routes might not be inserted in the table. Such routes need to be added to the table after the network issue is resolved. Use the **clear bgp table** command to request that BGP refresh routes in a VPN instance table.

Required Privilege Level
clear

List of Sample Output
clear bgp table private.inet.0 on page 640
clear bgp table inet.6 logical-system all on page 640
clear bgp table private.inet.6 logical-system ls1 on page 640
clear bgp table logical-system all inet.0 on page 640
clear bgp table logical-system ls2 private.inet.0 on page 640

Output Fields
This command produces no output.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

clear bgp table private.inet.0	`user@host>` **clear bgp table private.inet.0**
clear bgp table inet.6 logical-system all	`user@host>` **clear bgp table inet.6 logical-system all**
clear bgp table private.inet.6 logical-system ls1	`user@host>` **clear bgp table private.inet.6 logical-system ls1**
clear bgp table logical-system all inet.0	`user@host>` **clear bgp table logical-system all inet.0**
clear bgp table logical-system ls2 private.inet.0	`user@host>` **clear bgp table logical-system ls2 private.inet.0**

Copyright © 2013, Juniper Networks, Inc.

clear validation database

Syntax
clear validation database
<instance *instance-name*>
<logical-system *logical-system-name*>

Release Information
Command introduced in Junos OS Release 12.2.

Description
Clear the route validation database.

Options
none—Clear the route validation database for all routing instances.

instance *instance-name*—(Optional) Clear the route validation database for the specified instance.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

Required Privilege Level
clear

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output
clear validation database on page 641

Sample Output

clear validation database

```
user@host> clear validation database
Clearing database
```

clear validation session

Syntax
clear validation session
<destination *session-ip-address*>
<instance *instance-name*>
<logical-system *logical-system-name*>
<soft-inbound>

Release Information
Command introduced in Junos OS Release 12.2.

Description
Clear the route validation session to the cache server.

Options
none—Clear all route validation sessions for all routing instances.

destination *session-ip-address*—(Optional) Clear the specified route validation session.

instance *instance-name*—(Optional) Clear the route validation session for the specified instance.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

soft-inbound—(Optional) Rather than flapping the session to the cache server and removing its contents from the database, refresh the session information without removing the database entries.

Required Privilege Level
clear

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output
clear validation session on page 642

Sample Output

clear validation session

```
user@host> clear validation session
Cleared 3 sessions
```


Copyright © 2013, Juniper Networks, Inc.

clear validation statistics

Syntax
clear validation statistics
<instance *instance-name*>
<logical-system *logical-system-name*>

Release Information
Command introduced in Junos OS Release 12.2.

Description
Clear the route validation statistics.

Options
none—Clear the route validation statistics for all routing instances.

instance *instance-name*—(Optional) Clear the route validation statistics for the specified instance.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

Required Privilege Level
clear

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output
clear validation statistics on page 643

Sample Output

clear validation statistics

```
user@host> clear validation statistics
Statistics cleared
```

request validation policy

Syntax
request validation policy
<instance *instance-name*>
<logical-system *logical-system-name*>
<record *ip-prefix*>

Release Information
Command introduced in Junos OS Release 12.2.

Description
When BGP origin validation is configured, manually request a route validation record policy to be reevaluated. This command causes dependent route validation records to be reevaluated. Dependent route validation records are exactly matching and more specific records.

Options
none—Request a policy reevaluation of all dependent route validation records.

instance *instance-name*—(Optional) Request a policy reevaluation of all dependent route validation records for the specified routing instance. The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

record *ip-prefix*—(Optional) Request a policy reevaluation of all route validation records that match a given prefix.

Required Privilege Level
maintenance

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output
request validation policy on page 644

Output Fields
When you enter this command, you are provided feedback on the status of your request.

Sample Output

request validation policy

```
user@host> request validation policy
  Enqueued 1 IPv4 records
  Enqueued 0 IPv6 records
```


Copyright © 2013, Juniper Networks, Inc.

restart

Syntax

restart
<adaptive-services |ancpd-service | application-identification |audit-process | auto-configuration |captive-portal-content-delivery |ce-l2tp-service |chassis-control | class-of-service |clksyncd-service |database-replication|datapath-trace-service |dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture | ecc-error-logging | ethernet-connectivity-fault-management |ethernet-link-fault-management |event-processing | firewall |general-authentication-service | gracefully | iccp-service |idp-policy | immediately |interface-control | ipsec-key-management | kernel-replication | l2-learning | l2cpd-service | l2tp-service | l2tp-universal-edge | lacp | license-service |link-management |local-policy-decision-function |mac-validation |mib-process | mobile-ip | mountd-service |mpls-traceroute |mspd | multicast-snooping |named-service | nfsd-service | packet-triggered-subscribers |peer-selection-service |pgcp-service | pgm | pic-services-logging | pki-service |ppp | ppp-service |pppoe | protected-system-domain-service | redundancy-interface-process | remote-operations | root-system-domain-service | routing <logical-system *logical-system-name*> | sampling | sbc-configuration-process | sdk-service |service-deployment | services | services pgcp gateway *gateway-name* | snmp |soft |static-subscribers |statistics-service| subscriber-management | subscriber-management-helper | tunnel-oamd |usb-control| vrrp |web-management>
<gracefully | immediately | soft>

Syntax (ACX Series Routers)

restart
<adaptive-services |audit-process | auto-configuration | autoinstallation |chassis-control | class-of-service |clksyncd-service |database-replication| dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture | ethernet-connectivity-fault-management |ethernet-link-fault-management |event-processing | firewall |general-authentication-service | gracefully | immediately |interface-control | ipsec-key-management | l2-learning | lacp |link-management |mib-process | mobile-ip | mountd-service |mpls-traceroute |mspd | named-service | nfsd-service | pgm | pki-service |ppp | pppoe | redundancy-interface-process | remote-operations | routing | sampling | sdk-service |secure-neighbor-discovery | service-deployment | services | snmp |soft |statistics-service| subscriber-management | subscriber-management-helper | tunnel-oamd | vrrp>

Syntax (EX Series Switches)

restart
<autoinstallation | chassis-control | class-of-service | database-replication | dhcp | dhcp-service | diameter-service | dot1x-protocol | ethernet-link-fault-management | ethernet-switching | event-processing | firewall | general-authentication-service | interface-control | kernel-replication | l2-learning | lacp | license-service | link-management | lldpd-service | mib-process | mountd-service | multicast-snooping | pgm | redundancy-interface-process | remote-operations | routing | secure-neighbor-discovery | service-deployment | sflow-service | snmp | vrrp | web-management>

Syntax (Routing Matrix)

restart
<adaptive-services | audit-process | chassis-control | class-of-service | disk-monitoring | dynamic-flow-capture | ecc-error-logging | event-processing | firewall | interface-control | ipsec-key-management | kernel-replication | l2-learning | l2tp-service | lacp | link-management | mib-process | pgm | pic-services-logging | ppp | pppoe | redundancy-interface-process | remote-operations | routing <logical-system *logical-system-name*> | sampling | service-deployment | snmp>
<all | all-lcc | lcc *number*>

Copyright © 2013, Juniper Networks, Inc.

<gracefully | immediately | soft>

Syntax (J Series Routing Platform)

restart
<adaptive-services | audit-process | chassis-control | class-of-service | dhcp | dialer-services | dlsw | event-processing | firewall | interface-control | ipsec-key-management | isdn-signaling | l2-learning | l2tp-service | mib-process | network-access-service | pgm | ppp | pppoe | remote-operations | routing <logical-system *logical-system-name*> | sampling | service-deployment | snmp | usb-control | web-management>
<gracefully | immediately | soft>

Syntax (TX Matrix Routers)

restart
<adaptive-services | audit-process | chassis-control | class-of-service | dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture | ecc-error-logging | event-processing | firewall | interface-control | ipsec-key-management | kernel-replication | l2-learning | l2tp-service | lacp | link-management | mib-process |pgm | pic-services-logging | ppp | pppoe | redundancy-interface-process | remote-operations | routing <logical-system *logical-system-name*> | sampling | service-deployment | snmp| statistics-service>
<all-chassis | all-lcc | lcc *number* | scc>
<gracefully | immediately | soft>

Syntax (TX Matrix Plus Routers)

restart
<adaptive-services | audit-process | chassis-control | class-of-service | dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture | ecc-error-logging | event-processing | firewall | interface-control | ipsec-key-management | kernel-replication | l2-learning | l2tp-service | lacp | link-management | mib-process | pgm | pic-services-logging | ppp | pppoe | redundancy-interface-process | remote-operations | routing <logical-system *logical-system-name*> | sampling | service-deployment | snmp| statistics-service>
<all-chassis | all-lcc | all-sfc | lcc *number* | sfc *number*>
<gracefully | immediately | soft>

Syntax (MX Series Routers)

restart
<adaptive-services | ancpd-service |application-identification|audit-process | auto-configuration |captive-portal-content-delivery |ce-l2tp-service |chassis-control | class-of-service |clksyncd-service |database-replication| datapath-trace-service |dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture | ecc-error-logging | ethernet-connectivity-fault-management |ethernet-link-fault-management |event-processing | firewall | general-authentication-service | gracefully |iccp-service |idp-policy |immediately |interface-control | ipsec-key-management | kernel-replication | l2-learning |l2cpd-service |l2tp-service | l2tp-universal-edge | lacp | license-service |link-management |local-policy-decision-function |mac-validation |mib-process | mobile-ip |mountd-service |mpls-traceroute |mspd | multicast-snooping |named-service | nfsd-service | packet-triggered-subscribers |peer-selection-service | pgcp-service | pgm | pic-services-logging | pki-service |ppp | ppp-service |pppoe | protected-system-domain-service | redundancy-interface-process | remote-operations |root-system-domain-service | routing |routing <logical-system *logical-system-name*> | sampling | sbc-configuration-process | sdk-service |service-deployment |services | services pgcp gateway *gateway-name* |snmp |soft |static-subscribers |statistics-service| subscriber-management | subscriber-management-helper | tunnel-oamd | usb-control| vrrp |web-management>
<all-members>
<gracefully | immediately | soft>
<local>
<member *member-id*>

Copyright © 2013, Juniper Networks, Inc.

Syntax (J Series Routers)

restart
<adaptive-services | audit-process | chassis-control | class-of-service | dhcp | dhcp-service | dialer-services | diameter-service | dlsw | event-processing | firewall | interface-control | ipsec-key-management | isdn-signaling | l2ald | l2-learning | l2tp-service | mib-process | network-access-service | pgm | ppp | pppoe | remote-operations | routing <logical-system *logical-system-name*> | sampling | service-deployment | snmp | usb-control | web-management>
<gracefully | immediately | soft>

Syntax (QFX Series)

restart
<adaptive-services | audit-process | chassis-control | class-of-service | dialer-services | diameter-service | dlsw | ethernet-connectivity | event-processing | fibre-channel | firewall | general-authentication-service | igmp-host-services | interface-control | ipsec-key-management | isdn-signaling | l2ald | l2-learning | l2tp-service | mib-process | named-service | network-access-service | nstrace-process | pgm | ppp | pppoe | redundancy-interface-process | remote-operations |*logical-system-name*> | routing | sampling |secure-neighbor-discovery | service-deployment | snmp | usb-control | web-management>
<gracefully | immediately | soft>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.1 for the QFX Series.
Command introduced in Junos OS Release 12.2 for ACX Series routers.
Options added:

- **dynamic-flow-capture** in Junos OS Release 7.4.
- **dlsw** in Junos OS Release 7.5.
- **event-processing** in Junos OS Release 7.5.
- **ppp** in Junos OS Release 7.5.
- **l2ald** in Junos OS Release 8.0.
- **link-management** in Release 8.0.
- **pgcp-service** in Junos OS Release 8.4.
- **sbc-configuration-process** in Junos OS Release 9.5.
- **services pgcp gateway** in Junos OS Release 9.6.
- **sfc** and **all-sfc** for the TX Matrix Router in Junos OS Release 9.6.

Description

Restart a Junos OS process.

CAUTION: Never restart a software process unless instructed to do so by a customer support engineer. A restart might cause the router or switch to drop calls and interrupt transmission, resulting in possible loss of data.

Options

none—Same as **gracefully**.

Copyright © 2013, Juniper Networks, Inc.

adaptive-services—(Optional) Restart the configuration management process that manages the configuration for stateful firewall, Network Address Translation (NAT), intrusion detection services (IDS), and IP Security (IPsec) services on the Adaptive Services PIC.

all-chassis—(TX Matrix and TX Matrix Plus routers only) (Optional) Restart the software process on all chassis.

all-lcc—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process on all T640 routers connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process on all T1600 routers connected to the TX Matrix Plus router.

all-members—(MX Series routers only) (Optional) Restart the software process for all members of the Virtual Chassis configuration.

all-sfc—(TX Matrix Plus routers only) (Optional) For a TX Matrix Plus router, restart the software processes for the TX Matrix Plus router (or switch-fabric chassis).

ancpd-service—(Optional) Restart the Access Node Control Protocol (ANCP) process, which works with a special Internet Group Management Protocol (IGMP) session to collect outgoing interface mapping events in a scalable manner.

application-identification—(Optional) Restart the process that identifies an application using intrusion detection and prevention (IDP) to allow or deny traffic based on applications running on standard or nonstandard ports.

audit-process—(Optional) Restart the RADIUS accounting process that gathers statistical data that can be used for general network monitoring, analyzing, and tracking usage patterns, for billing a user based on the amount of time or type of services accessed.

auto-configuration—(Optional) Restart the Interface Auto-Configuration process.

autoinstallation—(EX Series switches only) (Optional) Restart the autoinstallation process.

captive-portal-content-delivery—(Optional) Restart the HTTP redirect service by specifying the location to which a subscriber's initial Web browser session is redirected, enabling initial provisioning and service selection for the subscriber.

ce-l2tp-service—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Universal Edge Layer 2 Tunneling Protocol (L2TP) process, which establishes L2TP tunnels and Point-to-Point Protocol (PPP) sessions through L2TP tunnels.

chassis-control—(Optional) Restart the chassis management process.

class-of-service—(Optional) Restart the class-of-service (CoS) process, which controls the router's or switch's CoS configuration.

clksyncd-service—(Optional) Restart the external clock synchronization process, which uses synchronous Ethernet (SyncE).

Copyright © 2013, Juniper Networks, Inc.

database-replication—(EX Series switches and MX Series routers only) (Optional) Restart the database replication process.

datapath-trace-service—(Optional) Restart the packet path tracing process.

dhcp—(J Series routers and EX Series switches only) (Optional) Restart the software process for a Dynamic Host Configuration Protocol (DHCP) server. A DHCP server allocates network IP addresses and delivers configuration settings to client hosts without user intervention.

dhcp-service—(Optional) Restart the Dynamic Host Configuration Protocol process.

dialer-services—(J Series routers and EX Series switches only) (Optional) Restart the ISDN dial-out process.

diameter-service—(Optional) Restart the diameter process.

disk-monitoring—(Optional) Restart disk monitoring, which checks the health of the hard disk drive on the Routing Engine.

dlsw—(J Series routers and QFX Series only) (Optional) Restart the data link switching (DLSw) service.

dot1x-protocol—(EX Series switches only) (Optional) Restart the port-based network access control process.

dynamic-flow-capture—(Optional) Restart the dynamic flow capture (DFC) process, which controls DFC configurations on Monitoring Services III PICs.

ecc-error-logging—(Optional) Restart the error checking and correction (ECC) process, which logs ECC parity errors in memory on the Routing Engine.

ethernet-connectivity-fault-management—(Optional) Restart the process that provides IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.

ethernet-link-fault-management—(EX Series switches and MX Series routers only) (Optional) Restart the process that provides the OAM link fault management (LFM) information for Ethernet interfaces.

ethernet-switching—(EX Series switches only) (Optional) Restart the Ethernet switching process.

event-processing—(Optional) Restart the event process (eventd).

fibre-channel—(QFX Series only) (Optional) Restart the Fibre Channel process.

firewall—(Optional) Restart the firewall management process, which manages the firewall configuration and enables accepting or rejecting packets that are transiting an interface on a router or switch.

Copyright © 2013, Juniper Networks, Inc.

general-authentication-service—(EX Series switches and MX Series routers only) (Optional) Restart the general authentication process.

gracefully—(Optional) Restart the software process.

iccp-service—(Optional) Restart the Inter-Chassis Communication Protocol (ICCP) process.

idp-policy—(Optional) Restart the intrusion detection and prevention (IDP) protocol process.

immediately—(Optional) Immediately restart the software process.

interface-control—(Optional) Restart the interface process, which controls the router's or switch's physical interface devices and logical interfaces.

ipsec-key-management—(Optional) Restart the IPsec key management process.

isdn-signaling—(J Series routers and QFX Series only) (Optional) Restart the ISDN signaling process, which initiates ISDN connections.

kernel-replication—(Optional) Restart the kernel replication process, which replicates the state of the backup Routing Engine when graceful Routing Engine switchover (GRES) is configured.

l2-learning—(Optional) Restart the Layer 2 address flooding and learning process.

l2cpd-service—(Optional) Restart the Layer 2 Control Protocol process, which enables features such as Layer 2 protocol tunneling and nonstop bridging.

l2tp-service— (M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Layer 2 Tunneling Protocol (L2TP) process, which sets up client services for establishing Point-to-Point Protocol (PPP) tunnels across a network and negotiating Multilink PPP if it is implemented.

l2tp-universal-edge—(MX Series routers only) (Optional) Restart the L2TP process, which establishes L2TP tunnels and PPP sessions through L2TP tunnels.

lacp—(Optional) Restart the Link Aggregation Control Protocol (LACP) process. LACP provides a standardized means for exchanging information between partner systems on a link to allow their link aggregation control instances to reach agreement on the identity of the LAG to which the link belongs, and then to move the link to that LAG, and to enable the transmission and reception processes for the link to function in an orderly manner.

lcc *number*—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process for a specific T640 router that is connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process for a specific T1600 router that is connected to the TX Matrix Plus router. Replace ***number*** with a value from **0** through **3**.

license-service—(EX Series switches only) (Optional) Restart the feature license management process.

 Copyright © 2013, Juniper Networks, Inc.

link-management— (TX Matrix and TX Matrix Plus routers and EX Series switches only) (Optional) Restart the Link Management Protocol (LMP) process, which establishes and maintains LMP control channels.

lldpd-service—(EX Series switches only) (Optional) Restart the Link Layer Discovery Protocol (LLDP) process.

local—(MX Series routers only) (Optional) Restart the software process for the local Virtual Chassis member.

local-policy-decision-function— (Optional) Restart the process for the Local Policy Decision Function, which regulates collection of statistics related to applications and application groups and tracking of information about dynamic subscribers and static interfaces.

mac-validation— (Optional) Restart the Media Access Control (MAC) validation process, which configures MAC address validation for subscriber interfaces created on demux interfaces in dynamic profiles on MX Series routers.

member *member-id*—(MX Series routers only) (Optional) Restart the software process for a specific member of the Virtual Chassis configuration. Replace ***member-id*** with a value of **0** or **1**.

mib-process—(Optional) Restart the Management Information Base (MIB) version II process, which provides the router's MIB II agent.

mobile-ip—(Optional) Restart the Mobile IP process, which configures Junos OS Mobile IP features.

mountd-service—(EX Series switches and MX Series routers only) (Optional) Restart the service for NFS mount requests.

mpls-traceroute—(Optional) Restart the MPLS Periodic Traceroute process.

mspd—(Optional) Restart the Multiservice process.

multicast-snooping—(EX Series switches and MX Series routers only) (Optional) Restart the multicast snooping process, which makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.

named-service—(Optional) Restart the DNS Server process, which is used by a router or a switch to resolve hostnames into addresses.

network-access-service—(J Series routers and QFX Series only) (Optional) Restart the network access process, which provides the router's Challenge Handshake Authentication Protocol (CHAP) authentication service.

nfsd-service—(Optional) Restart the Remote NFS Server process, which provides remote file access for applications that need NFS-based transport.

Copyright © 2013, Juniper Networks, Inc.

packet-triggered-subscribers—(Optional) Restart the packet-triggered subscribers and policy control (PTSP) process, which allows the application of policies to dynamic subscribers that are controlled by a subscriber termination device.

peer-selection-service—(Optional) Restart the Peer Selection Service process.

pgcp-service—(Optional) Restart the pgcpd service process running on the Routing Engine. This option does not restart pgcpd processes running on mobile station PICs. To restart pgcpd processes running on mobile station PICs, use the **services pgcp gateway** option.

pgm—(Optional) Restart the process that implements the Pragmatic General Multicast (PGM) protocol for assisting in the reliable delivery of multicast packets.

pic-services-logging—(Optional) Restart the logging process for some PICs. With this process, also known as fsad (the file system access daemon), PICs send special logging information to the Routing Engine for archiving on the hard disk.

pki-service—(Optional) Restart the PKI Service process.

ppp—(Optional) Restart the Point-to-Point Protocol (PPP) process, which is the encapsulation protocol process for transporting IP traffic across point-to-point links.

ppp-service—(Optional) Restart the Universal Edge PPP process, which is the encapsulation protocol process for transporting IP traffic across Universal Edge routers.

pppoe—(Optional) Restart the Point-to-Point Protocol over Ethernet (PPPoE) process, which combines PPP that typically runs over broadband connections with the Ethernet link-layer protocol that allows users to connect to a network of hosts over a bridge or access concentrator.

protected-system-domain-service—(Optional) Restart the Protected System Domain (PSD) process.

redundancy-interface-process—(Optional) Restart the ASP redundancy process.

remote-operations—(Optional) Restart the remote operations process, which provides the ping and traceroute MIBs.

root-system-domain-service—(Optional) Restart the Root System Domain (RSD) service.

routing—(ACX Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the routing protocol process.

routing <logical-system *logical-system-name*>—(Optional) Restart the routing protocol process, which controls the routing protocols that run on the router or switch and maintains the routing tables. Optionally, restart the routing protocol process for the specified logical system only.

sampling—(Optional) Restart the sampling process, which performs packet sampling based on particular input interfaces and various fields in the packet header.

Copyright © 2013, Juniper Networks, Inc.

sbc-configuration-process—(Optional) Restart the session border controller (SBC) process of the border signaling gateway (BSG).

scc—(TX Matrix routers only) (Optional) Restart the software process on the TX Matrix router (or switch-card chassis).

sdk-service—(Optional) Restart the SDK Service process, which runs on the Routing Engine and is responsible for communications between the SDK application and Junos OS. Although the SDK Service process is present on the router, it is turned off by default.

secure-neighbor-discovery—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the secure Neighbor Discovery Protocol (NDP) process, which provides support for protecting NDP messages.

sfc *number*—(TX Matrix Plus routers only) (Optional) Restart the software process on the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with **0**.

service-deployment—(Optional) Restart the service deployment process, which enables Junos OS to work with the Session and Resource Control (SRC) software.

services—(Optional) Restart a service.

services pgcp gateway *gateway-name*—(Optional) Restart the pgcpd process for a specific border gateway function (BGF) running on an MS-PIC. This option does not restart the pgcpd process running on the Routing Engine. To restart the pgcpd process on the Routing Engine, use the **pgcp-service** option.

sflow-service—(EX Series switches only) (Optional) Restart the flow sampling (sFlow technology) process.

snmp—(Optional) Restart the SNMP process, which enables the monitoring of network devices from a central location and provides the router's or switch's SNMP master agent.

soft—(Optional) Reread and reactivate the configuration without completely restarting the software processes. For example, BGP peers stay up and the routing table stays constant. Omitting this option results in a graceful restart of the software process.

static-subscribers—(Optional) Restart the static subscribers process, which associates subscribers with statically configured interfaces and provides dynamic service activation and activation for these subscribers.

statistics-service—(Optional) Restart the process that manages the Packet Forwarding Engine statistics.

subscriber-management—(Optional) Restart the Subscriber Management process.

subscriber-management-helper—(Optional) Restart the Subscriber Management Helper process.

tunnel-oamd—(Optional) Restart the Tunnel OAM process, which enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol

Copyright © 2013, Juniper Networks, Inc.

tunneling (L2PT) allows service providers to send Layer 2 PDUs across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.

usb-control—(J Series routers and MX Series routers only) (Optional) Restart the USB control process.

vrrp—(ACX Series routers, EX Series switches, and MX Series routers only) (Optional) Restart the Virtual Router Redundancy Protocol (VRRP) process, which enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

web-management—(J Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the Web management process.

Required Privilege Level reset

Related Documentation
- Overview of Junos OS CLI Operational Mode Commands

List of Sample Output restart interfaces on page 654

Output Fields When you enter this command, you are provided feedback on the status of your request.

Sample Output

restart interfaces

```
user@host> restart interfaces
interfaces process terminated
interfaces process restarted
```

 Copyright © 2013, Juniper Networks, Inc.

show bgp bmp

Syntax **show bgp bmp**

Release Information Command introduced in Junos OS Release 9.5.
Command introduced in Junos OS Release 9.5 for EX Series switches.

Description Display information about the BGP Monitoring Protocol (BMP).

Options This command has no options.

Required Privilege Level view

List of Sample Output show bgp bmp on page 655

Output Fields Table 9 on page 655 lists the output fields for the **show bgp bmp** command. Output fields are listed in the approximate order in which they appear.

Table 9: show bgp bmp Output Fields

Field Name	Field Description
BMP station address/port	IP address and port number of the monitoring station to which BGP Monitoring Protocol (BMP) statistics are sent.
BMP session state	Status of the BMP session: **UP** or **DOWN**.
Memory consumed by BMP	Memory used by the active BMP session.
Statistics timeout	Amount of time, in seconds, between transmissions of BMP data to the monitoring station.
Memory limit	Threshold, in bytes, at which the routing device stops collecting BMP data.
Memory-connect retry timeout	Amount of time, in seconds, after which the routing device attempts to resume a BMP session that was ended after the configured memory threshold was exceeded.

Sample Output

show bgp bmp

```
user@host> show bgp bmp
  BMP station address/port: 172.24.24.157+5454
  BMP session state: DOWN
  Memory consumed by BMP: 0
  Statistics timeout: 15
  Memory limit: 10485760
  Memory connect retry timeout: 600
```

Copyright © 2013, Juniper Networks, Inc.

show bgp group

Syntax

show bgp group
<brief | detail | summary>
<*group-name*>
<exact-instance *instance-name*>
<instance *instance-name*>
<logical-system (all | *logical-system-name*)>
<rtf>

Syntax (EX Series Switch and QFX Series)

show bgp group
<brief | detail | summary>
<*group-name*>
<exact-instance *instance-name*>
<instance *instance-name*>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.
exact-instance option introduced in Junos OS Release 11.4.

Description

Display information about the configured BGP groups.

Options

none—Display group information about all BGP groups.

brief | detail | summary—(Optional) Display the specified level of output.

group-name—(Optional) Display group information for the specified group.

exact-instance *instance-name*—(Optional) Display information for the specified instance only.

instance *instance-name*—(Optional) Display information about BGP groups for all routing instances whose name begins with this string (for example, **cust1**, **cust11**, and **cust111** are all displayed when you run the **show bgp group instance cust1** command). The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

rtf—(Optional) Display BGP group route targeting information.

Required Privilege Level

view

List of Sample Output

show bgp group on page 661
show bgp group brief on page 661
show bgp group detail on page 661
show bgp group rtf detail on page 662
show bgp group summary on page 662

Copyright © 2013, Juniper Networks, Inc.

Output Fields Table 10 on page 657 describes the output fields for the **show bgp group** command. Output fields are listed in the approximate order in which they appear.

Table 10: show bgp group Output Fields

Field Name	Field Description	Level of Output
Group Type or **Group**	Type of BGP group: **Internal** or **External**.	All levels
group-index	Index number for the BGP peer group. The index number differentiates between groups when a single BGP group is split because of different configuration options at the group and peer levels.	**rtf detail**
AS	AS number of the peer. For internal BGP (IBGP), this number is the same as **Local AS**.	**brief detail** none
Local AS	AS number of the local routing device.	**brief detail** none
Name	Name of a specific BGP group.	**brief detail** none
Index	Unique index number of a BGP group.	**brief detail** none
Flags	Flags associated with the BGP group. This field is used by Juniper Networks customer support.	**brief detail** none
Remove-private options	Options associated with the remove-private statement.	**brief detail** none
Holdtime	Maximum number of seconds allowed to elapse between successive keepalive or update messages that BGP receives from a peer in the BGP group, after which the connection to the peer is closed and routing devices through that peer become unavailable.	**brief detail** none
Export	Export policies configured for the BGP group with the **export** statement.	**brief detail** none
MED tracks IGP metric update delay	Time, in seconds, that updates to multiple exit discriminator (MED) are delayed. Also displays the time remaining before the interval is set to expire	All levels
Traffic Statistics Interval	Time between sample periods for labeled-unicast traffic statistics, in seconds.	**brief detail** none
Total peers	Total number of peers in the group.	**brief detail** none
Established	Number of peers in the group that are in the established state.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 10: show bgp group Output Fields *(continued)*

Field Name	Field Description	Level of Output
Active/Received/Accepted/Damped	Multipurpose field that displays information about BGP peer sessions. The field's contents depend upon whether a session is established and whether it was established in the main routing device or in a routing instance. • If a peer is not established, the field shows the state of the peer session: **Active**, **Connect**, or **Idle**. • If a BGP session is established in the main routing device, the field shows the number of active, received, accepted, and damped routes that are received from a neighbor and appear in the **inet.0** (main) and **inet.2** (multicast) routing tables. For example, **8/10/10/2 and 2/4/4/0** indicate the following: ◦ 8 active routes, 10 received routes, 10 accepted routes, and 2 damped routes from a BGP peer appear in the **inet.0** routing table. ◦ 2 active routes, 4 received routes, 4 accepted routes, and no damped routes from a BGP peer appear in the **inet.2** routing table.	**summary**
ip-addresses	List of peers who are members of the group. The address is followed by the peer's port number.	All levels
Route Queue Timer	Number of seconds until queued routes are sent. If this time has already elapsed, this field displays the number of seconds by which the updates are delayed.	**detail**
Route Queue	Number of prefixes that are queued up for sending to the peers in the group.	**detail**
inet.*number*	Number of active, received, accepted, and damped routes in the routing table. For example, **inet.0: 7/10/9/0** indicates the following: • 7 active routes, 10 received routes, 9 accepted routes, and no damped routes from a BGP peer appear in the **inet.0** routing table.	none

Copyright © 2013, Juniper Networks, Inc.

Table 10: show bgp group Output Fields *(continued)*

Field Name	Field Description	Level of Output
Table inet.*number*	Information about the routing table. • **Received prefixes**—Total number of prefixes from the peer, both active and inactive, that are in the routing table. • **Active prefixes**—Number of prefixes received from the peer that are active in the routing table. • **Suppressed due to damping**—Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols. • **Advertised prefixes**—Number of prefixes advertised to a peer. • **Received external prefixes**—Total number of prefixes from the external BGP (EBGP) peers, both active and inactive, that are in the routing table. • **Active external prefixes**—Number of prefixes received from the EBGP peers that are active in the routing table. • **Externals suppressed**—Number of routes received from EBGP peers currently inactive because of damping or other reasons. • **Received internal prefixes**—Total number of prefixes from the IBGP peers, both active and inactive, that are in the routing table. • **Active internal prefixes**—Number of prefixes received from the IBGP peers that are active in the routing table. • **Internals suppressed**—Number of routes received from IBGP peers currently inactive because of damping or other reasons. • **RIB State**—Status of the graceful restart process for this routing table: **BGP restart is complete**, **BGP restart in progress**, **VPN restart in progress**, or **VPN restart is complete**.	**detail**
Groups	Total number of groups.	All levels
Peers	Total number of peers.	All levels
External	Total number of external peers.	All levels
Internal	Total number of internal peers.	All levels
Down peers	Total number of unavailable peers.	All levels
Flaps	Total number of flaps that occurred.	All levels
Table	Name of a routing table.	**brief**, none
Tot Paths	Total number of routes.	**brief**, none
Act Paths	Number of active routes.	**brief**, none
Suppressed	Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.	**brief**, none

Copyright © 2013, Juniper Networks, Inc.

Table 10: show bgp group Output Fields *(continued)*

Field Name	Field Description	Level of Output
History	Number of withdrawn routes stored locally to keep track of damping history.	**brief**, none
Damp State	Number of active routes with a figure of merit greater than zero, but lower than the threshold at which suppression occurs.	**brief**, none
Pending	Routes being processed by the BGP import policy.	**brief**, none
Group	Group the peer belongs to in the BGP configuration.	**detail**
Receive mask	Mask of the received target included in the advertised route.	**detail**
Entries	Number of route entries received.	**detail**
Target	Route target that is to be passed by route-target filtering. If a route advertised from the provider edge (PE) routing device matches an entry in the route-target filter, the route is passed to the peer.	**detail**
Mask	Mask which specifies that the peer receive routes with the given route target.	**detail**

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show bgp group

```
user@host> show bgp group
 Groups: 2  Peers: 2    External: 0    Internal: 2    Down peers: 1   Flaps: 0
 Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending

 inet.0
                        0          0          0          0          0          0

 bgp.l3vpn.0
                        0          0          0          0          0          0

 bgp.rtarget.0
                        2          0          0          0          0          0
```

show bgp group brief

```
user@host> show bgp group brief
 Groups: 2  Peers: 2    External: 0    Internal: 2    Down peers: 1   Flaps: 0
 Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending

 inet.0
                        0          0          0          0          0          0

 bgp.l3vpn.0
                        0          0          0          0          0          0

 bgp.rtarget.0
                        2          0          0          0          0          0
```

show bgp group detail

```
user@host> show bgp group detail
Group Type: Internal    AS: 1                     Local AS: 1
  Name: ibgp            Index: 0                  Flags: <Export Eval>
  Holdtime: 0
  Total peers: 3        Established: 0
  22.0.0.2
  22.0.0.8
  22.0.0.5

Groups: 1  Peers: 3    External: 0    Internal: 3    Down peers: 3   Flaps: 3
  Table bgp.l3vpn.0
    Received prefixes:            0
    Accepted prefixes:            0
    Active prefixes:              0
    Suppressed due to damping:    0
    Received external prefixes:   0
    Active external prefixes:     0
    Externals suppressed:         0
    Received internal prefixes:   0
    Active internal prefixes:     0
    Internals suppressed:         0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
  Table bgp.mdt.0
    Received prefixes:            0
    Accepted prefixes:            0
    Active prefixes:              0
    Suppressed due to damping:    0
    Received external prefixes:   0
    Active external prefixes:     0
```

Copyright © 2013, Juniper Networks, Inc.

```
    Externals suppressed:          0
    Received internal prefixes:    0
    Active internal prefixes:      0
    Internals suppressed:          0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
  Table VPN-A.inet.0
    Received prefixes:             0
    Accepted prefixes:             0
    Active prefixes:               0
    Suppressed due to damping:     0
    Received external prefixes:    0
    Active external prefixes:      0
    Externals suppressed:          0
    Received internal prefixes:    0
    Active internal prefixes:      0
    Internals suppressed:          0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
  Table VPN-A.mdt.0
    Received prefixes:             0
    Accepted prefixes:             0
    Active prefixes:               0
    Suppressed due to damping:     0
    Received external prefixes:    0
    Active external prefixes:      0
    Externals suppressed:          0
    Received internal prefixes:    0
    Active internal prefixes:      0
    Internals suppressed:          0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
```

show bgp group rtf detail

```
user@host> show bgp group rtf detail
 Group: internal (group-index: 0)
     Receive mask: 00000002
     Table: bgp.rtarget.0                                    Entries: 2
         Target                          Mask
         100:100/64                      00000002
         200:201/64                      (Group)
 Group: internal (group-index: 1)
     Table: bgp.rtarget.0                                    Entries: 1
         Target                          Mask
         200:201/64                      (Group)
```

show bgp group summary

```
user@host> show bgp group summary
Group        Type       Peers     Established    Active/Received/Accepted/Damped
ibgp         Internal   3         0

Groups: 1  Peers: 3    External: 0    Internal: 3    Down peers: 3   Flaps: 3
  bgp.l3vpn.0      : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
  bgp.mdt.0        : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
  VPN-A.inet.0     : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
  VPN-A.mdt.0      : 0/0/0/0 External: 0/0/0/0 Internal: 0/0/0/0
```


Copyright © 2013, Juniper Networks, Inc.

show bgp group traffic-statistics

Syntax

show bgp group traffic-statistics
<brief | detail>
<*group-name*>
<logical-system (all | *logical-system-name*)>

Release Information

Command introduced before Junos OS Release 7.4.

Description

Display the traffic statistics for configured Border Gateway Protocol (BGP) groups.

Options

none—Display traffic statistics for all BGP groups.

brief | detail—(Optional) Display the specified level of output.

group-name—(Optional) Display BGP traffic statistics for only the specified group.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level

view

List of Sample Output

show bgp group traffic-statistics (Per-Group-Label Not Configured) on page 664
show bgp group traffic-statistics (Per-Group-Label Configured) on page 664

Output Fields

Table 11 on page 663 describes the output fields for the **show bgp group traffic-statistics** command. Output fields are listed in the approximate order in which they appear.

Table 11: show bgp group traffic-statistics Output Fields

Field Name	Field Description
Group name	Name of a specific BGP group.
Group Index	Index number for the BGP group.
NLRI	Network layer reachability information (NLRI) indicating the source of the traffic statistics for the BGP group.
FEC	Forwarding equivalence classes (FECs) associated with the BGP group.
Packets	Number of packets sent through each FEC.
Bytes	Number of bytes transmitted through each FEC.
EgressAS	Autonomous system (AS) number of the egress router.
AdvLabel	Label associated with each FEC.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show bgp group traffic-statistics (Per-Group-Label Not Configured)

```
user@host> show bgp group traffic-statistics
Group Name: ext1       Group Index: 0          NLRI: inet-labeled-unicast
FEC                  Packets              Bytes     EgressAS    AdvLabel
10.255.245.55              0                  0            I      100224
10.255.245.57              0                  0            I      100240
100.101.0.0              550              48400           25      100256
100.102.0.0              550              48400           25      100256
100.103.0.0              550              48400           25      100272
100.104.0.0              550              48400           25      100272
192.168.25.0               0                  0            I      100288

Group Name: ext2       Group Index: 1          NLRI: inet-labeled-unicast
FEC                  Packets              Bytes     EgressAS    AdvLabel
10.255.245.55              0                  0            I      100224
10.255.245.57              0                  0            I      100240
100.101.0.0              550              48400           25      100256
100.102.0.0              550              48400           25      100256
100.103.0.0              550              48400           25      100272
100.104.0.0              550              48400           25      100272
192.168.25.0               0                  0            I      100288
```

show bgp group traffic-statistics (Per-Group-Label Configured)

```
user@host> show bgp group traffic-statistics
Group Name: ext1       Group Index: 0          NLRI: inet-labeled-unicast
FEC                  Packets              Bytes     EgressAS    AdvLabel
10.255.245.55              0                  0            I      100384
10.255.245.57              0                  0            I      100400
100.101.0.0              101               8888           25      100416
100.102.0.0              101               8888           25      100416
100.103.0.0                0                  0           25      100432
100.104.0.0                0                  0           25      100432
192.168.25.0               0                  0            I      100448

Group Name: ext2       Group Index: 1          NLRI: inet-labeled-unicast
FEC                  Packets              Bytes     EgressAS    AdvLabel
10.255.245.55              0                  0            I      100304
10.255.245.57              0                  0            I      100320
100.101.0.0                0                  0           25      100336
100.102.0.0                0                  0           25      100336
100.103.0.0              101               8888           25      100352
100.104.0.0              101               8888           25      100352
192.168.25.0               0                  0            I      100368
```


Copyright © 2013, Juniper Networks, Inc.

show bgp neighbor

Syntax

show bgp neighbor
<exact-instance *instance-name*>
<instance *instance-name*>
<logical-system (all | *logical-system-name*)>
<*neighbor-address*>
<orf (detail | *neighbor-address*)

Syntax (EX Series Switch and QFX Series)

show bgp neighbor
<instance *instance-name*>
<exact-instance *instance-name*>
<*neighbor-address*>
<orf (*neighbor-address* | detail)

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.
orf option introduced in Junos OS Release 9.2.
exact-instance option introduced in Junos OS Release 11.4.

Description

Display information about BGP peers.

Options

none—Display information about all BGP peers.

exact-instance *instance-name*—(Optional) Display information for the specified instance only.

instance *instance-name*—(Optional) Display information about BGP peers for all routing instances whose name begins with this string (for example, **cust1**, **cust11**, and **cust111** are all displayed when you run the **show bgp neighbor instance cust1** command).

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

neighbor-address—(Optional) Display information for only the BGP peer at the specified IP address.

orf (detail | *neighbor-address*)—(Optional) Display outbound route-filtering information for all BGP peers or only for the BGP peer at the specified IP address. The default is to display brief output. Use the **detail** option to display detailed output.

Additional Information

For information about the **local-address, nlri**, **hold-time,** and **preference** statements, see the Junos OS Routing Protocols Configuration Guide.

Required Privilege Level

view

Related Documentation

- clear bgp neighbor on page 637

Copyright © 2013, Juniper Networks, Inc.

List of Sample Output

show bgp neighbor on page 673
show bgp neighbor (CLNS) on page 673
show bgp neighbor (Layer 2 VPN) on page 674
show bgp neighbor (Layer 3 VPN) on page 676
show bgp neighbor neighbor-address on page 677
show bgp neighbor neighbor-address on page 677
show bgp neighbor orf neighbor-address detail on page 678

Output Fields

Table 12 on page 666 describes the output fields for the **show bgp neighbor** command. Output fields are listed in the approximate order in which they appear.

Table 12: show bgp neighbor Output Fields

Field Name	Field Description
Peer	Address of the BGP neighbor. The address is followed by the neighbor port number.
AS	AS number of the peer.
Local	Address of the local routing device. The address is followed by the peer port number.
Type	Type of peer: **Internal** or **External**.
State	Current state of the BGP session: • **Active**—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message. • **Connect**—BGP is waiting for the transport protocol connection to be completed. • **Established**—The BGP session has been established, and the peers are exchanging update messages. • **Idle**—This is the first stage of a connection. BGP is waiting for a Start event. • **OpenConfirm**—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message. • **OpenSent**—BGP has sent an open message and is waiting to receive an open message from the peer.
Flags	Internal BGP flags: • **Aggregate Label**—BGP has aggregated a set of incoming labels (labels received from the peer) into a single forwarding label. • **CleanUp**—The peer session is being shut down. • **Delete**—This peer has been deleted. • **Idled**—This peer has been permanently idled. • **ImportEval**—At the last commit operation, this peer was identified as needing to reevaluate all received routes. • **Initializing**—The peer session is initializing. • **SendRtn**—Messages are being sent to the peer. • **Sync**—This peer is synchronized with the rest of the peer group. • **TryConnect**—Another attempt is being made to connect to the peer. • **Unconfigured**—This peer is not configured. • **WriteFailed**—An attempt to write to this peer failed.

Copyright © 2013, Juniper Networks, Inc.

Table 12: show bgp neighbor Output Fields *(continued)*

Field Name	Field Description
Last state	Previous state of the BGP session: • **Active**—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message. • **Connect**—BGP is waiting for the transport protocol connection to be completed. • **Established**—The BGP session has been established, and the peers are exchanging update messages. • **Idle**—This is the first stage of a connection. BGP is waiting for a Start event. • **OpenConfirm**—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message. • **OpenSent**—BGP has sent an open message and is waiting to receive an open message from the peer.
Last event	Last activity that occurred in the BGP session: • **Closed**—The BGP session closed. • **ConnectRetry**—The transport protocol connection failed, and BGP is trying again to connect. • **HoldTime**—The session ended because the hold timer expired. • **KeepAlive**—The local routing device sent a BGP keepalive message to the peer. • **Open**—The local routing device sent a BGP open message to the peer. • **OpenFail**—The local routing device did not receive an acknowledgment of a BGP open message from the peer. • **RecvKeepAlive**—The local routing device received a BGP keepalive message from the peer. • **RecvNotify**—The local routing device received a BGP notification message from the peer. • **RecvOpen**—The local routing device received a BGP open message from the peer. • **RecvUpdate**—The local routing device received a BGP update message from the peer. • **Start**—The peering session started. • **Stop**—The peering session stopped. • **TransportError**—A TCP error occurred.
Last error	Last error that occurred in the BGP session: • **Cease**—An error occurred, such as a version mismatch, that caused the session to close. • **Finite State Machine Error**—In setting up the session, BGP received a message that it did not understand. • **Hold Time Expired**—The session's hold time expired. • **Message Header Error**—The header of a BGP message was malformed. • **Open Message Error**—A BGP open message contained an error. • **None**—No errors occurred in the BGP session. • **Update Message Error**—A BGP update message contained an error.
Export	Name of the export policy that is configured on the peer.
Import	Name of the import policy that is configured on the peer.

Copyright © 2013, Juniper Networks, Inc.

Table 12: show bgp neighbor Output Fields *(continued)*

Field Name	Field Description
Options	Configured BGP options: • **AddressFamily**—Configured address family: **inet** or **inet-vpn**. • **AutheKeyChain**—Authentication key change is enabled. • **DropPathAttributes**—Certain path attributes are configured to be dropped from neighbor updates during inbound processing. • **GracefulRestart**—Graceful restart is configured. • **HoldTime**—Hold time configured with the **hold-time** statement. The hold time is three times the interval at which keepalive messages are sent. • **IgnorePathAttributes**—Certain path attributes are configured to be ignored in neighbor updates during inbound processing. • **Local Address**—Address configured with the **local-address** statement. • **Multihop**—Allow BGP connections to external peers that are not on a directly connected network. • **NLRI**—Configured MBGP state for the BGP group: **multicast**, **unicast**, or both if you have configured **nlri any**. • **Peer AS**—Configured peer autonomous system (AS). • **Preference**—Preference value configured with the **preference** statement. • **Refresh**—Configured to refresh automatically when the policy changes. • **Rib-group**—Configured routing table group.
Path-attributes dropped	Path attribute codes that are dropped from neighbor updates.
Path-attributes ignored	Path attribute codes that are ignored during neighbor updates.
Authentication key change	(appears only if the **authentication-keychain** statement has been configured) Name of the authentication keychain enabled.
Authentication algorithm	(appears only if the **authentication-algorithm** statement has been configured) Type of authentication algorithm enabled: **hmac** or **md5**.
Address families configured	Names of configured address families for the VPN.
Local Address	Address of the local routing device.
Remove-private options	Options associated with the remove-private statement.
Holdtime	Hold time configured with the **hold-time** statement. The hold time is three times the interval at which keepalive messages are sent.
Flags for NLRI inet-label-unicast	Flags related to labeled-unicast: • **TrafficStatistics**—Collection of statistics for labeled-unicast traffic is enabled.

Copyright © 2013, Juniper Networks, Inc.

Table 12: show bgp neighbor Output Fields *(continued)*

Field Name	Field Description
Traffic statistics	Information about labeled-unicast traffic statistics: • **Options**—Options configured for collecting statistics about labeled-unicast traffic. • **File**—Name and location of statistics log files. • **size**—Size of all the log files, in bytes. • **files**—Number of log files.
Traffic Statistics Interval	Time between sample periods for labeled-unicast traffic statistics, in seconds.
Preference	Preference value configured with the **preference** statement.
Outbound Timer	Time for which the route is available in Junos OS routing table before it is exported to BGP. This field is displayed in the output only if the **out-delay** parameter is configured to a non-zero value.
Number of flaps	Number of times the BGP session has gone down and then come back up.
Peer ID	Router identifier of the peer.
Group index	Index number for the BGP peer group. The index number differentiates between groups when a single BGP group is split because of different configuration options at the group and peer levels.
Peer index	Index that is unique within the BGP group to which the peer belongs.
Local ID	Router identifier of the local routing device.
Local Interface	Name of the interface on the local routing device.
Active holdtime	Hold time that the local routing device negotiated with the peer.
Keepalive Interval	Keepalive interval, in seconds.
BFD	Status of BFD failure detection.
Local Address	Name of directly connected interface over which direct EBGP peering is established.
NLRI for restart configured on peer	Names of address families configured for restart.
NLRI advertised by peer	Address families supported by the peer: **unicast** or **multicast**.
NLRI for this session	Address families being used for this session.
Peer supports Refresh capability	Remote peer's ability to send and request full route table readvertisement (route refresh capability). For more information, see RFC 2918, *Route Refresh Capability for BGP-4*.
Restart time configured on peer	Configured time allowed for restart on the neighbor.

Copyright © 2013, Juniper Networks, Inc.

Table 12: show bgp neighbor Output Fields *(continued)*

Field Name	Field Description
Stale routes from peer are kept for	When graceful restart is negotiated, the maximum time allowed to hold routes from neighbors after the BGP session has gone down.
Peer does not support Restarter functionality	Graceful restart restarter-mode is disabled on the peer.
Peer does not support Receiver functionality	Graceful restart helper-mode is disabled on the peer.
Restart time requested by this peer	Restart time requested by this neighbor during capability negotiation.
Restart flag received from the peer	When this field appears, the BGP speaker has restarted (Restarting), and this peer should not wait for the **end-of-rib** marker from the speaker before advertising routing information to the speaker.
NLRI that peer supports restart for	Neighbor supports graceful restart for this address family.
NLRI peer can save forwarding state	Neighbor supporting this address family saves all forwarding states.
NLRI that peer saved forwarding for	Neighbor saves all forwarding states for this address family.
NLRI that restart is negotiated for	Router supports graceful restart for this address family.
NLRI of received end-of-rib markers	Address families for which end-of-routing-table markers are received from the neighbor.
NLRI of all end-of-rib markers sent	Address families for which end-of-routing-table markers are sent to the neighbor.
Peer supports 4 byte AS extension (peer-as 1)	Peer understands 4-byte AS numbers in BGP messages. The peer is running Junos OS Release 9.1 or later.
NLRIs for which peer can receive multiple paths	Appears in the command output of the local router if the downstream peer is configured to receive multiple BGP routes to a single destination, instead of only receiving the active route. Possible value is **inet-unicast**.
NLRIs for which peer can send multiple paths: inet-unicast	Appears in the command output of the local router if the upstream peer is configured to send multiple BGP routes to a single destination, instead of only sending the active route. Possible value is **inet-unicast**.

Copyright © 2013, Juniper Networks, Inc.

Table 12: show bgp neighbor Output Fields *(continued)*

Field Name	Field Description
Table inet.*number*	Information about the routing table: • **RIB State**—BGP is in the graceful restart process for this routing table: **restart is complete** or **restart in progress**. • **Bit**—Number that represents the entry in the routing table for this peer. • **Send state**—State of the BGP group: **in sync**, **not in sync**, or **not advertising**. • **Active prefixes**—Number of prefixes received from the peer that are active in the routing table. • **Received prefixes**—Total number of prefixes from the peer, both active and inactive, that are in the routing table. • **Accepted prefixes**—Total number of prefixes from the peer that have been accepted by a routing policy. • **Suppressed due to damping**—Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.
Last traffic (seconds)	Last time any traffic was received from the peer or sent to the peer, and the last time the local routing device checked.
Input messages	Messages that BGP has received from the receive socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Output messages	Messages that BGP has written to the transmit socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Input dropped path attributes	Information about dropped path attributes: • Code—Path attribute code. • Count—Path attribute count.
Input ignored path attributes	Information about ignored path attributes: • Code—Path attribute code. • Count—Path attribute count.
Output queue	Number of BGP packets that are queued to be transmitted to a particular neighbor for a particular routing table. Output queue **0** is for unicast NLRIs, and queue **1** is for multicast NLRIs.
Trace options	Configured tracing of BGP protocol packets and operations.
Trace file	Name of the file to receive the output of the tracing operation.
Filter Updates recv	(**orf** option only) Number of outbound-route filters received for each configured address family. NOTE: The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.

Copyright © 2013, Juniper Networks, Inc.

Table 12: show bgp neighbor Output Fields *(continued)*

Field Name	Field Description
Immediate	(**orf** option only) Number of route updates received with the immediate flag set. The immediate flag indicates that the BGP peer should readvertise the updated routes. NOTE: The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.
Filter	(**orf** option only) Type of prefix filter received: **prefix-based** or **extended-community**.
Received filter entries	(**orf** option only) List of received filters displayed.
seq	(**orf** option only) Numerical order assigned to this prefix entry among all the received outbound route filter prefix entries.
prefix	(**orf** option only) Address for the prefix entry that matches the filter.
minlength	(**orf** option only) Minimum prefix length, in bits, required to match this prefix.
maxlength	(**orf** option only) Maximum prefix length, in bits, required to match this prefix.
match	(**orf** option only) For this prefix match, whether to **permit** or **deny** route updates.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show bgp neighbor

```
user@host > show bgp neighbor
Peer: 10.255.7.250+179 AS 10   Local: 10.255.7.248+63740 AS 10
  Type: Internal    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ redist_static ]
  Options: <Preference LocalAddress PeerAS Refresh>
  Local Address: 10.255.7.248 Holdtime: 90 Preference: 170 Outbound Timer: 50
  Number of flaps: 0
  Peer ID: 10.255.7.250    Local ID: 10.255.7.248      Active Holdtime: 90
  Keepalive Interval: 30         Group index: 0    Peer index: 0
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300
  Peer does not support Restarter functionality
  NLRI that restart is negotiated for: inet-unicast
  NLRI of received end-of-rib markers: inet-unicast
  NLRI of all end-of-rib markers sent: inet-unicast
  Peer supports 4 byte AS extension (peer-as 10)
  Peer does not support Addpath
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              1
    Received prefixes:            1
    Accepted prefixes:            1
    Suppressed due to damping:    0
    Advertised prefixes:          1
  Last traffic (seconds): Received 9    Sent 5    Checked 5
  Input messages:  Total 36     Updates 2       Refreshes 0     Octets 718
  Output messages: Total 37     Updates 1       Refreshes 0     Octets 796
  Output Queue[0]: 0

Peer: 10.255.162.214+52193 AS 100 Local: 10.255.167.205+179 AS 100
   Type: Internal    State: Established  (route reflector client)Flags: <Sync>
   Last State: OpenConfirm   Last Event: RecvKeepAlive
   Last Error: None
   Options: <Preference LocalAddress Cluster AddressFamily Rib-group Refresh>
   Address families configured: inet-unicast inet-vpn-unicast route-target
   Local Address: 10.255.167.205 Holdtime: 90 Preference: 170
   Number of flaps: 0
   Peer ID: 10.255.162.214  Local ID: 10.255.167.205    Active Holdtime: 90
   Keepalive Interval: 30         Group index: 0    Peer index: 1
```

show bgp neighbor (CLNS)

```
user@host> show bgp neighbor
Peer: 10.245.245.1+179 AS 200  Local: 10.245.245.3+3770 AS 100
  Type: External    State: Established    Flags: <ImportEval Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Multihop Preference LocalAddress HoldTime AddressFamily PeerAS
Rib-group Refresh>
  Address families configured: iso-vpn-unicast
  Local Address: 10.245.245.3 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.245.245.1     Local ID: 10.245.245.3     Active Holdtime: 90
```

Copyright © 2013, Juniper Networks, Inc.

```
  Keepalive Interval: 30         Peer index: 0
  NLRI advertised by peer: iso-vpn-unicast
  NLRI for this session: iso-vpn-unicast
  Peer supports Refresh capability (2)
  Table bgp.isovpn.0 Bit: 10000
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: in sync
    Active prefixes:              3
    Received prefixes:            3
    Suppressed due to damping:    0
    Advertised prefixes:          3
  Table aaaa.iso.0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: not advertising
    Active prefixes:              3
    Received prefixes:            3
    Suppressed due to damping:    0
  Last traffic (seconds): Received 6    Sent 5    Checked 5
  Input messages:  Total 1736   Updates 4       Refreshes 0     Octets 33385
  Output messages: Total 1738   Updates 3       Refreshes 0     Octets 33305
  Output Queue[0]: 0
  Output Queue[1]: 0
```

show bgp neighbor (Layer 2 VPN)

```
user@host> show bgp neighbor
Peer: 10.69.103.2     AS 65100 Local: 10.69.103.1     AS 65103
  Type: External    State: Active         Flags: <ImportEval>
  Last State: Idle          Last Event: Start
  Last Error: None
  Export: [ BGP-INET-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily   PeerAS
 Refresh>
  Address families configured: inet-unicast
  Local Address: 10.69.103.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
Peer: 10.69.104.2     AS 65100 Local: 10.69.104.1     AS 65104
  Type: External    State: Active         Flags: <ImportEval>
  Last State: Idle          Last Event: Start
  Last Error: None
  Export: [ BGP-L-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily PeerAS
 Refresh>
  Address families configured: inet-labeled-unicast
  Local Address: 10.69.104.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
Peer: 10.255.14.182+179 AS 69    Local: 10.255.14.176+2131 AS 69
  Type: Internal    State: Established    Flags: <ImportEval>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
  Rib-group Refresh>
  Address families configured: inet-vpn-unicast l2vpn
  Local Address: 10.255.14.176 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.255.14.182    Local ID: 10.255.14.176    Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-vpn-unicast l2vpn
  NLRI advertised by peer: inet-vpn-unicast l2vpn
  NLRI for this session: inet-vpn-unicast l2vpn
  Peer supports Refresh capability (2)
```


Copyright © 2013, Juniper Networks, Inc.

```
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast l2vpn
NLRI peer can save forwarding state: inet-vpn-unicast l2vpn
NLRI that peer saved forwarding for: inet-vpn-unicast l2vpn
NLRI that restart is negotiated for: inet-vpn-unicast l2vpn
NLRI of received end-of-rib markers: inet-vpn-unicast l2vpn
Table bgp.l3vpn.0 Bit: 10000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            10
  Received prefixes:          10
  Suppressed due to damping:  0
Table bgp.l2vpn.0 Bit: 20000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            1
  Received prefixes:          1
  Suppressed due to damping:  0
Table BGP-INET.inet.0 Bit: 30000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            2
  Received prefixes:          2
  Suppressed due to damping:  0
Table BGP-L.inet.0 Bit: 40000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            2
  Received prefixes:          2
  Suppressed due to damping:  0
Table LDP.inet.0 Bit: 50000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            1
  Received prefixes:          1
  Suppressed due to damping:  0
Table OSPF.inet.0 Bit: 60000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            2
  Received prefixes:          2
  Suppressed due to damping:  0
Table RIP.inet.0 Bit: 70000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:            2
  Received prefixes:          2
  Suppressed due to damping:  0
Table STATIC.inet.0 Bit: 80000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
```

Copyright © 2013, Juniper Networks, Inc.

```
    Active prefixes:            1
    Received prefixes:          1
    Suppressed due to damping:  0
  Table L2VPN.l2vpn.0 Bit: 90000
    RIB State: BGP restart is complete
    RIB State: VPN restart in progress
    Send state: in sync
    Active prefixes:            1
    Received prefixes:          1
    Suppressed due to damping:  0
  Last traffic (seconds): Received 0    Sent 0    Checked 0
  Input messages:  Total 14     Updates 13      Refreshes 0     Octets 1053
  Output messages: Total 3      Updates 0       Refreshes 0     Octets 105
  Output Queue[0]: 0
  Output Queue[1]: 0
  Output Queue[2]: 0
  Output Queue[3]: 0
  Output Queue[4]: 0
  Output Queue[5]: 0
  Output Queue[6]: 0
  Output Queue[7]: 0
  Output Queue[8]: 0
```

show bgp neighbor (Layer 3 VPN)

```
user@host> show bgp neighbor
Peer: 4.4.4.4+179     AS 10045 Local: 5.5.5.5+1214    AS 10045
  Type: Internal    State: Established    Flags: <ImportEval>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Export: [ match-all ] Import: [ match-all ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
   Rib-group Refresh>
  Address families configured: inet-vpn-unicast
  Local Address: 5.5.5.5 Holdtime: 90 Preference: 170
  Flags for NLRI inet-labeled-unicast: TrafficStatistics
  Traffic Statistics: Options: all File: /var/log/bstat.log
                                         size 131072 files 10
  Traffic Statistics Interval: 60
  Number of flaps: 0
  Peer ID: 192.168.1.110    Local ID: 192.168.1.111    Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-vpn-unicast
  NLRI advertised by peer: inet-vpn-unicast
  NLRI for this session: inet-vpn-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-vpn-unicast
  NLRI peer can save forwarding state: inet-vpn-unicast
  NLRI that peer saved forwarding for: inet-vpn-unicast
  NLRI that restart is negotiated for: inet-vpn-unicast
  NLRI of received end-of-rib markers: inet-vpn-unicast
  NLRI of all end-of-rib markers sent: inet-vpn-unicast
  Table bgp.l3vpn.0 Bit: 10000
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: in sync
    Active prefixes:            2
    Received prefixes:          2
    Suppressed due to damping:  0
  Table vpn-green.inet.0 Bit: 20001
```


Copyright © 2013, Juniper Networks, Inc.

```
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: in sync
    Active prefixes:              2
    Received prefixes:            2
    Suppressed due to damping:  0
  Last traffic (seconds): Received 15   Sent 20   Checked 20
  Input messages:  Total 40     Updates 2       Refreshes 0     Octets 856
  Output messages: Total 44     Updates 2       Refreshes 0     Octets 1066
  Output Queue[0]: 0
  Output Queue[1]: 0
  Trace options: detail packets
  Trace file: /var/log/bgpgr.log size 131072 files 10
```

show bgp neighbor neighbor-address

```
user@host> show bgp neighbor 192.168.1.111
Peer: 10.255.245.12+179 AS 35  Local: 10.255.245.13+2884 AS 35
  Type: Internal    State: Established  (route reflector client)Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress HoldTime Cluster AddressFamily Rib-group
  Refresh>
  Address families configured: inet-vpn-unicast inet-labeled-unicast
  Local Address: 10.255.245.13 Holdtime: 90 Preference: 170
  Flags for NLRI inet-vpn-unicast: AggregateLabel
  Flags for NLRI inet-labeled-unicast: AggregateLabel
  Number of flaps: 0
  Peer ID: 10.255.245.12    Local ID: 10.255.245.13    Active Holdtime: 90
  Keepalive Interval: 30
BFD: disabled
  NLRI advertised by peer: inet-vpn-unicast inet-labeled-unicast
  NLRI for this session: inet-vpn-unicast inet-labeled-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 300
  Stale routes from peer are kept for: 60
  Restart time requested by this peer: 300
  NLRI that peer supports restart for: inet-unicast inet6-unicast
  NLRI that restart is negotiated for: inet-unicast inet6-unicast
  NLRI of received end-of-rib markers: inet-unicast inet6-unicast
  NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
  Table inet.0 Bit: 10000
    RIB State: restart is complete
    Send state: in sync
    Active prefixes: 4
    Received prefixes: 6
    Suppressed due to damping: 0
  Table inet6.0 Bit: 20000
    RIB State: restart is complete
    Send state: in sync
    Active prefixes: 0
    Received prefixes: 2
    Suppressed due to damping: 0
  Last traffic (seconds): Received 3    Sent 3    Checked 3
  Input messages:  Total 9      Updates 6       Refreshes 0     Octets 403
  Output messages: Total 7      Updates 3       Refreshes 0     Octets 365
  Output Queue[0]: 0
  Output Queue[1]: 0
  Trace options: detail packets
  Trace file: /var/log/bgpgr size 131072 files 10

user@host> show bgp neighbor 192.168.4.222
```

show bgp neighbor neighbor-address

```
Peer: 192.168.4.222+4902 AS 65501 Local: 192.168.4.221+179 AS 65500
  Type: External    State: Established    Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: Cease
  Export: [ export-policy ] Import: [ import-policy ]
  Options: <Preference HoldTime AddressFamily PeerAS PrefixLimit Refresh>
  Address families configured: inet-unicast inet-multicast
  Holdtime: 60000 Preference: 170
  Number of flaps: 4
  Last flap event: RecvUpdate
  Error: 'Cease' Sent: 5 Recv: 0
  Peer ID: 10.255.245.6     Local ID: 10.255.245.5     Active Holdtime: 60000
  Keepalive Interval: 20000      Peer index: 0
  BFD: disabled, down
  Local Interface: fxp0.0
  NLRI advertised by peer: inet-unicast inet-multicast
  NLRI for this session: inet-unicast inet-multicast
  Peer supports Refresh capability (2)
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              8
    Received prefixes:            10
    Accepted prefixes:            10
    Suppressed due to damping:    0
    Advertised prefixes:          3
  Table inet.2 Bit: 20000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:              0
    Received prefixes:            0
    Accepted prefixes:            0
    Suppressed due to damping:    0
    Advertised prefixes:          0
  Last traffic (seconds): Received 357  Sent 357  Checked 357
  Input messages:  Total 4 Updates 2  Refreshes 0  Octets 211
  Output messages: Total 4 Updates 1  Refreshes 0  Octets 147
  Output Queue[0]: 0
  Output Queue[1]: 0
  Trace options:  all
  Trace file: /var/log/bgp size 10485760 files 10
```

show bgp neighbor orf neighbor-address detail

```
user@host > show bgp neighbor orf 192.168.165.56 detail
Peer: 192.168.165.56+179 Type: External
  Group: ext1

  inet-unicast
    Filter updates recv:          1 Immediate:          1
    Filter: prefix-based  receive
      Received filter entries:
        seq 1: prefix 2.2.2.2/32: minlen 32: maxlen 32: match deny:

  inet6-unicast
    Filter updates recv:          0 Immediate:          1
    Filter: prefix-based  receive
      Received filter entries:
        *:*
```


Copyright © 2013, Juniper Networks, Inc.

show bgp replication

Syntax **show bgp replication**

Release Information Command introduced in JUNOS Release 8.5.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description Displays the status of BGP state replication between the master and backup Routing Engines on devices that have nonstop active routing configured on them.

Options This command has no options.

Required Privilege Level view

List of Sample Output show bgp replication (for Master) on page 680
show bgp replication (for Backup) on page 680

Output Fields Table 13 on page 679 lists the output fields for the **show bgp replication** command. Output fields are listed in the approximate order in which they appear.

Table 13: show bgp replication Output Fields

Field Name	Field Description
session state	State of the current internal BGP state replication session, Up or Down, and the duration for which the session has been in the indicated state.
flaps	Total number of flaps that occurred.
protocol state	Current state of the protocol operation, Active, Connect, Idle, and the duration for which the protocol has been in the indicated state.
synchronization state	Synchronization state at the time of executing the command. The states can be: • **Idle** • **Neighbor**—Indicates that the neighbor state synchronization is in progress. • **AckWait**—Indicates that the request processing is over. • **ORF**—Indicates that the outbound routing filter synchronization is in progress. • **RIB**—Indicates that the routing table synchronization is in progress. • **Complete**
number of peers waiting	Total number of peers waiting for various messages: • **AckWait**—Number of peers waiting for a connection establishment or completed acknowledgment messages. • **SoWait**—Number of peers waiting for TCP socket-related operations. • **Scheduled**—Number of peers being synchronized.

Copyright © 2013, Juniper Networks, Inc.

Table 13: show bgp replication Output Fields *(continued)*

Field Name	Field Description
messages sent	Number of various types of messages that have been sent since internal replication session became active: • **Open**—Number of Open messages sent. • **Establish**—Number of connection establishment acknowledgment messages sent. • **Update**—Number of update messages sent. • **Error**—Number of error messages sent. • **Complete**—Number of connection complete acknowledgment messages sent.

messages received	Total number of messages received:
	• **Open**—Number of Open messages received.
	• **Request**—Number of request messages received:
	  ◦ **Wildcard**—Number of requests received that used wildcards in the target address.
	  ◦ **Targeted**—Number of requests received that used a specific address.
	• **EstablishAck**—Number of connection establishment acknowledgement messages received.
	• **CompleteAck**—Number of connection completed acknowledgement messages received.

Sample Output

show bgp replication (for Master)

```
user@host> show bgp replication
Synchronization master:
  Session state: Up, Since: 44:07
  Flaps: 0
  Protocol state: Idle, Since: 14
  Synchronization state: Complete
  Number of peers waiting: AckWait: 0, SoWait: 0, Scheduled: 0
  Messages sent: Open 1, Establish 924, Update 381, Error 60, Complete 114
  Messages received: Open 1, Request 1 wildcard 113 targeted, EstablishAck 924,
CompleteAck 114
```

show bgp replication (for Backup)

```
user@host> show bgp replication
Synchronization backup:
  State: Established 13 ago
  , Unsync timer: 2

    Unsync entry queue:
        Instance: 0 Neighbor: 30.30.30.1 elapsed: 7
        Instance: 0 Neighbor: 40.40.40.3 elapsed: 7
        Instance: 0 Neighbor: 40.40.40.4 elapsed: 7
        Instance: 0 Neighbor: 40.40.40.5 elapsed: 7
        Instance: 0 Neighbor: 40.40.40.6 elapsed: 7
        Instance: 0 Neighbor: 40.40.40.1 elapsed: 7
        Instance: 0 Neighbor: 40.40.40.2 elapsed: 7
```


Copyright © 2013, Juniper Networks, Inc.

show bgp summary

Syntax
show bgp summary
<exact-instance *instance-name*>
<instance *instance-name*>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switch and QFX Series)
show bgp summary
<exact-instance *instance-name*>
<instance *instance-name*>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.
exact-instance option introduced in Junos OS Release 11.4.

Description
Display BGP summary information.

Options
none—Display BGP summary information for all routing instances.

exact-instance *instance-name*—(Optional) Display information for the specified instance only.

instance *instance-name*—(Optional) Display information for all routing instances whose name begins with this string (for example, **cust1**, **cust11**, and **cust111** are all displayed when you run the **show bgp summary instance cust1** command). The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show bgp summary (When a Peer Is Not Established) on page 684
show bgp summary (When a Peer Is Established) on page 684
show bgp summary (CLNS) on page 684
show bgp summary (Layer 2 VPN) on page 684
show bgp summary (Layer 3 VPN) on page 685

Output Fields
Table 14 on page 681 describes the output fields for the **show bgp summary** command. Output fields are listed in the approximate order in which they appear.

Table 14: show bgp summary Output Fields

Field Name	Field Description
Groups	Number of BGP groups.
Peers	Number of BGP peers.

Copyright © 2013, Juniper Networks, Inc.

Table 14: show bgp summary Output Fields *(continued)*

Field Name	Field Description
Down peers	Number of down BGP peers.
Table	Name of routing table.
Tot Paths	Total number of paths.
Act Paths	Number of active routes.
Suppressed	Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.
History	Number of withdrawn routes stored locally to keep track of damping history.
Damp State	Number of routes with a figure of merit greater than zero, but still active because the value has not reached the threshold at which suppression occurs.
Pending	Routes in process by BGP import policy.
Peer	Address of each BGP peer. Each peer has one line of output.
AS	Peer's AS number.
InPkt	Number of packets received from the peer.
OutPkt	Number of packets sent to the peer.
OutQ	Number of BGP packets that are queued to be transmitted to a particular neighbor. It normally is **0** because the queue usually is emptied quickly.
Flaps	Number of times the BGP session has gone down and then come back up.
Last Up/Down	Last time since the neighbor transitioned to or from the established state.

Copyright © 2013, Juniper Networks, Inc.

Table 14: show bgp summary Output Fields *(continued)*

Field Name	Field Description
State|#Active /Received/Accepted /Damped	Multipurpose field that displays information about BGP peer sessions. The field's contents depend upon whether a session is established and whether it was established on the main routing device or in a routing instance. • If a peer is not established, the field shows the state of the peer session: **Active**, **Connect**, or **Idle**. In general, the Idle state is the first stage of a connection. BGP is waiting for a Start event. A session can be idle for other reasons as well. The reason that a session is idle is sometimes displayed. For example: **Idle (Removal in progress)** or **Idle (LicenseFailure)**. • If a BGP session is established on the main routing device, the field shows the number of active, received, accepted, and damped routes that are received from a neighbor and appear in the **inet.0** (main) and **inet.2** (multicast) routing tables. For example, **8/10/10/2 and 2/4/4/0** indicate the following: ◦ 8 active routes, 10 received routes, 10 accepted routes, and 2 damped routes from a BGP peer appear in the **inet.0** routing table. ◦ 2 active routes, 4 received routes, 4 accepted routes, and no damped routes from a BGP peer appear in the **inet.2** routing table. • If a BGP session is established in a routing instance, the field indicates the established **(Establ)** state, identifies the specific routing table that receives BGP updates, and shows the number of active, received, and damped routes that are received from a neighbor. For example, **Establ VPN-AB.inet.0: 2/4/0** indicates the following: ◦ The BGP session is established. ◦ Routes are received in the **VPN-AB.inet.0** routing table. ◦ The local routing device has two active routes, four received routes, and no damped routes from a BGP peer. When a BGP session is established, the peers are exchanging update messages.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show bgp summary (When a Peer Is Not Established)

```
user@host> show bgp summary
Groups: 2 Peers: 4 Down peers: 1
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 6          4          0          0          0          0
Peer               AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.3        65002         86         90       0       2       42:54 0/0/0

0/0/0
10.0.0.4        65002         90         91       0       1       42:54 0/2/0

0/0/0
10.0.0.6        65002         87         90       0       3           3 Active
10.1.12.1       65001         89         89       0       1       42:54 4/4/0

0/0/0
```

show bgp summary (When a Peer Is Established)

```
user@host> show bgp summary
Groups: 1 Peers: 3 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 6          4          0          0          0          0
Peer               AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65002      88675      88652       0       2       42:38 2/4/0

0/0/0
10.0.0.3        65002      54528      54532       0       1     2w4d22h 0/0/0

 0/0/0
10.0.0.4        65002      51597      51584       0       0     2w3d22h 2/2/0

0/0/0
```

show bgp summary (CLNS)

```
user@host> show bgp summary
Groups: 1 Peers: 1 Down peers: 0
Peer               AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.245.245.1      200       1735       1737       0       0    14:26:12 Establ
  bgp.isovpn.0: 3/3/0
  aaaa.iso.0: 3/3/0
```

show bgp summary (Layer 2 VPN)

```
user@host> show bgp summary
Groups: 1 Peers: 5 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
bgp.l2vpn.0            1          1          0          0          0          0
inet.0                 0          0          0          0          0          0
Peer               AS      InPkt     OutPkt    OutQ   Flaps Last
Up/Dwn State|#Active/Received/Damped...
10.255.245.35   65299         72         74       0       1       19:00 Establ
  bgp.l2vpn.0: 1/1/0
  frame-vpn.l2vpn.0: 1/1/0
10.255.245.36   65299       2164       2423       0       4       19:50 Establ
  bgp.l2vpn.0: 0/0/0
  frame-vpn.l2vpn.0: 0/0/0
10.255.245.37   65299         36         37       0       4       17:07 Establ
```


Copyright © 2013, Juniper Networks, Inc.

```
  inet.0: 0/0/0
10.255.245.39   65299        138        168       0       6       53:48 Establ
  bgp.l2vpn.0: 0/0/0
  frame-vpn.l2vpn.0: 0/0/0
10.255.245.69   65299        134        140       0       6       53:42 Establ
  inet.0: 0/0/0
```

show bgp summary (Layer 3 VPN)

```
user@host> show bgp summary
Groups: 2 Peers: 2 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State Pending
bgp.l3vpn.0            2          2          0          0          0       0
Peer               AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.39.1.5           2         21         22       0       0        6:26 Establ
  VPN-AB.inet.0: 1/1/0
10.255.71.15        1         19         21       0       0        6:17 Establ
  bgp.l3vpn.0: 2/2/0
  VPN-A.inet.0: 1/1/0
  VPN-AB.inet.0: 2/2/0
  VPN-B.inet.0: 1/1/0
```

Copyright © 2013, Juniper Networks, Inc.

show policy damping

Syntax
show policy damping
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switch and QFX Series)
show policy damping

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description
Display information about BGP route flap damping parameters.

Options
none—Display information about BGP route flap damping parameters.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Additional Information
In the output from this command, figure-of-merit values correlate with the probability of future instability of a routing device. Routes with higher figure-of-merit values are suppressed for longer periods of time. The figure-of-merit value decays exponentially over time. A figure-of-merit value of zero is assigned to each new route. The value is increased each time the route is withdrawn or readvertised, or when one of its path attributes changes.

Required Privilege Level
view

Related Documentation
- "Configuring BGP Flap Damping Parameters" in the Routing Policy Configuration Guide
- clear bgp damping on page 636
- show route damping on page 723

List of Sample Output
show policy damping on page 687

Output Fields
Table 15 on page 686 describes the output fields for the **show policy damping** command. Output fields are listed in the approximate order in which they appear.

Table 15: show policy damping Output Fields

Field Name	Field Description
Halflife	Decay half-life, in minutes. The value represents the period during which the accumulated figure-of-merit value is reduced by half if the route remains stable. If a route has flapped, but then becomes stable, the figure-of-merit value for the route decays exponentially. For example, for a route with a figure-of-merit value of 1500, if no incidents occur, its figure-of-merit value is reduced to 750 after 15 minutes and to 375 after another 15 minutes.

Copyright © 2013, Juniper Networks, Inc.

Table 15: show policy damping Output Fields *(continued)*

Field Name	Field Description
Reuse merit	Figure-of-merit value below which a suppressed route can be used again. A suppressed route becomes reusable when its figure-of-merit value decays to a value below a reuse threshold, and the route once again is considered usable and can be installed in the forwarding table and exported from the routing table.
Suppress/cutoff merit	Figure-of-merit value above which a route is suppressed for use or inclusion in advertisements. When a route's figure-of-merit value reaches a particular level, called the cutoff or suppression threshold, the route is suppressed. When a route is suppressed, the routing table no longer installs the route into the forwarding table and no longer exports this route to any of the routing protocols.
Maximum suppress time	Maximum hold-down time, in minutes. The value represents the maximum time that a route can be suppressed no matter how unstable it has been before this period of stability.
Computed values	• **Merit ceiling**—Maximum merit that a flapping route can collect. • **Maximum decay**—Maximum decay half-life, in minutes.

Sample Output

show policy damping

```
user@host> show policy damping
Default damping information:
  Halflife: 15 minutes
  Reuse merit: 750 Suppress/cutoff merit: 3000
  Maximum suppress time: 60 minutes
  Computed values:
    Merit ceiling: 12110
    Maximum decay: 6193
Damping information for "standard-damping":
  Halflife: 10 minutes
  Reuse merit: 4000 Suppress/cutoff merit: 8000
  Maximum suppress time: 30 minutes
  Computed values:
    Merit ceiling: 32120
    Maximum decay: 12453
```

Copyright © 2013, Juniper Networks, Inc.

show policy

Syntax

show policy
<logical-system (all | *logical-system-name*)>
<*policy-name*>

Syntax (EX Series Switches)

show policy
<*policy-name*>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display information about configured routing policies.

Options

none—List the names of all configured routing policies.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

policy-name—(Optional) Show the contents of the specified policy.

Required Privilege Level

view

Related Documentation

- show policy damping on page 686

List of Sample Output

show policy on page 689
show policy policy-name on page 689
show policy (Multicast Scoping) on page 689

Output Fields

Table 16 on page 688 lists the output fields for the **show policy** command. Output fields are listed in the approximate order in which they appear.

Table 16: show policy Output Fields

Field Name	Field Description
policy-name	Name of the policy listed.
term	Policy term listed.
from	Match condition for the policy.
then	Action for the policy.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show policy

```
user@host> show policy
Configured policies:
__vrf-export-red-internal__
__vrf-import-red-internal__
red-export
all_routes
```

show policy policy-name

```
user@host> show policy test-statics
Policy test-statics:
    from
         3.0.0.0/8  accept
         3.1.0.0/16  accept
    then reject
```

show policy (Multicast Scoping)

```
user@host> show policy test-statics
Policy test-statics:
    from
         multicast-scoping == 8
```

Copyright © 2013, Juniper Networks, Inc.

show policy conditions

Syntax

show policy conditions
<*condition-name*>
<detail>
<dynamic>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show policy conditions
<*condition-name*>
<detail>
<dynamic>

Release Information

Command introduced in Junos OS Release 9.0.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display all the configured conditions as well as the routing tables with which the configuration manager is interacting. If the **detail** keyword is included, the output also displays dependent routes for each condition.

Options

none—Display all configured conditions and associated routing tables.

condition-name—(Optional) Display information about the specified condition only.

detail—(Optional) Display the specified level of output.

dynamic—(Optional) Display information about the conditions in the dynamic database.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level

view

List of Sample Output

show policy conditions detail on page 691

Output Fields

Table 17 on page 690 lists the output fields for the **show policy conditions** command. Output fields are listed in the approximate order in which they appear.

Table 17: show policy conditions Output Fields

Field Name	Field Description	Level of Output
Condition	Name of configured condition.	All levels
event	Condition type. If the **if-route-exists** option is configured, the event type is: **Existence of a route in a specific routing table**.	All levels
Dependent routes	List of routes dependent on the condition, along with the latest generation number.	**detail**
Condition tables	List of routing tables associated with the condition, along with the latest generation number and number of dependencies.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 17: show policy conditions Output Fields *(continued)*

Field Name	Field Description	Level of Output
If-route-exists conditions	List of conditions configured to look for a route in the specified table.	All levels

Sample Output

show policy conditions detail

```
user@host> show policy conditions detail
Configured conditions:
Condition cond1, event: Existence of a route in a specific routing table
Dependent routes:
 4.4.4.4/32, generation 3
 6.6.6.6/32, generation 3
 10.10.10.10/32, generation 3

Condition cond2, event: Existence of a route in a specific routing table
Dependent routes:
None

Condition tables:
Table inet.0, generation 4, dependencies 3, If-route-exists conditions: cond1
(static) cond2 (static)
```

Copyright © 2013, Juniper Networks, Inc.

show policy damping

Syntax
show policy damping
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switch and QFX Series)
show policy damping

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description
Display information about BGP route flap damping parameters.

Options
none—Display information about BGP route flap damping parameters.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Additional Information
In the output from this command, figure-of-merit values correlate with the probability of future instability of a routing device. Routes with higher figure-of-merit values are suppressed for longer periods of time. The figure-of-merit value decays exponentially over time. A figure-of-merit value of zero is assigned to each new route. The value is increased each time the route is withdrawn or readvertised, or when one of its path attributes changes.

Required Privilege Level
view

Related Documentation
- "Configuring BGP Flap Damping Parameters" in the Routing Policy Configuration Guide
- clear bgp damping on page 636
- show route damping on page 723

List of Sample Output
show policy damping on page 693

Output Fields
Table 15 on page 686 describes the output fields for the **show policy damping** command. Output fields are listed in the approximate order in which they appear.

Table 18: show policy damping Output Fields

Field Name	Field Description
Halflife	Decay half-life, in minutes. The value represents the period during which the accumulated figure-of-merit value is reduced by half if the route remains stable. If a route has flapped, but then becomes stable, the figure-of-merit value for the route decays exponentially. For example, for a route with a figure-of-merit value of 1500, if no incidents occur, its figure-of-merit value is reduced to 750 after 15 minutes and to 375 after another 15 minutes.

Copyright © 2013, Juniper Networks, Inc.

Table 18: show policy damping Output Fields *(continued)*

Field Name	Field Description
Reuse merit	Figure-of-merit value below which a suppressed route can be used again. A suppressed route becomes reusable when its figure-of-merit value decays to a value below a reuse threshold, and the route once again is considered usable and can be installed in the forwarding table and exported from the routing table.
Suppress/cutoff merit	Figure-of-merit value above which a route is suppressed for use or inclusion in advertisements. When a route's figure-of-merit value reaches a particular level, called the cutoff or suppression threshold, the route is suppressed. When a route is suppressed, the routing table no longer installs the route into the forwarding table and no longer exports this route to any of the routing protocols.
Maximum suppress time	Maximum hold-down time, in minutes. The value represents the maximum time that a route can be suppressed no matter how unstable it has been before this period of stability.
Computed values	• **Merit ceiling**—Maximum merit that a flapping route can collect. • **Maximum decay**—Maximum decay half-life, in minutes.

Sample Output

show policy damping

```
user@host> show policy damping
Default damping information:
  Halflife: 15 minutes
  Reuse merit: 750 Suppress/cutoff merit: 3000
  Maximum suppress time: 60 minutes
  Computed values:
    Merit ceiling: 12110
    Maximum decay: 6193
Damping information for "standard-damping":
  Halflife: 10 minutes
  Reuse merit: 4000 Suppress/cutoff merit: 8000
  Maximum suppress time: 30 minutes
  Computed values:
    Merit ceiling: 32120
    Maximum decay: 12453
```

Copyright © 2013, Juniper Networks, Inc.

show route

Syntax

show route
<all>
<*destination-prefix*>
<logical-system (all | *logical-system-name*)>
<private>

Syntax (EX Series Switches)

show route
<all>
<*destination-prefix*>
<private>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Option **private** introduced in Junos OS Release 9.5.
Option **private** introduced in Junos OS Release 9.5 for EX Series switches.

Description

Display the active entries in the routing tables.

Options

none—Display brief information about all active entries in the routing tables.

all—(Optional) Display information about all routing tables, including private, or internal, routing tables.

destination-prefix—(Optional) Display active entries for the specified address or range of addresses.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

private—(Optional) Display information only about all private, or internal, routing tables.

Required Privilege Level

view

Related Documentation

- Example: Configuring RIP
- Example: Configuring RIPng
- Example: Configuring IS-IS
- Examples: Configuring Internal BGP Peering on page 42
- Examples: Configuring External BGP Peering on page 19
- Examples: Configuring OSPF Routing Policy

List of Sample Output

show route on page 698
show route destination-prefix on page 698
show route extensive on page 698

Copyright © 2013, Juniper Networks, Inc.

Output Fields Table 19 on page 695 describes the output fields for the **show route** command. Output fields are listed in the approximate order in which they appear.

Table 19: show route Output Fields

Field Name	Field Description
routing-table-name	Name of the routing table (for example, inet.0).
number **destinations**	Number of destinations for which there are routes in the routing table.
number **routes**	Number of routes in the routing table and total number of routes in the following states: • **active** (routes that are active). • **holddown** (routes that are in the pending state before being declared inactive). A holddown route was once the active route and is no longer the active route. The route is in the holddown state because a protocol still has interest in the route, meaning that the interest bit is set. A protocol might have its interest bit set on the previously active route because the protocol is still advertising the route. The route will be deleted after all protocols withdraw their advertisement of the route and remove their interest bit. A persistent holddown state often means that the interested protocol is not releasing its interest bit properly. However, if you have configured advertisement of multiple routes (with the add-path or advertise-inactive statement), the holddown bit is most likely set because BGP is advertising the route as an active route. In this case, you can ignore the holddown state because nothing is wrong. • **hidden** (routes that are not used because of a routing policy).
destination-prefix	Route destination (for example:10.0.0.1/24). Sometimes the route information is presented in another format, such as: • *MPLS-label* (for example, 80001). • *interface-name* (for example, ge-1/0/2). • *neighbor-address*:*control-word-status*:*encapsulation type*:*vc-id*:*source* (Layer 2 circuit only. For example, 10.1.1.195:NoCtrlWord:1:1:Local/96): ◦ *neighbor-address*—Address of the neighbor. ◦ *control-word-status*—Whether the use of the control word has been negotiated for this virtual circuit: **NoCtrlWord** or **CtrlWord**. ◦ *encapsulation type*—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport. ◦ *vc-id*—Virtual circuit identifier. ◦ *source*—Source of the advertisement: **Local** or **Remote**.
[*protocol*, *preference* **]**	Protocol from which the route was learned and the preference value for the route. • **+**—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • **-** —A hyphen indicates the last active route. • *****—An asterisk indicates that the route is both the active and the last active route. An asterisk before a **to** line indicates the best subpath to the route. In every routing metric except for the BGP **LocalPref** attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the **LocalPref** value in the **Preference2** field. For example, if the **LocalPref** value for Route 1 is 100, the **Preference2** value is -101. If the **LocalPref** value for Route 2 is 155, the **Preference2** value is -156. Route 2 is preferred because it has a higher **LocalPref** value and a lower **Preference2** value.

Copyright © 2013, Juniper Networks, Inc.

Table 19: show route Output Fields *(continued)*

Field Name	Field Description
weeks:days hours:minutes:seconds	How long the route been known (for example, **2w4d 13:11:14**, or 2 weeks, 4 days, 13 hours, 11 minutes, and 14 seconds).
metric	Cost value of the indicated route. For routes within an AS, the cost is determined by the IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
localpref	Local preference value included in the route.
from	Interface from which the route was received.
AS path	AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **?**—Incomplete; typically, the AS path was aggregated. When AS path numbers are included in the route, the format is as follows: • **[ ]**—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured. • **{ }**—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • **( )**—Parentheses enclose a confederation. • **([ ])**—Parentheses and brackets enclose a confederation set. NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.
validation-state	(BGP-learned routes) Validation status of the route: • **Invalid**—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • **Unknown**—Indicates that the prefix is not among the prefixes or prefix ranges in the database. • **Valid**—Indicates that the prefix and autonomous system pair are found in the database.
to	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route. If the destination is **Discard**, traffic is dropped.

Copyright © 2013, Juniper Networks, Inc.

Table 19: show route Output Fields *(continued)*

Field Name	Field Description
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word **Selected**. This field can also contain the following information: • **Weight**—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • **Balance**—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing. • ***lsp-path-name***—Name of the LSP used to reach the next hop. • ***label-action***—MPLS label and operation occurring at the next hop. The operation can be **pop** (where a label is removed from the top of the stack), **push** (where another label is added to the label stack), or **swap** (where a label is replaced by another label).

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route

```
user@host> show route
inet.0: 11 destinations, 12 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:65500:1:10.0.0.20/240
                   *[MVPN/70] 19:53:41, metric2 1
                      Indirect
1:65500:1:10.0.0.40/240
                   *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
                      AS path: I
                    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
                    [BGP/170] 19:53:26, localpref 100, from 10.0.0.33
                      AS path: I
                    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
1:65500:1:10.0.0.60/240
                   *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
                      AS path: I
                    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
                    [BGP/170] 19:53:25, localpref 100, from 10.0.0.33
                      AS path: I
                    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
```

show route destination-prefix

```
user@host> show route 172.16.0.0/12

inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.0.0/12      *[Static/5] 2w4d 12:54:27
                    > to 192.168.167.254 via fxp0.0
```

show route extensive

```
user@host> show route extensive
v1.mvpn.0: 5 destinations, 8 routes (5 active, 1 holddown, 0 hidden)
1:65500:1:10.0.0.40/240 (1 entry, 1 announced)
    *BGP   Preference: 170/-101
          PMSI: Flags 0x0: Label[0:0:0]: PIM-SM: Sender 10.0.0.40 Group 225.1.1.1

           Next hop type: Indirect
           Address: 0x92455b8
           Next-hop reference count: 2
           Source: 10.0.0.30
           Protocol next hop: 10.0.0.40
           Indirect next hop: 2 no-forward
           State: <Active Int Ext>
                    Local AS: 65500 Peer AS: 65500
           Age: 3  Metric2: 1
           Task: BGP_65500.10.0.0.30+179
           Announcement bits (2): 0-PIM.v1 1-mvpn global task
           AS path: I (Originator) Cluster list:  10.0.0.30
           AS path:  Originator ID: 10.0.0.40
           Communities: target:65520:100
           Import Accepted
           Localpref: 100
           Router ID: 10.0.0.30
           Primary Routing Table bgp.mvpn.0
           Indirect next hops: 1
                Protocol next hop: 10.0.0.40 Metric: 1
```


Copyright © 2013, Juniper Networks, Inc.

```
Indirect next hop: 2 no-forward
Indirect path forwarding next hops: 1
      Next hop type: Router
      Next hop: 10.0.24.4 via lt-0/3/0.24 weight 0x1
10.0.0.40/32 Originating RIB: inet.3
      Metric: 1                        Node path count: 1
      Forwarding nexthops: 1
         Nexthop: 10.0.24.4 via lt-0/3/0.24
```

Copyright © 2013, Juniper Networks, Inc.

show route active-path

Syntax

show route active-path
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show route active-path
<brief | detail | extensive | terse>

Release Information

Command introduced in Junos OS Release 8.0.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display all active routes for destinations. An active route is a route that is selected as the best path. Inactive routes are not displayed.

Options

none—Display all active routes.

brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level

view

List of Sample Output

show route active-path on page 701
show route active-path brief on page 701
show route active-path detail on page 701
show route active-path extensive on page 702
show route active-path terse on page 704

Output Fields

For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route active-path

```
user@host> show route active-path

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.70.19/32    *[Direct/0] 21:33:52
                    > via lo0.0
10.255.71.50/32    *[IS-IS/15] 00:18:13, metric 10
                    > to 100.1.2.1 via so-2/1/3.0
100.1.2.0/24       *[Direct/0] 00:18:36
                    > via so-2/1/3.0
100.1.2.2/32       *[Local/0] 00:18:41
                       Local via so-2/1/3.0
192.168.64.0/21    *[Direct/0] 21:33:52
                    > via fxp0.0
192.168.70.19/32   *[Local/0] 21:33:52
                       Local via fxp0.0
```

show route active-path brief

The output for the **show route active-path brief** command is identical to that for the **show route active-path** command. For sample output, see show route active-path on page 701.

show route active-path detail

```
user@host> show route active-path detail

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)

10.255.70.19/32 (1 entry, 1 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 3
                Next hop: via lo0.0, selected
                State: ‹Active Int›
                Local AS:   200
                Age: 21:37:10
                Task: IF
                Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

                AS path: I

10.255.71.50/32 (1 entry, 1 announced)
        *IS-IS  Preference: 15
                Level: 1
                Next hop type: Router, Next hop index: 397
                Next-hop reference count: 4
                Next hop: 100.1.2.1 via so-2/1/3.0, selected
                State: ‹Active Int›
                Local AS:   200
                Age: 21:31      Metric: 10
                Task: IS-IS
                Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
                AS path: I

100.1.2.0/24 (1 entry, 1 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 3
```

Copyright © 2013, Juniper Networks, Inc.

```
                    Next hop: via so-2/1/3.0, selected
                    State: ‹Active Int›
                    Local AS:   200
                    Age: 21:54
                    Task: IF
                    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

                    AS path: I

100.1.2.2/32 (1 entry, 1 announced)
        *Local  Preference: 0
                    Next hop type: Local
                    Next-hop reference count: 11
                    Interface: so-2/1/3.0
                    State: ‹Active NoReadvrt Int›
                    Local AS:   200
                    Age: 21:59
                    Task: IF
                    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
                    AS path: I

192.168.64.0/21 (1 entry, 1 announced)
        *Direct Preference: 0
                    Next hop type: Interface
                    Next-hop reference count: 3
                    Next hop: via fxp0.0, selected
                    State: ‹Active Int›
                    Local AS:   200
                    Age: 21:37:10
                    Task: IF
                    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
                    AS path: I

192.168.70.19/32 (1 entry, 1 announced)
        *Local  Preference: 0
                    Next hop type: Local
                    Next-hop reference count: 11
                    Interface: fxp0.0
                    State: ‹Active NoReadvrt Int›
                    Local AS:   200
                    Age: 21:37:10
                    Task: IF
                    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
                    AS path: I
```

show route active-path extensive

```
user@host> show route active-path extensive

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
10.255.70.19/32 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
        *Direct Preference: 0
                    Next hop type: Interface
                    Next-hop reference count: 3
                    Next hop: via lo0.0, selected
                    State: ‹Active Int›
                    Local AS:   200
                    Age: 21:39:47
                    Task: IF
                    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
```


Copyright © 2013, Juniper Networks, Inc.

```
                AS path: I

10.255.71.50/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.255.71.50/32 -> {100.1.2.1}
IS-IS level 2, LSP fragment 0
        *IS-IS  Preference: 15
                Level: 1
                Next hop type: Router, Next hop index: 397
                Next-hop reference count: 4
                Next hop: 100.1.2.1 via so-2/1/3.0, selected
                State: ‹Active Int›
                Local AS:   200
                Age: 24:08      Metric: 10
                Task: IS-IS
                Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
                AS path: I

100.1.2.0/24 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 3
                Next hop: via so-2/1/3.0, selected
                State: ‹Active Int›
                Local AS:   200
                Age: 24:31
                Task: IF
                Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

                AS path: I

100.1.2.2/32 (1 entry, 1 announced)
        *Local  Preference: 0
                Next hop type: Local
                Next-hop reference count: 11
                Interface: so-2/1/3.0
                State: ‹Active NoReadvrt Int›
                Local AS:   200
                Age: 24:36
                Task: IF
                Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
                AS path: I

192.168.64.0/21 (1 entry, 1 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 3
                Next hop: via fxp0.0, selected
                State: ‹Active Int›
                Local AS:   200
                Age: 21:39:47
                Task: IF
                Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
                AS path: I

192.168.70.19/32 (1 entry, 1 announced)
```

Copyright © 2013, Juniper Networks, Inc.

```
        *Local  Preference: 0
                Next hop type: Local
                Next-hop reference count: 11
                Interface: fxp0.0
                State: ‹Active NoReadvrt Int›
                Local AS:   200
                Age: 21:39:47
                Task: IF
                Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
                AS path: I
```

show route active-path terse

```
user@host> show route active-path terse

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.255.70.19/32    D   0                     >lo0.0
* 10.255.71.50/32    I  15         10          >100.1.2.1
* 100.1.2.0/24       D   0                     >so-2/1/3.0
* 100.1.2.2/32       L   0                      Local
* 192.168.64.0/21    D   0                     >fxp0.0
* 192.168.70.19/32   L   0                      Local
```


Copyright © 2013, Juniper Networks, Inc.

show route advertising-protocol

Syntax

show route advertising-protocol *protocol neighbor-address*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Release Information

Command introduced before Junos OS Release 7.4.

Description

Display the routing information as it has been prepared for advertisement to a particular neighbor of a particular dynamic routing protocol.

Options

brief | detail | extensive | terse—(Optional) Display the specified level of output.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

neighbor-address—Address of the neighboring router to which the route entry is being transmitted.

protocol—Protocol transmitting the route:

- **bgp**—Border Gateway Protocol
- **dvmrp**—Distance Vector Multicast Routing Protocol
- **msdp**—Multicast Source Discovery Protocol
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation

Additional Information

Routes displayed are routes that the routing table has exported into the routing protocol and that have been filtered by the associated protocol's **export** routing policy statements.

Required Privilege Level

view

Related Documentation

- Example: Configuring the MED Attribute Directly on page 81

List of Sample Output

show route advertising-protocol bgp (Layer 3 VPN) on page 708
show route advertising-protocol bgp detail on page 708
show route advertising-protocol bgp detail (Layer 2 VPN) on page 708
show route advertising-protocol bgp detail (Layer 3 VPN) on page 708
show route advertising-protocol bgp extensive all (Next Hop Self with RIB-out IP Address) on page 709

Output Fields

Table 20 on page 706 lists the output fields for the **show route advertising-protocol** command. Output fields are listed in the approximate order in which they appear.

Copyright © 2013, Juniper Networks, Inc.

Table 20: show route advertising-protocol Output Fields

Field Name	Field Description	Level of Output
routing-table-name	Name of the routing table—for example, inet.0.	All levels
number **destinations**	Number of destinations for which there are routes in the routing table.	All levels
number **routes**	Number of routes in the routing table and total number of routes in the following states: • **active** (routes that are active) • **holddown** (routes that are in the pending state before being declared inactive) • **hidden** (routes that are not used because of a routing policy)	All levels
Prefix	Destination prefix.	**brief** none
destination-prefix **(entry , announced)**	Destination prefix. The **entry** value is the number of routes for this destination, and the **announced** value is the number of routes being announced for this destination.	**detail extensive**
BGP group and type	BGP group name and type (**Internal** or **External**).	**detail extensive**
Route Distinguisher	Unique 64-bit prefix augmenting each IP subnet.	**detail extensive**
Advertised Label	Incoming label advertised by the LDP. When an IP packet enters a label-switched path (LSP), the ingress router examines the packet and assigns it a label based on its destination, placing the label in the packet's header. The label transforms the packet from one that is forwarded based on its IP routing information to one that is forwarded based on information associated with the label.	**detail extensive**
Label-Base, range	First label in a block of labels and label block size. A remote PE router uses this first label when sending traffic toward the advertising PE router.	**detail extensive**
VPN Label	Virtual private network (VPN) label. Packets are sent between CE and PE routers by advertising VPN labels. VPN labels transit over either an RSVP or an LDP LSP tunnel.	**detail extensive**
Nexthop	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route. If the next-hop advertisement to the peer is **Self**, and the RIB-out next hop is a specific IP address, the RIB-out IP address is included in the extensive output. See show route advertising-protocol bgp extensive all (Next Hop Self with RIB-out IP Address) on page 709.	All levels
MED	Multiple exit discriminator value included in the route.	**brief**
Lclpref or **Localpref**	Local preference value included in the route.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 20: show route advertising-protocol Output Fields *(continued)*

Field Name	Field Description	Level of Output
AS path	AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **?**—Incomplete; typically, the AS path was aggregated. When AS path numbers are included in the route, the format is as follows: • **[ ]**—Brackets enclose the local AS number associated with the AS path if configured on the router, or if AS path prepending is configured. • **{ }**—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • **( )**—Parentheses enclose a confederation. • **([ ])**—Parentheses and brackets enclose a confederation set. NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.	All levels
Communities	Community path attribute for the route. See the output field table for the show route detail command for all possible values for this field.	**detail extensive**
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.	**detail extensive**
Attrset AS	Number, local preference, and path of the autonomous system (AS) that originated the route. These values are stored in the **Attrset** attribute at the originating router.	**detail extensive**
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).	**detail extensive**
control flags	Control flags: **none** or **Site Down**.	**detail extensive**
mtu	Maximum transmission unit (MTU) of the Layer 2 circuit.	**detail extensive**

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route advertising-protocol bgp (Layer 3 VPN)

```
user@host> show route advertising-protocol bgp 10.255.14.171
      VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
      Prefix             Nexthop                MED    Lclpref AS path
      10.255.14.172/32   Self                     1        100 I
      VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
      Prefix             Nexthop                MED    Lclpref AS path
      10.255.14.181/32   Self                     2        100 I
```

show route advertising-protocol bgp detail

```
user@host> show route advertising-protocol bgp 111.222.1.3 detail
bgp20.inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
111.222.1.11/32 (1 entry, 1 announced)
 BGP group pe-pe type Internal
     Route Distinguisher: 111.255.14.11:69
     Advertised Label: 100000
     next hop: Self
     Localpref: 100
     AS path: 2 I
     Communities: target:69:20
     AIGP 210
111.8.0.0/16 (1 entry, 1 announced)
 BGP group pe-pe type Internal
     Route Distinguisher: 111.255.14.11:69
     Advertised Label: 100000
     Next hop: Self
     Localpref: 100
     AS path: 2 I
     Communities: target:69:20
     AIGP 210
```

show route advertising-protocol bgp detail (Layer 2 VPN)

```
user@host> show route advertising-protocol bgp 192.168.24.1 detail
vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
192.168.16.1:1:1:1/96 (1 entry, 1 announced)
 BGP group int type Internal
     Route Distinguisher: 192.168.16.1:1
     Label-base : 32768, range : 3
     Nexthop: Self
     Localpref: 100
     AS path: I
     Communities: target:65412:100
     AIGP 210
     Layer2-info: encaps:VLAN, control flags:, mtu:
```

show route advertising-protocol

```
user@host> show route advertising-protocol bgp 10.255.14.176 detail
vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
```


Copyright © 2013, Juniper Networks, Inc.

bgp detail (Layer 3 VPN)

```
 BGP group ibgp type Internal
     Route Distinguisher: 10.255.14.174:2
     VPN Label: 101264
     Nexthop: Self
     Localpref: 100
     AS path: I
     Communities: target:200:100
     AIGP 210
     AttrSet AS: 100
         Localpref: 100
         AS path: I
...
```

show route advertising-protocol bgp extensive all (Next Hop Self with RIB-out IP Address)

```
user@host> show route advertising-protocol bgp 200.0.0.2 170.0.1.0/24 extensive all
inet.0: 13 destinations, 19 routes (13 active, 0 holddown, 6 hidden)
  170.0.1.0/24 (2 entries, 1 announced)
 BGP group eBGP-INTEROP type External
     Nexthop: Self (rib-out 10.100.3.2)
     AS path: [4713] 200 I
...
```

Copyright © 2013, Juniper Networks, Inc.

show route all

Syntax
show route all
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route all

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display information about all routes in all routing tables, including private, or internal, tables.

Options
none—Display information about all routes in all routing tables, including private, or internal, tables.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route all on page 711

Output Fields
In Junos OS Release 9.5 and later, only the output fields for the **show route all** command display all routing tables, including private, or hidden, routing tables. The output field table of the show route command does not display entries for private, or hidden, routing tables in Junos OS Release 9.5 and later.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route all

The following example displays a snippet of output from the **show route** command and then displays the same snippet of output from the **show route all** command:

```
user@host> show route
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0                  *[MPLS/0] 2d 02:24:39, metric 1
                      Receive
1                  *[MPLS/0] 2d 02:24:39, metric 1
                      Receive
2                  *[MPLS/0] 2d 02:24:39, metric 1
                      Receive
800017             *[VPLS/7] 1d 14:00:16
                    > via vt-3/2/0.32769, Pop
800018             *[VPLS/7] 1d 14:00:26
                    > via vt-3/2/0.32772, Pop

user@host> show route all
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0                  *[MPLS/0] 2d 02:19:12, metric 1
                      Receive
1                  *[MPLS/0] 2d 02:19:12, metric 1
                      Receive
2                  *[MPLS/0] 2d 02:19:12, metric 1
                      Receive
800017             *[VPLS/7] 1d 13:54:49
                    > via vt-3/2/0.32769, Pop
800018             *[VPLS/7] 1d 13:54:59
                    > via vt-3/2/0.32772, Pop
vt-3/2/0.32769      [VPLS/7] 1d 13:54:49
                      Unusable
vt-3/2/0.32772      [VPLS/7] 1d 13:54:59
                      Unusable
```

Copyright © 2013, Juniper Networks, Inc.

show route aspath-regex

Syntax

show route aspath-regex *regular-expression*
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show route aspath-regex *regular-expression*

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display the entries in the routing table that match the specified autonomous system (AS) path regular expression.

Options

regular-expression—Regular expression that matches an entire AS path.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Additional Information

You can specify a regular expression as:

- An individual AS number
- A period wildcard used in place of an AS number
- An AS path regular expression that is enclosed in parentheses

You also can include the operators described in the table of AS path regular expression operators in the *Junos Policy Framework Configuration Guide*. The following list summarizes these operators:

- ***{m,n}***—At least *m* and at most *n* repetitions of the AS path term.
- ***{m}***—Exactly *m* repetitions of the AS path term.
- ***{m,}***—*m* or more repetitions of the AS path term.
- *******—Zero or more repetitions of an AS path term.
- ***+***—One or more repetitions of an AS path term.
- ***?***—Zero or one repetition of an AS path term.
- ***aspath_term | aspath_term***—Match one of the two AS path terms.

  When you specify more than one AS number or path term, or when you include an operator in the regular expression, enclose the entire regular expression in quotation marks. For example, to match any path that contains AS number 234, specify the following command:

  ```
  show route aspath-regex ".* 234 .*"
  ```

Required Privilege Level

view

Copyright © 2013, Juniper Networks, Inc.

List of Sample Output

show route aspath-regex (Matching a Specific AS Number) on page 713
show route aspath-regex (Matching Any Path with Two AS Numbers) on page 713

Output Fields

For information about output fields, see the output field table for the show route command.

Sample Output

show route aspath-regex (Matching a Specific AS Number)

```
user@host> show route aspath-regex 65477
inet.0: 46411 destinations, 46411 routes (46409 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

111.222.1.0/25     *[BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65488 65535}) IGP
                     to 111.222.18.225 via fpa0.0(111.222.18.233)
111.222.1.128/25   *[IS-IS/15] 09:15:37, metric 37, tag 1
                     to 111.222.18.225 via fpa0.0(111.222.18.233)
                    [BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65488 65535}) IGP
                     to 111.222.18.225 via fpa0.0(111.222.18.233)
...
```

show route aspath-regex (Matching Any Path with Two AS Numbers)

```
user@host> show route aspath-regex ?.* 234 3561 .*?

inet.0: 46351 destinations, 46351 routes (46349 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

9.20.0.0/17        *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 2685 2686 Incomplete
                     to 192.156.169.1 via 192.156.169.14(so-0/0/0)
12.10.231.0/24     *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 5696 7369 IGP
                     to 192.156.169.1 via 192.156.169.14(so-0/0/0)
24.64.32.0/19      *[BGP/170] 01:34:59, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 6327 IGP
                     to 192.156.169.1 via 192.156.169.14(so-0/0/0)
...
```

Copyright © 2013, Juniper Networks, Inc.

show route best

Syntax

show route best *destination-prefix*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show route best *destination-prefix*
<brief | detail | extensive | terse>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display the route in the routing table that is the best route to the specified address or range of addresses. The best route is the longest matching route.

Options

brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

destination-prefix—Address or range of addresses.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level

view

List of Sample Output

show route best on page 715
show route best detail on page 715
show route best extensive on page 716
show route best terse on page 716

Output Fields

For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route best

```
user@host> show route best 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32   *[OSPF/10] 1d 13:19:20, metric 2
                    > to 10.31.1.6 via ge-3/1/0.0
                      via so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32   *[RSVP/7] 1d 13:20:13, metric 2
                    > via so-0/3/0.0, label-switched-path green-r1-r3

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.0.0.0/8         *[Direct/0] 2d 01:43:34
                    > via fxp2.0
                    [Direct/0] 2d 01:43:34
                    > via fxp1.0
```

show route best detail

```
user@host> show route best 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
        *OSPF   Preference: 10
                Next-hop reference count: 9
                Next hop: 10.31.1.6 via ge-3/1/0.0, selected
                Next hop: via so-0/3/0.0
                State: <Active Int>
                Local AS:    69
                Age: 1d 13:20:06        Metric: 2
                Area: 0.0.0.0
                Task: OSPF
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
        State: <FlashAll>
        *RSVP   Preference: 7
                Next-hop reference count: 5
                Next hop: via so-0/3/0.0 weight 0x1, selected
                Label-switched-path green-r1-r3
                Label operation: Push 100016
                State: <Active Int>
                Local AS:    69
                Age: 1d 13:20:59        Metric: 2
                Task: RSVP
                Announcement bits (1): 1-Resolve tree 2
                AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
10.0.0.0/8 (2 entries, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
```

Copyright © 2013, Juniper Networks, Inc.

```
                Next-hop reference count: 1
                Next hop: via fxp2.0, selected
                State: <Active Int>
                Age: 2d 1:44:20
                Task: IF
                AS path: I
        Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via fxp1.0, selected
                State: <NotBest Int>
                Inactive reason: No difference
                Age: 2d 1:44:20
                Task: IF
                AS path: I
```

show route best extensive

The output for the **show route best extensive** command is identical to that for the **show route best detail** command. For sample output, see show route best detail on page 715.

show route best terse

```
user@host> show route best 10.255.70.103 terse
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.255.70.103/32   O  10          2            >10.31.1.6
                                                   so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.255.70.103/32   R   7          2            >so-0/3/0.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.0.0.0/8         D   0                        >fxp2.0
                     D   0                        >fxp1.0
```


Copyright © 2013, Juniper Networks, Inc.

show route brief

Syntax
show route brief
<*destination-prefix*>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route brief
<*destination-prefix*>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display brief information about the active entries in the routing tables.

Options
none—Display all active entries in the routing table.

destination-prefix—(Optional) Display active entries for the specified address or range of addresses.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route brief on page 718

Output Fields
For information about output fields, see the Output Field table of the show route command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route brief

```
user@host> show route brief
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 1w5d 20:30:29
                      Discard
10.255.245.51/32   *[Direct/0] 2w4d 13:11:14
                    > via lo0.0
172.16.0.0/12      *[Static/5] 2w4d 13:11:14
                    > to 192.168.167.254 via fxp0.0
192.168.0.0/18     *[Static/5] 1w5d 20:30:29
                    > to 192.168.167.254 via fxp0.0
192.168.40.0/22    *[Static/5] 2w4d 13:11:14
                    > to 192.168.167.254 via fxp0.0
192.168.64.0/18    *[Static/5] 2w4d 13:11:14
                    > to 192.168.167.254 via fxp0.0
192.168.164.0/22   *[Direct/0] 2w4d 13:11:14
                    > via fxp0.0
192.168.164.51/32  *[Local/0] 2w4d 13:11:14
                      Local via fxp0.0
207.17.136.192/32  *[Static/5] 2w4d 13:11:14
                    > to 192.168.167.254 via fxp0.0
green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16     *[Direct/0] 1w5d 20:30:28
                    > via fe-0/0/3.0
100.101.2.3/32     *[Local/0] 1w5d 20:30:28
                      Local via fe-0/0/3.0
224.0.0.5/32       *[OSPF/10] 1w5d 20:30:29, metric 1
                      MultiRecv
```


Copyright © 2013, Juniper Networks, Inc.

show route community

Syntax

show route community *as-number:community-value*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show route community *as-number:community-value*
<brief | detail | extensive | terse>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community.

Options

as-number:community-value—One or more community identifiers. ***as-number*** is the AS number, and ***community-value*** is the community identifier. When you specify more than one community identifier, enclose the identifiers in double quotation marks. Community identifiers can include wildcards.

brief | detail | extensive | terse—(Optional) Display the specified level of output.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Additional Information

Specifying the community option displays all routes matching the community found within the routing table. The community option does not limit the output to only the routes being advertised to the neighbor after any egress routing policy.

Required Privilege Level

view

Related Documentation

- show route detail on page 729

List of Sample Output

show route community on page 720

Output Fields

For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route community

```
user@host> show route community 234:80
inet.0: 46511 destinations, 46511 routes (46509 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

4.0.0.0/8           *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                    AS Path: {666} 234 2548 1 IGP
                      to 192.156.169.1 via 192.156.169.14(so-0/0/0)
6.0.0.0/8           *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                    AS Path: {666} 234 2548 568 721 Incomplete
                      to 192.156.169.1 via 192.156.169.14(so-0/0/0)
9.2.0.0/16          *[BGP/170] 03:33:06, localpref 100, from 131.103.20.49
                    AS Path: {666} 234 2548 1673 1675 1747 IGP
                      to 192.156.169.1 via 192.156.169.14(so-0/0/0)
```


Copyright © 2013, Juniper Networks, Inc.

show route community-name

Syntax
show route community-name *community-name*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route community-name *community-name*
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community, specified by a community name.

Options
community-name—Name of the community.

brief | detail | extensive | terse—(Optional) Display the specified level of output.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route community-name on page 722

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route community-name

```
user@host> show route community-name red-com
inet.0: 17 destinations, 17 routes (16 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

instance1.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.212/32  *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                      AS path: 300 I
                    > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
20.20.20.20/32     *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                      AS path: I
                    > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
100.1.4.0/24       *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                      AS path: I
                    > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.204:10:10.255.245.212/32
                   *[BGP/170] 00:06:40, localpref 100, from 10.255.245.204
                      AS path: 300 I
                    > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:20.20.20.20/32
                   *[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
                      AS path: I
                    > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:100.1.4.0/24
                   *[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
                      AS path: I
                    > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

instance1.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```


Copyright © 2013, Juniper Networks, Inc.

show route damping

Syntax
show route damping (decayed | history | suppressed)
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switch and QFX Series)
show route damping (decayed | history | suppressed)
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description
Display the BGP routes for which updates might have been reduced because of route flap damping.

Options
brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.

decayed—Display route damping entries that might no longer be valid, but are not suppressed.

history—Display entries that have already been withdrawn, but have been logged.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

suppressed—Display entries that have been suppressed and are no longer being installed into the forwarding table or exported by routing protocols.

Required Privilege Level
view

Related Documentation
- clear bgp damping on page 636
- show policy damping on page 686

List of Sample Output
show route damping decayed detail on page 727
show route damping history on page 727
show route damping history detail on page 727

Output Fields
Table 21 on page 723 lists the output fields for the **show route damping** command. Output fields are listed in the approximate order in which they appear.

Table 21: show route damping Output Fields

Field Name	Field Description	Level of Output
routing-table-name	Name of the routing table—for example, **inet.0**.	All levels
destinations	Number of destinations for which there are routes in the routing table.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 21: show route damping Output Fields *(continued)*

Field Name	Field Description	Level of Output
***number* routes**	Number of routes in the routing table and total number of routes in the following states: • **active** • **holddown** (routes that are in a pending state before being declared inactive) • **hidden** (the routes are not used because of a routing policy)	All levels
***destination-prefix* (entry, announced)**	Destination prefix. The **entry** value is the number of routes for this destination, and the **announced** value is the number of routes being announced for this destination.	**detail extensive**
[*protocol*, *preference*]	Protocol from which the route was learned and the preference value for the route. • **+**—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • **-** —A hyphen indicates the last active route. • ***—An asterisk indicates that the route is both the active and the last active route. An asterisk before a **to** line indicates the best subpath to the route. In every routing metric except for the BGP **LocalPref** attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the **LocalPref** value in the **Preference2** field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the **LocalPref** value for Route 2 is 155, the **Preference2** value is -156. Route 2 is preferred because it has a higher **LocalPref** value and a lower **Preference2** value.	All levels
Next-hop reference count	Number of references made to the next hop.	**detail extensive**
Source	IP address of the route source.	**detail extensive**
Next hop	Network layer address of the directly reachable neighboring system.	**detail extensive**
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word **Selected**.	**detail extensive**
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.	**detail extensive**
Indirect next hop	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.	**detail extensive**
State	Flags for this route. For a description of possible values for this field, see the output field table for the show route detail command.	**detail extensive**
Local AS	AS number of the local routing device.	**detail extensive**
Peer AS	AS number of the peer routing device.	**detail extensive**

Copyright © 2013, Juniper Networks, Inc.

Table 21: show route damping Output Fields *(continued)*

Field Name	Field Description	Level of Output
Age	How long the route has been known.	**detail extensive**
Metric	Metric for the route.	**detail extensive**
Task	Name of the protocol that has added the route.	**detail extensive**
Announcement bits	List of protocols that announce this route. ***n*-Resolve inet** indicates that the route is used for route resolution for next hops found in the routing table. ***n*** is an index used by Juniper Networks customer support only.	**detail extensive**
AS path	AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **?**—Incomplete; typically, the AS path was aggregated. When AS path numbers are included in the route, the format is as follows: • **[ ]**—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device or if AS path prepending is configured. • **{ }**—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • **( )**—Parentheses enclose a confederation. • **([ ])**—Parentheses and brackets enclose a confederation set. NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.	All levels
to	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	**brief** none
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word **Selected**.	**brief** none
Communities	Community path attribute for the route. See the output field table for the show route detail command.	**detail extensive**
Localpref	Local preference value included in the route.	All levels
Router ID	BGP router ID as advertised by the neighbor in the open message.	**detail extensive**
Merit (last update/now)	Last updated and current figure-of-merit value.	**detail extensive**

Copyright © 2013, Juniper Networks, Inc.

Table 21: show route damping Output Fields *(continued)*

Field Name	Field Description	Level of Output
damping-parameters	Name that identifies the damping parameters used, which is defined in the damping statement at the **[edit policy-options]** hierarchy level.	**detail extensive**
Last update	Time of most recent change in path attributes.	**detail extensive**
First update	Time of first change in path attributes, which started the route damping process.	**detail extensive**
Flaps	Number of times the route has gone up or down or its path attributes have changed.	**detail extensive**
Suppressed	(**suppressed** keyword only) This route is currently suppressed. A suppressed route does not appear in the forwarding table and routing protocols do not export it.	All levels
Reusable in	(**suppressed** keyword only) Time when a suppressed route will again be available.	All levels
Preference will be	(**suppressed** keyword only) Preference value that will be applied to the route when it is again active.	All levels

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route damping decayed detail

```
user@host> show route damping decayed detail
inet.0: 173319 destinations, 1533668 routes (172625 active, 4 holddown, 108083
hidden)
10.0.111.0/24 (7 entries, 1 announced)
        *BGP    Preference: 170/-101
                Next-hop reference count: 151973
                Source: 172.23.2.129
                Next hop: via so-1/2/0.0
                Next hop: via so-5/1/0.0, selected
                Next hop: via so-6/0/0.0
                Protocol next hop: 172.23.2.129
                Indirect next hop: 89a1a00 264185
                State: <Active Ext>
                Local AS: 65000 Peer AS:   65490
                Age: 3:28       Metric2: 0
                Task: BGP_65490.172.23.2.129+179
                Announcement bits (6): 0-KRT 1-RT 4-KRT 5-BGP.0.0.0.0+179

             6-Resolve tree 2 7-Resolve tree 3
                AS path: 65490 65520 65525 65525 65525 65525 I ()
                Communities: 65501:390 65501:2000 65501:3000 65504:701
                Localpref: 100
                Router ID: 172.23.2.129
                Merit (last update/now): 1934/1790
                damping-parameters: damping-high
                Last update:       00:03:28 First update:       00:06:40
                Flaps: 2
```

show route damping history

```
user@host> show route damping history
inet.0: 173320 destinations, 1533529 routes (172624 active, 6 holddown, 108122
hidden)
+ = Active Route, - = Last Active, * = Both

10.108.0.0/15       [BGP ] 2d 22:47:58, localpref 100
                      AS path: 65220 65501 65502 I
                    > to 192.168.60.85 via so-3/1/0.0
```

show route damping history detail

```
user@host> show route damping history detail
inet.0: 173319 destinations, 1533435 routes (172627 active, 2 holddown, 108105
hidden)
10.108.0.0/15 (3 entries, 1 announced)
             BGP                 /-101
                Next-hop reference count: 69058
                Source: 192.168.60.85
                Next hop: 192.168.60.85 via so-3/1/0.0, selected
                State: <Hidden Ext>
                Inactive reason: Unusable path
                Local AS: 65000 Peer AS:  65220
                Age: 2d 22:48:10
                Task: BGP_65220.192.168.60.85+179
                AS path: 65220 65501 65502 I ()
                Communities: 65501:390 65501:2000 65501:3000 65504:3561
                Localpref: 100
                Router ID: 192.168.80.25
                Merit (last update/now): 1000/932
                damping-parameters: set-normal
```

Copyright © 2013, Juniper Networks, Inc.

```
Last update:       00:01:05 First update:       00:01:05
Flaps: 1
```


Copyright © 2013, Juniper Networks, Inc.

show route detail

Syntax
show route detail
<*destination-prefix*>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route detail
<*destination-prefix*>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display detailed information about the active entries in the routing tables.

Options
none—Display all active entries in the routing table on all systems.

destination-prefix—(Optional) Display active entries for the specified address or range of addresses.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route detail on page 738
show route detail (with BGP Multipath) on page 743

Output Fields
Table 22 on page 729 describes the output fields for the **show route detail** command. Output fields are listed in the approximate order in which they appear.

Table 22: show route detail Output Fields

Field Name	Field Description
routing-table-name	Name of the routing table (for example, inet.0).
number **destinations**	Number of destinations for which there are routes in the routing table.
number **routes**	Number of routes in the routing table and total number of routes in the following states: • **active** (routes that are active) • **holddown** (routes that are in the pending state before being declared inactive) • **hidden** (routes that are not used because of a routing policy)

Copyright © 2013, Juniper Networks, Inc.

Table 22: show route detail Output Fields *(continued)*

Field Name	Field Description
route-destination **(entry, announced)**	Route destination (for example:10.0.0.1/24). The **entry** value is the number of routes for this destination, and the **announced** value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as: • ***MPLS-label*** (for example, 80001). • ***interface-name*** (for example, ge-1/0/2). • ***neighbor-address*****:*****control-word-status*****:*****encapsulation type*****:*****vc-id*****:*****source*** (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). ◦ ***neighbor-address***—Address of the neighbor. ◦ ***control-word-status***—Whether the use of the control word has been negotiated for this virtual circuit: **NoCtrlWord** or **CtrlWord**. ◦ ***encapsulation type***—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport. ◦ ***vc-id***—Virtual circuit identifier. ◦ ***source***—Source of the advertisement: **Local** or **Remote**.
label stacking	**(**Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels. • **S=0 route** indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed). • If there is no **S=** information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).
[*protocol*, *preference*]	Protocol from which the route was learned and the preference value for the route. • **+**—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • **-** —A hyphen indicates the last active route. • *****—An asterisk indicates that the route is both the active and the last active route. An asterisk before a **to** line indicates the best subpath to the route. In every routing metric except for the BGP **LocalPref** attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the **LocalPref** value in the **Preference2** field. For example, if the **LocalPref** value for Route 1 is 100, the **Preference2** value is -101. If the **LocalPref** value for Route 2 is 155, the **Preference2** value is -156. Route 2 is preferred because it has a higher **LocalPref** value and a lower **Preference2** value.
Level	(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
Route Distinguisher	IP subnet augmented with a 64-bit prefix.
Next-hop type	Type of next hop. For a description of possible values for this field, see Table 23 on page 733.

Copyright © 2013, Juniper Networks, Inc.

Table 22: show route detail Output Fields *(continued)*

Field Name	Field Description
Next-hop reference count	Number of references made to the next hop.
Flood nexthop branches exceed maximum message	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
Source	IP address of the route source.
Next hop	Network layer address of the directly reachable neighboring system.
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word **Selected**. This field can also contain the following information: • Weight—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • Balance—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.
Label-switched-path *lsp-path-name*	Name of the LSP used to reach the next hop.
Label operation	MPLS label and operation occurring at this routing device. The operation can be **pop** (where a label is removed from the top of the stack), **push** (where another label is added to the label stack), or **swap** (where a label is replaced by another label).
Interface	(Local only) Local interface name.
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.
Indirect next hop	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.
State	State of the route (a route can be in more than one state). See Table 24 on page 735.
Local AS	AS number of the local routing device.
Age	How long the route has been known.
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.
Metric*n*	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.

Copyright © 2013, Juniper Networks, Inc.

Table 22: show route detail Output Fields *(continued)*

Field Name	Field Description
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
TTL-Action	For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances. For sample output, see show route table.
Task	Name of the protocol that has added the route.
Announcement bits	List of protocols that announce this route. ***n*-Resolve inet** indicates that the route is used for route resolution for next hops found in the routing table. ***n*** is an index used by Juniper Networks customer support only.
AS path	AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **Recorded**—The AS path is recorded by the sample process (sampled). • **?**—Incomplete; typically, the AS path was aggregated. When AS path numbers are included in the route, the format is as follows: • **[ ]**—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893. • **[ ]**—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path. • **{ }**—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • **( )**—Parentheses enclose a confederation. • **([ ])**—Parentheses and brackets enclose a confederation set. NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See Table 25 on page 737 for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).

Copyright © 2013, Juniper Networks, Inc.

Table 22: show route detail Output Fields *(continued)*

Field Name	Field Description
control flags	Control flags: **none** or **Site Down**.
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
status vector	Layer 2 VPN and VPLS network layer reachability information (NLRI).
Accepted Multipath	Current active path when BGP multipath is configured.
Accepted MultipathContrib	Path currently contributing to BGP multipath.
Localpref	Local preference value included in the route.
Router ID	BGP router ID as advertised by the neighbor in the open message.
Primary Routing Table	In a routing table group, the name of the primary routing table in which the route resides.
Secondary Tables	In a routing table group, the name of one or more secondary tables in which the route resides.

Table 23 on page 733 describes all possible values for the **Next-hop Types** output field.

Table 23: Next-hop Types Output Field Values

Next-Hop Type	Description
Broadcast (bcast)	Broadcast next hop.
Deny	Deny next hop.
Discard	Discard next hop.
Flood	Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.
Hold	Next hop is waiting to be resolved into a unicast or multicast type.
Indexed (idxd)	Indexed next hop.

Copyright © 2013, Juniper Networks, Inc.

Table 23: Next-hop Types Output Field Values *(continued)*

Next-Hop Type	Description
Indirect (indr)	Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.
Interface	Used for a network address assigned to an interface. Unlike the **router** next hop, the **interface** next hop does not reference any specific node on the network.
Local (locl)	Local address on an interface. This next-hop type causes packets with this destination address to be received locally.
Multicast (mcst)	Wire multicast next hop (limited to the LAN).
Multicast discard (mdsc)	Multicast discard.
Multicast group (mgrp)	Multicast group member.
Receive (recv)	Receive.
Reject (rjct)	Discard. An ICMP unreachable message was sent.
Resolve (rslv)	Resolving next hop.
Routed multicast (mcrt)	Regular multicast next hop.
Router	A specific node or set of nodes to which the routing device forwards packets that match the route prefix. To qualify as next-hop type router, the route must meet the following criteria: • Must not be a direct or local subnet for the routing device. • Must have a next hop that is directly connected to the routing device.
Table	Routing table next hop.
Unicast (ucst)	Unicast.
Unilist (ulst)	List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.

Table 24 on page 735 describes all possible values for the **State** output field. A route can be in more than one state (for example, **<Active NoReadvrt Int Ext>**).

Copyright © 2013, Juniper Networks, Inc.

Table 24: State Output Field Values

Value	Description
Accounting	Route needs accounting.
Active	Route is active.
Always Compare MED	Path with a lower multiple exit discriminator (MED) is available.
AS path	Shorter AS path is available.
Cisco Non-deterministic MED selection	Cisco nondeterministic MED is enabled, and a path with a lower MED is available.
Clone	Route is a clone.
Cluster list length	Length of cluster list sent by the route reflector.
Delete	Route has been deleted.
Ex	Exterior route.
Ext	BGP route received from an external BGP neighbor.
FlashAll	Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes.
Hidden	Route not used because of routing policy.
IfCheck	Route needs forwarding RPF check.
IGP metric	Path through next hop with lower IGP metric is available.
Inactive reason	Flags for this route, which was not selected as best for a particular destination.
Initial	Route being added.
Int	Interior route.
Int Ext	BGP route received from an internal BGP peer or a BGP confederation peer.
Interior > Exterior > Exterior via Interior	Direct, static, IGP, or EBGP path is available.
Local Preference	Path with a higher local preference value is available.
Martian	Route is a martian (ignored because it is obviously invalid).

Copyright © 2013, Juniper Networks, Inc.

Table 24: State Output Field Values *(continued)*

Value	Description
MartianOK	Route exempt from martian filtering.
Next hop address	Path with lower metric next hop is available.
No difference	Path from neighbor with lower IP address is available.
NoReadvrt	Route not to be advertised.
NotBest	Route not chosen because it does not have the lowest MED.
Not Best in its group	Incoming BGP AS is not the best of a group (only one AS can be the best).
NotInstall	Route not to be installed in the forwarding table.
Number of gateways	Path with a greater number of next hops is available.
Origin	Path with a lower origin code is available.
Pending	Route pending because of a hold-down configured on another route.
Release	Route scheduled for release.
RIB preference	Route from a higher-numbered routing table is available.
Route Distinguisher	64-bit prefix added to IP subnets to make them unique.
Route Metric or MED comparison	Route with a lower metric or MED is available.
Route Preference	Route with lower preference value is available
Router ID	Path through a neighbor with lower ID is available.
Secondary	Route not a primary route.
Unusable path	Path is not usable because of one of the following conditions: • The route is damped. • The route is rejected by an import policy. • The route is unresolved.
Update source	Last tiebreaker is the lowest IP address value.

Table 25 on page 737 describes the possible values for the **Communities** output field.

Copyright © 2013, Juniper Networks, Inc.

Table 25: Communities Output Field Values

Value	Description
area-number	4 bytes, encoding a 32-bit area number. For AS-external routes, the value is **0**. A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.
bandwidth: *local AS number:link-bandwidth-number*	Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.
domain-id	Unique configurable number that identifies the OSPF domain.
domain-id-vendor	Unique configurable number that further identifies the OSPF domain.
link-bandwidth-number	Link-bandwidth number: from **0** through **4,294,967,295** (bytes per second).
local AS number	Local AS number: from **1** through **65,535**.
options	1 byte. Currently this is only used if the route type is **5** or **7**. Setting the least significant bit in the field indicates that the route carries a type 2 metric.
origin	(Used with VPNs) Identifies where the route came from.
ospf-route-type	1 byte, encoded as **1** or **2** for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); **3** for summary routes; **5** for external routes (area number must be**0**); **7** for NSSA routes; or **129** for sham link endpoint addresses.
route-type-vendor	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute **0x8000**. The format is *area-number:ospf-route-type:options*.
rte-type	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute **0x0306**. The format is *area-number:ospf-route-type:options*.
target	Defines which VPN the route participates in; **target** has the format ***32-bit IP address:16-bit number***. For example, 10.19.0.0:100.
unknown IANA	Incoming IANA codes with a value between **0x1** and **0x7fff**. This code of the BGP extended community attribute is accepted, but it is not recognized.
unknown OSPF vendor community	Incoming IANA codes with a value above **0x8000**. This code of the BGP extended community attribute is accepted, but it is not recognized.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route detail

```
user@host> show route detail

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 29
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 1:31:43
                Task: RT
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

10.31.1.0/30 (2 entries, 1 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 2
                Next hop: via so-0/3/0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:30:17
                Task: IF
                Announcement bits (1): 3-Resolve tree 2
                AS path: I
         OSPF   Preference: 10
                Next-hop reference count: 1
                Next hop: via so-0/3/0.0, selected
                State: <Int>
                Inactive reason: Route Preference
                Local AS:    69
                Age: 1:30:17    Metric: 1
                Area: 0.0.0.0
                Task: OSPF
                AS path: I

10.31.1.1/32 (1 entry, 1 announced)
        *Local  Preference: 0
                Next hop type: Local
                Next-hop reference count: 7
                Interface: so-0/3/0.0
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:30:20
                Task: IF
                Announcement bits (1): 3-Resolve tree 2
                AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
        *OSPF   Preference: 10
                Next-hop reference count: 9
                Next hop: via so-0/3/0.0
                Next hop: 10.31.1.6 via ge-3/1/0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:29:56    Metric: 2
```


Copyright © 2013, Juniper Networks, Inc.

```
                Area: 0.0.0.0
                Task: OSPF
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
        *PIM    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:31:45
                Task: PIM Recv
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
        *IGMP   Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:31:43
                Task: IGMP
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
        State: <FlashAll>
        *RSVP   Preference: 7
                Next-hop reference count: 6
                Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
                Label-switched-path green-r1-r3
                Label operation: Push 100096
                State: <Active Int>
                Local AS:    69
                Age: 1:25:49    Metric: 2
                Task: RSVP
                Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
                AS path: I

10.255.71.238/32 (1 entry, 1 announced)
        State: <FlashAll>
        *RSVP   Preference: 7
                Next-hop reference count: 6
                Next hop: via so-0/3/0.0 weight 0x1, selected
                Label-switched-path green-r1-r2
                State: <Active Int>
                Local AS:    69
                Age: 1:25:49    Metric: 1
                Task: RSVP
                Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
                AS path: I

private__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Copyright © 2013, Juniper Networks, Inc.

```
47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:31:44
                Task: IF
                AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
0   (1 entry, 1 announced)
        *MPLS   Preference: 0
                Next hop type: Receive
                Next-hop reference count: 6
                State: <Active Int>
                Local AS:    69
                Age: 1:31:45    Metric: 1
                Task: MPLS
                Announcement bits (1): 0-KRT
                AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
299776 (1 entry, 1 announced)
TSI:
KRT in-kernel 299776 /52 -> {Flood}
        *RSVP   Preference: 7
                Next hop type: Flood
                Next-hop reference count: 130
                Flood nexthop branches exceed maximum
                Address: 0x8ea65d0
...

800010 (1 entry, 1 announced)
        *VPLS   Preference: 7
                Next-hop reference count: 2
                Next hop: via vt-3/2/0.32769, selected
                Label operation: Pop
                State: <Active Int>
                Age: 1:29:30
                Task: Common L2 VC
                Announcement bits (1): 0-KRT
                AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
        *VPLS   Preference: 7
                Next-hop reference count: 2
                Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
                Label-switched-path green-r1-r3
                Label operation: Push 800012, Push 100096(top)
                Protocol next hop: 10.255.70.103
                Push 800012
                Indirect next hop: 87272e4 1048574
                State: <Active Int>
                Age: 1:29:30    Metric2: 2
                Task: Common L2 VC
                Announcement bits (2): 0-KRT 1-Common L2 VC
```

 Copyright © 2013, Juniper Networks, Inc.

```
                AS path: I
                Communities: target:11111:1 Layer2-info: encaps:VPLS,
                control flags:, mtu: 0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:31:44
                Task: IF
                AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:31:44
                Task: IF
                AS path: I

ff02::2/128 (1 entry, 1 announced)
        *PIM    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:31:45
                Task: PIM Recv6
                Announcement bits (1): 0-KRT
                AS path: I

ff02::d/128 (1 entry, 1 announced)
        *PIM    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:31:45
                Task: PIM Recv6
                Announcement bits (1): 0-KRT
                AS path: I

ff02::16/128 (1 entry, 1 announced)
        *MLD    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:31:43
                Task: MLD
                Announcement bits (1): 0-KRT
                AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
```

Copyright © 2013, Juniper Networks, Inc.

```
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.16385, selected
                State: <Active NoReadvrt Int>
                Age: 1:31:44
                Task: IF
                AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Route Distinguisher: 10.255.70.103:1
                Next-hop reference count: 7
                Source: 10.255.70.103
                Protocol next hop: 10.255.70.103
                Indirect next hop: 2 no-forward
                State: <Secondary Active Int Ext>
                Local AS:    69 Peer AS:    69
                Age: 1:25:49    Metric2: 1
                AIGP 210
                Task: BGP_69.10.255.70.103+179
                Announcement bits (1): 0-green-l2vpn
                AS path: I
                Communities: target:11111:1 Layer2-info: encaps:VPLS,
                control flags:, mtu: 0
                Label-base: 800008, range: 8
                Localpref: 100
                Router ID: 10.255.70.103
                Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
        *L2VPN  Preference: 170/-1
                Next-hop reference count: 5
                Protocol next hop: 10.255.71.52
                Indirect next hop: 0 -
                State: <Active Int Ext>
                Age: 1:31:40    Metric2: 1
                Task: green-l2vpn
                Announcement bits (1): 1-BGP.0.0.0.0+179
                AS path: I
                Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
                mtu: 0
                Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
        *L2VPN  Preference: 170/-101
                Next-hop reference count: 5
                Protocol next hop: 10.255.71.52
                Indirect next hop: 0 -
                State: <Active Int Ext>
                Age: 1:31:40    Metric2: 1
                Task: green-l2vpn
                Announcement bits (1): 1-BGP.0.0.0.0+179
                AS path: I
                Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
                Label-base: 800008, range: 8, status-vector: 0x9F

...
```


Copyright © 2013, Juniper Networks, Inc.

```
l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
        *L2CKT  Preference: 7
                Next hop: via so-1/1/2.0 weight 1, selected
                Label-switched-path my-lsp
                Label operation: Push 100000[0]
                Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
                State: <Active Int>
                Local AS:    99
                Age: 10:21
                Task: l2 circuit
                Announcement bits (1): 0-LDP
                AS path: I
                VC Label 100000, MTU 1500, VLAN ID 512
```

show route detail (with BGP Multipath)

```
user@host> show route detail

10.1.1.8/30 (2 entries, 1 announced)
        *BGP    Preference: 170/-101
                Next hop type: Router, Next hop index: 262142
                Address: 0x901a010
                Next-hop reference count: 2
                Source: 10.1.1.2
                Next hop: 10.1.1.2 via ge-0/3/0.1, selected
                Next hop: 10.1.1.6 via ge-0/3/0.5
                State: <Active Ext>
                Local AS:     1 Peer AS:     2
                Age: 5:04:43
                Task: BGP_2.10.1.1.2+59955
                Announcement bits (1): 0-KRT
                AS path: 2 I
                Accepted Multipath
                Localpref: 100
                Router ID: 1.1.1.2
         BGP    Preference: 170/-101
                Next hop type: Router, Next hop index: 678
                Address: 0x8f97520
                Next-hop reference count: 9
                Source: 10.1.1.6
                Next hop: 10.1.1.6 via ge-0/3/0.5, selected
                State: <NotBest Ext>
                Inactive reason: Not Best in its group - Active preferred
                Local AS:     1 Peer AS:     2
                Age: 5:04:43
                Task: BGP_2.10.1.1.6+58198
                AS path: 2 I
                Accepted MultipathContrib
                Localpref: 100
                Router ID: 1.1.1.3
```

Copyright © 2013, Juniper Networks, Inc.

show route exact

Syntax
show route exact *destination-prefix*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route exact *destination-prefix*
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display only the routes that exactly match the specified address or range of addresses.

Options
brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

destination-prefix—Address or range of addresses.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route exact on page 745
show route exact detail on page 745
show route exact extensive on page 745
show route exact terse on page 745

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route exact

```
user@host> show route exact 207.17.136.0/24

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
207.17.136.0/24    *[Static/5] 2d 03:30:22
                    > to 192.168.71.254 via fxp0.0
```

show route exact detail

```
user@host> show route exact 207.17.136.0/24 detail

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
207.17.136.0/24 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 29
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2d 3:30:26
                Task: RT
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I
```

show route exact extensive

```
user@host> show route exact 207.17.136.0/24 extensive
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 29
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 1:25:18
                Task: RT
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I
```

show route exact terse

```
user@host> show route exact 207.17.136.0/24 terse

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 207.17.136.0/24    S   5                      >192.168.71.254
```

Copyright © 2013, Juniper Networks, Inc.

show route export

Syntax
show route export
<brief | detail>
<instance <*instance-name*> | *routing-table-name*>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route export
<brief | detail>
<instance <*instance-name*> | *routing-table-name*>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display policy-based route export information. Policy-based export simplifies the process of exchanging route information between routing instances.

Options
none—(Same as **brief**.) Display standard information about policy-based export for all instances and routing tables on all systems.

brief | detail—(Optional) Display the specified level of output.

instance <*instance-name*>—(Optional) Display a particular routing instance for which policy-based export is currently enabled.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

routing-table-name—(Optional) Display information about policy-based export for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the **show route export inet** command).

Required Privilege Level
view

List of Sample Output
show route export on page 747
show route export detail on page 747
show route export instance detail on page 747

Output Fields
Table 26 on page 746 lists the output fields for the **show route export** command. Output fields are listed in the approximate order in which they appear.

Table 26: show route export Output Fields

Field Name	Field Description	Level of Output
Table or ***table-name***	Name of the routing tables that either import or export routes.	All levels
Routes	Number of routes exported from this table into other tables. If a particular route is exported to different tables, the counter will only increment by one.	**brief** none
Export	Whether the table is currently exporting routes to other tables: **Y** or **N** (Yes or No).	**brief** none

Copyright © 2013, Juniper Networks, Inc.

Table 26: show route export Output Fields *(continued)*

Field Name	Field Description	Level of Output
Import	Tables currently importing routes from the originator table. (Not displayed for tables that are not exporting any routes.)	**detail**
Flags	(**instance** keyword only) Flags for this feature on this instance: • **config auto-policy**—The policy was deduced from the configured IGP export policies. • **cleanup**—Configuration information for this instance is no longer valid. • **config**—The instance was explicitly configured.	**detail**
Options	(**instance** keyword only) Configured option displays the type of routing tables the feature handles: • **unicast**—Indicates *instance*.inet.0. • **multicast**—Indicates *instance*.inet.2. • **unicast multicast**—Indicates *instance*.inet.0 and *instance*.inet.2.	**detail**
Import policy	(**instance** keyword only) Policy that **route export** uses to construct the import-export matrix. Not displayed if the instance type is **vrf**.	**detail**
Instance	(**instance** keyword only) Name of the routing instance.	**detail**
Type	(**instance** keyword only) Type of routing instance: **forwarding**, **non-forwarding**, or **vrf**.	**detail**

Sample Output

show route export

```
user@host> show route export
Table                           Export          Routes
inet.0                          N                    0
black.inet.0                    Y                    3
red.inet.0                      Y                    4
```

show route export detail

```
user@host>  show route export detail
inet.0                                          Routes:        0
black.inet.0                                    Routes:        3
  Import: [ inet.0 ]
red.inet.0                                      Routes:        4
  Import: [ inet.0 ]
```

show route export instance detail

```
user@host>  show route export instance detail
Instance: master                        Type: forwarding
  Flags: <config auto-policy> Options: <unicast multicast>
  Import policy: [ (ospf-master-from-red || isis-master-from-black) ]
Instance: black                         Type: non-forwarding
Instance: red                           Type: non-forwarding
```

Copyright © 2013, Juniper Networks, Inc.

show route extensive

Syntax
show route extensive
<*destination-prefix*>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route extensive
<*destination-prefix*>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display extensive information about the active entries in the routing tables.

Options
none—Display all active entries in the routing table.

destination-prefix—(Optional) Display active entries for the specified address or range of addresses.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route extensive on page 754
show route extensive (Access Route) on page 760
show route extensive (Route Reflector) on page 760
show route extensive (FRR and LFA) on page 760
show route extensive (FRR and LFA) on page 761

Output Fields
Table 27 on page 748 describes the output fields for the **show route extensive** command. Output fields are listed in the approximate order in which they appear.

Table 27: show route extensive Output Fields

Field Name	Field Description
routing-table-name	Name of the routing table (for example, inet.0).
number **destinations**	Number of destinations for which there are routes in the routing table.
number **routes**	Number of routes in the routing table and total number of routes in the following states: • **active** (routes that are active). • **holddown** (routes that are in the pending state before being declared inactive). • **hidden** (routes that are not used because of a routing policy).

Copyright © 2013, Juniper Networks, Inc.

Table 27: show route extensive Output Fields *(continued)*

Field Name	Field Description

route-destination **(entry, announced)**	Route destination (for example: 10.0.0.1/24). The **entry** value is the number of route for this destination, and the **announced** value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:
	• ***MPLS-label*** (for example, 80001).
	• ***interface-name*** (for example, ge-1/0/2).
	• ***neighbor-address*:*control-word-status*:*encapsulation type*:*vc-id*:*source*** (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96).
	  ◦ ***neighbor-address***—Address of the neighbor.
	  ◦ ***control-word-status***—Whether the use of the control word has been negotiated for this virtual circuit: **NoCtrlWord** or **CtrlWord**.
	  ◦ ***encapsulation type***—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.
	  ◦ ***vc-id***—Virtual circuit identifier.
	  ◦ ***source***—Source of the advertisement: **Local** or **Remote**.

TSI	Protocol header information.
label stacking	(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels. • **S=0 route** indicates that a packet with an incoming label stack depth of two or more exits this router with one fewer label (the label-popping operation is performed). • If there is no **S=** information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).
[*protocol*, *preference*]	Protocol from which the route was learned and the preference value for the route. • **+**—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • **-** —A hyphen indicates the last active route. • *****—An asterisk indicates that the route is both the active and the last active route. An asterisk before a **to** line indicates the best subpath to the route. In every routing metric except for the BGP **LocalPref** attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the **LocalPref** value in the **Preference2** field. For example, if the **LocalPref** value for Route 1 is 100, the **Preference2** value is -101. If the **LocalPref** value for Route 2 is 155, the **Preference2** value is -156. Route 2 is preferred because it has a higher **LocalPref** value and a lower **Preference2** value.
Level	(IS-IS only). In IS-IS, a single autonomous system (AS) can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
Route Distinguisher	IP subnet augmented with a 64-bit prefix.

Copyright © 2013, Juniper Networks, Inc.

Table 27: show route extensive Output Fields *(continued)*

Field Name	Field Description
Next-hop type	Type of next hop. For a description of possible values for this field, see the Output Field table in the show route detail command.
Next-hop reference count	Number of references made to the next hop.
Flood nexthop branches exceed maximum message	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
Source	IP address of the route source.
Next hop	Network layer address of the directly reachable neighboring system.
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word **Selected**. This field can also contain the following information: • Weight—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • Balance—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.
Label-switched-path *lsp-path-name*	Name of the LSP used to reach the next hop.
Label operation	MPLS label and operation occurring at this routing device. The operation can be **pop** (where a label is removed from the top of the stack), **push** (where another label is added to the label stack), or **swap** (where a label is replaced by another label).
Offset	Whether the metric has been increased or decreased by an offset value.
Interface	(Local only) Local interface name.
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to recursively derive a forwarding next hop.
label-operation	MPLS label and operation occurring at this routing device. The operation can be **pop** (where a label is removed from the top of the stack), **push** (where another label is added to the label stack), or **swap** (where a label is replaced by another label).
Indirect next hops	When present, a list of nodes that are used to resolve the path to the next-hop destination, in the order that they are resolved.
State	State of the route (a route can be in more than one state). See the Output Field table in the show route detail command.

Copyright © 2013, Juniper Networks, Inc.

Table 27: show route extensive Output Fields *(continued)*

Field Name	Field Description
Session ID	The BFD session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).
Inactive reason	If the route is inactive, the reason for its current state is indicated. Typical reasons include: • **Active preferred**—Currently active route was selected over this route. • **Always compare MED**—Path with a lower multiple exit discriminator (MED) is available. • **AS path**—Shorter AS path is available. • **Cisco Non-deterministic MED selection**—Cisco nondeterministic MED is enabled and a path with a lower MED is available. • **Cluster list length**—Path with a shorter cluster list length is available. • **Forwarding use only**—Path is only available for forwarding purposes. • **IGP metric**—Path through the next hop with a lower IGP metric is available. • **IGP metric type**—Path with a lower OSPF link-state advertisement type is available. • **Interior > Exterior > Exterior via Interior**—Direct, static, IGP, or EBGP path is available. • **Local preference**—Path with a higher local preference value is available. • **Next hop address**—Path with a lower metric next hop is available. • **No difference**—Path from a neighbor with a lower IP address is available. • **Not Best in its group**—Occurs when multiple peers of the same external AS advertise the same prefix and are grouped together in the selection process. When this reason is displayed, an additional reason is provided (typically one of the other reasons listed). • **Number of gateways**—Path with a higher number of next hops is available. • **Origin**—Path with a lower origin code is available. • **OSPF version**—Path does not support the indicated OSPF version. • **RIB preference**—Route from a higher-numbered routing table is available. • **Route destinguisher**—64-bit prefix added to IP subnets to make them unique. • **Route metric or MED comparison**—Route with a lower metric or MED is available. • **Route preference**—Route with a lower preference value is available. • **Router ID**—Path through a neighbor with a lower ID is available. • **Unusable path**—Path is not usable because of one of the following conditions: the route is damped, the route is rejected by an import policy, or the route is unresolved. • **Update source**—Last tiebreaker is the lowest IP address value.
Local AS	Autonomous system (AS) number of the local routing device.
Age	How long the route has been known.
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.
Metric	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.

Copyright © 2013, Juniper Networks, Inc.

Table 27: show route extensive Output Fields *(continued)*

Field Name	Field Description
TTL-Action	For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances. For sample output, see show route table.
Task	Name of the protocol that has added the route.
Announcement bits	List of protocols that announce this route. ***n*-Resolve inet** indicates that the route is used for route resolution for next hops found in the routing table. ***n*** is an index used by Juniper Networks customer support only.
AS path	AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **Recorded**—The AS path is recorded by the sample process (sampled). • **?**—Incomplete; typically, the AS path was aggregated. When AS path numbers are included in the route, the format is as follows: • **[ ]**—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured. • **{ }**—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • **( )**—Parentheses enclose a confederation. • **([ ])**—Parentheses and brackets enclose a confederation set. NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.
AS path: I <Originator>	(For route reflected output only) Originator ID attribute set by the route reflector.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Cluster list	(For route reflected output only) Cluster ID sent by the route reflector.
Originator ID	(For route reflected output only) Address of router that originally sent the route to the route reflector.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See the Output Field table in the show route detail command for all possible values for this field.

Copyright © 2013, Juniper Networks, Inc.

Table 27: show route extensive Output Fields *(continued)*

Field Name	Field Description
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: **none** or Site Down.
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
status vector	Layer 2 VPN and VPLS network layer reachability information (NLRI).
Localpref	Local preference value included in the route.
Router ID	BGP router ID as advertised by the neighbor in the open message.
Primary Routing Table	In a routing table group, the name of the primary routing table in which the route resides.
Secondary Tables	In a routing table group, the name of one or more secondary tables in which the route resides.
Originating RIB	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of inet.0 resolving through inet.0 and inet.3, this field indicates which routing table, inet.0 or inet.3, provided the best path for a particular prefix.
Node path count	Number of nodes in the path.
Forwarding nexthops	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route extensive

```
user@host> show route extensive
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 29
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 1:34:06
                Task: RT
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

10.31.1.0/30 (2 entries, 1 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 2
                Next hop: via so-0/3/0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:32:40
                Task: IF
                Announcement bits (1): 3-Resolve tree 2
                AS path: I
         OSPF   Preference: 10
                Next-hop reference count: 1
                Next hop: via so-0/3/0.0, selected
                State: <Int>
                Inactive reason: Route Preference
                Local AS:    69
                Age: 1:32:40    Metric: 1
                Area: 0.0.0.0
                Task: OSPF
                AS path: I

10.31.1.1/32 (1 entry, 1 announced)
        *Local  Preference: 0
                Next hop type: Local
                Next-hop reference count: 7
                Interface: so-0/3/0.0
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:32:43
                Task: IF
                Announcement bits (1): 3-Resolve tree 2
                AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.31.2.0/30 -> {10.31.1.6}
        *OSPF   Preference: 10
                Next-hop reference count: 9
                Next hop: via so-0/3/0.0
                Next hop: 10.31.1.6 via ge-3/1/0.0, selected
```


Copyright © 2013, Juniper Networks, Inc.

```
                State: <Active Int>
                Local AS:    69
                Age: 1:32:19    Metric: 2
                Area: 0.0.0.0
                Task: OSPF
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 224.0.0.2/32 -> {}
        *PIM    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:34:08
                Task: PIM Recv
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 224.0.0.22/32 -> {}
        *IGMP   Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:34:06
                Task: IGMP
                Announcement bits (2): 0-KRT 3-Resolve tree 2
                AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
        State: <FlashAll>
        *RSVP   Preference: 7
                Next-hop reference count: 6
                Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
                Label-switched-path green-r1-r3
                Label operation: Push 100096
                State: <Active Int>
                Local AS:    69
                Age: 1:28:12    Metric: 2
                Task: RSVP
                Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
                AS path: I

10.255.71.238/32 (1 entry, 1 announced)
        State: <FlashAll>
        *RSVP   Preference: 7
                Next-hop reference count: 6
                Next hop: via so-0/3/0.0 weight 0x1, selected
                Label-switched-path green-r1-r2
                State: <Active Int>
                Local AS:    69
                Age: 1:28:12    Metric: 1
```

Copyright © 2013, Juniper Networks, Inc.

```
                Task: RSVP
                Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
                AS path: I

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

...

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:34:07
                Task: IF
                AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

0   (1 entry, 1 announced)
TSI:
KRT in-kernel 0      /36 -> {}
        *MPLS   Preference: 0
                Next hop type: Receive
                Next-hop reference count: 6
                State: <Active Int>
                Local AS:    69
                Age: 1:34:08    Metric: 1
                Task: MPLS
                Announcement bits (1): 0-KRT
                AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
299776 (1 entry, 1 announced)
TSI:
KRT in-kernel 299776 /52 -> {Flood}
        *RSVP   Preference: 7
                Next hop type: Flood
                Next-hop reference count: 130
                Flood nexthop branches exceed maximum
                Address: 0x8ea65d0
...

800010 (1 entry, 1 announced)

TSI:
KRT in-kernel 800010 /36 -> {vt-3/2/0.32769}
        *VPLS   Preference: 7
                Next-hop reference count: 2
                Next hop: via vt-3/2/0.32769, selected
                Label operation: Pop
                State: <Active Int>
                Age: 1:31:53
                Task: Common L2 VC
                Announcement bits (1): 0-KRT
```


Copyright © 2013, Juniper Networks, Inc.

```
                AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
TSI:
KRT in-kernel vt-3/2/0.32769.0      /16 -> {indirect(1048574)}
        *VPLS   Preference: 7
                Next-hop reference count: 2
                Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
                Label-switched-path green-r1-r3
                Label operation: Push 800012, Push 100096(top)
                Protocol next hop: 10.255.70.103
                Push 800012
                Indirect next hop: 87272e4 1048574
                State: <Active Int>
                Age: 1:31:53    Metric2: 2
                Task: Common L2 VC
                Announcement bits (2): 0-KRT 1-Common L2 VC
                AS path: I
                Communities: target:11111:1 Layer2-info: encaps:VPLS,
                control flags:, mtu: 0
                Indirect next hops: 1
                        Protocol next hop: 10.255.70.103 Metric: 2
                        Push 800012
                        Indirect next hop: 87272e4 1048574
                        Indirect path forwarding next hops: 1
                                Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1
                        10.255.70.103/32 Originating RIB: inet.3
                          Metric: 2                     Node path count: 1
                          Forwarding nexthops: 1
                                Nexthop: 10.31.1.6 via ge-3/1/0.0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Active Int>
                Local AS:    69
                Age: 1:34:07
                Task: IF
                AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:34:07
                Task: IF
                AS path: I

ff02::2/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::2/128 -> {}
        *PIM    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
```

```
                Local AS:    69
                Age: 1:34:08
                Task: PIM Recv6
                Announcement bits (1): 0-KRT
                AS path: I

ff02::d/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::d/128 -> {}
        *PIM    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:34:08
                Task: PIM Recv6
                Announcement bits (1): 0-KRT
                AS path: I

ff02::16/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::16/128 -> {}
        *MLD    Preference: 0
                Next-hop reference count: 18
                State: <Active NoReadvrt Int>
                Local AS:    69
                Age: 1:34:06
                Task: MLD
                Announcement bits (1): 0-KRT
                AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.16385, selected
                State: <Active NoReadvrt Int>
                Age: 1:34:07
                Task: IF
                AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Route Distinguisher: 10.255.70.103:1
                Next-hop reference count: 7
                Source: 10.255.70.103
                Protocol next hop: 10.255.70.103
                Indirect next hop: 2 no-forward
                State: <Secondary Active Int Ext>
                Local AS:    69 Peer AS:    69
                Age: 1:28:12    Metric2: 1
                Task: BGP_69.10.255.70.103+179
                Announcement bits (1): 0-green-l2vpn
                AS path: I
                Communities: target:11111:1 Layer2-info: encaps:VPLS,
                control flags:, mtu: 0
                Label-base: 800008, range: 8
                Localpref: 100
```


Copyright © 2013, Juniper Networks, Inc.

```
                Router ID: 10.255.70.103
                Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699540
        *L2VPN  Preference: 170/-1
                Next-hop reference count: 5
                Protocol next hop: 10.255.71.52
                Indirect next hop: 0 -
                State: <Active Int Ext>
                Age: 1:34:03    Metric2: 1
                Task: green-l2vpn
                Announcement bits (1): 1-BGP.0.0.0.0+179
                AS path: I
                Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
                mtu: 0
                Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699528
        *L2VPN  Preference: 170/-101
                Next-hop reference count: 5
                Protocol next hop: 10.255.71.52
                Indirect next hop: 0 -
                State: <Active Int Ext>
                Age: 1:34:03    Metric2: 1
                Task: green-l2vpn
                Announcement bits (1): 1-BGP.0.0.0.0+179
                AS path: I
                Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
                Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

TSI:

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
        *L2CKT  Preference: 7
                Next hop: via so-1/1/2.0 weight 1, selected
                Label-switched-path my-lsp
                Label operation: Push 100000[0]
                Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
                State: <Active Int>
                Local AS:    99
                Age: 10:21
                Task: l2 circuit
                Announcement bits (1): 0-LDP
                AS path: I
                VC Label 100000, MTU 1500, VLAN ID 512


55.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT queued (pending) add
  55.0.0.0/24 -> {Push 300112}
        *BGP    Preference: 170/-101
                Next hop type: Router
```

Copyright © 2013, Juniper Networks, Inc.

```
                    Address: 0x925c208
                    Next-hop reference count: 2
                    Source: 10.0.0.9
                    Next hop: 10.0.0.9 via ge-1/2/0.15, selected
                    Label operation: Push 300112
                    Label TTL action: prop-ttl
                    State: <Active Ext>
                    Local AS:  7019 Peer AS: 13979
                    Age: 1w0d 23:06:56
                    AIGP: 25
                    Task: BGP_13979.10.0.0.9+56732
                    Announcement bits (1): 0-KRT
                    AS path: 13979 7018 I
                    Accepted
                    Route Label: 300112
                    Localpref: 100
                    Router ID: 10.9.9.1
```

show route extensive (Access Route)

```
user@host> show route 13.160.0.102 extensive
inet.0: 39256 destinations, 39258 routes (39255 active, 0 holddown, 1 hidden)
13.160.0.102/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.102/32 -> {13.160.0.2}
OSPF area : 0.0.0.0, LSA ID : 13.160.0.102, LSA type : Extern
        *Access Preference: 13
                Next-hop reference count: 78472
                Next hop: 13.160.0.2 via fe-0/0/0.0, selected
                State: <Active Int>
       Age: 12
                Task: RPD Unix Domain Server./var/run/rpd_serv.local
                Announcement bits (2): 0-KRT 1-OSPFv2
                AS path: I
```

show route extensive (Route Reflector)

```
user@host> show route extensive
1.0.0.0/8 (1 entry, 1 announced)

TSI:
KRT in-kernel 1.0.0.0/8 -> {indirect(40)}
        *BGP    Preference: 170/-101
                Source: 192.168.4.214
                Protocol next hop: 207.17.136.192 Indirect next hop: 84ac908 40
                State: <Active Int Ext>
                Local AS: 10458 Peer AS: 10458
                Age: 3:09       Metric: 0       Metric2: 0
                Task: BGP_10458.192.168.4.214+1033
                Announcement bits (2): 0-KRT 4-Resolve inet.0
                AS path: 3944 7777 I <Originator>
                Cluster list:  1.1.1.1
                Originator ID: 10.255.245.88
                Communities: 7777:7777
                Localpref: 100
                Router ID: 4.4.4.4
                Indirect next hops: 1
                        Protocol next hop: 207.17.136.192 Metric: 0
                        Indirect next hop: 84ac908 40
                        Indirect path forwarding next hops: 0
                                Next hop type: Discard

user@host> show route 20:31:2:0 extensive
```


Copyright © 2013, Juniper Networks, Inc.

show route extensive (FRR and LFA)

```
inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
20.31.2.0/24 (2 entries, 1 announced)
        State: FlashAll
TSI:
KRT in-kernel 20.31.2.0/24 -> {Push 299776, Push 299792}
        *RSVP   Preference: 7/1
                Next hop type: Router, Next hop index: 1048574
                Address: 0xbbbc010
                Next-hop reference count: 5
                Next hop: 10.31.1.2 via ge-2/1/8.0 weight 0x1, selected
                Label-switched-path europa-d-to-europa-e
                Label operation: Push 299776
                Label TTL action: prop-ttl
                Session Id: 0x201
                Next hop: 10.31.2.2 via ge-2/1/4.0 weight 0x4001
                Label-switched-path europa-d-to-europa-e
                Label operation: Push 299792
                Label TTL action: prop-ttl
                Session Id: 0x202
                State: Active Int
                Local AS:   100
                Age: 5:31  Metric: 2
                Task: RSVP
                Announcement bits (1): 0-KRT
                AS path: I
         OSPF   Preference: 10
                Next hop type: Router, Next hop index: 615
                Address: 0xb9d78c4
                Next-hop reference count: 7
                Next hop: 10.31.1.2 via ge-2/1/8.0, selected
                Session Id: 0x201
                State: Int
                Inactive reason: Route Preference
                Local AS:   100
                Age: 5:35  Metric: 3
                Area: 0.0.0.0
                Task: OSPF
                AS path: I
```

show route extensive (FRR and LFA)

```
user@host> show route 20:31:2:0 extensive
inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
20.31.2.0/24 (2 entries, 1 announced)
        State: FlashAll
TSI:
KRT in-kernel 20.31.2.0/24 -> {Push 299776, Push 299792}
        *RSVP   Preference: 7/1
                Next hop type: Router, Next hop index: 1048574
                Address: 0xbbbc010
                Next-hop reference count: 5
                Next hop: 10.31.1.2 via ge-2/1/8.0 weight 0x1, selected
                Label-switched-path europa-d-to-europa-e
                Label operation: Push 299776
                Label TTL action: prop-ttl
                Session Id: 0x201
                Next hop: 10.31.2.2 via ge-2/1/4.0 weight 0x4001
                Label-switched-path europa-d-to-europa-e
                Label operation: Push 299792
                Label TTL action: prop-ttl
                Session Id: 0x202
                State: Active Int
                Local AS:   100
```

```
        Age: 5:31  Metric: 2
        Task: RSVP
        Announcement bits (1): 0-KRT
        AS path: I
OSPF    Preference: 10
        Next hop type: Router, Next hop index: 615
        Address: 0xb9d78c4
        Next-hop reference count: 7
        Next hop: 10.31.1.2 via ge-2/1/8.0, selected
        Session Id: 0x201
        State: Int
        Inactive reason: Route Preference
        Local AS:   100
        Age: 5:35  Metric: 3
        Area: 0.0.0.0
        Task: OSPF
        AS path: I
```


Copyright © 2013, Juniper Networks, Inc.

show route flow validation

Syntax

show route flow validation
<brief | detail>
<*ip-prefix*>
<table *table-name*>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show route flow validation
<brief | detail>
<*ip-prefix*>
<table *table-name*>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description

Display flow route information.

Options

none—Display flow route information.

brief | detail—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.

ip-prefix—(Optional) IP address for the flow route.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

table *table-name*—(Optional) Display flow route information for all routing tables whose name begins with this string (for example, **inet.0** and **inet6.0** are both displayed when you run the **show route flow validation inet** command).

Required Privilege Level

view

List of Sample Output

show route flow validation on page 764

Output Fields

Table 28 on page 763 lists the output fields for the **show route flow validation** command. Output fields are listed in the approximate order in which they appear.

Table 28: show route flow validation Output Fields

Field Name	Field Description	Level of Output
routing-table-name	Name of the routing table (for example, **inet.0**).	All levels
prefix	Route address.	All levels
Active unicast route	Active route in the routing table.	All levels
Dependent flow destinations	Number of flows for which there are routes in the routing table.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 28: show route flow validation Output Fields *(continued)*

Field Name	Field Description	Level of Output
Origin	Source of the route flow.	All levels
Neighbor AS	Autonomous system identifier of the neighbor.	All levels
Flow destination	Number of entries and number of destinations that match the route flow.	All levels
Unicast best match	Destination that is the best match for the route flow.	All levels
Flags	Information about the route flow.	All levels

Sample Output

show route flow validation

```
user@host> show route flow validation
inet.0:
10.0.5.0/24Active unicast route
Dependent flow destinations: 1
Origin: 192.168.224.218, Neighbor AS: 65001
Flow destination (3 entries, 1 match origin)
Unicast best match: 10.0.5.0/24
Flags: SubtreeApex Consistent
```


Copyright © 2013, Juniper Networks, Inc.

show route forwarding-table

Syntax

show route forwarding-table
<detail | extensive | summary>
<all>
<ccc *interface-name*>
<destination *destination-prefix*>
<family *family* | matching *matching*>
<interface-name *interface-name*>
<label *name*>
<matching *matching*>
<multicast>
<table (default | *logical-system-name/routing-instance-name* | *routing-instance-name*)>
<vlan (all | *vlan-name*)>
<vpn *vpn*>

Syntax (MX Series Routers)

show route forwarding-table
<detail | extensive | summary>
<all>
<bridge-domain (all | *domain-name*)>
<ccc *interface-name*>
<destination *destination-prefix*>
<family *family* | matching *matching*>
<interface-name *interface-name*>
<label *name*>
<learning-vlan-id *learning-vlan-id*>
<matching *matching*>
<multicast>
<table (default | *logical-system-name/routing-instance-name* | *routing-instance-name*)>
<vlan (all | *vlan-name*)>
<vpn *vpn*>

Syntax (Routing Matrix)

show route forwarding-table
<detail | extensive | summary>
<all>
<ccc *interface-name*>
<destination *destination-prefix*>
<family *family* | matching *matching*>
<interface-name *interface-name*>
<matching *matching*>
<label *name*>
<lcc *number*>
<multicast>
<table *routing-instance-name*>
<vpn *vpn*>

Release Information

Command introduced before Junos OS Release 7.4.
Option **bridge-domain** introduced in Junos OS Release 7.5
Option **learning-vlan-id** introduced in Junos OS Release 8.4
Options **all** and **vlan** introduced in Junos OS Release 9.6.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Copyright © 2013, Juniper Networks, Inc.

Description Display the Routing Engine's forwarding table, including the network-layer prefixes and their next hops. This command is used to help verify that the routing protocol process has relayed the correction information to the forwarding table. The Routing Engine constructs and maintains one or more routing tables. From the routing tables, the Routing Engine derives a table of active routes, called the forwarding table.

NOTE: The Routing Engine copies the forwarding table to the Packet Forwarding Engine, the part of the router that is responsible for forwarding packets. To display the entries in the Packet Forwarding Engine's forwarding table, use the **show pfe route** command.

Options **none**—Display the routes in the forwarding tables. By default, the **show route forwarding-table** command does not display information about private, or internal, forwarding tables.

detail | extensive | summary—(Optional) Display the specified level of output.

all—(Optional) Display routing table entries for all forwarding tables, including private, or internal, tables.

bridge-domain (all | *bridge-domain-name*)—(MX Series routers only) (Optional) Display route entries for all bridge domains or the specified bridge domain.

ccc *interface-name*—(Optional) Display route entries for the specified circuit cross-connect interface.

destination *destination-prefix*—(Optional) Destination prefix.

family *family*—(Optional) Display routing table entries for the specified family: **fibre-channel**, **fmembers**, **inet**, **inet6**, **iso**, **mpls**, **tnp**, **unix**, **vpls**, or **vlan-classification**.

interface-name *interface-name*—(Optional) Display routing table entries for the specified interface.

label *name*—(Optional) Display route entries for the specified label.

lcc *number*—(Routing Matrix only) (Optional) On a routing matrix composed of a TX Matrix Plus router and T640 routers configured in the routing matrix, display information for the specified T640 router (or line-card chassis) connected to the TX Matrix router. On a routing matrix composed of the TX Matrix Plus router and T1600 routers configured in the routing matrix, display information for the specified T1600 router (or line-card chassis) connected to the TX Matrix Plus router. Replace ***number*** with a value from 0 through 3.

learning-vlan-id *learning-vlan-id*—(MX Series routers only) (Optional) Display learned information for all VLANs or for the specified VLAN.

matching *matching*—(Optional) Display routing table entries matching the specified prefix or prefix length.

Copyright © 2013, Juniper Networks, Inc.

multicast—(Optional) Display routing table entries for multicast routes.

table (default | *logical-system-name/routing-instance-name* | *routing-instance-name*)—(Optional) Display route entries for all the routing tables in the main routing instance or for the specified routing instance. If your device supports logical systems, you can also display route entries for the specified logical system and routing instance. To view the routing instances on your device, use the show route instance command.

vlan (all | *vlan-name*)—(Optional) Display information for all VLANs or for the specified VLAN.

vpn *vpn*—(Optional) Display routing table entries for a specified VPN.

Required Privilege Level view

List of Sample Output

show route forwarding-table on page 770
show route forwarding-table detail on page 770
show route forwarding-table destination extensive (Weights and Balances) on page 771
show route forwarding-table extensive on page 772
show route forwarding-table extensive (RPF) on page 773
show route forwarding-table family mpls on page 775
show route forwarding-table family vpls on page 775
show route forwarding-table family vpls extensive on page 775
show route forwarding-table table default on page 776
show route forwarding-table table logical-system-name/routing-instance-name on page 777
show route forwarding-table vpn on page 778

Output Fields Table 29 on page 767 lists the output fields for the **show route forwarding-table** command. Output fields are listed in the approximate order in which they appear. Field names might be abbreviated (as shown in parentheses) when no level of output is specified, or when the **detail** keyword is used instead of the **extensive** keyword.

Table 29: show route forwarding-table Output Fields

Field Name	Field Description	Level of Output
Logical system	Name of the logical system. This field is displayed if you specify the **table *logical-system-name/routing-instance-name*** option on a device that is configured for and supports logical systems.	All levels
Routing table	Name of the routing table (for example, inet, inet6, mpls).	All levels
Address family	Address family (for example, **IP**, **IPv6**, **ISO**, **MPLS**, and **VPLS**).	All levels
Destination	Destination of the route.	**detail extensive**

Copyright © 2013, Juniper Networks, Inc.

Table 29: show route forwarding-table Output Fields *(continued)*

Field Name	Field Description	Level of Output
Route Type (Type)	How the route was placed into the forwarding table. When the **detail** keyword is used, the route type might be abbreviated (as shown in parentheses): • **cloned** (**clon**)—(TCP or multicast only) Cloned route. • **destination** (**dest**)—Remote addresses directly reachable through an interface. • **destination down** (**iddn**)—Destination route for which the interface is unreachable. • **interface cloned** (**ifcl**)—Cloned route for which the interface is unreachable. • **route down** (**ifdn**)—Interface route for which the interface is unreachable. • **ignore** (**ignr**)—Ignore this route. • **interface** (**intf**)—Installed as a result of configuring an interface. • **permanent** (**perm**)—Routes installed by the kernel when the routing table is initialized. • **user**—Routes installed by the routing protocol process or as a result of the configuration.	All levels
Route Reference (RtRef)	Number of routes to reference.	**detail extensive**
Flags	Route type flags: • **none**—No flags are enabled. • **accounting**—Route has accounting enabled. • **cached**—Cache route. • **incoming-iface** ***interface-number***—Check against incoming interface. • **prefix load balance**—Load balancing is enabled for this prefix. • **rt nh decoupled**—Route has been decoupled from the next hop to the destination. • **sent to PFE**—Route has been sent to the Packet Forwarding Engine. • **static**—Static route.	**extensive**
Next hop	IP address of the next hop to the destination.	**detail extensive**

Copyright © 2013, Juniper Networks, Inc.

Table 29: show route forwarding-table Output Fields *(continued)*

Field Name	Field Description	Level of Output
Next hop Type (Type)	Next-hop type. When the **detail** keyword is used, the next-hop type might be abbreviated (as indicated in parentheses): • **broadcast (bcst)**—Broadcast. • **deny**—Deny. • **discard (dscd)** —Discard. • **hold**—Next hop is waiting to be resolved into a unicast or multicast type. • **indexed (idxd)**—Indexed next hop. • **indirect (indr)**—Indirect next hop. • **local (locl)**—Local address on an interface. • **routed multicast (mcrt)**—Regular multicast next hop. • **multicast (mcst)**—Wire multicast next hop (limited to the LAN). • **multicast discard (mdsc)**—Multicast discard. • **multicast group (mgrp)**—Multicast group member. • **receive (recv)**—Receive. • **reject (rjct)**—Discard. An ICMP unreachable message was sent. • **resolve (rslv)**—Resolving the next hop. • **unicast (ucst)**—Unicast. • **unilist (ulst)**—List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.	**detail extensive**
Index	Software index of the next hop that is used to route the traffic for a given prefix.	**detail extensive** none
Route interface-index	Logical interface index from which the route is learned. For example, for interface routes, this is the logical interface index of the route itself. For static routes, this field is zero. For routes learned through routing protocols, this is the logical interface index from which the route is learned.	**extensive**
Reference (NhRef)	Number of routes that refer to this next hop.	**detail extensive** none
Next-hop interface (Netif)	Interface used to reach the next hop.	**detail extensive** none
Weight	Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible (see the **Balance** field description).	**extensive**
Balance	Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a router is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.	**extensive**
RPF interface	List of interfaces from which the prefix can be accepted. Reverse path forwarding (RPF) information is displayed only when **rpf-check** is configured on the interface.	**extensive**

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route forwarding-table

```
user@host> show route forwarding-table
Routing table: default.inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    46     4
0.0.0.0/32         perm     0                    dscd    44     1
1.1.1.0/24         ifdn     0                    rslv   608     1 ge-2/0/1.0
1.1.1.0/32         iddn     0 1.1.1.0            recv   606     1 ge-2/0/1.0
1.1.1.1/32         user     0                    rjct    46     4
1.1.1.1/32         intf     0 1.1.1.1            locl   607     2
1.1.1.1/32         iddn     0 1.1.1.1            locl   607     2
1.1.1.255/32       iddn     0 ff:ff:ff:ff:ff:ff  bcst   605     1 ge-2/0/1.0
10.0.0.0/24        intf     0                    rslv   616     1 ge-2/0/0.0
10.0.0.0/32        dest     0 10.0.0.0           recv   614     1 ge-2/0/0.0
10.0.0.1/32        intf     0 10.0.0.1           locl   615     2
10.0.0.1/32        dest     0 10.0.0.1           locl   615     2
10.0.0.255/32      dest     0 10.0.0.255         bcst   613     1 ge-2/0/0.0
10.1.1.0/24        ifdn     0                    rslv   612     1 ge-2/0/1.0
10.1.1.0/32        iddn     0 10.1.1.0           recv   610     1 ge-2/0/1.0
10.1.1.1/32        user     0                    rjct    46     4
10.1.1.1/32        intf     0 10.1.1.1           locl   611     2
10.1.1.1/32        iddn     0 10.1.1.1           locl   611     2
10.1.1.255/32      iddn     0 ff:ff:ff:ff:ff:ff  bcst   609     1 ge-2/0/1.0
10.206.0.0/16      user     0 10.209.63.254      ucst   419    20 fxp0.0
10.209.0.0/16      user     1 0:12:1e:ca:98:0    ucst   419    20 fxp0.0
10.209.0.0/18      intf     0                    rslv   418     1 fxp0.0
10.209.0.0/32      dest     0 10.209.0.0         recv   416     1 fxp0.0
10.209.2.131/32    intf     0 10.209.2.131       locl   417     2
10.209.2.131/32    dest     0 10.209.2.131       locl   417     2
10.209.17.55/32    dest     0 0:30:48:5b:78:d2   ucst   435     1 fxp0.0
10.209.63.42/32    dest     0 0:23:7d:58:92:ca   ucst   434     1 fxp0.0
10.209.63.254/32   dest     0 0:12:1e:ca:98:0    ucst   419    20 fxp0.0
10.209.63.255/32   dest     0 10.209.63.255      bcst   415     1 fxp0.0
10.227.0.0/16      user     0 10.209.63.254      ucst   419    20 fxp0.0

...

Routing table: iso
ISO:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                   rjct    27     1
47.0005.80ff.f800.0000.0108.0003.0102.5524.5220.00
intf     0                   locl    28     1

Routing table: inet6
Internet6:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                   rjct     6     1
ff00::/8           perm     0                   mdsc     4     1
ff02::1/128        perm     0 ff02::1           mcst     3     1

Routing table: ccc
MPLS:
Interface.Label    Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct 16     1
100004(top)fe-0/0/1.0
```


Copyright © 2013, Juniper Networks, Inc.

show route forwarding-table detail

```
user@host> show route forwarding-table detail
Routing table: inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            user     2 0:90:69:8e:b1:1b   ucst   132     4 fxp0.0
default            perm     0                    rjct    14     1
10.1.1.0/24        intf     0 ff.3.0.21          ucst   322     1 so-5/3/0.0
10.1.1.0/32        dest     0 10.1.1.0           recv   324     1 so-5/3/0.0
10.1.1.1/32        intf     0 10.1.1.1           locl   321     1
10.1.1.255/32      dest     0 10.1.1.255         bcst   323     1 so-5/3/0.0
10.21.21.0/24      intf     0 ff.3.0.21          ucst   326     1 so-5/3/0.0
10.21.21.0/32      dest     0 10.21.21.0         recv   328     1 so-5/3/0.0
10.21.21.1/32      intf     0 10.21.21.1         locl   325     1
10.21.21.255/32    dest     0 10.21.21.255       bcst   327     1 so-5/3/0.0
127.0.0.1/32       intf     0 127.0.0.1          locl   320     1
172.17.28.19/32    clon     1 192.168.4.254      ucst   132     4 fxp0.0
172.17.28.44/32    clon     1 192.168.4.254      ucst   132     4 fxp0.0

...

Routing table: private1__.inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    46     1
10.0.0.0/8         intf     0                    rslv   136     1 fxp1.0
10.0.0.0/32        dest     0 10.0.0.0           recv   134     1 fxp1.0
10.0.0.4/32        intf     0 10.0.0.4           locl   135     2
10.0.0.4/32        dest     0 10.0.0.4           locl   135     2

...

Routing table: iso
ISO:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    38     1

Routing table: inet6
Internet6:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    22     1
ff00::/8           perm     0                    mdsc    21     1
ff02::1/128        perm     0 ff02::1            mcst    17     1

...

Routing table: mpls
MPLS:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct 28     1
```

show route forwarding-table destination extensive

```
user@host> show route forwarding-table destination 3.4.2.1 extensive
Routing table: inet [Index 0]
Internet:
```

Copyright © 2013, Juniper Networks, Inc.

(Weights and Balances)

```
Destination:  3.4.2.1/32
  Route type: user
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Next-hop type: unilist                Index: 262143   Reference: 1
  Nexthop: 4.4.4.4
  Next-hop type: unicast                Index: 335      Reference: 2
  Next-hop interface: so-1/1/0.0        Weight: 22      Balance: 3
  Nexthop: 145.12.1.2
  Next-hop type: unicast                Index: 337      Reference: 2
  Next-hop interface: so-0/1/2.0        Weight: 33      Balance: 33
```

show route forwarding-table extensive

```
user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:

Destination:  default
  Route type: user
  Route reference: 2                    Route interface-index: 0
  Flags: sent to PFE
  Nexthop: 0:90:69:8e:b1:1b
  Next-hop type: unicast                Index: 132      Reference: 4
  Next-hop interface: fxp0.0

Destination:  default
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: none
  Next-hop type: reject                 Index: 14       Reference: 1

Destination:  127.0.0.1/32
  Route type: interface
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Nexthop: 127.0.0.1
  Next-hop type: local                  Index: 320      Reference: 1

...

Routing table: private1__.inet [Index 1]
Internet:

Destination:  default
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Next-hop type: reject                 Index: 46       Reference: 1

Destination:  10.0.0.0/8
  Route type: interface
  Route reference: 0                    Route interface-index: 3
  Flags: sent to PFE
  Next-hop type: resolve                Index: 136      Reference: 1
  Next-hop interface: fxp1.0

...

Routing table: iso [Index 0]
ISO:

Destination:  default
```


Copyright © 2013, Juniper Networks, Inc.

```
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Next-hop type: reject                 Index: 38       Reference: 1

Routing table: inet6 [Index 0]
Internet6:

Destination:  default
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Next-hop type: reject                 Index: 22       Reference: 1

Destination:  ff00::/8
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Next-hop type: multicast discard      Index: 21       Reference: 1

...

Routing table: private1__.inet6 [Index 1]
Internet6:

Destination:  default
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Next-hop type: reject                 Index: 54       Reference: 1

Destination:  fe80::2a0:a5ff:fe3d:375/128
  Route type: interface
  Route reference: 0                    Route interface-index: 0
  Flags: sent to PFE
  Nexthop: fe80::2a0:a5ff:fe3d:375
  Next-hop type: local                  Index: 75       Reference: 1

...
```

show route forwarding-table extensive (RPF)

The next example is based on the following configuration, which enables an RPF check on all routes that are learned from this interface, including the interface route:

```
so-1/1/0 {
    unit 0 {
        family inet {
            rpf-check;
            address 15.95.1.2/30;
        }
    }
}

user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:
...
...
Destination:  15.95.1.3/32
  Route type: destination
  Route reference: 0                    Route interface-index: 67
```

```
Flags: sent to PFE
Nexthop: 15.95.1.3
Next-hop type: broadcast             Index: 328      Reference: 1
Next-hop interface: so-1/1/0.0
RPF interface: so-1/1/0.0
```


Copyright © 2013, Juniper Networks, Inc.

show route forwarding-table family mpls

```
user@host> show route forwarding-table family mpls
Routing table: mpls
MPLS:
Destination        Type RtRef Next hop          Type Index NhRef Netif
default            perm     0                   rjct    19     1
0                  user     0                   recv    18     3
1                  user     0                   recv    18     3
2                  user     0                   recv    18     3
100000             user     0 10.31.1.6         swap  100001     fe-1/1/0.0
800002             user     0                   Pop              vt-0/3/0.32770

vt-0/3/0.32770 (VPLS)
                   user     0                   indr   351     4
                                                Push 800000, Push 100002(top)
so-0/0/0.0
```

show route forwarding-table family vpls

```
user@host> show route forwarding-table family vpls
Routing table: green.vpls
VPLS:
Destination        Type RtRef Next hop          Type Index NhRef Netif
default            dynm     0                   flood   353     1
default            perm     0                   rjct    298     1
fe-0/1/0.0         dynm     0                   flood   355     1
00:90:69:0c:20:1f/48              <<<<<Remote CE

                   dynm     0                   indr   351     4
                                                Push 800000, Push 100002(top)
so-0/0/0.0
00:90:69:85:b0:1f/48              <<<<<<Local CE

                   dynm     0                   ucst   354     2 fe-0/1/0.0
```

show route forwarding-table family vpls extensive

```
user@host> show route forwarding-table family vpls extensive
Routing table: green.vpls [Index 2]
VPLS:

Destination:  default
  Route type: dynamic
  Route reference: 0                    Route interface-index: 72
  Flags: sent to PFE
  Next-hop type: flood                  Index: 289      Reference: 1
  Next-hop type: unicast                Index: 291      Reference: 3
  Next-hop interface: fe-0/1/3.0
  Next-hop type: unicast                Index: 290      Reference: 3
  Next-hop interface: fe-0/1/2.0

Destination:  default
  Route type: permanent
  Route reference: 0                    Route interface-index: 0
  Flags: none
  Next-hop type: discard                Index: 341      Reference: 1

Destination:  fe-0/1/2.0
  Route type: dynamic
  Route reference: 0                    Route interface-index: 69
  Flags: sent to PFE
  Next-hop type: flood                  Index: 293      Reference: 1
  Next-hop type: indirect               Index: 363      Reference: 4
  Next-hop type: Push 800016
```

Copyright © 2013, Juniper Networks, Inc.

```
  Next-hop interface: at-1/0/1.0
  Next-hop type: indirect              Index: 301      Reference: 5
  Next hop: 10.31.3.2
  Next-hop type: Push 800000
  Next-hop interface: fe-0/1/1.0
  Next-hop type: unicast               Index: 291      Reference: 3
  Next-hop interface: fe-0/1/3.0

Destination:  fe-0/1/3.0
  Route type: dynamic
  Route reference: 0                   Route interface-index: 70
  Flags: sent to PFE
  Next-hop type: flood                 Index: 292      Reference: 1
  Next-hop type: indirect              Index: 363      Reference: 4
  Next-hop type: Push 800016
  Next-hop interface: at-1/0/1.0
  Next-hop type: indirect              Index: 301      Reference: 5
  Next hop: 10.31.3.2
  Next-hop type: Push 800000
  Next-hop interface: fe-0/1/1.0
  Next-hop type: unicast               Index: 290      Reference: 3
  Next-hop interface: fe-0/1/2.0

Destination:  10:00:00:01:01:01/48
  Route type: dynamic
  Route reference: 0                   Route interface-index: 70
  Flags: sent to PFE, prefix load balance
  Next-hop type: unicast               Index: 291      Reference: 3
  Next-hop interface: fe-0/1/3.0
  Route used as destination:
    Packet count:         6640    Byte count:      675786
  Route used as source
    Packet count:         6894    Byte count:      696424

Destination:  10:00:00:01:01:04/48
  Route type: dynamic
  Route reference: 0                   Route interface-index: 69
  Flags: sent to PFE, prefix load balance
  Next-hop type: unicast               Index: 290      Reference: 3
  Next-hop interface: fe-0/1/2.0
  Route used as destination:
    Packet count:           96    Byte count:        8079
  Route used as source:
    Packet count:          296    Byte count:       24955

Destination:  10:00:00:01:03:05/48
  Route type: dynamic
  Route reference: 0                   Route interface-index: 74
  Flags: sent to PFE, prefix load balance
  Next-hop type: indirect              Index: 301      Reference: 5
  Next hop: 10.31.3.2
  Next-hop type: Push 800000
  Next-hop interface: fe-0/1/1.0
```

show route forwarding-table table default

```
user@host> show route forwarding-table table default
Routing table: default.inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    36     2
0.0.0.0/32         perm     0                    dscd    34     1
10.0.60.0/30       user     0 10.0.60.13         ucst   713     5 fe-0/1/3.0
```


Copyright © 2013, Juniper Networks, Inc.

```
10.0.60.12/30      intf     0                    rslv   688     1 fe-0/1/3.0
10.0.60.12/32      dest     0 10.0.60.12         recv   686     1 fe-0/1/3.0
10.0.60.13/32      dest     0 0:5:85:8b:bc:22    ucst   713     5 fe-0/1/3.0
10.0.60.14/32      intf     0 10.0.60.14         locl   687     2
10.0.60.14/32      dest     0 10.0.60.14         locl   687     2
10.0.60.15/32      dest     0 10.0.60.15         bcst   685     1 fe-0/1/3.0
10.0.67.12/30      user     0 10.0.60.13         ucst   713     5 fe-0/1/3.0
10.0.80.0/30       ifdn     0 ff.3.0.21          ucst   676     1 so-0/0/1.0
10.0.80.0/32       dest     0 10.0.80.0          recv   678     1 so-0/0/1.0
10.0.80.2/32       user     0                    rjct    36     2
10.0.80.2/32       intf     0 10.0.80.2          locl   675     1
10.0.80.3/32       dest     0 10.0.80.3          bcst   677     1 so-0/0/1.0
10.0.90.12/30      intf     0                    rslv   684     1 fe-0/1/0.0
10.0.90.12/32      dest     0 10.0.90.12         recv   682     1 fe-0/1/0.0
10.0.90.14/32      intf     0 10.0.90.14         locl   683     2
10.0.90.14/32      dest     0 10.0.90.14         locl   683     2
10.0.90.15/32      dest     0 10.0.90.15         bcst   681     1 fe-0/1/0.0
10.5.0.0/16        user     0 192.168.187.126    ucst   324    15 fxp0.0
10.10.0.0/16       user     0 192.168.187.126    ucst   324    15 fxp0.0
10.13.10.0/23      user     0 192.168.187.126    ucst   324    15 fxp0.0
10.84.0.0/16       user     0 192.168.187.126    ucst   324    15 fxp0.0
10.150.0.0/16      user     0 192.168.187.126    ucst   324    15 fxp0.0
10.157.64.0/19     user     0 192.168.187.126    ucst   324    15 fxp0.0
10.209.0.0/16      user     0 192.168.187.126    ucst   324    15 fxp0.0

...

Routing table: default.iso
ISO:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    60     1

Routing table: default.inet6
Internet6:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct    44     1
::/128             perm     0                    dscd    42     1
ff00::/8           perm     0                    mdsc    43     1
ff02::1/128        perm     0 ff02::1            mcst    39     1

Routing table: default.mpls
MPLS:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    dscd    50     1
```

show route forwarding-table table *logical-system-name:routing-instance-name*

```
user@host> show route forwarding-table table R4/vpn-red
Logical system: R4
Routing table: vpn-red.inet
Internet:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct   563     1
0.0.0.0/32         perm     0                    dscd   561     2
1.0.0.1/32         user     0                    dscd   561     2
2.0.2.0/24         intf     0                    rslv   771     1 ge-1/2/0.3
2.0.2.0/32         dest     0 2.0.2.0            recv   769     1 ge-1/2/0.3
2.0.2.1/32         intf     0 2.0.2.1            locl   770     2
2.0.2.1/32         dest     0 2.0.2.1            locl   770     2
2.0.2.2/32         dest     0 0.4.80.3.0.1b.c0.d5.e4.bd.0.1b.c0.d5.e4.bc.8.0
                                                 ucst   789     1 ge-1/2/0.3
2.0.2.255/32       dest     0 2.0.2.255          bcst   768     1 ge-1/2/0.3
224.0.0.0/4        perm     1                    mdsc   562     1
```

Copyright © 2013, Juniper Networks, Inc.

```
224.0.0.1/32       perm     0 224.0.0.1          mcst   558     1
255.255.255.255/32 perm     0                    bcst   559     1

Logical system: R4
Routing table: vpn-red.iso
ISO:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct   608     1

Logical system: R4
Routing table: vpn-red.inet6
Internet6:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    rjct   708     1
::/128             perm     0                    dscd   706     1
ff00::/8           perm     0                    mdsc   707     1
ff02::1/128        perm     0 ff02::1            mcst   704     1

Logical system: R4
Routing table: vpn-red.mpls
MPLS:
Destination        Type RtRef Next hop           Type Index NhRef Netif
default            perm     0                    dscd   638
```

show route forwarding-table vpn

```
user@host> show route forwarding-table vpn VPN-A
      Routing table:: VPN-A.inet
Internet:
      Destination        Type RtRef Nexthop           Type Index NhRef Netif
      default            perm     0                   rjct     4     4
      10.39.10.20/30     intf     0 ff.3.0.21         ucst    40     1
      so-0/0/0.0
      10.39.10.21/32     intf     0 10.39.10.21       locl    36     1
      10.255.14.172/32   user     0                   ucst    69     2
      so-0/0/0.0
      10.255.14.175/32   user     0                   indr    81     3
                                                      Push 100004, Push
      100004(top) so-1/0/0.0
      224.0.0.0/4        perm     2                   mdsc     5     3
      224.0.0.1/32       perm     0 224.0.0.1         mcst     1     8
      224.0.0.5/32       user     1 224.0.0.5         mcst     1     8
      255.255.255.255/32 perm     0                   bcst     2     3
```


Copyright © 2013, Juniper Networks, Inc.

show route hidden

Syntax
show route hidden
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Release Information
Command introduced before Junos OS Release 7.4.

Description
Display only hidden route information. A hidden route is unusable, even if it is the best path.

Options
brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route hidden on page 780
show route hidden detail on page 780
show route hidden extensive on page 781
show route hidden terse on page 781

Output Fields
For information about output fields, see the output field table for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route hidden

```
user@host> show route hidden
inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
127.0.0.1/32        [Direct/0] 04:26:38
                    > via lo0.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.5.5.5/32         [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
                      AS path: 100 I
                      Unusable
10.12.1.0/24        [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
                      AS path: 100 I
                      Unusable
10.12.80.4/30       [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
                      AS path: I
                      Unusable
...
```

show route hidden detail

```
user@host> show route hidden detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
127.0.0.1/32 (1 entry, 0 announced)
         Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Hidden Martian Int>
                Local AS:     1
                Age: 4:27:37
                Task: IF
                AS path: I

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.5.5.5/32 (1 entry, 0 announced)
         BGP    Preference: 170/-101
                Route Distinguisher: 10.4.4.4:4
                Next hop type: Unusable
                Next-hop reference count: 6
                State: <Secondary Hidden Int Ext>
                Local AS:     1 Peer AS:     1
                Age: 3:45:09
                Task: BGP_1.10.4.4.4+2493
                AS path: 100 I
                Communities: target:1:999
                VPN Label: 100064
                Localpref: 100
                Router ID: 10.4.4.4
```


Copyright © 2013, Juniper Networks, Inc.

```
                    Primary Routing Table bgp.l3vpn.0
...
```

show route hidden extensive

The output for the **show route hidden extensive** command is identical to that of the **show route hidden detail** command. For sample output, see show route hidden detail on page 780.

show route hidden terse

```
user@host> show route hidden terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  127.0.0.1/32       D   0                     >lo0.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  10.5.5.5/32        B 170        100             Unusable        100 I
  10.12.1.0/24       B 170        100             Unusable        100 I
  10.12.80.4/30      B 170        100             Unusable        I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  10.4.4.4:4:10.5.5.5/32
                     B 170        100             Unusable        100 I
  10.4.4.4:4:10.12.1.0/24
                     B 170        100             Unusable        100 I
  10.4.4.4:4:10.12.80.4/30
                     B 170        100             Unusable        I

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Copyright © 2013, Juniper Networks, Inc.

show route inactive-path

Syntax
show route inactive-path
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route inactive-path
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display routes for destinations that have no active route. An inactive route is a route that was not selected as the best path.

Options
none—Display all inactive routes.

brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route inactive-path on page 783
show route inactive-path detail on page 783
show route inactive-path extensive on page 784
show route inactive-path terse on page 784

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route inactive-path

```
user@host> show route inactive-path

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.100.12/30     [OSPF/10] 03:57:28, metric 1
                    > via so-0/3/0.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/8          [Direct/0] 04:39:56
                    > via fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.80.0/30       [BGP/170] 04:38:17, localpref 100
                      AS path: 100 I
                    > to 10.12.80.1 via ge-6/3/2.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route inactive-path detail

```
user@host> show route inactive-path detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete

10.12.100.12/30 (2 entries, 1 announced)
         OSPF   Preference: 10
                Next-hop reference count: 1
                Next hop: via so-0/3/0.0, selected
                State: <Int>
                Inactive reason: Route Preference
                Local AS:     1
                Age: 3:58:24    Metric: 1
                Area: 0.0.0.0
                Task: OSPF
                AS path: I

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

10.0.0.0/8 (2 entries, 0 announced)
```

Copyright © 2013, Juniper Networks, Inc.

```
            Direct Preference: 0
                   Next hop type: Interface
                   Next-hop reference count: 1
                   Next hop: via fxp1.0, selected
                   State: <NotBest Int>
                   Inactive reason: No difference
                   Age: 4:40:52
                   Task: IF
                   AS path: I

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.12.80.0/30 (2 entries, 1 announced)
            BGP    Preference: 170/-101
                   Next-hop reference count: 6
                   Source: 10.12.80.1
                   Next hop: 10.12.80.1 via ge-6/3/2.0, selected
                   State: <Ext>
                   Inactive reason: Route Preference
                   Peer AS:   100
                   Age: 4:39:13
                   Task: BGP_100.10.12.80.1+179
                   AS path: 100 I
                   Localpref: 100
                   Router ID: 10.0.0.0
```

show route inactive-path extensive

The output for the **show route inactive-path extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see show route inactive-path detail on page 783.

show route inactive-path terse

```
user@host> show route inactive-path terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  10.12.100.12/30    O  10          1            >so-0/3/0.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  10.0.0.0/8         D   0                        >fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  10.12.80.0/30      B 170        100            >10.12.80.1      100 I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
```


Copyright © 2013, Juniper Networks, Inc.

```
bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Copyright © 2013, Juniper Networks, Inc.

show route inactive-prefix

Syntax
show route inactive-prefix
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route inactive-prefix
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display inactive route destinations in each routing table.

Options
none—Display all inactive route destination.

brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route inactive-prefix on page 787
show route inactive-prefix detail on page 787
show route inactive-prefix extensive on page 787
show route inactive-prefix terse on page 787

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route inactive-prefix

```
user@host> show route inactive-prefix

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

127.0.0.1/32        [Direct/0] 00:04:54
                    > via lo0.0
```

show route inactive-prefix detail

```
user@host> show route inactive-prefix detail

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
127.0.0.1/32 (1 entry, 0 announced)
         Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via lo0.0, selected
                State: <Hidden Martian Int>
                Age: 4:51
                Task: IF
                AS path: I00:04:54
                    > via lo0.0
```

show route inactive-prefix extensive

The output for the **show route inactive-prefix extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see show route inactive-prefix detail on page 787.

show route inactive-prefix terse

```
user@host> show route inactive-prefix terse

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  127.0.0.1/32       D   0                     >lo0.0
```

Copyright © 2013, Juniper Networks, Inc.

show route instance

Syntax

show route instance
<brief | detail | summary>
<*instance-name*>
<logical-system (all | *logical-system-name*)>
<operational>

Syntax (EX Series Switches and QFX Series)

show route instance
<brief | detail | summary>
<*instance-name*>
<operational>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
Command introduced in Junos OS Release 11.3 for the QFX Series.

Description

Display routing instance information.

Options

none—(Same as **brief**) Display standard information about all routing instances.

brief | detail | summary—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**. (These options are not available with the **operational** keyword.)

instance-name—(Optional) Display information for all routing instances whose name begins with this string (for example, **cust1**, **cust11**, and **cust111** are all displayed when you run the **show route instance cust1** command).

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

operational—(Optional) Display operational routing instances.

Required Privilege Level

view

List of Sample Output

show route instance on page 790
show route instance detail (Graceful Restart Complete) on page 790
show route instance detail (Graceful Restart Incomplete) on page 792
show route instance detail (VPLS Routing Instance) on page 793
show route instance operational on page 794
show route instance summary on page 794

Output Fields

Table 30 on page 788 lists the output fields for the **show route instance** command. Output fields are listed in the approximate order in which they appear.

Table 30: show route instance Output Fields

Field Name	Field Description	Level of Output
Instance or ***instance-name***	Name of the routing instance.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 30: show route instance Output Fields *(continued)*

Field Name	Field Description	Level of Output
Operational Routing Instances	(**operational** keyword only) Names of all operational routing instances.	—
Type	Type of routing instance: **forwarding**, **l2vpn**, **no-forwarding**, **vpls**, **virtual-router**, or **vrf**.	All levels
State	State of the routing instance: **active** or **inactive**.	**brief detail** none
Interfaces	Name of interfaces belonging to this routing instance.	**brief detail** none
Restart State	Status of graceful restart for this instance: **Pending** or **Complete**.	**detail**
Path selection timeout	Maximum amount of time, in seconds, remaining until graceful restart is declared complete. The default is **300**.	**detail**
Tables	Tables (and number of routes) associated with this routing instance.	**brief detail** none
Route-distinguisher	Unique route distinguisher associated with this routing instance.	**detail**
Vrf-import	VPN routing and forwarding instance import policy name.	**detail**
Vrf-export	VPN routing and forwarding instance export policy name.	**detail**
Vrf-import-target	VPN routing and forwarding instance import target community name.	**detail**
Vrf-export-target	VPN routing and forwarding instance export target community name.	**detail**
Fast-reroute-priority	Fast reroute priority setting for a VPLS routing instance: **high**, **medium**, or **low**. The default is **low**.	**detail**
Restart State	Restart state: • **Pending:*protocol-name***—List of protocols that have not yet completed graceful restart for this routing table. • **Complete**—All protocols have restarted for this routing table.	**detail**
Primary rib	Primary table for this routing instance.	**brief** none **summary**
Active/holddown/hidden	Number of active, hold-down, and hidden routes.	All levels

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route instance

```
user@host> show route instance
Instance             Type
         Primary RIB                                    Active/holddown/hidden
master               forwarding
         inet.0                                         16/0/1
         iso.0                                          1/0/0
         mpls.0                                         0/0/0
         inet6.0                                        2/0/0
         l2circuit.0                                    0/0/0
__juniper_private1__ forwarding
         __juniper_private1__.inet.0                    12/0/0
         __juniper_private1__.inet6.0                   1/0/0
```

show route instance detail (Graceful Restart Complete)

```
user@host> show route instance detail
master:
  Router ID: 10.255.14.176
  Type: forwarding        State: Active
  Restart State: Complete Path selection timeout: 300
  Tables:
    inet.0                : 17 routes (15 active, 0 holddown, 1 hidden)
    Restart Complete
    inet.3                : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    iso.0                 : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0                : 19 routes (19 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l3vpn.0           : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Complete
    inet6.0               : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0           : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
BGP-INET:
  Router ID: 10.69.103.1
  Type: vrf               State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.103
  Route-distinguisher: 10.255.14.176:103
  Vrf-import: [ BGP-INET-import ]
  Vrf-export: [ BGP-INET-export ]
  Tables:
    BGP-INET.inet.0       : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
BGP-L:
  Router ID: 10.69.104.1
  Type: vrf               State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.104
  Route-distinguisher: 10.255.14.176:104
  Vrf-import: [ BGP-L-import ]
  Vrf-export: [ BGP-L-export ]
  Tables:
    BGP-L.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
```


Copyright © 2013, Juniper Networks, Inc.

```
    BGP-L.mpls.0           : 3 routes (3 active, 0 holddown, 0 hidden)
    Restart Complete
L2VPN:
  Router ID: 0.0.0.0
  Type: l2vpn             State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.512
  Route-distinguisher: 10.255.14.176:512
  Vrf-import: [ L2VPN-import ]
  Vrf-export: [ L2VPN-export ]
  Tables:
    L2VPN.l2vpn.0          : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
LDP:
  Router ID: 10.69.105.1
  Type: vrf               State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.105
  Route-distinguisher: 10.255.14.176:105
  Vrf-import: [ LDP-import ]
  Vrf-export: [ LDP-export ]
  Tables:
    LDP.inet.0             : 5 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
OSPF:
  Router ID: 10.69.101.1
  Type: vrf               State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.101
  Route-distinguisher: 10.255.14.176:101
  Vrf-import: [ OSPF-import ]
  Vrf-export: [ OSPF-export ]
  Vrf-import-target: [ target:11111
  Tables:
    OSPF.inet.0            : 8 routes (7 active, 0 holddown, 0 hidden)
    Restart Complete
RIP:
  Router ID: 10.69.102.1
  Type: vrf               State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.102
  Route-distinguisher: 10.255.14.176:102
  Vrf-import: [ RIP-import ]
  Vrf-export: [ RIP-export ]
  Tables:
    RIP.inet.0             : 6 routes (6 active, 0 holddown, 0 hidden)
    Restart Complete
STATIC:
  Router ID: 10.69.100.1
  Type: vrf               State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.255.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
```

Copyright © 2013, Juniper Networks, Inc.

```
    STATIC.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
```

show route instance detail (Graceful Restart Incomplete)

```
user@host> show route instance detail
master:
  Router ID: 10.255.14.176
  Type: forwarding        State: Active
  Restart State: Pending  Path selection timeout: 300
  Tables:
    inet.0                : 17 routes (15 active, 1 holddown, 1 hidden)
    Restart Pending: OSPF LDP
    inet.3                : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: OSPF LDP
    iso.0                 : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0                : 23 routes (23 active, 0 holddown, 0 hidden)
    Restart Pending: LDP VPN
    bgp.l3vpn.0           : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
    inet6.0               : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0           : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
BGP-INET:
  Router ID: 10.69.103.1
  Type: vrf               State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.103
  Route-distinguisher: 10.255.14.176:103
  Vrf-import: [ BGP-INET-import ]
  Vrf-export: [ BGP-INET-export ]
  Tables:
    BGP-INET.inet.0       : 6 routes (5 active, 0 holddown, 0 hidden)
    Restart Pending: VPN
BGP-L:
  Router ID: 10.69.104.1
  Type: vrf               State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.104
  Route-distinguisher: 10.255.14.176:104
  Vrf-import: [ BGP-L-import ]
  Vrf-export: [ BGP-L-export ]
  Tables:
    BGP-L.inet.0          : 6 routes (5 active, 0 holddown, 0 hidden)
    Restart Pending: VPN
    BGP-L.mpls.0          : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: VPN
L2VPN:
  Router ID: 0.0.0.0
  Type: l2vpn             State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.512
  Route-distinguisher: 10.255.14.176:512
  Vrf-import: [ L2VPN-import ]
  Vrf-export: [ L2VPN-export ]
  Tables:
    L2VPN.l2vpn.0         : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: VPN L2VPN
```


Copyright © 2013, Juniper Networks, Inc.

```
LDP:
  Router ID: 10.69.105.1
  Type: vrf                State: Active
  Restart State: Pending   Path selection timeout: 300
  Interfaces:
    t3-0/0/0.105
  Route-distinguisher: 10.255.14.176:105
  Vrf-import: [ LDP-import ]
  Vrf-export: [ LDP-export ]
  Tables:
    LDP.inet.0             : 5 routes (4 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF LDP VPN
OSPF:
  Router ID: 10.69.101.1
  Type: vrf                State: Active
  Restart State: Pending   Path selection timeout: 300
  Interfaces:
    t3-0/0/0.101
  Route-distinguisher: 10.255.14.176:101
  Vrf-import: [ OSPF-import ]
  Vrf-export: [ OSPF-export ]
  Tables:
    OSPF.inet.0            : 8 routes (7 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF VPN
RIP:
  Router ID: 10.69.102.1
  Type: vrf                State: Active
  Restart State: Pending   Path selection timeout: 300
  Interfaces:
    t3-0/0/0.102
  Route-distinguisher: 10.255.14.176:102
  Vrf-import: [ RIP-import ]
  Vrf-export: [ RIP-export ]
  Tables:
    RIP.inet.0             : 8 routes (6 active, 2 holddown, 0 hidden)
    Restart Pending: RIP VPN
STATIC:
  Router ID: 10.69.100.1
  Type: vrf                State: Active
  Restart State: Pending   Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.255.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
    STATIC.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Pending: VPN
```

show route instance detail (VPLS Routing Instance)

```
user@host> show route instance detail test-vpls
test-vpls:
  Router ID: 0.0.0.0
  Type: vpls               State: Active
  Interfaces:
    lsi.1048833
    lsi.1048832
    fe-0/1/0.513
  Route-distinguisher: 10.255.37.65:1
  Vrf-import: [ __vrf-import-test-vpls-internal__ ]
  Vrf-export: [ __vrf-export-test-vpls-internal__ ]
  Vrf-import-target: [ target:300:1 ]
```

Copyright © 2013, Juniper Networks, Inc.

```
  Vrf-export-target: [ target:300:1 ]
  Fast-reroute-priority: high
  Tables:
    test-vpls.l2vpn.0          : 3 routes (3 active, 0 holddown, 0 hidden)
```

show route instance operational

```
user@host> show route instance operational
Operational Routing Instances:

master
default
```

show route instance summary

```
user@host> show route instance summary
Instance             Type            Primary rib            Active/holddown/hidden
master               forwarding
                                     inet.0                 15/0/1
                                     iso.0                  1/0/0
                                     mpls.0                 35/0/0
                                     l3vpn.0                0/0/0
                                     inet6.0                2/0/0
                                     l2vpn.0                0/0/0
                                     l2circuit.0            0/0/0
BGP-INET             vrf
                                     BGP-INET.inet.0        5/0/0
                                     BGP-INET.iso.0         0/0/0
                                     BGP-INET.inet6.0       0/0/0
BGP-L                vrf
                                     BGP-L.inet.0           5/0/0
                                     BGP-L.iso.0            0/0/0
                                     BGP-L.mpls.0           4/0/0
                                     BGP-L.inet6.0          0/0/0
L2VPN                l2vpn
                                     L2VPN.inet.0           0/0/0
                                     L2VPN.iso.0            0/0/0
                                     L2VPN.inet6.0          0/0/0
                                     L2VPN.l2vpn.0          2/0/0
LDP                  vrf
                                     LDP.inet.0             4/0/0
                                     LDP.iso.0              0/0/0
                                     LDP.mpls.0             0/0/0
                                     LDP.inet6.0            0/0/0
                                     LDP.l2circuit.0        0/0/0
OSPF                 vrf
                                     OSPF.inet.0            7/0/0
                                     OSPF.iso.0             0/0/0
                                     OSPF.inet6.0           0/0/0
RIP                  vrf
                                     RIP.inet.0             6/0/0
                                     RIP.iso.0              0/0/0
                                     RIP.inet6.0            0/0/0
STATIC               vrf
                                     STATIC.inet.0          4/0/0
                                     STATIC.iso.0           0/0/0
                                     STATIC.inet6.0         0/0/0
```


Copyright © 2013, Juniper Networks, Inc.

show route next-hop

Syntax
show route next-hop *next-hop*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route next-hop *next-hop*
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display the entries in the routing table that are being sent to the specified next-hop address.

Options
brief | detail | extensive | terse—(Optional) Display the specified level of ouput.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

next-hop—Next-hop address.

Required Privilege Level
view

List of Sample Output
show route next-hop on page 796
show route next-hop detail on page 796
show route next-hop extensive on page 798
show route next-hop terse on page 800

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route next-hop

```
user@host> show route next-hop 192.168.71.254

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16       *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0
10.209.0.0/16      *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0
172.16.0.0/12      *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0
192.168.0.0/16     *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0
192.168.102.0/23   *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0
207.17.136.0/24    *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0
207.17.136.192/32  *[Static/5] 06:26:25
                    > to 192.168.71.254 via fxp0.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route next-hop detail

```
user@host> show route next-hop 192.168.71.254 detail

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
10.10.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I

10.209.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
```


Copyright © 2013, Juniper Networks, Inc.

```
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I

172.16.0.0/12 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I

192.168.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I

192.168.102.0/23 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I

207.17.136.0/24 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I

207.17.136.192/32 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 36
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:     1
                Age: 6:27:41
                Task: RT
                Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
                AS path: I
```

Copyright © 2013, Juniper Networks, Inc.

```
private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route next-hop extensive

```
user@host> show route next-hop 192.168.71.254 extensive

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

192.168.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.0.0/16 -> {192.168.71.254}
```


Copyright © 2013, Juniper Networks, Inc.

```
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

192.168.102.0/23 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.102.0/23 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

207.17.136.192/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.192/32 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:02:28
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

Copyright © 2013, Juniper Networks, Inc.

```
red.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route next-hop terse

```
user@host> show route next-hop 192.168.71.254 terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.10.0.0/16       S   5                       >192.168.71.254
* 10.209.0.0/16      S   5                       >192.168.71.254
* 172.16.0.0/12      S   5                       >192.168.71.254
* 192.168.0.0/16     S   5                       >192.168.71.254
* 192.168.102.0/23   S   5                       >192.168.71.254
* 207.17.136.0/24    S   5                       >192.168.71.254
* 207.17.136.192/32  S   5                       >192.168.71.254

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```


Copyright © 2013, Juniper Networks, Inc.

show route no-community

Syntax
show route no-community
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route no-community
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display the route entries in each routing table that are not associated with any community.

Options
none—(Same as **brief**) Display the route entries in each routing table that are not associated with any community.

brief | detail | extensive | terse—(Optional) Display the specified level of output.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route no-community on page 802
show route no-community detail on page 802
show route no-community extensive on page 802
show route no-community terse on page 803

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route no-community

```
user@host> show route no-community
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16       *[Static/5] 00:36:27
                    > to 192.168.71.254 via fxp0.0
10.209.0.0/16      *[Static/5] 00:36:27
                    > to 192.168.71.254 via fxp0.0
10.255.71.52/32    *[Direct/0] 00:36:27
                    > via lo0.0
10.255.71.63/32    *[OSPF/10] 00:04:39, metric 1
                    > to 35.1.1.2 via ge-3/1/0.0
10.255.71.64/32    *[OSPF/10] 00:00:08, metric 2
                    > to 35.1.1.2 via ge-3/1/0.0
10.255.71.240/32   *[OSPF/10] 00:05:04, metric 2
                      via so-0/1/2.0
                    > via so-0/3/2.0
10.255.71.241/32   *[OSPF/10] 00:05:14, metric 1
                    > via so-0/1/2.0
10.255.71.242/32   *[OSPF/10] 00:05:19, metric 1
                    > via so-0/3/2.0
12.1.1.0/24        *[OSPF/10] 00:05:14, metric 2
                    > via so-0/3/2.0
14.1.1.0/24        *[OSPF/10] 00:00:08, metric 3
                    > to 35.1.1.2 via ge-3/1/0.0
                      via so-0/1/2.0
                      via so-0/3/2.0
16.1.1.0/24        *[OSPF/10] 00:05:14, metric 2
                    > via so-0/1/2.0
.....
```

show route no-community detail

```
user@host> show route no-community detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Age: 38:08
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

10.209.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Age: 38:08
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I
....

user@host> show route no-community extensive
```


Copyright © 2013, Juniper Networks, Inc.

show route no-community extensive

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:03:33
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
        *Static Preference: 5
                Next-hop reference count: 22
                Next hop: 192.168.71.254 via fxp0.0, selected
                State: <Active NoReadvrt Int Ext>
                Local AS:    69
                Age: 2:03:33
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I
```

show route no-community terse

```
user@host> show route no-community terse

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.10.0.0/16       S   5                       >192.168.71.254
* 10.209.0.0/16      S   5                       >192.168.71.254
* 10.255.71.52/32    D   0                       >lo0.0
* 10.255.71.63/32    O  10          1            >35.1.1.2
* 10.255.71.64/32    O  10          2            >35.1.1.2
* 10.255.71.240/32   O  10          2             so-0/1/2.0
                                                 >so-0/3/2.0
* 10.255.71.241/32   O  10          1            >so-0/1/2.0
* 10.255.71.242/32   O  10          1            >so-0/3/2.0
* 12.1.1.0/24        O  10          2            >so-0/3/2.0
* 14.1.1.0/24        O  10          3            >35.1.1.2
                                                  so-0/1/2.0
                                                  so-0/3/2.0
* 16.1.1.0/24        O  10          2            >so-0/1/2.0
...
```

Copyright © 2013, Juniper Networks, Inc.

show route output

Syntax
show route output (address *ip-address* | interface *interface-name*)
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route output (address *ip-address* | interface *interface-name*)
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display the entries in the routing table learned through static routes and interior gateway protocols that are to be sent out the interface with either the specified IP address or specified name.

To view routes advertised to a neighbor or received from a neighbor for the BGP protocol, use the **show route advertising-protocol bgp** and **show route receive-protocol bgp** commands instead.

Options
address ***ip-address***—Display entries in the routing table that are to be sent out the interface with the specified IP address.

brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

interface ***interface-name***—Display entries in the routing table that are to be sent out the interface with the specified name.

logical-system (all | ***logical-system-name*****)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route output address on page 805
show route output address detail on page 805
show route output address extensive on page 805
show route output address terse on page 805
show route output interface on page 806
show route output interface detail on page 806
show route output interface extensive on page 807
show route output interface terse on page 807

Output Fields
For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route output address

```
user@host> show route output address 36.1.1.1/24

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

36.1.1.0/24        *[Direct/0] 00:19:56
                    > via so-0/1/2.0
                    [OSPF/10] 00:19:55, metric 1
                    > via so-0/1/2.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route output address detail

```
user@host> show route output address 36.1.1.1 detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
36.1.1.0/24 (2 entries, 0 announced)
        *Direct Preference: 0
                Next hop type: Interface
                Next-hop reference count: 1
                Next hop: via so-0/1/2.0, selected
                State: <Active Int>
                Age: 23:00
                Task: IF
                AS path: I
         OSPF   Preference: 10
                Next-hop reference count: 1
                Next hop: via so-0/1/2.0, selected
                State: <Int>
                Inactive reason: Route Preference
                Age: 22:59      Metric: 1
                Area: 0.0.0.0
                Task: OSPF
                AS path: I

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route output address extensive

The output for the **show route output address extensive** command is identical to that of the **show route output address detail** command. For sample output, see show route output address detail on page 805.

Copyright © 2013, Juniper Networks, Inc.

show route output address terse

```
user@host> show route output address 36.1.1.1 terse

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 36.1.1.0/24        D   0                     >so-0/1/2.0
                     O  10          1          >so-0/1/2.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route output interface

```
user@host> show route output interface so-0/1/2.0

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.71.240/32   *[OSPF/10] 00:13:00, metric 2
                      via so-0/1/2.0
                    > via so-0/3/2.0
10.255.71.241/32   *[OSPF/10] 00:13:10, metric 1
                    > via so-0/1/2.0
14.1.1.0/24        *[OSPF/10] 00:05:11, metric 3
                      to 35.1.1.2 via ge-3/1/0.0
                    > via so-0/1/2.0
                      via so-0/3/2.0
16.1.1.0/24        *[OSPF/10] 00:13:10, metric 2
                    > via so-0/1/2.0
36.1.1.0/24        *[Direct/0] 00:13:21
                    > via so-0/1/2.0
                    [OSPF/10] 00:13:20, metric 1
                    > via so-0/1/2.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route output interface detail

```
user@host> show route output interface so-0/1/2.0 detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
10.255.71.240/32 (1 entry, 1 announced)
        *OSPF   Preference: 10
                Next-hop reference count: 2
                Next hop: via so-0/1/2.0
                Next hop: via so-0/3/2.0, selected
                State: <Active Int>
                Age: 14:52      Metric: 2
```


Copyright © 2013, Juniper Networks, Inc.

```
                Area: 0.0.0.0
                Task: OSPF
                Announcement bits (1): 0-KRT
                AS path: I

10.255.71.241/32 (1 entry, 1 announced)
        *OSPF   Preference: 10
                Next-hop reference count: 4
                Next hop: via so-0/1/2.0, selected
                State: <Active Int>
                Age: 15:02      Metric: 1
                Area: 0.0.0.0
                Task: OSPF
                Announcement bits (1): 0-KRT
                AS path: I
...
```

show route output interface extensive

The output for the **show route output interface extensive** command is identical to that of the **show route output interface detail** command. For sample output, see show route output interface detail on page 806.

show route output interface terse

```
user@host> show route output interface so-0/1/2.0 terse

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* 10.255.71.240/32   O  10          2             so-0/1/2.0
                                                 >so-0/3/2.0
* 10.255.71.241/32   O  10          1            >so-0/1/2.0
* 14.1.1.0/24        O  10          3             35.1.1.2
                                                 >so-0/1/2.0
                                                  so-0/3/2.0
* 16.1.1.0/24        O  10          2            >so-0/1/2.0
* 36.1.1.0/24        D   0                       >so-0/1/2.0
                     O  10          1            >so-0/1/2.0

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Copyright © 2013, Juniper Networks, Inc.

show route protocol

Syntax

show route protocol *protocol*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)

show route protocol *protocol*
<brief | detail | extensive | terse>

Release Information

Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.
opsf2 and **ospf3** options introduced in Junos OS Release 9.2.
opsf2 and **ospf3** options introduced in Junos OS Release 9.2 for EX Series switches.
flow option introduced in Junos OS Release 10.0.
flow option introduced in Junos OS Release 10.0 for EX Series switches.

Description

Display the route entries in the routing table that were learned from a particular protocol.

Options

brief | detail | extensive | terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

protocol—Protocol from which the route was learned:

- **access**—Access route for use by DHCP application
- **access-internal**—Access-internal route for use by DHCP application
- **aggregate**—Locally generated aggregate route
- **arp**—Route learned through the Address Resolution Protocol
- **atmvpn**—Asynchronous Transfer Mode virtual private network
- **bgp**—Border Gateway Protocol
- **ccc**—Circuit cross-connect
- **direct**—Directly connected route
- **dvmrp**—Distance Vector Multicast Routing Protocol
- **esis**—End System-to-Intermediate System
- **flow**—Locally defined flow-specification route
- **frr**—Precomputed protection route or backup route used when a link goes down
- **isis**—Intermediate System-to-Intermediate System
- **ldp**—Label Distribution Protocol
- **l2circuit**—Layer 2 circuit
- **l2vpn**—Layer 2 virtual private network

Copyright © 2013, Juniper Networks, Inc.

- **local**—Local address
- **mpls**—Multiprotocol Label Switching
- **msdp**—Multicast Source Discovery Protocol
- **ospf**—Open Shortest Path First versions 2 and 3
- **ospf2**—Open Shortest Path First versions 2 only
- **ospf3**—Open Shortest Path First version 3 only
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation
- **rsvp**—Resource Reservation Protocol
- **rtarget**—Local route target virtual private network
- **static**—Statically defined route
- **tunnel**—Dynamic tunnel
- **vpn**—Virtual private network

NOTE: EX Series switches run a subset of these protocols. See the switch CLI for details.

Required Privilege Level view

List of Sample Output

show route protocol access on page 811
show route protocol access-internal extensive on page 811
show route protocol arp on page 811
show route protocol bgp on page 812
show route protocol bgp detail on page 812
show route protocol bgp extensive on page 812
show route protocol bgp terse on page 813
show route protocol direct on page 813
show route protocol frr on page 813
show route protocol l2circuit detail on page 814
show route protocol l2vpn extensive on page 815
show route protocol ldp on page 815
show route protocol ldp extensive on page 816
show route protocol ospf (Layer 3 VPN) on page 817
show route protocol ospf detail on page 817
show route protocol rip on page 818
show route protocol rip detail on page 818
show route protocol ripng table inet6 on page 818
show route protocol static detail on page 818

Copyright © 2013, Juniper Networks, Inc.

Output Fields For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route protocol access

```
user@host> show route protocol access
inet.0: 30380 destinations, 30382 routes (30379 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

13.160.0.3/32      *[Access/13] 00:00:09
                    > to 13.160.0.2 via fe-0/0/0.0
13.160.0.4/32      *[Access/13] 00:00:09
                    > to 13.160.0.2 via fe-0/0/0.0
13.160.0.5/32      *[Access/13] 00:00:09
                    > to 13.160.0.2 via fe-0/0/0.0
```

show route protocol access-internal extensive

```
user@host> show route protocol access-internal 13.160.0.19 extensive
inet.0: 100020 destinations, 100022 routes (100019 active, 0 holddown, 1 hidden)
13.160.0.19/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.19/32 -> {13.160.0.2}
        *Access-internal Preference: 12
                Next-hop reference count: 200000
                Next hop: 13.160.0.2 via fe-0/0/0.0, selected
                State: <Active Int>
       Age: 36
                Task: RPD Unix Domain Server./var/run/rpd_serv.local
                Announcement bits (1): 0-KRT
                AS path: I
```

show route protocol arp

```
user@host> show route protocol arp
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32        [ARP/4294967293] 00:04:35, from 20.20.1.1
                      Unusable
20.20.1.4/32        [ARP/4294967293] 00:04:35, from 20.20.1.1
                      Unusable
20.20.1.5/32        [ARP/4294967293] 00:04:32, from 20.20.1.1
                      Unusable
20.20.1.6/32        [ARP/4294967293] 00:04:34, from 20.20.1.1
                      Unusable
20.20.1.7/32        [ARP/4294967293] 00:04:35, from 20.20.1.1
                      Unusable
20.20.1.8/32        [ARP/4294967293] 00:04:35, from 20.20.1.1
                      Unusable
20.20.1.9/32        [ARP/4294967293] 00:04:35, from 20.20.1.1
                      Unusable
20.20.1.10/32       [ARP/4294967293] 00:04:35, from 20.20.1.1
                      Unusable
20.20.1.11/32       [ARP/4294967293] 00:04:33, from 20.20.1.1
                      Unusable
20.20.1.12/32       [ARP/4294967293] 00:04:33, from 20.20.1.1
                      Unusable
20.20.1.13/32       [ARP/4294967293] 00:04:33, from 20.20.1.1
                      Unusable
...
```

Copyright © 2013, Juniper Networks, Inc.

show route protocol bgp

```
user@host> show route protocol bgp 192.168.64.0/21
inet.0: 335832 destinations, 335833 routes (335383 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.64.0/21       *[BGP/170] 6d 10:41:16, localpref 100, from 192.168.69.71
                      AS path: 10458 14203 2914 4788 4788 I
                    > to 192.168.167.254 via fxp0.0
```

show route protocol bgp detail

```
user@host> show route protocol bgp 66.117.63.0/24 detail
inet.0: 335805 destinations, 335806 routes (335356 active, 0 holddown, 450 hidden)
66.117.63.0/24  (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 1006436
                Source: 192.168.69.71
                Next hop type: Router, Next hop index: 324
                Next hop: 192.168.167.254 via fxp0.0, selected
                Protocol next hop: 192.168.69.71
                Indirect next hop: 8e166c0 342
                State: <Active Ext>
                Local AS:    69 Peer AS: 10458
                Age: 6d 10:42:42        Metric2: 0
                Task: BGP_10458.192.168.69.71+179
                Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
1
                AS path: 10458 14203 2914 4788 4788 I
                Communities: 2914:410 2914:2403 2914:3400
                Accepted
                Localpref: 100
                Router ID: 207.17.136.192
```

show route protocol bgp extensive

```
user@host> show route protocol bgp 192.168.64.0/21 extensive

inet.0: 335827 destinations, 335828 routes (335378 active, 0 holddown, 450 hidden)
192.168.64.0/21 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
    Nexthop: Self
    AS path: [69] 10458 14203 2914 4788 4788 I
    Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4.  Val: 1
        *BGP    Preference: 170/-101
                Next hop type: Indirect
                Next-hop reference count: 1006502
                Source: 192.168.69.71
                Next hop type: Router, Next hop index: 324
                Next hop: 192.168.167.254 via fxp0.0, selected
                Protocol next hop: 192.168.69.71
                Indirect next hop: 8e166c0 342
                State: <Active Ext>
                Local AS:    69 Peer AS: 10458
                Age: 6d 10:44:45        Metric2: 0
                Task: BGP_10458.192.168.69.71+179
                Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
1
                AS path: 10458 14203 2914 4788 4788 I
                Communities: 2914:410 2914:2403 2914:3400
```


Copyright © 2013, Juniper Networks, Inc.

```
                    Accepted
                    Localpref: 100
                    Router ID: 207.17.136.192
                    Indirect next hops: 1
                            Protocol next hop: 192.168.69.71
                            Indirect next hop: 8e166c0 342
                            Indirect path forwarding next hops: 1
                                    Next hop type: Router
                                    Next hop: 192.168.167.254 via fxp0.0
                            192.168.0.0/16 Originating RIB: inet.0
                              Node path count: 1
                              Forwarding nexthops: 1
                                    Nexthop: 192.168.167.254 via fxp0.0
```

show route protocol bgp terse

```
user@host> show route protocol bgp 192.168.64.0/21 terse

inet.0: 24 destinations, 32 routes (23 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
  192.168.64.0/21    B 170        100            >100.1.3.2       10023 21 I
```

show route protocol direct

```
user@host> show route protocol direct

inet.0: 335843 destinations, 335844 routes (335394 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

8.8.8.0/24          *[Direct/0] 17w0d 10:31:49
                     > via fe-1/3/1.0
10.255.165.1/32     *[Direct/0] 25w4d 04:13:18
                     > via lo0.0
30.30.30.0/24       *[Direct/0] 17w0d 23:06:26
                     > via fe-1/3/2.0
192.168.164.0/22    *[Direct/0] 25w4d 04:13:20
                     > via fxp0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

47.0005.80ff.f800.0000.0108.0001.0102.5516.5001/152
                    *[Direct/0] 25w4d 04:13:21
                     > via lo0.0

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

abcd::10:255:165:1/128
                    *[Direct/0] 25w4d 04:13:21
                     > via lo0.0
fe80::2a0:a5ff:fe12:ad7/128
                    *[Direct/0] 25w4d 04:13:21
                     > via lo0.0
```

show route protocol frr

```
user@host> show route protocol frr
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
```

Copyright © 2013, Juniper Networks, Inc.

```
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32       *[FRR/200] 00:05:38, from 20.20.1.1
                    > to 20.20.1.3 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.4/32       *[FRR/200] 00:05:38, from 20.20.1.1
                    > to 20.20.1.4 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.5/32       *[FRR/200] 00:05:35, from 20.20.1.1
                    > to 20.20.1.5 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.6/32       *[FRR/200] 00:05:37, from 20.20.1.1
                    > to 20.20.1.6 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.7/32       *[FRR/200] 00:05:38, from 20.20.1.1
                    > to 20.20.1.7 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.8/32       *[FRR/200] 00:05:38, from 20.20.1.1
                    > to 20.20.1.8 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.9/32       *[FRR/200] 00:05:38, from 20.20.1.1
                    > to 20.20.1.9 via ge-4/1/0.0
                      to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.10/32      *[FRR/200] 00:05:38, from 20.20.1.1
...
```

show route protocol l2circuit detail

```
user@host> show route protocol l2circuit detail

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
100000 (1 entry, 1 announced)
        *L2CKT  Preference: 7
                Next hop: via ge-2/0/0.0, selected
                Label operation: Pop       Offset: 4
                State: <Active Int>
                Local AS:    99
                Age: 9:52
                Task: Common L2 VC
                Announcement bits (1): 0-KRT
                AS path: I

ge-2/0/0.0 (1 entry, 1 announced)
        *L2CKT  Preference: 7
                Next hop: via so-1/1/2.0 weight 1, selected
                Label-switched-path my-lsp
                Label operation: Push 100000, Push 100000(top)[0] Offset: -4
                Protocol next hop: 10.245.255.63
                Push 100000 Offset: -4
                 Indirect next hop: 86af0c0 298
                State: <Active Int>
                Local AS:    99
                Age: 9:52
                Task: Common L2 VC
                Announcement bits (2): 0-KRT 1-Common L2 VC
                AS path: I

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
        *L2CKT  Preference: 7
                Next hop: via so-1/1/2.0 weight 1, selected
                Label-switched-path my-lsp
```


Copyright © 2013, Juniper Networks, Inc.

```
                    Label operation: Push 100000[0]
                    Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
                    State: <Active Int>
                    Local AS:    99
                    Age: 10:21
                    Task: l2 circuit
                    Announcement bits (1): 0-LDP
                    AS path: I
                    VC Label 100000, MTU 1500, VLAN ID 512
```

show route protocol l2vpn extensive

```
user@host> show route protocol l2vpn extensive

inet.0: 14 destinations, 15 routes (13 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
800001 (1 entry, 1 announced)
TSI:
KRT in-kernel 800001 /36 -> {so-0/0/0.0}
        *L2VPN  Preference: 7
                Next hop: via so-0/0/0.0 weight 49087 balance 97%, selected
                Label operation: Pop       Offset: 4
                State: <Active Int>
                Local AS:    69
                Age: 7:48
                Task: Common L2 VC
                Announcement bits (1): 0-KRT
                AS path: I

so-0/0/0.0 (1 entry, 1 announced)
TSI:
KRT in-kernel so-0/0/0.0.0      /16 -> {indirect(288)}
        *L2VPN  Preference: 7
                Next hop: via so-0/0/1.0, selected
                Label operation: Push 800000 Offset: -4
                Protocol next hop: 10.255.14.220
                Push 800000 Offset: -4
                 Indirect next hop: 85142a0 288
                State: <Active Int>
                Local AS:    69
                Age: 7:48
                Task: Common L2 VC
                Announcement bits (2): 0-KRT 1-Common L2 VC
                AS path: I
                Communities: target:69:1 Layer2-info: encaps:PPP,
                control flags:2, mtu: 0
```

show route protocol ldp

```
user@host> show route protocol ldp
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.16.1/32    *[LDP/9] 1d 23:03:35, metric 1
                    > via t1-4/0/0.0, Push 100000
192.168.17.1/32    *[LDP/9] 1d 23:03:35, metric 1
                    > via t1-4/0/0.0
```

Copyright © 2013, Juniper Networks, Inc.

```
private1__.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100064             *[LDP/9] 1d 23:03:35, metric 1
                    > via t1-4/0/0.0, Pop
100064(S=0)        *[LDP/9] 1d 23:03:35, metric 1
                    > via t1-4/0/0.0, Pop
100080             *[LDP/9] 1d 23:03:35, metric 1
                    > via t1-4/0/0.0, Swap 100000
```

show route protocol ldp extensive

```
user@host> show route protocol ldp extensive
192.168.16.1/32 (1 entry, 1 announced)
        State: <FlashAll>
        *LDP    Preference: 9
                Next-hop reference count: 3
                Next hop: via t1-4/0/0.0, selected
                Label operation: Push 100000
                State: <Active Int>
                Local AS: 65500
                Age: 1d 23:03:58        Metric: 1
                Task: LDP
                Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
                AS path: I

192.168.17.1/32 (1 entry, 1 announced)
        State: <FlashAll>
        *LDP    Preference: 9
                Next-hop reference count: 3
                Next hop: via t1-4/0/0.0, selected
                State: <Active Int>
                Local AS: 65500
                Age: 1d 23:03:58        Metric: 1
                Task: LDP
                Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
                AS path: I

private1__.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)

100064 (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /36 -> {t1-4/0/0.0}
        *LDP    Preference: 9
                Next-hop reference count: 2
                Next hop: via t1-4/0/0.0, selected
                State: <Active Int>
                Local AS: 65500
                Age: 1d 23:03:58        Metric: 1
                Task: LDP
                Announcement bits (1): 0-KRT
                AS path: I
                Prefixes bound to route: 192.168.17.1/32

100064(S=0) (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /40 -> {t1-4/0/0.0}
        *LDP    Preference: 9
```


Copyright © 2013, Juniper Networks, Inc.

```
                    Next-hop reference count: 2
                    Next hop: via t1-4/0/0.0, selected
                    Label operation: Pop
                    State: <Active Int>
                    Local AS: 65500
                    Age: 1d 23:03:58        Metric: 1
                    Task: LDP
                    Announcement bits (1): 0-KRT
                    AS path: I

100080 (1 entry, 1 announced)
TSI:
KRT in-kernel 100080 /36 -> {t1-4/0/0.0}
        *LDP    Preference: 9
                    Next-hop reference count: 2
                    Next hop: via t1-4/0/0.0, selected
                    Label operation: Swap 100000
                    State: <Active Int>
                    Local AS: 65500
                    Age: 1d 23:03:58        Metric: 1
                    Task: LDP
                    Announcement bits (1): 0-KRT
                    AS path: I
                    Prefixes bound to route: 192.168.16.1/32
```

show route protocol ospf (Layer 3 VPN)

```
user@host> show route protocol ospf
inet.0: 40 destinations, 40 routes (39 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.4/30       *[OSPF/10] 00:05:18, metric 4
                    > via t3-3/2/0.0
10.39.1.8/30        [OSPF/10] 00:05:18, metric 2
                    > via t3-3/2/0.0
10.255.14.171/32   *[OSPF/10] 00:05:18, metric 4
                    > via t3-3/2/0.0
10.255.14.179/32   *[OSPF/10] 00:05:18, metric 2
                    > via t3-3/2/0.0
224.0.0.5/32       *[OSPF/10] 20:25:55, metric 1

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30       [OSPF/10] 00:05:43, metric 1
                    > via so-0/2/2.0
10.255.14.173/32   *[OSPF/10] 00:05:43, metric 1
                    > via so-0/2/2.0
224.0.0.5/32       *[OSPF/10] 20:26:20, metric 1
```

show route protocol ospf detail

```
user@host> show route protocol ospf detail
VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 (2 entries, 0 announced)
         OSPF   Preference:  10
                    Nexthop: via so-0/2/2.0, selected
                    State: <Int>
                    Inactive reason: Route Preference
                    Age: 6:25       Metric: 1
                    Area: 0.0.0.0
                    Task: VPN-AB-OSPF
```

Copyright © 2013, Juniper Networks, Inc.

```
                    AS path: I
                    Communities: Route-Type:0.0.0.0:1:0

...
```

show route protocol rip

```
user@host> show route protocol rip
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32   *[RIP/100] 20:24:34, metric 2
                     > to 10.39.1.22 via t3-0/2/2.0
224.0.0.9/32       *[RIP/100] 00:03:59, metric 1
```

show route protocol rip detail

```
user@host> show route protocol rip detail
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 (1 entry, 1 announced)
        *RIP    Preference: 100
                Nexthop: 10.39.1.22 via t3-0/2/2.0, selected
                State: <Active Int>
                Age: 20:25:02   Metric: 2
                Task: VPN-AB-RIPv2
                Announcement bits (2): 0-KRT 2-BGP.0.0.0.0+179
                AS path: I
                Route learned from 10.39.1.22 expires in 96 seconds
```

show route protocol ripng table inet6

```
user@host> show route protocol ripng table inet6
inet6.0: 4215 destinations, 4215 routes (4214 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

1111::1/128        *[RIPng/100] 02:13:33, metric 2
                     > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::2/128        *[RIPng/100] 02:13:33, metric 2
                     > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::3/128        *[RIPng/100] 02:13:33, metric 2
                     > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::4/128        *[RIPng/100] 02:13:33, metric 2
                     > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::5/128        *[RIPng/100] 02:13:33, metric 2
                     > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::6/128        *[RIPng/100] 02:13:33, metric 2
                     > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
```

show route protocol static detail

```
user@host> show route protocol static detail
inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
10.5.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next hop type: Router, Next hop index: 324
                Address: 0x9274010
                Next-hop reference count: 27
                Next hop: 192.168.187.126 via fxp0.0, selected
                Session Id: 0x0
                State: <Active NoReadvrt Int Ext>
```


Copyright © 2013, Juniper Networks, Inc.

```
                Age: 7w3d 21:24:25
                Validation State: unverified
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

10.10.0.0/16 (1 entry, 1 announced)
        *Static Preference: 5
                Next hop type: Router, Next hop index: 324
                Address: 0x9274010
                Next-hop reference count: 27
                Next hop: 192.168.187.126 via fxp0.0, selected
                Session Id: 0x0
                State: <Active NoReadvrt Int Ext>
                Age: 7w3d 21:24:25
                Validation State: unverified
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I

10.13.10.0/23 (1 entry, 1 announced)
        *Static Preference: 5
                Next hop type: Router, Next hop index: 324
                Address: 0x9274010
                Next-hop reference count: 27
                Next hop: 192.168.187.126 via fxp0.0, selected
                Session Id: 0x0
                State: <Active NoReadvrt Int Ext>
                Age: 7w3d 21:24:25
                Validation State: unverified
                Task: RT
                Announcement bits (1): 0-KRT
                AS path: I
```

Copyright © 2013, Juniper Networks, Inc.

show route receive-protocol

Syntax
show route receive-protocol *protocol neighbor-address*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)

Syntax (EX Series Switches)
show route receive-protocol *protocol neighbor-address*
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display the routing information as it was received through a particular neighbor using a particular dynamic routing protocol.

Options
brief | detail | extensive | terse—(Optional) Display the specified level of output.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

protocol neighbor-address—Protocol transmitting the route (**bgp**, **dvmrp**, **msdp**, **pim**, **rip**, or **ripng**) and address of the neighboring router from which the route entry was received.

Additional Information
The output displays the selected routes and the attributes with which they were received, but does not show the effects of import policy on the routing attributes.

Required Privilege Level
view

List of Sample Output
show route receive-protocol bgp on page 823
show route receive-protocol bgp extensive on page 823
show route receive-protocol bgp table extensive on page 823
show route receive-protocol bgp logical-system extensive on page 823
show route receive-protocol bgp detail (Layer 2 VPN) on page 824
show route receive-protocol bgp extensive (Layer 2 VPN) on page 825
show route receive-protocol bgp (Layer 3 VPN) on page 826
show route receive-protocol bgp detail (Layer 3 VPN) on page 826
show route receive-protocol bgp extensive (Layer 3 VPN) on page 827

Output Fields
Table 31 on page 820 describes the output fields for the **show route receive-protocol** command. Output fields are listed in the approximate order in which they appear.

Table 31: show route receive-protocol Output Fields

Field Name	Field Description	Level of Output
routing-table-name	Name of the routing table—for example, inet.0.	All levels
number **destinations**	Number of destinations for which there are routes in the routing table.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 31: show route receive-protocol Output Fields *(continued)*

Field Name	Field Description	Level of Output
***number* routes**	Number of routes in the routing table and total number of routes in the following states: • **active** • **holddown** (routes that are in pending state before being declared inactive) • **hidden** (routes that are not used because of a routing policy)	All levels
Prefix	Destination prefix.	none **brief**
MED	Multiple exit discriminator value included in the route.	none **brief**
***destination-prefix* (entry, announced)**	Destination prefix. The **entry** value is the number of routes for this destination, and the **announced** value is the number of routes being announced for this destination.	**detail extensive**
Route Distinguisher	64-bit prefix added to IP subnets to make them unique.	**detail extensive**
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.	**detail extensive**
VPN Label	Virtual private network (VPN) label. Packets are sent between CE and PE routing devices by advertising VPN labels. VPN labels transit over either an RSVP or an LDP label-switched path (LSP) tunnel.	**detail extensive**
Next hop	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	All levels
Localpref or **Lclpref**	Local preference value included in the route.	All levels

Copyright © 2013, Juniper Networks, Inc.

Table 31: show route receive-protocol Output Fields *(continued)*

Field Name	Field Description	Level of Output
AS path	Autonomous system (AS) path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **?**—Incomplete; typically, the AS path was aggregated. When AS path numbers are included in the route, the format is as follows: • **[ ]**—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used the AS-path merge process, as defined in RFC 4893. • **[ ]**—If more than one AS number is configured on the router, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path. • **{ }**—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • **( )**—Parentheses enclose a confederation. • **([ ])**—Parentheses and brackets enclose a confederation set. NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.	All levels
Cluster list	(For route reflected output only) Cluster ID sent by the route reflector.	**detail extensive**
Originator ID	(For route reflected output only) Address of routing device that originally sent the route to the route reflector.	**detail extensive**
Communities	Community path attribute for the route. See the Output Field table in the show route detail command for all possible values for this field.	**detail extensive**
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.	**detail extensive**
Attrset AS	Number, local preference, and path of the AS that originated the route. These values are stored in the **Attrset** attribute at the originating routing device.	**detail extensive**
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).	**detail extensive**
control flags	Control flags: **none** or **Site Down**.	**detail extensive**
mtu	Maximum transmission unit (MTU) of the Layer 2 circuit.	**detail extensive**

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route receive-protocol bgp

```
user@host> show route receive-protocol bgp 10.255.245.215

inet.0: 28 destinations, 33 routes (27 active, 0 holddown, 1 hidden)
Prefix                  Next hop             MED     Lclpref    AS path
10.22.1.0/24            10.255.245.215       0       100        I
10.22.2.0/24            10.255.245.215       0       100        I
```

show route receive-protocol bgp extensive

```
user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
Prefix             Next hop               MED    Lclpref AS path
1.1.1.0/24 (1 entry, 1 announced)
     Next hop: 10.0.50.3
     Localpref: 100
     AS path: I <Orginator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.45
165.3.0.0/16 (1 entry, 1 announced)
     Next hop: 111.222.5.254
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.68
165.4.0.0/16 (1 entry, 1 announced)
     Next hop: 111.222.5.254
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.45
195.1.2.0/24 (1 entry, 1 announced)
     Next hop: 111.222.5.254
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix             Next hop               MED    Lclpref AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix             Next hop               MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix             Next hop               MED    Lclpref AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)
```

show route receive-protocol bgp table extensive

```
user@host> show route receive-protocol bgp 207.17.136.192 table inet.0 66.117.68.0/24 extensive
inet.0: 227315 destinations, 227316 routes (227302 active, 0 holddown, 13 hidden)
* 66.117.63.0/24 (1 entry, 1 announced)
     Nexthop: 207.17.136.29
     Localpref: 100
     AS path: AS2 PA[6]: 14203 2914 3356 29748 33437 AS_TRANS
     AS path: AS4 PA[2]: 33437 393219
     AS path: Merged[6]: 14203 2914 3356 29748 33437 393219 I
     Communities: 2914:420
```

show route receive-protocol bgp

```
user@host> show route receive-protocol bgp 10.0.0.9 logical-system PE4 extensive
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)
* 10.0.0.0/30 (1 entry, 1 announced)
```

Copyright © 2013, Juniper Networks, Inc.

logical-system extensive

```
     Accepted
     Route Label: 3
     Nexthop: 10.0.0.9
     AS path: 13979 I

* 10.0.0.4/30 (1 entry, 1 announced)
     Accepted
     Route Label: 3
     Nexthop: 10.0.0.9
     AS path: 13979 I

  10.0.0.8/30 (2 entries, 1 announced)
     Accepted
     Route Label: 3
     Nexthop: 10.0.0.9
     AS path: 13979 I

* 10.9.9.1/32 (1 entry, 1 announced)
     Accepted
     Route Label: 3
     Nexthop: 10.0.0.9
     AS path: 13979 I

* 10.100.1.1/32 (1 entry, 1 announced)
     Accepted
     Route Label: 3
     Nexthop: 10.0.0.9
     AS path: 13979 I

* 44.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300096
     Nexthop: 10.0.0.9
     AS path: 13979 I
     AIGP: 203

* 55.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300112
     Nexthop: 10.0.0.9
     AS path: 13979 7018 I
     AIGP: 25

* 66.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300144
     Nexthop: 10.0.0.9
     AS path: 13979 7018 I

* 99.0.0.0/24 (1 entry, 1 announced)
     Accepted
     Route Label: 300160
     Nexthop: 10.0.0.9
     AS path: 13979 7018 I
```

show route receive-protocol bgp detail (Layer 2 VPN)

```
user@host> show route receive-protocol bgp 10.255.14.171 detail
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix             Nexthop               MED    Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix             Nexthop               MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```


Copyright © 2013, Juniper Networks, Inc.

```
Prefix             Nexthop              MED    Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix             Nexthop              MED    Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0
hidden)
Prefix             Nexthop              MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
     Route Distinguisher: 10.255.245.35:1
     Label-base : 800000, range : 4, status-vector : 0x0
     Nexthop: 10.255.245.35
     Localpref: 100
     AS path: I
     Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
     control flags: 0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix             Nexthop              MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
     Route Distinguisher: 10.255.245.35:1
     Label-base : 800000, range : 4, status-vector : 0x0
     Nexthop: 10.255.245.35
     Localpref: 100
     AS path: I
     Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
     control flags:0, mtu: 0
```

show route receive-protocol bgp

```
user@host> show route receive-protocol bgp 10.255.14.171 extensive
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix             Nexthop              MED    Lclpref AS path
```

extensive (Layer 2 VPN)

```
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix             Nexthop               MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix             Nexthop               MED    Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix             Nexthop               MED    Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix             Nexthop               MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
     Route Distinguisher: 10.255.245.35:1
     Label-base : 800000, range : 4, status-vector : 0x0
     Nexthop: 10.255.245.35
     Localpref: 100
     AS path: I
     Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
     control flags:0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix             Nexthop               MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
     Route Distinguisher: 10.255.245.35:1
     Label-base : 800000, range : 4, status-vector : 0x0
     Nexthop: 10.255.245.35
     Localpref: 100
     AS path: I
     Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
     control flags:0, mtu: 0
```

show route receive-protocol bgp (Layer 3 VPN)

```
user@host> show route receive-protocol bgp 10.255.14.171
      inet.0: 33 destinations, 33 routes (32 active, 0 holddown, 1 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      10.255.14.175/32   10.255.14.171                     100 2 I
      10.255.14.179/32   10.255.14.171           2         100 I
      VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      10.255.14.175/32   10.255.14.171                     100 2 I
      10.255.14.177/32   10.255.14.171                     100 I
      iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      mpls.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
      Prefix             Nexthop               MED    Lclpref AS path
      10.255.14.171:300:10.255.14.177/32
                         10.255.14.171                     100 I
      10.255.14.171:100:10.255.14.179/32
                         10.255.14.171           2         100 I
      10.255.14.171:200:10.255.14.175/32
                         10.255.14.171                     100 2 I
```

show route receive-protocol bgp detail (Layer 3 VPN)

```
user@host> show route receive-protocol bgp 10.255.14.174 detail
inet.0: 16 destinations, 17 routes (15 active, 0 holddown, 1 hidden)
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
     Route Distinguisher: 10.255.14.176:2
     VPN Label: 101264
```


Copyright © 2013, Juniper Networks, Inc.

```
     Nexthop: 10.255.14.174
     Localpref: 100
     AS path: I
     Communities: target:200:100
     AttrSet AS: 100
         Localpref: 100
         AS path: I
* 10.255.14.172/32 (1 entry, 1 announced)
     Route Distinguisher: 10.255.14.176:2
     VPN Label: 101280
     Nexthop: 10.255.14.174
     Localpref: 100
     AS path: I
     Communities: target:200:100
     AttrSet AS: 100
         Localpref: 100
         AS path: I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
* 10.255.14.174:2:10.49.0.0/30 (1 entry, 0 announced)
     Route Distinguisher: 10.255.14.174:2
     VPN Label: 101264
     Nexthop: 10.255.14.174
     Localpref: 100
     AS path: I
     Communities: target:200:100
     AttrSet AS: 100
         Localpref: 100
         AS path: I
* 10.255.14.174:2:10.255.14.172/32 (1 entry, 0 announced)
     Route Distinguisher: 10.255.14.174:2
     VPN Label: 101280
     Nexthop: 10.255.14.174
     Localpref: 100
     AS path: I
     Communities: target:200:100
     AttrSet AS: 100
         Localpref: 100
         AS path: I
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

show route receive-protocol bgp

```
user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
     Prefix             Nexthop               MED    Lclpref AS path
```

extensive (Layer 3 VPN)

```
1.1.1.0/24 (1 entry, 1 announced)
     Nexthop: 10.0.50.3
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.45
165.3.0.0/16 (1 entry, 1 announced)
     Nexthop: 111.222.5.254
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.68
165.4.0.0/16 (1 entry, 1 announced)
     Nexthop: 111.222.5.254
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.45
195.1.2.0/24 (1 entry, 1 announced)
     Nexthop: 111.222.5.254
     Localpref: 100
     AS path: I <Originator>
     Cluster list:  10.2.3.1
     Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix             Nexthop                MED    Lclpref AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix             Nexthop                MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix             Nexthop                MED    Lclpref AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)
```


Copyright © 2013, Juniper Networks, Inc.

show route table

Syntax
show route table *routing-table-name*
<brief | detail | extensive | terse>
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route table *routing-table-name*
<brief | detail | extensive | terse>

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display the route entries in a particular routing table.

Options
brief | detail | extensive | terse—(Optional) Display the specified level of output.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

routing-table-name—Display route entries for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the **show route table inet** command).

Required Privilege Level
view

Related Documentation
- show route summary

List of Sample Output
show route table bgp.l2.vpn on page 831
show route table bgp.l3vpn.0 on page 831
show route table bgp.l3vpn.0 detail on page 831
show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured) on page 832
show route table inet.0 on page 833
show route table inet6.0 on page 833
show route table inet6.3 on page 833
show route table inetflow detail on page 833
show route table l2circuit.0 on page 834
show route table mpls on page 834
show route table mpls extensive on page 835
show route table mpls.0 on page 835
show route table mpls.0 (RSVP Route—Transit LSP) on page 835
show route table vpls_1 detail on page 836
show route table vpn-a on page 836
show route table vpn-a.mdt.0 on page 836
show route table VPN-A detail on page 837
show route table VPN-AB.inet.0 on page 837
show route table VPN_blue.mvpn-inet6.0 on page 837
show route table VPN-A detail on page 838

Copyright © 2013, Juniper Networks, Inc.

show route table inetflow detail on page 838

Output Fields For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show route table bgp.l2.vpn

```
user@host> show route table bgp.l2.vpn
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.24.1:1:4:1/96
                   *[BGP/170] 01:08:58, localpref 100, from 192.168.24.1
                      AS path: I
                    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
```

show route table bgp.l3vpn.0

```
user@host> show route table bgp.l3vpn.0
      bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
      + = Active Route, - = Last Active, * = Both

      10.255.71.15:100:10.255.71.17/32
                         *[BGP/170] 00:03:59, MED 1, localpref 100, from
      10.255.71.15
                           AS path: I
                          > via so-2/1/0.0, Push 100020, Push 100011(top)
      10.255.71.15:200:10.255.71.18/32
                         *[BGP/170] 00:03:59, MED 1, localpref 100, from
      10.255.71.15
                           AS path: I
                          > via so-2/1/0.0, Push 100021, Push 100011(top)
```

show route table bgp.l3vpn.0 detail

```
user@host> show route table bgp.l3vpn.0 detail
bgp.l3vpn.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)

10.255.245.12:1:4.0.0.0/8 (1 entry, 1 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.245.12:1
          Source: 10.255.245.12
          Next hop: 192.168.208.66 via fe-0/0/0.0, selected
          Label operation: Push 182449
          Protocol next hop: 10.255.245.12
          Push 182449
          Indirect next hop: 863a630 297
          State: <Active Int Ext>
          Local AS:    35 Peer AS:    35
          Age: 12:19      Metric2: 1
          Task: BGP_35.10.255.245.12+179
          Announcement bits (1): 0-BGP.0.0.0.0+179
          AS path: 30 10458 14203 2914 3356 I (Atomic) Aggregator: 3356 4.68.0.11

          Communities: 2914:420 target:11111:1 origin:56:78
          VPN Label: 182449
          Localpref: 100
           Router ID: 10.255.245.12

10.255.245.12:1:4.17.225.0/24 (1 entry, 1 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.245.12:1
          Source: 10.255.245.12
          Next hop: 192.168.208.66 via fe-0/0/0.0, selected
          Label operation: Push 182465
          Protocol next hop: 10.255.245.12
          Push 182465
```

Copyright © 2013, Juniper Networks, Inc.

```
            Indirect next hop: 863a8f0 305
            State: <Active Int Ext>
            Local AS:    35 Peer AS:    35
            Age: 12:19      Metric2: 1
            Task: BGP_35.10.255.245.12+179
            Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496 6496 I
                   Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
                   VPN Label: 182465
                   Localpref: 100
                   Router ID: 10.255.245.12

10.255.245.12:1:4.17.226.0/23 (1 entry, 1 announced)
  *BGP   Preference: 170/-101
            Route Distinguisher: 10.255.245.12:1
            Source: 10.255.245.12
            Next hop: 192.168.208.66 via fe-0/0/0.0, selected
            Label operation: Push 182465
            Protocol next hop: 10.255.245.12
            Push 182465
            Indirect next hop: 86bd210 330
            State: <Active Int Ext>
            Local AS:    35 Peer AS:    35
            Age: 12:19      Metric2: 1
            Task: BGP_35.10.255.245.12+179
            Announcement bits (1): 0-BGP.0.0.0.0+179
            AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496

            6496 I
            Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
            VPN Label: 182465
            Localpref: 100
            Router ID: 10.255.245.12

10.255.245.12:1:4.17.251.0/24 (1 entry, 1 announced)
  *BGP   Preference: 170/-101
            Route Distinguisher: 10.255.245.12:1
            Source: 10.255.245.12
            Next hop: 192.168.208.66 via fe-0/0/0.0, selected
            Label operation: Push 182465
            Protocol next hop: 10.255.245.12
            Push 182465
            Indirect next hop: 86bd210 330
            State: <Active Int Ext>
            Local AS:    35 Peer AS:    35
            Age: 12:19      Metric2: 1
            Task: BGP_35.10.255.245.12+179
            Announcement bits (1): 0-BGP.0.0.0.0+179
            AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496

            6496 I
            Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
            VPN Label: 182465
            Localpref: 100
```

show route table bgp.rtarget.0 (When Proxy BGP Route

```
user@host> show route table bgp.rtarget.o
bgp.rtarget.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```


Copyright © 2013, Juniper Networks, Inc.

Target Filtering Is Configured)

```
100:100:100/96
                   *[RTarget/5] 00:03:14
                      Type Proxy
                        for 10.255.165.103
                        for 10.255.166.124
                      Local
```

show route table inet.0

```
user@host> show route table inet.0
inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 00:51:57
                    > to 111.222.5.254 via fxp0.0
1.0.0.1/32         *[Direct/0] 00:51:58
                    > via at-5/3/0.0
1.0.0.2/32         *[Local/0] 00:51:58
                      Local
12.12.12.21/32     *[Local/0] 00:51:57
                      Reject
13.13.13.13/32     *[Direct/0] 00:51:58
                    > via t3-5/2/1.0
13.13.13.14/32     *[Local/0] 00:51:58
                      Local
13.13.13.21/32     *[Local/0] 00:51:58
                      Local
13.13.13.22/32     *[Direct/0] 00:33:59
                    > via t3-5/2/0.0
127.0.0.1/32        [Direct/0] 00:51:58
                    > via lo0.0
111.222.5.0/24     *[Direct/0] 00:51:58
                    > via fxp0.0
111.222.5.81/32    *[Local/0] 00:51:58
                      Local
```

show route table inet6.0

```
user@host> show route table inet6.0
inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Route, * = Both

fec0:0:0:3::/64 *[Direct/0] 00:01:34
>via fe-0/1/0.0

fec0:0:0:3::/128 *[Local/0] 00:01:34
>Local

fec0:0:0:4::/64 *[Static/5] 00:01:34
>to fec0:0:0:3::ffff via fe-0/1/0.0
```

show route table inet6.3

```
user@router> show route table inet6.3
inet6.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::10.255.245.195/128
                   *[LDP/9] 00:00:22, metric 1
                    > via so-1/0/0.0
::10.255.245.196/128
                   *[LDP/9] 00:00:08, metric 1
                    > via so-1/0/0.0, Push 100008
```

Copyright © 2013, Juniper Networks, Inc.

show route table inetflow detail

```
user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Next-hop reference count: 2
                State: **Active Ext>
                Local AS: 65002 Peer AS: 65000
                Age: 4
                Task: BGP_65000.10.12.99.5+3792
                Announcement bits (1): 0-Flow
                AS path: 65000 I
                Communities: traffic-rate:0:0
                Validation state: Accept, Originator: 10.12.99.5
                Via: 10.12.44.0/24, Active
                Localpref: 100
                Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
        *Flow   Preference: 5
                Next-hop reference count: 2
                State: **Active>
                Local AS: 65002
                Age: 6:30
                Task: RT Flow
                Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
                AS path: I
                Communities: 1:1
```

show route table l2circuit.0

```
user@host> show route table l2circuit.0
l2circuit.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.195:NoCtrlWord:1:1:Local/96
                   *[L2CKT/7] 00:50:47
                    > via so-0/1/2.0, Push 100049
                      via so-0/1/3.0, Push 100049
10.1.1.195:NoCtrlWord:1:1:Remote/96
                   *[LDP/9] 00:50:14
                      Discard
10.1.1.195:CtrlWord:1:2:Local/96
                   *[L2CKT/7] 00:50:47
                    > via so-0/1/2.0, Push 100049
                      via so-0/1/3.0, Push 100049
10.1.1.195:CtrlWord:1:2:Remote/96
                   *[LDP/9] 00:50:14
                      Discard
```

show route table mpls

```
user@host> show route table mpls
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0                  *[MPLS/0] 00:13:55, metric 1
                      Receive
1                  *[MPLS/0] 00:13:55, metric 1
                      Receive
2                  *[MPLS/0] 00:13:55, metric 1
                      Receive
1024               *[VPN/0] 00:04:18
                      to table red.inet.0, Pop
```


Copyright © 2013, Juniper Networks, Inc.

show route table mpls extensive

```
user@host> show route table mpls extensive
100000 (1 entry, 1 announced)
TSI:
KRT in-kernel 100000 /36 -> {so-1/0/0.0}
        *LDP    Preference:   9
                Next hop:  via so-1/0/0.0, selected
                Pop
                State: <Active Int>
                Age: 29:50      Metric: 1
                Task: LDP
                Announcement bits (1): 0-KRT
                AS path: I
                Prefixes bound to route: 10.0.0.194/32
```

show route table mpls.0

```
user@host> show route table mpls.0
mpls.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0                  *[MPLS/0] 00:45:09, metric 1
                      Receive
1                  *[MPLS/0] 00:45:09, metric 1
                      Receive
2                  *[MPLS/0] 00:45:09, metric 1
                      Receive
100000             *[L2VPN/7] 00:43:04
                    > via so-0/1/0.1, Pop
100001             *[L2VPN/7] 00:43:03
                    > via so-0/1/0.2, Pop       Offset: 4
100002             *[LDP/9] 00:43:22, metric 1
                      via so-0/1/2.0, Pop
                    > via so-0/1/3.0, Pop
100002(S=0)        *[LDP/9] 00:43:22, metric 1
                      via so-0/1/2.0, Pop
                    > via so-0/1/3.0, Pop
100003             *[LDP/9] 00:43:22, metric 1
                    > via so-0/1/2.0, Swap 100002
                      via so-0/1/3.0, Swap 100002
100004             *[LDP/9] 00:43:16, metric 1
                      via so-0/1/2.0, Swap 100049
                    > via so-0/1/3.0, Swap 100049
so-0/1/0.1         *[L2VPN/7] 00:43:04
                    > via so-0/1/2.0, Push 100001, Push 100049(top)
                      via so-0/1/3.0, Push 100001, Push 100049(top)
so-0/1/0.2         *[L2VPN/7] 00:43:03
                      via so-0/1/2.0, Push 100000, Push 100049(top) Offset: -4
                    > via so-0/1/3.0, Push 100000, Push 100049(top) Offset: -4
```

show route table mpls.0 (RSVP Route—Transit LSP)

```
user@host> show route table mpls.0

mpls.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0                  *[MPLS/0] 00:37:31, metric 1
                      Receive
1                  *[MPLS/0] 00:37:31, metric 1
                      Receive
2                  *[MPLS/0] 00:37:31, metric 1
                      Receive
```

Copyright © 2013, Juniper Networks, Inc.

```
13                 *[MPLS/0] 00:37:31, metric 1
                      Receive
300352             *[RSVP/7/1] 00:08:00, metric 1
                    > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300352(S=0)        *[RSVP/7/1] 00:08:00, metric 1
                    > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300384             *[RSVP/7/2] 00:05:20, metric 1
                    > to 8.64.1.106 via ge-1/0/0.0, Pop
300384(S=0)        *[RSVP/7/2] 00:05:20, metric 1
                    > to 8.64.1.106 via ge-1/0/0.0, Pop
```

show route table vpls_1 detail

```
user@host> show route table vpls_1 detail
vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

1.1.1.11:1000:1:1/96 (1 entry, 1 announced)
*L2VPN Preference: 170/-1
Receive table: vpls_1.l2vpn.0
Next-hop reference count: 2
State: <Active Int Ext>
Age: 4:29:47 Metric2: 1
Task: vpls_1-l2vpn
Announcement bits (1): 1-BGP.0.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down
Label-base: 800000, range: 8, status-vector: 0xFF
```

show route table vpn-a

```
user@host> show route table vpn-a
vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

+ = Active Route, - = Last Active, * = Both
192.168.16.1:1:1:1/96
                   *[VPN/7] 05:48:27
                     Discard
192.168.24.1:1:2:1/96
                   *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
                      AS path: I
                    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
192.168.24.1:1:3:1/96
                   *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
                      AS path: I
                    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
```

show route table vpn-a.mdt.0

```
user@host> show route table vpn-a.mdt.0
vpn-a.mdt.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:1:0:10.255.14.216:232.1.1.1/144
                   *[MVPN/70] 01:23:05, metric2 1
                      Indirect
1:1:1:10.255.14.218:232.1.1.1/144
                   *[BGP/170] 00:57:49, localpref 100, from 10.255.14.218
                      AS path: I
                    > via so-0/0/0.0, label-switched-path r0e-to-r1
1:1:2:10.255.14.217:232.1.1.1/144
                   *[BGP/170] 00:57:49, localpref 100, from 10.255.14.217
                      AS path: I
> via so-0/0/1.0, label-switched-path r0-to-r2
```


Copyright © 2013, Juniper Networks, Inc.

show route table VPN-A detail

```
user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Route Distinguisher: 10.255.179.13:200
                Next hop type: Indirect
                Next-hop reference count: 5
                Source: 10.255.179.13
                Next hop type: Router, Next hop index: 732
                Next hop: 10.39.1.14 via fe-0/3/0.0, selected
                Label operation: Push 299824, Push 299824(top)
                Protocol next hop: 10.255.179.13
                Push 299824
                Indirect next hop: 8f275a0 1048574
                State: (Secondary Active Int Ext)
                Local AS: 1 Peer AS: 1
                Age: 3:41:06 Metric: 1 Metric2: 1
                Task: BGP_1.10.255.179.13+64309
                Announcement bits (2): 0-KRT 1-BGP RT Background
                AS path: I
                Communities: target:1:200 rte-type:0.0.0.0:1:0
                Import Accepted
                VPN Label: 299824 TTL Action: vrf-ttl-propagate
                Localpref: 100
                Router ID: 10.255.179.13
                Primary Routing Table bgp.l3vpn.0
```

show route table VPN-AB.inet.0

```
user@host> show route table VPN-AB.inet.0
      VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
      + = Active Route, - = Last Active, * = Both

      10.39.1.0/30       *[OSPF/10] 00:07:24, metric 1
                          > via so-7/3/1.0
      10.39.1.4/30       *[Direct/0] 00:08:42
                          > via so-5/1/0.0
      10.39.1.6/32       *[Local/0] 00:08:46
                            Local
      10.255.71.16/32    *[Static/5] 00:07:24
                          > via so-2/0/0.0
      10.255.71.17/32    *[BGP/170] 00:07:24, MED 1, localpref 100, from
      10.255.71.15
                            AS path: I
                          > via so-2/1/0.0, Push 100020, Push 100011(top)
      10.255.71.18/32    *[BGP/170] 00:07:24, MED 1, localpref 100, from
      10.255.71.15
                            AS path: I
                          > via so-2/1/0.0, Push 100021, Push 100011(top)
      10.255.245.245/32  *[BGP/170] 00:08:35, localpref 100
                            AS path: 2 I
                          > to 10.39.1.5 via so-5/1/0.0
      10.255.245.246/32  *[OSPF/10] 00:07:24, metric 1
                          > via so-7/3/1.0
```

show route table VPN_blue.mvpn-inet6.0

```
user@host> show route table VPN_blue.mvpn-inet6.0
vpn_blue.mvpn-inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:10.255.2.202:65535:10.255.2.202/432
```

Copyright © 2013, Juniper Networks, Inc.

```
                    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
                      AS path: I
                     > via so-0/1/3.0
1:10.255.2.203:65535:10.255.2.203/432
                    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.203
                      AS path: I
                     > via so-0/1/0.0
1:10.255.2.204:65535:10.255.2.204/432
                    *[MVPN/70] 00:57:23, metric2 1
                      Indirect
5:10.255.2.202:65535:128:::192.168.90.2:128:ffff::1/432
                    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
                      AS path: I
                     > via so-0/1/3.0
6:10.255.2.203:65535:65000:128:::10.12.53.12:128:ffff::1/432
                    *[PIM/105] 00:02:37
                      Multicast (IPv6)
7:10.255.2.202:65535:65000:128:::192.168.90.2:128:ffff::1/432
                    *[MVPN/70] 00:02:37, metric2 1
                      Indirect
```

show route table VPN-A detail

```
user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Route Distinguisher: 10.255.179.13:200
                Next hop type: Indirect
                Next-hop reference count: 5
                Source: 10.255.179.13
                Next hop type: Router, Next hop index: 732
                Next hop: 10.39.1.14 via fe-0/3/0.0, selected
                Label operation: Push 299824, Push 299824(top)
                Protocol next hop: 10.255.179.13
                Push 299824
                Indirect next hop: 8f275a0 1048574
                State: (Secondary Active Int Ext)
                Local AS: 1 Peer AS: 1
                Age: 3:41:06 Metric: 1 Metric2: 1
                Task: BGP_1.10.255.179.13+64309
                Announcement bits (2): 0-KRT 1-BGP RT Background
                AS path: I
                Communities: target:1:200 rte-type:0.0.0.0:1:0
                Import Accepted
                VPN Label: 299824 TTL Action: vrf-ttl-propagate
                Localpref: 100
                Router ID: 10.255.179.13
                Primary Routing Table bgp.l3vpn.0
```

show route table inetflow detail

```
user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Next-hop reference count: 2
                State: **Active Ext>
                Local AS: 65002 Peer AS: 65000
                Age: 4
                Task: BGP_65000.10.12.99.5+3792
                Announcement bits (1): 0-Flow
                AS path: 65000 I
                Communities: traffic-rate:0:0
```


Copyright © 2013, Juniper Networks, Inc.

```
                Validation state: Accept, Originator: 10.12.99.5
                Via: 10.12.44.0/24, Active
                Localpref: 100
                Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
        *Flow   Preference: 5
                Next-hop reference count: 2
                State: **Active>
                Local AS: 65002
                Age: 6:30
                Task: RT Flow
                Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
                AS path: I
                Communities: 1:1
```

```
user@PE1> show route table green.l2vpn.0 (VPLS Multihoming with FEC 129)
green.l2vpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.2:100:1.1.1.2/96 AD
                   *[VPLS/170] 1d 03:11:03, metric2 1
                         Indirect
1.1.1.4:100:1.1.1.4/96 AD
                   *[BGP/170] 1d 03:11:02, localpref 100, from 1.1.1.4
                      AS path: I, validation-state: unverified
                    >    via ge-1/2/1.5
1.1.1.2:100:1:0/96 MH
                   *[VPLS/170] 1d 03:11:03, metric2 1
                         Indirect
1.1.1.4:100:1:0/96 MH
                   *[BGP/170] 1d 03:11:02, localpref 100, from 1.1.1.4
                      AS path: I, validation-state: unverified
                    >    via ge-1/2/1.5
1.1.1.4:NoCtrlWord:5:100:100:1.1.1.2:1.1.1.4/176
                   *[VPLS/7] 1d 03:11:02, metric2 1
                    >    via ge-1/2/1.5
1.1.1.4:NoCtrlWord:5:100:100:1.1.1.4:1.1.1.2/176
                   *[LDP/9] 1d 03:11:02
                         Discard
```

Copyright © 2013, Juniper Networks, Inc.

show route terse

Syntax
show route terse
<logical-system (all | *logical-system-name*)>

Syntax (EX Series Switches)
show route terse

Release Information
Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description
Display a high-level summary of the routes in the routing table.

NOTE: For BGP routes, the **show route terse** command displays the local preference attribute and MED instead of the metric1 and metric2 values. This is mostly due to historical reasons.

To display the metric1 and metric2 value of a BGP route, use the show route extensive command.

Options
none—Display a high-level summary of the routes in the routing table.

logical-system (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

Required Privilege Level
view

List of Sample Output
show route terse on page 842

Output Fields
Table 32 on page 840 describes the output fields for the **show route terse** command. Output fields are listed in the approximate order in which they appear.

Table 32: show route terse Output Fields

Field Name	Field Description
routing-table-name	Name of the routing table (for example, inet.0).
number **destinations**	Number of destinations for which there are routes in the routing table.
number **routes**	Number of routes in the routing table and total number of routes in the following states: • **active** (routes that are active) • **holddown** (routes that are in the pending state before being declared inactive) • **hidden** (routes that are not used because of a routing policy)

Copyright © 2013, Juniper Networks, Inc.

Table 32: show route terse Output Fields *(continued)*

Field Name	Field Description
route key	Key for the state of the route: • **+**—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • **-** —A hyphen indicates the last active route. • *****—An asterisk indicates that the route is both the active and the last active route. An asterisk before a **to** line indicates the best subpath to the route.
A	Active route. An asterisk (*) indicates this is the active route.
V	Validation status of the route: • **?**—Not evaluated. Indicates that the route was not learned through BGP. • **I**—Invalid. Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • **N**—Unknown. Indicates that the prefix is not among the prefixes or prefix ranges in the database. • **V**—Valid. Indicates that the prefix and autonomous system pair are found in the database.
Destination	Destination of the route.
P	Protocol through which the route was learned: • **A**—Aggregate • **B**—BGP • **C**—CCC • **D**—Direct • **G**—GMPLS • **I**—IS-IS • **L**—L2CKT, L2VPN, LDP, Local • **K**—Kernel • **M**—MPLS, MSDP • **O**—OSPF • **P**—PIM • **R**—RIP, RIPng • **S**—Static • **T**—Tunnel
Prf	Preference value of the route. In every routing metric except for the BGP **LocalPref** attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the **LocalPref** value in the **Preference2** field. For example, if the **LocalPref** value for Route 1 is 100, the **Preference2** value is -101. If the **LocalPref** value for Route 2 is 155, the **Preference2** value is -156. Route 2 is preferred because it has a higher **LocalPref** value and a lower **Preference2** value.
Metric 1	First metric value in the route. For routes learned from BGP, this is the MED metric.
Metric 2	Second metric value in the route. For routes learned from BGP, this is the IGP metric.

Copyright © 2013, Juniper Networks, Inc.

Table 32: show route terse Output Fields *(continued)*

Field Name	Field Description
Next hop	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.
AS path	AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: • **I**—IGP. • **E**—EGP. • **?**—Incomplete; typically, the AS path was aggregated.

Sample Output

show route terse

```
user@host> show route terse
inet.0: 10 destinations, 12 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A V Destination        P Prf   Metric 1   Metric 2  Next hop        AS path
* ? 1.0.1.1/32         O  10          1             >10.0.0.2
  ?                    B 170        100                           I
  unverified                                      >10.0.0.2
* ? 1.1.1.1/32         D   0                       >lo0.2
* V 2.2.0.2/32         B 170        110                           200 I
  valid                                           >10.0.0.2
* ? 10.0.0.0/30        D   0                       >lt-1/2/0.1
  ?                    B 170        100                           I
  unverified                                      >10.0.0.2
* ? 10.0.0.1/32        L   0                        Local
* ? 10.0.0.4/30        B 170        100                           I
  unverified                                      >10.0.0.2
* ? 10.0.0.8/30        B 170        100                           I
  unverified                                      >10.0.0.2
* I 172.16.1.1/32      B 170         90                           200 I
  invalid                                         >10.0.0.2
* N 192.168.2.3/32     B 170        100                           200 I
  unknown                                         >10.0.0.2
* ? 224.0.0.5/32       O  10          1            MultiRecv
```


Copyright © 2013, Juniper Networks, Inc.

show validation database

Syntax

show validation database
<brief | detail>
<instance *instance-name*>
<logical-system *logical-system-name*>
<mismatch>
<origin-autonomous-system *as-number*>
<record *ip-prefix*>
<session *ip-address*>

Release Information

Command introduced in Junos OS Release 12.2.

Description

Display information about the route validation database when resource public key infrastructure (RPKI) BGP route validation is configured. You can query all route validation records that match a given prefix or origin-autonomous-system. In addition, you can filter the output by a specific RPKI cache session.

Options

none—Display all route validation database entries.

brief | detail—(Optional) Display the specified level of output.

instance *instance-name*—(Optional) Display information about route validation database entries for the specified routing instance. The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

mismatch—(Optional) Filter the output by mismatched origin autonomous systems.

origin-autonomous-system *as-number*—(Optional) Filter the output by mismatched origin autonomous systems. The **mismatch** qualifier is useful for finding conflicting origin-autonomous-system information between RPKI caches. Mismatches might occur during cache reconfiguration.

record *ip-prefix*—(Optional) Filter the output by route validation records that match a given prefix.

session *ip-address*—(Optional) Filter the output by a specific RPKI cache session.

Required Privilege Level

view

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output

show validation database on page 844

Output Fields

Table 33 on page 844 describes the output fields for the **show validation database** command. Output fields are listed in the approximate order in which they appear.

Copyright © 2013, Juniper Networks, Inc.

Table 33: show validation database Output Fields

Field Name	Field Description	Level of Output
Prefix	Route validation (RV) record prefix. RV records are received from the cache server and can also be configured statically at the **[edit routing-options validation** static**]** hierarchy level .	All levels
Origin-AS	Legitimate originator autonomous system (AS).	All levels
Session	IP address of the RPKI cache server.	All levels
State	State of the route validation records. The state can be **valid**, **invalid** or **unknown**.	All levels
Mismatch	Conflicting origin-autonomous-system information between RPKI caches when nonstop active routing (NSR) is configured.	All levels
IPv4 records	Number of IPv4 route validation records.	All levels
IPv6 records	Number of IPv6 route validation records.	All levels

Sample Output

show validation database

```
user@host> show validation database
 RV database for instance master

  Prefix               Origin-AS Session         State   Mismatch
  1.0.1.0/24-32                1 10.0.77.1       valid
  1.0.2.0/24-32                2 10.0.77.1       valid
  1.0.3.0/24-32                3 10.0.77.1       valid
  1.0.4.0/24-32                4 10.0.77.1       valid
  1.0.5.0/24-32                5 10.0.77.1       valid
  1.0.6.0/24-32                6 10.0.77.1       valid
  1.0.7.0/24-32                7 10.0.77.1       valid
  1.0.8.0/24-32                8 10.0.77.1       valid
  72.9.224.0/19-24         26234 192.168.1.100   valid   *
  72.9.224.0/19-24          3320 192.168.1.200   invalid *
  10.0.0.0/8-32                0 internal        valid

  IPv4 records: 14
  IPv6 records: 0
```


Copyright © 2013, Juniper Networks, Inc.

show validation group

Syntax
show validation group
<instance *instance-name*>
<logical-system *logical-system-name*>

Release Information
Command introduced in Junos OS Release 12.2.

Description
Display information about route validation redundancy groups.

Options
none—Display information about all route validation groups.

instance *instance-name*—(Optional) Display information about route validation groups for the specified routing instance. The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

Required Privilege Level
view

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output
show validation group on page 846

Output Fields
Table 34 on page 845 describes the output fields for the **show validation group** command. Output fields are listed in the approximate order in which they appear.

Table 34: show validation group Output Fields

Field Name	Field Description
Group	Group name.
Maximum sessions	Number of concurrent sessions for each group. The default is 2. The number is configurable with the max-sessions statement.
Session	Resource public key infrastructure (RPKI) cache session IP address.
State	State of the connection between the routing device and the cache server. **Up** means that the connection is established. **Connect** means that the connection is not established.
Preference	Each cache server has a preference. Higher preferences are preferred. During a session start or restart, the routing device attempts to start a session with the cache server that has the numerically highest preference. The routing device connects to multiple cache servers in preference order. The default preference is 100. The preference is configurable with the preference statement.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

show validation group

```
user@host> show validation group
master
    Group: test, Maximum sessions: 3
      Session 10.255.255.11, State: Up, Preference: 100
      Session 10.255.255.12, State: Up, Preference: 100
    Group: test2, Maximum sessions: 2
      Session 10.255.255.13, State: Connect, Preference: 100
```


Copyright © 2013, Juniper Networks, Inc.

show validation replication database

Syntax

show validation replication database
<brief | detail>
<instance *instance-name*>
<logical-system *logical-system-name*>
<origin-autonomous-system *as-number*>
<record *ip-prefix*>
<session *ip-address*>

Release Information

Command introduced in Junos OS Release 12.2.

Description

Display the state of the nonstop active routing (NSR) records. The output is the same as the output of the show validation database command, except for the **Mismatch** column.

Options

none—Display all route validation database entries.

brief | detail—(Optional) Display the specified level of output.

instance ***instance-name***—(Optional) Display information about route validation database entries for the specified routing instance. The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system ***logical-system-name***—(Optional) Perform this operation on a particular logical system.

origin-autonomous-system ***as-number***—(Optional) Filter the output by mismatched origin autonomous systems. The **mismatch** qualifier is useful for finding conflicting origin-autonomous-system information between resource public key infrastructure (RPKI) caches. Mismatches might occur during cache reconfiguration.

record ***ip-prefix***—(Optional) Filter the output by route validation records that match a given prefix.

session ***ip-address***—(Optional) Filter the output by a specific RPKI cache session.

Required Privilege Level

view

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output

show validation replication database on page 848

Output Fields

Table 35 on page 848 describes the output fields for the **show validation replication database** command. Output fields are listed in the approximate order in which they appear.

Copyright © 2013, Juniper Networks, Inc.

Table 35: show validation replication database Output Fields

Field Name	Field Description	Level of Output
Prefix	Route validation (RV) record prefix. RV records are received from the cache server and can also be configured statically at the **[edit routing-options validation** static**]** hierarchy level.	All levels
Origin-AS	Legitimate originator autonomous system (AS).	All levels
Session	IP address of the RPKI cache server.	All levels
State	State of the route validation records. The state can be **valid** or **invalid**.	All levels
IPv4 records	Number of IPv4 route validation records.	All levels
IPv6 records	Number of IPv6 route validation records.	All levels

Sample Output

show validation replication database

```
user@host> show validation replication database
RV database for instance master

  Prefix               Origin-AS Session         State
  1.0.1.0/24-32                1 10.0.77.1       valid
  1.0.2.0/24-32                2 10.0.77.1       valid
  1.0.3.0/24-32                3 10.0.77.1       valid
  1.0.4.0/24-32                4 10.0.77.1       valid
  1.0.5.0/24-32                5 10.0.77.1       valid
  1.0.6.0/24-32                6 10.0.77.1       valid
  1.0.7.0/24-32                7 10.0.77.1       valid
  1.0.8.0/24-32                8 10.0.77.1       valid
  72.9.224.0/19-24         26234 192.168.1.100   valid
  72.9.224.0/19-24          3320 192.168.1.200   invalid
  10.0.0.0/8-32                0 internal        valid

  IPv4 records: 14
  IPv6 records: 0
```


Copyright © 2013, Juniper Networks, Inc.

show validation session

Syntax

show validation session
<brief | detail>
<*destination*>
<instance *instance-name*>
<logical-system *logical-system-name*>

Release Information

Command introduced in Junos OS Release 12.2.

Description

Display information about all sessions or a specific session with a resource public key infrastructure (RPKI) cache server.

Options

none—Display information about all sessions.

destination—(Optional) Display information about a specific session.

brief | detail—(Optional) Display the specified level of output.

instance *instance-name*—(Optional) Display information about sessions for the specified routing instance. The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system *logical-system-name*—(Optional) Perform this operation on a particular logical system.

Required Privilege Level

view

Related Documentation

- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output

show validation session brief on page 851
show validation session detail on page 851

Output Fields

Table 36 on page 849 describes the output fields for the **show validation session** command. Output fields are listed in the approximate order in which they appear.

Table 36: show validation session Output Fields

Field Name	Field Description	Level of Output
Session	IP address of the RPKI cache server.	All levels
State	State of the connection between the routing device and the cache server. **Up** means that the connection is established. **Connect** means that the connection is not established.	All levels
Flaps	Number of attempts to establish a session.	None and **brief**

Copyright © 2013, Juniper Networks, Inc.

Table 36: show validation session Output Fields *(continued)*

Field Name	Field Description	Level of Output
Uptime	Length of time that the session has remained establshed.	None and **brief**
#IPv4/IPv6 records	Number of IPv4 and IPv6 route validation records.	None and **brief**
Session index	Every session has an index number.	**detail**
Group	Name of the group to which the session belongs	**detail**
Preference	Each cache server has a preference. Higher preferences are preferred. During a session start or restart, the routing device attempts to start a session with the cache server that has the numerically highest preference. The routing device connects to multiple cache servers in preference order. The default preference is 100. The preference is configurable with the preference statement.	**detail**
Port	TCP port number for the outgoing connection with the cache server. The well-known RPKI port is TCP port 2222. For a given deployment, an RPKI cache server might listen on some other TCP port number. If so, you can configure the alternative port number with the port statement.	**detail**
Refresh time	Liveliness check interval for an RPKI cache server. Every refresh-time (seconds), a serial query protocol data unit (PDU) with the last known serial number is transmitted. The hold-time must be at least 2 x the **refresh-time**.	**detail**
Hold time	Length of time in seconds that the session between the routing device and the cache server is considered operational without any activity. After the hold time expires, the session is dropped. Reception of any PDU from the cache server resets the hold timer. The hold-time is 600 seconds, by default, and must be least 2 x the refresh-time. If the hold time expires, the session is considered to be down. This, in turn, triggers a session restart event. During a session restart, the routing device attempts to start a session with the cache server that has the numerically highest preference.	**detail**
Record Life time	Amount of time that route validation (RV) records learned from a cache server are valid. RV records expire if the session to the cache server goes down and remains down for the record-lifetime (seconds).	**detail**
Serial (Full Update)	Number of full serial updates.	**detail**
Serial (Incremental Update)	Number of incremental serial updates.	**detail**
Session flaps	Number of attempts to establish a session.	**detail**

Copyright © 2013, Juniper Networks, Inc.

Table 36: show validation session Output Fields *(continued)*

Field Name	Field Description	Level of Output
Session uptime	Length of time that the session has remained establshed.	**detail**
Last PDU received	Time when the most recent PDU was received.	**detail**
IPv4 prefix count	Number of IPv4 sessions.	**detail**
IPv6 prefix count	Number of IPv6 sessions.	**detail**

Sample Output

show validation session brief

```
user@host> show validation session brief
 Session                                 State    Flaps     Uptime #IPv4/IPv6
records
  1.3.0.2                                 up           2   00:01:37 13/0
  10.255.255.11                           up           3   00:00:01 1/0
  10.255.255.12                           connect      2            64/68
```

show validation session detail

```
user@host> show validation session detail
Session 10.0.77.1, State: up
    Group: test, Preference: 100
    Local IPv4 address: 10.0.77.2, Port: 2222
    Refresh time: 300s
    Session flaps: 14, Last Session flap: 5h13m18s ago
    Hold time: 900s
    Record Life time: 3600s
    Serial (Full Update): 0
    Serial (Incremental Update): 0
      Session flaps 2
      Session uptime: 00:48:35
      Last PDU received: 00:03:35
      IPv4 prefix count: 71234
      IPv6 prefix count: 345
```

Copyright © 2013, Juniper Networks, Inc.

show validation statistics

Syntax show validation statistics
<instance *instance-name*>
<logical-system *logical-system-name*>

Release Information Command introduced in Junos OS Release 12.2.

Description Display route validation statistics.

Options **none**—Display statistics for all routing instances.

instance ***instance-name***—(Optional) Display information for the specified routing instance. The instance name can be master for the main instance, or any valid configured instance name or its prefix.

logical-system ***logical-system-name***—(Optional) Perform this operation on a particular logical system.

Required Privilege Level view

Related Documentation
- Example: Configuring Origin Validation for BGP on page 375

List of Sample Output show validation statistics on page 853

Output Fields Table 37 on page 852 describes the output fields for the **show validation statistics** command. Output fields are listed in the approximate order in which they appear.

Table 37: show validation statistics Output Fields

Field Name	Field Description
Total RV records	Group name.
Total Replication RV records	Number of concurrent sessions for each group. The default is 2. The number is configurable with the max-sessions statement.
Prefix entries	Resource public key infrastructure (RPKI) cache session IP address.
Origin-AS entries	State of the connection between the routing device and the cache server. **Up** means that the connection is up. **Connect** means that the connection is not up.
Memory utilization	Each cache server has a preference. Higher preferences are preferred. During a session start or restart, the routing device attempts to start a session with the cache server that has the numerically highest preference. The routing device connects to multiple cache servers in preference order. The default preference is 100. The preference is configurable with the preference statement.

Copyright © 2013, Juniper Networks, Inc.

Table 37: show validation statistics Output Fields *(continued)*

Field Name	Field Description
Policy origin-validation requests	Number of queries for validation state of a given instance and prefix.
Valid	Number of valid prefixes reported by the validation query.
Invalid	Number of invalid prefixes reported by the validation query.
Unknown	Number of unknown prefixes reported by the validation query. This means that the prefix is not found in the database.
BGP import policy reevaluation notifications	A change, addition, or deletion of a route validation record triggers a BGP import reevaluation for all exact matching and more specific prefixes.
inet.0	Number of IPv4 route validation records that have been added, deleted, or changed.
inet6.0	Number of IPv6 route validation records that have been added, deleted, or changed.

Sample Output

show validation statistics

```
user@host> show validation statistics
Total RV records:        453455
  Total Replication RV records: 453455
    Prefix entries:         35432
    Origin-AS entries:     124400
  Memory utilization: 16.31MB
  Policy origin-validation requests: 234995
    valid:                  23445
    invalid:                14666
    unknown:                34567
  BGP import policy reevaluation notifications: 460268
    inet.0:                435345
    inet6.0:                 3454
```

Copyright © 2013, Juniper Networks, Inc.

test policy

Syntax test policy *policy-name prefix*

Release Information Command introduced before Junos OS Release 7.4.
Command introduced in Junos OS Release 9.0 for EX Series switches.

Description Test a policy configuration to determine which prefixes match routes in the routing table.

Options ***policy-name***—Name of a policy.

prefix—Destination prefix to match.

Additional Information All prefixes in the default unicast routing table (inet.0) that match prefixes that are the same as or longer than the specific prefix are processed by the **from** clause in the specified policy. All prefixes accepted by the policy are displayed. The **test policy** command evaluates a policy differently from the BGP import process. When testing a policy that contains an **interface** match condition in the **from** clause, the **test policy** command uses the match condition. In contrast, BGP does not use the **interface** match condition when evaluating the policy against routes learned from internal BGP (IBGP) or external BGP (EGBP) multihop peers.

Required Privilege Level view

Related Documentation
- show policy damping on page 686

List of Sample Output test policy on page 855

Output Fields For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Copyright © 2013, Juniper Networks, Inc.

Sample Output

test policy

```
user@host> test policy test-statics 3.0.0.1/8
inet.0: 44 destinations, 44 routes (44 active, 0 holddown, 0 hidden)
Prefixes passing policy:

3.0.0.0/8           *[BGP/170] 16:22:46, localpref 100, from 10.255.255.41
                    AS Path: 50888 I
                     > to 10.11.4.32 via en0.2, label-switched-path l2
3.3.3.1/32          *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                     > to 10.0.4.7 via fxp0.0
3.3.3.2/32          *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                     > to 10.0.4.7 via fxp0.0
3.3.3.3/32          *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                     > to 10.0.4.7 via fxp0.0
3.3.3.4/32          *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                     > to 10.0.4.7 via fxp0.0
Policy test-statics: 5 prefixes accepted, 0 prefixes rejected
```

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

PART 4

Troubleshooting

- BGP Troubleshooting on page 859
- Routing Protocol Process Memory FAQs on page 913

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 16

BGP Troubleshooting

- Checklist for Verifying the BGP Protocol and Peers on page 859
- Checklist for Checking the BGP Layer on page 860
- Checking the BGP Layer on page 861
- Check BGP Sessions on page 876
- Verify BGP Peers on page 878
- Verify the BGP Protocol on page 879
- Verify the BGP Configuration on page 881
- Display Sent or Received BGP Packets on page 887
- Diagnose BGP Session Establishment Problems on page 888
- Examine BGP Routes and Route Selection on page 889
- Examine Routes in the Forwarding Table on page 895
- Log BGP State Transition Events on page 896
- Display Detailed BGP Protocol Information on page 898
- Verify Received BGP Routes on page 900
- Verify That a Particular BGP Route Is Received on Your Router on page 900
- Check That BGP Traffic Is Using the LSP on page 901
- Check That BGP Traffic Is Using the LSP Again on page 902
- Examine the EBGP over IBGP Selection on page 903
- Verify BGP on an Internal Router on page 904
- Verify BGP on a Border Router on page 907

Checklist for Verifying the BGP Protocol and Peers

Purpose Table 38 on page 860 provides links and commands for verifying whether the Border Gateway Protocol (BGP) is configured correctly on a Juniper Networks router in your network, the internal Border Gateway Protocol (IBGP) and exterior Border Gateway Protocol (EBGP) sessions are properly established, the external routes are advertised and received correctly, and the BGP path selection process is working properly.

Action

Copyright © 2013, Juniper Networks, Inc.

Table 38: Checklist for Verifying the BGP Protocol and Peers

Tasks	Command or Action
"Verify the BGP Protocol" on page 879	
1. Verify BGP on an Internal Router on page 904	**show configuration**
2. Verify BGP on a Border Router on page 907	**show configuration**
"Verify BGP Peers" on page 878	
1. Check That BGP Sessions Are Up	**show bgp summary**
2. Verify That a Neighbor is Advertising a Particular Route	**show route advertising-protocol bgp *neighbor-address***
3. Verify That a Particular BGP Route Is Received on Your Router on page 900	**show route receive-protocol bgp *neighbor-address***
"Examine BGP Routes and Route Selection" on page 889	
1. Examine the Local Preference Selection on page 891	**show route *destination-prefix* < detail >**
2. Examine the Multiple Exit Discriminator Route Selection on page 892	**show route *destination-prefix* < detail >**
3. Examine the EBGP over IBGP Selection on page 892	**show route *destination-prefix* < detail >**
4. Examine the IGP Cost Selection on page 894	**show route *destination-prefix* < detail >**
"Examine Routes in the Forwarding Table" on page 895	**show route forwarding-table**

Checklist for Checking the BGP Layer

Problem This checklist provides the steps and commands for checking the BGP configuration of the Multiprotocol Label Switching (MPLS) network. The checklist provides links to an overview of the BGP configuration and more detailed information about the commands used to configure BGP. (See Table 39 on page 860.)

Table 39: Checklist for Checking the BGP Layer

Solution

Tasks	Command or Action
"Checking the BGP Layer" on page 861	
1. Check That BGP Traffic Is Using the LSP on page 863	**traceroute *hostname***
2. Check BGP Sessions on page 864	**show bgp summary**
3. Verify the BGP Configuration on page 866	**show configuration**
4. Examine BGP Routes on page 872	**show route *destination-prefix* detail**

Copyright © 2013, Juniper Networks, Inc.

Table 39: Checklist for Checking the BGP Layer *(continued)*

Tasks	Command or Action
5. Verify Received BGP Routes on page 873	**show route receive protocol bgp *neighbor-address***
6. Take Appropriate Action on page 874	The following sequence of commands addresses the specific problem described in this topic: **[edit]** **edit protocols bgp** **[edit protocols bgp]** **show** **set local-address 10.0.0.1** **delete group internal neighbor 10.1.36.2** **show** **commit**
7. Check That BGP Traffic Is Using the LSP Again on page 875	**traceroute *hostname***

Checking the BGP Layer

Purpose After you have configured the label-switched path (LSP) and determined that it is up, and configured BGP and determined that sessions are established, ensure that BGP is using the LSP to forward traffic.

Figure 50 on page 862 illustrates the BGP layer of the layered MPLS model.

Copyright © 2013, Juniper Networks, Inc.

Figure 50: Checking the BGP Layer

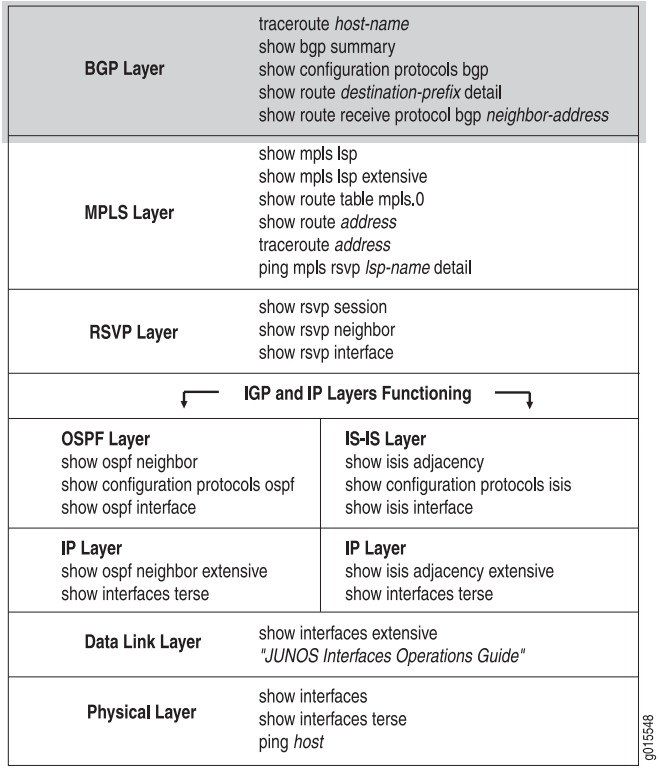

When you check the BGP layer, you verify that the route is present and active, and more importantly, you ensure that the next hop is the LSP. There is no point in checking the BGP layer unless the LSP is established, because BGP uses the MPLS LSP to forward traffic. If the network is not functioning at the BGP layer, the LSP does not work as configured.

Figure 51 on page 863 illustrates the MPLS network used in this topic.

Copyright © 2013, Juniper Networks, Inc.

Figure 51: MPLS Network Broken at the BGP Layer

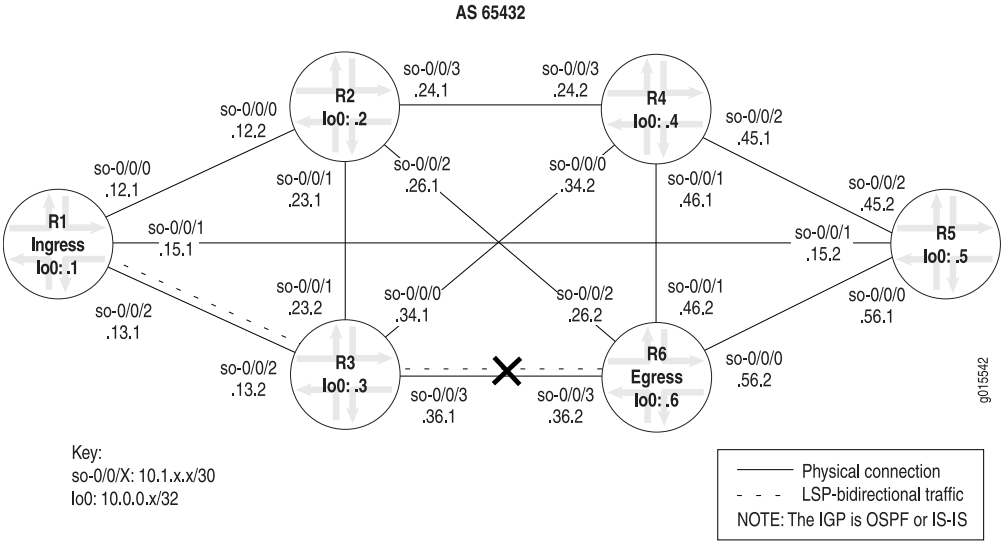

The network shown in Figure 51 on page 863 is a fully meshed configuration where every directly connected interface can receive and send packets to every other similar interface. The LSP in this network is configured to run from ingress router **R1**, through transit router **R3**, to egress router **R6**. In addition, a reverse LSP is configured to run from **R6** through **R3** to **R1**, creating bidirectional traffic.

The cross shown in Figure 51 on page 863 indicates where BGP is not being used to forward traffic through the LSP. Possible reasons for the LSP not working correctly are that the destination IP address of the LSP does not equal the BGP next hop or that BGP is not configured properly.

To check the BGP layer, follow these steps:

1. Check That BGP Traffic Is Using the LSP on page 863
2. Check BGP Sessions on page 864
3. Verify the BGP Configuration on page 866
4. Examine BGP Routes on page 872
5. Verify Received BGP Routes on page 873
6. Take Appropriate Action on page 874
7. Check That BGP Traffic Is Using the LSP Again on page 875

Check That BGP Traffic Is Using the LSP

Purpose At this level of the troubleshooting model, BGP and the LSP may be up, however BGP traffic might not be using the LSP to forward traffic.

Action To verify that BGP traffic is using the LSP, enter the following Junos OS command-line interface (CLI) operational mode command from the ingress router:

```
user@host> traceroute hostname
```

Sample Output

```
user@R1> traceroute 100.100.6.1
traceroute to 100.100.6.1 (100.100.6.1), 30 hops max, 40 byte packets
 1  10.1.13.2 (10.1.13.2)  0.653 ms  0.590 ms  0.543 ms
 2  10.1.36.2 (10.1.36.2)  0.553 ms !N  0.552 ms !N  0.537 ms !N

user@R6> traceroute 100.100.1.1
traceroute to 100.100.1.1 (100.100.1.1), 30 hops max, 40 byte packets
 1  10.1.36.1 (10.1.36.1)  0.660 ms  0.551 ms  0.526 ms
 2  10.1.13.1 (10.1.13.1)  0.568 ms !N  0.553 ms !N  0.536 ms !N
```

Meaning The sample output shows that BGP traffic is not using the LSP, consequently MPLS labels do not appear in the output. Instead of using the LSP, BGP traffic is using the interior gateway protocol (IGP) to reach the BGP next-hop LSP egress address for **R6** and **R1**. The Junos OS default is to use LSPs for BGP traffic when the BGP next hop equals the LSP egress address.

Check BGP Sessions

Purpose Display summary information about BGP and its neighbors to determine if routes are received from peers in the autonomous system (AS). When a BGP session is established, the peers are exchanging update messages.

Action To check that BGP sessions are up, enter the following Junos OS CLI operational mode command from the ingress router:

```
user@host> show bgp summary
```


Copyright © 2013, Juniper Networks, Inc.

Sample Output 1

```
user@R1> show bgp summary
Groups: 1 Peers: 6   Down peers: 1
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 1          1          0          0          0          0
Peer              AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65432      11257      11259       0       0 3d 21:49:57  0/0/0
                0/0/0
10.0.0.3        65432      11257      11259       0       0 3d 21:49:57 0/0/0
                0/0/0
10.0.0.4        65432      11257      11259       0       0 3d 21:49:57 0/0/0
                0/0/0
10.0.0.5        65432      11257      11260       0       0 3d 21:49:57 0/0/0
                0/0/0
10.0.0.6    65432    4    4572    0    1 3d 21:46:59 Active
10.1.36.2       65432      11252      11257       0       0 3d 21:46:49  1/1/0
                0/0/0
```

Sample Output 2

```
user@R1> show bgp summary
Groups: 1 Peers: 5 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 1          1          0          0          0          0
Peer              AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65432         64         68       0       0       32:18 0/0/0
                0/0/0
10.0.0.3        65432         64         67       0       0       32:02 0/0/0
                0/0/0
10.0.0.4        65432         64         67       0       0       32:10 0/0/0
                0/0/0
10.0.0.5        65432         64         67       0       0       32:14 0/0/0
                0/0/0
10.0.0.6        65432         38         39       0       1       18:02 1/1/0
                0/0/0
```

Meaning Sample Output 1 shows that one peer (egress router **10.0.0.6**) is not established, as indicated by the **Down Peers: 1** field. The last column (**State|#Active/Received/Damped**) shows that peer **10.0.0.6** is active, indicating that is it not established. All other peers are established as indicated by the number of active, received, and damped routes. For example, **0/0/0** for peer **10.0.0.2** indicates that no BGP routes were active or received in the routing table, and no BGP routes were damped; **1/1/0** for peer **10.1.36.2** indicates that one BGP route was active and received in the routing table, and no BGP routes were damped.

If the output of the **show bgp summary** command of an ingress router shows that a neighbor is down, check the BGP configuration. For information on checking the BGP configuration, see "Verify the BGP Configuration" on page 866.

Sample Output 2 shows output from ingress router **R1** after the BGP configurations on **R1** and **R6** were corrected in "Take Appropriate Action" on page 874. All BGP peers are established and one route is active and received. No BGP routes were damped.

Copyright © 2013, Juniper Networks, Inc.

If the output of the **show bgp summary** command shows that a neighbor is up but packets are not being forwarded, check for received routes from the egress router. For information on checking the egress router for received routes, see "Verify Received BGP Routes" on page 873.

Verify the BGP Configuration

Purpose For BGP to run on the router, you must define the local AS number, configure at least one group, and include information about at least one peer in the group (the peer's IP address and AS number). When BGP is part of an MPLS network, you must ensure that the LSP is configured with a destination IP address equal to the BGP next hop in order for BGP routes to be installed with the LSP as the next hop for those routes.

Action To verify the BGP configuration, enter the following Junos OS CLI operational mode command:

```
user@host> show configuration
```


Copyright © 2013, Juniper Networks, Inc.

Sample Output 1

```
user@R1> show configuration
[...Output truncated...]
interfaces {
    so-0/0/0 {
        unit 0 {
            family inet {
                address 10.1.12.1/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/1 {
        unit 0 {
            family inet {
                address 10.1.15.1/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/2 {
        unit 0 {
            family inet {
                address 10.1.13.1/30;
            }
             family iso;
            family mpls;
        }
    }
    fxp0 {
        unit 0 {
            family inet {
                address 192.168.70.143/21;
            }
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.1/32;
            }
             family iso {
                address 49.0004.1000.0000.0001.00;
            }
        }
    }
}
routing-options {
    [...Output truncated...]
         route 100.100.1.0/24 reject;
    }
     router-id 10.0.0.1;
     autonomous-system 65432;
}
protocols {
    rsvp {
        interface so-0/0/0.0;
```

```
            interface so-0/0/1.0;
            interface so-0/0/2.0;
            interface fxp0.0 {
                disable;
            }
        }
        mpls {
            label-switched-path R1-to-R6 {
                to  10.0.0.6; <<< destination address of the LSP
            }
            inactive: interface so-0/0/0.0;
            inactive: interface so-0/0/1.0;
            interface so-0/0/2.0;
            interface fxp0.0 {
                disable;
            }
        }
        bgp {
            export send-statics; <<< missing local-address statement
             group internal {
                type internal;
                neighbor 10.0.0.2;
                neighbor 10.0.0.5;
                neighbor 10.0.0.4;
                neighbor 10.0.0.6;
                neighbor 10.0.0.3;
                neighbor 10.1.36.2; <<< incorrect interface address
            }
        }
        isis {
            level 1 disable;
            interface so-0/0/0.0;
            interface so-0/0/1.0;
            interface so-0/0/2.0;
            interface all {
                level 2 metric 10;
            }
            interface fxp0.0 {
                disable;
            }
            interface lo0.0 {
                passive;
            }
        }
        ospf {
            traffic-engineering;
            area 0.0.0.0 {
                interface so-0/0/0.0;
                interface so-0/0/1.0;
                interface so-0/0/2.0;
                interface lo0.0; {
                    passive
                }
            }
        }
    }
    policy-options {
        policy-statement send-statics {
            term statics {
                from {
                    route-filter 100.100.1.0/24 exact;
```


Copyright © 2013, Juniper Networks, Inc.

```
            }
            then accept;
        }
    }
}
```

Sample Output 2

```
user@R6> show configuration
[...Output truncated...]
interfaces {
    so-0/0/0 {
        unit 0 {
            family inet {
                address 10.1.56.2/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/1 {
        unit 0 {
            family inet {
                address 10.1.46.2/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/2 {
        unit 0 {
            family inet {
                address 10.1.26.2/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/3 {
        unit 0 {
            family inet {
                address 10.1.36.2/30;
            }
             family iso;
            family mpls;
        }
    }
    fxp0 {
        unit 0 {
            family inet {
                address 192.168.70.148/21;
            }
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.6/32;
                address 127.0.0.1/32;
            }
            family iso {
```

```
                address 49.0004.1000.0000.0006.00;
            }
        }
    }
}
routing-options {
    [...Output truncated...]
     route 100.100.6.0/24 reject;
    }
     router-id 10.0.0.6;
     autonomous-system 65432;
}
protocols {
    rsvp {
        interface so-0/0/0.0;
        interface so-0/0/1.0;
        interface so-0/0/2.0;
        interface so-0/0/3.0;
        interface fxp0.0 {
            disable;
        }
    }
    mpls {
        label-switched-path R6-to-R1 {
            to 10.0.0.1; <<< destination address of the reverse LSP
        }
        inactive: interface so-0/0/0.0;
        inactive: interface so-0/0/1.0;
        inactive: interface so-0/0/2.0;
        interface so-0/0/3.0;
    }
    bgp {
        group internal {
            type internal;
            export send-statics; <<< missing local-address statement
             neighbor 10.0.0.2;
            neighbor 10.0.0.3;
            neighbor 10.0.0.4;
            neighbor 10.0.0.5;
            neighbor 10.0.0.1;
            neighbor 10.1.13.1;          <<< incorrect interface address
        }
    }
    isis {
        level 1 disable;
        interface all {
            level 2 metric 10;
        }
        interface fxp0.0 {
            disable;
        }
        interface lo0.0 {
            passive;
        }
    }
    ospf {
        traffic-engineering;
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface so-0/0/1.0;
            interface so-0/0/2.0;
```


Copyright © 2013, Juniper Networks, Inc.

```
            interface so-0/0/3.0;
            interface lo0.0 {
                passive;
            }
        }
    }
}
policy-options {
    policy-statement send-statics {
        term statics {
            from {
                route-filter 100.100.6.0/24 exact;
            }
            then accept;
        }
    }
}
```

Meaning The sample output shows the BGP configurations on ingress router **R1** and egress router **R6**. Both configurations show the local AS (**65432**), one group (**internal**), and six peers configured. The underlying interior gateway protocol is IS-IS, and the relevant interfaces are configured to run IS-IS.

NOTE: In this configuration, the RID is manually configured to avoid any duplicate RID problems, and all interfaces configured with BGP include the **family inet** statement at the [**edit interfaces** *type-fpc/pic/port* **unit** *logical-unit-number*] hierarchy level.

Sample output for ingress router **R1** and egress router **R6** shows that the BGP protocol configuration is missing the **local-address** statement for the internal group. When the **local-address** statement is configured, BGP packets are forwarded from the local router loopback (**lo0**) interface address, which is the address to which BGP peers are peering. If the **local-address** statement is not configured, BGP packets are forwarded from the outgoing interface address, which does not match the address to which BGP peers are peering, and BGP does not come up.

On the ingress router, the IP address (**10.0.0.1**) in the **local-address** statement should be the same as the address configured for the LSP on the egress router (**R6**) in the **to** statement at the [**edit protocols mpls label-switched-path** *lsp-path-name*] hierarchy level. BGP uses this address, which is identical to the LSP address, to forward BGP traffic through the LSP.

In addition, the BGP configuration on **R1** includes two IP addresses for **R6**, an interface address (**10.1.36.2**) and a loopback (**lo0**) interface address (**10.0.0.6**), resulting in the LSP destination address (**10.0.0.6**) not matching the BGP next-hop address (**10.1.36.2**). The BGP configuration on **R6** also includes two IP addresses for **R1**, an interface address (**10.1.13.1**) and a loopback (**lo0**) interface address, resulting in the reverse LSP destination address (**10.0.0.1**) not matching the BGP next-hop address (**10.1.13.1**).

Copyright © 2013, Juniper Networks, Inc.

In this instance, because the **local-address** statement is missing in the BGP configurations of both routers and the LSP destination address does not match the BGP next-hop address, BGP is not using the LSP to forward traffic.

Examine BGP Routes

Purpose You can examine the BGP path selection process to determine the single, active path when BGP receives multiple routes to the same destination. In this step, we examine the reverse LSP **R6-to-R1**, making **R6** the ingress router for that LSP.

Action To examine BGP routes and route selection, enter the following Junos OS CLI operational mode command:

```
user@host> show route destination-prefix detail
```

Sample Output 1

```
user@R6> show route 100.100.1.1 detail
inet.0: 30 destinations, 46 routes (29 active, 0 holddown, 1 hidden)
100.100.1.0/24 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Source: 10.1.13.1
                Next hop: via so-0/0/3.0, selected
                 Protocol next hop: 10.1.13.1  Indirect next hop: 8671594 304
                State: <Active Int Ext>
                Local AS: 65432 Peer AS: 65432
                Age: 4d 5:15:39         Metric2: 2
                Task: BGP_65432.10.1.13.1+3048
                Announcement bits (2): 0-KRT 4-Resolve inet.0
                AS path: I
                Localpref: 100
                 Router ID: 10.0.0.1
```

Sample Output 2

```
user@R6> show route 100.100.1.1 detail
inet.0: 30 destinations, 46 routes (29 active, 0 holddown, 1 hidden)
100.100.1.0/24 (1 entry, 1 announced)
        *BGP    Preference: 170/-101
                Source: 10.0.0.1
                Next hop: via so-0/0/3.0 weight 1, selected
                 Label-switched-path R6-to-R1
                Label operation: Push 100000
                 Protocol next hop: 10.0.0.1  Indirect next hop: 8671330 301
                State: <Active Int Ext>
                Local AS: 65432 Peer AS: 65432
                Age: 24:35      Metric2: 2
                Task: BGP_65432.10.0.0.1+179
                Announcement bits (2): 0-KRT 4-Resolve inet.0
                AS path: I
                Localpref: 100
                 Router ID: 10.0.0.1
```

Meaning Sample Output 1 shows that the BGP next hop (**10.1.13.1**) does not equal the LSP destination address (**10.0.0.1**) in the **to** statement at the [**edit protocols mpls**

Copyright © 2013, Juniper Networks, Inc.

label-switched-path ***label-switched-path-name***] hierarchy level when the BGP configuration of **R6** and **R1** is incorrect.

Sample Output 2, taken after the configurations on R1 and R6 are corrected, shows that the BGP next hop (**10.0.0.1**) and the LSP destination address (**10.0.0.1**) are the same, indicating that BGP can use the LSP to forward BGP traffic.

Verify Received BGP Routes

Purpose Display the routing information received on router **R6**, the ingress router for the reverse LSP **R6-to-R1**.

Action To verify that a particular BGP route is received on the egress router, enter the following Junos OS CLI operational mode command:

user@host> **show route receive protocol bgp** ***neighbor-address***

Sample Output 1

```
user@R6> show route receive-protocol bgp 10.0.0.1
inet.0: 30 destinations, 46 routes (29 active, 0 holddown, 1 hidden)
<<< missing route
inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)
```

Sample Output 2

```
user@R6> show route receive-protocol bgp 10.0.0.1
inet.0: 30 destinations, 46 routes (29 active, 0 holddown, 1 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 100.100.1.0/24     10.0.0.1         100     I

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)
```

Meaning Sample Output 1 shows that ingress router **R6** (reverse LSP **R6-to-R1**) does not receive any BGP routes into the **inet.0** routing table when the BGP configurations of **R1** and **R6** are incorrect.

Sample Output 2 shows a BGP route installed in the **inet.0** routing table after the BGP configurations on **R1** and **R6** are corrected using "Take Appropriate Action" on page 874.

Copyright © 2013, Juniper Networks, Inc.

Take Appropriate Action

Problem Depending on the error you encountered in your investigation, you must take the appropriate action to correct the problem. In this example, the ingress and egress routers are incorrectly configured for BGP to forward traffic using the LSP.

Solution To correct the errors in this example, follow these steps:

1. On ingress router R1, include the **local-address** statement and delete the incorrect interface address (repeat these steps on egress router R6):

   ```
   [edit]
   user@R1#  edit protocols bgp
   [edit protocols bgp]
   user@R1# show
   user@R1#  set local-address 10.0.0.1
   user@R1#  delete group internal neighbor 10.1.36.2
   ```

2. Verify and commit the configuration:

   ```
   [edit protocols bgp]
   user@R1# show
   user@R1# commit
   ```


Copyright © 2013, Juniper Networks, Inc.

Sample Output

```
[edit]
user@R1# edit protocols bgp

[edit protocols bgp]
user@R1# show
export send-statics;
group internal {
    type internal;
    neighbor 10.0.0.2;
    neighbor 10.0.0.5;
    neighbor 10.0.0.4;
    neighbor 10.0.0.6;
    neighbor 10.0.0.3;
    neighbor 10.1.36.2;
}

[edit protocols bgp]
user@R1# set local-address 10.0.0.1

[edit protocols bgp]
user@R1#  delete group internal neighbor 10.1.36.2

[edit protocols bgp]
user@R1# show
local-address 10.0.0.1;
export send-statics;
group internal {
    type internal;
    neighbor 10.0.0.2;
    neighbor 10.0.0.5;
    neighbor 10.0.0.4;
    neighbor 10.0.0.6;
    neighbor 10.0.0.3;
}

[edit protocols bgp]
user@R1# commit
commit complete
```

Meaning The sample output shows that the configuration of BGP on ingress router **R1** is now correct. BGP can now forward BGP traffic through the LSP.

Check That BGP Traffic Is Using the LSP Again

Purpose After taking the appropriate action to correct the error, the LSP needs to be checked again to confirm that BGP traffic is using the LSP and that the problem in the BGP layer has been resolved.

Action To verify that BGP traffic is using the LSP, enter the following Junos OS CLI operational mode command from the ingress router:

```
user@host> traceroute hostname
```

Copyright © 2013, Juniper Networks, Inc.

Sample Output

```
user@R1> traceroute 100.100.6.1
traceroute to 100.100.6.1 (100.100.6.1), 30 hops max, 40 byte packets
 1  10.1.13.2 (10.1.13.2)  0.858 ms  0.740 ms  0.714 ms
      MPLS Label=100016 CoS=0 TTL=1 S=1
 2  10.1.36.2 (10.1.36.2)  0.592 ms !N  0.564 ms !N  0.548 ms !N

user@R6> traceroute 100.100.1.1
traceroute to 100.100.1.1 (100.100.1.1), 30 hops max, 40 byte packets
 1  10.1.36.1 (10.1.36.1)  0.817 ms  0.697 ms  0.771 ms
      MPLS Label=100000 CoS=0 TTL=1 S=1
 2  10.1.13.1 (10.1.13.1)  0.581 ms !N  0.567 ms !N  0.544 ms !N
```

Meaning The sample output shows that MPLS labels are used to forward packets through the LSP. Included in the output is a label value (**MPLS Label=100016**), the time-to-live value (**TTL=1**), and the stack bit value (**S=1**).

The **MPLS Label** field is used to identify the packet to a particular LSP. It is a 20-bit field, with a maximum value of (2^^20-1), approximately 1,000,000.

The time-to-live (TTL) value contains a limit on the number of hops that this MPLS packet can travel through the network (1). It is decremented at each hop, and if the TTL value drops below one, the packet is discarded.

The bottom of the stack bit value (**S=1**) indicates that is the last label in the stack and that this MPLS packet has one label associated with it. The MPLS implementation in the Junos OS supports a stacking depth of 3 on the M-series routers and up to 5 on the T-series routing platforms. For more information on MPLS label stacking, see RFC 3032, *MPLS Label Stack Encoding*.

MPLS labels appear in the sample output because the **traceroute** command is issued to a BGP destination where the BGP next hop for that route is the LSP egress address. The Junos OS by default uses LSPs for BGP traffic when the BGP next hop equals the LSP egress address.

If the BGP next hop does not equal the LSP egress address, the BGP traffic does not use the LSP, and consequently MPLS labels do not appear in the output for the **traceroute** command, as indicated in the sample output in "Check BGP Sessions" on page 864.

Check BGP Sessions

Purpose Display summary information about BGP and its neighbors to determine if routes are received from peers in the autonomous system (AS). When a BGP session is established, the peers are exchanging update messages.

Action To check that BGP sessions are up, enter the following Junos OS CLI operational mode command from the ingress router:

```
user@host> show bgp summary
```


Copyright © 2013, Juniper Networks, Inc.

Sample Output 1

```
user@R1> show bgp summary
Groups: 1 Peers: 6   Down peers: 1
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 1          1          0          0          0          0
Peer              AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65432      11257      11259       0       0 3d 21:49:57  0/0/0
                0/0/0
10.0.0.3        65432      11257      11259       0       0 3d 21:49:57 0/0/0
                0/0/0
10.0.0.4        65432      11257      11259       0       0 3d 21:49:57 0/0/0
                0/0/0
10.0.0.5        65432      11257      11260       0       0 3d 21:49:57 0/0/0
                0/0/0
10.0.0.6    65432    4    4572    0    1 3d 21:46:59 Active
10.1.36.2       65432      11252      11257       0       0 3d 21:46:49  1/1/0
                0/0/0
```

Sample Output 2

```
user@R1> show bgp summary
Groups: 1 Peers: 5 Down peers: 0
Table          Tot Paths  Act Paths Suppressed    History Damp State    Pending
inet.0                 1          1          0          0          0          0
Peer              AS      InPkt     OutPkt    OutQ   Flaps Last Up/Dwn
State|#Active/Received/Damped...
10.0.0.2        65432         64         68       0       0       32:18 0/0/0
                0/0/0
10.0.0.3        65432         64         67       0       0       32:02 0/0/0
                0/0/0
10.0.0.4        65432         64         67       0       0       32:10 0/0/0
                0/0/0
10.0.0.5        65432         64         67       0       0       32:14 0/0/0
                0/0/0
10.0.0.6        65432         38         39       0       1       18:02 1/1/0
                0/0/0
```

Meaning Sample Output 1 shows that one peer (egress router **10.0.0.6**) is not established, as indicated by the **Down Peers: 1** field. The last column (**State|#Active/Received/Damped**) shows that peer **10.0.0.6** is active, indicating that is it not established. All other peers are established as indicated by the number of active, received, and damped routes. For example, **0/0/0** for peer **10.0.0.2** indicates that no BGP routes were active or received in the routing table, and no BGP routes were damped; **1/1/0** for peer **10.1.36.2** indicates that one BGP route was active and received in the routing table, and no BGP routes were damped.

If the output of the **show bgp summary** command of an ingress router shows that a neighbor is down, check the BGP configuration. For information on checking the BGP configuration, see "Verify the BGP Configuration" on page 866.

Sample Output 2 shows output from ingress router **R1** after the BGP configurations on **R1** and **R6** were corrected in "Take Appropriate Action" on page 874. All BGP peers are established and one route is active and received. No BGP routes were damped.

Copyright © 2013, Juniper Networks, Inc.

If the output of the **show bgp summary** command shows that a neighbor is up but packets are not being forwarded, check for received routes from the egress router. For information on checking the egress router for received routes, see "Verify Received BGP Routes" on page 873.

Verify BGP Peers

Purpose Assuming that all the routers are correctly configured for BGP, you can verify if IBGP and EBGP sessions are properly established, external routes are advertised and received correctly, and the BGP path selection process is working properly.

Figure 52 on page 878 illustrates an example BGP network topology used in this topic.

Figure 52: BGP Network Topology

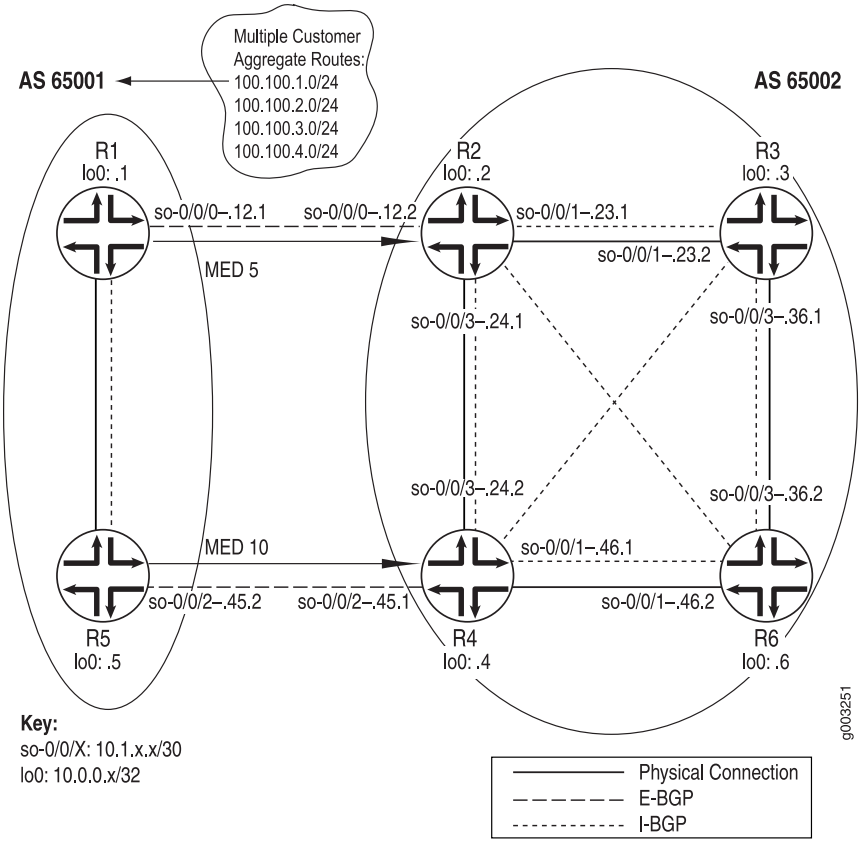

The network consists of two directly connected ASs consisting of external and internal peers. The external peers are directly connected through a shared interface and are running EBGP. The internal peers are connected through their loopback (**lo0**) interfaces through IBGP. AS 65001 is running OSPF and AS 65002 is running IS-IS as its underlying IGP. IBGP routers do not have to be directly connected, the underlying IGP allows neighbors to reach one another.

The two routers in AS 65001 each contain one EBGP link to AS 65002 (**R2** and **R4**) over which they announce aggregated prefixes: **100.100.1.0**, **100.100.2.0**, **100.100.3.0**, and

Copyright © 2013, Juniper Networks, Inc.

100.100.4.0. Also, **R1** and **R5** are injecting multiple exit discriminator (MED) values of 5 and 10, respectively, for some routes.

The internal routers in both ASs are using a full mesh IBGP topology. A full mesh is required because the networks are not using confederations or route reflectors, so any routes learned through IBGP are not distributed to other internal neighbors. For example, when **R3** learns a route from **R2**, **R3** does not distribute that route to **R6** because the route is learned through IBGP, so **R6** must have a direct BGP connection to **R2** to learn the route.

In a full mesh topology, only the border router receiving external BGP information distributes that information to other routers within its AS. The receiving router does not redistribute that information to other IBGP routers in its own AS.

From the point of view of AS 65002, the following sessions should be up:

- The four routers in AS 65002 should have IBGP sessions established with each other.
- **R2** should have an EBGP session established with **R1**.
- **R4** should have an EBGP session established with **R5**.

To verify BGP peers, follow these steps:

Verify the BGP Protocol

Purpose For BGP to run on a router in your network, you must define the local autonomous system (AS) number, configure at least one group, and include information about at least one peer in the group. If the peer is an EBGP peer, include the peer's AS number. For all peers, include either the peer's interface IP address or loopback (**lo0**) IP address. When configuring BGP on an interface, you must also include the **family inet** statement at the [**edit interfaces** *interface-name* **unit** *logical-unit-number*] hierarchy level.

Figure 53 on page 880 illustrates the example configurations used in this topic.

Copyright © 2013, Juniper Networks, Inc.

Figure 53: BGP Configuration Topology

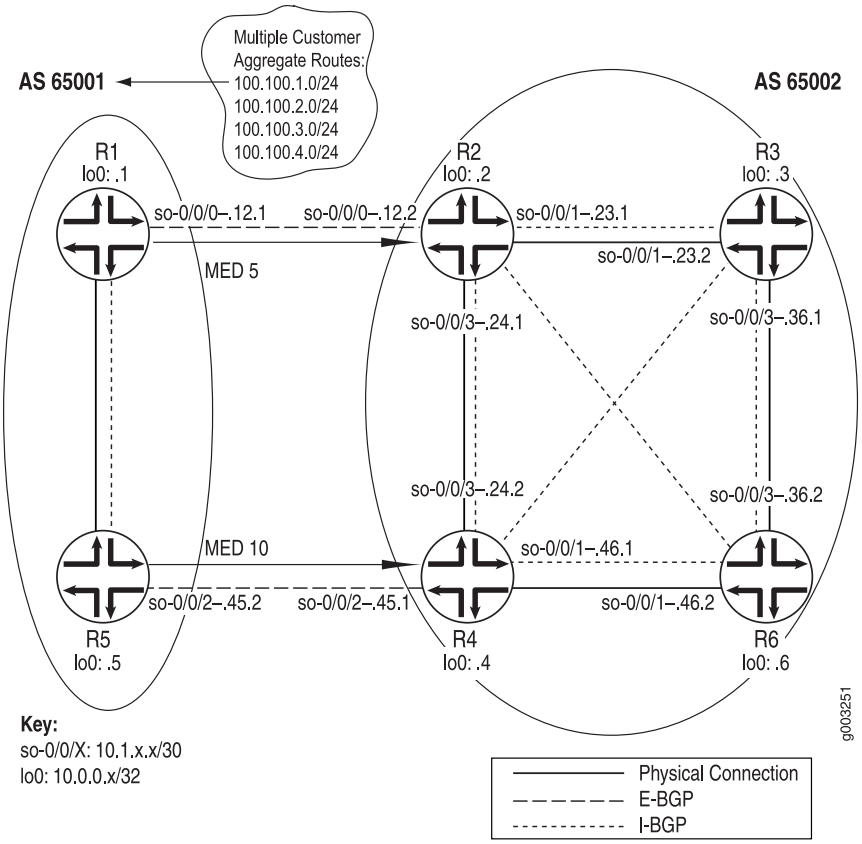

The network in Figure 53 on page 880 consists of two directly connected ASs. IP addresses included in the network diagram are as follows:

- **10.1.12.1**—AS 650001external IP address on **R1**
- **10.1.45.2**—AS 650001 external IP address on **R5**
- **10.0.0.1**—Internal loopback (**lo0**) IP address for **R1**
- **10.0.0.5**—Internal loopback (**lo0**) IP address for **R5**
- **10.1.12.2**—AS 65002 external IP address on **R2**
- **10.1.45.1**—AS 65002 external IP address on **R5**
- **10.0.0.2**—Internal loopback (**lo0**) address for **R2**
- **10.0.0.3**—Internal loopback (**lo0**) address for **R3**
- **10.0.0.4**—Internal loopback (**lo0**) address for **R4**
- **10.0.0.6**—Internal loopback (**lo0**) address for **R6**

All routers within each AS maintain an IBGP session between each router in that AS. **R1** and **R5** have an IBGP session through their loopback (**lo0**) interfaces: **10.0.0.1** and **10.0.05**. **R2**, **R3**, **R4**, and **R6** maintain IBGP sessions between each other through their loopback (**lo0**) interfaces: **10.0.0.2**, **10.0.0.3**, **10.0.0.4**, and **10.0.0.6**.

Copyright © 2013, Juniper Networks, Inc.

The two routers in AS 65001 each contain one EBGP link to AS 65002 (**R2** and **R4**) over which they announce aggregated prefixes: **100.100/16**. Routers at the edge of a network that communicate directly with routers in other networks are called border routers. Border routers use EBGP to exchange routing information between networks.

Adjacent BGP routers are referred to as neighbors or peers. Peers can be internal or external to the AS. Internal and external peers are configured slightly differently. In general, internal peers communicate using the loopback (**lo0**) interface, and external peers communicate through the shared interface. See Figure 53 on page 880 for the loopback (**lo0**) and interface information.

To verify the BGP configuration of a router in your network, follow these steps:

Verify the BGP Configuration

Purpose For BGP to run on the router, you must define the local AS number, configure at least one group, and include information about at least one peer in the group (the peer's IP address and AS number). When BGP is part of an MPLS network, you must ensure that the LSP is configured with a destination IP address equal to the BGP next hop in order for BGP routes to be installed with the LSP as the next hop for those routes.

Action To verify the BGP configuration, enter the following Junos OS CLI operational mode command:

```
user@host> show configuration
```

Copyright © 2013, Juniper Networks, Inc.

Sample Output 1

```
user@R1> show configuration
[...Output truncated...]
interfaces {
    so-0/0/0 {
        unit 0 {
            family inet {
                address 10.1.12.1/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/1 {
        unit 0 {
            family inet {
                address 10.1.15.1/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/2 {
        unit 0 {
            family inet {
                address 10.1.13.1/30;
            }
             family iso;
            family mpls;
        }
    }
    fxp0 {
        unit 0 {
            family inet {
                address 192.168.70.143/21;
            }
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.1/32;
            }
             family iso {
                address 49.0004.1000.0000.0001.00;
            }
        }
    }
}
routing-options {
    [...Output truncated...]
         route 100.100.1.0/24 reject;
    }
     router-id 10.0.0.1;
     autonomous-system 65432;
}
protocols {
    rsvp {
        interface so-0/0/0.0;
```


Copyright © 2013, Juniper Networks, Inc.

```
            interface so-0/0/1.0;
            interface so-0/0/2.0;
            interface fxp0.0 {
                disable;
            }
        }
        mpls {
            label-switched-path R1-to-R6 {
                to  10.0.0.6; <<< destination address of the LSP
            }
            inactive: interface so-0/0/0.0;
            inactive: interface so-0/0/1.0;
            interface so-0/0/2.0;
            interface fxp0.0 {
                disable;
            }
        }
        bgp {
            export send-statics; <<< missing local-address statement
             group internal {
                type internal;
                neighbor 10.0.0.2;
                neighbor 10.0.0.5;
                neighbor 10.0.0.4;
                neighbor 10.0.0.6;
                neighbor 10.0.0.3;
                neighbor 10.1.36.2; <<< incorrect interface address
            }
        }
        isis {
            level 1 disable;
            interface so-0/0/0.0;
            interface so-0/0/1.0;
            interface so-0/0/2.0;
            interface all {
                level 2 metric 10;
            }
            interface fxp0.0 {
                disable;
            }
            interface lo0.0 {
                passive;
            }
        }
        ospf {
            traffic-engineering;
            area 0.0.0.0 {
                interface so-0/0/0.0;
                interface so-0/0/1.0;
                interface so-0/0/2.0;
                interface lo0.0; {
                    passive
                }
            }
        }
    }
    policy-options {
        policy-statement send-statics {
            term statics {
                from {
                    route-filter 100.100.1.0/24 exact;
```

Copyright © 2013, Juniper Networks, Inc.

```
            }
            then accept;
        }
    }
}
```

Sample Output 2

```
user@R6> show configuration
[...Output truncated...]
interfaces {
    so-0/0/0 {
        unit 0 {
            family inet {
                address 10.1.56.2/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/1 {
        unit 0 {
            family inet {
                address 10.1.46.2/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/2 {
        unit 0 {
            family inet {
                address 10.1.26.2/30;
            }
            family iso;
            family mpls;
        }
    }
    so-0/0/3 {
        unit 0 {
            family inet {
                address 10.1.36.2/30;
            }
             family iso;
            family mpls;
        }
    }
    fxp0 {
        unit 0 {
            family inet {
                address 192.168.70.148/21;
            }
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.6/32;
                address 127.0.0.1/32;
            }
            family iso {
```


Copyright © 2013, Juniper Networks, Inc.

```
                address 49.0004.1000.0000.0006.00;
            }
        }
    }
}
routing-options {
    [...Output truncated...]
     route 100.100.6.0/24 reject;
    }
     router-id 10.0.0.6;
     autonomous-system 65432;
}
protocols {
    rsvp {
        interface so-0/0/0.0;
        interface so-0/0/1.0;
        interface so-0/0/2.0;
        interface so-0/0/3.0;
        interface fxp0.0 {
            disable;
        }
    }
    mpls {
        label-switched-path R6-to-R1 {
            to 10.0.0.1; <<< destination address of the reverse LSP
        }
        inactive: interface so-0/0/0.0;
        inactive: interface so-0/0/1.0;
        inactive: interface so-0/0/2.0;
        interface so-0/0/3.0;
    }
    bgp {
        group internal {
            type internal;
            export send-statics; <<< missing local-address statement
             neighbor 10.0.0.2;
            neighbor 10.0.0.3;
            neighbor 10.0.0.4;
            neighbor 10.0.0.5;
            neighbor 10.0.0.1;
            neighbor 10.1.13.1;          <<< incorrect interface address
        }
    }
    isis {
        level 1 disable;
        interface all {
            level 2 metric 10;
        }
        interface fxp0.0 {
            disable;
        }
        interface lo0.0 {
            passive;
        }
    }
    ospf {
        traffic-engineering;
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface so-0/0/1.0;
            interface so-0/0/2.0;
```

Copyright © 2013, Juniper Networks, Inc.

```
            interface so-0/0/3.0;
            interface lo0.0 {
                passive;
            }
        }
    }
}
policy-options {
    policy-statement send-statics {
        term statics {
            from {
                route-filter 100.100.6.0/24 exact;
            }
            then accept;
        }
    }
}
```

Meaning The sample output shows the BGP configurations on ingress router **R1** and egress router **R6**. Both configurations show the local AS (**65432**), one group (**internal**), and six peers configured. The underlying interior gateway protocol is IS-IS, and the relevant interfaces are configured to run IS-IS.

NOTE: In this configuration, the RID is manually configured to avoid any duplicate RID problems, and all interfaces configured with BGP include the **family inet** statement at the [**edit interfaces** *type-fpc/pic/port* **unit** *logical-unit-number*] hierarchy level.

Sample output for ingress router **R1** and egress router **R6** shows that the BGP protocol configuration is missing the **local-address** statement for the internal group. When the **local-address** statement is configured, BGP packets are forwarded from the local router loopback (**lo0**) interface address, which is the address to which BGP peers are peering. If the **local-address** statement is not configured, BGP packets are forwarded from the outgoing interface address, which does not match the address to which BGP peers are peering, and BGP does not come up.

On the ingress router, the IP address (**10.0.0.1**) in the **local-address** statement should be the same as the address configured for the LSP on the egress router (**R6**) in the **to** statement at the [**edit protocols mpls label-switched-path** *lsp-path-name*] hierarchy level. BGP uses this address, which is identical to the LSP address, to forward BGP traffic through the LSP.

In addition, the BGP configuration on **R1** includes two IP addresses for **R6**, an interface address (**10.1.36.2**) and a loopback (**lo0**) interface address (**10.0.0.6**), resulting in the LSP destination address (**10.0.0.6**) not matching the BGP next-hop address (**10.1.36.2**). The BGP configuration on **R6** also includes two IP addresses for **R1**, an interface address (**10.1.13.1**) and a loopback (**lo0**) interface address, resulting in the reverse LSP destination address (**10.0.0.1**) not matching the BGP next-hop address (**10.1.13.1**).

Copyright © 2013, Juniper Networks, Inc.

In this instance, because the **local-address** statement is missing in the BGP configurations of both routers and the LSP destination address does not match the BGP next-hop address, BGP is not using the LSP to forward traffic.

Display Sent or Received BGP Packets

Action To configure the tracing for sent or received BGP protocol packets, follow these steps:

1. In configuration mode, go to the following hierarchy level:

   ```
   [edit]
   user@host# edit protocol bgp traceoptions
   ```

2. Configure the flag to display sent, received, or both sent and received packet information:

   ```
   [edit protocols bgp traceoptions]
   user@host#  set flag update send
   ```

   or

   ```
   [edit protocols bgp traceoptions]
   user@host# set flag update receive
   ```

   or

   ```
   [edit protocols bgp traceoptions]
   user@host# set flag update
   ```

3. Verify the configuration:

   ```
   user@host# show
   ```

   For example:

   ```
   [edit protocols bgp traceoptions]
   user@host# show
   file bgplog size 10k files 10;
   flag update send;
   ```

   or

   ```
   [edit protocols bgp traceoptions]
   user@host# show
   file bgplog size 10k files 10;
   flag update receive;
   ```

   or

   ```
   [edit protocols bgp traceoptions]
   user@host# show
   file bgplog size 10k files 10;
   flag update send receive;
   ```

4. Commit the configuration:

   ```
   user@host# commit
   ```

5. View the contents of the file containing the detailed messages:

   ```
   user@host# run show log filename
   ```

Copyright © 2013, Juniper Networks, Inc.

For example:

```
[edit protocols bgp traceoptions]
user@host# run show log bgplog
Sep 13 12:58:23 trace_on: Tracing to "/var/log/bgplog" started
Sep 13 12:58:23 BGP RECV flags 0x40 code ASPath(2): <null>
Sep 13 12:58:23 BGP RECV flags 0x40 code LocalPref(5): 100
Sep 13 12:58:23 BGP RECV flags 0xc0 code Extended Communities(16): 2:10458:3
[...Output truncated...]
```

Diagnose BGP Session Establishment Problems

Purpose To trace BGP session establishment problems.

Action To trace BGP session establishment problems, follow these steps:

1. In configuration mode, go to the following hierarchy level:

   ```
   [edit]
   user@host#  edit protocol bgp
   ```

2. Configure BGP open messages:

   ```
   [edit protocols bgp]
   user@host#  set traceoptions flag open detail
   ```

3. Verify the configuration:

   ```
   user@host# show
   ```

   For example:

   ```
   [edit protocols bgp]
   user@host# show
   traceoptions {
     file bgplog size 10k files 10;
     flag open detail;
   }
   ```

4. Commit the configuration:

   ```
   user@host# commit
   ```

5. View the contents of the file containing the detailed messages:

   ```
   user@host#run show log  filename
   ```

   For example:

   ```
   [edit protocols bgp]
   user@hotst# run show log bgplog
   ```

   ```
   Sep 17 17:13:14 trace_on: Tracing to "/var/log/bgplog" started
   Sep 17 17:13:14 bgp_read_v4_update: done with 201.0.0.2 (Internal AS 10458)
   received 19 octets 0 updates 0 routes
   Sep 17 17:13:15 bgp_read_v4_update: receiving packet(s) from 201.0.0.3 (Internal
   AS 10458)
   Sep 17 17:13:15 bgp_read_v4_update: done with 201.0.0.3 (Internal AS 10458)
   received 19 octets 0 updates 0 routes
   Sep 17 17:13:44 bgp_read_v4_update: receiving packet(s) from 201.0.0.2 (Internal
   AS 10458)
   ```


Copyright © 2013, Juniper Networks, Inc.

```
[...Output truncated...]
```

Examine BGP Routes and Route Selection

Purpose You can examine the BGP path selection process to determine the single, active path when BGP receives multiple routes to the same destination prefix.

Figure 54: BGP Network Topology

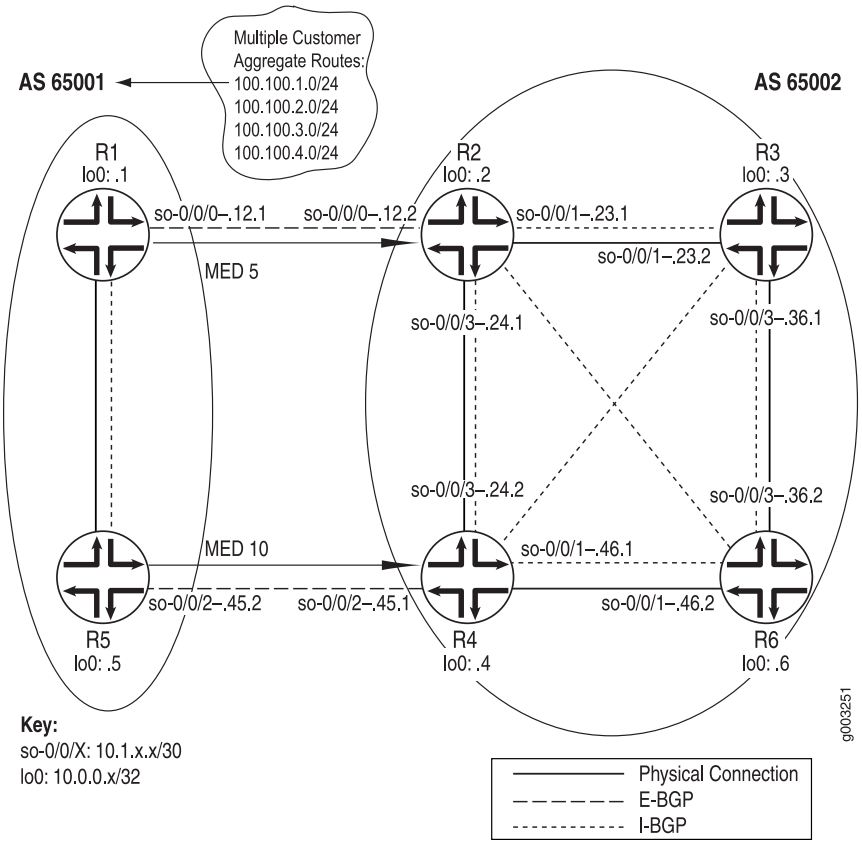

The network in Figure 54 on page 889 shows that **R1** and **R5** announce the same aggregate routes to **R2** and **R4,** which results in **R2** and **R4** receiving two routes to the same destination prefix. The route selection process on **R2** and **R4** determines which of the two BGP routes received is active and advertised to the other internal routers (**R3** and **R6**).

Before the router installs a BGP route, it must make sure that the BGP **next-hop** attribute is reachable. If the BGP next hop cannot be resolved, the route is not installed. When a BGP route is installed in the routing table, it must go through a path selection process if multiple routes exist to the same destination prefix. The BGP path selection process proceeds in the following order:

Copyright © 2013, Juniper Networks, Inc.

1. Route preference in the routing table is compared. For example, if an OSPF and a BGP route exist for a particular destination, the OSPF route is selected as the active route because the OSPF route has a default preference of 110, while the BGP route has a default preference of 170.
2. Routes are compared for local preference. The route with the highest local preference is preferred. For example, see "Examine the Local Preference Selection" on page 891.
3. The AS path attribute is evaluated. The shorter AS path is preferred.
4. The origin code is evaluated. The lowest origin code is preferred (**I (IGP) < E (EGP) < ? (Incomplete)**).
5. The MED value is evaluated. By default, if any of the routes are advertised from the same neighboring AS, the lowest MED value is preferred. The absence of a MED value is interpreted as a MED of 0. For an example, see "Examine the Multiple Exit Discriminator Route Selection" on page 892.
6. The route is evaluated as to whether it is learned through EBGP or IBGP. EBGP learned routes are preferred to IBGP learned routes. For an example, see "Examine the EBGP over IBGP Selection" on page 892
7. If the route is learned from IBGP, the route with the lowest IGP cost is preferred. For an example, see "Examine the IGP Cost Selection" on page 894. The physical next hop to the IBGP peer is installed according to the following three rules:
    a. After BGP examines the **inet.0** and **inet.3** routing tables, the physical next hop of the route with the lowest preference is used.
    b. If the preference values in the **inet.0** and the **inet.3** routing tables are a tie, the physical next hop of the route in the **inet.3** routing table is used.
    c. When a preference tie exists in the same routing table, the physical next hop of the route with more paths is installed.
8. The route reflection cluster list attribute is evaluated. The shortest length cluster list is preferred. Routes without a cluster list are considered to have a cluster list length of 0.
9. The router ID is evaluated. The route from the peer with the lowest router ID is preferred (usually the loopback address).
10. The peer address value is examined. The peer with the lowest peer IP address is preferred.

To determine the single, active path when BGP receives multiple routes to the same destination prefix, enter the following Junos OS CLI operational mode command:

```
user@host> show route destination-prefix < detail >
```

The following steps illustrate the inactive reason displayed when BGP receives multiple routes to the same destination prefix and one route is selected as the single, active path:

1. Examine the Local Preference Selection on page 891
2. Examine the Multiple Exit Discriminator Route Selection on page 892

 Copyright © 2013, Juniper Networks, Inc.

3. Examine the EBGP over IBGP Selection on page 892
4. Examine the IGP Cost Selection on page 894

Examine the Local Preference Selection

Purpose To examine a route to determine if local preference is the selection criteria for the single, active path.

Action To examine a route to determine if local preference is the selection criteria for the single, active path, enter the following Junos OS CLI operational mode command:

user@host> **show route** ***destination-prefix*** < detail >

Sample Output

```
user@R4> show route 100.100.1.0 detail
inet.0: 20 destinations, 24 routes (20 active, 0 holddown, 0 hidden)
100.100.1.0/24 (2 entries, 1 announced)
         *BGP    Preference: 170/-201
                 Source: 10.0.0.2
                Next hop: 10.1.24.1 via so-0/0/3.0, selected
                Protocol next hop: 10.0.0.2 Indirect next hop: 8644000 277
                State: <Active Int Ext>
                Local AS: 65002 Peer AS: 65002
                Age: 2:22:34    Metric: 5       Metric2: 10
                Task: BGP_65002.10.0.0.2+179
                Announcement bits (3): 0-KRT 3-BGP.0.0.0.0+179 4-Resolve inet.0

                 AS path: 65001 I
                 Localpref: 200
                Router ID: 10.0.0.2
         BGP    Preference: 170/-101
                 Source: 10.1.45.2
                Next hop: 10.1.45.2 via so-0/0/2.0, selected
                State: <Ext>
                 Inactive reason: Local Preference
                Local AS: 65002 Peer AS: 65001
                Age: 2w0d 1:28:31       Metric: 10
                Task: BGP_65001.10.1.45.2+179
                 AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.5
```

Meaning The sample output shows that **R4** received two instances of the **100.100.1.0** route: one from **10.0.0.2** (**R2**) and one from **10.1.45.2** (**R5**). **R4** selected the path from **R2** as its active path, as indicated by the asterisk (*). The selection is based on the local preference value contained in the **Localpref** field. The path with the *highest* local preference is preferred. In the example, the path with the higher local preference value is the path from **R2**, 200.

The reason that the route from **R5** is not selected is in the **Inactive reason** field, in this case, **Local Preference**.

Note that the two paths are from the same neighboring network: AS 65001.

Copyright © 2013, Juniper Networks, Inc.

Examine the Multiple Exit Discriminator Route Selection

Purpose To examine a route to determine if the MED is the selection criteria for the single, active path.

Action To examine a route to determine if the MED is the selection criteria for the single, active path, enter the following Junos OS CLI operational mode command:

user@host> **show route** ***destination-prefix*** < detail >

Sample Output

```
user@R4> show route 100.100.2.0 detail
inet.0: 20 destinations, 24 routes (20 active, 0 holddown, 0 hidden)
100.100.2.0/24 (2 entries, 1 announced)
         *BGP     Preference: 170/-101
                  Source: 10.0.0.2
                 Next hop: 10.1.24.1 via so-0/0/3.0, selected
                 Protocol next hop: 10.0.0.2 Indirect next hop: 8644000 277
                 State: <Active Int Ext>
                 Local AS: 65002 Peer AS: 65002
                 Age: 2:32:01     Metric: 5       Metric2: 10
                 Task: BGP_65002.10.0.0.2+179
                 Announcement bits (3): 0-KRT 3-BGP.0.0.0.0+179 4-Resolve inet.0

                  AS path: 65001 I
                 Localpref: 100
                 Router ID: 10.0.0.2
         BGP     Preference: 170/-101
                  Source: 10.1.45.2
                 Next hop: 10.1.45.2 via so-0/0/2.0, selected
                 State: <NotBest Ext>
                  Inactive reason: Not Best in its group
                 Local AS: 65002 Peer AS: 65001
                 Age: 2w0d 1:37:58        Metric: 10
                 Task: BGP_65001.10.1.45.2+179
                  AS path: 65001 I
                 Localpref: 100
                 Router ID: 10.0.0.5
```

Meaning The sample output shows that **R4** received two instances of the **100.100.2.0** route: one from **10.0.0.2** (**R2**), and one from **10.1.45.2** (**R5**). **R4** selected the path from **R2** as its active route, as indicated by the asterisk (*). The selection is based on the MED value contained in the **Metric:** field. The path with the lowest MED value is preferred. In the example, the path with the lowest MED value (5) is the path from **R2**. Note that the two paths are from the same neighboring network: AS 65001.

The reason that the inactive path is not selected is displayed in the **Inactive reason:** field, in this case, **Not Best in its group**. The wording is used because the Junos OS uses the process of deterministic MED selection, by default.

Examine the EBGP over IBGP Selection

Purpose To examine a route to determine if EBGP is selected over IBGP as the selection criteria for the single, active path.

Copyright © 2013, Juniper Networks, Inc.

Action To examine a route to determine if EBGP is selected over IBGP as the selection criteria for the single, active path, enter the following Junos OS CLI operational mode command:

```
user@host> show route destination-prefix < detail >
```

Sample Output

```
user@R4> show route 100.100.3.0 detail
inet.0: 20 destinations, 24 routes (20 active, 0 holddown, 0 hidden)
100.100.3.0/24 (2 entries, 1 announced)
         *BGP     Preference: 170/-101
                  Source: 10.1.45.2
                Next hop: 10.1.45.2 via so-0/0/2.0, selected
                State: <Active Ext>
                 Local AS: 65002 Peer AS: 65001
                Age: 5d 0:31:25
                Task: BGP_65001.10.1.45.2+179
                Announcement bits (3): 0-KRT 3-BGP.0.0.0.0+179 4-Resolve inet.0

                AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.5
         BGP     Preference: 170/-101
                  Source: 10.0.0.2
                Next hop: 10.1.24.1 via so-0/0/3.0, selected
                Protocol next hop: 10.0.0.2 Indirect next hop: 8644000 277
                State: <NotBest Int Ext>
                 Inactive reason: Interior > Exterior > Exterior via Interior
                Local AS: 65002 Peer AS: 65002
                Age: 2:48:18    Metric2: 10
                Task: BGP_65002.10.0.0.2+179
                AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.2
```

Meaning The sample output shows that **R4** received two instances of the **100.100.3.0** route: one from **10.1.45.2** (**R5**) and one from **10.0.0.2** (**R2**). **R4** selected the path from **R5** as its active path, as indicated by the asterisk (*). The selection is based on a preference for routes learned from an EBGP peer over routes learned from an IBGP. **R5** is an EBGP peer.

You can determine if a path is received from an EBGP or IBGP peer by examining the **Local As** and **Peer As** fields. For example, the route from **R5** shows the local AS is 65002 and the peer AS is 65001, indicating that the route is received from an EBGP peer. The route from **R2** shows that both the local and peer AS is 65002, indicating that it is received from an IBGP peer.

The reason that the inactive path is not selected is displayed in the **Inactive reason** field, in this case, **Interior > Exterior > Exterior via Interior**. The wording of this reason shows the order of preferences applied when the same route is received from two routers. The route received from a strictly internal source (IGP) is preferred first, the route received from an external source (EBGP) is preferred next, and any route which comes from an external source and is received internally (IBGP) is preferred last.

Copyright © 2013, Juniper Networks, Inc.

Examine the IGP Cost Selection

Purpose To examine a route to determine if EBGP is selected over IBGP as the selection criteria for the single, active path.

Action To examine a route to determine if EBGP is selected over IBGP as the selection criteria for the single, active path, enter the following Junos OS CLI operational mode command:

user@host> **show route** ***destination-prefix*** < detail >

Sample Output

```
user@R6> show route 100.100.4.0 detail
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
100.100.4.0/24 (2 entries, 1 announced)
        *BGP    Preference: 170/-101
                Source: 10.0.0.4
                Next hop: 10.1.46.1 via so-0/0/1.0, selected
                Protocol next hop: 10.0.0.4 Indirect next hop: 864c000 276
                State: <Active Int Ext>
                Local AS: 65002 Peer AS: 65002
                Age: 2:16:11    Metric2: 10
                Task: BGP_65002.10.0.0.4+4120
                Announcement bits (2): 0-KRT 4-Resolve inet.0
                AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.4
         BGP    Preference: 170/-101
                Source: 10.0.0.2
                Next hop: 10.1.46.1 via so-0/0/1.0, selected
                Next hop: 10.1.36.1 via so-0/0/3.0
                Protocol next hop: 10.0.0.2 Indirect next hop: 864c0b0 278
                State: <NotBest Int Ext>
                Inactive reason: IGP metric
                Local AS: 65002 Peer AS: 65002
                Age: 2:16:03    Metric2: 20
                Task: BGP_65002.10.0.0.2+179
                AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.2
```

Meaning The sample output shows that **R6** received two instances of the **100.100.4.0** route: one from **10.0.0.4** (**R4**) and one from **10.0.0.2** (**R2**). **R6** selected the path from **R4** as its active route, as indicated by the asterisk (*). The selection is based on the IGP metric, displayed in the **Metric2** field. The route with the lowest IGP metric is preferred. In the example, the path with the lowest IGP metric value is the path from **R4**, with an IGP metric value of 10, while the path from **R2** has an IGP metric of 20. Note that the two paths are from the same neighboring network: AS 65001.

The reason that the inactive path was not selected is displayed in the **Inactive reason** field, in this case, **IGP metric**.

Copyright © 2013, Juniper Networks, Inc.

Examine Routes in the Forwarding Table

Purpose When you run into problems, such as connectivity problems, you may need to examine routes in the forwarding table to verify that the routing protocol process has relayed the correct information into the forwarding table.

Action To display the set of routes installed in the forwarding table, enter the following Junos OS CLI operational mode command:

```
user@host> show route forwarding-table
```

Sample Output

```
user@R2> show route forwarding-table
Routing table: inet
Internet:
Destination        Type RtRef Next hop           Type  Index NhRef Netif
default            perm     0                    rjct    10     1
10.0.0.2/32        intf     0 10.0.0.2           locl   256     1
10.0.0.3/32        user     1 10.1.23.0          ucst   282     4 so-0/0/1.0
10.0.0.4/32        user     1 10.1.24.0          ucst   290     7 so-0/0/3.0
10.0.0.6/32        user     1 10.1.24.0          ucst   290     7 so-0/0/3.0
10.1.12.0/30       intf     1 ff.3.0.21          ucst   278     6 so-0/0/0.0
10.1.12.0/32       dest     0 10.1.12.0          recv   280     1 so-0/0/0.0
10.1.12.2/32       intf     0 10.1.12.2          locl   277     1
10.1.12.3/32       dest     0 10.1.12.3          bcst   279     1 so-0/0/0.0
10.1.23.0/30       intf     0 ff.3.0.21          ucst   282     4 so-0/0/1.0
10.1.23.0/32       dest     0 10.1.23.0          recv   284     1 so-0/0/1.0
10.1.23.1/32       intf     0 10.1.23.1          locl   281     1
10.1.23.3/32       dest     0 10.1.23.3          bcst   283     1 so-0/0/1.0
10.1.24.0/30       intf     0 ff.3.0.21          ucst   290     7 so-0/0/3.0
10.1.24.0/32       dest     0 10.1.24.0          recv   292     1 so-0/0/3.0
10.1.24.1/32       intf     0 10.1.24.1          locl   289     1
10.1.24.3/32       dest     0 10.1.24.3          bcst   291     1 so-0/0/3.0
10.1.36.0/30       user     0 10.1.23.0          ucst   282     4 so-0/0/1.0
10.1.46.0/30       user     0 10.1.24.0          ucst   290     7 so-0/0/3.0
100.100.1.0/24     user     0 10.1.12.0          ucst   278     6 so-0/0/0.0
100.100.2.0/24     user     0 10.1.12.0          ucst   278     6 so-0/0/0.0
100.100.3.0/24     user     0 10.1.12.0          ucst   278     6 so-0/0/0.0
100.100.4.0/24     user     0 10.1.12.0          ucst   278     6 so-0/0/0.0
[...Output truncated...]
```

Meaning The sample output shows the network-layer prefixes and their next hops installed in the forwarding table. The output includes the same next-hop information as in the **show route detail** command (the next-hop address and interface name). Additional information includes the destination type, the next-hop type, the number of references to this next hop, and an index into an internal next-hop database. (The internal database contains additional information used by the Packet Forwarding Engine to ensure proper encapsulation of packets sent out an interface. This database is not accessible to the user.

For detailed information about the meanings of the various flags and types fields, see the *Junos Routing Protocols and Policies Command Reference.*

Copyright © 2013, Juniper Networks, Inc.

Log BGP State Transition Events

Purpose Border Gateway Protocol (BGP) state transitions indicate a network problem and need to be logged and investigated.

Action To log BGP state transition events to the system log, follow these steps:

1. In configuration mode, go to the following hierarchy level:

   ```
   [edit]
   user@host# edit protocol bgp
   ```

2. Configure the system log:

   ```
   user@host#  set log-updown
   ```

3. Verify the configuration:

   ```
   user@host# show
   ```

4. Commit the configuration:

   ```
   user@host# commit
   ```

Meaning Log messages from BGP state transition events are sufficient to diagnose most BGP session problems. Table 40 on page 896 lists and describes the six states of a BGP session.

Table 40: Six States of a BGP Session

BGP State	Description
Idle	This is the first state of a connection. BGP waits for a start event initiated by an administrator. The start event might be the establishment of a BGP session through router configuration or the resetting of an existing session. After the start event, BGP initializes its resources, resets a connect-retry timer, initiates a TCP transport connection, and starts listening for connections initiated by remote peers. BGP then transitions to a **Connect** state. If there are errors, BGP falls back to the **Idle** state.
Connect	BGP waits for the transport protocol connection to complete. If the TCP transport connection is successful, the state transitions to **OpenSent**. If the transport connection is not successful, the state transitions to **Active**. If the connect-retry timer has expired, the state remains in the **Connect** state, the timer is reset, and a transport connection is initiated. With any other event, the state goes back to **Idle**.

Copyright © 2013, Juniper Networks, Inc.

Table 40: Six States of a BGP Session *(continued)*

BGP State	Description
Active	BGP tries to acquire a peer by initiating a transport protocol connection. If it is successful, the state transitions to **OpenSent**. If the connect-retry timer expires, BGP restarts the connect timer and falls back to the **Connect** state. BGP continues to listen for a connection that may be initiated from another peer. The state may go back to **Idle** in case of other events, such as a stop event. In general, a neighbor state flip-flopping between **Connect** and **Active** is an indication that there is a problem with the TCP transport connection. Such a problem might be caused by many TCP retransmissions or the inability of a neighbor to reach the IP address of its peer.
OpenSent	BGP receives an open message from its peer. In the **OpenSent** state, BGP compares its autonomous system (AS) number with the AS number of its peer and recognizes whether the peer belongs to the same AS (internal BGP) or to a different AS (external BGP). The open message is checked for correctness. In case of errors, such as a bad version number of an unacceptable AS, BGP sends an error-notification message and goes back to **Idle**. For any other errors, such as expiration of the hold timer or a stop event, BGP sends a notification message with the corresponding error code and falls back to the **Idle** state. If there are no errors, BGP sends keepalive messages and resets the keepalive timer. In this state, the hold time is negotiated. If the hold time is 0, the hold and keepalive timers are not restarted. When a TCP transport disconnect is detected, the state falls back to **Active**.
OpenConfirm	BGP waits for a keepalive or notification message. If a keepalive is received, the state becomes **Established**, and the neighbor negotiation is complete. If the system receives an update or keepalive message, it restarts the hold timer (assuming that the negotiated hold time is not 0). If a notification message is received, the state falls back to **Idle**. The system sends periodic keepalive messages at the rate set by the keepalive timer. In case of a transport disconnect notification or in response to a stop event, the state falls back to **Idle**. In response to other events, the system sends a notification message with a finite state machine (FSM) error code and goes back to **Idle**.

Copyright © 2013, Juniper Networks, Inc.

Table 40: Six States of a BGP Session *(continued)*

BGP State	Description
Established	This is the final state in the neighbor negotiation. In this state, BGP exchanges update ackets with its peers and the hold timer is restarted at the receipt of an update or keepalive message when it is not set to zero. If the system receives a notification message, the state falls back to **Idle**. Update messages are checked for errors, such as missing attributes, duplicate attributes, and so on. If errors are found, a notification is sent to the peer, and the state falls back to **Idle**. BGP goes back to **Idle** when the hold timer expires, a disconnect notification is received from the transport protocol, a stop event is received, or in response to any other event.

For more detailed BGP protocol packet information, configure BGP-specific tracing. See Checklist for Tracking Error Conditions for more information.

Display Detailed BGP Protocol Information

Action To display BGP protocol information in detail, follow these steps:

1. In configuration mode, go to the following hierarchy level:

   ```
   [edit]
   user@host#  edit protocol bgp traceoptions
   ```

2. Configure the flag to display detailed BGP protocol messages:

   ```
   [edit protocols bgp traceoptions]
   user@host#  set flag update detail
   ```

3. Verify the configuration:

   ```
   user@host# show
   ```

   For example:

   ```
   [edit protocols bgp traceoptions]
   user@host# show
   flag update detail;
   ```

4. Commit the configuration:

   ```
   user@host# commit
   ```

5. View the contents of the file containing the detailed messages:

   ```
   user@host# run show log filename
   ```

   For example:

   ```
   [edit protocols bgp traceoptions]
   user@pro5-a# run show log bgp
   Sep 17 14:47:16 trace_on: Tracing to "/var/log/bgp" started
   Sep 17 14:47:17 bgp_read_v4_update: receiving packet(s) from 10.255.245.53 (Internal
     AS 10458)
   Sep 17 14:47:17 BGP RECV 10.255.245.53+179 -> 10.255.245.50+1141
   ```


Copyright © 2013, Juniper Networks, Inc.

```
Sep 17 14:47:17 BGP RECV message type 2 (Update) length 128
Sep 17 14:47:17 BGP RECV flags 0x40 code Origin(1): IGP
Sep 17 14:47:17 BGP RECV flags 0x40 code ASPath(2): 2
Sep 17 14:47:17 BGP RECV flags 0x80 code MultiExitDisc(4): 0
Sep 17 14:47:17 BGP RECV flags 0x40 code LocalPref(5): 100
Sep 17 14:47:17 BGP RECV flags 0xc0 code Extended Communities(16): 2:10458:1
[...Output truncated...]
```

Meaning Table 41 on page 899 lists tracing flags specific to BGP and presents example output for some of the flags. You can also configure tracing for a specific BGP peer or peer group. For more information, see the *Junos System Basics Configuration Guide*.

Table 41: BGP Protocol Tracing Flags

Tracing Flags	Description	Example Output
aspath	AS path regular expression operations	Not available.
damping	Damping operations	Nov 28 17:01:12 bgp_damp_change: Change event Nov 28 17:01:12 bgp_dampen: Damping 10.10.1.0 Nov 28 17:01:12 bgp_damp_change: Change event Nov 28 17:01:12 bgp_dampen: Damping 10.10.2.0 Nov 28 17:01:12 bgp_damp_change: Change event Nov 28 17:01:12 bgp_dampen: Damping 10.10.3.0
keepalive	BGP keepalive messages	Nov 28 17:09:27 bgp_send: sending 19 bytes to 10.217.5.101 (External AS 65471) Nov 28 17:09:27 Nov 28 17:09:27 BGP SEND 10.217.5.1+179 -> 10.217.5.101+52162 Nov 28 17:09:27 BGP SEND message type 4 (KeepAlive) length 19 Nov 28 17:09:28 Nov 28 17:09:28 BGP RECV 10.217.5.101+52162 -> 10.217.5.1+179 Nov 28 17:09:28 BGP RECV message type 4 (KeepAlive) length 19
open	BGP open packets	Nov 28 18:37:42 bgp_send: sending 37 bytes to 10.217.5.101 (External AS 65471) Nov 28 18:37:42 Nov 28 18:37:42 BGP SEND 10.217.5.1+179 -> 10.217.5.101+38135 Nov 28 18:37:42 BGP SEND message type 1 (Open) length 37
packets	All BGP protocol packets	Sep 27 17:45:31 BGP RECV 10.0.100.108+179 -> 10.0.100.105+1033 Sep 27 17:45:31 BGP RECV message type 4 (KeepAlive) length 19 Sep 27 17:45:31 bgp_send: sending 19 bytes to 10.0.100.108 (Internal AS 100) Sep 27 17:45:31 BGP SEND 10.0.100.105+1033 -> 10.0.100.108+179 Sep 27 17:45:31 BGP SEND message type 4 (KeepAlive) length 19 Sep 27 17:45:31 bgp_read_v4_update: receiving packet(s) from 10.0.100.108 (Internal AS 100)
update	Update packets	Nov 28 19:05:24 BGP SEND 10.217.5.1+179 -> 10.217.5.101+55813 Nov 28 19:05:24 BGP SEND message type 2 (Update) length 53 Nov 28 19:05:24 bgp_send: sending 65 bytes to 10.217.5.101 (External AS 65471) Nov 28 19:05:24 Nov 28 19:05:24 BGP SEND 10.217.5.1+179 -> 10.217.5.101+55813 Nov 28 19:05:24 BGP SEND message type 2 (Update) length 65 Nov 28 19:05:24 bgp_send: sending 55 bytes to 10.217.5.101 (External AS 65471)

Copyright © 2013, Juniper Networks, Inc.

Verify Received BGP Routes

Purpose Display the routing information received on router **R6**, the ingress router for the reverse LSP **R6-to-R1**.

Action To verify that a particular BGP route is received on the egress router, enter the following Junos OS CLI operational mode command:

```
user@host> show route receive protocol bgp neighbor-address
```

Sample Output 1

```
user@R6> show route receive-protocol bgp 10.0.0.1
inet.0: 30 destinations, 46 routes (29 active, 0 holddown, 1 hidden)
<<< missing route
inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)
```

Sample Output 2

```
user@R6> show route receive-protocol bgp 10.0.0.1
inet.0: 30 destinations, 46 routes (29 active, 0 holddown, 1 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 100.100.1.0/24     10.0.0.1         100    I

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)
```

Meaning Sample Output 1 shows that ingress router **R6** (reverse LSP **R6-to-R1**) does not receive any BGP routes into the **inet.0** routing table when the BGP configurations of **R1** and **R6** are incorrect.

Sample Output 2 shows a BGP route installed in the **inet.0** routing table after the BGP configurations on **R1** and **R6** are corrected using "Take Appropriate Action" on page 874.

Verify That a Particular BGP Route Is Received on Your Router

Purpose Display the routing information as it is received through a particular BGP neighbor and advertised by the local router to the neighbor.

Action To verify that a particular BGP route is received on your router, enter the following Junos OS CLI operational mode command:

Copyright © 2013, Juniper Networks, Inc.

user@host> **show route receive-protocol bgp** *neighbor-address*

Sample Output

```
user@R6> show route receive-protocol bgp 10.0.0.2
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 100.100.1.0/24     10.0.0.2      5   200    65001 I
* 100.100.2.0/24     10.0.0.2      5   100    65001 I
  100.100.3.0/24          10.0.0.2                    100        65001 I
  100.100.4.0/24          10.0.0.2                    100        65001 I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

user@R6> show route receive-protocol bgp 10.0.0.4
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
  Prefix                  Nexthop              MED     Lclpref    AS path
* 100.100.3.0/24           10.0.0.4                    100        65001 I
* 100.100.4.0/24          10.0.0.4                    100        65001 I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Meaning The sample output shows four BGP routes from **R2** and two from **R4**. Of the four routes from **R2**, only two are active in the routing table, as indicated by the asterisk (*), while both routes received from **R4** are active in the routing table. All BGP routes came through AS 65001.

Check That BGP Traffic Is Using the LSP

Purpose At this level of the troubleshooting model, BGP and the LSP may be up, however BGP traffic might not be using the LSP to forward traffic.

Action To verify that BGP traffic is using the LSP, enter the following Junos OS command-line interface (CLI) operational mode command from the ingress router:

user@host> **traceroute** *hostname*

Sample Output

```
user@R1> traceroute 100.100.6.1
traceroute to 100.100.6.1 (100.100.6.1), 30 hops max, 40 byte packets
 1  10.1.13.2 (10.1.13.2)  0.653 ms  0.590 ms  0.543 ms
 2  10.1.36.2 (10.1.36.2)  0.553 ms !N  0.552 ms !N  0.537 ms !N

user@R6> traceroute 100.100.1.1
traceroute to 100.100.1.1 (100.100.1.1), 30 hops max, 40 byte packets
 1  10.1.36.1 (10.1.36.1)  0.660 ms  0.551 ms  0.526 ms
 2  10.1.13.1 (10.1.13.1)  0.568 ms !N  0.553 ms !N  0.536 ms !N
```

Meaning The sample output shows that BGP traffic is not using the LSP, consequently MPLS labels do not appear in the output. Instead of using the LSP, BGP traffic is using the interior gateway protocol (IGP) to reach the BGP next-hop LSP egress address for **R6** and **R1**. The Junos OS default is to use LSPs for BGP traffic when the BGP next hop equals the LSP egress address.

Copyright © 2013, Juniper Networks, Inc.

Check That BGP Traffic Is Using the LSP Again

Purpose After taking the appropriate action to correct the error, the LSP needs to be checked again to confirm that BGP traffic is using the LSP and that the problem in the BGP layer has been resolved.

Action To verify that BGP traffic is using the LSP, enter the following Junos OS CLI operational mode command from the ingress router:

```
user@host> traceroute hostname
```

Sample Output

```
user@R1> traceroute 100.100.6.1
traceroute to 100.100.6.1 (100.100.6.1), 30 hops max, 40 byte packets
 1  10.1.13.2 (10.1.13.2)  0.858 ms  0.740 ms  0.714 ms
      MPLS Label=100016 CoS=0 TTL=1 S=1
 2  10.1.36.2 (10.1.36.2)  0.592 ms !N  0.564 ms !N  0.548 ms !N

user@R6> traceroute 100.100.1.1
traceroute to 100.100.1.1 (100.100.1.1), 30 hops max, 40 byte packets
 1  10.1.36.1 (10.1.36.1)  0.817 ms  0.697 ms  0.771 ms
      MPLS Label=100000 CoS=0 TTL=1 S=1
 2  10.1.13.1 (10.1.13.1)  0.581 ms !N  0.567 ms !N  0.544 ms !N
```

Meaning The sample output shows that MPLS labels are used to forward packets through the LSP. Included in the output is a label value (**MPLS Label=100016**), the time-to-live value (**TTL=1**), and the stack bit value (**S=1**).

The **MPLS Label** field is used to identify the packet to a particular LSP. It is a 20-bit field, with a maximum value of (2^^20-1), approximately 1,000,000.

The time-to-live (TTL) value contains a limit on the number of hops that this MPLS packet can travel through the network (1). It is decremented at each hop, and if the TTL value drops below one, the packet is discarded.

The bottom of the stack bit value (**S=1**) indicates that is the last label in the stack and that this MPLS packet has one label associated with it. The MPLS implementation in the Junos OS supports a stacking depth of 3 on the M-series routers and up to 5 on the T-series routing platforms. For more information on MPLS label stacking, see RFC 3032, *MPLS Label Stack Encoding*.

MPLS labels appear in the sample output because the **traceroute** command is issued to a BGP destination where the BGP next hop for that route is the LSP egress address. The Junos OS by default uses LSPs for BGP traffic when the BGP next hop equals the LSP egress address.

If the BGP next hop does not equal the LSP egress address, the BGP traffic does not use the LSP, and consequently MPLS labels do not appear in the output for the **traceroute** command, as indicated in the sample output in "Check BGP Sessions" on page 864.

 Copyright © 2013, Juniper Networks, Inc.

Examine the EBGP over IBGP Selection

Purpose To examine a route to determine if EBGP is selected over IBGP as the selection criteria for the single, active path.

Action To examine a route to determine if EBGP is selected over IBGP as the selection criteria for the single, active path, enter the following Junos OS CLI operational mode command:

user@host> **show route** ***destination-prefix*** < detail >

Sample Output

```
user@R4> show route 100.100.3.0 detail
inet.0: 20 destinations, 24 routes (20 active, 0 holddown, 0 hidden)
100.100.3.0/24 (2 entries, 1 announced)
         *BGP     Preference: 170/-101
                  Source: 10.1.45.2
                Next hop: 10.1.45.2 via so-0/0/2.0, selected
                State: <Active Ext>
                 Local AS: 65002 Peer AS: 65001
                Age: 5d 0:31:25
                Task: BGP_65001.10.1.45.2+179
                Announcement bits (3): 0-KRT 3-BGP.0.0.0.0+179 4-Resolve inet.0

                AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.5
         BGP    Preference: 170/-101
                 Source: 10.0.0.2
                Next hop: 10.1.24.1 via so-0/0/3.0, selected
                Protocol next hop: 10.0.0.2 Indirect next hop: 8644000 277
                State: <NotBest Int Ext>
                 Inactive reason: Interior > Exterior > Exterior via Interior
                Local AS: 65002 Peer AS: 65002
                Age: 2:48:18    Metric2: 10
                Task: BGP_65002.10.0.0.2+179
                AS path: 65001 I
                Localpref: 100
                Router ID: 10.0.0.2
```

Meaning The sample output shows that **R4** received two instances of the **100.100.3.0** route: one from **10.1.45.2** (**R5**) and one from **10.0.0.2** (**R2**). **R4** selected the path from **R5** as its active path, as indicated by the asterisk (*). The selection is based on a preference for routes learned from an EBGP peer over routes learned from an IBGP. **R5** is an EBGP peer.

You can determine if a path is received from an EBGP or IBGP peer by examining the **Local As** and **Peer As** fields. For example, the route from **R5** shows the local AS is 65002 and the peer AS is 65001, indicating that the route is received from an EBGP peer. The route from **R2** shows that both the local and peer AS is 65002, indicating that it is received from an IBGP peer.

The reason that the inactive path is not selected is displayed in the **Inactive reason** field, in this case, **Interior > Exterior > Exterior via Interior**. The wording of this reason shows the order of preferences applied when the same route is received from two routers. The route received from a strictly internal source (IGP) is preferred first, the route received from an

Copyright © 2013, Juniper Networks, Inc.

external source (EBGP) is preferred next, and any route which comes from an external source and is received internally (IBGP) is preferred last.

Verify BGP on an Internal Router

Purpose To verify the BGP configuration of an internal router.

Action To verify the BGP configuration of an internal router, enter the following Junos OS command-line interface (CLI) command:

```
user@host> show configuration
```

The following sample output is for a BGP configuration on R3, as shown in "Verify the BGP Protocol" on page 879:

Copyright © 2013, Juniper Networks, Inc.

Sample Output

```
user@R3> show configuration
[...Output truncated...]
interfaces {
    so-0/0/1 {
        unit 0 {
             family inet {
                address 10.1.23.2/30;
            }
            family iso;
        }
    }
    so-0/0/3 {
        unit 0 {
            family inet {
                address 10.1.36.1/30;
            }
            family iso;
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.3/32;
            }
            family iso {
                address 49.0002.1000.0000.0003.00;
            }
        }
    }
}
routing-options {
    [...Output truncated...]
    router-id 10.0.0.3;
    autonomous-system 65002;
}
protocols {
    bgp {
        group internal {
            type internal;
            local-address 10.0.0.3;
            neighbor 10.0.0.2;
            neighbor 10.0.0.4;
            neighbor 10.0.0.6;
        }
    }
    isis {
        level 1 disable;
        interface all {
            level 2 metric 10;
        }
        interface lo0.0;
    }
}

user@R6> show configuration |
[Output truncated...]
interfaces {
    so-0/0/1 {
```

Copyright © 2013, Juniper Networks, Inc.

```
        unit 0 {
            family inet {
                address 10.1.46.2/30;
            }
            family iso;
        }
    }
    so-0/0/3 {
        unit 0 {
            family inet {
                address 10.1.36.2/30;
            }
            family iso;
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.6/32;
            }
            family iso {
                address 49.0003.1000.0000.0006.00;
            }
        }
    }
}
routing-options {
    [Output truncated...]
    router-id 10.0.0.6;
    autonomous-system 65002;
}
protocols {
    bgp {
        group internal {
            type internal;
            local-address 10.0.0.6;
            neighbor 10.0.0.2;
            neighbor 10.0.0.3;
            neighbor 10.0.0.4;
        }
    }
    isis {
        level 1 disable;
        interface all {
            level 2 metric 10;
        }
        interface lo0.0;
    }
}
```

Meaning The sample output shows a basic BGP configuration on routers **R3** and **R6**. The local AS (65002) and one group (**internal**) are configured on both routers. **R3** has three internal peers—**10.0.0.2**, **10.0.0.4**, and **10.0.0.6**—included at the [**protocols bgp group *group***] hierarchy level. **R6** also has three internal peers: **10.0.0.2**, **10.0.0.3**, and **10.0.0.4**. The underlying IGP protocol is Intermediate System-to-Intermediate System (IS-IS), and relevant interfaces are configured to run IS-IS.

Note that in this configuration the router ID is manually configured to avoid any duplicate router ID problems.

 Copyright © 2013, Juniper Networks, Inc.

Verify BGP on a Border Router

Purpose To verify the BGP configuration of a border router.

Action To verify the BGP configuration of a border router, enter the following Junos OS CLI operational mode command:

```
user@host> show configuration
```

Copyright © 2013, Juniper Networks, Inc.

Sample Output

The following sample output is for a BGP configuration on two border routers from AS 65002 (R2 and R4 as shown in "Verify the BGP Protocol" on page 879):

```
user@R2> show configuration
[...Output truncated...]
interfaces {
    so-0/0/0 {
        unit 0 {
            family inet {
                address 10.1.12.2/30;
            }
            family iso;
        }
    }
    so-0/0/1 {
        unit 0 {
             family inet {
                address 10.1.23.1/30;
            }
            family iso;
        }
    }
    so-0/0/3 {
        unit 0 {
             family inet {
                address 10.1.24.1/30;
            }
            family iso;
        }
    }
    lo0 {
        unit 0 {
             family inet {
                address 10.0.0.2/32;
            }
            family iso {
                address 49.0002.1000.0000.0002.00;
            }
        }
    }
}
routing-options {
[...Output truncated...]
     router-id 10.0.0.2;
    autonomous-system 65002;
}
protocols {
     bgp {
        group internal {
            type internal;
            export next-hop-self;
            neighbor 10.0.0.3;
            neighbor 10.0.0.4;
            neighbor 10.0.0.6;
        }
        group toR1 {
            type external;
```


Copyright © 2013, Juniper Networks, Inc.

```
            import import-toR1;
            peer-as 65001;
            neighbor 10.1.12.1;
        }
    }
    isis {
        level 1 disable;
        interface all {
            level 2 metric 10;
        }
        interface lo0.0;
    }
}
policy-options {
    policy-statement next-hop-self {
        term change-next-hop {
            from neighbor 10.1.12.1;
            then {
                next-hop self;
            }
        }
    }
    policy-statement import-toR1 {
        term 1 {
            from {
                route-filter 100.100.1.0/24 exact;
            }
            then {
                local-preference 200;
            }
        }
    }

user@R4> show configuration
[...Output truncated...]
interfaces {
    so-0/0/1 {
        unit 0 {
            family inet {
                address 10.1.46.1/30;
            }
            family iso;
        }
    }
    so-0/0/2 {
        unit 0 {
            family inet {
                address 10.1.45.1/30;
            }
            family iso;
        }
    }
    so-0/0/3 {
        unit 0 {
            family inet {
                address 10.1.24.2/30;
            }
            family iso;
        }
    }
    lo0 {
```

Copyright © 2013, Juniper Networks, Inc.

```
        unit 0 {
            family inet {
                address 10.0.0.4/32;
            }
            family iso {
                address 49.0001.1000.0000.0004.00;
            }
        }
    }
}
routing-options {
    [...Output truncated...]
    router-id 10.0.0.4;
    autonomous-system 65002;
}
protocols {
    bgp {
        group internal {
            type internal;
            local-address 10.0.0.4;
            export next-hop-self;
            neighbor 10.0.0.2;
            neighbor 10.0.0.3;
            neighbor 10.0.0.6;
        }
        group toR5 {
            type external;
            peer-as 65001;
            neighbor 10.1.45.2;
        }
    }
    isis {
        level 1 disable;
        interface all {
            level 2 metric 10;
        }
        interface lo0.0;
    }
}
policy-options {
    policy-statement next-hop-self {
        term change-next-hop {
            from neighbor 10.1.45.2;
            then {
                next-hop self;
            }
        }
    }
```

Meaning The sample output shows a basic BGP configuration on border routers **R2** and **R4**. Both routers have the AS (65002) included at the [**routing-options**] hierarchy level. Each router has two groups included at the [**protocols bgp group *group***] hierarchy level. External peers are included in the external group, either **toR1** or **toR5**, depending on the router. Internal peers are included in the **internal** group. The underlying IGP protocol is IS-IS on both routers, and relevant interfaces are configured to run IS-IS.

 Copyright © 2013, Juniper Networks, Inc.

Note that in the configuration on both routers, the router ID is manually configured to avoid duplicate router ID problems, and the **next-hop-self** statement is included to avoid any BGP next-hop reachability problems.

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

CHAPTER 17

Routing Protocol Process Memory FAQs

- Routing Protocol Process Memory FAQs Overview on page 913
- Routing Protocol Process Memory FAQs on page 914

Routing Protocol Process Memory FAQs Overview

Junos OS is based on the FreeBSD Unix operating system. The open source software is modified and hardened to operate in the device's specialized environment. For example, some executables have been deleted, while other utilities were de-emphasized. Additionally, certain software processes were added to enhance the routing functionality. The result of this transformation is the kernel, the heart of the Junos OS software.

The kernel is responsible for operating multiple processes that perform the actual functions of the device. Each process operates in its own protected memory space, while the communication among all the processes is still controlled by the kernel. This separation provides isolation between the processes, and resiliency in the event of a process failure. This is important in a core routing platform because a single process failure does not cause the entire device to cease functioning.

Some of the common software processes include the routing protocol process (rpd) that controls the device's protocols, the device control process (dcd) that controls the device's interfaces, the management process (mgd) that controls user access to the device, the chassis process (chassisd) that controls the device's properties itself, and the Packet Forwarding Engine process (pfed) that controls the communication between the device's Packet Forwarding Engine and the Routing Engine. The kernel also generates specialized processes as needed for additional functionality, such as SNMP, the Virtual Router Redundancy Protocol (VRRP), and Class of Service (CoS).

The routing protocol process is a software process within the Routing Engine software, which controls the routing protocols that run on the device. Its functionality includes all protocol messages, routing table updates, and implementation of routing policies.

The routing protocol process starts all configured routing protocols and handles all routing messages. It maintains one or more routing tables, which consolidate the routing information learned from all routing protocols. From this routing information, the routing protocol process determines the active routes to network destinations and installs these routes into the Routing Engine's forwarding table. Finally, it implements routing policy, which allows you to control the routing information that is transferred between the routing

Copyright © 2013, Juniper Networks, Inc.

protocols and the routing table. Using routing policy, you can filter and limit the transfer of information as well as set properties associated with specific routes.

Related Documentation

- Routing Protocol Process Memory FAQs on page 914

Routing Protocol Process Memory FAQs

The following sections present the most frequently asked questions and answers related to the routing protocol process memory utilization, operation, interpretation of related command outputs, and troubleshooting the software process.

Frequently Asked Questions: Routing Protocol Process Memory

This section presents frequently asked questions and answers related to the memory usage of the routing protocol process.

Why does the routing protocol process use excessive memory?

The routing protocol process uses hundreds of megabytes of RAM in the Routing Engine to store information needed for the operation of routing and related protocols, such as BGP, OSPF, IS-IS, RSVP, LDP and MPLS. Such huge consumption of memory is common for the process, as the information it stores includes routes, next hops, interfaces, routing policies, labels, and label-switched paths (LSPs). Because access to the RAM memory is much faster than access to the hard disk, most of the routing protocol process information is stored in the RAM memory instead of using the hard disk space. This ensures that the performance of the routing protocol process is maximized.

How can I check the amount of memory the routing protocol process is using?

You can check routing protocol process memory usage by entering the **show system processes** and the **show task memory** Junos OS command-line interface (CLI) operational mode commands.

The **show system processes** command displays information about software processes that are running on the device and that have controlling terminals. The **show task memory** command displays memory utilization for routing protocol tasks on the Routing Engine.

You can check the routing protocol process memory usage by using the **show system processes** command with the **extensive** option. The **show task memory** command displays a report generated by the routing protocol process on its own memory usage. However, this report does not display all the memory used by the process. The value reported by the routing protocol process does not account for the memory used for the **TEXT** and **STACK** segments, or the memory used by the process's internal memory manager. Further, the Resident Set Size value includes shared library pages used by the routing protocol process.

For more information about checking the routing protocol process memory usage, see Check Routing Protocol Process (rpd) Memory Usage .

For more information, see the **show system processes** command and the **show task memory** command.

Copyright © 2013, Juniper Networks, Inc.

I just deleted a large number of routes from the routing protocol process. Why is it still using so much memory?

The **show system processes extensive** command displays a **RES** value measured in kilobytes. This value represents the amount of program memory resident in the physical memory. This is also known as RSS or Resident Set Size. The **RES** value includes shared library pages used by the process. Any amount of memory freed by the process might still be considered part of the **RES** value. Generally, the kernel delays the migrating of memory out of the **Inact** queue into the **Cache** or **Free** list unless there is a memory shortage. This can lead to large discrepancies between the values reported by the routing protocol process and the kernel, even after the routing protocol process has freed a large amount of memory.

Frequently Asked Questions: Interpreting Routing Protocol Process-Related Command Outputs

This section presents frequently asked questions and answers about the routing protocol process-related Junos OS command-line interface (CLI) command outputs that are used to display the memory usage of the routing protocol process.

How do I interpret memory numbers displayed in the show system processes extensive command output?

The **show system processes extensive** command displays exhaustive system process information about software processes that are running on the device and have controlling terminals. This command is equivalent to the UNIX **top** command. However, the UNIX **top** command shows real-time memory usage, with the memory values constantly changing, while the **show system processes extensive** command provides a snapshot of memory usage in a given moment.

To check overall CPU and memory usage, enter the **show system processes extensive** command. Refer to Table 42 on page 916 for information about the **show system processes extensive** commands output fields.

```
user@host> show system processes extensive
last pid:   544;  load averages:  0.00,  0.00,  0.00    18:30:33
37 processes:  1 running, 36 sleeping

Mem: 25M Active, 3968K Inact, 19M Wired, 184K Cache, 8346K Buf, 202M Free
Swap: 528M Total, 64K Used, 528M Free
  PID USERNAME PRI NICE SIZE    RES STATE    TIME   WCPU    CPU COMMAND
  544 root      30   0   604K   768K RUN      0:00  0.00%  0.00% top
    3 root      28   0     0K    12K psleep   0:00  0.00%  0.00% vmdaemon
    4 root      28   0     0K    12K update   0:03  0.00%  0.00% update
  528 aviva     18   0   660K   948K pause    0:00  0.00%  0.00% tcsh
  204 root      18   0   300K   544K pause    0:00  0.00%  0.00% csh
  131 root      18   0   332K   532K pause    0:00  0.00%  0.00% cron
  186 root      18   0   196K    68K pause    0:00  0.00%  0.00% watchdog
   27 root      10   0   512M 16288K mfsidl   0:00  0.00%  0.00% mount_mfs
    1 root      10   0   620K   344K wait     0:00  0.00%  0.00% init
  304 root       3   0   884K   900K ttyin    0:00  0.00%  0.00% bash
  200 root       3   0   180K   540K ttyin    0:00  0.00%  0.00% getty
  203 root       3   0   180K   540K ttyin    0:00  0.00%  0.00% getty
  202 root       3   0   180K   540K ttyin    0:00  0.00%  0.00% getty
  201 root       3   0   180K   540K ttyin    0:00  0.00%  0.00% getty
  194 root       2   0  2248K  1640K select   0:11  0.00%  0.00% rpd
  205 root       2   0   964K   800K select   0:12  0.00%  0.00% tnp.chassisd
```

Copyright © 2013, Juniper Networks, Inc.

```
  189 root      2 -12   352K   740K select   0:03  0.00%  0.00% xntpd
  114 root      2   0   296K   612K select   0:00  0.00%  0.00% amd
  188 root      2   0   780K   600K select   0:00  0.00%  0.00% dcd
  527 root      2   0   176K   580K select   0:00  0.00%  0.00% rlogind
  195 root      2   0   212K   552K select   0:00  0.00%  0.00% inetd
  187 root      2   0   192K   532K select   0:00  0.00%  0.00% tnetd
   83 root      2   0   188K   520K select   0:00  0.00%  0.00% syslogd
  538 root      2   0  1324K   516K select   0:00  0.00%  0.00% mgd
   99 daemon    2   0   176K   492K select   0:00  0.00%  0.00% portmap
  163 root      2   0   572K   420K select   0:00  0.00%  0.00% nsrexecd
  192 root      2   0   560K   400K select   0:10  0.00%  0.00% snmpd
  191 root      2   0  1284K   376K select   0:00  0.00%  0.00% mgd
  537 aviva     2   0   636K   364K select   0:00  0.00%  0.00% cli
  193 root      2   0   312K   204K select   0:07  0.00%  0.00% mib2d
    5 root      2   0     0K    12K pfesel   0:00  0.00%  0.00% if_pfe
    2 root    -18   0     0K    12K psleep   0:00  0.00%  0.00% pagedaemon
    0 root    -18   0     0K     0K sched    0:00  0.00%  0.00% swapper
```

Table 42 on page 916 describes the output fields that represent the memory values for the **show system processes extensive** command. Output fields are listed in the approximate order in which they appear.

Table 42: show system processes extensive Output Fields

Field Name	Field Description
Mem	Information about physical and virtual memory allocation.
Active	Memory allocated and actively used by the program.
Inact	Memory allocated but not recently used or memory freed by the programs. Inactive memory remains mapped in the address space of one or more processes and, therefore, counts toward the RSS value of those processes.
Wired	Memory that is not eligible to be swapped, usually used for in-kernel memory structures and/or memory physically locked by a process.
Cache	Memory that is not associated with any program and does not need to be swapped before being reused.
Buf	Size of memory buffer used to hold data recently called from the disk.
Free	Memory that is not associated with any programs. Memory freed by a process can become **Inactive**, **Cache**, or **Free**, depending on the method used by the process to free the memory.
Swap	Information about swap memory. • Total—Total memory available to be swapped to disk. • Used—Memory swapped to disk. • Free—Memory available for further swap.

The rest of the command output displays information about the memory usage of each process. The **SIZE** field indicates the size of the virtual address space, and the **RES** field indicates the amount of the program in physical memory, which is also known as RSS or Resident Set Size. For more information, see the **show system processes** command.

Copyright © 2013, Juniper Networks, Inc.

What is the difference between Active and Inact memory that is displayed by the show system processes extensive command?

When the system is under memory pressure, the pageout process reuses memory from the free, cache, inact and, if necessary, active pages. When the pageout process runs, it scans memory to see which pages are good candidates to be unmapped and freed up. Thus, the distinction between **Active** and **Inact** memory is only used by the pageout process to determine which pool of pages to free first at the time of a memory shortage.

The pageout process first scans the **Inact** list, and checks whether the pages on this list have been accessed since the time they have been listed here. The pages that have been accessed are moved from the **Inact** list to the **Active** list. On the other hand, pages that have not been accessed become prime candidates to be freed by the pageout process. If the pageout process cannot produce enough free pages from the **Inact** list, pages from the **Active** list get freed up.

Because the pageout process runs only when the system is under memory pressure, the pages on the **Inact** list remain untouched – even if they have not been accessed recently – when the amount of **Free** memory is adequate.

How do I interpret memory numbers displayed in the show task memory command output?

The **show task memory** command provides a comprehensive picture of the memory utilization for routing protocol tasks on the Routing Engine. The routing protocol process is the main task that uses Routing Engine memory.

To check routing process memory usage, enter the **show task memory** command. Refer to Table 43 on page 917 for information about the **show task memory** command output fields.

```
user@host> show task memory
Memory                 Size (kB)  %Available  When
  Currently In Use:        29417          3%  now
  Maximum Ever Used:       33882          4%  00/02/11 22:07:03
  Available:              756281        100%  now
```

Table 43 on page 917 describes the output fields for the **show task memory** command. Output fields are listed in the approximate order in which they appear.

Table 43: show task memory Output Fields

Field Name	Field Description
Memory Currently In Use	Memory currently in use. Dynamically allocated memory plus the **DATA** segment memory in kilobytes.
Memory Maximum Ever Used	Maximum memory ever used.
Memory Available	Memory currently available.

The **show task memory** command does not display all the memory used by the routing protocol process. This value does not account for the memory used for the **TEXT** and

Copyright © 2013, Juniper Networks, Inc.

STACK segments, or the memory used by the routing protocol process's internal memory manager.

Why is the Currently In Use value less than the RES value?

The **show task memory** command displays a **Currently In Use** value measured in kilobytes. This value represents the memory currently in use. It is the dynamically allocated memory plus the **DATA** segment memory. The **show system processes extensive** command displays a **RES** value measured in kilobytes. This value represents the amount of program memory resident in the physical memory. This is also known as RSS or Resident Set Size.

The **Currently In Use** value does not account for all of the memory that the routing protocol process uses. This value does not include the memory used for the **TEXT** and the **STACK** segments, and a small percentage of memory used by the routing protocol process's internal memory manager. Further, the **RES** value includes shared library pages used by the routing protocol process.

Any amount of memory freed by the routing protocol process might still be considered part of the **RES** value. Generally, the kernel delays the migrating of memory out of the **Inact** queue into the **Cache** or **Free** list unless there is a memory shortage. This can lead to large discrepancies between the **Currently In Use** value and the **RES** value.

Frequently Asked Questions: Routing Protocol Process Memory Swapping

This section presents frequently asked questions and answers related to the memory swapping of the routing protocol process from the Routing Engine memory to the hard disk memory.

How do I monitor swap activity?

When the system is under memory pressure, the pageout process reuses memory from the free, cache, inact and, if necessary, active pages. You can monitor the swap activity by viewing the syslog message reported by the kernel during periods of high pageout activity.

The syslog message appears as follows:

```
Mar  3 20:08:02 olympic /kernel: High pageout rate!! 277 pages/sec.
```

You can use the **vmstat -s** command to print the statistics for the swapout activity. The displayed statistics appear as follows:

```
0 swap pager pageouts
0 swap pager pages paged out
```

The **swap pager pageouts** is the number of pageout operations to the swap device, and the **swap pager pages paged out** is the number of pages paged out to the swap device.

Why does the system start swapping when I try to dump core using the request system core-dumps command?

The **request system core-dumps** command displays a list of system core files created when the device has failed. This command can be useful for diagnostic purposes. Each list item includes the file permissions, number of links, owner, group, size, modification

Copyright © 2013, Juniper Networks, Inc.

date, path, and filename. You can use the **core-filename** option and the **core-file-info**, **brief**, and **detail** options to display more information about the specified core-dump files.

You can use the **request system core-dumps** command to perform a non-fatal core-dump without aborting the routing protocol process. To do this, the routing protocol process is forked, generating a second copy, and then aborted. This process can double the memory consumed by the two copies of the routing protocol processes, pushing the system into swap.

Why does the show system processes extensive command show that memory is swapped to disk although there is plenty of free memory?

Memory can remain swapped out indefinitely if it is not accessed again. Therefore, the **show system processes extensive** command shows that memory is swapped to disk even though there is plenty of free memory, and such a situation is not unusual.

Frequently Asked Questions: Troubleshooting the Routing Protocol Process

This section presents frequently asked questions and answers related to a shortage of memory and memory leakage by the routing protocol process.

What does the RPD_OS_MEMHIGH message mean?

The **RPD_OS_MEMHIGH** message is written into the system message file if the routing protocol process is running out of memory. This message alerts you that the routing protocol process is using the indicated amount and percentage of Routing Engine memory, which is considered excessive. This message is generated either because the routing protocol process is leaking memory or the use of system resources is excessive, perhaps because routing filters are misconfigured or the configured network topology is very complex.

When the memory utilization for the routing protocol process is using all available Routing Engine DRAM memory (Routing Engines with maximum 2 GB DRAM) or reaches the limit of 2 GB of memory (Routing Engines with 4 GB DRAM), a message of the following form is written every minute in the syslog message file:

```
RPD_OS_MEMHIGH: Using 188830 KB of memory, 100 percent of available
```

This message includes the amount, in kilobytes and/or the percentage, of the available memory in use.

This message should not appear under normal conditions, as any further memory allocations usually require a portion of existing memory to be written to swap. As a recommended solution, increase the amount of RAM in the Routing Engine. For more information, go to http://kb.juniper.net/InfoCenter/index?page=content&id=KB14186 .

What can I do when there is a memory shortage even after a swap?

It is not recommended for the system to operate in this state, notwithstanding the existence of swap. The protocols that run in the routing protocol process usually have a real-time requirement that cannot reliably withstand the latency of being swapped to hard disk. If the memory shortage has not resulted from a memory leak, then either a

Copyright © 2013, Juniper Networks, Inc.

reduction in the memory usage or an upgrade to a higher memory-capacity Routing Engine is required.

How do I determine whether there is a memory leak in the routing protocol process?

Memory leaks are typically the result of a seemingly unbounded growth in the memory usage of a process as reported by the **show system processes extensive** command.

There are two classes of memory leaks that the routing protocol process can experience.

- The first class occurs when the allocated memory that is no longer in use is not freed. This class of leak can usually be fixed by taking several samples of the **show task memory detail** command over a period of time and comparing the deltas.
- The second class occurs when there is a late access to freed memory. If the access is not outside the mapped address space, the kernel backfills the accessed page with real memory. This backfill is done without the knowledge of the routing protocol process's internal memory allocator, which makes this class of leak much more difficult to resolve. If a memory leak of this class is suspected, writing the state of the system to a disk file (creating a core file) is suggested.

A large discrepancy between the **RES** value and the **Currently In Use** value might indicate a memory leak. However, large discrepancies can also occur for legitimate reasons. For example, the memory used for the **TEXT** and **STACK** segments or the memory used by the routing protocol process's internal memory manager might not be displayed. Further, the **RES** value includes shared library pages used by the process.

What is the task_timer?

The source of a routing protocol process memory leak can usually be identified by dumping the timers for each task. You can use the **show task *task-name*** command to display routing protocol tasks on the Routing Engine. Tasks can be baseline tasks performed regardless of the device's configuration, and other tasks that depend on the device configuration.

For more information, see the **show task** command.

Related Documentation

- Routing Protocol Process Memory FAQs Overview on page 913

Copyright © 2013, Juniper Networks, Inc.

PART 5

Index

- Index on page 923

Copyright © 2013, Juniper Networks, Inc.

Copyright © 2013, Juniper Networks, Inc.

Index

Symbols

#, comments in configuration statements....xx
( ), in syntax descriptions....xx
< >, in syntax descriptions....xx
[ ], in configuration statements....xx
{ }, in configuration statements....xx
| (pipe), in syntax descriptions....xx

A

accept
  firewall filters
    action....436
accept-remote-nexthop statement....477
  usage guidelines....282
accepted-prefix-limit statement....478
  usage guidelines....425
action modifiers, firewall filters....436
active
  BGP protocol session state....897
active routes....8, 224
add-path statement
  BGP
    usage guidelines....294
administrative distance....217
  BGP *See* preference statement
advertise-external statement....481
  usage guidelines....202
advertise-from-main-vpn-tables statement....482
advertise-inactive statement....483
  usage guidelines....202, 220
advertise-peer-as statement....484
  usage guidelines....204
advertisements, displaying 705
advertising multiple paths to a destination
  BGP....480, 585, 610
aggregate routes
  preferences....217
aggregate-label statement....485
AIGP
  BGP....137
aigp statement
  BGP....486, 488
    usage guidelines....137
aigp-originate statement
  BGP
    usage guidelines....137
allow statement....491
always compare, BGP MED option....80
always-compare-med option....8, 224
apply-path statement
  firewall filter match condition....367
AS path
  ignoring in route selection....228
AS paths
  matching regular expressions, displaying....712
as-override
  usage guidelines....176
as-override statement....492
as-path (tracing flag)....621
as-path-ignore
  usage guidelines....8, 224, 228
as-path-ignore option....586
ASN
  BGP community routes, displaying....719
aspath, BGP protocol tracing flag....899
ASs
  paths....6
    operations, tracing....621
  private, removing....235, 236, 602
ASs (autonomous systems)
  breaking into confederations....343
authentication *See* of routes
  algorithm
    BGP....352
  BGP....7, 489, 493
  keychains
    BGP....352
  MD5
    BGP....352
authentication configuration
  BFD....272
authentication-algorithm statement
  BGP....495
    usage guidelines....352
authentication-key statement
  BGP....496
    usage guidelines....352

Copyright © 2013, Juniper Networks, Inc.

authentication-key-chain statement....497
BGP
usage guidelines....352
usage guidelines....352
auto-discovery-only statement
BGP....498
autonomous system number *See* ASN

B

best routes, displaying....714
BFD
authentication configuration....272
protocol....261, 262
with IBGP....261, 262
bfd-liveness-detection statement
BGP....499, 511
minimum-interval....562
threshold....618
transmit-interval....626
usage guidelines....262
BGP *See* multipath *See* secure interdomain routing
administrative distance....217
advertising multiple paths to a destination....293, 294, 480, 585, 610
aggregator path attribute....576
AIGP attribute....137
AS numbers, peers....588
ASs *See* ASs
authentication....7, 352, 496
authentication algorithm....495
authentication keychain....497
autonomous system override....492
best external route advertising....202
BFD....261, 262, 489, 493, 499, 541, 556, 612, 631
BGP_L2VPN_AD_NLRI....498
CLNS....453, 455
communities
policy, routing....191
community ASN, displaying routes....719
community name, displaying routes....721
configuration, verifying....866, 881
damping parameters
clearing....636
displaying....686, 692
damping routes, displaying....723
delete group internal neighbor command....874
description....43
EBGP IPv6 peering....27
edit protocol bgp command....874
enabling on router....503
external (EBGP)....4
FEC 129....498
filtering paths to a destination....595
graceful restart....523
groups....19, 78, 525
general information, displaying....656
traffic statistics, displaying....663
hold time....7, 531
identifier....7
idle-after-switch-over statement....534
ignoring the AS path attribute in route selection....228
indirect next hops....282
injecting OSPF routes into BGP....188
internal....42
internal (IBGP)....4
IP address....7
IPsec....358, 538
IPv6....427
logical systems....27
keepalive messages....8, 621
LDP-based Layer 2 VPN and VPLS update messages....498
local address....43, 545
local AS....116, 121, 131
local interface....550
local preference....65, 66
MED....81, 93, 106
messages....7
MP-BGP....421, 516
MTU discovery....565
multihop sessions....567, 578
ttl....627
multipath configuration....277, 278
neighbors
clearing connections....637
displaying....665
neighbors BGP, peers *See* BGP, peers
NLRI....7
IPv4 VPN....421
IPv6 VPN....421
open messages....7, 399, 584
origin AS validation....383
outbound route filter....205
outbound route filters
interoperability....504
overview....3

Copyright © 2013, Juniper Networks, Inc.

packets, tracing....621
passive mode....399
path attributes....6, 7
peers....4, 78, 571
point-to-point peer session (configuration editor)....20
policy, routing....515, 535
precedence....201
preferences....217, 219, 592
prefix-limit
accepted....425
received....425
private AS....235, 236
receiving multiple paths to a destination....598
resolve routes to other tables....426
route reflection....506, 577
route target filtering....608
route validation
information, displaying....843, 845, 847, 849, 852
routes....6
routing tables
delays in exchanging routes....203, 582
nonactive routes....202, 220, 483
retaining routes....540
routing to CE deivices....176
scaling....591
secure interdomain routing
group....528
hold-time period....533
local address....547
maximum prefix length....558
maximum sessions....557
origin AS....581
port....590
preference....593
record....599
record lifetime....600
refresh time....601
session....611
static records....614
tracing....520, 521, 624
validation....629
validation state....630
session drops....399
sessions, checking....864, 876
set local AS number....548
set local-address command....874
show bgp summary command....864, 876
show configuration command....866, 881
show route detail command....872
show route receive protocol bgp command....873, 900
summary information, displaying....681
supported software standards....13
system log messages....399
table
clearing....639
TCP....3
TCP segment size....371
traceroute command....875, 902
tracing operations....621
4-byte AS events....464
BFD protocol events....464
damping operations....464
description....464
graceful restart....464
keepalive messages....464
NSR synchronization....464
open PDUs....464
policy processing....464
protocol task processing....464
protocol timer processing....464
refresh PDUs....464
route information....464
state transitions....464
update PDUs....464
traffic, verifying....875, 902
type, group....628
update messages....7
version supported....3
VPNs
preventing session flaps....399
with BFD....261, 262
BGP (Border Gateway Protocol)
confederations *See* BGP confederations
for CLNS VPN NLRI....453
internal peer session (configuration editor)....43
peering sessions *See* BGP peers; BGP sessions
point-to-point internal peer session
logical systems....54
route reflectors *See* BGP route reflectors
route-flap damping....406
BGP confederations
creating (configuration editor)....344
description....343
route-flap damping....406

Copyright © 2013, Juniper Networks, Inc.

BGP groups
confederations (configuration editor).....344
BGP layer
broken network topology, figure 863
BGP Monitoring Protocol.....505
configuring.....461
displaying
statistics.....655
BGP peers
external (configuration editor).....20
internal.....54
internal (configuration editor).....43
point-to-point connections.....19
BGP protocol
checklist for verifying.....860
detail statement.....888
edit protocol bgp traceoptions
command.....887
edit protocol command.....888
establishment issues 888
flag statement.....888
network
configuration topology, figure 880
topology, figure 878, 889
open statement.....888
protocol statement.....888
run show log command.....888
send statement.....887
session
problems.....888, 896
states, table 896
set flag command.....887
show configuration command
border router.....907
internal router.....904
show route command
EBGP over IBGP.....892, 903
IGP cost.....894
local preference.....891
MED.....892
show route forwarding-table command.....895
show route receive-protocol bgp
command.....901
state transitions, logging.....896
traceoptions statement.....887, 888, 898
tracing
configuring.....898
flags, table.....899
update statement.....887
BGP route reflectors
cluster of clusters.....322
creating (configuration editor).....323, 339
description.....321
multiple clusters.....322
BGP sessions
internal.....54
internal (configuration editor).....43
point-to-point external (configuration
editor).....20
sample peering session.....19
bgp statement.....503
bgp-orf-cisco-mode
usage guidelines.....205
bgp-orf-cisco-mode statement.....504
BGP_L2VPN_AD_NLRI.....498
bmp statement.....505
usage guidelines.....461
Border Gateway Protocol *See* BGP
braces, in configuration statements.....xx
brackets
angle, in syntax descriptions.....xx
square, in configuration statements.....xx

C

checklist for
BGP protocol, verifying.....860
Cisco non-deterministic, BGP MED option.....80
cisco-non-deterministic option.....8, 224, 586
clear bgp damping command.....636
clear bgp neighbor command.....637
clear bgp table command.....639
clear validation databasecommand.....641
clear validation session command.....642
clear validation statistics command.....643
CLNS.....539
BGP.....453, 455
CLNS (Connectionless Network Service) VPNs
BGP, to carry CLNS VPN NLRI.....453
cluster statement.....506
usage guidelines.....323, 339
clusters *See* BGP route reflectors
commands for
BGP protocol, verifying.....860
comments, in configuration statements.....xx
communities
policy, routing.....191
community
example.....192

Copyright © 2013, Juniper Networks, Inc.

community ASN, displaying routes....719
community name, displaying routes....721
conditions
routing policy....690
confederation statement
usage guidelines....344
confederations *See* BGP confederations
connect, BGP protocol session state....896
conventions
text and syntax....xix
count (firewall filter action)....436
curly braces, in configuration statements....xx
customer support....xxi
contacting JTAC....xxi

D

damping....508, 621
damping (tracing flag)....621
damping parameters, BGP
clearing....636
displaying....686, 692
damping routes, BGP
displaying....723
damping statement....508
usage guidelines....407, 410
damping, BGP protocol tracing flag....899
default routing policy *See* PTX Series
delay-med-update statement
usage guidelines....106
delete group internal neighbor command 874
description statement....510
usage guidelines....43
destination-port (firewall filter match condition)....434
detail statement
BGP protocol 888, 898
detection-time statement
BGP....499, 511
disable statement....621
BGP....512
discard (firewall filter action)....436
documentation
comments on....xxi
dscp (firewall filter match condition)....434

E

EBGP *See* BGP
EBGP (external BGP)
route-flap damping....406
EBGP IPv6 peering, BGP....27
edit protocol bgp command 888, 896
edit protocol bgp traceoptions command 887, 898
edit protocols bgp command 874
established, BGP protocol session state....898
establishment issues
BGP protocol....888
events
BGP protocol state transition....896
except (firewall filter match condition)....434
explicit-null statement....514
export route information, displaying....746
export statement
BGP....515
usage guidelines....201
forwarding table
usage guidelines....278
IS-IS
usage guidelines....192
export statement, for routing policies....187
external-router-id option....8, 224

F

family statement
BGP....516
usage guidelines....421
FAQs
routing protocol process memory....913, 914
fault tolerance
advertising multiple paths to a destination....293, 294
FEC 129....498
file command
logical systems....465
file statement
Origin AS Validation....520
filtering paths to a destination
BGP....595
flag statement
Origin AS Validation....521
flag statements
BGP protocol....887, 888
flap damping....406
parameters....407
flow routes....434
BGP....438
flow statement....516
usage guidelines....438

Copyright © 2013, Juniper Networks, Inc.

font conventions....xix
forwarding table
route entries, displaying....765
forwarding-class (firewall filter action)....436
forwarding-table statement
usage guidelines....278
fragment-offset (firewall filter match condition)....434
fragmentation
avoiding....371
full mesh requirement
fulfilling with confederations....343
fulfilling with route reflectors....321

G

generated routes
preferences....217
graceful-restart statement....523
BGP....523
group statement
BGP....525
Origin AS Validation....528
groups
BGP
general information, displaying....656
traffic statistics, displaying....663

H

hidden routes, displaying....779
hold-down-interval
BGP....529
hold-time statement
BGP....531
Origin AS Validation....533

I

IBGP *See* BGP
overview....42
IBGP (internal BGP)
full mesh (configuration editor)....19
icmp-code (firewall filter match condition)....434
icmp-type (firewall filter match condition)....434
identifiers
BGP *See* BGP, identifier
idle, BGP protocol state....896
idle-after-switch-over statement....534
IGP plus MED, BGP option....80
import statement
BGP....535
usage guidelines....201
import statement, for routing policies....187
include-mp-next-hop statement....536
inet-mdt statement
BGP address family....537
ingress router
show bgp summary command....865, 877
install-to-fib
usage guidelines....243
interface-group (firewall filter match condition)....434
ipsec-sa statement
BGP....538
usage guidelines....358
IPv6
BGP....427
EBGP link-local peering....27
logical systems....27
IS-IS
policy, routing....192
preferences....192, 217
iso-vpn statement....539
usage guidelines....453, 455

K

keep statement....540
usage guidelines....203
keepalive (tracing flag)
BGP....621
keepalive messages....8
keepalive, BGP protocol tracing flag....899
key-chain-name
BGP....541
keychain
BGP....352
overview....351

L

labeled-unicast statement....543
layered model
BGP layer, figure....862
LDP
authentication algorithm....495
LDP-based Layer 2 VPN and VPLS update messages
BGP....498

Copyright © 2013, Juniper Networks, Inc.

load balancing
advertising multiple paths to a destination....293, 294
per-prefix....243
load-balance statement
usage guidelines....278
local AS
BGP....116, 121, 131
local-address statement
BGP....545
Origin AS Validation....547
usage guidelines....43
local-as statement....548
usage guidelines....121, 131
local-interface statement
BGP....550
usage guidelines....27
local-preference statement....551
usage guidelines....66
log (firewall filter action)....436
log-updown statement....552
BGP
usage guidelines....399
logical systems
EBGP
with IPv6 interfaces....27
internal BGP....54
viewing system files on....465
logical-systems statement....553
loops statement
BGP address family....554
loose-check
BGP....556
loss-priority (firewall filter action)....436

M

manuals
comments on....xxi
match conditions
firewall filters
overview....434
max-sessions statement
Origin AS Validation....557
maximum-length statement
Origin AS Validation....558
MBGP MVPNs....410
MD5 authentication....352
BGP....352
MED *See* BGP
MED (multiple exit discriminator)
always compare option....80
Cisco non-deterministic option....80
plus IGP option....80
med-igp-update-interval statement
usage guidelines....106
med-plus-igp statement....586
usage guidelines....8, 224
members statement
usage guidelines....344
metric statement
BGP
usage guidelines....93
metric-out statement
BGP....559
usage guidelines....81
minimum-interval
BGP....561, 562
usage guidelines....262
minimum-interval statement
BGP....499
minimum-receive-interval
BGP....564
minimum-receive-interval statement
BFD (BGP)
usage guidelines....262
BGP....499
MP-BGP....421, 516
MPLS
ultimate-hop popping....514
mtu-discovery statement....565
multihop
BGP....208
multihop statement....567, 578
usage guidelines....208
multipath statement....569
usage guidelines....278
multiplier
BGP....570
multiplier statement
BFD (BGP)
usage guidelines....262
BGP....499
multiprotocol BGP
IPv6 example....427
multiprotocol BGP (MP-BGP)....421, 516

Copyright © 2013, Juniper Networks, Inc.

N

neighbor statement
BGP....571
neighbors
BGP....4
network layer reachability information *See* BGP, NLRI *See* NLRI
network topology
BGP protocol, figure....878, 889
networks
sample BGP confederations....344
sample BGP MED use....79
sample BGP peer session....19
sample BGP route reflector (one cluster)....322
sample BGP route reflectors (cluster of clusters)....323
sample BGP route reflectors (multiple clusters)....322
next hops
routes sent to, displaying....795
NLRI
BGP_L2VPN_AD_NLRI....498
NLRI (network layer reachability information), BGP
for CLNS....453
NLRI, BGP....7
nlri-route-type statement
usage guidelines....410
no-adaptation
BFD (BGP)
usage guidelines....262
BGP....574
no-adaptation statement
BGP....499
no-advertise-peer-as statement....575
usage guidelines....204
no-aggregator-id statement....576
no-client-reflect statement....577
no-install-to-fib
usage guidelines....243
no-prepend-global-as statement
usage guidelines....121
no-validate statement....580

O

open messages, BGP....7
open statement, BGP protocol....888
open, BGP protocol tracing flag....899
openConfirm, BGP session state....897
openSent, BGP protocol session state....897
ORF
BGP....205
origin AS validation
BGP....383
Origin AS Validation
group....528
hold-time period....533
local address....547
maximum prefix length....558
maximum sessions....557
origin AS....581
port....590
preference....593
record....599
record lifetime....600
refresh time....601
session....611
static records....614
tracing....520, 521, 624
validation....629
validation state....630
origin validation
RPKI....641, 642, 643, 644
origin-autonomous-system statement
Origin AS Validation....581
OSPF
preferences....217
OSPF (Open Shortest Path First)
injecting OSPF routes into BGP....188
out-delay statement....582
usage guidelines....203
outbound-route-filter
usage guidelines....205
outbound-route-filter statement
BGP....583

P

packet-length (firewall filter match condition)....434
packets
BGP protocol tracing flag....899
received....887
sent....887
packets (tracing flag)
BGP....621
parentheses, in syntax descriptions....xx
passive statement
BGP....584
usage guidelines....399

Copyright © 2013, Juniper Networks, Inc.

path attributes, BGP....6, 7
path-count statement....585
BGP
usage guidelines....294
path-selection statement....586
usage guidelines....8, 224
peer-as statement....588
peering sessions *See* BGP peers; BGP sessions
per-packet load balancing....278
per-packet statement
usage guidelines....278
per-prefix load balancing....243
policers
firewall filter action....436
policy, routing
BGP....515, 535
communities....191
IS-IS....192
precedence....201
port (firewall filter match condition)....434
port statement
Origin AS Validation....590
precedence (firewall filter match condition)....434
precistion-timers statement
BGP....591
preference statement
BGP....592
usage guidelines....219
Origin AS Validation....593
preferences
active routes....8, 224
aggregate routes
generated routes....217
default....217
IS-IS....217
modifying
with configuration statements....217
RIP....217
static routes....217
prefix list statement
firewall filter match condition....367
prefix-based
usage guidelines....205
prefix-limit statement....594
usage guidelines....425, 433
prefix-policy statement....595
BGP
usage guidelines....294
private statement
usage guidelines....131
processes
restarting....645
propagation, suppressing....406
protocol bgp statement....888
protocols
firewall filter match condition....434
match condition
firewall filters....434
protocols statement....596
PTX Series
default routing policy....243

R

receive statement....598
BGP
usage guidelines....294
receive statements
BGP protocol statement....887
receiving multiple paths to a destination
BGP....598
record statement
Origin AS Validation....599
record-lifetime statement
Origin AS Validation....600
redirected routes....217
refresh-time statement
Origin AS Validation....601
regular expressions
AS paths, displaying matching routes....712
reject
firewall filters
action....436
remove-private statement....602
usage guidelines....236
replication
of BGP configuration....679
request validation policy command....644
resolve-vpn statement....604
usage guidelines....426
resource public key infrastructure *See* RPKI
restart command....645
restart-time statement....605
restarting
software processes....645
rib statement
BGP....606

Copyright © 2013, Juniper Networks, Inc.

rib-group statement
BGP....607
usage guidelines....421
RID....871, 886
RIP
preferences....217
route advertisements, displaying....705
route authentication
peering sessions....351
route injection....188
route redistribution....188
route reflector
in a Layer 3 VPN....176
route reflectors *See* BGP route reflectors
BGP....323, 339
route resolution
BGP....604
route, displaying
next-hop....795
route-flap damping....406
parameters....407
route-target statement....608
routers
border router BGP, configuring....907
configuration
BGP protocol....879
internal router BGP, configuring....904
routes, displaying
active....694
active path....700
advertising protocol....705
all....710
AS paths
regular expressions, matching....712
best....714
brief information....717
community ASN....719
community name....721
damping, BGP....723
detailed information....729
extensive information....748
flow validation....763
hidden....779
in a specific routing table....829
in the forwarding table....765
inactive path....782
inactive prefix....786
instances....788
learned from a specific protocol....808
matching the specified address....744
not associated with a community....801
policy-based route export....746
received through a neighbor....820
sent to a specific interface....804
terse information....840
routing policies
applying....187
configuration tasks....188, 407
displaying....688
export statement....187
import statement....187
injecting routes from one protocol into another....188
reducing update messages with flap damping....406
route redistribution....188
route-flap damping....406
testing the configuration for....854
routing protocol process memory
FAQ....913, 914
routing solutions
BGP confederations, for scaling problems....344
BGP route reflectors, for scaling problems....323, 339
reducing update messages with flap damping....406
routing tables
BGP, delays in exchanging routes....203
group....607
nonactive routes, exchanging with BGP....202, 220, 483
routing-instance (firewall filter action)....436
routing-instances statement....609
RPKI
information, displaying....843, 845, 847, 849, 852
RSVP
preferences....217
run show log command
BGP protocol....887, 888, 898

S

sample (firewall filter action)....436
secure interdomain routing *See* BGP

Copyright © 2013, Juniper Networks, Inc.

send statement....480, 610
BGP
usage guidelines....294
BGP protocol....887
session statement
Origin AS Validation....611
session states, BGP protocol....896
session-mode statement
BGP....612
sessions, checking BGP....864, 876
set flag command
BGP protocol....887
set flag update detail command....898
set flag update send command....887
set local-address command....874
set log-updown command....896
set traceoptions flag open detail command....888
show bgp bmp command....655
show bgp group command....656
show bgp group traffic-statistics command....663
show bgp neighbor command....347, 665
explanation....348
show bgp replication command....679
show bgp summary command....349, 681, 864, 876
explanation....350
show configuration command....866, 881
BGP protocol
border router....907
internal router....904
show policy command....688
show policy conditions command....690
show policy damping command....686, 692
show route active-path command....700
show route advertising-protocol command....705
show route all command....710
show route aspath-regex command....712
show route best command....714
show route brief command....717
show route command....694
BGP protocol
EBGP over IBGP....892, 903
IGP cost....894
local preference....891
MED....892
show route community command....719
show route community-name command....721
show route damping command....723
show route detail command....729, 872
show route exact command....744
show route export command....746
show route extensive command....748
show route flow validation command....763
show route forwarding-table command....765, 895
show route hidden command....779
show route inactive-path command....782
show route inactive-prefix command....786
show route instance command....788
show route next-hop command....795
show route no-community command....801
show route output command....804
show route protocol command....808
show route receive protocol bgp
command....873, 900
show route receive-protocol bgp command....901
show route receive-protocol command....820
show route table command....829
show route terse command....840
show validation database command....843
show validation group command....845
show validation replication database
command....847
show validation session command....849
show validation statistics command....852
source-port (firewall filter match condition)....434
stack bit value....876, 902
stale-routes-time statement....613
state transition events....896
stateless firewall filters
accepting Routing Engine traffic from trusted
sources
example: blocking TCP access....362
example: blocking Telnet and SSH
access....367
examples
blocking TCP access....362
blocking Telnet and SSH access....367
states, BGP protocol....896
static routes
preferences....217
static statement
Origin AS Validation....614
sub-ASs, BGP....343
subautonomous systems, BGP....343
support, technical *See* technical support
syntax conventions....xix
syslog (firewall filter action)....436

Copyright © 2013, Juniper Networks, Inc.

T

tcp-mss statement....615
  BGP
    usage guidelines....371
technical support
  contacting JTAC....xxi
test policy command....854
threshold
  BGP....616, 618
threshold statement
  BFD (BGP)
    usage guidelines....262
  BGP....499
time-to-live....876, 902
topology
  sample BGP confederations....344
  sample BGP MED use....79
  sample BGP peer session....19
  sample BGP route reflector (one cluster)....322
  sample BGP route reflectors (cluster of clusters)....323
  sample BGP route reflectors (multiple clusters)....322
topology statement
  Multitopology Routing
    OSPF....619
trace files
  logical systems
   465
traceoptions statement
  BGP....621
    description....464
  BGP protocol....887, 888
  Origin AS Validation....624
traceroute command 875, 902
tracing flags
  as-path....621
  BGP protocol, table 899
  damping....621
  keepalive
    BGP....621
  packets
    BGP....621
tracing operations
  BGP....464, 621
traffic, verifying BGP 875, 902
traffic-statistics statement....625
transmit-interval
  BGP....626
transmit-interval statement
  BGP....499
ttl statement....627
type statement....628

U

update messages
  BGP....7
update statement, BGP protocol 887, 898
update, BGP protocol tracing flag....899

V

validation statement
  Origin AS Validation....629
  usage guidelines....383, 438
validation-state statement
  Origin AS Validation....630
verification
  BGP session flap prevention....405
  BMP....463
  network interfaces....169, 314
  tracing....470
version
  BGP....631
version statement
  BFD (BGP)
    usage guidelines....262
  BGP....499
vpn-apply-export statement....632
VPNs
  BGP
    preventing session flaps....399
VRF export policy....632

Copyright © 2013, Juniper Networks, Inc.