

# IEEE 802.1ag OAM Connectivity-Fault Management



---

Published: 2013-02-14

Juniper Networks, Inc.  
1194 North Mathilda Avenue  
Sunnyvale, California 94089  
USA  
408-745-2000  
www.juniper.net

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

*IEEE 802.1ag OAM Connectivity-Fault Management*  
Copyright © 2013, Juniper Networks, Inc.  
All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	xi
	Documentation and Release Notes . . . . .	xi
	Supported Platforms . . . . .	xi
	Using the Examples in This Manual . . . . .	xi
	Merging a Full Example . . . . .	xii
	Merging a Snippet . . . . .	xii
	Documentation Conventions . . . . .	xiii
	Documentation Feedback . . . . .	xv
	Requesting Technical Support . . . . .	xv
	Self-Help Online Tools and Resources . . . . .	xv
	Opening a Case with JTAC . . . . .	xvi
<b>Part 1</b>	<b>Overview</b>	
<b>Chapter 1</b>	<b>IEEE 802.1ag OAM Connectivity-Fault Management . . . . .</b>	<b>3</b>
	IEEE 802.1ag OAM Connectivity Fault Management Overview . . . . .	3
	Connectivity Fault Management Key Elements . . . . .	4
<b>Part 2</b>	<b>Configuration</b>	
<b>Chapter 2</b>	<b>IEEE 802.1ag OAM Connectivity-Fault Management . . . . .</b>	<b>9</b>
	Creating the Maintenance Domain . . . . .	9
	Configuring the Maintenance Domain Name Format . . . . .	10
	Configuring the Maintenance Domain Level . . . . .	10
	Configuring Maintenance Intermediate Points . . . . .	11
	Configuring MIP for Bridge Domains of a Virtual Switch . . . . .	11
	Configuring the Maintenance Domain Bridge Domain . . . . .	12
	Configuring the Maintenance Domain Instance . . . . .	12
	Configuring the Maintenance Domain MIP Half Function . . . . .	12
	Creating a Maintenance Association . . . . .	13
	Continuity Check Protocol . . . . .	14
	Configuring the Continuity Check . . . . .	14
	Configuring the Continuity Check Hold Interval . . . . .	14
	Configuring the Continuity Check Interval . . . . .	15
	Configuring the Continuity Check Loss Threshold . . . . .	15
	Continuity Measurement . . . . .	15
	Configuring a Maintenance Endpoint . . . . .	16
	Enabling Maintenance Endpoint Automatic Discovery . . . . .	17
	Configuring the Maintenance Endpoint Direction . . . . .	17
	Configuring the Maintenance Endpoint Interface . . . . .	17
	Configuring the Maintenance Endpoint Priority . . . . .	18

Configuring the Maintenance Endpoint Lowest Priority Defect . . . . .	18
Configuring a Remote Maintenance Endpoint . . . . .	19
Configuring a Remote Maintenance Endpoint Action Profile . . . . .	19
Configuring Maintenance Endpoint Service Protection . . . . .	19
Configuring a Connectivity Fault Management Action Profile . . . . .	21
Configuring the Action of a CFM Action Profile . . . . .	21
Configuring the Default Actions of a CFM Action Profile . . . . .	22
Configuring a CFM Action Profile Event . . . . .	23
Configuring Linktrace Protocol in CFM . . . . .	24
Configuring the Linktrace Path Age Timer . . . . .	24
Configuring the Linktrace Database Size . . . . .	24
Configuring Ethernet Local Management Interface . . . . .	25
Ethernet Local Management Interface Overview . . . . .	25
Configuring the Ethernet Local Management Interface . . . . .	27
Configuring an OAM Protocol (CFM) . . . . .	27
Assigning the OAM Protocol to an EVC . . . . .	27
Enabling E-LMI on an Interface and Mapping CE VLAN IDs to an EVC . . . . .	28
Example E-LMI Configuration . . . . .	29
Configuring PE1 . . . . .	29
Configuring PE2 . . . . .	30
Configuring Two UNIs Sharing the Same EVC . . . . .	32
Configuring Port Status TLV and Interface Status TLV . . . . .	33
TLVs Overview . . . . .	33
Various TLVs for CFM PDUs . . . . .	34
Support for Additional Optional TLVs . . . . .	35
Port Status TLV . . . . .	36
Interface Status TLV . . . . .	38
MAC Status Defects . . . . .	41
Configuring Remote MEP Action Profile Support . . . . .	42
Monitoring a Remote MEP Action Profile . . . . .	43
Configuring MAC Flush Message Processing in CET Mode . . . . .	45
Configuring a Connection Protection TLV Action Profile . . . . .	47
Configuring M120 and MX Series Routers for CCC Encapsulated Packets . . . . .	48
IEEE 802.1ag CFM OAM Support for CCC Encapsulated Packets Overview . . . . .	48
CFM Features Supported on Layer 2 VPN Circuits . . . . .	48
Configuring CFM for CCC Encapsulated Packets . . . . .	49
Configuring Rate Limiting of Ethernet OAM Messages . . . . .	50
Configuring 802.1ag Ethernet OAM for VPLS . . . . .	53
Configuring Unified ISSU for 802.1ag CFM . . . . .	54
Configuring CCM for Better Scalability . . . . .	57
Configuring Faster Protection Switching . . . . .	57
Configuring Faster Convergence . . . . .	59
Configuring a Primary VLAN ID . . . . .	60
Configuring a Remote Maintenance Association . . . . .	60
Example: Configuring Ethernet CFM over VPLS . . . . .	61

<b>Chapter 3</b>	<b>Network Interfaces Configuration Statements and Hierarchy . . . . .</b>	<b>69</b>
	[edit interfaces] Hierarchy Level . . . . .	69
	[edit logical-systems] Hierarchy Level . . . . .	85
	[edit protocols oam] Hierarchy Level . . . . .	89
<b>Chapter 4</b>	<b>Statement Summary . . . . .</b>	<b>93</b>
	action-profile (Applying to CFM) . . . . .	93
	action-profile (Defining for CFM) . . . . .	94
	age . . . . .	95
	bridge-domain . . . . .	95
	connectivity-fault-management . . . . .	96
	continuity-check . . . . .	98
	convey-loss-threshold . . . . .	98
	default-actions . . . . .	99
	direction . . . . .	100
	ethernet (Protocols OAM) . . . . .	101
	evcs . . . . .	104
	fast-aps-switch . . . . .	105
	hold-interval (OAM) . . . . .	106
	instance . . . . .	106
	interface-down . . . . .	107
	interface-status-tlv . . . . .	107
	level . . . . .	108
	linktrace . . . . .	108
	lmi (Ethernet OAM) . . . . .	109
	loss-threshold . . . . .	110
	lowest-priority-defect . . . . .	111
	maintenance-association . . . . .	112
	maintenance-domain . . . . .	113
	mep . . . . .	114
	mip-half-function . . . . .	115
	name-format . . . . .	116
	oam . . . . .	117
	path-database-size . . . . .	119
	policer (CFM Firewall) . . . . .	120
	policer (CFM Global) . . . . .	121
	policer (CFM Session) . . . . .	122
	port-status-tlv . . . . .	123
	priority (OAM Connectivity-Fault Management) . . . . .	123
	remote-maintenance-association (OAM) . . . . .	124
	remote-mep . . . . .	124
	protect-maintenance-association (OAM) . . . . .	125
	routing-instance . . . . .	125
	short-name-format . . . . .	126
	virtual-switch . . . . .	127

<b>Part 3</b>	<b>Administration</b>	
<b>Chapter 5</b>	<b>Monitoring Commands</b> . . . . .	<b>131</b>
	show interfaces (Aggregated Ethernet) . . . . .	132
	show interfaces demux0 (Demux Interfaces) . . . . .	142
	show interfaces (Fast Ethernet) . . . . .	152
	show interfaces (10-Gigabit Ethernet) . . . . .	169
	show interfaces interface-set (Ethernet Interface Set) . . . . .	196
	show oam ethernet connectivity-fault-management delay-statistics . . . . .	199
	show oam ethernet connectivity-fault-management forwarding-state . . . . .	203
	show oam ethernet connectivity-fault-management interfaces . . . . .	207
	show oam ethernet connectivity-fault-management linktrace path-database . . . . .	217
	show oam ethernet connectivity-fault-management mep-database . . . . .	219
	show oam ethernet connectivity-fault-management mep-statistics . . . . .	229
	show oam ethernet connectivity-fault-management path-database . . . . .	240
	show oam ethernet evc . . . . .	242
	show oam ethernet link-fault-management . . . . .	243
	show oam ethernet lmi . . . . .	249
	show oam ethernet lmi statistics . . . . .	251
<b>Chapter 6</b>	<b>Command Summary</b> . . . . .	<b>253</b>
	Ethernet Interface Operational Mode Commands . . . . .	253
<b>Part 4</b>	<b>Troubleshooting</b>	
<b>Chapter 7</b>	<b>Ethernet</b> . . . . .	<b>261</b>
	traceroute ethernet . . . . .	262
<b>Chapter 8</b>	<b>Interface Diagnostics</b> . . . . .	<b>265</b>
	Interface Diagnostics . . . . .	265
	Configuring Loopback Testing . . . . .	265
	Interface Diagnostics . . . . .	267
	Starting and Stopping a BERT Test . . . . .	271
	Example: Configuring Bit Error Rate Testing . . . . .	271
<b>Part 5</b>	<b>Index</b>	
	Index . . . . .	275

# List of Figures

<b>Part 1</b>	<b>Overview</b>	
<b>Chapter 1</b>	<b>IEEE 802.1ag OAM Connectivity-Fault Management</b>	<b>3</b>
	Figure 1: Relationship Among MEPs, MIPs, and Maintenance Domain Levels	4
	Figure 2: Relationship Among Bridges, Maintenance Domains, Maintenance Associations, and MEPs	5
<b>Part 2</b>	<b>Configuration</b>	
<b>Chapter 2</b>	<b>IEEE 802.1ag OAM Connectivity-Fault Management</b>	<b>9</b>
	Figure 3: Scope of the E-LMI Protocol	26
	Figure 4: E-LMI Configuration for a Point-to-Point EVC (SVLAN) Monitored by CFM	29
	Figure 5: CET inter-op Dual Homed Topology	46
	Figure 6: CET inter-op Dual Attached Topology	47
	Figure 7: Layer 2 VPN Topology	49
	Figure 8: Ethernet OAM with VPLS	62





# List of Tables

	<b>About the Documentation</b> . . . . .	<b>xi</b>
	Table 1: Notice Icons . . . . .	xiii
	Table 2: Text and Syntax Conventions . . . . .	xiii
<b>Part 2</b>	<b>Configuration</b>	
<b>Chapter 2</b>	<b>IEEE 802.1ag OAM Connectivity-Fault Management</b> . . . . .	<b>9</b>
	Table 3: Lowest Priority Defect Options . . . . .	18
	Table 4: Service Protection Options . . . . .	20
	Table 5: Format of TLVs . . . . .	33
	Table 6: Type Field Values for Various TLVs for CFM PDUs . . . . .	34
	Table 7: Port Status TLV Format . . . . .	36
	Table 8: Port Status TLV Values . . . . .	36
	Table 9: Interface Status TLV Format . . . . .	39
	Table 10: Interface Status TLV Values . . . . .	39
	Table 11: Loss Threshold TLV Format . . . . .	55
<b>Part 3</b>	<b>Administration</b>	
<b>Chapter 5</b>	<b>Monitoring Commands</b> . . . . .	<b>131</b>
	Table 12: show interfaces (Aggregated Ethernet) Output Fields . . . . .	132
	Table 13: Demux show interfaces Output Fields . . . . .	142
	Table 14: show interfaces Fast Ethernet Output Fields . . . . .	152
	Table 15: show interfaces Gigabit Ethernet Output Fields . . . . .	170
	Table 16: Gigabit Ethernet IQ PIC Traffic and MAC Statistics by Interface Type . . . . .	184
	Table 17: Ethernet show interfaces interface-set Output Fields . . . . .	196
	Table 18: show oam ethernet connectivity-fault-management delay-statistics and mep-statistics Output Fields . . . . .	200
	Table 19: show oam ethernet connectivity-fault-management forwarding-state Output Fields . . . . .	203
	Table 20: show oam ethernet connectivity-fault-management interfaces Output Fields . . . . .	208
	Table 21: show oam ethernet connectivity-fault-management linktrace path-database Output Fields . . . . .	217
	Table 22: show oam ethernet connectivity-fault-management mep-database Output Fields . . . . .	220
	Table 23: show oam ethernet connectivity-fault-management delay-statistics and mep-statistics Output Fields . . . . .	230
	Table 24: show oam ethernet connectivity-fault-management path-database Output Fields . . . . .	240

	Table 25: show oam ethernet evc Output Fields . . . . .	242
	Table 26: show oam ethernet link-fault-management Output Fields . . . . .	243
	Table 27: show oam ethernet lmi Output Fields . . . . .	249
	Table 28: show oam ethernet lmi statistics Output Fields . . . . .	251
<b>Chapter 6</b>	<b>Command Summary . . . . .</b>	<b>253</b>
	Table 29: Ethernet Interface Operational Mode Commands . . . . .	253
<b>Part 4</b>	<b>Troubleshooting</b>	
<b>Chapter 7</b>	<b>Ethernet . . . . .</b>	<b>261</b>
	Table 30: traceroute ethernet Output Fields . . . . .	262
<b>Chapter 8</b>	<b>Interface Diagnostics . . . . .</b>	<b>265</b>
	Table 31: Loopback Modes by Interface Type . . . . .	266
	Table 32: BERT Capabilities by Interface Type . . . . .	270

# About the Documentation

- Documentation and Release Notes on page xi
- Supported Platforms on page xi
- Using the Examples in This Manual on page xi
- Documentation Conventions on page xiii
- Documentation Feedback on page xv
- Requesting Technical Support on page xv

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

## Supported Platforms

---

For the features described in this document, the following platforms are supported:

- M Series
- MX Series
- T Series
- J Series
- ACX Series

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming

configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xsl;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the CLI User Guide.

## Documentation Conventions

Table 1 on page xiii defines notice icons used in this guide.

Table 1: Notice Icons



Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xiii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b> No alarms currently active

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies book names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS System Basics Configuration Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
<b>Text like this</b>	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Enclose optional keywords or variables.	<b>stub</b> <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast   multicast</b>  ( <i>string1</i>   <i>string2</i>   <i>string3</i> )
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Enclose a variable for which you can substitute one or more values.	<b>community name members [</b> <i>community-ids</i> <b>]</b>
Indentation and braces ( { } )	Identify a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
<b>J-Web GUI Conventions</b>		
<b>Bold text like this</b>	Represents J-Web graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
> (bold right angle bracket)	Separates levels in a hierarchy of J-Web selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

---

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net), or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

## Requesting Technical Support

---

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>

- Join and participate in the Juniper Networks Community Forum:  
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.



## PART 1

# Overview

- [IEEE 802.1ag OAM Connectivity-Fault Management on page 3](#)



## CHAPTER 1

# IEEE 802.1ag OAM Connectivity-Fault Management

- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)

## IEEE 802.1ag OAM Connectivity Fault Management Overview

---

Ethernet interfaces on M7i and M10i routers with the Enhanced CFEB (CFEB-E) and on M120, M320, MX Series, T Series, and PTX Series routers support the IEEE 802.1ag standard for Operation, Administration, and Management (OAM). The IEEE 802.1ag specification provides for Ethernet connectivity fault management (CFM). The goal of CFM is to monitor an Ethernet network that may comprise one or more service instances. Junos OS supports IEEE 802.1ag connectivity fault management.

In Junos OS Release 9.3 and later, CFM also supports aggregated Ethernet interfaces. On interfaces configured on Modular Port Concentrators (MPCs) and Modular Interface Cards (MICs) on MX Series routers, CFM is not supported on untagged aggregated Ethernet member links. MPCs and MICs do support CFM on untagged and tagged aggregated Ethernet logical interfaces.

CFM does not support Multichassis Link Aggregation (MC-LAG). Do not configure the **mc-ae** statement when you configure CFM.

On T Series routers, CFM is not supported on interfaces configured with CCC encapsulation. If you configure CFM, the system displays the following message: **“MEPs cannot be configured on ccc interface on this platform”**.

Network entities such as operators, providers, and customers may be part of different administrative domains. Each administrative domain is mapped into one maintenance domain. Maintenance domains are configured with different level values to keep them separate. Each domain provides enough information for the entities to perform their own management, perform end-to-end monitoring, and still avoid security breaches.



**NOTE:** As a requirement for Ethernet OAM 802.1ag to work, distributed periodic packet management (PPM) runs on the Routing Engine and Packet Forwarding Engine by default. You can only disable PPM on the Packet Forwarding Engine. To disable PPM on the PFE, include the `ppm no-delegate-processing` statement at the `[edit routing-options ppm]` hierarchy level.


IEEE 802.1ag OAM supports graceful Routing Engine switchover (GRES). IEEE 802.1ag OAM is supported on untagged, single tagged, and stacked VLAN interfaces.

- [Connectivity Fault Management Key Elements on page 4](#)

## Connectivity Fault Management Key Elements

Figure 1 on page 4 shows the relationships among the customer, provider, and operator Ethernet bridges, maintenance domains, maintenance association end points (MEPs), and maintenance intermediate points (MIPs).


**Figure 1: Relationship Among MEPs, MIPs, and Maintenance Domain Levels**

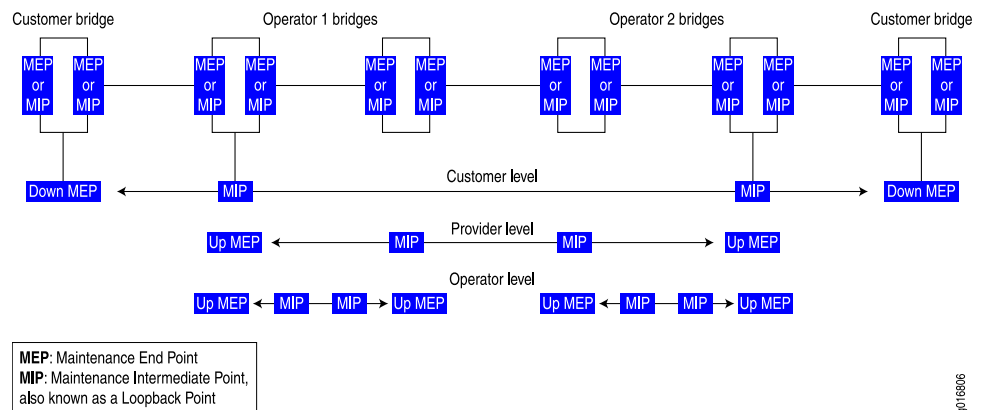

**NOTE:** Maintenance intermediate points (MIP) are not supported on the ACX Series routers.

A maintenance association is a set of MEPs configured with the same maintenance association identifier and maintenance domain level. Figure 2 on page 5 shows the hierarchical relationships between the Ethernet bridge, maintenance domains, maintenance associations, and MEPs.

**Figure 2: Relationship Among Bridges, Maintenance Domains, Maintenance Associations, and MEPs**

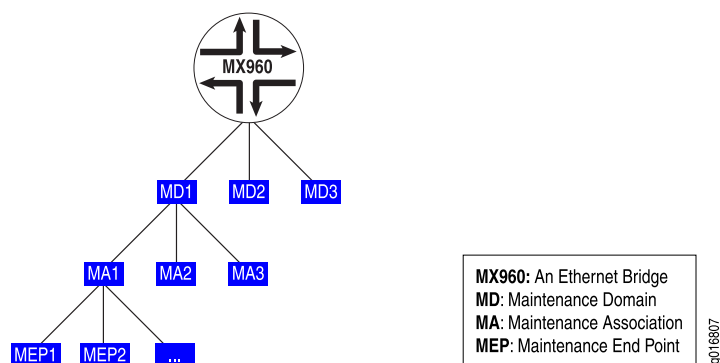

**Related Documentation**

- [connectivity-fault-management on page 96](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)



## PART 2

# Configuration

- [IEEE 802.1ag OAM Connectivity-Fault Management on page 9](#)
- [Network Interfaces Configuration Statements and Hierarchy on page 69](#)
- [Statement Summary on page 93](#)





## CHAPTER 2

# IEEE 802.1ag OAM Connectivity-Fault Management

- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Configuring Unified ISSU for 802.1ag CFM on page 54](#)
- [Configuring CCM for Better Scalability on page 57](#)
- [Example: Configuring Ethernet CFM over VPLS on page 61](#)

## Creating the Maintenance Domain

---

To enable CFM on an Ethernet interface, maintenance domains, maintenance associations, and MEPs must be created and configured.

To create a maintenance domain, include the **maintenance-domain *domain-name*** statement at the **[edit protocols oam ethernet connectivity-fault-management]** hierarchy level.

Give the maintenance domain a name. Names can be in one of several formats:

- [Configuring the Maintenance Domain Name Format on page 10](#)
- [Configuring the Maintenance Domain Level on page 10](#)

## Configuring the Maintenance Domain Name Format

You can specify the maintenance domain name format as one of the following:

- A plain ASCII character string.
- A domain name service (DNS) format, a MAC address plus a two-octet identifier in the range from 0 through 65,535, or none.
- A MAC address plus a two-octet identifier in the range from 0 through 65,535.
- Or none.

If none is specified, the maintenance domain name is not used.

The default name format is an ASCII character string.

To configure the maintenance domain name format, include the **name-format** (**character-string** | **none** | **dns** | **mac+2octet**) statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name*]** hierarchy level.



**NOTE:** If you configure the maintenance domain name length greater than 45 octet, then the following error message is displayed::

**error: configuration check-out failed**

---

## Configuring the Maintenance Domain Level

The maintenance domain level is a mandatory parameter that indicates the nesting relationship between various maintenance domains. The level is embedded in each of the CFM frames. CFM messages within a given level are processed by MEPs at that same level. For example, the operator domain can be level 0, the provider domain can be level 3, and the customer domain can be level 7.

To configure the maintenance domain level, include the **level *number*** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name*]** hierarchy level.

### Related Documentation

- [connectivity-fault-management on page 96](#)
- [maintenance-domain on page 113](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)

- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- Junos® OS Ethernet Interfaces

## Configuring Maintenance Intermediate Points

---

MX Series routers support maintenance intermediate points (MIPs) for the Ethernet OAM 802.1ag CFM protocol at a bridge-domain level. This enables you to define a maintenance domain for each default level. The MIPs names are created as **default-level-number** at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain]** hierarchy level. Use the **bridge-domain**, **instance**, **virtual-switch**, and **mip-half-function** MIP options to specify the MIP configuration.



**NOTE:** Whenever a MIP is configured and a bridge domain is mapped to multiple maintenance domains or maintenance associations, it is essential that the **mip-half-function** value for all maintenance domains and maintenance associations be the same.

To display MIP configurations, use the **show oam ethernet connectivity-fault-management mip (bridge-domain | instance-name | interface-name)** command.

The following sections describe MIP configuration:

- [Configuring MIP for Bridge Domains of a Virtual Switch on page 11](#)
- [Configuring the Maintenance Domain Bridge Domain on page 12](#)
- [Configuring the Maintenance Domain Instance on page 12](#)
- [Configuring the Maintenance Domain MIP Half Function on page 12](#)

### Configuring MIP for Bridge Domains of a Virtual Switch

The default maintenance domain configuration allows MIP configuration for bridge domains for a default virtual switch or a user-defined virtual switch. You can use the **virtual-switch** and **bridge-domain** statements to specify which MIPs to enable for a user-defined virtual switch.

A bridge domain must be specified by name only if it is configured by including the **vlan-id id** statement under the **virtual-switch** statement.

If a bridge domain is configured with a range of VLAN IDs, then the VLAN IDs must be explicitly listed after the bridge domain name.

To configure a bridge domain under a user-defined virtual switch, include the **virtual-switch *name*** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* default-*x*]** hierarchy level.

```
[edit protocols oam ethernet connectivity-fault-management maintenance-domain
  domain-name default-x]
virtual-switch name {
  bridge-domain {
    name-1;
    name-2 {
      vlan-id [vlan-ids ];
    }
  }
}
```

## Configuring the Maintenance Domain Bridge Domain

The VLAN corresponds to the bridge domain.

To configure the bridge domain for the default virtual switch, include the **bridge-domain** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *maintenance-domain-name*]** hierarchy level.

## Configuring the Maintenance Domain Instance

To configure the maintenance domain instance for a VPLS routing instance, include the **instance** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain]** hierarchy level.

## Configuring the Maintenance Domain MIP Half Function

MIP Half Function (MHF) divides MIP functionality into two unidirectional segments, improves visibility with minimal configuration, and improves network coverage by increasing the number of points that can be monitored. MHF extends monitoring capability by responding to loopback and linktrace messages to help isolate faults.

Whenever a MIP is configured and a bridge domain is mapped to multiple maintenance domains or maintenance associations, it is essential that the *MIP half function* value for all maintenance domains and maintenance associations be the same. To configure the MIP half function, include the **mip-half-function** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain]** hierarchy level.

### Related Documentation

- [bridge-domain on page 95](#)
- [connectivity-fault-management on page 96](#)
- [instance on page 106](#)
- [mip-half-function on page 115](#)
- [virtual-switch on page 127](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Creating a Maintenance Association on page 13](#)

- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

---

## Creating a Maintenance Association

---

To create a maintenance association, include the **maintenance-association *ma-name*** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name*]** hierarchy level.

Maintenance association names can be in one of the following formats:

- As a plain ASCII character string
- As the VLAN identifier of the VLAN you primarily associate with the maintenance association
- As a two-octet identifier in the range from 0 through 65,535
- As a name in the format specified by RFC 2685

The default short name format is an ASCII character string.

To configure the maintenance association short name format, include the **short-name-format (character-string | vlan | 2octet | rfc-2685-vpn-id)** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name*]** hierarchy level.

### Related Documentation

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)

- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- Junos® OS Ethernet Interfaces

## Continuity Check Protocol

---

The continuity check protocol is used for fault detection by a MEP within a maintenance association. The MEP periodically sends continuity check multicast messages. The receiving MEPs use the continuity check messages to build a MEP database of all MEPs in the maintenance association.

The continuity check protocol packets use the ethertype value 0x8902 and the multicast destination MAC address 01:80:c2:00:00:32.

- [Configuring the Continuity Check on page 14](#)
- [Configuring the Continuity Check Hold Interval on page 14](#)
- [Configuring the Continuity Check Interval on page 15](#)
- [Configuring the Continuity Check Loss Threshold on page 15](#)
- [Continuity Measurement on page 15](#)

### Configuring the Continuity Check

You can configure the following continuity check protocol parameters:

- **hold-interval** *minutes*
- **interval** *time*
- **loss-threshold** *number*

To enable the continuity check protocol, include the **continuity-check** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name*]** hierarchy level.

### Configuring the Continuity Check Hold Interval

You can specify the continuity check hold interval. The hold interval is the number of minutes to wait before flushing the MEP database if no updates occur. The default value is 10 minutes.

The hold interval logic runs a polling timer per CFM session level (not per remote MEP level) where the polling timer duration is equal to the configured hold time. When the

polling timer expires, it deletes all the auto discovered remote MEP entries which have been in the failed state for a time period equal to or greater than the configured hold time. If the remote MEP completes the hold time duration in the failed state, then flushing will not occur until the next polling timer expires. Hence remote MEP flushing may not happen exactly at the configured hold time.

To configure the hold interval, include the **hold-interval** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* continuity-check]** hierarchy level.



**NOTE:** Hold timer based flushing is applicable only for auto discovered remote MEPs and not for statically configured remote MEPs.

## Configuring the Continuity Check Interval

You can specify the continuity check message (CCM) interval. The interval is the time between the transmission of CCMs. You can specify 10 minutes (**10m**), 1 minute (**1m**), 10 seconds (**10s**), 1 second (**1s**), 100 milliseconds (**100ms**), or 10 milliseconds (**10ms**). The default value is 1 minute.



**NOTE:** For the continuity check message interval to be configured for 10 milliseconds, periodic packet management (PPM) runs on the Routing Engine and Packet Forwarding Engine (PFE) by default. You can only disable PPM on the PFE. To disable PPM on the PFE, use the **no-delegate-processing** statement at the **[edit routing-options ppm]** hierarchy level.

Continuity check interval of 10 milliseconds is not supported for CFM sessions over a Label-Switched interface (LSI).

To configure the interval, include the **interval** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* continuity-check]** hierarchy level.

## Configuring the Continuity Check Loss Threshold

You can specify the number of continuity check messages that can be lost before marking the MEP as down. The default value is three (PDUs).

To configure the loss threshold, include the **loss-threshold** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* continuity-check]** hierarchy level.

## Continuity Measurement

Continuity measurement is provided by an existing continuity check protocol. The continuity for every remote MEP is measured as the percentage of time that remote MEP was operationally up over the total administratively enabled time. Here, the operational uptime is the total time during which the CCM adjacency is active for a particular remote

MEP and the administrative enabled time is the total time during which the local MEP is active. You can also restart the continuity measurement by clearing the currently measured operational uptime and the administrative enabled time.

**Related  
Documentation**

- [connectivity-fault-management on page 96](#)
- [Displaying Continuity Measurement Statistics](#)
- [Clearing Continuity Measurement Statistics](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

---

## Configuring a Maintenance Endpoint

To configure the maintenance endpoint, include the `mep mep-id` statement at the `[edit protocols oam ethernet connectivity-fault-management maintenance-domain domain-name maintenance-association ma-name]` hierarchy level.

- [Enabling Maintenance Endpoint Automatic Discovery on page 17](#)
- [Configuring the Maintenance Endpoint Direction on page 17](#)
- [Configuring the Maintenance Endpoint Interface on page 17](#)
- [Configuring the Maintenance Endpoint Priority on page 18](#)
- [Configuring the Maintenance Endpoint Lowest Priority Defect on page 18](#)
- [Configuring a Remote Maintenance Endpoint on page 19](#)
- [Configuring a Remote Maintenance Endpoint Action Profile on page 19](#)
- [Configuring Maintenance Endpoint Service Protection on page 19](#)



## Enabling Maintenance Endpoint Automatic Discovery

You can enable the MEP to accept continuity check messages from all remote MEPs of the same maintenance association.

To configure automatic discovery, include the **auto-discovery** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*]** hierarchy level.

## Configuring the Maintenance Endpoint Direction

You can specify the direction in which CFM packets are transmitted for the MEP.

Direction up continuity check messages (CCMs) are transmitted out of every logical interface that is part of the same bridging or VPLS instance except for the interface configured on this MEP.

Direction down CCMs are transmitted only out of the interface configured on this MEP.



**NOTE:** Ports in the Spanning Tree Protocol (STP) blocking state do not block CFM packets destined to a down MEP. Ports in an STP blocking state without the continuity check protocol configured do block CFM packets.

To configure the MEP direction, include the **direction** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*]** hierarchy level.



**NOTE:** Starting with Junos OS Release 12.3, for all interfaces configured on Modular Port Concentrators (MPCs) on MX Series 3D Universal Edge Routers, you no longer need to configure the **no-control-word** statement for all Layer 2 VPNs and Layer 2 circuits over which you are running CFM MEPs. For all other interfaces on MX Series routers and on all our routers and switches, you must continue to configure the **no-control-word** statement at the **[edit routing-instances routing-instance-name protocols l2vpn]** or **[edit protocols l2circuit neighbor *neighbor-id* interface *interface-name*]** hierarchy level when you configure CFM MEPs. Otherwise, the CFM packets are not transmitted, and the **show oam ethernet connectivity-fault-management mep-database** command does not display any remote MEPs.

## Configuring the Maintenance Endpoint Interface

You must specify the interface to which the MEP is attached. It can be a physical interface, logical interface, or trunk interface.

On MX Series routers, you can enable the MEP on a specific VLAN of a trunk interface.

To configure the interface, include the **interface** *interface-name* statement at the [edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*] hierarchy level.

#### MEP Interface Configuration

This example shows the MEP interface configuration statements:

```
[edit protocols oam ethernet connectivity-fault-management maintenance-domain
  domain-name maintenance-association ma-name]
mep mep-id {
  direction (up | down);
  interface (ge | xe)-(fpc/pic/port | fpc/pic/port.domain | fpc/pic/port.domain vlan vlan-id);
  auto-discovery;
  priority number;
}
```

### Configuring the Maintenance Endpoint Priority

You can specify the IEEE 802.1 priority bits that are used by continuity check and link trace messages.

To configure the priority, include the **priority** statement at the [edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*] hierarchy level.

### Configuring the Maintenance Endpoint Lowest Priority Defect

You can specify the lowest priority defect that is allowed to generate a fault alarm. This configuration determines whether to generate a fault alarm whenever it detects a defect. This configuration is done at the MEP level.

To configure the lowest priority defect, include the **lowest-priority-defect options** statement at the [edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*] hierarchy level.

Table 3 on page 18 describes the available lowest priority defect options.

Table 3: Lowest Priority Defect Options

Option	Description
all-defects	Allows all defects.
err-xcon	Allows only erroneous CCM and cross-connect CCM defects.
mac-rem-err-xcon	Allows only MAC, not receiving CCM, erroneous CCM, and cross-connect defects.
no-defect	Allows no defect.
rem-err-xcon	Allows only not receiving CCM, erroneous CCM, and cross-connect CCM defects.
xcon	Allows only cross-connect CCM defects.

The following configuration example shows **mac-rem-err-xcon** as the lowest priority defect:

```
[edit protocols]
oam {
  ethernet {
    connectivity-fault-management {
      maintenance-domain md6 {
        level 6;
        maintenance-association ma6 {
          mep 200 {
            interface ge-5/0/0.0;
            direction down;
            lowest-priority-defect mac-rem-err-xcon;
          }
        }
      }
    }
  }
}
```

## Configuring a Remote Maintenance Endpoint

You can configure a remote MEP from which CCM messages are expected. If autodiscovery is not enabled, the remote MEP must be configured under the **mep** statement. If the remote MEP is not configured under the **mep** statement, the CCMs from the remote MEP are treated as errors.

To configure the remote MEP, include the **remote-mep** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*]** hierarchy level.

## Configuring a Remote Maintenance Endpoint Action Profile

You can specify the name of the action profile to use for the remote MEP.

To configure the action profile, include the **action-profile *profile-name*** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id* remote-mep *mep-id*]** hierarchy level. The profile must already be defined at the **[edit protocols oam ethernet connectivity-fault-management]** hierarchy level.

## Configuring Maintenance Endpoint Service Protection

You can enable service protection for a VPWS (Virtual Private Wire Service) over MPLS by specifying a working path or protect path on the MEP. Service protection provides end-to-end connection protection of the working path in the event of a failure.

To configure service protection, you must create two separate transport paths a working path and a protect path. You can specify the working path and protect path by creating two maintenance associations. To associate the maintenance association with a path, you must configure the MEP **interface** statement within the maintenance association and specify the path as working or protect.

To configure the MEP interface, include the **interface** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name* mep *mep-id*]** hierarchy level. On the **interface** statement, specify the path as (**working** | **protect**). The direction must also be configured as **direction down** for both sessions.



**NOTE:** If the path is not specified, the session monitors the active path.

Table 4 on page 20 describes the available service protection options.

**Table 4: Service Protection Options**

Option	Description
<b>working</b>	Specifies the working path.
<b>protect</b>	Specifies the protect path.

The following configuration example shows service protection is enabled for the VPWS service. The CCM session is configured for the working path and references the CCM session configured for the protect path in the **protect-maintenance-association** statement. The APS profile is configured and associated with the maintenance-association for the working path:

```
[edit protocols]
oam {
  ethernet {
    connectivity-fault-management {
      maintenance-domain vpws-service-1 {
        name-format none;
        level 5;
        maintenance-association W {
          short-name-format character-string;
          protect-maintenance-association P {
            aps-profile aps-profile-1;
          }
          continuity-check {
            interval 1s;
          }
          mep 1 {
            interface ge-1/3/5.0 working;
            direction down;
            auto-discovery;
          }
        }
        maintenance-association P {
          short-name-format character-string;
          continuity-check {
            interval 1s;
          }
          mep 1 {
            interface ge-1/3/5.0 protect;
```

```

        direction down;
        auto-discovery;
    }
}
}
}
}
}
}

```

#### Related Documentation

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

## Configuring a Connectivity Fault Management Action Profile

You can configure an action profile and specify the action to be taken when any of the configured events occur. Alternatively, you can configure an action profile and specify default actions when connectivity to a remote maintenance association endpoint (MEP) fails.

To configure the action profile name, include the **action-profile** statement at the **[edit protocols oam ethernet connectivity-fault-management]** hierarchy level.

- [Configuring the Action of a CFM Action Profile on page 21](#)
- [Configuring the Default Actions of a CFM Action Profile on page 22](#)
- [Configuring a CFM Action Profile Event on page 23](#)

## Configuring the Action of a CFM Action Profile

You can configure the action to be taken when any of the configured events occur.

To configure the action profile's action, include the **action** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name*]** hierarchy level.

```
[edit protocols oam]
ethernet {
  connectivity-fault-management {
    action-profile bring-down {
      event {
        interface-status-tlv down;
      }
      action {
        interface-down;
      }
    }
  }
}
```

### Configuring the Default Actions of a CFM Action Profile

You can configure the default actions to be taken when connectivity to a remote MEP fails.

To enable the **interface-down** as the default action for an action profile, include the **interface-down** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* default-actions]** hierarchy level.

```
[edit]
protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        action-profile bring-down {
          default-actions {
            interface-down;
          }
        }
      }
      maintenance-domain mdl {
        level 0;
        maintenance-association mal {
          continuity-check {
            interval 100 ms;
          }
          mep 4001 {
            interface ge-4/1/0;
            direction down;
            remote-mep 1 {
              action-profile bring-down;
            }
          }
        }
      }
    }
  }
}
```

}



**NOTE:** Associating an **action-profile** with the action of **interface-down** on an up MEP CFM session running over a circuit cross-connect (CCC) interface (l2circuit/l2vpn) is not advisable and can result in a deadlock situation.

## Configuring a CFM Action Profile Event

You can configure one or more events under the action profile, the occurrence of which triggers the corresponding action to be taken.

To configure the interface-status-tlv lower-layer-down event, include the **interface-status-tlv lower-layer-down** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

To configure the interface-status-tlv down event, include the **interface-status-tlv down** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

To configure the port-status-tlv blocked event, include the **port-status-tlv blocked** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

To configure the adjacency-loss event, include the **adjacency-loss** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

To configure an RDI event to bring an interface down on reception of an RDI bit from a MEP, include the **rdi** statement at the **(edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

```
[edit protocols oam]
ethernet {
  connectivity-fault-management {
    action-profile bring-down {
      event {
        adjacency-loss;
        interface-status-tlv (down | lower-layer-down);
        port-status-tlv blocked;
        rdi;
      }
      action {
        interface-down;
      }
      clear-action {
        interface-down peer-interface ;
      }
    }
  }
}
```



**NOTE:** You cannot configure multiple actions at this time. Only one action can be configured. This limitation affects both the action and clear-action statements.

**Related  
Documentation**

- event (CFM)
- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Creating a Maintenance Association on page 13](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- Junos® OS Ethernet Interfaces

---

## Configuring Linktrace Protocol in CFM

The linktrace protocol is used for path discovery between a pair of maintenance points. Linktrace messages are triggered by an administrator using the **traceroute** command to verify the path between a pair of MEPs under the same maintenance association. Linktrace messages can also be used to verify the path between an MEP and an MIP under the same maintenance domain. The operation of IEEE 802.1ag linktrace request and response messages is similar to the operation of Layer 3 **traceroute** commands. For more information about the **traceroute** command, see the Junos OS System Basics Configuration Guide.

### Configuring the Linktrace Path Age Timer

If no response to a **linktrace** request is received, the request and response entries are deleted after the age timer expires. To configure the linktrace age timer, use the **linktrace** statement with the **age time** option at the **[edit protocols oam ethernet connectivity-fault-management]** hierarchy level. The age is configured in minutes or seconds.

### Configuring the Linktrace Database Size

Configure the number of linktrace reply entries to be stored per linktrace request. To configure the linktrace database size, use the **linktrace** statement with the **path-database-size path-database-size** option at the **[edit protocols oam ethernet connectivity-fault-management]** hierarchy level.

Display the linktrace database using the **show oam ethernet connectivity-fault-management path-database** command.

**Related  
Documentation**

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)



- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

---

## Configuring Ethernet Local Management Interface


- [Ethernet Local Management Interface Overview on page 25](#)
- [Configuring the Ethernet Local Management Interface on page 27](#)
- [Example E-LMI Configuration on page 29](#)

### Ethernet Local Management Interface Overview

MX Series routers with Gigabit Ethernet (**ge**), 10-Gigabit Ethernet (**xe**), or Aggregated Ethernet (**ae**) interfaces support the Ethernet Local Management Interface (E-LMI). The E-LMI specification is available at the Metro Ethernet Forum. E-LMI procedures and protocols are used for enabling automatic configuration of the customer edge (CE) to support Metro Ethernet services. The E-LMI protocol also provides user-to-network interface (UNI) and Ethernet virtual connection (EVC) status information to the CE. The UNI and EVC information enables automatic configuration of CE operation based on the Metro Ethernet configuration.

The E-LMI protocol operates between the CE device and the provider edge (PE) device. It runs only on the PE-CE link and notifies the CE of connectivity status and configuration parameters of Ethernet services available on the CE port. The scope of the E-LMI protocol is shown in [Figure 3 on page 26](#).

Figure 3: Scope of the E-LMI Protocol

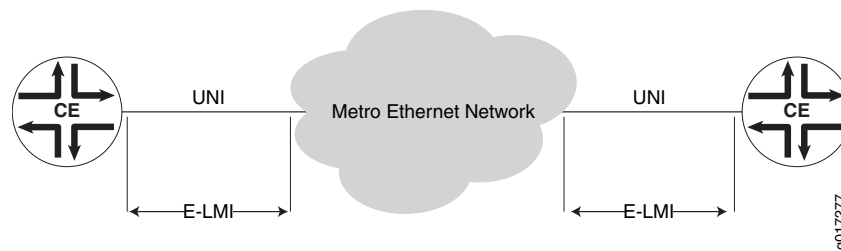

The E-LMI implementation on MX Series routers includes only the PE side of the E-LMI protocol.

E-LMI interoperates with an OAM protocol, such as Connectivity Fault Management (CFM), that runs within the provider network to collect OAM status. CFM runs at the provider maintenance level (UNI-N to UNI-N with up MEPs at the UNI). E-LMI relies on the CFM for end-to-end status of EVCs across CFM domains (SVLAN domain or VPLS).

The E-LMI protocol relays the following information:

- Notification to the CE of the addition/deletion of an EVC (active, not active, or partially active)
- Notification to the CE of the availability state of a configured EVC
- Communication of UNI and EVC attributes to the CE:
  - UNI attributes:
    - UNI identifier (a user-configured name for UNI)
    - CE-VLAN ID/EVC map type (all-to-one bundling, service multiplexing with bundling, or no bundling)
    - Bandwidth profile is not supported (including the following features):
      - CM (coupling mode)
      - CF (color flag)
      - CIR (committed Information rate)
      - CBR (committed burst size)
      - EIR (excess information rate)
      - EBS (excess burst size)
  - EVC attributes:
    - EVC reference ID
    - EVC status type (active, not active, or partially active)
    - EVC type (point-to-point or multipoint-to-multipoint)
    - EVC ID (a user-configured name for EVC)
    - Bandwidth profile (not supported)

- CE-VLAN ID/EVC map

E-LMI on MX Series routers supports the following EVC types:

- Q-in-Q SVLAN (point-to-point or multipoint-to-multipoint)—Requires an end-to-end CFM session between UNI-Ns to monitor the EVS status.
- VPLS (BGP or LDP) (point-to-point or multipoint-to-multipoint)—Either VPLS pseudowire status or end-to-end CFM sessions between UNI-Ns can be used to monitor EVC status.
- L2 circuit/L2VPN (point-to-point)—Either VPLS pseudowire status or end-to-end CFM sessions between UNI-Ns can be used to monitor EVC status.



**NOTE:** l2-circuit and l2vpn are not supported.

## Configuring the Ethernet Local Management Interface

To configure E-LMI, perform the following steps:

- [Configuring an OAM Protocol \(CFM\) on page 27](#)
- [Assigning the OAM Protocol to an EVC on page 27](#)
- [Enabling E-LMI on an Interface and Mapping CE VLAN IDs to an EVC on page 28](#)

### Configuring an OAM Protocol (CFM)

For information on configuring the OAM protocol (CFM), see “[IEEE 802.1ag OAM Connectivity Fault Management Overview](#)” on page 3.

### Assigning the OAM Protocol to an EVC

To configure an EVC, you must specify a name for the EVC using the **evc***evc-id* statement at the **[edit protocols oam ethernet]** hierarchy level. You can set the EVC protocol for monitoring EVC statistics to **cfm** or **vpls** using the **evc-protocol** statement and its options at the **[edit protocols oam ethernet evcs]** hierarchy level.

You can set the number of remote UNIs in the EVC using the **remote-uni-count** *number* statement at the **[edit protocols oam ethernet evcs evcs-protocol]** hierarchy level. The **remote-uni-count** defaults to 1. Configuring a value greater than 1 makes the EVC multipoint-to-multipoint. If you enter a value greater than the actual number of endpoints, the EVC status will display as partially active even if all endpoints are up. If you enter a **remote-uni-count** less than the actual number of endpoints, the status will display as active, even if all endpoints are not up.

You can configure an EVC by including the **evcs** statement at the **[edit protocols oam ethernet]** hierarchy level:

```
[edit protocols oam ethernet]
evcs evc-id {
    evc-protocol (cfm (management-domain name management-association name) | vpls
        (routing-instance name)) {
```

```
remote-uni-count <number>; # Optional, defaults to 1
multipoint-to-multipoint;
# Optional, defaults to point-to-point if remote-uni-count is 1
}
}
```

---

### Enabling E-LMI on an Interface and Mapping CE VLAN IDs to an EVC

To configure E-LMI, include the **lmi** statement at the **[edit protocols oam ethernet]** hierarchy level:

```
[edit protocols oam ethernet]
lmi {
  polling-verification-timer value;
  # Polling verification timer (T392), defaults to 15 seconds
  status-counter count; # Status counter (N393), defaults to 4
  interface name {
    evc evc-id {
      default-evc;
      vlan-list [ vlan-ids ];
    }
    evc-map-type (all-to-one-bundling | bundling | service-multiplexing);
    polling-verification-time value; # Optional, defaults to global value
    status-counter count; # Optional, defaults to global value
    uni-id value; # Optional, defaults to interface-name
  }
}
```

You can set the status counter to count consecutive errors using the **status-counter *count*** statement at the **[edit protocols oam ethernet lmi]** hierarchy level. The status counter is used to determine if E-LMI is operational or not. The default value is 4.

You can set the **polling-verification-timer *value*** statement at the **[edit protocols oam ethernet lmi]** hierarchy level. The default value is 15 seconds.

You can enable an interface and set its options for use with E-LMI using the **interface *name*** statement at the **[edit protocols oam ethernet lmi]** hierarchy level. Only **ge**, **xe**, and **ae** interfaces are supported. You can use the interface **uni-id** option to specify a name for the UNI. If **uni-id** is not configured, it defaults to the name variable of **interface *name***.

You can specify the CE-VLAN ID/EVC map type using the **evc-map-type *type*** interface option. The options are **all-to-one-bundling**, **bundling**, or **service-multiplexing**. Service multiplexing is with no bundling. The default type is **all-to-one-bundling**.


To specify the EVC that an interface uses, use the **evc *evc-id*** statement at the **[edit protocols oam ethernet lmi interface *name*]** hierarchy level. You can specify an interface as the default EVC interface using the **default-evc** statement at the **[edit protocols oam ethernet lmi interface *name* evc *evc-id*]** hierarchy level. All VLANs that are not mapped to any other EVCs are mapped to this EVC. Only one EVC can be configured as the default.

You can map a list of VLANs to an EVC using the **vlan-list *vlan-id-list*** statement at the **[edit protocols oam ethernet lmi interface *name* evc *evc-id*]** hierarchy level.

## Example E-LMI Configuration

Figure 4 on page 29 illustrates the E-LMI configuration for a point-to-point EVC (SVLAN) monitored by CFM. In this example, VLANs 1 through 2048 are mapped to **evc1** (SVLAN 100) and 2049 through 4096 are mapped to **evc2** (SVLAN 200). Two CFM sessions are created to monitor these EVCs.

Figure 4: E-LMI Configuration for a Point-to-Point EVC (SVLAN) Monitored by CFM

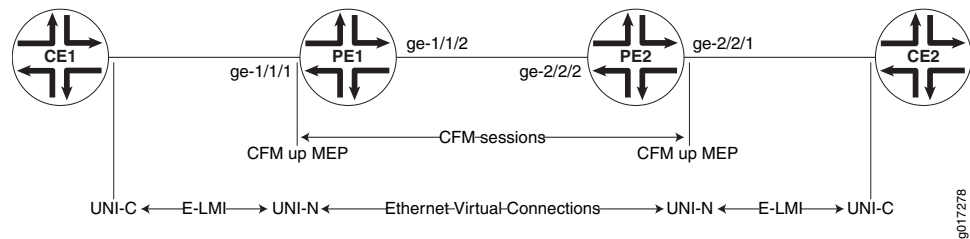

## Configuring PE1

```
[edit]
interfaces {
  ge-1/1/1 {
    unit 0 {
      family bridge {
        interface-mode trunk;
        vlan-id-list 1-2048;
      }
    }
  }
  ge-1/1/2 {
    unit 0 {
      vlan-id 100;
      family bridge {
        interface-mode trunk;
        inner-vlan-id-list 1-2048;
      }
    }
    unit 1 {
      vlan-id 200;
      family bridge {
        interface-mode trunk;
        inner-vlan-id-list 2049-4096;
      }
    }
  }
}
protocols {
```

```
oam {
  ethernet {
    connectivity-fault-management {
      maintenance-domain md {
        level 0;
        maintenance-association 1 {
          name-format vlan;
          mep 1 {
            direction up;
            interface ge-1/1/1.0 vlan 1;
          }
        }
        maintenance-association 2049 {
          name-format vlan;
          mep 1 {
            direction up;
            interface ge-1/1/1.1 vlan 2049;
          }
        }
      }
    }
  }
  evcs {
    evc1 {
      evc-protocol cfm management-domain md management-association 1;
      remote-uni-count 1;
    }
    evc2 {
      evc-protocol cfm management-domain md management-association 2049;
      remote-uni-count 1;
    }
  }
  lmi {
    interface ge-1/1/1 {
      evc evc1 {
        vlan-list 1-2048;
      }
      evc evc2 {
        vlan-list 2049-4096;
      }
      evc-map-type bundling;
      uni-id uni-ce1;
    }
  }
}
}
```

---

### Configuring PE2

```
[edit]
interfaces {
  ge-2/2/1 {
    unit 0 {
      family bridge {
        interface-mode trunk;
        vlan-id-list 1-2048;
      }
    }
  }
}
```

```

    }
  }
  unit 1 {
    family bridge {
      interface-mode trunk;
      vlan-id-list 2049-4096;
    }
  }
}
ge-2/2/2 {
  unit 0 {
    vlan-id 100;
    family bridge {
      interface-mode trunk;
      inner-vlan-id-list 1-2048;
    }
  }
  unit 1 {
    vlan-id 200;
    family bridge {
      interface-mode trunk;
      inner-vlan-id-list 2049-4095;
    }
  }
}
}
protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        maintenance-domain md {
          level 0;
          maintenance-association 1 {
            name-format vlan;
            mep 1 {
              direction up;
              interface ge-2/2/1.0 vlan 1;
            }
          }
          maintenance-association 2049 {
            name-format vlan;
            mep 1 {
              direction up;
              interface ge-2/2/1.1 vlan 2049;
            }
          }
        }
      }
    }
  }
  evcs {
    evc1 {
      evc-protocol cfm management-domain md management-association 1;
      remote-uni-count 1;
    }
    evc2 {
      evc-protocol cfm management-domain md management-association 2049;
      uni-count 2;
    }
  }
}

```

```
    }
  }
  lmi {
    interface ge-2/2/1 {
      evc evc1 {
        vlan-list 1-2048;
      }
      evc evc2 {
        vlan-list 2049-4095;
      }
      evc-map-type bundling;
      uni-id uni-ce2;
    }
  }
}
```

---

### Configuring Two UNIs Sharing the Same EVC

```
[edit protocols]
oam {
  ethernet {
    connectivity-fault-management { ...}
    evcs {
      evc1 {
        evc-protocol cfm management-domain md management-association 1;
        remote-uni-count 1;
      }
    }
    lmi {
      interface ge-2/2/1 {
        evc evc1 {
          vlan-list 0-4095;
        }
        evc-map-type all-to-one-bundling;
        uni-id uni-ce1;
      }
      interface ge-2/3/1 {
        evc evc1 {
          vlan-list 0-4095;
        }
        evc-map-type all-to-one-bundling;
        uni-id uni-ce2;
      }
    }
  }
}
```

#### Related Documentation

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)



- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

## Configuring Port Status TLV and Interface Status TLV

- [TLVs Overview on page 33](#)
- [Various TLVs for CFM PDUs on page 34](#)
- [Support for Additional Optional TLVs on page 35](#)
- [MAC Status Defects on page 41](#)
- [Configuring Remote MEP Action Profile Support on page 42](#)

### TLVs Overview

Type, Length, and Value (TLVs) are described in the IEEE 802.1ag standard for CFM as a method of encoding variable-length and/or optional information in a PDU. TLVs are not aligned to any particular word or octet boundary. TLVs follow each other with no padding between them.

[Table 5 on page 33](#) shows the TLV format and indicates if it is required or optional.

**Table 5: Format of TLVs**

Parameter	Octet (sequence)	Description
Type	1	Required. If 0, no Length or Value fields follow. If not 0, at least the Length field follows the Type field.
Length	2–3	Required if the Type field is not 0. Not present if the Type field is 0. The 16 bits of the Length field indicate the size, in octets, of the Value field. 0 in the Length field indicates that there is no Value field.
Value	4	Length specified by the Length field. Optional. Not present if the Type field is 0 or if the Length field is 0.

## Various TLVs for CFM PDUs

Table 6 on page 34 shows a set of TLVs defined by IEEE 802.1ag for various CFM PDU types. Each TLV can be identified by the unique value assigned to its type field. Some type field values are reserved.

**Table 6: Type Field Values for Various TLVs for CFM PDUs**

TLV or Organization	Type Field
End TLV	0
Sender ID TLV	1
Port Status TLV	2
Data TLV	3
Interface Status TLV	4
Reply Ingress TLV	5
Reply Egress TLV	6
LTM Egress Identifier TLV	7
LTR Egress Identifier TLV	8
Reserved for IEEE 802.1	9 to 30
Organization-Specific TLV	31
Defined by ITU-T Y.1731	32 to 63
Reserved for IEEE 802.1	64 to 255

Not every TLV is applicable for all types of CFM PDUs.

- TLVs applicable for continuity check message (CCM):
  - End TLV
  - Sender ID TLV
  - Port Status TLV
  - Interface Status TLV
  - Organization-Specific TLV
- TLVs applicable for loopback message (LBM):

- End TLV
- Sender ID TLV
- Data TLV
- Organization-Specific TLV
- TLVs applicable for loopback reply (LBR):
  - End TLV
  - Sender ID TLV
  - Data TLV
  - Organization-Specific TLV
- TLVs applicable for linktrace message (LTM):
  - End TLV
  - LTM Egress Identifier TLV
  - Sender ID TLV
  - Organization-Specific TLV
- TLVs applicable for linktrace reply (LTR):
  - End TLV
  - LTR Egress Identifier TLV
  - Reply Ingress TLV
  - Reply Egress TLV
  - Sender ID TLV
  - Organization-Specific TLV

The following TLVs are currently supported in the applicable CFM PDUs:

- End TLV
- Reply Ingress TLV
- Reply Egress TLV
- LTR Egress Identifier TLV
- LTM Egress Identifier TLV
- Data TLV

### Support for Additional Optional TLVs

The following additional optional TLVs are supported:

- Port Status TLV

- Interface Status TLV

MX Series routers support configuration of port status TLV and interface status TLV. Configuring the Port Status TLV allows the operator to control the transmission of the Port Status TLV in CFM PDUs.



**NOTE:** Although Port Status TLV configuration statements are visible in the CLI on M120 and M320 routers, Port Status TLV cannot be configured on these systems. Port Status TLV can be enabled on a MEP interface only if it is a bridge logical interface, which is not possible on these systems.

For configuration information, see the following sections:

- [Port Status TLV on page 36](#)
- [Interface Status TLV on page 38](#)

### Port Status TLV

The Port Status TLV indicates the ability of the bridge port on which the transmitting MEP resides to pass ordinary data, regardless of the status of the MAC. The value of this TLV is driven by the MEP variable **enableRmepDefect**, as shown in [Table 8 on page 36](#). The format of this TLV is shown in [Table 7 on page 36](#).

Any change in the Port Status TLV's value triggers one extra transmission of that bridge ports MEP CCMs.

**Table 7: Port Status TLV Format**

Parameter	Octet (Sequence)
Type = 2	1
Length	2–3
Value (See <a href="#">Table 8 on page 36</a> )	4

**Table 8: Port Status TLV Values**

Mnemonic	Ordinary Data Passing Freely Through the Port	Value
psBlocked	No: <b>enableRmepDefect</b> = false	1
psUp	Yes: <b>enableRmepDefect</b> = true	2

The MEP variable **enableRmepDefect** is a boolean variable indicating whether frames on the service instance monitored by the maintenance associations if this MEP are enabled to pass through this bridge port by the Spanning Tree Protocol and VLAN topology management. It is set to TRUE if:

- The bridge port is set in a state where the traffic can pass through it.

- The bridge port is running multiple instances of the spanning tree.
- The MEP interface is not associated with a bridging domain.

### Configuring Port Status TLV

Junos OS provides configuration support for the Port Status TLV, allowing you to control the transmission of this TLV in CCM PDUs. The Junos OS provides this configuration at the continuity-check level. By default, the CCM does not include the Port Status TLV. To configure the Port Status TLV, use the **port-status-tlv** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *identifier* maintenance-association *identifier* continuity-check]** hierarchy level.



**NOTE:** Port Status TLV configuration is not mandated by IEEE 802.1ag. The Junos OS provides it in order to give more flexibility to the operator; however it receives and processes CCMs with a Port Status TLV, regardless of this configuration.

An example of the configuration statements follows:

```
protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        maintenance-domain identifier {
          level number;
          maintenance-association identifier {
            continuity-check {
              interval number;
              loss-threshold number;
              hold-interval number;
              port-status-tlv; # Sets Port Status TLV
            }
          }
        }
      }
    }
  }
}
```

You cannot enable Port Status TLV transmission in the following two cases:

- If the MEP interface under the maintenance-association is not of type bridge.
- If the MEP is configured on a physical interface.

### Displaying the Received Port Status TLV

The Junos OS saves the last received Port Status TLV from a remote MEP. If the received Port Status value does not correspond to one of the standard values listed in [Table 8 on page 36](#), then the **show** command displays it as "unknown." You can display the last saved received Port Status TLV using the **show oam ethernet connectivity-fault-management mep-database maintenance-domain *identifier***

**maintenance-association *identifier* local-mep *identifier* remote-mep *identifier*** command, as in the following example:

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 local-mep 2001 remote-mep 1001
Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 2001, Direction: down, MAC address: 00:19:e2:b2:81:4a
Auto-discovery: enabled, Priority: 0
Interface status TLV: up, Port status TLV: up
Interface name: ge-2/0/0.0, Interface status: Active, Link status: Up

Remote MEP identifier: 1001, State: ok
MAC address: 00:19:e2:b0:74:00, Type: Learned
Interface: ge-2/0/0.0
Last flapped: Never
Remote defect indication: false
Port status TLV: none # RX PORT STATUS
Interface status TLV: none
```

### ***Displaying the Transmitted Port Status TLV***

The Junos OS saves the last transmitted Port Status TLV from a local MEP. If the transmission of the Port Status TLV has not been enabled, then the **show** command displays "none." You can display the last saved transmitted Port Status TLV using the **show oam ethernet connectivity-fault-management mep-database maintenance-domain *identifier* maintenance-association *identifier* local-mep *identifier* remote-mep *identifier*** command, as in the following example:

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 local-mep 2001 remote-mep 1001
Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 2001, Direction: down, MAC address: 00:19:e2:b2:81:4a
Auto-discovery: enabled, Priority: 0
Interface status TLV: up, Port status TLV: up # TX PORT STATUS
Interface name: ge-2/0/0.0, Interface status: Active, Link status: Up

Remote MEP identifier: 1001, State: ok
MAC address: 00:19:e2:b0:74:00, Type: Learned
Interface: ge-2/0/0.0
Last flapped: Never
Remote defect indication: false
Port status TLV: none
Interface status TLV: none
```

---

### **Interface Status TLV**

The Interface Status TLV indicates the status of the interface on which the MEP transmitting the CCM is configured, or the next-lower interface in the IETF RFC 2863 IF-MIB. The format of this TLV is shown in [Table 9 on page 39](#). The enumerated values are shown in [Table 10 on page 39](#).

Table 9: Interface Status TLV Format

Parameter	Octet (Sequence)
Type = 4	1
Length	2–3
Value (See Table 10 on page 39)	4

Table 10: Interface Status TLV Values

Mnemonic	Interface Status	Value
isUp	up	1
isDown	down	2
isTesting	testing	3
isUnknown	unknown	4
isDormant	dormant	5
isNotPresent	notPresent	6
isLowerLayerDown	lowerLayerDown	7

**Configuring Interface Status TLV**

The Junos OS provides configuration support for the Interface Status TLV, thereby allowing operators to control the transmission of this TLV in CCM PDUs through configuration at the continuity-check level.



**NOTE:** This configuration is not mandated by IEEE 802.1ag; rather it is provided to give more flexibility to the operator. The Junos OS receives and processes CCMs with the Interface Status TLV, regardless of this configuration.

The interface status TLV configuration is shown below:

```

protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        maintenance-domain identifier {
          level number;
          maintenance-association identifier {
            continuity-check {
              interval number;
              loss-threshold number;
            }
          }
        }
      }
    }
  }
}

```

```

        hold-interval number;
        interface-status-tlv; # Sets the interface status TLV
    }
}
}
}
}
}
}

```



**NOTE:** The Junos OS supports transmission of only three out of seven possible values for the Interface Status TLV. The supported values are 1, 2, and 7. However, the Junos OS is capable of receiving any value for the Interface Status TLV.

### Displaying the Received Interface Status TLV

The Junos OS saves the last received Interface Status TLV from the remote MEP. If the received Interface Status value does not correspond to one of the standard values listed in [Table 9 on page 39](#), then the **show** command displays "unknown."

You can display this last saved Interface Status TLV using the **show oam ethernet connectivity-fault-management mep-database maintenance-domain *identifier* maintenance-association *identifier* local-mep *identifier* remote-mep *identifier*** command, as in the following example:

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 local-mep 2001 remote-mep 1001
```

```

Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 2001, Direction: down, MAC address: 00:19:e2:b2:81:4a
Auto-discovery: enabled, Priority: 0
Interface status TLV: up, Port status TLV: up
Interface name: ge-2/0/0.0, Interface status: Active, Link status: Up

Remote MEP identifier: 1001, State: ok
MAC address: 00:19:e2:b0:74:00, Type: Learned
Interface: ge-2/0/0.0
Last flapped: Never
Remote defect indication: false
Port status TLV: none
Interface status TLV: none # displays the Interface Status TLV state

```

### Displaying the Transmitted Interface Status TLV

The Junos OS saves the last transmitted Interface Status TLV from a local MEP. If the transmission of Interface Status TLV has not been enabled, then the **show** command displays "none."

You can display the last transmitted Interface Status TLV using the **show oam ethernet connectivity-fault-management mep-database maintenance-domain *identifier* maintenance-association *identifier* local-mep *identifier* remote-mep *identifier*** command, as in the following example:



```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 local-mep 2001 remote-mep 1001
```

```
Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 2001, Direction: down, MAC address: 00:19:e2:b2:81:4a
Auto-discovery: enabled, Priority: 0
Interface status TLV: up, Port status TLV: up
Interface name: ge-2/0/0.0, Interface status: Active, Link status: Up

Remote MEP identifier: 1001, State: ok
MAC address: 00:19:e2:b0:74:00, Type: Learned
Interface: ge-2/0/0.0
Last flapped: Never
Remote defect indication: false
Port status TLV: none
Interface status TLV: none
```

## MAC Status Defects

The Junos OS provides MAC status defect information, indicating that one or more of the remote MEPs is reporting a failure in its Port Status TLV or Interface Status TLV. It indicates “yes” if either some remote MEP is reporting that its interface is not isUp (for example, at least one remote MEPs interface is unavailable), or if all remote MEPs are reporting a Port Status TLV that contains some value other than psUp (for example, all remote MEPs Bridge Ports are not forwarding data). There are two **show** commands you can use to view the MAC Status Defects indication.

Use the **mep-database** command to display MAC status defects:

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md6 maintenance-association ma6
Maintenance domain name: md6, Format: string, Level: 6
Maintenance association name: ma6, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 500, Direction: down, MAC address: 00:05:85:73:7b:39
Auto-discovery: enabled, Priority: 0
Interface status TLV: up, Port status TLV: up
Interface name: xe-5/0/0.0, Interface status: Active, Link status: Up
Defects:
  Remote MEP not receiving CCM          : no
  Erroneous CCM received                 : no
  Cross-connect CCM received             : no
  RDI sent by some MEP                  : no
  Some remote MEP's MAC in error state  : yes # MAC Status Defects yes/no
Statistics:
  CCMs sent                             : 1658
  CCMs received out of sequence          : 0
  LBMs sent                             : 0
  Valid in-order LBRs received           : 0
  Valid out-of-order LBRs received       : 0
  LBRs received with corrupted data      : 0
  LBRs sent                             : 0
  LTMs sent                             : 0
  LTMs received                         : 0
  LTRs sent                             : 0
  LTRs received                         : 0
```

```

Sequence number of next LTM request      : 0
1DMs sent                               : 0
Valid 1DMs received                       : 0
Invalid 1DMs received                     : 0
DMMs sent                               : 0
DMRs sent                               : 0
Valid DMRs received                       : 0
Invalid DMRs received                     : 0
Remote MEP count: 1
  Identifier  MAC address      State   Interface
    200      00:05:85:73:39:4a   ok    xe-5/0/0.0

```

Use the **interfaces** command to display MAC status defects:

```

user@host> show oam ethernet connectivity-fault-management interfaces detail
Interface name: xe-5/0/0.0, Interface status: Active, Link status: Up
Maintenance domain name: md6, Format: string, Level: 6
Maintenance association name: ma6, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
Interface status TLV: up, Port status TLV: up
MEP identifier: 500, Direction: down, MAC address: 00:05:85:73:7b:39
MEP status: running
Defects:
  Remote MEP not receiving CCM              : no
  Erroneous CCM received                     : no
  Cross-connect CCM received                 : no
  RDI sent by some MEP                      : no
  Some remote MEP's MAC in error state       : yes # MAC Status Defects
yes/no
Statistics:
  CCMs sent                                 : 1328
  CCMs received out of sequence              : 0
  LBMs sent                                 : 0
  Valid in-order LBRs received               : 0
  Valid out-of-order LBRs received           : 0
  LBRs received with corrupted data          : 0
  LBRs sent                                 : 0
  LTMs sent                                 : 0
  LTMs received                             : 0
  LTRs sent                                 : 0
  LTRs received                             : 0
  Sequence number of next LTM request        : 0
  1DMs sent                                 : 0
  Valid 1DMs received                       : 0
  Invalid 1DMs received                     : 0
  DMMs sent                                 : 0
  DMRs sent                                 : 0
  Valid DMRs received                       : 0
  Invalid DMRs received                     : 0
Remote MEP count: 1
  Identifier  MAC address      State   Interface
    200      00:05:85:73:39:4a   ok    xe-5/0/0.0

```

## Configuring Remote MEP Action Profile Support

Based on values of **interface-status-tlv** and **port-status-tlv** in the received CCM packets, a specific action, such as **interface-down**, can be taken using the **action-profile** options. Multiple action profiles can be configured on the router, but only one action profile can be assigned to a remote MEP.

The action profile can be configured with at least one event to trigger the action; but the action will be triggered if any one of these events occurs. It is not necessary for all of the configured events to occur to trigger **action**.

An action-profile can be applied only at the remote MEP level.

The following example shows an action profile configuration with explanatory comments added:

```
[edit protocols oam ethernet connectivity-fault-management]
action-profile tlv-action {
  event {
    # If interface status tlv with value specified in the config is received
    interface-status-tlv down|lower-layer-down;
    # If port status tlv with value specified in the config is received
    port-status-tlv blocked;
    # If connectivity is lost to the peer */
    adjacency-loss;
  }
  action {
    # Bring the interface down */
    interface-down;
  }
  default-actions interface-down;
}
# domains
maintenance-domain identifier {
  # maintenance domain level (0-7)
  level number;
  # association
  maintenance-association identifier {
    mep identifier {
      interface ge-x/y/z.w;
      remote-mep identifier {
        # Apply the action-profile for the remote MEP
        action-profile tlv-action;
      }
    }
  }
}
```

### Monitoring a Remote MEP Action Profile

You can use the **show oam ethernet connectivity-fault-management mep-database** command to view the action profile status of a remote MEP, as in the following example:

**show oam ethernet  
connectivity-fault-  
management  
mep-database  
remote-mep  
(Action Profile Event)**

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 remote-mep 200
Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 100, Direction: down, MAC address: 00:05:85:73:e8:ad
Auto-discovery: enabled, Priority: 0
Interface status TLV: none, Port status TLV: none # last status TLVs transmitted
by the router
Interface name: ge-1/0/8.0, Interface status: Active, Link status: Up

Remote MEP identifier: 200, State: ok # displays the remote MEP name and state

MAC address: 00:05:85:73:96:1f, Type: Configured
Interface: ge-1/0/8.0
Last flapped: Never
Remote defect indication: false
Port status TLV: none
Interface status TLV: lower-layer-down
Action profile: juniper # displays remote MEP's action profile identifier
Last event: Interface-status-tlv lower-layer-down # last remote MEP event

# to trigger action
Action: Interface-down, Time: 2009-03-27 14:25:10 PDT (00:00:02 ago)
# action occurrence time
```

**Related  
Documentation**

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

## Configuring MAC Flush Message Processing in CET Mode

---

In carrier Ethernet transport (CET) mode, MX Series routers are used as provider edge (PE) routers, and Nokia Siemens Networks A2200 Carrier Ethernet Switches (referred to as E-domain devices) that run standard-based protocols are used in the access side. On the MX Series routers, VPLS pseudowires are configured dynamically through label distribution protocol (LDP). On the E-domain devices, topology changes are detected through connectivity fault management (CFM) sessions running between the E-domain devices and the MX Series PE routers. The MX Series PE routers can bring the carrier Ethernet interface down if there is CFM connectivity loss. This triggers a local MAC flush as well as a targeted label distribution protocol (T-LDP) MAC flush notification that gets sent towards the remote MX Series PEs to trigger MAC flush on them.

In CET inter-op mode, MX Series routers need to interoperate with the Nokia Siemens Networks Ax100 Carrier Ethernet access devices (referred to as A-domain devices) that run legacy protocols. Nokia Siemens Networks A4100 and A8100 devices act as an intermediate between the MX Series PE routers and A-domain devices. These intermediate devices perform interworking function (IWF) procedures so that operations administration management (OAM) sessions can be run between MX Series routers and A-domain devices. There are no VPLS pseudowires between the MX Series PE routers and the Nokia Siemens Networks A4100 and A8100 intermediate devices, so there is no LDP protocol running between the PE routers to send topology change notifications. In order to communicate topology changes, MX Series routers can trigger a MAC flush and propagate it in the core. MX Series routers can use action profiles based upon the connection protection type length value (TLV) event. The action profile brings down the carrier edge logical interface in MX Series PE routers, which will trigger a local MAC flush and also propagate the topology change to the core using LDP notification.

For VPLS there is no end-to-end connectivity monitored. The access rings are independently monitored by running CFM down multiple end points (MEPs) on the working and protection paths for each of the services between the E-domain devices and the MX Series PE routers, and between the A-domain devices and the MX Series PE routers the IWF hosted by the Nokia Siemens Networks A-4100 devices. When there is a connectivity failure on the working path, the Nokia Siemens Networks Ax200 devices perform a switchover to the protection path, triggering a topology change notification (in the form of TLVs carried in CCM) to be sent on the active path.

Figure 5: CET inter-op Dual Homed Topology

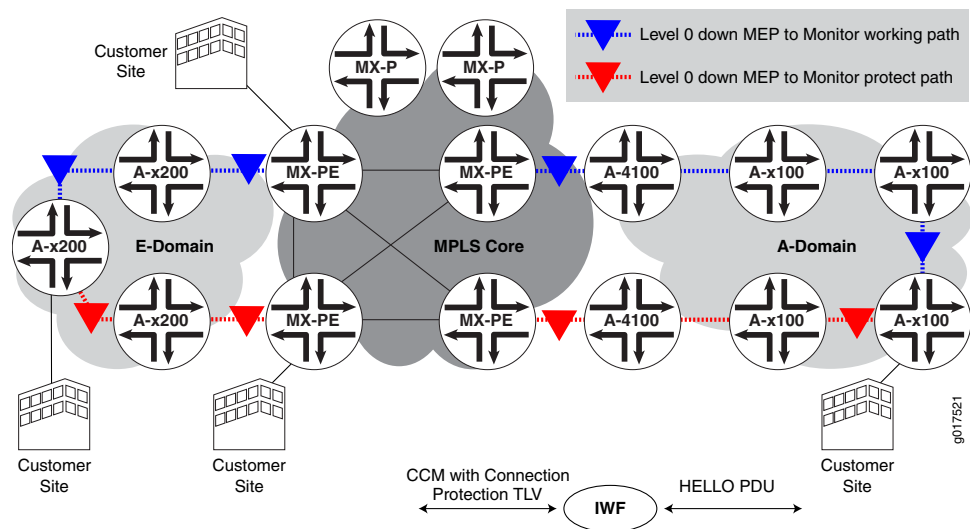


Figure 5 on page 46 describes the dual homed topology on MX Series PE routers connected to the A-domain. When an A-domain device triggers a switchover, it starts switching the service traffic to the new active path. This change is communicated in the HELLO protocol data units (PDUs) sent by that A-domain device on the working and protection paths. When the IWF in A4100 receives these HELLO PDUs, it converts them to standard CCM messages and also inserts a connection protection TLV. The “Protection-in-use” field of the connection protection TLV is encoded with the currently active path, and is included in the CCM message. CCM messages are received by the MX Series PE routers through the VLAN spoke in A4100. In the above dual homed scenario, one MX Series PE router monitors the working path, and the other MX Series PE router monitors the protection path.

A MAC flush occurs when the CFM session that is monitoring the working path detects that the service traffic has moved to the protection path or when the CFM session that is monitoring the protection path detects that the service traffic has moved to the working path.

Figure 6: CET inter-op Dual Attached Topology

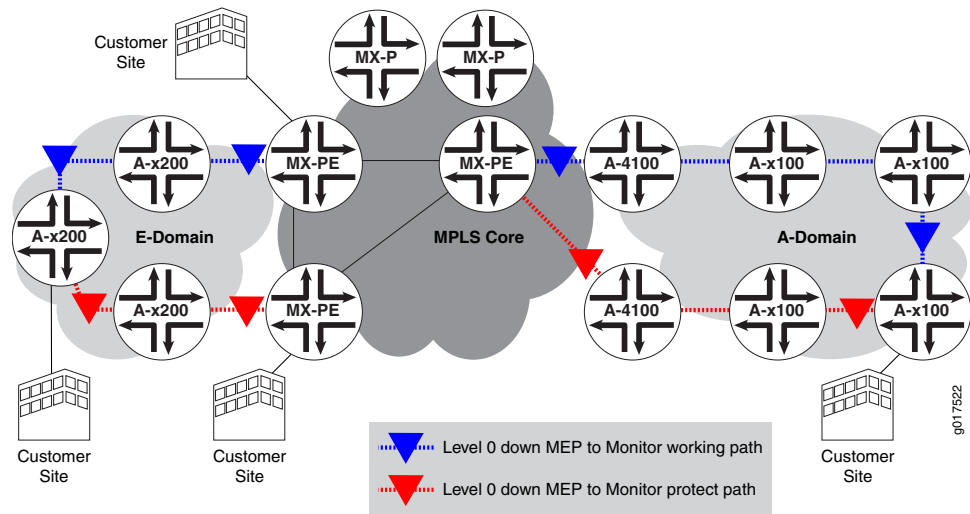


Figure 6 on page 47 describes the dual attached topology on MX Series PE routers connected to the A-domain. The MAC flush mechanism used in this case is also the same as the one used for the A-domain in the dual homed scenario (Figure 1). However in this case both the CFM sessions are hosted by only one MX Series PE router. When Ax100 in the A-domain detects topology changes, the MX Series PE router receives the connection protection TLV in the CCM message for the working and protection paths with the value of “Protection-in-use” indicating which path is the active one. Based upon the event that is generated for the CFM session, the MX Series PE router will bring down the appropriate interface which will trigger a local MAC flush.

## Configuring a Connection Protection TLV Action Profile

An action profile can be configured to perform the **interface-down** action based on the values of **connection-protection-tlv** in the received CCM packets.

The following example shows an action profile configuration with explanatory comments added:

```
[edit protocols oam ethernet connectivity-fault-management]
action-profile <tlv-action> {
  event {
    # If a connection protection TLV with a "Protection-in-use" value of SET is received */
    connection-protection-tlv <using-protection-path>;
    # If a connection protection TLV with a "Protection-in-use" value of RESET is received
    */
    connection-protection-tlv <using-working-path>;
  }
  action {
    # Bring the interface down */
    interface-down;
  }
}
```

**Related Documentation**

- connection-protection-tlv

- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

## **Configuring M120 and MX Series Routers for CCC Encapsulated Packets**

---

- [IEEE 802.1ag CFM OAM Support for CCC Encapsulated Packets Overview on page 48](#)
- [CFM Features Supported on Layer 2 VPN Circuits on page 48](#)
- [Configuring CFM for CCC Encapsulated Packets on page 49](#)

### **IEEE 802.1ag CFM OAM Support for CCC Encapsulated Packets Overview**

Layer 2 virtual private network (L2VPN) is a type of virtual private network service used to transport customer's private Layer 2 traffic (for example, Ethernet, ATM or Frame Relay) over the service provider's shared IP/MPLS infrastructure. The service provider edge (PE) router must have an interface with circuit cross-connect (CCC) encapsulation to switch the customer edge (CE) traffic to the public network.

The IEEE 802.1ag Ethernet Connectivity Fault Management (CFM) is an OAM standard used to perform fault detection, isolation, and verification on virtual bridge LANs. M120 and MX Series routers provide CFM support for bridge/VPLS/routed interfaces and support 802.1ag Ethernet OAM for CCC encapsulated packets.

### **CFM Features Supported on Layer 2 VPN Circuits**


CFM features supported on L2VPN circuits are as follows:

- Creation of up/down MEPs at any level on the CE-facing logical interfaces.
- Creation of MIPs at any level on the CE-facing logical interfaces.
- Support for continuity check, loopback, and linkrace protocol.



- Support for the Y1731 Ethernet Delay measurement protocol.
- Support for action profiles to bring the CE-facing logical interfaces down when loss of connectivity is detected.

Figure 7: Layer 2 VPN Topology

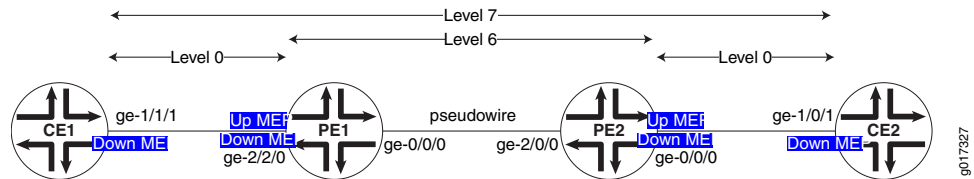

To monitor the L2VPN circuit, a CFM up MEP (Level 6 in [Figure 7 on page 49](#)) can be configured on the CE-facing logical interfaces of provider edge routers PE1 and PE2. To monitor the CE-PE attachment circuit, a CFM down MEP can be configured on the customer logical interfaces of CE1-PE1 and CE2-PE2 (Level 0 in [Figure 7 on page 49](#)).

## Configuring CFM for CCC Encapsulated Packets

The only change from the existing CLI configuration is the introduction of a new command to create a MIP on the CE-facing interface of the PE router.

```
protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        # Define a maintenance domains for each default level.
        #; These names are specified as DEFAULT_level_number
        maintenance-domain DEFAULT_x {
          # L2VPN CE interface
          interface (ge | xe)-fpc/pic/port.domain;
        }
      }
      level number;
      maintenance-association identifier {
        mep mep-id {
          direction (up | down);
          # L2 VPN CE interface on which encapsulation family CCC is configured.
          interface (ge | xe)-fpc/pic/port.domain;
          auto-discovery;
          priority number;
        }
      }
    }
  }
}
```

### Related Documentation

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)

- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- Junos® OS Ethernet Interfaces

---

## Configuring Rate Limiting of Ethernet OAM Messages

M Series, M320 with Enhanced III FPC, M120, M7i and M10 with CFEB, and MX Series routers support rate limiting of Ethernet OAM messages. Depending on the connectivity fault management (CFM) configuration, CFM packets are discarded, sent to the CPU for processing, or flooded to other bridge interfaces. This feature allows the router to intercept incoming CFM packets for prevention of DoS attacks.

You can apply rate limiting of Ethernet OAM messages at either of two CFM policing levels, as follows:

- Global-level CFM policing—uses a policer at the global level to police the CFM traffic belonging to all the sessions.
- Session-level CFM policing—uses a policer created to police the CFM traffic belonging to one session.

To configure global-level CFM policing, include the **policer** statement and its options at the **[edit protocols oam ethernet connectivity-fault-management]** hierarchy level.

To configure session-level CFM policing, include the **policer** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *name* level *number* maintenance-association *name*]** hierarchy level.

The following example shows a CFM policer used for rate-limiting CFM:

```
[edit]
firewall {
  policer cfm-policer {
    if-exceeding {
      bandwidth-limit 8k;
      burst-size-limit 2k;
    }
  }
}
```

```

        then discard;
    }
}

```

#### Case 1: Global-Level CFM Policing

This example shows a global level policer, at the CFM level, for rate-limiting CFM. The **continuity-check** *cfm-policer* statement at the global **connectivity-fault-management policer** hierarchy level specifies the policer to use for policing all continuity check packets of the CFM traffic belonging to all sessions. The **other** *cfm-policer1* statement at the **connectivity-fault-management policer** hierarchy level specifies the policer to use for policing all non-continuity check packets of the CFM traffic belonging to all sessions. The **all** *cfm-policer2* statement specifies to police all CFM packets with the specified policer *cfm-policer2*. If the **all** *policer-name* option is used, then the user cannot specify the previous **continuity-check** and **other** options.

```

[edit protocols oam ethernet]
connectivity-fault-management {
  policer {
    continuity-check cfm-policer;
    other cfm-policer1;
    # all cfm-policer2;
  }
}

```

#### Case 2: Session-Level CFM Policing

This example shows a session-level CFM policer used for rate-limiting CFM. The **policer** statement at the session **connectivity-fault-management maintenance-domain md maintenance-association ma** hierarchy level specifies the policer to use for policing only continuity check packets of the CFM traffic belonging to the specified session. The **other** *cfm-policer1* statement at the **connectivity-fault-management maintenance-domain md maintenance-association ma** hierarchy level specifies the policer to use for policing all non-continuity check packets of the CFM traffic belonging to this session only. The **all** *cfm-policer2* statement specifies to police all CFM packets with the specified policer *cfm-policer2*. If the **all** *policer-name* option is used, then the user cannot specify the previous **continuity-check** and **other** options.

```

[edit protocols oam ethernet]
connectivity-fault-management {
  maintenance-domain md {
    level number;
    maintenance-association ma {
      continuity-check {
        interval 1s;
      }
      policer {
        continuity-check cfm-policer;
        other cfm-policer1;
        # all cfm-policer2;
      }
      mep 1 {
        interface ge-3/3/0.0;
        direction up;
        auto-discovery;
      }
    }
  }
}

```

In the case of global CFM policing, the same policer is shared across multiple CFM sessions. In per-session CFM policing, a separate policer must be created to rate-limit packets specific to that session.



NOTE:

Service-level policer configuration for any two CFM sessions on the same interface at different levels must satisfy the following constraints if the direction of the sessions is the same:

- If one session is configured with policer all, then the other session cannot have a policer all or policer other configuration.
- If one session is configured with policer other, then the other session cannot have a policer all or policer other configuration.

A commit error will occur if such a configuration is committed.



NOTE: Policers with PBB and MIPs are not supported.

**Related  
Documentation**

- [connectivity-fault-management on page 96](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring 802.1ag Ethernet OAM for VPLS on page 53](#)
- [Junos® OS Ethernet Interfaces](#)

## Configuring 802.1ag Ethernet OAM for VPLS



**BEST PRACTICE:** The logical interfaces in a VPLS routing instance may have the same or different VLAN configurations. VLAN normalization is required to switch packets correctly among these interfaces. VLAN normalization is effectively VLAN translation wherein the VLAN tags of the received packet need to be translated if they are different than the normalized VLAN tags. Configuration is described starting in [“IEEE 802.1ag OAM Connectivity Fault Management Overview” on page 3](#) and you should further observe the additional requirements described in this section.

For MX Series routers, the normalized VLAN is specified using one of the following configuration statements in the VPLS routing instance:

- `vlan-id vlan-number`
- `vlan-id none`
- `vlan-tags outer outer-vlan-number inner inner-vlan-number`

You must configure `vlan-maps` explicitly on all interfaces belonging to the routing instance.

The following forwarding path considerations must be observed:

- Packet receive path:
  - This is the forwarding path for packets received on the interfaces.
  - 802.1ag Ethernet OAM for VPLS uses implicit interface filters and forwarding table filters to flood, accept, and drop the CFM packets.
- Packet transmit path:
  - The JUNOS Software uses the router's hardware-based forwarding for CPU-generated packets.
  - For Down MEPs, the packets are transmitted on the interface on which the MEP is configured.
  - For Up MEPs, the packet must be flooded to other interfaces in the VPLS routing instance. The router creates a flood route tied to a flood next hop (with all interfaces to flood) and then sources the packet to be forwarded with this flood route.
  - The router also uses implicit-based forwarding for CPU generated packets. The result is for the flood next hop tied to the flood route to be tied to the filter term. The filter term uses match criteria to correctly identify the host-generated packets.

**Related  
Documentation**

- [connectivity-fault-management on page 96](#)
- [Example: Configuring Ethernet CFM over VPLS on page 61](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Creating the Maintenance Domain on page 9](#)
- [Configuring Maintenance Intermediate Points on page 11](#)
- [Creating a Maintenance Association on page 13](#)
- [Continuity Check Protocol on page 14](#)
- [Configuring a Maintenance Endpoint on page 16](#)
- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [Configuring Linktrace Protocol in CFM on page 24](#)
- [Configuring Ethernet Local Management Interface on page 25](#)
- [Configuring Port Status TLV and Interface Status TLV on page 33](#)
- [Configuring MAC Flush Message Processing in CET Mode on page 45](#)
- [Configuring M120 and MX Series Routers for CCC Encapsulated Packets on page 48](#)
- [Configuring Rate Limiting of Ethernet OAM Messages on page 50](#)
- Junos® OS Ethernet Interfaces

---

## Configuring Unified ISSU for 802.1ag CFM

---

A unified in-service software upgrade (ISSU) enables you to upgrade between two different Junos OS releases with no disruption on the control plane and with minimal disruption of traffic. Unified ISSU is automatically enabled for the Connectivity Fault Management (CFM) protocols and interoperates between local and remote maintenance endpoints (MEPs).

The Junos OS provides support for unified ISSU using the loss threshold type length value (TLV), which is automatically enabled for CFM. TLVs are described in the IEEE 802.1ag standard for CFM as a method of encoding variable-length and optional information in a protocol data unit (PDU). The loss threshold TLV indicates the loss threshold value of a remote MEP. The loss threshold TLV is transmitted as part of the CFM continuity check messages.

During a unified ISSU, the control plane may go down for several seconds and cause CFM continuity check packets to get dropped. This may cause the remote MEP to detect a connectivity loss and mark the MEP as down. To keep the MEP active during a unified ISSU, the loss threshold TLV communicates the minimum threshold value the receiving MEP requires to keep the MEP active. The receiving MEP parses the TLV and updates the loss threshold value, but only if the new threshold value is greater than the locally configured threshold value.

An overview of CFM is described starting in “[IEEE 802.1ag OAM Connectivity Fault Management Overview](#)” on page 3, and you should further observe the additional requirements described in this topic.

Table 11 on page 55 shows the Loss Threshold TLV format.

**Table 11: Loss Threshold TLV Format**

Parameter	Octet (sequence)	Description
Type=31	1	Required. Required. If 0, no Length or Value fields follow. If not 0, at least the Length field follows the Type field.
Length=12	2	Required if the Type field is not 0. Not present if the Type field is 0. The 16 bits of the Length field indicate the size, in octets, of the Value field. 0 in the Length field indicates that there is no Value field.
OUI	3	Optional. Organization unique identifier (OUI), which is controlled by the IEEE and is typically the first three bytes of a MAC address (Juniper OUI 0x009069).
Subtype	1	Optional. Organizationally defined subtype.
Value	4	Optional. Loss threshold value.
Flag	4	Optional. Bit0 (identifies an ISSU is in progress) Bit1-31 (reserved)

Junos OS provides configuration support for the **convey-loss-threshold** statement, allowing you to control the transmission of the loss threshold TLV in continuity check messages PDUs. The **convey-loss-threshold** statement specifies that the loss threshold TLV must be transmitted as part of the continuity check messages. If the **convey-loss-threshold** statement is not specified, continuity check messages transmit this TLV only when a unified ISSU is in progress. The Junos OS provides this configuration at the continuity-check level. By default, continuity check messages do not include the loss threshold TLV.

To configure the convey loss threshold, use the **convey-loss-threshold** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *identifier* maintenance-association *identifier* continuity-check]** hierarchy level.

For the remote MEP, the loss threshold TLV is transmitted only during the unified ISSU if the **convey-loss-threshold** statement is not configured. The remote MEP switches back to the default loss threshold if no loss threshold TLV is received or the TLV has a default threshold value of 3.

An example of the configuration statements follows:

```
protocols {
  oam {
    ethernet {
      connectivity-fault-management {
```

```

maintenance-domain identifier {
  level number;
  maintenance-association identifier {
    continuity-check {
      convey-loss-threshold;
      interval number;
      loss-threshold number;
      hold-interval number;
    }
  }
}

```

The Junos OS saves the last received loss threshold TLV from the remote MEP. You can display the last saved loss threshold TLV that is received by the remote MEP, using the **show oam ethernet connectivity-fault-management mep-database maintenance-domain *identifier* maintenance-association *identifier* local-mep *identifier* remote-mep *identifier*** command, as in the following example:

```

user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md3 maintenance-association ma5 local-mep 2 remote-mep 1
Maintenance domain name: md3, Format: string, Level: 3
Maintenance association name: ma3, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 2, Direction: up, MAC address: 00:19:e2:b0:76:be
Auto-discovery: enabled, Priority: 0
Interface status TLV: none, Port status TLV: none
Connection Protection TLV: yes
  Prefer me: no, Protection in use: no, FRR Flag: no
Interface name: xe-4/1/1.0, Interface status: Active, Link status: Up
Loss Threshold TLV:
  Loss Threshold: 3 , Flag: 0x0

Remote MEP identifier: 1, State: ok
MAC address: 00:1f:12:b7:ce:79, Type: Learned
Interface: xe-4/1/1.0
Last flapped: Never
Continuity: 100%, Admin-enable duration: 45sec, Oper-down duration: 0sec
Effective loss threshold: 3 frames
Remote defect indication: false
Port status TLV: none
Interface status TLV: none
Connection Protection TLV:
  Prefer me: no, Protection in use: no, FRR Flag: no
Loss Threshold TLV:  #Displays last received value
  Loss Threshold: 3 , Flag: 0x0

```

The Junos OS saves the last transmitted loss threshold TLV from a local MEP. You can display the last transmitted loss threshold TLV and the effective loss (operational) threshold for the remote MEP, using the **show oam ethernet connectivity-fault-management mep-database maintenance-domain *identifier* maintenance-association *identifier* local-mep *identifier* remote-mep *identifier*** command, as in the following example:

```

user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md3 maintenance-association ma5 local-mep 2 remote-mep 1

```



```

Maintenance domain name: md3, Format: string, Level: 3
Maintenance association name: ma3, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 2, Direction: up, MAC address: 00:19:e2:b0:76:be
Auto-discovery: enabled, Priority: 0
Interface status TLV: none, Port status TLV: none
Connection Protection TLV: yes
  Prefer me: no, Protection in use: no, FRR Flag: no
Interface name: xe-4/1/1.0, Interface status: Active, Link status: Up
Loss Threshold TLV:  #Displays last transmitted value
  Loss Threshold: 3 , Flag: 0x0

Remote MEP identifier: 1, State: ok
MAC address: 00:1f:12:b7:ce:79, Type: Learned
Interface: xe-4/1/1.0
Last flapped: Never
Continuity: 100%, Admin-enable duration: 45sec, Oper-down duration: 0sec
Effective loss threshold: 3 frames  #Displays operational threshold
Remote defect indication: falsePort status TLV: none
Interface status TLV: none
Connection Protection TLV:
  Prefer me: no, Protection in use: no, FRR Flag: no
Loss Threshold TLV:
  Loss Threshold: 3 , Flag: 0x0

```

- Related Documentation**
- [Example: Configuring Ethernet CFM over VPLS on page 61](#)
  - [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)

## Configuring CCM for Better Scalability

This topic describes how to configure CCM for better scalability. Junos OS provides enhancements to trigger faster protection-switching and convergence in the event of failures in Ethernet domains for Carrier Ethernet services. These enhancements can be used when CE devices in the Ethernet domain detect faster service failures and propagates the information in the interface-status TLV of the continuity-check messages (CCMs). When CCMs are received, PE devices can perform certain actions which facilitates faster protection-switching and convergence.

- [Configuring Faster Protection Switching on page 57](#)
- [Configuring Faster Convergence on page 59](#)
- [Configuring a Primary VLAN ID on page 60](#)
- [Configuring a Remote Maintenance Association on page 60](#)

## Configuring Faster Protection Switching

You can apply an action profile to provide faster protection switching for point-to-point network topologies with local switching configured. In a normal state, CCM sessions are configured on the working and protect interfaces. The CCM packets transmitted contain an interface-status TLV with the value up on the working interface and value down on the protect interface. When a link fails on the working interface, the protect interface starts receiving the interface-status TLV as up. With the profile configuration, if the

interface-status TLV received on the protect interface is up, the working interface is automatically marked as **interface-down**.

To configure the **interface-status-tlv** down event, include the **interface-status-tlv down** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

To configure **interface-down** as the action profile's action, include the **interface-down** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* action]** hierarchy level.

To configure **interface-down *peer-interface*** as the clear-action, include **interface-down *peer-interface*** at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* clear-action]** hierarchy level.

```
[edit protocols oam]
ethernet {
  connectivity-fault-management {
    action-profile p1 {
      event {
        interface-status-tlv down;
      }
      action {
        interface-down;
      }
      clear-action {
        interface-down peer-interface;
      }
    }
  }
}
```

In this action profile configuration, when the interface-status TLV is received as up, the *peer-interface* is marked as down.

The *peer-interface* is configured in the **protect-maintenance-association** statement. Consider the following example using the **protect-maintenance-association** statement in the configuration:

```
[edit protocols oam]
ethernet {
  connectivity-fault-management {
    action-profile p1 {
      event {
        adjacency-loss;
      }
      action {
        interface-down;
      }
      clear-action {
        interface-down peer-interface;
      }
    }
  }
  maintenance-domain nsn {
    level 5;
  }
}
```

```

maintenance-association ma1 {
  protect-maintenance-association ma2;
  continuity-check {
    interval 100ms;
    connection-protection-tlv;
  }
  mep 100 {
    interface ge-1/1/0.0;
    direction down;
    auto-discovery;
  }
}
maintenance-association ma2 {
  continuity-check {
    interval 100ms;
    connection-protection-tlv;
  }
  mep 101 {
    interface ge-1/2/0.0;
    direction down;
    auto-discovery;
  }
  remote-mep 100
  action-profile p1;
}
}
}

```

## Configuring Faster Convergence

You can apply an action profile to provide faster convergence for dual-homed multipoint-to-multipoint network topologies. If a multipoint-to-multipoint Ethernet service uses MAC-based forwarding and stale MAC addresses exist in the learning tables, this can result in traffic black holes in the network where incoming traffic is silently discarded, without informing the source that the data did not reach its intended recipient. With the profile configuration, if the interface-status TLV received on the protect interface is up, then the interface-status TLV on the working interface is marked as down and the PE device for the protect interface propagates a remote MAC-flush message to the PE devices in the virtual private LAN service (VPLS) by using TLDP-MAC-FLUSH. The MAC flush avoids traffic blackholing due to stale mac-db entries.

To configure the **interface-status-tlv** down event, include the **interface-status-tlv down** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* event]** hierarchy level.

To configure **propagate-remote-flush** as the action profile's action, include the **propagate-remote-flush** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* action]** hierarchy level.

To configure **propagate-remote-flush** as the clear-action, include the **propagate-remote-flush** statement at the **[edit protocols oam ethernet connectivity-fault-management action-profile *profile-name* clear-action]** hierarchy level.

```
[edit protocols oam]
ethernet {
  connectivity-fault-management {
    action-profile test {
      event {
        interface-status-tlv down;
      }
      action {
        propagate-remote-mac-flush;
      }
      clear-action {
        propagate-remote-mac-flush;
      }
    }
  }
}
```

In this action profile configuration, when the incoming CCM packet contains the interface-status TLV with value down, the **propagate-remote-mac-flush** action is triggered for the action-profile.

## Configuring a Primary VLAN ID

You can assign a primary virtual LAN (VLAN) ID in the maintenance association for increased flexibility in the number of tags. When a **vlan-range** or **vlan-id-list** is configured on an interface, the service OAM must run on one of the VLANs. The VLAN assigned for service monitoring is considered the primary VLAN. If a **primary-vid** is not configured, Junos OS assigns the first VLAN from the **vlan-range** or **vlan-id-list**. In earlier releases, Junos OS assigned VLAN 4095.

To configure a primary VLAN ID, you can specify the **primary-vid** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name*]** hierarchy level:

```
[edit protocols oam ethernet connectivity-fault-management]
maintenance domain md3 {
  level 3;
  maintenance-association ma3 {
    primary-vid 2000;
    continuity-check {
      interval 10ms;
      connection-protection-tlv;
    }
    mep 2 {
      interface ge-2/2/0.0;
      direction up;
      auto-discovery;
    }
  }
}
```

## Configuring a Remote Maintenance Association

You can configure a maintenance association to accept a different maintenance association identifier (ID) from a neighbor by including a **remote-maintenance-association**

statement. The 802.1ag CCM sessions expect the same maintenance association identifier from its neighbors. If there is a maintenance association identifier mismatch, the PDUs are marked as error PDUs. If a **remote-maintenance-association** statement is configured, a different maintenance association identifier is accepted and the 802.1ag CCM sessions do not mark the CCM PDUs as error PDUs when the maintenance-association name is the same as the name specified in the **remote-maintenance-association** statement.

To configure a remote maintenance association, include the **remote-maintenance-association** statement at the **[edit protocols oam ethernet connectivity-fault-management maintenance-domain *domain-name* maintenance-association *ma-name*]** hierarchy level:

```
[edit protocols oam ethernet connectivity-fault-management]
maintenance domain md3 {
  level 1;
  maintenance-association ma3 {
    remote-maintenance-association fix-ma;
    continuity-check {
      interval 10ms;
      connection-protection-tlv;
    }
    mep 2 {
      interface ge-2/2/0.0;
      direction up;
      auto-discovery;
    }
  }
}
```

Using this configuration, interoperability is improved for CCMs with low-end CE devices supporting fixed maintenance association identifier configurations.

## Example: Configuring Ethernet CFM over VPLS


In this example, both the customer and service provider are running Ethernet CFM over a VPLS and a multiprotocol label switching (MPLS) network. The network is shown in [Figure 8 on page 62](#). The customer has configured Ethernet CFM on MX Series routers L2-CE1 and L2-CE2. The service provider has configured Ethernet CFM on MX Series routers PE1, P, and PE2.



**NOTE:** The configurations in this example are only partial examples of complete and functional router configurations. Do not copy these configurations and use them directly on an actual system.

The service provider is using CFM level 5 and the customer is using CFM level 7. The boundaries are marked with “up mep” and “down mep” CFM terminology in the figure.

Figure 8: Ethernet OAM with VPLS

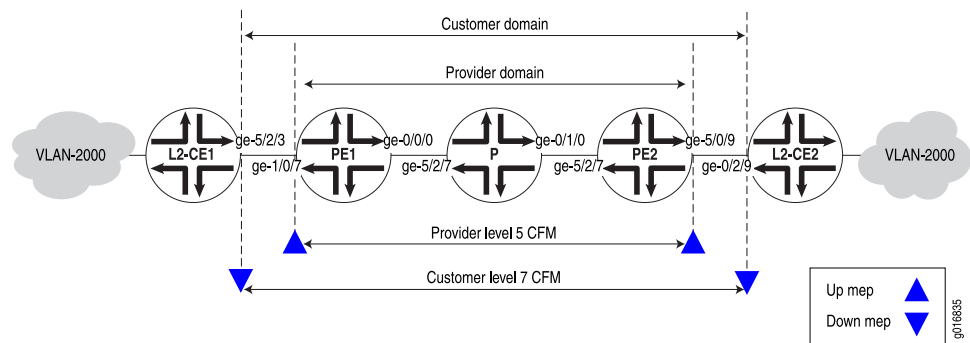

The following are the configurations of the VPLS and CFM on the service provider routers.

#### Configuration of PE1

```
[edit chassis]
fpc 5 {
  pic 0 {
    tunnel-services {
      bandwidth 1g;
    }
  }
}

[edit interfaces]
ge-1/0/7 {
  encapsulation flexible-ethernet-services;
  vlan-tagging;
  unit 1 {
    encapsulation vlan-vpls;
    vlan-id 2000;
  }
}
ge-0/0/0 {
  unit 0 {
    family inet {
      address 10.200.1.1/24;
    }
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.255.168.231/32 {
        primary;
      }
      address 127.0.0.1/32;
    }
  }
}

[edit routing-instances]
vpls-vlan2000 {
```

```

instance-type vpls;
vlan-id 2000;
interface ge-1/0/7.1;
route-distinguisher 10.255.168.231:2000;
vrf-target target:1000:1;
protocols {
  vpls {
    site-range 10;
    site vlan2000-PE1 {
      site-identifier 2;
    }
  }
}

[edit protocols]
rsvp {
  interface ge-0/0/0.0;
}
mpls {
  label-switched-path PE1-to-PE2 {
    to 10.100.1.1;
  }
  interface ge-0/0/0.0;
}
bgp {
  group PE1-to-PE2 {
    type internal;
    local-address 10.200.1.1;
    family l2vpn {
      signaling;
    }
    local-as 65000;
    neighbor 10.100.1.1;
  }
}
ospf {
  traffic-engineering;
  reference-bandwidth 4g;
  area 0.0.0.0 {
    interface all;
    interface fxp0.0 {
      disable;
    }
    interface ge-0/0/0.0;
  }
}
oam {
  ethernet {
    connectivity-fault-management {
      maintenance-domain customer-site1 {
        level 5;
        maintenance-association customer-site1 {
          continuity-check {
            interval 1s;
          }
        }
      }
    }
  }
}

```

```
    }
    mep 100 {
        interface ge-1/0/7.1;
        direction up;
        auto-discovery;
    }
}
}
```

**Configuration of PE2**

```
[edit chassis]
fpc 5 {
    pic 0 {
        tunnel-services {
            bandwidth 1g;
        }
    }
}

[edit interfaces]
ge-5/0/9 {
    vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 1 {
        encapsulation vlan-vpls;
        vlan-id 2000;
    }
}
ge-5/2/7 {
    unit 0 {
        family inet {
            address 10.100.1.1/24;
        }
        family mpls;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.255.168.230/32 {
                primary;
            }
            address 127.0.0.1/32;
        }
    }
}

[edit routing-instances]
vpls-vlan2000 {
    instance-type vpls;
    vlan-id 2000;
    interface ge-5/0/9.1;
    route-distinguisher 10.255.168.230:2000;
```



```

vrf-target target:1000:1;
protocols {
  vpls {
    site-range 10;
    site vlan2000-PE2 {
      site-identifier 1;
    }
  }
}

[edit protocols]
rsvp {
  interface ge-5/2/7.0;
}
mpls {
  label-switched-path PE2-to-PE1 {
    to 10.200.1.1;
  }
  interface ge-5/2/7.0;
}
bgp {
  group PE2-to-PE1 {
    type internal;
    local-address 10.100.1.1;
    family l2vpn {
      signaling;
    }
    local-as 65000;
    neighbor 10.200.1.1;
  }
}
ospf {
  traffic-engineering;
  reference-bandwidth 4g;
  area 0.0.0.0 {
    interface all;
    interface fxp0.0 {
      disable;
    }
    interface ge-5/2/7.0;
  }
}
oam {
  ethernet {
    connectivity-fault-management {
      maintenance-domain customer-site1 {
        level 5;
        maintenance-association customer-site1 {
          continuity-check {
            interval 1s;
          }
        }
        mep 200 {
          interface ge-5/0/9.1;
          direction up;
        }
      }
    }
  }
}

```

```
        auto-discovery;
    }
}
}
}
```

**Configuration of P  
router**

MPLS only, no CFM needed:

```
[edit]
interfaces {
  ge-5/2/7 {
    # Connected to PE1
    unit 0 {
      family inet {
        address 10.200.1.10/24;
      }
      family mpls;
    }
  }
  ge-0/1/0 {
    # Connected to PE2
    unit 0 {
      family inet {
        address 10.100.1.10/24;
      }
      family mpls;
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.255.168.240/32;
      }
    }
  }
}

[edit]
protocols {
  rsvp {
    interface ge-0/1/0.0;
    interface ge-5/2/7.0;
  }
  mpls {
    interface ge-0/1/0.0;
    interface ge-5/2/7.0;
  }
  ospf {
    traffic-engineering;
    reference-bandwidth 4g;
    area 0.0.0.0 {
      interface all;
      interface fxp0.0 {
```

```

        disable;
    }
    interface ge-0/1/0.0;
    interface ge-5/2/7.0;
}
}
}

```

**CFM on L2-CE1** Here is the configuration of CFM on L2-E1:

```

[edit interfaces]
ge-5/2/3 {
  vlan-tagging;
  unit 0 {
    vlan-id 2000;
  }
}

[edit protocols oam]
ethernet {
  connectivity-fault-management {
    maintenance-domain customer {
      level 7;
      maintenance-association customer-site1 {
        continuity-check {
          interval 1s;
        }
        mep 800 {
          interface ge-5/2/3.0;
          direction down;
          auto-discovery;
        }
      }
    }
  }
}
}
}

```

**CFM on L2-CE2** Here is the configuration of CFM L2-CE2:

```

[edit interfaces]
ge-0/2/9 {
  vlan-tagging;
  unit 0 {
    vlan-id 2000;
  }
}

[edit protocols oam]
ethernet {
  connectivity-fault-management {
    maintenance-domain customer {
      level 7;
      maintenance-association customer-site1 {
        continuity-check {
          interval 1s;
        }
      }
    }
  }
}

```

```
    }  
    mep 700 {  
        interface ge-0/2/9.0;  
        direction down;  
        auto-discovery;  
    }  
}  
}  
}
```

- Related Documentation**
- Ethernet OAM
  - Ethernet Operations, Administration, and Maintenance
  - Ethernet OAM Connectivity Fault Management
  - Example: Configuring Ethernet CFM on Bridge Connections
  - Example: Configuring Ethernet CFM on Physical Interfaces

## CHAPTER 3

# Network Interfaces Configuration Statements and Hierarchy

- [edit interfaces] Hierarchy Level on page 69
- [edit logical-systems] Hierarchy Level on page 85
- [edit protocols oam] Hierarchy Level on page 89

### [edit interfaces] Hierarchy Level

---

The statements at the [edit interfaces *interface-name* unit *logical-unit-number*] hierarchy level can also be configured at the [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*] hierarchy level.



**NOTE:** The accounting-profile statement is an exception to this rule. The accounting-profile statement can be configured at the [edit interfaces *interface-name* unit *logical-unit-number*] hierarchy level, but it cannot be configured at the [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*] hierarchy level.

```
interfaces {
  traceoptions {
    file filename <files number> <match regular-expression> <size size> <world-readable |
      no-world-readable> ;
    flag flag <disable>;
  }
  interface-name {
    accounting-profile name;
    aggregated-ether-options {
      (flow-control | no-flow-control);
      lacp {
        (active | passive);
        link-protection {
          disable;
        }
        (revertive | non-revertive);
        periodic interval;
        system-priority priority;
      }
    }
    link-protection;
```

```
link-speed speed;  
(loopback | no-loopback);  
mc-ae {  
    chassis-id chassis-id;  
    mc-ae-id mc-ae-id;  
    mode (active-active | active-standby);  
    redundancy-group group-id;  
    status-control (active | standby);  
}  
minimum-links number;  
source-address-filter {  
    mac-address;  
}  
(source-filtering | no-source-filtering);  
}  
aggregated-sonet-options {  
    link-speed speed | mixed;  
    minimum-links number;  
}  
atm-options {  
    cell-bundle-size cells;  
    ilmi;  
    linear-red-profiles profile-name {  
        high-plp-max-threshold percent;  
        low-plp-max-threshold percent;  
        queue-depth cells high-plp-threshold percent low-plp-threshold percent;  
    }  
}  
mpls {  
    pop-all-labels {  
        required-depth number;  
    }  
}  
pic-type (atm1 | atm2);  
plp-to-clp;  
promiscuous-mode {  
    vpi vpi-identifier;  
}  
scheduler-maps map-name {  
    forwarding-class class-name {  
        epd-threshold cells plp1 cells;  
        linear-red-profile profile-name;  
        priority (high | low);  
        transmit-weight (cells number | percent number);  
    }  
    vc-cos-mode (alternate | strict);  
}  
use-null-cw;  
vpi vpi-identifier {  
    maximum-vcs maximum-vcs;  
    oam-liveness {  
        down-count cells;  
        up-count cells;  
    }  
    oam-period (seconds | disable);  
    shaping {
```

```

        (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate
        burst length);
        queue-length number;
    }
}
clocking clock-source;
data-input (system | interface interface-name);
dce;
serial-options {
    clock-rate rate;
    clocking-mode (dce | internal | loop);
    control-polarity (negative | positive);
    cts-polarity (negative | positive);
    dcd-polarity (negative | positive);
    dce-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
        indication (ignore | normal | require);
        rts (assert | de-assert | normal);
        tm (ignore | normal | require);
    }
    dsr-polarity (negative | positive);
    dte-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
        indication (ignore | normal | require);
        rts (assert | de-assert | normal);
        tm (ignore | normal | require);
    }
    dtr-circuit (balanced | unbalanced);
    dtr-polarity (negative | positive);
    encoding (nrz | nrzi);
    indication-polarity (negative | positive);
    line-protocol protocol;
    loopback mode;
    rts-polarity (negative | positive);
    tm-polarity (negative | positive);
    transmit-clock invert;
}
description text;
dialer-options {
    pool pool-name <priority priority>;
}
disable;
dsO-options {
    bert-algorithm algorithm;
    bert-error-rate rate;

```

```
bert-period seconds;  
byte-encoding (nx56 | nx64);  
fcs (16 | 32);  
idle-cycle-flag (flags | ones);  
invert-data;  
loopback payload;  
start-end-flag (filler | shared);  
}  
e1-options {  
    bert-error-rate rate;  
    bert-period seconds;  
    fcs (16 | 32);  
    framing (g704 | g704-no-crc4 | unframed);  
    idle-cycle-flag (flags | ones);  
    invert-data;  
    loopback (local | remote);  
    start-end-flag (filler | shared);  
    timeslots time-slot-range;  
}  
e3-options {  
    atm-encapsulation (direct | plcp);  
    bert-algorithm algorithm;  
    bert-error-rate rate;  
    bert-period seconds;  
    framing feet;  
    compatibility-mode (digital-link | kentrox | larscom) <subrate value>;  
    fcs (16 | 32);  
    framing (g.751 | g.832);  
    idle-cycle-flag (filler | shared);  
    invert-data;  
    loopback (local | remote);  
    (payload-scrambler | no-payload-scrambler);  
    start-end-flag (filler | shared);  
    (unframed | no-unframed);  
}  
encapsulation type;  
es-options {  
    backup-interface es-fpc/pic/port;  
}  
fastether-options {  
    802.3ad aex;  
    (flow-control | no-flow-control);  
    ignore-l3-incompletes;  
    ingress-rate-limit rate;  
    (loopback | no-loopback);  
    mpls {  
        pop-all-labels {  
            required-depth number;  
        }  
    }  
    source-address-filter {  
        mac-address;  
    }  
    (source-filtering | no-source-filtering);  
}  
flexible-vlan-tagging;
```



```

gigether-options {
  802.3ad aex;
  (asynchronous-notification | no-asynchronous-notification);
  (auto-negotiation | no-auto-negotiation) remote-fault <local-interface-online |
    local-interface-offline>;
  auto-reconnect seconds;
  (flow-control | no-flow-control);
  ignore-l3-incompletes;
  (loopback | no-loopback);
  mpls {
    pop-all-labels {
      required-depth number;
    }
  }
  no-auto-mdix;
  source-address-filter {
    mac-address;
  }
  (source-filtering | no-source-filtering);
  ethernet-switch-profile {
    (mac-learn-enable | no-mac-learn-enable);
    tag-protocol-id [ tpids ];
    ethernet-policer-profile {
      input-priority-map {
        ieee802.1p premium [ values ];
      }
      output-priority-map {
        classifier {
          premium {
            forwarding-class class-name {
              loss-priority (high | low);
            }
          }
        }
      }
    }
    policer cos-policer-name {
      aggregate {
        bandwidth-limit bps;
        burst-size-limit bytes;
      }
      premium {
        bandwidth-limit bps;
        burst-size-limit bytes;
      }
    }
  }
}
(gratuitous-arp-reply | no-gratuitous-arp-reply);
hold-time up milliseconds down milliseconds;
ima-group-options {
  differential-delay number;
  frame-length (32 | 64 | 128 | 256);
  frame-synchronization {
    alpha number;
    beta number;
  }
}

```

```

        gamma number;
    }
    minimum-links number;
    symmetry (symmetrical-config-and-operation |
        symmetrical-config-asymmetrical-operation);
    test-procedure {
        ima-test-start;
        ima-test-stop;
        interface name;
        pattern number;
        period number;
    }
    transmit-clock (common | independent);
    version (1.0 | 1.1);
}
ima-link-options group-id group-id;
interface-set interface-set-name {
    interface ethernet-interface-name {
        (unit unit-number | vlan-tags-outer vlan-tag);
    }
    interface interface-name {
        (unit unit-number);
    }
}
isdn-options {
    bchannel-allocation (ascending | descending);
    calling-number number;
    pool pool-name <priority priority>;
    spid1 spid-string;
    spid2 spid-string;
    static-tei-val value;
    switch-type (att5e | etsi | ni1 | ntdms100 | ntt);
    t310 seconds;
    tei-option (first-call | power-up);
}
keepalives <down-count number> <interval seconds> <up-count number>;
link-mode mode;
lmi {
    lmi-type (ansi | itu | c-lmi);
    n391dte number;
    n392dce number;
    n392dte number;
    n393dce number;
    n393dte number;
    t391dte seconds;
    t392dce seconds;
}
lsq-failure-options {
    no-termination-request;
    [ trigger-link-failure interface-name ];
}
mac mac-address;
mlfr-uni-nni-bundle-options {
    acknowledge-retries number;
    acknowledge-timer milliseconds;
    action-red-differential-delay (disable-tx | remove-link);
}

```

```

drop-timeout milliseconds;
fragment-threshold bytes;
cisco-interoperability send-lip-remove-link-for-link-reject;
hello-timer milliseconds;
link-layer-overhead percent;
lmi-type (ansi | itu | c-lmi);
minimum-links number;
mrru bytes;
n391 number;
n392 number;
n393 number;
red-differential-delay milliseconds;
t391 seconds;
t392 seconds;
yellow-differential-delay milliseconds;
}
modem-options {
    dialin (console | routable);
    init-command-string initialization-command-string;
}
mtu bytes;
multi-chassis-protection {
    peer a.b.c.d {
        interface interface-name;
    }
}
multiservice-options {
    (core-dump | no-core-dump);
    (syslog | no-syslog);
}
native-vlan-id number;
no-gratuitous-arp-request;
no-keepalives;
no-partition {
    interface-type type;
}
no-vpivci-swapping;
otn-options {
    fec (efec | gfec | none);
    (laser-enable | no-laser-enable);
    (line-loopback | no-line-loopback);
    pass-thru;
    rate (fixed-stuff-bytes | no-fixed-stuff-bytes | pass-thru);
    transmit-payload-type number;
    trigger (oc-lof | oc-lom | oc-los | oc-wavelength-lock | odu-ais | odu-bbe-th | odu-bdi
        | odu-es-th | odu-lck | odu-oci | odu-sd | odu-ses-th | odu-ttim | odu-uas-th |
        opu-ptm | otu-ais | otu-bbe-th | otu-bdi | otu-es-th | otu-fec-deg | otu-fec-exe |
        otu-iae | otu-sd | otu-ses-th | otu-ttim | otu-uas-th);
    tti;
}
optics-options {
    wavelength nm;
    alarm alarm-name {
        (syslog | link-down);
    }
    warning warning-name {

```

```
        (syslog | link-down);
    }
}
partition partition-number oc-slice oc-slice-range interface-type type;
timeslots time-slot-range;
passive-monitor-mode;
per-unit-scheduler;
ppp-options {
    chap {
        access-profile name;
        default-chap-secret name;
        local-name name;
        passive;
    }
    compression {
        acfc;
        pfc;
    }
    dynamic-profile profile-name;
    no-termination-request;
    pap {
        access-profile name;
        local-name name;
        local-password password;
        compression;
    }
}
psn-vcip psn-vci-identifier;
psn-vpip psn-vpi-identifier;
receive-bucket {
    overflow (discard | tag);
    rate percentage;
    threshold bytes;
}
redundancy-options {
    priority sp-fpc/pic/port;
    secondary sp-fpc/pic/port;
    hot-standby;
}
satop-options {
    payload-size n;
}
schedulers number;
serial-options {
    clock-rate rate;
    clocking-mode (dce | internal | loop);
    control-polarity (negative | positive);
    cts-polarity (negative | positive);
    dcd-polarity (negative | positive);
    dce-options {
        control-signal (assert | de-assert | normal);
        cts (ignore | normal | require);
        dcd (ignore | normal | require);
        dsr (ignore | normal | require);
        dtr signal-handling-option;
        ignore-all;
    }
}
```

```

    indication (ignore | normal | require);
    rts (assert | de-assert | normal);
    tm (ignore | normal | require);
}
dsr-polarity (negative | positive);
dte-options {
    control-signal (assert | de-assert | normal);
    cts (ignore | normal | require);
    dcd (ignore | normal | require);
    dsr (ignore | normal | require);
    dtr signal-handling-option;
    ignore-all;
    indication (ignore | normal | require);
    rts (assert | de-assert | normal);
    tm (ignore | normal | require);
}
dtr-circuit (balanced | unbalanced);
dtr-polarity (negative | positive);
encoding (nrz | nrzi);
indication-polarity (negative | positive);
line-protocol protocol;
loopback mode;
rts-polarity (negative | positive);
tm-polarity (negative | positive);
transmit-clock invert;
}
services-options {
    inactivity-timeout seconds;
    open-timeout seconds;
    session-limit {
        maximum number;
        rate new-sessions-per-second;
    }
    syslog {
        host hostname {
            facility-override facility-name;
            log-prefix prefix-number;
            services priority-level;
        }
    }
}
shdsl-options {
    annex (annex-a | annex-b);
    line-rate line-rate;
    loopback (local | remote);
    snr-margin {
        current margin;
        snext margin;
    }
}
sonet-options {
    aggregate asx;
    aps {
        advertise-interval milliseconds;
        annex-b;
        authentication-key key;
    }
}

```

```

fast-aps-switch;
force;
hold-time milliseconds;
lockout;
neighbor address;
paired-group group-name;
preserve-interface;
protect-circuit group-name;
request;
revert-time seconds;
switching-mode (bidirectional | unidirectional);
working-circuit group-name;
}
bytes {
  c2 value;
  e1-quiet value;
  f1 value;
  f2 value;
  s1 value;
  z3 value;
  z4 value;
}
fcs (16 | 32);
loopback (local | remote);
mpls {
  pop-all-labels {
    required-depth number;
  }
}
path-trace trace-string;
(payload-scrambler | no-payload-scrambler);
rfc-2615;
trigger {
  defect ignore;
  hold-time up milliseconds down milliseconds;
}
vtmapping (itu-t | klm);
(z0-increment | no-z0-increment);
}
speed (10m | 100m | 1g | oc3 | oc12 | oc48);
stacked-vlan-tagging;
switch-options {
  switch-port port-number {
    (auto-negotiation | no-auto-negotiation);
    speed (10m | 100m | 1g);
    link-mode (full-duplex | half-duplex);
  }
}
t1-options {
  bert-algorithm algorithm;
  bert-error-rate rate;
  bert-period seconds;
  buildout value;
  byte-encoding (nx56 | nx64);
  crc-major-alarm-threshold (1e-3 | 5e-4 | 1e-4 | 5e-5 | 1e-5);
  crc-minor-alarm-threshold (1e-3 | 5e-4 | 1e-4 | 5e-5 | 1e-5 | 5e-6 | 1e-6);
}

```

```

fcs (16 | 32);
framing (esf | sf);
idle-cycle-flag (flags | ones);
invert-data;
line-encoding (ami | b8zs);
loopback (local | payload | remote);
remote-loopback-respond;
start-end-flag (filler | shared);
timeslots time-slot-range;
}
t3-options {
  atm-encapsulation (direct | plcp);
  bert-algorithm algorithm;
  bert-error-rate rate;
  bert-period seconds;
  buildout feet;
  (cbit-parity | no-cbit-parity);
  compatibility-mode (adtran | digital-link | kentrox | larscom | verilink) <subrate
    value>;
  fcs (16 | 32);
  (feac-loop-respond | no-feac-loop-respond);
  idle-cycle-flag value;
  (long-buildout | no-long-buildout);
  (loop-timing | no-loop-timing);
  loopback (local | payload | remote);
  (mac | no-mac);
  (payload-scrambler | no-payload-scrambler);
  start-end-flag (filler | shared);
}
traceoptions {
  flag flag <flag-modifier> <disable>;
}
transmit-bucket {
  overflow discard;
  rate percentage;
  threshold bytes;
}
(traps | no-traps);
unidirectional;
vlan-tagging;
vlan-vci-tagging;
unit logical-unit-number {
  accept-source-mac {
    mac-address mac-address {
      policer {
        input cos-policer-name;
        output cos-policer-name;
      }
    }
  }
}
accounting-profile name;
advisory-options {
  downstream-rate rate;
  upstream-rate rate;
}
allow-any-vci;

```

```
atm-scheduler-map (map-name | default);
backup-options {
    interface interface-name;
}
bandwidth rate;
cell-bundle-size cells;
clear-dont-fragment-bit;
compression {
    rtp {
        f-max-period number;
        maximum-contexts number <force>;
        queues [ queue-numbers ];
        port {
            minimum port-number;
            maximum port-number;
        }
    }
}
compression-device interface-name;
copy-tos-to-outer-ip-header;
demux-destination family;
demux-source family;
demux-options {
    underlying-interface interface-name;
}
description text;
interface {
    l2tp-interface-id name;
    (dedicated | shared);
}
dialer-options {
    activation-delay seconds;
    callback;
    callback-wait-period time;
    deactivation-delay seconds;
    dial-string [ dial-string-numbers ];
    idle-timeout seconds;
    incoming-map {
        caller (caller-id | accept-all);
        initial-route-check seconds;
        load-interval seconds;
        load-threshold percent;
        pool pool-name;
        redial-delay time;
        watch-list {
            [ routes ];
        }
    }
}
disable;
disable-mlppp-inner-ppp-pfc;
dlci dlci-identifier;
drop-timeout milliseconds;
dynamic-call-admission-control {
    activation-priority priority;
    bearer-bandwidth-limit kilobits-per-second;
```



```

}
encapsulation type;
epd-threshold cells plp1 cells;
fragment-threshold bytes;
inner-vlan-id-range start start-id end end-id;
input-vlan-map {
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-push | swap-swap);
    inner-tag-protocol-id tpid;
    inner-vlan-id number;
    tag-protocol-id tpid;
    vlan-id number;
}
interleave-fragments;
inverse-arp;
layer2-policer {
    input-policer policer-name;
    input-three-color policer-name;
    output-policer policer-name;
    output-three-color policer-name;
}
link-layer-overhead percent;
minimum-links number;
mrru bytes;
multicast-dlci dlci-identifier;
multicast-vci vpi-identifier.vci-identifier;
multilink-max-classes number;
multipoint;
oam-liveness {
    down-count cells;
    up-count cells;
}
oam-period (seconds | disable);
output-vlan-map {
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-push | swap-swap);
    inner-tag-protocol-id tpid;
    inner-vlan-id number;
    tag-protocol-id tpid;
    vlan-id number;
}
passive-monitor-mode;
peer-unit unit-number;
plp-to-clp;
point-to-point;
ppp-options {
    chap {
        access-profile name;
        default-chap-secret name;
        local-name name;
        passive;
    }
    compression {
        acfc;
        pfc;
        pap;
        default-pap-password password;
        local-name name;
    }
}

```

```

        local-password password;
        passive;
    }
    dynamic-profile profile-name;
    lcp-max-conf-req number;
    lcp-restart-timer milliseconds;
    loopback-clear-timer seconds;
    ncp-max-conf-req number;
    ncp-restart-timer milliseconds;
}
pppoe-options {
    access-concentrator name;
    auto-reconnect seconds;
    (client | server);
    service-name name;
    underlying-interface interface-name;
}
proxy-arp;
service-domain (inside | outside);
shaping {
    (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate
    burst length);
    queue-length number;
}
short-sequence;
transmit-weight number;
(traps | no-traps);
trunk-bandwidth rate;
trunk-id number;
tunnel {
    backup-destination address;
    destination address;
    key number;
    routing-instance {
        destination routing-instance-name;
    }
    source source-address;
    ttl number;
}
vci vpi-identifier.vci-identifier;
vci-range start start-vci end end-vci;
vpi vpi-identifier;
vlan-id number;
vlan-id-list [vlan-id vlan-id-vlan-id];
vlan-id-range number-number;
vlan-tags inner tpid.vlan-id outer tpid.vlan-id;
vlan-tags-outer tpid.vlan-id inner-list [vlan-id vlan-id-vlan-id];
family family {
    accounting {
        destination-class-usage;
        source-class-usage {
            direction;
        }
    }
}
access-concentrator name;
address address {

```

```

    destination address;
}
bundle ml-fpc/pic/port | ls-fpc/pic/port);
duplicate-protection;
dynamic-profile profile-name;
filter {
    group filter-group-number;
    input filter-name;
    input-list {
        [ filter-names ];
        output filter-name;
    }
    output-list {
        [ filter-names ];
    }
}
ipsec-sa sa-name;
keep-address-and-control;
max-sessions number;
max-sessions-vs-a-ignore;
mtu bytes;
multicast-only;
negotiate-address;
no-redirects;
policer {
    arp policer-template-name;
    input policer-template-name;
    output policer-template-name;
}
primary;
proxy inet-address address;
receive-options-packets;
receive-ttl-exceeded;
remote (inet-address address | mac-address address);
rpf-check {
    fail-filter filter-name;
    mode loose;
}
sampling {
    direction;
}
service {
    input {
        service-set service-set-name <service-filter filter-name>;
        post-service-filter filter-name;
    }
    output {
        service-set service-set-names <service-filter filter-name>;
    }
}
service-name-table table-name;
short-cycle-protection <lockout-time-min minimum-seconds lockout-time-max
    maximum-seconds>;
targeted-broadcast {
    forward-and-send-to-re;
    forward-only;
}

```

```

}
(translate-discard-eligible | no-translate-discard-eligible);
(translate-fecn-and-becn | no-translate-fecn-and-becn);
translate-plp-control-word-de;
unnumbered-address interface-name <destination address destination-profile
  profile-name | preferred-source-address address>;
address address {
  arp ip-address (mac | multicast-mac) mac-address <publish>;
  broadcast address;
  destination address;
  destination-profile name;
  eui-64;
  multipoint-destination address (dlci dlci-identifier | vci vci-identifier);
  multipoint-destination address {
    epd-threshold cells plp1 cells;
    inverse-arp;
    oam-liveness {
      up-count cells;
      down-count cells;
    }
    oam-period (seconds | disable);
    shaping {
      (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained
        rate burst length);
      queue-length number;
    }
    vci vpi-identifier.vci-identifier;
  }
  preferred;
  primary;
  (vrrp-group | vrrp-inet6-group) group-number {
    (accept-data | no-accept-data);
    advertise-interval seconds;
    authentication-type authentication;
    authentication-key key;
    fast-interval milliseconds;
    (preempt | no-preempt) {
      hold-time seconds;
    }
    priority-number number;
    track {
      priority-cost seconds;
      priority-hold-time interface-name {
        bandwidth-threshold bits-per-second {
          priority;
        }
        interface priority;
      }
      route ip-address/mask routing-instance instance-name priority-cost cost;
    }
  }
  virtual-address [ addresses ];
}
}
}
}
}

```

}

**Related Documentation**

- *Junos OS Hierarchy and RFC Reference*
- Junos® OS Ethernet Interfaces
- Junos® OS Network Interfaces

**[edit logical-systems] Hierarchy Level**

The following lists the statements that can be configured at the **[edit logical-systems]** hierarchy level that are also documented in this manual. For more information about logical systems, see the Logical Systems Configuration Guide.

```
logical-systems logical-system-name {
  interfaces interface-name {
    unit logical-unit-number {
      accept-source-mac {
        mac-address mac-address {
          policer {
            input cos-policer-name;
            output cos-policer-name;
          }
        }
      }
    }
  }
  allow-any-vci;
  atm-scheduler-map (map-name | default);
  bandwidth rate;
  backup-options {
    interface interface-name;
  }
  cell-bundle-size cells;
  clear-dont-fragment-bit;
  compression {
    rtp {
      f-max-period number;
      port {
        minimum port-number;
        maximum port-number;
      }
      queues [ queue-numbers ];
    }
  }
  compression-device interface-name;
  description text;
  interface {
    l2tp-interface-id name;
    (dedicated | shared);
  }
  dialer-options {
    activation-delay seconds;
    deactivation-delay seconds;
    dial-string [ dial-string-numbers ];
    idle-timeout seconds;
    initial-route-check seconds;
  }
}
```

```
load-threshold number;
pool pool;
remote-name remote-callers;
watch-list {
    [ routes ];
}
}
disable;
dlci dlci-identifier;
drop-timeout milliseconds;
dynamic-call-admission-control {
    activation-priority priority;
    bearer-bandwidth-limit kilobits-per-second;
}
encapsulation type;
epd-threshold cells plp1 cells;
fragment-threshold bytes;
input-vlan-map {
    inner-tag-protocol-id;
    inner-vlan-id;
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-push | swap-swap);
    tag-protocol-id tpid;
    vlan-id number;
}
interleave-fragments;
inverse-arp;
layer2-policer {
    input-policer policer-name;
    input-three-color policer-name;
    output-policer policer-name;
    output-three-color policer-name;
}
link-layer-overhead percent;
minimum-links number;
mrru bytes;
multicast-dlci dlci-identifier;
multicast-vci vpi-identifier.vci-identifier;
multilink-max-classes number;
multipoint;
oam-liveness {
    up-count cells;
    down-count cells;
}
oam-period (seconds | disable);
output-vlan-map {
    inner-tag-protocol-id;
    inner-vlan-id;
    (pop | pop-pop | pop-swap | push | push-push | swap | swap-swap);
    tag-protocol-id tpid;
    vlan-id number;
}
passive-monitor-mode;
peer-unit unit-number;
plp-to-clp;
point-to-point;
ppp-options {
```

```

chap {
    access-profile name;
    default-chap-secret name;
    local-name name;
    passive;
}
compression {
    acfc;
    pfc;
}
}
dynamic-profile profile-name;
pap {
    default-pap-password password;
    local-name name;
    local-password password;
    passive;
}
}
proxy-arp;
service-domain (inside | outside);
shaping {
    (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained rate
    burst length);
    queue-length number;
}
short-sequence;
transmit-weight number;
(traps | no-traps);
trunk-bandwidth rate;
trunk-id number;
tunnel {
    backup-destination address;
    destination address;
    key number;
    routing-instance {
        destination routing-instance-name;
    }
    source source-address;
    ttl number;
}
vci vpi-identifier.vci-identifier;
vlan-id number;
vlan-id-list [vlan-id vlan-id-vlan-id]
vlan-tags inner tpid.vlan-id outer tpid.vlan-id;
vlan-tags outer tpid.vlan-id inner-list [vlan-id vlan-id-vlan-id]
vpi vpi-identifier;
family family {
    accounting {
        destination-class-usage;
        source-class-usage {
            direction;
        }
    }
}
bundle interface-name;
filter {

```

```

    group filter-group-number;
    input filter-name;
    input-list {
        [ filter-names ];
    }
    output filter-name;
    output-list {
        [ filter-names ];
    }
}
ipsec-sa sa-name;
keep-address-and-control;
mtu bytes;
multicast-only;
no-redirects;
policer {
    arp policer-template-name;
    input policer-template-name;
    output policer-template-name;
}
primary;
proxy inet-address address;
receive-options-packets;
receive-ttl-exceeded;
remote (inet-address address | mac-address address);
rpf-check <fail-filter filter-name> {
    <mode loose>;
}
sampling {
    direction;
}
service {
    input {
        service-set service-set-name <service-filter filter-name>;
        post-service-filter filter-name;
    }
    output {
        service-set service-set-name <service-filter filter-name>;
    }
}
(translate-discard-eligible | no-translate-discard-eligible);
(translate-fecn-and-becn | no-translate-fecn-and-becn);
unnumbered-address interface-name destination address destination-profile
    profile-name;
address address {
    arp ip-address (mac | multicast-mac) mac-address <publish>;
    broadcast address;
    destination address;
    destination-profile name;
    eui-64;
    multipoint-destination address (dlci dlci-identifier | vci vci-identifier);
    multipoint-destination address {
        epd-threshold cells plp1 cells;
        inverse-arp;
        oam-liveness {
            up-count cells;

```



```

        down-count cells;
    }
    oam-period (seconds | disable);
    shaping {
        (cbr rate | rtvbr peak rate sustained rate burst length | vbr peak rate sustained
            rate burst length);
        queue-length number;
    }
    vci vpi-identifier.vci-identifier;
}
preferred;
primary;
(vrrp-group | vrrp-inet6-group) group-number {
    (accept-data | no-accept-data);
    advertise-interval seconds;
    authentication-type authentication;
    authentication-key key;
    fast-interval milliseconds;
    (preempt | no-preempt) {
        hold-time seconds;
    }
    priority-number number;
    track {
        priority-cost seconds;
        priority-hold-time interface-name {
            interface priority;
            bandwidth-threshold bits-per-second {
                priority;
            }
        }
    }
    route ip-address/mask routing-instance instance-name priority-cost cost;
}
}
virtual-address [ addresses ];
}
}
}
}
}
}
}

```

- Related Documentation**
- [Junos OS Hierarchy and RFC Reference](#)
  - [Junos® OS Ethernet Interfaces](#)
  - [Junos® OS Network Interfaces](#)

## [\[edit protocols oam\] Hierarchy Level](#)

```

ethernet {
    connectivity-fault-management {
        action-profile profile-name {
            default-actions {
                interface-down;
            }
            event {

```

```

adjacency-loss;
interface-status-tlv (down | lower-layer-down);
port-status-tlv blocked;
rdi;
}
}
linktrace {
age (30m | 10m | 1m | 30s | 10s);
path-database-size path-database-size;
}
maintenance-domain domain-name {
bridge-domain name;
routing-instance r1 {
bridge-domain name;
instance vpls-instance;
interface (ge | xe) fpc/pic/port.domain;
level number;
maintenance-association name {
mep identifier {
direction (up | down)
interface (ge | xe) fpc/pic/port.domain (working | protect );
auto-discovery;
lowest-priority-defect (all-defects | err-xcon | mac-rem-err-xcon | no-defect |
rem-err-xcon | xcon);
priority number;
}
}
mip-half-function (none | default | explicit);
name-format (character-string | none | dns | mac+2oct);
short-name-format (character-string | vlan | 2octet | rfc-2685-vpn-id);
protect-maintenance-association protect-ma-name;
remote-maintenance-association remote-ma-name;
continuity-check {
hold-interval minutes;
interval (10m | 10s | 1m | 1s | 100ms);
loss-threshold number;
}
maintenance-association ma-name {
mip-half-function (none | default | explicit);
mep mep-id {
auto-discovery;
direction (up | down);
interface interface-name (working | protect);
priority number;
remote-mep mep-id {
action-profile profile-name;
sla-iterator-profile profile-name {
data-tlv-size bytes;
iteration-count frames;
priority priority-value;
}
}
}
}
}
}
performance-monitoring {

```

```

hardware-assisted-timestamping;
sla-iterator-profiles {
  profile-name {
    disable;
    calculation-weight {
      delay delay-weight;
      delay-variation delay-variation-weight;
    }
    cycle-time milliseconds;
    iteration-period connections;
    measurement-type (loss | statistical-frame-loss | two-way-delay);
  }
}
}
link-fault-management {
  action-profile profile-name {
    action {
      syslog;
      link-down;
      send-critical-event;
    }
    event {
      link-adjacency-loss;
      link-event-rate {
        frame-error count;
        frame-period count;
        frame-period-summary count;
        symbol-period count;
      }
      protocol-down;
    }
  }
}
interface interface-name {
  apply-action-profile profile-name;
  event-thresholds {
    frame-error count;
    frame-period count;
    frame-period-summary count;
    symbol-period count;
  }
  link-discovery (active | passive);
  negotiation-options {
    allow-remote-loopback;
    no-allow-link-events;
  }
  pdu-interval interval;
  pdu-threshold threshold-value;
  remote-loopback;
}
}
fnp {
  interval <100ms | 1s | 10s | 1m | 10m>;
  loss-threshold number
  interface interface name {
    domain-id domain-id

```

```
}  
}  
}
```

- Related Documentation**
- *Junos OS Hierarchy and RFC Reference*
  - Junos® OS Ethernet Interfaces
  - Junos® OS Network Interfaces

## CHAPTER 4

# Statement Summary

### action-profile (Applying to CFM)

---

<b>Syntax</b>	<code>action-profile <i>profile-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> mep <i>mep-id</i> <i>remote-mep</i> <i>mep-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	Identify the action profile to use.
<b>Options</b>	<i>profile-name</i> —Name of the action profile to use.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li></ul>

## action-profile (Defining for CFM)

---

**Syntax**    `action-profile profile-name {  
                  event {  
                    adjacency-loss;  
                    interface-status-tlv (down | lower-layer-down);  
                    port-status-tlv blocked;  
                    rdi;  
                  }  
                  action {  
                    interface-down;  
                  }  
                  default-actions {  
                    interface-down;  
                  }  
                }`

**Hierarchy Level**    [edit protocols oam ethernet [connectivity-fault-management](#)]

**Release Information**    Statement introduced in Junos OS Release 8.4.

**Description**    Configure a name and default action for an action profile.

**Options**    *profile-name*—Name of the action profile.

The remaining statements are explained separately.

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring a Connectivity Fault Management Action Profile on page 21](#)
- [default-actions on page 99](#)
- [event \(CFM\)](#)
- [interface-down on page 107](#)

## age

<b>Syntax</b>	age (30m   10m   1m   30s   10s);
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet connectivity-fault-management linktrace</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5.
<b>Description</b>	Time to wait (in minutes or seconds) for a response. If no response is received, the request and response entry is deleted from the linktrace database.
<b>Default</b>	10 minutes
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Linktrace Protocol in CFM on page 24</a></li> </ul>

## bridge-domain

<b>Syntax</b>	bridge-domain <i>name</i> ; vlan-id [ <i>vlan-identifiers</i> ]; }
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>maintenance-domain-name</i> ], [edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>maintenance-domain-name</i> virtual-switch <i>virtual-switch-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.4.
<b>Description</b>	(MX Series routers only) Specify the OAM Ethernet CFM maintenance domain bridge domain.
<b>Options</b>	<i>name</i> —Specify the name of the bridge domain.  <i>vlan-identifiers</i> —Specify one or more VLAN identifiers.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Maintenance Intermediate Points on page 11</a></li> <li>• Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</li> <li>• <a href="#">maintenance-domain on page 113</a></li> </ul>

## connectivity-fault-management

```

Syntax connectivity-fault-management {
    action-profile profile-name {
        default-actions {
            interface-down;
        }
        event {
            adjacency-loss;
            interface-status-tlv (down | lower-layer-down);
            port-status-tlv blocked;
            rdi;
        }
    }
    performance-monitoring {
        delegate-server-processing;
        hardware-assisted-timestamping;
        sla-iterator-profiles {
            profile-name {
                disable;
                calculation-weight {
                    delay delay-weight;
                    delay-variation delay-variation-weight;
                }
                cycle-time milliseconds;
                iteration-period connections;
                measurement-type (loss | statistical-frame-loss | two-way-delay);
            }
        }
    }
    linktrace {
        age (30m | 10m | 1m | 30s | 10s);
        path-database-size path-database-size;
    }
    maintenance-domain domain-name {
        bridge-domain <vlan-id [ vlan-ids ]>;
        instance routing-instance-name;
        interface interface-name;
        level number;
        name-format (character-string | none | dns | mac+2oct);
        maintenance-association ma-name {
            protect-maintenance-association protect-ma-name;
            remote-maintenance-association remote-ma-name;
            short-name-format (character-string | vlan | 2octet | rfc-2685-vpn-id);
            continuity-check {
                convey-loss-threshold;
                hold-interval minutes;
                interface-status-tlv;
                interval (10m | 10s | 1m | 1s | 100ms);
                loss-threshold number;
                port-status-tlv;
            }
        }
        mep mep-id {
            auto-discovery;
        }
    }
}

```



```

    direction (up | down);
    interface interface-name (protect | working);
    lowest-priority-defect (all-defects | err-xcon | mac-rem-err-xcon | no-defect |
        rem-err-xcon | xcon );
    priority number;
    remote-mep mep-id {
        action-profile profile-name;
        sla-iterator-profile profile-name {
            data-tlv-size size;
            iteration-count count-value;
            priority priority-value;
        }
    }
}
}
virtual-switch routing-instance-name {
    bridge-domain name <vlan-ids [ vlan-ids ]>;
}
}
}

```

**Hierarchy Level** [edit protocols [oam ethernet](#)]

**Release Information** Statement introduced in Junos OS Release 8.4.

**Description** For Ethernet interfaces on M7i and M10i routers with Enhanced CFEB (CFEB-E), and on M120, M320, MX Series, and T Series routers, specify connectivity fault management for IEEE 802.1ag Operation, Administration, and Management (OAM) support. In Junos OS Release 9.3 and later, this statement is also supported on aggregated Ethernet interfaces.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3](#)
- [Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers](#)

## continuity-check

---

<b>Syntax</b>	<pre>continuity-check {     convey-loss-threshold;     hold-interval <i>minutes</i>;     interface-status-tlv;     interval (10m   10s   1m   1s  100ms   10ms);     loss-threshold <i>number</i>;     port-status-tlv; }</pre>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	Specify continuity check protocol options.
<b>Options</b>	<p><b>convey-loss-threshold</b>—Enable loss-threshold-tlv transmission.</p> <p><b>hold-interval <i>minutes</i></b>—Specify the continuity check hold-interval, in minutes.</p> <p><b>interface-status-tlv</b>—Enable interface-status-tlv transmission.</p> <p><b>interval (<i>10m</i>   <i>10s</i>   <i>1m</i>   <i>1s</i>  <i>100ms</i>   <i>10ms</i>)</b>—Specify the continuity check interval.</p> <p><b>loss-threshold <i>minutes</i></b>—Specify the loss-threshold, in minutes.</p> <p><b>port-status-tlv</b>—Enable port-status-tlv transmission.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Continuity Check Protocol on page 14</a></li><li>• Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</li></ul>

## convey-loss-threshold

---

<b>Syntax</b>	<pre>convey-loss-threshold;</pre>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> <b>continuity-check</b> ]
<b>Description</b>	Enable loss-threshold-tlv transmission.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

---


## default-actions

---

<b>Syntax</b>	<code>default-actions {     interface-down; }</code>
<b>Hierarchy Level</b>	[edit protocols oam ethernet <code>connectivity-fault-management action-profile</code> <i>profile-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	Define the action to be taken when connectivity to the remote MEP is lost.
<b>Default</b>	If no action is configured, no action is taken.
<b>Options</b>	<code>interface-down</code> —When a remote MEP connectivity failure is detected, bring the interface down.
<b>Required Privilege Level</b>	<code>interface</code> —To view this statement in the configuration. <code>interface-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Connectivity Fault Management Action Profile on page 21</a></li></ul>

## direction

---

<b>Syntax</b>	direction (up   down);
<b>Hierarchy Level</b>	[edit protocols <b>oam ethernet connectivity-fault-management</b> maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> <b>mep</b> <i>mep-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	Configure the direction of the MEP.
<b>Options</b>	<b>up</b> —An UP MEP CCM is transmitted out of every logical interface which is part of the same bridging or vpls instance except for the interface configured on this MEP.   <b>NOTE:</b> The up direction for MEP is not supported on T Series routers.  <b>down</b> —Down MEP CCMs are transmitted only out the interface configured on this MEP.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li><li>• <a href="#">Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</a></li><li>• <a href="#">IEEE 802.1ag OAM Connectivity Fault Management Overview on page 3</a></li></ul>

## ethernet (Protocols OAM)

```

Syntax  ethernet {
        connectivity-fault-management {
            action-profile profile-name {
                default-actions {
                    interface-down;
                }
            }
        }
        performance-monitoring {
            delegate-server-processing;
            hardware-assisted-timestamping;
            sla-iterator-profiles {
                profile-name {
                    disable;
                    calculation-weight {
                        delay delay-weight;
                        delay-variation delay-variation-weight;
                    }
                    cycle-time milliseconds;
                    iteration-period connections;
                    measurement-type (loss | statistical-frame-loss | two-way-delay);
                }
            }
        }
        linktrace {
            age (30m | 10m | 1m | 30s | 10s);
            path-database-size path-database-size;
        }
        maintenance-domain domain-name {
            level number;
            name-format (character-string | none | dns | mac+2octet);
            maintenance-association ma-name {
                short-name-format (character-string | vlan | 2octet | rfc-2685-vpn-id);
                protect-maintenance-association protect-ma-name;
                remote-maintenance-association remote-ma-name;
                continuity-check {
                    convey-loss-threshold;
                    hold-interval minutes;
                    interface-status-tlv;
                    interval (10m | 10s | 1m | 1s | 100ms);
                    loss-threshold number;
                    port-status-tlv;
                }
            }
            mep mep-id {
                auto-discovery;
                direction (up | down);
                interface interface-name (protect | working);
                lowest-priority-defect (all-defects | err-xcon | mac-rem-err-xcon | no-defect |
                    rem-err-xcon | xcon );
                priority number;
                remote-mep mep-id {
                    action-profile profile-name;
                    sla-iterator-profile profile-name {

```

Copyright © 2013, Juniper Networks, Inc.

```

    status-counter number;
    polling-verification-timer value;
    evc-map-type (all-to-one-bundling | bundling | service-multiplexing);
    evc evc-name {
        default-evc;
        vlan-list vlan-id-list;
    }
}
}
}

```

**Hierarchy Level** [edit protocols [oam](#)]

**Release Information** Statement introduced in Junos OS Release 8.2.

**Description** For Ethernet interfaces on M320, MX Series, and T Series routers, provide fault signaling and detection for 802.3ah Operation, Administration, and Management (OAM) support.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**


- Enabling IEEE 802.3ah OAM Support
- Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers

## evcs

<b>Syntax</b>	<pre>evcs evc-id {     evc-protocol cfm management-domain <i>domain-id</i> (management-association <i>association-id</i>           vpls (routing-instance <i>instance-id</i>);     remote-uni-count <i>count</i>;     multipoint-to-multipoint; }</pre>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5.
<b>Description</b>	On MX Series routers with <b>ge</b> , <b>xe</b> , or <b>ae</b> interfaces, configure an OAM Ethernet virtual connection.
<b>Options</b>	<p><b>evc-protocol cfm   vpls</b>—Specify connectivity fault management (CFM) or virtual private LAN service (VPLS) as the Ethernet Virtual Connection (EVC) protocol.</p> <p><b>management-domain <i>domain-id</i></b>—(Optional) For CFM, specify the CFM management domain.</p> <p><b>management-association <i>association-id</i></b>—(Optional) For CFM, specify the CFM management association.</p> <p><b>routing-instance <i>instance-id</i></b>—(Optional) For VPLS, specify the VPLS routing instance.</p> <p><b>remote-uni-count <i>count</i></b>—(Optional) Specify the number of remote UNIs in the EVC configuration, the default is 1.</p> <p><b>multipoint-to-multipoint</b>—(Optional) Specify multiple points in the EVC configuration, the default is point-to-point if <b>remote-uni-count</b> is 1.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Ethernet Local Management Interface on page 25</a></li> <li>• <a href="#">lmi (Ethernet OAM) on page 109</a></li> </ul>



## fast-aps-switch

<b>Syntax</b>	fast-aps-switch;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> sonet-options aps]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1.
<b>Description</b>	(M320 routers with Channelized OC3/STM1 Circuit Emulation PIC with SFP only) Reduce the Automatic Protection Switching (APS) switchover time in Layer 2 circuits.
	<div>  <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>Configuring this statement reduces the APS switchover time only when the Layer 2 circuit encapsulation type for the interface receiving traffic from a Layer 2 circuit neighbor is SAToP.</li> <li>When the fast-aps-switch statement is configured in revertive APS mode, you must configure an appropriate value for revert time to achieve reduction in APS switchover time.</li> <li>To prevent the logical interfaces in the data path from being shut down, configure appropriate hold-time values on all the interfaces in the data path that support TDM.</li> <li>The fast-aps-switch statement cannot be configured when the APS annex-b option is configured.</li> <li>The interfaces that have the fast-aps-switch statement configured cannot be used in virtual private LAN service (VPLS) environments.</li> </ul> </div>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Reducing APS Switchover Time in Layer 2 Circuits</li> </ul>

## hold-interval (OAM)

---

<b>Syntax</b>	<code>hold-interval <i>minutes</i>;</code>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> <a href="#">continuity-check</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4. Statement introduced in junos os release 12.1X48 for PTX Series Packet Transport Switches.
<b>Description</b>	The time to wait before flushing the maintenance association end point (MEP) database, if no updates occur.
<b>Options</b>	<i>minutes</i> —Time to wait, in minutes.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Continuity Check Protocol on page 14</a></li><li>• <a href="#">Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</a></li></ul>

## instance

---

<b>Syntax</b>	<code>instance <i>vpls-instance-name</i>;</code>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.4.
<b>Description</b>	Specify the VPLS instance of the default maintenance domain.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Maintenance Intermediate Points on page 11</a></li><li>• <a href="#">maintenance-domain on page 113</a></li></ul>

## interface-down

---

<b>Syntax</b>	interface-down;
<b>Hierarchy Level</b>	[edit protocols oam ethernet <a href="#">connectivity-fault-management action-profile profile-name default-actions</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5.
<b>Description</b>	Bring the interface down when a remote MEP connectivity failure is detected.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Connectivity Fault Management Action Profile on page 21</a></li> </ul>

## interface-status-tlv

---

<b>Syntax</b>	interface-status-tlv [ down lower-layer-down ];
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet</a> connectivity-fault-management <a href="#">action-profile profile-name</a> event]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6.
<b>Description</b>	Defines an <b>action-profile</b> consisting of various events and the action. Based on values of <b>interface-status-tlv</b> in the received CCM packets, specific action such as <i>interface-down</i> can be taken using <a href="#">action-profile</a> options.
<b>Options</b>	<p><b>down</b>—When the incoming CCM packet contains interface status TLV with value down, the action will be triggered for this action-profile.</p> <p><b>lower-layer-down</b>—When the incoming CCM packet contains interface status TLV with value lower-layer-down, the action will be triggered for this action-profile.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Remote MEP Action Profile Support on page 42</a></li> </ul>

## level

---

<b>Syntax</b>	<code>level <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management <a href="#">maintenance-domain domain-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4. Statement introduced in junos os release 12.1X48 for PTX Series Packet Transport Switches.
<b>Description</b>	A number used in CFM messages to identify the maintenance association.
<b>Options</b>	<b><i>number</i></b> —A number used to identify the maintenance domain to which the CFM message belongs. <b>Range:</b> 0 through 7
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Maintenance Domain Level on page 10</a></li><li>• Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</li><li>• Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</li></ul>

## linktrace

---

<b>Syntax</b>	<code>linktrace {     <a href="#">age</a> (30m   10m   1m   30s   10s);     <a href="#">path-database-size</a> <i>path-database-size</i>; }</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet connectivity-fault-management</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5.
<b>Description</b>	Configure connectivity fault management linktrace parameters.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Linktrace Protocol in CFM on page 24</a></li></ul>

## lmi (Ethernet OAM)

<b>Syntax</b>	<pre>lmi {   status-counter <i>count</i>;   polling-verification-timer <i>value</i>;   interface <i>name</i> {     uni-id <i>uni-name</i>;     status-counter <i>number</i>;     polling-verification-timer <i>value</i>;     evc-map-type (all-to-one-bundling   bundling   service-multiplexing);     evc <i>evc-name</i> {       default-evc;       vlan-list <i>vlan-id-list</i>;     }   } }</pre>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5.
<b>Description</b>	On routers with <b>ge</b> , <b>xe</b> , or <b>ae</b> interfaces, configure an OAM Ethernet local management interface.
<b>Options</b>	<p><b>status-counter <i>count</i></b>—Status counter (N393), defaults to 4.</p> <p><b>interface <i>name</i></b>—Polling verification timer (T392), defaults to 15 seconds.</p> <p><b>uni-id <i>uni-name</i></b>—(Optional) Defaults to the physical interface name.</p> <p><b>status-counter <i>number</i></b>—(Optional) Defaults to a global value.</p> <p><b>polling-verification-timer <i>value</i></b>—(Optional) Defaults to a global value.</p> <p><b>evc-map-type (all-to-one-bundling   bundling   service-multiplexing)</b>—Specify the Ethernet virtual connection (EVC) map type.</p> <p><b>evc <i>evc-name</i></b>—Specify the name of the EVC.</p> <p><b>default-evc</b>—Set the specified EVC as the default EVC.</p> <p><b>vlan-list <i>vlan-id-list</i></b>—Specify a group of VLANs to assign to the EVC.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Ethernet Local Management Interface on page 25</a></li> <li>• <a href="#">evcs on page 104</a></li> </ul>

## loss-threshold

---

<b>Syntax</b>	<code>loss-threshold <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> <a href="#">continuity-check</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4. Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Switches.
<b>Description</b>	Specify the number of continuity check messages lost before marking the remote MEP as down.
<b>Options</b>	<i>number</i> —The number of continuity check messages that can be lost before the remote MEP is considered down.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Continuity Check Protocol on page 14</a></li><li>• <a href="#">Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</a></li></ul>

## lowest-priority-defect

<b>Syntax</b>	lowest-priority-defect (all-defects   err-xcon   mac-rem-err-xcon   no-defect   rem-err-xcon   xcon)
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> mep <i>mep-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0.
<b>Description</b>	Specify the lowest priority defect that is allowed to generate a Fault Alarm whenever CFM detects a defect. This configuration is done at the MEP level.
<b>Options</b>	Specify one of the following lowest priority defect options: <p><b>all-defects</b>—Allows all defects.</p> <p><b>err-xcon</b>—Allows only erroneous CCM and cross-connect CCM defects.</p> <p><b>mac-rem-err-xcon</b>—Allows only MAC, not receiving CCM, erroneous CCM, and cross-connect defects.</p> <p><b>no-defect</b>—Allows no defects.</p> <p><b>rem-err-xcon</b>—Allows only not receiving CCM, erroneous CCM, and cross-connect CCM defects.</p> <p><b>xcon</b>—Allows only cross-connect CCM defects.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Maintenance Endpoint Lowest Priority Defect on page 18</a></li> </ul>

## maintenance-association

<b>Syntax</b>	<pre> maintenance-association <i>ma-name</i> {   <b>short-name-format</b> (character-string   vlan   2octet   rfc-2685-vpn-id);   <b>protect-maintenance-association</b> <i>protect-ma-name</i>;   <b>remote-maintenance-association</b> <i>remote-ma-name</i>;   <b>continuity-check</b> {     <b>hold-interval</b> <i>minutes</i>;     <b>interval</b> (10m   10s   1m   1s   100ms);     <b>loss-threshold</b> <i>number</i>;   }   <b>mep</b> <i>mep-id</i> {     auto-discovery;     <b>direction</b> (up   down);     <b>interface</b> <i>interface-name</i> (protect   working);     <b>lowest-priority-defect</b> (all-defects   err-xcon   mac-rem-err-xcon   no-defect         rem-err-xcon   xcon );     <b>priority</b> <i>number</i>;     <b>remote-mep</b> <i>mep-id</i> {       <b>action-profile</b> <i>profile-name</i>;       <b>sla-iterator-profile</b> <i>profile-name</i> {         <b>data-tlv-size</b> <i>size</i>;         <b>iteration-count</b> <i>count-value</i>;         <b>priority</b> <i>priority-value</i>;       }     }   } } </pre>
<b>Hierarchy Level</b>	[edit protocols <b>oam ethernet connectivity-fault-management maintenance-domain</b> <i>domain-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4. Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Switches.
<b>Description</b>	Configure the name of the maintenance association in IEEE-compliant format.
<b>Options</b>	<b>ma-name</b> —The name of the maintenance association within the maintenance domain.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	<b>interface</b> —To view this statement in the configuration. <b>interface-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Creating a Maintenance Association on page 13</a></li> <li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li> <li>• Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</li> <li>• Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</li> </ul>



## maintenance-domain

```
Syntax maintenance-domain domain-name {
    bridge-domain name <vlan-id [ vlan-ids ]>;
    instance vpls-instance-name;
    level number;
    maintenance-association ma-name {
        protect-maintenance-association protect-ma-name;
        remote-maintenance-association remote-ma-name;
        short-name-format (character-string | vlan | 2octet | rfc-2685-vpn-id);
        continuity-check {
            hold-interval minutes;
            interval (10m | 10s | 1m | 1s | 100ms);
            loss-threshold number
        }
    }
    mep mep-id {
        auto-discovery;
        direction (up | down);
        interface interface-name (protect | working);
        lowest-priority-defect (all-defects | err-xcon | mac-rem-err-xcon | no-defect |
            rem-err-xcon | xcon );
        priority number;
        remote-mep mep-id {
            action-profile profile-name;
            sla-iterator-profile profile-name {
                data-tlv-size size;
                iteration-count count-value;
                priority priority-value;
            }
        }
    }
    mip-half-function (none | default | explicit);
    name-format (character-string | none | dns | mac+2oct);
}
virtual-switch name {
    bridge-domain name <vlan-id [ vlan-ids ]>;
}
}
```

**Hierarchy Level** [edit protocols [oam](#) [ethernet](#) [connectivity-fault-management](#)]

**Release Information** Statement introduced in Junos OS Release 8.4.  
Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Switches.

**Description** Configure the name of the maintenance domain in IEEE-compliant format.

**Options** *domain-name*—Name of the maintenance domain.  
  
The remaining statements are explained separately.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.


- Related Documentation**
- [Creating the Maintenance Domain on page 9](#)
  - [Configuring a Maintenance Endpoint on page 16](#)
  - Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers
  - Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches

---

## mep

<b>Syntax</b>	<pre>mep mep-id {   auto-discovery;   direction (up   down);   interface interface-name (protect   working);   priority number;   remote-mep mep-id {     action-profile profile-name;     sla-iterator-profile profile-name {       data-tlv-size size;       iteration-count count-value;       priority priority-value;     }   } }</pre>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam</a> <a href="#">ethernet connectivity-fault-management maintenance-domain md-name</a> <a href="#">maintenance-association ma-name</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	The numeric identifier of the maintenance association end point (MEP) within the maintenance association.
<b>Options</b>	<p><b>mep-id</b>—Specify the numeric identifier of the MEP.</p> <p><b>Range:</b> 1 through 8191</p> <p>The remaining statements are explained separately.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li><li>• Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</li></ul>

## mip-half-function

<b>Syntax</b>	mip-half-function (none   default   explicit);
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet connectivity-fault-management</a> <i>md-name</i> ], [edit protocols <a href="#">oam ethernet connectivity-fault-management</a> <i>ma-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6.
<b>Description</b>	Specify the OAM Ethernet CFM maintenance domain MIP half functions.
	<div>  <p><b>NOTE:</b> Whenever a MIP is configured and a bridge domain is mapped to multiple maintenance domains or maintenance associations, it is essential that the <code>mip-half-function</code> value for all maintenance domains and maintenance associations are the same.</p> </div>
<b>Options</b>	<p><b>none</b>—Specify to not use the mip-half-function.</p> <p><b>default</b>—Specify to use the default mip-half-function.</p> <p><b>explicit</b>—Specify an explicit mip-half-function.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Creating the Maintenance Domain on page 9</a></li> <li>• <a href="#">Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</a></li> <li>• <a href="#">maintenance-domain on page 113</a></li> </ul>

## name-format

---

<b>Syntax</b>	name-format (character-string   none   dns   mac+2oct);
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management <a href="#">maintenance-domain</a> <i>domain-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4. Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Switches.
<b>Description</b>	Specify the format of the maintenance domain name.
<b>Options</b>	<p><b>character-string</b>—The name is an ASCII character string.</p> <p><b>none</b>—The maintenance domain name is not used.</p> <p><b>dns</b>—The name is in domain name service (DNS) format. For example: www.juniper.net.</p> <p><b>mac+2oct</b>—Name is the MAC address plus a two-octet maintenance association identifier. For example: 08:00:22:33:44:55.100.</p> <p><b>Default:</b> character-string</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Creating a Maintenance Association on page 13</a></li><li>• Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</li></ul>

## oam

```

Syntax  oam {
    ethernet {
        connectivity-fault-management {
            action-profile profile-name {
                default-actions {
                    interface-down;
                }
            }
        }
        performance-monitoring {
            delegate-server-processing;
            hardware-assisted-timestamping;
            sla-iterator-profiles {
                profile-name {
                    disable;
                    calculation-weight {
                        delay delay-weight;
                        delay-variation delay-variation-weight;
                    }
                    cycle-time milliseconds;
                    iteration-period connections;
                    measurement-type (loss | statistical-frame-loss | two-way-delay);
                }
            }
        }
    }
    linktrace {
        age (30m | 10m | 1m | 30s | 10s);
        path-database-size path-database-size;
    }
    maintenance-domain domain-name {
        level number;
        name-format (character-string | none | dns | mac+2octet);
        maintenance-association ma-name {
            short-name-format (character-string | vlan | 2octet | rfc-2685-vpn-id);
            protect-maintenance-association protect-ma-name;
            remote-maintenance-association remote-ma-name;
            continuity-check {
                convey-loss-threshold;
                hold-interval minutes;
                interface-status-tlv;
                interval (10m | 10s | 1m | 1s | 100ms);
                loss-threshold number;
                port-status-tlv;
            }
        }
        mep mep-id {
            auto-discovery;
            direction (up | down);
            interface interface-name (protect | working);
            lowest-priority-defect (all-defects | err-xcon | mac-rem-err-xcon | no-defect |
                rem-err-xcon | xcon );
            priority number;
            remote-mep mep-id {
                action-profile profile-name;
            }
        }
    }
}

```

```

        sla-iterator-profile profile-name {
            data-tlv-size size;
            iteration-count count-value;
            priority priority-value;
        }
    }
}
}
}
link-fault-management {
    action-profile profile-name {
        action {
            link-down;
            send-critical-event;
            syslog;
        }
        event {
            link-adjacency-loss;
            link-event-rate {
                frame-error count;
                frame-period count;
                frame-period-summary count;
                symbol-period count;
            }
            protocol-down;
        }
    }
}
interface interface-name {
    apply-action-profile
    link-discovery (active | passive);
    pdu-interval interval;
    pdu-threshold threshold-value;
    remote-loopback;
    event-thresholds {
        frame-error count;
        frame-period count;
        frame-period-summary count;
        symbol-period count;
    }
    negotiation-options {
        allow-remote-loopback;
        no-allow-link-events;
    }
}
}
}
}

```

**Hierarchy Level** [edit protocols]

**Release Information** Statement introduced in Junos OS Release 8.2.  
Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Switches.

<b>Description</b>	For Ethernet interfaces on M320, M120, MX Series, and T Series routers and PTX Series Packet Transport Switches, provide IEEE 802.3ah Operation, Administration, and Maintenance (OAM) support.  The remaining statements are explained separately.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• IEEE 802.3ah OAM Link-Fault Management Overview</li> <li>• Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</li> </ul>

## path-database-size

<b>Syntax</b>	<code>path-database-size <i>path-database-size</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam</a> <a href="#">ethernet</a> <a href="#">connectivity-fault-management</a> <a href="#">linktrace</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.5.
<b>Description</b>	Number of linktrace reply entries to be stored per linktrace request.
<b>Options</b>	<p><b>path-database-size</b>—Database size.</p> <p><b>Range:</b> 1 through 255</p> <p><b>Default:</b> 64</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Linktrace Protocol in CFM on page 24</a></li> </ul>

## **policer (CFM Firewall)**

---

<b>Syntax</b>	<pre>policer <i>cfm-policer</i> {     if-exceeding {         bandwidth-limit 8k;         burst-size-limit 2k;     }     then discard; }</pre>
<b>Hierarchy Level</b>	[edit firewall]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0.
<b>Description</b>	Attach an explicit policer to CFM sessions.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Rate Limiting of Ethernet OAM Messages on page 50</a></li><li>• <a href="#">policer (CFM Global) on page 121</a></li><li>• <a href="#">policer (CFM Session) on page 122</a></li></ul>



## policer (CFM Global)

---

<b>Syntax</b>	<pre> policer {     all <i>cfm-policer-name</i>;     continuity-check <i>cfm-policer-name</i>;     other <i>cfm-policer-name</i>; } </pre>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0.
<b>Description</b>	Specify a policer at the global level to police the CFM traffic belonging to all sessions.
<b>Options</b>	<p><b>continuity-check <i>cfm-policer-name</i></b>—Police all continuity check packets with the policer specified.</p> <p><b>other <i>cfm-policer-name</i></b>—Police all non-continuity check packets with the policer specified.</p> <p><b>all <i>cfm-policer-name</i></b>—Police all CFM packets with policer specified. If the <b>all</b> option is used, then you cannot specify above two options.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Rate Limiting of Ethernet OAM Messages on page 50</a></li> <li>• <a href="#">policer (CFM Session) on page 122</a></li> </ul>

## policer (CFM Session)

---

<b>Syntax</b>	<pre>policer {     all <i>cfm-policer-name</i>;     continuity-check <i>cfm-policer-name</i>;     other <i>cfm-policer-name</i>; }</pre>
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>name</i> level <i>number</i> maintenance-association <i>name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.0.
<b>Description</b>	Specify a separate policer to rate-limit packets specific to that session.
<b>Options</b>	<ul style="list-style-type: none"><li>• <b>continuity-check <i>cfm-policer-name</i></b>—Police continuity check packets belonging to this session.</li><li>• <b>other <i>cfm-policer-name</i></b>—Police all non-continuity check packets belonging to this session.</li><li>• <b>all <i>cfm-policer-name</i></b>—Police all CFM packets belonging to this session. If the <b>all</b> option is used, then you cannot specify the above two options.</li></ul>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Rate Limiting of Ethernet OAM Messages on page 50</a></li><li>• <a href="#">policer (CFM Global) on page 121</a></li></ul>

## port-status-tlv

<b>Syntax</b>	<code>port-status-tlv blocked;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet connectivity-fault-management action-profile tlv-action</a> event]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6.
<b>Description</b>	Define an <b>action-profile</b> consisting of various events and the action. Based on values of <b>port-status-tlv</b> in the received CCM packets, specific action such as <i>interface-down</i> can be taken using <a href="#">action-profile</a> options.
<b>Options</b>	<b>blocked</b> —When the incoming CCM packet contains port status TLV with value blocked, the action will be triggered for this action-profile.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Connectivity Fault Management Action Profile on page 21</a></li> <li>• <a href="#">Configuring Remote MEP Action Profile Support on page 42</a></li> </ul>

## priority (OAM Connectivity-Fault Management)

<b>Syntax</b>	<code>priority number;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam ethernet connectivity-fault-management maintenance-domain md-name maintenance-association ma-name mep mep-id</a> ]  For EX Series Switches:  [edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> mep <i>mep-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	IEEE 802.1p priority bits used by the continuity check messages.
<b>Options</b>	<b>number</b> —Configure the IEEE 802.1p priority bits to be used in the VLAN header of the CFM packets. <b>Range:</b> 0 through 7
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li> </ul>

## remote-maintenance-association (OAM)

---

<b>Syntax</b>	<code>remote-maintenance-association <i>remote-ma-name</i>;</code>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam</a> <a href="#">ethernet</a> <a href="#">connectivity-fault-management</a> <a href="#">maintenance-domain</a> <i>domain-name</i> <a href="#">maintenance-association</a> <i>ma-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Configure the name of the remote maintenance association.
<b>Options</b>	<i>remote-ma-name</i> —Name of the remote maintenance association.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li></ul>

## remote-mep

---

<b>Syntax</b>	<pre>remote-mep <i>mep-id</i> {   <a href="#">action-profile</a> <i>profile-name</i>;   sla-iterator-profile <i>profile-name</i> {     data-tlv-size <i>size</i>;     iteration-count <i>count-value</i>;     priority <i>priority-value</i>;   } }</pre>
<b>Hierarchy Level</b>	[edit protocols <a href="#">oam</a> <a href="#">ethernet</a> <a href="#">connectivity-fault-management</a> <a href="#">maintenance-domain</a> <i>md-name</i> <a href="#">maintenance-association</a> <i>ma-name</i> <a href="#">mep</a> <i>mep-id</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4.
<b>Description</b>	Configure the numeric identifier of the remote maintenance association end point (MEP) within the maintenance association.
<b>Options</b>	<i>mep-id</i> —Numeric identifier of the MEP. <b>Range:</b> 1 through 8191  The remaining statements are explained separately.
<b>Required Privilege Level</b>	Configure—To enter configuration mode. Control—To modify any configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li></ul>

## protect-maintenance-association (OAM)

---

<b>Syntax</b>	<code>protect-maintenance-association <i>protect-ma-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit protocols oam ethernet connectivity-fault-management maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> ]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4
<b>Description</b>	Configure the name of the protect transport path for the maintenance-association.
<b>Options</b>	<b><i>protect-ma-name</i></b> —The name of the protect transport path.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Maintenance Endpoint on page 16</a></li> </ul>

## routing-instance

---

<b>Syntax</b>	<code>routing-instance {     destination <i>routing-instance-name</i>; }</code>
<b>Hierarchy Level</b>	<code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> tunnel],</code> <code>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> tunnel]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	To configure <b>interfaces</b> and <b>logical-systems</b> , specify the destination routing instance that points to the routing table containing the tunnel destination address.
<b>Default</b>	The default Internet routing table is <b>inet.0</b> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• Junos Services Interfaces Configuration Release 12.3</li> </ul>

## short-name-format

---

<b>Syntax</b>	short-name-format (character-string   vlan   2octet   rfc-2685-vpn-id);
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management maintenance-domain domain-name <b>maintenance-association</b> ma-name]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.4. Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Switches.
<b>Description</b>	Specify the name format of the maintenance association name.
<b>Options</b>	<b>character-string</b> —The name is an ASCII character string. <b>vlan</b> —The primary VLAN identifier. <b>2octet</b> —A number in the range 0 through 65,535. <b>rfc-2685-vpn-id</b> —A VPN identifier that complies with RFC 2685. <b>Default:</b> character-string



.....  
**NOTE:** The PTX Series Packet Transport Switches support the vlan and 2octet options only.  
.....

<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Creating a Maintenance Association on page 13</a></li><li>• <a href="#">Configuring Ethernet 802.1ag OAM on PTX Series Packet Transport Switches</a></li></ul>

---

## virtual-switch

---

<b>Syntax</b>	virtual-switch <i>name</i> bridge-domain <i>name</i> vlan-id [ <i>vlan-ids</i> ];
<b>Hierarchy Level</b>	[edit protocols oam ethernet connectivity-fault-management <a href="#">maintenance-domain</a> <i>domain-name</i> default-x]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6.
<b>Description</b>	Specify the routing-instance type as a virtual switch, under which bridge-domain MIPs must be enabled.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring MIP for Bridge Domains of a Virtual Switch on page 11</a></li><li>• Example: Configuring Connectivity Fault Management for a PBB Network on MX Series Routers</li></ul>





## PART 3

# Administration

- [Monitoring Commands on page 131](#)
- [Command Summary on page 253](#)



## CHAPTER 5

# Monitoring Commands

## show interfaces (Aggregated Ethernet)

<b>Syntax</b>	<pre>show interfaces ae <i>number</i> &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	(M Series, T Series, and MX Series routers and EX Series switches) Display status information about the specified aggregated Fast Ethernet or Gigabit Ethernet interface.
<b>Options</b>	<p><b>ae <i>number</i></b>—Display standard information about the specified aggregated Fast Ethernet or Gigabit Ethernet interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information about the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces (Aggregated Ethernet) on page 137</a></p> <p><a href="#">show interfaces brief (Aggregated Ethernet) on page 137</a></p> <p><a href="#">show interfaces detail (Aggregated Ethernet) on page 137</a></p> <p><a href="#">show interfaces extensive (Aggregated Ethernet) on page 138</a></p> <p><a href="#">show interfaces extensive (Aggregated Ethernet with VLAN Stacking) on page 139</a></p>
<b>Output Fields</b>	Table 12 on page 132 lists the output fields for the <b>show interfaces</b> (Aggregated Ethernet) command. Output fields are listed in the approximate order in which they appear.

Table 12: show interfaces (Aggregated Ethernet) Output Fields

Field Name	Field Description	Level of Output
Physical Interface		
<b>Physical interface</b>	Name of the physical interface and state of the interface.	All levels
<b>Enabled</b>	State of the physical interface. Possible values are described in the “Enabled Field” section under Common Output Fields Description.	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	All levels

Table 12: show interfaces (Aggregated Ethernet) Output Fields (*continued*)

Field Name	Field Description	Level of Output
SNMP ifIndex	SNMP index number for the physical interface.	detail extensive none
Generation	Unique number for use by Juniper Networks technical support only.	detail extensive
Link-level type	Encapsulation being used on the physical interface.	All levels
MTU	Maximum transmission unit size on the physical interface.	All levels
Speed	Speed at which the interface is running.	All levels
Loopback	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
Source filtering	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
Flow control	Flow control status: <b>Enabled</b> or <b>Disabled</b> .	All levels
Minimum links needed	Number of child links that must be operational for the aggregate interface to be operational.	All levels
Device flags	Information about the physical device. Possible values are described in the "Device Flags" section under Common Output Fields Description.	All levels
Interface flags	Information about the interface. Possible values are described in the "Interfaces Flags" section under Common Output Fields Description.	All levels
Current address	Configured MAC address.	detail extensive
Hardware address	Hardware MAC address.	detail extensive
Last flapped	Date, time, and how long ago the interface went from down to up or from up to down. The format is <b>Last flapped: year-month-day hours:minutes:seconds timezone (hours:minutes:seconds ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	detail extensive
Input Rate	Input rate in bits per second (bps) and packets per second (pps).	None specified
Output Rate	Output rate in bps and pps.	None specified
Statistics last cleared	Time when the statistics for the interface were last set to zero.	detail extensive

Table 12: show interfaces (Aggregated Ethernet) Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Traffic statistics</b>	<p>Number of and rate at which bytes and packets are received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes and rate, in bps, at which bytes are received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes and rate, in bps, at which bytes are transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets and rate, in pps, at which packets are received on the interface.</li> <li>• <b>Output packets</b>—Number of packets and rate, in pps, at which packets are transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Input errors</b>	<p>Input errors on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of incoming frame aborts and frame check sequence (FCS) errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's random early detection (RED) mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid FCS.</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or were not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>detail extensive</b>
<b>Output errors</b>	<p>Output errors on the interface:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), then the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	<p>Number of IPv6 transit bytes and packets received and transmitted on the physical interface if IPv6 statistics tracking is enabled.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>

Table 12: show interfaces (Aggregated Ethernet) Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Queue counters</b>	CoS queue number and its associated user-configured forwarding class name. <ul style="list-style-type: none"> <li><b>Queued packets</b>—Number of queued packets.</li> <li><b>Transmitted packets</b>—Number of transmitted packets.</li> <li><b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Index number of the logical interface (which reflects its initialization sequence).	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP interface index number of the logical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the “Logical Interface Flags Field” section under Common Output Fields Description.	All levels
<b>VLAN-Tag</b>	Tag Protocol Identifier (TPID) and VLAN identifier.	All levels
<b>Demux</b>	IP demultiplexing (demux) value that appears if this interface is used as the demux underlying interface. The output is one of the following: <ul style="list-style-type: none"> <li><b>Source Family Inet</b></li> <li><b>Destination Family Inet</b></li> </ul>	<b>detail extensive</b> none
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Statistics</b>	Information about the number of packets, packets per second, number of bytes, and bytes per second on this aggregate interface. <ul style="list-style-type: none"> <li><b>Bundle</b>—Information about input and output bundle rates.</li> <li><b>Link</b>—(<b>detail</b> and <b>extensive</b> only) Information about specific links in the aggregate, including link state and input and output rates.</li> <li><b>Marker Statistics</b>—(<b>detail</b> and <b>extensive</b> only) Information about 802.3ad marker protocol statistics on the specified links. <ul style="list-style-type: none"> <li><b>Marker Rx</b>—Number of valid marker protocol data units (PDUs) received on this aggregation port.</li> <li><b>Resp Tx</b>—Number of marker response PDUs transmitted on this aggregation port.</li> <li><b>Unknown Rx</b>—Number of frames received that either carry the slow protocols Ethernet type value (43B.4) but contain an unknown PDU, or are addressed to the slow protocols group MAC address (43B.3) but do not carry the slow protocols Ethernet type.</li> <li><b>Illegal Rx</b>—Number of frames received that carry the slow protocols Ethernet type value (43B.4) but contain a badly formed PDU or an illegal value of protocol subtype (43B.4).</li> </ul> </li> </ul>	<b>detail extensive</b> none
<b>protocol-family</b>	Protocol family configured on the logical interface. Possible values are described in the “Protocol Field” section under Common Output Fields Description.	<b>brief</b>

Table 12: show interfaces (Aggregated Ethernet) Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Protocol</b>	Protocol family configured on the logical interface. Possible values are described in the "Protocol Field" section under Common Output Fields Description.	<b>detail extensive none</b>
<b>MTU</b>	Maximum transmission unit size on the logical interface.	<b>detail extensive none</b>
<b>Maximum labels</b>	Maximum number of MPLS labels configured for the MPLS protocol family on the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Routing table in which the logical interface address is located. For example, 0 refers to the routing table inet.0.	<b>detail extensive</b>
<b>Flags</b>	Information about protocol family flags. Possible values are described in the "Family Flags Field" section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Mac-Validate Failures</b>	Number of MAC address validation failures for packets and bytes. This field is displayed when MAC address validation is enabled for the logical interface.	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about address flags. Possible values are described in the "Addresses Flags" section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>



## Sample Output

### show interfaces (Aggregated Ethernet)

```

user@host> show interfaces ae0
Physical interface: ae0, Enabled, Physical link is Up
  Interface index: 153, SNMP ifIndex: 59
  Link-level type: Ethernet, MTU: 1514, Speed: 300mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Disabled, Minimum links needed: 1
  Device flags   : Present Running
  Interface flags: SNMP-Traps 16384
  Current address: 00:05:85:8b:bf:f0, Hardware address: 00:05:85:8b:bf:f0
  Last flapped   : Never
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)

Logical interface ae0.0 (Index 72) (SNMP ifIndex 60)
  Flags: SNMP-Traps 16384 Encapsulation: ENET2
  Statistics
  Bundle:
    Input :          0          0          0          0
    Output:          0          0          0          0
  Protocol inet, MTU: 1500
  Flags: None
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 10.100.1/24, Local: 10.100.1.2, Broadcast: 10.100.1.255

```

### show interfaces brief (Aggregated Ethernet)

```

user@host> show interfaces ae0 brief
Physical interface: ae0, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 1514, Speed: 300mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Disabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps 16384

Logical interface ae0.0
  Flags: SNMP-Traps 16384 Encapsulation: ENET2
  inet 10.100.1.2/24

```

### show interfaces detail (Aggregated Ethernet)

```

user@host> show interfaces ae0 detail
Physical interface: ae0, Enabled, Physical link is Up
  Interface index: 153, SNMP ifIndex: 59, Generation: 36
  Link-level type: Ethernet, MTU: 1514, Speed: 300mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Disabled, Minimum links needed: 1
  Device flags   : Present Running
  Interface flags: SNMP-Traps 16384
  Current address: 00:05:85:8b:bf:f0, Hardware address: 00:05:85:8b:bf:f0
  Last flapped   : Never
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes :          0          0 bps
    Output bytes:          0          0 bps
    Input packets:          0          0 pps
    Output packets:        0          0 pps
  Queue counters:
    Queued packets  Transmitted packets  Dropped packets

    0 best-effort          7375          7375          0
    1 expedited-fo          0          0          0
    2 assured-forw          0          0          0

```

3 network-cont	2268	2268	0
----------------	------	------	---

Logical interface ae0.0 (Index 72) (SNMP ifIndex 60) (Generation 18)

Flags: SNMP-Traps 16384 Encapsulation: ENET2

Statistics	Packets	pps	Bytes	bps
------------	---------	-----	-------	-----

Bundle:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Link:

fe-0/1/0.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

fe-0/1/2.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

fe-0/1/3.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Marker Statistics:	Marker Rx	Resp Tx	Unknown Rx	Illegal Rx
--------------------	-----------	---------	------------	------------

fe-0/1/0.0	0	0	0	0
------------	---	---	---	---

fe-0/1/2.0	0	0	0	0
------------	---	---	---	---

fe-0/1/3.0	0	0	0	0
------------	---	---	---	---

Protocol inet, MTU: 1500, Generation: 37, Route table: 0

Flags: Is-Primary, Mac-Validate-Strict

Mac-Validate Failures: Packets: 0, Bytes: 0

Destination: 10.100.1/24, Local: 10.100.1.2, Broadcast: 10.100.1.255,

Generation: 49

### show interfaces extensive (Aggregated Ethernet)

user@host> show interfaces ae0 extensive

Physical interface: ae0, Enabled, Physical link is Up

Interface index: 153, SNMP ifIndex: 59, Generation: 36

Link-level type: Ethernet, MTU: 1514, Speed: 300mbps, Loopback: Disabled,

Source filtering: Disabled, Flow control: Disabled, Minimum links needed: 1

Device flags : Present Running

Interface flags: SNMP-Traps 16384

Current address: 00:05:85:8b:bf:f0, Hardware address: 00:05:85:8b:bf:f0

Last flapped : Never

Statistics last cleared: Never

Traffic statistics:

Input bytes :	60	0 bps
---------------	----	-------

Output bytes :	0	0 bps
----------------	---	-------

Input packets:	1	0 pps
----------------	---	-------

Output packets:	0	0 pps
-----------------	---	-------

Input errors:

Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,

Policed discards: 0, Resource errors: 0

Output errors:

Carrier transitions: 0, Errors: 0, Drops: 0, MTU errors: 0,

Resource errors: 0

Queue counters:	Queued packets	Transmitted packets	Dropped packets
-----------------	----------------	---------------------	-----------------

0 best-effort	7375	7375	0
---------------	------	------	---

1 expedited-fo	0	0	0
----------------	---	---	---

2 assured-forw	0	0	0
----------------	---	---	---

3 network-cont	2268	2268	0
----------------	------	------	---

```

Logical interface ae0.0 (Index 72) (SNMP ifIndex 60) (Generation 18)
Flags: SNMP-Traps 16384 Encapsulation: ENET2
Statistics          Packets      pps          Bytes          bps
Bundle:
  Input :            1            0            60            0
  Output:            0            0             0            0
Link:
  fe-0/1/0.0
    Input :            0            0             0            0
    Output:            0            0             0            0
  fe-0/1/2.0
    Input :            0            0             0            0
    Output:            0            0             0            0
  fe-0/1/3.0
    Input :            1            0            60            0
    Output:            0            0             0            0
Marker Statistics:  Marker Rx      Resp Tx      Unknown Rx      Illegal Rx
fe-0/1/0.0          0          0          0          0
fe-0/1/2.0          0          0          0          0
fe-0/1/3.0          0          0          0          0
Protocol inet, MTU: 1500, Generation: 37, Route table: 0
Flags: None
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 10.100.1/24, Local: 10.100.1.2, Broadcast: 10.100.1.255,
  Generation: 49

```

show interfaces  
extensive (Aggregated

```

user@host> show interfaces ae0 extensive
Physical interface: ae0, Enabled, Physical link is Up
Interface index: 155, SNMP ifIndex: 48, Generation: 186

```

Ethernet with VLAN  
Stacking)

```

Link-level type: 52, MTU: 1518, Speed: 2000mbps, Loopback: Disabled, Source
filtering: Disabled,
Flow control: Disabled, Minimum links needed: 1, Minimum bandwidth needed: 0
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x4000
Current address: 00:12:1e:19:3f:f0, Hardware address: 00:12:1e:19:3f:f0
Last flapped   : Never
Statistics last cleared: Never
Traffic statistics:
Input bytes   :          2406875          40152 bps
Output bytes  :          1124470          22056 bps
Input packets :           5307           5 pps
Output packets:          13295          21 pps
IPv6 transit statistics:
Input bytes   :           0
Output bytes  :           0
Input packets :           0
Output packets:           0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0, Policed discards:
0, Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, MTU errors: 0, Resource errors:
0
Ingress queues: 4 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort              0              859777              0
  1 expedited-fo             0              0              0
  2 assured-forw             0              0              0
  3 network-cont             0              0              0

Egress queues: 4 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort              0             1897615              0
  1 expedited-fo             0              0              0
  2 assured-forw             0              0              0
  3 network-cont             0             662505              0

Logical interface ae0.451 (Index 69) (SNMP ifIndex 167) (Generation 601)
Flags: SNMP-Traps VLAN-Tag [ 0x8100.451 ] Encapsulation: VLAN-VPLS
Statistics      Packets      pps      Bytes      bps
Bundle:
  Input :          289          0       25685       376
  Output:         1698          4      130375      3096
Link:
  ge-1/2/0.451
    Input :          289          0       25685       376
    Output:           0          0           0           0
  ge-1/2/1.451
    Input :           0          0           0           0
    Output:         1698          4      130375      3096
Marker Statistics:  Marker Rx      Resp Tx      Unknown Rx      Illegal Rx

```

```

ge-1/2/0.451          0          0          0          0
ge-1/2/1.451          0          0          0          0
Protocol vpls, MTU: 1518, Generation: 849, Route table: 3
Flags: Is-Primary

```

Logical interface ae0.452 (Index 70) (SNMP ifIndex 170) (Generation 602)

Flags: SNMP-Traps VLAN-Tag [ 0x8100.452 ] Encapsulation: VLAN-VPLS

Statistics	Packets	pps	Bytes	bps
------------	---------	-----	-------	-----

Bundle:

Input :	293	1	26003	1072
Output:	1694	3	130057	2400

Link:

ge-1/2/0.452				
Input :	293	1	26003	1072
Output:	1694	3	130057	2400

ge-1/2/1.452				
Input :	0	0	0	0
Output:	0	0	0	0

Marker Statistics:	Marker Rx	Resp Tx	Unknown Rx	Illegal Rx
ge-1/2/0.452	0	0	0	0
ge-1/2/1.452	0	0	0	0

Protocol vpls, MTU: 1518, Generation: 850, Route table: 3

Flags: None

...

## show interfaces demux0 (Demux Interfaces)

<b>Syntax</b>	<pre>show interfaces demux0 <i>logical-interface-number</i> &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0.
<b>Description</b>	(MX Series and M Series routers only) Display status information about the specified demux interface.
<b>Options</b>	<p><b>none</b>—Display standard information about the specified demux interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Verifying and Managing Agent Circuit Identifier-Based Dynamic VLAN Configuration</li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show interfaces (Demux) on page 149</a></p> <p><a href="#">show interfaces (PPPoE over Aggregated Ethernet) on page 150</a></p> <p><a href="#">show interfaces extensive (Targeted Distribution for Aggregated Ethernet Links) on page 150</a></p> <p><a href="#">show interfaces demux0 (ACI Interface Set Configured) on page 151</a></p>
<b>Output Fields</b>	Table 13 on page 142 lists the output fields for the <b>show interfaces</b> (demux interfaces) command. Output fields are listed in the approximate order in which they appear.

Table 13: Demux show interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	brief detail extensive none
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	brief detail extensive none

Table 13: Demux show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under Common Output Fields Description.	<b>brief detail extensive none</b>
<b>Physical link</b>	Status of the physical link ( <b>Up</b> or <b>Down</b> ).	<b>detail extensive none</b>
<b>Admin</b>	Administrative state of the interface ( <b>Up</b> or <b>Down</b> ).	<b>terse</b>
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>Link</b>	Status of the physical link ( <b>Up</b> or <b>Down</b> ).	<b>terse</b>
<b>Targeting summary</b>	Status of aggregated Ethernet links that are configured with targeted distribution ( <b>primary</b> or <b>backup</b> )	<b>extensive</b>
<b>Bandwidth</b>	Bandwidth allocated to the aggregated Ethernet links that are configured with targeted distribution.	<b>extensive</b>
<b>Proto</b>	Protocol family configured on the interface.	<b>terse</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Type</b>	Type of interface. <b>Software-Pseudo</b> indicates a standard software interface with no associated hardware device.	<b>brief detail extensive none</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	<b>brief detail extensive</b>
<b>MTU</b>	Maximum transmission unit size on the physical interface.	<b>brief detail extensive</b>
<b>Clocking</b>	Reference clock source: <b>Internal</b> (1) or <b>External</b> (2).	<b>brief detail extensive</b>
<b>Speed</b>	Speed at which the interface is running.	<b>brief detail extensive</b>
<b>Device flags</b>	Information about the physical device. Possible values are described in the “Device Flags” section under Common Output Fields Description.	<b>brief detail extensive none</b>
<b>Interface flags</b>	Information about the interface. Possible values are described in the “Interface Flags” section under Common Output Fields Description.	<b>brief detail extensive none</b>
<b>Link type</b>	Data transmission type.	<b>detail extensive none</b>
<b>Link flags</b>	Information about the link. Possible values are described in the “Link Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Physical info</b>	Information about the physical interface.	<b>detail extensive</b>
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	<b>detail extensive</b>

Table 13: Demux show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
Current address	Configured MAC address.	detail extensive
Hardware address	Hardware MAC address.	detail extensive
Alternate link address	Backup address of the link.	detail extensive
Last flapped	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	detail extensive none
Statistics last cleared	Time when the statistics for the interface were last set to zero.	detail extensive
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> <li>• <b>IPv6 transit statistics</b>—Number of IPv6 transit bytes and packets received and transmitted on the physical interface if IPv6 statistics tracking is enabled.</li> </ul> <p><b>NOTE:</b> These fields include dropped traffic and exception traffic, as those fields are not separately defined.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	detail extensive
Input errors	<p>Input errors on the interface whose definitions are as follows:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant packet threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	extensive
Input Rate	Input rate in bits per second (bps) and packets per second (pps).	none



Table 13: Demux show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious: <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Output Rate</b>	Output rate in bps and pps.	none
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	<b>brief detail extensive</b> none
<b>Index</b>	Index number of the logical interface, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP interface index number for the logical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the "Logical Interface Flags" section under Common Output Fields Description.	<b>brief detail extensive</b> none
<b>Encapsulation</b>	Encapsulation on the logical interface.	<b>brief extensive</b> none
<b>ACI VLAN: Dynamic Profile</b>	Name of the dynamic profile that defines the agent circuit identifier (ACI) interface set. If configured, the ACI interface set enables the underlying demux interface to create dynamic VLAN subscriber interfaces based on ACI information.	<b>brief detail extensive</b> none
<b>Demux</b>	Specific IP demultiplexing (demux) values: <ul style="list-style-type: none"> <li>• <b>Underlying interface</b>—The underlying interface that the demux interface uses.</li> <li>• <b>Index</b>—Index number of the logical interface.</li> <li>• <b>Family</b>—Protocol family configured on the logical interface.</li> <li>• <b>Source prefixes, total</b>—Total number of source prefixes for the underlying interface.</li> <li>• <b>Destination prefixes, total</b>—Total number of destination prefixes for the underlying interface.</li> <li>• <b>Prefix—in</b>et family prefix.</li> </ul>	<b>detail extensive</b> none

Table 13: Demux show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<i>protocol-family</i>	Protocol family configured on the logical interface.	<b>brief</b>
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the specified interface set.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface set.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface set.</li> <li>• <b>IPv6 transit statistics</b>—Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.</li> </ul> <p><b>NOTE:</b> The packet and byte counts in these fields include traffic that is dropped and does not leave the router.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Local statistics</b>	<p>Number of transit bytes and packets received and transmitted on the local interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Transit statistics</b>	<p>Number and rate of bytes and packets transiting the switch.</p> <p><b>NOTE:</b> The packet and byte counts in these fields include traffic that is dropped and does not leave the router.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>IPv6 Transit statistics</b>	<p>Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.</p> <p><b>NOTE:</b> The packet and byte counts in these fields include traffic that is dropped and does not leave the router.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Input packets</b>	Number of packets received on the interface.	<b>none</b>

Table 13: Demux show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output packets</b>	Number of packets transmitted on the interface.	none
<b>Protocol</b>	Protocol family. Possible values are described in the “Protocol Field” section under Common Output Fields Description.	detail extensive none
<b>MTU</b>	Maximum transmission unit size on the logical interface.	detail extensive none
<b>Maximum labels</b>	Maximum number of MPLS labels configured for the MPLS protocol family on the logical interface.	detail extensive none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	detail extensive
<b>Route table</b>	Route table in which the logical interface address is located. For example, 0 refers to the routing table inet.0.	detail extensive
<b>Flags</b>	Information about protocol family flags. Possible values are described in the “Family Flags” section under Common Output Fields Description.	detail extensive none
<b>Mac-Validate Failures</b>	Number of MAC address validation failures for packets and bytes. This field is displayed when MAC address validation is enabled for the logical interface.	detail extensive none
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under Common Output Fields Description.	detail extensive none
<b>Destination</b>	IP address of the remote side of the connection.	detail extensive statistics none
<b>Local</b>	IP address of the logical interface.	detail extensive terse none
<b>Remote</b>	IP address of the remote interface.	terse
<b>Broadcast</b>	Broadcast address of the logical interface.	detail extensive none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	detail extensive
<b>Link</b>	Name of the physical interfaces for member links in an aggregated Ethernet bundle for a PPPoE over aggregated Ethernet configuration. PPPoE traffic goes out on these interfaces.	detail extensive none
<b>Dynamic-profile</b>	Name of the PPPoE dynamic profile assigned to the underlying interface.	detail extensive none
<b>Service Name Table</b>	Name of the PPPoE service name table assigned to the PPPoE underlying interface.	detail extensive none
<b>Max Sessions</b>	Maximum number of dynamic PPPoE logical interfaces that the router can activate on the underlying interface.	detail extensive none

Table 13: Demux show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Duplicate Protection</b>	State of duplicate protection: <b>On</b> or <b>Off</b> . Duplicate protection prevents the activation of another dynamic PPPoE logical interface on the same underlying interface when a dynamic PPPoE logical interface for a client with the same MAC address is already active on that interface.	<b>detail extensive none</b>
<b>AC Name</b>	Name of the access concentrator.	<b>detail extensive none</b>

---

## Sample Output

### show interfaces (Demux)

```

user@host> show interfaces demux0
Physical interface: demux0, Enabled, Physical link is Up
  Interface index: 128, SNMP ifIndex: 79, Generation: 129
  Type: Software-Pseudo, Link-level type: Unspecified, MTU: 9192, Clocking: 1,
  Speed: Unspecified
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Link type      : Full-Duplex
  Link flags     : None
  Physical info  : Unspecified
  Hold-times    : Up 0 ms, Down 0 ms
  Current address: Unspecified, Hardware address: Unspecified
  Alternate link address: Unspecified
  Last flapped   : Never
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes   :                0                0 bps
    Output bytes  :                0                0 bps
    Input packets :                0                0 pps
    Output packets:                0                0 pps
  IPv6 transit statistics:
    Input bytes   :                0
    Output bytes  :                0
    Input packets :                0
    Output packets:                0
  Input errors:
    Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
    Policed discards: 0, Resource errors: 0
  Output errors:
    Carrier transitions: 0, Errors: 0, Drops: 0, MTU errors: 0,
    Resource errors: 0

Logical interface demux0.0 (Index 87) (SNMP ifIndex 84) (Generation 312)
  Flags: SNMP-Traps 0x4000 Encapsulation: ENET2
  Demux:
    Underlying interface: ge-2/0/1.0 (Index 74)
  Family Inet Source prefixes, total 1
  Prefix: 1.1.1/24
  Traffic statistics:
    Input bytes   :                0
    Output bytes  :             1554
    Input packets :                0
    Output packets:             37
  IPv6 transit statistics:
    Input bytes   :                0
    Output bytes  :                0
    Input packets :                0
    Output packets:                0
  Local statistics:
    Input bytes   :                0
    Output bytes  :             1554
    Input packets :                0
    Output packets:             37
  Transit statistics:
    Input bytes   :                0                0 bps
    Output bytes  :                0                0 bps
    Input packets :                0                0 pps
    Output packets:                0                0 pps

```

```
IPv6 transit statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Protocol inet, MTU: 1500, Generation: 395, Route table: 0
  Flags: Is-Primary, Mac-Validate-Strict
  Mac-Validate Failures: Packets: 0, Bytes: 0
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 11.1.1/24, Local: 11.1.1.1, Broadcast: 11.1.1.255,
    Generation: 434
```

**show interfaces**  
**(PPPoE over**  
**Aggregated Ethernet)**

```
user@host> show interfaces demux0.100
Logical interface demux0.100 (Index 76) (SNMP ifIndex 61160)
  Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.100 ]
  Encapsulation: ENET2
  Demux:
    Underlying interface: ae0 (Index 199)
  Link:
    ge-1/0/0
    ge-1/1/0
  Input packets : 0
  Output packets: 0
  Protocol pppoe
    Dynamic Profile: pppoe-profile,
    Service Name Table: service-table1,
    Max Sessions: 100, Duplicate Protection: On,
    AC Name: pppoe-server-1
```

**show interfaces**  
**extensive (Targeted**  
**Distribution for**

```
user@host> show interfaces demux0.1073741824 extensive

Logical interface demux0.1073741824 (Index 75) (SNMP ifIndex 558) (Generation
346)
```

### Aggregated Ethernet Links)

```

Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2
Demux:
  Underlying interface: ae0 (Index 201)
Link:
  ge-1/0/0
  ge-1/1/0
  ge-2/0/7
  ge-2/0/8
Targeting summary:
  ge-1/1/0, primary, Physical link is Up
  ge-2/0/8, backup, Physical link is Up
Bandwidth: 1000mbps

```

### show interfaces demux0 (ACI Interface Set Configured)

```

user@host> show interfaces demux0.1073741827
Logical interface demux0.1073741827 (Index 346) (SNMP ifIndex 527)
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1802 0x8100.302 ] Encapsulation:
ENET2
Demux: Source Family Inet
ACI VLAN:
  Dynamic Profile: aci-vlan-set-profile
Demux:
  Underlying interface: ge-1/0/0 (Index 138)
Input packets : 18
Output packets: 16
Protocol inet, MTU: 1500
  Flags: Sendbcst-pkt-to-re, Unnumbered
  Donor interface: lo0.0 (Index 322)
  Preferred source address: 100.20.200.202
  Addresses, Flags: Primary Is-Default Is-Primary
    Local: 10.4.12.119
Protocol pppoe
  Dynamic Profile: aci-vlan-pppoe-profile,
  Service Name Table: None,
  Max Sessions: 32000, Max Sessions VSA Ignore: Off,
  Duplicate Protection: On, Short Cycle Protection: Off,
  AC Name: nbc

```

## show interfaces (Fast Ethernet)

<b>Syntax</b>	<pre>show interfaces <i>interface-type</i> &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	Display status information about the specified Fast Ethernet interface.
<b>Options</b>	<p><b><i>interface-type</i></b>—On M Series and T Series routers, the interface type is <b><i>fe-fpc/pic/port</i></b>. On the J Series routers, the interface type is <b><i>fe-pim/O/port</i></b>.</p> <p><b><i>brief   detail   extensive   terse</i></b>—(Optional) Display the specified level of output.</p> <p><b><i>descriptions</i></b>—(Optional) Display interface description strings.</p> <p><b><i>media</i></b>—(Optional) Display media-specific information about network interfaces.</p> <p><b><i>snmp-index snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b><i>statistics</i></b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces (Fast Ethernet) on page 166</a></p> <p><a href="#">show interfaces brief (Fast Ethernet) on page 166</a></p> <p><a href="#">show interfaces detail (Fast Ethernet) on page 166</a></p> <p><a href="#">show interfaces extensive (Fast Ethernet) on page 167</a></p>
<b>Output Fields</b>	<p><a href="#">Table 14 on page 152</a> lists the output fields for the <b>show interfaces Fast Ethernet</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 14: show interfaces Fast Ethernet Output Fields

Field Name	Field Description	Level of Output
Physical Interface		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under Common Output Fields Description.	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>



Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface.	All levels
<b>Link-mode</b>	Type of link connection configured for the physical interface: <b>Full-duplex</b> or <b>Half-duplex</b>	<b>extensive</b>
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
<b>Source filtering</b>	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>LAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Local Area Network Physical Layer Device (LAN PHY) mode. LAN PHY allows 10-Gigabit Ethernet wide area links to use existing Ethernet applications.	All levels
<b>WAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Wide Area Network Physical Layer Device (WAN PHY) mode. WAN PHY allows 10-Gigabit Ethernet wide area links to use fiber-optic cables and other devices intended for SONET/SDH.	All levels
<b>Unidirectional</b>	Unidirectional link mode status for 10-Gigabit Ethernet interface: <b>Enabled</b> or <b>Disabled</b> for parent interface; <b>Rx-only</b> or <b>Tx-only</b> for child interfaces.	All levels
<b>Flow control</b>	Flow control status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Auto-negotiation</b>	(Gigabit Ethernet interfaces) Autonegotiation status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Remote-fault</b>	(Gigabit Ethernet interfaces) Remote fault status: <ul style="list-style-type: none"> <li>• <b>Online</b>—Autonegotiation is manually configured as online.</li> <li>• <b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under Common Output Fields Description.	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under Common Output Fields Description.	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the "Links Flags" section under Common Output Fields Description.	All levels
<b>Wavelength</b>	(10-Gigabit Ethernet dense wavelength-division multiplexing [DWDM] interfaces) Displays the configured wavelength, in nanometers (nm).	All levels

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Frequency</b>	(10-Gigabit Ethernet DWDM interfaces only) Displays the frequency associated with the configured wavelength, in terahertz (THz).	All levels
<b>CoS queues</b>	Number of CoS queues configured.	detail extensive none
<b>Schedulers</b>	(GigabitEthernet intelligent queuing 2 (IQ2) interfaces only) Number of CoS schedulers configured.	extensive
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	detail extensive
<b>Current address</b>	Configured MAC address.	detail extensive none
<b>Hardware address</b>	Hardware MAC address.	detail extensive none
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	detail extensive none
<b>Input Rate</b>	Input rate in bits per second (bps) and packets per second (pps).	None specified
<b>Output Rate</b>	Output rate in bps and pps.	None specified
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	detail extensive
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> <p>Gigabit Ethernet and 10-Gigabit Ethernet IQ PICs count the overhead and CRC bytes.</p> <p>For Gigabit Ethernet IQ PICs, the input byte counts vary by interface type. For more information, see Table 31 under the <a href="#">show interfaces (10-Gigabit Ethernet)</a> command.</p>	detail extensive

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored by configuring the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Collisions</b>—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters (Egress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Ingress queues</b>	Total number of ingress queues supported on the specified interface. Displayed on IQ2 interfaces.	<b>extensive</b>
<b>Queue counters (Ingress)</b>	<p>CoS queue number and its associated user-configured forwarding class name. Displayed on IQ2 interfaces.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>extensive</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active alarms and Active defects</b>	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	<b>detail extensive none</b>
<b>OTN FEC statistics</b>	<p>The forward error correction (FEC) counters provide the following statistics:</p> <ul style="list-style-type: none"> <li>• <b>Corrected Errors</b>—The count of corrected errors in the last second.</li> <li>• <b>Corrected Error Ratio</b>—The corrected error ratio in the last 25 seconds. For example, 1e-7 is 1 error per 10 million bits.</li> </ul>	
<b>PCS statistics</b>	<p>(10-Gigabit Ethernet interfaces) Displays Physical Coding Sublayer (PCS) fault conditions from the WAN PHY or the LAN PHY device.</p> <ul style="list-style-type: none"> <li>• <b>Bit errors</b>—High bit error rate. Indicates the number of bit errors when the PCS receiver is operating in normal mode.</li> <li>• <b>Errored blocks</b>—Loss of block lock. The number of errored blocks when PCS receiver is operating in normal mode.</li> </ul>	<b>detail extensive</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
MAC statistics	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem, including the following:</p> <ul style="list-style-type: none"> <li>• <b>Total octets and total packets</b>—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type. For more information, see Table 31 under the <a href="#">show interfaces (10-Gigabit Ethernet)</a> command.</li> <li>• <b>Unicast packets, Broadcast packets, and Multicast packets</b>—Number of unicast, broadcast, and multicast packets.</li> <li>• <b>CRC/Align errors</b>—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>• <b>FIFO error</b>—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC or a cable is probably malfunctioning.</li> <li>• <b>MAC control frames</b>—Number of MAC control frames.</li> <li>• <b>MAC pause frames</b>—Number of MAC control frames with <b>pause</b> operational code.</li> <li>• <b>Oversized frames</b>—Number of frames that exceed 1518 octets.</li> <li>• <b>Jabber frames</b>—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>• <b>Fragment frames</b>—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runts (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>• <b>VLAN tagged frames</b>—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not.</li> <li>• <b>Code violations</b>—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	extensive
OTN Received Overhead Bytes	APS/PCC0: 0x02, APS/PCC1: 0x11, APS/PCC2: 0x47, APS/PCC3: 0x58 Payload Type: 0x08	extensive
OTN Transmitted Overhead Bytes	APS/PCC0: 0x00, APS/PCC1: 0x00, APS/PCC2: 0x00, APS/PCC3: 0x00 Payload Type: 0x08	extensive

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Filter statistics</b>	<p><b>Receive</b> and <b>Transmit</b> statistics reported by the PIC's MAC address filter subsystem. The filtering is done by the content-addressable memory (CAM) on the PIC. The filter examines a packet's source and destination MAC addresses to determine whether the packet should enter the system or be rejected.</p> <ul style="list-style-type: none"> <li>• <b>Input packet count</b>—Number of packets received from the MAC hardware that the filter processed.</li> <li>• <b>Input packet rejects</b>—Number of packets that the filter rejected because of either the source MAC address or the destination MAC address.</li> <li>• <b>Input DA rejects</b>—Number of packets that the filter rejected because the destination MAC address of the packet is not on the accept list. It is normal for this value to increment. When it increments very quickly and no traffic is entering the router from the far-end system, either there is a bad ARP entry on the far-end system, or multicast routing is not on and the far-end system is sending many multicast packets to the local router (which the router is rejecting).</li> <li>• <b>Input SA rejects</b>—Number of packets that the filter rejected because the source MAC address of the packet is not on the accept list. The value in this field should increment only if source MAC address filtering has been enabled. If filtering is enabled, if the value increments quickly, and if the system is not receiving traffic that it should from the far-end system, it means that the user-configured source MAC addresses for this interface are incorrect.</li> <li>• <b>Output packet count</b>—Number of packets that the filter has given to the MAC hardware.</li> <li>• <b>Output packet pad count</b>—Number of packets the filter padded to the minimum Ethernet size (60 bytes) before giving the packet to the MAC hardware. Usually, padding is done only on small ARP packets, but some very small IP packets can also require padding. If this value increments rapidly, either the system is trying to find an ARP entry for a far-end system that does not exist or it is misconfigured.</li> <li>• <b>Output packet error count</b>—Number of packets with an indicated error that the filter was given to transmit. These packets are usually aged packets or are the result of a bandwidth problem on the FPC hardware. On a normal system, the value of this field should not increment.</li> <li>• <b>CAM destination filters, CAM source filters</b>—Number of entries in the CAM dedicated to destination and source MAC address filters. There can only be up to 64 source entries. If source filtering is disabled, which is the default, the values for these fields should be 0.</li> </ul>	<b>extensive</b>
<b>PMA PHY</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) SONET error information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. Any state other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>PHY Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>	<b>extensive</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>WIS section</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) SONET error information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. Any state other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B1</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>LOL</b>—Loss of light</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>ES-S</b>—Errored seconds (section)</li> <li>• <b>SES-S</b>—Severely errored seconds (section)</li> <li>• <b>SEFS-S</b>—Severely errored framing seconds (section)</li> </ul>	<b>extensive</b>
<b>WIS line</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>REI-L</b>—Remote error indication (near-end line)</li> <li>• <b>RDI-L</b>—Remote defect indication (near-end line)</li> <li>• <b>AIS-L</b>—Alarm indication signal (near-end line)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>ES-L</b>—Errored seconds (near-end line)</li> <li>• <b>SES-L</b>—Severely errored seconds (near-end line)</li> <li>• <b>UAS-L</b>—Unavailable seconds (near-end line)</li> <li>• <b>ES-LFE</b>—Errored seconds (far-end line)</li> <li>• <b>SES-LFE</b>—Severely errored seconds (far-end line)</li> <li>• <b>UAS-LFE</b>—Unavailable seconds (far-end line)</li> </ul>	<b>extensive</b>



Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>WIS path</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. Any state other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B3</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>REI-P</b>—Remote error indication</li> <li>• <b>LOP-P</b>—Loss of pointer (path)</li> <li>• <b>AIS-P</b>—Path alarm indication signal</li> <li>• <b>RDI-P</b>—Path remote defect indication</li> <li>• <b>UNEQ-P</b>—Path unequipped</li> <li>• <b>PLM-P</b>—Path payload (signal) label mismatch</li> <li>• <b>ES-P</b>—Errored seconds (near-end STS path)</li> <li>• <b>SES-P</b>—Severely errored seconds (near-end STS path)</li> <li>• <b>UAS-P</b>—Unavailable seconds (near-end STS path)</li> <li>• <b>SES-PFE</b>—Severely errored seconds (far-end STS path)</li> <li>• <b>UAS-PFE</b>—Unavailable seconds (far-end STS path)</li> </ul>	<b>extensive</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
Autonegotiation information	<p>Information about link autonegotiation.</p> <ul style="list-style-type: none"> <li>• <b>Negotiation status:</b> <ul style="list-style-type: none"> <li>• <b>Incomplete</b>—Ethernet interface has the speed or link mode configured.</li> <li>• <b>No autonegotiation</b>—Remote Ethernet interface has the speed or link mode configured, or does not perform autonegotiation.</li> <li>• <b>Complete</b>—Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> </ul> </li> <li>• <b>Link partner status</b>—OK when Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> <li>• <b>Link partner:</b> <ul style="list-style-type: none"> <li>• <b>Link mode</b>—Depending on the capability of the attached Ethernet device, either <b>Full-duplex</b> or <b>Half-duplex</b>.</li> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Fast Ethernet interfaces, the type is <b>None</b>. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information from the link partner—<b>Failure</b> indicates a receive link error. <b>OK</b> indicates that the link partner is receiving. <b>Negotiation error</b> indicates a negotiation error. <b>Offline</b> indicates that the link partner is going offline.</li> </ul> </li> <li>• <b>Local resolution</b>—Information from the link partner: <ul style="list-style-type: none"> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information. <b>Link OK</b> (no error detected on receive), <b>Offline</b> (local interface is offline), and <b>Link Failure</b> (link error detected on receive).</li> </ul> </li> </ul>	extensive
Received path trace, Transmitted path trace	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) SONET/SDH interfaces allow path trace bytes to be sent inband across the SONET/SDH link. Juniper Networks and other router manufacturers use these bytes to help diagnose misconfigurations and network errors by setting the transmitted path trace message so that it contains the system hostname and name of the physical interface. The received path trace value is the message received from the router at the other end of the fiber. The transmitted path trace value is the message that this router transmits.</p>	extensive
Packet Forwarding Engine configuration	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> </ul>	extensive

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>CoS information</b>	Information about the CoS queue for the physical interface. <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Index number of the logical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP interface index number for the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the “Logical Interface Flags” section under Common Output Fields Description.	All levels
<b>VLAN-Tag</b>	Rewrite profile applied to incoming or outgoing frames on the outer ( <b>Out</b> ) VLAN tag or for both the outer and inner ( <b>In</b> ) VLAN tags. <ul style="list-style-type: none"> <li>• <b>push</b>—An outer VLAN tag is pushed in front of the existing VLAN tag.</li> <li>• <b>pop</b>—The outer VLAN tag of the incoming frame is removed.</li> <li>• <b>swap</b>—The outer VLAN tag of the incoming frame is overwritten with the user specified VLAN tag information.</li> <li>• <b>push</b>—An outer VLAN tag is pushed in front of the existing VLAN tag.</li> <li>• <b>push-push</b>—Two VLAN tags are pushed in from the incoming frame.</li> <li>• <b>swap-push</b>—The outer VLAN tag of the incoming frame is replaced by a user-specified VLAN tag value. A user-specified outer VLAN tag is pushed in front. The outer tag becomes an inner tag in the final frame.</li> <li>• <b>swap-swap</b>—Both the inner and the outer VLAN tags of the incoming frame are replaced by the user specified VLAN tag value.</li> <li>• <b>pop-swap</b>—The outer VLAN tag of the incoming frame is removed, and the inner VLAN tag of the incoming frame is replaced by the user-specified VLAN tag value. The inner tag becomes the outer tag in the final frame.</li> <li>• <b>pop-pop</b>—Both the outer and inner VLAN tags of the incoming frame are removed.</li> </ul>	<b>brief detail extensive none</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Demux:</b>	IP demultiplexing (demux) value that appears if this interface is used as the demux underlying interface. The output is one of the following: <ul style="list-style-type: none"> <li>Source Family Inet</li> <li>Destination Family Inet</li> </ul>	<b>detail extensive none</b>
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family. Possible values are described in the "Protocol Field" section under Common Output Fields Description.	<b>detail extensive none</b>
<b>MTU</b>	Maximum transmission unit size on the logical interface.	<b>detail extensive none</b>
<b>Maximum labels</b>	Maximum number of MPLS labels configured for the MPLS protocol family on the logical interface.	<b>detail extensive none</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received and transmitted on the specified interface set. <ul style="list-style-type: none"> <li><b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface set</li> <li><b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface set.</li> </ul>	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.	<b>extensive</b>
<b>Local statistics</b>	Number and rate of bytes and packets destined to the router.	<b>extensive</b>
<b>Transit statistics</b>	Number and rate of bytes and packets transiting the switch. <p><b>NOTE:</b> For Gigabit Ethernet intelligent queuing 2 (IQ2) interfaces, the logical interface egress statistics might not accurately reflect the traffic on the wire when output shaping is applied. Traffic management output shaping might drop packets after they are tallied by the <b>Output bytes</b> and <b>Output packets</b> interface counters. However, correct values display for both of these egress statistics when per-unit scheduling is enabled for the Gigabit Ethernet IQ2 physical interface, or when a single logical interface is actively using a shared scheduler.</p>	<b>extensive</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Route table in which the logical interface address is located. For example, 0 refers to the routing table inet.0.	<b>detail extensive none</b>
<b>Flags</b>	Information about protocol family flags. Possible values are described in the "Family Flags" section under Common Output Fields Description.	<b>detail extensive</b>
<b>Donor interface</b>	(Unnumbered Ethernet) Interface from which an unnumbered Ethernet interface borrows an IPv4 address.	<b>detail extensive none</b>

Table 14: show interfaces Fast Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Preferred source address</b>	(Unnumbered Ethernet) Secondary IPv4 address of the donor loopback interface that acts as the preferred source address for the unnumbered Ethernet interface.	<b>detail extensive none</b>
<b>Input Filters</b>	Names of any input filters applied to this interface. If you specify a precedence value for any filter in a dynamic profile, filter precedence values appear in parenthesis next to all interfaces.	<b>detail extensive</b>
<b>Output Filters</b>	Names of any output filters applied to this interface. If you specify a precedence value for any filter in a dynamic profile, filter precedence values appear in parenthesis next to all interfaces.	<b>detail extensive</b>
<b>Mac-Validate Failures</b>	Number of MAC address validation failures for packets and bytes. This field is displayed when MAC address validation is enabled for the logical interface.	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b><i>protocol-family</i></b>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	<b>brief</b>
<b>Flags</b>	Information about address flag (possible values are described in the “Addresses Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interlace.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

## Sample Output

### show interfaces (Fast Ethernet)

```
user@host> show interfaces fe-0/0/0
Physical interface: fe-0/0/0, Enabled, Physical link is Up
  Interface index: 128, SNMP ifIndex: 22
  Link-level type: Ethernet, MTU: 1514, Speed: 100mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000
  CoS queues     : 4 supported, 4 maximum usable queues
  Current address: 00:05:85:02:38:00, Hardware address: 00:05:85:02:38:00
  Last flapped   : 2006-01-20 14:50:58 PST (2w4d 00:44 ago)
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)
  Active alarms   : None
  Active defects  : None
Logical interface fe-0/0/0.0 (Index 66) (SNMP ifIndex 198)
  Flags: SNMP-Traps Encapsulation: ENET2
  Protocol inet, MTU: 1500
    Flags: None
    Addresses, Flags: Is-Preferred Is-Primary
      Destination: 10.10.10/24, Local: 10.10.10.1, Broadcast: 10.10.10.255
```

### show interfaces brief (Fast Ethernet)

```
user@host> show interfaces fe-0/0/0 brief
Physical interface: fe-0/0/0, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 1514, Speed: 100mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000
Logical interface fe-0/0/0.0
  Flags: SNMP-Traps Encapsulation: ENET2
  inet 10.10.10.1/24
```

### show interfaces detail (Fast Ethernet)

```
user@host> show interfaces fe-0/0/0 detail
Physical interface: fe-0/0/0, Enabled, Physical link is Up
  Interface index: 128, SNMP ifIndex: 22, Generation: 5391
  Link-level type: Ethernet, MTU: 1514, Speed: 100mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000
  CoS queues     : 4 supported, 4 maximum usable queues
  Hold-times     : Up 0 ms, Down 0 ms
  Current address: 00:05:85:02:38:00, Hardware address: 00:05:85:02:38:00
  Last flapped   : 2006-01-20 14:50:58 PST (2w4d 00:45 ago)
  Statistics last cleared: Never
Traffic statistics:
  Input bytes   :                0                0 bps
  Output bytes  :                42                0 bps
  Input packets:                0                0 pps
  Output packets:               1                0 pps
  Active alarms : None
  Active defects: None
Logical interface fe-0/0/0.0 (Index 66) (SNMP ifIndex 198) (Generation 67)
  Flags: SNMP-Traps Encapsulation: ENET2
  Protocol inet, MTU: 1500, Generation: 105, Route table: 0
    Flags: Is-Primary, Mac-Validate-Strict
    Mac-Validate Failures: Packets: 0, Bytes: 0
    Addresses, Flags: Is-Preferred Is-Primary
```

Destination: 10.10.10/24, Local: 10.10.10.1, Broadcast: 10.10.10.255,  
Generation: 136

**show interfaces  
extensive  
(Fast Ethernet)**

```

user@host> show interfaces fe-0/0/0 extensive
Physical interface: fe-0/0/0, Enabled, Physical link is Up
Interface index: 128, SNMP ifIndex: 22, Generation: 5391
Link-level type: Ethernet, MTU: 1514, Link-mode: Full-duplex, Speed:
100Mbps, Loopback: Disabled,
Source filtering: Disabled, Flow control: Enabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x4000
CoS queues     : 4 supported, 4 maximum usable queues
Hold-times     : Up 0 ms, Down 0 ms
Current address: 00:05:85:02:38:00, Hardware address: 00:05:85:02:38:00
Last flapped   : 2006-01-20 14:50:58 PST (2w4d 00:46 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes   :          0          0 bps
Output bytes  :          42          0 bps
Input packets :          0          0 pps
Output packets:          1          0 pps
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
FIFO errors: 0, Resource errors: 0
Output errors:
Carrier transitions: 3, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,

FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Active alarms : None
Active defects : None
MAC statistics:
Total octets      Receive      Transmit
Total packets    0          1
Unicast packets  0          0
Broadcast packets 0          1
Multicast packets 0          0
CRC/Align errors 0          0
FIFO errors       0          0
MAC control frames 0          0
MAC pause frames  0          0
Oversized frames  0
Jabber frames     0
Fragment frames   0
VLAN tagged frames 0
Code violations    0
Filter statistics:
Input packet count      0
Input packet rejects    0
Input DA rejects        0
Input SA rejects        0
Output packet count     1
Output packet pad count 0
Output packet error count 0
CAM destination filters: 1, CAM source filters: 0
Autonegotiation information:
Negotiation status: Complete
Link partner:
Link partner: Full-duplex, Flow control: None, Remote fault: Ok
Local resolution:
Packet Forwarding Engine configuration:

```

Destination slot: 0  
CoS information:

	Bandwidth		Buffer	Priority	Limit		
		%	bps	%	usec		
0 best-effort		95	950000000	95	0	low	none
3 network-control		5	50000000	5	0	low	none

Logical interface fe-0/0/0.0 (Index 66) (SNMP ifIndex 198) (Generation 67)  
Flags: SNMP-Traps Encapsulation: ENET2  
Protocol inet, MTU: 1500, Generation: 105, Route table: 0  
Flags: None  
Addresses, Flags: Is-Preferred Is-Primary  
Destination: 10.10.10/24, Local: 10.10.10.1, Broadcast: 10.10.10.255,  
Generation: 136



## show interfaces (10-Gigabit Ethernet)

<b>Syntax</b>	<pre>show interfaces <i>xe-fpc/pic/port</i> &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 8.0.
<b>Description</b>	(M320, M120, MX Series, and T Series routers only) Display status information about the specified 10-Gigabit Ethernet interface.
<b>Options</b>	<p><i>xe-fpc/pic/port</i>—Display standard information about the specified 10-Gigabit Ethernet interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces extensive (10-Gigabit Ethernet, LAN PHY Mode, IQ2) on page 184</a></p> <p><a href="#">show interfaces extensive (10-Gigabit Ethernet, WAN PHY Mode) on page 187</a></p> <p><a href="#">show interfaces extensive (10-Gigabit Ethernet, DWDM OTN PIC) on page 189</a></p> <p><a href="#">show interfaces extensive (10-Gigabit Ethernet, LAN PHY Mode, Unidirectional Mode) on page 192</a></p> <p><a href="#">show interfaces extensive (10-Gigabit Ethernet, LAN PHY Mode, Unidirectional Mode, Transmit-Only) on page 192</a></p> <p><a href="#">show interfaces extensive (10-Gigabit Ethernet, LAN PHY Mode, Unidirectional Mode, Receive-Only) on page 193</a></p>
<b>Output Fields</b>	See <a href="#">Table 15 on page 170</a> for the output fields for the <b>show interfaces</b> (10-Gigabit Ethernet) command.

Table 15: show interfaces Gigabit Ethernet Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under Common Output Fields Description.	All levels
<b>Interface index</b>	Index number of the physical interface, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface.	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface.	All levels
<b>Speed</b>	Speed at which the interface is running.	All levels
<b>Loopback</b>	Loopback status: <b>Enabled</b> or <b>Disabled</b> . If loopback is enabled, type of loopback: <b>Local</b> or <b>Remote</b> .	All levels
<b>Source filtering</b>	Source filtering status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>LAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Local Area Network Physical Layer Device (LAN PHY) mode. LAN PHY allows 10-Gigabit Ethernet wide area links to use existing Ethernet applications.	All levels
<b>WAN-PHY mode</b>	10-Gigabit Ethernet interface operating in Wide Area Network Physical Layer Device (WAN PHY) mode. WAN PHY allows 10-Gigabit Ethernet wide area links to use fiber-optic cables and other devices intended for SONET/SDH.	All levels
<b>Unidirectional</b>	Unidirectional link mode status for 10-Gigabit Ethernet interface: <b>Enabled</b> or <b>Disabled</b> for parent interface; <b>Rx-only</b> or <b>Tx-only</b> for child interfaces.	All levels
<b>Flow control</b>	Flow control status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Auto-negotiation</b>	(Gigabit Ethernet interfaces) Autonegotiation status: <b>Enabled</b> or <b>Disabled</b> .	All levels
<b>Remote-fault</b>	(Gigabit Ethernet interfaces) Remote fault status: <ul style="list-style-type: none"> <li>• <b>Online</b>—Autonegotiation is manually configured as online.</li> <li>• <b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the “Device Flags” section under Common Output Fields Description.	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the “Interface Flags” section under Common Output Fields Description.	All levels

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Link flags</b>	Information about the link. Possible values are described in the “Links Flags” section under Common Output Fields Description.	All levels
<b>Wavelength</b>	(10-Gigabit Ethernet dense wavelength-division multiplexing [DWDM] interfaces) Displays the configured wavelength, in nanometers (nm).	All levels
<b>Frequency</b>	(10-Gigabit Ethernet DWDM interfaces only) Displays the frequency associated with the configured wavelength, in terahertz (THz).	All levels
<b>CoS queues</b>	Number of CoS queues configured.	detail extensive none
<b>Schedulers</b>	(Gigabit Ethernet intelligent queuing 2 (IQ2) interfaces only) Number of CoS schedulers configured.	extensive
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.	detail extensive
<b>Current address</b>	Configured MAC address.	detail extensive none
<b>Hardware address</b>	Hardware MAC address.	detail extensive none
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	detail extensive none
<b>Input Rate</b>	Input rate in bits per second (bps) and packets per second (pps).	None specified
<b>Output Rate</b>	Output rate in bps and pps.	None specified
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	detail extensive
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul> <p>Gigabit Ethernet and 10-Gigabit Ethernet IQ PICs count the overhead and CRC bytes.</p> <p>For Gigabit Ethernet IQ PICs, the input byte counts vary by interface type. For more information, see <a href="#">Table 15 on page 170</a>.</p>	detail extensive

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input errors</b>	<p>Input errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that the Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. L3 incomplete errors can be ignored by configuring the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the receive direction that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Output errors</b>	<p>Output errors on the interface. The following paragraphs explain the counters whose meaning might not be obvious:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC or PIM is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Collisions</b>—Number of Ethernet collisions. The Gigabit Ethernet PIC supports only full-duplex operation, so for Gigabit Ethernet PICs, this number should always remain 0. If it is nonzero, there is a software bug.</li> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>FIFO errors</b>—Number of FIFO errors in the send direction as reported by the ASIC on the PIC. If this value is ever nonzero, the PIC is probably malfunctioning.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeded the MTU of the interface.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Egress queues</b>	Total number of egress queues supported on the specified interface.	<b>detail extensive</b>
<b>Queue counters (Egress)</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b>
<b>Ingress queues</b>	Total number of ingress queues supported on the specified interface. Displayed on IQ2 interfaces.	<b>extensive</b>
<b>Queue counters (Ingress)</b>	<p>CoS queue number and its associated user-configured forwarding class name. Displayed on IQ2 interfaces.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Active alarms and Active defects</b>	<p>Ethernet-specific defects that can prevent the interface from passing packets. When a defect persists for a certain amount of time, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router, or turn on the red or yellow alarm LED on the craft interface. These fields can contain the value <b>None</b> or <b>Link</b>.</p> <ul style="list-style-type: none"> <li>• <b>None</b>—There are no active defects or alarms.</li> <li>• <b>Link</b>—Interface has lost its link state, which usually means that the cable is unplugged, the far-end system has been turned off, or the PIC is malfunctioning.</li> </ul>	<b>detail extensive none</b>
<b>OTN alarms</b>	Active OTN alarms identified on the interface.	<b>detail extensive</b>
<b>OTN defects</b>	OTN defects received on the interface.	<b>detail extensive</b>
<b>OTN FEC Mode</b>	<p>The FECmode configured on the interface.</p> <ul style="list-style-type: none"> <li>• <b>efec</b>—Enhanced forward error correction (EFEC) is configured to detect and correct bit errors.</li> <li>• <b>gfec</b>—G.709 Forward error correction (GFEC) mode is configured to detect and correct bit errors.</li> <li>• <b>none</b>—FEC mode is not configured.</li> </ul>	<b>detail extensive</b>
<b>OTN Rate</b>	<p>OTN mode.</p> <ul style="list-style-type: none"> <li>• <b>fixed-stuff-bytes</b>—Fixed stuff bytes 11.0957 Gbps.</li> <li>• <b>no-fixed-stuff-bytes</b>—No fixed stuff bytes 11.0491 Gbps.</li> <li>• <b>pass-through</b>—Enable OTN passthrough mode.</li> <li>• <b>no-pass-through</b>—Do not enable OTN passthrough mode.</li> </ul>	<b>detail extensive</b>
<b>OTN Line Loopback</b>	Status of the line loopback, if configured for the DWDM OTN PIC. Its value can be: <b>enabled</b> or <b>disabled</b> .	<b>detail extensive</b>
<b>OTN FEC statistics</b>	<p>The forward error correction (FEC) counters for the DWDM OTN PIC.</p> <ul style="list-style-type: none"> <li>• <b>Corrected Errors</b>—The count of corrected errors in the last second.</li> <li>• <b>Corrected Error Ratio</b>—The corrected error ratio in the last 25 seconds. For example, 1e-7 is 1 error per 10 million bits.</li> </ul>	<b>detail extensive</b>
<b>OTN FEC alarms</b>	<p>OTN FEC excessive or degraded error alarms triggered on the interface.</p> <ul style="list-style-type: none"> <li>• <b>FEC Degrade</b>—OTU FEC Degrade defect.</li> <li>• <b>FEC Excessive</b>—OTU FEC Excessive Error defect.</li> </ul>	<b>detail extensive</b>
<b>OTN OC</b>	<p>OTN OC defects triggered on the interface.</p> <ul style="list-style-type: none"> <li>• <b>LOS</b>—OC Loss of Signal defect.</li> <li>• <b>LOF</b>—OC Loss of Frame defect.</li> <li>• <b>LOM</b>—OC Loss of Multiframe defect.</li> <li>• <b>Wavelength Lock</b>—OC Wavelength Lock defect.</li> </ul>	<b>detail extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>OTN OTU</b>	OTN OTU defects detected on the interface <ul style="list-style-type: none"> <li>• <b>AIS</b>—OTN AIS alarm.</li> <li>• <b>BDI</b>—OTN OTU BDI alarm.</li> <li>• <b>IAE</b>—OTN OTU IAE alarm.</li> <li>• <b>TTIM</b>—OTN OTU TTIM alarm.</li> <li>• <b>SF</b>—OTN ODU bit error rate fault alarm.</li> <li>• <b>SD</b>—OTN ODU bit error rate defect alarm.</li> <li>• <b>TCA-ES</b>—OTN ODU ES threshold alarm.</li> <li>• <b>TCA-SES</b>—OTN ODU SES threshold alarm.</li> <li>• <b>TCA-UAS</b>—OTN ODU UAS threshold alarm.</li> <li>• <b>TCA-BBE</b>—OTN ODU BBE threshold alarm.</li> <li>• <b>BIP</b>—OTN ODU BIP threshold alarm.</li> <li>• <b>BBE</b>—OTN OTU BBE threshold alarm.</li> <li>• <b>ES</b>—OTN OTU ES threshold alarm.</li> <li>• <b>SES</b>—OTN OTU SES threshold alarm.</li> <li>• <b>UAS</b>—OTN OTU UAS threshold alarm.</li> </ul>	<b>detail extensive</b>
<b>Received DAPI</b>	Destination Access Port Interface (DAPI) from which the packets were received.	<b>detail extensive</b>
<b>Received SAPI</b>	Source Access Port Interface (SAPI) from which the packets were received.	<b>detail extensive</b>
<b>Transmitted DAPI</b>	Destination Access Port Interface (DAPI) to which the packets were transmitted.	<b>detail extensive</b>
<b>Transmitted SAPI</b>	Source Access Port Interface (SAPI) to which the packets were transmitted.	<b>detail extensive</b>
<b>PCS statistics</b>	(10-Gigabit Ethernet interfaces) Displays Physical Coding Sublayer (PCS) fault conditions from the WAN PHY or the LAN PHY device. <ul style="list-style-type: none"> <li>• <b>Bit errors</b>—High bit error rate. Indicates the number of bit errors when the PCS receiver is operating in normal mode.</li> <li>• <b>Errored blocks</b>—Loss of block lock. The number of errored blocks when PCS receiver is operating in normal mode.</li> </ul>	<b>detail extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>MAC statistics</b>	<p>Receive and Transmit statistics reported by the PIC's MAC subsystem, including the following:</p> <ul style="list-style-type: none"> <li>• <b>Total octets and total packets</b>—Total number of octets and packets. For Gigabit Ethernet IQ PICs, the received octets count varies by interface type. For more information, see <a href="#">Table 16 on page 184</a></li> <li>• <b>Unicast packets, Broadcast packets, and Multicast packets</b>—Number of unicast, broadcast, and multicast packets.</li> <li>• <b>CRC/Align errors</b>—Total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a nonintegral number of octets (Alignment Error).</li> <li>• <b>FIFO error</b>—Number of FIFO errors that are reported by the ASIC on the PIC. If this value is ever nonzero, the PIC or a cable is probably malfunctioning.</li> <li>• <b>MAC control frames</b>—Number of MAC control frames.</li> <li>• <b>MAC pause frames</b>—Number of MAC control frames with <b>pause</b> operational code.</li> <li>• <b>Oversized frames</b>—Number of frames that exceed 1518 octets.</li> <li>• <b>Jabber frames</b>—Number of frames that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. This definition of jabber is different from the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition in which any packet exceeds 20 ms. The allowed range to detect jabber is from 20 ms to 150 ms.</li> <li>• <b>Fragment frames</b>—Total number of packets that were less than 64 octets in length (excluding framing bits, but including FCS octets), and had either an FCS error or an alignment error. Fragment frames normally increment because both runts (which are normal occurrences caused by collisions) and noise hits are counted.</li> <li>• <b>VLAN tagged frames</b>—Number of frames that are VLAN tagged. The system uses the TPID of 0x8100 in the frame to determine whether a frame is tagged or not.</li> <li>• <b>Code violations</b>—Number of times an event caused the PHY to indicate "Data reception error" or "invalid data symbol error."</li> </ul>	<b>extensive</b>
<b>OTN Received Overhead Bytes</b>	APS/PCC0: 0x02, APS/PCC1: 0x11, APS/PCC2: 0x47, APS/PCC3: 0x58 Payload Type: 0x08	<b>extensive</b>
<b>OTN Transmitted Overhead Bytes</b>	APS/PCC0: 0x00, APS/PCC1: 0x00, APS/PCC2: 0x00, APS/PCC3: 0x00 Payload Type: 0x08	<b>extensive</b>



Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
Filter statistics	<p>Receive and Transmit statistics reported by the PIC's MAC address filter subsystem. The filtering is done by the content-addressable memory (CAM) on the PIC. The filter examines a packet's source and destination MAC addresses to determine whether the packet should enter the system or be rejected.</p> <ul style="list-style-type: none"> <li>• <b>Input packet count</b>—Number of packets received from the MAC hardware that the filter processed.</li> <li>• <b>Input packet rejects</b>—Number of packets that the filter rejected because of either the source MAC address or the destination MAC address.</li> <li>• <b>Input DA rejects</b>—Number of packets that the filter rejected because the destination MAC address of the packet is not on the accept list. It is normal for this value to increment. When it increments very quickly and no traffic is entering the router from the far-end system, either there is a bad ARP entry on the far-end system, or multicast routing is not on and the far-end system is sending many multicast packets to the local router (which the router is rejecting).</li> <li>• <b>Input SA rejects</b>—Number of packets that the filter rejected because the source MAC address of the packet is not on the accept list. The value in this field should increment only if source MAC address filtering has been enabled. If filtering is enabled, if the value increments quickly, and if the system is not receiving traffic that it should from the far-end system, it means that the user-configured source MAC addresses for this interface are incorrect.</li> <li>• <b>Output packet count</b>—Number of packets that the filter has given to the MAC hardware.</li> <li>• <b>Output packet pad count</b>—Number of packets the filter padded to the minimum Ethernet size (60 bytes) before giving the packet to the MAC hardware. Usually, padding is done only on small ARP packets, but some very small IP packets can also require padding. If this value increments rapidly, either the system is trying to find an ARP entry for a far-end system that does not exist or it is misconfigured.</li> <li>• <b>Output packet error count</b>—Number of packets with an indicated error that the filter was given to transmit. These packets are usually aged packets or are the result of a bandwidth problem on the FPC hardware. On a normal system, the value of this field should not increment.</li> <li>• <b>CAM destination filters, CAM source filters</b>—Number of entries in the CAM dedicated to destination and source MAC address filters. There can only be up to 64 source entries. If source filtering is disabled, which is the default, the values for these fields should be 0.</li> </ul>	extensive
PMA PHY	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) SONET error information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. Any state other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>PHY Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>	extensive

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>WIS section</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) SONET error information:</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. Any state other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B1</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>LOL</b>—Loss of light</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>ES-S</b>—Errored seconds (section)</li> <li>• <b>SES-S</b>—Severely errored seconds (section)</li> <li>• <b>SEFS-S</b>—Severely errored framing seconds (section)</li> </ul>	<b>extensive</b>
<b>WIS line</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. State other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>REI-L</b>—Remote error indication (near-end line)</li> <li>• <b>RDI-L</b>—Remote defect indication (near-end line)</li> <li>• <b>AIS-L</b>—Alarm indication signal (near-end line)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>ES-L</b>—Errored seconds (near-end line)</li> <li>• <b>SES-L</b>—Severely errored seconds (near-end line)</li> <li>• <b>UAS-L</b>—Unavailable seconds (near-end line)</li> <li>• <b>ES-LFE</b>—Errored seconds (far-end line)</li> <li>• <b>SES-LFE</b>—Severely errored seconds (far-end line)</li> <li>• <b>UAS-LFE</b>—Unavailable seconds (far-end line)</li> </ul>	<b>extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>WIS path</b>	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. Any state other than <b>OK</b> indicates a problem.</li> </ul> <p>Subfields are:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B3</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>REI-P</b>—Remote error indication</li> <li>• <b>LOP-P</b>—Loss of pointer (path)</li> <li>• <b>AIS-P</b>—Path alarm indication signal</li> <li>• <b>RDI-P</b>—Path remote defect indication</li> <li>• <b>UNEQ-P</b>—Path unequipped</li> <li>• <b>PLM-P</b>—Path payload label mismatch</li> <li>• <b>ES-P</b>—Errored seconds (near-end STS path)</li> <li>• <b>SES-P</b>—Severely errored seconds (near-end STS path)</li> <li>• <b>UAS-P</b>—Unavailable seconds (near-end STS path)</li> <li>• <b>SES-PFE</b>—Severely errored seconds (far-end STS path)</li> <li>• <b>UAS-PFE</b>—Unavailable seconds (far-end STS path)</li> </ul>	<b>extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
Autonegotiation information	<p>Information about link autonegotiation.</p> <ul style="list-style-type: none"> <li>• <b>Negotiation status:</b> <ul style="list-style-type: none"> <li>• <b>Incomplete</b>—Ethernet interface has the speed or link mode configured.</li> <li>• <b>No autonegotiation</b>—Remote Ethernet interface has the speed or link mode configured, or does not perform autonegotiation.</li> <li>• <b>Complete</b>—Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> </ul> </li> <li>• <b>Link partner status</b>—OK when Ethernet interface is connected to a device that performs autonegotiation and the autonegotiation process is successful.</li> <li>• <b>Link partner:</b> <ul style="list-style-type: none"> <li>• <b>Link mode</b>—Depending on the capability of the attached Ethernet device, either <b>Full-duplex</b> or <b>Half-duplex</b>.</li> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Fast Ethernet interfaces, the type is <b>None</b>. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information from the link partner—<b>Failure</b> indicates a receive link error. <b>OK</b> indicates that the link partner is receiving. <b>Negotiation error</b> indicates a negotiation error. <b>Offline</b> indicates that the link partner is going offline.</li> </ul> </li> <li>• <b>Local resolution</b>—Information from the link partner: <ul style="list-style-type: none"> <li>• <b>Flow control</b>—Types of flow control supported by the remote Ethernet device. For Gigabit Ethernet interfaces, types are <b>Symmetric</b> (link partner supports <b>PAUSE</b> on receive and transmit), <b>Asymmetric</b> (link partner supports <b>PAUSE</b> on transmit), and <b>Symmetric/Asymmetric</b> (link partner supports both <b>PAUSE</b> on receive and transmit or only <b>PAUSE</b> receive).</li> <li>• <b>Remote fault</b>—Remote fault information. <b>Link OK</b> (no error detected on receive), <b>Offline</b> (local interface is offline), and <b>Link Failure</b> (link error detected on receive).</li> </ul> </li> </ul>	extensive
Received path trace, Transmitted path trace	<p>(10-Gigabit Ethernet interfaces, WAN PHY mode) SONET/SDH interfaces allow path trace bytes to be sent inband across the SONET/SDH link. Juniper Networks and other router manufacturers use these bytes to help diagnose misconfigurations and network errors by setting the transmitted path trace message so that it contains the system hostname and name of the physical interface. The received path trace value is the message received from the router at the other end of the fiber. The transmitted path trace value is the message that this router transmits.</p>	extensive
Packet Forwarding Engine configuration	<p>Information about the configuration of the Packet Forwarding Engine:</p> <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> </ul>	extensive

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>CoS information</b>	<p>Information about the CoS queue for the physical interface.</p> <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Index number of the logical interface, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP interface index number for the logical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the "Logical Interface Flags" section under Common Output Fields Description.	All levels

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>VLAN-Tag</b>	<p>Rewrite profile applied to incoming or outgoing frames on the outer (<b>Out</b>) VLAN tag or for both the outer and inner (<b>In</b>) VLAN tags.</p> <ul style="list-style-type: none"> <li>• <b>push</b>—An outer VLAN tag is pushed in front of the existing VLAN tag.</li> <li>• <b>pop</b>—The outer VLAN tag of the incoming frame is removed.</li> <li>• <b>swap</b>—The outer VLAN tag of the incoming frame is overwritten with the user specified VLAN tag information.</li> <li>• <b>push</b>—An outer VLAN tag is pushed in front of the existing VLAN tag.</li> <li>• <b>push-push</b>—Two VLAN tags are pushed in from the incoming frame.</li> <li>• <b>swap-push</b>—The outer VLAN tag of the incoming frame is replaced by a user-specified VLAN tag value. A user-specified outer VLAN tag is pushed in front. The outer tag becomes an inner tag in the final frame.</li> <li>• <b>swap-swap</b>—Both the inner and the outer VLAN tags of the incoming frame are replaced by the user specified VLAN tag value.</li> <li>• <b>pop-swap</b>—The outer VLAN tag of the incoming frame is removed, and the inner VLAN tag of the incoming frame is replaced by the user-specified VLAN tag value. The inner tag becomes the outer tag in the final frame.</li> <li>• <b>pop-pop</b>—Both the outer and inner VLAN tags of the incoming frame are removed.</li> </ul>	<b>brief detail extensive none</b>
<b>Demux:</b>	<p>IP demultiplexing (demux) value that appears if this interface is used as the demux underlying interface. The output is one of the following:</p> <ul style="list-style-type: none"> <li>• Source Family Inet</li> <li>• Destination Family Inet</li> </ul>	<b>detail extensive none</b>
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Protocol</b>	Protocol family. Possible values are described in the “Protocol Field” section under Common Output Fields Description.	<b>detail extensive none</b>
<b>MTU</b>	Maximum transmission unit size on the logical interface.	<b>detail extensive none</b>
<b>Maximum labels</b>	Maximum number of MPLS labels configured for the MPLS protocol family on the logical interface.	<b>detail extensive none</b>
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the specified interface set.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface set</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface set.</li> </ul>	<b>detail extensive</b>
<b>IPv6 transit statistics</b>	Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.	<b>extensive</b>
<b>Local statistics</b>	Number and rate of bytes and packets destined to the router.	<b>extensive</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Transit statistics</b>	Number and rate of bytes and packets transiting the switch.  <b>NOTE:</b> For Gigabit Ethernet intelligent queuing 2 (IQ2) interfaces, the logical interface egress statistics might not accurately reflect the traffic on the wire when output shaping is applied. Traffic management output shaping might drop packets after they are tallied by the <b>Output bytes</b> and <b>Output packets</b> interface counters. However, correct values display for both of these egress statistics when per-unit scheduling is enabled for the Gigabit Ethernet IQ2 physical interface, or when a single logical interface is actively using a shared scheduler.	<b>extensive</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route Table</b>	Route table in which the logical interface address is located. For example, <b>0</b> refers to the routing table inet.0.	<b>detail extensive none</b>
<b>Flags</b>	Information about protocol family flags. Possible values are described in the “Family Flags” section under Common Output Fields Description.	<b>detail extensive</b>
<b>Donor interface</b>	(Unnumbered Ethernet) Interface from which an unnumbered Ethernet interface borrows an IPv4 address.	<b>detail extensive none</b>
<b>Preferred source address</b>	(Unnumbered Ethernet) Secondary IPv4 address of the donor loopback interface that acts as the preferred source address for the unnumbered Ethernet interface.	<b>detail extensive none</b>
<b>Input Filters</b>	Names of any input filters applied to this interface. If you specify a precedence value for any filter in a dynamic profile, filter precedence values appear in parenthesis next to all interfaces.	<b>detail extensive</b>
<b>Output Filters</b>	Names of any output filters applied to this interface. If you specify a precedence value for any filter in a dynamic profile, filter precedence values appear in parenthesis next to all interfaces.	<b>detail extensive</b>
<b>Mac-Validate Failures</b>	Number of MAC address validation failures for packets and bytes. This field is displayed when MAC address validation is enabled for the logical interface.	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b><i>protocol-family</i></b>	Protocol family configured on the logical interface. If the protocol is <b>inet</b> , the IP address of the interface is also displayed.	<b>brief</b>
<b>Flags</b>	Information about address flag (possible values are described in the “Addresses Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address of the logical interlace.	<b>detail extensive none</b>

Table 15: show interfaces Gigabit Ethernet Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

For Gigabit Ethernet IQ PICs, traffic and MAC statistics output varies. [Table 16 on page 184](#) describes the traffic and MAC statistics for two sample interfaces, each of which is sending traffic in packets of 500 bytes (including 478 bytes for the Layer 3 packet, 18 bytes for the Layer 2 VLAN traffic header, and 4 bytes for cyclic redundancy check [CRC] information). In [Table 16 on page 184](#), the **ge-0/3/0** interface is the inbound physical interface, and the **ge-0/0/0** interface is the outbound physical interface. On both interfaces, traffic is carried on logical unit .50 (VLAN 50).

Table 16: Gigabit Ethernet IQ PIC Traffic and MAC Statistics by Interface Type

Interface Type	Sample Command	Byte and Octet Counts Include	Comments
Inbound physical interface	<b>show interfaces ge-0/3/0 extensive</b>	Traffic statistics:  Input bytes: 496 bytes per packet, representing the Layer 2 packet  MAC statistics:  Received octets: 500 bytes per packet, representing the Layer 2 packet + 4 bytes	The additional 4 bytes are for the CRC.
Inbound logical interface	<b>show interfaces ge-0/3/0.50 extensive</b>	Traffic statistics:  Input bytes: 478 bytes per packet, representing the Layer 3 packet	
Outbound physical interface	<b>show interfaces ge-0/0/0 extensive</b>	Traffic statistics:  Input bytes: 490 bytes per packet, representing the Layer 3 packet + 12 bytes  MAC statistics:  Received octets: 478 bytes per packet, representing the Layer 3 packet	For input bytes, the additional 12 bytes includes 6 bytes for the destination MAC address + 4 bytes for VLAN + 2 bytes for the Ethernet type.
Outbound logical interface	<b>show interfaces ge-0/0/0.50 extensive</b>	Traffic statistics:  Input bytes: 478 bytes per packet, representing the Layer 3 packet	

## Sample Output

**show interfaces extensive**

```
user@host> show interfaces xe-5/0/0 extensive
Physical interface: xe-5/0/0, Enabled, Physical link is Up
Interface index: 177, SNMP ifIndex: 99, Generation: 178
```



**(10-Gigabit Ethernet,  
LAN PHY Mode, IQ2)**

```

Link-level type: Ethernet, MTU: 1518, LAN-PHY mode, Speed: 10Gbps, Loopback:
None, Source filtering: Enabled,
Flow control: Enabled
Device flags   : Present Running
Interface flags: SNMP-Traps Internal: 0x4000
Link flags     : None
CoS queues    : 8 supported, 4 maximum usable queues
Schedulers    : 1024
Hold-times     : Up 0 ms, Down 0 ms
Current address: 00:14:f6:b9:f1:f6, Hardware address: 00:14:f6:b9:f1:f6
Last flapped   : Never
Statistics last cleared: Never
Traffic statistics:
Input bytes   :          6970332384          0 bps
Output bytes  :              0          0 bps
Input packets :          81050506          0 pps
Output packets:              0          0 pps
IPv6 transit statistics:
Input bytes   :              0
Output bytes  :              0
Input packets :              0
Output packets:              0
Ingress traffic statistics at Packet Forwarding Engine:
Input bytes   :          6970299398          0 bps
Input packets :          81049992          0 pps
Drop bytes    :              0          0 bps
Drop packets  :              0          0 pps
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0,
L2 mismatch timeouts: 0, FIFO errors: 0, Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0,
MTU errors: 0, Resource errors: 0
Ingress queues: 4 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

0 best-effort          81049992          81049992          0

1 expedited-fo              0              0          0

2 assured-forw           0              0          0

3 network-cont           0              0          0

Egress queues: 4 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

0 best-effort          0              0          0

1 expedited-fo          0              0          0

2 assured-forw          0              0          0

3 network-cont          0              0          0

Active alarms : None
Active defects : None
PCS statistics
Bit errors          Seconds
                   0

```

```

    Errored blocks                                0
MAC statistics:
    Receive
    Transmit
    Total octets                                6970332384
    Total packets                               81050506
    Unicast packets                             81050000
    Broadcast packets                           506
    Multicast packets                           0
    CRC/Align errors                           0
    FIFO errors                                0
    MAC control frames                         0
    MAC pause frames                          0
    Oversized frames                          0
    Jabber frames                             0
    Fragment frames                           0
    VLAN tagged frames                        0
    Code violations                           0
Filter statistics:
    Input packet count                         81050506
    Input packet rejects                       506
    Input DA rejects                          0
    Input SA rejects                          0
    Output packet count                       0
    Output packet pad count                   0
    Output packet error count                 0
    CAM destination filters: 0, CAM source filters: 0
Packet Forwarding Engine configuration:
    Destination slot: 5
CoS information:
    Direction : Output
    CoS transmit queue      Bandwidth      Buffer Priority Limit
                             %      bps      %      usec
    0 best-effort           95      950000000  95      0      low      none
    3 network-control       5      50000000   5      0      low      none

    Direction : Input
    CoS transmit queue      Bandwidth      Buffer Priority Limit
                             %      bps      %      usec
    0 best-effort           95      950000000  95      0      low      none
    3 network-control       5      50000000   5      0      low      none

Logical interface xe-5/0/0.0 (Index 71) (SNMP ifIndex 95) (Generation 195)
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.100 ] Encapsulation: ENET2
Traffic statistics:
    Input bytes : 0
    Output bytes : 46
    Input packets: 0
    Output packets: 1
IPv6 transit statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
Local statistics:
    Input bytes : 0
    Output bytes : 46
    Input packets: 0
    Output packets: 1
Transit statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
    0 bps
    0 bps
    0 pps

```

```
Output packets:                0                0 pps
IPv6 transit statistics:
Input bytes :                   0
Output bytes :                   0
Input packets:                   0
Output packets:                   0
Protocol inet, MTU: 1500, Generation: 253, Route table: 0
Addresses, Flags: Is-Preferred Is-Primary
Destination: 192.1.1/24, Local: 192.1.1.1, Broadcast: 192.1.1.255,
Generation: 265
Protocol multiservice, MTU: Unlimited, Generation: 254, Route table: 0
Flags: None
Policer: Input: __default_arp_policer__
```

**show interfaces  
extensive**

```
user@host> show interfaces xe-1/0/0 extensive
Physical interface: xe-1/0/0, Enabled, Physical link is Up
Interface index: 141, SNMP ifIndex: 34, Generation: 47
```

(10-Gigabit Ethernet,  
WAN PHY Mode)

```

Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, Loopback: Disabled
WAN-PHY mode
Source filtering: Disabled, Flow control: Enabled
Device flags   : Present Running
Interface flags: SNMP-Traps 16384
Link flags     : None
CoS queues     : 4 supported
Hold-times     : Up 0 ms, Down 0 ms
Current address: 00:05:85:a2:10:9d, Hardware address: 00:05:85:a2:10:9d
Last flapped   : 2005-07-07 11:22:34 PDT (3d 12:28 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes :                0                0 bps
Output bytes :                0                0 bps
Input packets:                0                0 pps
Output packets:                0                0 pps
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
  L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
  HS Link CRC errors: 0, HS Link FIFO overflows: 0,
  Resource errors: 0
Output errors:
  Carrier transitions: 1, Errors: 0, Drops: 0, Collisions: 0,
  Aged packets: 0, FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0,
  Resource errors: 0
Queue counters:      Queued packets  Transmitted packets      Dropped packets
0 best-effort        0                0                0
1 expedited-fo       0                0                0
2 assured-forw       0                0                0
3 network-cont       0                0                0
Active alarms : LOL, LOS, LBL
Active defects: LOL, LOS, LBL, SEF, AIS-L, AIS-P
PCS statistics      Seconds      Count
Bit errors          0            0
Errored blocks      0            0
MAC statistics:
Receive      Transmit
Total octets  0            0
Total packets 0            0
Unicast packets 0          0
Broadcast packets 0         0
Multicast packets 0         0
CRC/Align errors 0          0
FIFO errors      0          0
MAC control frames 0         0
MAC pause frames  0          0
Oversized frames  0          0
Jabber frames     0          0
Fragment frames   0          0
VLAN tagged frames 0          0
Code violations    0          0
Filter statistics:
Input packet count      0
Input packet rejects    0
Input DA rejects        0
Input SA rejects        0
Output packet count      0
Output packet pad count  0
Output packet error count 0
CAM destination filters: 0, CAM source filters: 0
PMA PHY:      Seconds      Count State
PLL lock      0            0 OK

```

```

PHY light          63159          1 Light Missing
WIS section:
  BIP-B1            0              0
  SEF               434430        434438 Defect Active
  LOS               434430        1 Defect Active
  LOF               434430        1 Defect Active
  ES-S              434430
  SES-S             434430
  SEFS-S            434430
WIS line:
  BIP-B2            0              0
  REI-L             0              0
  RDI-L             0              0 OK
  AIS-L             434430        1 Defect Active
  BERR-SF           0              0 OK
  BERR-SD           0              0 OK
  ES-L              434430
  SES-L             434430
  UAS-L             434420
  ES-LFE            0
  SES-LFE           0
  UAS-LFE           0
WIS path:
  BIP-B3            0              0
  REI-P             0              0
  LOP-P             0              0 OK
  AIS-P             434430        1 Defect Active
  RDI-P             0              0 OK
  UNEQ-P            0              0 OK
  PLM-P             0              0 OK
  ES-P              434430
  SES-P             434430
  UAS-P             434420
  ES-PFE            0
  SES-PFE           0
  UAS-PFE           0
Received path trace:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Transmitted path trace: orissa so-1/0/0
6f 72 69 73 73 61 20 73 6f 2d 31 2f 30 2f 30 00   orissa so-1/0/0.
Packet Forwarding Engine configuration:
  Destination slot: 1
CoS information:
  CoS transmit queue      %      Bandwidth      %      Buffer      Priority      Limit
                           %      bps              %      bytes
  0 best-effort           95      950000000    95      0           low          none
  3 network-control       5       50000000    5       0           low          none

```

### show interfaces extensive

```

user@host> show interfaces ge-7/0/0 extensive
Physical interface: ge-7/0/0, Enabled, Physical link is Down
Interface index: 143, SNMP ifIndex: 508, Generation: 208

```

(10-Gigabit Ethernet,  
DWDM OTN PIC)

```

Link-level type: Ethernet, MTU: 1514, Speed: 10Gbps, BPDU Error: None,
MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled,
Flow control: Enabled
Device flags   : Present Running Down
Interface flags: Hardware-Down SNMP-Traps Internal: 0x4000
Link flags     : None
Wavelength    : 1550.12 nm, Frequency: 193.40 THz
CoS queues     : 8 supported, 8 maximum usable queues
Hold-times     : Up 0 ms, Down 0 ms
Current address: 00:05:85:70:2b:72, Hardware address: 00:05:85:70:2b:72
Last flapped   : 2011-04-20 15:48:54 PDT (18:39:49 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes   : 0                0 bps
Output bytes  : 0                0 bps
Input packets : 0                0 pps
Output packets: 0                0 pps
IPv6 transit statistics:
Input bytes   : 0
Output bytes  : 0
Input packets : 0
Output packets: 0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
FIFO errors: 0, Resource errors: 0
Output errors:
Carrier transitions: 2, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

0 best-effort        0                0                0

1 expedited-fo       0                0                0

2 assured-forw       0                0                0

3 network-cont
Queue number:        Mapped forwarding classes
0                    best-effort
1                    expedited-forwarding
2                    assured-forwarding
3                    network-control
Active alarms  : LINK
Active defects : LINK
MAC statistics:
Total octets      Receive      Transmit
Total packets    0            0
Unicast packets  0            0
Broadcast packets 0            0
Multicast packets 0            0
CRC/Align errors 0            0
FIFO errors       0            0
MAC control frames 0            0
MAC pause frames  0            0
Oversized frames  0
Jabber frames     0
Fragment frames   0
VLAN tagged frames 0
Code violations    0

```

```

Total octets                                0                0
Total packets                              0                0
Unicast packets                            0                0
Broadcast packets                          0                0
Multicast packets                          0                0
CRC/Align errors                           0                0
FIFO errors                                0                0
MAC control frames                         0                0
MAC pause frames                           0                0
Oversized frames                           0
Jabber frames                              0
Fragment frames                            0
VLAN tagged frames                         0
Code violations                             0
OTN alarms : None
OTN defects : None
OTN FEC Mode : GFEC
OTN Rate : Fixed Stuff Bytes 11.0957Gbps
OTN Line Loopback : Enabled
OTN FEC statistics :
  Corrected Errors                                0
  Corrected Error Ratio ( 0 sec average) 0e-0
OTN FEC alarms: Seconds Count State
  FEC Degrade          0          0 OK
  FEC Excessive         0          0 OK
OTN OC: Seconds Count State
  LOS                   2          1 OK
  LOF                   67164       2 Defect Active
  LOM                   67164       71 Defect Active
  Wavelength Lock       0          0 OK
OTN OTU:
  AIS                   0          0 OK
  BDI                   65919       4814 Defect Active
  IAE                   67158       1 Defect Active
  TTIM                  7          1 OK
  SF                    67164       2 Defect Active
  SD                    67164       3 Defect Active
  TCA-ES                0          0 OK
  TCA-SES               0          0 OK
  TCA-UAS               80         40 OK
  TCA-BBE               0          0 OK
  BIP                   0          0 OK
  BBE                   0          0 OK
  ES                    0          0 OK
  SES                   0          0 OK
  UAS                   587         0 OK
Received DAPI:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Received SAPI:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Transmitted DAPI:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
Transmitted SAPI:
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
OTN Received Overhead Bytes:
  APS/PCC0: 0x02, APS/PCC1: 0x42, APS/PCC2: 0xa2, APS/PCC3: 0x48
  Payload Type: 0x03
OTN Transmitted Overhead Bytes:
  APS/PCC0: 0x00, APS/PCC1: 0x00, APS/PCC2: 0x00, APS/PCC3: 0x00
  Payload Type: 0x03
Filter statistics:

```

```

Input packet count          0
Input packet rejects        0
Input DA rejects            0
Input SA rejects            0
Output packet count         0
Output packet pad count     0
Output packet error count   0
CAM destination filters: 0, CAM source filters: 0
Packet Forwarding Engine configuration:
  Destination slot: 7
CoS information:
  Direction : Output
  CoS transmit queue      Bandwidth      Buffer Priority
Limit                    %      bps      %      usec      low
0 best-effort           95    9500000000    95      0
none
3 network-control       5     500000000     5      0
none
...

```

**show interfaces  
extensive (10-Gigabit  
Ethernet, LAN PHY  
Mode, Unidirectional  
Mode)**

```

user@host> show interfaces xe-7/0/0 extensive
Physical interface: xe-7/0/0, Enabled, Physical link is Up
Interface index: 173, SNMP ifIndex: 212, Generation: 174
Link-level type: Ethernet, MTU: 1514, LAN-PHY mode, Speed: 10Gbps,
Unidirectional: Enabled,
Loopback: None, Source filtering: Disabled, Flow control: Enabled
Device flags : Present Running
...

```

**show interfaces  
extensive (10-Gigabit  
Ethernet, LAN PHY**

```

user@host> show interfaces xe-7/0/0-tx extensive
Physical interface: xe-7/0/0-tx, Enabled, Physical link is Up
Interface index: 176, SNMP ifIndex: 137, Generation: 177
Link-level type: Ethernet, MTU: 1514, LAN-PHY mode, Speed: 10Gbps,

```



## Mode, Unidirectional Mode, Transmit-Only)

```

Unidirectional: Tx-Only
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x4000
Link flags : None
CoS queues : 8 supported, 8 maximum usable queues
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:05:85:73:e4:83, Hardware address: 00:05:85:73:e4:83
Last flapped : 2007-06-01 09:08:19 PDT (3d 02:31 ago)
Statistics last cleared: Never
Traffic statistics:
Input bytes : 0 0 bps
Output bytes : 322891152287160 9627472888 bps
Input packets: 0 0 pps
Output packets: 328809727380 1225492 pps

...

Filter statistics:
Output packet count 328810554250
Output packet pad count 0
Output packet error count 0

...

Logical interface xe-7/0/0-tx.0 (Index 73) (SNMP ifIndex 138) (Generation 139)

Flags: SNMP-Traps Encapsulation: ENET2
Traffic statistics:
Input bytes : 0
Output bytes : 322891152287160
Input packets: 0
Output packets: 328809727380
IPv6 transit statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Local statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Transit statistics:
Input bytes : 0 0 bps
Output bytes : 322891152287160 9627472888 bps
Input packets: 0 0 pps
Output packets: 328809727380 1225492 pps
IPv6 transit statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Protocol inet, MTU: 1500, Generation: 147, Route table: 0
Addresses, Flags: Is-Preferred Is-Primary
Destination: 10.11.12/24, Local: 10.11.12.13, Broadcast: 10.11.12.255,
Generation: 141
Protocol multiservice, MTU: Unlimited, Generation: 148, Route table: 0
Flags: None
Policer: Input: __default_arp_policer__

```

## show interfaces

```

user@host> show interfaces xe-7/0/0-rx extensive
Physical interface: xe-7/0/0-rx, Enabled, Physical link is Up

```

extensive (10-Gigabit  
Ethernet, LAN PHY

Interface index: 174, SNMP ifIndex: 118, Generation: 175  
Link-level type: Ethernet, MTU: 1514, LAN-PHY mode, Speed: 10Gbps,  
Unidirectional: Rx-Only

### Mode, Unidirectional Mode, Receive-Only)

```

Device flags      : Present Running
Interface flags:  SNMP-Traps Internal: 0x4000
Link flags       : None
CoS queues       : 8 supported, 8 maximum usable queues
Hold-times       : Up 0 ms, Down 0 ms
Current address:  00:05:85:73:e4:83, Hardware address: 00:05:85:73:e4:83
Last flapped    : 2007-06-01 09:08:22 PDT (3d 02:31 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes :      322857456303482      9627496104 bps
  Output bytes :              0          0 bps
  Input packets:      328775413751      1225495 pps
  Output packets:              0          0 pps

```

...

```

Filter statistics:
  Input packet count      328775015056
  Input packet rejects    1
  Input DA rejects        0

```

...

Logical interface xe-7/0/0-rx.0 (Index 72) (SNMP ifIndex 120) (Generation 138)

Flags: SNMP-Traps Encapsulation: ENET2

Traffic statistics:

```

  Input bytes :      322857456303482
  Output bytes :              0
  Input packets:      328775413751
  Output packets:              0

```

IPv6 transit statistics:

```

  Input bytes :              0
  Output bytes :              0
  Input packets:              0
  Output packets:              0

```

Local statistics:

```

  Input bytes :              0
  Output bytes :              0
  Input packets:              0
  Output packets:              0

```

Transit statistics:

```

  Input bytes :      322857456303482      9627496104 bps
  Output bytes :              0          0 bps
  Input packets:      328775413751      1225495 pps
  Output packets:              0          0 pps

```

IPv6 transit statistics:

```

  Input bytes :              0
  Output bytes :              0
  Input packets:              0
  Output packets:              0

```

Protocol inet, MTU: 1500, Generation: 145, Route table: 0

Addresses, Flags: Is-Preferred Is-Primary

Destination: 192.1.1/24, Local: 192.1.1.1, Broadcast: 192.1.1.255,

Generation: 139

Protocol multiservice, MTU: Unlimited, Generation: 146, Route table: 0

Flags: None

Policer: Input: \_\_default\_arp\_policer\_\_

## show interfaces interface-set (Ethernet Interface Set)

<b>Syntax</b>	<code>show interfaces interface-set <i>interface-set-name</i></code> <detail   terse>
<b>Release Information</b>	Command introduced in Junos OS Release 8.5.
<b>Description</b>	<p>Display information about the specified gigabit or 10-Gigabit Ethernet interface set. Supported in MX Series routers with enhanced queuing DPCs or MPCs.</p> <p>You can also use the <b>show interfaces interface-set</b> command to display information about agent circuit identifier (ACI) interface sets configured on MX Series routers with MPCs/MICs.</p>
<b>Options</b>	<p><b>interface-set <i>interface-set-name</i></b>—Display information about the specified Gigabit Ethernet, 10-Gigabit Ethernet, or ACI interface set.</p> <p><b>detail   terse</b>—(Optional) Display the specified level of output.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>Verifying and Managing Agent Circuit Identifier-Based Dynamic VLAN Configuration</li> </ul>
<b>List of Sample Output</b>	<a href="#">show interfaces interface-set terse on page 198</a> <a href="#">show interfaces interface-set detail on page 198</a> <a href="#">show interfaces interface-set (ACI Interface Set) on page 198</a>
<b>Output Fields</b>	Table 17 on page 196 describes the information for the <b>show interfaces interface-set</b> command.

Table 17: Ethernet show interfaces interface-set Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Interface set</b>	Name of the interface set or sets.	All levels
<b>Interface set index</b>	<p>Index number of the interface set. For ACI interface sets, the following fields are displayed:</p> <ul style="list-style-type: none"> <li><b>ACI VLAN</b>—ACI interface set that the router uses to create dynamic VLAN subscriber interfaces based on the agent circuit identifier value.</li> <li><b>PPPoE</b>—Dynamic PPPoE subscriber interface that the router creates using the ACI interface set.</li> </ul>	<b>detail none</b>
<b>Agent Circuit ID</b>	For ACI interface sets, string in DHCP or PPPoE control packets that uniquely identifies the subscriber's access node and the DSL line on the access node.	<b>detail none</b>
<b>Max Sessions</b>	For dynamic PPPoE subscriber interfaces, maximum number of PPPoE logical interfaces that that can be activated on the underlying interface.	<b>detail none</b>

Table 17: Ethernet show interfaces interface-set Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Max Sessions VSA Ignore</b>	For dynamic PPPoE subscriber interfaces, whether the router is configured to ignore (clear) the PPPoE maximum session value returned by RADIUS in the Max-Clients-Per-Interface Juniper Networks VSA [26-143] and restore the PPPoE maximum session value on the underlying interface to the value configured with the <b>max-sessions</b> statement: <b>Off</b> (default) or <b>On</b> .	<b>detail none</b>
<b>Traffic statistics</b>	<p>Number and rate of bytes and packets received and transmitted on the specified interface set.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes and number of bytes per second received and transmitted on the interface set</li> <li>• <b>Input packets, Output packets</b>—Number of packets and number of packets per second received and transmitted on the interface set.</li> </ul>	<b>detail</b>
<b>Egress queues supported</b>	Total number of egress queues supported on the specified interface set.	<b>detail</b>
<b>Egress queues in use</b>	Total number of egress queues used on the specified interface set.	<b>detail</b>
<b>Queue counters</b>	<b>Queued packets, Transmitted packets, and Dropped packets</b> statistics for the four forwarding classes.	<b>detail</b>
<b>Members</b>	List of all interface sets or, for ACI interface sets, list of all subscriber interfaces belonging to the specified ACI interface set.	<b>detail none</b>

## Sample Output

**show interfaces  
interface-set terse**

```
user@host> show interfaces interface-set terse
Interface set:
  iflset-xe-11/3/0-0
  ge-1/0/1-0
  ge-1/0/1-2
```

**show interfaces  
interface-set detail**

```
user@host> show interfaces interface-set iflset-xe-11/3/0-0 detail
Interface set: iflset-xe-11/3/0-0
Interface set index: 19
Traffic statistics:
  Output bytes :          751017840          401673504 bps
  Output packets:         11044380          738377 pps
Egress queues: 4 supported, 4 in use
Queue counters:
  Queued packets  Transmitted packets  Dropped packets
0 best-effort    211091327          11044380        199995746
1 expedited-fo      0                  0                0
2 assured-forw      0                  0                0
3 network-cont      0                  0                0
Members:
  xe-11/3/0.0
```

**show interfaces  
interface-set (ACI  
Interface Set)**

```
user@host> show interfaces interface-set
Interface set: aci-1001-demux0.1073741826
Interface set index: 1
ACI VLAN:
  Agent Circuit ID: aci-ppp-dhcp-dvlan-60
PPPoE:
  Max Sessions: 3, Max Sessions VSA Ignore: Off
Members:
  pp0.1073741827
```

## show oam ethernet connectivity-fault-management delay-statistics

<b>Syntax</b>	<pre>show oam ethernet connectivity-fault-management delay-statistics &lt;count <i>entry-count</i>&gt; &lt;local-mep <i>local-mep-id</i>&gt; maintenance-association <i>ma-name</i> maintenance-domain <i>md-name</i> &lt;remote-mep <i>remote-mep-id</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 11.4 for EX Series switches.</p>
<b>Description</b>	<p>On MX Series routers with Ethernet interfaces on Dense Port Concentrators (DPCs), display ETH-DM delay statistics.</p> <p>On EX Series switches, display delay measurement results.</p>
<b>Options</b>	<p><b>count</b> <i>entry-count</i>—(Optional) Number of entries to display from the statistics table. The range of values is 1 through 100. The default value is 100 entries.</p> <p><b>local-mep</b> <i>local-mep-id</i>—(Optional) Numeric identifier of the local MEP. On MX Series routers, the range of values is 1 through 8192. On EX Series switches, the range of values is 1 through 8191.</p> <p><b>maintenance-association</b> <i>ma-name</i>—Name of an existing CFM maintenance association.</p> <p><b>maintenance-domain</b> <i>md-name</i>—Name of an existing connectivity fault management (CFM) maintenance domain.</p> <p><b>remote-mep</b> <i>remote-mep-id</i>—(Optional) Numeric identifier of the remote MEP. On MX Series routers, the range of values is 1 through 8192. On EX Series switches, the range of values is 1 through 8191.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>clear oam ethernet connectivity-fault-management statistics</li> <li>clear oam ethernet connectivity-fault-management delay-statistics</li> <li><a href="#">show oam ethernet connectivity-fault-management interfaces on page 207</a></li> <li><a href="#">show oam ethernet connectivity-fault-management mep-database on page 219</a></li> <li><a href="#">show oam ethernet connectivity-fault-management mep-statistics on page 229</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show oam ethernet connectivity-fault-management delay-statistics on page 201</a></p> <p><a href="#">show oam ethernet connectivity-fault-management delay-statistics remote-mep on page 201</a></p>
<b>Output Fields</b>	<p>Table 18 on page 200 lists the output fields for the <b>show oam ethernet connectivity-fault-management delay-statistics</b> command and the <b>show oam ethernet</b></p>

**connectivity-fault-management mep-statistics** command. Output fields are listed in the approximate order in which they appear.

**Table 18: show oam ethernet connectivity-fault-management delay-statistics and mep-statistics Output Fields**

Output Field Name	Field Description
MEP identifier	Maintenance association end point (MEP) numeric identifier.
MAC address	Unicast MAC address configured for the MEP.
Remote MEP count	Number of remote MEPs (unless you specify the <b>remote-mep</b> option).
Remote MEP identifier	Numeric identifier of the remote MEP.
Remote MAC address	Unicast MAC address of the remote MEP.
Index	Index number that corresponds to the ETH-DM entry in the CFM database.
One-way delay (usec)	For a one-way ETH-DM session, the frame delay time, in microseconds, measured at the receiver MEP.  For a detailed description of one-way Ethernet frame delay measurement, see the <i>ITU-T Y.1731 Ethernet Service OAM</i> topics in the Junos® OS Network Interfaces.
Two-way delay (usec)	For a two-way ETH-DM session, the frame delay time, in microseconds, measured at the initiator MEP.  For a detailed description of two-way Ethernet frame delay measurement, see the <i>ITU-T Y.1731 Ethernet Service OAM</i> topics in the Junos® OS Network Interfaces.
Average one-way delay	Average one-way frame delay for the statistics displayed.
Average one-way delay variation	Average one-way “frame jitter” for the statistics displayed.
Best-case one-way delay	Lowest one-way frame delay for the statistics displayed.
Worst-case one-way delay	Highest one-way frame delay for the statistics displayed.
Average two-way delay	Average two-way frame delay for the statistics displayed.
Average two-way delay variation	Average two-way “frame jitter” for the statistics displayed.
Best-case two-way delay	Lowest two-way frame delay for the statistics displayed.
Worst-case two-way delay	Highest two-way frame delay calculated in this session.



## Sample Output

**show oam ethernet  
connectivity-fault-  
management  
delay-statistics**

```
user@switch> show oam ethernet connectivity-fault-management delay-statistics
maintenance-domain md6 maintenance-association ma6
```

```
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
```

```
Remote MEP count: 2
```

```
Remote MEP identifier: 101
```

```
Remote MAC address: 00:05:85:73:39:4a
```

```
Delay measurement statistics:
```

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```
Average one-way delay : 286 usec
```

```
Average one-way delay variation: 62 usec
```

```
Best case one-way delay : 259 usec
```

```
Worst case one-way delay : 313 usec
```

```
Average two-way delay : 580 usec
```

```
Average two-way delay variation: 26 usec
```

```
Best case two-way delay : 519 usec
```

```
Worst case two-way delay : 650 usec
```

```
Remote MEP identifier: 102
```

```
Remote MAC address: 00:04:55:63:39:5a
```

```
Delay measurement statistics:
```

Index	One-way delay (usec)	Two-way delay (usec)
1	29	58
2	23	59
3	27	56
4	29	62
5	33	68

```
Average one-way delay : 28 usec
```

```
Average one-way delay variation: 3 usec
```

```
Best case one-way delay : 23 usec
```

```
Worst case one-way delay : 33 usec
```

```
Average two-way delay : 60 usec
```

```
Average two-way delay variation: 3 usec
```

```
Best case two-way delay : 56 usec
```

```
Worst case two-way delay : 68 usec
```

**show oam ethernet  
connectivity-fault-  
management  
delay-statistics  
remote-mep**

```
user@switch> show oam ethernet connectivity-fault-management delay-statistics
maintenance-domain md6 maintenance-association ma6 remote-mep 101
```

```
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
```

```
Remote MEP identifier: 101
```

```
Remote MAC address: 00:05:85:73:39:4a
```

```
Delay measurement statistics:
```

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```
Average one-way delay : 286 usec
```

Average one-way delay variation: 62 usec  
Best case one-way delay : 259 usec  
Worst case one-way delay : 313 usec  
Average two-way delay : 580 usec  
Average two-way delay variation: 26 usec  
Best case two-way delay : 519 usec  
Worst case two-way delay : 650 usec

## show oam ethernet connectivity-fault-management forwarding-state

<b>Syntax</b>	<b>show oam ethernet connectivity-fault-management forwarding-state</b> <b>interface</b> <i>interface-name</i>   <b>instance</b> <i>instance-name</i> <brief   detail   extensive>
<b>Release Information</b>	Command introduced in Junos OS Release 8.4.
<b>Description</b>	On M7i and M10i with the Enhanced CFEB (CFEB-E), M320, MX Series, T320, and T640 routers, display IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management forwarding state information for Ethernet interfaces.
<b>Options</b>	<p><b>interface</b> <i>interface-name</i>—Display forwarding state information for the specified Ethernet interface only.</p> <p><b>instance</b> <i>instance-name</i>—Display forwarding state information for the specified forwarding instance only.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show oam ethernet connectivity-fault-management forwarding-state instance on page 205</a></p> <p><a href="#">show oam ethernet connectivity-fault-management forwarding-state interface on page 205</a></p> <p><a href="#">show oam ethernet connectivity-fault-management forwarding-state interface detail on page 205</a></p> <p><a href="#">show oam ethernet connectivity-fault-management forwarding-state interfaceinterface-name on page 206</a></p>
<b>Output Fields</b>	Table 19 on page 203 lists the output fields for the <b>show oam ethernet connectivity-fault-management forwarding-state</b> command. Output fields are listed in the approximate order in which they appear.

Table 19: show oam ethernet connectivity-fault-management forwarding-state Output Fields

Field Name	Field Description	Level of Output
Interface name	Interface identifier.	All levels
Link (Status)	Local link status.	All levels
Filter action	Filter action for messages at the level.	All levels
Next hop type	Next-hop type.	All levels
Next index	Next-hop index number.	brief
Level	Maintenance domain (MD) level.	detail

**Table 19: show oam ethernet connectivity-fault-management forwarding-state Output Fields (*continued*)**

Field Name	Field Description	Level of Output
<b>Direction</b>	MEP direction configured.	none
<b>Instance name</b>	Forwarding instance name.	All levels
<b>CEs</b>	Number of customer edge (CE) interfaces.	All levels
<b>VEs</b>	Number of VPN endpoint (VE) interfaces.	All levels

## Sample Output

**show oam ethernet  
connectivity-fault-  
management  
forwarding-  
state instance**

```
user@host> show oam ethernet connectivity-fault-management forwarding-state instance
Instance name: __+bd1__
CEs: 3
VEs: 0
Maintenance domain forwarding state:
```

Level	Direction	Filter action	Nexthop type	Nexthop index
0		Drop	none	
1		Drop	none	
2		Drop	none	
3		Drop	none	
4		Drop	none	
5		Drop	none	
6		Drop	none	
7		Drop	none	

**show oam ethernet  
connectivity-fault-  
management  
forwarding-  
state interface**

```
user@host> show oam ethernet connectivity-fault-management forwarding-state interface
Interface name: ge-3/0/0.0
Instance name: __+bd1__
Maintenance domain forwarding state:
```

Level	Direction	Filter action	Nexthop type	Nexthop index
0		Drop	none	
1		Drop	none	
2		Drop	none	
3		Drop	none	
4		Drop	none	
5		Drop	none	
6		Drop	none	
7	down	Receive	none	

```
Interface name: xe-0/0/0.0
Instance name: __+bd1__
Maintenance domain forwarding state:
```

Level	Direction	Filter action	Nexthop type	Nexthop index
0		Drop	none	
1		Drop	none	
2		Drop	none	
3		Drop	none	
4		Drop	none	
5		Drop	none	
6		Drop	none	
7	down	Receive	none	

**show oam ethernet  
connectivity-fault-  
management  
forwarding-  
state interface detail**

```
user@host> show oam ethernet connectivity-fault-management forwarding-state interface
detail
Interface name: ge-3/0/0.0
Instance name: __+bd1__

Level: 0
Filter action: Drop
Nexthop type: none
```

```

Level: 1
Filter action: Drop
Nexthop type: none

Level: 2
Filter action: Drop
Nexthop type: none

Level: 3
Filter action: Drop
Nexthop type: none

Level: 4
Filter action: Drop
Nexthop type: none

Level: 5
Filter action: Drop
Nexthop type: none

Level: 6
Filter action: Drop
Nexthop type: none

Level: 7
Direction: down
Filter action: Receive
Nexthop type: none

Interface name: xe-0/0/0.0
Instance name: __+bd1__

Level: 0
Filter action: Drop
Nexthop type: none

Level: 1
Filter action: Drop
Nexthop type: none

...

```

**show oam ethernet  
connectivity-fault-  
management  
forwarding-  
state interface  
interface-name**

```

user@host> show oam ethernet connectivity-fault-management forwarding-state interface
interface-name ge-3/0/0/0.0
Interface name: ge-3/0/0.0
Instance name: __+bd1__
Maintenance domain forwarding state:

```

Level	Direction	Filter action	Nexthop type	Nexthop index
0		Drop	none	
1		Drop	none	
2		Drop	none	
3		Drop	none	
4		Drop	none	
5		Drop	none	
6		Drop	none	
7	down	Receive	none	

## show oam ethernet connectivity-fault-management interfaces

<b>Syntax</b>	<pre>show oam ethernet connectivity-fault-management interfaces &lt;ethernet-interface-name&gt; &lt;level md-level&gt; &lt;brief   detail   extensive&gt;</pre>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 8.4.</p> <p>Support for ITU-T Y.1731 frame delay measurement added in Junos OS Release 9.5.</p>
<b>Description</b>	<p>On M7i and M10i routers with Enhanced CFEB (CFEB-E), and on M320, MX Series, ACX Series, T320, and T640 routers, display IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management (CFM) database information for Ethernet interfaces.</p> <p>In addition, for Ethernet interfaces on MX Series routers, also display any ITU-T Y.1731 frame delay measurement (ETH-DM) frame counts when <b>detail</b> or <b>extensive</b> mode is specified.</p>
<b>Options</b>	<p><b>brief   detail   extensive</b>—(Optional) Specified level of output.</p> <p><b>ethernet-interface-name</b>—(Optional) CFM information only for CFM entities attached to the specified Ethernet interface.</p> <p><b>level md-level</b>—(Optional) CFM information for CFM identities enclosed within a maintenance domain of the specified level.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• clear oam ethernet connectivity-fault-management statistics</li> <li>• <a href="#">show oam ethernet connectivity-fault-management delay-statistics on page 199</a></li> <li>• <a href="#">show oam ethernet connectivity-fault-management mep-database on page 219</a></li> <li>• <a href="#">show oam ethernet connectivity-fault-management mep-statistics on page 229</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show oam ethernet connectivity-fault-management interfaces on page 212</a></p> <p><a href="#">show oam ethernet connectivity-fault-management interfaces detail on page 212</a></p> <p><a href="#">show oam ethernet connectivity-fault-management interfaces detail (One-Way ETH-DM) on page 213</a></p> <p><a href="#">show oam ethernet connectivity-fault-management interfaces detail (Connection Protection TLV Configured) on page 213</a></p> <p><a href="#">show oam ethernet connectivity-fault-management interfaces extensive on page 215</a></p> <p><a href="#">show oam ethernet connectivity-fault-management interfaces level on page 215</a></p> <p><a href="#">show oam ethernet connectivity-fault-management interfaces (trunk ports) on page 215</a></p>
<b>Output Fields</b>	<p>Table 20 on page 208 lists the output fields for the <b>show oam ethernet connectivity-fault-management interfaces</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 20: show oam ethernet connectivity-fault-management interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Interface</b>	Interface identifier.	All levels
<b>Interface status</b>	Local interface status.	All levels
<b>Link status</b>	Local link status. <b>Up</b> , <b>down</b> , or <b>oam-down</b> .	All levels
<b>Maintenance domain name</b>	Maintenance domain name.	<b>detail extensive</b>
<b>Format (Maintenance domain)</b>	Maintenance domain name format configured.	<b>detail extensive</b>
<b>Level</b>	Maintenance domain level configured.	All levels
<b>Maintenance association name</b>	Maintenance association name.	<b>detail extensive</b>
<b>Format (Maintenance association)</b>	Maintenance association name format configured.	<b>detail extensive</b>
<b>Continuity-check status</b>	Continuity-check status.	<b>detail extensive</b>
<b>Interval</b>	Continuity-check message interval.	<b>detail extensive</b>
<b>Loss-threshold</b>	Lost continuity-check message threshold.	<b>detail extensive</b>
<b>Interface status TLV</b>	Status of the interface status TLV, if configured on the MEP interface: <b>none</b> , <b>up</b> , <b>down</b> , <b>testing</b> , <b>unknown</b> , <b>dormant</b> , <b>notPresent</b> , <b>lowerLayerDown</b>	<b>detail extensive</b>
<b>Port status TLV</b>	Status of the port status TLV, if configured on the MEP interface: <b>none</b> , <b>no</b> , <b>yes</b>	<b>detail extensive</b>
<b>Connection Protection TLV</b>	Status of the connection protection TLV if configured on the MEP interface: <b>no</b> , <b>yes</b>  If <b>yes</b> , then the transmitted connection protection TLV is decoded and the following three fields are displayed: <b>Prefer me</b> , <b>Protection in use</b> , <b>FRR Flag</b>	<b>detail extensive</b>
<b>Prefer me</b>	If set to <b>yes</b> , the path through which CCM was transmitted is preferred (unless the path fails). It is used for signaling a manual-switch command to the remote side.  Its value can be <b>yes</b> or <b>no</b> .	<b>detail extensive</b>
<b>Protection in use</b>	Used for protection decision coordination. Its value is set to <b>yes</b> if the endpoint transmitting the CCM is currently transmitting the user traffic to protection path.  Its value can be <b>yes</b> or <b>no</b> .	<b>detail extensive</b>



**Table 20: show oam ethernet connectivity-fault-management interfaces Output Fields (*continued*)**

Field Name	Field Description	Level of Output
<b>FRR Flag</b>	LSR/LER forwarding the CCM Frame into a bypass tunnel is set.  Its value can be <b>yes</b> or <b>no</b> .	<b>detail extensive</b>
<b>MEP identifier</b>	Maintenance association end point (MEP) identifier.	All levels
<b>Neighbors</b>	Number of MEP neighbors.	All levels
<b>Direction</b>	MEP direction configured.	<b>detail extensive</b>
<b>MAC address</b>	MAC address configured for the MEP.	<b>detail extensive</b>
<b>MEP status</b>	Indicates the status of the connectivity fault management (CFM) protocol running on the MEP: <b>Running</b> , <b>inactive</b> , <b>disabled</b> , or <b>unsupported</b> .	<b>detail extensive</b>
<b>Remote MEP not receiving CCM</b>	Whether the remote MEP is not receiving connectivity check messages (CCMs).	<b>detail extensive</b>
<b>Erroneous CCM received</b>	Whether erroneous CCMs have been received.	<b>detail extensive</b>
<b>Cross-connect CCM received</b>	Whether cross-connect CCMs have been received.	<b>detail extensive</b>
<b>RDI sent by some MEP</b>	Whether the remote defect indication (RDI) bit is set in messages that have been received. The absence of the RDI bit in a CCM indicates that the transmitting MEP is receiving CCMs from all configured MEPs.	<b>detail extensive</b>
<b>CCMs sent</b>	Number of CCMs transmitted.	<b>detail extensive</b>
<b>CCMs received out of sequence</b>	Number of CCMs received out of sequence.	<b>detail extensive</b>
<b>LBMs sent</b>	Number of loopback request messages (LBMs) sent.	<b>detail extensive</b>
<b>Valid in-order LBRs received</b>	Number of loopback response messages (LBRs) received that were valid messages and in sequence.	<b>detail extensive</b>
<b>Valid out-of-order LBRs received</b>	Number of LBRs received that were valid messages and not in sequence.	<b>detail extensive</b>
<b>LBRs received with corrupted data</b>	Number of LBRs received that were corrupted.	<b>detail extensive</b>
<b>LBRs sent</b>	Number of LBRs transmitted.	<b>detail extensive</b>
<b>LTMs sent</b>	Linktrace messages (LTMs) transmitted.	<b>detail extensive</b>

**Table 20: show oam ethernet connectivity-fault-management interfaces Output Fields (*continued*)**

Field Name	Field Description	Level of Output
<b>LTM received</b>	Linktrace messages received.	<b>detail extensive</b>
<b>LTRs sent</b>	Linktrace responses (LTRs) transmitted.	<b>detail extensive</b>
<b>LTRs received</b>	Linktrace responses received.	<b>detail extensive</b>
<b>Sequence number of next LTM request</b>	Sequence number of next LTM request to be transmitted.	<b>detail extensive</b>
<b>1DMs sent</b>	<p>If the interface is attached to an initiator MEP for a one-way ETH-DM session: Number of one-way delay measurement (1DM) PDU frames sent to the peer MEP in this session.</p> <p>For all other cases, this field displays 0.</p>	<b>detail extensive</b>
<b>Valid 1DMs received</b>	<p>If the interface is attached to a receiver MEP for a one-way ETH-DM session: Number of valid 1DM frames received.</p> <p>For all other cases, this field displays 0.</p>	<b>detail extensive</b>
<b>Invalid 1DMs received</b>	<p>If the interface is attached to a receiver MEP for a one-way ETH-DM session: Number of invalid 1DM frames received.</p> <p>For all other cases, this field displays 0.</p>	<b>detail extensive</b>
<b>Out of sync 1DMs received</b>	<p>If the interface is attached to a receiver MEP for a one-way ETH-DM session: Number of out-of-sync one-way delay measurement request packets received.</p>	<b>detail extensive</b>
<b>DMMs sent</b>	<p>If the interface is attached to an initiator MEP for a two-way ETH-DM session: Number of Delay Measurement Message (DMM) PDU frames sent to the peer MEP in this session.</p> <p>For all other cases, this field displays 0.</p>	<b>detail extensive</b>
<b>Valid DMMs received</b>	<p>If the interface is attached to an initiator MEP for a two-way ETH-DM session: Number of valid two-way delay measurement request packets received.</p>	<b>detail extensive</b>
<b>Invalid DMMs received</b>	<p>If the interface is attached to an initiator MEP for a two-way ETH-DM session: Number of invalid two-way delay measurement request packets received.</p>	<b>detail extensive</b>
<b>DMRs sent</b>	<p>If the interface is attached to a responder MEP for a two-way ETH-DM session: Number of delay measurement reply (DMR) frames sent.</p> <p>For all other cases, this field displays 0.</p>	<b>detail extensive</b>
<b>Valid DMRs received</b>	<p>If the interface is attached to an initiator MEP for a two-way ETH-DM session: Number of valid DMRs received.</p> <p>For all other cases, this field displays 0.</p>	<b>detail extensive</b>

**Table 20: show oam ethernet connectivity-fault-management interfaces Output Fields (*continued*)**

Field Name	Field Description	Level of Output
<b>Invalid DMRs received</b>	If the interface is attached to an initiator MEP for a two-way ETH-DM session: Number of invalid DMRs received.  For all other cases, this field displays 0.	<b>detail extensive</b>
<b>LMM sent</b>	If the interface is attached to an initiator MEP for a ETH-LM session: Number of loss measurement message (LMM) PDU frames sent to the peer MEP in this session.	<b>detail extensive</b>
<b>Valid LMM received</b>	If the interface is attached to an initiator MEP for a ETH-LM session: Number of valid loss measurement request packets received.	<b>detail extensive</b>
<b>Invalid LMM received</b>	If the interface is attached to an initiator MEP for a ETH-LM session: Number of invalid loss measurement request packets received.	<b>detail extensive</b>
<b>LMR sent</b>	If the interface is attached to a responder MEP for a ETH-LM session: Number of loss measurement reply (LMR) frames sent.	<b>detail extensive</b>
<b>Valid LMR received</b>	If the interface is attached to an initiator MEP for a ETH-LM session: Number of valid LMR frames received.	<b>detail extensive</b>
<b>Invalid LMR received</b>	If the interface is attached to an initiator MEP for a ETH-LM session: Number of invalid LMR frames received.	<b>detail extensive</b>
<b>Remote MEP count</b>	Number of remote MEPs.	<b>extensive</b>
<b>Identifier (remote MEP)</b>	MEP identifier of the remote MEP.	<b>extensive</b>
<b>MAC address (remote MEP)</b>	MAC address of the remote MEP.	<b>extensive</b>
<b>State (remote MEP)</b>	State of the remote MEP.	<b>extensive</b>
<b>Interface (remote MEP)</b>	Interface of the remote MEP.	<b>extensive</b>

## Sample Output

show oam ethernet  
connectivity-fault-  
management  
interfaces

```
user@host> show oam ethernet connectivity-fault-management interfaces
Interface      Link      Status      Level      MEP
               Identifier Neighbors
ge-1/1/0.0     Up        Active      0          2          1
ge-1/1/0.1     Up        Active      0          2          1
ge-1/1/0.10    Up        Active      0          2          1
ge-1/1/0.100   Up        Active      0          2          1
ge-1/1/0.101   Up        Active      0          2          1
ge-1/1/0.102   Up        Active      0          2          1
ge-1/1/0.103   Up        Active      0          2          1
ge-1/1/0.104   Up        Active      0          2          1
ge-1/1/0.105   Up        Active      0          2          1
ge-1/1/0.106   Up        Active      0          2          1
```

...

show oam ethernet  
connectivity-fault-  
management  
interfaces detail

```
user@host> show oam ethernet connectivity-fault-management interfaces detail
Interface name: ge-5/2/9.0, Interface status: Active, Link status: Up
Maintenance domain name: md0, Format: string, Level: 5
Maintenance association name: ma1, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 1, Direction: down, MAC address: 00:90:69:0b:4b:94
MEP status: running
Defects:
  Remote MEP not receiving CCM          : no
  Erroneous CCM received                 : yes
  Cross-connect CCM received             : no
  RDI sent by some MEP                   : yes
Statistics:
  CCMs sent                             : 76
  CCMs received out of sequence          : 0
  LBMs sent                             : 0
  Valid in-order LBRs received            : 0
  Valid out-of-order LBRs received       : 0
  LBRs received with corrupted data      : 0
  LBRs sent                             : 0
  LTMs sent                             : 0
  LTMs received                         : 0
  LTRs sent                             : 0
  LTRs received                         : 0
  Sequence number of next LTM request    : 0
  1DMs sent                             : 0
  Valid 1DMs received                   : 0
  Invalid 1DMs received                  : 0
  DMMs sent                             : 0
  DMRs sent                             : 0
  Valid DMRs received                   : 0
  Invalid DMRs received                  : 0
  LMM sent                             : 10
  Valid LMM received                    : 20
  Invalid LMM received                   : 0
  LMR sent                             : 20
  Valid LMR received                    : 10
  Invalid LMR received                   : 0
Remote MEP count: 2
Identifier      MAC address      State      Interface
2001           00:90:69:0b:7f:71    ok        ge-5/2/9.0
```

4001 00:90:69:0b:09:c5 ok ge-5/2/9.0

**show oam ethernet  
connectivity-fault-  
management  
interfaces detail  
(One-Way ETH-DM)**

```
user@host show oam ethernet connectivity-fault-management interfaces detail
Interface name: ge-0/2/5.0, Interface status: Active, Link status: Up
Maintenance domain name: md6, Format: string, Level: 6
Maintenance association name: ma6, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 101, Direction: down, MAC address: 00:90:69:0a:48:57
MEP status: running
Defects:
  Remote MEP not receiving CCM                : no
  Erroneous CCM received                      : no
  Cross-connect CCM received                  : no
  RDI sent by some MEP                       : no
Statistics:
  CCMs sent                                  : 1590
  CCMs received out of sequence              : 0
  LBMs sent                                  : 0
  Valid in-order LBRs received               : 0
  Valid out-of-order LBRs received          : 0
  LBRs received with corrupted data         : 0
  LBRs sent                                  : 0
  LTMs sent                                  : 0
  LTMs received                             : 0
  LTRs sent                                  : 0
  LTRs received                             : 0
  Sequence number of next LTM request       : 0
  1DMs sent                                  : 10
  Valid 1DMs received                       : 0
  Invalid 1DMs received                     : 0
  DMMs sent                                  : 0
  DMRs sent                                  : 0
  Valid DMRs received                       : 0
  Invalid DMRs received                     : 0
Remote MEP count: 1
  Identifier  MAC address  State  Interface
  201        00:90:69:0a:43:94  ok    ge-0/2/5.0
```

**show oam ethernet  
connectivity-fault-  
management  
interfaces detail  
(Connection  
Protection TLV  
Configured)**

```
user@host show oam ethernet connectivity-fault-management interfaces detail
Interface name: xe-6/2/0.0 , Interface status: Active, Link status: Up
Maintenance domain name: md6, Format: string, Level: 6
Maintenance association name: ma6, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
Interface status TLV: none, Port status TLV: none
Connection Protection TLV: yes
  Prefer me: no, Protection in use: no, FRR Flag: no
MEP identifier: 1, Direction: down, MAC address: 00:19:e2:b1:14:30
MEP status: running
Defects:
  Remote MEP not receiving CCM                : no
  Erroneous CCM received                      : no
  Cross-connect CCM received                  : no
  RDI sent by some MEP                       : no
  Some remote MEP's MAC in error state       : no
Statistics:
  CCMs sent                                  : 225
  CCMs received out of sequence              : 0
  LBMs sent                                  : 0
  Valid in-order LBRs received               : 0
```

Valid out-of-order LBRs received	:	0
LBRs received with corrupted data	:	0
LBRs sent	:	0
LTMs sent	:	0
LTMs received	:	0
LTRs sent	:	0
LTRs received	:	0
Sequence number of next LTM request	:	0
1DMs sent	:	0
Valid 1DMs received	:	0
Invalid 1DMs received	:	0
Out of sync 1DMs received	:	0
DMMs sent	:	0
Valid DMMs received	:	0
Invalid DMMs received	:	0
DMRs sent	:	0
Valid DMRs received	:	0
Invalid DMRs received	:	0
LMMs sent	:	0
Valid LMMs received	:	0
Invalid LMMs received	:	0
LMRs sent	:	0
Valid LMRs received	:	0
Invalid LMRs received	:	0
Remote MEP count:	1	
Identifier	MAC address	State
2	00:90:69:7f:e4:30	Interface

**show oam ethernet  
connectivity-fault-  
management  
interfaces  
extensive**

```

user@host> show oam ethernet connectivity-fault-management interfaces extensive
Interface name: ge-5/2/9.0, Interface status: Active, Link status: Up
Maintenance domain name: md0, Format: string, Level: 5
Maintenance association name: ma1, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
Interface status TLV: none, Port status TLV: none
Connection Protection TLV: no
MEP identifier: 1, Direction: down, MAC address: 00:90:69:0b:4b:94
MEP status: running
Defects:
  Remote MEP not receiving CCM                : no
  Erroneous CCM received                      : yes
  Cross-connect CCM received                  : no
  RDI sent by some MEP                       : yes
Statistics:
  CCMs sent                                  : 76
  CCMs received out of sequence              : 0
  LBMs sent                                  : 0
  Valid in-order LBRs received               : 0
  Valid out-of-order LBRs received          : 0
  LBRs received with corrupted data          : 0
  LBRs sent                                  : 0
  LTMs sent                                  : 0
  LTMs received                             : 0
  LTRs sent                                  : 0
  LTRs received                             : 0
  Sequence number of next LTM request        : 0
  1DMs sent                                  : 0
  Valid 1DMs received                       : 0
  Invalid 1DMs received                     : 0
  DMMs sent                                  : 0
  DMRs sent                                  : 0
  Valid DMRs received                      : 0
  Invalid DMRs received                    : 0
Remote MEP count: 2
Identifier  MAC address      State  Interface
2001       00:90:69:0b:7f:71  ok    ge-5/2/9.0
4001       00:90:69:0b:09:c5  ok    ge-5/2/9.0

```

**show oam ethernet  
connectivity-fault-  
management  
interfaces level**

```

user@host> show oam ethernet connectivity-fault-management interfaces level 7
Interface  Link      Status      Level  MEP      Neighbors
Identifier
ge-3/0/0.0  Up       Active      7      201      0
xe-0/0/0.0  Up       Active      7      203      1

```

**show oam ethernet  
connectivity-fault-  
management  
interfaces (trunk  
ports)**

```

user@host> show oam ethernet connectivity-fault-management interfaces

Interface              Link      Status      Level  MEP      Neighbors
Identifier
ge-4/0/1.0, vlan 100   Up       Active      5      100      0
ge-10/3/10.4091, vlan 4091 Down     Inactive    4      400      0
ge-4/0/0.0             Up       Active      6      200      0

```

```

user@host> show oam ethernet connectivity-fault-management interfaces ge-4/0/0.0

```

```

Interface              Link      Status      Level  MEP      Neighbors
Identifier

```

ge-4/0/0.0	Up	Active	6	200	0
------------	----	--------	---	-----	---

user@host> show oam ethernet connectivity-fault-management interfaces ge-4/0/1.0 vlan 100

Interface	Link	Status	Level	MEP Identifier	Neighbors
ge-4/0/1.0, vlan 100	Up	Active	5	100	0

user@host> show oam ethernet connectivity-fault-management interfaces ge-10/3/10.4091  
vlan 4091

Interface	Link	Status	Level	MEP Identifier	Neighbors
ge-10/3/10.4091, vlan 4091	Down	Inactive	4	400	0



## show oam ethernet connectivity-fault-management linktrace path-database

<b>Syntax</b>	<b>show oam ethernet connectivity-fault-management linktrace path-database mac-address maintenance-association <i>ma-name</i> maintenance-domain <i>md-name</i></b>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0.
<b>Description</b>	On M320, MX Series, T320, and T640 routers, display IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management maintenance linktrace database information.
<b>Options</b>	<p><b>mac-address</b>—Display connectivity fault management path database information for the specified MAC address of the remote host.</p> <p><b>maintenance-association <i>ma-name</i></b>—Display connectivity fault management path database information for the specified maintenance association.</p> <p><b>maintenance-domain <i>md-name</i></b>—Display connectivity fault management path database information for the specified maintenance domain.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show oam ethernet connectivity-fault-management linktrace path-database on page 218</a></p> <p><a href="#">show oam ethernet connectivity-fault-management linktrace path-database (Two traceroute Commands) on page 218</a></p>
<b>Output Fields</b>	Table 21 on page 217 lists the output fields for the <b>show oam ethernet connectivity-fault-management linktrace path-database</b> command. Output fields are listed in the approximate order in which they appear.

**Table 21: show oam ethernet connectivity-fault-management linktrace path-database Output Fields**

Field Name	Field Description
<b>Linktrace to</b>	MAC address of the 802.1ag node to which the linktrace message is targeted.
<b>Interface</b>	Interface used by the local MEP to send the linktrace message (LTM).
<b>Maintenance Domain</b>	Maintenance domain identifier specified in the traceroute command.
<b>Maintenance Association</b>	Maintenance association identifier specified in the traceroute command.
<b>Level</b>	Maintenance domain level configured for the maintenance domain.
<b>Local Mep</b>	MEP identifier of the local MEP originating the linktrace.
<b>Hop</b>	Sequential hop count of the linktrace path.

Table 21: show oam ethernet connectivity-fault-management linktrace path-database Output Fields (*continued*)

Field Name	Field Description
TTL	Number of hops remaining in the linktrace message (LTM). The time to live (TTL) is decremented at each hop.
Source MAC address	MAC address of the 802.1ag maintenance intermediate point (MIP) that is forwarding the LTM.
Next hop MAC address	MAC address of the 802.1ag node that is the next hop in the LTM path.
Transaction Identifier	4-byte identifier maintained by the MEP. Each LTM uses a transaction identifier. The transaction identifier is maintained globally across all maintenance domains. Use the transaction identifier to match an incoming linktrace responses (LTR), with a previously sent LTM.

### Sample Output

**show oam ethernet connectivity-fault-management linktrace path-database**

```
user@host> show oam ethernet connectivity-fault-management linktrace path-database
maintenance-domain MD1 maintenance-association MA1 00:01:02:03:04:05
Linktrace to 00:01:02:03:04:05, Interface : ge-5/0/0.0
Maintenance Domain: MD1, Level: 7
Maintenance Association: MA1, Local Mep: 1
```

Hop	TTL	Source MAC address	Next hop MAC address
Transaction Identifier:100001			
1	63	00:00:aa:aa:aa:aa	00:00:bb:bb:bb:bb
2	62	00:00:bb:bb:bb:bb	00:00:cc:cc:cc:cc
3	61	00:00:cc:cc:cc:cc	00:01:02:03:04:05
4	60	00:01:02:03:04:05	00:00:00:00:00:00

**show oam ethernet connectivity-fault-management linktrace path-database (Two traceroute Commands)**

```
user@host> show oam ethernet connectivity-fault-management linktrace path-database
maintenance-domain MD2 maintenance-association MA2 00:06:07:08:09:0A
Linktrace to 00:06:07:08:09:0A, Interface : ge-5/0/1.0
Maintenance Domain: MD2, Level: 6
Maintenance Association: MA2, Local Mep: 10
```

Hop	TTL	Source MAC address	Next hop MAC address
Transaction Identifier:100002			
1	63	00:00:aa:aa:aa:aa	00:00:bb:bb:bb:bb
2	62	00:00:bb:bb:bb:bb	00:00:cc:cc:cc:cc
3	61	00:00:cc:cc:cc:cc	00:06:07:08:09:0A
4	60	00:06:07:08:09:0A	00:00:00:00:00:00
Transaction Identifier:100003			
1	63	00:00:aa:aa:aa:aa	00:00:bb:bb:bb:bb
2	62	00:00:bb:bb:bb:bb	00:00:cc:cc:cc:cc
3	61	00:00:cc:cc:cc:cc	00:06:07:08:09:0A
4	60	00:06:07:08:09:0A	00:00:00:00:00:00

## show oam ethernet connectivity-fault-management mep-database

<b>Syntax</b>	<pre>show oam ethernet connectivity-fault-management mep-database maintenance-domain <i>domain-name</i> maintenance-association <i>ma-name</i> &lt;local-mep <i>local-mep-id</i>&gt; &lt;remote-mep <i>remote-mep-id</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 8.4.</p> <p>Support for ITU-T Y.1731 frame delay measurement added in Junos OS Release 9.5.</p>
<b>Description</b>	<p>On M7i and M10i routers with Enhanced CFEB (CFEB-E), and on M320, M120, MX Series, ACX Series, T320, and T640 routers, display IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.</p> <p>In addition, on M120, M320, and MX series routers, also display port status TLV, interface status TLV, and action profile information.</p> <p>In addition, for Ethernet interfaces on MX Series routers, also display any ITU-T Y.1731 frame delay measurement (ETH-DM) frame counts.</p>
<b>Options</b>	<p><b>maintenance-association <i>ma-name</i></b>—Name of the maintenance association.</p> <p><b>maintenance-domain <i>domain-name</i></b>—Name of the maintenance domain.</p> <p><b><i>local-mep-id</i></b>—(Optional) Numeric identifier of local MEP.</p> <p><b><i>remote-mep-id</i></b>—(Optional) Numeric identifier of the remote MEP.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• clear oam ethernet connectivity-fault-management statistics</li> <li>• <a href="#">show oam ethernet connectivity-fault-management delay-statistics on page 199</a></li> <li>• <a href="#">show oam ethernet connectivity-fault-management interfaces on page 207</a></li> <li>• <a href="#">show oam ethernet connectivity-fault-management mep-statistics on page 229</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show oam ethernet connectivity-fault-management mep-database on page 225</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-database (One-Way ETH-DM) on page 225</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-database local-mep remote-mep on page 226</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-database remote-mep (Action Profile Event) on page 226</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-database (Connection Protection TLV Configured) on page 226</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-database on page 227</a></p>

[show oam ethernet connectivity-fault-management mep-database \(enhanced continuity measurement\) on page 228](#)

**Output Fields** Table 22 on page 220 lists the output fields for the **show oam ethernet connectivity-fault-management mep-database** command. Output fields are listed in the approximate order in which they appear.

**Table 22: show oam ethernet connectivity-fault-management mep-database Output Fields**

Field Name	Field Description
Maintenance domain name	Maintenance domain name.
Format (Maintenance domain)	Maintenance domain name format configured.
Level	Maintenance domain level configured.
Maintenance association name	Maintenance association name.
Format (Maintenance association)	Maintenance association name format configured.
Continuity-check status	Continuity-check status.
Interval	Continuity-check message interval.
Loss-threshold	Lost continuity-check message threshold.
Connection Protection TLV	Status of the connection protection TLV, if configured on the MEP interface: <b>no</b> , <b>yes</b>  If <b>yes</b> , then the transmitted connection protection TLV is decoded and the following three fields are displayed: <b>Prefer me</b> , <b>Protection in use</b> , <b>FRR Flag</b>
Prefer me	If set to <b>yes</b> , the path through which CCM was transmitted is preferred (unless the path fails). It is used for signaling a manual-switch command to remote side.  Its value can be <b>yes</b> or <b>no</b> .
Protection in use	Used for protection decision coordination. Its value is set to <b>yes</b> if the endpoint transmitting the CCM is currently transmitting the user traffic to protection path.  Its value can be <b>yes</b> or <b>no</b> .
FRR Flag	LSR/LER forwarding the CCM Frame into a bypass tunnel is set.  Its value can be <b>yes</b> or <b>no</b> .
MEP identifier	Maintenance association end point (MEP) identifier.
Direction	MEP direction configured.

Table 22: show oam ethernet connectivity-fault-management mep-database Output Fields (*continued*)

Field Name	Field Description
MAC address	MAC address configured for the MEP.
Auto-discovery	Whether automatic discovery is enabled or disabled.
Priority	Priority used for CCMs and linktrace messages transmitted by the MEP.
Interface name	Interface identifier.
Interface status	Local interface status.
Link status	Local link status.
Remote MEP not receiving CCM	Whether the remote MEP is not receiving CCMs.
Erroneous CCM received	Whether erroneous CCMs have been received.
Cross-connect CCM received	Whether cross-connect CCMs have been received.
RDI sent by some MEP	Whether the remote defect indication (RDI) bit is set in messages that have been received. The absence of the RDI bit in a CCM indicates that the transmitting MEP is receiving CCMs from all configured MEPs.
CCMs sent	Number of CCMs transmitted.
CCMs received out of sequence	Number of CCMs received out of sequence.
LBMs sent	Number of loopback messages (LBMs) sent.
Valid in-order LBRs received	Number of loopback response messages (LBRs) received that were valid messages and in sequence.
1DMs sent	If the MEP is an initiator for a one-way ETH-DM session: Number of one-way delay measurement (1DM) PDU frames sent to the peer MEP in this session.  For all other cases, this field displays 0.
Valid 1DMs received	If the MEP is a receiver for a one-way ETH-DM session: Number of valid 1DM frames received.  For all other cases, this field displays 0.
Invalid 1DMs received	If the MEP is a receiver for a one-way ETH-DM session: Number of invalid 1DM frames received.  For all other cases, this field displays 0.

Table 22: show oam ethernet connectivity-fault-management mep-database Output Fields (*continued*)

Field Name	Field Description
<b>Out of sync 1DMs received</b>	If the MEP is a receiver for a one-way ETH-DM session: Number of out-of-sync one-way delay measurement request packets received.
<b>DMMs sent</b>	If the MEP is an initiator for a two-way ETH-DM session: Number of Delay Measurement Message (DMM) PDU frames sent to the peer MEP in this session.  For all other cases, this field displays 0.
<b>Valid DMMs received</b>	If the MEP is an initiator for a two-way ETH-DM session: Number of valid two-way delay measurement packets received.
<b>Invalid DMMs received</b>	If the MEP is an initiator for a two-way ETH-DM session: Number of invalid two-way delay measurement packets received.
<b>DMRs sent</b>	If the MEP is a responder for a ETH-DM session: Number of Delay Measurement Reply (DMR) frames sent.  For all other cases, this field displays 0.
<b>Valid DMRs received</b>	If the MEP is an initiator for a two-way ETH-DM session: Number of valid DMRs received.  For all other cases, this field displays 0.
<b>Invalid DMRs received</b>	If the MEP is an initiator for a two-way ETH-DM session: Number of invalid DMRs received.  For all other cases, this field displays 0.
<b>Valid out-of-order LBRs received</b>	Number of LBRs received that were valid messages and not in sequence.
<b>LBRs received with corrupted data</b>	Number of LBRs received that were corrupted.
<b>LBRs sent</b>	Number of LBRs transmitted.
<b>LTMs sent</b>	Linktrace messages (LTMs) transmitted.
<b>LTMs received</b>	Linktrace messages received.
<b>LTRs sent</b>	Linktrace responses (LTRs) transmitted.
<b>LTRs received</b>	Linktrace responses received.
<b>Sequence number of next LTM request</b>	Sequence number of the next linktrace message request to be transmitted.
<b>LMM sent</b>	If the interface is attached to an initiator MEP for a ETH-LM session: Number of loss measurement message (LMM) PDU frames sent to the peer MEP in this session.

Table 22: show oam ethernet connectivity-fault-management mep-database Output Fields (*continued*)

Field Name	Field Description
Valid LMM received	If the interface is attached to an initiator MEP for a ETH-LM session: Number of valid loss measurement request packets received.
Invalid LMM received	If the interface is attached to an initiator MEP for a ETH LM session: Number of invalid loss measurement request packets received.
LMR sent	If the interface is attached to a responder MEP for a ETH-LM session: Number of loss measurement reply (LMR) frames sent.
Valid LMR received	If the interface is attached to an initiator MEP for a ETH LM session: Number of valid LMR frames received.
Invalid LMR received	If the interface is attached to an initiator MEP for a ETH-LM session: Number of invalid LMR frames received.
Remote MEP identifier	MEP identifier of the remote MEP.
State (remote MEP)	State of the remote MEP: <b>idle</b> , <b>start</b> , <b>ok</b> , or <b>failed</b> .
MAC address	MAC address of the remote MEP.
Type	Whether the remote MEP MAC address was learned using automatic discovery or configured.
Interface	Interface of the remote MEP. A seven-digit number is appended if CFM is configured to run on a routing instance of type VPLS.
Last flapped	Date, time, and how long ago the remote MEP interface went from down to up. The format is <b>Last flapped: year-month-day hours:minutes:seconds timezone (hours:minutes:seconds ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .
Remote defect indication	Whether the remote defect indication (RDI) bit is set in messages that have been received or transmitted.
Port status TLV	<ul style="list-style-type: none"> <li>In the Maintenance domain section, displays the last transmitted port status TLV value.</li> <li>In the Remote MEP section, displays the last value of port status TLV received from the remote MEP.</li> </ul> <p>In the Action profile section, displays, the last occurred event <b>port-status-tlv blocked</b> event. This event occurred due to the reception of <b>blocked</b> value in the port status TLV from remote MEP.</p>
Interface status TLV	<ul style="list-style-type: none"> <li>In the Maintenance domain section, displays the last transmitted interface status TLV value.</li> <li>In the Remote MEP section, displays the last value of interface status TLV received from the remote MEP.</li> </ul> <p>In the Action profile section, if displays, the last occurred event interface-status-tlv event ( either <b>lower-layer-down</b> or <b>down</b>). This event occurred due to the reception of either lower or <b>down</b> value in the interface status TLV from remote MEP.</p>
Action profile	Name of the action profile occurrence associated with a remote MEP.

**Table 22: show oam ethernet connectivity-fault-management mep-database Output Fields** (*continued*)

Field Name	Field Description
<b>Last event</b>	When an action profile occurs, displays the last event that triggered it.
<b>Last event cleared</b>	When all the configured and occurred events (under action profile) are cleared, then the action taken gets reverted (such as down interface is made up) and the corresponding time is noted and displayed.
<b>Action</b>	Action taken and the corresponding time of the action occurrence.



## Sample Output

**show oam ethernet  
connectivity-fault-  
management  
mep-database**

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain vpls-vlan2000 maintenance-association vpls-vlan200
Maintenance domain name: vpls-vlan2000, Format: string, Level: 5
Maintenance association name: vpls-vlan200, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 200, Direction: up, MAC address: 00:19:e2:b0:74:01
Auto-discovery: enabled, Priority: 0
Interface status TLV: none, Port status TLV: none
Connection Protection TLV: no Interface name: ge-0/0/1.0, Interface status:
Active, Link status: Up
Defects:
  Remote MEP not receiving CCM                : no
  Erroneous CCM received                      : no
  Cross-connect CCM received                  : no
  RDI sent by some MEP                       : no
Statistics:
  CCMs sent                                  : 1476
  CCMs received out of sequence              : 0
  LBMs sent                                  : 85
  Valid in-order LBRs received               : 78
  Valid out-of-order LBRs received           : 0
  LBRs received with corrupted data          : 0
  LBRs sent                                  : 0
  LTMs sent                                  : 1
  LTMs received                             : 0
  LTRs sent                                  : 0
  LTRs received                             : 1
  Sequence number of next LTM request        : 1
  1DMs sent                                  : 0
  Valid 1DMs received                       : 0
  Invalid 1DMs received                     : 0
  DMMs sent                                  : 0
  DMRs sent                                  : 0
  Valid DMRs received                      : 0
  Invalid DMRs received                    : 0
Remote MEP count: 1
Identifier  MAC address      State  Interface
100        00:19:e2:b2:81:4b  ok    vt-0/1/10.1049088
```

**show oam ethernet  
connectivity-fault-  
management  
mep-database  
(One-Way ETH-DM)**

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md6 maintenance-domain ma6
Maintenance domain name: md6, Format: string, Level: 6
Maintenance association name: ma6, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 101, Direction: down, MAC address: 00:90:69:0a:48:57
Auto-discovery: enabled, Priority: 0
Interface name: ge-0/2/5.0, Interface status: Active, Link status: Up
Defects:
  Remote MEP not receiving CCM                : no
  Erroneous CCM received                      : no
  Cross-connect CCM received                  : no
  RDI sent by some MEP                       : no
Statistics:
  CCMs sent                                  : 1590
  CCMs received out of sequence              : 0
  LBMs sent                                  : 0
  Valid in-order LBRs received               : 0
```

```

Valid out-of-order LBRs received          : 0
LBRs received with corrupted data         : 0
LBRs sent                                : 0
LTMs sent                                 : 0
LTMs received                             : 0
LTRs sent                                 : 0
LTRs received                             : 0
Sequence number of next LTM request       : 0
1DMs sent                                 : 10
Valid 1DMs received                       : 0
Invalid 1DMs received                     : 0
DMMs sent                                 : 0
DMRs sent                                 : 0
Valid DMRs received                       : 0
Invalid DMRs received                     : 0
Remote MEP count: 1
Identifier  MAC address      State    Interface
  201      00:90:69:0a:43:94   ok      ge-0/2/5.0

```

**show oam ethernet  
connectivity-fault-  
management  
mep-database  
local-mep remote-mep**

```

user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain vpls-vlan2000 maintenance-association vpls-vlan200 local-mep 200
remote-mep 100

```

```

Maintenance domain name: vpls-vlan2000, Format: string, Level: 5
Maintenance association name: vpls-vlan200, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 200, Direction: up, MAC address: 00:19:e2:b0:74:01
Auto-discovery: enabled, Priority: 0
Interface name: ge-0/0/1.0, Interface status: Active, Link status: Up

```

```

Remote MEP identifier: 100, State: ok
MAC address: 00:19:e2:b2:81:4b, Type: Learned
Interface: vt-0/1/10.1049088
Last flapped: Never
Remote defect indication: false
Port status TLV: none
Interface status TLV: none

```

**show oam ethernet  
connectivity-fault-  
management  
mep-database  
remote-mep  
(Action Profile Event)**

```

user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 remote-mep 200

```

```

Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 100, Direction: down, MAC address: 00:05:85:73:e8:ad
Auto-discovery: enabled, Priority: 0
Interface status TLV: none, Port status TLV: none
Interface name: ge-1/0/8.0, Interface status: Active, Link status: Up

```

```

Remote MEP identifier: 200, State: ok
MAC address: 00:05:85:73:96:1f, Type: Configured
Interface: ge-1/0/8.0
Last flapped: Never
Remote defect indication: false
Port status TLV: none
Interface status TLV: lower-layer-down
Action profile: juniper
  Last event: Interface-status-tlv lower-layer-down
  Action: Interface-down, Time: 2009-03-27 14:25:10 PDT (00:00:02 ago)

```

```

user@host> show oam ethernet connectivity-fault-management mep-database

```

```
show oam ethernet
connectivity-fault-
management
mep-database
(Connection
Protection TLV
Configured)
```

#### **maintenance-domain md5 maintenance-association ma5**

If connection-protection is not enabled on down MEPs, but connection-protection TLV is used, MX always sets the protection-in-use flag in connection-protection tlv, while CCMs are sent out. During reversion, this is an indicator to the receiver that protect-path is in use, otherwise the peer (receiver) assumes working is active and reversion does not work as expected. Setting this bit does not affect protection-switching/traffic-loss.

```
Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 1, Direction: down, MAC address: 00:19:e2:b1:14:30
Auto-discovery: enabled, Priority: 0
Interface status TLV: none, Port status TLV: none
Connection Protection TLV: yes
  Prefer me: no, Protection in use: no, FRR Flag: no
Interface name: xe-6/2/0.0, Interface status: Active, Link status: Up
Defects:
  Remote MEP not receiving CCM                : no
  Erroneous CCM received                       : no
  Cross-connect CCM received                   : no
  RDI sent by some MEP                         : no
  Some remote MEP's MAC in error state         : no
Statistics:
  CCMs sent                                   : 251
  CCMs received out of sequence                : 0
  LBMs sent                                   : 0
  Valid in-order LBRs received                  : 0
  Valid out-of-order LBRs received              : 0
  LBRs received with corrupted data             : 0
  LBRs sent                                   : 0
  LTMs sent                                   : 0
  LTMs received                               : 0
  LTRs sent                                   : 0
  LTRs received                               : 0
  Sequence number of next LTM request           : 0
  1DMs sent                                   : 0
  Valid 1DMs received                         : 0
  Invalid 1DMs received                       : 0
  Out of sync 1DMs received                   : 0
  DMMs sent                                   : 0
  Valid DMMs received                         : 0
  Invalid DMMs received                       : 0
  DMRs sent                                   : 0
  Valid DMRs received                         : 0
  Invalid DMRs received                       : 0
  LMMs sent                                   : 0
  Valid LMMs received                         : 0
  Invalid LMMs received                       : 0
  LMRs sent                                   : 0
  Valid LMRs received                         : 0
  Invalid LMRs received                       : 0
Remote MEP count: 1
Identifier    MAC address    State    Interface
  2          00:90:69:7f:e4:30
```

```
show oam ethernet
connectivity-fault-
management
mep-database
```

#### **user@host> show oam ethernet connectivity-fault-management mep-database maintenance-domain md5 maintenance-association ma5**

```
Maintenance association name: ma1, Format: string
Continuity-check status: enabled, Interval: 1s, Loss-threshold: 3 frames
MEP identifier: 1, Direction: down, MAC address: 00:14:f6:b6:01:fe
```

Auto-discovery: enabled, Priority: 0  
 Interface name: ge-1/0/0.0, Interface status: Active, Link status: Up

Defects:

Remote MEP not receiving CCM : no  
 Erroneous CCM received : no  
 Cross-connect CCM received : no  
 RDI sent by some MEP : no

Statistics:

CCMs sent : 328703  
 CCMs received out of sequence : 0  
 LBMs sent : 85  
 Valid in-order LBRs received : 78  
 Valid out-of-order LBRs received : 0  
 LBRs received with corrupted data : 0  
 LBRs sent : 0  
 LTMs sent : 0  
 LTMs received : 0  
 LTRs sent : 0  
 LTRs received : 0  
 Sequence number of next LTM request : 0  
 1DMs sent : 10  
 Valid 1DMs received : 10  
 Invalid 1DMs received : 0  
 DMMs sent : 20  
 DMRs sent : 0  
 Valid DMRs received : 10  
 Invalid DMRs received : 0  
 LMM sent : 10  
 Valid LMM received : 20  
 Invalid LMM received : 0  
 LMR sent : 20  
 Valid LMR received : 10  
 Invalid LMR received : 0  
 Remote MEP count : 1

Identifier	MAC address	State	Interface
2	00:12:1e:fb:ea:7d	ok	ge-1/0/0.0

**show oam ethernet  
 connectivity-fault-  
 management  
 mep-database  
 (enhanced continuity  
 measurement)**

```
user@host> show oam ethernet connectivity-fault-management mep-database
maintenance-domain md5 maintenance-association ma5 local-mep 2001 remote-mep 1001
Maintenance domain name: md5, Format: string, Level: 5
Maintenance association name: ma5, Format: string
Continuity-check status: enabled, Interval: 100ms, Loss-threshold: 3 frames
MEP identifier: 2001, Direction: down, MAC address: 00:19:e2:b2:81:4a
Auto-discovery: enabled, Priority: 0
Interface status TLV: up, Port status TLV: up
Interface name: ge-2/0/0.0, Interface status: Active, Link status: Up
```

```
Remote MEP identifier: 1001, State: ok
MAC address : 00:19:e2:b0:74:00, Type: Learned
Interface : ge-2/0/0.0
Last flapped : Never
+ Continuity : 91%, Admin-enable duration: 2100sec, Oper-down duration: 100sec
Remote defect indication: false
Port status TLV: none
Interface status TLV: none
```

## show oam ethernet connectivity-fault-management mep-statistics

<b>Syntax</b>	<pre>show oam ethernet connectivity-fault-management mep-statistics maintenance-domain <i>md-name</i> maintenance-association <i>ma-name</i> &lt;mep <i>mep-id</i>&gt; &lt;remote-mep <i>remote-mep-id</i>&gt; &lt;count <i>entry-count</i>&gt;</pre>
<b>Release Information</b>	<p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 11.4 for EX Series switches.</p>
<b>Description</b>	On MX Series and ACX Series routers and EX Series switches with Ethernet interfaces, display ETH-DM statistics and ETH-DM frame counts.
<b>Options</b>	<p><b>maintenance-domain <i>md-name</i></b>—Name of an existing CFM maintenance domain.</p> <p><b>maintenance-association <i>ma-name</i></b>—Name of an existing CFM maintenance association.</p> <p><b>mep <i>mep-id</i></b>—(Optional) Numeric identifier of the local MEP. The range of values is 1 through 8192. On EX Series switches, the range of values is 1 through 8191.</p> <p><b>remote-mep <i>remote-mep-id</i></b>—(Optional) Numeric identifier of the remote MEP. The range of values is 1 through 8192. On EX Series switches, the range of values is 1 through 8191.</p> <p><b>count <i>entry-count</i></b>—(Optional) Number of entries to display from the statistics table. The range of values is 1 through 100. The default value is 100 entries.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• clear oam ethernet connectivity-fault-management statistics</li> <li>• <a href="#">show oam ethernet connectivity-fault-management delay-statistics on page 199</a></li> <li>• <a href="#">show oam ethernet connectivity-fault-management interfaces on page 207</a></li> <li>• <a href="#">show oam ethernet connectivity-fault-management mep-database on page 219</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show oam ethernet connectivity-fault-management mep-statistics (CIR counters only) on page 231</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-statistics (CIR and EIR counters enabled) on page 232</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-statistics remote-mep (CIR counters only) on page 234</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-statistics remote-mep (CIR and EIR counters enabled) on page 236</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-statistics on page 238</a></p> <p><a href="#">show oam ethernet connectivity-fault-management mep-statistics remote-mep on page 239</a></p>

**Output Fields** Table 23 on page 230 lists the output fields for the **show oam ethernet connectivity-fault-management mep-statistics** command. Output fields are listed in the approximate order in which they appear.

**Table 23: show oam ethernet connectivity-fault-management delay-statistics and mep-statistics Output Fields**

Output Field Name	Field Description
MEP identifier	Maintenance association end point (MEP) numeric identifier.
MAC address	Unicast MAC address configured for the MEP.
Remote MEP count	Number of remote MEPs (unless you specify the <b>remote-mep</b> option).
Remote MEP identifier	Numeric identifier of the remote MEP.
Remote MAC address	Unicast MAC address of the remote MEP.
Index	Index number that corresponds to the ETH-DM entry in the CFM database.
One-way delay (usec)	For a one-way ETH-DM session, the frame delay time, in microseconds, measured at the receiver MEP.  For a detailed description of one-way Ethernet frame delay measurement, see the <i>ITU-T Y.1731 Ethernet Service OAM</i> topics in the Junos® OS Network Interfaces.
Two-way delay (usec)	For a two-way ETH-DM session, the frame delay time, in microseconds, measured at the initiator MEP.  For a detailed description of two-way Ethernet frame delay measurement, see the <i>ITU-T Y.1731 Ethernet Service OAM</i> topics in the Junos® OS Network Interfaces.
Average one-way delay	Average one-way frame delay for the statistics displayed.
Average one-way delay variation	Average one-way “frame jitter” for the statistics displayed.
Best-case one-way delay	Lowest one-way frame delay for the statistics displayed.
Worst-case one-way delay	Highest one-way frame delay for the statistics displayed.
Average two-way delay	Average two-way frame delay for the statistics displayed.
Average two-way delay variation	Average two-way “frame jitter” for the statistics displayed.
Best-case two-way delay	Lowest two-way frame delay for the statistics displayed.
Worst-case two-way delay	Highest two-way frame delay calculated in this session.

## Sample Output

show oam ethernet  
connectivity-fault-  
management  
mep-statistics (CIR  
counters only)

```
user@host> show oam ethernet connectivity-fault-management mep-statistics
maintenance-domain md1 maintenance-association ma-1 local-mep 3 remote-mep 103 count 3
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
Remote MEP count           : 1
CCMs sent                  : 6550
CCMs received out of sequence : 0
LBMs sent                  : 0
Valid in-order LBRs received : 0
Valid out-of-order LBRs received : 0
LBRs received with corrupted data : 0
LBRs sent                  : 0
LTMs sent                  : 0
LTMs received              : 0
LTRs sent                  : 0
LTRs received              : 0
Sequence number of next LTM request : 0
1DMs sent                  : 5
Valid 1DMs received        : 0
Invalid 1DMs received      : 0
DMMs sent                  : 5
DMRs sent                  : 0
Valid DMRs received        : 5
Invalid DMRs received      : 0
LMM sent                   : 5
Valid LMM received         : 5
Invalid LMM received       : 0
LMR sent                   : 0
Valid LMR received         : 5
Invalid LMR received       : 0
Remote MEP identifier       : 101
Remote MAC address         : 00:05:85:73:39:4a
```

### Delay measurement statistics:

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```
Average one-way delay           : 286 usec
Average one-way delay variation  : 62 usec
Best case one-way delay         : 259 usec
Average two-way delay           : 580 usec
Average two-way delay variation  : 26 usec
Best case two-way delay         : 519 usec
Worst case two-way delay        : 650 usec
```

### Loss measurement statistics:

Index	Near-end Frame loss (CIR)	Far-end Frame loss (CIR)	Near-end Frame loss (EIR)	Far-end Frame loss (EIR)
1	9	9		
2	3	5		
3	7	5		
4	9	6		
5	3	6		

```
Average near-end loss (CIR)           : 6.2
Average near-end loss ratio (CIR)      : 6.2%
Average far-end loss (CIR)            : 6.2
Average far-end loss ratio (CIR)       : 6.2%
Near-end best case loss (CIR)          : 3
Near-end best case loss ratio (CIR)    : 3%
Near-end worst case loss (CIR)         : 9
Near-end worst case loss ratio (CIR)   : 9%
Far-end best case loss (CIR)           : 5
Far-end best case loss ratio (CIR)     : 5%
Far-end worst case loss (CIR)          : 9
Far-end worst case loss ratio (CIR)    : 9%
```

**show oam ethernet  
connectivity-fault-  
management  
mep-statistics (CIR**

```
user@host> show oam ethernet connectivity-fault-management mep-statistics
maintenance-domain mdl maintenance-association ma-1 local-mep 3 remote-mep 103 count 3
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
Remote MEP count           : 1
CCMs sent                  : 6550
```



and EIR counters  
enabled)

```

CCMs received out of sequence      : 0
LBMs sent                          : 0
Valid in-order LBRs received       : 0
Valid out-of-order LBRs received   : 0
LBRs received with corrupted data  : 0
LBRs sent                          : 0
LTMs sent                          : 0
LTMs received                      : 0
LTRs sent                          : 0
LTRs received                      : 0
Sequence number of next LTM request : 0
1DMs sent                          : 5
Valid 1DMs received                : 0
Invalid 1DMs received              : 0
DMMs sent                          : 5
DMRs sent                          : 0
Valid DMRs received                : 5
Invalid DMRs received              : 0
LMM sent                           : 5
Valid LMM received                 : 5
Invalid LMM received               : 0
LMR sent                           : 0
Valid LMR received                 : 5
Invalid LMR received               : 0
Remote MEP identifier               : 101
Remote MAC address                  : 00:05:85:73:39:4a

```

#### Delay measurement statistics:

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```

Average one-way delay              : 286 usec
Average one-way delay variation    : 62 usec
Best case one-way delay            : 259 usec
Average two-way delay              : 580 usec
Average two-way delay variation    : 26 usec
Best case two-way delay            : 519 usec
Worst case two-way delay           : 650 usec

```

#### Loss measurement statistics:

Index	Near-end Frame loss (CIR)	Far-end Frame loss (CIR)	Near-end Frame loss (EIR)	Far-end Frame loss (EIR)
1	9	9	2	4
2	3	5	4	6
3	7	5	0	2
4	9	6	8	2
5	3	6	6	4

```

Average near-end loss (CIR)        : 6.2
Average near-end loss ratio (CIR)  : 6.2%
Average far-end loss (CIR)         : 6.2
Average far-end loss ratio (CIR)   : 6.2%
Near-end best case loss (CIR)      : 3
Near-end best case loss ratio (CIR): 3%
Near-end worst case loss (CIR)     : 9

```

Near-end worst case loss ratio (CIR)	: 9%
Far-end best case loss (CIR)	: 5
Far-end best case loss ratio (CIR)	: 5%
Far-end worst case loss (CIR)	: 9
Far-end worst case loss ratio (CIR)	: 9%
Average near-end loss (EIR)	: 4
Average near-end loss ratio (EIR)	: 4%
Average far-end loss (EIR)	: 3.4
Average far-end loss ratio (EIR)	: 3.4%
Near-end best case loss (EIR)	: 0
Near-end best case loss ratio (EIR)	: 0%
Near-end worst case loss (EIR)	: 8
Near-end worst case loss ratio (EIR)	: 8%
Far-end best case loss (EIR)	: 2
Far-end best case loss ratio (EIR)	: 2%
Far-end worst case loss (EIR)	: 6
Far-end worst case loss ratio (EIR)	: 6%

show oam ethernet  
connectivity-fault-  
management  
mep-statistics

```
user@host> show oam ethernet connectivity-fault-management mep-statistics
maintenance-domain md1 maintenance-association ma-1 local-mep 3 remote-mep 103 count 3
remote-mep 101
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
CCMs sent : 7762
```

remote-mep (CIR  
counters only)

```

CCMs received out of sequence      : 0
LBMs sent                          : 0
Valid in-order LBRs received       : 0
Valid out-of-order LBRs received   : 0
LBRs received with corrupted data  : 0
LBRs sent                          : 0
LTMs sent                          : 0
LTMs received                      : 0
LTRs sent                          : 0
LTRs received                      : 0
Sequence number of next LTM request : 0
1DMs sent                          : 5
Valid 1DMs received                : 0
Invalid 1DMs received              : 0
DMMs sent                          : 5
DMRs sent                          : 0
Valid DMRs received                : 5
Invalid DMRs received              : 0
LMM sent                           : 5
Valid LMM received                 : 5
Invalid LMM received               : 0
LMR sent                           : 0
Valid LMR received                 : 5
Invalid LMR received               : 0
Remote MEP identifier               : 101
Remote MAC address                  : 00:05:85:73:39:4a

```

## Delay measurement statistics:

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```

Average one-way delay              : 286 usec
Average one-way delay variation    : 62 usec
Best case one-way delay            : 259 usec
Average two-way delay              : 580 usec
Average two-way delay variation    : 26 usec
Best case two-way delay            : 519 usec
Worst case two-way delay           : 650 usec

```

## Loss measurement statistics:

Index	Near-end Frame loss (CIR)	Far-end Frame loss (CIR)	Near-end Frame loss (EIR)	Far-end Frame loss (EIR)
1	9	9		
2	3	5		
3	7	5		
4	9	6		
5	3	6		

```

Average near-end loss (CIR)        : 6.2
Average near-end loss ratio (CIR)  : 6.2%
Average far-end loss (CIR)         : 6.2
Average far-end loss ratio (CIR)   : 6.2%
Near-end best case loss (CIR)      : 3
Near-end best case loss ratio (CIR): 3%
Near-end worst case loss (CIR)     : 9
Near-end worst case loss ratio (CIR): 9%

```

Far-end best case loss (CIR)	: 5
Far-end best case loss ratio (CIR)	: 5%
Far-end worst case loss (CIR)	: 9
Far-end worst case loss ratio (CIR)	: 9%
Average near-end loss (EIR)	: 4
Average near-end loss ratio (EIR)	: 4%
Average far-end loss (EIR)	: 3.4
Average far-end loss ratio (EIR)	: 3.4%
Near-end best case loss (EIR)	: 0
Near-end best case loss ratio (EIR)	: 0%
Near-end worst case loss (EIR)	: 8
Near-end worst case loss ratio (EIR)	: 8%
Far-end best case loss (EIR)	: 2
Far-end best case loss ratio (EIR)	: 2%
Far-end worst case loss (EIR)	: 6
Far-end worst case loss ratio (EIR)	: 6%

**show oam ethernet  
connectivity-fault-  
management  
mep-statistics**

```
user@host> show oam ethernet connectivity-fault-management mep-statistics
maintenance-domain mdl maintenance-association ma-1 local-mep 3 remote-mep 103 count 3
remote-mep 101
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
CCMs sent :7762
```

## remote-mep (CIR and EIR counters enabled)

```

CCMs received out of sequence      : 0
LBMs sent                          : 0
Valid in-order LBRs received       : 0
Valid out-of-order LBRs received   : 0
LBRs received with corrupted data  : 0
LBRs sent                          : 0
LTMs sent                          : 0
LTMs received                      : 0
LTRs sent                          : 0
LTRs received                      : 0
Sequence number of next LTM request : 0
1DMs sent                          : 5
Valid 1DMs received                : 0
Invalid 1DMs received              : 0
DMMs sent                          : 5
DMRs sent                          : 0
Valid DMRs received                : 5
Invalid DMRs received              : 0
LMM sent                           : 5
Valid LMM received                 : 5
Invalid LMM received               : 0
LMR sent                           : 0
Valid LMR received                 : 5
Invalid LMR received               : 0
Remote MEP identifier               : 101
Remote MAC address                  : 00:05:85:73:39:4a

```

## Delay measurement statistics:

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```

Average one-way delay              : 286 usec
Average one-way delay variation    : 62 usec
Best case one-way delay            : 259 usec
Average two-way delay              : 580 usec
Average two-way delay variation    : 26 usec
Best case two-way delay            : 519 usec
Worst case two-way delay           : 650 usec

```

## Loss measurement statistics:

Index	Near-end Frame loss (CIR)	Far-end Frame loss (CIR)	Near-end Frame loss (EIR)	Far-end Frame loss (EIR)
1	10	8	5	12
2	12	7	6	16
3	7	5	0	2
4	9	6	8	2
5	3	6	6	4

```

Average near-end loss (CIR)        : 6.2
Average near-end loss ratio (CIR)  : 6.2%
Average far-end loss (CIR)         : 6.2
Average far-end loss ratio (CIR)   : 6.2%
Near-end best case loss (CIR)      : 3
Near-end best case loss ratio (CIR): 3%
Near-end worst case loss (CIR)     : 9

```

```

Near-end worst case loss ratio (CIR) : 9%
Far-end best case loss (CIR) : 5
Far-end best case loss ratio (CIR) : 5%
Far-end worst case loss (CIR) : 9
Far-end worst case loss ratio (CIR) : 9%
Average near-end loss (EIR) : 4
Average near-end loss ratio (EIR) : 4%
Average far-end loss (EIR) : 3.4
Average far-end loss ratio (EIR) : 3.4%
Near-end best case loss (EIR) : 0
Near-end best case loss ratio (EIR) : 0%
Near-end worst case loss (EIR) : 8
Near-end worst case loss ratio (EIR) : 8%
Far-end best case loss (EIR) : 2
Far-end best case loss ratio (EIR) : 2%
Far-end worst case loss (EIR) : 6
Far-end worst case loss ratio (EIR) : 6%

```

#### show oam ethernet connectivity-fault- management mep-statistics

```

user@host> show oam ethernet connectivity-fault-management mep-statistics
maintenance-domain md1 maintenance-association ma-1

```

```
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
```

```
Remote MEP count: 1
```

```

CCMs sent : 6550
CCMs received out of sequence : 0
LBMs sent : 0
Valid in-order LBRs received : 0
Valid out-of-order LBRs received : 0
LBRs received with corrupted data : 0
LBRs sent : 0
LTMs sent : 0
LTMs received : 0
LTRs sent : 0
LTRs received : 0
Sequence number of next LTM request : 0
IDMs sent : 5
Valid IDMs received : 0
Invalid IDMs received : 0
DMMs sent : 5
DMRs sent : 0
Valid DMRs received : 5
Invalid DMRs received : 0

```

```
Remote MEP identifier: 101
```

```
Remote MAC address: 00:05:85:73:39:4a
```

```
Delay measurement statistics:
```

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```

Average one-way delay : 286 usec
Average one-way delay variation: 62 usec
Best case one-way delay : 259 usec
Worst case one-way delay : 313 usec
Average two-way delay : 580 usec
Average two-way delay variation: 26 usec
Best case two-way delay : 519 usec
Worst case two-way delay : 650 usec

```

```
show oam ethernet
connectivity-fault-
management
mep-statistics
remote-mep
```

```
user@host> show oam ethernet connectivity-fault-management mep-statistics
maintenance-domain md1 maintenance-association ma1 remote-mep 101
```

```
MEP identifier: 100, MAC address: 00:05:85:73:7b:39
CCMs sent : 7762
CCMs received out of sequence : 0
LBMs sent : 0
Valid in-order LBRs received : 0
Valid out-of-order LBRs received : 0
LBRs received with corrupted data : 0
LBRs sent : 0
LTMs sent : 0
LTMs received : 0
LTRs sent : 0
LTRs received : 0
Sequence number of next LTM request : 0
1DMs sent : 5
Valid 1DMs received : 0
Invalid 1DMs received : 0
DMMs sent : 5
DMRs sent : 0
Valid DMRs received : 5
Invalid DMRs received : 0
```

```
Remote MEP identifier: 101
```

```
Remote MAC address: 00:05:85:73:39:4a
```

```
Delay measurement statistics:
```

Index	One-way delay (usec)	Two-way delay (usec)
1	259	519
2	273	550
3	287	571
4	299	610
5	313	650

```
Average one-way delay : 286 usec
Average one-way delay variation: 62 usec
Best case one-way delay : 259 usec
Worst case one-way delay : 313 usec
Average two-way delay : 580 usec
Average two-way delay variation: 26 usec
Best case two-way delay : 519 usec
Worst case two-way delay : 650 usec
```

## show oam ethernet connectivity-fault-management path-database

<b>Syntax</b>	show oam ethernet connectivity-fault-management path-database <host-mac-address> <maintenance-association <i>ma-name</i> > <maintenance-domain <i>domain-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 8.4.
<b>Description</b>	On M7i and M10i with Enhanced CFEB (CFEB-E), M320, MX Series, ACX Series, T320, and T640 routers, display IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault management path database information for a host configured with an MEP.
<b>Options</b>	<p><b>host-mac-address</b>—(Optional) Display connectivity fault management path database information for a specified Ethernet host.</p> <p><b>maintenance-association <i>ma-name</i></b>—(Optional) Display connectivity fault management path database information for the specified maintenance association.</p> <p><b>maintenance-domain <i>domain-name</i></b>—(Optional) Display connectivity fault management path database information for the specified maintenance domain.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show oam ethernet connectivity-fault-management path-database on page 241</a>
<b>Output Fields</b>	<a href="#">Table 24 on page 240</a> lists the output fields for the <b>show oam ethernet connectivity-fault-management path-database</b> command. Output fields are listed in the approximate order in which they appear.

**Table 24: show oam ethernet connectivity-fault-management path-database Output Fields**

Field Name	Field Description
Linktrace to	MAC address of the remote MEPs in the path.
Interface	Interface identifier.
Maintenance domain name	Maintenance domain name.
Format (Maintenance domain)	Maintenance domain name format configured.
Level	Maintenance domain level configured.
Maintenance association name	Maintenance association name.



Table 24: show oam ethernet connectivity-fault-management path-database Output Fields (*continued*)

Field Name	Field Description
Local Mep	Local MEP identifier.

## Sample Output

**show oam ethernet  
connectivity-fault-  
management  
path-database**

```
user@host> show oam ethernet connectivity-fault-management path-database
maintenance-domain md1 maintenance-association ma1 00:05:85:79:39:ef
Linktrace to 00:05:85:79:39:ef, Interface : ge-3/0/0
    Maintenance Domain: md1, Level: 7
    Maintenance Association: ma1, Local Mep: 201
```

## show oam ethernet evc

<b>Syntax</b>	<b>show oam ethernet evc &lt;evc-id&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 9.5.
<b>Description</b>	On MX Series routers with OAM Ethernet Virtual Connection (EVC) configurations, displays the EVC configuration and status information.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	View
<b>Output Fields</b>	<a href="#">Table 25 on page 242</a> lists the output fields for the <b>show oam ethernet evc</b> command. Output fields are listed in the approximate order in which they appear.

**Table 25: show oam ethernet evc Output Fields**

Field Name	Field Description
<b>EVC identifier</b>	Header for the EVC information showing the EVC name, configuration, and active/inactive status.
<b>UNI count</b>	Number of configured and active UNIs.
<b>Protocol</b>	Protocol configured between the UNIs.
<b>Local UNIs</b>	Heading for the list of local UNIs
<b>UNI Identifier</b>	Name of the UNI.
<b>Interface</b>	Interface type-dpc/pic/port.unit-number.
<b>Status</b>	Status operational or not operational.

## Sample Output

```

show oam ethernet evc user@host> show oam ethernet evc
EVC identifier: evc1, Point-to-Point, Active
UNI count: Configured(2), Active(2)
Protocol: cfm, Management domain: md, Management association: ma
Local UNIs:
  UNI Identifier      Interface      Status
  uni1               ge-1/1/1      Operational
  uni2               ge-1/1/1      Not Operational

```

## show oam ethernet link-fault-management

<b>Syntax</b>	show oam ethernet link-fault-management <brief   detail> <interface-name>
<b>Release Information</b>	Command introduced in Junos OS Release 8.2.
<b>Description</b>	On M320, M120, MX Series, T320, and T640 routers, display Operation, Administration, and Management (OAM) link fault management information for Ethernet interfaces.
<b>Options</b>	<b>brief   detail</b> —(Optional) Display the specified level of output.  <b>interface-name</b> —(Optional) Display link fault management information for the specified Ethernet interface only.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show oam ethernet link-fault-management brief on page 248</a> <a href="#">show oam ethernet link-fault-management detail on page 248</a>
<b>Output Fields</b>	<a href="#">Table 26 on page 243</a> lists the output fields for the <b>show oam ethernet link-fault-management</b> command. Output fields are listed in the approximate order in which they appear.

**Table 26: show oam ethernet link-fault-management Output Fields**

Field Name	Field Description	Level of Output
<b>Status</b>	Indicates the status of the established link.  <ul style="list-style-type: none"> <li>• <b>Fail</b>—A link fault condition exists.</li> <li>• <b>Running</b>—A link fault condition does not exist.</li> </ul>	All levels
<b>Discovery state</b>	State of the discovery mechanism:  <ul style="list-style-type: none"> <li>• <b>Passive Wait</b></li> <li>• <b>Send Any</b></li> <li>• <b>Send Local Remote</b></li> <li>• <b>Send Local Remote Ok</b></li> <li>• <b>Fault</b></li> </ul>	All levels
<b>Peer address</b>	Address of the OAM peer.	All levels

Table 26: show oam ethernet link-fault-management Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Flags</b>	<p>Information about the interface. Possible values are described in the “Link Flags” section under Common Output Fields Description.</p> <ul style="list-style-type: none"> <li>• <b>Remote-Stable</b>—Indicates remote OAM client acknowledgment of and satisfaction with local OAM state information. <b>False</b> indicates that remote DTE either has not seen or is unsatisfied with local state information. <b>True</b> indicates that remote DTE has seen and is satisfied with local state information.</li> <li>• <b>Local-Stable</b>—Indicates local OAM client acknowledgment of and satisfaction with remote OAM state information. <b>False</b> indicates that local DTE either has not seen or is unsatisfied with remote state information. <b>True</b> indicates that local DTE has seen and is satisfied with remote state information.</li> <li>• <b>Remote-State-Valid</b>—Indicates the OAM client has received remote state information found within Local Information TLVs of received Information OAM PDUs. <b>False</b> indicates that OAM client has not seen remote state information. <b>True</b> indicates that the OAM client has seen remote state information.</li> </ul>	All levels
<b>Remote loopback status</b>	Indicates the remote loopback status. An OAM entity can put its remote peer into loopback mode using the Loopback control OAM PDU. In loopback mode, every frame received is transmitted back on the same port (except for OAM PDUs, which are needed to maintain the OAM session).	All levels
<b>Remote entity information</b>	<p>Remote entity information.</p> <ul style="list-style-type: none"> <li>• <b>Remote MUX action</b>—Indicates the state of the multiplexer functions of the OAM sublayer. Device is forwarding non-OAM PDUs to the lower sublayer or discarding non-OAM PDUs.</li> <li>• <b>Remote parser action</b>—Indicates the state of the parser function of the OAM sublayer. Device is forwarding non-OAM PDUs to higher sublayer, looping back non-OAM PDUs to the lower sublayer, or discarding non-OAM PDUs.</li> <li>• <b>Discovery mode</b>—Indicates whether discovery mode is active or inactive.</li> <li>• <b>Unidirectional mode</b>—Indicates the ability to operate a link in a unidirectional mode for diagnostic purposes.</li> <li>• <b>Remote loopback mode</b>—Indicates whether remote loopback is supported or unsupported.</li> <li>• <b>Link events</b>—Indicates whether interpreting link events is supported or unsupported on the remote peer.</li> <li>• <b>Variable requests</b>—Indicates whether variable requests are supported. The Variable Request OAM PDU, is used to request one or more MIB variables from the remote peer.</li> </ul>	All levels
<b>OAM Receive Statistics</b>		
<b>Information</b>	The total number of information PDUs received.	<b>detail</b>
<b>Event</b>	The total number of loopback control PDUs received.	<b>detail</b>
<b>Variable request</b>	The total number of variable request PDUs received.	<b>detail</b>
<b>Variable response</b>	The total number of variable response PDUs received.	<b>detail</b>

Table 26: show oam ethernet link-fault-management Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Loopback control</b>	The total number of loopback control PDUs received.	<b>detail</b>
<b>Organization specific</b>	The total number of vendor organization specific PDUs received.	<b>detail</b>
<b>OAM Transmit Statistics</b>		
<b>Information</b>	The total number of information PDUs transmitted.	<b>detail</b>
<b>Event</b>	The total number of event notification PDUs transmitted.	<b>detail</b>
<b>Variable request</b>	The total number of variable request PDUs transmitted.	<b>detail</b>
<b>Variable response</b>	The total number of variable response PDUs transmitted.	<b>detail</b>
<b>Loopback control</b>	The total number of loopback control PDUs transmitted.	<b>detail</b>
<b>Organization specific</b>	The total number of vendor organization specific PDUs transmitted.	<b>detail</b>
<b>OAM Received Symbol Error Event information</b>		
<b>Events</b>	The number of symbol error event TLVs that have been received since the OAM sublayer was reset.	<b>detail</b>
<b>Window</b>	The symbol error event window in the received PDU.  The protocol default value is the number of symbols that can be received in one second on the underlying physical layer.	<b>detail</b>
<b>Threshold</b>	The number of errored symbols in the period required for the event to be generated.	<b>detail</b>
<b>Errors in period</b>	The number of symbol errors in the period reported in the received event PDU.	<b>detail</b>
<b>Total errors</b>	The number of errored symbols that have been reported in received event TLVs since the OAM sublayer was reset.  Symbol errors are coding symbol errors.	<b>detail</b>
<b>OAM Received Frame Error Event Information</b>		
<b>Events</b>	The number of errored frame event TLVs that have been received since the OAM sublayer was reset.	<b>detail</b>
<b>Window</b>	The duration of the window in terms of the number of 100 ms period intervals.	<b>detail</b>
<b>Threshold</b>	The number of detected errored frames required for the event to be generated.	<b>detail</b>
<b>Errors in period</b>	The number of detected errored frames in the period.	<b>detail</b>

Table 26: show oam ethernet link-fault-management Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Total errors</b>	The number of errored frames that have been reported in received event TLVs since the OAM sublayer was reset.  A frame error is any frame error on the underlying physical layer.	<b>detail</b>
<b>OAM Received Frame Period Error Event Information</b>		
<b>Events</b>	The number of frame seconds errors event TLVs that have been received since the OAM sublayer was reset.	<b>detail</b>
<b>Window</b>	The duration of the frame seconds window.	<b>detail</b>
<b>Threshold</b>	The number of frame seconds errors in the period.	<b>detail</b>
<b>Errors in period</b>	The number of frame seconds errors in the period.	<b>detail</b>
<b>Total errors</b>	The number of frame seconds errors that have been reported in received event TLVs since the OAM sublayer was reset.	<b>detail</b>
<b>OAM Transmitted Symbol Error Event Information</b>		
<b>Events</b>	The number of symbol error event TLVs that have been transmitted since the OAM sublayer was reset.	<b>detail</b>
<b>Window</b>	The symbol error event window in the transmitted PDU.	<b>detail</b>
<b>Threshold</b>	The number of errored symbols in the period required for the event to be generated.	<b>detail</b>
<b>Errors in period</b>	The number of symbol errors in the period reported in the transmitted event PDU.	<b>detail</b>
<b>Total errors</b>	The number of errored symbols reported in event TLVs that have been transmitted since the OAM sublayer was reset.	<b>detail</b>
<b>OAM Current Symbol Error Event Information</b>		
<b>Events</b>	The number of symbol error TLVs that have been generated regardless of whether the threshold for sending event TLVs has been crossed.	<b>detail</b>
<b>Window</b>	The symbol error event window in the transmitted PDU.	<b>detail</b>
<b>Threshold</b>	The number of errored symbols in the period required for the event to be generated.	<b>detail</b>
<b>Errors in period</b>	The total number of symbol errors in the period reported.	<b>detail</b>
<b>Total errors</b>	The number of errored symbols reported in event TLVs that have been generated regardless of whether the threshold for sending event TLVs has been crossed.	<b>detail</b>
<b>OAM Transmitted Frame Error Event Information</b>		

Table 26: show oam ethernet link-fault-management Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Events</b>	The number of errored frame event TLVs that have been transmitted since the OAM sublayer was reset.	<b>detail</b>
<b>Window</b>	The duration of the window in terms of the number of 100 ms period intervals.	<b>detail</b>
<b>Threshold</b>	The number of detected errored frames required for the event to be generated.	<b>detail</b>
<b>Errors in period</b>	The number of detected errored frames in the period.	<b>detail</b>
<b>Total errors</b>	The number of errored frames that have been detected since the OAM sublayer was reset.	<b>detail</b>
<b>OAM Current Frame Error Event Information</b>		
<b>Events</b>	The number of errored frame event TLVs that have been generated regardless of whether the threshold for sending event TLVs has been crossed.	<b>detail</b>
<b>Window</b>	The duration of the window in terms of the number of 100 ms period intervals.	<b>detail</b>
<b>Threshold</b>	The number of detected errored frames required for the event to be generated.	<b>detail</b>
<b>Errors in period</b>	The number of errored frames in the period.	<b>detail</b>
<b>Total errors</b>	The number of errored frames detected regardless of whether the threshold for transmitting event TLVs has been crossed.	<b>detail</b>

## Sample Output

**show oam ethernet  
link-fault-management  
brief**

```
user@host> show oam ethernet link-fault-management brief
Interface: ge-3/1/3
Status: Running, Discovery state: Send Any
Peer address: 00:90:69:72:2c:83
Flags:Remote-Stable Remote-State-Valid Local-Stable 0x50
Remote loopback status: Disabled on local port, Enabled on peer port
Remote entity information:
  Remote MUX action: discarding, Remote parser action: loopback
  Discovery mode: active, Unidirectional mode: unsupported
  Remote loopback mode: supported, Link events: supported
  Variable requests: unsupported
```

**show oam ethernet  
link-fault-management  
detail**

```
user@host> show oam ethernet link-fault-management detail
Interface: ge-6/1/0
Status: Running, Discovery state: Send Any
Peer address: 00:90:69:0a:07:14
Flags:Remote-Stable Remote-State-Valid Local-Stable 0x50
OAM receive statistics:
  Information: 186365, Event: 0, Variable request: 0, Variable response: 0
  Loopback control: 0, Organization specific: 0
OAM transmit statistics:
  Information: 186347, Event: 0, Variable request: 0, Variable response: 0
  Loopback control: 0, Organization specific: 0
OAM received symbol error event information:
  Events: 0, Window: 0, Threshold: 0
  Errors in period: 0, Total errors: 0
OAM received frame error event information:
  Events: 0, Window: 0, Threshold: 0
  Errors in period: 0, Total errors: 0
OAM received frame period error event information:
  Events: 0, Window: 0, Threshold: 0
  Errors in period: 0, Total errors: 0
OAM transmitted symbol error event information:
  Events: 0, Window: 0, Threshold: 1
  Errors in period: 0, Total errors: 0
OAM current symbol error event information:
  Events: 0, Window: 0, Threshold: 1
  Errors in period: 0, Total errors: 0
OAM transmitted frame error event information:
  Events: 0, Window: 0, Threshold: 1
  Errors in period: 0, Total errors: 0
OAM current frame error event information:
  Events: 0, Window: 0, Threshold: 1
  Errors in period: 0, Total errors: 0
Remote entity information:
  Remote MUX action: forwarding, Remote parser action: forwarding
  Discovery mode: active, Unidirectional mode: unsupported
  Remote loopback mode: supported, Link events: supported
  Variable requests: unsupported
```



## show oam ethernet lmi

<b>Syntax</b>	<b>show oam ethernet lmi (interface &lt;interface-name&gt;)</b>
<b>Release Information</b>	Command introduced in Junos OS Release 9.5.
<b>Description</b>	On MX Series routers with Gigabit Ethernet, Fast Ethernet, or aggregated Ethernet, and OAM Ethernet Local Management Interface (LMI) configuration, display the LMI information for the configured interfaces or optionally for a specified interface.
<b>Options</b>	<b>interface</b> —(Optional) Display LMI information for a specified interface. <b>interface-name</b> —(Optional) Display Ethernet LMI information for the specified interface only.
<b>Required Privilege Level</b>	View
<b>Output Fields</b>	Table 27 on page 249 lists the output fields for the <b>show oam ethernet lmi</b> command. Output fields are listed in the approximate order in which they appear.

**Table 27: show oam ethernet lmi Output Fields**

Field Name	Field Description
Physical Interface	Header for the EVC information showing the Ethernet virtual circuit (EVC) name, configuration, and active/inactive status.
UNI Identifier	Name of the UNI.
EVC map type	EVC configuration.
Polling verification timer	Polling verification timer status.
E-LMI state	Operational status of the E-LMI configuration in the interfaces or specified interface.
Priority/Untagged VLAN ID	To be provided.
Default EVC	The EVC set as the default EVC.
Associated EVCs	Heading for the list of configured EVCs.
EVC Identifier	EVC name.
Reference ID	To be provided.
Status	Status active or not active.
CE VLAN IDs	Customer edge VLAN ID numbers.

## Sample Output

```
show oam ethernet lmi interface user@host> show oam ethernet lmi interface ge-1/1/1
interface
Physical interface: ge-1/1/1, Physical link is Up
UNI identifier: uni-ce1, EVC map type: Bundling
Polling verification timer: Enabled, E-LMI state: Operational
Priority/Untagged VLAN ID: 20, Default EVC: evc1
Associated EVCs:
  EVC      Reference      Status      CE VLAN IDs
  Identifier ID
  evc1      1      Active (New)  1-2048
  evc2      2      Not Active   2049-4096
```

## show oam ethernet lmi statistics

<b>Syntax</b>	<b>show oam ethernet lmi statistics</b> <interface <i>interface-name</i> >
<b>Release Information</b>	Command introduced in Junos OS Release 9.5.
<b>Description</b>	On MX Series routers with Gigabit Ethernet, Fast Ethernet, or aggregated Ethernet PICs, displays OAM Ethernet Local Management Interface (LMI) statistics.
<b>Options</b>	<p><b>interface</b>—(Optional) Display LMI statistics for a specified interface.</p> <p><b>interface-name</b>—(Optional) Display Ethernet LMI information for the specified Ethernet interface only.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show oam ethernet lmi statistics on page 252</a>
<b>Output Fields</b>	<a href="#">Table 28 on page 251</a> lists the output fields for the <b>show oam ethernet lmi statistics</b> command. Output fields are listed in the approximate order in which they appear.

**Table 28: show oam ethernet lmi statistics Output Fields**

Field Name	Field Description
Physical interface	Name of the interface for the displayed statistics.
Reliability errors	Number of E-LMI reliability errors logged.
Protocol errors	Number of E-LMI protocol errors.
Status check received	Number of E-LMI status check receive errors.
Status check sent	Number of E-LMI status check sent errors.
Full status received	Number of E-LMI full status receive errors.
Full status sent	Number of E-LMI full status sent errors.
Full status continued received	Number of E-LMI status continued received errors.
Full status continued sent	Number of E-LMI full status continued sent errors.
Asynchronous status sent	Number of E-LMI asynchronous status sent errors.

## Sample Output

```
show oam ethernet lmi statistics user@host> show oam ethernet lmi statistics interface ge-1/1/1
statistics                        Physical interface: ge-1/1/1
    Reliability errors                4    Protocol errors
    0
    Status check received              0    Status check sent
    0
    Full status received              694    Full status sent
694
    Full status continued received      0    Full status continued sent
    0
    Asynchronous status sent           0
```

## CHAPTER 6

# Command Summary

- [Ethernet Interface Operational Mode Commands on page 253](#)

### Ethernet Interface Operational Mode Commands

[Table 29 on page 253](#) summarizes the command-line interface (CLI) commands that you can use to monitor and troubleshoot aggregated Ethernet, Fast Ethernet, Gigabit Ethernet, and 10-Gigabit Ethernet interfaces. Commands are listed in alphabetical order.

**Table 29: Ethernet Interface Operational Mode Commands**

Task	Command
Clear dynamic VLAN interfaces.	clear auto-configuration interfaces
Clear a specified dynamic agent circuit identifier (ACI) interface set configured on the router. You can clear only those ACI interface sets that have no subscriber interface members.	clear auto-configuration interfaces interface-set
Clear Link Aggregation Control Protocol (LACP) statistics.	clear lacp statistics
Clear Link Aggregation Control Protocol (LACP) timeout entries.	clear lacp timeouts
Clear learned MAC addresses from the hardware and MAC database. Static MAC addresses are not cleared.	clear interfaces mac-database
Clear statistics that are collected for every MAC address, including policer statistics, on a given physical or logical interface.	clear interfaces mac-database statistics
Clear statistics that are collected for interface sets.	clear interfaces interface-set statistics
Clear the existing continuity measurement and restart counting the operational uptime.	clear oam ethernet connectivity-fault-management continuity-measurement

Table 29: Ethernet Interface Operational Mode Commands (*continued*)

Task	Command
Clear ITU-T Y.1731 Ethernet frame delay measurement (ETH-DM) delay statistics and ETH-DM frame counts. (MX Series routers)	clear oam ethernet connectivity-fault-management delay-statistics
Clear Operation, Administration, and Management (OAM) and connectivity fault management (CFM) linktrace database information.	clear oam ethernet connectivity-fault-management linktrace path-database
Clear all loss statistics maintained by CFM for a given maintenance domain and maintenance association.	clear oam ethernet connectivity-fault-management loss-statistics
Clear connectivity-fault-management policer statistics.	clear oam ethernet connectivity-fault-management policer
Clear all statistics maintained by CFM. (Routers that support IEEE 802.1ag OAM CFM)  In addition, for interfaces that support ITU-T Y.1731 Ethernet frame delay measurement (ETH-DM), also clear any ETH-DM statistics and frame counts for CFM maintenance association end points (MEPs).	clear oam ethernet connectivity-fault-management statistics
Clear Operation, Administration, and Management (OAM) link fault management state information and restart the link discovery process on Ethernet interfaces.	clear oam ethernet link-fault-management state
Clear Operation, Administration, and Management (OAM) statistics link fault management statistics for Ethernet interfaces.	clear oam ethernet link-fault-management statistics
Clear the statistics for all Ethernet ring protection groups or a specific Ethernet ring protection group.	clear protection-group ethernet-ring statistics
Check the reachability of a remote IEEE 802.1ag OAM maintenance association end point (MEP) or maintenance association intermediate point (MIP).	ping ethernet
Manually rebalance the subscribers on an aggregated Ethernet bundle with targeted distribution enabled.	request interface rebalance (Aggregated Ethernet for Subscriber Management)
Manually revert egress traffic from the designated backup link to the designated primary link of an aggregated Ethernet interface for which link protection is enabled, or manually switch egress traffic from the primary link to the backup link.	request interface (revert   switchover) (Aggregated Ethernet Link Protection)
Force LACP link switchover.	request lacp link-switchover

Table 29: Ethernet Interface Operational Mode Commands (*continued*)

Task	Command
Clear the lockout, force switch, manual switch, exercise, and wait-to-restore states.	request protection-group ethernet-aps clear
Test if APS is operating correctly.	request protection-group ethernet-aps exercise
Force traffic to switch from the active path to the alternate path.	request protection-group ethernet-aps force-switch
Lock the protection path, forcing the use of the working path.	request protection-group ethernet-aps lockout
Force traffic to switch from the active path to the alternate path.	request protection-group ethernet-aps manual-switch
Display status information about aggregated Fast Ethernet or Gigabit Ethernet router interfaces.	<a href="#">show interfaces (Aggregated Ethernet)</a>  show interfaces (far-end-interval)
Display status information about Fast Ethernet interfaces.	<a href="#">show interfaces (Fast Ethernet)</a>
Display status information about the specified Gigabit Ethernet interface.	show interfaces (Gigabit Ethernet)
Display status information about 10-Gigabit Ethernet router interfaces.	<a href="#">show interfaces (10-Gigabit Ethernet)</a>
Display IPv6 interface statistics for IPv6 traffic traversing through the IQ2 and IQ2E PICs on standalone T640 routers and on T640 routers in a TX Matrix or in a TXP Matrix.	show interfaces extensive
Display IPv6 interface statistics for IPv6 traffic traversing through the IQ2 PICs on M10i and M120 routers.	
Display IPv6 interface statistics for IPv6 traffic traversing through the IQ2E PICs on M10i, M120, and M320 routers.	
Display information about Gigabit Ethernet or 10-Gigabit Ethernet router interface sets.	<a href="#">show interfaces interface-set (Ethernet Interface Set)</a>
Display information about Gigabit Ethernet or 10-Gigabit Ethernet router interface set queues.	show interfaces interface-set queue
Display the transceiver temperature, laser bias current, laser output power, receive optical power, and related alarms for 10-Gigabit Ethernet dense wavelength-division multiplexing (DWDM) interfaces.	show interfaces diagnostics optics (Gigabit Ethernet, 10-Gigabit Ethernet, and 100 Gigabit Ethernet)

Table 29: Ethernet Interface Operational Mode Commands (*continued*)

Task	Command
Display information about integrated routing and bridging interfaces.	<code>show interfaces irb</code>
Display status information about the distribution of subscribers on different links in an aggregated Ethernet bundle.	<code>show interfaces targeting</code> (Aggregated Ethernet for Subscriber Management)
Display Link Aggregation Control Protocol (LACP) information for aggregated, Fast Ethernet, or Gigabit Ethernet router interfaces.	<code>show lacp interfaces</code>
Display Link Aggregation Control Protocol (LACP) statistics.	<code>show lacp statistics</code>
Display Link Aggregation Control Protocol timeout entries.	<code>show lacp timeouts</code>
Display MAC address information for Gigabit Ethernet router interfaces.	<code>show interfaces mac-database</code> (Gigabit Ethernet)
Display information on a specified interface that is part of a multichassis link aggregation configuration.	<code>show interfaces mc-ae</code>
Display ETH-DM statistics for CFM MEPs. (MX Series routers, Ethernet DPCs).	<code>show oam ethernet connectivity-fault-management delay-statistics</code>
Display IEEE 802.1ag OAM connectivity fault management forwarding state information for Ethernet interfaces.	<code>show oam ethernet connectivity-fault-management forwarding-state</code>
Display OAM connectivity fault management information for Ethernet interfaces.  For interfaces that support ETH-DM, also display any ETH-DM frame counts when the <b>detail</b> or <b>extensive</b> option is included. In all other cases, ETH-DM frame counts are zero.	<code>show oam ethernet connectivity-fault-management interfaces</code>
Display OAM connectivity fault management linktrace path database information.	<code>show oam ethernet connectivity-fault-management linktrace path-database</code>
Display OAM connectivity fault management maintenance association end point (MEP) database information.  For interfaces that support ETH-DM, also display any ETH-DM frame counts. In all other cases, ETH-DM frame counts are zero.	<code>show oam ethernet connectivity-fault-management mep-database</code>
Display ETH-DM statistics and frame counts for CFM MEPs. (MX Series routers, Ethernet DPCs)	<code>show oam ethernet connectivity-fault-management mep-statistics</code>



Table 29: Ethernet Interface Operational Mode Commands (*continued*)

Task	Command
Display ETH-LM statistics for on-demand mode only.	<code>show oam ethernet connectivity-fault-management loss-statistics</code>
Display information about maintenance intermediate points (MIPs) for the Ethernet OAM 802.1ag standard for connectivity fault management (CFM).	<code>show oam ethernet connectivity-fault-management mip</code>
Display OAM connectivity fault management path database information for hosts configured with MEP.	<code>show oam ethernet connectivity-fault-management path-database</code>
Displays connectivity-fault-management policer statistics.	<code>show oam ethernet connectivity-fault-management policer</code>
Display OAM Ethernet Virtual Connection (EVC) information for hosts configured with Ethernet Local Management Interface (E-LMI). (MX series only)	<code>show oam ethernet evc</code>
Display OAM fault management statistics for Ethernet interfaces.	<code>show oam ethernet link-fault-management</code>
Display OAM Ethernet Local Management Interface status information for an LMI configured interface. (MX series only)	<code>show oam ethernet lmi</code>
Display OAM Ethernet Local Management Interface statistics for an LMI configured interface. (MX series only)	<code>show oam ethernet lmi statistics</code>
Display protection group Ethernet ring Automatic Protection Switching (APS).	<code>show protection-group ethernet-ring aps</code>
Display data channel information for all Ethernet ring protection groups or for a specific Ethernet ring protection group.	<code>show protection-group ethernet-ring data-channel</code>
Display protection group Ethernet ring interfaces.	<code>show protection-group ethernet-ring interface</code>
Display protection group Ethernet ring nodes.	<code>show protection-group ethernet-ring node-state</code>
Display protection group Ethernet ring statistics.	<code>show protection-group ethernet-ring statistics</code>
Display all data channel logical interfaces and the VLAN IDs controlled by a ring instance data channel.	<code>show protection-group ethernet-ring vlan</code>
Trace the path between two Ethernet OAM end points.	<code>traceroute ethernet</code>



## PART 4

# Troubleshooting

- [Ethernet on page 261](#)
- [Interface Diagnostics on page 265](#)



## CHAPTER 7

# Ethernet

## traceroute ethernet

<b>Syntax</b>	<b>traceroute ethernet</b> ( <i>mac-address</i>   <i>mep-id</i> ) <b>maintenance-association</b> <i>ma-name</i> <b>maintenance-domain</b> <i>md-name</i> <b>ttl</b> <i>value</i> <b>&lt;wait seconds&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0. <b>mep-id</b> option introduced in Junos OS Release 9.1.
<b>Description</b>	Triggers the linktrace protocol to trace the route between two maintenance points. The result of the traceroute protocol is stored in the path database. To display the path database, use the <b>show oam ethernet connectivity-fault-management path-database</b> command.  Before using the traceroute command, you can verify the remote MEP's MAC address using the <b>show oam ethernet connectivity-fault-management path-database</b> command.
<b>Options</b>	<b>mac-address</b> —Destination unicast MAC address of the remote maintenance point.  <b>mep-id</b> —MEP identifier of the remote maintenance point. The range of values is 1 through 8191.  <b>maintenance-association</b> <i>ma-name</i> —Specifies an existing maintenance association from the set of configured maintenance associations.  <b>maintenance-domain</b> <i>md-name</i> —Specifies an existing maintenance domain from the set of configured maintenance domains.  <b>ttl</b> <i>value</i> —Number of hops to use in the linktrace request. The range is 1 to 255 hops. The default is 4.  <b>wait</b> <i>seconds</i> —(Optional) Maximum time to wait for a response to the traceroute request. The range is 1 to 255 seconds. The default is 5.
<b>Required Privilege Level</b>	network
<b>List of Sample Output</b>	<a href="#">traceroute ethernet on page 263</a>
<b>Output Fields</b>	<a href="#">Table 30 on page 262</a> lists the output fields for the <b>traceroute ethernet</b> command. Output fields are listed in the approximate order in which they appear.

**Table 30: traceroute ethernet Output Fields**

Field Name	Field Description
Linktrace to	MAC address of the destination maintenance point.
Interface	Local interface used to send the linktrace message (LTM).

Table 30: traceroute ethernet Output Fields (*continued*)

Field Name	Field Description
<b>Maintenance Domain</b>	Maintenance domain specified in the traceroute command.
<b>Level</b>	Maintenance domain level configured.
<b>Maintenance Association</b>	Maintenance association specified in the traceroute command.
<b>Local Mep</b>	The local maintenance end point identifier.
<b>Transaction Identifier</b>	4-byte identifier maintained by the MEP. Each LTM uses a transaction identifier. The transaction identifier is maintained globally across all Maintenance Domains. Use the transaction identifier to match an incoming linktrace response (LTR), with a previously sent LTM.
<b>Hop</b>	Sequential hop count of the linktrace path.
<b>TTL</b>	Number of hops remaining in the linktrace message. The time to live (TTL) is decremented at each hop.
<b>Source MAC address</b>	MAC address of the 802.1ag maintenance point that is sending the linktrace message.
<b>Next-hop MAC address</b>	MAC address of the 802.1ag node that is the next hop in the LTM path.

## Sample Output

### traceroute ethernet

```
user@host> traceroute ethernet maintenance-domain md1 maintenance-association ma1
00:90:69:7e:01:ff
```

```
Linktrace to 00:01:02:03:04:05, Interface : ge-5/0/0.0
```

```
  Maintenance Domain: MD1, Level: 7
```

```
  Maintenance Association: MA1, Local Mep: 1
```

Hop	TTL	Source MAC address	Next hop MAC address
Transaction Identifier:100001			
1	63	00:00:aa:aa:aa:aa	00:00:bb:bb:bb:bb
2	62	00:00:bb:bb:bb:bb	00:00:cc:cc:cc:cc
3	61	00:00:cc:cc:cc:cc	00:01:02:03:04:05
4	60	00:01:02:03:04:05	00:00:00:00:00:00





## CHAPTER 8

# Interface Diagnostics

- [Interface Diagnostics on page 265](#)

## Interface Diagnostics

---

You can use two diagnostic tools to test the physical layer connections of interfaces: loopback testing and bit error rate test (BERT) testing. Loopback testing enables you to verify the connectivity of a circuit. BERT testing enables you to identify poor signal quality on a circuit. This section contains the following topics:

- [Configuring Loopback Testing on page 265](#)
- [Interface Diagnostics on page 267](#)

## Configuring Loopback Testing

Loopback testing allows you to verify the connectivity of a circuit. You can configure any of the following interfaces to execute a loopback test: Aggregated Ethernet, Fast Ethernet, Gigabit Ethernet, E1, E3, NxDS0, serial, SONET/SDH, T1, and T3.

The physical path of a network data circuit usually consists of segments interconnected by devices that repeat and regenerate the transmission signal. The transmit path on one device connects to the receive path on the next device. If a circuit fault occurs in the form of a line break or a signal corruption, you can isolate the problem by using a loopback test. Loopback tests allow you to isolate segments of the circuit and test them separately.

To do this, configure a *line loopback* on one of the routers. Instead of transmitting the signal toward the far-end device, the line loopback sends the signal back to the originating router. If the originating router receives back its own data link layer packets, you have verified that the problem is beyond the originating router. Next, configure a line loopback farther away from the local router. If this originating router does not receive its own data link layer packets, you can assume the problem is on one of the segments between the local router and the remote router's interface card. In this case, the next troubleshooting step is to configure a line loopback closer to the local router to find the source of the problem.

There are several types of loopback testing supported by the Junos OS, as follows:

- DCE local—Loops packets back on the local DCE.
- DCE remote—Loops packets back on the remote DCE.

- **Local**—Useful for troubleshooting physical PIC errors. Configuring local loopback on an interface allows transmission of packets to the channel service unit (CSU) and then to the circuit toward the far-end device. The interface receives its own transmission, which includes data and timing information, on the local router's PIC. The data received from the CSU is ignored. To test a local loopback, issue the **show interfaces *interface-name*** command. If PPP keepalives transmitted on the interface are received by the PIC, the **Device Flags** field contains the output **Loop-Detected**.
- **Payload**—Useful for troubleshooting the physical circuit problems between the local router and the remote router. A payload loopback loops data only (without clocking information) on the remote router's PIC. With payload loopback, overhead is recalculated.
- **Remote**—Useful for troubleshooting the physical circuit problems between the local router and the remote router. A remote loopback loops packets, including both data and timing information, back on the remote router's interface card. A router at one end of the circuit initiates a remote loopback toward its remote partner. When you configure a remote loopback, the packets received from the physical circuit and CSU are received by the interface. Those packets are then retransmitted by the PIC back toward the CSU and the circuit. This loopback tests all the intermediate transmission segments.

Table 31 on page 266 shows the loopback modes supported on the various interface types.

**Table 31: Loopback Modes by Interface Type**

Interface	Loopback Modes	Usage Guidelines
Aggregated Ethernet, Fast Ethernet, Gigabit Ethernet	Local	Configuring Ethernet Loopback Capability
Circuit Emulation E1	Local and remote	Configuring E1 Loopback Capability
Circuit Emulation T1	Local and remote	Configuring T1 Loopback Capability
E1 and E3	Local and remote	Configuring E1 Loopback Capability and Configuring E3 Loopback Capability
NxDSO	Payload	Configuring Channelized E1 IQ and IQE Interfaces, Configuring T1 and NxDSO Interfaces, Configuring Channelized OC12/STM4 IQ and IQE Interfaces (SONET Mode), Configuring Channelized STM1 IQ and IQE Interfaces, and Configuring Channelized T3 IQ Interfaces
Serial (V.35 and X.21)	Local and remote	Configuring Serial Loopback Capability
Serial (EIA-530)	DCE local, DCE remote, local, and remote	Configuring Serial Loopback Capability
SONET/SDH	Local and remote	Configuring SONET/SDH Loopback Capability

Table 31: Loopback Modes by Interface Type (*continued*)

Interface	Loopback Modes	Usage Guidelines
T1 and T3	Local, payload, and remote	Configuring T1 Loopback Capability and Configuring T3 Loopback Capability  See also Configuring the T1 Remote Loopback Response

To configure loopback testing, include the **loopback** statement:

**loopback mode;**

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* aggregated-ether-options]
- [edit interfaces *interface-name* ds0-options]
- [edit interfaces *interface-name* e1-options]
- [edit interfaces *interface-name* e3-options]
- [edit interfaces *interface-name* fastether-options]
- [edit interfaces *interface-name* gigether-options]
- [edit interfaces *interface-name* serial-options]
- [edit interfaces *interface-name* sonet-options]
- [edit interfaces *interface-name* t1-options]
- [edit interfaces *interface-name* t3-options]

## Interface Diagnostics

BERT allows you to troubleshoot problems by checking the quality of links. You can configure any of the following interfaces to execute a BERT when the interface receives a request to run this test: E1, E3, T1, T3; the channelized DS3, OC3, OC12, and STM1 interfaces; and the channelized DS3 IQ, E1 IQ, and OC12 IQ interfaces.

A BERT test requires a line loop to be in place on either the transmission devices or the far-end router. The local router generates a known bit pattern and sends it out the transmit path. The received pattern is then verified against the sent pattern. The higher the bit error rate of the received pattern, the worse the noise is on the physical circuit. As you move the position of the line loop increasingly downstream toward the far-end router, you can isolate the troubled portion of the link.

To configure BERT, you must configure the duration of the test, the bit pattern to send on the transmit path, and the error rate to monitor when the inbound pattern is received.

To configure the duration of the test, the pattern to send in the bit stream, and the error rate to include in the bit stream, include the **bert-period**, **bert-algorithm**, and **bert-error-rate** statements, respectively, at the [edit interfaces *interface-name* *interface-type*-options] hierarchy level:

```
[edit interfaces interface-name interface-type-options]
bert-algorithm algorithm;
bert-error-rate rate;
bert-period seconds;
```

By default, the BERT period is 10 seconds. You can configure the BERT period to last from 1 through 239 seconds on some PICs and from 1 through 240 seconds on other PICs.

**rate** is the bit error rate. This can be an integer from 0 through 7, which corresponds to a bit error rate from  $10^{-0}$  (1 error per bit) to  $10^{-7}$  (1 error per 10 million bits).

**algorithm** is the pattern to send in the bit stream. For a list of supported algorithms, enter a ? after the **bert-algorithm** statement; for example:

```
[edit interfaces t1-0/0/0 t1-options]
user@host# set bert-algorithm ?
Possible completions:
pseudo-2e11-o152      Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151      Pattern is 2^15 - 1 (per 0.152 standard)
pseudo-2e20-o151      Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e20-o153      Pattern is 2^20 - 1 (per 0.153 standard)
...
```

For specific hierarchy information, see the individual interface types.



**NOTE:** The 4-port E1 PIC supports only the following algorithms:

pseudo-2e11-o152	Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151	Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151	Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e23-o151	Pattern is 2^23 (per 0.151 standard)

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



**NOTE:** The 12-port T1/E1 Circuit Emulation (CE) PIC supports only the following algorithms:

```
all-ones-repeating    Repeating one bits
all-zeros-repeating   Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
pseudo-2e11-o152      Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151      Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151      Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e7            Pattern is 2^7 - 1
pseudo-2e9-o153       Pattern is 2^9 - 1 (per 0.153 standard)
repeating-1-in-4       1 bit in 4 is set
repeating-1-in-8       1 bit in 8 is set
repeating-3-in-24      3 bits in 24 are set
```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



**NOTE:** The IQE PICs support only the following algorithms:

```
all-ones-repeating    Repeating one bits
all-zeros-repeating   Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
pseudo-2e9-o153       Pattern is 2^9 - 1 (per 0.153 (511 type) standard)
pseudo-2e11-o152      Pattern is 2^11 - 1 (per 0.152 and 0.153 (2047 type)
standards)
pseudo-2e15-o151      Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151      Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e20-o153      Pattern is 2^20 - 1 (per 0.153 standard)
pseudo-2e23-o151      Pattern is 2^23 - 1 (per 0.151 standard)
repeating-1-in-4       1 bit in 4 is set
repeating-1-in-8       1 bit in 8 is set
repeating-3-in-24      3 bits in 24 are set
```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



**NOTE:** BERT is supported on the PDH interfaces of the Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP and the DS3/E3 MIC. The following BERT algorithms are supported:

all-ones-repeating	Repeating one bits
all-zeros-repeating	Repeating zero bits
alternating-double-ones-zeros	Alternating pairs of ones and zeros
alternating-ones-zeros	Alternating ones and zeros
repeating-1-in-4	1 bit in 4 is set
repeating-1-in-8	1 bit in 8 is set
repeating-3-in-24	3 bits in 24 are set
pseudo-2e9-o153	Pattern is $2^9 - 1$ (per 0.153 standard)
pseudo-2e11-o152	Pattern is $2^{11} - 1$ (per 0.152 standard)
pseudo-2e15-o151	Pattern is $2^{15} - 1$ (per 0.151 standard)
pseudo-2e20-o151	Pattern is $2^{20} - 1$ (per 0.151 standard)
pseudo-2e20-o153	Pattern is $2^{20} - 1$ (per 0.153 standard)
pseudo-2e23-o151	Pattern is $2^{23} - 1$ (per 0.151 standard)

Table 32 on page 270 shows the BERT capabilities for various interface types.

**Table 32: BERT Capabilities by Interface Type**

Interface	T1 BERT	T3 BERT	Comments
12-port T1/E1 Circuit Emulation	Yes (ports 0–11)		<ul style="list-style-type: none"> <li>Limited algorithms</li> </ul>
4-port Channelized OC3/STM1 Circuit Emulation	Yes (port 0–3)		<ul style="list-style-type: none"> <li>Limited algorithms</li> </ul>
E1 or T1	Yes (port 0–3)	Yes (port 0–3)	<ul style="list-style-type: none"> <li>Single port at a time</li> <li>Limited algorithms</li> </ul>
E3 or T3	Yes (port 0–3)	Yes (port 0–3)	<ul style="list-style-type: none"> <li>Single port at a time</li> </ul>
Channelized OC12	N/A	Yes (channel 0–11)	<ul style="list-style-type: none"> <li>Single channel at a time</li> <li>Limited algorithms</li> <li>No bit count</li> </ul>
Channelized STM1	Yes (channel 0–62)	N/A	<ul style="list-style-type: none"> <li>Multiple channels</li> <li>Only one algorithm</li> <li>No error insert</li> <li>No bit count</li> </ul>
Channelized T3 and Multichannel T3	Yes (channel 0–27)	Yes (port 0–3 on channel 0)	<ul style="list-style-type: none"> <li>Multiple ports and channels</li> <li>Limited algorithms for T1</li> <li>No error insert for T1</li> <li>No bit count for T1</li> </ul>

These limitations do not apply to channelized IQ interfaces. For information about BERT capabilities on channelized IQ interfaces, see Channelized IQ and IQE Interfaces Properties.

### Starting and Stopping a BERT Test

Before you can start the BERT test, you must disable the interface. To do this, include the **disable** statement at the **[edit interfaces *interface-name*]** hierarchy level:

```
[edit interfaces interface-name]  
disable;
```

After you configure the BERT properties and commit the configuration, begin the test by issuing the **test interface *interface-name interface-type-bert-start*** operational mode command:

```
user@host> test interface interface-name interface-type-bert-start
```

The test runs for the duration you specify with the **bert-period** statement. If you wish to terminate the test sooner, issue the **test interface *interface-name interface-type-bert-stop*** command:

```
user@host> test interface interface-name interface-type-bert-stop
```

For example:

```
user@host> test interface t3-1/2/0 t3-bert-start  
user@host> test interface t3-1/2/0 t3-bert-stop
```

To view the results of the BERT test, issue the **show interfaces extensive | find BERT** command:

```
user@host> show interfaces interface-name extensive | find BERT
```

For more information about running and evaluating the results of the BERT procedure, see the Junos OS Operational Mode Commands.



**NOTE:** To exchange BERT patterns between a local router and a remote router, include the **loopback remote** statement in the interface configuration at the remote end of the link. From the local router, issue the **test interface** command.

### Example: Configuring Bit Error Rate Testing

Configure a BERT test on a T3 interface. In this example, the run duration lasts for 120 seconds. The configured error rate is 0, which corresponds to a bit error rate of  $10^{-0}$  (1 error per bit). The configured bit pattern of **all-ones-repeating** means that every bit the interface sends is a set to a value of 1.

```
[edit interfaces]  
t3-1/2/0 {  
  t3-options {  
    bert algorithm all-ones-repeating;  
    bert-error-rate 0;  
    bert-period 120;
```

}

}



## PART 5

# Index

- [Index on page 275](#)



# Index

## Symbols

#, comments in configuration statements.....	xiv
( ), in syntax descriptions.....	xiv
10-Gigabit Ethernet interfaces	
status information, displaying.....	196
802.1ag Ethernet OAM for VPLS.....	53
< >, in syntax descriptions.....	xiv
[ ], in configuration statements.....	xiv
{ }, in configuration statements.....	xiv
(pipe), in syntax descriptions.....	xiv

## A

ACI (agent circuit identifier) interface sets	
status information, displaying.....	196
action-profile statement	
applying to remote MEP.....	93
CFM.....	94
age statement.....	95
aggregated Ethernet interfaces	
status information, displaying.....	132

## B

BERT	
configuring interface diagnostics.....	267
bert-algorithm statement	
usage guidelines.....	267
bert-error-rate statement	
usage guidelines.....	267
bert-period statement	
usage guidelines.....	267
bit error rate test See BERT	
braces, in configuration statements.....	xiv
brackets	
angle, in syntax descriptions.....	xiv
square, in configuration statements.....	xiv
Bridge Domain.....	12
bridge-domain.....	12
bridge-domain statement.....	95

## C

CCM	
Configuring CCM for Better Scalability.....	57
Configuring Faster Convergence.....	59
Configuring Faster Protection Switching.....	57
Configuring Primary VLAN ID.....	60
Remote Maintenance Association.....	60
CFM statistics	
displaying for CFM interfaces.....	219
displaying for interfaces.....	207
comments, in configuration statements.....	xiv
Configuring CCM for Better Scalability.....	57
Configuring Faster Convergence.....	59
Configuring Faster Protection Switching.....	57
Configuring Primary VLAN ID.....	60
Configuring Remote Maintenance Association.....	60
Configuring Unified ISSU for 801.1ag CFM .....	54
connectivity-fault management.....	93, 94
connectivity-fault-management statement.....	96
continuity-check statement.....	98
conventions	
text and syntax.....	xiii
convey-loss-threshold statement.....	98
curly braces, in configuration statements.....	xiv
customer support.....	xv
contacting JTAC.....	xv

## D

default-actions statement.....	99
direction statement.....	100
documentation	
comments on.....	xv

## E

E-LMI.....	25, 109
ETH-DM frame counts (with CFM statistics)	
displaying for MEPs by enclosing CFM.....	219
displaying for MEPs by interface or domain	
level.....	207
ETH-DM statistics (only)	
displaying.....	199
ETH-DM statistics and frame counts	
displaying.....	229
Ethernet	
CFM.....	61
Ethernet interface set	
status information, displaying.....	196

Ethernet interfaces	
CFM statistics	
displaying for CFM interfaces.....	219
displaying for interfaces.....	207
ETH-DM frame counts (with CFM statistics)	
displaying for MEPs by enclosing	
CFM.....	219
displaying for MEPs by interface or domain	
level.....	207
ETH-DM statistics (only)	
displaying.....	199
ETH-DM statistics and frame counts	
displaying.....	229
status information, displaying	
aggregated.....	132
Fast Ethernet.....	152
Gigabit Ethernet.....	169
Ethernet Local Management Interface See E-LMI	
ethernet statement.....	101
evcs statement.....	104
event statement	
convey-loss-threshold statement.....	98
interface-status-tlv statement.....	107
port-status-tlv statement.....	123
<b>F</b>	
Fast Ethernet interfaces	
status information, displaying.....	152
fast-aps-switch statement.....	105
font conventions.....	xiii
<b>G</b>	
Gigabit Ethernet interfaces	
demultiplexing interface information,	
displaying.....	142
status information, displaying.....	169, 196
Gigabit Ethernet IQ PIC	
traffic and MAC statistics.....	169
<b>H</b>	
hold-interval statement	
connectivity-fault management.....	106
<b>I</b>	
instance.....	12
Instance.....	12
instance statement.....	106
interface-down statement.....	99, 107
interface-status-tlv statement.....	107
interfaces	
configuration statements.....	69
<b>L</b>	
level statement.....	108
linktrace	
database, displaying.....	217
tracing.....	262
linktrace statement.....	108
lmi statement	
Ethernet OAM.....	109
logical systems	
configuration statements.....	85
loopback testing.....	265
loss-threshold statement.....	110
lowest-priority-defect statement.....	111
<b>M</b>	
MAC flush.....	45
Maintenance Intermediate Points.....	11
Bridge Domain.....	12
Instance.....	12
MIP.....	11
MIP Half Function.....	12
maintenance-association statement.....	112
maintenance-domain statement.....	113
mip-half-function.....	115
virtual-switch.....	127
manuals	
comments on.....	xv
mep statement.....	114
MIP Half Function.....	12
mip-half-function.....	12
mip-half-function statement.....	115
<b>N</b>	
name-format statement.....	116
<b>O</b>	
OAM	
configuration statements.....	89
E-LMI.....	25
Ethernet CFM.....	61
oam statement.....	117
<b>P</b>	
parentheses, in syntax descriptions.....	xiv
path-database-size statement.....	119

policer statement	
CFM firewall.....	120
CFM global level.....	121
CFM session level.....	122
port-status-tlv statement.....	123
priority statement	
OAM connectivity-fault management.....	123
protect-maintenance-association statement	
connectivity-fault management.....	125
protocols OAM	
configuration statements.....	89

## R

remote-maintenance-association statement	
connectivity-fault management.....	124
remote-mep statement.....	124
routing-instance statement.....	125

## S

short-name-format statement.....	126
show interfaces (10-Gigabit Ethernet)	
command.....	169
show interfaces (Aggregated Ethernet)	
command.....	132
show interfaces (Fast Ethernet) command.....	152
show interfaces demux0 (Demux Interfaces)	
command.....	142
show interfaces interface-set command.....	196
show oam ethernet connectivity-fault-management	
delay-statistics command.....	199
show oam ethernet connectivity-fault-management	
forwarding-state command.....	203
show oam ethernet connectivity-fault-management	
interfaces command.....	207
show oam ethernet connectivity-fault-management	
linktrace path-database command.....	217
show oam ethernet connectivity-fault-management	
mep-database command.....	219
show oam ethernet connectivity-fault-management	
mep-statistics command.....	229
show oam ethernet connectivity-fault-management	
path-database command.....	240
show oam ethernet link-fault-management	
command.....	243
support, technical See technical support	
syntax conventions.....	xiii

## T

technical support	
contacting JTAC.....	xv
traceroute ethernet.....	262
traceroute ethernet command.....	262

## V

virtual-switch statement.....	127
-------------------------------	-----

