



---

Junos<sup>®</sup> OS

## IS-IS Feature Guide



---

Modified: 2018-12-05

Juniper Networks, Inc.  
1133 Innovation Way  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

*Junos® OS IS-IS Feature Guide*

Copyright © 2018 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

|                  |                                                                                                          |           |
|------------------|----------------------------------------------------------------------------------------------------------|-----------|
|                  | About the Documentation . . . . .                                                                        | xv        |
|                  | Documentation and Release Notes . . . . .                                                                | xv        |
|                  | Using the Examples in This Manual . . . . .                                                              | xv        |
|                  | Merging a Full Example . . . . .                                                                         | xvi       |
|                  | Merging a Snippet . . . . .                                                                              | xvi       |
|                  | Documentation Conventions . . . . .                                                                      | xvii      |
|                  | Documentation Feedback . . . . .                                                                         | xix       |
|                  | Requesting Technical Support . . . . .                                                                   | xix       |
|                  | Self-Help Online Tools and Resources . . . . .                                                           | xx        |
|                  | Opening a Case with JTAC . . . . .                                                                       | xx        |
| <b>Part 1</b>    | <b>Overview</b>                                                                                          |           |
| <b>Chapter 1</b> | <b>Introduction to IS-IS . . . . .</b>                                                                   | <b>3</b>  |
|                  | IS-IS Overview . . . . .                                                                                 | 3         |
|                  | IS-IS Terminology . . . . .                                                                              | 4         |
|                  | ISO Network Addresses . . . . .                                                                          | 4         |
|                  | IS-IS Packets . . . . .                                                                                  | 6         |
|                  | Persistent Route Reachability . . . . .                                                                  | 7         |
|                  | IS-IS Support for Multipoint Network Clouds . . . . .                                                    | 7         |
|                  | Installing a Default Route to the Nearest Routing Device That Operates at<br>Both IS-IS Levels . . . . . | 7         |
|                  | Supported Standards for IS-IS . . . . .                                                                  | 8         |
|                  | ISIS Fast Reroute Convergence . . . . .                                                                  | 9         |
| <b>Part 2</b>    | <b>Configuring IS-IS</b>                                                                                 |           |
| <b>Chapter 2</b> | <b>Configuring a Basic IS-IS Network . . . . .</b>                                                       | <b>13</b> |
|                  | Understanding IS-IS Configuration . . . . .                                                              | 13        |
|                  | Example: Configuring IS-IS . . . . .                                                                     | 14        |
|                  | Understanding IS-IS Areas to Divide an Autonomous System into Smaller<br>Groups . . . . .                | 20        |
|                  | Example: Configuring a Multi-Level IS-IS Topology to Control Interarea<br>Flooding . . . . .             | 21        |
|                  | Understanding IS-IS Designated Routers . . . . .                                                         | 29        |
|                  | Configuring Designated Router Election Priority for IS-IS . . . . .                                      | 30        |
|                  | Configuring an ISO System Identifier for the Router . . . . .                                            | 31        |
|                  | Understanding Default Routes . . . . .                                                                   | 31        |

|                  |                                                                                                                            |            |
|------------------|----------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Chapter 3</b> | <b>Configuring IS-IS Authentication and Checksums . . . . .</b>                                                            | <b>33</b>  |
|                  | Configuring IS-IS Authentication . . . . .                                                                                 | 33         |
|                  | Configuring IS-IS Authentication Without Network-Wide Deployment . . . . .                                                 | 35         |
|                  | Understanding Hitless Authentication Key Rollover for IS-IS . . . . .                                                      | 35         |
|                  | Example: Configuring Hitless Authentication Key Rollover for IS-IS . . . . .                                               | 36         |
|                  | Understanding Checksums on IS-IS Interfaces for Error Checking . . . . .                                                   | 41         |
|                  | Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking . . . . .                                        | 42         |
| <b>Chapter 4</b> | <b>Configuring IS-IS Routing Policy and Route Redistribution . . . . .</b>                                                 | <b>45</b>  |
|                  | Understanding Routing Policies . . . . .                                                                                   | 45         |
|                  | Importing and Exporting Routes . . . . .                                                                                   | 46         |
|                  | Active and Inactive Routes . . . . .                                                                                       | 47         |
|                  | Explicitly Configured Routes . . . . .                                                                                     | 47         |
|                  | Dynamic Database . . . . .                                                                                                 | 48         |
|                  | Understanding Backup Selection Policy for IS-IS Protocol . . . . .                                                         | 48         |
|                  | Example: Configuring Backup Selection Policy for IS-IS Protocol . . . . .                                                  | 50         |
|                  | Configuring Backup Selection Policy for the IS-IS Protocol . . . . .                                                       | 81         |
|                  | Example: Redistributing OSPF Routes into IS-IS . . . . .                                                                   | 87         |
|                  | Example: Configuring IS-IS Route Leaking from a Level 2 Area to a Level 1<br>Area . . . . .                                | 96         |
|                  | Understanding BGP Communities, Extended Communities, and Large<br>Communities as Routing Policy Match Conditions . . . . . | 103        |
|                  | Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific<br>Community Tag into IS-IS . . . . .     | 104        |
|                  | IS-IS Extensions to Support Route Tagging . . . . .                                                                        | 114        |
|                  | Example: Configuring a Routing Policy to Prioritize IS-IS Routes . . . . .                                                 | 115        |
|                  | Configuring Overloading of Stub Networks . . . . .                                                                         | 125        |
| <b>Chapter 5</b> | <b>Configuring IS-IS Bidirectional Forwarding Detection . . . . .</b>                                                      | <b>127</b> |
|                  | Understanding BFD for IS-IS . . . . .                                                                                      | 127        |
|                  | Example: Configuring BFD for IS-IS . . . . .                                                                               | 129        |
|                  | Understanding BFD Authentication for IS-IS . . . . .                                                                       | 136        |
|                  | BFD Authentication Algorithms . . . . .                                                                                    | 137        |
|                  | Security Authentication Keychains . . . . .                                                                                | 137        |
|                  | Strict Versus Loose Authentication . . . . .                                                                               | 138        |
|                  | Configuring BFD Authentication for IS-IS . . . . .                                                                         | 138        |
|                  | Configuring BFD Authentication Parameters . . . . .                                                                        | 138        |
|                  | Viewing Authentication Information for BFD Sessions . . . . .                                                              | 140        |
|                  | Example: Configuring BFD Authentication for IS-IS . . . . .                                                                | 141        |
| <b>Chapter 6</b> | <b>Configuring IS-IS Flood Groups . . . . .</b>                                                                            | <b>147</b> |
|                  | Understanding IS-IS Flood Group . . . . .                                                                                  | 147        |
|                  | Example: Configuring IS-IS Flood Group . . . . .                                                                           | 147        |
| <b>Chapter 7</b> | <b>Configuring IS-IS Multitopology Routing and IPv6 Support . . . . .</b>                                                  | <b>153</b> |
|                  | IS-IS Multicast Topologies Overview . . . . .                                                                              | 153        |
|                  | Example: Configuring IS-IS Multicast Topology . . . . .                                                                    | 155        |
|                  | Understanding Dual Stacking of IPv4 and IPv6 Unicast Addresses . . . . .                                                   | 170        |
|                  | Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast<br>Addresses . . . . .                                   | 171        |

|                  |                                                                                                                     |            |
|------------------|---------------------------------------------------------------------------------------------------------------------|------------|
|                  | Understanding IS-IS IPv4 and IPv6 Unicast Topologies . . . . .                                                      | 177        |
|                  | Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies . . . . .                                               | 178        |
| <b>Chapter 8</b> | <b>Configuring IS-IS Link and Node Link Protection . . . . .</b>                                                    | <b>189</b> |
|                  | Understanding Loop-Free Alternate Routes for IS-IS . . . . .                                                        | 189        |
|                  | Configuring Link Protection for IS-IS . . . . .                                                                     | 191        |
|                  | Configuring Node-Link Protection for IS-IS . . . . .                                                                | 192        |
|                  | Excluding an IS-IS Interface as a Backup for Protected Interfaces . . . . .                                         | 192        |
|                  | Configuring RSVP Label-Switched Paths as Backup Paths for IS-IS . . . . .                                           | 193        |
|                  | Using Operational Mode Commands to Monitor Protected IS-IS Routes . . . . .                                         | 193        |
|                  | Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN . . . . .                               | 193        |
|                  | Understanding Remote LFA over LDP Tunnels in IS-IS Networks . . . . .                                               | 205        |
|                  | Configuring Remote LFA Backup over LDP Tunnels in an IS-IS Network . . . . .                                        | 206        |
|                  | Example: Configuring Remote LFA over LDP Tunnels in IS-IS Networks . . . . .                                        | 208        |
|                  | Understanding Weighted ECMP Traffic Distribution on One-Hop IS-IS<br>Neighbors . . . . .                            | 220        |
|                  | Example: Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors . . . . .                                    | 221        |
| <b>Chapter 9</b> | <b>Configuring IS-IS Traffic Engineering . . . . .</b>                                                              | <b>245</b> |
|                  | IS-IS Extensions to Support Traffic Engineering . . . . .                                                           | 246        |
|                  | IS-IS IGP Shortcuts . . . . .                                                                                       | 246        |
|                  | Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts . . . . .                                      | 246        |
|                  | Example: Enabling IS-IS Traffic Engineering Support . . . . .                                                       | 248        |
|                  | Understanding Forwarding Adjacencies . . . . .                                                                      | 263        |
|                  | Example: Advertising Label-Switched Paths into IS-IS . . . . .                                                      | 263        |
|                  | Understanding Wide IS-IS Metrics for Traffic Engineering . . . . .                                                  | 272        |
|                  | Example: Enabling Wide IS-IS Metrics for Traffic Engineering . . . . .                                              | 272        |
|                  | Understanding LDP-IGP Synchronization . . . . .                                                                     | 274        |
|                  | Synchronization Behavior During Graceful Restart . . . . .                                                          | 276        |
|                  | Synchronization Behavior on LAN Interfaces . . . . .                                                                | 276        |
|                  | Synchronization Behavior on IGP Passive Interfaces . . . . .                                                        | 276        |
|                  | Synchronization and TE Metrics . . . . .                                                                            | 276        |
|                  | Example: Configuring Synchronization Between IS-IS and LDP . . . . .                                                | 276        |
|                  | Layer 2 Mapping for IS-IS . . . . .                                                                                 | 281        |
|                  | Example: Configuring Layer 2 Mapping for IS-IS . . . . .                                                            | 282        |
|                  | Understanding Source Packet Routing in Networking (SPRING) . . . . .                                                | 289        |
|                  | Understanding Adjacency Segments, Anycast Segments, and Configurable<br>SRGB in SPRING for IS-IS Protocol . . . . . | 292        |
|                  | Benefits of Anycast Segments, Adjacency Segments, and Configurable<br>SRGB . . . . .                                | 292        |
|                  | Configurable Segment Routing Global Block . . . . .                                                                 | 292        |
|                  | Adjacency Segments and Prefix Segments . . . . .                                                                    | 293        |
|                  | Configurable Adjacency Segment Hold Time . . . . .                                                                  | 293        |
|                  | Prefix Segment Index . . . . .                                                                                      | 293        |
|                  | Anycast Segments . . . . .                                                                                          | 294        |
|                  | Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to<br>Increase Network Speed . . . . .       | 294        |

|                   |                                                                                                          |            |
|-------------------|----------------------------------------------------------------------------------------------------------|------------|
|                   | Example: Configuring Anycast and Prefix Segments in SPRING for IS-IS to Increase Network Speed . . . . . | 306        |
|                   | Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol . . . . .            | 324        |
|                   | Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol . . . . .                           | 326        |
|                   | Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS . . . . .          | 330        |
|                   | Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS . . . . .            | 333        |
|                   | Example: Configuring Topology Independent Loop-Free Alternate with Segment Routing for IS-IS . . . . .   | 334        |
|                   | Static Adjacency Segment Identifier for ISIS . . . . .                                                   | 351        |
| <b>Chapter 10</b> | <b>Configuring IS-IS Scaling and Throttling . . . . .</b>                                                | <b>357</b> |
|                   | Understanding Link-State PDU Throttling for IS-IS Interfaces . . . . .                                   | 357        |
|                   | Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces . . . . .        | 358        |
|                   | Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces . . . . .                         | 363        |
|                   | Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces . . . . .           | 363        |
|                   | Understanding IS-IS Mesh Groups . . . . .                                                                | 368        |
|                   | Example: Configuring Mesh Groups of IS-IS Interfaces . . . . .                                           | 369        |
| <b>Chapter 11</b> | <b>Configuring IS-IS CLNS . . . . .</b>                                                                  | <b>377</b> |
|                   | Understanding IS-IS for CLNS . . . . .                                                                   | 377        |
|                   | Example: Configuring IS-IS for CLNS . . . . .                                                            | 377        |
| <b>Chapter 12</b> | <b>Configuring IS-IS on Logical Systems . . . . .</b>                                                    | <b>381</b> |
|                   | Introduction to Logical Systems . . . . .                                                                | 381        |
|                   | Example: Configuring IS-IS on Logical Systems Within the Same Router . . . . .                           | 383        |
|                   | Example: Configuring an IS-IS Default Route Policy on Logical Systems . . . . .                          | 394        |
| <b>Part 3</b>     | <b>Monitoring and Troubleshooting Network Issues</b>                                                     |            |
| <b>Chapter 13</b> | <b>Monitoring Networks . . . . .</b>                                                                     | <b>403</b> |
|                   | Example: Tracing Global Routing Protocol Operations . . . . .                                            | 403        |
|                   | IS-IS Purge Originator Identification Overview . . . . .                                                 | 407        |
| <b>Chapter 14</b> | <b>Troubleshooting Network Issues . . . . .</b>                                                          | <b>409</b> |
|                   | Working with Problems on Your Network . . . . .                                                          | 409        |
|                   | Isolating a Broken Network Connection . . . . .                                                          | 410        |
|                   | Identifying the Symptoms of a Broken Network Connection . . . . .                                        | 411        |
|                   | Isolating the Causes of a Network Problem . . . . .                                                      | 412        |
|                   | Taking Appropriate Action for Resolving the Network Problem . . . . .                                    | 413        |
|                   | Evaluating the Solution to Check Whether the Network Problem Is Resolved . . . . .                       | 414        |
| <b>Chapter 15</b> | <b>Troubleshooting IS-IS . . . . .</b>                                                                   | <b>417</b> |
|                   | Verifying the IS-IS Protocol . . . . .                                                                   | 417        |
|                   | Verify the LSP . . . . .                                                                                 | 418        |
|                   | Verify IS-IS Adjacencies and Interfaces . . . . .                                                        | 420        |

|                                                                      |                                                          |
|----------------------------------------------------------------------|----------------------------------------------------------|
| Verify the IS-IS Configuration . . . . .                             | 421                                                      |
| Take Appropriate Action . . . . .                                    | 422                                                      |
| Verify the LSP Again . . . . .                                       | 423                                                      |
| Verifying the IS-IS Configuration on a Router in a Network . . . . . | 426                                                      |
| Check the Configuration of a Level 1/Level 2 Router . . . . .        | 428                                                      |
| Check the Configuration of a Level 1 Router . . . . .                | 430                                                      |
| Check the Configuration of a Level 2 Router . . . . .                | 432                                                      |
| Displaying the Status of IS-IS Adjacencies . . . . .                 | 433                                                      |
| Verifying Adjacent Routers . . . . .                                 | 434                                                      |
| Examine the Forwarding Table . . . . .                               | 436                                                      |
| Displaying Detailed IS-IS Protocol Information . . . . .             | 437                                                      |
| Analyzing IS-IS Link-State PDUs in Detail . . . . .                  | 439                                                      |
| Displaying Sent or Received IS-IS Protocol Packets . . . . .         | 441                                                      |
| <br>                                                                 |                                                          |
| <b>Part 4</b>                                                        | <b>Configuration Statements and Operational Commands</b> |
| <b>Chapter 16</b>                                                    | <b>Configuration Statements . . . . . 445</b>            |
| admin-group . . . . .                                                | 449                                                      |
| adjacency-segment . . . . .                                          | 451                                                      |
| authentication-key (Protocols IS-IS) . . . . .                       | 452                                                      |
| authentication-key-chain (Protocols IS-IS) . . . . .                 | 453                                                      |
| authentication-type (Protocols IS-IS) . . . . .                      | 454                                                      |
| auto-bandwidth . . . . .                                             | 455                                                      |
| backup-selection (Protocols ISIS) . . . . .                          | 457                                                      |
| backup-spf-options (Protocols IS-IS) . . . . .                       | 459                                                      |
| bfd-liveness-detection (Protocols IS-IS) . . . . .                   | 461                                                      |
| checksum (Protocols IS-IS) . . . . .                                 | 464                                                      |
| clns-routing . . . . .                                               | 465                                                      |
| clns-updown-compatibility . . . . .                                  | 466                                                      |
| context-identifier (Protocols IS-IS) . . . . .                       | 467                                                      |
| csnp-interval . . . . .                                              | 468                                                      |
| destination . . . . .                                                | 469                                                      |
| disable (Protocols IS-IS) . . . . .                                  | 471                                                      |
| disable (LDP Synchronization for IS-IS) . . . . .                    | 472                                                      |
| export . . . . .                                                     | 473                                                      |
| external-preference (Protocols IS-IS) . . . . .                      | 474                                                      |
| family (Protocols IS-IS) . . . . .                                   | 475                                                      |
| flood-group (Protocols IS-IS) . . . . .                              | 476                                                      |
| graceful-restart (Protocols IS-IS) . . . . .                         | 477                                                      |
| hello-authentication-key . . . . .                                   | 478                                                      |
| hello-authentication-key-chain . . . . .                             | 479                                                      |
| hello-authentication-type . . . . .                                  | 480                                                      |
| hello-interval (Protocols IS-IS) . . . . .                           | 482                                                      |
| hello-padding . . . . .                                              | 484                                                      |
| hold-time (Protocols IS-IS) . . . . .                                | 486                                                      |
| hold-time (LDP Synchronization for IS-IS) . . . . .                  | 488                                                      |
| ignore-attached-bit . . . . .                                        | 489                                                      |
| ignore-lsp-metrics (Protocols IS-IS) . . . . .                       | 490                                                      |
| import (Protocols IS-IS) . . . . .                                   | 491                                                      |

|                                                            |     |
|------------------------------------------------------------|-----|
| interface (Protocols IS-IS) . . . . .                      | 492 |
| interface-group-holddown-delay . . . . .                   | 494 |
| interface (Protocols ISIS) . . . . .                       | 495 |
| ipv4-multicast . . . . .                                   | 499 |
| ipv4-multicast-metric . . . . .                            | 500 |
| ipv6-multicast . . . . .                                   | 501 |
| ipv6-multicast-metric . . . . .                            | 502 |
| ipv6-unicast . . . . .                                     | 503 |
| ipv6-unicast-metric . . . . .                              | 504 |
| isis . . . . .                                             | 505 |
| label-switched-path (Protocols IS-IS) . . . . .            | 506 |
| layer2-map . . . . .                                       | 507 |
| ldp-synchronization . . . . .                              | 508 |
| level (Global IS-IS) . . . . .                             | 509 |
| level (IS-IS Interfaces) . . . . .                         | 511 |
| link-group-protection (Protocols IS-IS) . . . . .          | 512 |
| link-protection (Protocols IS-IS) . . . . .                | 513 |
| loose-authentication-check . . . . .                       | 514 |
| lsp-equal-cost . . . . .                                   | 515 |
| lsp-interval . . . . .                                     | 516 |
| lsp-lifetime . . . . .                                     | 518 |
| max-areas . . . . .                                        | 520 |
| max-hello-size . . . . .                                   | 521 |
| max-lsp-size . . . . .                                     | 522 |
| max-snp-size . . . . .                                     | 523 |
| mesh-group (Protocols IS-IS) . . . . .                     | 524 |
| metric (Protocols IS-IS) . . . . .                         | 525 |
| multicast-rpf-routes . . . . .                             | 526 |
| multipath (Protocols IS-IS) . . . . .                      | 527 |
| multipath (SPF Options) . . . . .                          | 528 |
| no-adjacency-down-notification (Protocols IS-IS) . . . . . | 529 |
| no-adjacency-holddown . . . . .                            | 530 |
| no-authentication-check . . . . .                          | 531 |
| no-advertise-adjacency-segment (Protocols IS-IS) . . . . . | 532 |
| no-csnp-authentication . . . . .                           | 533 |
| node . . . . .                                             | 534 |
| node-protection . . . . .                                  | 535 |
| node-segment (Protocols IS-IS) . . . . .                   | 536 |
| node-tag . . . . .                                         | 538 |
| node-link-protection (Protocols IS-IS) . . . . .           | 540 |
| no-eligible-backup (Protocols IS-IS) . . . . .             | 541 |
| no-eligible-remote-backup . . . . .                        | 542 |
| no-hello-authentication . . . . .                          | 543 |
| no-ipv4-multicast . . . . .                                | 544 |
| no-ipv4-routing . . . . .                                  | 545 |
| no-ipv6-multicast . . . . .                                | 546 |
| no-ipv6-routing . . . . .                                  | 547 |
| no-ipv6-unicast . . . . .                                  | 548 |
| no-psnp-authentication . . . . .                           | 549 |



|                                                  |            |
|--------------------------------------------------|------------|
| no-unicast-topology                              | 550        |
| overload (Protocols IS-IS)                       | 551        |
| passive (Protocols IS-IS)                        | 554        |
| per-interface-per-member-link                    | 556        |
| per-sid                                          | 557        |
| point-to-point                                   | 558        |
| post-convergence-lfa                             | 559        |
| preference (Protocols IS-IS)                     | 560        |
| prefix-export-limit (Protocols IS-IS)            | 561        |
| prefix-segment                                   | 562        |
| priority (Protocols IS-IS)                       | 563        |
| protocols                                        | 564        |
| purge-originator                                 | 567        |
| reference-bandwidth (Protocols IS-IS)            | 568        |
| remote-backup-calculation                        | 569        |
| rib-group (Protocols IS-IS)                      | 570        |
| routing-instances (Multiple Routing Entities)    | 571        |
| sensor-based-stats (Protocols IS-IS)             | 572        |
| shortcuts (Protocols IS-IS)                      | 573        |
| spf-options (Protocols IS-IS)                    | 574        |
| static-host-mapping                              | 576        |
| source-packet-routing-disable (Protocols IS-IS)  | 577        |
| source-packet-routing (Protocols IS-IS and OSPF) | 578        |
| srgb                                             | 580        |
| te-metric (Protocols IS-IS)                      | 581        |
| topologies (Protocols IS-IS)                     | 582        |
| traceoptions (Protocols IS-IS)                   | 583        |
| traffic-engineering (Protocols IS-IS)            | 586        |
| traffic-statistics                               | 590        |
| update-threshold-max-reservable                  | 591        |
| use-source-packet-routing (Protocols IS-IS)      | 592        |
| use-post-convergence-lfa                         | 593        |
| use-for-post-convergence-lfa                     | 594        |
| wide-metrics-only                                | 595        |
| <b>Chapter 17</b>                                |            |
| <b>Operational Commands</b>                      | <b>597</b> |
| clear bfd adaptation                             | 599        |
| clear bfd session                                | 600        |
| clear isis adjacency                             | 602        |
| clear isis database                              | 604        |
| clear isis overload                              | 606        |
| clear isis statistics                            | 608        |
| clear isis spring traffic-statistics             | 610        |
| ping clns                                        | 611        |
| restart                                          | 613        |
| show auto-bandwidth                              | 624        |
| show bfd session                                 | 627        |
| show isis adjacency                              | 638        |
| show isis adjacency holddown                     | 643        |

|                                                         |     |
|---------------------------------------------------------|-----|
| show isis authentication . . . . .                      | 646 |
| show isis backup coverage . . . . .                     | 648 |
| show isis backup label-switched-path . . . . .          | 650 |
| show backup-selection . . . . .                         | 652 |
| show isis backup spf results . . . . .                  | 659 |
| show isis context-identifier . . . . .                  | 663 |
| show isis database . . . . .                            | 665 |
| show isis hostname . . . . .                            | 680 |
| show isis interface . . . . .                           | 682 |
| show isis interface-group . . . . .                     | 687 |
| show isis layer2-map . . . . .                          | 689 |
| show isis overview . . . . .                            | 691 |
| show isis purge log . . . . .                           | 696 |
| show isis route . . . . .                               | 698 |
| show isis route download priority . . . . .             | 703 |
| show isis spf . . . . .                                 | 706 |
| show isis spring interface traffic-statistics . . . . . | 711 |
| show isis statistics . . . . .                          | 712 |
| show policy . . . . .                                   | 715 |
| show policy conditions . . . . .                        | 718 |
| show route . . . . .                                    | 720 |
| show route active-path . . . . .                        | 742 |
| show route advertising-protocol . . . . .               | 747 |
| show route all . . . . .                                | 753 |
| show route best . . . . .                               | 755 |
| show route brief . . . . .                              | 758 |
| show route detail . . . . .                             | 760 |
| show route exact . . . . .                              | 780 |
| show route export . . . . .                             | 782 |
| show route extensive . . . . .                          | 785 |
| show route forwarding-table . . . . .                   | 804 |
| show route hidden . . . . .                             | 822 |
| show route inactive-path . . . . .                      | 825 |
| show route instance . . . . .                           | 829 |
| show route next-hop . . . . .                           | 837 |
| show route output . . . . .                             | 843 |
| show route protocol . . . . .                           | 848 |
| show route receive-protocol . . . . .                   | 862 |
| show route table . . . . .                              | 872 |
| show route terse . . . . .                              | 913 |
| show security keychain . . . . .                        | 916 |
| test policy . . . . .                                   | 919 |
| traceroute clns . . . . .                               | 921 |

# List of Figures

|                  |                                                                                                     |            |
|------------------|-----------------------------------------------------------------------------------------------------|------------|
| <b>Part 1</b>    | <b>Overview</b>                                                                                     |            |
| <b>Chapter 1</b> | <b>Introduction to IS-IS</b>                                                                        | <b>3</b>   |
|                  | Figure 1: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2 | 7          |
|                  | Figure 2: Topology                                                                                  | 10         |
| <b>Part 2</b>    | <b>Configuring IS-IS</b>                                                                            |            |
| <b>Chapter 2</b> | <b>Configuring a Basic IS-IS Network</b>                                                            | <b>13</b>  |
|                  | Figure 3: Simple IS-IS Topology                                                                     | 15         |
|                  | Figure 4: IS-IS Multi-Level Topology                                                                | 21         |
| <b>Chapter 3</b> | <b>Configuring IS-IS Authentication and Checksums</b>                                               | <b>33</b>  |
|                  | Figure 5: Hitless Authentication Key Rollover for IS-IS                                             | 37         |
|                  | Figure 6: IS-IS Checksum Topology                                                                   | 42         |
| <b>Chapter 4</b> | <b>Configuring IS-IS Routing Policy and Route Redistribution</b>                                    | <b>45</b>  |
|                  | Figure 7: Importing and Exporting Routes                                                            | 46         |
|                  | Figure 8: Backup Selection Path                                                                     | 51         |
|                  | Figure 9: IS-IS Route Redistribution Topology                                                       | 88         |
|                  | Figure 10: Route Leaking from a Level 2 Area to a Level 1 Area                                      | 97         |
|                  | Figure 11: Redistributing BGP Routes with a Specific Community Tag into IS-IS                       | 105        |
|                  | Figure 12: Example: Configuring a Routing Policy to prioritize IS-IS Routes                         | 116        |
| <b>Chapter 5</b> | <b>Configuring IS-IS Bidirectional Forwarding Detection</b>                                         | <b>127</b> |
|                  | Figure 13: Configuring BFD for IS-IS                                                                | 130        |
|                  | Figure 14: IS-IS BFD Authentication Topology                                                        | 142        |
| <b>Chapter 6</b> | <b>Configuring IS-IS Flood Groups</b>                                                               | <b>147</b> |
|                  | Figure 15: Flood Group Topology                                                                     | 148        |
| <b>Chapter 7</b> | <b>Configuring IS-IS Multitopology Routing and IPv6 Support</b>                                     | <b>153</b> |
|                  | Figure 16: Configuring IS-IS Multicast Topology                                                     | 155        |
|                  | Figure 17: IS-IS IPv4 and IPv6 Dual Stacking Topology                                               | 172        |
|                  | Figure 18: IS-IS IPv4 and IPv6 Unicast Topologies                                                   | 180        |
| <b>Chapter 8</b> | <b>Configuring IS-IS Link and Node Link Protection</b>                                              | <b>189</b> |
|                  | Figure 19: Link Protection and Node-Link Protection Comparison for IS-IS Routes                     | 191        |
|                  | Figure 20: IS-IS Node-Link Protection Topology                                                      | 194        |
|                  | Figure 21: Configuring Remote LFA over LDP Tunnels in IS-IS Networks                                | 209        |

|                   |                                                                                                 |            |
|-------------------|-------------------------------------------------------------------------------------------------|------------|
|                   | Figure 22: Weighted ECMP Traffic Distribution on One Hop IS-IS Neighbors . . .                  | 222        |
| <b>Chapter 9</b>  | <b>Configuring IS-IS Traffic Engineering . . . . .</b>                                          | <b>245</b> |
|                   | Figure 23: Typical SPF Tree, Sourced from Router A . . . . .                                    | 247        |
|                   | Figure 24: Modified SPF Tree, Using LSP A–D as a Shortcut . . . . .                             | 247        |
|                   | Figure 25: IS-IS Shortcuts Topology . . . . .                                                   | 249        |
|                   | Figure 26: IS-IS Advertising a Label-Switched Path Topology . . . . .                           | 264        |
|                   | Figure 27: IS-IS Wide Metrics Topology . . . . .                                                | 273        |
|                   | Figure 28: IS-IS and LDP Synchronization Topology . . . . .                                     | 278        |
|                   | Figure 29: Configuring Layer 2 Mapping for IS-IS . . . . .                                      | 283        |
|                   | Figure 30: Topology-Independent Loop-Free Alternate with Segment Routing<br>for IS-IS . . . . . | 336        |
| <b>Chapter 10</b> | <b>Configuring IS-IS Scaling and Throttling . . . . .</b>                                       | <b>357</b> |
|                   | Figure 31: IS-IS Link-State PDU Interval Topology . . . . .                                     | 358        |
|                   | Figure 32: IS-IS CSNP Interval Topology . . . . .                                               | 364        |
|                   | Figure 33: IS-IS Mesh Topology . . . . .                                                        | 370        |
| <b>Chapter 12</b> | <b>Configuring IS-IS on Logical Systems . . . . .</b>                                           | <b>381</b> |
|                   | Figure 34: Logical Systems Concepts . . . . .                                                   | 382        |
|                   | Figure 35: Junos OS Without Logical Systems . . . . .                                           | 382        |
|                   | Figure 36: Junos OS with Logical Systems . . . . .                                              | 383        |
|                   | Figure 37: IS-IS on Logical Systems . . . . .                                                   | 384        |
|                   | Figure 38: IS-IS with a Default Route to an ISP . . . . .                                       | 394        |
| <b>Part 3</b>     | <b>Monitoring and Troubleshooting Network Issues</b>                                            |            |
| <b>Chapter 14</b> | <b>Troubleshooting Network Issues . . . . .</b>                                                 | <b>409</b> |
|                   | Figure 39: Process for Diagnosing Problems in Your Network . . . . .                            | 410        |
|                   | Figure 40: Network with a Problem . . . . .                                                     | 410        |
| <b>Chapter 15</b> | <b>Troubleshooting IS-IS . . . . .</b>                                                          | <b>417</b> |
|                   | Figure 41: MPLS Network Broken at the IS-IS Protocol Layer . . . . .                            | 418        |
|                   | Figure 42: Levels in an IS-IS Network Topology . . . . .                                        | 427        |
|                   | Figure 43: IS-IS Network Topology with Details . . . . .                                        | 428        |
|                   | Figure 44: IS-IS Network Topology . . . . .                                                     | 434        |

# List of Tables

|                   |                                                                                                   |            |
|-------------------|---------------------------------------------------------------------------------------------------|------------|
|                   | <b>About the Documentation</b> . . . . .                                                          | <b>xv</b>  |
|                   | Table 1: Notice Icons . . . . .                                                                   | xvii       |
|                   | Table 2: Text and Syntax Conventions . . . . .                                                    | xviii      |
| <b>Part 2</b>     | <b>Configuring IS-IS</b>                                                                          |            |
| <b>Chapter 5</b>  | <b>Configuring IS-IS Bidirectional Forwarding Detection</b> . . . . .                             | <b>127</b> |
|                   | Table 3: Configuring BFD for IS-IS . . . . .                                                      | 128        |
| <b>Chapter 7</b>  | <b>Configuring IS-IS Multitopology Routing and IPv6 Support</b> . . . . .                         | <b>153</b> |
|                   | Table 4: IPv4 Statements . . . . .                                                                | 154        |
|                   | Table 5: IPv6 Statements . . . . .                                                                | 154        |
|                   | Table 6: Choosing the Right Solution to Address Next-Generation Addressing Requirements . . . . . | 171        |
| <b>Part 3</b>     | <b>Monitoring and Troubleshooting Network Issues</b>                                              |            |
| <b>Chapter 14</b> | <b>Troubleshooting Network Issues</b> . . . . .                                                   | <b>409</b> |
|                   | Table 7: Checklist for Working with Problems on Your Network . . . . .                            | 409        |
| <b>Chapter 15</b> | <b>Troubleshooting IS-IS</b> . . . . .                                                            | <b>417</b> |
|                   | Table 8: IS-IS Protocol Tracing Flags . . . . .                                                   | 438        |
| <b>Part 4</b>     | <b>Configuration Statements and Operational Commands</b>                                          |            |
| <b>Chapter 16</b> | <b>Configuration Statements</b> . . . . .                                                         | <b>445</b> |
|                   | Table 9: Default Metric Values for Routes Exported into IS-IS . . . . .                           | 525        |
| <b>Chapter 17</b> | <b>Operational Commands</b> . . . . .                                                             | <b>597</b> |
|                   | Table 10: show bfd session Output Fields . . . . .                                                | 629        |
|                   | Table 11: show isis adjacency Output Fields . . . . .                                             | 639        |
|                   | Table 12: show isis authentication Output Fields . . . . .                                        | 647        |
|                   | Table 13: show isis backup coverage Output Fields . . . . .                                       | 648        |
|                   | Table 14: show isis backup label-switched-path Output Fields . . . . .                            | 650        |
|                   | Table 15: show backup-selection Output Fields . . . . .                                           | 652        |
|                   | Table 16: show isis backup spf results Output Fields . . . . .                                    | 660        |
|                   | Table 17: show isis context-identifier Output Fields . . . . .                                    | 663        |
|                   | Table 18: show isis database Output Fields . . . . .                                              | 666        |
|                   | Table 19: show isis hostname Output Fields . . . . .                                              | 680        |
|                   | Table 20: show isis interface Output Fields . . . . .                                             | 683        |
|                   | Table 21: show layer2-map Output Fields . . . . .                                                 | 687        |
|                   | Table 22: show isis layer2-map Output Fields . . . . .                                            | 689        |

|                                                                   |     |
|-------------------------------------------------------------------|-----|
| Table 23: show isis overview Output Fields . . . . .              | 691 |
| Table 24: show isis purge log Output Fields . . . . .             | 696 |
| Table 25: show isis route Output Fields . . . . .                 | 699 |
| Table 26: show isis route Output Fields . . . . .                 | 704 |
| Table 27: show isis spf Output Fields . . . . .                   | 707 |
| Table 28: show isis statistics Output Fields . . . . .            | 713 |
| Table 29: show policy Output Fields . . . . .                     | 716 |
| Table 30: show policy conditions Output Fields . . . . .          | 718 |
| Table 31: show route Output Fields . . . . .                      | 721 |
| Table 32: show route advertising-protocol Output Fields . . . . . | 748 |
| Table 33: show route detail Output Fields . . . . .               | 760 |
| Table 34: Next-hop Types Output Field Values . . . . .            | 766 |
| Table 35: State Output Field Values . . . . .                     | 768 |
| Table 36: Communities Output Field Values . . . . .               | 770 |
| Table 37: show route export Output Fields . . . . .               | 783 |
| Table 38: show route extensive Output Fields . . . . .            | 785 |
| Table 39: show route forwarding-table Output Fields . . . . .     | 807 |
| Table 40: show route instance Output Fields . . . . .             | 830 |
| Table 41: show route receive-protocol Output Fields . . . . .     | 863 |
| Table 42: show route table Output Fields . . . . .                | 873 |
| Table 43: Next-hop Types Output Field Values . . . . .            | 879 |
| Table 44: State Output Field Values . . . . .                     | 881 |
| Table 45: Communities Output Field Values . . . . .               | 883 |
| Table 46: show route terse Output Fields . . . . .                | 913 |
| Table 47: show security keychain Output Fields . . . . .          | 916 |
| Table 48: Traceroute clns Output Fields . . . . .                 | 921 |

# About the Documentation

- Documentation and Release Notes on page xv
- Using the Examples in This Manual on page xv
- Documentation Conventions on page xvii
- Documentation Feedback on page xix
- Requesting Technical Support on page xix

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <https://www.juniper.net/documentation/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <https://www.juniper.net/books>.

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```



2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

## Documentation Conventions

Table 1 on page xvii defines notice icons used in this guide.

Table 1: Notice Icons

| Icon                                                                                | Meaning            | Description                                                                 |
|-------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------|
|  | Informational note | Indicates important features or instructions.                               |
|  | Caution            | Indicates a situation that might result in loss of data or hardware damage. |
|  | Warning            | Alerts you to the risk of personal injury or death.                         |
|  | Laser warning      | Alerts you to the risk of personal injury from a laser.                     |
|  | Tip                | Indicates helpful information.                                              |
|  | Best practice      | Alerts you to a recommended use or implementation.                          |

Table 2 on page xviii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

| Convention                     | Description                                                                                                                                                                         | Examples                                                                                                                                                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bold text like this</b>     | Represents text that you type.                                                                                                                                                      | To enter configuration mode, type the <b>configure</b> command:<br><br>user@host> <b>configure</b>                                                                                                                                 |
| Fixed-width text like this     | Represents output that appears on the terminal screen.                                                                                                                              | user@host> <b>show chassis alarms</b><br><br>No alarms currently active                                                                                                                                                            |
| <i>Italic text like this</i>   | <ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies guide names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul> | <ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS CLI User Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul> |
| <i>Italic text like this</i>   | Represents variables (options for which you substitute a value) in commands or configuration statements.                                                                            | Configure the machine's domain name:<br><br>[edit]<br>root@# <b>set system domain-name</b> <i>domain-name</i>                                                                                                                      |
| Text like this                 | Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.                           | <ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>      |
| < > (angle brackets)           | Encloses optional keywords or variables.                                                                                                                                            | <b>stub</b> <default-metric <i>metric</i> >;                                                                                                                                                                                       |
| (pipe symbol)                  | Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.              | <b>broadcast</b>   <b>multicast</b><br><br>( <i>string1</i>   <i>string2</i>   <i>string3</i> )                                                                                                                                    |
| # (pound sign)                 | Indicates a comment specified on the same line as the configuration statement to which it applies.                                                                                  | <b>rsvp { # Required for dynamic MPLS only</b>                                                                                                                                                                                     |
| [ ] (square brackets)          | Encloses a variable for which you can substitute one or more values.                                                                                                                | <b>community name members</b> [ <i>community-ids</i> ]                                                                                                                                                                             |
| Indentation and braces ( { } ) | Identifies a level in the configuration hierarchy.                                                                                                                                  | [edit]<br>routing-options {<br>static {<br>route default {<br>nexthop <i>address</i> ;<br>retain;<br>}<br>}<br>}                                                                                                                   |
| ;(semicolon)                   | Identifies a leaf statement at a configuration hierarchy level.                                                                                                                     |                                                                                                                                                                                                                                    |


Table 2: Text and Syntax Conventions (continued)

| Convention                   | Description                                                          | Examples                                                                                                                                                                  |
|------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>GUI Conventions</b>       |                                                                      |                                                                                                                                                                           |
| <b>Bold text like this</b>   | Represents graphical user interface (GUI) items you click or select. | <ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul> |
| > (bold right angle bracket) | Separates levels in a hierarchy of menu selections.                  | In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .                                                                                                  |

## Documentation Feedback

We encourage you to provide feedback so that we can improve our documentation. You can use either of the following methods:

- Online feedback system—Click TechLibrary Feedback, on the lower right of any page on the [Juniper Networks TechLibrary](#) site, and do one of the following:

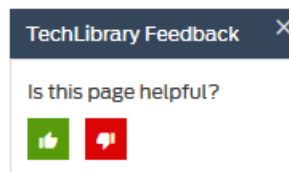

- Click the thumbs-up icon if the information on the page was helpful to you.
- Click the thumbs-down icon if the information on the page was not helpful to you or if you have suggestions for improvement, and use the pop-up form to provide feedback.
- E-mail—Send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net). Include the document or topic name, URL or page number, and software version (if applicable).

## Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <https://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <https://www.juniper.net/support/warranty/>.

- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <https://www.juniper.net/customers/support/>
- Search for known bugs: <https://prsearch.juniper.net/>
- Find product documentation: <https://www.juniper.net/documentation/>
- Find solutions and answer questions using our Knowledge Base: <https://kb.juniper.net/>
- Download the latest versions of software and review release notes: <https://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <https://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <https://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://entitlementsearch.juniper.net/entitlementsearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <https://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <https://www.juniper.net/support/requesting-support.html>.

## PART 1

# Overview

- [Introduction to IS-IS on page 3](#)



## CHAPTER 1

# Introduction to IS-IS

- [IS-IS Overview on page 3](#)
- [Supported Standards for IS-IS on page 8](#)
- [ISIS Fast Reroute Convergence on page 9](#)

## IS-IS Overview

---

The IS-IS protocol is an interior gateway protocol (IGP) that uses link-state information to make routing decisions.

IS-IS is a link-state IGP that uses the shortest-path-first (SPF) algorithm to determine routes. IS-IS evaluates the topology changes and determines whether to perform a full SPF recalculation or a partial route calculation (PRC). This protocol originally was developed for routing International Organization for Standardization (ISO) Connectionless Network Protocol (CLNP) packets.

Like OSPF routing, IS-IS uses hello packets that allow network convergence to occur quickly when network changes are detected. IS-IS uses the SPF algorithm to determine routes. Using SPF, IS-IS evaluates network topology changes and determines if a full or partial route calculation is required.



**NOTE:** Because IS-IS uses ISO addresses, the configuration of IP version 6 (IPv6) and IP version 4 (IPv4) implementations of IS-IS is identical.



**NOTE:** See *Platforms/FPCs That Cannot Forward TCC Encapsulated ISO Traffic* to find a list of those devices and FPC configurations that cannot pass ISO traffic when encapsulated in TCC format.

This section discusses the following topics:

- [IS-IS Terminology on page 4](#)
- [ISO Network Addresses on page 4](#)
- [IS-IS Packets on page 6](#)
- [Persistent Route Reachability on page 7](#)

- [IS-IS Support for Multipoint Network Clouds on page 7](#)
- [Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels on page 7](#)

## IS-IS Terminology

An IS-IS network is a single autonomous system (AS), also called a *routing domain*, that consists of *end systems* and *intermediate systems*. End systems are network entities that send and receive packets. Intermediate systems send and receive packets and relay (forward) packets. (Intermediate system is the Open System Interconnection [OSI] term for a router.) ISO packets are called network PDUs.

In IS-IS, a single AS can be divided into smaller groups called *areas*. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring *Level 1* and *Level 2* intermediate systems. Level 1 systems route within an area; when the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs. No IS-IS area functions strictly as a backbone.

Level 1 routers share intra-area routing information, and Level 2 routers share interarea information about IP addresses available within each area. Uniquely, IS-IS routers can act as both Level 1 and Level 2 routers, sharing intra-area routes with other Level 1 routers and interarea routes with other Level 2 routers.

The propagation of link-state updates is determined by the level boundaries. All routers within a level maintain a complete link-state database of all other routers in the same level. Each router then uses the Dijkstra algorithm to determine the shortest path from the local router to other routers in the link-state database.

## ISO Network Addresses

IS-IS uses ISO network addresses. Each address identifies a point of connection to the network, such as a router interface, and is called a *network service access point (NSAP)*.

IS-IS supports multiple NSAP addresses on the loopback lo0 interface.

An end system can have multiple NSAP addresses, in which case the addresses differ only by the last byte (called the *n-selector*). Each NSAP represents a service that is available at that node. In addition to having multiple services, a single node can belong to multiple areas.

Each network entity also has a special network address called a *network entity title (NET)*. Structurally, an NET is identical to an NSAP address but has an n-selector of 00. Most end systems and intermediate systems have one NET. Intermediate systems that participate in multiple areas can have multiple NETs.

The following ISO addresses illustrate the IS-IS address format:

```
49.0001.00a0.c96b.c490.00
49.0001.2081.9716.9018.00
```



NETs take several forms, depending on your network requirements. NET addresses are hexadecimal and range from 8 octets to 20 octets in length. Generally, the format consists of an authority and format Identifier (AFI), a domain ID, an area ID, a system identifier, and a selector. The simplest format omits the domain ID and is 10 octets long. For example, the NET address 49.0001.1921.6800.1001.00 consists of the following parts:

- 49—AFI
- 0001—Area ID
- 1921.6800.1001—System identifier
- 00—Selector

The system identifier must be unique within the network. For an IP-only network, we recommend using the IP address of an interface on the router. Configuring a loopback NET address with the IP address is helpful when troubleshooting is required on the network.

The first portion of the address is the area number, which is a variable number from 1 through 13 bytes. The first byte of the area number (49) is the authority and format indicator (AFI). The next bytes are the assigned domain (area) identifier, which can be from 0 through 12 bytes. In the examples above, the area identifier is 0001.

The next six bytes form the system identifier. The system identifier can be any six bytes that are unique throughout the entire domain. The system identifier commonly is the media access control (MAC) address (as in the first example, 00a0.c96b.c490) or the IP address expressed in binary-coded decimal (BCD) (as in the second example, 2081.9716.9018, which corresponds to IP address 208.197.169.18). The last byte (00) is the n-selector.



**NOTE:** The system identifier cannot be 0000.0000.0000. All 0s is an illegal setting, and the adjacency is not formed with this setting.

---

To provide help with IS-IS debugging, the Junos<sup>®</sup> operating system (Junos OS) supports dynamic mapping of ISO system identifiers to the hostname. Each system can be configured with a hostname, which allows the system identifier-to-hostname mapping to be carried in a dynamic hostname type, length, and value (TLV) tuple in IS-IS link-state PDUs. This enables intermediate systems in the routing domain to learn about the ISO system identifier of a particular intermediate system.

## IS-IS Packets

Each IS-IS PDU shares a common header. IS-IS uses the following PDUs to exchange protocol information:

- IS-IS hello (IIH) PDUs—Broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.

IS-IS hello PDUs establish adjacencies with other routers and have three different formats: one for point-to-point hello packets, one for Level 1 broadcast links, and one for Level 2 broadcast links. Level 1 routers must share the same area address to form an adjacency, while Level 2 routers do not have this limitation. The request for adjacency is encoded in the Circuit type field of the PDU.

Hello PDUs have a preset length assigned to them. The IS-IS router does not resize any PDU to match the maximum transmission unit (MTU) on a router interface. Each interface supports the maximum IS-IS PDU of 1492 bytes, and hello PDUs are padded to meet the maximum value. When the hello is sent to a neighboring router, the connecting interface supports the maximum PDU size.

- Link-state PDUs—Contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.

Also included is metric and IS-IS neighbor information. Each link-state PDU must be refreshed periodically on the network and is acknowledged by information within a sequence number PDU.

On point-to-point links, each link-state PDU is acknowledged by a partial sequence number PDU (PSNP), but on broadcast links, a complete sequence number PDU (CSNP) is sent out over the network. Any router that finds newer link-state PDU information in the CSNP then purges the out-of-date entry and updates the link-state database.

Link-state PDUs support variable-length subnet mask addressing.

- Complete sequence number PDUs (CSNPs)—Contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.

Contained within the CSNP is a link-state PDU identifier, a lifetime, a sequence number, and a checksum for each entry in the database. Periodically, a CSNP is sent on both broadcast and point-to-point links to maintain a correct database. Also, the advertisement of CSNPs occurs when an adjacency is formed with another router. Like IS-IS hello PDUs, CSNPs come in two types: Level 1 and Level 2.

When a device receives a CSNP, it checks the database entries against its own local link-state database. If it detects missing information, the device requests specific link-state PDU details using a partial sequence number PDU (PSNP).

- Partial sequence number PDUs (PSNPs)—Sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively

requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.

A PSNP is used by an IS-IS router to request link-state PDU information from a neighboring router. A PSNP can also explicitly acknowledge the receipt of a link-state PDU on a point-to-point link. On a broadcast link, a CSNP is used as implicit knowledge. Like hello PDUs and CSNPs, the PSNP also has two types: Level 1 and Level 2.

When a device compares a CSNP to its local database and determines that a link-state PDU is missing, the router issues a PSNP for the missing link-state PDU, which is returned in a link-state PDU from the router sending the CSNP. The received link-state PDU is then stored in the local database, and an acknowledgment is sent back to the originating router.

## Persistent Route Reachability

IPv4 and IPv6 route reachability information in IS-IS link-state PDUs is preserved when you commit a configuration. IP prefixes are preserved with their original packet fragment upon link-state PDU regeneration.


## IS-IS Support for Multipoint Network Clouds

IS-IS does not support multipoint configurations. Therefore, when configuring Frame Relay or Asynchronous Transfer Mode (ATM) networks, you must configure them as collections of point-to-point links, not as multipoint clouds.

## Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels

When a routing device that operates as both a Level 1 and Level 2 router (Router B) determines that it can reach at least one area other than its own (for example, in Area Y), it sets the ATTACHED bit in its Level 1 link-state PDU. Thereafter, the Level 1 router (Router A) introduces a default route pointing to the nearest attached routing device that operates as both a Level 1 and Level 2 router (Router B). See [Figure 1 on page 7](#).

**Figure 1: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2**

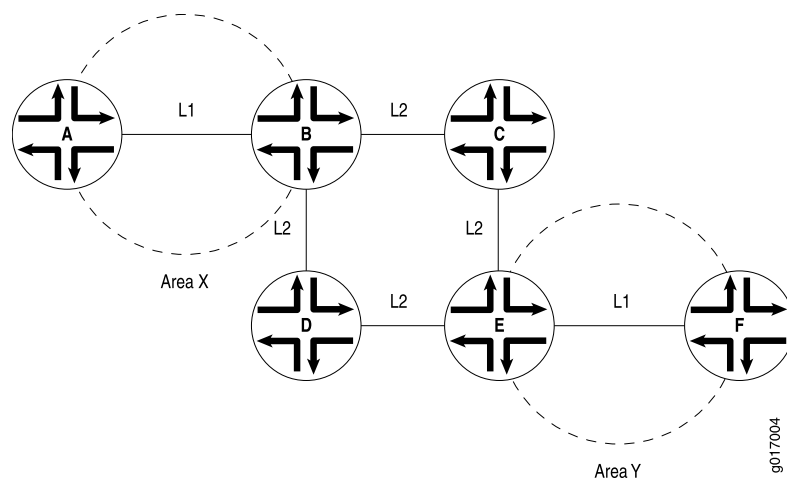

- Related Documentation**
- [Understanding IS-IS Configuration on page 13](#)
  - [Example: Configuring IS-IS on page 14](#)

---

## Supported Standards for IS-IS

Junos OS substantially supports the following standards for IS-IS.

- International Organization for Standardization/International Electrotechnical Commission (ISO/IEC) 8473, *Information technology — Protocol for providing the connectionless-mode network service*
- ISO 9542, *End System to Intermediate System Routing Exchange Protocol for Use in Conjunction with the Protocol for the Provision of the Connectionless-mode Network Service*
- ISO/IEC 10589, *Information technology — Telecommunications and information exchange between systems — Intermediate System to Intermediate System intra-domain routing information exchange protocol for use in conjunction with the protocol for providing the connectionless-mode network service (ISO 8473)*
- RFC 1195, *Use of OSI IS-IS for Routing in TCP/IP and Dual Environments*
- RFC 3719, *Recommendations for Interoperable Networks using Intermediate System to Intermediate System (IS-IS)*
- RFC 3847, *Restart Signaling for Intermediate System to Intermediate System (IS-IS)*
- RFC 5120, *M-ISIS: Multi Topology (MT) Routing in Intermediate System to Intermediate Systems (IS-ISs)*
- RFC 5130, *A Policy Control Mechanism in IS-IS Using Administrative Tags*
- RFC 5286, *Basic Specification for IP Fast Reroute: Loop-Free Alternates*
- RFC 5301, *Dynamic Hostname Exchange Mechanism for IS-IS*
- RFC 5302, *Domain-Wide Prefix Distribution with Two-Level IS-IS*
- RFC 5303, *Three-Way Handshake for IS-IS Point-to-Point Adjacencies*
- RFC 5304, *IS-IS Cryptographic Authentication*
- RFC 5305, *IS-IS Extensions for Traffic Engineering*
- RFC 5306, *Restart Signaling for IS-IS*
- RFC 5307, *IS-IS Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)*
- RFC 5308, *Routing IPv6 with IS-IS*
- RFC 5310, *IS-IS Generic Cryptographic Authentication*
- RFC 5880, *Bidirectional Forwarding Detection (BFD)*
- RFC 6232, *Purge Originator Identification TLV for IS-IS*

The following RFCs do not define standards, but provide information about IS-IS and related technologies. The IETF classifies them as “Informational.”

- RFC 2973, *IS-IS Mesh Groups*
- RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)*
- RFC 3359, *Reserved Type, Length and Value (TLV) Codepoints in Intermediate System to Intermediate System*
- RFC 3373, *Three-Way Handshake for Intermediate System to Intermediate System (IS-IS) Point-to-Point Adjacencies*
- RFC 3567, *Intermediate System to Intermediate System (IS-IS) Cryptographic Authentication*
- RFC 3787, *Recommendations for Interoperable IP Networks using Intermediate System to Intermediate System (IS-IS)*
- RFC 5309, *Point-to-Point Operation over LAN in Link State Routing Protocols*
- Internet draft draft-ietf-isis-wg-255adj-02.txt, *Maintaining more than 255 circuits in IS-IS*

**Related  
Documentation**

- [IS-IS Overview on page 3](#)
- [Supported ES-IS Standards](#)
- [Accessing Standards Documents on the Internet](#)

---


## ISIS Fast Reroute Convergence

Sub-second service restoration is a key requirement for MPLS and native IP-based network service providers. There are many ways to achieve fast reroute with sub optimal next-hop to reach destination like loop-free alternate and remote loop-free alternate. In these cases, IGP will download primary and backup next-hop beforehand in FIB. Packet forwarding engine (PFE) performs local repair when a primary next-hop loses its reachability to a given destination. Since PFE already has alternative path to reach destination, sub-second restoration is possible. If destination is reachable via equal cost multi path (ECMP) then only primary path is downloaded to forwarding information base (FIB). If few ECMP links go down than the required bandwidth for a destination, fast reroute convergence is not possible.

To resolve this, the best ECMP links are grouped as unilist of primary next-hops to reach destination and the sub-optimal ECMP links are grouped as unilist of backup next-hops to reach the destination. If bandwidth of the primary next-hops falls below the desired bandwidth, PFE does a local repair and switches traffic to backup unilist next-hops. This is yet another backup, where the backup path is computed and installed in FIB for ECMP paths. Here, a set of best ECMP links are grouped as primary next-hops to reach destination and a set of sub-optimal ECMP links are grouped as backup next-hops to reach destination. If bandwidth of the primary next-hops falls below desired bandwidth due to link failure on primary group, PFE should perform local repair and switch the traffic to backup next-hops.

In the following topology, R1 has three ECMP links to D1 via R2. R1 also has three sub-optimal ECMP links to D1 via R3 and R2. All ECMP links L1, L2 and L3 can be placed under one group; a primary group and also group sub-optimal ECMP links L3, L4 and L5 under another group; a backup group.

*Figure 2: Topology*

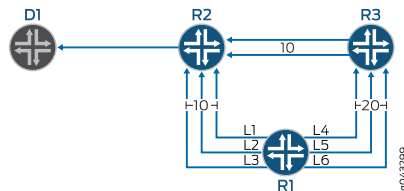

IS-IS calculates the shortest path using shortest-path-first (SPF) algorithm and downloads primary next-hops with appropriate weight in FIB. IS-IS also calculates backup next-hops and downloads them to FIB with appropriate weight.

Backup next-hops weight will always be greater than primary next-hops. If a link from primary group goes down, PFE performs a local repair and modifies the weight of the next-hops. PFE forwards traffic to the destination with least weight next-hops to achieve sub-millisecond convergence. IS-IS runs SPF and comes up with a set of primary and backup next-hops. IS-IS then updates the FIB with the updated next hops. PFE resumes traffic forwarding on new next-hops without any traffic loss.

**Related  
Documentation**

- [link-group-protection \(Protocols IS-IS\) on page 512](#)

## PART 2

# Configuring IS-IS

- [Configuring a Basic IS-IS Network on page 13](#)
- [Configuring IS-IS Authentication and Checksums on page 33](#)
- [Configuring IS-IS Routing Policy and Route Redistribution on page 45](#)
- [Configuring IS-IS Bidirectional Forwarding Detection on page 127](#)
- [Configuring IS-IS Flood Groups on page 147](#)
- [Configuring IS-IS Multitopology Routing and IPv6 Support on page 153](#)
- [Configuring IS-IS Link and Node Link Protection on page 189](#)
- [Configuring IS-IS Traffic Engineering on page 245](#)
- [Configuring IS-IS Scaling and Throttling on page 357](#)
- [Configuring IS-IS CLNS on page 377](#)
- [Configuring IS-IS on Logical Systems on page 381](#)





## CHAPTER 2

# Configuring a Basic IS-IS Network

- [Understanding IS-IS Configuration on page 13](#)
- [Example: Configuring IS-IS on page 14](#)
- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)
- [Understanding IS-IS Designated Routers on page 29](#)
- [Configuring Designated Router Election Priority for IS-IS on page 30](#)
- [Configuring an ISO System Identifier for the Router on page 31](#)
- [Understanding Default Routes on page 31](#)

## Understanding IS-IS Configuration

---

To configure IS-IS, you must enable IS-IS on the interfaces and configure a NET address on one of the device interfaces (preferably, the lo0 interface) by setting **family iso address net-address** on the interface. To create the NET address (also known as the system ID or the NSAP address), you can use the convention that is dictated by your network design, or you can follow this convention:

1. Take the router ID, remove the dots (.), and insert leading zeroes where necessary so that the string is 12 characters long.

For example, if the router ID is 192.168.0.4, the 12-character string would be 192168000004. If the router ID is 10.12.23.1, the 12-character string would be 010012023001.

2. Add a dot after every 4th character.

The strings would become 1921.6800.0004 and 0100.1202.3001.

3. Prepend the area number.

If the routing devices are in area 47, the strings would become 47.1921.6800.0004 and 47.0100.1202.3001.

4. Append the selector (00).

The strings would become 47.1921.6800.0004.00 and 47.0100.1202.3001.00.

You must configure the ISO family on all interfaces that are supporting the IS-IS protocol by setting **family iso** on the interface. This means that IS-IS related frames are not discarded by the routing devices.

You must enable IS-IS to run on the interfaces by setting **interface *interface-name*** in the protocol configuration. This means that the interfaces are advertised into IS-IS.

Unlike OSPF, when you enable IS-IS on the lo0 interface, you do not need to explicitly set passive mode. Passive mode means that the interface is advertised into the link-state protocol, but the interface does not send or receive protocol control packets, such as IS-IS hello and link-state PDUs. In IS-IS, the lo0 interface is always passive.

When you enable IS-IS on an interface, both levels (Level 1 and Level 2) are enabled by default. To specify that an interface is on a Level 1 link, disable Level 2. To specify that an interface is on a Level 2 link, disable Level 1. You can disable a level on the entire device or per-interface. If two routing devices, R1 and R2, are both in the same IS-IS area, they communicate at Level 1 if one or both devices have Level 2 disabled.

For security devices only, you must enable IS-IS by setting **mode packet-based** at the **[edit security forwarding-options family iso]** hierarchy level.

#### Related Documentation

- [Example: Configuring IS-IS on page 14](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)
- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)

---

## Example: Configuring IS-IS

This example shows how to configure IS-IS.

- [Requirements on page 14](#)
- [Overview on page 14](#)
- [Configuration on page 15](#)
- [Verification on page 17](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.


### Overview

In this example, you configure the two IS-IS routing devices in a single area. The devices have NET addresses 49.0002.0192.0168.0001.00 and 49.0002.0192.0168.0002.00 on the lo0 interfaces. Additionally, you configure the ISO family on the IS-IS interfaces.

For Junos OS security devices only, you configure the **mode packet-based** statement at the **[edit security forwarding-options family iso]** hierarchy level.

Figure 3 on page 15 shows the topology used in this example.

Figure 3: Simple IS-IS Topology

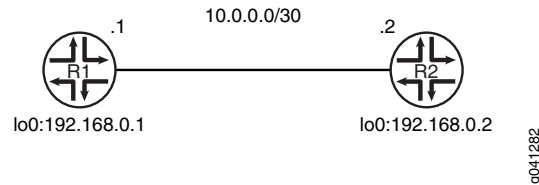

“CLI Quick Configuration” on page 15 shows the configuration for both of the devices in Figure 3 on page 15. The section “Step-by-Step Procedure” on page 15 describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R2
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

**Device R2**

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R1
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS:

1. Enable IS-IS if your router is in secure context.

```

[edit security forwarding-options family iso]
user@R1# set mode packet-based
  
```

2. Create the interface that connects to Device R2, and configure the ISO family on the interface.

```
[edit interfaces ge-1/2/0 unit 0]
user@R1# set description to-R2
user@R1# set family inet address 10.0.0.1/30
user@R1# set family iso
```

3. Create the loopback interface, set the IP address, and set the NET address.

```
[edit interfaces lo0 unit 0]
user@R1# set family inet address 192.168.0.1/32
user@R1# set family iso address 49.0002.0192.0168.0001.00
```

4. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@R1# set interface ge-1/2/0.0
user@R1# set interface lo0.0
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show security
forwarding-options {
  family iso {
    mode packet-based;
  }
}
```

```
user@R1# show interfaces
ge-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
  }
}
```

```
}
}
```

```
user@R1# show protocols
isis {
  interface ge-1/2/0.0;
  interface lo0.0;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying IS-IS Interface Configuration on page 17](#)
- [Verifying IS-IS Interface Configuration in Detail on page 17](#)
- [Verifying IS-IS Adjacencies on page 18](#)
- [Verifying IS-IS Adjacencies in Detail on page 19](#)

### Verifying IS-IS Interface Configuration

**Purpose** Verify the status of the IS-IS-enabled interfaces.

**Action** From operational mode, enter the **show isis interface brief** command.

```
user@R1> show isis interface brief
```

```
IS-IS interface database:
```

| Interface  | L | CirID | Level 1 | DR | Level 2 | DR | L1/L2 Metric |
|------------|---|-------|---------|----|---------|----|--------------|
| lo0.0      | 3 | 0x1   | Passive |    | Passive |    | 0/0          |
| ge-1/2/0.0 | 3 | 0x1   | R2.02   |    | R2.02   |    | 10/10        |

**Meaning** Verify that the output shows the intended configuration of the interfaces on which IS-IS is enabled.

### Verifying IS-IS Interface Configuration in Detail

**Purpose** Verify the details of IS-IS-enabled interfaces.

**Action** From operational mode, enter the **show isis interface detail** command.

```
user@R1> show isis interface detail
```

```
IS-IS interface database:
```

```
lo0.0
  Index: 75, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled
  Adjacency advertisement: Advertise
```

```

Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
  1           0       64      0 Passive
  2           0       64      0 Passive
ge-1/2/0.0
Index: 77, State: 0x6, Circuit id: 0x1, Circuit type: 3
LSP interval: 100 ms, CSNP interval: 10 s
Adjacency advertisement: Advertise
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
  1           1       64      10   9.000      27 R2.02 (not us)
  2           1       64      10   9.000      27 R2.02 (not us)

```

**Meaning** Check the following output fields and verify that the output shows the intended configuration of IS-IS-enabled interfaces:

- Interface—Interface configured for IS-IS.
- State—Internal implementation information.
- Circuit id—Circuit identifier.
- Circuit type—Configured level of IS-IS:
  - 1—Level 1 only
  - 2—Level 2 only
  - 3—Level 1 and Level 2
- link-state PDU interval—Time between IS-IS information messages.
- L or Level—Type of adjacency:
  - 1—Level 1 only
  - 2—Level 2 only
  - 3—Level 1 and Level 2
- Adjacencies—Adjacencies established on the interface.
- Priority—Priority value established on the interface.
- Metric—Metric value for the interface.
- Hello(s)—Intervals between hello PDUs.
- Hold(s)—Hold time on the interface.

### Verifying IS-IS Adjacencies

**Purpose** Display brief information about IS-IS neighbors.

**Action** From operational mode, enter the **show isis adjacency brief** command.

```
user@R1> show isis adjacency brief
```

| Interface  | System | L State | Hold (secs) | SNPA            |
|------------|--------|---------|-------------|-----------------|
| ge-1/2/0.0 | R2     | 1 Up    | 6           | 0:5:85:8f:c8:bd |
| ge-1/2/0.0 | R2     | 2 Up    | 6           | 0:5:85:8f:c8:bd |

**Meaning** Verify the adjacent routers in the IS-IS database.

### Verifying IS-IS Adjacencies in Detail

**Purpose** Display extensive information about IS-IS neighbors.

**Action** From operational mode, enter the **show isis adjacency extensive** command.

```
user@R1> show isis adjacency extensive
```

```
R2
Interface: ge-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
When          State      Event          Down reason
Thu May 31 11:18:48  Up        Seenself

R2
Interface: ge-1/2/0.0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
When          State      Event          Down reason
Thu May 31 11:18:48  Up        Seenself
```

**Meaning** Check the following fields and verify the adjacency information about IS-IS neighbors:

- Interface—Interface through which the neighbor is reachable.
- L or Level—Configured level of IS-IS:
  - 1—Level 1 only
  - 2—Level 2 only
  - 3—Level 1 and Level 2

An exclamation point before the level number indicates that the adjacency is missing an IP address.

- State—Status of the adjacency: **Up**, **Down**, **New**, **One-way**, **Initializing**, or **Rejected**.
- Event—Message that identifies the cause of a state.

- Down reason—Reason the adjacency is down.
- Restart capable—A neighbor is configured for graceful restart.
- Transition log—List of transitions including **When**, **State**, and **Reason**.

**Related  
Documentation**

- [Understanding IS-IS Configuration on page 13](#)
- [Example: Configuring IS-IS for GRES with Graceful Restart](#)
- [Configuring Designated Router Election Priority for IS-IS on page 30](#)
- [Junos OS Feature Support Reference for SRX Series and J Series Devices](#)

---

## Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups

In IS-IS, a single AS can be divided into smaller groups called *areas*.

Link-state protocols cannot scale well if a large autonomous system (AS) consists of a single set of routing devices that all share a common database to compute the best paths through the AS. Because the shortest-path-first (SPF) algorithm works in an exponential fashion, the CPU demand can become too heavy when too many routing devices share their complete routing information with each other. To alleviate this issue, large ASs are divided into smaller parts called areas.

When ASs are split into areas, the disjointed areas must be connected to route traffic between the areas. Reachability information at the area borders must be injected into each other areas.

In IS-IS, routing between areas is organized hierarchically. This organization is accomplished by configuring *Level 1* and *Level 2* intermediate systems. Level 1 systems route within an area. When the destination is outside an area, Level 1 systems route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs. No IS-IS area functions strictly as a backbone.

Level 1 routers share intra-area routing information, and Level 2 routers share interarea information about IP addresses available within each area. Uniquely, IS-IS routers can act as both Level 1 and Level 2 routers, sharing intra-area routes with other Level 1 routers and interarea routes with other Level 2 routers.

The propagation of link-state updates is determined by the level boundaries. All routers within a level maintain a complete link-state database of all other routers in the same level. Each router then uses the Dijkstra algorithm to determine the shortest path from the local router to other routers in the link-state database.

**Related  
Documentation**

- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)



## Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding

This example shows how to configure a multi-level IS-IS topology.

- [Requirements on page 21](#)
- [Overview on page 21](#)
- [Configuration on page 22](#)
- [Verification on page 26](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview


Like OSPF, the IS-IS protocol supports the partitioning of a routing domain into multiple areas with levels that control interarea flooding. The use of multiple levels improves protocol scalability, as Level 2 (backbone) link-state PDUs are normally not flooded into a Level 1 area.

An IS-IS Level 2 area is analogous to the OSPF backbone area (0), while a Level 1 area operates much like an OSPF totally stubby area, in that a default route is normally used to reach both inter-level and AS external routes.

Unlike OSPF, IS-IS area boundaries occur between routers, such that a given routing device is always wholly contained within a particular area. Level 1 adjacencies can be formed between routers that share a common area number, while a Level 2 adjacency can be formed between routers that might or might not share an area number.

[Figure 4 on page 21](#) shows the topology used in this example.

**Figure 4: IS-IS Multi-Level Topology**

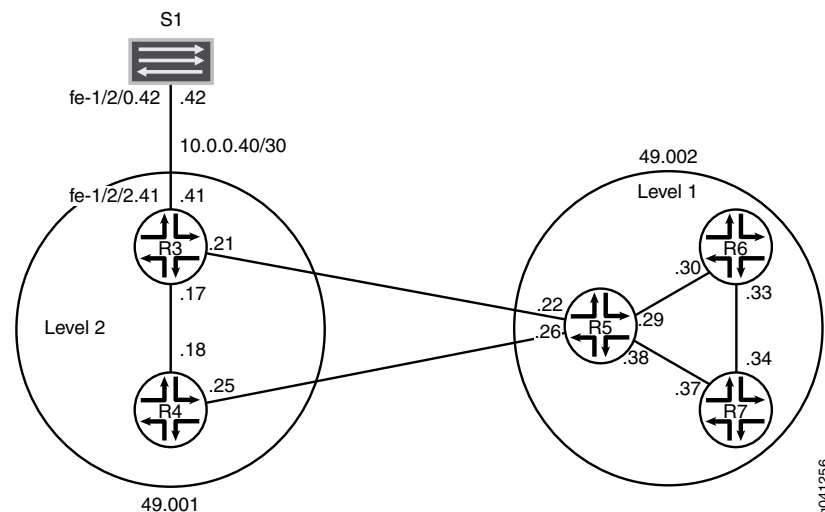

[“CLI Quick Configuration” on page 22](#) shows the configuration for all of the devices in [Figure 4 on page 21](#). The section [“Step-by-Step Procedure” on page 24](#) describes the steps on Device R5.

This example has the following characteristics:

- Device R5 functions as a Level 1/Level 2 router to interconnect the Level 2 backbone area 49.001 and the Level 1 area 49.002 containing Device R6 and Device R7.
- The system ID is based on the devices' IPv4 lo0 addresses.
- Loss of any individual interface does not totally disrupt the IS-IS operation.
- The IPv4 lo0 addresses of all routers are reachable through IS-IS.
- The link between Device R3 and Device S1 appears in area 49.001 as an intra-area route. No IS-IS adjacencies can be established on this interface. This is accomplished by configuring the [passive](#) statement on Device R3's interface to Device S1.
- The loopback addresses of Level 2 devices do not appear in a Level 1 area.
- There is only one adjacency for each device pairing.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R3**

```

set interfaces fe-1/2/0 unit 0 description to-R4
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.21/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.41/30
set interfaces fe-1/2/2 unit 0 description to-S1
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.001.0192.0168.0003.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
set protocols isis interface fe-1/2/2.0 passive

```

**Device R4**

```

set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.001.0192.0168.0004.00

```

```

set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable

```

**Device R5**

```

set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R4
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R6
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.29/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/3 unit 0 description to-R7
set interfaces fe-1/2/3 unit 0 family inet address 10.0.0.38/30
set interfaces fe-1/2/3 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0005.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 2 disable
set protocols isis interface fe-1/2/3.0 level 2 disable
set protocols isis interface lo0.0 level 1 disable

```

**Device R6**

```

set interfaces fe-1/2/0 unit 0 description to-R5
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.30/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R7
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.33/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0006.00
set protocols isis interface fe-1/2/0.0 level 2 disable
set protocols isis interface fe-1/2/1.0 level 2 disable
set protocols isis interface lo0.0 level 2 disable

```

**Device R7**

```

set interfaces fe-1/2/0 unit 0 description to-R6
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.34/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.7/32
set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0007.00
set protocols isis interface fe-1/2/0.0 level 2 disable
set protocols isis interface fe-1/2/1.0 level 2 disable
set protocols isis interface lo0.0 level 2 disable

```

**Device S1**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.42/30

```

### set interfaces fe-1/2/0 unit 0 description to-R3

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the network interfaces.

Enable IS-IS on the interfaces by including the ISO address family on each interface.

```
[edit interfaces]
user@R5# set fe-1/2/0 unit 0 description to-R3
user@R5# set fe-1/2/0 unit 0 family inet address 10.0.0.22/30
user@R5# set fe-1/2/0 unit 0 family iso
user@R5# set fe-1/2/1 unit 0 description to-R4
user@R5# set fe-1/2/1 unit 0 family inet address 10.0.0.26/30
user@R5# set fe-1/2/1 unit 0 family iso
user@R5# set fe-1/2/2 unit 0 description to-R6
user@R5# set fe-1/2/2 unit 0 family inet address 10.0.0.29/30
user@R5# set fe-1/2/2 unit 0 family iso
user@R5# set fe-1/2/3 unit 0 description to-R7
user@R5# set fe-1/2/3 unit 0 family inet address 10.0.0.38/30
user@R5# set fe-1/2/3 unit 0 family iso
```

2. Configure two loopback interface addresses.

One address is for IPv4.

The other is for the IS-IS area 49.002 so that Device R5 can form adjacencies with the other Level 1 devices in area 49.002. Even though Device R5's NET identifies itself as belonging to the Level 1 area 49.002, its loopback interface is not configured as a Level 1 interface. Doing so would cause the route to Device R5's loopback to be injected into the Level 1 area.

```
[edit interfaces lo0 unit 0]
user@R5# set family inet address 192.168.0.5/32
user@R5# set family iso address 49.002.0192.0168.0005.00
```

3. Specify the IS-IS level on a per-interface basis.

Device R5 becomes adjacent to the other routing devices on the same level on each link.

By default, IS-IS is enabled for IS-IS areas on all interfaces on which the ISO protocol family is enabled (at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level). To disable IS-IS at any particular level on an interface, include the **disable** statement.

Device R5's loopback interface is configured to run Level 2 only. If Level 1 operation were enabled on lo0.0, Device R5 would include its loopback address in its Level 1

link-state PDU, which is incorrect for this example in which the loopback addresses of Level 2 devices must not appear in a Level 1 area.

Unlike OSPF, you must explicitly list the router's lo0 interface at the **[edit protocols isis]** hierarchy level, because this interface is the source of the router's NET, and therefore must be configured as an IS-IS interface. In IS-IS, the lo0 interface operates in the passive mode by default, which is ideal because adjacency formation can never occur on a virtual interface.

```
[edit protocols isis]
user@R5# set interface fe-1/2/0.0 level 1 disable
user@R5# set interface fe-1/2/1.0 level 1 disable
user@R5# set interface fe-1/2/0.0 level 2 disable
user@R5# set interface fe-1/2/3.0 level 2 disable
user@R5# set interface lo0.0 level 1 disable
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R5# show interfaces
fe-1/2/0 {
  unit 0 {
    description to-R3;
    family inet {
      address 10.0.0.22/30;
    }
    family iso;
  }
}
fe-1/2/1 {
  unit 0 {
    description to-R4;
    family inet {
      address 10.0.0.26/30;
    }
    family iso;
  }
}
fe-1/2/2 {
  unit 0 {
    description to-R6;
    family inet {
      address 10.0.0.29/30;
    }
    family iso;
  }
}
fe-1/2/3 {
  unit 0 {
    description to-R7;
    family inet {
```

```
        address 10.0.0.38/30;
    }
    family iso;
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.0.5/32;
        }
        family iso {
            address 49.002.0192.0168.0005.00;
        }
    }
}
```

```
user@R5# show protocols
isis {
    interface fe-1/2/0.0 {
        level 1 disable;
    }
    interface fe-1/2/1.0 {
        level 1 disable;
    }
    interface fe-1/2/0.0 {
        level 2 disable;
    }
    interface fe-1/2/3.0 {
        level 2 disable;
    }
    interface lo0.0 {
        level 1 disable;
    }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking Interface-to-Area Associations on page 26](#)
- [Verifying IS-IS Adjacencies on page 27](#)
- [Examining the IS-IS Database on page 28](#)

---

### Checking Interface-to-Area Associations

**Purpose** Make sure that the interface-to-area associations are configured as expected.

**Action** From operational mode, enter the **show isis interface** command.

```
user@R5> show isis interface
```

## IS-IS interface database:

| Interface  | L | CirID | Level 1 DR | Level 2 DR | L1/L2 Metric |
|------------|---|-------|------------|------------|--------------|
| lo0.0      | 3 | 0x1   | Disabled   | Passive    | 0/0          |
| fe-1/2/0.0 | 2 | 0x3   | Disabled   | R5.03      | 10/10        |
| fe-1/2/1.0 | 2 | 0x2   | Disabled   | R5.02      | 10/10        |
| fe-1/2/0.0 | 1 | 0x1   | R6.02      | Disabled   | 10/10        |
| fe-1/2/3.0 | 1 | 0x4   | R5.04      | Disabled   | 10/10        |

**Meaning** The output shows that Device R5's interfaces have been correctly configured with the ISO family, and that the interfaces have been placed into the correct levels.

You can also see that Device R5 has elected itself as the designated intermediate system (DIS) on its broadcast-capable IS-IS interfaces.

### Verifying IS-IS Adjacencies

**Purpose** Verify that the expected adjacencies have formed between Device R5 and its IS-IS neighbors.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```
user@R5> show isis adjacency detail
```

R3

```
Interface: fe-1/2/0.0, Level: 2, State: Up, Expires in 25 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:31 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.03, IP addresses: 10.0.0.21
```

R4

```
Interface: fe-1/2/1.0, Level: 2, State: Up, Expires in 24 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:36 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.02, IP addresses: 10.0.0.25
```

R6

```
Interface: fe-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:20:24 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R6.02, IP addresses: 10.0.0.30
```

R7

```
Interface: fe-1/2/3.0, Level: 1, State: Up, Expires in 21 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:29 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.04, IP addresses: 10.0.0.37
```

**Meaning** These results confirm that Device R5 has two Level 2 adjacencies and two Level 1 adjacencies.

### Examining the IS-IS Database

**Purpose** Because Device R5 is a Level 1/Level 2 (L1/L2) attached router, examine the Level 1 link-state database associated with area 49.002 to confirm that loopback addresses from backbone routers are not being advertised into the Level 1 area.

**Action** From operational mode, enter the **show isis database detail** command.

```
user@R5> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```
R5.00-00 Sequence: 0x19, Checksum: 0x7488, Lifetime: 727 secs
  IS neighbor: R5.04          Metric:      10
  IS neighbor: R6.02          Metric:      10
  IP prefix: 10.0.0.28/30      Metric:      10 Internal Up
  IP prefix: 10.0.0.36/30      Metric:      10 Internal Up
```

```
R5.04-00 Sequence: 0x14, Checksum: 0x2668, Lifetime: 821 secs
```

```
  IS neighbor: R5.00          Metric:      0
  IS neighbor: R7.00          Metric:      0
```

```
R6.00-00 Sequence: 0x17, Checksum: 0xa65, Lifetime: 774 secs
```

```
  IS neighbor: R6.02          Metric:      10
  IS neighbor: R7.02          Metric:      10
  IP prefix: 10.0.0.28/30      Metric:      10 Internal Up
  IP prefix: 10.0.0.32/30      Metric:      10 Internal Up
  IP prefix: 192.168.0.6/32    Metric:      0 Internal Up
```

```
R6.02-00 Sequence: 0x13, Checksum: 0xd1c0, Lifetime: 908 secs
```

```
  IS neighbor: R5.00          Metric:      0
  IS neighbor: R6.00          Metric:      0
```

```
R7.00-00 Sequence: 0x17, Checksum: 0xe39, Lifetime: 775 secs
```

```
  IS neighbor: R5.04          Metric:      10
  IS neighbor: R7.02          Metric:      10
  IP prefix: 10.0.0.32/30      Metric:      10 Internal Up
  IP prefix: 10.0.0.36/30      Metric:      10 Internal Up
  IP prefix: 192.168.0.7/32    Metric:      0 Internal Up
```

```
R7.02-00 Sequence: 0x13, Checksum: 0x404d, Lifetime: 966 secs
```

```
  IS neighbor: R6.00          Metric:      0
  IS neighbor: R7.00          Metric:      0
```

```
IS-IS level 2 link-state database:
```

```
R3.00-00 Sequence: 0x17, Checksum: 0x5f84, Lifetime: 1085 secs
```

```
  IS neighbor: R4.02          Metric:      10
  IS neighbor: R5.03          Metric:      10
  IP prefix: 10.0.0.16/30      Metric:      10 Internal Up
  IP prefix: 10.0.0.20/30      Metric:      10 Internal Up
  IP prefix: 10.0.0.40/30      Metric:      10 Internal Up
```



```

IP prefix: 192.168.0.3/32          Metric:      0 Internal Up

R4.00-00 Sequence: 0x17, Checksum: 0xab3a, Lifetime: 949 secs
IS neighbor: R4.02                 Metric:      10
IS neighbor: R5.02                 Metric:      10
IP prefix: 10.0.0.16/30            Metric:     10 Internal Up
IP prefix: 10.0.0.24/30            Metric:     10 Internal Up
IP prefix: 192.168.0.4/32          Metric:      0 Internal Up

R4.02-00 Sequence: 0x14, Checksum: 0xf2a8, Lifetime: 1022 secs
IS neighbor: R3.00                 Metric:       0
IS neighbor: R4.00                 Metric:       0

R5.00-00 Sequence: 0x1f, Checksum: 0x20d7, Lifetime: 821 secs
IS neighbor: R5.02                 Metric:      10
IS neighbor: R5.03                 Metric:      10
IP prefix: 10.0.0.20/30            Metric:     10 Internal Up
IP prefix: 10.0.0.24/30            Metric:     10 Internal Up
IP prefix: 10.0.0.28/30            Metric:     10 Internal Up
IP prefix: 10.0.0.32/30            Metric:     20 Internal Up
IP prefix: 10.0.0.36/30            Metric:     10 Internal Up
IP prefix: 192.168.0.5/32          Metric:       0 Internal Up
IP prefix: 192.168.0.6/32          Metric:     10 Internal Up
IP prefix: 192.168.0.7/32          Metric:     10 Internal Up

R5.02-00 Sequence: 0x14, Checksum: 0x6135, Lifetime: 977 secs
IS neighbor: R4.00                 Metric:       0
IS neighbor: R5.00                 Metric:       0

R5.03-00 Sequence: 0x14, Checksum: 0x1483, Lifetime: 1091 secs
IS neighbor: R3.00                 Metric:       0
IS neighbor: R5.00                 Metric:       0

```

**Meaning** This display indicates that Device R5's loopback interface is correctly configured to run Level 2 only. Had Level 1 operation been enabled on lo0.0, Device R5 would have then included its loopback address in its Level 1 link-state PDU.

You can also see that Device R5 has Level 2 link-state PDUs, received from its adjacent neighbors.

Like an OSPF totally stubby area, no backbone (Level 2) or external prefixes are leaked into a Level 1 area, by default. Level 1 prefixes are leaked up into the IS-IS backbone, however, as can be seen in Device R5's Level 2 link-state PDU.

**Related Documentation**

- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)

## Understanding IS-IS Designated Routers

A router advertises its priority to become a designated router in its hello packets. On all multiaccess networks (physical networks that support the attachment of more than two routers, such as Ethernet networks), IS-IS uses the advertised priorities to elect a

designated router for the network. This router is responsible for sending network link-state advertisements, which describe all the routers attached to the network. These advertisements are flooded throughout a single area. The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.

A router's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127, which you configure on the IS-IS interface. The router with the highest priority becomes the designated router for the area (Level 1, Level 2, or both), also configured on the IS-IS interface. If routers in the network have the same priority, then the router with the highest MAC address is elected as the designated router. By default, routers have a priority value of 64.

- Related Documentation**
- [Junos OS Feature Support Reference for SRX Series and J Series Devices](#)
  - [Configuring Designated Router Election Priority for IS-IS on page 30](#)

---

## Configuring Designated Router Election Priority for IS-IS

---

This example shows how to configure the designated router election priority for IS-IS.

Before you begin:

- Configure network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Enable IS-IS on the interfaces. See [“Example: Configuring IS-IS” on page 14](#).

In this example, you configure the priority for logical interface ge-0/0/1.0 to be 100 and the level number to be 1. If this interface has the highest priority value, the router becomes the designated router for the Level 1 area.

To configure a designated router election priority for IS-IS:

```
[edit]
user@host# set protocols isis interface ge-0/0/1.0 level 1 priority 100
```

- Related Documentation**
- [Understanding IS-IS Designated Routers on page 29](#)
  - [Example: Configuring IS-IS on page 14](#)

## Configuring an ISO System Identifier for the Router

For IS-IS to operate on the router, you can optionally configure a system identifier (system ID). The system identifier is commonly the media access control (MAC) address or the IP address expressed in binary-coded decimal (BCD).

If you do not statically map the hostname, the mapping is generated dynamically, based on the system host-name. If you omit the **static-host-mapping hostname sysid** statement, the IS-IS system ID is dynamically generated from the host portion of the ISO address configured on the loopback interface (lo0) and is mapped to the **host-name** statement configured at the **[edit system]** hierarchy level. Run the **show isis hostname** command to view the mappings.

To configure an International Organization for Standardization (ISO) system ID, include the **sysid** statement at the **[edit system static-host-mapping hostname]** hierarchy level:

```
[edit system]
static-host-mapping {
  hostname {
    sysid system-identifier;
  }
}
```

**hostname** is the name specified by the **host-name** statement at the **[edit system]** hierarchy level.

**system-identifier** is the ISO system identifier. It is the 6-byte system ID portion of the IS-IS network service access point (NSAP). We recommend that you use the host's IP address represented in BCD format. For example, the IP address 192.168.1.77 is 1921.6800.1077 in BCD.

**Related Documentation** • *Example: Configuring the Unique Identity of a Router for Making it Accessible on the Network*

## Understanding Default Routes

A default route is the route that takes effect when no other route is available for an IP destination address.

If a packet is received on a routing device, the device first checks to see if the IP destination address is on one of the device's local subnets. If the destination address is not local, the device checks its routing table. If the remote destination subnet is not listed in the routing table, the packet is forwarded to the next hop toward the destination using the default route. The default route generally has a next-hop address of another routing device, which performs the same process. The process repeats until a packet is delivered to the destination.

The route evaluation process in each router uses the longest prefix match method to obtain the most specific route. The network with the longest subnet mask that matches the destination IP address is the next-hop network gateway.

The default route in IPv4 is designated as 0.0.0.0/0 or simply 0/0. Similarly, in IPv6, the default route is specified as ::/0. The subnet mask /0 specifies all networks, and is the shortest match possible. A route lookup that does not match any other route uses this route if it is configured and active in the routing table. To be active, the configured next-hop address must be reachable.

Administrators generally point the default route toward the routing device that has a connection to a network service provider. Therefore, packets with destinations outside the organization's local area network, typically destinations on the Internet or a wide area network, are forwarded to the routing device with the connection to that provider. The device to which the default route points is often called the default gateway.

**Related  
Documentation**

- [Example: Configuring an IS-IS Default Route Policy on Logical Systems on page 394](#)
- *Example: Configuring an OSPF Default Route Policy on Logical Systems*
- *Example: Configuring a Conditional Default Route Policy*

## CHAPTER 3

# Configuring IS-IS Authentication and Checksums

- [Configuring IS-IS Authentication on page 33](#)
- [Configuring IS-IS Authentication Without Network-Wide Deployment on page 35](#)
- [Understanding Hitless Authentication Key Rollover for IS-IS on page 35](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36](#)
- [Understanding Checksums on IS-IS Interfaces for Error Checking on page 41](#)
- [Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page 42](#)

## Configuring IS-IS Authentication

---

All IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in the autonomous system (AS) routing. By default, IS-IS authentication is disabled on the routing device.

To configure IS-IS authentication, you must define an authentication password and specify the authentication type.

You can configure one of the following authentication methods:

- Simple authentication—Uses a text password that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet. Simple authentication is included for compatibility with existing IS-IS implementations. However, we recommend that you do *not* use this authentication method because it is insecure (the text can be “sniffed”).



**CAUTION:** A simple password that exceeds 254 characters is truncated.

- HMAC-MD5 authentication—Uses an iterated cryptographic hash function. The receiving routing device uses an authentication key (password) to verify the packet.

You can also configure more fine-grained interface-level authentication for hello packets.

To enable authentication and specify an authentication method, include the **authentication-type** statement, specifying the **simple** or **md5** authentication type:

```
authentication-type authentication;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure a password, include the **authentication-key** statement. The authentication password for all routing devices in a domain must be the same.

```
authentication-key key;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure hitless authentication key rollover, include the **authentication-key-chain (Protocols IS-IS)** statement.

The password can contain up to 255 characters. If you include spaces, enclose all characters in quotation marks (" ").

If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces that are shared with a Junos OS implementation.

Authentication of hello packets, partial sequence number PDU (PSNP), and complete sequence number PDU (CSNP) can be suppressed to enable interoperability with the routing software of different vendors. Different vendors handle authentication in various ways, and suppressing authentication for different PDU types might be the simplest way to allow compatibility within the same network.

To configure IS-IS to generate authenticated packets, but not to check the authentication on received packets, include the **no-authentication-check** statement:

```
no-authentication-check;
```

To suppress authentication of IS-IS hello packets, include the **no-hello-authentication** statement:

```
no-hello-authentication;
```

To suppress authentication of PSNPs, include the **no-psnp-authentication** statement:

```
no-psnp-authentication;
```

To suppress authentication of CSNPs, include the **no-csnp-authentication** statement:

```
no-csnp-authentication;
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.



**NOTE:** The authentication and the no-authentication statements must be configured at the same hierarchy level. Configuring authentication at the [edit protocols isis interface *interface-name*] hierarchy level and configuring no-authentication at the [edit protocols isis] hierarchy level has no effect.

- Related Documentation**
- [Configuring IS-IS Authentication Without Network-Wide Deployment on page 35](#)

## Configuring IS-IS Authentication Without Network-Wide Deployment

To allow the use of authentication without requiring network-wide deployment, include the **loose-authentication-check** statement:

```
loose-authentication-check;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

- Related Documentation**
- [Understanding Hitless Authentication Key Rollover for IS-IS on page 35](#)
  - [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36](#)

## Understanding Hitless Authentication Key Rollover for IS-IS

IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in routing. By default, authentication is disabled. The authentication algorithm creates an encoded checksum that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet's checksum.

If you configure authentication for all peers, each peer in that group inherits the group's authentication.

You can update authentication keys without resetting any IS-IS neighbor sessions. This is referred to as *hitless authentication key rollover*.

Hitless authentication key rollover uses authentication keychains, which consist of the authentication keys that are being updated. The keychain includes multiple keys. Each key in the keychain has a unique start time. At the next key's start time, a rollover occurs from the current key to the next key, and the next key becomes the current key.

You can choose the algorithm through which authentication is established. You can configure MD5 or SHA-1 authentication. You associate a keychain and the authentication algorithm with an IS-IS neighboring session. Each key contains an identifier and a secret password.

The sending peer chooses the active key based on the system time and the start times of the keys in the keychain. The receiving peer determines the key with which it authenticates based on the incoming key identifier.

You can configure either RFC 5304-based encoding or RFC 5310-based encoding for the IS-IS protocol transmission encoding format.

#### Related Documentation

- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36](#)

---

## Example: Configuring Hitless Authentication Key Rollover for IS-IS

---

This example shows how to configure hitless authentication key rollover for IS-IS.

- [Requirements on page 36](#)
- [Overview on page 36](#)
- [Configuration on page 37](#)
- [Verification on page 41](#)

### Requirements

No special configuration beyond device initialization is required before configuring hitless authentication key rollover for IS-IS.

### Overview

Authentication guarantees that only trusted routers participate in routing updates. This keychain authentication method is referred to as hitless because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol. Junos OS supports both RFC 5304, *IS-IS Cryptographic Authentication* and RFC 5310, *IS-IS Generic Cryptographic Authentication*.

This example includes the following statements for configuring the keychain:

- **algorithm**—For each key in the keychain, you can specify an encryption algorithm. The algorithm can be SHA-1 or MD-5.
- **key**—A keychain can have multiple keys. Each key within a keychain must be identified by a unique integer value. The range of valid identifier values is from 0 through 63.
- **key-chain**—For each keychain, you must specify a name. This example defines two keychains: **base-key-global** and **base-key-inter**.
- **options**—For each key in the keychain, you can specify the encoding for the message authentication code: **isis-enhanced** or **basic**. The basic (RFC 5304) operation is enabled by default.

When you configure the **isis-enhanced** option, Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.

When you configure **basic** (or do not include the **options** statement in the key configuration) Junos OS sends and receives RFC 5304-encoded routing protocols



packets, and drops 5310-encoded routing protocol packets that are received from other devices.

Because this setting is for IS-IS only, the TCP and the BFD protocols ignore the encoding option configured in the key.

- **secret**—For each key in the keychain, you must set a secret password. This password can be entered in either encrypted or plain text format in the **secret** statement. It is always displayed in encrypted format.
- **start-time**—Each key must specify a start time in UTC format. Control gets passed from one key to the next. When a configured start time arrives (based on the routing device's clock), the key with that start time becomes active. Start times are specified in the local time zone for a routing device and must be unique within the key chain.


You can apply a keychain globally to all interfaces or more granularly to specific interfaces.

This example includes the following statements for applying the keychain to all interfaces or to particular interfaces:

- **authentication-key-chain**—Enables you to apply a keychain at the global IS-IS level for all Level 1 or all Level 2 interfaces.
- **hello-authentication-key-chain**—Enables you to apply a keychain at the individual IS-IS interface level. The interface configuration overrides the global configuration.

Figure 5 on page 37 shows the topology used in the example.

*Figure 5: Hitless Authentication Key Rollover for IS-IS*

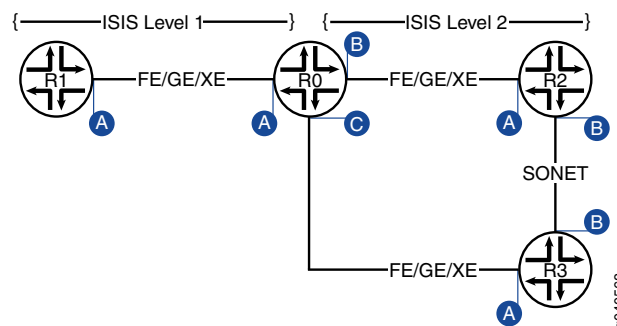

This example shows the configuration for Router R0.

## Configuration

### CLI Quick Configuration

To quickly configure the hitless authentication key rollover for IS-IS, copy the following commands and paste the commands into the CLI.

```
[edit]
set interfaces ge-0/0/0 unit 0 description "interface A"
set interfaces ge-0/0/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family inet6 address fe80::200:f8ff:fe21:67cf/128
set interfaces ge-0/0/1 unit 0 description "interface B"
```

```

set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family inet6 address 10FB::C:ABC:1FOC:44DA/128
set interfaces ge-0/0/2 unit 0 description "interface C"
set interfaces ge-0/0/2 unit 0 family inet address 10.0.0.9/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
set security authentication-key-chains key-chain base-key-global key 63 secret "$ABC123"
set security authentication-key-chains key-chain base-key-global key 63 start-time
  "2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-global key 63 algorithm
  hmac-sha-1
set security authentication-key-chains key-chain base-key-global key 63 options
  isis-enhanced
set security authentication-key-chains key-chain base-key-inter key 0 secret "$ABC123"
set security authentication-key-chains key-chain base-key-inter key 0 start-time
  "2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-inter key 0 algorithm md5
set security authentication-key-chains key-chain base-key-inter key 0 options basic
set protocols isis level 1 authentication-key-chain base-key-global
set protocols isis interface ge-0/0/0.0 level 1 hello-authentication-key-chain
  base-key-inter

```

**Step-by-Step Procedure** To configure hitless authentication key rollover for IS-IS:

1. Configure the Router R0 interfaces.

```

[edit]
user@host# edit interfaces ge-0/0/0 unit 0
[edit interfaces ge-0/0/0 unit 0]
user@host# set description "interface A"
user@host# set family inet address 10.0.0.1/30
user@host# set family iso
user@host# set family inet6 address fe80::200:f8ff:fe21:67cf/128
user@host# exit
[edit]
user@host# edit interfaces ge-0/0/1 unit 0
[edit interfaces ge-0/0/1 unit 0]
user@host# set interfaces ge-0/0/1 unit 0 description "interface B"
user@host# set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
user@host# set interfaces ge-0/0/1 unit 0 family iso
user@host# set interfaces ge-0/0/1 unit 0 family inet6 address
  10FB::C:ABC:1FOC:44DA/128
user@host# exit
[edit]
user@host# edit interfaces ge-0/0/2 unit 0
[edit interfaces ge-0/0/2 unit 0]
user@host# set description "interface C"
user@host# set family inet address 10.0.0.9/30
user@host# set interfaces ge-0/0/2 unit 0 family iso
user@host# set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
user@host# exit

```

2. Configure one or more authentication keys.

```
[edit]
user@host# edit security authentication-key-chains key-chain base-key-global
[edit security authentication-key-chains key-chain base-key-global]
user@host# set key 63 secret "$ABC123"
user@host# set key 63 start-time "2011-8-6.06:54:00-0700"
user@host# set key 63 algorithm hmac-sha-1
user@host# set key 63 options isis-enhanced
user@host# exit
[edit]
user@host# edit security authentication-key-chains key-chain base-key-inter
[edit security authentication-key-chains key-chain base-key-inter]
user@host# set key 0 secret "$ABC123"
user@host# set key 0 start-time "2011-8-6.06:54:00-0700"
user@host# set key 0 algorithm md5
user@host# set key 0 options basic
user@host# exit
```

3. Apply the base-key-global keychain to all Level 1 IS-IS interfaces on Router R0.

```
[edit]
user@host# edit protocols isis level 1
[edit protocols isis level 1]
set authentication-key-chain base-key-global
user@host# exit
```

4. Apply the base-key-inter keychain to the **ge-0/0/0.0** interface on Router R0.

```
[edit]
user@host# edit protocols isis interface ge-0/0/0.0 level 1
[edit protocols isis interface ge-0/0/0.0 level 1]
set hello-authentication-key-chain base-key-inter
user@host# exit
```

5. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

## Results

Confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands.

```
user@host# show interfaces
ge-0/0/0 {
  unit 0 {
```

```
description "interface A";
family inet {
    address 10.0.0.1/30;
}
family iso;
family inet6 {
    address fe80::200:f8ff:fe21:67cf/128;
}
}
}
ge-0/0/1 {
    unit 0 {
        description "interface B";
        family inet {
            address 10.0.0.5/30;
        }
        family iso;
        family inet6 {
            address 10FB::C:ABC:1F0C:44DA/128;
        }
    }
}
ge-0/0/2 {
    unit 0 {
        description "interface C";
        family inet {
            address 10.0.0.9/30;
        }
        family iso;
        family inet6 {
            address ff06::c3/128;
        }
    }
}
}
```

```
user@host# show protocols
isis {
    level 1 authentication-key-chain base-key-global;
    interface ge-0/0/0.0 {
        level 1 hello-authentication-key-chain base-key-inter;
    }
}
```

```
user@host# show security
authentication-key-chains {
    key-chain base-key-global {
        key 63 {
            secret "ABC123";
            start-time "2011-8-6.06:54:00-0700";
            algorithm hmac-sha-1;
            options isis-enhanced;
        }
    }
    key-chain base-key-inter {
```

```
key 0 {  
    secret "$ABC123";  
    start-time "2011-8-6.06:54:00-0700";  
    algorithm md5;  
    options basic;  
}  
}  
}
```

## Verification

To verify the configuration, run the following commands:

- show isis authentication
- show security keychain

### Related Documentation

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 35](#)

## Understanding Checksums on IS-IS Interfaces for Error Checking

The checksum enables IS-IS to check at the receiver if the IS-IS protocol frames have become corrupted while traversing the network.

Sometimes corrupt IS-IS protocol frames can go undetected. If routing control traffic becomes corrupted, it is likely that user payload traffic might be corrupted, too. This can lead to unacceptable throughput. To prevent corrupt frames from going undetected, we recommend enabling checksumming on the IS-IS interfaces.

To review, IS-IS hello (IIH) PDUs establish adjacencies with other routing devices. A partial sequence number PDU (PSNP) is used by an IS-IS router to request link-state PDU information from a neighboring router. The complete sequence number PDU (CSNP) lists all the link-state PDUs in the link-state database.

The original specification for IS-IS does not provide checksums for IIHs, CSNPs, and PSNPs.

RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)* introduced an optional type, length, and value (TLV) tuple that provides checksums for IIHs, PSNPs, and CSNPs.

Junos OS supports the checksumming TLV on a per-interface basis.

### Related Documentation

- [Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page 42](#)

## Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking

This example shows how to enable packet checksums for IS-IS interfaces.

- [Requirements on page 42](#)
- [Overview on page 42](#)
- [Configuration on page 42](#)
- [Verification on page 43](#)

### Requirements

Before you begin, configure IS-IS on both routers. See “[Example: Configuring IS-IS](#)” on [page 14](#) for information about the sample IS-IS configuration.

### Overview


Junos OS supports IS-IS checksums as documented in RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)*.

IS-IS protocol data units (PDUs) include link-state PDUs, complete sequence number PDUs (CSNPs), partial sequence number PDUs (PSNPs), and IS-IS hello (IIH) packets. These PDUs can be corrupt due to faulty implementations of Layer 2 hardware or lack of checksums on a specific network technology. Corruption of length or type, length, and value (TLV) fields can lead to the generation of extensive numbers of empty link-state PDUs in the receiving node. Because authentication is not a replacement for a checksum mechanism, you might want to enable the optional checksum TLV on your IS-IS interfaces.

The checksum cannot be enabled with MD5 hello authentication on the same interface.

[Figure 6 on page 42](#) shows the topology used in this example.

**Figure 6: IS-IS Checksum Topology**

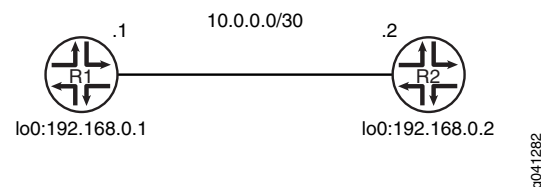

This example describes the steps on Device R1.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device R1

```
set protocols isis traceoptions file isis
set protocols isis traceoptions flag all
```

```
set protocols isis interface fe-1/2/0.1 checksum
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS checksums:

1. Enable checksums.

```
[edit protocols isis interface fe-1/2/0.1]
user@R1# set checksum
```

2. (Optional) Enable tracing for tracking checksum operations.

```
[edit protocols isis traceoptions]
user@R1# set file isis
user@R1# set flag all
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
isis {
  traceoptions {
    file isis;
    flag all;
  }
  interface fe-1/2/0.1 {
    checksum;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

### Verifying Checksums

**Purpose** Verify that checksums are performed.

**Action** From operational mode, enter the **show log isis | match checksum** command.

```
user@R1> show log isis | match checksum
```

```
May 31 16:47:39.513267 sequence 0x49 checksum 0x8e64
May 31 16:47:39.513394 sequence 0x4e checksum 0x34b3
May 31 16:47:39.513517 sequence 0x50 checksum 0x9dcb
May 31 16:47:46.563781 sequence 0x45 checksum 0x7e1a
May 31 16:47:46.563970 sequence 0x46 checksum 0x226d
May 31 16:47:46.564104 sequence 0x52 checksum 0x99cd
May 31 16:47:46.581087 sequence 0x49 checksum 0x8e64
May 31 16:47:46.581222 sequence 0x4e checksum 0x34b3
May 31 16:47:46.581353 sequence 0x50 checksum 0x9dcb
May 31 16:47:55.799090 sequence 0x45 checksum 0x7e1a
May 31 16:47:55.799223 sequence 0x46 checksum 0x226d
May 31 16:47:55.799347 sequence 0x52 checksum 0x99cd
May 31 16:47:55.818255 sequence 0x49 checksum 0x8e64
May 31 16:47:55.818473 sequence 0x4e checksum 0x34b3
May 31 16:47:55.818606 sequence 0x50 checksum 0x9dcb
May 31 16:48:03.455816 sequence 0x49 checksum 0x8e64
May 31 16:48:03.455973 sequence 0x4e checksum 0x34b3
```

**Meaning** The output shows that checksum information is captured in the IS-IS trace log file.

**Related Documentation**

- [Understanding Checksums on IS-IS Interfaces for Error Checking on page 41](#)



## CHAPTER 4

# Configuring IS-IS Routing Policy and Route Redistribution

- [Understanding Routing Policies on page 45](#)
- [Understanding Backup Selection Policy for IS-IS Protocol on page 48](#)
- [Example: Configuring Backup Selection Policy for IS-IS Protocol on page 50](#)
- [Configuring Backup Selection Policy for the IS-IS Protocol on page 81](#)
- [Example: Redistributing OSPF Routes into IS-IS on page 87](#)
- [Example: Configuring IS-IS Route Leaking from a Level 2 Area to a Level 1 Area on page 96](#)
- [Understanding BGP Communities, Extended Communities, and Large Communities as Routing Policy Match Conditions on page 103](#)
- [Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS on page 104](#)
- [IS-IS Extensions to Support Route Tagging on page 114](#)
- [Example: Configuring a Routing Policy to Prioritize IS-IS Routes on page 115](#)
- [Configuring Overloading of Stub Networks on page 125](#)

## Understanding Routing Policies

---

For some routing platform vendors, the flow of routes occurs between various protocols. If, for example, you want to configure redistribution from RIP to OSPF, the RIP process tells the OSPF process that it has routes that might be included for redistribution. In Junos OS, there is not much direct interaction between the routing protocols. Instead, there are central gathering points where all protocols install their routing information. These are the main unicast routing tables `inet.0` and `inet6.0`.

From these tables, the routing protocols calculate the best route to each destination and place these routes in a forwarding table. These routes are then used to forward routing protocol traffic toward a destination, and they can be advertised to neighbors.

- [Importing and Exporting Routes on page 46](#)
- [Active and Inactive Routes on page 47](#)

- [Explicitly Configured Routes on page 47](#)
- [Dynamic Database on page 48](#)

## Importing and Exporting Routes

Two terms—*import* and *export*—explain how routes move between the routing protocols and the routing table.


- When the Routing Engine places the routes of a routing protocol into the routing table, it is *importing* routes into the routing table.
- When the Routing Engine uses active routes from the routing table to send a protocol advertisement, it is *exporting* routes from the routing table.



**NOTE:** The process of moving routes between a routing protocol and the routing table is described always *from the point of view of the routing table*. That is, routes are *imported into* a routing table from a routing protocol and they are *exported from* a routing table to a routing protocol. Remember this distinction when working with routing policies.

As shown in [Figure 7 on page 46](#), you use import routing policies to control which routes are placed in the routing table, and export routing policies to control which routes are advertised from the routing table to neighbors.

**Figure 7: Importing and Exporting Routes**

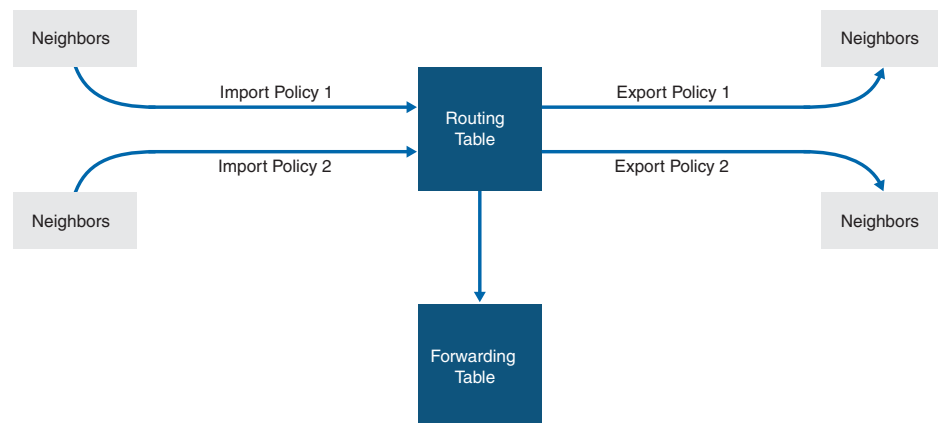

g001706

In general, the routing protocols place all their routes in the routing table and advertise a limited set of routes from the routing table. The general rules for handling the routing information between the routing protocols and the routing table are known as the *routing policy framework*.

The routing policy framework is composed of default rules for each routing protocol that determine which routes the protocol places in the routing table and advertises from the routing table. The default rules for each routing protocol are known as *default routing policies*.

You can create routing policies to preempt the default policies, which are always present. A *routing policy* allows you to modify the routing policy framework to suit your needs. You can create and implement your own routing policies to do the following:

- Control which routes a routing protocol places in the routing table.
- Control which active routes a routing protocol advertises from the routing table. An *active route* is a route that is chosen from all routes in the routing table to reach a destination.
- Manipulate the route characteristics as a routing protocol places the route in the routing table or advertises the route from the routing table.

You can manipulate the route characteristics to control which route is selected as the active route to reach a destination. The active route is placed in the forwarding table and is used to forward traffic toward the route's destination. In general, the active route is also advertised to a router's neighbors.

## Active and Inactive Routes

When multiple routes for a destination exist in the routing table, the protocol selects an active route and that route is placed in the appropriate routing table. For equal-cost routes, the Junos OS places multiple next hops in the appropriate routing table.

When a protocol is exporting routes from the routing table, it exports active routes only. This applies to actions specified by both default and user-defined export policies.

When evaluating routes for export, the Routing Engine uses only active routes from the routing table. For example, if a routing table contains multiple routes to the same destination and one route has a preferable metric, only that route is evaluated. In other words, an export policy does not evaluate all routes; it evaluates only those routes that a routing protocol is allowed to advertise to a neighbor.



**NOTE:** By default, BGP advertises active routes. However, you can configure BGP to advertise *inactive routes*, which go to the same destination as other routes but have less preferable metrics.

## Explicitly Configured Routes

An *explicitly configured route* is a route that you have configured. *Direct routes* are not explicitly configured. They are created as a result of IP addresses being configured on an interface. Explicitly configured routes include aggregate, generated, local, and static routes. (An *aggregate route* is a route that distills groups of routes with common addresses into one route. A *generated route* is a route used when the routing table has no information about how to reach a particular destination. A *local route* is an IP address assigned to a router interface. A *static route* is an unchanging route to a destination.)

The policy framework software treats direct and explicitly configured routes as if they are learned through routing protocols; therefore, they can be imported into the routing table. Routes cannot be exported from the routing table to the pseudoprotocol, because this protocol is not a real routing protocol. However, aggregate, direct, generated, and

static routes can be exported from the routing table to routing protocols, whereas local routes cannot.

## Dynamic Database

In Junos OS Release 9.5 and later, you can configure routing policies and certain routing policy objects in a dynamic database that is not subject to the same verification required by the standard configuration database. As a result, you can quickly commit these routing policies and policy objects, which can be referenced and applied in the standard configuration as needed. BGP is the only protocol to which you can apply routing policies that reference policies configured in the dynamic database. After a routing policy based on the dynamic database is configured and committed in the standard configuration, you can quickly make changes to existing routing policies by modifying policy objects in the dynamic database. Because Junos OS does not validate configuration changes to the dynamic database, when you use this feature, you should test and verify all configuration changes before committing them.

### Related Documentation

- *Example: Configuring Dynamic Routing Policies*
- [Example: Redistributing OSPF Routes into IS-IS on page 87](#)

---

## Understanding Backup Selection Policy for IS-IS Protocol

Support for IS-IS loop-free alternate (LFA) routes essentially adds IP fast-reroute capability for IS-IS. Junos OS precomputes multiple loop-free backup routes for all IS-IS routes. These backup routes are pre-installed in the Packet Forwarding Engine, which performs a local repair and implements the backup path when the link for a primary next hop for a particular route is no longer available. The selection of LFA is done randomly by selecting any matching LFA to progress to the given destination. This does not ensure best backup coverage available for the network. In order to choose the best LFA, Junos OS allows you to configure network-wide backup selection policies for each destination (IPv4 and IPv6) and a primary next-hop interface. These policies are evaluated based on admin-group, srlg, bandwidth, protection-type, metric, and neighbor information.

During backup shortest-path-first (SPF) computation, each node and link attribute of the backup path is accumulated by IGP and is associated with every node (router) in the topology. The next hop in the best backup path is selected as the backup next hop in the routing table. In general, backup evaluation policy rules are categorized into the following types:

- Pruning — Rules configured to select the eligible backup path.
- Ordering — Rules configured to select the best among the eligible backup paths.

The backup selection policies can be configured with both pruning and ordering rules. While evaluating the backup policies, each backup path is assigned a score, an integer value that signifies the total weight of the evaluated criteria. The backup path with the highest score is selected.

To enforce LFA selection, configure various rules for the following attributes:

- **admin-group**— Administrative groups, also known as link coloring or resource class, are manually assigned attributes that describe the “color” of links, such that links with the same color conceptually belong to the same class. These configured administrative groups are defined under protocol MPLS. You can use administrative groups to implement a variety of backup selection policies using exclude, include-all, include-any, or preference.
- **backup-neighbor**— A neighbor ID to either prefer or exclude in the backup path selection.
- **node**— A list of loop-back IP addresses of the adjacent nodes to either prefer or exclude in the backup path selection. The node can be a local (adjacent router) node, remote node, or any other router in the backup path. The nodes are identified through the TE-router-ID TLV advertised by a node in the LSP.
- **node-tag**— A node tag identifies a group of nodes in the network based on criteria such as the same neighbor tag values for all PE nodes to either prefer or exclude in the a backup path selection. This is implemented using IS-IS admin-tags. The routers are not identified with the explicit router-id but with an admin-tag prefix to their lo0 address prefix. These tags are advertised as part of extended IP reachability with a /32 prefix length that represents the TE-router\_ID or node-ID of a router.
- **srlg**— A shared risk link group (SRLG) is a set of links sharing a common resource, which affects all links in the set if the common resource fails. These links share the same risk of failure and are therefore considered to belong to the same SRLG. For example, links sharing a common fiber are said to be in the same SRLG because a fault with the fiber might cause all links in the group to fail. An SRLG is represented by a 32-bit number unique within an IGP (IS-IS) domain. A link might belong to multiple SRLGs. You can define the backup selection to either allow or reject the common SRLGs between the primary and the backup path.
- **bandwidth**—The bandwidth specifies the bandwidth constraints between the primary and the backup path. The backup next-hop link can be used only if the bandwidth of the backup next-hop interface is greater than or equal to the bandwidth of the primary next hop.
- **protection-type**— The protection-type protects the destination from node failure of the primary node or link failure of the primary link. You can configure node, link, or node-link to protect the destination.. If link-node is configured , then the node-protecting LFA is preferred over link-protection LFA.
- **metric**— Metric decides how the LFAs should be preferred. In backup selection path, root metric and dest-metric are the two types of metrics. root-metric indicates the metric to the one-hop neighbor or a remote router such as an RSVP backup LSP tail-end router. The dest-metric indicates the metric from a one-hop neighbor or remote router such as an RSVP backup LSP tail-end router to the final destination. The metric evaluation is done either in ascending or descending order. By default, the first preference is given to backup paths with lowest destination evaluation and then to backup paths with lowest root metrics.

The evaluation-order allows you to control the order and criteria of evaluating these attributes in the backup path. You can explicitly configure the evaluation order. Only the configured attributes influence the backup path selection. The default order of evaluation

of these attributes for the LFA is [ admin-group srlg bandwidth protection-type neighbor neighbor-tag metric ] .

- Related Documentation**
- [Example: Configuring Backup Selection Policy for IS-IS Protocol on page 50](#)
  - [backup-selection \(Protocols ISIS\) on page 457](#)

---

## Example: Configuring Backup Selection Policy for IS-IS Protocol

This example shows how to configure the backup selection policy for the IS-IS protocol.

When you enable backup selection policies, Junos OS allows selection of LFA based on the policy rules and attributes of the links and nodes in the network. These attributes are admin-group, srlg, bandwidth, protection-type, metric, neighbor, and neighbor-tag.

- [Requirements on page 50](#)
- [Overview on page 50](#)
- [Configuration on page 51](#)
- [Verification on page 72](#)

### Requirements

This example uses the following hardware and software components:

- Eight routers that can be a combination of M Series Multiservice Edge Routers, MX Series 5G Universal Routing Platforms, and T Series Core Routers
- Junos OS Release 14.1 or later running on all devices

Before you begin:

1. Configure the device interfaces.
2. Configure IS-IS.


### Overview

Starting with Junos OS Release 14.1, the default loop free alternative (LFA) selection algorithm or criteria can be overridden with an LFA policy. These policies are configured for each destination (IPv4 and IPv6) and a primary next-hop interface . These backup policies enforce LFA selection based on admin-group, srlg, bandwidth, protection-type, metric, neighbor, and neighbor-tag attributes of the backup path. During backup shortest-path-first (SPF) computation, each attribute (both node and link) of the backup path, stored per backup next-hop, is accumulated by IGP. For the routes created internally by IGP, the attribute set of every backup path is evaluated against the policy configured for each destination (IPv4 and IPv6) and a primary next-hop interface. The first or the best backup path is selected and installed as the backup next hop in the routing table. To configure the backup selection policy, include the **backup-selection** configuration statement at the **[edit routing-options]** hierarchy level. The **show backup-selection** command displays the configured policies for a given interface and destination. The display can be filtered against a particular destination, prefix, interface, or logical systems.

## Topology

In this topology, backup selection policy is configured on Device R3.

Figure 8: Backup Selection Path

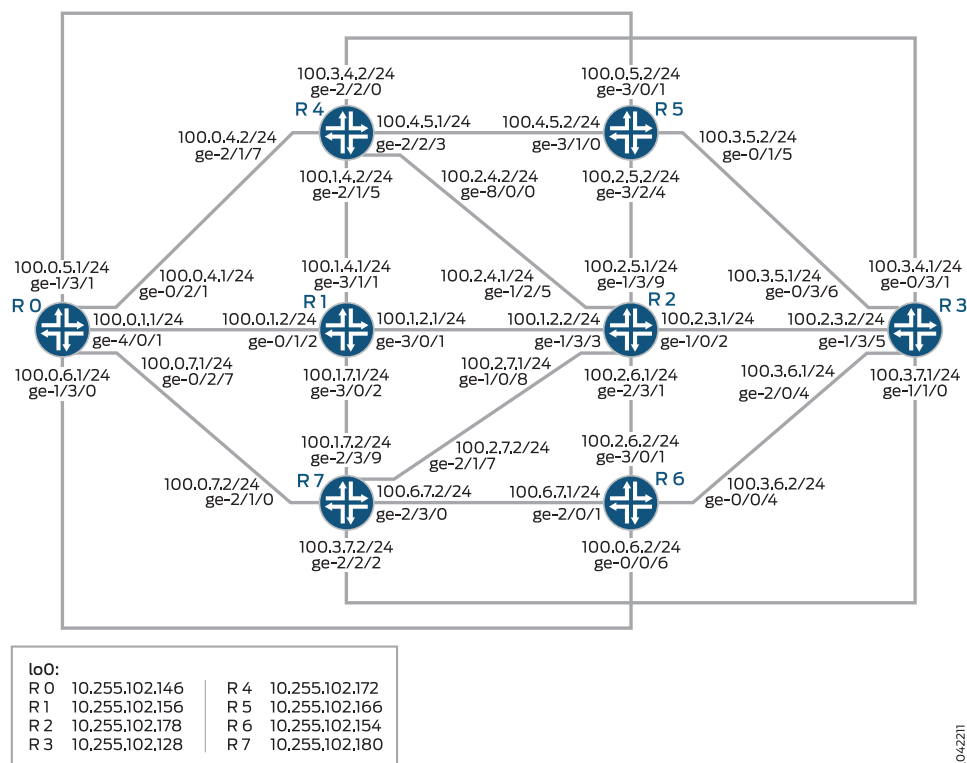

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
R0
set interfaces ge-4/0/1 unit 0 family inet address 100.0.1.1/24
set interfaces ge-4/0/1 unit 0 family iso
set interfaces ge-4/0/1 unit 0 family inet6 address 2001:100:0:1::1/64
set interfaces ge-4/0/1 unit 0 family mpls
set interfaces ge-0/2/1 unit 0 family inet address 100.0.4.1/24
set interfaces ge-0/2/1 unit 0 family iso
set interfaces ge-0/2/1 unit 0 family inet6 address 2001:100:0:4::1/64
set interfaces ge-0/2/1 unit 0 family mpls
set interfaces ge-1/3/1 unit 0 family inet address 100.0.5.1/24
set interfaces ge-1/3/1 unit 0 family iso
set interfaces ge-1/3/1 unit 0 family inet6 address 2001:100:0:5::1/64
set interfaces ge-1/3/1 unit 0 family mpls
set interfaces ge-1/3/0 unit 0 family inet address 100.0.6.1/24
set interfaces ge-1/3/0 unit 0 family iso
```

```
set interfaces ge-1/3/0 unit 0 family inet6 address 2001:100:0:6::1/64
set interfaces ge-1/3/0 unit 0 family mpls
set interfaces ge-0/2/7 unit 0 family inet address 100.0.7.1/24
set interfaces ge-0/2/7 unit 0 family iso
set interfaces ge-0/2/7 unit 0 family inet6 address 2001:100:0:7::1/64
set interfaces ge-0/2/7 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.146/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1001.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:146/128
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols isis interface ge-4/0/1 level 2 metric 10
set protocols isis interface ge-0/2/1 level 2 metric 18
set protocols isis interface ge-1/3/1 level 2 metric 51
set protocols isis interface ge-1/3/0 level 2 metric 52
set protocols isis interface ge-0/2/7 level 2 metric 23
set protocols isis interface all level 2 metric 10
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
```



```

set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112

```

```

R1
set interfaces ge-0/1/2 unit 0 family inet address 100.0.1.2/24
set interfaces ge-0/1/2 unit 0 family iso
set interfaces ge-0/1/2 unit 0 family inet6 address 2001:100:0:1::2/64
set interfaces ge-0/1/2 unit 0 family mpls
set interfaces ge-3/0/1 unit 0 family inet address 100.1.2.1/24
set interfaces ge-3/0/1 unit 0 family iso
set interfaces ge-3/0/1 unit 0 family inet6 address 2001:100:1:2::1/64
set interfaces ge-3/0/1 unit 0 family mpls
set interfaces ge-3/1/1 unit 0 family inet address 100.1.4.1/24
set interfaces ge-3/1/1 unit 0 family iso
set interfaces ge-3/1/1 unit 0 family inet6 address 2001:100:1:4::1/64
set interfaces ge-3/1/1 unit 0 family mpls
set interfaces ge-3/0/2 unit 0 family inet address 100.1.7.1/24
set interfaces ge-3/0/2 unit 0 family iso
set interfaces ge-3/0/2 unit 0 family inet6 address 2001:100:1:7::1/64
set interfaces ge-3/0/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.156/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1002.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:156/128
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23

```

```

set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-0/1/2 srlg srlg9
set protocols mpls interface ge-0/1/2 admin-group c1
set protocols mpls interface ge-0/1/2 admin-group c2
set protocols mpls interface ge-0/1/2 admin-group c6
set protocols isis interface all level 2 metric 10
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112

```

```

R2
set interfaces ge-1/3/3 unit 0 family inet address 100.1.2.2/24
set interfaces ge-1/3/3 unit 0 family iso
set interfaces ge-1/3/3 unit 0 family inet6 address 2001:100:1:2::2/64
set interfaces ge-1/3/3 unit 0 family mpls
set interfaces ge-1/0/2 unit 0 family inet address 100.2.3.1/24
set interfaces ge-1/0/2 unit 0 family iso
set interfaces ge-1/0/2 unit 0 family inet6 address 2001:100:2:3::1/64
set interfaces ge-1/0/2 unit 0 family mpls
set interfaces ge-1/2/5 unit 0 family inet address 100.2.4.1/24
set interfaces ge-1/2/5 unit 0 family iso
set interfaces ge-1/2/5 unit 0 family inet6 address 2001:100:2:4::1/64
set interfaces ge-1/2/5 unit 0 family mpls
set interfaces ge-1/3/9 unit 0 family inet address 100.2.5.1/24
set interfaces ge-1/3/9 unit 0 family iso
set interfaces ge-1/3/9 unit 0 family inet6 address 2001:100:2:5::1/64
set interfaces ge-2/3/1 unit 0 family inet address 100.2.6.1/24
set interfaces ge-2/3/1 unit 0 family iso
set interfaces ge-2/3/1 unit 0 family inet6 address 2001:100:2:6::1/64
set interfaces ge-2/3/1 unit 0 family mpls
set interfaces ge-1/0/8 unit 0 family inet address 100.2.7.1/24
set interfaces ge-1/0/8 unit 0 family iso
set interfaces ge-1/0/8 unit 0 family inet6 address 2001:100:2:7::1/64
set interfaces ge-1/0/8 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.178/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1003.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:178/128

```

```
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-1/0/2 srlg srlg1
set protocols mpls interface ge-1/3/9 srlg srlg1
set protocols mpls interface ge-1/3/9 srlg srlg2
set protocols mpls interface ge-2/3/1 srlg srlg1
set protocols mpls interface ge-1/0/8 srlg srlg7
set protocols isis interface ge-1/0/2 link-protection
set protocols isis interface ge-1/2/5 level 2 metric 12
set protocols isis interface ge-2/3/1 level 2 metric 12
set protocols isis interface ge-1/0/8 level 2 metric 13
set protocols isis interface all level 2 metric 10
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
```

```
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112
```

```
R3
set interfaces ge-1/3/5 unit 0 family inet address 100.2.3.2/24
set interfaces ge-1/3/5 unit 0 family iso
set interfaces ge-1/3/5 unit 0 family inet6 address 2001:100:2:3::2/64
set interfaces ge-1/3/5 unit 0 family mpls
set interfaces ge-0/3/1 unit 0 family inet address 100.3.4.1/24
set interfaces ge-0/3/1 unit 0 family iso
set interfaces ge-0/3/1 unit 0 family inet6 address 2001:100:3:4::1/64
set interfaces ge-0/3/1 unit 0 family mpls
set interfaces ge-0/3/6 unit 0 family inet address 100.3.5.1/24
set interfaces ge-0/3/6 unit 0 family iso
set interfaces ge-0/3/6 unit 0 family inet6 address 2001:100:3:5::1/64
set interfaces ge-0/3/6 unit 0 family mpls
set interfaces ge-2/0/4 unit 0 family inet address 100.3.6.1/24
set interfaces ge-2/0/4 unit 0 family iso
set interfaces ge-2/0/4 unit 0 family inet6 address 2001:100:3:6::1/64
set interfaces ge-2/0/4 unit 0 family mpls
set interfaces ge-1/1/0 unit 0 family inet address 100.3.7.1/24
set interfaces ge-1/1/0 unit 0 family iso
set interfaces ge-1/1/0 unit 0 family inet6 address 2001:100:3:7::1/64
set interfaces ge-1/1/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.128/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1004.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:128/128
set interfaces lo0 unit 0 family mpls
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
```

```
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-0/3/1 srlg srlg1
set protocols mpls interface ge-0/3/1 srlg srlg2
set protocols mpls interface ge-0/3/1 admin-group c1
set protocols mpls interface ge-0/3/1 admin-group c2
set protocols mpls interface ge-0/3/1 admin-group c3
set protocols mpls interface ge-0/3/1 admin-group c5
set protocols mpls interface ge-0/3/6 admin-group c1
set protocols mpls interface ge-0/3/6 admin-group c2
set protocols mpls interface ge-2/0/4 admin-group c1
set protocols mpls interface ge-2/0/4 admin-group c2
set protocols mpls interface ge-2/0/4 admin-group c5
set protocols mpls interface ge-1/1/0 admin-group c2
set protocols mpls interface ge-1/1/0 admin-group c12
set protocols isis interface ge-1/3/5 link-protection
set protocols isis interface ge-0/3/1 level 2 metric 21
set protocols isis interface ge-0/3/6 level 2 metric 13
set protocols isis interface ge-2/0/4 level 2 metric 15
set protocols isis interface ge-1/1/0 level 2 metric 22
set protocols isis interface all level 2 metric 10
set routing-options forwarding-table export ecmp
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112
set routing-options backup-selection destination 0.0.0.0/0 interface all admin-group
  include-all c1
set routing-options backup-selection destination 0.0.0.0/0 interface all admin-group
  include-any c2
set routing-options backup-selection destination 0.0.0.0/0 interface all admin-group
  preference c3
set routing-options backup-selection destination 0.0.0.0/0 interface all srlg loose
set routing-options backup-selection destination 0.0.0.0/0 interface all
  downstream-paths-only
set routing-options backup-selection destination 0.0.0.0/0 interface all
  bandwidth-greater-equal-primary
set routing-options backup-selection destination 0.0.0.0/0 interface all neighbor
  preference 10.255.102.178
```

```

set routing-options backup-selection destination 0.0.0.0/0 interface all neighbor-tag
  preference 1004
set routing-options backup-selection destination 0.0.0.0/0 interface all metric-order
  dest
set routing-options backup-selection destination 0.0.0.0/0 interface all evaluation-order
  admin-group
set routing-options backup-selection destination 0.0.0.0/0 interface all evaluation-order
  srlg
set routing-options backup-selection destination 0.0.0.0/0 interface all evaluation-order
  bandwidth
set routing-options backup-selection destination 100.0.1.0/24 interface all srlg strict
set routing-options backup-selection destination 100.0.1.0/24 interface all
  bandwidth-greater-equal-primary
set routing-options backup-selection destination 100.0.7.0/24 interface all srlg strict

```

```

R4
set interfaces ge-2/1/7 unit 0 family inet address 100.0.4.2/24
set interfaces ge-2/1/7 unit 0 family iso
set interfaces ge-2/1/7 unit 0 family inet6 address 2001:100:0:4::2/64
set interfaces ge-2/1/5 unit 0 family mpls
set interfaces ge-2/1/5 unit 0 family inet address 100.1.4.2/24
set interfaces ge-2/1/5 unit 0 family iso
set interfaces ge-2/1/5 unit 0 family inet6 address 2001:100:1:4::2/64
set interfaces ge-2/1/5 unit 0 family mpls
set interfaces ge-8/0/0 unit 0 family inet address 100.2.4.2/24
set interfaces ge-8/0/0 unit 0 family iso
set interfaces ge-8/0/0 unit 0 family inet6 address 2001:100:2:4::2/64
set interfaces ge-8/0/0 unit 0 family mpls
set interfaces ge-2/2/0 unit 0 family inet address 100.3.4.2/24
set interfaces ge-2/2/0 unit 0 family iso
set interfaces ge-2/2/0 unit 0 family inet6 address 2001:100:3:4::2/64
set interfaces ge-2/2/0 unit 0 family mpls
set interfaces ge-2/2/3 unit 0 family inet address 100.4.5.1/24
set interfaces ge-2/2/3 unit 0 family iso
set interfaces ge-2/2/3 unit 0 family inet6 address 2001:100:4:5::1/64
set interfaces ge-2/2/3 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.172/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1005.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:172/128
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12

```

```

set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-2/1/7 srlg srlg1
set protocols mpls interface ge-2/1/7 srlg srlg2
set protocols mpls interface ge-2/1/7 srlg srlg3
set protocols mpls interface ge-2/1/7 admin-group c1
set protocols mpls interface ge-2/1/7 admin-group c2
set protocols mpls interface ge-2/1/7 admin-group c6
set protocols mpls interface ge-2/1/7 admin-group c13
set protocols isis interface ge-2/1/7 level 2 metric 18
set protocols isis interface ge-8/0/0 level 2 metric 12
set protocols isis interface ge-2/2/0 level 2 metric 21
set protocols isis interface ge-2/2/3 level 2 metric 10
set protocols isis interface all level 2 metric 10
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112

```

```

R5 set interfaces ge-3/0/1 unit 0 family inet address 100.0.5.2/24
set interfaces ge-3/0/1 unit 0 family iso
set interfaces ge-3/0/1 unit 0 family inet6 address 2001:100:0:5::2/64
set interfaces ge-3/0/1 unit 0 family mpls
set interfaces ge-3/2/4 unit 0 family inet address 100.2.5.2/24
set interfaces ge-3/2/4 unit 0 family iso
set interfaces ge-3/2/4 unit 0 family inet6 address 2001:100:2:5::2/64
set interfaces ge-3/2/4 unit 0 family mpls

```

```
set interfaces ge-0/1/5 unit 0 family inet address 100.3.5.2/24
set interfaces ge-0/1/5 unit 0 family iso
set interfaces ge-0/1/5 unit 0 family inet6 address 2001:100:3:5::2/64
set interfaces ge-0/1/5 unit 0 family mpls
set interfaces ge-3/1/0 unit 0 family inet address 100.4.5.2/24
set interfaces ge-3/1/0 unit 0 family iso
set interfaces ge-3/1/0 unit 0 family inet6 address 2001:100:4:5::2/64
set interfaces ge-3/1/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.166/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1006.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:166/128
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-3/1/0 admin-group c1
set protocols mpls interface ge-3/1/0 admin-group c2
set protocols mpls interface ge-3/1/0 admin-group c4
set protocols mpls interface ge-3/0/1 srlg srlg3
set protocols mpls interface ge-3/0/1 srlg srlg4
set protocols isis interface ge-3/0/1 level 2 metric 51
set protocols isis interface ge-0/1/5 level 2 metric 13
set protocols isis interface ge-3/1/0 level 2 metric 10
set protocols isis interface all level 2 metric 10
```



```

set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112

```

```

R6 set interfaces ge-0/0/6 unit 0 family inet address 100.0.6.2/24
set interfaces ge-0/0/6 unit 0 family iso
set interfaces ge-0/0/6 unit 0 family inet6 address 2001:100:0:6::2/64
set interfaces ge-0/0/6 unit 0 family mpls
set interfaces ge-3/0/1 unit 0 family inet address 100.2.6.2/24
set interfaces ge-3/0/1 unit 0 family iso
set interfaces ge-3/0/1 unit 0 family inet6 address 2001:100:2:6::2/64
set interfaces ge-3/0/1 unit 0 family mpls
set interfaces ge-0/0/4 unit 0 family inet address 100.3.6.2/24
set interfaces ge-0/0/4 unit 0 family iso
set interfaces ge-0/0/4 unit 0 family inet6 address 2001:100:3:6::2/64
set interfaces ge-0/0/4 unit 0 family mpls
set interfaces ge-2/0/1 unit 0 family inet address 100.6.7.1/24
set interfaces ge-2/0/1 unit 0 family iso
set interfaces ge-2/0/1 unit 0 family inet6 address 2001:100:6:7::1/64
set interfaces ge-2/0/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.154/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1007.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:154/128
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18

```

```

set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-2/0/1 srlg srlg2
set protocols mpls interface ge-2/0/1 srlg srlg3
set protocols mpls interface ge-2/0/1 srlg srlg4
set protocols mpls interface ge-2/0/1 srlg srlg5
set protocols mpls interface ge-2/0/1 admin-group c1
set protocols mpls interface ge-2/0/1 admin-group c2
set protocols mpls interface ge-2/0/1 admin-group c5
set protocols mpls interface ge-2/0/1 admin-group c11
set protocols isis interface ge-0/0/6 level 2 metric 52
set protocols isis interface ge-3/0/1 level 2 metric 12
set protocols isis interface ge-0/0/4 level 2 metric 15
set protocols isis interface ge-2/0/1 level 2 metric 10
set protocols isis interface all level 2 metric 10
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112

```

```

R7
set interfaces ge-2/1/0 unit 0 family inet address 100.0.7.2/24
set interfaces ge-2/1/0 unit 0 family iso
set interfaces ge-2/1/0 unit 0 family inet6 address 2001:100:0:7::2/64
set interfaces ge-2/1/0 unit 0 family mpls
set interfaces ge-2/3/9 unit 0 family inet address 100.1.7.2/24
set interfaces ge-2/3/9 unit 0 family iso
set interfaces ge-2/3/9 unit 0 family inet6 address 2001:100:1:7::2/64
set interfaces ge-2/3/9 unit 0 family mpls
set interfaces ge-2/1/7 unit 0 family inet address 100.2.7.2/24
set interfaces ge-2/1/7 unit 0 family iso
set interfaces ge-2/1/7 unit 0 family inet6 address 2001:100:2:7::2/64
set interfaces ge-2/1/7 unit 0 family mpls
set interfaces ge-2/2/2 unit 0 family inet address 100.3.7.2/24

```

```
set interfaces ge-2/2/2 unit 0 family iso
set interfaces ge-2/2/2 unit 0 family inet6 address 2001:100:3:7::2/64
set interfaces ge-2/2/2 unit 0 family mpls
set interfaces ge-2/3/0 unit 0 family inet address 100.6.7.2/24
set interfaces ge-2/3/0 unit 0 family iso
set interfaces ge-2/3/0 unit 0 family inet6 address 2001:100:6:7::2/64
set interfaces ge-2/3/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.102.180/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1008.00
set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:180/128
set interfaces lo0 unit 0 family mpls
set protocols rsvp interface all
set protocols mpls admin-groups c0 0
set protocols mpls admin-groups c1 1
set protocols mpls admin-groups c2 2
set protocols mpls admin-groups c3 3
set protocols mpls admin-groups c4 4
set protocols mpls admin-groups c5 5
set protocols mpls admin-groups c6 6
set protocols mpls admin-groups c7 7
set protocols mpls admin-groups c8 8
set protocols mpls admin-groups c9 9
set protocols mpls admin-groups c10 10
set protocols mpls admin-groups c11 11
set protocols mpls admin-groups c12 12
set protocols mpls admin-groups c13 13
set protocols mpls admin-groups c14 14
set protocols mpls admin-groups c15 15
set protocols mpls admin-groups c16 16
set protocols mpls admin-groups c17 17
set protocols mpls admin-groups c18 18
set protocols mpls admin-groups c19 19
set protocols mpls admin-groups c20 20
set protocols mpls admin-groups c21 21
set protocols mpls admin-groups c22 22
set protocols mpls admin-groups c23 23
set protocols mpls admin-groups c24 24
set protocols mpls admin-groups c25 25
set protocols mpls admin-groups c26 26
set protocols mpls admin-groups c27 27
set protocols mpls admin-groups c28 28
set protocols mpls admin-groups c29 29
set protocols mpls admin-groups c30 30
set protocols mpls admin-groups c31 31
set protocols mpls interface all
set protocols mpls interface ge-2/3/9 srlg srlg8
set protocols mpls interface ge-2/3/9 admin-group c1
set protocols mpls interface ge-2/3/9 admin-group c2
set protocols mpls interface ge-2/3/9 admin-group c7
set protocols isis interface ge-2/1/0 level 2 metric 23
set protocols isis interface ge-2/1/7 level 2 metric 13
set protocols isis interface ge-2/2/2 level 2 metric 22
set protocols isis interface all level 2 metric 10
set routing-options srlg srlg1 srlg-value 101
set routing-options srlg srlg2 srlg-value 102
```

```

set routing-options srlg srlg3 srlg-value 103
set routing-options srlg srlg4 srlg-value 104
set routing-options srlg srlg5 srlg-value 105
set routing-options srlg srlg6 srlg-value 106
set routing-options srlg srlg7 srlg-value 107
set routing-options srlg srlg8 srlg-value 108
set routing-options srlg srlg9 srlg-value 109
set routing-options srlg srlg10 srlg-value 110
set routing-options srlg srlg11 srlg-value 111
set routing-options srlg srlg12 srlg-value 112

```

### Configuring Device R3

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device R3:

1. Configure the interfaces.

```

[edit interfaces]
user@R3# set ge-1/3/5 unit 0 family inet address 100.2.3.2/24
user@R3# set ge-1/3/5 unit 0 family iso
user@R3# set ge-1/3/5 unit 0 family inet6 address 2001:100:2:3::2/64
user@R3# set ge-1/3/5 unit 0 family mpls
user@R3# set ge-0/3/1 unit 0 family inet address 100.3.4.1/24
user@R3# set ge-0/3/1 unit 0 family iso
user@R3# set ge-0/3/1 unit 0 family inet6 address 2001:100:3:4::1/64
user@R3# set ge-0/3/1 unit 0 family mpls
user@R3# set ge-0/3/6 unit 0 family inet address 100.3.5.1/24
user@R3# set ge-0/3/6 unit 0 family iso
user@R3# set ge-0/3/6 unit 0 family inet6 address 2001:100:3:5::1/64
user@R3# set ge-0/3/6 unit 0 family mpls
user@R3# set ge-2/0/4 unit 0 family inet address 100.3.6.1/24
user@R3# set ge-2/0/4 unit 0 family iso
user@R3# set ge-2/0/4 unit 0 family inet6 address 2001:100:3:6::1/64
user@R3# set ge-2/0/4 unit 0 family mpls
user@R3# set ge-1/1/0 unit 0 family inet address 100.3.7.1/24
user@R3# set ge-1/1/0 unit 0 family iso
user@R3# set ge-1/1/0 unit 0 family inet6 address 2001:100:3:7::1/64
user@R3# set ge-1/1/0 unit 0 family mpls
user@R3# set interfaces lo0 unit 0 family inet address 10.255.102.128/32
user@R3# set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1004.00
user@R3# set interfaces lo0 unit 0 family inet6 address abcd::10:255:102:128/128
user@R3# set interfaces lo0 unit 0 family mpls

```

2. Configure routing policy.

```

[edit policy-options]
user@R3# set policy-statement ecmp term 1 then load-balance per-packet

```

3. Enable RSVP on all the interfaces.

```
[edit protocols]
user@R3# set rsvp interface all
```

4. Configure administrative groups.

```
[edit protocols mpls]
user@R3# set admin-groups c0 0
user@R3# set admin-groups c1 1
user@R3# set admin-groups c2 2
user@R3# set admin-groups c3 3
user@R3# set admin-groups c4 4
user@R3# set admin-groups c5 5
user@R3# set admin-groups c6 6
user@R3# set admin-groups c7 7
user@R3# set admin-groups c8 8
user@R3# set admin-groups c9 9
user@R3# set admin-groups c10 10
user@R3# set admin-groups c11 11
user@R3# set admin-groups c12 12
user@R3# set admin-groups c13 13
user@R3# set admin-groups c14 14
user@R3# set admin-groups c15 15
user@R3# set admin-groups c16 16
user@R3# set admin-groups c16 16
user@R3# set admin-groups c17 17
user@R3# set admin-groups c18 18
user@R3# set admin-groups c19 19
user@R3# set admin-groups c20 20
user@R3# set admin-groups c21 21
user@R3# set admin-groups c22 22
user@R3# set admin-groups c23 23
user@R3# set admin-groups c24 24
user@R3# set admin-groups c25 25
user@R3# set admin-groups c26 26
user@R3# set admin-groups c27 27
user@R3# set admin-groups c28 28
user@R3# set admin-groups c29 29
user@R3# set admin-groups c30 30
user@R3# set admin-groups c31 31
```

5. Configure srlg values.

```
[edit routing-options]
user@R3# set srlg srlg1 srlg-value 101
user@R3# set srlg srlg2 srlg-value 102
user@R3# set srlg srlg3 srlg-value 103
user@R3# set srlg srlg4 srlg-value 104
user@R3# set srlg srlg5 srlg-value 105
user@R3# set srlg srlg6 srlg-value 106
user@R3# set srlg srlg7 srlg-value 107
user@R3# set srlg srlg8 srlg-value 108
```

```
user@R3# set srlg srlg9 srlg-value 109
user@R3# set srlg srlg10 srlg-value 110
user@R3# set srlg srlg11 srlg-value 111
user@R3# set srlg srlg12 srlg-value 112
```

6. Enable MPLS on all the interfaces.

```
[edit protocols mpls]
user@R3# set interface all
```

7. Configure srlg on the interfaces.

```
[edit protocols mpls]
user@R3# set interface ge-0/3/1 srlg srlg1
user@R3# set interface ge-0/3/1 srlg srlg2
```

8. Configure administrative groups on the interfaces.

```
[edit protocols mpls]
user@R3# set interface ge-0/3/1 admin-group c1
user@R3# set interface ge-0/3/1 admin-group c2
user@R3# set interface ge-0/3/1 admin-group c3
user@R3# set interface ge-0/3/1 admin-group c5
user@R3# set interface ge-0/3/6 admin-group c1
user@R3# set interface ge-0/3/6 admin-group c2
user@R3# set interface ge-2/0/4 admin-group c1
user@R3# set interface ge-2/0/4 admin-group c2
user@R3# set interface ge-2/0/4 admin-group c5
user@R3# set interface ge-1/1/0 admin-group c2
user@R3# set interface ge-1/1/0 admin-group c12
```

9. Enable link protection and configure metric values on the interfaces.

```
[edit protocols]
user@R3# set isis interface ge-1/3/5 link-protection
user@R3# set isis interface ge-0/3/1 level 2 metric 21
user@R3# set isis interface ge-0/3/6 level 2 metric 13
user@R3# set isis interface ge-2/0/4 level 2 metric 15
user@R3# set isis interface ge-1/1/0 level 2 metric 22
```

10. Configure the metric value on all the interfaces.

```
[edit protocols]
user@R3# set isis interface all level 2 metric 10
```

11. Apply the routing policy to all equal cost multi paths exported from the routing table to the forwarding table.

```
[edit routing-options]
user@R3# set forwarding-table export ecmp
```

12. Configure attributes of the backup selection policy.

```
[edit routing-options]
user@R3# set backup-selection destination 0.0.0.0/0 interface all admin-group
include-all c1
user@R3# set backup-selection destination 0.0.0.0/0 interface all admin-group
include-any c2
user@R3# set backup-selection destination 0.0.0.0/0 interface all admin-group
preference c3
user@R3# set backup-selection destination 0.0.0.0/0 interface all srlg loose
user@R3# set backup-selection destination 0.0.0.0/0 interface all
downstream-paths-only
user@R3# set backup-selection destination 0.0.0.0/0 interface all
bandwidth-greater-equal-primary
user@R3# set backup-selection destination 0.0.0.0/0 interface all neighbor
preference 10.255.102.178
user@R3# set backup-selection destination 0.0.0.0/0 interface all neighbor-tag
preference 1004
user@R3# set backup-selection destination 0.0.0.0/0 interface all metric-order
dest
user@R3# set backup-selection destination 0.0.0.0/0 interface all evaluation-order
admin-group
user@R3# set backup-selection destination 0.0.0.0/0 interface all evaluation-order
srlg
user@R3# set backup-selection destination 0.0.0.0/0 interface all evaluation-order
bandwidth
user@R3# set backup-selection destination 100.0.1.0/24 interface all srlg strict
user@R3# set backup-selection destination 100.0.1.0/24 interface all
bandwidth-greater-equal-primary
user@R3# set backup-selection destination 100.0.7.0/24 interface all srlg strict
```

## Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
ge-1/3/5 {
  unit 0 {
    family inet {
      address 100.2.3.2/24;
    }
    family iso;
    family inet6 {
      address 2001:100:2:3::2/64;
    }
    family mpls;
```

```
    }  
  }  
  ge-0/3/1 {  
    unit 0 {  
      family inet {  
        address 100.3.4.1/24;  
      }  
      family iso;  
      family inet6 {  
        address 2001:100:3:4::1/64;  
      }  
      family mpls;  
    }  
  }  
  ge-0/3/6 {  
    unit 0 {  
      family inet {  
        address 100.3.5.1/24;  
      }  
      family iso;  
      family inet6 {  
        address 2001:100:3:5::1/64;  
      }  
      family mpls;  
    }  
  }  
  ge-2/0/4 {  
    unit 0 {  
      family inet {  
        address 100.3.6.1/24;  
      }  
      family iso;  
      family inet6 {  
        address 2001:100:3:6::1/64;  
      }  
      family mpls;  
    }  
  }  
  ge-1/1/0 {  
    unit 0 {  
      family inet {  
        address 100.3.7.1/24;  
      }  
      family iso;  
      family inet6 {  
        address 2001:100:3:7::1/64;  
      }  
      family mpls;  
    }  
  }  
  lo0 {  
    unit 0 {  
      family inet {  
        address 10.255.102.128/32;  
      }  
    }  
  }
```



```
family iso {  
    address 49.0001.0010.0100.1004.00;  
}  
family inet6 {  
    address abcd::10:255:102:128/128;  
}  
family mpls;  
}  
}
```

```
user@R3# show protocols  
rsvp {  
    interface all;  
}  
mpls {  
    admin-groups {  
        c0 0;  
        c1 1;  
        c2 2;  
        c3 3;  
        c4 4;  
        c5 5;  
        c6 6;  
        c7 7;  
        c8 8;  
        c9 9;  
        c10 10;  
        c11 11;  
        c12 12;  
        c13 13;  
        c14 14;  
        c15 15;  
        c16 16;  
        c17 17;  
        c18 18;  
        c19 19;  
        c20 20;  
        c21 21;  
        c22 22;  
        c23 23;  
        c24 24;  
        c25 25;  
        c26 26;  
        c27 27;  
        c28 28;  
        c29 29;  
        c30 30;  
        c31 31;  
    }  
    interface all;  
    interface ge-0/3/1 {  
        srlg [ srlg1 srlg2 ];  
        admin-group [ c1 c2 c3 c5 ];  
    }  
}
```

```
interface ge-0/3/6 {  
  admin-group [ c1 c2 ];  
}  
interface ge-2/0/4 {  
  admin-group [ c1 c2 c5 ];  
}  
interface ge-1/1/0 {  
  admin-group [ c2 c12 ];  
}  
isis {  
  interface ge-1/3/5 {  
    link-protection;  
  }  
  interface ge-0/3/1 {  
    level 2 metric 21;  
  }  
  interface ge-0/3/6 {  
    level 2 metric 13;  
  }  
  interface ge-2/0/4 {  
    level 2 metric 15;  
  }  
  interface ge-1/1/0 {  
    level 2 metric 22;  
  }  
  interface all {  
    level 2 metric 10;  
  }  
}
```

user@R3# show routing-options

```
srlg {  
  srlg1 {  
    srlg-value 101;  
  }  
  srlg2 {  
    srlg-value 102;  
  }  
  srlg3 {  
    srlg-value 103;  
  }  
  srlg4 {  
    srlg-value 104;  
  }  
  srlg5 {  
    srlg-value 105;  
  }  
  srlg6 {  
    srlg-value 106;  
  }  
  srlg7 {  
    srlg-value 107;  
  }  
  srlg8 {
```

```

    srlg-value 108;
  }
  srlg9 {
    srlg-value 109;
  }
  srlg10 {
    srlg-value 110;
  }
  srlg11 {
    srlg-value 111;
  }
  srlg12 {
    srlg-value 112;
  }
}
backup-selection {
  destination 0.0.0.0/0 {
    interface all {
      admin-group {
        include-all c1;
        include-any c2;
        preference c3;
      }
      srlg loose;
      downstream-paths-only;
      bandwidth-greater-equal-primary;
      neighbor {
        preference 10.255.102.178;
      }
      neighbor-tag {
        preference 1004;
      }
      metric-order dest;
      evaluation-order [ admin-group srlg bandwidth ];
    }
  }
  destination 100.0.1.0/24 {
    interface all {
      srlg strict;
      bandwidth-greater-equal-primary;
    }
  }
  destination 100.0.7.0/24 {
    interface all {
      srlg strict;
    }
  }
}
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Verify that the configuration is working properly.

- [Verifying the Routes on page 72](#)
- [Verifying the IS-IS Route on page 76](#)
- [Verifying the Backup SPF Roots for Device R3. on page 78](#)
- [Verifying the Backup Selection Policy for Device R3 on page 80](#)

### Verifying the Routes

---

**Purpose** Verify that the expected routes are learned.

**Action** From operational mode, run the **show route** command for the routing table.

```
user@R3> show route
```

```
inet.0: 32 destinations, 32 routes (32 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
10.255.102.128/32  *[Direct/0] 1w0d 04:14:44
                   > via lo0.31
10.255.102.146/32  *[IS-IS/18] 6d 07:19:57, metric 40
                   > to 100.2.3.1 via ge-1/3/5.0
                   to 100.3.4.2 via ge-0/3/1.0
10.255.102.154/32  *[IS-IS/18] 1w0d 04:12:02, metric 25
                   > to 100.3.6.2 via ge-2/0/4.0
10.255.102.156/32  *[IS-IS/18] 06:38:55, metric 30
                   > to 100.2.3.1 via ge-1/3/5.0
                   to 100.3.6.2 via ge-2/0/4.0
10.255.102.166/32  *[IS-IS/18] 1w0d 04:11:57, metric 23
                   > to 100.3.5.2 via ge-0/3/6.0
10.255.102.172/32  *[IS-IS/18] 1w0d 04:12:03, metric 31
                   > to 100.3.4.2 via ge-0/3/1.0
10.255.102.178/32  *[IS-IS/18] 06:38:55, metric 20
                   > to 100.2.3.1 via ge-1/3/5.0
10.255.102.180/32  *[IS-IS/18] 1w0d 04:12:51, metric 32
                   > to 100.3.7.2 via ge-1/1/0.0
100.0.1.0/24       *[IS-IS/18] 1w0d 04:11:57, metric 30
                   > to 100.2.3.1 via ge-1/3/5.0
                   to 100.3.4.2 via ge-0/3/1.0
100.0.4.0/24       *[IS-IS/18] 1w0d 04:12:03, metric 39
                   > to 100.3.4.2 via ge-0/3/1.0
100.0.5.0/24       *[IS-IS/18] 1w0d 04:11:57, metric 64
                   > to 100.3.5.2 via ge-0/3/6.0
100.0.6.0/24       *[IS-IS/18] 1w0d 04:12:02, metric 67
                   > to 100.3.6.2 via ge-2/0/4.0
100.0.7.0/24       *[IS-IS/18] 1w0d 04:12:51, metric 45
                   > to 100.3.7.2 via ge-1/1/0.0
100.1.2.0/24       *[IS-IS/18] 06:38:55, metric 20
                   > to 100.2.3.1 via ge-1/3/5.0
100.1.4.0/24       *[IS-IS/18] 06:38:55, metric 30
                   > to 100.2.3.1 via ge-1/3/5.0
                   to 100.3.6.2 via ge-2/0/4.0
100.1.7.0/24       *[IS-IS/18] 06:38:55, metric 30
                   > to 100.2.3.1 via ge-1/3/5.0
                   to 100.3.6.2 via ge-2/0/4.0
100.2.3.0/24       *[Direct/0] 1w0d 04:13:11
                   > via ge-1/3/5.0
100.2.3.2/32       *[Local/0] 1w0d 04:13:11
                   Local via ge-1/3/5.0
100.2.4.0/24       *[IS-IS/18] 06:38:55, metric 22
                   > to 100.2.3.1 via ge-1/3/5.0
100.2.5.0/24       *[IS-IS/18] 06:38:55, metric 20
                   > to 100.2.3.1 via ge-1/3/5.0
100.2.6.0/24       *[IS-IS/18] 06:38:55, metric 22
                   > to 100.2.3.1 via ge-1/3/5.0
100.2.7.0/24       *[IS-IS/18] 06:38:55, metric 23
                   > to 100.2.3.1 via ge-1/3/5.0
100.3.4.0/24       *[Direct/0] 1w0d 04:13:10
                   > via ge-0/3/1.0
100.3.4.1/32       *[Local/0] 1w0d 04:13:10
```

```

    Local via ge-0/3/1.0
100.3.5.0/24    *[Direct/0] 1w0d 04:13:10
                > via ge-0/3/6.0
100.3.5.1/32   *[Local/0] 1w0d 04:13:10
                Local via ge-0/3/6.0
100.3.6.0/24   *[Direct/0] 1w0d 04:13:10
                > via ge-2/0/4.0
100.3.6.1/32   *[Local/0] 1w0d 04:13:10
                Local via ge-2/0/4.0
100.3.7.0/24   *[Direct/0] 1w0d 04:13:10
                > via ge-1/1/0.0
100.3.7.1/32   *[Local/0] 1w0d 04:13:10
                Local via ge-1/1/0.0
100.4.5.0/24   *[IS-IS/18] 1w0d 04:11:57, metric 23
                > to 100.3.5.2 via ge-0/3/6.0
100.6.7.0/24   *[IS-IS/18] 1w0d 04:12:02, metric 25
                > to 100.3.6.2 via ge-2/0/4.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

49.0001.0010.0100.1004/72
    *[Direct/0] 1w0d 04:14:44
    > via lo0.0

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 1w0d 04:14:47, metric 1
           Receive
1          *[MPLS/0] 1w0d 04:14:47, metric 1
           Receive
2          *[MPLS/0] 1w0d 04:14:47, metric 1
           Receive
13         *[MPLS/0] 1w0d 04:14:47, metric 1
           Receive

inet6.0: 39 destinations, 43 routes (39 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:100:0:1::/64 *[IS-IS/18] 1w0d 04:11:57, metric 30
                  > to fe80::2a0:a514:0:1749 via ge-1/3/5.0
                  to fe80::2a0:a514:0:2b49 via ge-0/3/1.0
2001:100:0:4::/64 *[IS-IS/18] 1w0d 04:12:03, metric 39
                  > to fe80::2a0:a514:0:2b49 via ge-0/3/1.0
2001:100:0:5::/64 *[IS-IS/18] 1w0d 04:11:57, metric 64
                  > to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:0:6::/64 *[IS-IS/18] 1w0d 04:12:02, metric 67
                  > to fe80::2a0:a514:0:3f49 via ge-2/0/4.0
2001:100:0:7::/64 *[IS-IS/18] 1w0d 04:12:51, metric 45
                  > to fe80::2a0:a514:0:4949 via ge-1/1/0.0
2001:100:1:2::/64 *[IS-IS/18] 1w0d 04:11:57, metric 20
                  > to fe80::2a0:a514:0:1749 via ge-1/3/5.0
                  to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:1:4::/64 *[IS-IS/18] 1w0d 04:11:57, metric 30
                  > to fe80::2a0:a514:0:1749 via ge-1/3/5.0
                  to fe80::2a0:a514:0:2b49 via ge-0/3/1.0
2001:100:1:7::/64 *[IS-IS/18] 1w0d 04:11:57, metric 30
                  > to fe80::2a0:a514:0:1749 via ge-1/3/5.0
                  to fe80::2a0:a514:0:2b49 via ge-0/3/1.0

```

```

2001:100:2:3::/64 *[Direct/0] 1w0d 04:13:00
> via ge-1/3/5.0
2001:100:2:3::2/128*[Local/0] 1w0d 04:13:11
Local via ge-1/3/5.0
2001:100:2:4::/64 *[IS-IS/18] 1w0d 04:11:57, metric 22
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:2:5::/64 *[IS-IS/18] 1w0d 04:11:57, metric 20
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:2:6::/64 *[IS-IS/18] 1w0d 04:11:57, metric 22
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:2:7::/64 *[IS-IS/18] 1w0d 04:11:57, metric 23
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:3:4::/64 *[Direct/0] 1w0d 04:12:59
> via ge-0/3/1.0
2001:100:3:4::1/128*[Local/0] 1w0d 04:13:10
Local via ge-0/3/1.0
2001:100:3:5::/64 *[Direct/0] 1w0d 04:12:59
> via ge-0/3/6.0
2001:100:3:5::1/128*[Local/0] 1w0d 04:13:10
Local via ge-0/3/6.0
2001:100:3:6::/64 *[Direct/0] 1w0d 04:12:59
> via ge-2/0/4.0
2001:100:3:6::1/128*[Local/0] 1w0d 04:13:10
Local via ge-2/0/4.0
2001:100:3:7::/64 *[Direct/0] 1w0d 04:12:59
> via ge-1/1/0.0
2001:100:3:7::1/128*[Local/0] 1w0d 04:13:10
Local via ge-1/1/0.0
2001:100:4:5::/64 *[IS-IS/18] 1w0d 04:11:57, metric 23
> to fe80::2a0:a514:0:3549 via ge-0/3/6.0
2001:100:6:7::/64 *[IS-IS/18] 1w0d 04:12:02, metric 25
> to fe80::2a0:a514:0:3f49 via ge-2/0/4.0
abcd::10:255:102:128/128
*[Direct/0] 1w0d 04:14:43
> via lo0.0
abcd::10:255:102:146/128
*[IS-IS/18] 1w0d 04:11:57, metric 40
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:2b49 via ge-0/3/1.0
abcd::10:255:102:154/128
*[IS-IS/18] 1w0d 04:12:02, metric 25
> to fe80::2a0:a514:0:3f49 via ge-2/0/4.0
abcd::10:255:102:156/128
*[IS-IS/18] 1w0d 04:11:57, metric 30
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:2b49 via ge-0/3/1.0
abcd::10:255:102:166/128
*[IS-IS/18] 1w0d 04:11:57, metric 23
> to fe80::2a0:a514:0:3549 via ge-0/3/6.0
abcd::10:255:102:172/128
*[IS-IS/18] 1w0d 04:12:03, metric 31
> to fe80::2a0:a514:0:2b49 via ge-0/3/1.0
abcd::10:255:102:178/128
*[IS-IS/18] 1w0d 04:11:57, metric 20
> to fe80::2a0:a514:0:1749 via ge-1/3/5.0
to fe80::2a0:a514:0:3549 via ge-0/3/6.0

```

```
abcd::10:255:102:180/128
      *[IS-IS/18] 1w0d 04:12:51, metric 32
      > to fe80::2a0:a514:0:4949 via ge-1/1/0.0
fe80::/64
      *[Direct/0] 1w0d 04:13:00
      > via ge-1/3/5.0
      [Direct/0] 1w0d 04:12:59
      > via ge-0/3/1.0
      [Direct/0] 1w0d 04:12:59
      > via ge-0/3/6.0
      [Direct/0] 1w0d 04:12:59
      > via ge-2/0/4.0
      [Direct/0] 1w0d 04:12:59
      > via ge-1/1/0.0
fe80::2a0:a50f:fc64:7649/128
      *[Direct/0] 1w0d 04:14:43
      > via lo0.0
fe80::2a0:a514:0:2049/128
      *[Local/0] 1w0d 04:13:11
      Local via ge-1/3/5.0
fe80::2a0:a514:0:2249/128
      *[Local/0] 1w0d 04:13:10
      Local via ge-0/3/1.0
fe80::2a0:a514:0:2349/128
      *[Local/0] 1w0d 04:13:10
      Local via ge-0/3/6.0
fe80::2a0:a514:0:2449/128
      *[Local/0] 1w0d 04:13:10
      Local via ge-2/0/4.0
fe80::2a0:a514:0:2549/128
      *[Local/0] 1w0d 04:13:10
      Local via ge-1/1/0.0
```

**Meaning** The output shows all Device R3 routes.

---

### Verifying the IS-IS Route

**Purpose** Verify the routing table of IS-IS.



**Action** From operational mode, run the **show isis route** command for Device R3.

```
user@R3> show isis route
```

```

IS-IS routing table
IPv4/IPv6 Routes
-----
Prefix          L  Version  Metric Type Interface      NH Via Backup Score
10.255.102.146/32 2    5023      40 int  ge-1/3/5.0    IPV4 R2
                  ge-0/3/1.0    IPV4 R4 0000000000200000

10.255.102.154/32 2    5023      25 int  ge-2/0/4.0    IPV4 R6
10.255.102.156/32 2    5023      30 int  ge-1/3/5.0    IPV4 R2
                  ge-2/0/4.0    IPV4 R6 0000000000000000

10.255.102.166/32 2    5023      23 int  ge-0/3/6.0    IPV4 R5
10.255.102.172/32 2    5023      31 int  ge-0/3/1.0    IPV4 R4
10.255.102.178/32 2    5023      20 int  ge-1/3/5.0    IPV4 R2
10.255.102.180/32 2    5023      32 int  ge-1/1/0.0    IPV4 R7
100.0.1.0/24      2    5023      30 int  ge-1/3/5.0    IPV4 R2
                  ge-0/3/1.0    IPV4 R4 0000000002003100

100.0.4.0/24      2    5023      39 int  ge-0/3/1.0    IPV4 R4
100.0.5.0/24      2    5023      64 int  ge-0/3/6.0    IPV4 R5
100.0.6.0/24      2    5023      67 int  ge-2/0/4.0    IPV4 R6
100.0.7.0/24      2    5023      45 int  ge-1/1/0.0    IPV4 R7
100.1.2.0/24      2    5023      20 int  ge-1/3/5.0    IPV4 R2
100.1.4.0/24      2    5023      30 int  ge-1/3/5.0    IPV4 R2
                  ge-2/0/4.0    IPV4 R6 0000000000000000

100.1.7.0/24      2    5023      30 int  ge-1/3/5.0    IPV4 R2
                  ge-2/0/4.0    IPV4 R6 0000000000000000

100.2.4.0/24      2    5023      22 int  ge-1/3/5.0    IPV4 R2
100.2.5.0/24      2    5023      20 int  ge-1/3/5.0    IPV4 R2
100.2.6.0/24      2    5023      22 int  ge-1/3/5.0    IPV4 R2
100.2.7.0/24      2    5023      23 int  ge-1/3/5.0    IPV4 R2
100.4.5.0/24      2    5023      23 int  ge-0/3/6.0    IPV4 R5
100.6.7.0/24      2    5023      25 int  ge-2/0/4.0    IPV4 R6
2001:100:0:1::/64 2    5023      30 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/1.0    IPV6 R4
2001:100:0:4::/64 2    5023      39 int  ge-0/3/1.0    IPV6 R4
2001:100:0:5::/64 2    5023      64 int  ge-0/3/6.0    IPV6 R5
2001:100:0:6::/64 2    5023      67 int  ge-2/0/4.0    IPV6 R6
2001:100:0:7::/64 2    5023      45 int  ge-1/1/0.0    IPV6 R7
2001:100:1:2::/64 2    5023      20 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/6.0    IPV6 R5
2001:100:1:4::/64 2    5023      30 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/1.0    IPV6 R4
2001:100:1:7::/64 2    5023      30 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/1.0    IPV6 R4
2001:100:2:4::/64 2    5023      22 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/6.0    IPV6 R5
2001:100:2:5::/64 2    5023      20 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/6.0    IPV6 R5
2001:100:2:6::/64 2    5023      22 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/6.0    IPV6 R5
2001:100:2:7::/64 2    5023      23 int  ge-1/3/5.0    IPV6 R2
                  ge-0/3/6.0    IPV6 R5

```

```
2001:100:4:5::/64 2 5023 23 int ge-0/3/6.0 IPV6 R5
2001:100:6:7::/64 2 5023 25 int ge-2/0/4.0 IPV6 R6
abcd::10:255:102:146/128 2 5023 40 int ge-1/3/5.0 IPV6 R2
                                ge-0/3/1.0 IPV6 R4
abcd::10:255:102:154/128 2 5023 25 int ge-2/0/4.0 IPV6 R6
abcd::10:255:102:156/128 2 5023 30 int ge-1/3/5.0 IPV6 R2
                                ge-0/3/1.0 IPV6 R4
abcd::10:255:102:166/128 2 5023 23 int ge-0/3/6.0 IPV6 R5
abcd::10:255:102:172/128 2 5023 31 int ge-0/3/1.0 IPV6 R4
abcd::10:255:102:178/128 2 5023 20 int ge-1/3/5.0 IPV6 R2
                                ge-0/3/6.0 IPV6 R5
abcd::10:255:102:180/128 2 5023 32 int ge-1/1/0.0 IPV6 R7
```

**Meaning** The output displays the routing table of IS-IS routers.

#### Verifying the Backup SPF Roots for Device R3.

---

**Purpose** Verify the potential IS-IS backup SPF roots for Device R3.

**Action** From operational mode, run the **show isis backup spf results** command for Device R3.

```
user@R3> show isis backup spf results
```

```
IS-IS level 1 SPF results:
```

```
0 nodes
```

```
IS-IS level 2 SPF results:
```

```
R0.00
```

```
Primary next-hop: ge-1/3/5, IPV4, R2, SNPA: b0:c6:9a:2a:f4:bc
```

```
Primary next-hop: ge-1/3/5, IPV6, R2, SNPA: b0:c6:9a:2a:f4:bc
```

```
Root: R4, Root Metric: 21, Metric: 18, Root Preference: 0x0
```

```
track-item: R4.04-00, track-item-isnbr: R4.00
```

```
track-item: R0.00-00, track-item-isnbr: R6.03
```

```
Eligible, Backup next-hop: ge-0/3/1, IPV4, R4, SNPA: b0:c6:9a:2a:f4:bd
```

```
Eligible, Backup next-hop: ge-0/3/1, IPV6, R4, SNPA: b0:c6:9a:2a:f4:bd
```

```
Root: R2, Root Metric: 10, Metric: 20, Root Preference: 0x0
```

```
track-item: R2.02-00, track-item-isnbr: R2.00
```

```
track-item: R1.02-00
```

```
track-item: R1.00-00, track-item-isnbr: R2.02
```

```
track-item: R0.00-00, track-item-isnbr: R1.02
```

```
Not eligible, IPV4, Reason: Primary next-hop link fate sharing
```

```
Not eligible, IPV6, Reason: Primary next-hop link fate sharing
```

```
Root: R7, Root Metric: 22, Metric: 20, Root Preference: 0x0
```

```
track-item: R7.05-00, track-item-isnbr: R7.00
```

```
track-item: R1.02-00
```

```
track-item: R1.00-00
```

```
track-item: R0.00-00, track-item-isnbr: R1.02
```

```
Eligible, Backup next-hop: ge-1/1/0, IPV4, R7, SNPA: b0:c6:9a:2a:f4:bd
```

```
Eligible, Backup next-hop: ge-1/1/0, IPV6, R7, SNPA: b0:c6:9a:2a:f4:bd
```

```
Root: R5, Root Metric: 13, Metric: 28, Root Preference: 0x0
```

```
track-item: R5.03-00, track-item-isnbr: R5.00
```

```
track-item: R4.04-00, track-item-isnbr: R4.00
```

```
track-item: R4.00-00
```

```
track-item: R0.00-00, track-item-isnbr: R6.03
```

```
Eligible, Backup next-hop: ge-0/3/6, IPV4, R5, SNPA: b0:c6:9a:2a:f4:bd
```

```
Eligible, Backup next-hop: ge-0/3/6, IPV6, R5, SNPA: b0:c6:9a:2a:f4:bd
```

```
Root: R6, Root Metric: 15, Metric: 30, Root Preference: 0x0
```

```
track-item: R7.05-00, track-item-isnbr: R7.00
```

```
track-item: R7.04-00, track-item-isnbr: R6.00
```

```
track-item: R7.00-00
```

```
track-item: R1.02-00
```

```
track-item: R1.00-00
```

```
track-item: R0.00-00, track-item-isnbr: R1.02
```

```
Eligible, Backup next-hop: ge-2/0/4, IPV4, R6, SNPA: b0:c6:9a:2a:f4:bd
```

```
Eligible, Backup next-hop: ge-2/0/4, IPV6, R6, SNPA: b0:c6:9a:2a:f4:bd
```

```
R7.00
```

```
Primary next-hop: ge-1/1/0, IPV4, R7, SNPA: b0:c6:9a:2a:f4:bd
```

```
Primary next-hop: ge-1/1/0, IPV6, R7, SNPA: b0:c6:9a:2a:f4:bd
```

```
Root: R7, Root Metric: 22, Metric: 0, Root Preference: 0x0
```

```
Not eligible, IPV4, Reason: Interface protection not configured
```

```
Not eligible, IPV6, Reason: Interface protection not configured
```

```
Root: R6, Root Metric: 15, Metric: 10, Root Preference: 0x0
```

```
track-item: R7.04-00, track-item-isnbr: R6.00
```

```
track-item: R7.00-00
```

```
. . .
```

**Meaning** The output displays the root calculations through each directly connected router.

### Verifying the Backup Selection Policy for Device R3

---

**Action** From operational mode, run the **show backup-selection** command for Device R3.

```
user@R3> show backup-selection
```

```
Prefix: 0.0.0.0/0
Interface: all
  Admin-group include-all: c1
  Admin-group include-any: c2
  Admin-group preference: c3
  Neighbor preference: 10.255.102.178
  Neighbor-tag preference: 1004
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth
Prefix: 100.0.1.0/24
Interface: all
  Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Neighbor,
Metric, Neighbor-Tag
Prefix: 100.0.7.0/24
Interface: all
  Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Neighbor,
Metric, Neighbor-Tag
```

**Meaning** The output displays the configured policies per prefix per primary next-hop interface.

**Related Documentation**

- [Understanding Backup Selection Policy for IS-IS Protocol on page 48](#)
- [backup-selection \(Protocols ISIS\) on page 457](#)

## Configuring Backup Selection Policy for the IS-IS Protocol

Support for IS-IS loop-free alternate (LFA) routes essentially adds IP fast-reroute capability for IS-IS. Junos OS precomputes multiple loop-free backup routes for all IS-IS routes. These backup routes are pre-installed in the Packet Forwarding Engine, which performs a local repair and implements the backup path when the link for a primary next hop for a particular route is no longer available. The selection of LFA is done randomly by selecting any matching LFA to progress to the given destination. This does not ensure best backup coverage available for the network. In order to choose the best LFA, Junos OS allows you to configure network-wide backup selection policies for each destination (IPv4 and IPv6) and a primary next-hop interface. These policies are evaluated based on admin-group, srlg, bandwidth, protection-type, metric, and neighbor information.

Before you begin to configure the backup selection policy for the IS-IS protocol:

- Configure the router interfaces. See the *Junos OS Network Management Administration Guide for Routing Devices*
- Configure an interior gateway protocol or static routing. See the *Junos OS Routing Protocols Library for Routing Devices*

To configure the backup selection policy for the IS-IS protocol:

1. Configure per-packet load balancing.

```
[edit policy-options]
user@host# set policy-statement ecmp term 1 then load-balance per-packet
```

2. Enable RSVP on all the interfaces.

```
[edit protocols]
user@host# set rsvp interface all
```

3. Configure administrative groups.

```
[edit protocols mpls]
user@host# set admin-groups group-name
```

4. Configure srlg values.

```
[edit routing-options]
user@host# set srlg srlg-name srlg-value srlg-value
```

5. Enable MPLS on all the interfaces.

```
[edit protocols mpls]
user@host# set interface all
```

6. Configure srlg on the interfaces.

```
[edit protocols mpls]
user@host# set interface interface-name srlg srlg-name
```

7. Configure the administrative groups on the interfaces.

```
[edit protocols mpls]
user@host# set interface interface-name admin-group group-name
```

8. Enable link protection and configure the metric value on all the interfaces.

```
[edit protocols]
user@host# set isis interface all level 2 metric 10
```

9. Apply the routing policy to all equal cost multipaths exported from the routing table to the forwarding table.

```
[edit routing-options]
user@host# set forwarding-table export ecmp
```

10. Configure the administrative group of the backup selection policy for an IP address. You can choose to exclude, include all, include any, or prefer the administrative groups from the backup path.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface interface-name
admin-group
```

- Specify the administrative group to be excluded.

```
[edit routing-options backup-selection destination ip-address interface interface-name
admin-group]
user@host# set exclude group-name
```

The backup path is not selected as the loop-free alternate (LFA) or backup nexthop if any of the links in the path have any one of the listed administrative groups.

For example, to exclude the group c1 from the administrative group:

```
[edit routing-options backup-selection destination 0.0.0.0/0 interface all
admin-group]
user@host# set exclude c1
```

- Configure all the administrative groups if each link in the backup path requires all the listed administrative groups in order to accept the path.

```
[edit routing-options backup-selection destination ip-address interface interface-name
admin-group]
user@host# set include-all group-name
```

For example, to set all the administrative groups if each link requires all the listed administrative groups in order to accept the path:

```
[edit routing-options backup-selection destination 0.0.0.0/0 interface all
 admin-group]
user@host# set include-all c2
```

- Configure any administrative group if each link in the backup path requires at least one of the listed administrative groups in order to select the path.

```
[edit routing-options backup-selection destination ip-address interface interface-name
 admin-group]
user@host# set include-any group-name
```

For example, to set any administrative group if each link in the backup path requires at least one of the listed administrative groups in order to select the path:

```
[edit routing-options backup-selection destination 0.0.0.0/0 interface all
 admin-group]
user@host# set include-any c3
```

- Define an ordered set of administrative group that specifies the preference of the backup path.  
The leftmost element in the set is given the highest preference.

```
[edit routing-options backup-selection destination ip-address interface interface-name
 admin-group]
user@host# set preference group-name
```

For example, to set an ordered set of administrative group that specifies the preference of the backup path:

```
[edit routing-options backup-selection destination 0.0.0.0/0 interface all
 admin-group]
user@host# set preference c4
```

11. Configure the backup path to allow the selection of the backup next hop only if the bandwidth is greater than or equal to the bandwidth of the primary next hop.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface interface-name
 bandwidth-greater-equal-primary
```

12. Configure the backup path to specify the metric from the one-hop neighbor or from the remote router such as an RSVP backup label-switched-path (LSP) tail-end router to the final destination.

The destination metric can be either highest or lowest.

- Configure the backup path that has the highest destination metric.

```
[edit routing-options]
```

```
user@host# set backup-selection destination ip-address interface interface-name  
dest-metric highest
```

- Configure the backup path that has the lowest destination metric.

```
[edit routing-options]  
user@host# set backup-selection destination ip-address interface interface-name  
dest-metric lowest
```

13. Configure the backup path that is a downstream path to the destination.

```
[edit routing-options]  
user@host# set backup-selection destination ip-address interface interface-name  
downstream-paths-only
```

14. Set the order of preference of the root and the destination metric during backup path selection.

The preference order can be :

- [root dest] — Backup path selection or preference is first based on the root-metric criteria. If the criteria of all the root-metric is the same, then the selection or preference is based on the dest-metric.
- [dest root] — Backup path selection or preference is first based on the dest-metric criteria. If the criteria of all the dest-metric is the same, then the selection is based on the root-metric.

```
[edit routing-options]  
user@host# set backup-selection destination ip-address interface interface-name  
metric-order root  
user@host# set backup-selection destination ip-address interface interface-name  
metric-order dest
```

15. Configure the backup path to define a list of loop-back IP addresses of the adjacent neighbors to either exclude or prefer in the backup path selection.

The neighbor can be a local (adjacent router) neighbor, remote neighbor, or any other router in the backup path.

```
[edit routing-options]  
user@host# set backup-selection destination ip-address interface interface-name  
neighbor
```

- Configure the list of neighbors to be excluded.

```
[edit routing-options backup-selection destination ip-address interface interface-name  
neighbor]  
user@host# set exclude neighbor-address
```

The backup path that has a router from the list is not selected as the loop-free alternative or backup next hop.



- Configure an ordered set of neighbors to be preferred.

```
[edit routing-options backup-selection destination ip-address interface interface-name
neighbor]
user@host# set preference neighbor-address
```

The backup path having the leftmost neighbor is selected.

16. Define the backup path per-neighbor policy, to either exclude or prefer a backup path.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface all neighbor-tag
```

- Configure to not select the backup path as the loop-free alternative or backup-next hop if any node or router with route-tag is present in the path.

```
[edit routing-options backup-selection destination ip-address interface interface-name
neighbor-tag]
user@host# set exclude route-tag
```

For example, to not select the backup path as the loop-free alternative or backup-next hop if any node or router with 1004 route-tag is present in the path:

```
[edit routing-options backup-selection destination 0.0.0.0/0 interface all
neighbor-tag]
user@host# set exclude 1004
```

- Configure the set of route tags in descending order of preference.

```
[edit routing-options backup-selection destination ip-address interface interface-name
neighbor-tag]
user@host# set preference route-tag
```

For example, to configure the set of route tags in descending order of preference:

```
[edit routing-options backup-selection destination 0.0.0.0/0 interface all
neighbor-tag]
user@host# set preference 1006
```

17. Configure the backup path to specify the required protection type of the backup path to be link, node, or node-link.

- Select the backup path that provides link protection.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface interface-name
protection-type link
```

- Select the backup path that provides node protection.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface interface-name
protection-type node
```

- Select the backup path that allows either node or link protection LFA where node-protection LFA is preferred over link-protection LFA.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface interface-name
protection-type node-link
```

- Specify the metric to the one-hop neighbor or to the remote router such as an RSVP backup label-switched-path (LSP) tail-end router.

- Select the path with highest root metric.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface all root-metric
highest
```

- Select the path with lowest root metric.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface all root-metric
lowest
```

- Configure the backup selection path to either allow or reject the common shared risk link groups (SRLGs) between the primary link and each link in the backup path.

- Configure the backup path to allow common srlgs between the primary link and each link in the backup path.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface all srlg loose
```

A backup path with a fewer number of srlg collisions is preferred.

- Configure the backup path to reject the backup path that has common srlgs between the primary link and each link in the backup path.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface all srlg strict
```

- Configure the backup path to control the order and the criteria of evaluating the backup path based on the administrative group, srlg, bandwidth, protection type, neighbor, neighbor-tag, and metric. The default order of evaluation is admin-group, srlg, bandwidth, protection-type, neighbor, neighbor-tag, and metric.

```
[edit routing-options]
user@host# set backup-selection destination ip-address interface all evaluation-order
admin-group
user@host# set backup-selection destination ip-address interface all evaluation-order
srlg
user@host# set backup-selection destination ip-address interface all evaluation-order
bandwidth
```

- Related Documentation**
- [Understanding Backup Selection Policy for IS-IS Protocol on page 48](#)

## Example: Redistributing OSPF Routes into IS-IS

---

This example shows how to redistribute OSPF routes into an IS-IS network.

- [Requirements on page 87](#)
- [Overview on page 87](#)
- [Configuration on page 88](#)
- [Verification on page 94](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview

Export policy can be applied to IS-IS to facilitate route redistribution.


Junos OS does not support the application of import policy for link-state routing protocols like IS-IS because such policies can lead to inconsistent link-state database (LSDB) entries, which in turn can result in routing inconsistencies.

In this example, OSPF routes 192.168.0/24 through 192.168.3/24 are redistributed into IS-IS area 49.0002 from Device R2.

In addition, policies are configured to ensure that Device R1 can reach destinations on the 10.0.0.44/30 network, and that Device R3 can reach destinations on the 10.0.0.36/30 network. This enables end-to-end reachability.

[Figure 9 on page 88](#) shows the topology used in this example.

Figure 9: IS-IS Route Redistribution Topology

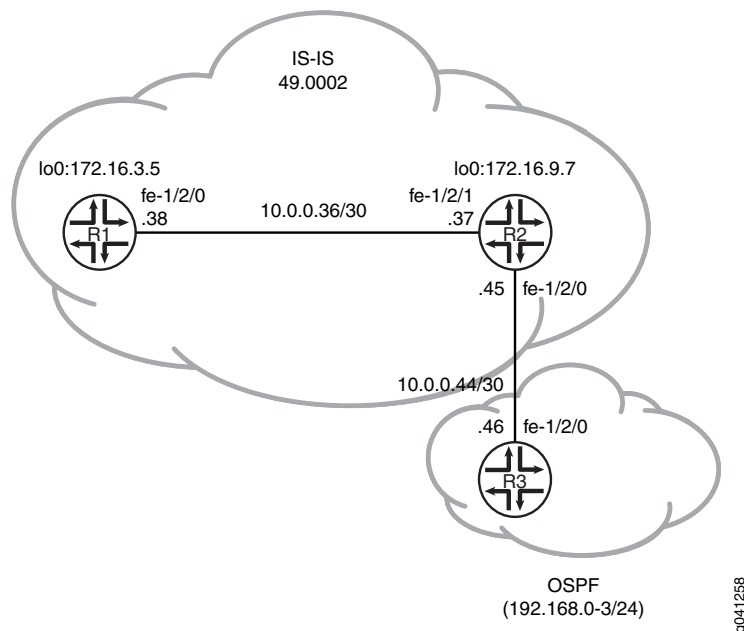

“CLI Quick Configuration” on page 88 shows the configuration for all of the devices in Figure 9 on page 88. The section “Step-by-Step Procedure” on page 89 describes the steps on Device R2. “Step-by-Step Procedure” on page 91 describes the steps on Device R3.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 0 description to-R7
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.38/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 172.16.3.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0305.00
set protocols isis interface fe-1/2/0.0
set protocols isis interface lo0.0
```

**Device R2**

```
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/0 unit 0 description to-OSPF-network
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.45/30
set interfaces lo0 unit 0 family inet address 172.16.9.7/32
set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0907.00
set protocols isis export ospf-isis
```

```

set protocols isis export send-direct-to-isis-neighbors
set protocols isis interface fe-1/2/1.0
set protocols isis interface lo0.0
set protocols ospf export send-direct-to-ospf-neighbors
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0
set protocols ospf area 0.0.0.1 interface lo0.0 passive
set policy-options policy-statement ospf-isis term 1 from protocol ospf
set policy-options policy-statement ospf-isis term 1 from route-filter 192.168.0.0/22
  longer
set policy-options policy-statement ospf-isis term 1 then accept
set policy-options policy-statement send-direct-to-isis-neighbors from protocol direct
set policy-options policy-statement send-direct-to-isis-neighbors from route-filter
  10.0.0.44/30 exact
set policy-options policy-statement send-direct-to-isis-neighbors then accept
set policy-options policy-statement send-direct-to-ospf-neighbors from protocol direct
set policy-options policy-statement send-direct-to-ospf-neighbors from route-filter
  10.0.0.36/30 exact
set policy-options policy-statement send-direct-to-ospf-neighbors then accept

```

**Device R3**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.46/30
set interfaces lo0 unit 0 family inet address 192.168.1.1/32
set interfaces lo0 unit 0 family inet address 192.168.2.1/32
set interfaces lo0 unit 0 family inet address 192.168.3.1/32
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set protocols ospf export ospf
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0
set protocols ospf area 0.0.0.1 interface lo0.0 passive
set policy-options policy-statement ospf term 1 from protocol static
set policy-options policy-statement ospf term 1 then accept
set routing-options static route 192.168.0.0/24 discard
set routing-options static route 192.168.1.0/24 discard
set routing-options static route 192.168.3.0/24 discard
set routing-options static route 192.168.2.0/24 discard

```

**Step-by-Step  
Procedure**

To configure Device R2:

1. Configure the network interfaces.

```

[edit interfaces]
user@R2# set fe-1/2/1 unit 0 description to-R5
user@R2# set fe-1/2/1 unit 0 family inet address 10.0.0.37/30
user@R2# set fe-1/2/1 unit 0 family iso
user@R2# set fe-1/2/0 unit 0 description to-OSPF-network
user@R2# set fe-1/2/0 unit 0 family inet address 10.0.0.45/30
user@R2# set lo0 unit 0 family inet address 172.16.9.7/32
user@R2# set lo0 unit 0 family iso address 49.0002.0172.0016.0907.00

```

2. Configure IS-IS on the interface facing Device R1 and the loopback interface.

```

[edit protocols isis]
user@R2# set interface fe-1/2/1.0

```

```
user@R2# set interface lo0.0
```

3. Configure the policy that enables Device R1 to reach the 10.0.0.44/30 network.

```
[edit policy-options policy-statement send-direct-to-isis-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.44/30 exact
user@R2# set then accept
```

4. Apply the policy that enables Device R1 to reach the 10.0.0.44/30 network.

```
[edit protocols isis]
user@R2# set export send-direct-to-isis-neighbors
```

5. Configure OSPF on the interfaces.

```
[edit protocols ospf]
user@R2# set area 0.0.0.1 interface fe-1/2/0.0
user@R2# set area 0.0.0.1 interface lo0.0 passive
```

6. Configure the OSPF route redistribution policy.

```
[edit policy-options policy-statement ospf-isis term 1]
user@R2# set from protocol ospf
user@R2# set from route-filter 192.168.0.0/22 longer
user@R2# set then accept
```

7. Apply the OSPF route redistribution policy to the IS-IS instance.

```
[edit protocols isis]
user@R2# set export ospf-isis
```

8. Configure the policy that enables Device R3 to reach the 10.0.0.36/30 network.

```
[edit policy-options policy-statement send-direct-to-ospf-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.36/30 exact
user@R2# set then accept
```

9. Apply the policy that enables Device R3 to reach the 10.0.0.36/30 network.

```
[edit protocols ospf]
user@R2# set export send-direct-to-ospf-neighbors
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the network interfaces.

Multiple addresses are configured on the loopback interface to simulate multiple route destinations.

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 0 family inet address 10.0.0.46/30
user@R3# set lo0 unit 0 family inet address 192.168.1.1/32
user@R3# set lo0 unit 0 family inet address 192.168.2.1/32
user@R3# set lo0 unit 0 family inet address 192.168.3.1/32
user@R3# set lo0 unit 0 family inet address 192.168.0.1/32
```

2. Configure static routes to the loopback interface addresses.

These are the routes that are redistributed into IS-IS.

```
[edit routing-options static]
user@R3# set route 192.168.0.0/24 discard
user@R3# set route 192.168.1.0/24 discard
user@R3# set route 192.168.3.0/24 discard
user@R3# set route 192.168.2.0/24 discard
```

3. Configure OSPF on the interfaces.

```
[edit protocols ospf area 0.0.0.1]
user@R3# set interface fe-1/2/0.0
user@R3# set interface lo0.0 passive
```

4. Configure the OSPF policy to export the static routes.

```
[edit policy-options policy-statement ospf term 1]
user@R3# set from protocol static
user@R3# set then accept
```

5. Apply the OSPF export policy.

```
[edit protocols ospf]
user@R3# set export ospf
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

**Device R2**

```
user@R2# show interfaces
fe-1/2/1 {
  unit 0 {
    description to-R5;
    family inet {
      address 10.0.0.37/30;
    }
    family iso;
  }
}
fe-1/2/0 {
  unit 0 {
    description to-OSPF-network;
    family inet {
      address 10.0.0.45/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 172.16.9.7/32;
    }
    family iso {
      address 49.0002.0172.0016.0907.00;
    }
  }
}
```

```
user@R2# show protocols
isis {
  export [ ospf-isis send-direct-to-isis-neighbors ];
  interface fe-1/2/1.0;
  interface lo0.0;
}
ospf {
  export send-direct-to-ospf-neighbors;
  area 0.0.0.1 {
    interface fe-1/2/0.0;
    interface lo0.0 {
      passive;
    }
  }
}
```

```
user@R2# show policy-options
policy-statement ospf-isis {
  term 1 {
    from {
      protocol ospf;
      route-filter 192.168.0.0/22 longer;
    }
    then accept;
  }
}
```



```

    }
  }
  policy-statement send-direct-to-isis-neighbors {
    from {
      protocol direct;
      route-filter 10.0.0.44/30 exact;
    }
    then accept;
  }
  policy-statement send-direct-to-ospf-neighbors {
    from {
      protocol direct;
      route-filter 10.0.0.36/30 exact;
    }
    then accept;
  }
}

```

**Device R3**

```

user@R3# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.46/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.1.1/32;
      address 192.168.2.1/32;
      address 192.168.3.1/32;
      address 192.168.0.1/32;
    }
  }
}
}

```

```

user@R3# show protocols
ospf {
  export ospf;
  area 0.0.0.1 {
    interface fe-1/2/0.0;
    interface lo0.0 {
      passive;
    }
  }
}
}

```

```

user@R3# show policy-options
policy-statement ospf {
  term 1 {
    from protocol static;
    then accept;
  }
}

```

```
}
}
```

```
user@R3# show routing-options
static {
  route 192.168.0.0/24 discard;
  route 192.168.1.0/24 discard;
  route 192.168.3.0/24 discard;
  route 192.168.2.0/24 discard;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying OSPF Route Advertisement on page 94](#)
- [Verifying Route Redistribution on page 95](#)
- [Verifying Connectivity on page 95](#)

### Verifying OSPF Route Advertisement

**Purpose** Make sure that the expected routes are advertised by OSPF.

**Action** From operational mode on Device R2, enter the **show route protocol ospf** command.

```
user@R2> show route protocol ospf
```

```
inet.0: 15 destinations, 15 routes (15 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
192.168.0.0/24    *[OSPF/150] 03:54:21, metric 0, tag 0
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.0.1/32   *[OSPF/10] 03:54:21, metric 1
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.1.0/24   *[OSPF/150] 03:54:21, metric 0, tag 0
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.1.1/32   *[OSPF/10] 03:54:21, metric 1
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.2.0/24   *[OSPF/150] 03:54:21, metric 0, tag 0
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.2.1/32   *[OSPF/10] 03:54:21, metric 1
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.3.0/24   *[OSPF/150] 03:54:21, metric 0, tag 0
                  > to 10.0.0.46 via fe-1/2/0.0
192.168.3.1/32   *[OSPF/10] 03:54:21, metric 1
                  > to 10.0.0.46 via fe-1/2/0.0
224.0.0.5/32     *[OSPF/10] 03:56:03, metric 1
                  MultiRecv
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

**Meaning** The 192.168/16 routes are advertised by OSPF.

### Verifying Route Redistribution

**Purpose** Make sure that the expected routes are redistributed from OSPF into IS-IS.

**Action** From operational mode on Device R1, enter the **show route protocol isis** command.

```
user@R1> show route protocol isis
```

```
inet.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.44/30      *[IS-IS/160] 03:45:24, metric 20
                  > to 10.0.0.37 via fe-1/2/0.0
172.16.9.7/32    *[IS-IS/15] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.0.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.0.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.1.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.1.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.2.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.2.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.3.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.3.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

**Meaning** The 192.168/16 routes are redistributed into IS-IS.

### Verifying Connectivity

**Purpose** Check that Device R1 can reach the destinations on Device R3.

**Action** From operational mode, enter the **ping** command.

```
user@R1> ping 192.168.1.1
```

```
PING 192.168.1.1 (192.168.1.1): 56 data bytes
64 bytes from 192.168.1.1: icmp_seq=0 ttl=63 time=2.089 ms
```

```
64 bytes from 192.168.1.1: icmp_seq=1 ttl=63 time=1.270 ms
64 bytes from 192.168.1.1: icmp_seq=2 ttl=63 time=2.135 ms
```

**Meaning** These results confirm that Device R1 can reach the destinations in the OSPF network.

**Related Documentation**

- [Understanding Routing Policies on page 45](#)

---

## Example: Configuring IS-IS Route Leaking from a Level 2 Area to a Level 1 Area

This example shows how to leak prefixes in an IS-IS network from a Level 2 area to a Level 1 area.

- [Requirements on page 96](#)
- [Overview on page 96](#)
- [Configuration on page 97](#)
- [Verification on page 101](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview

Every routing protocol passes routing information up or down the routing hierarchy. This bidirectional flow of routing information is known as route leaking.

By default, IS-IS protocol leaks routing information from a Level 1 area to a Level 2 area. However, to leak routing information from a Level 2 area to a Level 1 area, an export policy must be explicitly configured.


---

### Topology

In this example, Devices R3 and R4 are configured in a Level 2 area. Devices R5, R6, and R7 are configured in a Level 1 area.

[Figure 10 on page 97](#) shows the topology used in this example.

Figure 10: Route Leaking from a Level 2 Area to a Level 1 Area

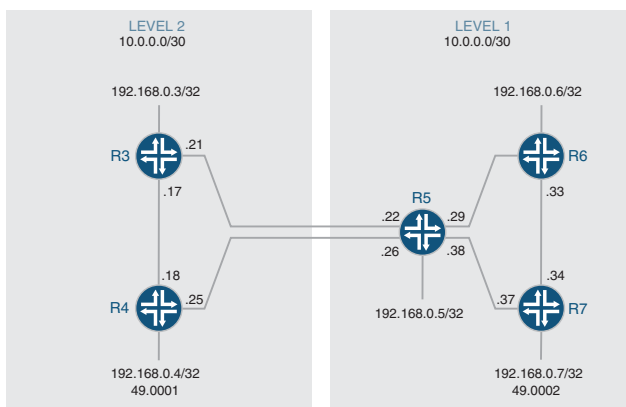

## Configuration

### Configuring Route Leaking from a Level 2 Area to a Level 1 Area

#### CLI Quick Configuration

To quickly configure route leaking from a Level 2 area to a Level 1 area, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

#### Device R3

```
set interfaces fe-1/2/0 unit 0 description to-R4
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.21/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0001.0192.0168.0003.00
set policy-options policy-statement leak-L2-to-L1 from route-filter 192.168.0.0/24 orlonger
set policy-options policy-statement leak-L2-to-L1 from protocol isis
set policy-options policy-statement leak-L2-to-L1 from level 2
set policy-options policy-statement leak-L2-to-L1 to protocol isis
set policy-options policy-statement leak-L2-to-L1 to level 1
set policy-options policy-statement leak-L2-to-L1 then accept
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
set protocols isis export leak-L2-to-L1
```

#### Device R4

```
set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
```

```

set interfaces lo0 unit 0 family iso address 49.0001.0192.0168.0004.00
set policy-options policy-statement leak-L2-to-L1 from route-filter 192.168.0.0/24 orlonger
set policy-options policy-statement leak-L2-to-L1 from protocol isis
set policy-options policy-statement leak-L2-to-L1 from level 2
set policy-options policy-statement leak-L2-to-L1 to protocol isis
set policy-options policy-statement leak-L2-to-L1 to level 1
set policy-options policy-statement leak-L2-to-L1 then accept
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
set protocols isis export leak-L2-to-L1

```

**Device R5**

```

set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R4
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R6
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.29/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/3 unit 0 description to-R7
set interfaces fe-1/2/3 unit 0 family inet address 10.0.0.38/30
set interfaces fe-1/2/3 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 2 disable
set protocols isis interface fe-1/2/3.0 level 2 disable
set protocols isis interface lo0.0 level 1 disable

```

**Device R6**

```

set interfaces fe-1/2/0 unit 0 description to-R5
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.30/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R7
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.33/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0006.00
set protocols isis interface fe-1/2/0.0 level 2 disable
set protocols isis interface fe-1/2/1.0 level 2 disable
set protocols isis interface lo0.0 level 2 disable

```

**Device R7**

```

set interfaces fe-1/2/0 unit 0 description to-R6
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.34/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 0 family iso

```

```

set interfaces lo0 unit 0 family inet address 192.168.0.7/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0007.00
set protocols isis interface fe-1/2/0.0 level 2 disable
set protocols isis interface fe-1/2/1.0 level 2 disable
set protocols isis interface lo0.0 level 2 disable

```

### Configuring Route Leaking from a Level 2 Area to a Level 1 Area

#### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure route leaking from a Level 2 area to a Level 1 area:

1. Configure the network interfaces.

Enable IS-IS on the interfaces by including the ISO address family on each interface.

```

[edit interfaces]
user@R3# set fe-1/2/0 unit 0 description to-R4
user@R3# set fe-1/2/0 unit 0 family inet address 10.0.0.17/30
user@R3# set fe-1/2/0 unit 0 family iso
user@R3# set fe-1/2/1 unit 0 description to-R5
user@R3# set fe-1/2/1 unit 0 family inet address 10.0.0.21/30
user@R3# set fe-1/2/1 unit 0 family iso

```

Similarly, configure other routers.

2. Configure two loopback interface addresses.

One address is for IPv4, and the other address is to enable the router to form adjacencies with other routers in the area.

```

[edit interfaces lo0 unit 0]
user@R3# set family inet address 192.168.0.3/32
user@R3# set family iso address 49.0001.0192.0168.0003.00

```

3. Specify the IS-IS level on a per-interface basis.

```

[edit protocols isis interface]
user@R3# set fe-1/2/0.0 level 1 disable
user@R3# set fe-1/2/1.0 level 1 disable
user@R3# set lo0.0 level 1 disable

```

4. Configure a route leaking policy on the routers configured in the Level 2 area to leak routes into the Level 1 area.

```

[edit policy-options policy-statement leak-L2-to-L1]
user@R3# set from route-filter 192.168.0.0/24 orlonger
user@R3# set from protocol isis
user@R3# set from level 2

```

```

user@R3# set to protocol isis
user@R3# set to level 1
user@R3# set then accept

```

```

[edit protocols isis]
user@R3# set export leak-L2-to-L1

```

Similarly, configure Device R4.

## Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols isis**, and **show policy-options** commands.

If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R3# show interfaces
fe-1/2/0 {
    unit 0 {
        description to-R4;
        family inet {
            address 10.0.0.17/30;
        }
        family iso;
    }
}
fe-1/2/1 {
    unit 0 {
        description to-R5;
        family inet {
            address 10.0.0.21/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.0.3/32;
        }
        family iso {
            address 49.0001.0192.0168.0003.00;
        }
    }
}

```

```

user@R3# show protocols isis
export leak-L2-to-L1;
interface fe-1/2/0.0 {
    level 1 disable;
}
interface fe-1/2/1.0 {

```



```

    level 1 disable;
  }
  interface lo0.0 {
    level 1 disable;
  }

```

```

user@R3# show policy-options
policy-statement leak-L2-to-L1 {
  from {
    protocol isis;
    level 2;
    route-filter 192.168.0.0/24 orlonger;
  }
  to {
    protocol isis;
    level 1;
  }
  then accept;
}

```

Similarly, confirm the configuration on all other routers. If you are done configuring the routers, enter **commit** from configuration mode.

## Verification

### Verifying Route Leaking from a Level 2 Area to a Level 1 Area

**Purpose** Verify that IS-IS leaks routes from a Level 2 area to a Level 1 area.

**Action** To verify that route leaking is taking place, use the following commands:

- **show isis adjacency** (to verify that the IS-IS network is up and adjacencies have been established)
  - **show isis database detail** (to verify the presence of leaked routes)
1. From operational mode on Device R3, run the **show isis adjacency** command.

```

user@R3> show isis adjacency

```

| Interface  | System | L State | Hold (secs) | SNPA            |
|------------|--------|---------|-------------|-----------------|
| fe-1/2/0.0 | R4     | 2 Up    | 7           | 0:5:85:8f:94:bd |
| fe-1/2/1.0 | R5     | 2 Up    | 7           | 0:5:85:8f:94:bd |

The output verifies that the interfaces on Device R3 are up and have established adjacencies with the connecting interfaces on Routers R4 and R5. If you don't see the interfaces being functional, see the [“Results” on page 100](#) section for troubleshooting your configuration.

2. From operational mode on Device R3, run the **show isis database detail** command.

```
user@R3> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```
R3.00-00 Sequence: 0x19, Checksum: 0x3453, Lifetime: 1078 secs
```

```
IP prefix: 192.168.0.4/32      Metric: 10 Internal Down
IP prefix: 192.168.0.5/32      Metric: 10 Internal Down
IP prefix: 192.168.0.6/32      Metric: 20 Internal Down
IP prefix: 192.168.0.7/32      Metric: 20 Internal Down
```

```
IS-IS level 2 link-state database:
```

```
R3.00-00 Sequence: 0x1c, Checksum: 0xc657, Lifetime: 1078 secs
```

```
IS neighbor: R4.02             Metric: 10
IS neighbor: R5.02             Metric: 10
IP prefix: 10.0.0.16/30         Metric: 10 Internal Up
IP prefix: 10.0.0.20/30         Metric: 10 Internal Up
IP prefix: 192.168.0.3/32       Metric: 0 Internal Up
```

```
R4.00-00 Sequence: 0x19, Checksum: 0xea13, Lifetime: 1076 secs
```

```
IS neighbor: R4.02             Metric: 10
IS neighbor: R5.03             Metric: 10
IP prefix: 10.0.0.16/30         Metric: 10 Internal Up
IP prefix: 10.0.0.24/30         Metric: 10 Internal Up
IP prefix: 192.168.0.4/32       Metric: 0 Internal Up
```

```
R4.02-00 Sequence: 0x17, Checksum: 0xecab, Lifetime: 1076 secs
```

```
IS neighbor: R3.00             Metric: 0
IS neighbor: R4.00             Metric: 0
```

```
R5.00-00 Sequence: 0x12, Checksum: 0xf4e5, Lifetime: 1076 secs
```

```
IS neighbor: R5.02             Metric: 10
IS neighbor: R5.03             Metric: 10
IP prefix: 10.0.0.20/30         Metric: 10 Internal Up
IP prefix: 10.0.0.24/30         Metric: 10 Internal Up
IP prefix: 10.0.0.28/30         Metric: 10 Internal Up
IP prefix: 10.0.0.32/30         Metric: 20 Internal Up
IP prefix: 10.0.0.36/30         Metric: 10 Internal Up
IP prefix: 192.168.0.5/32       Metric: 0 Internal Up
IP prefix: 192.168.0.6/32       Metric: 10 Internal Up
IP prefix: 192.168.0.7/32       Metric: 10 Internal Up
```

```
R5.02-00 Sequence: 0xb, Checksum: 0x2d74, Lifetime: 1076 secs
```

```
IS neighbor: R3.00             Metric: 0
IS neighbor: R5.00             Metric: 0
```

```
R5.03-00 Sequence: 0xb, Checksum: 0x6c32, Lifetime: 1076 secs
```

```
IS neighbor: R4.00             Metric: 0
IS neighbor: R5.00             Metric: 0
```

The **Down** keyword identifies the routes that have successfully leaked from the Level 2 area to the Level 1 area.

**Meaning** Route leaking from a Level 2 to a Level 1 area is functioning as expected.

## Understanding BGP Communities, Extended Communities, and Large Communities as Routing Policy Match Conditions

A *BGP community* is a group of destinations that share a common property. Community information is included as a path attribute in BGP update messages. This information identifies community members and enables you to perform actions on a group without having to elaborate upon each member. You can use community and extended communities attributes to trigger routing decisions, such as acceptance, rejection, preference, or redistribution.

You can assign community tags to non-BGP routes through configuration (for static, aggregate, or generated routes) or an import routing policy. These tags can then be matched when BGP exports the routes.

A community value is a 32-bit field that is divided into two main sections. The first 16 bits of the value encode the AS number of the network that originated the community, while the last 16 bits carry a unique number assigned by the AS. This system attempts to guarantee a globally unique set of community values for each AS in the Internet. Junos OS uses a notation of **as-number:community-value**, where each value is a decimal number. The AS values of 0 and 65,535 are reserved, as are all of the community values within those AS numbers. Each community, or set of communities, is given a name within the **[edit policy-options]** configuration hierarchy. The name of the community uniquely identifies it to the routing device and serves as the method by which routes are categorized. For example, a route with a community value of 64510:1111 might belong to the community named **AS64510-routes**. The community name is also used within a routing policy as a match criterion or as an action. The command syntax for creating a community is: **policy-options community name members [community-ids]**. The **community-ids** are either a single community value or multiple community values. When more than one value is assigned to a community name, the routing device interprets this as a logical AND of the community values. In other words, a route must have all of the configured values before being assigned the community name.

The regular community attribute is four octets. Networking enhancements, such as VPNs, have functionality requirements that can be satisfied by an attribute such as a community. However, the 4-octet community value does not provide enough expansion and flexibility to accommodate VPN requirements. This leads to the creation of extended communities. An extended community is an 8-octet value that is also divided into two main sections. The first 2 octets of the community encode a type field while the last 6 octets carry a unique set of data in a format defined by the type field. Extended communities provide a larger range for grouping or categorizing communities.

The BGP extended communities attribute format has three fields: **type:administrator:assigned-number**. The routing device expects you to use the words **target** or **origin** to represent the type field. The administrator field uses a decimal number for the AS or an IPv4 address, while the assigned number field expects a decimal number no larger than the size of the field (65,535 for 2 octets or 4,294,967,295 for 4 octets).

When specifying community IDs for standard and extended community attributes, you can use UNIX-style regular expressions. The only exception is for VPN import policies

(**vrf-import**), which do not support regular expressions for the extended communities attribute.

Regular BGP communities attributes are a variable length attribute consisting of a set of one or more 4-byte values that was split into 16 bit values. The most significant word is interpreted as an AS number and least significant word is a locally defined value assigned by the operator of the AS. Since the adoption of 4-byte ASNs, the 4-byte BGP regular community and 6-byte BGP extended community can no longer support BGP community attributes. Operators often encode AS number in the local portion of the BGP community that means that sometimes the format of the community is ASN:ASN. With the 4-byte ASN, you need 8-bytes to encode it. Although BGP extended community permits a 4-byte AS to be encoded as the global administrator field, the local administrator field has only 2-byte of available space. Thus, 6-byte extended community attribute is also unsuitable. To overcome this, Junos OS allows you to configure optional transitive path attribute - a 12-byte BGP large community that provides the most significant 4-byte value to encode autonomous system number as the global administrator and the remaining two 4-byte assigned numbers to encode the local values as defined in RFC 8092. You can configure BGP large community at the **[edit policy-options community community-name members]** and **[edit routing-options static route ip-address community]** hierarchy levels. The BGP large community attributes format has four fields: **large:global administrator:assigned number:assigned number**.



**NOTE:** The length of the BGP large communities attribute value should be a non-zero multiple of 12.

**Related  
Documentation**

- [Understanding How to Define BGP Communities and Extended Communities](#)
- [How BGP Communities and Extended Communities Are Evaluated in Routing Policy Match Conditions](#)
- [Example: Configuring a Routing Policy That Removes BGP Communities](#)
- [Example: Configuring Communities in a Routing Policy](#)
- [Example: Configuring Extended Communities in a Routing Policy](#)
- [Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS on page 104](#)

---

## Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS

---

This example defines a policy that takes BGP routes from the **Edu** community and places them into IS-IS with a metric of 63.

- [Requirements on page 105](#)
- [Overview on page 105](#)

- [Configuration on page 105](#)
- [Verification on page 113](#)


Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

[Figure 11 on page 105](#) shows the topology used in this example.

*Figure 11: Redistributing BGP Routes with a Specific Community Tag into IS-IS*

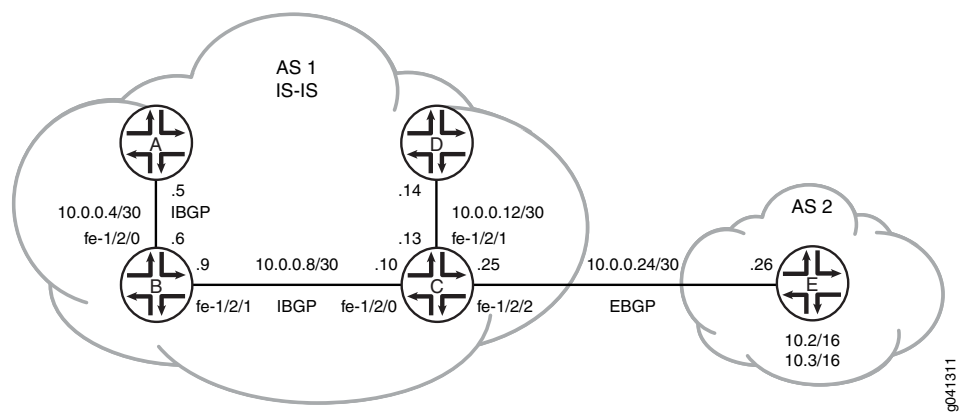

In this example, Device A, Device B, Device C, and Device D are in autonomous system (AS) 1 and are running IS-IS. All of the AS 1 devices, except Device D, are running internal BGP (IBGP).

Device E is in AS 2 and has an external BGP (EBGP) peering session with Device C. Device E has two static routes, 10.2.0.0/16 and 10.3.0.0/16. These routes are tagged with the Edu 2:5 community attribute and are advertised by way of EBGP to Device C.

Device C accepts the BGP routes that are tagged with the Edu 2:5 community attribute, redistributes the routes into IS-IS, and applies an IS-IS metric of 63 to these routes.

[“CLI Quick Configuration” on page 105](#) shows the configuration for all of the devices in [Figure 11 on page 105](#). The section [“Step-by-Step Procedure” on page 107](#) describes the steps on Device C and Device E.

Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device A** `set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.5/30`  
`set interfaces fe-1/2/0 unit 0 family iso`

```

set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.1
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 1

```

**Device B**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.2
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.2
set routing-options autonomous-system 1

```

**Device C**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.3
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group external-peers type external
set protocols bgp group external-peers export send-isis-and-direct
set protocols bgp group external-peers peer-as 2
set protocols bgp group external-peers neighbor 10.0.0.26
set protocols isis export Edu-to-isis
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 2 passive
set protocols isis interface lo0.0
set policy-options policy-statement Edu-to-isis term 1 from protocol bgp
set policy-options policy-statement Edu-to-isis term 1 from community Edu
set policy-options policy-statement Edu-to-isis term 1 then metric 63

```

```

set policy-options policy-statement Edu-to-isis term 1 then accept
set policy-options policy-statement send-isis-and-direct term 1 from protocol isis
set policy-options policy-statement send-isis-and-direct term 1 from protocol direct
set policy-options policy-statement send-isis-and-direct term 1 from route-filter
  10.0.0.0/16 orlonger
set policy-options policy-statement send-isis-and-direct term 1 from route-filter
  192.168.0.0/16 orlonger
set policy-options policy-statement send-isis-and-direct term 1 then accept
set policy-options community Edu members 2:5
set routing-options router-id 192.168.0.3
set routing-options autonomous-system 1

```

**Device D**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.4
set routing-options autonomous-system 1

```

**Device E**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.26/30
set interfaces lo0 unit 7 family inet address 192.168.0.5/32 primary
set interfaces lo0 unit 7 family inet address 10.2.0.1/32
set interfaces lo0 unit 7 family inet address 10.3.0.1/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers export statics
set protocols bgp group external-peers peer-as 1
set protocols bgp group external-peers neighbor 10.0.0.25
set policy-options policy-statement statics from protocol static
set policy-options policy-statement statics then community add Edu
set policy-options policy-statement statics then accept
set policy-options community Edu members 2:5
set routing-options static route 10.2.0.0/16 reject
set routing-options static route 10.2.0.0/16 install
set routing-options static route 10.3.0.0/16 reject
set routing-options static route 10.3.0.0/16 install
set routing-options router-id 192.168.0.5
set routing-options autonomous-system 2

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device E:

1. Configure the interfaces.

```

[edit interfaces]
user@E# set fe-1/2/0 unit 0 family inet address 10.0.0.26/30

```

```

user@E# set lo0 unit 7 family inet address 192.168.0.5/32 primary
user@E# set lo0 unit 7 family inet address 10.2.0.1/32
user@E# set lo0 unit 7 family inet address 10.3.0.1/32

```

2. Configure the **statics** policy, which adds the **Edu** community attribute to the static routes.

```

[edit policy-options]
user@E# set policy-statement statics from protocol static
user@E# set policy-statement statics then community add Edu
user@E# set policy-statement statics then accept
user@E# set community Edu members 2:5

```

3. Configure EBGp and apply the **statics** policy.

```

[edit protocols bgp group external-peers]
user@E# set type external
user@E# set export statics
user@E# set peer-as 1
user@E# set protocols bgp group external-peers neighbor 10.0.0.25

```

4. Configure the static routes.

```

[edit routing-options static]
user@E# set route 10.2.0.0/16 reject
user@E# set route 10.2.0.0/16 install
user@E# set route 10.3.0.0/16 reject
user@E# set route 10.3.0.0/16 install

```

5. Configure the router ID and the AS number.

```

[edit routing-options]
user@E# set router-id 192.168.0.5
user@E# set autonomous-system 2

```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device C:

1. Configure the interfaces.

```

[edit interfaces]
user@C# set fe-1/2/0 unit 0 family inet address 10.0.0.10/30
user@C# set fe-1/2/0 unit 0 family iso
user@C# set fe-1/2/1 unit 0 family inet address 10.0.0.13/30
user@C# set fe-1/2/1 unit 0 family iso

```



```

user@C# set fe-1/2/2 unit 0 family inet address 10.0.0.25/30
user@C# set fe-1/2/2 unit 0 family iso
user@C# set lo0 unit 0 family inet address 192.168.0.3/32
user@C# set lo0 unit 0 family iso address 49.0002.0192.0168.0003.00

```

2. Configure IBGP.

```

[edit protocols bgp group int]
user@C# set type internal
user@C# set local-address 192.168.0.3
user@C# set neighbor 192.168.0.1
user@C# set neighbor 192.168.0.2

```

3. Configure the Edu-to-isis policy, which redistributes the Edu-tagged BGP routes learned from Device E and applies a metric of 63.

```

[edit policy-options]
user@C# set policy-statement Edu-to-isis term 1 from protocol bgp
user@C# set policy-statement Edu-to-isis term 1 from community Edu
user@C# set policy-statement Edu-to-isis term 1 then metric 63
user@C# set policy-statement Edu-to-isis term 1 then accept
user@C# set community Edu members 2:5

```

4. Enable IS-IS on the interfaces, and apply the Edu-to-isis policy.

```

[edit protocols isis]
user@C# set export Edu-to-isis
user@C# set interface fe-1/2/0.0 level 1 disable
user@C# set interface fe-1/2/1.0 level 1 disable
user@C# set interface fe-1/2/2.0 level 1 disable
user@C# set interface fe-1/2/2.0 level 2 passive
user@C# set interface lo0.0

```

5. Configure the send-isis-and-direct policy, which redistributes routes to Device E, through EBGP.

Without this policy, Device E would not have connectivity to the networks in AS 1.

```

[edit policy-options policy-statement send-isis-and-direct term 1]
user@C# set from protocol isis
user@C# set from protocol direct
user@C# set from route-filter 10.0.0.0/16 orlonger
user@C# set from route-filter 192.168.0.0/16 orlonger
user@C# set then accept

```

6. Configure EBGP and apply the send-isis-and-direct policy.

```

[edit protocols bgp group external-peers]
user@C# set type external

```

```

user@C# set export send-isis-and-direct
user@C# set peer-as 2
user@C# set neighbor 10.0.0.26

```

7. Configure the router ID and the autonomous system (AS) number.

```

[edit routing-options]
user@C# set router-id 192.168.0.3
user@C# set autonomous-system 1

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

**Device E**

```

user@E# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.26/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.5/32 {
        primary;
      }
      address 10.2.0.1/32;
      address 10.3.0.1/32;
    }
  }
}

```

```

user@E# show protocols
bgp {
  group external-peers {
    type external;
    export statics;
    peer-as 1;
    neighbor 10.0.0.25;
  }
}

```

```

user@E# show policy-options
policy-statement statics {
  from protocol static;
  then {

```

```

        community add Edu;
        accept;
    }
}
community Edu members 2:5;

```

```

user@E# show routing-options
static {
    route 10.2.0.0/16 {
        reject;
        install;
    }
    route 10.3.0.0/16 {
        reject;
        install;
    }
}
router-id 192.168.0.5;
autonomous-system 2;

```

**Device C**

```

user@C# show interfaces
fe-1/2/0 {
    unit 0 {
        family inet {
            address 10.0.0.10/30;
        }
        family iso;
    }
}
fe-1/2/1 {
    unit 0 {
        family inet {
            address 10.0.0.13/30;
        }
        family iso;
    }
}
fe-1/2/2 {
    unit 0 {
        family inet {
            address 10.0.0.25/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.0.3/32;
        }
        family iso {
            address 49.0002.0192.0168.0003.00;
        }
    }
}

```

```
}  
}
```

```
user@C# show protocols  
bgp {  
  group int {  
    type internal;  
    local-address 192.168.0.3;  
    neighbor 192.168.0.1;  
    neighbor 192.168.0.2;  
  }  
  group external-peers {  
    type external;  
    export send-isis-and-direct;  
    peer-as 2;  
    neighbor 10.0.0.26;  
  }  
}  
isis {  
  export Edu-to-isis;  
  interface fe-1/2/0.0 {  
    level 1 disable;  
  }  
  interface fe-1/2/1.0 {  
    level 1 disable;  
  }  
  interface fe-1/2/2.0 {  
    level 1 disable;  
    level 2 passive;  
  }  
  interface lo0.0;  
}
```

```
user@C# show policy-options  
policy-statement Edu-to-isis {  
  term 1 {  
    from {  
      protocol bgp;  
      community Edu;  
    }  
    then {  
      metric 63;  
      accept;  
    }  
  }  
}  
policy-statement send-isis-and-direct {  
  term 1 {  
    from {  
      protocol [ isis direct ];  
      route-filter 10.0.0.0/16 orlonger;  
      route-filter 192.168.0.0/16 orlonger;  
    }  
  }  
}
```

```

        then accept;
    }
}
community Edu members 2:5;

```

```

user@C# show routing-options
router-id 192.168.0.3;
autonomous-system 1;

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

### Verifying the IS-IS Neighbor

**Purpose** Verify that the BGP routes from Device E are communicated on the IS-IS network in AS 1.

**Action** From operational mode, enter the **show route protocol isis** command.

```

user@D> show route protocol isis

inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.4/30      * [IS-IS/18] 22:30:53, metric 30
                 > to 10.0.0.13 via fe-1/2/0.0
10.0.0.8/30      * [IS-IS/18] 22:30:53, metric 20
                 > to 10.0.0.13 via fe-1/2/0.0
10.0.0.24/30     * [IS-IS/18] 03:31:21, metric 20
                 > to 10.0.0.13 via fe-1/2/0.0
10.2.0.0/16     * [IS-IS/165] 02:36:31, metric 73
                 > to 10.0.0.13 via fe-1/2/0.0
10.3.0.0/16     * [IS-IS/165] 02:36:31, metric 73
                 > to 10.0.0.13 via fe-1/2/0.0
192.168.0.1/32   * [IS-IS/18] 03:40:28, metric 30
                 > to 10.0.0.13 via fe-1/2/0.0
192.168.0.2/32   * [IS-IS/18] 22:30:53, metric 20
                 > to 10.0.0.13 via fe-1/2/0.0
192.168.0.3/32   * [IS-IS/18] 22:30:53, metric 10
                 > to 10.0.0.13 via fe-1/2/0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

**Meaning** As expected, the 10.2.0.0/16 and 10.3.0.0/16 routes are in Device D's routing table as IS-IS external routes with a metric of 73. If Device C had not added 63 to the metric, Device D would have a metric of 10 for these routes.

Related Documentation • [Advertising LSPs into IGPs](#)

## IS-IS Extensions to Support Route Tagging

To control the transmission of routes into IS-IS, or to control transmission of IS-IS routes between different IS-IS levels, you can tag routes with certain attributes. IS-IS routes can carry these attributes, which the routing policies can use to export and import routes between different IS-IS levels. A sub-TLV to the IP prefix TLV is used to carry the tag or attribute on the routes.



**NOTE:** Route tagging does not work when IS-IS traffic engineering is disabled.

```
protocols {
  isis {
    export tag-lo0;
  }
}
policy-options {
  policy-statement tag-lo0 {
    from {
      interface lo0.0;
    }
    then {
      accept;
      tag 200;
    }
  }
}
```

You can verify that the tag has been correctly applied by using the **show isis database extensive** command. In the command output, look for the **Administrative tag** field.

After verifying that the routes are tagged correctly, you can apply a route leaking policy to match against the presence of administrative tags, rather than specifying a list of route filters.

```
protocols {
  isis {
    export leak-tagged-L2-to-L1;
  }
}
policy-options {
  policy-statement leak-tagged-L2-to-L1 {
    from {
      tag 200;
      protocol isis;
      level 2;
    }
    to {
```

```
protocol isis;  
  level 1;  
}  
then accept;  
}  
}
```

**Related  
Documentation**

- [Example: Configuring IS-IS Route Leaking from a Level 2 Area to a Level 1 Area on page 96](#)

## Example: Configuring a Routing Policy to Prioritize IS-IS Routes

In a network with a large number of IS-IS routes, it can be useful to control the order in which routes are updated in response to a network topology change. This example shows how to define a routing policy to prioritize some IS-IS routes over others. In the event of an IS-IS topology change, high priority prefixes are updated in the routing table first, followed by medium and then low priority prefixes. Internet Service Providers (ISP) can use this feature to ensure faster convergence for important customers.

- [Requirements on page 115](#)
- [Overview on page 115](#)
- [Configuration on page 116](#)
- [Verification on page 122](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

This example uses the following hardware and software components:

- Three routers that can be a combination of M Series, MX Series, or T Series routers
- Junos OS Release 17.1 or later on the device

### Overview

Beginning with Junos OS Release 17.1, you can prioritize or reject IS-IS routes that are installed in the routing table. Use the **reject** policy option to reject routes from a specific prefix or routes marked with a particular tag.

You can prioritize IS-IS routes for better convergence and to provide differentiated services. In a network with a large number of IGP prefixes with BGP Layer 3 VPN or label-based pseudowire service established on top of some IGP prefixes, it is important to control the order in which routes get updated in the forwarding table. You can configure an import policy and use a route tag or filter the routes based on their prefix before setting a priority of **high**, **medium**, or **low** as per your network requirements. The IS-IS protocol downloads routes to the rpd routing table based on the configured priority. If you do not configure an import policy, all routes are set to a medium priority by default.

An IS-IS import policy can be used to set priority or to filter IS-IS external routes based on the following criteria:

**Prefix**—Use **route-filter** policy option to filter known prefixes.

**Route Tag**—Use **tag** policy option to assign a specific priority for prefixes that contain a particular tag.




**NOTE:** If an IS-IS import policy is applied that results in a reject terminating action for a non-external route, then the reject action is ignored and the route is accepted anyway. By default, such a route is now installed in the routing table with a priority of low. This behavior prevents traffic black holes, that is, silently discarded traffic, by ensuring consistent routing. However, you can use the reject policy option to reject routes based on the prefix or the configured tag.



**CAUTION:** You might see an increase in micro loop traffic as order of route download changes.

In [Figure 12 on page 116](#), Router R1 is connected to Router R3 via Router R2. We need to set a high priority to a route to Router R3 to ensure quicker convergence. An import routing policy is configured on Router R1, which sets a high priority to routes connecting to Router R3. Routes matching 203.0.113.3/32 are installed first because they have a priority of high. LDP imports routes and their configure priority from IS-IS. This route is restored first in the event of a network topology change.

*Figure 12: Example: Configuring a Routing Policy to prioritize IS-IS Routes*

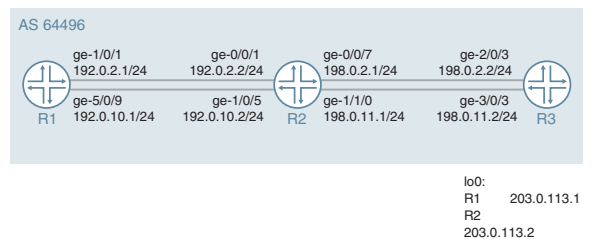

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter commit from configuration mode.

#### Router R1

```
set interfaces ge-1/0/1 unit 0 description R1->R2
set interfaces ge-1/0/1 unit 0 family inet address 192.0.2.1/24
set interfaces ge-1/0/1 unit 0 family isis
```



```

set interfaces ge-1/0/1 unit 0 family inet6 address 2001:db8:1:2::1/64
set interfaces ge-1/0/1 unit 0 family mpls
set interfaces ge-5/0/9 unit 0 description R1->R2
set interfaces ge-5/0/9 unit 0 family inet address 192.0.10.1/24
set interfaces ge-5/0/9 unit 0 family iso
set interfaces ge-5/0/9 unit 0 family inet6 address 2001:db8:1:1::1/64
set interfaces ge-5/0/9 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0103.0000.0010.00
set interfaces lo0 unit 0 family inet6 address 2001:db8:1:1::1/128
set interfaces lo0 unit 0 family mpls
set protocols mpls ipv6-tunneling
set protocols mpls interface ge-5/0/9.0
set protocols mpls interface ge-1/0/1.0
set protocols isis level 1 disable
set protocols isis interface ge-1/0/1.0
set protocols isis interface ge-5/0/9.0
set protocols isis interface lo0.0 passive
set protocols ldp interface ge-1/0/1.0
set protocols ldp interface ge-5/0/9.0
set protocols ldp interface lo0.0
set policy-options policy-statement test_rf term t1 from route-filter 203.0.113.3/32 exact
set policy-options policy-statement test_rf term t1 then priority high
set protocols isis import test_rf
set routing-options router-id 203.0.113.1
set routing-options autonomous-system 64496

```

**Router R2**

```

set interfaces ge-0/0/1 unit 0 description R2->R1
set interfaces ge-0/0/1 unit 0 family inet address 192.0.2.2/24
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family inet6 address 2001:db8:1:2::2/64
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/7 unit 0 description R2->R3
set interfaces ge-0/0/7 unit 0 family inet address 198.0.2.1/24
set interfaces ge-0/0/7 unit 0 family iso
set interfaces ge-0/0/7 unit 0 family inet6 address 2001:db8:1:2::1/64
set interfaces ge-0/0/7 unit 0 family mpls
set interfaces ge-1/0/5 unit 0 description R2->R1
set interfaces ge-1/0/5 unit 0 family inet address 192.0.10.2/24
set interfaces ge-1/0/5 unit 0 family iso
set interfaces ge-1/0/5 unit 0 family inet6 address 2001:db8:1:1::2/64
set interfaces ge-1/0/5 unit 0 family mpls
set interfaces ge-1/1/0 unit 0 family inet address 198.0.10.1/24
set interfaces ge-1/1/0 unit 0 family iso
set interfaces ge-1/1/0 unit 0 family inet6 address 2001:db8::1:1/64
set interfaces ge-1/1/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0103.0000.0030.00
set interfaces lo0 unit 0 family inet6 address 2001:db8:2:2::1/128
set interfaces lo0 unit 0 family mpls
set protocols mpls interface ge-1/0/5.0
set protocols mpls interface ge-0/0/1.0
set protocols mpls interface ge-1/1/0.0

```

```
set protocols mpls interface ge-0/0/7.0
set protocols isis level 1 disable
set protocols isis interface ge-0/0/1.0
set protocols isis interface ge-0/0/7.0
set protocols isis interface ge-1/0/5.0
set protocols isis interface ge-1/1/0.0
set protocols isis interface lo0.0 passive
set protocols ldp interface ge-0/0/1.0
set protocols ldp interface ge-0/0/7.0
set protocols ldp interface ge-1/0/5.0
set protocols ldp interface ge-1/1/0.0
set protocols ldp interface lo0.0
set routing-options router-id 203.0.113.2
set routing-options autonomous-system 64496
```

**Router R3**

```
set interfaces ge-2/0/3 unit 0 description R3->R2
set interfaces ge-2/0/3 unit 0 family inet address 198.1.2.2/24
set interfaces ge-2/0/3 unit 0 family iso
set interfaces ge-2/0/3 unit 0 family inet6 address 2001:db8:1:2::2/64
set interfaces ge-2/0/3 unit 0 family mpls
set interfaces ge-3/0/10 unit 0 description R3->R4
set interfaces ge-3/0/0 unit 0 family inet address 198.0.1.2/24
set interfaces ge-3/0/0 unit 0 family iso
set interfaces ge-3/0/0 unit 0 family inet6 address 2001:db8::1:1::2/64
set interfaces ge-3/0/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0103.0000.0020.00
set interfaces lo0 unit 0 family inet6 address 2001:db8:3:3::3/128
set interfaces lo0 unit 0 family mpls
set protocols mpls ipv6-tunneling
set protocols mpls interface ge-3/0/0.0
set protocols mpls interface ge-2/0/3.0
set protocols isis level 1 disable
set protocols isis interface ge-2/0/3.0
set protocols isis interface ge-3/0/0.0
set protocols isis interface lo0.0 passive
set protocols ldp interface ge-2/0/3.0
set protocols ldp interface ge-3/0/0.0
set protocols ldp interface lo0.0
set policy-options policy-statement add_tag term t1 from route-filter 203.0.113.3/32 exact
set policy-options policy-statement add_tag term t1 then tag 18
set protocols isis export add_tag
set routing-options router-id 203.0.113.3
set routing-options autonomous-system 64496
```

## Configuring Router R1

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router R1:



**NOTE:** Repeat this procedure for other routers after modifying the appropriate interface names, addresses, and other parameters.

1. Configure the interfaces with IPv4 and IPv6 addresses.

```
[edit interfaces]
user@R1# set ge-1/0/1 unit 0 description R1->R2
user@R1# set ge-1/0/1 unit 0 family inet address 192.0.2.1/24
user@R1# set ge-1/0/1 unit 0 family iso
user@R1# set ge-1/0/1 unit 0 family inet6 address 2001:db8:1:2::1/64
user@R1# set ge-1/0/1 unit 0 family mpls

user@R1# set ge-1/0/1 unit 0 description R1->R2
user@R1# set ge-5/0/9 unit 0 family inet address 192.0.10.1/24
user@R1# set ge-5/0/9 unit 0 family iso
user@R1# set ge-5/0/9 unit 0 family inet6 address 2001:db8:1:1::1/64
user@R1# set ge-5/0/9 unit 0 family mpls
```

2. Configure the loopback address.

```
[edit interfaces]
user@R1# set lo0 unit 0 family inet address 203.0.113.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0103.0000.0010.00
user@R1# set lo0 unit 0 family inet6 address 2001:db8:1:1::1/128
user@R1# set lo0 unit 0 family mpls
```

3. Configure MPLS.

```
[edit protocols]
user@R1# set mpls ipv6-tunneling
user@R1# set mpls interface ge-5/0/9.0
user@R1# set mpls interface ge-1/0/1.0
```

4. Enable IS-IS protocol on the interfaces.

```
[edit protocols]
user@R1# set isis level 1 disable
user@R1# set isis interface ge-1/0/1.0
user@R1# set isis interface ge-5/0/9.0
```

```
user@R1# set isis interface lo0.0 passive
user@R1# set isis import test_rf
```

5. Configure LDP protocol on the interfaces.

```
[edit protocols]
user@R1# set ldp interface ge-1/0/1.0
user@R1# set ldp interface ge-5/0/9.0
user@R1# set ldp interface lo0.0
```

6. Define a policy to prioritize IS-IS routes to Router R3. .

```
[edit policy-options]
user@R1# set policy-statement test_rf term t1 from route-filter 203.0.113.3/32 exact
user@R1# set policy-statement test_rf term t1 then priority high
```

7. Configure the router ID and autonomous system (AS) number.

```
[edit routing--options]
user@R1# set routing-options router-id 203.0.113.1
user@R1# set routing-options autonomous-system 64496
```

## Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R1> show interfaces
ge-1/0/1 {
  unit 0 {
    family inet {
      address 192.0.2.1/24;
    }
    family iso;
    family inet6 {
      address 2001:db8:1:2::1/64;
    }
    family mpls;
  }
}
ge-5/0/9 {
  unit 0 {
    family inet {
      address 192.0.2.1/24;
    }
    family iso;
```

```

    family inet6 {
        address 2001:db8:1::1/64;
    }
    family mpls;
}
lo0 {
    unit 0 {
        family inet {
            address 203.0.113.1/32;
        }
        family iso {
            address 49.0002.0103.0000.0010.00;
        }
        family inet6 {
            address 2001:db8:1::1/128;
        }
        family mpls;
    }
}

```

```

[edit]
user@R1> show protocols
mpls {
    ipv6-tunneling;
    interface ge-5/0/9.0;
    interface ge-1/0/1.0;
}
isis {
    import test_rf;
    level 1 disable;
    interface ge-1/0/1.0;
    interface ge-5/0/9.0;
    interface lo0.0 {
        passive;
    }
}
ldp {
    interface ge-1/0/1.0;
    interface ge-5/0/9.0;
    interface lo0.0;
}

```

```

[edit]
user@R1> show routing-options
router-id 203.0.113.1;
autonomous-system 64496;

```

```

user@R1> sshow configuration policy-options
policy-statement test_rf {
    term t1 {
        from {
            route-filter 203.0.113.3/32 exact;

```

```
    }  
    then priority high;  
  }  
}
```

## Verification

- [Verifying the Priority for LDP Routes on page 122](#)
- [Verifying the Priority of IS-IS Routes on page 124](#)

### Verifying the Priority for LDP Routes

---

**Purpose** Verify that LDP has inherits route 203.0.113.3 from IS-IS protocol.

**Action** From operational mode, run the **show route extensive** command on Router R1.

```
user@R1> show route 203.0.113.3 extensive
inet.0: 26 destinations, 26 routes (26 active, 0 holddown, 0 hidden)

203.0.113.3/32 (1 entry, 1 announced)
  State: <FlashAll>
TSI:
KRT in-kernel 203.0.113.3/32 -> {16.1.2.2}
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Router, Next hop index: 0
    Address: 0x4a1f43c
    Next-hop reference count: 4
    Next hop: 16.1.2.2 via ge-1/0/1.0, selected
    Session Id: 0x0
    Next hop: 16.1.1.2 via ge-5/0/9.0
    Session Id: 0x0
    State: <Active Int HighPriority>
    Local AS: 64496
    Age: 59 Metric: 20
    Validation State: unverified
    ORR Generation-ID: 0
    Tag: 18
    Task: IS-IS
    Announcement bits (2): 0-KRT 4-LDP
    AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

203.0.113.3/32 (1 entry, 1 announced)
  State: <FlashAll>
  *LDP Preference: 9
    Next hop type: Router, Next hop index: 0
    Address: 0x4a1e55c
    Next-hop reference count: 2
    Next hop: 16.1.2.2 via ge-1/0/1.0, selected
    Label operation: Push 299776
    Label TTL action: prop-ttl
    Load balance label: Label 299776: None;
    Label element ptr: 0x4b99100
    Label parent element ptr: 0x0
    Label element references: 2
    Label element child references: 0
    Label element lsp id: 0
    Session Id: 0x0
    Next hop: 16.1.1.2 via ge-5/0/9.0
    Label operation: Push 299776
    Label TTL action: prop-ttl
    Load balance label: Label 299776: None;
    Label element ptr: 0x4b99100
    Label parent element ptr: 0x0
    Label element references: 2
    Label element child references: 0
    Label element lsp id: 0
    Session Id: 0x0
    State:<Active Int HighPriority>
    Local AS: 64496
```

```

Age: 59 Metric: 1
Validation State: unverified
Task: LDP
Announcement bits (1): 2-Resolve tree 1
AS path: I
Secondary Tables: inet6.3

```

**Meaning** The output shows that LDP inherits the route 203.0.113.3, with priority **high** from IS-IS.

### Verifying the Priority of IS-IS Routes

**Purpose** Verify that the priority is set for route 203.0.113.3 in IS-IS.

**Action** user@R1> show isis route download-priority

```

IS-IS routing table          Current version: L1: 0 L2: 122
IPv4/IPv6 Routes
-----
Prefix          L Version  Metric Type Interface      NH   Via
  Backup Score
203.0.113.3/32  2  122   20 int ge-1/0/1.0  IPV4 R2
                  ge-5/0/9.0  IPV4 R2
203.0.113.2/32          2    122    10 int ge-1/0/1.0    IPV4 R2
                        ge-5/0/9.0    IPV4 R2
198.1.1.0/24           2    122    20 int ge-1/0/1.0    IPV4 R2
                        ge-5/0/9.0    IPV4 R2
198.1.2.0/24           2    122    20 int ge-1/0/1.0    IPV4 R2
                        ge-5/0/9.0    IPV4 R2
2001:db8:2:2::1/128    2    122    10 int ge-1/0/1.0    IPV6 R2
                        ge-5/0/9.0    IPV6 R2
2001:db8:3:3::3/128    2    122    20 int ge-1/0/1.0    IPV6 R2
                        ge-5/0/9.0    IPV6 R2
2001:db8:1:1::/64      2    122    20 int ge-1/0/1.0    IPV6 R2
                        ge-5/0/9.0    IPV6 R2
2001:db8:1:2::/64      2    122    20 int ge-1/0/1.0    IPV6 R2
                        ge-5/0/9.0    IPV6 R2

```

**Meaning** The routes are displayed in the order of the set priorities. Route 203.0.113.3, which is set with **high** priority is displayed at the very top followed by routes with medium or low priority.

**Related Documentation**

- [import \(Protocols IS-IS\) on page 491](#)
- [show isis route download priority on page 703](#)
- [show isis route on page 698](#)



## Configuring Overloading of Stub Networks

---

Starting in Junos OS Release 18.3R1, new configuration options **external-prefixes** and **internal-prefixes** are available at the **[edit protocols isis overload]** hierarchy level to control overload of internal prefixes, external prefixes or both internal and external prefixes as per network requirement. The user can choose not to receive any traffic for internal and external prefixes advertised by the overloaded IS-IS routers unless the router is the only node in the network which hosts the prefix. In previous Junos OS releases, overloaded IS-IS routers continued to receive traffic for prefixes even if the user did not want to receive traffic for directly connected prefixes.

Related •  
Documentation



## CHAPTER 5

# Configuring IS-IS Bidirectional Forwarding Detection

- [Understanding BFD for IS-IS on page 127](#)
- [Example: Configuring BFD for IS-IS on page 129](#)
- [Understanding BFD Authentication for IS-IS on page 136](#)
- [Configuring BFD Authentication for IS-IS on page 138](#)
- [Example: Configuring BFD Authentication for IS-IS on page 141](#)

## Understanding BFD for IS-IS

---

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. The failure detection timers for BFD have shorter time limits than the failure detection mechanisms of IS-IS, providing faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. For example, the timers can adapt to a higher value if the adjacency fails, or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (RX) interval by two if the local BFD instance is the reason for the session flap. The transmission (TX) interval is increased by two if the remote BFD instance is the reason for the session flap.

You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.



**NOTE:** Starting with Junos OS Release 16.1R1, you can configure IS-IS BFD sessions for IPv6 by including the `bfd-liveness-detection` statement at the `[edit protocols isis interface interface-name family inet|inet6]` hierarchy level.

- For interfaces that support both IPv4 and IPv6 routing, the `bfd-liveness-detection` statement must be configured separately for each inet family.
- BFD over IPv6 link local address is currently not distributed because IS-IS uses link local addresses for forming adjacencies.
- BFD sessions over IPv6 must not have the same aggressive detection intervals as IPv4 sessions.
- BFD IPv6 sessions with detection intervals less than 2.5 seconds are currently not supported when nonstop active routing (NSR) is enabled.

To detect failures in the network, the set of statements in [Table 3 on page 128](#) are used in the configuration.

**Table 3: Configuring BFD for IS-IS**

| Statement                                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>bfd-liveness-detection</code>                    | Enable failure detection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <code>minimum-interval<br/>milliseconds</code>         | <p>Specify the minimum transmit and receive intervals for failure detection.</p> <p>This value represents the minimum interval at which the local router transmits hellos packets as well as the minimum interval at which the router expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number from 1 through 255,000 milliseconds. You can also specify the minimum transmit and receive intervals separately.</p> <p><b>NOTE:</b> BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.</p> <p>Depending on your network environment, these additional recommendations might apply:</p> <ul style="list-style-type: none"> <li>• For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.</li> <li>• For very large-scale network deployments with a large number of BFD sessions, please contact Juniper Networks customer support for more information.</li> <li>• For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with nonstop active routing configured, the minimum interval recommendations are unchanged and depend only on your network deployment.</li> </ul> |
| <code>minimum-receive-interval<br/>milliseconds</code> | <p>Specify only the minimum receive interval for failure detection.</p> <p>This value represents the minimum interval at which the local router expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number from 1 through 255,000 milliseconds.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Table 3: Configuring BFD for IS-IS (continued)

| Statement                                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>multiplier number</b>                            | Specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down.<br><br>The default is 3, and you can configure a value from 1 through 225.                                                                                                                                                                                                                             |
| <b>no-adaptation</b>                                | Disable BFD adaptation.<br><br>In Junos OS Release 9.0 and later, you can specify that the BFD sessions not adapt to changing network conditions.<br><br><b>NOTE:</b> We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.                                                                                                                                 |
| <b>threshold</b>                                    | Specify the threshold for the following: <ul style="list-style-type: none"> <li>Adaptation of the detection time<br/>When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a system log message are sent.</li> <li>Transmit interval</li> </ul> <b>NOTE:</b> The threshold value must be greater than the minimum transmit interval multiplied by the multiplier number. |
| <b>transmit-interval</b><br><b>minimum-interval</b> | Specify the minimum transmit interval for failure detection.<br><br>This value represents the minimum interval at which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value from 1 through 255,000 milliseconds.                                                                                                                               |
| <b>version</b>                                      | Specify the BFD version used for detection.<br><br>The default is to have the version detected automatically.                                                                                                                                                                                                                                                                                                                      |



**NOTE:** You can trace BFD operations by including the `traceoptions` statement at the `[edit protocols bfd]` hierarchy level.

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

#### Related Documentation

- [Example: Configuring BFD for IS-IS on page 129](#)
- [Understanding BFD Authentication for IS-IS on page 136](#)

## Example: Configuring BFD for IS-IS

This example describes how to configure the Bidirectional Forwarding Detection (BFD) protocol to detect failures in an IS-IS network.



**NOTE:** BFD is not supported with ISIS for IPV6 on QFX10000 series switches.

- [Requirements on page 130](#)
- [Overview on page 130](#)
- [Configuration on page 130](#)
- [Verification on page 134](#)

## Requirements

Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 14](#) for information about the required IS-IS configuration.

This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

## Overview

This example shows two routers connected to each other. A loopback interface is configured on each router. IS-IS and BFD protocols are configured on both routers.

[Figure 13 on page 130](#) shows the sample network.

*Figure 13: Configuring BFD for IS-IS*

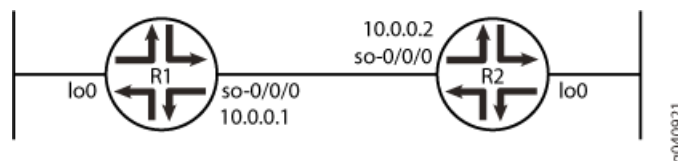

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Router R1

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 5
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 2
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 3
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
  minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```

## Router R2

```

set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 6
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 3
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 4
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
  minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.



**NOTE:** To simply configure BFD for IS-IS, only the minimum-interval statement is required. The BFD protocol selects default parameters for all the other configuration statements when you use the `bfd-liveness-detection` statement without specifying any parameters.



**NOTE:** You can change parameters at any time without stopping or restarting the existing session. BFD automatically adjusts to the new parameter value. However, no changes to BFD parameters take place until the values resynchronize with each BFD peer.

To configure BFD for IS-IS on Routers R1 and R2:

1. Enable BFD failure detection for IS-IS.

```

[edit protocols isis]
user@R1# set interface so-0/0/0 bfd-liveness-detection

```

```

[edit protocols isis]
user@R2# set interface so-0/0/0 bfd-liveness-detection

```

2. Configure the threshold for the adaptation of the detection time, which must be greater than the multiplier number multiplied by the minimum interval.

```

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set detection-time threshold 5

```

```

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set detection-time threshold 6

```

3. Configure the minimum transmit and receive intervals for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-interval 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-interval 3
```

4. Configure only the minimum receive interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-receive-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-receive-interval 1
```

5. Disable BFD adaptation.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set no-adaptation
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set no-adaptation
```

6. Configure the threshold for the transmit interval, which must be greater than the minimum transmit interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval threshold 3
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval threshold 4
```

7. Configure the minimum transmit interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval minimum-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval minimum-interval 1
```

8. Configure the multiplier number, which is the number of hello packets not received by the neighbor that causes the originating interface to be declared down.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set multiplier 2
```



```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set multiplier 2
```

9. Configure the BFD version used for detection.

The default is to have the version detected automatically.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set version automatic
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set version automatic
```

## Results

From configuration mode, confirm your configuration by issuing the **show protocols isis interface** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

user@R1# show protocols isis interface so-0/0/0

```
bfd-liveness-detection {
  version automatic;
  minimum-interval 2;
  minimum-receive-interval 1;
  multiplier 2;
  no-adaptation;
  transmit-interval {
    minimum-interval 1;
    threshold 3;
  }
  detection-time {
    threshold 5;
  }
}
...
```

user@R2# show protocols isis interface so-0/0/0

```
bfd-liveness-detection {
  version automatic;
  minimum-interval 3;
  minimum-receive-interval 1;
  multiplier 2;
  no-adaptation;
  transmit-interval {
    minimum-interval 1;
    threshold 4;
  }
  detection-time {
    threshold 6;
  }
}
```

```
}  
...
```

## Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1 and R2 on page 134](#)
- [Verifying That IS-IS Is Configured on page 134](#)
- [Verifying That BFD Is configured on page 135](#)

### Verifying the Connection Between Routers R1 and R2

**Purpose** Make sure that Routers R1 and R2 are connected to each other.

**Action** Ping the other router to check the connectivity between the two routers as per the network topology.

```
user@R1> ping 10.0.0.2
```

```
PING 10.0.0.2 (10.0.0.2): 56 data bytes  
64 bytes from 10.0.0.2: icmp_seq=0 ttl=64 time=1.367 ms  
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.662 ms  
64 bytes from 10.0.0.2: icmp_seq=2 ttl=64 time=1.291 ms  
^C  
--- 10.0.0.2 ping statistics ---  
3 packets transmitted, 3 packets received, 0% packet loss  
round-trip min/avg/max/stddev = 1.291/1.440/1.662/0.160 ms
```

```
user@R2> ping 10.0.0.1
```

```
PING 10.0.0.1 (10.0.0.1): 56 data bytes  
64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.287 ms  
64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=1.310 ms  
64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.289 ms  
^C  
--- 10.0.0.1 ping statistics ---  
3 packets transmitted, 3 packets received, 0% packet loss  
round-trip min/avg/max/stddev = 1.287/1.295/1.310/0.010 ms
```

**Meaning** Routers R1 and R2 are connected to each other.

### Verifying That IS-IS Is Configured

**Purpose** Make sure that the IS-IS instance is running on both routers.

**Action** Use the **show isis database** statement to check if the IS-IS instance is running on both routers, R1 and R2.

```
user@R1> show isis database
```

```
IS-IS level 1 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4a571  0x30c5    1195 L1 L2
R2.00-00    0x4a586  0x4b7e    1195 L1 L2
R2.02-00    0x330ca1 0x3492    1196 L1 L2
  3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4a856  0x5db0    1194 L1 L2
R2.00-00    0x4a89d  0x149b    1194 L1 L2
R2.02-00    0x1fb2ff 0xd302    1194 L1 L2
  3 LSPs
```

```
user@R2> show isis database
```

```
IS-IS level 1 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4b707  0xcc80    1195 L1 L2
R2.00-00    0x4b71b  0xeb37    1198 L1 L2
R2.02-00    0x33c2ce 0xb52d    1198 L1 L2
  3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4b9f2  0xee70    1192 L1 L2
R2.00-00    0x4ba41  0x9862    1197 L1 L2
R2.02-00    0x3      0x6242    1198 L1 L2
  3 LSPs
```

**Meaning** IS-IS is configured on both routers, R1 and R2.

### Verifying That BFD Is configured

**Purpose** Make sure that the BFD instance is running on both routers, R1 and R2.

**Action** Use the **show bfd session detail** statement to check if BFD instance is running on the routers.

```
user@R1> show bfd session detail
```

```
Address          State      Interface    Detect   Transmit
10.0.0.2         Up         so-0/0/0     Time    Interval  Multiplier
                2.000     1.000        2
Client ISIS R2, TX interval 0.001, RX interval 0.001
Client ISIS R1, TX interval 0.001, RX interval 0.001
Session down time 00:00:00, previous up time 00:00:15
Local diagnostic NbrSignal, remote diagnostic NbrSignal
```

```
Remote state AdminDown, version 1
Router 3, routing table index 17
```

```
1 sessions, 2 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps
```

```
user@R2> show bfd session detail
```

| Address  | State | Interface | Detect Time | Transmit Interval | Multiplier |
|----------|-------|-----------|-------------|-------------------|------------|
| 10.0.0.1 | Up    | so-0/0/0  | 2.000       | 1.000             | 2          |

```
Client ISIS R2, TX interval 0.001, RX interval 0.001
Session down time 00:00:00, previous up time 00:00:05
Local diagnostic NbrSignal, remote diagnostic NbrSignal
Remote state AdminDown, version 1
Router 2, routing table index 15
```

```
1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps
```

**Meaning** BFD is configured on Routers R1 and R2 for detecting failures in the IS-IS network.

**Related Documentation**

- [Understanding BFD for IS-IS on page 127](#)

## Understanding BFD Authentication for IS-IS

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when running BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IS-IS. BFD authentication is only supported in the domestic image and is not available in the export image.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 137](#)
- [Security Authentication Keychains on page 137](#)
- [Strict Versus Loose Authentication on page 138](#)

## BFD Authentication Algorithms

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords might be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

## Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session,

and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

## Strict Versus Loose Authentication

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

### Related Documentation

- [Example: Configuring BFD Authentication for IS-IS on page 141](#)

---

## Configuring BFD Authentication for IS-IS

Beginning with Junos OS Release 9.6, you can configure authentication for BFD sessions running over IS-IS. Routing instances are also supported. Only three steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the IS-IS protocol.
2. Associate the authentication keychain with the IS-IS protocol.
3. Configure the related security authentication keychain.

The following sections provide instructions for configuring and viewing BFD authentication on IS-IS:

- [Configuring BFD Authentication Parameters on page 138](#)
- [Viewing Authentication Information for BFD Sessions on page 140](#)

## Configuring BFD Authentication Parameters

To configure BFD authentication:

1. Specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on an IS-IS route or routing instance.

```
[edit]
user@host# set protocols isis interface if1-isis bfd-liveness-detection authentication
algorithm keyed-sha-1
```



**NOTE:** Nonstop active routing (NSR) is not supported with the meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

2. Specify the keychain to be used to associate BFD sessions on the specified IS-IS route or routing instance with the unique security authentication keychain attributes.

This should match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit]
user@host# set protocols isis interface if1-isis bfd-liveness-detection authentication
keychain bfd-isis
```



**NOTE:** The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

3. Specify the unique security authentication information for BFD sessions:
  - The matching keychain name as specified in Step 2.
  - At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
  - The secret data used to allow access to the session.
  - The time at which the authentication key becomes active, *yyyy-mm-dd.hh:mm:ss*.

```
[edit security]
user@host# set authentication-key-chains key-chain bfd-sr4 key 53 secret
$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm start-time 2009-06-14.10:00:00
```

4. (Optional) Specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

```
[edit]
user@host> set protocols isis interface if1-isis bfd-liveness-detection authentication
loose-check
```

5. (Optional) View your configuration using the **show bfd session detail** or **show bfd session extensive** command.
6. Repeat these steps to configure the other end of the BFD session.



**NOTE:** BFD authentication is only supported in the domestic image and is not available in the export image.

## Viewing Authentication Information for BFD Sessions

You can view the existing BFD authentication configuration using the **show bfd session detail** and **show bfd session extensive** commands.

The following example shows BFD authentication configured for the if1-isis interface. It specifies the keyed SHA-1 authentication algorithm and a keychain name of **bfd-isis**. The authentication keychain is configured with two keys. Key 1 contains the secret data “\$9\$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm” and a start time of June 1, 2009, at 9:46:02 AM PST. Key 2 contains the secret data “\$9\$a5jiKW9L.reP38ny.TszF2/9” and a start time of June 1, 2009, at 3:29:20 PM PST.

```
[edit protocols isis]
interface if1-isis {
  bfd-liveness-detection {
    authentication {
      algorithm keyed-sha-1;
      key-chain bfd-isis;
    }
  }
}
[edit security]
authentication key-chains {
  key-chain bfd-isis {
    key 1 {
      secret "$9$ggaJDmPQ6/tJgF/AtREVsyPsnCtUHm";
      start-time "2009-6-1.09:46:02 -0700";
    }
    key 2 {
      secret "$9$a5jiKW9L.reP38ny.TszF2/9";
      start-time "2009-6-1.15:29:20 -0700";
    }
  }
}
```

If you commit these updates to your configuration, you see output similar to the following. In the output for the **show bfd sessions detail** command, **Authenticate** is displayed to indicate that BFD authentication is configured. For more information about the configuration, use the **show bfd sessions extensive** command. The output for this command provides the keychain name, the authentication algorithm and mode for each client in the session, and the overall BFD authentication configuration status, keychain name, and authentication algorithm and mode.

### show bfd sessions detail

```
user@host# show bfd session detail
```

```
Detect    Transmit
```



```

Address          State      Interface    Time    Interval  Multiplier
10.9.1.29        Up        ge-4/0/0.0   0.600   0.200     3
Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3, Authenticate

Session up time 3d 00:34, previous down time 00:00:01
Local diagnostic NbrSignal, remote diagnostic AdminDown
Remote state Up, version 1

1 sessions, 1 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

```

### show bfd sessions extensive

```

user@host# show bfd session extensive

Address          State      Interface    Detect    Transmit
10.9.1.29        Up        ge-4/0/0.0   0.600    0.200     3
Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3, Authenticate

      keychain bfd-isis, algo keyed-sha-1, mode strict
      Session up time 00:04:42
      Local diagnostic None, remote diagnostic NbrSignal
      Remote state Up, version 1
      Replicated
      Min async interval 0.300, min slow interval 1.000
      Adaptive async TX interval 0.300, RX interval 0.300
      Local min TX interval 0.300, minimum RX interval 0.300, multiplier 3
      Remote min TX interval 0.300, min RX interval 0.300, multiplier 3
      Local discriminator 2, remote discriminator 2
      Echo mode disabled/inactive
      Authentication enabled/active, keychain bfd-isis, algo keyed-sha-1, mode strict

1 sessions, 1 clients

Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

```

### Related Documentation

- [Understanding BFD Authentication for IS-IS on page 136](#)
- [Example: Configuring BFD for IS-IS on page 129](#)
- [Understanding BFD for IS-IS on page 127](#)

## Example: Configuring BFD Authentication for IS-IS

This example shows how to configure BFD authentication for IS-IS.

- [Requirements on page 142](#)
- [Overview on page 142](#)
- [Configuration on page 142](#)
- [Verification on page 144](#)

## Requirements


Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 14](#) for information about the required IS-IS configuration.

## Overview

In this example, a BFD authentication keychain is configured with meticulous keyed MD5 authentication.

[Figure 14 on page 142](#) shows the topology used in this example.

*Figure 14: IS-IS BFD Authentication Topology*

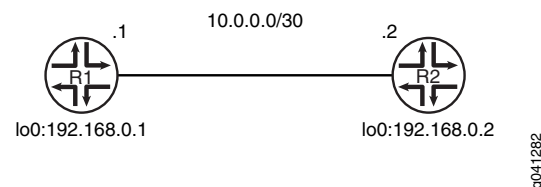

[“CLI Quick Configuration” on page 142](#) shows the configuration for both of the devices in [Figure 14 on page 142](#). The section [“Step-by-Step Procedure” on page 143](#) describes the steps on Device R1.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device R1

```

set security authentication-key-chains key-chain secret123 description for-isis-bfd
set security authentication-key-chains key-chain secret123 key 1 secret $ABC123
set security authentication-key-chains key-chain secret123 key 1 start-time
  "2012-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 2 secret $ABC123
set security authentication-key-chains key-chain secret123 key 2 start-time
  "2013-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 3 secret $ABC123
set security authentication-key-chains key-chain secret123 key 3 start-time
  "2014-5-31.13:00:00 -0700"
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain
  secret123
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm
  meticulous-keyed-md5
  
```

#### Device R2

```

set security authentication-key-chains key-chain secret123 description for-isis-bfd
set security authentication-key-chains key-chain secret123 key 1 secret $ABC123
set security authentication-key-chains key-chain secret123 key 1 start-time
  "2012-5-31.13:00:00 -0700"
  
```

```

set security authentication-key-chains key-chain secret123 key 2 secret $ABC123
set security authentication-key-chains key-chain secret123 key 2 start-time
"2013-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 3 secret $ABC123
set security authentication-key-chains key-chain secret123 key 3 start-time
"2014-5-31.13:00:00 -0700"
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain
secret123
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm
meticulous-keyed-md5

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS BFD authentication:

1. Configure the authentication keychain.

```

[edit security authentication-key-chains key-chain secret123]
user@R1# set description for-isis-bfd
user@R1# set key 1 secret "$ABC123"
user@R1# set key 1 start-time "2012-5-31.13:00:00 -0700"
user@R1# set key 2 secret "$ABC123"
user@R1# set key 2 start-time "2013-5-31.13:00:00 -0700"
user@R1# set key 3 secret "$ABC123"
user@R1# set key 3 start-time "2014-5-31.13:00:00 -0700"

```

2. Enable BFD.

```

[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set minimum-interval 100

```

3. Apply the authentication keychain.

```

[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication key-chain secret123

```

4. Set the authentication type.

```

[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication algorithm meticulous-keyed-md5

```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R1# show protocols
isis {
  interface ge-1/2/0.0 {
    bfd-liveness-detection {
      minimum-interval 100;
      authentication {
        key-chain secret123;
        algorithm meticulous-keyed-md5;
      }
    }
  }
}

```

```

user@R1# show security
authentication-key-chains {
  key-chain secret123 {
    description for-isis-bfd;
    key 1 {
      secret "$ABC123";
      start-time "2012-5-31.13:00:00 -0700";
    }
    key 2 {
      secret "$ABC123";
      start-time "2013-5-31.13:00:00 -0700";
    }
    key 3 {
      secret "$ABC123";
      start-time "2014-5-31.13:00:00 -0700";
    }
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

### Verifying IS-IS BFD Authentication

**Purpose** Verify the status of IS-IS BFD authentication.

**Action** From operational mode, enter the **show bfd session extensive** command.

```
user@R1> show bfd session extensive
```

| Address                                                            | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|--------------------------------------------------------------------|-------|------------|-------------|-------------------|------------|
| 10.0.0.2                                                           | Down  | ge-1/2/0.0 | 0.300       | 1.000             | 3          |
| Client ISIS L1, TX interval 0.100, RX interval 0.100, Authenticate |       |            |             |                   |            |
| keychain secret123, algo meticulous-keyed-md5, mode strict         |       |            |             |                   |            |
| Client ISIS L2, TX interval 0.100, RX interval 0.100, Authenticate |       |            |             |                   |            |
| keychain secret123, algo meticulous-keyed-md5, mode strict         |       |            |             |                   |            |
| Session down time 00:35:13, previous up time 00:12:17              |       |            |             |                   |            |

```
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 2, routing table index 85
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 1.000, minimum RX interval 0.100, multiplier 3
Remote min TX interval 0.100, min RX interval 0.100, multiplier 3
Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive, no-absorb, no-refresh
Authentication enabled/active, keychain secret123, algo meticulous-keyed-md5,
mode strict
  Session ID: 0x100101

1 sessions, 2 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 10.0 pps
```

**Meaning** The output shows that BFD authentication is enabled on IS-IS Level 1 and Level 2.

- Related Documentation**
- [Configuring BFD Authentication for IS-IS on page 138](#)
  - [Example: Configuring BFD for IS-IS on page 129](#)
  - [Understanding BFD for IS-IS on page 127](#)



## CHAPTER 6

# Configuring IS-IS Flood Groups

- [Understanding IS-IS Flood Group on page 147](#)
- [Example: Configuring IS-IS Flood Group on page 147](#)

## Understanding IS-IS Flood Group

---

IS-IS supports flood-group. This feature limits link-state packet data unit (PDU) flooding over IS-IS interfaces.

A link-state packet (LSP) that is not self-originated will be flooded only through the interface belonging to the flood group that has the configured area ID in the LSP. This helps minimize the routes and topology information, thus ensuring optimal convergence. You can segregate both Level 1 and Level 2 IS-IS routers into flood groups by using area IDs as tags to identify a flood group. Configure interfaces with specific area IDs to modify the flooding behavior as per your requirements. To enable IS-IS flood group, include the **flood-group *flood-group-area-ID*** statement at the **[edit protocols isis interface]** hierarchy level.

### Related Documentation

- [IS-IS Overview on page 3](#)
- [Example: Configuring IS-IS Flood Group on page 147](#)

## Example: Configuring IS-IS Flood Group

---

### Requirements

This example uses the following hardware and software components:

- Four MX Series routers.
- Junos OS Release 16.2 or future release.

Before you begin:


1. Configure IS-IS routing protocol on the routers.
2. Configure IS-IS interfaces with specific area IDs to modify the flood behavior as per your requirements.

## Overview

Starting with Junos OS Release 16.2, IS-IS has support for flood-group.

### Topology

In this topology, flood-group is configured on router R2.

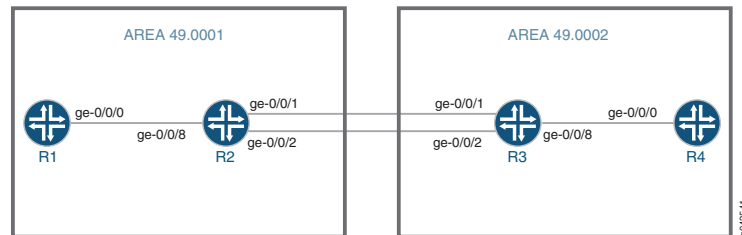

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

- ```

R1
set interfaces ge-0/0/0 description "Connected To R2"
set interfaces ge-0/0/0 unit 0 family inet address 81.1.3.3/24
set interfaces ge-0/0/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 81.3.3.3/32
set interfaces lo0 unit 0 family iso address 49.0001.0810.0300.3003.00
set protocols isis interface all
set protocols isis interface fxp0.0 disable

R2
set interfaces ge-0/0/1 description "Connected To R3"
set interfaces ge-0/0/1 unit 0 family inet address 30.1.1.1/32
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/2 description "Connected To R3"
set interfaces ge-0/0/2 unit 0 family inet address 40.1.1.1/32
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/8 description "Connected To R1"
set interfaces ge-0/0/8 unit 0 family inet address 81.1.3.1/24
set interfaces ge-0/0/8 unit 0 family iso
set interfaces lo0 unit 0 family inet address 81.1.1.1/32
set interfaces lo0 unit 0 family iso address 49.0001.0810.0100.1001.00
set protocols isis interface all
set protocols isis interface fxp0.0 disable

R3
set interfaces ge-0/0/1 description "Connected To R2"
set interfaces ge-0/0/1 unit 0 family inet address 30.1.1.2/32
set interfaces ge-0/0/1 unit 0 family iso

```



```

set interfaces ge-0/0/2 description "Connected To R2"
set interfaces ge-0/0/2 unit 0 family inet address 40.1.1.2/32
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/8 description "Connected To R4"
set interfaces ge-0/0/8 unit 0 family inet address 81.2.4.2/24
set interfaces ge-0/0/8 unit 0 family iso
set interfaces lo0 unit 0 family inet address 81.2.2.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0810.0200.2002.00
set protocols isis interface all
set protocols isis interface fxp0.0 disable

```

R4

```

set interfaces ge-0/0/0 description "Connected To R3"
set interfaces ge-0/0/0 unit 0 family inet address 81.2.4.4/24
set interfaces ge-0/0/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 81.4.4.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0810.0400.4004.00
set protocols isis interface all
set protocols isis interface fxp0.0 disable

```



**NOTE:** 1. commit after every configuration.

2. Following is the output before configuring *flood-group* on R2. You will see the link-state packets (LSPs) of R1, R2, R3 and R4.

From operational mode, run the **show isis database** command on router R1.

user@R1> show isis database

```

user@R1# run show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
R2.00-00              0x3    0xea11    1175 L1 L2
R1.00-00              0x5    0x34f8    1197 L1 L2
R1.02-00              0x2      0         0 L1 L2
  3 LSPs

IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
R2.00-00              0x1b   0x2ccc    1175 L1 L2
R3.00-00              0x21   0xb15e     865 L1 L2
R3.02-00              0xb    0xdac3     839 L1 L2
R3.03-00              0xc    0xd1ca     865 L1 L2
R3.04-00              0x8    0x33ff     618 L1 L2
R1.00-00              0xb    0x2cfa    1197 L1 L2
R1.02-00              0x8      0         0 L1 L2
R4.00-00              0xc    0x40c3     621 L1 L2

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

Flood-group functionality check:

1. Deactivate protocol IS-IS on routers R1 and R2

```
[edit protocols]
user@R1# deactivate protocols isis
user@R1# commit
```

```
[edit protocols]
user@R2# deactivate protocols isis
user@R2# commit
```

2. Configure flood-group on interface of router R2: **set protocol isis interface *interface* flood-group *flood-group-area-ID***

```
[edit protocols]
user@R2# set protocol isis interface ge-0/0/8.0 flood-group 49.0001
user@R2# commit
```

3. Activate protocol IS-IS on routers R1 and R2 and wait until the adjacency comes up.

```
[edit protocols]
user@R1# activate protocols isis
user@R1# commit
```

```
[edit protocols]
user@R2# activate protocols isis
user@R2# commit
```

## Verification

### Verifying the IS-IS Database

**Purpose** Verify IS-IS database.

**Action**



**NOTE:** Following is the output after configuring *flood-group* on R2. **show isis database** on router R1 will show LSPs from router R1 and router R2 only. *flood-group* is applicable to non self-originated LSPs only.

From operational mode, run the **show isis database** command on router R1.

```
user@R1> show isis database
```

```
user@R1# run show isis database
```

```
IS-IS level 1 link-state database:
```

| LSP ID   | Sequence | Checksum | Lifetime | Attributes |
|----------|----------|----------|----------|------------|
| R2.00-00 | 0x2      | 0x43b9   | 1123     | L1 L2      |
| R1.00-00 | 0x2      | 0x8e60   | 1125     | L1 L2      |
| R1.02-00 | 0x1      | 0x88e9   | 1125     | L1 L2      |

3 LSPs

```
IS-IS level 2 link-state database:
```

| LSP ID   | Sequence | Checksum | Lifetime | Attributes |
|----------|----------|----------|----------|------------|
| R2.00-00 | 0x1a     | 0x7485   | 1148     | L1 L2      |
| R1.00-00 | 0x9      | 0xddaf   | 1150     | L1 L2      |
| R1.02-00 | 0x1      | 0x88e9   | 1150     | L1 L2      |

3 LSPs

- Related Documentation**
- [Understanding IS-IS Flood Group on page 147](#)
  - [show isis database on page 665](#)



## CHAPTER 7

# Configuring IS-IS Multitopology Routing and IPv6 Support

- [IS-IS Multicast Topologies Overview on page 153](#)
- [Example: Configuring IS-IS Multicast Topology on page 155](#)
- [Understanding Dual Stacking of IPv4 and IPv6 Unicast Addresses on page 170](#)
- [Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses on page 171](#)
- [Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177](#)
- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178](#)

## IS-IS Multicast Topologies Overview

---

Most multicast routing protocols perform a reverse-path forwarding (RPF) check on the source of multicast data packets. If a packet comes in on the interface that is used to send data to the source, the packet is accepted and forwarded to one or more downstream interfaces. Otherwise, the packet is discarded and a notification is sent to the multicast routing protocol running on the interface.

In certain instances, the unicast routing table used for the RPF check is also the table used for forwarding unicast data packets. Thus, unicast and multicast routing are congruent. In other cases, where it is preferred that multicast routing be independent of unicast routing, the multicast routing protocols are configured to perform the RPF check using an alternate unicast routing table `inet.2`.

You can configure IS-IS to calculate an alternate IPv4 multicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to `inet.2`. The IS-IS interface metrics for the multicast topology can be configured independently of the unicast metrics. You can also selectively disable interfaces from participating in the multicast topology while continuing to participate in the regular unicast topology. This enables you to exercise control over the paths that multicast data takes through a network so that it is independent of unicast data paths. You can also configure IS-IS to calculate an alternate IPv6 multicast topology, in addition to the normal IPv6 unicast topology.



**NOTE:** IS-IS only starts advertising the routes when the interface routes are in `inet.2`.



**NOTE:** For the multicast metric commands, these are interface-specific settings, not global.

Table 4 on page 154 lists the various IPv4 statements you can use to configure IS-IS topologies.

**Table 4: IPv4 Statements**

| Statement                                        | Description                                                               |
|--------------------------------------------------|---------------------------------------------------------------------------|
| <code>ipv4-multicast</code>                      | Enables an alternate IPv4 multicast topology.                             |
| <code>ipv4-multicast-metric <i>number</i></code> | Configures the multicast metric for an alternate IPv4 multicast topology. |
| <code>no-ipv4-multicast</code>                   | Excludes an interface from the IPv4 multicast topology.                   |
| <code>no-unicast-topology</code>                 | Excludes an interface from the IPv4 unicast topologies.                   |

Table 5 on page 154 lists the various IPv6 statements you can use to configure IS-IS topologies.

**Table 5: IPv6 Statements**

| Statement                                        | Description                                                               |
|--------------------------------------------------|---------------------------------------------------------------------------|
| <code>ipv6-multicast</code>                      | Enables an alternate IPv6 multicast topology.                             |
| <code>ipv6-unicast</code>                        | Enables an alternate IPv6 unicast topology.                               |
| <code>ipv6-multicast-metric <i>number</i></code> | Configures the multicast metric for an alternate IPv6 multicast topology. |
| <code>ipv6-unicast-metric <i>number</i></code>   | Configures the unicast metric for an alternate IPv6 multicast topology.   |
| <code>no-ipv6-multicast</code>                   | Excludes an interface from the IPv6 multicast topology.                   |
| <code>no-ipv6-unicast</code>                     | Excludes an interface from the IPv6 unicast topologies.                   |

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

#### Related Documentation

- [Example: Configuring IS-IS Multicast Topology on page 155](#)

## Example: Configuring IS-IS Multicast Topology

This example shows how to configure a multicast topology for an IS-IS network.

- [Requirements on page 155](#)
- [Overview on page 155](#)
- [Configuration on page 156](#)
- [Verification on page 160](#)

### Requirements

Before you begin, configure IS-IS on all routers. See [“Example: Configuring IS-IS” on page 14](#) for information about the required IS-IS configuration.

This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

### Overview

This example shows an IS-IS multicast topology configuration. Three routers are connected to each other. A loopback interface is configured on each router.

[Figure 16 on page 155](#) shows the sample network.

*Figure 16: Configuring IS-IS Multicast Topology*

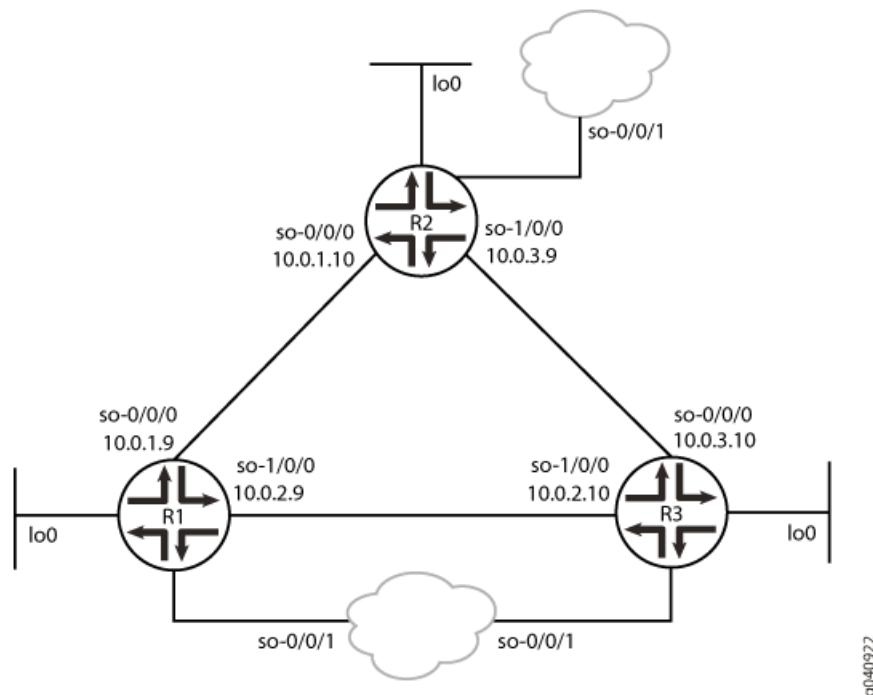

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

### Router R1

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 15
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-0/0/0 level 2 metric 20
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 14
set protocols isis interface so-1/0/0 level 1 metric 13
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-1/0/0 level 2 metric 29
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface fxp0.0 disable
```

### Router R2

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 13
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-0/0/0 level 2 metric 29
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface so-1/0/0 level 1 metric 14
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-1/0/0 level 2 metric 32
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 26
set protocols isis interface fxp0.0 disable
```

### Router R3

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 19
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 11
set protocols isis interface so-0/0/0 level 2 metric 27
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 21
set protocols isis interface so-1/0/0 level 1 metric 16
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 26
set protocols isis interface so-1/0/0 level 2 metric 30
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 20
set protocols isis interface fxp0.0 disable
```



The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS multicast topologies:

1. Enable the multicast topology for IS-IS by using the **ipv4-multicast** statement.

#### Routers R1, R2, and R3

```
[edit protocols isis]
user@host# set traceoptions file isis size 5m world-readable
user@host# set traceoptions flag error
user@host# set topologies ipv4-multicast
```

2. Enable multicast metrics on the first SONET/SDH Interface by using the **ipv4-multicast-metric** statement.

#### Router R1

```
[edit protocols isis interface so-0/0/0 ]
user@R1# set level 1 metric 15
user@R1# set level 1 ipv4-multicast-metric 18
user@R1# set level 2 metric 20
user@R1# set level 2 ipv4-multicast-metric 14
```

#### Router R2

```
[edit protocols isis interface so-0/0/0]
user@R2# set level 1 metric 13
user@R2# set level 1 ipv4-multicast-metric 12
user@R2# set level 2 metric 29
user@R2# set level 2 ipv4-multicast-metric 23
```

#### Router R3

```
[edit protocols isis interface so-0/0/0]
user@R3# set level 1 metric 19
user@R3# set level 1 ipv4-multicast-metric 11
user@R3# set level 2 metric 27
user@R3# set level 2 ipv4-multicast-metric 21
```

3. Enable multicast metrics on a second sonet Interface by using the **ipv4-multicast-metric** statement.

#### Router R1

```
[edit protocols isis interface so-1/0/0]
user@R1# set level 1 metric 13
user@R1# set level 1 ipv4-multicast-metric 12
user@R1# set level 2 metric 29
user@R1# set level 2 ipv4-multicast-metric 23
```

**Router R2**

```
[edit protocols isis interface so-1/0/0]
user@R2# set level 1 metric 14
user@R2# set level 1 ipv4-multicast-metric 18
user@R2# set level 2 metric 32
user@R2# set level 2 ipv4-multicast-metric 26
```

**Router R3**

```
[edit protocols isis interface so-1/0/0]
user@R3# set level 1 metric 16
user@R3# set level 1 ipv4-multicast-metric 26
user@R3# set level 2 metric 30
user@R3# set level 2 ipv4-multicast-metric 20
```

4. Disable the out-of-band management port, fxp0.

**Routers R1, R2, and R3**

```
[edit protocols isis]
user@host# set interface fxp0.0 disable
```

5. If you are done configuring the routers, commit the configuration.

**Routers R1, R2, and R3**

```
[edit]
user@host# commit
```

**Results** From configuration mode, confirm your configuration by using the **show protocols isis** statement. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

**Router R1**

```
user@R1# show protocols isis
```

```
traceoptions {
  file isis size 5m world-readable;
  flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
  level 1 {
    metric 15;
    ipv4-multicast-metric 18;
  }
  level 2 {
    metric 20;
    ipv4-multicast-metric 14;
  }
}
```

```

interface so-1/0/0 {
    level 1 {
        metric 13;
        ipv4-multicast-metric 12;
    }
    level 2 {
        metric 29;
        ipv4-multicast-metric 23;
    }
}
interface fxp0.0 {
    disable;
}

```

### Router R2

user@R2# show protocols isis

```

traceoptions {
    file isis size 5m world-readable;
    flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
    level 1 {
        metric 13;
        ipv4-multicast-metric 12;
    }
    level 2 {
        metric 29;
        ipv4-multicast-metric 23;
    }
}
interface so-1/0/0 {
    level 1 {
        metric 14;
        ipv4-multicast-metric 18;
    }
    level 2 {
        metric 32;
        ipv4-multicast-metric 26;
    }
}
interface fxp0.0 {
    disable;
}

```

### Router R3

user@R3# show protocols isis

```

traceoptions {
    file isis size 5m world-readable;
    flag error;
}
topologies ipv4-multicast;

```

```
interface so-0/0/0 {
  level 1 {
    metric 19;
    ipv4-multicast-metric 11;
  }
  level 2 {
    metric 27;
    ipv4-multicast-metric 21;
  }
}
interface so-1/0/0 {
  level 1 {
    metric 16;
    ipv4-multicast-metric 26;
  }
  level 2 {
    metric 30;
    ipv4-multicast-metric 20;
  }
}
interface fxp0.0 {
  disable;
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1, R2, and R3 on page 160](#)
- [Verifying That IS-IS Is Configured on page 162](#)
- [Verifying the Configured Multicast Metric Values on page 164](#)
- [Verifying the Configuration of the Multicast Topology on page 165](#)

### Verifying the Connection Between Routers R1, R2, and R3

**Purpose** Make sure that Routers R1, R2, and R3 are connected to each other.

**Action** Ping the other two routers from any router, to check the connectivity between the three routers as per the network topology.

```
user@R1> ping 10.0.3.9
```

```
PING 10.0.3.9 (10.0.3.9): 56 data bytes
64 bytes from 10.0.3.9: icmp_seq=0 ttl=64 time=1.299 ms
64 bytes from 10.0.3.9: icmp_seq=1 ttl=64 time=52.304 ms
64 bytes from 10.0.3.9: icmp_seq=2 ttl=64 time=1.271 ms
64 bytes from 10.0.3.9: icmp_seq=3 ttl=64 time=1.343 ms
64 bytes from 10.0.3.9: icmp_seq=4 ttl=64 time=1.434 ms
64 bytes from 10.0.3.9: icmp_seq=5 ttl=64 time=1.306 ms
^C
--- 10.0.3.9 ping statistics ---
6 packets transmitted, 6 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.271/9.826/52.304/18.997 ms
```

```
user@R1> ping 10.0.3.10
```

```
PING 10.0.3.10 (10.0.3.10): 56 data bytes
64 bytes from 10.0.3.10: icmp_seq=0 ttl=64 time=1.431 ms
64 bytes from 10.0.3.10: icmp_seq=1 ttl=64 time=1.296 ms
64 bytes from 10.0.3.10: icmp_seq=2 ttl=64 time=1.887 ms
^C
--- 10.0.3.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.296/1.538/1.887/0.253 ms
```

```
user@R2> ping 10.0.2.9
```

```
PING 10.0.2.9 (10.0.2.9): 56 data bytes
64 bytes from 10.0.2.9: icmp_seq=0 ttl=64 time=1.365 ms
64 bytes from 10.0.2.9: icmp_seq=1 ttl=64 time=1.813 ms
64 bytes from 10.0.2.9: icmp_seq=2 ttl=64 time=1.290 ms
^C
--- 10.0.2.9 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.290/1.489/1.813/0.231 ms
```

```
user@R2> ping 10.0.2.10
```

```
PING 10.0.2.10 (10.0.2.10): 56 data bytes
64 bytes from 10.0.2.10: icmp_seq=0 ttl=63 time=1.318 ms
64 bytes from 10.0.2.10: icmp_seq=1 ttl=63 time=1.394 ms
64 bytes from 10.0.2.10: icmp_seq=2 ttl=63 time=1.366 ms
64 bytes from 10.0.2.10: icmp_seq=3 ttl=63 time=1.305 ms
^C
--- 10.0.2.10 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.305/1.346/1.394/0.036 ms
```

```
user@R3> ping 10.0.1.10
```

```
PING 10.0.1.10 (10.0.1.10): 56 data bytes
64 bytes from 10.0.1.10: icmp_seq=0 ttl=63 time=1.316 ms
64 bytes from 10.0.1.10: icmp_seq=1 ttl=63 time=1.418 ms
64 bytes from 10.0.1.10: icmp_seq=2 ttl=63 time=1.277 ms
^C
--- 10.0.1.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.277/1.337/1.418/0.059 ms
```

```
user@R3> ping 10.0.1.9
```

```
PING 10.0.1.9 (10.0.1.9): 56 data bytes
64 bytes from 10.0.1.9: icmp_seq=0 ttl=64 time=1.381 ms
64 bytes from 10.0.1.9: icmp_seq=1 ttl=64 time=1.499 ms
64 bytes from 10.0.1.9: icmp_seq=2 ttl=64 time=1.300 ms
64 bytes from 10.0.1.9: icmp_seq=3 ttl=64 time=1.397 ms
```

```

^C
--- 10.0.1.9 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.300/1.394/1.499/0.071 ms

```

**Meaning** Routers R1, R2, and R3 have a peer relationship with each other.

### Verifying That IS-IS Is Configured

**Purpose** Make sure that the IS-IS instance is running on Routers R1, R2, and R3, and that they are adjacent to each other.

**Action** Use the `show isis adjacency detail` command to check the adjacency between the routers.

#### Router R1

```
user@R1> show isis adjacency detail
```

R2

```

Interface: so-0/0/0, Level: 1, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10

```

R2

```

Interface: so-0/0/0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:58 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10

```

R3

```

Interface: so-1/0/0, Level: 1, State: Up, Expires in 7 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10

```

R3

```

Interface: so-1/0/0, Level: 2, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10

```

#### Router R2

```
user@R2> show isis adjacency detail
```

```

R1
Interface: so-0/0/0, Level: 1, State: Up, Expires in 20 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.9

R1
Interface: so-0/0/0, Level: 2, State: Up, Expires in 26 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.9

R3
Interface: so-1/0/0, Level: 1, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.10

R3
Interface: so-1/0/0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.10

```

### Router R3

```
user@R3> show isis adjacency detail
```

```

R2
Interface: so-0/0/0, Level: 1, State: Up, Expires in 18 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.9

R2
Interface: so-0/0/0, Level: 2, State: Up, Expires in 22 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.9

R1
Interface: so-1/0/0, Level: 1, State: Up, Expires in 21 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast

```

```
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.9
```

R1

```
Interface: so-1/0/0, Level: 2, State: Up, Expires in 19 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.9
```

**Meaning** IS-IS is configured on Routers R1, R2, and R3, and they are adjacent to each other.

### Verifying the Configured Multicast Metric Values

**Purpose** Make sure that the SPF calculations are accurate as per the configured multicast metric values on Routers R1, R2, and R3.

**Action** Use the `show isis spf results` command to check the SPF calculations for the network.

#### Router R1

```
user@R1> show isis spf results
```

```
...
IPV4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.03  28         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R2.00  18         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R3.00  17         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  0
4 nodes

IPV4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.03  40         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R3.00  22         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R2.00  14         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R1.00  0
4 nodes
```

#### Router R2

```
user@R2> show isis spf results
```

```
...
IPV4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  29         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.00  18         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  12         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.02  12
R2.00  0
5 nodes
```



```

IPv4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  45         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.00  26         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  23         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.02  23
R2.00  0
      5 nodes

```

### Router R3

```
user@R3> show isis spf results
```

```

...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  26
R1.00  23         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R2.02  23         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R2.00  11         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R3.03  11
R3.00  0
      6 nodes

```

```

IPv4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R2.02  34         so-1/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.00  21         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R3.03  21
R1.00  20         so-1/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.02  20
R3.00  0
      6 nodes

```

**Meaning** The configured multicast metric values are used in SPF calculations for the IS-IS network.

### Verifying the Configuration of the Multicast Topology

**Purpose** Make sure that the multicast topology is configured on Routers R1, R2, and R3.

**Action** Use the **show isis database detail** command to verify the multicast topology configuration on the routers.

### Router R1

```
user@R1> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 663 secs
  IPV4 Unicast IS neighbor: R2.02 Metric: 15
  IPV4 Unicast IS neighbor: R3.02 Metric: 15

```

```

IPv4 Multicast IS neighbor: R2.02 Metric: 18
IPv4 Multicast IS neighbor: R3.02 Metric: 17
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 883 secs
IPv4 Unicast IS neighbor: R2.02 Metric: 13
IPv4 Unicast IS neighbor: R3.03 Metric: 14
IPv4 Multicast IS neighbor: R2.02 Metric: 12
IPv4 Multicast IS neighbor: R3.03 Metric: 18
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 13 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 14 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 913 secs
IPv4 Unicast IS neighbor: R1.00 Metric: 0
IPv4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13c, Checksum: 0xc8de, Lifetime: 488 secs
IPv4 Unicast IS neighbor: R3.02 Metric: 16
IPv4 Unicast IS neighbor: R3.03 Metric: 19
IPv4 Multicast IS neighbor: R3.02 Metric: 26
IPv4 Multicast IS neighbor: R3.03 Metric: 11
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 16 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 625 secs
IPv4 Unicast IS neighbor: R1.00 Metric: 0
IPv4 Unicast IS neighbor: R3.00 Metric: 0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 714 secs
IPv4 Unicast IS neighbor: R2.00 Metric: 0
IPv4 Unicast IS neighbor: R3.00 Metric: 0

IS-IS level 2 link-state database:

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 816 secs
IPv4 Unicast IS neighbor: R2.02 Metric: 20
IPv4 Unicast IS neighbor: R3.02 Metric: 31
IPv4 Multicast IS neighbor: R2.02 Metric: 14
IPv4 Multicast IS neighbor: R3.02 Metric: 22
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 20 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 31 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 966 secs
IPv4 Unicast IS neighbor: R2.02 Metric: 29
IPv4 Unicast IS neighbor: R3.03 Metric: 32
IPv4 Multicast IS neighbor: R2.02 Metric: 23
IPv4 Multicast IS neighbor: R3.03 Metric: 26
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 29 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 28 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 966 secs
IPv4 Unicast IS neighbor: R1.00 Metric: 0
IPv4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 805 secs
IPv4 Unicast IS neighbor: R3.02 Metric: 30
IPv4 Unicast IS neighbor: R3.03 Metric: 27

```

```

IPV4 Multicast IS neighbor: R3.02 Metric: 20
IPV4 Multicast IS neighbor: R3.03 Metric: 21
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 31 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 30 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 844 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 844 secs
IPV4 Unicast IS neighbor: R2.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

```

## Router R2

```
user@R2> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 524 secs
IPV4 Unicast IS neighbor: R2.02 Metric: 15
IPV4 Unicast IS neighbor: R3.02 Metric: 15
IPV4 Multicast IS neighbor: R2.02 Metric: 18
IPV4 Multicast IS neighbor: R3.02 Metric: 17
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 748 secs
IPV4 Unicast IS neighbor: R2.02 Metric: 13
IPV4 Unicast IS neighbor: R3.03 Metric: 14
IPV4 Multicast IS neighbor: R2.02 Metric: 12
IPV4 Multicast IS neighbor: R3.03 Metric: 18
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 13 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 14 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 777 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1102 secs
IPV4 Unicast IS neighbor: R3.02 Metric: 16
IPV4 Unicast IS neighbor: R3.03 Metric: 19
IPV4 Multicast IS neighbor: R3.02 Metric: 26
IPV4 Multicast IS neighbor: R3.03 Metric: 11
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 16 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 488 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 577 secs
IPV4 Unicast IS neighbor: R2.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

```

```
IS-IS level 2 link-state database:
```

```

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 676 secs
  IPV4 Unicast IS neighbor: R2.02      Metric:      20
  IPV4 Unicast IS neighbor: R3.02      Metric:      31
  IPV4 Multicast IS neighbor: R2.02    Metric:      14
  IPV4 Multicast IS neighbor: R3.02    Metric:      22
  IP IPV4 Unicast prefix: 10.0.1.8/30  Metric:      20 Internal Up
  IP IPV4 Unicast prefix: 10.0.2.8/30  Metric:      31 Internal Up
  IP IPV4 Unicast prefix: 10.0.3.8/30  Metric:      29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 831 secs
  IPV4 Unicast IS neighbor: R2.02      Metric:      29
  IPV4 Unicast IS neighbor: R3.03      Metric:      32
  IPV4 Multicast IS neighbor: R2.02    Metric:      23
  IPV4 Multicast IS neighbor: R3.03    Metric:      26
  IP IPV4 Unicast prefix: 10.0.1.8/30  Metric:      29 Internal Up
  IP IPV4 Unicast prefix: 10.0.2.8/30  Metric:      28 Internal Up
  IP IPV4 Unicast prefix: 10.0.3.8/30  Metric:      32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 831 secs
  IPV4 Unicast IS neighbor: R1.00      Metric:       0
  IPV4 Unicast IS neighbor: R2.00      Metric:       0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 667 secs
  IPV4 Unicast IS neighbor: R3.02      Metric:      30
  IPV4 Unicast IS neighbor: R3.03      Metric:      27
  IPV4 Multicast IS neighbor: R3.02    Metric:      20
  IPV4 Multicast IS neighbor: R3.03    Metric:      21
  IP IPV4 Unicast prefix: 10.0.1.8/30  Metric:      31 Internal Up
  IP IPV4 Unicast prefix: 10.0.2.8/30  Metric:      30 Internal Up
  IP IPV4 Unicast prefix: 10.0.3.8/30  Metric:      27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 707 secs
  IPV4 Unicast IS neighbor: R1.00      Metric:       0
  IPV4 Unicast IS neighbor: R3.00      Metric:       0

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 707 secs
  IPV4 Unicast IS neighbor: R2.00      Metric:       0
  IPV4 Unicast IS neighbor: R3.00      Metric:       0

```

### Router R3

```
user@R3> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R1.00-00 Sequence: 0x143, Checksum: 0xb08, Lifetime: 1155 secs
  IPV4 Unicast IS neighbor: R2.02      Metric:      15
  IPV4 Unicast IS neighbor: R3.02      Metric:      15
  IPV4 Multicast IS neighbor: R2.02    Metric:      18
  IPV4 Multicast IS neighbor: R3.02    Metric:      17
  IP IPV4 Unicast prefix: 10.0.1.8/30  Metric:      15 Internal Up
  IP IPV4 Unicast prefix: 10.0.2.8/30  Metric:      15 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 687 secs
  IPV4 Unicast IS neighbor: R2.02      Metric:      13
  IPV4 Unicast IS neighbor: R3.03      Metric:      14
  IPV4 Multicast IS neighbor: R2.02    Metric:      12
  IPV4 Multicast IS neighbor: R3.03    Metric:      18

```

```

IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      13 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      14 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 716 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:        0
  IPv4 Unicast IS neighbor: R2.00 Metric:        0

R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1044 secs
  IPv4 Unicast IS neighbor: R3.02 Metric:        16
  IPv4 Unicast IS neighbor: R3.03 Metric:        19
  IPv4 Multicast IS neighbor: R3.02 Metric:       26
  IPv4 Multicast IS neighbor: R3.03 Metric:       11
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:     16 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:     19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 430 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:        0
  IPv4 Unicast IS neighbor: R3.00 Metric:        0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 519 secs
  IPv4 Unicast IS neighbor: R2.00 Metric:        0
  IPv4 Unicast IS neighbor: R3.00 Metric:        0

IS-IS level 2 link-state database:

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 617 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:        20
  IPv4 Unicast IS neighbor: R3.02 Metric:        31
  IPv4 Multicast IS neighbor: R2.02 Metric:       14
  IPv4 Multicast IS neighbor: R3.02 Metric:       22
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:     20 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:     31 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:     29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 769 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:        29
  IPv4 Unicast IS neighbor: R3.03 Metric:        32
  IPv4 Multicast IS neighbor: R2.02 Metric:       23
  IPv4 Multicast IS neighbor: R3.03 Metric:       26
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:     29 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:     28 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:     32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 769 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:        0
  IPv4 Unicast IS neighbor: R2.00 Metric:        0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 610 secs
  IPv4 Unicast IS neighbor: R3.02 Metric:        30
  IPv4 Unicast IS neighbor: R3.03 Metric:        27
  IPv4 Multicast IS neighbor: R3.02 Metric:       20
  IPv4 Multicast IS neighbor: R3.03 Metric:       21
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:     31 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:     30 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:     27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 649 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:        0
  IPv4 Unicast IS neighbor: R3.00 Metric:        0

```

```
R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 649 secs
  IPV4 Unicast IS neighbor: R2.00      Metric:      0
  IPV4 Unicast IS neighbor: R3.00      Metric:      0
```

**Meaning** Multicast topology is configured on Routers R1, R2, and R3.

**Related Documentation**

- [IS-IS Multicast Topologies Overview on page 153](#)

---

## Understanding Dual Stacking of IPv4 and IPv6 Unicast Addresses

Service providers and enterprises are faced with growing their networks using IPv6, while continuing to serve IPv4 customers.

Increasingly, the public side of network address translation (NAT) devices is IPv6 rather than IPv4. Service providers cannot continue giving customers globally routable IPv4 addresses, they cannot get new globally routable IPv4 addresses for expanding their own networks, and yet they must continue to serve both IPv4 customers and new customers, all of whom are primarily trying to reach IPv4 destinations.

IPv4 and IPv6 must coexist for some number of years, and their coexistence must be transparent to end users. If an IPv4-to-IPv6 transition is successful, end users should not even notice it.

A dual-stack device is a device with network interfaces that can originate and understand both IPv4 and IPv6 packets.

Other strategies, such as manually or dynamically configured tunnels and translation devices exist, but dual stacking is often the preferable solution in many scenarios. The dual-stacked device can interoperate equally with IPv4 devices, IPv6 devices, and other dual-stacked devices. When both devices are dual stacked, the two devices agree on which IP version to use.

The transition is driven by DNS. If a dual-stacked device queries the name of a destination and DNS gives it an IPv4 address (a DNS A Record), it sends IPv4 packets. If DNS responds with an IPv6 address (a DNS AAAA Record), it sends IPv6 packets.

Keep in mind that if you are going to dual stack all of your network devices, the interfaces need both an IPv6 and an IPv4 address. This raises the issue that the Internet has run out of IPv4 addresses, which is the main reason IPv6 is needed in the first place. If you do not have an abundant supply of IPv4 addresses to apply to your devices, you can still use dual stacking, but you will need to conserve your supply of IPv4 addresses by using network address translation (NAT). Building dual-stacked networks with a mix of global IPv6 addresses and NAT-ed IPv4 addresses is quite feasible. Some specific solutions include carrier-grade NAT (CGN), NAT44(4), NAT64, NAT464, and dual-stack lite.

[Table 6 on page 171](#) describes at a high level how to pick a network addressing technique. In reality, a complete solution might include a set of techniques to satisfy multiple service needs. It is important to understand the backbone technology being used on the network

and also to know if the provider has control over the access customer premises equipment (CPE).

Table 6: Choosing the Right Solution to Address Next-Generation Addressing Requirements

| CPE Network | Access Network | Destinations  | Solution           |
|-------------|----------------|---------------|--------------------|
| IPv4        | IPv4           | IPv4 Internet | NAT44(4)           |
| IPv4/IPv6   | IPv6           | IPv4 Internet | DS-Lite with NAT44 |
| IPv4/IPv6   | IPv4           | IPv6 Internet | 6rd (6to4)         |
| IPv4        | IPv6           | IPv4 Internet | NAT64              |

- Related Documentation
- [Understanding IPv6 Dual-Stack Lite](#)
  - [Understanding IPv6](#)
  - [Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses on page 171](#)

### Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses

This example shows how to configure IPv4 and IPv6 dual stacking in IS-IS.

- [Requirements on page 171](#)
- [Overview on page 171](#)
- [Configuration on page 172](#)
- [Verification on page 175](#)

#### Requirements

No special configuration beyond device initialization is required before configuring this example.

#### Overview



Video: [IS-IS Dual Stacking](#)

You can use IPv4 and IPv6 dual stacking to begin your migration from IPv4 to IPv6 by implementing IPv6 alongside IPv4 in your existing networks. This allows you to implement IPv6 so that you can provide the same services over IPv6—for example, video, voice, high-quality data—that you currently provide in your IPv4 networks. You can then perform incremental upgrades to IPv6 and avoid service disruptions while migrating from IPv4 to IPv6.

Unlike RIP and OSPF, IS-IS does not require a distinct protocol or a new version to support IPv6. Because IS-IS uses ISO addresses, the configuration for IPv6 and IPv4 is identical in the Junos OS implementation of IS-IS. For IS-IS to carry IPv6 routes, you only need to add IPv6 addresses to IS-IS enabled interfaces or include other IPv6 routes in your IS-IS export policy.

The only explicit configuration needed in IS-IS with regard to IPv6 is if you want to disable it. Alternatively, you can disable IPv4 routing and use IS-IS with IPv6 only. An example of each is provided here:

Disable IPv6 routing in IS-IS:


```
[edit protocols isis]
user@host# set no-ipv6-routing
```

Use IS-IS exclusively for IPv6 routing:

```
[edit protocols isis]
user@host# set no-ipv4-routing
```

Figure 17 on page 172 shows the topology used in this example.

Figure 17: IS-IS IPv4 and IPv6 Dual Stacking Topology

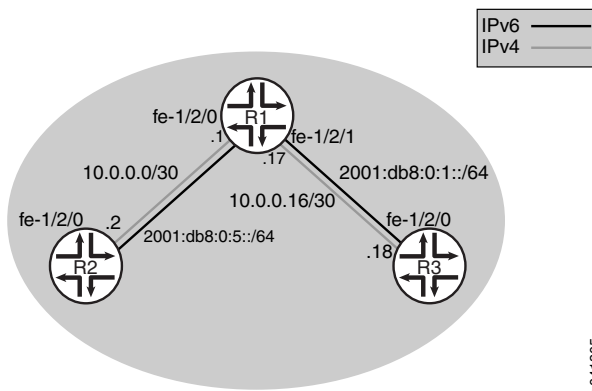

“CLI Quick Configuration” on page 172 shows the configuration for all of the devices in Figure 17 on page 172. The section “Step-by-Step Procedure” on page 173 describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
```



```

set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::1/128
set protocols isis interface fe-1/2/0.0
set protocols isis interface fe-1/2/1.0
set protocols isis interface lo0.0

```

**Device R2**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::2/128
set protocols isis interface fe-1/2/0.0
set protocols isis interface lo0.0

```

**Device R3**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::3/128
set protocols isis interface fe-1/2/0.0
set protocols isis interface lo0.0

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *Junos OS CLI User Guide*.

To configure IS-IS dual stacking:

1. Configure the interfaces, including both IPv4 and IPv6 addresses on each interface. Optionally, include the **eui-64** statement to automatically generate the host number portion of interface addresses.

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set fe-1/2/0 unit 0 family iso
user@R1# set fe-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
user@R1# set fe-1/2/1 unit 0 family inet address 10.0.0.17/30
user@R1# set fe-1/2/1 unit 0 family iso
user@R1# set fe-1/2/1 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
user@R1# set lo0 unit 0 family inet6 address 2001:db8::1/128

```

2. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@R1# set interface fe-1/2/0.0
user@R1# set interface fe-1/2/1.0
user@R1# set interface lo0.0
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
    family inet6 {
      address 2001:db8:0:5::/64 {
        eui-64;
      }
    }
  }
}
fe-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.17/30;
    }
    family iso;
    family inet6 {
      address 2001:db8:0:1::/64 {
        eui-64;
      }
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
    family inet6 {
      address 2001:db8::1/128;
    }
  }
}
```

```

user@R1# show protocols
isis {
  interface fe-1/2/0.0;
  interface fe-1/2/1.0;
  interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the Neighbor Adjacencies on page 175](#)
- [Pinging the IPv6 Interfaces on page 175](#)
- [Checking the IPv6 Routing Table on page 176](#)

### Checking the Neighbor Adjacencies

**Purpose** Determine what topologies are supported on neighboring IS-IS devices.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```

user@R1> show isis adjacency detail

```

```

R2
Interface: fe-1/2/0.0, Level: 3, State: Up, Expires in 24 secs
Priority: 0, Up/Down transitions: 1, Last transition: 18:34:08 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.2
IPv6 addresses: fe80::2a0:a514:0:24c

R3
Interface: fe-1/2/1.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 18:33:41 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.18
IPv6 addresses: fe80::2a0:a514:0:124c

```

**Meaning** As expected, the output shows that the two neighbors support both IPv4 and IPv6. The IPv4 address and the IPv6 link-local address are also shown.

### Pinging the IPv6 Interfaces

**Purpose** Make sure that you can ping the remote IPv6 interfaces.

**Action** From operational mode, enter the **ping** command to ping from Device R2 to Device R3.

1. Determine the IPv6 address assigned to Device R3.

If you use EUI-64 addressing as shown in the example, the host portion of the IPv6 addresses is assigned automatically. To determine what addresses are assigned, use the **show interfaces terse** command on Device R3.

```
user@R3> show interfaces terse
```

| Interface  | Admin | Link | Proto                | Local                                                                                  | Remote  |
|------------|-------|------|----------------------|----------------------------------------------------------------------------------------|---------|
| fe-1/2/0   |       |      |                      |                                                                                        |         |
| fe-1/2/0.0 | up    | up   | inet<br>iso<br>inet6 | 10.0.0.18/30<br><br><b>2001:db8:0:1:2a0:a514:0:124c/64</b><br>fe80::2a0:a514:0:124c/64 |         |
| lo0        |       |      |                      |                                                                                        |         |
| lo0.0      | up    | up   | inet<br>iso<br>inet6 | 192.168.0.3<br>49.0002.0192.0168.0003<br><b>2001:db8::3</b><br>fe80::2a0:a50f:fc56:14c | --> 0/0 |

The IPv6 addresses that should be pingable are 2001:db8:0:1:2a0:a514:0:124c and 2001:db8::3.

2. From Device R2, ping the Device R3 fe-1/2/0.0 IPv6 interface address and the lo0.0 IPv6 interface address.

```
user@R2> ping 2001:db8:0:1:2a0:a514:0:124c
```

```
PING6(56=40+8+8 bytes) 2001:db8:0:5:2a0:a514:0:24c -->
2001:db8:0:1:2a0:a514:0:124c
16 bytes from 2001:db8:0:1:2a0:a514:0:124c, icmp_seq=0 hlim=63 time=2.373 ms
16 bytes from 2001:db8:0:1:2a0:a514:0:124c, icmp_seq=1 hlim=63 time=1.600 ms
16 bytes from 2001:db8:0:1:2a0:a514:0:124c, icmp_seq=2 hlim=63 time=2.228 ms
```

```
user@R2> ping 2001:db8::3
```

```
PING6(56=40+8+8 bytes) 2001:db8:0:5:2a0:a514:0:24c --> 2001:db8::3
16 bytes from 2001:db8::3, icmp_seq=0 hlim=63 time=1.797 ms
16 bytes from 2001:db8::3, icmp_seq=1 hlim=63 time=1.430 ms
16 bytes from 2001:db8::3, icmp_seq=2 hlim=63 time=2.525 ms
```

**Meaning** This test confirms that IS-IS has learned the IPv6 routes.

### Checking the IPv6 Routing Table

**Purpose** Verify that the expected routes are in the IPv6 routing table.

**Action** user@R1> `show route table inet6.0`

```
inet6.0: 11 destinations, 12 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::1/128    * [Direct/0] 18:52:52
> via lo0.0
2001:db8::2/128    * [IS-IS/15] 01:59:52, metric 10
> to fe80::2a0:a514:0:24c via fe-1/2/0.0
2001:db8::3/128    * [IS-IS/15] 01:59:52, metric 10
> to fe80::2a0:a514:0:124c via fe-1/2/1.0
2001:db8:0:1::/64  * [Direct/0] 18:52:15
> via fe-1/2/1.0
2001:db8:0:1:2a0:a514:0:114c/128
* [Local/0] 18:52:48
Local via fe-1/2/1.0
2001:db8:0:5::/64  * [Direct/0] 18:52:49
> via fe-1/2/0.0
2001:db8:0:5:2a0:a514:0:14c/128
* [Local/0] 18:52:49
Local via fe-1/2/0.0
fe80::/64          * [Direct/0] 18:52:49
> via fe-1/2/0.0
[Direct/0] 18:52:15
> via fe-1/2/1.0
fe80::2a0:a50f:fc56:14c/128
* [Direct/0] 18:52:52
> via lo0.0
fe80::2a0:a514:0:14c/128
* [Local/0] 18:52:49
Local via fe-1/2/0.0
fe80::2a0:a514:0:114c/128
* [Local/0] 18:52:48
Local via fe-1/2/1.0
```

**Meaning** The output shows the IPv6 interface routes (direct and local) and the IPv6 routes learned through IS-IS.

**Related Documentation** • [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178](#)

## Understanding IS-IS IPv4 and IPv6 Unicast Topologies

You can configure IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This enables you to exercise control over the paths that unicast data takes through a network.

A topology is the set of joined nodes. IS-IS evaluates all the paths in a single topology for each IS-IS level and uses the shortest-path-first (SPF) algorithm to determine the best path among all the feasible paths. Topology discovery and SPF calculation is

performed in a protocol-neutral fashion because it is done at Layer 2 of the OSI model. If you load the topology with reachability information for a certain protocol (for example, IP), the assumption is that the circuits that are supposed to provide reachability between routing devices can carry the protocol. The SPF algorithm has a per-link orientation, not a per-address family or per-protocol orientation.

Multitopology routing enables you to override this default behavior by enabling a per-address family, per-protocol SPF calculation.

The additional CPU load associated with multiple runs of the SPF algorithm is generally not an issue with the processing power available on today's routing device control planes.

The multitopology extensions alter existing type, length, and value (TLV) tuples by adding a topology ID. Each routing device in a given topology maintains its adjacencies and runs a per-topology SPF calculation.

#### Related Documentation

- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178](#)

---

## Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies

This example shows how to configure IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology.

- [Requirements on page 178](#)
- [Overview on page 178](#)
- [Configuration on page 180](#)
- [Verification on page 184](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview

This example focuses on IPv4 and IPv6 unicast topologies. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This enables you to exercise control over the paths that unicast data takes through a network.

To enable an IPv6 unicast topology for IS-IS, include the **ipv6-unicast** statement:

```
isis {  
  topologies {  
    ipv6-unicast;  
  }  
}
```

To configure a metric for the IPv6 unicast topology, include the **ipv6-unicast-metric** statement:


```
isis {  
  interface interface-name {  
    level level-number {  
      ipv6-unicast-metric number;  
    }  
  }  
}
```

To exclude an interface from the IPv6 unicast topologies for IS-IS, include the **no-ipv6-unicast** statement:

```
isis {  
  interface interface-name {  
    no-ipv6-unicast;  
  }  
}
```

[Figure 18 on page 180](#) shows the topology used in this example. The black lines indicate link membership in the IPv6 topology. The gray lines indicate membership to the IPv4 topology. Using regular TLVs, it would not be possible to build multiple topologies and run an SPF calculation based on them. The multitopology extensions describe an extension to carry the set of supported protocols in the hello packet. After activating multitopology routing support on a link, the link carries all the topologies that the underlying circuit is able to relay.

Figure 18: IS-IS IPv4 and IPv6 Unicast Topologies

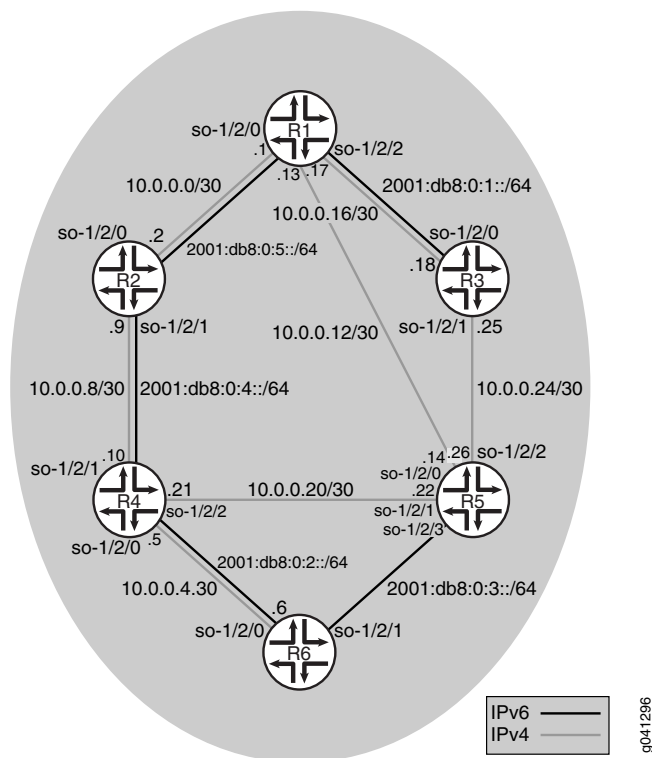

"CLI Quick Configuration" on page 180 shows the configuration for all of the devices in Figure 18 on page 180. The section "Step-by-Step Procedure" on page 182 describes the steps on Device R1.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device R1

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.17/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::1/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
```



```
set protocols isis interface so-1/2/2.0
set protocols isis interface lo0.0
```

Device R2

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:4::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::2/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.2
set protocols isis interface so-1/2/1.0
set protocols isis interface lo0.0
```

Device R3

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::3/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface lo0.0
```

Device R4

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.5/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:2::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.10/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.21/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::4/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0
set protocols isis interface so-1/2/2.0 no-ipv6-unicast
set protocols isis interface lo0.0
```

Device R5

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces so-1/2/0 unit 0 family iso
```

```

set interfaces so-1/2/1 unit 0 family inet address 10.0.0.22/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.26/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces so-1/2/3 unit 0 family iso
set interfaces so-1/2/3 unit 0 family inet6 address 2001:db8:0:3::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::5/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0 no-ipv6-unicast
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface so-1/2/2.0 no-ipv6-unicast
set protocols isis interface so-1/2/3.0
set protocols isis interface lo0.0

```

**Device R6**

```

set interfaces so-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:2::/64 eui-64
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:3::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0006.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::6/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0
set protocols isis interface lo0.0

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure an alternate IPv6 unicast topology:

1. Configure the interfaces.

```

[edit interfaces]
user@R1# set so-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set so-1/2/0 unit 0 family iso
user@R1# set so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
user@R1# set so-1/2/1 unit 0 family inet address 10.0.0.13/30
user@R1# set so-1/2/1 unit 0 family iso
user@R1# set so-1/2/2 unit 0 family inet address 10.0.0.17/30
user@R1# set so-1/2/2 unit 0 family iso
user@R1# set so-1/2/2 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
user@R1# set lo0 unit 0 family inet6 address 2001:db8::1/128

```

2. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@R1# set interface so-1/2/0.0
user@R1# set interface so-1/2/1.0
user@R1# set interface so-1/2/2.0
user@R1# set interface lo0.0
```

3. Enable multitopology routing on the IS-IS interfaces.

The **ipv6-unicast** statement enables multitopology IS-IS routing on all interfaces that have **family iso** and **family inet6** configured and are listed at the **[edit protocols isis interface]** hierarchy level.

```
[edit protocols isis]
user@R1# set topologies ipv6-unicast
```

4. Disable IPv6 unicast support on a given interface.

If you do not want to run multitopology IS-IS routing for IPv6 on a given interface, you can disable multitopology routing by including the **no-ipv6-unicast** statement in the IS-IS interface configuration.

```
[edit protocols isis]
user@R1# set interface so-1/2/1.0 no-ipv6-unicast
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
so-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
    family inet6 {
      address 2001:db8:0:5::/64 {
        eui-64;
      }
    }
  }
}
so-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.13/30;
    }
    family iso;
  }
}
```

```

so-1/2/2 {
  unit 0 {
    family inet {
      address 10.0.0.17/30;
    }
    family iso;
    family inet6 {
      address 2001:db8:0:1::/64 {
        eui-64;
      }
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
    family inet6 {
      address 2001:db8::1/128;
    }
  }
}
}

```

```

user@R1# show protocols
isis {
  topologies ipv6-unicast;
  interface so-1/2/0.0;
  interface so-1/2/1.0 {
    no-ipv6-unicast;
  }
  interface so-1/2/2.0;
  interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the Topologies on Neighbors on page 184](#)
- [Checking the IS-IS SPF Calculations on page 185](#)
- [Checking the Tcpcdump Output on page 186](#)

### Checking the Topologies on Neighbors

**Purpose** Determine what topologies are supported on neighboring IS-IS devices.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```
user@R1> show isis adjacency detail
```

```
R2
Interface: so-1/2/0.0, Level: 3, State: Up, Expires in 24 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:28:16 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.2
IPv6 addresses: fe80::2a0:a514:0:24c
```

```
R5
Interface: so-1/2/1.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:27:47 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.14
```

```
R3
Interface: so-1/2/2.0, Level: 3, State: Up, Expires in 22 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:27:25 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.18
IPv6 addresses: fe80::2a0:a514:0:124c
```

**Meaning** As expected, the adjacency with Device R5 only supports the IPv4 unicast topology, while the adjacencies with Device R2 and Device R3 support both the IPv4 and IPv6 topologies.

### Checking the IS-IS SPF Calculations

**Purpose** Verify that separate SPF calculations are being run for IPv4 and IPv6.

**Action** From operational mode, enter the **show isis spf brief** command.

```
user@R1> show isis spf brief
```

#### IPv4 Unicast IS-IS level 1 SPF results:

| Node    | Metric | Interface  | NH      | Via | SNPA |
|---------|--------|------------|---------|-----|------|
| R6.00   | 20     | so-1/2/1.0 | IPV4 R5 |     |      |
| R4.00   | 20     | so-1/2/0.0 | IPV4 R2 |     |      |
| R5.00   | 10     | so-1/2/1.0 | IPV4 R5 |     |      |
| R3.00   | 10     | so-1/2/2.0 | IPV4 R3 |     |      |
| R2.00   | 10     | so-1/2/0.0 | IPV4 R2 |     |      |
| R1.00   | 0      |            |         |     |      |
| 6 nodes |        |            |         |     |      |

#### IPv4 Unicast IS-IS level 2 SPF results:

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R6.00 | 20     | so-1/2/1.0 | IPV4 R5 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV4 R2 |     |      |

```

R5.00      10      so-1/2/1.0      IPV4 R5
R3.00      10      so-1/2/2.0      IPV4 R3
R2.00      10      so-1/2/0.0      IPV4 R2
R1.00      0
6 nodes

```

#### IPv6 Unicast IS-IS level 1 SPF results:

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R5.00 | 40     | so-1/2/0.0 | IPV6 R2 |     |      |
| R6.00 | 30     | so-1/2/0.0 | IPV6 R2 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV6 R2 |     |      |
| R3.00 | 10     | so-1/2/2.0 | IPV6 R3 |     |      |
| R2.00 | 10     | so-1/2/0.0 | IPV6 R2 |     |      |
| R1.00 | 0      |            |         |     |      |

6 nodes

#### IPv6 Unicast IS-IS level 2 SPF results:

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R5.00 | 40     | so-1/2/0.0 | IPV6 R2 |     |      |
| R6.00 | 30     | so-1/2/0.0 | IPV6 R2 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV6 R2 |     |      |
| R3.00 | 10     | so-1/2/2.0 | IPV6 R3 |     |      |
| R2.00 | 10     | so-1/2/0.0 | IPV6 R2 |     |      |
| R1.00 | 0      |            |         |     |      |

6 nodes

**Meaning** As expected, SPF calculations are being performed for IPv4 and IPv6 topologies.

### Checking the Tcpdump Output

**Purpose** Verify that the link can be a member of both the IPv4 unicast topology and the IPv6 unicast topology.

**Action** user@R1> monitor traffic detail interface so-1/2/0.0

[...]

```
15:52:35.719540 In IS-IS, length 82
    p2p IIH, hlen: 20, v: 1, pdu-v: 1, sys-id-len: 6 (0), max-area: 3 (0)
    source-id: 0192.0168.0002, holding time: 27s, Flags: [Level 1, Level
2]
    circuit-id: 0x01, PDU length: 82
    Point-to-point Adjacency State TLV #240, length: 15
    Adjacency State: Up (0)
    Extended Local circuit-ID: 0x00000054
    Neighbor System-ID: 0192.0168.0001
    Neighbor Extended Local circuit-ID: 0x00000043
    Protocols supported TLV #129, length: 2
    NLPID(s): IPv4 (0xcc), IPv6 (0x8e)
    IPv4 Interface address(es) TLV #132, length: 4
    IPv4 interface address: 10.0.0.2
    IPv6 Interface address(es) TLV #232, length: 16
    IPv6 interface address: fe80::2a0:a514:0:24c
    Area address(es) TLV #1, length: 4
    Area address (length: 3): 49.0002
    Restart Signaling TLV #211, length: 3
    Flags [none], Remaining holding time 0s
    Multi Topology TLV #229, length: 4
    IPv4 unicast Topology (0x000), Flags: [none]
    IPv6 unicast Topology (0x002), Flags: [none]
```

**Meaning** The IS-IS hello (IIH) packet shows that IPv4 and IPv6 are supported. The hello packet lists valid IPv4 and IPv6 addresses, and therefore the routing device can create valid next-hop entries. The supported protocols are listed in the multitopology TLV #229.

**Related Documentation**

- [Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses on page 171](#)





## CHAPTER 8

# Configuring IS-IS Link and Node Link Protection

- [Understanding Loop-Free Alternate Routes for IS-IS on page 189](#)
- [Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193](#)
- [Understanding Remote LFA over LDP Tunnels in IS-IS Networks on page 205](#)
- [Configuring Remote LFA Backup over LDP Tunnels in an IS-IS Network on page 206](#)
- [Example: Configuring Remote LFA over LDP Tunnels in IS-IS Networks on page 208](#)
- [Understanding Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors on page 220](#)
- [Example: Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors on page 221](#)

## Understanding Loop-Free Alternate Routes for IS-IS

---

In Junos OS Release 9.5 and later, support for IS-IS loop-free alternate routes enables IP fast-reroute capability for IS-IS. Junos OS precomputes loop-free backup routes for all IS-IS routes. These backup routes are preinstalled in the Packet Forwarding Engine, which performs a local repair and implements the backup path when the link for a primary next hop for a particular route is no longer available. With local repair, the Packet Forwarding Engine can correct a path failure before it receives recomputed paths from the Routing Engine. Local repair reduces the amount of time needed to reroute traffic to less than 50 milliseconds. In contrast, global repair can take up to 800 milliseconds to compute a new route. Local repair and global repair are thus complementary. Local repair enables traffic to continue to be routed using a backup path until global repair is able to calculate a new route.

A loop-free path is one that does not forward traffic back through the routing device to reach a given destination. That is, a neighbor whose shortest path to the destination traverses the routing device is not used as a backup route to that destination. To determine loop-free alternate paths for IS-IS routes, Junos OS runs shortest-path-first (SPF) calculations on each one-hop neighbor. You can enable support for alternate loop-free routes on any IS-IS interface. Because it is common practice to enable LDP on an interface for which IS-IS is already enabled, this feature also provides support for LDP label-switched paths (LSPs).



**NOTE:** If you enable support for alternate loop-free routes on an interface configured for both LDP and IS-IS, you can use the `traceroute` command to trace the active path to the primary next hop.


The level of backup coverage available through IS-IS routes depends on the actual network topology and is typically less than 100 percent for all destinations on any given routing device. You can extend backup coverage to include RSVP LSPs.

Junos OS provides two mechanisms for route redundancy for IS-IS through alternate loop-free routes: link protection and node-link protection. When you enable link protection or node-link protection on an IS-IS interface, Junos OS creates a single alternate path to the primary next hop for all destination routes that traverse a protected interface. Link protection offers per-link traffic protection. Use link protection when you assume that only a single link might become unavailable but that the neighboring node on the primary path would still be available through another interface.

Node-link protection establishes an alternate path through a different routing device altogether. Use node-link protection when you assume that access to a node is lost when a link is no longer available. As a result, Junos OS calculates a backup path that avoids the primary next-hop routing device. In Junos OS Release 9.4 and earlier, only the RSVP protocol supports Packet Forwarding Engine local repair and fast reroute as well as link protection and node protection.

In [Figure 19 on page 191](#), Case 2 shows how link protection allows source Router A to switch to Link B when the primary next hop Link A to destination Router C fails. However, if Router B fails, Link B also fails, and the protected Link A is lost. If node-link protection is enabled, Router A is able to switch to Link D on Router D and bypass the failed Router B altogether. As shown in Case 1, with node-link protection enabled, Router A has a node-link protection alternate path available through Router D to destination Router C. That means that if Router B fails, Router A can still reach Router C because the path from Router A to Link D remains available as an alternate backup path.

Figure 19: Link Protection and Node-Link Protection Comparison for IS-IS Routes

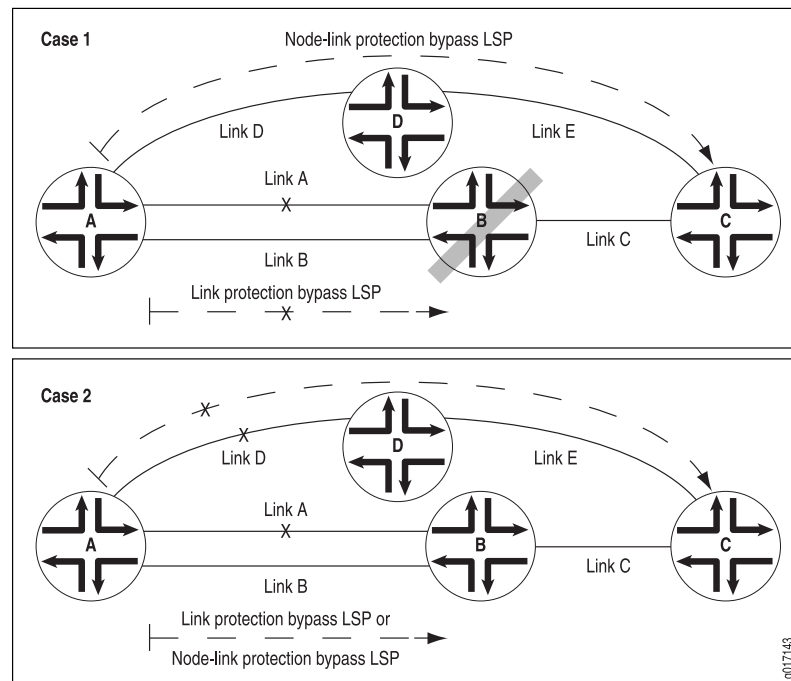

The Junos OS implementation of support for loop-free alternate paths for IS-IS routes is based on the following standards:

- RFC 5286, *Basic Specification for IP Fast-Reroute: Loop-free Alternates*
- RFC 5714, *IP Fast Reroute Framework*

## Configuring Link Protection for IS-IS

You can configure link protection on any interface for which IS-IS is enabled. When you enable link protection, Junos OS creates one alternate path to the primary next hop for all destination routes that traverse a protected interface. Link protection assumes that only a single link becomes unavailable but that the neighboring node would still be available through another interface.



**NOTE:** You must also configure a per-packet load-balancing routing policy to ensure that the routing protocol process installs all the next hops for a given route in the routing table.

To enable link protection, include the **link-protection** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```
[edit]
protocols {
  isis {
    interface interface-name {
```

```

    link-protection;
  }
}

```

## Configuring Node-Link Protection for IS-IS

You can configure node-link protection on any interface for which IS-IS is enabled. Node-link protection establishes an alternate path through a different routing device altogether for all destination routes that traverse a protected interface. Node-link protection assumes that the entire routing device, or node, has failed. Junos OS therefore calculates a backup path that avoids the primary next-hop routing device.



**NOTE:** You must also configure a per-packet load-balancing routing policy to ensure that the routing protocol process installs all the next hops for a given route in the routing table.

To enable node-link protection, include the **node-link-protection** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```

[edit]
protocols {
  isis {
    interface interface-name {
      node-link-protection;
    }
  }
}

```

## Excluding an IS-IS Interface as a Backup for Protected Interfaces

By default, all IS-IS interfaces that belong to the master instance or a specific routing instance are eligible as backup interfaces for protected interfaces. You can specify that any IS-IS interface be excluded from functioning as a backup interface to protected interfaces. To exclude an IS-IS interface as a backup interface, include the **no-eligible-backup** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```

[edit]
protocols {
  isis {
    interface interface-name {
      no-eligible-backup;
    }
  }
}

```

## Configuring RSVP Label-Switched Paths as Backup Paths for IS-IS

Relying on the shortest-path-first (SPF) calculation of backup paths for one-hop neighbors might result in less than 100 percent backup coverage for a specific network topology. You can enhance coverage of IS-IS and LDP label-switched paths (LSPs) by configuring RSVP LSPs as backup paths. To configure a specific RSVP LSP as a backup path, include the **backup** statement at the **[edit protocols mpls label-switched-path *lsp-name*]** hierarchy level:

```
[edit]
protocols {
  mpls {
    label-switched-path lsp-name {
      backup;
      to ip-address;
    }
  }
}
```

When configuring an LSP, you must specify the IP address of the egress routing device with the **to** statement. For detailed information about configuring LSPs and RSVP, see the *Junos OS MPLS Applications Library for Routing Devices*.

## Using Operational Mode Commands to Monitor Protected IS-IS Routes

You can issue operational mode commands that provide more details about your link-protected and node-link-protected IS-IS routes. The following guidelines explain the type of information available from the output of each command:

- **show isis backup label-switched-path**—Displays which MPLS LSPs have been designated as backup paths and the current status of those LSPs.
- **show isis backup spf results**—Displays SPF calculations for each neighbor for a given destination. Indicates whether a specific interface or node has been designated as a backup path and why. Use the **no-coverage** option to display only those nodes that do not have backup coverage.
- **show isis backup coverage**—Displays the percentage of nodes and prefixes for each type of address family that is protected.
- **show isis interface detail**—Displays the type of protection (link or node-link) applied to each protected interface.

### Related Documentation

- [Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193](#)

## Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN

Node-link protection establishes an alternate path through a different routing device. Use node-link protection when you assume that access to a node is lost when a link is

no longer available. Junos OS calculates a backup path that avoids the primary next-hop routing device.

- [Requirements on page 194](#)
- [Overview on page 194](#)
- [Configuration on page 195](#)
- [Verification on page 201](#)

## Requirements

This example requires Junos OS Release 9.5 or later.

No special configuration beyond device initialization is required before configuring this example.


## Overview

In this example, core-facing interfaces are enabled for IS-IS Level 2, LDP, and RSVP. Node-link protection is enabled on all the core-facing interfaces, which means that if the primary next hop for any destination that traverses the interfaces becomes unavailable, Junos OS uses a backup link that avoids the next-hop router altogether if necessary.

You also need to configure a routing policy that requires all traffic to use per-packet load balancing in order to enable Packet Forwarding Engine local repair. With local repair, the Packet Forwarding Engine can correct a path failure and implement a backup loop-free alternate route before it receives recomputed paths from the Routing Engine.

[Figure 20 on page 194](#) shows the topology used in this example.

**Figure 20: IS-IS Node-Link Protection Topology**

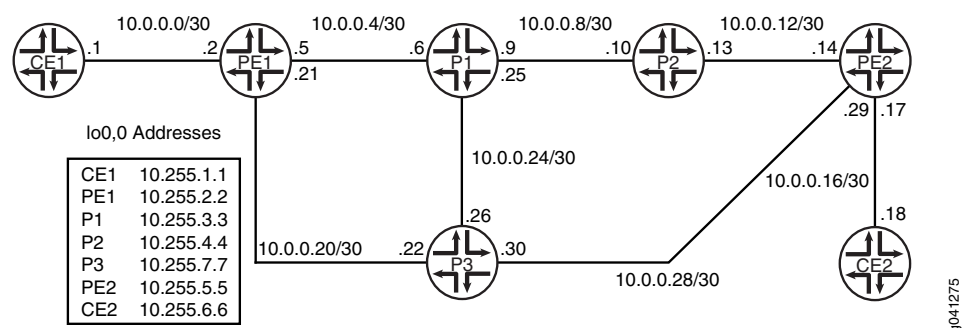

On Device PE1, an RSVP LSP is configured as a backup path for IS-IS. Relying on the shortest-path-first (SPF) calculation of backup paths for one-hop neighbors might result in less than 100 percent backup coverage for a specific network topology. You can enhance coverage of IS-IS and LDP LSPs by configuring RSVP LSPs as backup paths. To configure a specific RSVP LSP as a backup path, include the **backup** statement at the **[edit protocols mpls label-switched-path *lsp-name*]** hierarchy level.

[“CLI Quick Configuration” on page 195](#) shows the configuration for all of the devices in [Figure 20 on page 194](#). The section [“Step-by-Step Procedure” on page 198](#) describes the steps on Device P1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Device CE1</b> | <pre> set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30 set interfaces lo0 unit 0 family inet address 10.255.1.1/32 </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Device PE1</b> | <pre> set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30 set interfaces fe-1/2/0 unit 0 family iso set interfaces fe-1/2/0 unit 0 family mpls set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.5/30 set interfaces fe-1/2/1 unit 0 family iso set interfaces fe-1/2/1 unit 0 family mpls set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.21/30 set interfaces fe-1/2/2 unit 0 family iso set interfaces fe-1/2/2 unit 0 family mpls set interfaces lo0 unit 0 family inet address 10.255.2.2/32 set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0202.00 set protocols rsvp interface fe-1/2/2.0 set protocols rsvp interface fe-1/2/1.0 set protocols rsvp interface lo0.0 set protocols rsvp interface fxp0.0 disable set protocols mpls label-switched-path to-p2 backup set protocols mpls label-switched-path to-p2 to 10.255.4.4 set protocols mpls label-switched-path to-p2 ldp-tunneling set protocols mpls interface fe-1/2/2.0 set protocols mpls interface fe-1/2/1.0 set protocols mpls interface lo0.0 set protocols mpls interface fxp0.0 disable set protocols bgp group l3vpn type internal set protocols bgp group l3vpn local-address 10.255.2.2 set protocols bgp group l3vpn family inet-vpn unicast set protocols bgp group l3vpn peer-as 65534 set protocols bgp group l3vpn local-as 65534 set protocols bgp group l3vpn neighbor 10.255.5.5 set protocols isis spf-options delay 1000 set protocols isis interface all node-link-protection set protocols isis interface all level 2 metric 10 set protocols isis interface all level 1 disable set protocols isis interface fxp0.0 disable set protocols isis interface lo0.0 level 2 metric 0 set protocols ldp deaggregate set protocols ldp interface fe-1/2/1.0 set protocols ldp interface fe-1/2/2.0 set protocols ldp interface fxp0.0 disable set protocols ldp interface lo0.0 set policy-options policy-statement ecmp term 1 then load-balance per-packet set routing-instances VPN-A instance-type vrf set routing-instances VPN-A interface fe-1/2/0.0 </pre> |

```

set routing-instances VPN-A route-distinguisher 65534:1234
set routing-instances VPN-A vrf-target target:65534:1234
set routing-instances VPN-A routing-options static route 10.255.1.1/32 next-hop 10.0.0.1
set routing-options autonomous-system 65534
set routing-options forwarding-table export ecmp

```

**Device P1**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.3.3/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0303.00
set protocols rsvp interface all
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp

```

**Device P2**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.4.4/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0404.00
set protocols rsvp interface all
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate

```



```

set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp

```

**Device P3**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.30/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.7.7/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0707.00
set protocols rsvp interface all
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp

```

**Device PE2**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.29/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.5.5/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0505.00
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/2.0
set protocols rsvp interface lo0.0
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/2.0
set protocols mpls interface lo0.0
set protocols mpls interface fxp0.0 disable
set protocols bgp group l3vpn type internal
set protocols bgp group l3vpn local-address 10.255.5.5

```

```

set protocols bgp group l3vpn family inet-vpn unicast
set protocols bgp group l3vpn peer-as 65534
set protocols bgp group l3vpn local-as 65534
set protocols bgp group l3vpn neighbor 10.255.2.2
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface fe-1/2/0.0
set protocols ldp interface fe-1/2/2.0
set protocols ldp interface fxp0.0 disable
set protocols ldp interface lo0.0
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-instances VPN-A instance-type vrf
set routing-instances VPN-A interface fe-1/2/1.0
set routing-instances VPN-A route-distinguisher 65534:1234
set routing-instances VPN-A vrf-target target:65534:1234
set routing-instances VPN-A routing-options static route 10.255.1.1/32 next-hop 10.0.0.18
set routing-options autonomous-system 65534
set routing-options forwarding-table export ecmp

```

**Device CE2**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces lo0 unit 0 family inet address 10.255.6.6/32

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the interfaces.

Enable IS-IS and MPLS.

```

[edit interfaces]
user@P1# set fe-1/2/0 unit 0 family inet address 10.0.0.6/30
user@P1# set fe-1/2/0 unit 0 family iso
user@P1# set fe-1/2/0 unit 0 family mpls
user@P1# set fe-1/2/1 unit 0 family inet address 10.0.0.9/30
user@P1# set fe-1/2/1 unit 0 family iso
user@P1# set fe-1/2/1 unit 0 family mpls
user@P1# set fe-1/2/2 unit 0 family inet address 10.0.0.25/30
user@P1# set fe-1/2/2 unit 0 family iso
user@P1# set fe-1/2/2 unit 0 family mpls
user@P1# set lo0 unit 0 family inet address 10.255.3.3/32
user@P1# set lo0 unit 0 family iso address 49.0001.0010.0000.0303.00

```

2. Configure the IS-IS interfaces for Level 2.

```
[edit protocols]
user@P1# set isis interface all level 2 metric 10
user@P1# set isis interface all level 1 disable
user@P1# set isis interface fxp0.0 disable
user@P1# set isis interface lo0.0 level 2 metric 0
```

3. Enable IS-IS node-link protection, which also automatically extends backup coverage to all LDP LSPs.

```
[edit protocols]
user@P1# set isis interface all node-link-protection
```

4. (Optional) Configure a 1000-millisecond time interval between the detection of a topology change and when the SPF algorithm runs.

```
[edit protocols]
user@P1# set isis spf-options delay 1000
```

5. Configure MPLS to use both RSVP and LDP label-switched paths (LSPs).

```
[edit protocols]
user@P1# set mpls interface all
user@P1# set mpls interface fxp0.0 disable
user@P1# set rsvp interface all
user@P1# set rsvp interface fxp0.0 disable
user@P1# set ldp interface all
user@P1# set ldp interface fxp0.0 disable
```

6. (Optional) For LDP, enable forwarding equivalence class (FEC) deaggregation, which results in faster global convergence.

```
[edit protocols]
user@P1# set ldp deaggregate
```

7. To enable Packet Forwarding Engine local repair, establish a policy that forces the routing protocol process to install all the next hops for a given route.

This policy ensures that the backup route is installed in the forwarding table used by the Packet Forwarding Engine to forward traffic to a given destination.

```
[edit policy-options policy-statement ecmp term 1]
user@P1# set then load-balance per-packet
```

8. Apply the policy to the forwarding table of the local router with the **export** statement.

```
[edit routing-options forwarding-table]
user@P1# set export ecmp
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P1# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.6/30;
    }
    family iso;
    family mpls;
  }
}
fe-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.9/30;
    }
    family iso;
    family mpls;
  }
}
fe-1/2/2 {
  unit 0 {
    family inet {
      address 10.0.0.25/30;
    }
    family iso;
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.255.3.3/32;
    }
    family iso {
      address 49.0001.0010.0000.0303.00;
    }
  }
}
```

```
user@P1# show protocols
rsvp {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
mpls {
  interface all;
  interface fxp0.0 {
```

```

        disable;
    }
}
isis {
    spf-options delay 1000;
    interface all {
        node-link-protection;
        level 2 metric 10;
        level 1 disable;
    }
    interface fxp0.0 {
        disable;
    }
    interface lo0.0 {
        level 2 metric 0;
    }
}
ldp {
    deaggregate;
    interface all;
    interface fxp0.0 {
        disable;
    }
}
}

```

```

user@P1# show policy-options
policy-statement ecmp {
    term 1 {
        then {
            load-balance per-packet;
        }
    }
}
}

```

```

user@P1# show routing-options
forwarding-table {
    export ecmp;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the MPLS LSP Backup Path on page 202](#)
- [Checking Which Next-Hop Neighbors Are Designated as Backup Paths to the Destination Node on page 202](#)
- [Checking the Backup Coverage on page 203](#)
- [Checking the Type of Protection Configured on page 204](#)

### Checking the MPLS LSP Backup Path

---

**Purpose** Display information about the MPLS label-switched-paths (LSPs) designated as the backup route for the IS-IS routes.

**Action** On Device PE1, from operational mode, enter the **show isis backup label-switched-path** command.

```
user@PE1> show isis backup label-switched-path
```

```
Backup MPLS LSPs:
to-p2, Egress: 10.255.4.4, Status: up, Last change: 01:17:45
TE-metric: 19, Metric: 0, Refcount: 1
```

**Meaning** The output shows that the backup path is up and operational.

### Checking Which Next-Hop Neighbors Are Designated as Backup Paths to the Destination Node

---

**Purpose** Display SPF calculations for each neighbor for a given destination.

**Action** On Device PE1, from operational mode, enter the **show isis backup spf results** command.

```
user@PE1> show isis backup spf results
```

```
IS-IS level 1 SPF results:
 0 nodes

IS-IS level 2 SPF results:
PE2.00
  Primary next-hop: fe-1/2/2.0, IPV4, P3, SNPA: 0:5:85:8f:c8:bd
    Root: P2, Root Metric: 20, Metric: 10, Root Preference: 0x0
    track-item: P2.00-00
    Eligible, Backup next-hop: fe-1/2/1.0, LSP, to-p2
    Root: P3, Root Metric: 10, Metric: 10, Root Preference: 0x0
    Not eligible, Reason: Interface is already covered
    Root: P1, Root Metric: 10, Metric: 20, Root Preference: 0x0
    track-item: P3.00-00
    Not eligible, Reason: Interface is already covered
P2.00
  Primary next-hop: fe-1/2/1.0, IPV4, P1, SNPA: 0:5:85:8f:c8:bd
    Root: P2, Root Metric: 20, Metric: 0, Root Preference: 0x0
    track-item: P2.00-00
    Not eligible, Reason: Primary next-hop link fate sharing
    Root: P1, Root Metric: 10, Metric: 10, Root Preference: 0x0
    Not eligible, Reason: Primary next-hop link fate sharing
    Root: P3, Root Metric: 10, Metric: 20, Root Preference: 0x0
    track-item: P1.00-00
    Not eligible, Reason: Primary next-hop node fate sharing
P3.00
  Primary next-hop: fe-1/2/2.0, IPV4, P3, SNPA: 0:5:85:8f:c8:bd
    Root: P2, Root Metric: 20, Metric: 20, Root Preference: 0x0
```

```

track-item: P3.00-00
track-item: P2.00-00
track-item: P1.00-00
Eligible, Backup next-hop: fe-1/2/1.0, LSP, to-p2
Root: P3, Root Metric: 10, Metric: 0, Root Preference: 0x0
Not eligible, Reason: Interface is already covered
Root: P1, Root Metric: 10, Metric: 10, Root Preference: 0x0
track-item: P3.00-00
Not eligible, Reason: Interface is already covered
P1.00
Primary next-hop: fe-1/2/1.0, IPV4, P1, SNPA: 0:5:85:8f:c8:bd
Root: P2, Root Metric: 20, Metric: 10, Root Preference: 0x0
track-item: P2.00-00
track-item: P1.00-00
Not eligible, Reason: Primary next-hop link fate sharing
Root: P1, Root Metric: 10, Metric: 0, Root Preference: 0x0
Not eligible, Reason: Primary next-hop link fate sharing
Root: P3, Root Metric: 10, Metric: 10, Root Preference: 0x0
track-item: P1.00-00
Eligible, Backup next-hop: fe-1/2/2.0, IPV4, P3, SNPA: 0:5:85:8f:c8:bd
4 nodes

```

**Meaning** The output indicates whether a specific interface or node has been designated as a backup path and why.

### Checking the Backup Coverage

**Purpose** Check the percentage of protected nodes and prefixes.

**Action** From operational mode, enter the **show isis backup coverage** command.

```
user@PE1> show isis backup coverage
```

```

Backup Coverage:
Topology      Level  Node   IPv4   IPv6   CLNS
IPV4 Unicast  1      0.00%  0.00%  0.00%  0.00%
IPV4 Unicast  2      75.00% 87.50%  0.00%  0.00%

```

```
user@P1> show isis backup coverage
```

```

Backup Coverage:
Topology      Level  Node   IPv4   IPv6   CLNS
IPV4 Unicast  1      0.00%  0.00%  0.00%  0.00%
IPV4 Unicast  2      75.00% 71.43%  0.00%  0.00%

```

```
user@P2> show isis backup coverage
```

```

Backup Coverage:
Topology      Level  Node   IPv4   IPv6   CLNS
IPV4 Unicast  1      0.00%  0.00%  0.00%  0.00%
IPV4 Unicast  2      50.00% 37.50%  0.00%  0.00%

```

```
user@P3> show isis backup coverage
```

**Backup Coverage:**

| Topology     | Level | Node   | IPv4   | IPv6  | CLNS  |
|--------------|-------|--------|--------|-------|-------|
| IPV4 Unicast | 1     | 0.00%  | 0.00%  | 0.00% | 0.00% |
| IPV4 Unicast | 2     | 75.00% | 71.43% | 0.00% | 0.00% |

```
user@PE2> show isis backup coverage
```

**Backup Coverage:**

| Topology     | Level | Node   | IPv4   | IPv6  | CLNS  |
|--------------|-------|--------|--------|-------|-------|
| IPV4 Unicast | 1     | 0.00%  | 0.00%  | 0.00% | 0.00% |
| IPV4 Unicast | 2     | 50.00% | 37.50% | 0.00% | 0.00% |

**Meaning** The level of backup coverage available through IS-IS routes depends on the actual network topology and is typically less than 100 percent for all destinations on any given routing device. You can extend backup coverage to include RSVP LSPs.

### Checking the Type of Protection Configured

**Purpose** On all nodes in the IS-IS domain, check the type and percentage of protected nodes and prefixes.

**Action** From operational mode, enter the **show isis interface detail** command.

```
user@PE1> show isis interface detail
```

**IS-IS interface database:**

```
lo0.0
```

```
Index: 76, State: 0x6, Circuit id: 0x1, Circuit type: 0
```

```
LSP interval: 100 ms, CSNP interval: disabled
```

```
Adjacency advertisement: Advertise
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
1 0 64 0 Passive
```

```
2 0 64 0 Passive
```

```
fe-1/2/2.0
```

```
Index: 79, State: 0x6, Circuit id: 0x1, Circuit type: 2
```

```
LSP interval: 100 ms, CSNP interval: 10 s
```

```
Adjacency advertisement: Advertise
```

```
Protection Type: Node Link
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
2 1 64 10 9.000 27 P3.03 (not us)
```

```
fe-1/2/1.0
```

```
Index: 77, State: 0x6, Circuit id: 0x1, Circuit type: 2
```

```
LSP interval: 100 ms, CSNP interval: 10 s
```

```
Adjacency advertisement: Advertise
```

```
Protection Type: Node Link
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
2 1 64 10 9.000 27 P1.02 (not us)
```

**Meaning** The output shows that node-link protection is configured on the interfaces.



**Related Documentation** • [Understanding Loop-Free Alternate Routes for IS-IS on page 189](#)

## Understanding Remote LFA over LDP Tunnels in IS-IS Networks

In an IS-IS network, a loop free alternate (LFA) is a directly connected neighbor that provides precomputed backup paths to the destinations reachable through the protected link on the point of local repair (PLR). A remote LFA is not directly connected to the PLR and provides precomputed backup paths using dynamically created LDP tunnels to the remote LFA node. The PLR uses this remote LFA backup path when the primary link fails. The primary goal of the remote LFA is to increase backup coverage for the IS-IS networks and provide protection for Layer 1 metro-rings.

LFAs do not provide full backup coverage for IS-IS networks. This is a major setback for metro Ethernet networks that are often shaped as ring topologies. To overcome this setback, Resource Reservation Protocol - Traffic Engineering (RSVP-TE) backup tunnels are commonly used to extend the backup coverage. However, a majority of network providers have already implemented LDP as the MPLS tunnel setup protocol and do not want to implement the RSVP-TE protocol merely for backup coverage. LDP automatically brings up transport tunnels to all potential destinations in an IS-IS network and hence is the preferred protocol. The existing LDP implemented for the MPLS tunnel setup can be reused for protection of IS-IS networks and subsequent LDP destinations, thereby eliminating the need for RSVP-TE backup tunnels for backup coverage.

To calculate the remote LFA backup path, the IS-IS protocol determines the remote LFA node in the following manner:

1. Calculates the reverse shortest path first from the adjacent router across the protected link of a PLR. The reverse shortest path first uses the incoming link metric instead of the outgoing link metric to reach a neighboring node.

The result is a set of links and nodes, which is the shortest path from each leaf node to the root node.

2. Calculates the shortest path first (SPF) on the remaining adjacent routers to find the list of nodes that can be reached without traversing the link being protected.

The result is another set of links and nodes on the shortest path from the root node to all leaf nodes.

3. Determines the common nodes from the above results, These nodes are the remote LFAs.

IS-IS listens to the advertised labels for the LDP routes. For each advertised LDP route, IS-IS checks whether it contains an LDP supplied next hop. If the corresponding IS-IS route does have a backup next hop, then IS-IS runs the backup policy and adds an additional tracking route with the corresponding LDP label-switched path next hop as the backup next hop. If there are no backup next hops, LDP builds a dynamic LDP tunnel to the remote LFA, and LDP establishes a targeted adjacency between the remote LFA

node and the PLR node. This backup route has two LDP labels. The top label is the IS-IS route, which denotes the backup path from the PLR to the remote LFA route. The bottom label is the LDP MPLS label-switched path that denotes the route for reaching the ultimate destination from the remote LFA. When an LDP session goes down and a remote tunnel is no longer available, IS-IS changes all the routes that have been using this backup LDP tunnel.



**NOTE:** Currently, Junos OS supports only IPv4 transport LSPs. If you need to reuse IPv4 transport LSPs for IPv6 IGP networks, add an IPv6 explicit NULL label to the label stack of the tracking route. The system automatically converts the IPv4 LSP to an IPv6 LSP.

LDP might be vulnerable by an automatically targeted adjacency, and these threats can be mitigated using all or some of the following mechanisms:

- Remote LFAs that are several hops away use extended hello messages to indicate willingness to establish a targeted LDP session. A remote LFA can reduce the threat of spoofed extended hellos by filtering them and accepting only those originating at sources permitted by an access or filter list.
- There is a need to authenticate with TCP-MD5 all auto-targeted LDP sessions in the given IGP/LDP domain using apply groups or LDP global-level authentication.
- As an added security measure, the repair or remote tunnel endpoint routers should be assigned from a set of addresses that are not reachable from outside of the routing domain.

**Related  
Documentation**

- [\*auto-targeted-session\*](#)
- [no-eligible-remote-backup on page 542](#)
- [remote-backup-calculation on page 569](#)
- [Configuring Remote LFA Backup over LDP Tunnels in an IS-IS Network on page 206](#)
- [Example: Configuring Remote LFA over LDP Tunnels in IS-IS Networks on page 208](#)

---

## Configuring Remote LFA Backup over LDP Tunnels in an IS-IS Network

Starting in Junos OS Release 14.2, the primary goal of a remote loop-free alternate (LFA) is to increase backup coverage for IS-IS routes and provide protection especially for Layer 1 metro-rings. The existing LDP implemented for the MPLS tunnel setup can be reused for protection of IS-IS networks and subsequent LDP destinations. The IS-IS protocol creates a dynamic LDP tunnel to reach the remote LFA node from the point of local repair (PLR). The PLR uses this remote LFA backup path when the primary link fails.

Before you configure remote LFA over LDP tunnels in an IS-IS network, you must do the following:

1. Enable LDP on the loopback interface.

Configure a loopback interface because an LDP targeted adjacency cannot be formed without a loopback interface. LDP targeted adjacency is essential for determining remote LFA backup paths.

2. Make sure that remote LFA allows asymmetric remote neighbor discovery—that is, it must send periodic targeted hello messages to the router that initiated the remote neighbor for LDP auto-targeted adjacency.
3. Configure link protection or node-link protection on the PLR.

To configure remote LFA backup over LDP tunnels in an IS-IS network:

1. Enable remote LFA backup to determine the backup next hop using dynamic LDP label-switched path.

```
[edit protocols isis backup-spf-options]
user@host# set remote-backup-calculation
```

2. (Optional) Include the **node-link-degradation** statement even if node-link protection is not configured for a given interface.

The device uses the configured link protection LFA as the backup for the primary link.

```
[edit protocols isis backup-spf-options]
user@host# set node-link-degradation
```

3. Enable automatically targeted LDP sessions using the loopback addresses between the PLR and the remote LFA node.

```
[edit protocols ldp]
user@host# set auto-targeted-session
```

4. Specify a time interval for which the targeted LDP sessions are kept up even after the remote LFA node goes down.

```
[edit protocols ldp auto-targeted-session]
user@host# set teardown-delay seconds
```

For example, to set a teardown delay value of 60 seconds:

```
[edit protocols ldp auto-targeted-session]
user@host# set teardown-delay 60
```

5. Specify the maximum number of automatically targeted LDP sessions to optimize memory usage.

```
[edit protocols ldp auto-targeted-session]
```

```
user@host# set maximum-sessions number of sessions
```

For example, to set a maximum sessions allowed to 20:

```
[edit protocols ldp auto-targeted-session]
user@host# set maximum-sessions 20
```

#### Release History Table

| Release | Description                                                                                                                                                                                          |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 14.2    | Starting in Junos OS Release 14.2, the primary goal of a remote loop-free alternate (LFA) is to increase backup coverage for IS-IS routes and provide protection especially for Layer 1 metro-rings. |

#### Related Documentation

- [auto-targeted-session](#)
- [remote-backup-calculation on page 569](#)
- [no-eligible-remote-backup on page 542](#)
- [Example: Configuring Remote LFA over LDP Tunnels in IS-IS Networks on page 208](#)
- [Understanding Remote LFA over LDP Tunnels in IS-IS Networks on page 205](#)

### Example: Configuring Remote LFA over LDP Tunnels in IS-IS Networks

This example shows how to configure remote LFA for LDP tunnels in an IS-IS network for extending backup protection.

- [Requirements on page 208](#)
- [Overview on page 209](#)
- [Configuration on page 209](#)
- [Verification on page 217](#)

#### Requirements

This example uses the following hardware and software components:

- Six MX Series routers with IS-IS protocol and LDP enabled on the connected interfaces.
- Junos OS Release 14.2 or later running on all devices.

Before you configure remote LFA over LDP tunnels in IS-IS networks, make sure of the following:

- LDP is enabled on the loopback interface. Without a loopback interface, LDP targeted adjacency cannot be formed. Remote LFA cannot be configured without LDP targeted adjacency.

- Remote LFA must allow asymmetric remote neighbor discovery, that is, it must send periodic targeted hellos to the router that initiated the remote neighbor for LDP auto targeted adjacency.
- Link protection or node-link protection must be configured on the point of local repair (PLR).


Overview

The example includes six routers in a ring topology. Configure the IS-IS protocol on the directly connected interfaces. Device R1 is the PLR. This example verifies that Junos OS updates the routing table of Device R1 with LDP next-hop routes as the backup route.

Topology

Figure 21 on page 209 shows the topology used in this example.

Figure 21: Configuring Remote LFA over LDP Tunnels in IS-IS Networks

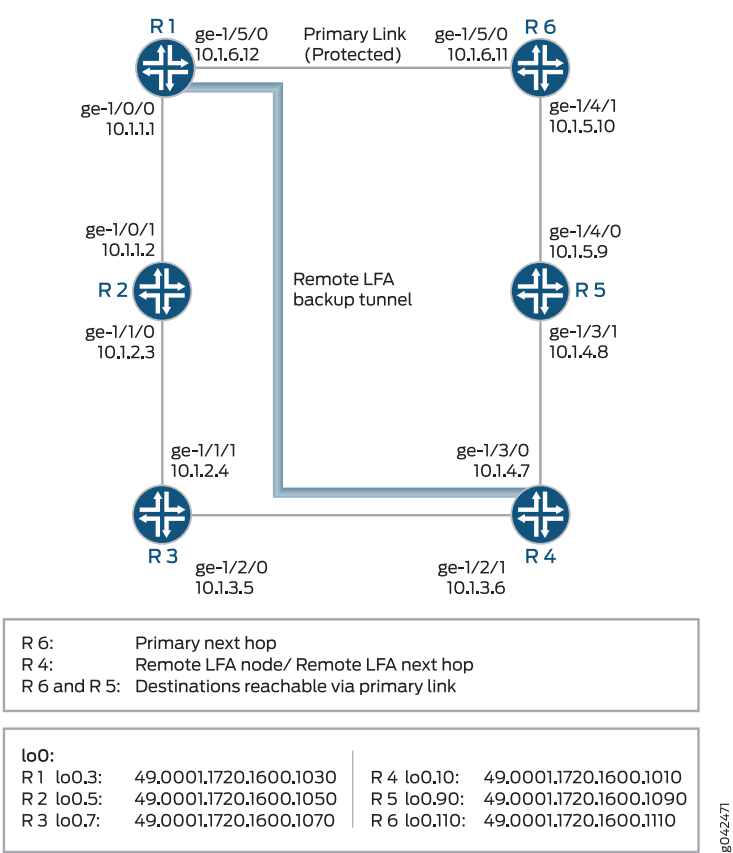

Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network

configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Router R1
set interfaces ge-1/0/0 unit 1 description R1->R2
set interfaces ge-1/0/0 unit 1 family inet address 1.1.1.1/24
set interfaces ge-1/0/0 unit 1 family iso
set interfaces ge-1/0/0 unit 1 family mpls
set interfaces ge-1/5/0 unit 12 description R1->R6
set interfaces ge-1/5/0 unit 12 family inet address 1.1.6.12/24
set interfaces ge-1/5/0 unit 12 family iso
set interfaces ge-1/5/0 unit 12 family mpls
set interfaces lo0 unit 10 family inet address 10.255.102.128/32
set interfaces lo0 unit 10 family iso address 49.0001.1720.1600.1010.00
set protocols isis interface ge-1/0/0.1
set protocols isis interface ge-1/5/0.12 link-protection
set protocols isis interface lo0.12 passive
set protocols isis interface all level 2 metric 10
set protocols isis interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options node-link-degradation
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set protocols ldp auto-targeted-session
set protocols ldp auto-targeted-session teardown-delay 60
set protocols ldp auto-targeted-session maximum-sessions 20
set protocols ldp deaggregate
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp
```

```
Router R2
set interfaces ge-1/0/1 unit 2 description R2>R1
set interfaces ge-1/0/1 unit 2 family inet address 1.1.1.2/24
set interfaces ge-1/0/1 unit 2 family iso
set interfaces ge-1/0/1 unit 2 family mpls
set interfaces ge-1/1/0 unit 3 description R2->R3
set interfaces ge-1/1/0 unit 3 family inet address 1.1.2.3/24
set interfaces ge-1/1/0 unit 3 family iso
set interfaces ge-1/1/0 unit 3 family mpls
set interfaces lo0 unit 3 family inet address 10.255.102.178/32
set interfaces lo0 unit 3 family iso address 49.0001.1720.1600.1030.00
set protocols isis interface ge-1/0/1.2
set protocols isis interface ge-1/1/0.3
set protocols isis interface lo0.3 passive
set protocols isis interface all level 2 metric 10
set protocols isis interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
```

```

set protocols ldp auto-targeted-session
set protocols ldp auto-targeted-session teardown-delay 60
set protocols ldp auto-targeted-session maximum-sessions 20
set protocols ldp deaggregate

```

**Router R3**

```

set interfaces ge-1/1/1 unit 4 description R3->R2
set interfaces ge-1/1/1 unit 4 family inet address 1.1.2.4/24
set interfaces ge-1/1/1 unit 4 family iso
set interfaces ge-1/1/1 unit 4 family mpls
set interfaces ge-1/2/0 unit 5 description R3->R4
set interfaces ge-1/2/0 unit 5 family inet address 1.1.3.5/24
set interfaces ge-1/2/0 unit 5 family iso
set interfaces ge-1/2/0 unit 5 family mpls
set interfaces lo0 unit 5 family inet address 10.255.102.146/32
set interfaces lo0 unit 5 family iso address 49.0001.1720.1600.1050.00
set protocols isis interface ge-1/1/1.4
set protocols isis interface ge-1/2/0.5
set protocols isis interface lo0.5 passive
set protocols isis interface all level 2 metric 10
set protocols isis interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set protocols ldp auto-targeted-session
set protocols ldp auto-targeted-session teardown-delay 60
set protocols ldp auto-targeted-session maximum-sessions 20
set protocols ldp deaggregate

```

**Router R4**

```

set interfaces ge-1/2/1 unit 6 description R4->R3
set interfaces ge-1/2/1 unit 6 family inet address 1.1.3.6/24
set interfaces ge-1/2/1 unit 6 family iso
set interfaces ge-1/2/1 unit 6 family mpls
set interfaces ge-1/3/0 unit 7 description R4->R5
set interfaces ge-1/3/0 unit 7 family inet address 1.1.4.7/24
set interfaces ge-1/3/0 unit 7 family iso
set interfaces ge-1/3/0 unit 7 family mpls
set interfaces lo0 unit 7 family inet address 10.255.102.156/32
set interfaces lo0 unit 7 family iso address 49.0001.1720.1600.1070.00
set protocols isis interface ge-1/2/1.6
set protocols isis interface ge-1/3/0.7
set protocols isis interface lo0.7 passive
set protocols isis interface all level 2 metric 10
set protocols isis interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set protocols ldp auto-targeted-session
set protocols ldp auto-targeted-session teardown-delay 60

```

```
set protocols ldp auto-targeted-session maximum-sessions 20
set protocols ldp deaggregate
```

**Router R5**

```
set interfaces ge-1/3/1 unit 8 description R5->R4
set interfaces ge-1/3/1 unit 8 family inet address 1.1.4.8/24
set interfaces ge-1/3/1 unit 8 family iso
set interfaces ge-1/3/1 unit 8 family mpls
set interfaces ge-1/4/0 unit 9 description R5->R6
set interfaces ge-1/4/0 unit 9 family inet address 1.1.5.9/24
set interfaces ge-1/4/0 unit 9 family iso
set interfaces ge-1/4/0 unit 9 family mpls
set interfaces lo0 unit 90 family inet address 10.255.102.166/32
set interfaces lo0 unit 90 family iso address 49.0001.1720.1600.1090.00
set protocols isis interface ge-1/3/1.8
set protocols isis interface ge-1/4/0.9
set protocols isis interface lo0.9 passive
set protocols isis interface all level 2 metric 10
set protocols isis interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set ldp auto-targeted-session
set ldp auto-targeted-session teardown-delay 60
set ldp auto-targeted-session maximum-sessions 20
set protocols ldp deaggregate
```

**Router R6**

```
set interfaces ge-1/4/1 unit 10 description R6->R5
set interfaces ge-1/4/1 unit 10 family inet address 1.1.5.10/24
set interfaces ge-1/4/1 unit 10 family iso
set interfaces ge-1/4/1 unit 10 family mpls
set interfaces ge-1/5/0 unit 11 description R6->R1
set interfaces ge-1/5/0 unit 11 family inet address 1.1.6.11/24
set interfaces ge-1/5/0 unit 11 family iso
set interfaces lo0 unit 110 family inet address 10.255.102.136/32
set interfaces lo0 unit 110 family iso address 49.0001.1720.1600.1110.00
set protocols isis interface ge-1/4/1.10
set protocols isis interface ge-1/5/0.11
set protocols isis interface lo0.11 passive
set protocols isis interface all level 2 metric 10
set protocols isis interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set protocols ldp auto-targeted-session teardown-delay 60
set protocols ldp auto-targeted-session maximum-sessions 20
set protocols ldp deaggregate
```



## Configuring Device R1

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.



**NOTE:** Repeat this procedure except Step 4 and 5 for every Juniper Networks router in the IGP domain, modifying the appropriate interface names, addresses, and any other parameters.

To configure Device R1:

1. Configure the interfaces.

```
[edit interfaces]
user@R1# set ge-1/0/0 unit 1 description R1->R2
user@R1# set ge-1/0/0 unit 1 family inet address 1.1.1/24
user@R1# set ge-1/0/0 unit 1 family iso
user@R1# set ge-1/0/0 unit 1 family mpls

user@R1# set ge-1/5/0 unit 12 description R1->R6
user@R1# set ge-1/5/0 unit 12 family inet address 1.1.6.12/24
user@R1# set ge-1/5/0 unit 12 family iso
user@R1# set ge-1/5/0 unit 12 family mpls
```

2. Assign a loopback address to the device.

```
[edit interfaces lo0 unit 10]
user@R1# set family inet address 10.255.102.128/32
user@R1# set family iso address 49.0001.1720.1600.1010.00
```

3. Configure the IS-IS interface for level 2 and the metric value on all the interfaces, and enable link protection on the protected interface.

```
[edit protocols isis]
user@R1# set interface all level 2 metric 10
user@R1# set interface lo0.12 passive
user@R1# set interface fxp0.0 disable
user@R1# set interface ge-1/0/0.1
user@R1# set interface ge-1/5/0.12 link-protection
```

4. Enable IS-IS node-link protection, which also automatically extends backup coverage to all LDP label-switched paths.

```
[edit protocols isis]
user@R1# set spf-options delay 1000
```

```
user@R1# set interface all node-link-protection
```

5. Enable remote LFA backup which calculates the backup next hop using dynamic LDP label-switched path.

(Optional) When you include the node link degradation statement even if node protection LFA is not configured for a given destination, the device uses the configured link protection LFA as the backup for the primary link.

```
[edit protocols isis]
user@R1# set backup-spf-options remote-backup-calculation
user@R1# set backup-spf-options node-link-degradation
```

6. Configure MPLS to use LDP label-switched paths for all interfaces on the device.

```
[edit protocols]
user@R1# set mpls interface all
user@R1# set mpls interface fxp0.0 disable
user@R1# set ldp interface all
user@R1# set ldp interface fxp0.0 disable
```

7. Specify a time interval for which the targeted LDP sessions are kept up when the remote LFA goes down, and specify a maximum number of automatically, targeted LDP sessions to optimize the use of memory.

```
[edit protocols ldp]
user@R1# set auto-targeted-session
user@R1# set auto-targeted-session teardown-delay 60
user@R1# set auto-targeted-session maximum-sessions 20
```

8. (Optional) Enable forwarding equivalence class (FEC) deaggregation, which results in faster global convergence.

```
[edit protocols ldp]
user@R1# set deaggregate
```

9. To enable Packet Forwarding Engine local repair, establish a policy that forces the routing protocol process to install all the next hops for a given route.

This policy ensures that the backup route is installed in the forwarding table used by the Packet Forwarding Engine to forward traffic to a given destination.

```
[edit policy-options]
user@R1# set policy-options policy-statement ecmp term 1
user@R1# set then load-balance per-packet
```

10. Apply the policy to the forwarding table of the local router with the export statement.

```
[edit routing-options forwarding-table]
user@R1# set export ecmp
```

## Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
ge-1/0/0 {
  unit 1 {
    description R1->R2;
    family inet {
      address 1.1.1/24;
    }
    family iso;
    family mpls;
  }
}
ge-1/5/0 {
  unit 12 {
    description R1->R6;
    family inet {
      address 1.1.6.12/24;
    }
    family iso;
    family mpls;
  }
}
lo0 {
  unit 10 {
    family inet {
      address 10.255.102.128/32;
    }
    family iso {
      address 49.0001.1720.1600.1010.00;
    }
  }
}
```

```
user@R1# show protocols
mpls {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
isis {
  spf-options delay 1000;
  backup-spf-options {
```

```
    remote-backup-calculation;
    node-link-degradation;
  }
  interface ge-1/0/0.1;
  interface ge-1/5/0.12; {
    link-protection;
  }
  interface all {
    node-link-protection;
    level 2 metric 10;
  }
  interface fxp0.0 {
    disable;
  }
  interface lo0.12 {
    passive;
  }
}
ldp {
  auto-targeted-session {
    teardown-delay 60;
    maximum-sessions 20;
  }
  deaggregate;
  interface all;
  interface fxp0.0 {
    disable;
  }
}
```

```
user@R1# show policy-options
policy-options {
  policy-statement ecmp {
    term 1 {
      then {
        load-balance per-packet;
      }
    }
  }
}
```

```
user@R1# show routing-options
forwarding-table {
  export ecmp;
}
```

If you are done configuring the device, enter **commit** from the configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying the Routes on page 217](#)
- [Verifying the IS-IS Routes on page 218](#)
- [Verifying the LDP Routes on page 218](#)
- [Verifying the Designated Backup Path Node on page 219](#)

### Verifying the Routes

**Purpose** Verify that the expected routes are learned.

**Action** On Device R1, from operational mode, run the **show route** command to display the routes in the routing table.

```
user@R1> show route 1.1.4/24
```

```
inet.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
1.1.4.0/24          *[IS-IS/15] 11:37:58, metric 30
                    > to 1.1.6.11 via ge-1/5/0
                    to 1.1.1.2 via ge-1/0/0, Push 299824
```

```
user@R1> show route 1.1.4/24 detail
```

```
inet.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
1.1.4.0/24 (1 entry, 1 announced)
State: <FlashAll>
*IS-IS Preference: 15
  Level: 1
  Next hop type: Router, Next hop index: 262154
  Address: 0x98047cc
  Next-hop reference count: 8
  Next hop: 1.1.6.11 via ge-1/5/0 weight 0x1, selected
  Session Id: 0x14b
  Next hop: 1.1.1.2 via ge-1/0/0 weight 0x101 uflags Remote neighbor path

  Label operation: Push 299824
  Label TTL action: prop-ttl
  Load balance label: Label 299824: None;
  Session Id: 0x142
  State:<Active Int>
  Age: 11:38:00
  Metric: 30
  Validation State: unverified
  Task: IS-IS
  Announcement bits (3): 0-LDP 1-IS-IS 3-KRT
  AS path: I
```

**Meaning** The output shows all the routes in the routing table of Device R1.

## Verifying the IS-IS Routes

**Purpose** Display all the LDP backup routes in the IS-IS routing table of Device R1.

**Action** On Device R1, from operational mode, run the **show isis route** command to display the routes in the IS-IS routing table.

```
user@R1> show isis route
```

```
IS-IS routing table          Current version: L1: 558 L2: 564
IPv4/IPv6 Routes
-----
Prefix      Backup Score  L Version  Metric Type Interface      NH   Via
1.1.2.0/24      1      558      20 int  1t-1/2/0.1      IPV4 tp3-R2
1.1.3.0/24      1      558      30 int  1t-1/2/0.1      IPV4 tp3-R2
1.1.4.0/24      1      558      30 int  1t-1/2/0.12     IPV4 tp3-R6
                                1t-1/2/0.1      LSP
LDP->tp3-R4(10.255.102.156)
1.1.5.0/24      1      558      20 int  1t-1/2/0.12     IPV4 tp3-R6
                                1t-1/2/0.1      LSP
LDP->tp3-R4(10.255.102.156)
10.255.102.136/32 1      558      10 int  1t-1/2/0.12     IPV4 tp3-R6
                                1t-1/2/0.1      LSP
LDP->tp3-R4(10.255.102.156)
10.255.102.146/32 1      558      20 int  1t-1/2/0.1      IPV4 tp3-R2
10.255.102.156/32 1      558      30 int  1t-1/2/0.1      IPV4 tp3-R2
                                1t-1/2/0.12     IPV4 tp3-R6
10.255.102.166/32 1      558      20 int  1t-1/2/0.12     IPV4 tp3-R6
                                1t-1/2/0.1      LSP
LDP->tp3-R4(10.255.102.156)
10.255.102.178/32 1      558      10 int  1t-1/2/0.1      IPV4 tp3-R2
```

**Meaning** The output shows all the LDP backup routes in the IS-IS routing table of Device R1.

## Verifying the LDP Routes

**Purpose** Verify the automatically targeted LDP routes.

**Action** From operational mode, enter the **show ldp session auto-targeted detail** command.

```
user@R1> show ldp session auto-targeted detail
```

```
Address: 10.255.102.156, State: Operational, Connection: Open, Hold time: 21
Session ID: 10.255.102.128:0--10.255.102.156:0
Next keepalive in 1 seconds
Passive, Maximum PDU: 4096, Hold time: 30, Neighbor count: 1
Neighbor types: auto-targeted
Keepalive interval: 10, Connect retry interval: 1
Local address: 10.255.102.128, Remote address: 10.255.102.156
Up for 11:38:23
Capabilities advertised: none
Capabilities received: none
Protection: disabled
Session flags: none
Local - Restart: disabled, Helper mode: enabled
Remote - Restart: disabled, Helper mode: enabled
Local maximum neighbor reconnect time: 120000 msec
Local maximum neighbor recovery time: 240000 msec
Local Label Advertisement mode: Downstream unsolicited
Remote Label Advertisement mode: Downstream unsolicited
Negotiated Label Advertisement mode: Downstream unsolicited
MTU discovery: disabled
Nonstop routing state: Not in sync
Next-hop addresses received:
  1.1.3.6
  1.1.4.7
  10.255.102.156
```

**Meaning** The output shows automatically targeted LDP next hops.

### Verifying the Designated Backup Path Node

**Purpose** Display the remote LFA next hop determined for a given destination.

**Action** From operational mode, enter the **show isis backup spf results** command.

```
user@R1> show isis backup spf results R6
```

```
IS-IS level 1 SPF results:
R6.00
Primary next-hop: ge-1/5/0, IPV4, R6, SNPA: 0:5:85:88:f0:bc
Root: R6, Root Metric: 10, Metric: 0, Root Preference: 0x0
  Not eligible, IPV4, Reason: Primary next-hop link fate sharing
Root: R2, Root Metric: 10, Metric: 20, Root Preference: 0x0
  track-item: R6.00-00
  track-item: R1.00-00
  Not eligible, IPV4, Reason: Path loops
Root: R4, Root Metric: 30, Metric: 20, Root Preference: 0x0
  track-item: R6.00-00
  track-item: R4.00-00
  Eligible, Backup next-hop: ge-1/0/0, LSP, LDP->R4(10.255.102.156), Prefixes: 2
1 nodes
```

```

IS-IS level 2 SPF results:
R6.00
  Primary next-hop: ge-1/5/0, IPV4, R6, SNPA: 0:5:85:88:f0:bc
    Root: R6, Root Metric: 10, Metric: 0, Root Preference: 0x0
    Not eligible, IPV4, Reason: Primary next-hop link fate sharing
  Root: R2, Root Metric: 10, Metric: 20, Root Preference: 0x0
    track-item: R6.00-00
    track-item: R1.00-00
    Not eligible, IPV4, Reason: Path loops
  Root: R4, Root Metric: 30, Metric: 20, Root Preference: 0x0
    track-item: R6.00-00
    track-item: R4.00-00
  Eligible, Backup next-hop: ge-1/0/0, LSP, LDP->R4(10.255.102.156), Prefixes: 0
1 nodes

```

**Meaning** The output indicates whether a specific interface or node has been designated as a remote backup path and why.

- Related Documentation**
- [Understanding Remote LFA over LDP Tunnels in IS-IS Networks on page 205](#)
  - [auto-targeted-session](#)
  - [no-eligible-remote-backup on page 542](#)
  - [remote-backup-calculation on page 569](#)

## Understanding Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors

Equal-cost multipath (ECMP) is a popular technique to load balance traffic across multiple paths. With ECMP enabled, if paths to a remote destination have the same cost, then traffic is distributed between them in equal proportion. Equal distribution of traffic across multiple paths is not desirable if the local links to adjacent routers towards the ultimate destination have unequal capacity. Commonly the traffic distribution between two links is equal and the link utilization is the same. However, if the capacity of an aggregated Ethernet bundle changes, equal traffic distribution results in imbalance of link utilization. In this case, weighted ECMP enables load balancing of traffic between equal cost paths in proportion to the capacity of the local links.

In figure 1, Router R1 has 5 links to Router R2, four of them are part of the aggregated Ethernet bundle. Both L3 links have the same cost. To reach the destination network N, Router R1, load balances traffic between L3 links. The distribution between the two links is equal in normal conditions and link utilization is the same. However, if AE bundle capacity changes, equal distribution results in the imbalance of link utilization. Weighted ECMP feature enables load balancing between equal cost paths in proportion to the capacity of the local links. In this example, if AE bundle has three active links, traffic is distributed in 30/40 proportion between AE bundle and a single link.



To enable weighted ECMP traffic distribution on directly connected IS-IS neighbors, configure **weighted one-hop** statement at the **[edit protocols isis spf-options multipath]** hierarchy level. Weighted ECMP is currently supported for the IS-IS protocol only.

Starting in Junos OS Release 17.1R1, weighted ECMP feature also supports IS-IS SPRING based next hop addresses.



**NOTE:** For logical interfaces, you must configure interface bandwidth to distribute traffic across equal cost multipaths based on the underlying physical interface bandwidth. If you do not configure the logical bandwidth for each logical interface, Junos OS assumes that the entire bandwidth of the physical interface is available for each logical interface.



**NOTE:** This feature provides weighted ECMP routing to IS-IS neighbors that are one hop away. Junos OS supports this feature on immediately connected routers only and does not support weighted ECMP on multihop routers, that is, on routers that are more than one hop away.

You must configure per-packet load balancing policy before configuring this feature. WECMP will be operational if per-packet load balancing policy is in place,

Release History Table

| Release | Description                                                                                                     |
|---------|-----------------------------------------------------------------------------------------------------------------|
| 17.1R1  | Starting in Junos OS Release 17.1R1, weighted ECMP feature also supports IS-IS SPRING based next hop addresses. |

Related  
Documentation

- [multipath on page 528](#)
- [Example: Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors on page 221](#)

## Example: Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors

This example shows how to configure weighted equal cost multipath (ECMP) routing for distributing traffic to IS-IS neighbors that are one hop away to ensure optimal load balancing. Weighted ECMP routing distributes traffic unequally over multiple paths for better load balancing. However, weighted ECMP routing is more efficient than equal distribution of traffic during per-packet load balancing.

- [Requirements on page 222](#)
- [Overview on page 222](#)
- [Configuration on page 222](#)
- [Verification on page 234](#)

## Requirements

This example uses the following hardware and software components:

- Two MX Series routers
- Junos OS Release 15.1F4 or later

Before you configure weighted ECMP in an IS-IS network, make sure you :

1. Configure IP addresses on the device interfaces.
2. Configure IS-IS.
3. Configure load balancing
4. Configure a per-packet load balancing policy.


## Overview

Beginning with Junos OS Release 15.1F4, you can configure the IS-IS protocol to get the logical interface bandwidth information associated with the gateways of equal-cost multipath (ECMP) next hop. During per-packet load balancing, traffic distribution is based on the available bandwidth to facilitate optimal bandwidth usage for incoming traffic on an ECMP path of one hop distance. The Packet Forwarding Engine does not distribute the traffic equally, but considers the balance values and distributes the traffic according to the bandwidth availability. However, this feature is not available for ECMP paths that are more than one hop away.

### Topology

In [Figure 22 on page 222](#), three aggregated Ethernet bundles ae0, ae1, and ae2 with four links each, are configured between Router R0 and Router R1. The Packet Forwarding Engine distributes traffic unequally between the three Ethernet bundles when one of the links goes down, depending on the available bandwidth.

*Figure 22: Weighted ECMP Traffic Distribution on One Hop IS-IS Neighbors*

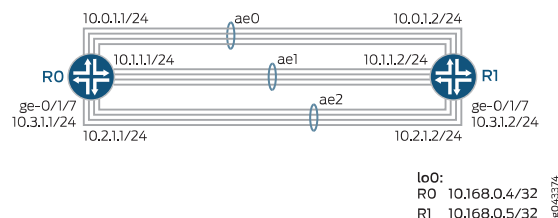

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network

configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Router R0

```
set interfaces ge-1/1/4 description "LinkID: ROR1-1"
set interfaces ge-0/0/0 description "LinkID: ROR1-2"
set interfaces ge-1/2/1 description "LinkID: ROR1-3"
set interfaces ge-1/2/2 description "LinkID: ROR1-4"
set interfaces ge-1/2/0 description "LinkID: ROR1-5"
set interfaces ge-1/2/3 description "LinkID: ROR1-6"
set interfaces ge-0/1/6 description "LinkID: ROR1-7"
set interfaces ge-1/1/6 description "LinkID: ROR1-8"
set interfaces ge-1/1/5 description "LinkID: ROR1-9"
set interfaces ge-1/3/3 description "LinkID: ROR1-10"
set interfaces ge-1/2/8 description "LinkID: ROR1-11"
set interfaces ge-0/1/8 description "LinkID: ROR1-12"
set interfaces ge-0/1/7 description "LinkID: ROR1-13"
set interfaces ge-0/0/1 description "LinkID: RORT0"
set chassis maximum-ecmp 64
set chassis redundancy graceful-switchover
set chassis aggregated-devices ethernet device-count 64
set interfaces ge-0/0/1 unit 0 family inet address 21.1.1.1/24
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-1/1/4 gigether-options 802.3ad ae0
set interfaces ge-0/0/0 gigether-options 802.3ad ae0
set interfaces ge-1/2/1 gigether-options 802.3ad ae0
set interfaces ge-1/2/2 gigether-options 802.3ad ae0
set interfaces ge-1/2/0 gigether-options 802.3ad ae1
set interfaces ge-1/2/3 gigether-options 802.3ad ae1
set interfaces ge-0/1/6 gigether-options 802.3ad ae1
set interfaces ge-1/1/6 gigether-options 802.3ad ae1
set interfaces ge-1/1/5 gigether-options 802.3ad ae2
set interfaces ge-1/3/3 gigether-options 802.3ad ae2
set interfaces ge-1/2/8 gigether-options 802.3ad ae2
set interfaces ge-0/1/8 gigether-options 802.3ad ae2
set interfaces ge-0/1/7 unit 0 family inet address 10.3.1.1/24
set interfaces ge-0/1/7 unit 0 family iso
set interfaces ae0 aggregated-ether-options minimum-links 1
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 unit 0 family inet address 10.0.1.1/24
set interfaces ae0 unit 0 family iso
set interfaces ae1 vlan-tagging
set interfaces ae1 aggregated-ether-options minimum-links 1
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 unit 0 family inet address 10.1.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 1;
set interfaces ae1 unit 1 family inet address 13.1.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 2;
set interfaces ae1 unit 1 family inet address 13.2.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
```

```

set interfaces ae1 unit 1 vlan-id 3;
set interfaces ae1 unit 1 family inet address 13.3.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 4;
set interfaces ae1 unit 1 family inet address 13.4.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 5;
set interfaces ae1 unit 1 family inet address 13.5.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 6;
set interfaces ae1 unit 1 family inet address 13.6.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 7;
set interfaces ae1 unit 1 family inet address 13.7.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 8;
set interfaces ae1 unit 1 family inet address 13.8.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 9;
set interfaces ae1 unit 1 family inet address 13.9.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 1 bandwidth 1g;
set interfaces ae1 unit 1 vlan-id 10;
set interfaces ae1 unit 1 family inet address 13.10.1.1/24
set interfaces ae1 unit 0 family iso
set interfaces ae2 aggregated-ether-options minimum-links 2
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 unit 0 family inet address 10.2.1.1/24
set interfaces ae2 unit 0 family iso
set interfaces lo0 unit 0 family iso address 49.0001.0102.5516.3127.00
set routing-options forwarding-table export pplib
set protocols isis interface ge-0/0/1.0
set protocols isis interface ge-0/1/7.0 level 1 metric 20
set protocols isis interface ge-0/1/7.0 level 2 metric 20
set protocols isis interface ae0.0 node-link-protection
set protocols isis interface ae1.0
set protocols isis interface ae2.0
set protocols isis interface lo0.0
set policy-options policy-statement pplib then load-balance per-packet
set protocols isis spf-options multipath weighted one-hop

```

**Router R1**

```

set interfaces ge-1/1/4 description "LinkID: ROR1-1"
set interfaces ge-0/0/0 description "LinkID: ROR1-2"
set interfaces ge-1/2/1 description "LinkID: ROR1-3"
set interfaces ge-1/2/2 description "LinkID: ROR1-4"
set interfaces ge-1/2/0 description "LinkID: ROR1-5"
set interfaces ge-1/2/3 description "LinkID: ROR1-6"

```

```
set interfaces ge-0/1/6 description "LinkID: ROR1-7"
set interfaces ge-1/1/6 description "LinkID: ROR1-8"
set interfaces ge-1/1/5 description "LinkID: ROR1-9"
set interfaces ge-1/3/3 description "LinkID: ROR1-10"
set interfaces ge-1/2/8 description "LinkID: ROR1-11"
set interfaces ge-0/1/8 description "LinkID: ROR1-12"
set interfaces ge-0/1/7 description "LinkID: ROR1-13"
set interfaces ge-0/1/0 description "LinkID: R1RT0"
set chassis aggregated-devices ethernet device-count 64
set interfaces ge-0/1/0 unit 0 family inet address 22.1.1.1/24
set interfaces ge-0/1/0 unit 0 family iso
set interfaces ge-1/1/4 gigether-options 802.3ad ae0
set interfaces ge-0/0/0 gigether-options 802.3ad ae0
set interfaces ge-1/2/1 gigether-options 802.3ad ae0
set interfaces ge-1/2/2 gigether-options 802.3ad ae0
set interfaces ge-1/2/0 gigether-options 802.3ad ae1
set interfaces ge-1/2/3 gigether-options 802.3ad ae1
set interfaces ge-0/1/6 gigether-options 802.3ad ae1
set interfaces ge-1/1/6 gigether-options 802.3ad ae1
set interfaces ge-1/1/5 gigether-options 802.3ad ae2
set interfaces ge-1/3/3 gigether-options 802.3ad ae2
set interfaces ge-1/2/8 gigether-options 802.3ad ae2
set interfaces ge-0/1/8 gigether-options 802.3ad ae2
set interfaces ge-0/1/7 unit 0 family inet address 10.3.1.2/24
set interfaces ge-0/1/7 unit 0 family iso
set interfaces ae0 aggregated-ether-options minimum-links 1
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 unit 0 family inet address 10.0.1.2/24
set interfaces ae0 unit 0 family iso
set interfaces ae1 aggregated-ether-options minimum-links 1
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 unit 0 family inet address 10.1.1.2/24
set interfaces ae1 unit 0 family iso
set interfaces ae2 aggregated-ether-options minimum-links 2
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 unit 0 family inet address 10.2.1.2/24
set interfaces ae2 unit 0 family iso
set interfaces lo0 unit 0 family iso address 49.0001.0102.5516.3130.00
set protocols isis export from-static
set protocols isis interface ge-0/1/0.0
set protocols isis interface ge-0/1/7.0
set protocols isis interface ae0.0
set protocols isis interface ae1.0
set protocols isis interface ae2.0
set protocols isis interface lo0.0
set policy-options policy-statement from-static from protocol static
set policy-options policy-statement from-static then accept
```

## Configuring Router R0

### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router R0:



**NOTE:** Repeat this procedure for Router R1 after modifying the appropriate interface names, addresses, and other parameters.

1. Specify the maximum number of weighted ECMP interfaces that you want to configure. Enable graceful switchover and specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@R0# set maximum-ecmp 64
user@R0# set redundancy graceful-switchover
user@R0# set aggregated-devices ethernet device-count 64
```

2. Configure the interfaces with multiple links to the same destination for load balancing traffic.

```
[edit interfaces]
user@R0# set ge-1/1/4 description "LinkID: R0R1-1"
user@R0# set ge-0/0/0 description "LinkID: R0R1-2"
user@R0# set ge-1/2/1 description "LinkID: R0R1-3"
user@R0# set ge-1/2/2 description "LinkID: R0R1-4"
user@R0# set ge-1/2/0 description "LinkID: R0R1-5"
user@R0# set ge-1/2/3 description "LinkID: R0R1-6"
user@R0# set ge-0/1/6 description "LinkID: R0R1-7"
user@R0# set ge-1/1/6 description "LinkID: R0R1-8"
user@R0# set ge-1/1/5 description "LinkID: R0R1-9"
user@R0# set ge-1/3/3 description "LinkID: R0R1-10"
user@R0# set ge-1/2/8 description "LinkID: R0R1-11"
user@R0# set ge-0/1/8 description "LinkID: R0R1-12"
user@R0# set ge-0/1/7 description "LinkID: R0R1-13"
user@R0# set ge-0/0/1 description "LinkID: R0R0"
```

3. Configure logical interfaces with appropriate bandwidth based on the underlying physical bandwidth.

```
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 1;
user@R0# set ae1 unit 1 family inet address 13.1.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 2;
```

```

user@R0# set ae1 unit 1 family inet address 13.2.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 3;
user@R0# set ae1 unit 1 family inet address 13.3.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 4;
user@R0# set ae1 unit 1 family inet address 13.4.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 5;
user@R0# set ae1 unit 1 family inet address 13.5.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 6;
user@R0# set ae1 unit 1 family inet address 13.6.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 7;
user@R0# set ae1 unit 1 family inet address 13.7.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 8;
user@R0# set ae1 unit 1 family inet address 13.8.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 9;
user@R0# set ae1 unit 1 family inet address 13.9.1.1/24
user@R0# set ae1 unit 0 family iso
user@R0# set ae1 unit 1 bandwidth 1g;
user@R0# set ae1 unit 1 vlan-id 10;
user@R0# set ae1 unit 1 family inet address 13.10.1.1/24
user@R0# set ae1 unit 0 family iso

```



**NOTE:** For logical interfaces, configure interface bandwidth to distribute traffic across equal-cost multipaths based on the underlying operational interface bandwidth. When you configure multiple logical interfaces on a single interface, configure appropriate logical bandwidth for each logical interface to see the desired traffic distribution over the logical interfaces.

4. Configure IP addresses on the interfaces with either IPv4 or IPv6 addresses, as per your network requirements.

```

[edit interfaces]
user@R0# set ge-0/0/1 unit 0 family inet address 21.1.1.1/24
user@R0# set ge-0/0/1 unit 0 family iso
user@R0# set ge-0/1/7 unit 0 family inet address 10.3.1.1/24
user@R0# set ge-0/1/7 unit 0 family iso

```

5. Configure the four member links of the ae0 aggregated Ethernet bundle.

```
[edit interfaces]
user@R0# set ge-1/1/4 gigether-options 802.3ad ae0
user@R0# set ge-0/0/0 gigether-options 802.3ad ae0
user@R0# set ge-1/2/1 gigether-options 802.3ad ae0
user@R0# set ge-1/2/2 gigether-options 802.3ad ae0
```

6. Configure the four member links of the ae1 aggregated Ethernet bundle.

```
[edit interfaces]
user@R0# set ge-1/2/0 gigether-options 802.3ad ae1
user@R0# set ge-1/2/3 gigether-options 802.3ad ae1
user@R0# set ge-0/1/6 gigether-options 802.3ad ae1
user@R0# set ge-1/1/6 gigether-options 802.3ad ae1
```

7. Configure the four member links of the ae2 aggregated Ethernet bundle.

```
[edit interfaces]
user@R0# set ge-1/1/5 gigether-options 802.3ad ae2
user@R0# set ge-1/3/3 gigether-options 802.3ad ae2
user@R0# set ge-1/2/8 gigether-options 802.3ad ae2
user@R0# set ge-0/1/8 gigether-options 802.3ad ae2
```

8. Configure IP address and the Link Aggregation Control Protocol (LACP) for ae0 aggregated Ethernet interface.

```
[edit interfaces]
user@R0# set ae0 aggregated-ether-options minimum-links 1
user@R0# set ae0 aggregated-ether-options lacp active
user@R0# set ae0 unit 0 family inet address 10.0.1.1/24
user@R0# set ae0 unit 0 family iso
```

9. Configure IP address and the Link Aggregation Control Protocol (LACP) for ae1 aggregated Ethernet interface.

```
[edit interfaces]
user@R0# set ae1 aggregated-ether-options minimum-links 1
user@R0# set ae1 aggregated-ether-options lacp active
user@R0# set ae1 unit 0 family inet address 10.1.1.1/24
user@R0# set ae1 unit 0 family iso
```

10. Configure IP address and the Link Aggregation Control Protocol (LACP) for ae2 aggregated Ethernet interface.

```
[edit interfaces]
user@R0# set ae2 aggregated-ether-options minimum-links 2
user@R0# set ae2 aggregated-ether-options lacp active
user@R0# set ae2 unit 0 family inet address 10.2.1.1/24
```



```
user@R0# set ae2 unit 0 family iso
```

11. Configure the loopback interface address and iso family address.

```
[edit interfaces]
user@R0# set lo0 unit 0 family inet address 10.168.0.4/32
user@R0# set lo0 unit 0 family iso address 49.0001.0102.5516.3127.00
```

12. Configure IS-IS on all the interfaces and on the AE bundles.

```
[edit protocols]
user@R0# set isis interface ge-0/0/1.0
user@R0# set isis interface ge-0/1/7.0 level 1 metric 20
user@R0# set isis interface ge-0/1/7.0 level 2 metric 20
user@R0# set isis interface ae0.0 node-link-protection
user@R0# set isis interface ae1.0
user@R0# set isis interface ae2.0
user@R0# set isis interface lo0.0
```

13. Configure per-packet load balancing.

```
[edit policy-options]
user@R0# set policy-statement pplb then load-balance per-packet
```

14. Apply per-packet load balancing policy.

```
[edit routing-options]
user@R0# set forwarding-table
user@R0# set export pplb
```

15. Enable weighted ECMP traffic distribution on directly connected IS-IS neighbors.

```
[edit protocols isis]
user@R0# set spf-options multipath weighted one-hop
```

## Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R0# show chassis
maximum-ecmp 64;
redundancy graceful-switchover;
```

```
aggregated-devices ethernet device-count 64;
```

```
[edit]
user@R0# show interfaces
ge-0/0/0 {
  description "LinkID: ROR1-2";
  gigether-options {
    802.3ad ae0;
  }
}
ge-0/0/1 {
  description "LinkID: RORT0";
  unit 0 {
    family inet {
      address 21.1.1.1/24;
    }
    family iso;
  }
}
ge-0/1/6 {
  description "LinkID: ROR1-7";
  gigether-options {
    802.3ad ae1;
  }
}
ge-0/1/7 {
  description "LinkID: ROR1-13";
  unit 0 {
    family inet {
      address 10.3.1.1/24;
    }
    family iso;
  }
}
ge-0/1/8 {
  description "LinkID: ROR1-12";
  gigether-options {
    802.3ad ae2;
  }
}
ge-1/1/4 {
  description "LinkID: ROR1-1";
  gigether-options {
    802.3ad ae0;
  }
}
ge-1/1/5 {
  description "LinkID: ROR1-9";
  gigether-options {
    802.3ad ae2;
  }
}
ge-1/1/6 {
  description "LinkID: ROR1-8";
```

```
    gigger-options {
      802.3ad ae1;
    }
  }
  ge-1/2/0 {
    description "LinkID: ROR1-5";
    gigger-options {
      802.3ad ae1;
    }
  }
  ge-1/2/1 {
    description "LinkID: ROR1-3";
    gigger-options {
      802.3ad ae0;
    }
  }
  ge-1/2/2 {
    description "LinkID: ROR1-4";
    gigger-options {
      802.3ad ae0;
    }
  }
  ge-1/2/3 {
    description "LinkID: ROR1-6";
    gigger-options {
      802.3ad ae1;
    }
  }
  ge-1/2/8 {
    description "LinkID: ROR1-11";
    gigger-options {
      802.3ad ae2;
    }
  }
  ge-1/3/3 {
    description "LinkID: ROR1-10";
    gigger-options {
      802.3ad ae2;
    }
  }
  ae0 {
    aggregated-ether-options {
      minimum-links 1;
      lacp {
        active;
      }
    }
    unit 0 {
      family inet {
        address 10.0.1.1/24;
      }
      family iso;
    }
  }
  ae1 {
```

```
vlan-tagging;
aggregated-ether-options {
    minimum-links 3;
    lacp {
        active;
    }
}
unit 0 {
    family inet {
        address 10.1.1.1/24;
    }
    family iso;
}
unit 1 {
    bandwidth 1g;
    vlan-id 1;
    family inet {
        address 13.1.1.1/24;
    }
    family iso;
}
unit 2 {
    bandwidth 1g;
    vlan-id 2;
    family inet {
        address 13.2.1.1/24;
    }
    family iso;
}
unit 3 {
    bandwidth 1g;
    vlan-id 3;
    family inet {
        address 13.3.1.1/24;
    }
    family iso;
}
unit 4 {
    bandwidth 1g;
    vlan-id 4;
    family inet {
        address 13.4.1.1/24;
    }
    family iso;
}
unit 5 {
    bandwidth 1g;
    vlan-id 5;
    family inet {
        address 13.5.1.1/24;
    }
    family iso;
}
unit 6 {
    bandwidth 1g;
```

```
    vlan-id 6;
    family inet {
        address 13.6.1.1/24;
    }
    family iso;
}
unit 7 {
    bandwidth 1g;
    vlan-id 7;
    family inet {
        address 13.7.1.1/24;
    }
    family iso;
}
unit 8 {
    bandwidth 1g;
    vlan-id 8;
    family inet {
        address 13.8.1.1/24;
    }
    family iso;
}
unit 9 {
    bandwidth 1g;
    vlan-id 9;
    family inet {
        address 13.9.1.1/24;
    }
    family iso;
}
unit 10 {
    bandwidth 1g;
    vlan-id 10;
    family inet {
        address 13.10.1.1/24;
    }
    family iso;
}
}
ae2 {
    aggregated-ether-options {
        minimum-links 2;
        lacp {
            active;
        }
    }
}
unit 0 {
    family inet {
        address 10.2.1.1/24;
    }
    family iso;
}
}
lo0 {
    unit 0 {
```

```
family inet {
    address 192.168.0.4/32;
}
family iso {
    address 49.0001.0102.5516.3127.00;
}
}
```

```
[edit]
user@R0# show protocols
isis {
    spf-options {
        multi-path {
            weighted {
                one-hop;
            }
        }
    }
}
```

```
[edit]
user@R01# show policy-options
policy-statement pplb {
    then {
        load-balance per-packet;
    }
}
```

```
[edit]
user@R0# show routing-options
forwarding-table {
    export pplb;
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying Equal Distribution of Traffic Over Equal-Cost Multiple Paths on page 234](#)
- [Verifying Unequal Traffic Distribution Over Available Bandwidth on page 239](#)
- [Verifying Unequal Traffic Distribution on Logical Interfaces on page 243](#)

---

### Verifying Equal Distribution of Traffic Over Equal-Cost Multiple Paths

**Purpose** To verify that traffic is equally distributed over the aggregated Ethernet bundles.

**Action** From operational mode, enter the **show route 198.0.0.1 extensive** command.

```
user@R0> show route 198.0.0.1 extensive
```

```
inet.0: 10028 destinations, 10029 routes (10027 active, 0 holddown, 1 hidden)
198.0.0.1/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 198.0.0.1/32 -> {10.0.1.2, 10.1.1.2, 10.2.1.2, 10.3.1.2}
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Router, Next hop index: 1048574
    Address: 0x9ec5e10
    Next-hop reference count: 20005
    Next hop: 10.0.1.2 via ae0.0 weight 0x1 balance 33%
    Session Id: 0x1b2
    Next hop: 10.1.1.2 via ae1.0 weight 0x1 balance 33%, selected
    Session Id: 0x1b1
    Next hop: 10.2.1.2 via ae2.0 weight 0x1 balance 33%
    Session Id: 0x1b3
    Next hop: 10.3.1.2 via ge-0/1/7.0 weight 0xf000
    Session Id: 0x1b0
    State: <Active Int>
  Age: 35      Metric: 20
  Validation State: unverified
  Task: IS-IS
    Announcement bits (1): 0-KRT
    AS path: I
```

```
user@R0> show interfaces ae0.0 extensive
```

```
Logical interface ae0.0 (Index 335) (SNMP ifIndex 625) (Generation 825)
Flags: Up SNMP-Traps 0x4004000 Encapsulation: ENET2
Statistics      Packets      pps      Bytes      bps
Bundle:
  Input :          702          4      207265      4320
  Output:      870567      33801      95801535      29746416
Adaptive Statistics:
  Adaptive Adjusts:          0
  Adaptive Scans :          0
  Adaptive Updates:          0
Link:
  ge-0/0/0.0
    Input :          149          1      17924          992
    Output:      218927      8586      24081728      7556344
  ge-1/1/4.0
    Input :          134          1      16616          992
    Output:      201384      7781      22152240      6847320
  ge-1/2/1.0
    Input :          136          1      16864          992
    Output:      212760      8238      23443069      7250056
  ge-1/2/2.0
    Input :          283          1      155861         1344
    Output:      237496      9196      26124498      8092696

Aggregate member links: 4

LACP info:      Role      System      System      Port      Port      Port
                priority      identifier  priority  number  key
```

```

ge-0/0/0.0    Actor      127  3c:61:04:2f:c7:c0    127      1      1
ge-0/0/0.0    Partner    127  3c:61:04:2d:9f:c0    127      1      1
ge-1/1/4.0    Actor      127  3c:61:04:2f:c7:c0    127      4      1
ge-1/1/4.0    Partner    127  3c:61:04:2d:9f:c0    127      4      1
ge-1/2/1.0    Actor      127  3c:61:04:2f:c7:c0    127      8      1
ge-1/2/1.0    Partner    127  3c:61:04:2d:9f:c0    127      8      1
ge-1/2/2.0    Actor      127  3c:61:04:2f:c7:c0    127      9      1
ge-1/2/2.0    Partner    127  3c:61:04:2d:9f:c0    127      9      1

LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
ge-0/0/0.0            130          125           0               0
ge-1/1/4.0            127          121           0               0
ge-1/2/1.0            127          123           0               0
ge-1/2/2.0            128          123           0               0
Marker Statistics:    Marker Rx      Resp Tx      Unknown Rx      Illegal Rx
ge-0/0/0.0             0              0             0               0
ge-1/1/4.0             0              0             0               0
ge-1/2/1.0             0              0             0               0
ge-1/2/2.0             0              0             0               0
Protocol inet, MTU: 1500, Generation: 1699, Route table: 0
  Flags: Sendbcst-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
  Destination: 10.0.1/24, Local: 10.0.1.1, Broadcast: 10.0.1.255, Generation:
1501
Protocol iso, MTU: 1497, Generation: 1700, Route table: 0
  Flags: Is-Primary
Protocol multiservice, MTU: Unlimited, Generation: 1701, Route table: 0
  Flags: Is-Primary
  Policer: Input: __default_arp_policer__

```

user@R0> show interfaces ae1.0 extensive

```

Logical interface ae1.0 (Index 336) (SNMP ifIndex 666) (Generation 826)
  Flags: Up SNMP-Traps 0x4004000 Encapsulation: ENET2
  Statistics      Packets      pps      Bytes      bps
Bundle:
  Input :          707          4      206275      3968
  Output:      849981      32979      93602009      29023264
Adaptive Statistics:
  Adaptive Adjusts:      0
  Adaptive Scans :      0
  Adaptive Updates:      0
Link:
ge-0/1/6.0
  Input :          148          1      17800      992
  Output:      198301      7819      21812806      6880984
ge-1/1/6.0
  Input :          134          1      16616      992
  Output:      209149      8088      23006390      7117728
ge-1/2/0.0
  Input :          136          1      16864      992
  Output:      215518      8291      23811445      7296528
ge-1/2/3.0

```



```

      Input :          289          1          154995          992
      Output:        227013        8781        24971368        7728024

Aggregate member links: 4

LACP info:          Role      System              System      Port      Port      Port
                  priority      identifier  priority  number    key

ge-0/1/6.0      Actor        127  3c:61:04:2f:c7:c0      127        2        2
ge-0/1/6.0      Partner      127  3c:61:04:2d:9f:c0      127        2        2
ge-1/1/6.0      Actor        127  3c:61:04:2f:c7:c0      127        6        2
ge-1/1/6.0      Partner      127  3c:61:04:2d:9f:c0      127        6        2
ge-1/2/0.0      Actor        127  3c:61:04:2f:c7:c0      127        7        2
ge-1/2/0.0      Partner      127  3c:61:04:2d:9f:c0      127        7        2
ge-1/2/3.0      Actor        127  3c:61:04:2f:c7:c0      127       10        2
ge-1/2/3.0      Partner      127  3c:61:04:2d:9f:c0      127       10        2

LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
ge-0/1/6.0            129          123           0           0
ge-1/1/6.0            127          121           0           0
ge-1/2/0.0            127          123           0           0
ge-1/2/3.0            128          123           0           0
Marker Statistics:      Marker Rx      Resp Tx      Unknown Rx      Illegal Rx
ge-0/1/6.0              0              0           0           0
ge-1/1/6.0              0              0           0           0
ge-1/2/0.0              0              0           0           0
ge-1/2/3.0              0              0           0           0
Protocol inet, MTU: 1500, Generation: 1702, Route table: 0
Flags: Sendbcst-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
Destination: 10.1.1/24, Local: 10.1.1.1, Broadcast: 10.1.1.255, Generation:
1503
Protocol iso, MTU: 1497, Generation: 1703, Route table: 0
Protocol multiservice, MTU: Unlimited, Generation: 1704, Route table: 0
Policer: Input: __default_arp_policer__

```

```
user@R0> show interfaces ae2.0 extensive
```

```

Logical interface ae2.0 (Index 337) (SNMP ifIndex 961) (Generation 827)
Flags: Up SNMP-Traps 0x4004000 Encapsulation: ENET2
Statistics      Packets      pps      Bytes      bps
Bundle:
  Input :          702          4      224128      3968
  Output:      855472      33229      94215862      29243664
Adaptive Statistics:
  Adaptive Adjusts:      0
  Adaptive Scans :      0
  Adaptive Updates:      0
Link:
  ge-0/1/8.0
    Input :          137          1      16988      992
    Output:      213214      8377      23453540      7372232

```

```

ge-1/1/5.0
  Input :      137      1      16988      992
  Output:    212174    8244    23339050    7255368
ge-1/2/8.0
  Input :      135      1      16740      992
  Output:    210583    8144    23164099    7167296
ge-1/3/3.0
  Input :      293      1      173412      992
  Output:    219501    8464    24259173    7448768

Aggregate member links: 4

LACP info:      Role      System      System      Port      Port      Port
                priority  identifier  priority  number
key
3    ge-0/1/8.0    Actor      127  3c:61:04:2f:c7:c0    127      3
3    ge-0/1/8.0    Partner    127  3c:61:04:2d:9f:c0    127      3
3    ge-1/1/5.0    Actor      127  3c:61:04:2f:c7:c0    127      5
3    ge-1/1/5.0    Partner    127  3c:61:04:2d:9f:c0    127      5
3    ge-1/2/8.0    Actor      127  3c:61:04:2f:c7:c0    127      11
3    ge-1/2/8.0    Partner    127  3c:61:04:2d:9f:c0    127      11
3    ge-1/3/3.0    Actor      127  3c:61:04:2f:c7:c0    127      12
3    ge-1/3/3.0    Partner    127  3c:61:04:2d:9f:c0    127      12

LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
ge-0/1/8.0            127          123           0              0
ge-1/1/5.0            130          123           0              0
ge-1/2/8.0            129          124           0              0
ge-1/3/3.0            129          124           0              0
Marker Statistics:    Marker Rx      Resp Tx      Unknown Rx      Illegal Rx
ge-0/1/8.0            0              0           0              0
ge-1/1/5.0            0              0           0              0
ge-1/2/8.0            0              0           0              0
ge-1/3/3.0            0              0           0              0
Protocol inet, MTU: 1500, Generation: 1705, Route table: 0
  Flags: Sendbcst-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 10.2.1/24, Local: 10.2.1.1, Broadcast: 10.2.1.255,
Generation: 1505
  Protocol iso, MTU: 1497, Generation: 1706, Route table: 0
  Protocol multiservice, MTU: Unlimited, Generation: 1707, Route table: 0
  Policer: Input: __default_arp_policer__

```

**Meaning** IS-IS distributes traffic equally when the three aggregated Ethernet bundles have the same bandwidth available.

### Verifying Unequal Traffic Distribution Over Available Bandwidth

- Purpose** To verify that IS-IS distributes traffic unevenly when one of the aggregated link is down during per-packet load balancing depending on the available bandwidth.
- Action** Disable one of the links on the ae0 bundle so that the available bandwidth is 3g on ae0 and 4g on ae1 and ae2. From operational mode, enter the **show route 198.0.0.1 extensive** command.

```
user@R0> show route 198.0.0.1 extensive
```

```
inet.0: 10028 destinations, 10029 routes (10027 active, 0 holddown, 1 hidden)
198.0.0.1/32 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 198.0.0.1/32 -> {10.0.1.2, 10.1.1.2, 10.2.1.2, 10.3.1.2}
```

```
*IS-IS Preference: 18
```

```
Level: 2
```

```
Next hop type: Router, Next hop index: 1048575
```

```
Address: 0x9ec55d0
```

```
Next-hop reference count: 20005
```

```
Next hop: 10.0.1.2 via ae0.0 weight 0x1 balance 27%
```

```
Session Id: 0x1b2
```

```
Next hop: 10.1.1.2 via ae1.0 weight 0x1 balance 36%, selected
```

```
Session Id: 0x1b1
```

```
Next hop: 10.2.1.2 via ae2.0 weight 0x1 balance 36%
```

```
Session Id: 0x1b3
```

```
Next hop: 10.3.1.2 via ge-0/1/7.0 weight 0xf000
```

```
Session Id: 0x1b0
```

```
State:<Active Int>
```

```
Age: 22 Metric: 20
```

```
Validation State: unverified
```

```
Task: IS-IS
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
user@R0> show interfaces ae0.0 extensive
```

```
Logical interface ae0.0 (Index 335) (SNMP ifIndex 625) (Generation 825)
```

```
Flags: Up SNMP-Traps 0x4004000 Encapsulation: ENET2
```

| Statistics | Packets | pps | Bytes | bps |
|------------|---------|-----|-------|-----|
|------------|---------|-----|-------|-----|

Bundle:

|         |     |   |        |      |
|---------|-----|---|--------|------|
| Input : | 793 | 3 | 218290 | 2976 |
|---------|-----|---|--------|------|

|         |         |       |           |          |
|---------|---------|-------|-----------|----------|
| Output: | 1617811 | 27223 | 178003101 | 23957320 |
|---------|---------|-------|-----------|----------|

Adaptive Statistics:

|                   |   |
|-------------------|---|
| Adaptive Adjusts: | 0 |
|-------------------|---|

|                  |   |
|------------------|---|
| Adaptive Scans : | 0 |
|------------------|---|

|                   |   |
|-------------------|---|
| Adaptive Updates: | 0 |
|-------------------|---|

Link:

ge-0/0/0.0

|         |     |   |       |     |
|---------|-----|---|-------|-----|
| Input : | 182 | 1 | 21794 | 992 |
|---------|-----|---|-------|-----|

|         |        |      |          |         |
|---------|--------|------|----------|---------|
| Output: | 461045 | 9423 | 50717650 | 8292776 |
|---------|--------|------|----------|---------|

ge-1/1/4.0 <-- down

|         |     |   |       |   |
|---------|-----|---|-------|---|
| Input : | 139 | 0 | 17236 | 0 |
|---------|-----|---|-------|---|

|         |        |   |          |   |
|---------|--------|---|----------|---|
| Output: | 241334 | 0 | 26546740 | 0 |
|---------|--------|---|----------|---|

ge-1/2/1.0

|         |     |   |       |     |
|---------|-----|---|-------|-----|
| Input : | 162 | 1 | 20088 | 992 |
|---------|-----|---|-------|-----|

|         |        |      |          |         |
|---------|--------|------|----------|---------|
| Output: | 444340 | 8979 | 48918653 | 7901976 |
|---------|--------|------|----------|---------|

ge-1/2/2.0

```

Input :          310          1          159172          992
Output:         471092        8821        51820058        7762568

```

Aggregate member links: 4

| LACP info: | Role    | System<br>priority | System<br>identifier | Port<br>priority | Port<br>number | Port<br>key |
|------------|---------|--------------------|----------------------|------------------|----------------|-------------|
| ge-0/0/0.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 1              | 1           |
| ge-0/0/0.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 1              | 1           |
| ge-1/1/4.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 4              | 1           |
| ge-1/1/4.0 | Partner | 1                  | 00:00:00:00:00:00    | 1                | 4              | 1           |
| ge-1/2/1.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 8              | 1           |
| ge-1/2/1.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 8              | 1           |
| ge-1/2/2.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 9              | 1           |
| ge-1/2/2.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 9              | 1           |

```

LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
ge-0/0/0.0           161          156           0              0
ge-1/1/4.0           151          145           0              0
ge-1/2/1.0           158          154           0              0
ge-1/2/2.0           159          154           0              0
Marker Statistics:    Marker Rx      Resp Tx      Unknown Rx      Illegal Rx
ge-0/0/0.0            0             0            0              0
ge-1/1/4.0            0             0            0              0
ge-1/2/1.0            0             0            0              0
ge-1/2/2.0            0             0            0              0
Protocol inet, MTU: 1500, Generation: 1699, Route table: 0
Flags: Sendbcst-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
Destination: 10.0.1/24, Local: 10.0.1.1, Broadcast: 10.0.1.255, Generation:
1501
Protocol iso, MTU: 1497, Generation: 1700, Route table: 0
Flags: Is-Primary
Protocol multiservice, MTU: Unlimited, Generation: 1701, Route table: 0
Flags: Is-Primary
Policer: Input: __default_arp_policer__

```

user@R0> show interfaces ae1.0 extensive

```

Logical interface ae1.0 (Index 336) (SNMP ifIndex 666) (Generation 826)
Flags: Up SNMP-Traps 0x4004000 Encapsulation: ENET2
Statistics      Packets      pps      Bytes      bps
Bundle:
Input :          817          5        219555      4672
Output:        1756031      35775    193270683   31483104
Adaptive Statistics:
Adaptive Adjusts:      0
Adaptive Scans :      0
Adaptive Updates:     0
Link:
ge-0/1/6.0
Input :          174          1        21024      992
Output:        411469      8414    45261286   7404544
ge-1/1/6.0
Input :          159          1        19716      992
Output:        433700      8893    47707000   7826296
ge-1/2/0.0
Input :          161          1        19964      992
Output:        447338      9190    49314819   8087408
ge-1/2/3.0

```

```

        Input :          323          2          158851          1696
        Output:        463524        9278        50987578        8164856

Aggregate member links: 4

LACP info:      Role      System      System      Port      Port      Port
                  priority      identifier  priority  number    key

ge-0/1/6.0      Actor      127      3c:61:04:2f:c7:c0      127      2      2
ge-0/1/6.0      Partner    127      3c:61:04:2d:9f:c0      127      2      2
ge-1/1/6.0      Actor      127      3c:61:04:2f:c7:c0      127      6      2
ge-1/1/6.0      Partner    127      3c:61:04:2d:9f:c0      127      6      2
ge-1/2/0.0      Actor      127      3c:61:04:2f:c7:c0      127      7      2
ge-1/2/0.0      Partner    127      3c:61:04:2d:9f:c0      127      7      2
ge-1/2/3.0      Actor      127      3c:61:04:2f:c7:c0      127     10      2
ge-1/2/3.0      Partner    127      3c:61:04:2d:9f:c0      127     10      2

LACP Statistics:      LACP Rx      LACP Tx      Unknown Rx      Illegal Rx
ge-0/1/6.0            159            153            0            0
ge-1/1/6.0            157            151            0            0
ge-1/2/0.0            157            153            0            0
ge-1/2/3.0            158            153            0            0
Marker Statistics:    Marker Rx      Resp Tx      Unknown Rx      Illegal Rx
ge-0/1/6.0              0              0            0            0
ge-1/1/6.0              0              0            0            0
ge-1/2/0.0              0              0            0            0
ge-1/2/3.0              0              0            0            0
Protocol inet, MTU: 1500, Generation: 1702, Route table: 0
Flags: Sendbcst-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
Destination: 10.1.1/24, Local: 10.1.1.1, Broadcast: 10.1.1.255, Generation:
1503
Protocol iso, MTU: 1497, Generation: 1703, Route table: 0
Protocol multiservice, MTU: Unlimited, Generation: 1704, Route table: 0
Policer: Input: __default_arp_policer__

```

```
user@R0> show interfaces ae2.0 extensive
```

```

Logical interface ae2.0 (Index 337) (SNMP ifIndex 961) (Generation 827)
Flags: Up SNMP-Traps 0x4004000 Encapsulation: ENET2
Statistics      Packets      pps      Bytes      bps
Bundle:
  Input :          813          4          237569          3968
  Output:        1786258        37008        196605473        32568272
Adaptive Statistics:
  Adaptive Adjusts:      0
  Adaptive Scans :      0
  Adaptive Updates:      0
Link:
  ge-0/1/8.0
    Input :          163          1          20212          992
    Output:        446715        9282        49138650        8168408

```

```

ge-1/1/5.0
  Input :      162      1      20088      992
  Output:    443846    9209    48822970    8104224
ge-1/2/8.0
  Input :      161      1      19964      992
  Output:    443943    9341    48833699    8220624
ge-1/3/3.0
  Input :      327      1      177305      992
  Output:    451754    9176    49810154    8075016

```

Aggregate member links: 4

| LACP info: | Role    | System<br>priority | System<br>identifier | Port<br>priority | Port<br>number | Port<br>key |
|------------|---------|--------------------|----------------------|------------------|----------------|-------------|
| ge-0/1/8.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 3              | 3           |
| ge-0/1/8.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 3              | 3           |
| ge-1/1/5.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 5              | 3           |
| ge-1/1/5.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 5              | 3           |
| ge-1/2/8.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 11             | 3           |
| ge-1/2/8.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 11             | 3           |
| ge-1/3/3.0 | Actor   | 127                | 3c:61:04:2f:c7:c0    | 127              | 12             | 3           |
| ge-1/3/3.0 | Partner | 127                | 3c:61:04:2d:9f:c0    | 127              | 12             | 3           |

| LACP Statistics: | LACP Rx | LACP Tx | Unknown Rx | Illegal Rx |
|------------------|---------|---------|------------|------------|
| ge-0/1/8.0       | 157     | 153     | 0          | 0          |
| ge-1/1/5.0       | 160     | 153     | 0          | 0          |
| ge-1/2/8.0       | 159     | 154     | 0          | 0          |
| ge-1/3/3.0       | 159     | 154     | 0          | 0          |

| Marker Statistics: | Marker Rx | Resp Tx | Unknown Rx | Illegal Rx |
|--------------------|-----------|---------|------------|------------|
| ge-0/1/8.0         | 0         | 0       | 0          | 0          |
| ge-1/1/5.0         | 0         | 0       | 0          | 0          |
| ge-1/2/8.0         | 0         | 0       | 0          | 0          |
| ge-1/3/3.0         | 0         | 0       | 0          | 0          |

Protocol inet, MTU: 1500, Generation: 1705, Route table: 0

Flags: Sendbcst-pkt-to-re

Addresses, Flags: Is-Preferred Is-Primary

Destination: 10.2.1/24, Local: 10.2.1.1, Broadcast: 10.2.1.255, Generation:

1505

Protocol iso, MTU: 1497, Generation: 1706, Route table: 0

Protocol multiservice, MTU: Unlimited, Generation: 1707, Route table: 0

Policer: Input: \_\_default\_arp\_policer\_\_

**Meaning** IS-IS infers that the ae0 bundle has only 3g of bandwidth available. Therefore, modifies per-packet load balancing according to the available bandwidth. As per the output, only 27 percent of the bandwidth is available on ae0 because one of the aggregated Ethernet links is down. Thus IS-IS distributes traffic unequally depending on the available bandwidth.

### Verifying Unequal Traffic Distribution on Logical Interfaces

**Purpose** To verify that IS-IS distributes traffic unevenly on logical interfaces based on the configured logical bandwidth.

**Action** user@R0> show interfaces ae1.1

```
Logical interface ae1.1 (Index 605) (SNMP ifIndex 1910)
  Flags: Up SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2
  Bandwidth: 2000mbps
  Statistics          Packets          pps          Bytes          bps
  Bundle:
    Input :           807              0          200537          360
    Output:           277              0           55529           0
  Adaptive Statistics:
    Adaptive Adjusts:              0
    Adaptive Scans  :              0
    Adaptive Updates:              0
  Protocol inet, MTU: 1500
  Max nh cache: 75000, New hold nh limit: 75000, Curr nh cnt: 1, Curr new hold
  cnt: 0, NH drop cnt: 0
  Flags: Sendbcast-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 13.1.1/24, Local: 13.1.1.2, Broadcast: 13.1.1.255
  Protocol iso, MTU: 1497
  Protocol multiservice, MTU: Unlimited
```

user@R0> show interfaces ae1.2

```
Logical interface ae1.2 (Index 606) (SNMP ifIndex 1911)
  Flags: Up SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2
  Bandwidth: 1000mbps
  Statistics          Packets          pps          Bytes          bps
  Bundle:
    Input :           836              0          208643          720
    Output:           305              0           61006           0
  Adaptive Statistics:
    Adaptive Adjusts:              0
    Adaptive Scans  :              0
    Adaptive Updates:              0
  Protocol inet, MTU: 1500
  Max nh cache: 75000, New hold nh limit: 75000, Curr nh cnt: 1, Curr new hold
  cnt: 0, NH drop cnt: 0
  Flags: Sendbcast-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 13.2.1/24, Local: 13.2.1.2, Broadcast: 13.2.1.255
  Protocol iso, MTU: 1497
  Protocol multiservice, MTU: Unlimited
```

## Release History Table

| Release | Description                                                                                                                                                                                           |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.1F4  | Beginning with Junos OS Release 15.1F4, you can configure the IS-IS protocol to get the logical interface bandwidth information associated with the gateways of equal-cost multipath (ECMP) next hop. |

## Related Documentation

- [multipath on page 528](#)
- [Understanding Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors on page 220](#)



## CHAPTER 9

# Configuring IS-IS Traffic Engineering

- [IS-IS Extensions to Support Traffic Engineering on page 246](#)
- [Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246](#)
- [Example: Enabling IS-IS Traffic Engineering Support on page 248](#)
- [Understanding Forwarding Adjacencies on page 263](#)
- [Example: Advertising Label-Switched Paths into IS-IS on page 263](#)
- [Understanding Wide IS-IS Metrics for Traffic Engineering on page 272](#)
- [Example: Enabling Wide IS-IS Metrics for Traffic Engineering on page 272](#)
- [Understanding LDP-IGP Synchronization on page 274](#)
- [Example: Configuring Synchronization Between IS-IS and LDP on page 276](#)
- [Layer 2 Mapping for IS-IS on page 281](#)
- [Example: Configuring Layer 2 Mapping for IS-IS on page 282](#)
- [Understanding Source Packet Routing in Networking \(SPRING\) on page 289](#)
- [Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292](#)
- [Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to Increase Network Speed on page 294](#)
- [Example: Configuring Anycast and Prefix Segments in SPRING for IS-IS to Increase Network Speed on page 306](#)
- [Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol on page 324](#)
- [Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol on page 326](#)
- [Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330](#)
- [Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333](#)
- [Example: Configuring Topology Independent Loop-Free Alternate with Segment Routing for IS-IS on page 334](#)
- [Static Adjacency Segment Identifier for ISIS on page 351](#)

## IS-IS Extensions to Support Traffic Engineering

---

To help provide traffic engineering and MPLS with information about network topology and loading, extensions have been added to the Junos OS implementation of IS-IS. Specifically, IS-IS supports new type, length, and value (TLV) tuples that specify link attributes. These TLVs are included in the IS-IS link-state PDUs. The link-attribute information is used to populate the traffic engineering database, which is used by the Constrained Shortest Path First (CSPF) algorithm to compute the paths that MPLS label-switched paths (LSPs) take. This path information is used by RSVP to set up LSPs and reserve bandwidth for them.



**NOTE:** Whenever possible, use IS-IS interior gateway protocol (IGP) shortcuts instead of traffic engineering shortcuts.

The traffic engineering extensions are defined in RFC 5305, *IS-IS Extensions for Traffic Engineering*.

### IS-IS IGP Shortcuts

In IS-IS, you can configure shortcuts, which allow IS-IS to use an LSP as the next hop as if it were a subinterface from the ingress routing device to the egress routing device. The address specified in the **to** statement at the **[edit protocols mpls label-switched-path lsp-path-name]** hierarchy level must match the router ID of the egress routing device for the LSP to function as a direct link to the egress routing device and to be used as input to IS-IS SPF calculations. When used in this way, LSPs are no different than Asynchronous Transfer Mode (ATM) and Frame Relay virtual circuits (VCs), except that LSPs carry only IPv4 traffic.

#### Related Documentation

- [Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246](#)
- [Example: Enabling IS-IS Traffic Engineering Support on page 248](#)

## Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts

---

Link-state protocols, such as OSPF and IS-IS, use the shortest-path-first (SPF) algorithm to compute the shortest-path tree to all nodes in the network. The results of such computations can be represented by the destination node, next-hop address, and output interface, where the output interface is a physical interface. Label-switched paths (LSPs) can be used to augment the SPF algorithm.


IGP typically performs two independent computations. The first is performed without considering any LSP. The result of the computation is stored in the inet.0 table. This step is no different from traditional SPF computations and is always performed even if IGP shortcut is disabled.

The second computation is performed considering only LSPs as a logical interface. Each LSP's egress router is considered. The list of destinations whose shortest path traverses

the egress router (established during the first computation) is placed in the inet.3 routing table. These destinations are given the egress router of the LSP as a next hop, enabling BGP on the local router to use these LSPs to access BGP next hops beyond the egress router. Normally, BGP can use only LSPs that terminate at the BGP next hop.


As an illustration, begin with a typical SPF tree (see [Figure 23 on page 247](#)).

*Figure 23: Typical SPF Tree, Sourced from Router A*

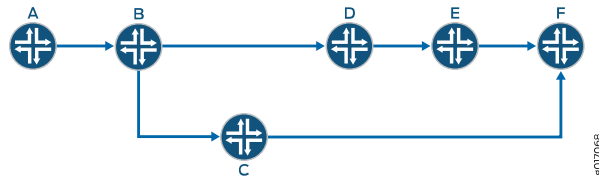

If an LSP connects Router A to Router D and if IGP shortcuts are enabled on Router A, you might have the SPF tree shown in [Figure 24 on page 247](#).

*Figure 24: Modified SPF Tree, Using LSP A–D as a Shortcut*

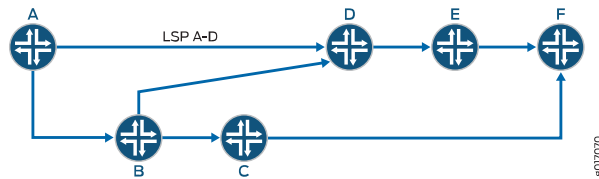

Note that Router D is now reachable through LSP A–D.

When computing the shortest path to reach Router D, Router A has two choices:

- Use IGP path A–B–D.
- Use LSP A–D.

Router A decides between the two choices by comparing the IGP metrics for path A–B–D with the LSP metrics for LSP A–D. If the IGP metric is lower, path A–B–D is chosen ([Figure 23 on page 247](#)). This path A–B–D is valid only when node D is not the tail-end of the LSP. If node D is the tail end of the LSP, even if the LSP metric is lower or both IGP and LSP metrics are equal, LSP A–D is used ([Figure 24 on page 247](#)).

Note that Router E is reachable through LSP A–D and Router F will take the IGP path.

- Related Documentation**
- [traffic-engineering on page 586](#)
  - *OSPF Support for Traffic Engineering*
  - *IGP Shortcuts and Routing Tables*

## Example: Enabling IS-IS Traffic Engineering Support

---

This example shows how to configure IS-IS so that it uses label-switched paths as shortcuts.

- [Requirements on page 248](#)
- [Overview on page 248](#)
- [Configuration on page 250](#)
- [Verification on page 257](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.


### Overview

MPLS traffic engineering maps certain data flows to established label-switched paths (LSPs) rather than to data links calculated by the interior gateway protocol (IGP) to be part of the best (shortest) path. Fundamental to this function is the determination of what traffic is to be mapped to an LSP. Traffic is mapped to an LSP at the tunnel's ingress label switching router (LSR) by designating the egress LSR as the next-hop router for certain destination prefixes.

It is important to understand that the LSP does not constitute an entire route to a destination. Rather, the LSP is a next-hop segment of the route. Therefore, packets can only be mapped to an LSP if the egress LSR is considered to be a feasible next-hop candidate during the route resolution process.

[Figure 25 on page 249](#) shows the topology used in this example.

*Figure 25: IS-IS Shortcuts Topology*

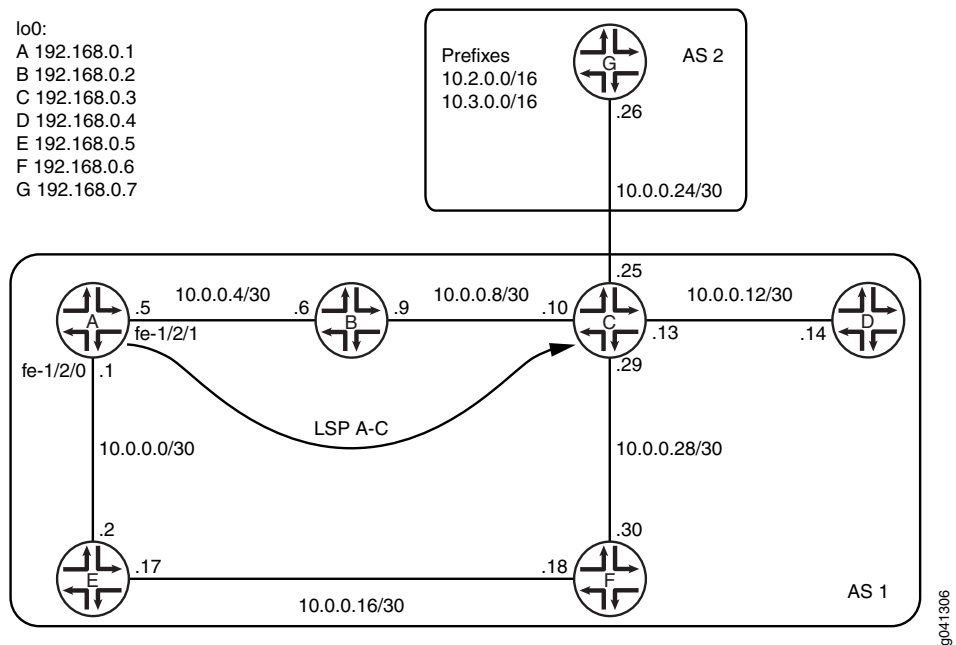

In this example, Device C has an external BGP (EBGP) peer session with Device G in autonomous system (AS) 2. In order to enable its internal BGP (IBGP) peers to access subnets in AS 2, Device C runs IS-IS passively on its interface connecting to Device G. IS-IS has information about the external subnets and enters routes to these subnets in the inet.0 routing table. BGP, when resolving the next-hop addresses of AS-external routes, uses the IGP route.



**TIP:** An alternative to passively running IS-IS on the interface would be to use a next-hop self policy.

Device A has an LSP to Device C. The path is configured to always go through Device E, rather than going through Device B.

Interior gateway protocol (IGP) shortcuts, also called traffic-engineering shortcuts, provide a tool by which the link-state IGP (OSPF or IS-IS) in an AS can consider an LSP in its shortest-path-first (SPF) calculations. If using passive external interfaces, the IGP views an LSP as a single data link toward the destinations beyond the LSP egress device.

When you use **traffic-engineering bgp** (which is the default) and IGP shortcuts, the traffic engineering solution is used for BGP AS-external route resolution only. However, traffic to AS-internal destinations can also be mapped to LSPs. To accomplish this, **traffic-engineering bgp-igp** is enabled. Thus, RSVP installs the MPLS prefixes into the inet.0 table rather than the inet.3 table. As a result, the MPLS LSPs are installed in the forwarding table.

This approach finds practical application whenever heavy traffic is routed to specific destinations within an AS, such as server farms.

An important point about IGP shortcuts, whether used alone or in conjunction with traffic-engineering BGP-IGP, is that IGP adjacencies are never formed across the LSPs. The IGP sees the LSP as a single data link, but does not view the egress router as a potential peer and does not forward hello messages across the LSP. Also, RSVP messages are never forwarded over LSPs, preventing the possibility of an LSP being inadvertently built within another LSP.

[“CLI Quick Configuration” on page 250](#) shows the configuration for all of the devices in [Figure 25 on page 249](#). The section [“Step-by-Step Procedure” on page 254](#) describes the steps on Device A.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device A**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.5/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.0
set protocols mpls traffic-engineering bgp-igp
set protocols mpls label-switched-path test_path to 192.168.0.3
set protocols mpls label-switched-path test_path no-cspf
set protocols mpls label-switched-path test_path primary through_E
set protocols mpls path through_E 192.168.0.5 strict
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.1
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.6
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group int neighbor 192.168.0.3
set protocols isis traffic-engineering family inet shortcuts
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 1

```

Device B

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.0
set protocols rsvp interface lo0.0
set protocols mpls interface fe-1/2/1.0
set protocols mpls interface fe-1/2/0.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.2
set protocols bgp group int neighbor 192.168.0.6
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.2
set routing-options autonomous-system 1

```

Device C

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/3 unit 0 family inet address 10.0.0.29/30
set interfaces fe-1/2/3 unit 0 family iso
set interfaces fe-1/2/3 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/3.0
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/3.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.3
set protocols bgp group int neighbor 192.168.0.6
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group external-peers type external
set protocols bgp group external-peers export send-some-isis
set protocols bgp group external-peers peer-as 2
set protocols bgp group external-peers neighbor 10.0.0.26
set protocols isis interface fe-1/2/0.0 level 1 disable

```

```

set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 2 passive
set protocols isis interface fe-1/2/3.0 level 1 disable
set protocols isis interface lo0.0
set policy-options policy-statement send-some-isis term 1 from protocol isis
set policy-options policy-statement send-some-isis term 1 from route-filter 10.0.0.0/24
  orlonger
set policy-options policy-statement send-some-isis term 1 from route-filter 192.168.0.0/24
  orlonger
set policy-options policy-statement send-some-isis term 1 then accept
set routing-options router-id 192.168.0.3
set routing-options autonomous-system 1

```

**Device D**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.4
set routing-options autonomous-system 1

```

**Device E**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.0
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.5
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.6
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.5
set routing-options autonomous-system 1

```

**Device F**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30

```



```

set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.30/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0006.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.0
set protocols rsvp interface fe-1/2/2.0
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.0
set protocols mpls interface fe-1/2/2.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.6
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.2
set protocols bgp group int neighbor 192.168.0.3
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.6
set routing-options autonomous-system 1

```

**Device G**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.26/30
set interfaces lo0 unit 0 family inet address 192.168.0.7/32 primary
set interfaces lo0 unit 0 family inet address 10.2.1.1/32
set interfaces lo0 unit 0 family inet address 10.3.1.1/32
set protocols bgp group external-peers type external
set protocols bgp group external-peers export statics
set protocols bgp group external-peers export send-directs
set protocols bgp group external-peers peer-as 1
set protocols bgp group external-peers neighbor 10.0.0.25
set policy-options policy-statement statics from protocol static
set policy-options policy-statement statics then accept
set policy-options policy-statement send-directs term 1 from protocol direct
set policy-options policy-statement send-directs term 1 then accept
set routing-options static route 10.2.0.0/32 reject
set routing-options static route 10.2.0.0/32 install
set routing-options static route 10.3.0.0/32 reject
set routing-options static route 10.3.0.0/32 install
set routing-options router-id 192.168.0.7
set routing-options autonomous-system 2

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS traffic-engineering shortcuts:

1. Configure the interfaces.

```
[edit interfaces]
user@A# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30
user@A# set fe-1/2/0 unit 0 family iso
user@A# set fe-1/2/0 unit 0 family mpls
user@A# set fe-1/2/1 unit 0 family inet address 10.0.0.5/30
user@A# set fe-1/2/1 unit 0 family iso
user@A# set fe-1/2/1 unit 0 family mpls
user@A# set lo0 unit 0 family inet address 192.168.0.1/32
user@A# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
```

2. Enable a signaling protocol on the interfaces.

```
[edit protocols rsvp]
user@A# set interface lo0.0
user@A# set interface fe-1/2/0.0
user@A# set interface fe-1/2/1.0
```

3. Enable MPLS on the interfaces.

```
[edit protocols mpls]
user@A# set interface fe-1/2/0.0
user@A# set interface fe-1/2/1.0
```

4. Configure the label-switched path.

A single LSP, named `test_path`, is configured from Device A to Device C. The LSP explicit route object (ERO) is specified to use a strict hop through Device E, so that the LSP takes a different path from the OSPF shortest path of A–B–C. The LSP is signaled using RSVP, but no CSPF is running.

```
[edit protocols mpls]
user@A# set label-switched-path test_path to 192.168.0.3
user@A# set label-switched-path test_path no-cspf
user@A# set label-switched-path test_path primary through_E
user@A# set path through_E 192.168.0.5 strict
```

5. Configure traffic engineering for both BGP and IGP destinations.

When IGP shortcuts are also enabled, the IGP can use the LSP in its calculations. The results of the calculations are entered into the `inet.0` table.

```
[edit protocols mpls]
```

```
user@A# set traffic-engineering bgp-igp
```

6. Configure internal BGP (IBGP) peering among the devices.

```
[edit protocols bgp group int]
user@A# set type internal
user@A# set local-address 192.168.0.1
user@A# set neighbor 192.168.0.5
user@A# set neighbor 192.168.0.6
user@A# set neighbor 192.168.0.2
user@A# set neighbor 192.168.0.3
```

7. Enable IS-IS on the interfaces, and set the link metric.

```
[edit protocols isis]
user@A# set interface fe-1/2/0.0 level 1 disable
user@A# set interface fe-1/2/1.0 level 1 disable
user@A# set interface lo0.0
```

8. Configure IS-IS to use MPLS LSPs as next hops for the IPv4 address family.

It is only necessary to enable IGP shortcuts on the ingress router because that is the router performing the shortest-path-first (SPF) calculations.

It is important to understand how IGP shortcuts affect the protocol and routing table relationship. The IGP performs SPF calculations to subnets downstream of LSP egress points, but the results of these calculations are entered into the inet.3 table only. At the same time, the IGP performs its traditional SPF calculations and enters the results of these calculations into the inet.0 table. The result is that although the IGP is making entries into the inet.3 table, BGP is still the only protocol with visibility into that table for the purposes of route resolution. Therefore, forwarding to AS-internal destinations still uses the inet.0 IGP routes, and the LSPs are only used for BGP next-hop resolution. If you want the LSPs to be used for IGP next-hop resolution, you must configure **traffic-engineering bgp-igp**.

```
[edit protocols isis]
user@A# set traffic-engineering family inet shortcuts
```

9. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@A# set router-id 192.168.0.1
user@A# set autonomous-system 1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@A# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
    family mpls;
  }
}
fe-1/2/1 {
  unit 0
    family inet {
      address 10.0.0.5/30;
    }
    family iso;
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
  }
}
```

```
user@A# show protocols
rsvp {
  interface lo0.0;
  interface fe-1/2/0.0;
  interface fe-1/2/1.0;
}
mpls {
  traffic-engineering bgp-igp;
  label-switched-path test_path {
    to 192.168.0.3;
    no-cspf;
    primary through_E;
  }
  path through_E {
    192.168.0.5 strict;
  }
  interface fe-1/2/0.0;
  interface fe-1/2/1.0;
}
bgp {
  group int {
    type internal;
    local-address 192.168.0.1;
    neighbor 192.168.0.5;
```

```

neighbor 192.168.0.6;
neighbor 192.168.0.2;
neighbor 192.168.0.3;
}
}
isis {
  traffic-engineering {
    family inet {
      shortcuts;
    }
  }
  interface fe-1/2/0.0 {
    level 1 disable;
  }
  interface fe-1/2/1.0 {
    level 1 disable;
  }
  interface lo0.0;
}

```

```

user@A# show routing-options
router-id 192.168.0.1;
autonomous-system 1;

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying the Next Hops on page 257](#)
- [Checking the RSVP Sessions on page 259](#)
- [Checking the Paths with Different Traffic Engineering Settings on page 260](#)

### Verifying the Next Hops

**Purpose** Verify that the MPLS LSP is used as the next hop in the expected routes.

**Action** From operational mode, enter the **show route** command.

```
user@A> show route
```

```

inet.0: 21 destinations, 21 routes (21 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30      *[Direct/0] 4d 09:07:26
                 >   via fe-1/2/0.0
10.0.0.1/32     *[Local/0] 4d 09:07:26
                 Local via fe-1/2/0.0
10.0.0.4/30     *[Direct/0] 4d 09:07:28
                 >   via fe-1/2/1.0
10.0.0.5/32     *[Local/0] 4d 09:07:28

```

```

                                Local via fe-1/2/1.0
10.0.0.8/30      * [IS-IS/18] 01:42:24, metric 20
                  > to 10.0.0.6 via fe-1/2/1.0
10.0.0.12/30     * [IS-IS/18] 01:42:24, metric 30
                  > to 10.0.0.6 via fe-1/2/1.0
10.0.0.16/30     * [IS-IS/18] 01:42:24, metric 20
                  > to 10.0.0.2 via fe-1/2/0.0
10.0.0.20/30     * [IS-IS/18] 01:42:24, metric 30
                  > to 10.0.0.2 via fe-1/2/0.0
10.0.0.24/30     * [IS-IS/18] 01:42:24, metric 30
                  > to 10.0.0.6 via fe-1/2/1.0
10.0.0.28/30     * [IS-IS/18] 01:42:24, metric 30
                  to 10.0.0.6 via fe-1/2/1.0
                  > to 10.0.0.2 via fe-1/2/0.0
10.2.0.0/32      * [BGP/170] 02:22:30, localpref 100, from 192.168.0.3
                  AS path: 2 I, validation-state: unverified
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
10.2.1.1/32      * [BGP/170] 02:20:23, localpref 100, from 192.168.0.3
                  AS path: 2 I, validation-state: unverified
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
10.3.0.0/32      * [BGP/170] 02:22:30, localpref 100, from 192.168.0.3
                  AS path: 2 I, validation-state: unverified
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
10.3.1.1/32      * [BGP/170] 02:20:23, localpref 100, from 192.168.0.3
                  AS path: 2 I, validation-state: unverified
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
192.168.0.1/32   * [Direct/0] 4d 09:08:47
                  > via lo0.0
192.168.0.2/32   * [IS-IS/18] 01:42:24, metric 10
                  > to 10.0.0.6 via fe-1/2/1.0
192.168.0.3/32   * [IS-IS/18] 01:42:24, metric 20
                  > to 10.0.0.6 via fe-1/2/1.0
192.168.0.4/32   * [IS-IS/18] 01:42:24, metric 30
                  > to 10.0.0.6 via fe-1/2/1.0
                  to 10.0.0.2 via fe-1/2/0.0
192.168.0.5/32   * [IS-IS/18] 01:42:24, metric 10
                  > to 10.0.0.2 via fe-1/2/0.0
192.168.0.6/32   * [IS-IS/18] 01:42:24, metric 20
                  > to 10.0.0.2 via fe-1/2/0.0
192.168.0.7/32   * [BGP/170] 02:20:23, localpref 100, from 192.168.0.3
                  AS path: 2 I, validation-state: unverified
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path

inet.3: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.12/30     * [IS-IS/18] 01:41:21, metric 30
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
10.0.0.24/30     * [IS-IS/18] 01:41:21, metric 30
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
10.0.0.28/30     * [IS-IS/18] 01:41:21, metric 30
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
192.168.0.3/32   * [RSVP/7/1] 01:41:21, metric 20
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
                  [IS-IS/18] 01:41:21, metric 20
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path
192.168.0.4/32   * [IS-IS/18] 01:41:21, metric 30
                  > to 10.0.0.2 via fe-1/2/0.0, label-switched-path test_path

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

```

+ = Active Route, - = Last Active, * = Both

49.0002.0192.0168.0001/72
    *Direct/0  4d 09:08:47
        >    via lo0.0

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          * [MPLS/0] 4d 09:10:00, metric 1
            Receive
1          * [MPLS/0] 4d 09:10:00, metric 1
            Receive
2          * [MPLS/0] 4d 09:10:00, metric 1
            Receive
13         * [MPLS/0] 4d 09:10:00, metric 1
            Receive

```

**Meaning** IS-IS chooses the LSP as the shortest path to destinations downstream of the LSP egress device. Additionally, because the IGP uses the LSP to reach external subnet 10.0.0.24/30, BGP also uses the LSP in its routes to 10.2.0.0 and 10.3.0.0.

If next-hop self were used at Device C, BGP would still choose the LSP over the IGP path.

### Checking the RSVP Sessions

**Purpose** Display information about RSVP sessions

**Action** From operational mode, enter the **show rsvp session brief** command.

```

user@A> show rsvp session brief

Ingress RSVP: 1 sessions
To          From          State   Rt Style Labelin Labelout LSPname
192.168.0.3  192.168.0.1  Up      0  1 FF      -    299776 test_path
Total 1 displayed, Up 1, Down 0

```

```

Egress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

```

Transit RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

```

user@E> show rsvp session brief

Ingress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

Egress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

Transit RSVP: 1 sessions
To          From          State   Rt Style Labelin Labelout LSPname

```

```

192.168.0.3      192.168.0.1    Up      0  1 FF  299776  299808 test_path
Total 1 displayed, Up 1, Down 0

```

```
user@F> show rsvp session brief
```

```

Ingress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

```

Egress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

```

Transit RSVP: 1 sessions
To          From          State  Rt Style Labelin Labelout LSPname
192.168.0.3 192.168.0.1    Up     0  1 FF  299808      3 test_path
Total 1 displayed, Up 1, Down 0

```

```
user@C> show rsvp session brief
```

```

Ingress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

```

Egress RSVP: 1 sessions
To          From          State  Rt Style Labelin Labelout LSPname
192.168.0.3 192.168.0.1    Up     0  1 FF      3      - test_path
Total 1 displayed, Up 1, Down 0

```

```

Transit RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

**Meaning** On all four routing devices, the ingress and egress IP addresses of the LSP are shown. The path is shown as an ingress path at Device A, and packets forwarded on the LSP are assigned a label of 299776. At Device E, the LSP is transit, and packets arriving with a label of 299776 are given an outgoing label of 299808. The labels have significance only between neighboring label-switched routers (LSRs). Device F swaps incoming label 299808 for outgoing label 3. Device C, the egress, pops label 3 and routes the received packet by standard IP longest-match route lookup.

### Checking the Paths with Different Traffic Engineering Settings

**Purpose** Check the paths used for IGP and BGP routes when **traffic-engineering bgp-igp** is used and when **traffic-engineering bgp** (the default) is used.

**Action** 1. Configure **traffic-engineering bgp**.

This removes **traffic-engineering bgp-igp** from the configuration because only one MPLS traffic engineering setting can be configured in each routing instance.

```

[edit protocols mpls]
user@A# set traffic-engineering bgp
user@A# commit

```



2. Use the **show route forwarding-table** command to check the paths when **traffic-engineering bgp** (the default) is configured.

```
user@A> show route forwarding-table destination 10.2.1.1
```

```
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
10.2.1.1/32      user  0         10.0.0.2          Push 299776 1013  2
fe-1/2/0.0
```

```
user@A> show route forwarding-table destination 192.168.0.3
```

```
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
192.168.0.3/32   user  1 10.0.0.6          ucst  938   11 fe-1/2/1.0
```

3. Use the **traceroute** command to check the paths when **traffic-engineering bgp** (the default) is configured.

```
user@A> traceroute 10.2.1.1
```

```
traceroute to 10.2.1.1 (10.2.1.1), 30 hops max, 40 byte packets
 1  10.0.0.2 (10.0.0.2)  11.086 ms  1.587 ms  1.603 ms
    MPLS Label=299776 CoS=0 TTL=1 S=1
 2  10.0.0.18 (10.0.0.18)  1.455 ms  1.477 ms  1.442 ms
    MPLS Label=299808 CoS=0 TTL=1 S=1
 3  10.0.0.29 (10.0.0.29)  2.240 ms  1.045 ms  1.243 ms
 4  10.2.1.1 (10.2.1.1)  1.363 ms  1.389 ms  1.374 ms
```

```
user@A> traceroute 192.168.0.3
```

```
traceroute to 192.168.0.3 (192.168.0.3), 30 hops max, 40 byte packets
 1  10.0.0.6 (10.0.0.6)  1.759 ms  1.872 ms  2.281 ms
 2  bb03-cc1ab-1o0.spg1ab.juniper.net (192.168.0.3)  2.119 ms  2.157 ms  1.598 ms
```

4. Configure **traffic-engineering bgp-igp**.

This removes **traffic-engineering bgp** from the configuration because only one MPLS traffic engineering setting can be configured in each routing instance.

```
[edit protocols mpls]
user@A# set traffic-engineering bgp-igp
user@A# commit
```

5. Use the **show route forwarding-table** command to check the paths when **traffic-engineering bgp-igp** is configured.

```
user@A> show route forwarding-table destination 10.2.1.1
```

```
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
10.2.1.1/32      user  0         10.0.0.2          indr 262145 6
```

```

                                10.0.0.2          Push 299776 1013      2
fe-1/2/0.0

```

```
user@A> show route forwarding-table destination 192.168.0.3
```

```
Routing table: default.inet
```

```
Internet:
```

| Destination    | Type | RtRef | Next hop | Type | Index  | NhRef | Netif |
|----------------|------|-------|----------|------|--------|-------|-------|
| 192.168.0.3/32 | user | 1     | 10.0.0.2 | Push | 299776 | 1013  | 8     |
| fe-1/2/0.0     |      |       |          |      |        |       |       |

6. Use the **traceroute** command to check the paths when **traffic-engineering bgp-igp** is configured.

```
user@A> traceroute 10.2.1.1
```

```
traceroute to 10.2.1.1 (10.2.1.1), 30 hops max, 40 byte packets
```

```

 1  10.0.0.2 (10.0.0.2)  2.348 ms  1.475 ms  1.434 ms
    MPLS Label=299776 CoS=0 TTL=1 S=1
 2  10.0.0.18 (10.0.0.18)  1.507 ms  2.307 ms  1.911 ms
    MPLS Label=299808 CoS=0 TTL=1 S=1
 3  10.0.0.29 (10.0.0.29)  1.743 ms  1.645 ms  1.940 ms
 4  10.2.1.1 (10.2.1.1)  2.041 ms  1.977 ms  2.233 ms

```

```
user@A> traceroute 192.168.0.3
```

```
traceroute to 192.168.0.3 (192.168.0.3), 30 hops max, 40 byte packets
```

```

 1  10.0.0.2 (10.0.0.2)  1.721 ms  2.558 ms  2.229 ms
    MPLS Label=299776 CoS=0 TTL=1 S=1
 2  10.0.0.18 (10.0.0.18)  2.505 ms  1.462 ms  1.408 ms
    MPLS Label=299808 CoS=0 TTL=1 S=1
 3  bb03-cclab-lo0.spglab.juniper.net (192.168.0.3)  1.371 ms  1.422 ms  1.351
ms

```

**Meaning** When **traffic-engineering bgp** is configured, the first trace is to a destination belonging to the BGP-learned 10.2.0.0/16 prefix, and follows the LSP. The second trace is to the IS-IS-learned 192.168.0.3 route (Device C's loopback interface address), and follows the IS-IS route. These results correspond to what we observe in the forwarding table. The forwarding table is built based on routes in inet.0 only. BGP can look into inet.3 and select an LSP as the best path to the next hop of a BGP prefix, and can add a route into inet.0 utilizing that LSP. An entry is then made to the forwarding table from the inet.0 route. No other protocol, by default, can consult inet.3, and the inet.3 routes are not entered into inet.0. Therefore, the forwarding entry for 192.168.0.3 is created from the only route to that destination in inet.0: the IS-IS route.

When **traffic-engineering bgp-igp** is configured, the first trace to 10.2.1.1 continues to follow the LSP. The second trace to 192.168.0.3 also follows the LSP. These results correspond to what we observe in the forwarding table, which shows that the LSP is used for IGP next-hop resolution.

- Related Documentation**
- [Advertising LSPs into IGPs](#)
  - [Example: Enabling OSPF Traffic Engineering Support](#)

## Understanding Forwarding Adjacencies

---

A forwarding adjacency is a traffic engineering label-switched path (LSP) that is configured between two nodes and that is used by the interior gateway protocol (IGP) to forward traffic.

When you set up MPLS traffic-engineering tunnels between sites, by default the IGP does not consider those tunnels for traffic forwarding. Forwarding adjacencies allow you to treat a traffic engineering LSP tunnel as a link in an IGP topology. The link is used in the shortest-path-first (SPF) algorithm and is advertised to the IGP peers. A forwarding adjacency can be created between routing devices regardless of their location in the network.

- Related Documentation**
- [Example: Advertising Label-Switched Paths into IS-IS on page 263](#)

## Example: Advertising Label-Switched Paths into IS-IS

---

This example shows how to advertise label-switched paths (LSPs) into IS-IS as point-to-point links (sometimes referred to as forwarding adjacencies) so that the LSPs can be used in SPF calculations. The advertisement contains a local address (the **from** address of the LSP), a remote address (the **to** address of the LSP), and a metric.

- [Requirements on page 263](#)
- [Overview on page 263](#)
- [Configuration on page 264](#)
- [Verification on page 270](#)


### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview

[Figure 26 on page 264](#) shows the topology used in this example.

Figure 26: IS-IS Advertising a Label-Switched Path Topology

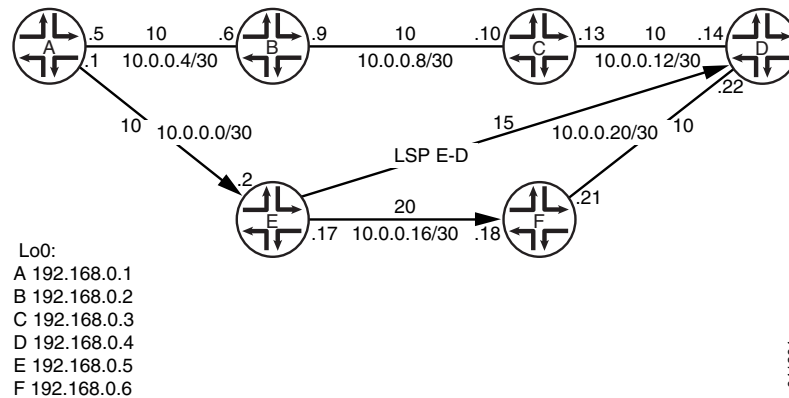

The example shows how to configure the LSP from Device E to Device D and then advertise this path through IS-IS. The configuration is verified by performing a traceroute operation from Device A to Device D and making sure that the LSP is used for forwarding.

[“CLI Quick Configuration” on page 264](#) shows the configuration for all of the devices in [Figure 26 on page 264](#). The section [“Step-by-Step Procedure” on page 267](#) describes the steps on Device E.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device A

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.5/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/0.0
set protocols mpls interface fe-1/2/0.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.1
set protocols bgp group int neighbor 192.168.0.6
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.4
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/0.0 level 2 metric 10
set protocols isis interface fe-1/2/0.5 level 2 metric 10
set protocols isis interface fe-1/2/0.5 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.1
set routing-options autonomous-system 1
```

**Device B**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 2 metric 10
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.2

```

**Device C**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 2 metric 10
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.3

```

**Device D**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/1.0
set protocols mpls label-switched-path E-D to 192.168.0.5
set protocols mpls interface fe-1/2/1.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.4
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.6
set protocols isis interface fe-1/2/0.14 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set protocols isis label-switched-path E-D level 2
set routing-options router-id 192.168.0.4
set routing-options autonomous-system 1

```

**Device E**

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls

```

```
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.0
set protocols mpls label-switched-path E-D to 192.168.0.4
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.5
set protocols bgp group int neighbor 192.168.0.6
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.4
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 2 metric 20
set protocols isis interface lo0.0
set protocols isis label-switched-path E-D level 2 metric 15
set routing-options router-id 192.168.0.5
set routing-options autonomous-system 1
```

**Device F**

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.21/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0006.00
set protocols rsvp interface lo0.0
set protocols rsvp interface fe-1/2/0.0
set protocols rsvp interface fe-1/2/1.0
set protocols mpls interface fe-1/2/0.0
set protocols mpls interface fe-1/2/1.0
set protocols bgp group int type internal
set protocols bgp group int local-address 192.168.0.6
set protocols bgp group int neighbor 192.168.0.1
set protocols bgp group int neighbor 192.168.0.5
set protocols bgp group int neighbor 192.168.0.4
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 2 metric 10
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0
set routing-options router-id 192.168.0.6
set routing-options autonomous-system 1
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To advertise LSPs into IS-IS:

1. Configure the interfaces.

```
[edit interfaces]
user@E# set fe-1/2/0 unit 0 family inet address 10.0.0.2/30
user@E# set fe-1/2/0 unit 0 family iso
user@E# set fe-1/2/0 unit 0 family mpls
user@E# set fe-1/2/1 unit 0 family inet address 10.0.0.17/30
user@E# set fe-1/2/1 unit 0 family iso
user@E# set fe-1/2/1 unit 0 family mpls
user@E# set lo0 unit 0 family inet address 192.168.0.5/32
user@E# set lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
```

2. Enable a signaling protocol on the interfaces.

```
[edit protocols rsvp]
user@E# set interface lo0.0
user@E# set interface fe-1/2/0.0
user@E# set interface fe-1/2/1.0
```

3. Enable MPLS on the interfaces.

```
[edit protocols mpls]
user@E# set interface fe-1/2/0.0
user@E# set interface fe-1/2/1.0
```

4. Configure the LSP.

Make sure that you configure the reverse LSP on the endpoint, in this case on Device D.

```
[edit protocols mpls]
user@E# set label-switched-path E-D to 192.168.0.4
```

5. Configure internal BGP (IBGP) peering among the devices that must run MPLS.

```
[edit protocols bgp group int]
user@E# set type internal
user@E# set local-address 192.168.0.5
user@E# set neighbor 192.168.0.6
user@E# set neighbor 192.168.0.1
user@E# set neighbor 192.168.0.4
```

6. Enable IS-IS on the interfaces, and set the link metric.

IS-IS Level 1 and Level 2 are enabled when you include the interface at **[edit protocols isis]**. By disabling Level 1, you are in effect creating a Level 2 IS-IS interface.

```
[edit protocols isis]
user@E# set interface fe-1/2/0.0 level 1 disable
user@E# set interface fe-1/2/1.0 level 1 disable
user@E# set interface fe-1/2/1.0 level 2 metric 20
user@E# set interface lo0.0
```

7. Advertise the LSP through IS-IS.

Make sure that you advertise the LSP on the endpoint, in this case on Device D.

```
[edit protocols isis]
user@E# set label-switched-path E-D level 2 metric 15
```

8. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@E# set router-id 192.168.0.5
user@E# set autonomous-system 1
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@E# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.2/30;
    }
    family iso;
    family mpls;
  }
}
fe-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.17/30;
    }
    family iso;
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.5/32;
    }
  }
}
```



```

    family iso {
      address 49.0002.0192.0168.0005.00;
    }
  }
}

```

```

user@E# show protocols
rsvp {
  interface lo0.0;
  interface fe-1/2/0.0;
  interface fe-1/2/1.0;
}
mpls {
  label-switched-path E-D {
    to 192.168.0.4;
  }
  interface fe-1/2/0.0;
  interface fe-1/2/1.0;
}
bgp {
  group int {
    type internal;
    local-address 192.168.0.5;
    neighbor 192.168.0.6;
    neighbor 192.168.0.1;
    neighbor 192.168.0.4;
  }
}
isis {
  interface fe-1/2/0.0 {
    level 1 disable;
  }
  interface fe-1/2/1.0 {
    level 1 disable;
    level 2 metric 20;
  }
  interface lo0.0;
  label-switched-path E-D {
    level 2 metric 15;
  }
}

```

```

user@E# show routing-options
router-id 192.168.0.5;
autonomous-system 1;

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying the IS-IS Neighbor on page 270](#)
- [Checking the IS-IS SPF Calculations on page 270](#)
- [Checking the Forwarding Path on page 271](#)

---

### Verifying the IS-IS Neighbor

**Purpose** Verify that another neighbor is listed and is reachable over the LSP. The interface field indicates the name of the LSP.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```
user@E> show isis adjacency detail
```

```
D
```

```
Interface: E-D, Level: 2, State: One-way, Expires in 0 secs
Priority: 0, Up/Down transitions: 1, Last transition: 1d 00:34:58 ago
Circuit type: 3, Speaks: IP
Topologies: Unicast
Restart capable: No, Adjacency advertisement: Advertise
IP addresses: 192.168.0.4
```

```
F
```

```
Interface: fe-1/2/1.0, Level: 2, State: Up, Expires in 7 secs
Priority: 64, Up/Down transitions: 1, Last transition: 1d 01:16:22 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: F.02, IP addresses: 10.0.0.18
```

```
A
```

```
Interface: fe-1/2/0.0, Level: 2, State: Up, Expires in 20 secs
Priority: 64, Up/Down transitions: 1, Last transition: 1d 01:17:20 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: E.02, IP addresses: 10.0.0.1
```

**Meaning** As expected, **Interface: E-D** is shown in the output, and the state is shown as **One-way**.

---

### Checking the IS-IS SPF Calculations

**Purpose** Verify that the LSP is being used in the SPF calculations.

**Action** From operational mode, enter the **show isis spf brief** command.

```
user@E> show isis spf brief
```

```

IS-IS level 1 SPF results:
Node      Metric  Interface  NH  Via  SNPA
E.00      0
1 nodes

IS-IS level 2 SPF results:
Node      Metric  Interface  NH  Via  SNPA
C.02      30      fe-1/2/0.0  IPV4 A  0:5:85:8f:c8:bc
C.00      25      fe-1/2/1.0  LSP E-D
D.03      25      fe-1/2/1.0  LSP E-D
D.02      25      fe-1/2/1.0  LSP E-D
F.00      20      fe-1/2/1.0  IPV4 F  0:5:85:8f:c8:bd
B.00      20      fe-1/2/0.0  IPV4 A  0:5:85:8f:c8:bc
B.02      20      fe-1/2/0.0  IPV4 A  0:5:85:8f:c8:bc
D.00      15      fe-1/2/1.0  LSP E-D
A.00      10      fe-1/2/0.0  IPV4 A  0:5:85:8f:c8:bc
E.02      10
E.00      0
11 nodes

```

**Meaning** As expected, the SPF results include the LSP, E-D.

### Checking the Forwarding Path

**Purpose** Verify that a traceroute operation from Device A to Device D uses the LSP.

**Action** user@A> traceroute 192.168.0.4

```

traceroute to 192.168.0.4 (192.168.0.4), 30 hops max, 40 byte packets
 1  10.0.0.2 (10.0.0.2)  1.092 ms  1.034 ms  1.174 ms
 2  10.0.0.18 (10.0.0.18)  1.435 ms  2.062 ms  2.232 ms
    MPLS Label=299792 CoS=0 TTL=1 S=1
 3  bb04-cc1ab-1o0.spg1ab.juniper.net (192.168.0.4)  2.286 ms  1.432 ms  1.354 ms

```

**Meaning** The output shows that the LSP is used.

**Related Documentation**

- *Advertising LSPs into IGPs*

## Understanding Wide IS-IS Metrics for Traffic Engineering

---

All OSPF and IS-IS interfaces have a cost, which is a routing metric that is used in the link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics. Unlike OSPF, in which the link metric is calculated automatically based on bandwidth, there is no automatic calculation for IS-IS. All IS-IS links use a metric of 10 by default.

Normally, IS-IS metrics can have values up to 63. The total cost to a destination is the sum of the metrics on all outgoing interfaces along a particular path from the source to the destination. By default, the total path metric is limited to 1023. This metric value is insufficient for large networks and provides too little granularity for traffic engineering, especially with high-bandwidth links. A wider range of metrics is also required if route leaking is used.

IS-IS generates two type, length, and value (TLV) tuples, one for an IS-IS adjacency and the second for an IP prefix. To allow IS-IS to support traffic engineering, a second pair of TLVs has been added to IS-IS, one for IP prefixes and the second for IS-IS adjacency and traffic engineering information. With these TLVs, IS-IS metrics can have values up to 16,777,215 ( $2^{24} - 1$ ).

By default, Junos OS supports the sending and receiving of wide metrics. Junos OS allows a maximum metric value of 63 and generates both pairs of TLVs. To configure IS-IS to generate only the new pair of TLVs and thus to allow the wider range of metric values, you must include the **wide-metrics-only** statement in the IS-IS configuration. Enabling **wide-metrics-only** under IS-IS protocols will result in loss of IS-IS routing information for that level.

### Related Documentation

- [Example: Enabling Wide IS-IS Metrics for Traffic Engineering on page 272](#)

## Example: Enabling Wide IS-IS Metrics for Traffic Engineering

---

This example shows how to allow a wide range of metric values on IS-IS interfaces.

- [Requirements on page 272](#)
- [Overview on page 272](#)
- [Configuration on page 273](#)
- [Verification on page 274](#)


### Requirements

Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 14](#) for information about the sample IS-IS configuration.

### Overview

[Figure 27 on page 273](#) shows the topology used in this example.

Figure 27: IS-IS Wide Metrics Topology

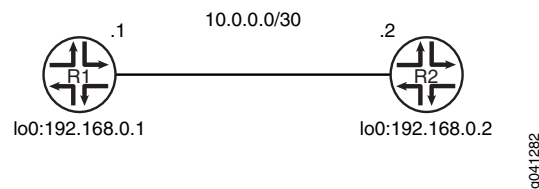

This example describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set protocols isis level 2 wide-metrics-only
set protocols isis level 1 wide-metrics-only
set protocols isis interface lt-1/2/0.1 level 2 metric 100
set protocols isis interface lt-1/2/0.1 level 1 metric 100

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS checksums:

1. Configure a metric of 100 on the interface at both IS-IS levels.

```

[edit protocols isis interface lt-1/2/0.1]
user@R1# set level 2 metric 100
user@R1# set level 1 metric 100

```

2. Enable wide metrics.

```

[edit protocols isis]
user@R1# set level 2 wide-metrics-only
user@R1# set level 1 wide-metrics-only

```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R1# show protocols
isis {
  level 2 wide-metrics-only;
  level 1 wide-metrics-only;
}

```

```
interface lt-1/2/0.1 {  
  level 2 metric 100;  
  level 1 metric 100;  
}  
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

### Verifying That Wide Metrics Are Enabled

---

**Purpose** Make sure that the interface has the expected metric.

**Action** From operational mode, enter the **show isis interface extensive** command.

```
user@R1> show isis interface lt-1/2/0.1 extensive  
  
IS-IS interface database:  
lt-1/2/0.1  
  Index: 68, State: 0x6, Circuit id: 0x1, Circuit type: 3  
  LSP interval: 100 ms, CSNP interval: 10 s, Loose Hello padding  
  Adjacency advertisement: Advertise  
  Level 1  
    Adjacencies: 1, Priority: 64, Metric: 100  
    Hello Interval: 9.000 s, Hold Time: 27 s  
    Designated Router: tp5-R2.02 (not us)  
  Level 2  
    Adjacencies: 1, Priority: 64, Metric: 100  
    Hello Interval: 9.000 s, Hold Time: 27 s  
    Designated Router: tp5-R2.02 (not us)
```

**Meaning** The output shows that the metric is set to 100, as expected, at both Level 1 and Level 2.

**Related Documentation**

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 35](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36](#)

## Understanding LDP-IGP Synchronization

---

Synchronization between the Label Distribution Protocol (LDP) and the underlying interior gateway protocol (IGP) ensures that LDP is fully established before the IGP path is used for forwarding traffic.

LDP is often used to establish MPLS label-switched paths (LSPs) throughout a complete network domain using an IGP such as OSPF or IS-IS. In such a network, all links in the domain have IGP adjacencies as well as LDP adjacencies. LDP establishes the LSPs on the shortest path to a destination as determined by IP forwarding.

If the IGP and LDP are not synchronized, packet loss can occur. This issue is especially significant for applications such as a core network that does not employ BGP. Another example is an MPLS VPN where each provider edge (PE) router depends on the availability of a complete MPLS forwarding path to the other PE devices for each VPN that it serves. This means that along the shortest path between the PE routers, each link must have an operational hello adjacency and an operational LDP session, and MPLS label bindings must have been exchanged over each session.

LDP establishes MPLS LSPs along the shortest path to the destination as determined by IP forwarding. In a Layer 2 VPN or Layer 3 VPN scenario, if the LSP is not yet formed between the PE devices, services depending on MPLS forwarding fail. When LDP has not completed exchanging label bindings with an IGP next hop, traffic is discarded if the head end of the LSP forwards traffic because the LSP is assumed to be in place.

There are various reasons that the LSP fails to come up, as follows:

- Configuration errors and implementation issues.
- When an LDP hello adjacency or an LDP session with a peer is lost due to some error while the IGP still points to that peer. IP forwarding of traffic continues on the IGP link associated with the LDP peer rather than being shifted to another IGP link with which LDP is synchronized.
- When a new IGP link comes up, causing the next hop to a certain destination to change in the IGP's shortest-path-first (SPF) calculations. Although the IGP might be up on the new link, LDP might not have completed label exchange for all the routes. This condition might be transient or due to a misconfiguration.

LDP-IGP synchronization discourages a link from being used while the LDP sessions are not fully established. When LDP is not fully operational on a link, the IGP advertises a maximum cost for the link, thus preventing traffic from flowing through it. The IGP does not advertise the original cost or metric for the link until either LDP label exchange has been completed with the peer on the link or a configured amount of time has passed (the holddown period).

When synchronization is configured, LDP notifies the IGP to advertise the maximum cost for the link when one of the following triggering events takes place:

- The LDP hello adjacency goes down.
- The LDP session goes down.
- LDP is configured on an interface.

If the holddown timer has been configured, the timer starts when the triggering event takes place. When the timer expires, LDP notifies the IGP to resume advertising the original cost.

If the holddown timer has not been configured, the IGP waits (endlessly) until bindings have been received from downstream routers for all the forwarding equivalence classes (FECs) that have a next hop on that interface. Only after that takes place does LDP notify the IGP to bring down the cost on the interface.

LDP-IGP synchronization is supported only for directly connected peers and links with the platform label space.

### Synchronization Behavior During Graceful Restart

LDP-IGP synchronization does not take place while the IGP is in the process of a graceful restart. When the graceful restart completes, links for which synchronization has been configured are advertised with maximum metrics in either of the following cases:

- LDP is not yet operational on the link and no holddown timer has been configured.
- The configured holddown timer has not expired.

During LDP graceful restart, no synchronization operations are done. If the LDP graceful restart is terminated, LDP notifies the IGP to advertise the links with the maximum metric.

### Synchronization Behavior on LAN Interfaces

LDP-IGP synchronization does not take place on LAN interfaces unless the IGP has a point-to-point connection over the LAN configured on the interface. The reason for this is that multiple LDP peers might be connected on such an interface unless a point-to-point connection to a single peer has been configured. Because synchronization raises the cost on the interface high enough to prevent traffic from being forwarded to that link, if multiple peers are connected, the cost is raised on all the peers even though LDP might be unsynchronized with only one of the peers. Consequently, traffic is diverted away from all the peers, an undesirable situation.

### Synchronization Behavior on IGP Passive Interfaces

On IGP passive interfaces, the link cost is not raised when LDP-IGP synchronization is configured and a triggering event occurs.

### Synchronization and TE Metrics

When traffic engineering is configured for an IGP, LDP-IGP synchronization does not affect the traffic engineering metric advertised for the link, regardless of whether the traffic-engineering (TE) metric is explicitly configured or the default value.

#### Related Documentation

- [Example: Configuring Synchronization Between IS-IS and LDP on page 276](#)

---

## Example: Configuring Synchronization Between IS-IS and LDP

---

This example shows how to enable synchronization between IS-IS and LDP.

- [Requirements on page 277](#)
- [Overview on page 277](#)
- [Configuration on page 278](#)
- [Verification on page 279](#)



## Requirements

Before you begin, configure IS-IS and LDP. For an example, see *Example: Configuring a Layer 3 VPN with Route Reflection and AS Override*.

## Overview

LDP distributes labels in non-traffic-engineered applications. Labels are distributed along the best path determined by IS-IS. If the synchronization between LDP and IS-IS is lost, the label-switched path (LSP) goes down. Therefore, LDP and IS-IS synchronization is beneficial. When LDP synchronization is configured and when LDP is not fully operational on a given link (a session is not established and labels are not exchanged), IS-IS advertises the link with the maximum cost metric. The link is not preferred but remains in the network topology.

LDP synchronization is supported only on point-to-point interfaces and LAN interfaces configured as point-to-point interfaces under IS-IS. LDP synchronization is not supported during graceful restart.

To advertise the maximum cost metric until LDP is operational for LDP synchronization, include the **ldp-synchronization** statement:

```
ldp-synchronization {  
  disable;  
  hold-time seconds;  
}
```


To disable synchronization, include the **disable** statement. To configure the time period to advertise the maximum cost metric for a link that is not fully operational, include the **hold-time** statement.



**NOTE:** When an interface has been in the holddown state for more than 3 minutes, a system log message with a warning level is sent. This message appears in both the messages file and the trace file.

Figure 28 on page 278 shows the topology used in this example.

Figure 28: IS-IS and LDP Synchronization Topology

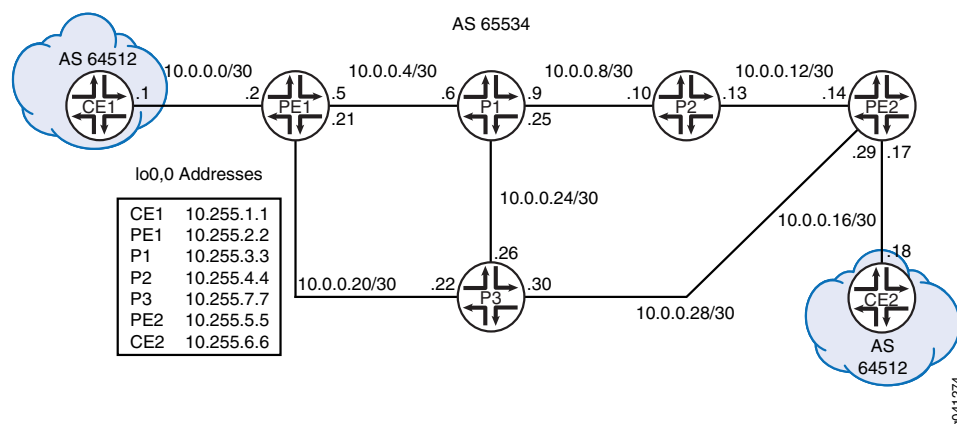

This example describes the steps on Device P1.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device P1

```
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis interface all
set protocols isis interface all ldp-synchronization
set protocols isis interface all point-to-point
set protocols isis interface fxp0.0 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure synchronization between IS-IS and LDP:

1. Enable MPLS on the interfaces

```
[edit protocols mpls]
user@P1# set interface all
user@P1# set interface fxp0.0 disable
```

2. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@P1# set interface all
user@P1# set interface fxp0.0 disable
```

3. Enable LDP on the interfaces.

```
[edit protocols ldp]
user@P1# set interface all
user@P1# set interface fxp0.0 disable
```

4. Enable LDP synchronization on the IS-IS interfaces.

```
[edit protocols isis interface all]
user@P1# set ldp-synchronization
```

5. Configure the IS-IS interfaces to behave like point-to-point interfaces.

```
[edit protocols isis interface all]
user@P1# set point-to-point
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P1# show protocols
mpls {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
isis {
  interface all {
    ldp-synchronization;
    point-to-point;
  }
  interface fxp0.0 {
    disable;
  }
}
ldp {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Device R2.

## Verification

Confirm that the configuration is working properly.

## Verifying LDP Synchronization

**Purpose** Check LDP synchronization setting on the IS-IS interfaces.

**Action** From operational mode, enter the **show isis interface extensive** command.

```
user@P1> show isis interface extensive
```

```
IS-IS interface database:
```

```
lo0.0
```

```
Index: 113, State: 0x6, Circuit id: 0x1, Circuit type: 0
LSP interval: 100 ms, CSNP interval: disabled, Loose Hello padding
Adjacency advertisement: Advertise
```

```
Level 1
```

```
Adjacencies: 0, Priority: 64, Metric: 0
Passive
```

```
Level 2
```

```
Adjacencies: 0, Priority: 64, Metric: 0
Passive
```

```
ge-1/2/0.0
```

```
Index: 116, State: 0x6, Circuit id: 0x1, Circuit type: 2
LSP interval: 100 ms, CSNP interval: 15 s, Loose Hello padding
Adjacency advertisement: Advertise
LDP sync state: in sync, for: 17:22:06, reason: LDP up during config
config holdtime: infinity
```

```
Level 2
```

```
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
```

```
ge-1/2/1.0
```

```
Index: 114, State: 0x6, Circuit id: 0x1, Circuit type: 2
LSP interval: 100 ms, CSNP interval: 15 s, Loose Hello padding
Adjacency advertisement: Advertise
LDP sync state: in sync, for: 17:22:06, reason: LDP up during config
config holdtime: infinity
```

```
Level 2
```

```
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
```

```
ge-1/2/2.0
```

```
Index: 115, State: 0x6, Circuit id: 0x1, Circuit type: 2
LSP interval: 100 ms, CSNP interval: 15 s, Loose Hello padding
Adjacency advertisement: Advertise
LDP sync state: in sync, for: 17:22:06, reason: LDP up during config
config holdtime: infinity
```

```
Level 2
```

```
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
```

**Meaning** The output shows that LDP is synchronized with IS-IS.

**Related Documentation**

- [Understanding LDP-IGP Synchronization on page 274](#)

## Layer 2 Mapping for IS-IS

IS-IS is a Layer 2 protocol that uses the Ethernet logical link control (LLC) encapsulation format for exchanging information. IS-IS Layer 2 mapping ensures that forwarding next-hop resolution is topology-driven rather than traffic-driven, which results in minimal traffic loss while activating an Ethernet link.

Typically, IS-IS installs Layer 3 routes that point to Layer 2 next hops into the forwarding table. Junos OS uses a Layer 3 anchor address notation to standardize the description of a next hop. IS-IS uses Address Resolution Protocol (ARP) to map these IPv4 Layer 3 next-hop anchors to a Layer 2 Media Access Control (MAC) address and installs the Layer 2 MAC addresses in the forwarding table for an Ethernet network. For IPv6 routes, Junos OS uses neighbor discovery to resolve IPv6 Layer 3 next-hop anchors. The Routing Engine installs a Layer 3 prefix along with the set of Layer 3 next-hop anchors for a route in the forwarding table. This method of referencing a Layer 2 next hop using its Layer 3 anchor address in IS-IS networks has the following undesired ramifications:

- When a new route is added to the kernel, its forwarding next hop might not have been resolved yet.
- As next-hop resolution is traffic-driven and always reactive, there is a nonzero traffic loss when you activate an Ethernet link.

Enabling Layer 2 mapping helps to overcome these undesired ramifications in IS-IS networks. IS-IS LAN and point-to-point Hellos supply all relevant Layer 2 and Layer 3 binding address information, which the device at the receiving end can use to populate the ARP or neighbor discovery cache of the kernel even before the route installation time. When Layer 2 mapping is enabled, IS-IS installs ARP or neighbor discovery next-hop entries into the forwarding table. Because this provides Layer 2 next-hop bindings ahead of time, IS-IS networks do not experience traffic loss while bringing up a link. Each entry gets enqueued as a semi-static ARP or neighbor discovery entry for simplifying garbage collection by a crashed or restarting routing protocol process (rpd). Therefore, each entry gets refreshed periodically.

The advantages of address resolution using IS-IS Hello messages are as follows:

- Forwarding next-hop resolution is topology-driven and not traffic-driven.
- Less Layer 2 resolution on core links because IS-IS already carries this information.
- Better security because IS-IS provides HMAC-MD5 and HMAC-SHA1 digests.



**CAUTION:** The ARP and neighbor discovery methods of address resolution are susceptible to MAC address spoofing attacks.



**NOTE:** Junos OS supports all Ethernet based interface types. However, non-Ethernet based interface types are not supported. Unnumbered IPv4 and IPv6 addresses are not supported as currently IS-IS does not have the capability to generate the IP address neighbor TLVs #132 and #232 from the loopback interface and advertise them on the unnumbered interface.

---

**Related  
Documentation**

- [layer2-map on page 507](#)
- [Example: Configuring Layer 2 Mapping for IS-IS on page 282](#)

---

## Example: Configuring Layer 2 Mapping for IS-IS

---

This example shows how to configure Layer 2 mapping for IS-IS, that is, mapping a Layer 2 MAC address to the IPv4 address of the forwarding next hop. Layer 2 mapping minimizes traffic loss, provides better security, and reduces Layer 2 resolution processing on core links while activating an Ethernet link.

- [Requirements on page 282](#)
- [Overview on page 282](#)
- [Configuration on page 283](#)
- [Verification on page 287](#)

### Requirements

This example uses the following hardware and software components:

- Two MX Series routers
- Junos OS Release 16.1 or later running on all the devices

### Overview

Layer 2 mapping ensures that the forwarding next-hop resolution is topology-driven rather than traffic-driven. IS-IS LAN and point-to-point Hellos supply all relevant Layer 2 and Layer 3 binding address information for address resolution. The device at the receiving end can use the information to populate the ARP or neighbor discovery cache of the kernel even before the route installation time. When Layer 2 mapping is enabled, IS-IS installs ARP or neighbor discovery next-hop entries into the forwarding table. Because this provides Layer 2 next-hop bindings ahead of time, IS-IS networks do not experience traffic loss while bringing up a link.


---

### Topology

---

In [Figure 29 on page 283](#), Router R1 is connected to Router R2. Layer 2 mapping is enabled on Router R1. Router R2 receives the Layer 2 information from Router R1 and updates the forwarding table.

Figure 29: Configuring Layer 2 Mapping for IS-IS

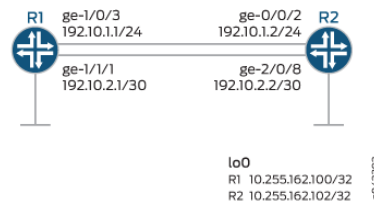

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

**Router R1**

```

set interfaces ge-1/0/3 description R0->R1_1
set interfaces ge-1/0/3 unit 0 family inet address 192.10.1.1/24
set interfaces ge-1/0/3 unit 0 family iso
set interfaces ge-1/0/3 unit 0 family inet6 address 0000:0000:0000:0000:192:10:1:1/120
set interfaces ge-1/0/3 unit 0 family mpls
set interfaces ge-1/0/7 description R0->R1_2
set interfaces ge-1/0/7 unit 0 family inet address 193.1.1.1/30
set interfaces ge-1/0/7 unit 0 family iso
set interfaces ge-1/0/7 unit 0 family inet6 address 0000:0000:0000:0000:193:1:1:1/120
set interfaces ge-1/0/7 unit 0 family mpls
set interfaces ge-1/1/1 description R0->R1_3
set interfaces ge-1/1/1 unit 0 family inet address 192.10.2.1/30
set interfaces ge-1/1/1 unit 0 family iso
set interfaces ge-1/1/1 unit 0 family inet6 address 0000:0000:0000:0000:192:10:2:1/120
set interfaces ge-1/1/1 unit 0 family mpls
set lo0 unit 0 family inet address 10.255.162.100/32
set routing-options router-id 10.255.162.100
set protocols rsvp interface all
set protocols rsvp interface lo0.0
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface lo0.0
set protocols mpls interface fxp0.0 disable
set protocols isis layer2-map
set protocols isis interface ge-1/0/3.0 level 2 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set protocols ldp interface lo0.0

```

**Router R2**

```

set interfaces ge-0/0/2 description R0->R1_1
set interfaces ge-0/0/2 unit 0 family inet address 192.10.1.2/24
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family inet6 address 0000:0000:0000:0000:192:10:1:2/120
set interfaces ge-0/0/2 unit 0 family mpls
set interfaces ge-2/0/3 description R1->R2_1

```

```

set interfaces ge-2/0/3 unit 0 family inet address 193.2.1.1/30
set interfaces ge-2/0/3 unit 0 family iso
set interfaces ge-2/0/3 unit 0 family inet6 address 0000:0000:0000:0000:193:2:1:1/120
set interfaces ge-2/0/3 unit 0 family mpls
set interfaces ge-2/0/8 description R0->R1_2
set interfaces ge-2/0/8 unit 0 family inet address 192.10.2.2/30
set interfaces ge-2/0/8 unit 0 family iso
set interfaces ge-2/0/8 unit 0 family inet6 address
    0000:0000:0000:0000:192:10:2:2/120
set interfaces ge-2/0/8 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.162.102/32
set routing-options router-id 10.255.162.109
set protocols rsvp interface all
set protocols rsvp interface lo0.0
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface lo0.0
set protocols mpls interface fxp0.0 disable
set protocols isis interface ge-0/0/2.0 level 2 disable
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set protocols ldp interface lo0.0

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Layer 2 mapping on Router R1:



**NOTE:** Repeat this procedure for Router 2 after modifying the appropriate interface names, addresses, and other parameters.

1. Configure the device interfaces.

```

[edit interfaces]
user@R1# set ge-1/0/3 description R0->R1_1
user@R1# set ge-1/0/3 unit 0 family inet address 192.10.1.1/24
user@R1# set ge-1/0/3 unit 0 family iso
user@R1# set ge-1/0/3 unit 0 family inet6 address
    0000:0000:0000:0000:192:10:1:1/120
user@R1# set ge-1/0/3 unit 0 family mpls

user@R1# set ge-1/0/7 description R0->RT0
user@R1# set ge-1/0/7 unit 0 family inet address 193.1.1.1/30
user@R1# set ge-1/0/7 unit 0 family iso
user@R1# set ge-1/0/7 unit 0 family inet6 address
    0000:0000:0000:0000:193:1:1:1/120
user@R1# set ge-1/0/7 unit 0 family mpls

```



```

user@R1# set ge-1/1/1 description R0->R1_2
user@R1# set ge-1/1/1 unit 0 family inet address 192.10.2.1/30
user@R1# set ge-1/1/1 unit 0 family iso
user@R1# set ge-1/1/1 unit 0 family inet6 address
0000:0000:0000:0000:192:10:2:1/120
user@R1# set ge-1/1/1 unit 0 family mpls

```

2. Configure the loopback interface.

```

[edit interfaces]
user@R1# set lo0 unit 0 family inet address 10.255.162.100/32

```

3. Configure the router id.

```

[edit routing-options]
user@R1# set router-id 10.255.162.100

```

4. Configure RSVP, MPLS, and LDP on all interfaces excluding the management interface.

```

[edit protocols]
user@R1# set rsvp interface all
user@R1# set rsvp interface lo0.0
user@R1# set rsvp interface fxp0.0 disable

user@R1# set mpls interface all
user@R1# set mpls interface lo0.0
user@R1# set mpls interface fxp0.0 disable

user@R1# set ldp interface all
user@R1# set ldp interface fxp0.0 disable
user@R1# set ldp interface lo0.0

```

5. Enable Layer 2 mapping.

```

[edit protocols]
user@R1# set isis layer2-map

```

6. Disable level 2 IS-IS on interface ge-1/0/3.0.

```

[edit protocols]
user@R1# set isis interface ge-1/0/3.0 level 2 disable

```

## Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@R1# show interfaces
ge-1/0/3 {
  description R0->R1_1;
  unit 0 {
    family inet {
      address 192.10.1.1/24;
    }
    family iso;
    family inet6 {
      address 0000:0000:0000:0000:192:10:1:1/120;
    }
    family mpls;
  }
}
ge-1/0/7 {
  description R0->RT0;
  unit 0 {
    family inet {
      address 193.1.1.1/30;
    }
    family iso;
    family inet6 {
      address 0000:0000:0000:0000:193:1:1:1/120;
    }
    family mpls;
  }
}
ge-1/1/1 {
  description R0->R1_2;
  unit 0 {
    family inet {
      address 192.10.2.1/30;
    }
    family iso;
    family inet6 {
      address 0000:0000:0000:0000:192:10:2:1/120;
    }
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.255.162.100/32;
    }
  }
}
```

```
}
```

```
[edit]
user@R1# show protocols
rsdp {
  interface all;
  interface lo0.0;
  interface fxp0.0 {
    disable;
  }
}
mpls {
  interface all;
  interface lo0.0;
  interface fxp0.0 {
    disable;
  }
}
isis {
  layer2-map;
}
ldp {
  interface all;
  interface fxp0.0 {
    disable;
  }
  interface lo0.0;
}
```

```
[edit]
user@R1# show routing-options
router-id 10.255.162.100;
```

If you are done configuring the device, commit the configuration.

```
user@R1# commit
```

## Verification

Confirm that the configuration is working properly.

- [Verifying IS-IS Adjacencies on page 287](#)
- [Verifying That Layer 2 Mapping Is Enabled on page 288](#)
- [Verifying That the Layer 2 Address Is Mapped on page 288](#)

### Verifying IS-IS Adjacencies

**Purpose** Verify that the expected adjacencies have formed between Router R1 and Router R2.

**Action** From operational mode, run the **show isis adjacency** command on Router R1.

```
user@R1> show isis adjacency
```

| Interface  | System | L State | Hold (secs) | SNPA             |
|------------|--------|---------|-------------|------------------|
| ge-1/0/3.0 | R2     | 1 Up    | 8           | 88:e0:f3:5e:e8:2 |

**Meaning** The interface ge-1/0/3.0 on Router R1 has established adjacency with Router R2.

---

### Verifying That Layer 2 Mapping Is Enabled

**Purpose** Verify that Layer 2 mapping is enabled on Router R1.

**Action** From operational mode, run the **show isis interface detail** command on Router R1.

```
user@R1> show isis interface detail
```

```
IS-IS interface database:
```

```
ge-1/0/3.0
```

```
Index: 196612, State: 0x6, Circuit id: 0x1, Circuit type: 1
```

```
LSP interval: 100 ms, CSNP interval: 10 s
```

```
Adjacency advertisement: Advertise, Layer2-map: Enabled
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
1 1 64 10 9.000 27 R2.02 (not us)
```

```
2 0 64 10 Disabled
```

**Meaning** The output confirms that Layer 2 mapping is enabled on Router R1.

---

### Verifying That the Layer 2 Address Is Mapped

**Purpose** Display Layer 3 next hop and the mapped data link address in the kernel for the routing instances.

**Action** From operational mode, run the **show isis layer2-map** command on Router R1.

```
user@R1> show isis layer2-map
```

```
Layer2 mapping database for instance master
```

| IP Address                | Interface  | SNPA             | Refresh  | State |
|---------------------------|------------|------------------|----------|-------|
| 192.10.1.2                | ge-1/0/3.0 | 88:e0:f3:5e:e8:2 | 00:11:54 |       |
| fe80::8ae0:f3ff:fe5e:e802 | ge-1/0/3.0 | 88:e0:f3:5e:e8:2 | 00:04:02 |       |
| IPv4 records: 1           |            |                  |          |       |
| IPv6 records: 1           |            |                  |          |       |

**Meaning** The Layer 2 MAC address of the next hop is mapped to the IP address of interface ge-1/0/3.0 in the kernel.

**Related Documentation**

- [layer2-map on page 507](#)
- [Layer 2 Mapping for IS-IS on page 281](#)
- [show isis layer2-map on page 689](#)

## Understanding Source Packet Routing in Networking (SPRING)

Source packet routing or segment routing is a control-plane architecture that enables an ingress router to steer a packet through a specific set of nodes and links in the network without relying on the intermediate nodes in the network to determine the actual path it should take. In this context, the term 'source' means 'the point at which the explicit route is imposed'. Starting with Junos OS Release 17.2R1, segment routing for IS-IS and OSPFv2 is supported on QFX5100 and QFX10000 switches.

Starting with Junos OS Release 17.3R1, segment routing for IS-IS and OSPFv2 is supported on QFX5110 and QFX5200 switches.

Essentially segment routing engages IGPs like IS-IS and OSPF for advertising two types of network segments or tunnels:

- First, a strict forwarded single-hop tunnel that carries packets over a specific link between two nodes, irrespective of the link cost, referred to as *adjacency segments*.
- Second, a multihop tunnel using shortest path links between two specific nodes, referred to as *node segments*.

Ingress routers can steer a packet through a desired set of nodes and links by pre-appending the packet with an appropriate combination of tunnels.

Segment routing leverages the source routing paradigm. A node steers a packet through an ordered list of instructions, called segments. A segment can represent any instruction, topological or service-based. A segment can have a local semantic to a segment routing node or to a global node within a segment routing domain. Segment routing enforces a

flow through any topological path and service chain while maintaining per-flow state only at the ingress node to the segment routing domain. Segment routing can be directly applied to the MPLS architecture with no change on the forwarding plane. A segment is encoded as an MPLS label. An ordered list of segments is encoded as a stack of labels. The segment to process is on the top of the stack. Upon completion of a segment, the related label is popped from the stack. Segment routing can be applied to the IPv6 architecture, with a new type of routing extension header. A segment is encoded as an IPv6 address. An ordered list of segments is encoded as an ordered list of IPv6 addresses in the routing extension header. The segment to process is indicated by a pointer in the routing extension header. Upon completion of a segment, the pointer is incremented.

Traffic engineering shortcuts are enabled for labeled IS-IS segment routes, when you configure **shortcuts** at the following hierarchy levels:

- **[edit protocols is-is traffic-engineering family inet]** for IPv4 traffic.
- **[edit protocols is-is traffic-engineering family inet6]** for IPv6 traffic.

When source packet routing is deployed in the network, the data center, backbone, and peering devices, switch MPLS packets with a label stack built by the source of the traffic; for example, data center servers. In Junos OS Release 17.4R1, the source-routed traffic co-exists with traffic taking RSVP signaled paths, and source routing is implemented as regular label switching through mpls.0 table using the label operations – pop, swap (to the same label value), and swap-push (for interface protection). In all the cases, traffic can be load balanced between multiple Layer 3 interfaces, or within an aggregate interface. Starting in Junos OS Release 17.4R1, the traffic statistics in a segment routing network can be recorded in an OpenConfig compliant format for the Layer 3 interfaces. The statistics is recorded for the Source Packet Routing in Networking (SPRING) traffic only, excluding RSVP and LDP-signaled traffic, and the family MPLS statistics per interface is accounted for separately. The SR statistics also includes SPRING traffic statistics per link aggregation group (LAG) member, and per segment identifier (SID). To enable recording of segment routing statistics, include **sensor-based-stats** statement at the **[edit protocol isis source-packet-routing]** hierarchy level.

Release History Table

| Release                | Description                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <a href="#">17.4R1</a> | Starting in Junos OS Release 17.4R1, the traffic statistics in a segment routing network can be recorded in an OpenConfig compliant format for the Layer 3 interfaces. |
| <a href="#">17.3R1</a> | Starting with Junos OS Release 17.3R1, segment routing for IS-IS and OSPFv2 is supported on QFX5110 and QFX5200 switches.                                              |
| <a href="#">17.2R1</a> | Starting with Junos OS Release 17.2R1, segment routing for IS-IS and OSPFv2 is supported on QFX5100 and QFX10000 switches.                                             |

**Related Documentation**

- [OSPF Support for Traffic Engineering](#)
- [Advertising Label-Switched Paths into OSPFv2](#)
- [IS-IS Extensions to Support Traffic Engineering on page 246](#)

- [Understanding Forwarding Adjacencies on page 263](#)
- [Understanding LDP-IGP Synchronization on page 274](#)
- *node-segment (Protocols OSPF)*
- *no-advertise-adjacency-segment (Protocols OSPF)*
- *no-source-packet-routing (Protocols OSPF)*
- [sensor-based-stats on page 572](#)
- *sensor (Junos Telemetry Interface)*
- *sensor-based-stats (Junos Telemetry Interface)*
- *show (ospf | ospf3) overview*
- *show (ospf | ospf3) neighbor*
- *show ospf database*
- *show (ospf | ospf3) route*
- [show route table on page 872](#)
- [level \(Global IS-IS\) on page 509](#)
- [show isis database on page 665](#)
- [show isis overview on page 691](#)
- [show isis route on page 698](#)
- [show isis adjacency on page 638](#)
- [source-packet-routing \(Protocols IS-IS and OSPF\) on page 578](#)
- *node-segment (Protocols IS-IS) on page 536*
- *no-advertise-adjacency-segment (Protocols IS-IS) on page 532*
- *use-source-packet-routing (Protocols IS-IS) on page 592*

## Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol

---

Segment routing (SR) or Source Packet Routing in Networking (SPRING) is a control-plane architecture that enables an ingress router to steer a packet through a specific set of nodes and links without relying on the intermediate nodes in the network to determine the actual path it should take. SPRING enables automation of a network by using a software-defined network (SDN) controller for traffic steering and traffic engineering in a WAN packet network. To steer packets through the specified set of nodes and links, the ingress router prepends packets with segments that contain an appropriate combination of tunnels. Each segment is associated with an identifier, which is referred to as the *segment identifier* (SID). An ordered list of segments is encoded as a stack of labels. Every node in the segment routing domain is allocated labels based on the availability of the dynamic label range. A segment routing global block (SRGB) is the range of label values reserved for segment routing.

Starting in Junos OS Release 17.2R1, you can define the SRGB for the IS-IS protocol, and provide prefix anycast segments in addition to node segments to prefixes that are advertised by the IS-IS protocol through policy configuration. Junos OS also extends support to SPRING anycast segments and configurable adjacency segment indexes for the IS-IS protocol.

- [Benefits of Anycast Segments, Adjacency Segments, and Configurable SRGB on page 292](#)
- [Configurable Segment Routing Global Block on page 292](#)
- [Adjacency Segments and Prefix Segments on page 293](#)

### Benefits of Anycast Segments, Adjacency Segments, and Configurable SRGB

- With the support for anycast prefix segments on Junos OS, you can configure multiple routers to advertise the same prefix with the same SID, which facilitates load balancing.
- Configuring the adjacency hold time helps retain segments for a specified period of time after a link flaps and ensures faster convergence after a link fails.
- Configuring the SRGB label range ensures that the labels are more predictable across segment routing domain.

### Configurable Segment Routing Global Block

A segment is encoded as an MPLS label. An ordered list of segments is encoded as a stack of labels. Every node in the segment routing domain is allocated labels by the node label manager based on the index range configured for source packet routing. These labels are allocated to the node segment based on the availability of the dynamic label range managed by node label manager. An SRGB is the range of label values used in segment routing. You can configure an available SRGB label range for the IS-IS protocol so that the labels are predictable across segment routing domains. Ensure that the configured SRGB labels are not used by any other application.



## Adjacency Segments and Prefix Segments

A node steers a packet to its destination through an ordered list of instructions, called segments. Essentially, segment routing engages interior gateway protocols (IGPs) such as IS-IS and OSPF to advertise two types of network segments:

- Adjacency segments—A strict forwarded single-hop tunnel that carries packets over a specific link between two nodes, irrespective of the link cost.
- Prefix segments—A multihop tunnel that uses equal cost multi-hop aware shortest path links to reach a prefix. The prefix SID supports both IPv4 and IPv6 prefixes. A node segment is a special case of prefix segment that uses shortest path links between two specific nodes. An anycast segment is also a type of prefix segment that identifies a set of routers to advertise the same prefix with the same SID value.

---

### Configurable Adjacency Segment Hold Time

The IS-IS protocol creates adjacency segments per adjacency, level, and address family (one each for IPv4 and IPv6). An MPLS label is allocated for each adjacency segment that gets created. These labels are allocated after the adjacency status of the segment changes to the up state. Starting in Junos OS Release 17.2R1, you can configure a hold time to ensure that IS-IS does not release the segments immediately after a link flaps or goes down, but retains them for the configured hold time duration.

---

### Prefix Segment Index

Currently, Junos OS enables you to configure a SPRING node SID for IPv4 and IPv6 address families for each routing instance. This node SID is attached to an IPv4 and IPv6 router ID if the router ID is configured on the loopback interface. Otherwise, the lowest IP address assigned to the loopback interface is chosen as the node SID. Configuring a node SID through policy allows you to choose the loopback address that gets the node SID. If the node SID configuration exists and a policy is defined for node SID selection for the same prefix, then the policy configuration takes precedence.

Starting in Junos OS Release 17.2R1, you can designate prefix segment indexes to prefix SIDs, both anycast and node SIDs, that are advertised in IS-IS through policy configuration. Remote routers use this index to consolidate prefixes into respective SRGBs and to derive the segment identifier and forward the traffic destined for a specific prefix. After the prefix segment indexes are provisioned, the devices running Junos OS advertise them in one or more of the following IS-IS TLV types by using a new Prefix-SID Sub-TLV (type 3):

- IP Prefix TLV (type 135)
- MT IP Prefix TLV (type 235)
- IPV6 Prefix Reachability TLV (type 236)
- MT IPV6 Prefix Reachability TLV (type 237)

## Anycast Segments

An IGP anycast segment is an IGP prefix segment that identifies a set of routers. An anycast segment enforces forwarding based on the equal-cost multipath-aware shortest-path toward the closest node of the anycast set. Within an anycast group, all the routers advertise the same prefix with the same SID value, which facilitates load balancing.

### Release History Table

| Release | Description                                                                                                                                                                                                                                                                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17.2R1  | Starting in Junos OS Release 17.2R1, you can define the SRGB for the IS-IS protocol, and provide prefix anycast segments in addition to node segments to prefixes that are advertised by the IS-IS protocol through policy configuration. Junos OS also extends support to SPRING anycast segments and configurable adjacency segment indexes for the IS-IS protocol. |
| 17.2R1  | Starting in Junos OS Release 17.2R1, you can configure a hold time to ensure that IS-IS does not release the segments immediately after a link flaps or goes down, but retains them for the configured hold time duration.                                                                                                                                            |

### Related Documentation

- [Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol on page 326](#)
- [Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol on page 324](#)
- [Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to Increase Network Speed on page 294](#)
- [adjacency-segment on page 451](#)
- [prefix-segment on page 562](#)
- [source-packet-routing on page 578](#)
- [srgb on page 580](#)
- [traffic-engineering on page 586](#)

## Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to Increase Network Speed

This example shows how to define the segment routing label block (SRGB) label range for segment packet routing in networking (SPRING) or segment routing (SR) for the IS-IS protocol. This configuration ensures that the labels are more predictable across the segment routing domain and thereby increasing the speed of the network.

- [Requirements on page 295](#)
- [Overview on page 295](#)
- [Configuration on page 295](#)
- [Verification on page 298](#)

## Requirements

This example uses the following hardware and software components:

- Two MX Series routers
- Junos OS Release 17.2 or later running on all devices


Before you configure the SRGB label range for SPRING in the IS-IS domain, be sure you configured the routing and signaling protocols.

## Overview

Currently, Junos OS allows you to configure only node segment indices. The value of the start label depends on the dynamic label available in the system. Because there is no predictability of the dynamic label range being allocated to the SRGB, Junos OS allows you to configure the SRGB label range used by SPRING. The labels in the SRGB range are used for SPRING in the IS-IS domain. This means the labels advertised are more predictable and deterministic across the SPRING domain.

## Topology

Figure 1 shows SRGB configured on router R1 and router R2.

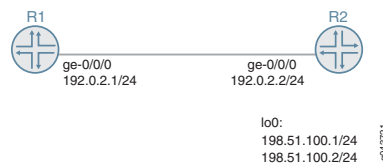

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```

R1
set chassis network-services enhanced-ip
set interfaces ge-0/0/0 unit 0 family inet address 192.0.2.1/24
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family inet6 address 2001:db8:1:1::1/128
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 198.51.100.1/24
set interfaces lo0 unit 0 family iso address 49.0001.0010.0100.1001.00
set interfaces lo0 unit 0 family inet6 address 2001:db8:10:10::1/128
set protocols mpls interface ge-0/0/0.0
set protocols isis source-packet-routing srgb start-label 400000
set protocols isis source-packet-routing srgb index-range 4000
set protocols isis source-packet-routing node-segment ipv4-index 2001
set protocols isis source-packet-routing node-segment ipv6-index 3001
set protocols isis level 1 disable
set protocols isis interface ge-0/0/0.0
  
```

```
set protocols isis interface lo0.0 passive
```

```
R2 set chassis network-services enhanced-ip
set interfaces ge-0/0/0 unit 0 family inet address 192.0.2.2/24
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family inet6 address 2001:db8:1:1::2/64
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 198.51.100.2/24
set interfaces lo0 unit 0 family iso address 49.0001.0020.0200.2001.00
set interfaces lo0 unit 0 family inet6 address 2001:db8:20:20::1/128
set protocols mpls interface ge-0/0/0.0
set protocols isis source-packet-routing srgb start-label 400000
set protocols isis source-packet-routing srgb index-range 4000
set protocols isis source-packet-routing node-segment ipv4-index 2002
set protocols isis source-packet-routing node-segment ipv6-index 3002
set protocols isis level 1 disable
set protocols isis interface ge-0/0/0.0
set protocols isis interface lo0.0 passive
```

## Configuring Device R1

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure device R1:



**NOTE:** Repeat this procedure for device R2 after modifying the appropriate interface names, addresses, and other parameters.

1. Configure enhanced-ip mode on the MX Series because the SRGB functionality is supported on routers with MPCs and MIC interfaces only. A system reboot is required after you commit this configuration.

```
[edit chassis network-services]
user@R1# set enhanced-ip
```

2. Configure the interfaces.

```
[edit interfaces]
user@R1# set ge-0/0/0 unit 0 family inet address 192.0.2.1/24
user@R1# set ge-0/0/0 unit 0 family iso
user@R1# set ge-0/0/0 unit 0 family inet6 address 2001:db8:1:1::1/128
user@R1# set ge-0/0/0 unit 0 family mpls

user@R1# set lo0 unit 0 family inet address 198.51.100.1/24
user@R1# set lo0 unit 0 family iso address 49.0001.0010.0100.1001.00
```

```
user@R1# set lo0 unit 0 family inet6 address 2001:db8:10:10::1/128
```

3. Configure the MPLS protocol on the interface.

```
[edit protocols mpls]
user@R1# set interface ge-0/0/0.0
```

4. Configure the start label and index range of SRGB.

```
[edit protocols isis source-packet-routing]
user@R1# set srgb start-label 400000
user@R1# set srgb index-range 4000
```

5. Configure the IPv4 index value of the node segment.

```
[edit protocols isis source-packet-routing]
user@R1# set node-segment ipv4-index 2001
```

6. Configure the IPv6 index value of the node segment.

```
[edit protocols isis source-packet-routing]
user@R1# set node-segment ipv6-index 3001
```

7. Disable level 1, configure the IS-IS protocol on the interface, and configure loopback interface lo0.0 as passive..

```
[edit protocols isis ]
user@R1# set level 1 disable
user@R1# set interface ge-0/0/0.0
user@R1# set interface lo0.0 passive
```

## Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show chassis
network-services enhanced-ip;
```

```
user@R1# show interfaces
ge-0/0/0 {
  unit 0 {
    family inet {
      address 192.0.2.1/24;
    }
  }
}
```

```
family iso;
family inet6 {
    address 2001:db8:1:1::1/128;
}
family mpls;
}
}
lo0 {
    unit 0 {
        family inet {
            address 198.51.100.1/24;
        }
        family iso {
            address 49.0001.0010.0100.1001.00;
        }
        family inet6 {
            address 2001:db8:10:10::1/128;
        }
    }
}
}
```

```
user@R1# show protocols
mpls {
    interface ge-0/0/0.0;
}
isis {
    source-packet-routing {
        srgb start-label 400000 index-range 4000;
        node-segment {
            ipv4-index 2001;
            ipv6-index 3001;
        }
    }
    level 1 disable;
    interface ge-0/0/0.0;
    interface lo0.0 {
        passive;
    }
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying IS-IS Neighbors on page 299](#)
- [Verifying the IS-IS Overview Information on page 299](#)
- [Verifying the IS-IS Configuration on page 300](#)
- [Verifying the Route Information of SRGB Label on page 302](#)
- [Verifying the Forwarding Table of SRGB Label 402002 on page 304](#)
- [Verifying the Route of SRGB Label on page 304](#)
- [Verifying the Forwarding Table of SRGB Label 403002 on page 306](#)

---

### Verifying IS-IS Neighbors

---

**Purpose** Verify IS-IS neighbors.

**Action** From operational mode, run the **show isis adjacency** command to display the IS-IS neighbor information.

user@R1> **show isis adjacency**

| Interface  | System | L State | Hold (secs) | SNPA           |
|------------|--------|---------|-------------|----------------|
| ge-0/0/0.0 | R2     | 2 Up    | 7           | 0:5:86:7e:cc:0 |

**Meaning** The output displays the IS-IS neighbor information of device R1.

---

### Verifying the IS-IS Overview Information

---

**Purpose** Verify the IS-IS overview information.

**Action** From operational mode, run the **show isis overview** command to display the IS-IS overview information.

```
user@R1> show isis overview
```

```
Instance: master
  Router ID: 198.51.100.1
  Hostname: R1
  Sysid: 0010.0100.1001
  Areaid: 49.0001
  Adjacency holddown: enabled
  Maximum Areas: 3
  LSP life time: 1200
  Attached bit evaluation: enabled
  SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
  IPv4 is enabled, IPv6 is enabled, SPRING based MPLS is enabled
  Traffic engineering: enabled
  Restart: Disabled
    Helper mode: Enabled
  Layer2-map: Disabled
  Source Packet Routing (SPRING): Enabled
    SRGB Config Range:
      SRGB Start-Label : 400000, SRGB Index-Range : 4000
      SRGB Block Allocation: Success
      SRGB Start Index : 400000, SRGB Size : 4000, Label-Range: [ 400000, 403999
    ]
  Node Segments: Enabled
    Ipv4 Index : 2001, Ipv6 Index : 3001
  Level 1
    Internal route preference: 15
    External route preference: 160
    Prefix export count: 0
    Wide metrics are enabled, Narrow metrics are enabled
    Source Packet Routing is enabled
  Level 2
    Internal route preference: 18
    External route preference: 165
    Prefix export count: 0
    Wide metrics are enabled, Narrow metrics are enabled
    Source Packet Routing is enabled
```

**Meaning** The output displays the IS-IS overview information along with SPRING information.

---

### Verifying the IS-IS Configuration

**Purpose** Verify the IS-IS configuration.



**Action** From operational mode, run the **show route protocol isis** command to display the IS-IS route information.

```
user@R1> show route protocol isis
```

```
inet.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

198.51.100.2/32      *[IS-IS/18] 00:17:27, metric 10
                    > to 192.0.2.2 via ge-0/0/0.0

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

198.51.100.2/32      *[L-ISIS/14] 00:17:26, metric 10
                    > to 192.0.2.2 via ge-0/0/0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

16                  *[L-ISIS/14] 00:21:03, metric 0
                    > to 192.0.2.2 via ge-0/0/0.0, Pop
16(S=0)             *[L-ISIS/14] 00:02:54, metric 0
                    > to 192.0.2.2 via ge-0/0/0.0, Pop
17                  *[L-ISIS/14] 00:21:03, metric 0
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0, Pop
17(S=0)             *[L-ISIS/14] 00:02:54, metric 0
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0, Pop

402002              *[L-ISIS/14] 00:17:26, metric 10
                    > to 192.0.2.2 via ge-0/0/0.0, Pop
402002(S=0)         *[L-ISIS/14] 00:02:54, metric 10
                    > to 192.0.2.2 via ge-0/0/0.0, Pop
403002              *[L-ISIS/14] 00:17:23, metric 10
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0, Pop
403002(S=0)         *[L-ISIS/14] 00:02:54, metric 10
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0, Pop

inet6.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2400:1:1:1::/64     *[IS-IS/18] 00:17:23, metric 20
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0
2400:20:20:20::1/128
                    *[IS-IS/18] 00:17:23, metric 10
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0

inet6.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2400:20:20:20::1/128
                    *[L-ISIS/14] 00:17:23, metric 10
                    > to 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0
```

**Meaning** The output displays the IS-IS route information along with segment routing information.

### Verifying the Route Information of SRGB Label

---

**Purpose** Verify the route information of SRGB label 402002 of IPv4 node 2002.

**Action** From operational mode, run the **show route label 402002 extensive** command to display the route information of label 402002 of IPv4 node 2002.

```
user@R1> show route label 402002 extensive
```

```
mpls.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
402002 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 402002 /52 -> {Pop      }
    *L-ISIS Preference: 14
      Level: 2
      Next hop type: Router, Next hop index: 591
      Address: 0xb7a2710
      Next-hop reference count: 4
      Next hop: 192.0.2.2 via ge-0/0/0.0, selected
      Label operation: Pop
      Load balance label: None;
      Label element ptr: 0xb7a26a0
      Label parent element ptr: 0x0
      Label element references: 2
      Label element child references: 0
      Label element lsp id: 0
      Session Id: 0x140
      State: < Active Int >
      Age: 19:24
      Metric: 10
      Validation State: unverified
      ORR Generation-ID: 0
      Task: IS-IS
      Announcement bits (1): 1-KRT
      AS path: I
```

```
402002(S=0) (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 402002 /56 -> {Pop      }
    *L-ISIS Preference: 14
      Level: 2
      Next hop type: Router, Next hop index: 593
      Address: 0xb7a27d0
      Next-hop reference count: 4
      Next hop: 192.0.2.2 via ge-0/0/0.0, selected
      Label operation: Pop
      Load balance label: None;
      Label element ptr: 0xb7a2760
      Label parent element ptr: 0x0
      Label element references: 2
      Label element child references: 0
      Label element lsp id: 0
      Session Id: 0x140
      State: < Active Int >
      Age: 4:52
      Metric: 10
      Validation State: unverified
      ORR Generation-ID: 0
      Task: IS-IS
      Announcement bits (1): 1-KRT
      AS path: I
```

**Meaning** The output displays the details of the SRGB label 402002 of IPv4 node 2002.

### Verifying the Forwarding Table of SRGB Label 402002

---

**Purpose** Verify the forwarding table information of SRGB label 402002.

**Action** user@R1> show route forwarding-table label 402002

```
Routing table: default.mpls
MPLS:
Destination      Type RtRef Next hop          Type Index  NhRef Netif
402002           user   0 192.0.2.2        Pop      591     3 ge-0/0/0.0
402002(S=0)      user   0 192.0.2.2        Pop      593     3 ge-0/0/0.0

Routing table: __mpls-oam__.mpls
MPLS:
Enabled protocols: Bridging, Single VLAN, Dual VLAN,
Destination      Type RtRef Next hop          Type Index  NhRef Netif
default          perm   0                  dscd     556     1
```

**Meaning** The output displays forwarding table information of SRGB label 402002 of IPv4 node 2002.

### Verifying the Route of SRGB Label

---

**Purpose** Verify the route of SRGB label of IPv6 node 3002.

**Action** user@R1> show route label 403002 extensive

```
mpls.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
403002 (1 entry, 1 announced)
TSI:
KRT in-kernel 403002 /52 -> {Pop      }
    *L-ISIS Preference: 14
        Level: 2
        Next hop type: Router, Next hop index: 594
        Address: 0xb7a2830
        Next-hop reference count: 4
        Next hop: 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0, selected

        Label operation: Pop
        Load balance label: None;
        Label element ptr: 0xb7a26a0
        Label parent element ptr: 0x0
        Label element references: 2
        Label element child references: 0
        Label element lsp id: 0
        Session Id: 0x141
        State: < Active Int >
        Age: 21:06      Metric: 10
        Validation State: unverified
        ORR Generation-ID: 0
        Task: IS-IS
        Announcement bits (1): 1-KRT
        AS path: I

403002(S=0) (1 entry, 1 announced)
TSI:
KRT in-kernel 403002 /56 -> {Pop      }
    *L-ISIS Preference: 14
        Level: 2
        Next hop type: Router, Next hop index: 596
        Address: 0xb7a2890
        Next-hop reference count: 4
        Next hop: 2001:db8:0000:205:86ff:fe7e:cc00 via ge-0/0/0.0, selected

        Label operation: Pop
        Load balance label: None;
        Label element ptr: 0xb7a2760
        Label parent element ptr: 0x0
        Label element references: 2
        Label element child references: 0
        Label element lsp id: 0
        Session Id: 0x141
        State: < Active Int >
        Age: 6:37      Metric: 10
        Validation State: unverified
        ORR Generation-ID: 0
        Task: IS-IS
        Announcement bits (1): 1-KRT
        AS path: I
```

**Meaning** The output displays forwarding table information of SRGB label 403002 of IPv6 node 3002.

## Verifying the Forwarding Table of SRGB Label 403002

**Purpose** Verify the forwarding table information of SRGB label 403002.

**Action** user@R1> show route forwarding-table label 403002

```
Routing table: default.mpls
MPLS:
Destination          Type RtRef Next hop          Type Index  NhRef Netif
403002                user   0 2001:db8:0000:205:86ff:fe7e:cc00
                        Pop      594      3 ge-0/0/0.0
403002(S=0)           user   0 2001:db8:0000:205:86ff:fe7e:cc00
                        Pop      596      3 ge-0/0/0.0

Routing table: __mpls-oam__.mpls
MPLS:
Enabled protocols: Bridging, Single VLAN, Dual VLAN,
Destination          Type RtRef Next hop          Type Index  NhRef Netif
default               perm   0                               dscd     556    1
```

**Meaning** The output displays forwarding table information of SRGB label 403002 of IPv6 node 3002.

- Related Documentation**
- [Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292](#)
  - [Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol on page 324](#)
  - [source-packet-routing on page 578](#)

## Example: Configuring Anycast and Prefix Segments in SPRING for IS-IS to Increase Network Speed

This example shows how to configure prefix segments, segment-routing global blocks (SRGBs), adjacency segments hold time, and explicit null flag for prefix segments in source packet routing in networking (SPRING) or segment routing (SR). This configuration helps in simplifying the network thereby increasing the speed of the network.

- [Requirements on page 307](#)
- [Overview on page 307](#)
- [Configuration on page 307](#)
- [Verification on page 319](#)

## Requirements

This example uses the following hardware and software components:

- Eight MX Series routers.
- Junos OS Release 17.2 or later running on all devices.


Before you configure prefix segments in SPRING, be sure you configure routing and signaling protocols.

## Overview

In Junos OS Release 17.2 or later, you can provide prefix segment identifier (SID) and node SID to prefixes that are advertised in IS-IS by configuring policies. Prefix segment index is the index assigned to a specific prefix. This is used by all other remote routers in the network to index the prefix into respective segment-routing global blocks (SRGBs) to derive the segment identifier and to forward the traffic destined for this prefix. The prefix SID supports both IPv4 and IPv6 prefixes. An IGP anycast segment is an IGP prefix segment that identifies a set of routers. An anycast segment or anycast SID enforces forwarding based on the equal-cost multipath-aware shortest-path towards the closest node of the anycast set. Within an anycast group, all the routers advertise the same prefix with the same SID value. The IS-IS protocol creates adjacency segments per adjacency, level, and address family (one each for IPv4 and IPv6).

### Topology

Figure 1 shows SRGBs, prefix segments, and adjacency hold time configured in SPRING on routers R0 to R7.

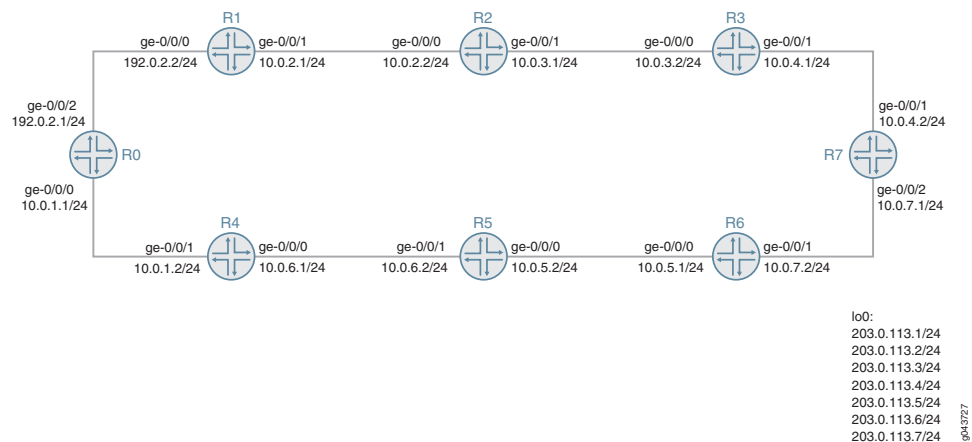

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.



**NOTE:** This topology demonstrates IPv4 prefixes. The same is applicable for IPv6 prefixes.

```

R0
set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 10.0.1.1/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/2 vlan-tagging
set interfaces ge-0/0/2 unit 1 vlan-id 1
set interfaces ge-0/0/2 unit 1 family inet address 192.10.12.1/24
set interfaces ge-0/0/2 unit 1 family iso
set interfaces ge-0/0/2 unit 1 family mpls maximum-labels 5
set interfaces lo0 unit 0 family inet address 203.0.113.1/24
set interfaces lo0 unit 0 family iso address 49.0001.000a.0a0a.0a00
set routing-options autonomous-system 100
set routing-options router-id 203.0.113.1
set routing-options forwarding-table export pplib
set routing-options forwarding-table chained-composite-next-hop ingress l3vpn
set protocols rsvp interface all link-protection
set protocols mpls traffic-engineering
set protocols mpls interface all
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis graceful-restart restart-duration 30
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/2.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set policy-options policy-statement pplib then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.1/24 exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1000
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept

R1
set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 192.0.2.2/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/0 unit 1 family mpls
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.2.1/24

```



```

set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.2/24
set interfaces lo0 unit 0 family iso address 49.0001.0001.0101.0100
set routing-options router-id 203.0.113.2
set protocols rsvp interface all link-protection
set protocols mpls traffic-engineering
set protocols mpls interface all
set protocols isis export prefix-sid
set protocols isis backup-spf-options per-prefix-calculation
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis traffic-engineering family inet shortcuts
set protocols isis graceful-restart restart-duration 30
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set protocols isis label-switched-path to_r2
set policy-options policy-statement pplb then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.2/24
  exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1001
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept
set policy-options policy-statement setpref from protocol isis
set policy-options policy-statement setpref from level 2
set policy-options policy-statement setpref then preference 11
set policy-options policy-statement setpref then local-preference 11
set policy-options policy-statement setpref then accept

```

```

R2 set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 encapsulation flexible-ethernet-services
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 10.0.2.2/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/0 unit 1 family mpls
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 encapsulation flexible-ethernet-services
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.3.1/24
set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.3/24
set interfaces lo0 unit 0 family iso address 49.0001.0002.0202.0200
set routing-options router-id 203.0.113.3

```

```

set routing-options forwarding-table export pplb
set protocols rsvp interface all link-protection
set protocols mpls label-switched-path to_r1 to 203.0.113.2
set protocols mpls label-switched-path to_r1 primary path1 deactivate protocols mpls
  label-switched-path to_r1
set protocols mpls path 10.0.2.1
set protocols mpls path path1 10.0.2.1 strict
set protocols mpls interface all
set protocols isis export leakl2tol1
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set protocols isis label-switched-path to_r1
set policy-options policy-statement leakl2tol1 from protocol isis
set policy-options policy-statement leakl2tol1 from level 2
set policy-options policy-statement leakl2tol1 to protocol isis
set policy-options policy-statement leakl2tol1 to level 1
set policy-options policy-statement leakl2tol1 then accept
set policy-options policy-statement pplb then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.3/24
  exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1002
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept

```

```

R3 set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 10-.0.3.2/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/0 unit 1 family mpls
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.4.1/24
set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.4/24
set interfaces lo0 unit 0 family iso address 49.0001.0003.0303.0300
set routing-options router-id 203.0.113.4
set routing-options forwarding-table export pplb
set protocols rsvp interface all link-protection
set protocols mpls interface all
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation

```

```

set protocols isis backup-spf-options use-source-packet-routing
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set policy-options policy-statement pplb then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.4/24
  exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1003
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept

```

```

R4 set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 10.0.6.2/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/0 unit 1 family mpls
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.1.2/24
set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.5/24
set interfaces lo0 unit 0 family iso address 49.0001.0004.0404.0400
set routing-options router-id 203.0.113.5
set routing-options forwarding-table export pplb
set protocols rsvp interface all link-protection
set protocols mpls interface all
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set policy-options policy-statement pplb then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.5/24
  exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1004
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept

```

- R5
- ```
set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 10.0.5.2/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/0 unit 1 family mpls
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.6.2/24
set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.6/24
set interfaces lo0 unit 0 family iso address 49.0001.0005.0505.0500
set routing-options router-id 203.0.113.6
set routing-options forwarding-table export pplb
set protocols rsvp interface all link-protection
set protocols mpls interface all
set protocols isis export leakl2tol1
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set policy-options policy-statement leakl2tol1 from protocol isis
set policy-options policy-statement leakl2tol1 from level 2
set policy-options policy-statement leakl2tol1 to protocol isis
set policy-options policy-statement leakl2tol1 to level 1
set policy-options policy-statement leakl2tol1 then accept
set policy-options policy-statement pplb then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.6/24
  exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1005
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept
```
- R6
- ```
set chassis network-services enhanced-ip
set interfaces ge-0/0/0 vlan-tagging
set interfaces ge-0/0/0 unit 1 vlan-id 1
set interfaces ge-0/0/0 unit 1 family inet address 10.0.5.1/24
set interfaces ge-0/0/0 unit 1 family iso
set interfaces ge-0/0/0 unit 1 family mpls
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.6.2/24
set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
```

```

set interfaces lo0 unit 0 family inet address 203.0.113.7/24
set interfaces lo0 unit 0 family iso address 49.0001.0006.0606.0600
set routing-options router-id 203.0.113.7
set routing-options forwarding-table export pplib
set protocols rsvp interface all link-protection
set protocols mpls interface all
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/0.1 node-link-protection
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set policy-options policy-statement pplib then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.7/24
    exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1006
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept

```

R7

```

set chassis network-services enhanced-ip
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 1 vlan-id 1
set interfaces ge-0/0/1 unit 1 family inet address 10.0.4.2/24
set interfaces ge-0/0/1 unit 1 family iso
set interfaces ge-0/0/1 unit 1 family mpls
set interfaces ge-0/0/2 vlan-tagging
set interfaces ge-0/0/2 unit 1 vlan-id 1
set interfaces ge-0/0/2 unit 1 family inet address 10.0.7.1/24
set interfaces ge-0/0/2 unit 1 family iso
set interfaces ge-0/0/2 unit 1 family mpls
set interfaces lo0 unit 0 family inet address 203.0.113.8/24
set interfaces lo0 unit 0 family iso address 49.0001.0007.0707.0700
set routing-options router-id 203.0.113.8
set routing-options autonomous-system 100
set routing-options forwarding-table export pplib
set protocols rsvp interface all link-protection
set protocols mpls explicit-null
set protocols mpls interface all
set protocols isis export prefix-sid
set protocols isis backup-spf-options remote-backup-calculation
set protocols isis backup-spf-options use-source-packet-routing
set protocols isis source-packet-routing adjacency-segment hold-time 240000
set protocols isis source-packet-routing srgb start-label 800000
set protocols isis source-packet-routing srgb index-range 40000
set protocols isis source-packet-routing explicit-null
set protocols isis interface ge-0/0/1.1 node-link-protection
set protocols isis interface ge-0/0/2.1 node-link-protection

```

```

set protocols isis interface all node-link-protection
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 passive
set policy-options policy-statement pplb then load-balance per-packet
set policy-options policy-statement prefix-sid term 1 from route-filter 203.0.113.8/24
  exact
set policy-options policy-statement prefix-sid term 1 then prefix-segment index 1007
set policy-options policy-statement prefix-sid term 1 then prefix-segment node-segment
set policy-options policy-statement prefix-sid term 1 then accept
set policy-options policy-statement setpref from protocol isis
set policy-options policy-statement setpref from level 2
set policy-options policy-statement setpref then preference 11
set policy-options policy-statement setpref then local-preference 11
set policy-options policy-statement setpref then accept
set policy-options policy-statement stat term 1 from protocol static
set policy-options policy-statement stat term 1 then accept

```

### Configuring Router R4

#### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router R4:



**NOTE:** Repeat this procedure for every router in the SPRING domain, after modifying the appropriate interface names, addresses, and any other parameters for each router.

1. Configure enhanced IP mode on the MX Series router because the SRGB functionality is supported on routers with MPCs and MIC interfaces only. A system reboot is required after you commit this configuration.

```

[edit chassis]
user@R4# set network-services enhanced-ip

```

2. Configure the interfaces.

```

[edit interfaces]
user@R4# set ge-0/0/0 vlan-tagging
user@R4# set ge-0/0/0 unit 1 vlan-id 1
user@R4# set ge-0/0/0 unit 1 family inet address 10.0.6.2/24
user@R4# set ge-0/0/0 unit 1 family iso
user@R4# set ge-0/0/0 unit 1 family mpls

user@R4# set ge-0/0/1 vlan-tagging
user@R4# set ge-0/0/1 unit 1 vlan-id 1
user@R4# set ge-0/0/1 unit 1 family inet address 10.0.1.2/24

```

```

user@R4# set ge-0/0/1 unit 1 family iso
user@R4# set ge-0/0/1 unit 1 family mpls

user@R4# set lo0 unit 0 family inet address 203.0.113.5/24
user@R4# set lo0 unit 0 family iso address 49.0001.0004.0404.0400

```

3. Configure the router ID for a routing option.

```

[edit routing-options]
user@R4# set router-id 203.0.113.5

```

4. Configure the export policy for the forwarding table.

```

[edit routing-options]
user@R4# set forwarding-table export pplb

```

5. Enable RSVP link protection on the all interfaces.

```

[edit protocols rsvp]
user@R4# set interface all link-protection

```

6. Configure the MPLS interface.

```

[edit protocols mpls]
user@R4# set interface all

```

7. Configure the export policy for the IS-IS protocol.

```

[edit protocols isis]
user@R4# set export prefix-sid

```

8. Configure backup shortest-path-first options to calculate remote loop-free alternate (LFA) backup next hops and to use SPRING routed paths for protection for the IS-IS protocol.

```

[edit protocols isis]
user@R4# set backup-spf-options remote-backup-calculation
user@R4# set backup-spf-options use-source-packet-routing

```

9. Configure adjacency segment hold time in SPRING for the IS-IS protocol.

```

[edit protocols isis]
user@R4# set source-packet-routing adjacency-segment hold-time 240000

```

10. Configure the start label and index range for segment routing global blocks (SRGBs) in SPRING for the IS-IS protocol.

```
[edit protocols isis]
user@R4# set source-packet-routing srgb start-label 800000
user@R4# set source-packet-routing srgb index-range 40000
```

11. Configure explicit null in SPRING for the IS-IS protocol.

```
[edit protocols isis]
user@R4# set source-packet-routing explicit-null
```

12. Configure the interfaces to protect from both link and node faults.

```
[edit protocols isis]
user@R4# set interface ge-0/0/0.1 node-link-protection
user@R4# set interface ge-0/0/1.1 node-link-protection
user@R4# set interface all node-link-protection
```

13. Disable the management interface and configure the loopback address as passive for the IS-IS protocol.

```
[edit protocols isis]
user@R4# set interface fxp0.0 disable
user@R4# set interface lo0.0 passive
```

14. Configure per packet load balancing for the routing policy.

```
[edit policy-options policy-statement pplb]
user@R4# set then load-balance per-packet
```

15. Configure the route filter for the routing policy term.

```
[edit policy-options policy-statement prefix-sid]
user@R4# set term 1 from route-filter 203.0.113.5/24 exact
```

16. Configure the index and node segment of the prefix segment for the routing policy term.

```
[edit policy-options policy-statement prefix-sid]
user@R4# set term 1 then prefix-segment index 1004
user@R4# set term 1 then prefix-segment node-segment
user@R4# set term 1 then accept
```



## Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R4# show chassis
network-services enhanced-ip;
```

```
user@R4# show interfaces
ge-0/0/0 {
  vlan-tagging;
  unit 1 {
    vlan-id 1;
    family inet {
      address 10.0.6.2/24;
    }
    family iso;
  }
}
ge-0/0/1 {
  vlan-tagging;
  unit 1 {
    vlan-id 1;
    family inet {
      address 10.0.1.2/24;
    }
    family iso;
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 203.0.113.5/24;
    }
    family iso {
      address 49.0001.0004.0404.0400;
    }
  }
}
```

```
user@R4# show protocols
rsvp {
  interface all {
    link-protection;
  }
}
mpls {
  interface all;
}
```

```
isis {
  export prefix-sid;
  backup-spf-options {
    remote-backup-calculation;
    use-source-packet-routing;
  }
  source-packet-routing {
    adjacency-segment hold-time 240000;
    srgb start-label 800000 index-range 40000;
    explicit-null;
  }
  interface ge-0/0/0.1 {
    node-link-protection;
  }
  interface ge-0/0/1.1 {
    node-link-protection;
  }
  interface all {
    node-link-protection;
  }
  interface fxp0.0 {
    disable;
  }
  interface lo0.0 {
    passive;
  }
}
```

```
user@R4# show policy-options
policy-statement pplb {
  then {
    load-balance per-packet;
  }
}
policy-statement prefix-sid {
  term 1 {
    from {
      route-filter 203.0.113.5/24 exact;
    }
    then {
      prefix-segment index 1004 node-segment;
      accept;
    }
  }
}
```

```
user@R4# show routing-options
router-id 203.0.113.5;
forwarding-table {
  export pplb;
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying the IS-IS Adjacency Routes on page 319](#)
- [Verifying the IS-IS Overview Information on page 320](#)
- [Verifying the Segment Routing Route Entries for the IS-IS Protocol on page 321](#)
- [Verifying the MPLS Segment Routing Route Entries for the IS-IS Protocol on page 322](#)

### Verifying the IS-IS Adjacency Routes

**Purpose** Verify the adjacency of Router R4.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```
user@R4> show isis adjacency detail
```

```
R5
  Interface: ge-0/0/0.0, Level: 1, State: Up, Expires in 25 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 1d 23:55:22 ago
  Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:86:e:2b:0
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: R5.02, IP addresses: 10.0.6.2
  Level 1 IPv4 Adj-SID: 16

R5
  Interface: ge-0/0/0.0, Level: 2, State: Up, Expires in 25 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 1d 23:55:22 ago
  Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:86:e:2b:0
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: R5.02, IP addresses: 10.0.6.2
  Level 2 IPv4 Adj-SID: 17

R0
  Interface: ge-0/0/1.0, Level: 1, State: Up, Expires in 7 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 1d 23:49:06 ago
  Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:86:5e:8e:1
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: R1.02, IP addresses: 10.0.1.1
  Level 1 IPv4 Adj-SID: 18

R0
  Interface: ge-0/0/1.0, Level: 2, State: Up, Expires in 8 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 1d 23:49:06 ago
  Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:86:5e:8e:1
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: R1.02, IP addresses: 10.0.1.1
  Level 2 IPv4 Adj-SID: 19
```

**Meaning** The output shows the IS-IS adjacency details of Router R4 with Router R0 and R5.

---

### Verifying the IS-IS Overview Information

---

**Purpose** Verify the IS-IS overview information of Router R4.

**Action** From operational mode, enter the **show isis overview** command.

```

user@R4> show isis overview

Instance: master
  Router ID: 203.0.113.5
  Hostname: R4
  Sysid: 0100.0404.0404
  Areaid: 47.0005.80ff.f800.0000.0108.0001
  Adjacency holddown: enabled
  Maximum Areas: 3
  LSP life time: 1200
  Attached bit evaluation: enabled
  SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
  IPv4 is enabled, IPv6 is enabled, SPRING based MPLS is enabled
  Traffic engineering: enabled
  Restart: Disabled
    Helper mode: Enabled
  Layer2-map: Disabled
  Source Packet Routing (SPRING): Enabled
    SRGB Config Range:
      SRGB Start-Label : 800000, SRGB Index-Range : 40000
      SRGB Block Allocation: Success
      SRGB Start Index : 800000, SRGB Size : 40000, Label-Range: [ 800000, 839999
    ]
  Node Segments: Disabled
    Level 1
      Internal route preference: 15
      External route preference: 160
      Prefix export count: 0
      Wide metrics are enabled, Narrow metrics are enabled
      Source Packet Routing is enabled
    Level 2
      Internal route preference: 18
      External route preference: 165
      Prefix export count: 0
      Wide metrics are enabled, Narrow metrics are enabled
      Source Packet Routing is enabled

```

**Meaning** The output displays the IS-IS overview information of the routing instance along with the SPRING details of Router R4.

### Verifying the Segment Routing Route Entries for the IS-IS Protocol

**Purpose** Verify the segment routing route entries of the routing table inet.3 for the IS-IS protocol.

**Action** From operational mode, enter the **show route table inet.3 protocol isis** command.

```
user@R4> show route table inet.3 protocol isis

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

203.0.113.0/24    *[L-ISIS/14] 00:09:31, metric 10
                  to 10.0.6.2 via ge-0/0/0.0, Push 0
                  > to 10.0.1.1 via ge-0/0/1.0, Push 0
203.0.113.2/32   *[L-ISIS/14] 00:02:44, metric 20
                  > to 10.0.1.1 via ge-0/0/1.0, Push 801001
```

**Meaning** The output shows the segment routing routes of routing table inet.3 for the IS-IS protocol.

#### Verifying the MPLS Segment Routing Route Entries for the IS-IS Protocol

**Purpose** Verify the MPLS segment routing route entries for the IS-IS protocol.

**Action** From operational mode, enter the **show route table mpls.0 protocol isis** command.

```
user@R4> show route table mpls.0 protocol isis
```

```
mpls.0: 23 destinations, 23 routes (23 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
0          *[MPLS/0] 2d 01:56:20, metric 1
            to table inet.0
0(S=0)     *[MPLS/0] 2d 01:56:20, metric 1
            to table mpls.0
1          *[MPLS/0] 2d 01:56:20, metric 1
            Receive
2          *[MPLS/0] 2d 01:56:20, metric 1
            to table inet6.0
2(S=0)     *[MPLS/0] 2d 01:56:20, metric 1
            to table mpls.0
13         *[MPLS/0] 2d 01:56:20, metric 1
            Receive
16         *[L-ISIS/14] 2d 01:52:56, metric 0
            > to 10.0.6.2 via ge-0/0/0.0, Pop
16(S=0)    *[L-ISIS/14] 00:01:34, metric 0
            > to 10.0.6.2 via ge-0/0/0.0, Pop
17         *[L-ISIS/14] 2d 01:52:56, metric 0
            > to 10.0.6.2 via ge-0/0/0.0, Pop
17(S=0)    *[L-ISIS/14] 00:10:49, metric 0
            > to 10.0.6.2 via ge-0/0/0.0, Pop
18         *[L-ISIS/14] 2d 01:46:40, metric 0
            > to 10.0.1.1 via ge-0/0/1.0, Pop
18(S=0)    *[L-ISIS/14] 00:01:34, metric 0
            > to 10.0.1.1 via ge-0/0/1.0, Pop
19         *[L-ISIS/14] 2d 01:46:40, metric 0
            > to 10.0.1.1 via ge-0/0/1.0, Pop
19(S=0)    *[L-ISIS/14] 00:10:49, metric 0
            > to 10.0.1.1 via ge-0/0/1.0, Pop
801000     *[L-ISIS/14] 2d 01:46:40, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 801000
            > to 10.0.1.1 via ge-0/0/1.0, Swap 0
801000(S=0) *[L-ISIS/14] 00:01:34, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 801000
            > to 10.0.1.1 via ge-0/0/1.0, Pop
801001     *[L-ISIS/14] 2d 01:46:14, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 801001
            > to 10.0.1.1 via ge-0/0/1.0, Swap 801001
801002     *[L-ISIS/14] 1d 21:57:31, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 801002
            > to 10.0.1.1 via ge-0/0/1.0, Swap 801002
801003     *[L-ISIS/14] 1d 21:56:57, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 801003
            > to 10.0.1.1 via ge-0/0/1.0, Swap 801003
801005     *[L-ISIS/14] 2d 01:46:40, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 0
            > to 10.0.1.1 via ge-0/0/1.0, Swap 801005
801005(S=0) *[L-ISIS/14] 00:01:34, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Pop
            > to 10.0.1.1 via ge-0/0/1.0, Swap 801005
801006     *[L-ISIS/14] 2d 01:46:40, metric 10
            to 10.0.6.2 via ge-0/0/0.0, Swap 801006
            > to 10.0.1.1 via ge-0/0/1.0, Swap 801006
```

```
801007          *[L-ISIS/14] 1d 21:56:24, metric 10
                to 10.0.6.2 via ge-0/0/0.0, Swap 801007
                > to 10.0.1.1 via ge-0/0/1.0, Swap 801007
```

**Meaning** The output shows the MPLS segment routing route entries for protocol IS-IS.

**Related Documentation**

- [Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol on page 326](#)
- [Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol on page 324](#)
- [Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to Increase Network Speed on page 294](#)
- [Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292](#)
- [adjacency-segment on page 451](#)
- [prefix-segment on page 562](#)
- [source-packet-routing on page 578](#)
- [srgb on page 580](#)
- [traffic-engineering on page 586](#)

## Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol

Segment routing (SR) or source packet routing in networking (SPRING) is a control-plane architecture that enables an ingress router to steer a packet through a specific set of nodes and links without relying on the intermediate nodes in the network to determine the actual path it should take. The label range for a segment routing global block (SRGB) is the range of label values used in segment routing. You can configure the start of the label range and the index range. The end of the label range is the summation of the start label value and the index range.

Before you configure SPRING SRGB for ISIS protocol, you must:

- Configure the router interfaces.
- Configure ISIS.

To configure SPRING SRGB label range on a device:

1. Configure the start-label and index-range of SRGB. The start label value indicates the start of the SPRING label block and the index range along with the start label indicate the end of the label block.

```
[edit protocols isis source-packet-routing]
user@host# set srgb start-label start-label-value
user@host# set srgb index-range index-range-value
```





**NOTE:** The default value for the index range is 4096. This causes chunks of 256 label blocks being dynamically allocated by the label manager depending on the availability.

For example, configure SRGB with start-label 800,000 and index-range 40,000. The start label of the SPRING label block is 800,000 and the end of the label block is 840,000.

```
[edit protocols isis source-packet-routing]
user@host# set srgb start-label 800000
user@host# set srgb index-range 40000
```



**NOTE:** Ensure that the labels in the SRGB label range are not used by any other applications. If a label in the configured label range is used by another application, then a syslog error message `RPD_ISIS_SRGBALLOCATIONFAIL` is logged to indicate that the label manager is unable to allocate the requested SRGB label range. To free up the configured label range, check the label ranges configured at the `[edit protocol mpls label-range]` hierarchy level and re-configure the SRGB label range with a label range that is available and restart the routing protocol process (RPD).

2. Configure the value of IPv4 node segment index.

```
[edit protocols isis source-packet-routing]
user@host# set node-segment ipv4-index ipv4-index-value
```

For example, configure 1001 for IPv4 node segment index.

```
[edit protocols isis source-packet-routing]
user@host# set node-segment ipv4-index 1001
```

3. Configure the value of IPv6 node segment index.

```
[edit protocols isis source-packet-routing]
user@host# set node-segment ipv6-index ipv6-index-value
```

For example, configure 2001 for IPv6 node segment index.

```
[edit protocols isis source-packet-routing]
user@host# set node-segment ipv6-index 2001
```

#### Related Documentation

- [Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292](#)
- [Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to Increase Network Speed on page 294](#)

- [source-packet-routing on page 578](#)

## Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol

Segment routing (SR) or source packet routing in networking (SPRING) is a control-plane architecture that enables an ingress router to steer a packet through a specific set of nodes and links without relying on the intermediate nodes in the network to determine the actual path it should take. Segment routing global block (SRGB) is the range of label values used in segment routing. Junos OS allows you to configure prefix segment identifier (SID) and node SID to prefixes that are advertised in IS-IS through policy configuration.

Before you configure SPRING SRGB, prefix SID, and anycast SID for the IS-IS protocol, you must:

- Configure the router interfaces.
- Configure the router ID.
- Configure IS-IS.

To configure device R1 with SPRING SRGB, prefix SID, and anycast SID for IS-IS protocols:

1. Configure the start-label and index-range of SRGB.

```
[edit protocols isis source-packet-routing]
user@host# set srgb start-label start-label-value
user@host# set srgb index-range index-range-value
```

For example, configure SRGB with start-label 800000 and index-range 40000 .

```
[edit protocols isis source-packet-routing]
user@host# set srgb start-label 800000
user@host# set srgb index-range 40000
```

2. Configure the routing policy to match a route (IPv4 or IPv6 ) exactly. Configure the index and the node segment of the prefix segment for a given term and accept the routing policy.

```
[edit policy-options policy-statement policy-name term term-value from]
user@host# set route-filter IP address exact
user@host# set prefix-segment index index-value
user@host# set prefix-segment node-segment
user@host# set accept
```



**NOTE:** Configure node segment as /32 prefix on loopback interface (lo0.0) or on a valid stub interface.

For example, configure the routing policy to match the IPv4 route exactly. Configure the index and the node segment of the prefix segment for a given term and accept the routing policy.

```
[edit policy-options policy-statement policy-name term term-value from]
user@host# set route-filter 198.51.100.1/32 exact
user@host# set prefix-segment index index-value
user@host# set prefix-segment node-segment
user@host# set accept
```

For example, configure the routing policy to match the IPv6 route exactly. Configure the index and the node segment of the prefix segment for a given term and accept the routing policy.

```
[edit policy-options policy-statement policy-name term term-value from]
user@host# set route-filter 2001:db8::/32 exact
user@host# set prefix-segment index index-value
user@host# set prefix-segment node-segment
user@host# set accept
```

3. Configure the index and the node segment of the prefix segment for a given term and accept the routing policy.

```
[edit policy-options policy-statement policy-name term term-value then]
user@host# set prefix-segment index index-value
user@host# set prefix-segment node-segment
user@host# set accept
```

For example, configure the prefix segment with index 1004 and the node segment for term 1 of policy statement prefix SID and accept the routing policy.

```
[edit policy-options policy-statement prefix-sid term 1 then]
user@host# set prefix-segment index 1004
user@host# set prefix-segment node-segment
user@host# set accept
```

4. Configure the routing policy with the same prefix (IPv4 or IPv6 )and same prefix segment on more than one routers for anycast SID.



**NOTE:** For anycast prefix SID, configure prefix SID on loopback interface( lo0.0).

```
[edit policy-options policy-statement prefix-sid term 1 ]
user@host# set from route-filter IP address exact
user@host# set then prefix-segment index index-value
user@host# set then accept
```

For example, configure IPv4 prefix 198.51.100.1/32 with prefix segment 1000 on two routers R0 and R1 for anycast SID.

```
[edit policy-options policy-statement prefix-sid term 1 ]
user@host# set from route-filter 198.51.100.1/32 exact
user@host# set then prefix-segment index 1000
user@host# set then accept
```

For example, configure IPv6 prefix 2001:db8::/32 with prefix segment 1000 on two routers R0 and R1 for anycast SID.

```
[edit policy-options policy-statement prefix-sid term 1 ]
user@host# set from route-filter 2001:db8::/32 exact
user@host# set then prefix-segment index 2000
user@host# set then accept
```

5. Configure export policy on the IS-IS protocol.

```
[edit protocols isis]
user@host# export prefix-sid
```

6. Configure traffic-engineering shortcuts for IPv4-MPLS family traffic.

```
[edit protocols isis traffic-engineering]
user@host# set family inet-mpls shortcuts
```

7. Configure traffic-engineering shortcuts for IPv6-MPLS family traffic.

```
[edit protocols isis traffic-engineering]
user@host# set family inet6-mpls shortcuts
```

8. Configure explicit NULL to enable E and P bits in all prefix SID advertisements.

```
[edit protocol isis source-packet-routing]
user@host# set explicit-null
```

9. Configure adjacency segment hold time to retain segment adjacency.

```
[edit protocol isis source-packet-routing]
user@host# set adjacency-segment hold-time hold-time
```

For example, configure adjacency segments with 240,000 milliseconds hold time.

```
[edit protocol isis source-packet-routing]
user@host# set adjacency-segment hold-time 240000
```

#### Related Documentation

- [Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292](#)
- [adjacency-segment on page 451](#)

- [source-packet-routing on page 578](#)
- [traffic-engineering on page 586](#)

## Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS

---

Segment routing enables a router to send a packet along a specific path in the network by imposing a label stack that describes the path. The forwarding actions described by a segment routing label stack do not need to be established on a per-path basis. Therefore, an ingress router can instantiate an arbitrary path using a segment routing label stack and use it immediately without any signaling.

In segment routing, each node advertises mappings between incoming labels and forwarding actions. A specific forwarding action is referred to as a segment and the label that identifies that segment is referred to as a segment identifier (SID). The backup paths created by TI-LFA use the following types of segments:

- Node segment—A node segment forwards packets along the shortest path or paths to a destination node. The label representing the node segment (the node SID) is swapped until the destination node is reached.
- Adjacency segment—An adjacency segment forwards packets across a specific interface on the node that advertised the adjacency segment. The label representing an adjacency segment (the adjacency SID) is popped by the node that advertised it.

A router can send a packet along a specific path by creating a label stack that uses a combination of node SIDs and adjacency SIDs. Typically, node SIDs are used to represent parts of the path that correspond to the shortest path between two nodes. An adjacency SID is used wherever a node SID cannot be used to accurately represent the desired path.

Loop-free alternate (LFA) and remote LFA (RLFA) have been used to provide fast-reroute protection for several years. With LFA, a point of local repair (PLR) determines whether or not a packet sent to one of its direct neighbors reaches its destination without looping back through the PLR. In a typical network topology, approximately 40 to 60 percent of the destinations can be protected by LFA. Remote LFA expands on the concept of LFA by allowing the PLR to impose a single label to tunnel the packet to a repair tunnel endpoint from which the packet can reach its destination without looping back through the PLR. Using remote LFA, more destinations can be protected by the PLR compared to LFA. However, depending on the network topology, the percentage of destinations protected by remote LFA is usually less than 100 percent.

Topology-independent LFA (TI-LFA) extends the concept of LFA and remote LFA by allowing the PLR to use deeper label stacks to construct backup paths. In addition, the TI-LFA imposes the constraint that the backup path used by the PLR be the same path that a packet takes once the interior gateway protocol (IGP) has converged for a given failure scenario. This path is referred to as the post-convergence path.

Using the post-convergence path as the backup path has some desirable characteristics. For some topologies, a network operator only needs to make sure that the network has enough capacity to carry the traffic along the post-convergence path after a failure. In these cases, a network operator does not need to allocate additional capacity to deal with the traffic pattern immediately after the failure while the backup path is active, because the backup path follows the post-convergence path.

TI-LFA provides protection against link failure, node failure, and fate-sharing failures. In link failure mode, the destination is protected if the link fails. In node protection mode, the destination is protected if the neighbor connected to the primary link fails. To

determine the node-protecting post-convergence path, the cost of all the links leaving the neighbor is assumed to increase by a configurable amount.

With fate-sharing protection, a list of fate-sharing groups are configured on each PLR with the links in each fate-sharing group identified by their respective IP addresses. The PLR associates a cost with each fate-sharing group. The fate-sharing-aware post-convergence path is computed by assuming that the cost of each link in the same fate-sharing group as the failed link has increased the cost associated with that group.

In order to construct a backup path that follows the post-convergence path, TI-LFA uses several labels in the label stack that define the backup path. If the number of labels required to construct a particular post-convergence backup path exceeds a certain amount, it is useful in some circumstances to not install that backup path. You can configure the maximum number of labels that a backup path can have in order to be installed. The default value is 3, with a range of 2 through 5.

It is often the case that the post-convergence path for a given failure is actually a set of equal-cost paths. TI-LFA attempts to construct the backup paths to a given destination using multiple equal-cost paths in the post-failure topology. Depending on the topology, TI-LFA might need to use different label stacks to accurately construct those equal-cost backup paths. By default, TI-LFA only installs one backup path for a given destination. However, you can configure the value in the range from 1 through 8.

**Related  
Documentation**

- [Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333](#)
- [Example: Configuring Topology Independent Loop-Free Alternate with Segment Routing for IS-IS on page 334](#)
- [post-convergence-lfa on page 559](#)
- [use-post-convergence-lfa on page 593](#)
- [use-for-post-convergence-lfa on page 594](#)
- [node-protection on page 535](#)



## Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS

Loop-free alternate (LFA) and remote LFA have been used to provide fast-reroute protection for several years. With LFA, a point of local repair (PLR) determines whether or not a packet sent to one of its direct neighbors will reach its destination without looping back through the PLR. In a typical network topology, perhaps 40-60 percent of destinations can be protected by LFA. Remote LFA expands on the concept of LFA by allowing the PLR to impose a single label to tunnel the packet to a repair tunnel endpoint from which the packet can reach its destination without looping back through the PLR. Using remote LFA, more destinations can be protected by the PLR compared to LFA. However, depending on the network topology, the percentage of destinations protected by remote LFA is usually less than 100 percent.

Topology-independent loop-free alternate (TI-LFA) extends the concept of LFA and remote LFA by allowing the PLR to use deeper label stacks to construct backup paths. In addition, TI-LFA imposes the constraint that the backup path used by the PLR be the same path that a packet takes once the IGP converges for a given failure scenario. This path is referred to as the post-convergence path.

Using the post-convergence path as the backup path has some desirable characteristics. For some topologies, a network operator only needs to make sure that the network has enough capacity to carry the traffic along the post-convergence path after a failure. In these cases, a network operator does not need to allocate additional capacity to deal with the traffic pattern immediately after the failure while the backup path is active, because the backup path follows the post-convergence path.

Before you configure TI-LFA for IS-IS, be sure you configure SPRING or segment routing.

To configure TI-LFA using SPRING for IS-IS, you must do the following:

1. Enable TI-LFA for IS-IS protocol.

```
[edit protocols isis backup-spf-options]
user@R1# set use-post-convergence-lfa
```

2. (Optional) Configure backup shortest path first (SPF) attributes such as maximum equal-cost multipath (ECMP) backup paths and maximum labels for TI-LFA for the IS-IS protocol.

```
[edit protocols isis backup-spf-options use-post-convergence-lfa]
user@R1# set maximum-backup-paths maximum-backup-paths
user@R1# set maximum-labels maximum-labels
```

3. Configure the computation and installation of a backup path that follows the post-convergence path on the given interface and level for the IS-IS protocol.

```
[edit protocols isis interface interface-name level level]
user@R1# set post-convergence-lfa
```

4. (Optional) Enable fate-sharing protection for a given interface and level. Specify the fate-sharing group to use as a constraint for the post-convergence path.



**NOTE:** You do not have to configure the `use-for-post-convergence-lfa` statement and the `fate-sharing-protection` statement for basic link protection for the backup path.

```
[edit routing-options fate-sharing group group-name]
user@R1# set use-for-post-convergence-lfa
```

```
[edit protocols isis interface interface-name level level post-convergence-lfa]
user@R1# set fate-sharing-protection
```

5. (Optional) Enable node protection for a given interface and level.

```
[edit protocols isis interface interface-name level level post-convergence-lfa]
user@R1# set node-protection
```

#### Related Documentation

- [Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330](#)
- [Example: Configuring Topology Independent Loop-Free Alternate with Segment Routing for IS-IS on page 334](#)
- [post-convergence-lfa on page 559](#)
- [use-post-convergence-lfa on page 593](#)
- [use-for-post-convergence-lfa on page 594](#)
- [node-protection on page 535](#)

## Example: Configuring Topology Independent Loop-Free Alternate with Segment Routing for IS-IS

This example shows topology-independent loop-free alternate (TI-LFA) with segment routing for the IS-IS protocol to provide MPLS fast reroute (FRR) backup paths corresponding to the post-convergence path for a given failure by using deeper label stacks to construct backup paths. TI-LFA provides protection against link failure, node failure, and fate-sharing failures. In link failure mode, the destination is protected if the link fails. In node protection mode, the destination is protected if the neighbor connected to the primary link fails. To determine the node-protecting post-convergence path, the cost of all the links leaving the neighbor is assumed to increase by a configurable amount. With fate-sharing protection, a list of fate-sharing groups are configured on each PLR with the links in each fate-sharing group identified by their respective IP addresses.



**NOTE:** TI-LFA supports protection of routes for both IPv4 and IPv6 prefixes. This example demonstrates protection of routes for IPv4 prefixes.

- [Requirements on page 335](#)
- [Overview on page 335](#)
- [Configuration on page 336](#)

## Requirements

This example uses the following hardware and software components:

- Nine MX Series routers
- Junos OS Release 17.4 or later running on all devices

Before you configure TI-LFA routes using SPRING for IS-IS, be sure you configure SPRING or segment routing.


## Overview

Junos OS allows you to enable TI-LFA for IS-IS by configuring the **use-post-convergence-lfa** statement at the **[edit protocols isis backup-spf-options]** hierarchy level. TI-LFA provides protection against link failure, node failure, and failures of fate-sharing groups. You can enable the creation of post-convergence backup paths for a given interface by configuring the **post-convergence-lfa** statement at the **[edit protocols isis interface interface-name level level]** hierarchy level. The **post-convergence-lfa** statement enables link-protection mode. You can enable **node-protection** mode, or **fate-sharing-protection** mode, or both modes, for a given interface at the **[edit protocols isis interface interface-name level level post-convergence-lfa]** hierarchy level. To ensure that the fate-sharing protection is enabled for a given fate-sharing group, you need to configure the **use-for-post-convergence-lfa** statement at the **[edit routing-options fate-sharing group group-name]** hierarchy level.

## Topology

[Figure 30 on page 336](#) shows TI-LFA with segment routing for IS-IS configured on Device R1.

Figure 30: Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS

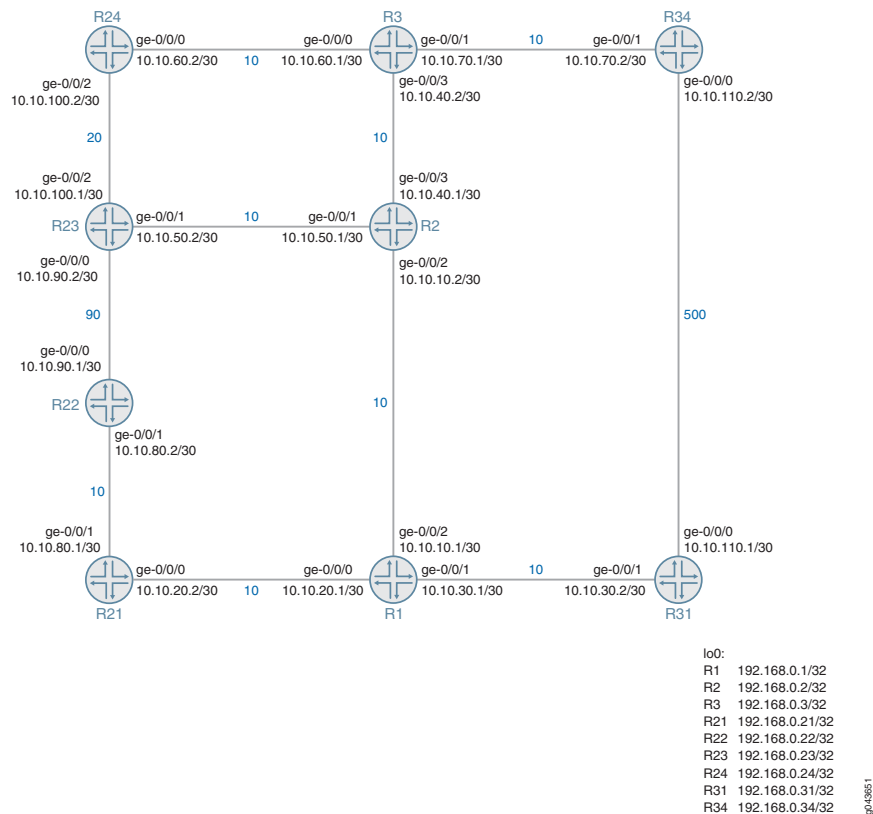

## Configuration

### CLI Quick Configuration

To quickly configure link-protection in this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the [edit] hierarchy level, and then enter commit from configuration mode.

```
R1
set interfaces ge-0/0/0 unit 0 family inet address 10.10.20.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/1 unit 0 family inet address 10.10.30.1/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/2 unit 0 family inet address 10.10.10.1/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 198.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0001.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 198.168.0.1
set protocols mpls interface ge-0/0/0
set protocols mpls interface ge-0/0/1
set protocols mpls interface ge-0/0/2
```

```

set protocols isis backup-spf-options use-post-convergence-lfa maximum-labels 5
set protocols isis source-packet-routing node-segment ipv4-index 1
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 10
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface ge-0/0/2 point-to-point
set protocols isis interface ge-0/0/2 level 2 metric 10
set protocols isis interface ge-0/0/2 level 2 post-convergence-lfa
set protocols isis interface lo0.0

```

R2

```

set interfaces ge-0/0/1 unit 0 family inet address 10.10.50.1/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/2 unit 0 family inet address 10.10.10.2/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family mpls
set interfaces ge-0/0/3 unit 0 family inet address 10.10.40.1/30
set interfaces ge-0/0/3 unit 0 family iso
set interfaces ge-0/0/3 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0002.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.2
set protocols mpls interface ge-0/0/1
set protocols mpls interface ge-0/0/2
set protocols mpls interface ge-0/0/3
set protocols isis source-packet-routing node-segment ipv4-index 2
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 1 disable
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface ge-0/0/2 point-to-point
set protocols isis interface ge-0/0/2 level 2 metric 10
set protocols isis interface ge-0/0/3 point-to-point
set protocols isis interface ge-0/0/3 level 2 metric 10
set protocols isis interface lo0.0

```

R3

```

set interfaces ge-0/0/0 unit 0 family inet address 10.10.60.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/1 unit 0 family inet address 10.10.70.1/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/3 unit 0 family inet address 10.10.40.2/30
set interfaces ge-0/0/3 unit 0 family iso
set interfaces ge-0/0/3 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0003.00

```

```

set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.3
set protocols mpls interface ge-0/0/0
set protocols mpls interface ge-0/0/1
set protocols mpls interface ge-0/0/3
set protocols isis source-packet-routing node-segment ipv4-index 3
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 10
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface ge-0/0/3 point-to-point
set protocols isis interface ge-0/0/3 level 2 metric 10
set protocols isis interface lo0.0

```

R21

```

set interfaces ge-0/0/0 unit 0 family inet address 10.10.29.2/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/1 unit 0 family inet address 10.10.80.1/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.21/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0021.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.21
set protocols mpls interface ge-0/0/0
set protocols mpls interface ge-0/0/1
set protocols isis source-packet-routing node-segment ipv4-index 21
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 10
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface lo0.0

```

R22

```

set interfaces ge-0/0/0 unit 0 family inet address 10.10.90.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/1 unit 0 family inet address 10.10.80.2/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.22/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0022.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.22
set protocols isis source-packet-routing node-segment ipv4-index 22
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 90

```

```

set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface lo0.0

```

```

R23
set interfaces ge-0/0/0 unit 0 family inet address 10.10.90.2/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/1 unit 0 family inet address 10.10.50.2/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/2 unit 0 family inet address 10.10.100.1/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.23/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0023.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.23
set protocols mpls interface ge-0/0/0
set protocols mpls interface ge-0/0/1
set protocols mpls interface ge-0/0/2
set protocols isis source-packet-routing node-segment ipv4-index 23
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/2 point-to-point
set protocols isis interface ge-0/0/2 level 2 metric 20
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 90
set protocols isis interface lo0.0

```

```

R24
set interfaces ge-0/0/0 unit 0 family inet address 10.10.60.2/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/2 unit 0 family inet address 1.23.24.2/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 04 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.24/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0024.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.24
set protocols mpls interface ge-0/0/0
set protocols mpls interface ge-0/0/2
set protocols isis source-packet-routing node-segment ipv4-index 24
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 10
set protocols isis interface ge-0/0/2 point-to-point
set protocols isis interface ge-0/0/2 level 2 metric 20
set protocols isis interface lo0.0

```

**R31**

```

set interfaces ge-0/0/1 unit 0 family inet address 10.10.30.2/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/0 unit 0 family inet address 10.10.110.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 10 family mpls
set interfaces lo0 unit 0 family inet address 198.162.0.31/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0031.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 198.162.0.31
set protocols mpls interface ge-0/0/1
set protocols mpls interface ge-0/0/0
set protocols isis source-packet-routing node-segment ipv4-index 31
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 500
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface lo0.0

```

**R34**

```

set interfaces ge-0/0/0 unit 0 family inet address 10.10.110.2/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family mpls
set interfaces ge-0/0/1 unit 11 family inet address 10.10.70.2/30
set interfaces ge-0/0/1 unit 11 family iso
set interfaces ge-0/0/1 unit 11 family mpls
set interfaces lo0 unit 0 family inet address 192.168.0.34/32
set interfaces lo0 unit 0 family iso address 49.0000.2222.0034.00
set interfaces lo0 unit 0 family mpls
set routing-options router-id 192.168.0.34
set protocols mpls interface ge-0/0/0
set protocols mpls interface ge-0/0/1
set protocols isis source-packet-routing node-segment ipv4-index 34
set protocols isis source-packet-routing node-segment index-range 512
set protocols isis level 2 wide-metrics-only
set protocols isis interface ge-0/0/0 point-to-point
set protocols isis interface ge-0/0/0 level 2 metric 500
set protocols isis interface ge-0/0/1 point-to-point
set protocols isis interface ge-0/0/1 level 2 metric 10
set protocols isis interface lo0.0

```

## Configuring R1

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device R1:

1. 1. Configure the interfaces.



```
[edit interfaces]
user@R1# set ge-0/0/0 unit 0 family inet address 10.10.20.1/30
user@R1# set ge-0/0/0 unit 0 family iso
user@R1# set ge-0/0/0 unit 0 family mpls

user@R1# set ge-0/0/1 unit 0 family inet address 10.10.30.1/30
user@R1# set ge-0/0/1 unit 0 family iso
user@R1# set ge-0/0/1 unit 0 family mpls

user@R1# set ge-0/0/2 unit 0 family inet address 10.10.10.1/30
user@R1# set ge-0/0/2 unit 0 family iso
user@R1# set ge-0/0/2 unit 0 family mpls

user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0000.2222.0001.00
user@R1# set lo0 unit 0 family mpls
```

2. 2. Configure the router ID.

```
[edit routing-options]
user@R1# set router-id 192.168.0.1
```

3. 3. Configure the MPLS protocol on the interfaces.

```
[edit protocols mpls]
user@R1# set interface ge-0/0/0
user@R1# set interface ge-0/0/1
user@R1# set interface ge-0/0/2
```

4. 4. Configure the maximum number of labels for segment routing routed paths for protection of backup shortest-path-first attributes.

```
[edit protocols isis]
user@R1# set backup-spf-options use-post-convergence-lfa maximum-labels 5
```

5. 5. Configure IPv4 index and index range for node segments in segment routing for the IS-IS protocol.

```
[edit protocols isis]
user@R1# set source-packet-routing node-segment ipv4-index 1
user@R1# set source-packet-routing node-segment index-range 512
```

6. 6. Configure wide metrics attribute of global level for the IS-IS protocol.

```
[edit protocols isis]
user@R1# set level 2 wide-metrics-only
```

7. Configure the interfaces to be point to point. Configure to install backup route along the link-protecting post-convergence path on the interface ge-0/0/2. .

```
[edit protocols isis]
user@R1# set interface ge-0/0/0 point-to-point
user@R1# set interface ge-0/0/0 level 2 metric 10

user@R1# set interface ge-0/0/1 point-to-point
user@R1# set interface ge-0/0/1 level 2 metric 10

user@R1# set interface ge-0/0/2 point-to-point
user@R1# set interface ge-0/0/2 level 2 metric 10
user@R1# set interface ge-0/0/2 level 2 post-convergence-lfa

user@R1# set interface lo0.0
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
ge-0/0/0 {
  unit 0 {
    family inet {
      address 10.10.20.1/30;
    }
    family iso;
    family mpls;
  }
ge-0/0/1 {
  unit 0 {
    family inet {
      address 10.10.30.1/30;
    }
    family iso;
    family mpls;
  }
ge-0/0/2 {
  unit 0 {
    family inet {
      address 10.10.10.1/30;
    }
    family iso;
    family mpls;
  }
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
```

```

        address 49.0000.2222.0001.00;
    }
    family mpls;
}

```

```

user@R1# show routing-options
router-id 192.168.0.1;

```

```

user@R1# show protocols
mpls {
    interface ge-0/0/0;
    interface ge-0/0/1;
    interface ge-0/0/2;
}
isis {
    backup-spf-options {
        use-post-convergence-lfa {
            maximum-labels 5;
        }
    }
    source-packet-routing {
        node-segment {
            ipv4-index 1;
            index-range 512;
        }
    }
    level 2 wide-metrics-only;
    interface ge-0/0/0 {
        point-to-point;
        level 2 metric 10;
    }
    interface ge-0/0/1 {
        point-to-point;
        level 2 metric 10;
    }
    interface ge-0/0/2 {
        point-to-point;
        level 2 {
            post-convergence-lfa;
            metric 10;
        }
    }
    interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verify the Link-protecting Backup Path for an Ingress Route on page 344](#)
- [Verify the Adjacency SID used in the Link-protecting Backup Path on page 344](#)

- [Verify the Link-protecting Backup Path for a Node SID label on page 345](#)
- [Verify the Link-protecting Backup Path for an Adjacency SID Label on page 345](#)

### *Verify the Link-protecting Backup Path for an Ingress Route*

**Purpose** Verify the link-protecting backup path for primary next hops on interface ge-0/0/2 for Device R1 and verify if the backup path to reach 192.168.0.3/32 has been created and has the correct label stack.

**Action** From operational mode, run the **show route table inet.3 192.168.0.3** command to display the routing table information.

```
user@R1> show route table inet.3 192.168.0.3

inet.3: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.0.3/32          *[L-ISIS/14] 18:09:19, metric 20
                      > to 10.10.10.2 via ge-0/0/2, Push 800003
                      to 10.10.20.2 via ge-0/0/0, Push 800003, Push 299792, Push
                        800022(top)
```

**Meaning** The primary path to reach 198.162.0.3/32 (corresponding to Device R3) is through the interface ge-0/0/2 with a label of 800003, corresponding to the node-SID of Device R3. If the interface ge-0/0/2 fails, the backup path using the interface ge-0/0/0 using the label stack [800022, 299792, 800003] becomes active. The link-protecting post-convergence path is R1-R21-R22-R23-R2-R3. The top label on the label stack is 800022 and corresponds to the node SID to reach R22 on the shortest path R1-R2-R22. The next label (299792) corresponds to the adjacency SID for the interface R22-R23. The last label (800003) corresponds to the node SID on R23 to reach R3 on the shortest path R23-R2-R3.

### *Verify the Adjacency SID used in the Link-protecting Backup Path*

**Purpose** Verify that the adjacency SID 299792 corresponds to the interface between R22-R23.

**Action** From operational mode, run the **show isis adjacency detail R23** command to display the adjacency information.

```
user@R22> show isis adjacency detail R23

R23
Interface: ge-0/0/0, Level: 2, State: Up, Expires in 23 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:24:28 ago
Circuit type: 2, Speaks: IP
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.10.90.2
Level 2 IPv4 Adj-SID: 299792
```

**Meaning** The Device R22 has assigned the value of 299792 to represent the level 2 adjacency to Device R23 for IPv4 traffic.

***Verify the Link-protecting Backup Path for a Node SID label***

**Purpose** Verify that the transit route in mpls.0 corresponding to the node SID to reach Device R3 has a link-protecting backup path.

**Action** From operational mode, run the **show route table mpls.0 label 800003** command to display the adjacency information.

```
user@R1> show route table mpls.0 label 800003
```

```
mpls.0: 38 destinations, 38 routes (38 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
800003          *[L-ISIS/14] 00:14:29, metric 20
                 > to 10.10.10.2 via ge-0/0/2, Swap 800003
                 to 10.10.20.2 via ge-0/0/0, Swap 800003, Push 299776, Push
800022(top)
```

**Meaning** An incoming label of 800003 corresponds to the node SID for Device R3. The primary route entry in mpls.0 corresponds to the swap of the incoming label 800003 with the outgoing label 800003 on interface ge-0/0/2, corresponding to the shortest path from Device R1 to Device R3 in the pre-failure topology. If interface ge-0/0/2 fails, the backup route entry causes a packet with the incoming label 800003 to leave interface ge-0/0/0 with that incoming label replaced by the label stack [800022, 299776, 800003]. This corresponds to the link-protecting post-convergence path to reach R3 (R1-R21-R22-R23-R2-R3). The top label on the label stack is 800022 and corresponds to the node SID to reach Device R22 on the shortest path R1-R2-R22. The next label (299792) corresponds to the adjacency SID for the interface on R22-R23. The last label (800003) corresponds to the node SID on Device R23 to reach Device R3 on the shortest path R23-R2-R3.

***Verify the Link-protecting Backup Path for an Adjacency SID Label***

**Purpose** Verify that the route in mpls.0 corresponding to the adjacency SID from Device R1 to Device R2 has a link-protecting backup path.

**Action** From operational mode, run the **show route table mpls.0 label 299808** command to display the adjacency information.

```
user@R1> show route table mpls.0 label 299808
```

```
mpls.0: 38 destinations, 38 routes (38 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
299808          *[L-ISIS/14] 01:10:05, metric 0
                 > to 10.10.10.2 via ge-0/0/2, Pop
```

```

      to 10.10.20.2 via ge-0/0/0, Swap 800002, Push 299792, Push
800022(top)
299808(S=0)  *[L-ISIS/14] 00:10:02, metric 0
              > to 10.10.10.2 via ge-0/0/2, Pop
              to 10.10.20.2 via ge-0/0/0, Swap 800002, Push 299792, Push
800022(top)

```

**Meaning** An incoming label of 299808 corresponds to the adjacency SID from Device R1 to Device R2. The primary route entry in mpls.0 corresponds to popping the incoming label 299808 and sending the packet out interface ge-0/0/2. If interface ge-0/0/2 fails, the backup route entry causes a packet with the incoming label 299808 to leave on interface ge-0/0/0 with that incoming label replaced by the label stack [800022, 299776, 800002]. This corresponds to the link-protecting post-convergence path to reach Device R2 (R1-R21-R22-R23-R2). The top label on the label stack is 800022 and corresponds to the node SID to reach Device R22 on the shortest path R1-R2-R22. The next label (299792) corresponds to the adjacency SID for the interface on R22-R23. The last label (800002) corresponds to the node SID on Device R23 to reach Device R2 on the shortest path R23-R2.

**CLI Quick Configuration** To quickly add node-protection for interface ge-0/0/2 to the above example configuration on Device R1, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

```

R1  set protocols isis interface ge-0/0/2 level 2 post-convergence-lfa node-protection cost
    2000

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Enable node-protection on interface ge-0/0/2.

```

[edit protocols isis interface ge-0/0/2 level 2 post-convergence-lfa]
user@R1# set node-protection cost 2000

```

**Results**

```

user@R1# show protocols
mpls {
  interface ge-0/0/0;
  interface ge-0/0/1;
  interface ge-0/0/2;
}
isis {
  backup-spf-options {
    use-post-convergence-lfa {
      maximum-labels 5;
    }
  }
}

```

```

    }
  }
  source-packet-routing {
    node-segment {
      ipv4-index 1;
      index-range 512;
    }
  }
  level 2 wide-metrics-only;
  interface ge-0/0/0 {
    point-to-point;
    level 2 {
      metric 10;
    }
  }
  interface ge-0/0/1 {
    point-to-point;
    level 2 {
      metric 10;
    }
  }
  interface ge-0/0/2 {
    point-to-point;
    level 2 {
      post-convergence-lfa {
        node-protection cost 20000;
      }
      metric 10;
    }
  }
  interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

- [Verify the Backup Route on Device R1 on page 347](#)

#### *Verify the Backup Route on Device R1*

**Purpose** Verify that the backup route to reach 192.168.0.3 passes through R1-R31-R34-R3. This shows that the node-protection is enabled.

**Action** From operational mode, run the **show route table inet.3 192.168.0.3** command to display the routing table information.

```
user@R1> show route table inet.3 192.168.0.3

inet.3: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.0.3/32          *[L-ISIS/14] 00:05:34, metric 20
                        > to 10.10.10.2 via ge-0/0/2, Push 800003
                        to 1.1.31.2 via ge-0/0/1, Push 800003, Push 299776(top)
```

**Meaning** The backup path to reach 192.168.0.3 now uses the interface ge-0/0/1 (the interface to reach R31). The top label on the stack (299776) corresponds to the adjacency SID on Device R31 to reach Device R34. The bottom label (800003) takes the packet from R34. This ensures that node-protection is enabled.

**CLI Quick Configuration** To quickly configure define fate-sharing protection on Device R1, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

**Device R1**

```
set routing-options fate-sharing group fs-group-1 cost 3000
set routing-options fate-sharing group fs-group-1 from 10.10.10.1 to 10.10.10.2
set routing-options fate-sharing group fs-group-1 from 10.10.80.1 to 10.10.80.2
set routing-options fate-sharing group fs-group-1 use-for-post-convergence-lfa
set protocols isis interface ge-0/0/2 level 2 post-convergence-lfa fate-sharing-protection
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Configure the fate-sharing group cost.

```
[edit routing-options fate-sharing group fs-group-1]
user@R1# set cost 3000
```

2. Configure the fate-sharing group to indicate that link from Device R1 to Device R2 and the link from Device R21 to Device R22 share fate and allow it to be used for post-convergence-lfa.

```
[edit routing-options fate-sharing group fs-group-1]
user@R1# set from 10.10.10.1 to 10.10.10.2
user@R1# set from 10.10.80.1 to 10.10.80.2
user@R1# set use-for-post-convergence-lfa
```

3. Enable fate-sharing protection for ge-0/0/2 on Device R1.



```
[edit protocols isis interface ge-0/0/2 level 2 post-convergence-lfa]
user@R1# set fate-sharing-protection
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show routing-options
router-id 192.168.0.1;
fate-sharing {
  group fs-group-1 {
    cost 3000;
    from {
      10.10.10.1 to 10.10.10.2;
      10.10.80.1 to 10.10.80.2;
    }
    use-for-post-convergence-lfa;
  }
}
```

```
user@R1# show protocols
mpls {
  interface ge-0/0/0;
  interface ge-0/0/1;
  interface ge-0/0/2;
}
isis {
  backup-spf-options {
    use-post-convergence-lfa {
      maximum-labels 5;
    }
  }
  source-packet-routing {
    node-segment {
      ipv4-index 1;
      index-range 512;
    }
  }
  level 2 wide-metrics-only;
  interface ge-0/0/0 {
    point-to-point;
    level 2 {
      metric 10;
    }
  }
  interface ge-0/0/1 {
    point-to-point;
    level 2 {
      metric 10;
    }
  }
  interface ge-0/0/2 {
    point-to-point;
```

```

level 2 {
  post-convergence-lfa {
    fate-sharing-protection;
    metric 10;
  }
}
interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Verify the Backup Path on Device R1 on page 350](#)

#### *Verify the Backup Path on Device R1*

**Purpose** Verify that the backup route to reach 192.168.0.3 is through path R1-R31-R34-R3. This shows that fate-sharing is enabled.

**Action** From operational mode, run the **show route table inet.3 192.168.0.3** command to display the routing table information.

```
user@R1# show route table inet.3 192.168.0.3
```

```
inet.3: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

192.168.0.3/32          *[L-ISIS/14] 00:05:34, metric 20
                        > to 1.1.2.2 via ge-0/0/0.1, Push 800003
                        to 1.1.31.2 via ge-0/0/0.9, Push 800003, Push 299776(top)

```

**Meaning** The backup path to reach 192.168.0.3 now uses ge-0/0/1 (the interface to reach R31). The top label on the stack (299776) corresponds to the adjacency-SID on Device R31 to reach Device R34. The bottom label (800003) takes the packet from Device R34 to Device R3.

- Related Documentation**
- [Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330](#)
  - [Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333](#)
  - [post-convergence-lfa on page 559](#)
  - [use-post-convergence-lfa on page 593](#)

- [use-for-post-convergence-lfa on page 594](#)
- [node-protection on page 535](#)

## Static Adjacency Segment Identifier for ISIS

Adjacency segment is a strict forwarded single-hop tunnel that carries packets over a specific link between two nodes, irrespective of the link cost. You can configure static adjacency segment identifier (SID) labels for an interface or an interface group.

Configuring a static adjacency SID on an interface causes the existing dynamically allocated adjacency SID to be removed along with the transit route for the same.

For static adjacency SIDs, the labels are picked from either a static reserved label pool or from an ISIS segment routing global block (SRGB).

You can reserve a label range to be used for static allocation of labels using the following configuration:

```
user@host# set protocols mpls label-range static-label-range start-value end-value
```

The static pool can be used by any protocol to allocate a label in this range. You need to ensure that no two protocols use the same static label. ISIS adjacency SIDs can be allocated from this label block through the configuration using keyword **label**. The **label** value for the specific adjacency SIDs need to be explicitly configured. The specific label is advertised as the adjacency SIDs for that interface for the specific level and address family. The following is a sample configuration:

```
user@host# set protocols mpls label-range static-label-range 700000 799999;  
user@host# set protocols isis source-packet-routing srgb start-label 800000 index-range 4000;  
user@host# set protocols isis interface ge-0/0/0.1 level 1 ipv4-adjacency-segment unprotected  
label 700001;
```

SRGB is a global label space that is allocated for the protocol based on configuration. The labels in the entire SRGB is available for ISIS to use and are not allocated to other applications/protocols. Prefix SIDs (and Node SIDs) are indexed from this SRGB.

ISIS Adj-SIDs can be allocated from ISIS SRGB using keyword 'index' in the configuration. In such cases, it should be ensured that the Adj-SID index does not conflict with any other prefix SID in the domain. Like Prefix-SIDs, Adj-SIDs will also be configured by mentioning the index with respect to the SRGB. However, the Adj-SID subtlv will still have the SID as a value and the L and V flags are set. The following is a sample configuration:

```
user@host# set protocols isis source-packet-routing srgb start-label 800000 index-range 4000;  
user@host# set protocols isis interface ge-0/0/0.1 level 1 ipv4-adjacency-segment unprotected  
index 1;
```

Static adjacency SIDs can be configured per address family and also based on whether the protection is required or not. Adjacency SIDs should be configured per level per interface at the **[edit protocols isis interface *interface-name* level *level-num*]** hierarchy level.

- Protected—Ensures adjacency SID is eligible to have a backup path and a B-flag is set in an adjacency SID advertisement.
- Unprotected—Ensures no backup path is calculated for a specific adjacency SID and a B-flag is not set in an adjacency SID advertisement.

The following is a sample configuration:

```
user@host# set protocols isis interface ge-0/0/0.1 level 1 ipv4-adjacency-segment unprotected
index 1;
user@host# set protocols isis interface ge-0/0/1.1 level 1 ipv4-adjacency-segment protected
index 2;
```

You can use the same adjacent SID for multiple interfaces by grouping a set of interfaces under an interface group and configuring the adjacency SID for that interface group and traffic can be load balanced among the interfaces under the interface group using weight. This can be configured under the `[edit protocols isis interface-group interface_group_name]` hierarchy level.

When segment routing is used in LAN subnetworks, each router in the LAN may advertise the adjacency SID of each of its neighbors. To configure adjacency SID for a LAN interface to a specific neighbor, you should configure the adjacency SIDs under the `lan-neighbor` configuration at the `[edit protocols isis interface interface_name level level_num lan-neighbor neighbor-sysid]` hierarchy level. The following is a sample configuration:

```
user@host# set protocols mpls label-range static-label-range 700000 799999;
user@host# set protocols isis source-packet-routing srgb start-label 800000 index-range 4000;
user@host# set protocols isis interface ge-0/0/0.1 level 1 lan-neighbor 1234.1234.1234
ipv4-adjacency-segment unprotected label 700001;
```

An adjacency set can be configured by declaring a set of interfaces under an interface group and configuring the adjacency segment for that interface group. The adjacency SID can be picked from the reserved static label pool or ISIS SRGB. Unlike normal interfaces, dynamic adjacency SID is not allocated by default under interface group, in which case the **dynamic** CLI statement is configured. Interfaces configured under an interface group can also be configured separately as independent interfaces as long as the link-group-protection is not configured. The following is a sample configuration:

```
user@host# set protocols mpls label-range static-label-range 700000 799999;
user@host# set protocols isis source-packet-routing srgb start-label 800000 index-range 4000;
user@host# set protocols isis interface-group group1 interface ge-0/0/0.1 weight 1;
user@host# set protocols isis interface-group group1 interface ge-0/0/1.1 weight 2;
user@host# set protocols isis interface-group group1 ipv4-adjacency-segment unprotected label
700001;
```

Use the following CLI hierarchy for configuring adjacency SID:

```
[edit ]
protocols {
  isis {
    interface <interface_name> {
      level <level_num> {
        ipv4-adjacency-segment {
```

```

    protected {
        dynamic;
        label <value>
        index <index> {
            global;
        }
    }
    unprotected {
        dynamic;
        label <value>
        index <index> {
            global;
        }
    }
}
ipv6-adjacency-segment {
    protected {
        dynamic;
        label <value>
        index <index> {
            global;
        }
    }
    unprotected {
        dynamic;
        label <value>
        index <index> {
            global;
        }
    }
}
}
interface <interface_name> {
    level <level_num> {
        lan-neighbor <neighbor-sysid>{
            ipv4-adjacency-segment {
                protected {
                    dynamic;
                    label <value>
                    index <index> {
                        global;
                    }
                }
                unprotected {
                    dynamic;
                    label <value>
                    index <index> {
                        global;
                    }
                }
            }
        }
        ipv6-adjacency-segment {
            protected {
                dynamic;

```

```

        label <value>
        index <index> {
            global;
        }
    }
    unprotected {
        dynamic;
        label <value>
        index <index> {
            global;
        }
    }
}
}
}
}
}
interface-group <interface_group_name> {
    interface <interface_1> weight <weight>
    ...
    interface <interface_n> weight <weight>
    level <level_num> {
        ipv4-adjacency-segment {
            protected {
                dynamic;
                label <value>
                index <index>
            }
            unprotected {
                dynamic;
                label <value>
                index <index>
            }
        }
        ipv6-adjacency-segment {
            protected {
                dynamic;
                label <value>
                index <index>
            }
            unprotected {
                dynamic;
                label <value>
                index <index>
            }
        }
    }
}
}
}
}
}
```

Use the following operational CLI commands to verify the configuration:

### show isis adjacency detail

The following sample output displays the details of configured and dynamic adjacency SID.

```
user@host> show isis adjacency r1 detail
```

```

r1
  Interface: ge-0/0/2.1, Level: 1, State: Up, Expires in 19 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 01:23:38 ago
  Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:86:48:49:0
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: r0.03, IP addresses: 11.1.1.2
  IPv6 addresses: fe80::205:8600:148:4900
  Level 1 IPv4   protected Adj-SID: 4138, Flags: BVL
  Level 1 IPv6   unprotected Adj-SID: 4139, Flags: FVL

```

### show isis database extensive

The following sample output displays the details of LAN/PTP adjacency SID.

```
user@host> show isis database extensive
```

```

r0.00-00 Sequence: 0x16, Checksum: 0xf156, Lifetime: 960 secs
  IPV4 Index: 1000, IPV6 Index: 2000
  Node Segment Blocks Advertised:
    Start Index : 0, Size : 4096, Label-Range: [ 16, 4111 ]
    IS neighbor: r4.00                      Metric:      10
      Two-way fragment: r4.00-00, Two-way first fragment: r4.00-00
    IS neighbor: r0.03                      Metric:      10
      Two-way fragment: r0.03-00, Two-way first fragment: r0.03-00
    IP prefix: 10.10.10.10/32                Metric:      0 Internal Up
    IP prefix: 11.1.1.0/24                  Metric:      10 Internal Up
    IP prefix: 21.1.1.0/24                  Metric:      10 Internal Up
    V6 prefix: 1001::/64                    Metric:      10 Internal Up
    V6 prefix: 2001::/64                    Metric:      10 Internal Up
    V6 prefix: abcd::10:10:10:10/128         Metric:      0 Internal Up
...
  TLVs:
    Area address: 49.00 (2)
    LSP Buffer Size: 1492
    Speaks: IP
    Speaks: IPV6
    IP router id: 10.10.10.10
    IP address: 10.10.10.10
    Hostname: r0
    IS neighbor: r0.03, Internal, Metric: default 10
    IS neighbor: r4.00, Internal, Metric: default 10
    IS extended neighbor: r0.03, Metric: default 10
    IP address: 11.1.1.1
    Local interface index: 342, Remote interface index: 0
    Current reservable bandwidth:
      Priority 0 : 1000Mbps
      Priority 1 : 1000Mbps
      Priority 2 : 1000Mbps
      Priority 3 : 1000Mbps
      Priority 4 : 1000Mbps

```

```

Priority 5 : 1000Mbps
Priority 6 : 1000Mbps
Priority 7 : 1000Mbps
Maximum reservable bandwidth: 1000Mbps
Maximum bandwidth: 1000Mbps
Administrative groups: 0 <none>
LAN IPV4 Adj-SID: 4138, Weight:0, Neighbor:r1, Flags: BVL
LAN IPV6 Adj-SID: 4139, Weight:0, Neighbor:r1, Flags: FBVL
IS extended neighbor: r4.00, Metric: default 10
IP address: 21.1.1.1
Neighbor's IP address: 21.1.1.2
Local interface index: 334, Remote interface index: 335
Current reservable bandwidth:
Priority 0 : 1000Mbps
Priority 1 : 1000Mbps
Priority 2 : 1000Mbps
Priority 3 : 1000Mbps
Priority 4 : 1000Mbps
Priority 5 : 1000Mbps
Priority 6 : 1000Mbps
Priority 7 : 1000Mbps
Maximum reservable bandwidth: 1000Mbps
Maximum bandwidth: 1000Mbps
Administrative groups: 0 <none>
P2P IPV4 Adj-SID - Flags: BVL, Weight:0, Label: 4125
P2P IPV6 Adj-SID - Flags: FBVL, Weight:0, Label: 4126

```

### show isis interface-group

The following sample output displays the status information about the specified interface group.

```
user@host> show isis interface-group
```

```

Interface-group: r1r2ig
ge-0/0/1.1, 1000Mbps, Up, Non-Degraded, Weight: 1
ge-0/0/1.3, 1000Mbps, Up, Non-Degraded, Weight: 1
ge-0/0/1.5, 1000Mbps, Up, Non-Degraded, Weight: 1
Total Nominal Bandwidth: 3Gbps, Total Actual Bandwidth: 3Gbps
Level 1 IPv4 protected Adj-SID: Label 4138
Level 1 IPv6 unprotected Adj-SID: Label 4139

```

**Related  
Documentation**



## CHAPTER 10

# Configuring IS-IS Scaling and Throttling

- [Understanding Link-State PDU Throttling for IS-IS Interfaces on page 357](#)
- [Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces on page 358](#)
- [Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces on page 363](#)
- [Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363](#)
- [Understanding IS-IS Mesh Groups on page 368](#)
- [Example: Configuring Mesh Groups of IS-IS Interfaces on page 369](#)

### Understanding Link-State PDU Throttling for IS-IS Interfaces

---

Link-state PDU throttling by use of the **lsp-interval** statement is a mechanism to control the flooding pace to neighboring routing devices to prevent overloading them.

Control traffic (link-state PDU and related packets) might cause delays in user traffic (information packets) because control traffic always has precedence in terms of scheduling on the interface cards.

Unfortunately, the control traffic transmission rate does not get lower on low-bandwidth interfaces such as DS-0 or fractional T1/E1 lines. Control traffic stays the same, regardless of line bandwidth.

Junos OS does not support automated calculation of link-state PDU throttling based on available bandwidth because the lowest-speed interface cards on a Juniper Networks routing device starts at T1/E1 speeds (1.5 and 2 Mbps). It is assumed that even with link-state PDU pacing of 20 ms, the control traffic will not consume more than half of the interface bandwidth.

However, there might be fractional T1/E1 circuits (less than the full bandwidth) configured as well, where link-state PDU pacing might have to be adjusted.

Thus, the **lsp-interval** statement helps to resolve two issues: regulating the control-traffic-to-user-traffic ratio, and protecting neighbors during transient situations.

The traffic subject to this pacing is non-self-originated traffic, which is traffic that has been originated by other routers, not the local router. Junos OS has hard-coded rate limiting for locally generated link-state PDUs. All the link-state PDUs are paced using a

20 ms timer. Additionally, there is logic that makes sure that the adjacency is reliably up for some time before advertising the adjacency.

- Related Documentation**
- [Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces on page 358](#)

## Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces

This example shows how to modify the link-state PDU interval time.

- [Requirements on page 358](#)
- [Overview on page 358](#)
- [Configuration on page 359](#)
- [Verification on page 360](#)

### Requirements

Before you begin, configure IS-IS. See “[Example: Configuring IS-IS](#)” on page 14 for information about the sample IS-IS configuration.

### Overview

To keep reachability information in the network current, link-state protocols need to originate, distribute, and revoke or time-out topology information. In IS-IS, topology information is encoded in link-state PDUs.

By default, the routing device sends one link-state PDU out an interface every 100 milliseconds. To modify this interval, include the **lsp-interval** statement:

```
lsp-interval milliseconds;
```


To disable the transmission of all link-state PDUs, set the interval to 0.

Link-state PDU throttling by use of the **lsp-interval** statement controls the flooding pace to neighboring routing devices in order to not overload them and also to ensure that user traffic is not delayed on low-bandwidth links.

In this example, an IS-IS routing device on a LAN segment is configured to send link-state PDUs every 1000 milliseconds.

[Figure 31 on page 358](#) shows the topology used in this example.

**Figure 31: IS-IS Link-State PDU Interval Topology**

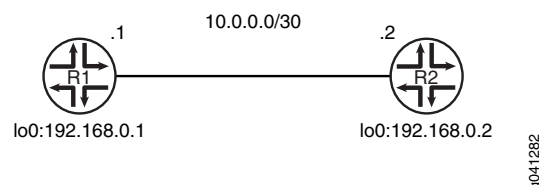

This example describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set interfaces fe-1/2/0 unit 0 description to-R2
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis traceoptions file isis-trace
set protocols isis traceoptions flag lsp
set protocols isis interface fe-1/2/0.0 lsp-interval 1000
set protocols isis interface lo0.0
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the link-state PDU interval:

1. Configure the interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 0 description to-R2
user@R1# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set fe-1/2/0 unit 0 family iso
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
```

2. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@R1# set interface fe-1/2/0.0
user@R1# set interface lo0.0
```

3. Modify the link-state PDU interval.

```
[edit protocols isis interface fe-1/2/0.0]
user@R1# set lsp-interval 1000
```

4. (Optional) Enable tracing for tracking link-state PDU operations.

```
[edit protocols isis traceoptions]
user@R1# set file isis-trace
```

```
user@R1# set flag lsp
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
  }
}
```

```
user@R1# show protocols
isis {
  traceoptions {
    file isis-trace;
    flag lsp;
  }
  interface fe-1/2/0.0 {
    lsp-interval 1000;
  }
  interface lo0.0;
}
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Device R2.

## Verification

Confirm that the configuration is working properly.

- [Verifying the Link-State PDU Interval on page 361](#)
- [Checking the Link-State PDU Statistics on page 361](#)
- [Checking the Trace Log on page 362](#)

### Verifying the Link-State PDU Interval

**Purpose** Check the link-state PDU interval setting on the IS-IS interface.

**Action** From operational mode, enter the **show isis interface extensive** command.

```
user@R1> show isis interface extensive
fe-1/2/0.0
  Index: 70, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 1000 ms, CSNP interval: 10 s, Loose Hello padding
  Adjacency advertisement: Advertise
  Level 1
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
    Designated Router: R2.02 (not us)
  Level 2
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
    Designated Router: R2.02 (not us)
```

**Meaning** The output shows that the link-state PDU interval is set to 1000 milliseconds.

### Checking the Link-State PDU Statistics

**Purpose** Check the number of link-state PDUs sent and received.

**Action** From operational mode, enter the **show isis statistics** command.

```
user@R1> show isis statistics

IS-IS statistics for R1:
PDU type      Received    Processed    Drops      Sent      Rexmit
LSP            24           24           0          13         0
IIH           2467         24           0          836        0
CSNP           474          474           0           0         0
PSNP            0            0            0           0         0
Unknown         0            0            0           0         0
Totals        2965          522           0          849        0

Total packets received: 2965 Sent: 849

SNP queue length: 0 Drops: 0
LSP queue length: 0 Drops: 0
SPF runs: 14
Fragments rebuilt: 15
LSP regenerations: 6
Purges initiated: 0
```

```
user@R2> show isis statistics
```

## IS-IS statistics for R2:

| PDU type | Received | Processed | Drops | Sent | Rexmit |
|----------|----------|-----------|-------|------|--------|
| LSP      | 13       | 13        | 0     | 24   | 0      |
| IIH      | 828      | 15        | 0     | 2459 | 0      |
| CSNP     | 0        | 0         | 0     | 474  | 0      |
| PSNP     | 0        | 0         | 0     | 0    | 0      |
| Unknown  | 0        | 0         | 0     | 0    | 0      |
| Totals   | 841      | 28        | 0     | 2957 | 0      |

Total packets received: 841 Sent: 2957

SNP queue length: 0 Drops: 0

LSP queue length: 0 Drops: 0

SPF runs: 17

Fragments rebuilt: 26

LSP regenerations: 11

Purges initiated: 0

**Meaning** The output shows the number of link-state PDUs sent and received on Device R1 and Device R2.

### Checking the Trace Log

**Purpose** Check the IS-IS trace log to view the interval between packets.

**Action** From operational mode, enter the **show log isis-trace | match lsp** command.

```
user@R1> show log isis | match lsp
```

```
Jun 18 15:27:02.692031 Received L1 LSP R2.00-00, on interface fe-1/2/0.0
Jun 18 15:27:02.692753 Updating L1 LSP R2.00-00 in TED
Jun 18 15:27:44.396480 Updating L1 LSP R1.00-00 in TED
Jun 18 15:27:45.398077 Sending L1 LSP R1.00-00 on interface fe-1/2/0.0
Jun 18 15:28:44.689024 Received L1 LSP R2.02-00, on interface fe-1/2/0.0
Jun 18 15:28:44.689663 Updating L1 LSP R2.02-00 in TED
Jun 18 15:29:15.954900 Updating L2 LSP R1.00-00 in TED
Jun 18 15:29:16.955620 Sending L2 LSP R1.00-00 on interface fe-1/2/0.0
Jun 18 15:29:28.789986 Received L2 LSP R2.00-00, on interface fe-1/2/0.0
Jun 18 15:29:28.790620 Updating L2 LSP R2.00-00 in TED
Jun 18 15:30:27.727892 Received L2 LSP R2.02-00, on interface fe-1/2/0.0
Jun 18 15:30:27.728519 Updating L2 LSP R2.02-00 in TED
```

**Meaning** The output shows that Level 1 and Level 2 link-state PDUs are being sent and received roughly every 1000 milliseconds (1 second).

**Related Documentation**

- [Understanding Link-State PDU Throttling for IS-IS Interfaces on page 357](#)
- [Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363](#)

## Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces

The complete sequence number PDU (CSNP) interval controls the frequency at which a routing device sends a directory of its link-state database.

When IS-IS is activated on a routing device's interface, the device first sends some IS-IS hello packets (IIHs) to its neighbors to ensure that the circuit is capable of transporting packets in both directions. In the IIHs, the router embeds information about the designated router (also called the designated intermediate system or DIS). One of the designated router roles on an IS-IS broadcast circuit is to synchronize the link-state databases on LANs. The designated router does this by periodically sending a directory of its link-state database, which is received by all the routing devices on a LAN.

If the routing device is the designated router on a LAN, IS-IS sends CSNPs every 10 seconds. If the routing device is on a point-to-point interface, it sends CSNPs every 5 seconds. The general recommendation is to use the default values or to increase the CSNP interval if there are a large number of broadcast circuits that need to be supplied with fresh CSNPs. Increasing the interval can help protect against CSNP flooding.

- Related Documentation**
- [Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363](#)

## Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces

This example shows how to modify the complete sequence number PDU (CSNP) interval on IS-IS interfaces.

- [Requirements on page 363](#)
- [Overview on page 363](#)
- [Configuration on page 364](#)
- [Verification on page 366](#)

### Requirements

Before you begin, configure IS-IS. See [“Example: Configuring IS-IS” on page 14](#) for information about the sample IS-IS configuration.

### Overview

CSNPs contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.

If the routing device is the designated router on a LAN, IS-IS sends CSNPs every 10 seconds. You might want to modify the default interval to protect against CSNP flooding.



**NOTE:** The `csnp-interval` statement is effective only when configured on LAN interfaces.

To modify the CSNP interval, include the `csnp-interval` statement:

```
csnp-interval seconds;
```

The time can range from 1 through 65,535 seconds.


To configure the interface not to send any CSNPs, specify the `disable` option:

```
csnp-interval disable;
```

In this example, an IS-IS routing device on a LAN segment is configured to send CSNPs every 30 seconds.

Figure 31 on page 358 shows the topology used in this example.

Figure 32: IS-IS CSNP Interval Topology

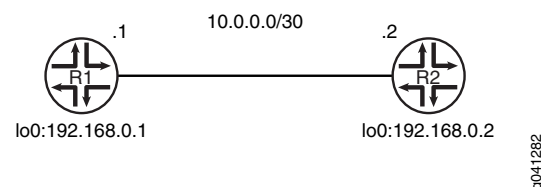

This example describes the steps on Device R1.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device R1

```
set interfaces fe-1/2/0 unit 0 description to-R2
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis traceoptions file isis-trace
set protocols isis traceoptions flag csnp
set protocols isis interface fe-1/2/0.0 csnp-interval 30
set protocols isis interface lo0.0
```



**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the CSNP interval:

1. Configure the interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 0 description to-R2
user@R1# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set fe-1/2/0 unit 0 family iso
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
```

2. Enable IS-IS on the interfaces.

```
[edit protocols isis]
user@R1# set interface fe-1/2/0.0
user@R1# set interface lo0.0
```

3. Modify the CSNP interval.

```
[edit protocols isis interface fe-1/2/0.0]
user@R1# set csnp-interval 30
```

4. (Optional) Enable tracing for tracking CSNP operations.

```
[edit protocols isis traceoptions]
user@R1# set file isis-trace
user@R1# set flag csn
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
```

```
    address 192.168.0.1/32;
  }
  family iso {
    address 49.0002.0192.0168.0001.00;
  }
}
}
```

```
user@R1# show protocols
isis {
  traceoptions {
    file isis-trace;
    flag csnp;
  }
  interface fe-1/2/0.0 {
    csnp-interval 30;
  }
  interface lo0.0;
}
```

If you are done configuring the device, enter **commit** from configuration mode. Repeat the configuration on Device R2.

## Verification

Confirm that the configuration is working properly.

- [Verifying the CSNP Interval on page 366](#)
- [Checking the CSNP Statistics on page 367](#)
- [Checking the IS-IS Log on page 368](#)

---

### Verifying the CSNP Interval

**Purpose** Check the CSNP interval setting on the IS-IS interface.

**Action** From operational mode, enter the **show isis interface extensive** command.

```
user@R1> show isis interface extensive

IS-IS interface database:
fe-1/2/0.0
  Index: 70, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 30 s, Loose Hello padding
  Adjacency advertisement: Advertise
  Level 1
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
    Designated Router: R2.02 (not us)
  Level 2
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
    Designated Router: R2.02 (not us)
```

**Meaning** The output shows that the CSNP interval is set to 30 seconds.

### Checking the CSNP Statistics

**Purpose** Checking the number of CSNPs sent and received.

**Action** From operational mode, enter the **show isis statistics** command.

```
user@R1> show isis statistics
```

IS-IS statistics for R1:

| PDU type    | Received | Processed | Drops | Sent | Rexmit |
|-------------|----------|-----------|-------|------|--------|
| LSP         | 5        | 5         | 0     | 3    | 0      |
| IIH         | 94       | 20        | 0     | 43   | 0      |
| <b>CSNP</b> | <b>6</b> | <b>6</b>  | 0     | 0    | 0      |
| PSNP        | 0        | 0         | 0     | 0    | 0      |
| Unknown     | 0        | 0         | 0     | 0    | 0      |
| Totals      | 105      | 31        | 0     | 46   | 0      |

Total packets received: 105 Sent: 46

SNP queue length: 0 Drops: 0

LSP queue length: 0 Drops: 0

SPF runs: 5

Fragments rebuilt: 5

LSP regenerations: 0

Purges initiated: 0

-----

```
user@R2> show isis statistics
```

IS-IS statistics for R2:

| PDU type    | Received | Processed | Drops    | Sent     | Rexmit |
|-------------|----------|-----------|----------|----------|--------|
| LSP         | 3        | 3         | 0        | 5        | 0      |
| IIH         | 35       | 11        | 0        | 86       | 0      |
| <b>CSNP</b> | <b>0</b> | <b>0</b>  | <b>0</b> | <b>6</b> | 0      |
| PSNP        | 0        | 0         | 0        | 0        | 0      |
| Unknown     | 0        | 0         | 0        | 0        | 0      |
| Totals      | 38       | 14        | 0        | 97       | 0      |

Total packets received: 38 Sent: 97

SNP queue length: 0 Drops: 0

LSP queue length: 0 Drops: 0

SPF runs: 7

Fragments rebuilt: 7

LSP regenerations: 0

Purges initiated: 0

**Meaning** The output shows the number of CSNPs sent and received on Device R1 and Device R2.



**NOTE:** On broadcast links, only the designated intermediate system (DIS) sends CSNPs.

### Checking the IS-IS Log

**Purpose** Check the IS-IS trace log to view the interval between packets.

**Action** From operational mode, enter the **show log isis-trace | match csn** command.

```
user@R1> show log isis-trace | match csn
```

```
Jun 18 14:36:19.504064 Received L1 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:36:19.523065 Received L2 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:36:48.904120 Received L1 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:36:48.916425 Received L2 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:37:14.954447 Received L1 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:37:14.971329 Received L2 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:37:44.227106 Received L1 CSN, source R2, interface fe-1/2/0.0
Jun 18 14:37:44.244181 Received L2 CSN, source R2, interface fe-1/2/0.0
```

**Meaning** The output shows that Level 1 and Level 2 CSNPs are being received roughly every 30 seconds.

**Related Documentation**

- [Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces on page 363](#)
- [Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces on page 358](#)

## Understanding IS-IS Mesh Groups

A *mesh group* is a set of routing devices that are fully connected. That is, they have a fully meshed topology.

Junos OS supports IS-IS mesh groups as documented in RFC 2973, *IS-IS Mesh Groups*.

When link-state PDUs are being flooded throughout an area, each router within a mesh group receives only a single copy of a link-state PDU instead of receiving one copy from each neighbor, thus minimizing the overhead associated with the flooding of link-state PDUs.

Mesh groups provide a scaling method for the flooding subsystem. We recommend that you deploy mesh groups when your network design has a dense flooding topology. For example, consider the classical overlay topologies of the 1990s where 200 routers were fully meshed using permanent virtual circuits (PVCs) over an ATM core, because ATM

was the only high-speed technology at the time. A PVC is a software-defined logical connection in a network such as a Frame Relay network.

What has changed since the 1990s is that IP and MPLS technology have reduced the ATM layer and removed the need for overlay meshing. The flooding graphs have become sparse in almost all practical deployments. In service provider networks, overlay networks are no longer used.

In enterprise networks, dense flooding graphs that, for example, lease a Layer 2 VPN service (an overlay network) to fully mesh its WAN routers might continue to be a useful architecture. In such cases, mesh groups might be useful.

#### Related Documentation

- [Example: Configuring Mesh Groups of IS-IS Interfaces on page 369](#)

## Example: Configuring Mesh Groups of IS-IS Interfaces

This example shows how to configure mesh groups of IS-IS interfaces.

- [Requirements on page 369](#)
- [Overview on page 369](#)
- [Configuration on page 370](#)
- [Verification on page 373](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.

### Overview

When link-state PDUs are being flooded throughout an area, each router within a mesh group receives only a single copy of a link-state PDU instead of receiving one copy from each neighbor, thus minimizing the overhead associated with the flooding of link-state PDUs.

To create a mesh group and designate that an interface be part of the group, assign a mesh-group number to all the routing device interfaces in the group:


```
mesh-group value;
```

To prevent an interface in the mesh group from flooding link-state PDUs, configure blocking on that interface:

```
mesh-group blocked;
```

[Figure 33 on page 370](#) shows the topology used in this example.

Figure 33: IS-IS Mesh Topology

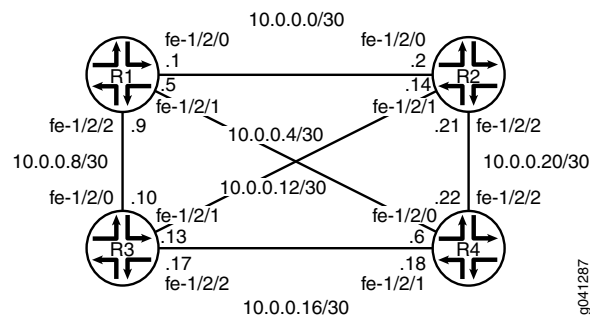

“CLI Quick Configuration” on page 370 shows the configuration for all of the devices in Figure 33 on page 370. The section “Step-by-Step Procedure” on page 371 describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 0 description to-R2
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R4
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.5/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R3
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis interface fe-1/2/0.0 mesh-group 1
set protocols isis interface fe-1/2/1.0 mesh-group 1
set protocols isis interface fe-1/2/2.0 mesh-group 1
set protocols isis interface lo0.0

```

**Device R2**

```

set interfaces fe-1/2/0 unit 0 description to-R1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R1
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.14/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R1
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.21/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols isis interface fe-1/2/0.2 mesh-group 1

```

```

set protocols isis interface fe-1/2/1.0 mesh-group 1
set protocols isis interface fe-1/2/2.0 mesh-group 1
set protocols isis interface lo0.0

```

**Device R3**

```

set interfaces fe-1/2/0 unit 0 description to-R1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R2
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R4
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set protocols isis interface fe-1/2/0.0 mesh-group 1
set protocols isis interface fe-1/2/1.0 mesh-group 1
set protocols isis interface fe-1/2/2.0 mesh-group 1
set protocols isis interface lo0.0

```

**Device R4**

```

set interfaces fe-1/2/0 unit 0 description to-R1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R3
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R2
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set protocols isis interface fe-1/2/0.0 mesh-group 1
set protocols isis interface fe-1/2/1.0 mesh-group 1
set protocols isis interface fe-1/2/2.0 mesh-group 1
set protocols isis interface lo0.0

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure an IS-IS mesh group:

1. Configure the interfaces.

```

[edit interfaces]
user@R1# set fe-1/2/0 unit 0 description to-R2
user@R1# set fe-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set fe-1/2/0 unit 0 family iso
user@R1# set fe-1/2/1 unit 0 description to-R4
user@R1# set fe-1/2/1 unit 0 family inet address 10.0.0.5/30

```

```

user@R1# set fe-1/2/1 unit 0 family iso
user@R1# set fe-1/2/2 unit 0 description to-R3
user@R1# set fe-1/2/2 unit 0 family inet address 10.0.0.9/30
user@R1# set fe-1/2/2 unit 0 family iso
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00

```

2. Enable IS-IS on the interfaces, and assign a mesh group number.

```

[edit protocols isis]
user@R1# set interface fe-1/2/0.0 mesh-group 1
user@R1# set interface fe-1/2/1.0 mesh-group 1
user@R1# set interface fe-1/2/2.0 mesh-group 1
user@R1# set interface lo0.0

```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R1# show interfaces
fe-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
fe-1/2/1 {
  unit 0 {
    description to-R4;
    family inet {
      address 10.0.0.5/30;
    }
    family iso;
  }
}
fe-1/2/2 {
  unit 0 {
    description to-R3;
    family inet {
      address 10.0.0.9/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
  }
}

```



```

    }
    family iso {
        address 49.0002.0192.0168.0001.00;
    }
}

```

```

user@R1# show protocols
isis {
    interface fe-1/2/0.0 {
        mesh-group 1;
    }
    interface fe-1/2/1.0 {
        mesh-group 1;
    }
    interface fe-1/2/2.0 {
        mesh-group 1;
    }
    interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the Interface Mesh Group on page 373](#)
- [Checking the IS-IS Statistics on page 374](#)

### Checking the Interface Mesh Group

**Purpose** Verify that the mesh group is enabled on the IS-IS interfaces.

**Action** From operational mode, enter the **show isis interface extensive** command.

```

user@R1> show isis interface extensive

```

```

IS-IS interface database:
lo0.0
  Index: 68, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled, Loose Hello padding
  Adjacency advertisement: Advertise
  Level 1
    Adjacencies: 0, Priority: 64, Metric: 0
    Passive
  Level 2
    Adjacencies: 0, Priority: 64, Metric: 0
    Passive
fe-1/2/0.1
  Index: 73, State: 0x206, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 10 s, Loose Hello padding
  Adjacency advertisement: Advertise

```

```

CSNP interval: disabled, Mesh group: 1
Level 1
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
Designated Router: tp5-R2.03 (not us)
Level 2
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
Designated Router: tp5-R2.03 (not us)
fe-1/2/1.0
Index: 75, State: 0x206, Circuit id: 0x1, Circuit type: 3
LSP interval: 100 ms, CSNP interval: 10 s, Loose Hello padding
Adjacency advertisement: Advertise
CSNP interval: disabled, Mesh group: 1
Level 1
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
Designated Router: tp5-R4.03 (not us)
Level 2
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
Designated Router: tp5-R4.03 (not us)
fe-1/2/2.0
Index: 76, State: 0x206, Circuit id: 0x1, Circuit type: 3
LSP interval: 100 ms, CSNP interval: 10 s, Loose Hello padding
Adjacency advertisement: Advertise
CSNP interval: disabled, Mesh group: 1
Level 1
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
Designated Router: tp5-R3.02 (not us)
Level 2
Adjacencies: 1, Priority: 64, Metric: 10
Hello Interval: 9.000 s, Hold Time: 27 s
Designated Router: tp5-R3.02 (not us)

```

**Meaning** **Mesh group:1** in the output shows that the mesh group is enabled as expected.

### Checking the IS-IS Statistics

**Purpose** Verify that the number of link-state PDUs received and sent is less than what it would be if the mesh group were not enabled.

**Action** From operational mode, enter the **show isis statistics** command.

```
user@R1> show isis statistics
```

IS-IS statistics for tp5-R1:

| PDU type   | Received  | Processed | Drops    | Sent      | Rexmit   |
|------------|-----------|-----------|----------|-----------|----------|
| <b>LSP</b> | <b>73</b> | <b>73</b> | <b>0</b> | <b>37</b> | <b>0</b> |
| IIH        | 4463      | 85        | 0        | 1525      | 0        |
| CSNP       | 1294      | 1294      | 0        | 0         | 0        |
| PSNP       | 0         | 0         | 0        | 2         | 0        |
| Unknown    | 0         | 0         | 0        | 0         | 0        |
| Totals     | 5830      | 1452      | 0        | 1564      | 0        |

```
Total packets received: 5830 Sent: 1564
```

```
SNP queue length: 0 Drops: 0
```

```
LSP queue length: 0 Drops: 0
```

```
SPF runs: 26
```

```
Fragments rebuilt: 15
```

```
LSP regenerations: 4
```

```
Purges initiated: 0
```

**Meaning** After the adjacencies have been up for about 38 minutes, the output shows that Device R1 has received 73 link-state PDUs and sent 37 link-state PDUs. In the same topology in the same amount of time without the mesh group enabled, Device R1 would have received roughly 156 link-state PDUs and sent roughly 117 link-state PDUs.

**Related Documentation**

- [Understanding IS-IS Mesh Groups on page 368](#)



## CHAPTER 11

# Configuring IS-IS CLNS

- [Understanding IS-IS for CLNS on page 377](#)
- [Example: Configuring IS-IS for CLNS on page 377](#)

## Understanding IS-IS for CLNS

---

IS-IS extensions provide the basic interior gateway protocol (IGP) support for collecting intradomain routing information for Connectionless Network Service (CLNS) destinations within a CLNS network. Routers that learn host addresses through End System-to-Intermediate System (ES-IS) can advertise the addresses to other routers (intermediate systems) by using IS-IS.

For more information about IS-IS, see the ISO 10589 standard.

- Related Documentation**
- [CLNS Overview](#)
  - [Example: Configuring IS-IS for CLNS on page 377](#)

## Example: Configuring IS-IS for CLNS

---

This example shows how to create a routing instance and enable IS-IS protocol on all interfaces.

- [Requirements on page 377](#)
- [Overview on page 377](#)
- [Configuration on page 378](#)
- [Verification on page 379](#)

### Requirements

Before you begin, configure the network interfaces. See [Interfaces Feature Guide for Security Devices](#).

### Overview

The configuration instructions in this topic describe how to create a routing-instance called `aaaa`, enable IS-IS on all interfaces, and define BGP export policy name (`dist-bgp`), family (ISO), and protocol (BP), and apply the export policy to IS-IS.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
set routing-instances aaaa protocols isis clns-routing
set routing-instances aaaa protocols isis interface all
set routing-instances aaaa protocols isis no-ipv4-routing no-ipv6-routing
set policy-options policy-statement dist-bgp from family iso protocol bgp
set policy-options policy-statement dist-bgp then accept
set routing-instances aaaa protocols isis export dist-bgp
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode*.

To configure IS-IS for CLNS:

1. Configure the routing instance.

```
[edit]
user@host# edit routing-instances aaaa
```

2. Enable CLNS routing.

```
[edit routing-instances aaaa]
user@host# set protocols isis clns-routing
```

3. Enable IS-IS on all interfaces.

```
[edit routing-instances aaaa]
user@host# set protocols isis interface all
```

4. (Optional) Disable IPv4 and IPv6 routing to configure a pure CLNS network .

```
[edit routing-instances aaaa]
user@host# set protocols isis no-ipv4-routing no-ipv6-routing
```

5. Define the BGP export policy name, family, and protocol.

```
[edit policy-options]
user@host# set policy-statement dist-bgp from family iso protocol bgp
```

6. Define the action for the export policy.

```
[edit policy-options]
user@host# set policy-statement dist-bgp then accept
```

7. Apply the export policy to IS-IS.

```
[edit routing-instances aaaa]
user@host# set protocols isis export dist-bgp
```

**Results** From configuration mode, confirm your configuration by entering the **show routing-instances** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit]
user@host# show routing-instances
aaaa {
  protocols {
    isis {
      export dist-bgp;
      no-ipv4-routing;
      no-ipv6-routing;
      clns-routing;
      interface all;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying Routing-Instance for CLNS on page 379](#)
- [Verifying IS-IS for CLNS on page 379](#)

### Verifying Routing-Instance for CLNS

---

**Purpose** Verify that the policy options are enabled for the routing instance.

**Action** From operational mode, enter the **show routing-instances** command.

### Verifying IS-IS for CLNS

---

**Purpose** Verify that IS-IS is enabled.

**Action** From operational mode, enter the **show protocols** command.

- Related Documentation**
- *CLNS Configuration Overview*
  - [Understanding IS-IS for CLNS on page 377](#)
  - *Verifying a CLNS VPN Configuration*



# Configuring IS-IS on Logical Systems

- [Introduction to Logical Systems on page 381](#)
- [Example: Configuring IS-IS on Logical Systems Within the Same Router on page 383](#)
- [Example: Configuring an IS-IS Default Route Policy on Logical Systems on page 394](#)

## Introduction to Logical Systems

---

For many years, engineers have combined power supplies, routing hardware and software, forwarding hardware and software, and physical interfaces into a networking device known as a router. Networking vendors have created large routers and small routers, but all routers have been placed into service as individual devices. As a result, the router has been considered a single physical device for most of its history.

The concept of logical systems breaks with this tradition. With the Junos<sup>®</sup> operating system (Junos OS), you can partition a single router into multiple logical devices that perform independent routing tasks. Because logical systems perform a subset of the tasks once handled by the main router, logical systems offer an effective way to maximize the use of a single routing or switching platform.



**NOTE:** Beginning with Junos OS Release 9.3, the logical router feature has been renamed logical system.

All configuration statements, operational commands, show command output, error messages, log messages, and SNMP MIB objects that contain the string `logical-router` have been changed to `logical-system`.

Traditionally, service provider network design requires multiple layers of switches and routers. These devices transport packet traffic between customers. As seen on the left side of [Figure 34 on page 382](#), access devices are connected to edge devices, which are in turn connected to core devices.

However, this complexity can lead to challenges in maintenance, configuration, and operation. To reduce such complexity, Juniper Networks supports logical systems. Logical systems perform a subset of the actions of the main router and have their own unique routing tables, interfaces, policies, and routing instances. As shown on the right side of [Figure 34 on page 382](#), a set of logical systems within a single router can handle the functions previously performed by several small routers.



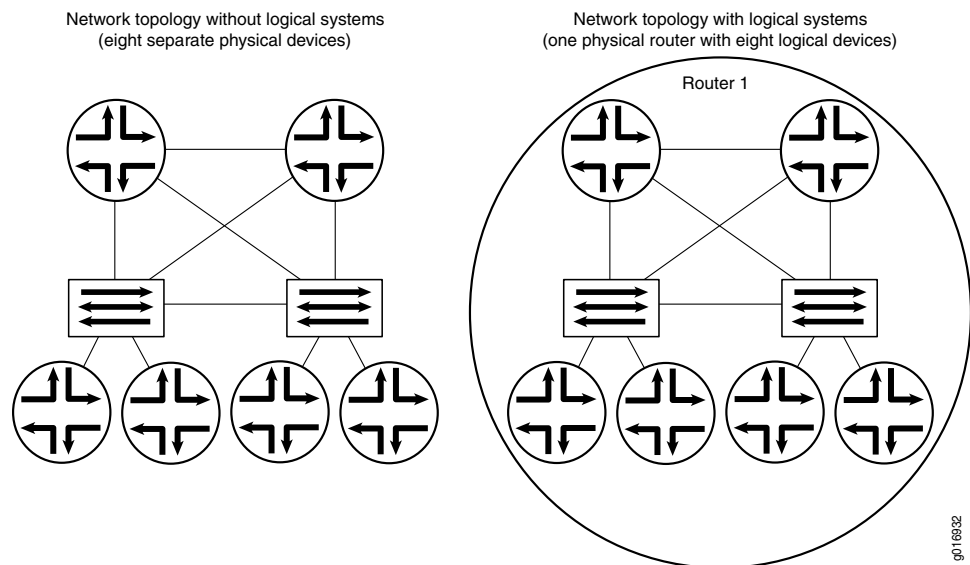
**Figure 34: Logical Systems Concepts**

Figure 35 on page 382 shows the Junos OS architecture without logical systems configured. Figure 36 on page 383 shows the Junos OS architecture when logical systems are configured. Note that each logical system runs its own routing protocol process (rpd).

**Figure 35: Junos OS Without Logical Systems**

*Figure 36: Junos OS with Logical Systems*

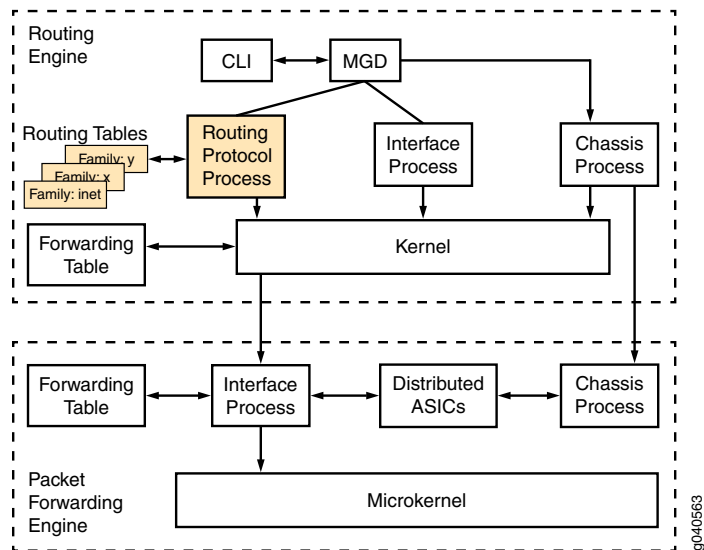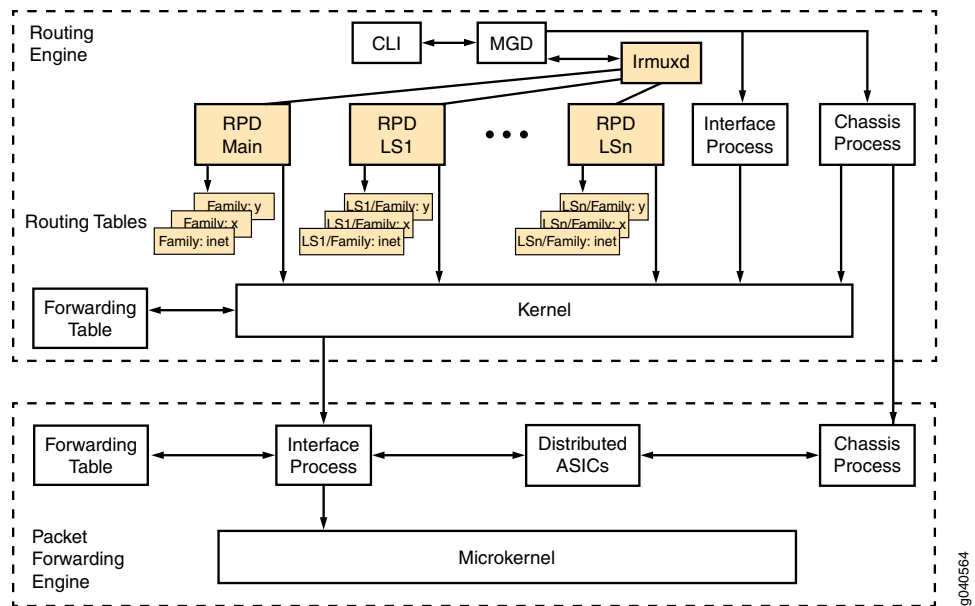

| Release History Table | Release | Description                                                                                      |
|-----------------------|---------|--------------------------------------------------------------------------------------------------|
|                       | 9.3     | Beginning with Junos OS Release 9.3, the logical router feature has been renamed logical system. |

## Related Documentation

- *Logical Systems Operations and Restrictions*
- *Junos OS Features That Are Supported on Logical Systems*

## Example: Configuring IS-IS on Logical Systems Within the Same Router

This example shows how to configure an IS-IS network by using multiple logical systems that are running on a single physical router. The logical systems are connected by logical tunnel interfaces.

- Requirements on page 383
- Overview on page 384
- Configuration on page 384
- Verification on page 389

## Requirements


You must connect the logical systems by using logical tunnel (lt) interfaces. See *Example: Connecting Logical Systems Within the Same Device Using Logical Tunnel Interfaces on MX Series Routers and EX Series Switches*.

## Overview

This example shows an IS-IS configuration with three logical systems running on one physical router. Each logical system has its own routing table. The configuration enables the protocol on all logical tunnel interfaces that participate in the IS-IS domain.

Figure 37 on page 384 shows the sample network.

Figure 37: IS-IS on Logical Systems

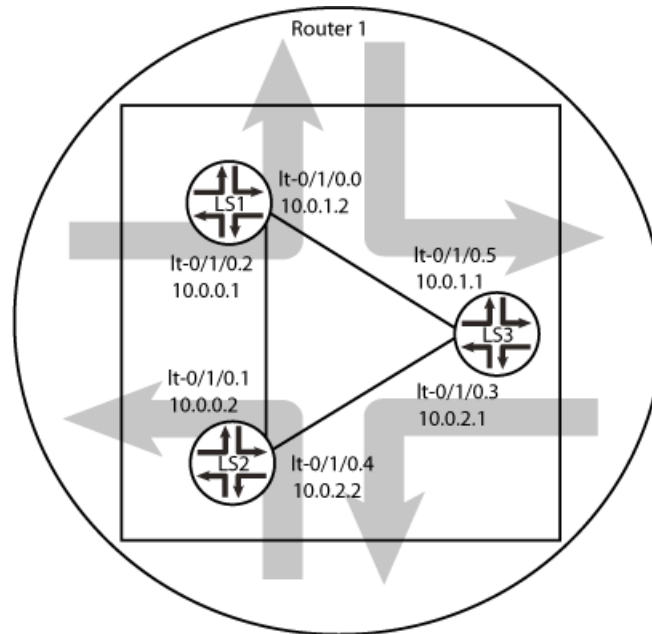

9040923

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter commit from configuration mode.

```
set logical-systems LS1 interfaces lt-0/1/0 unit 2 description LS1->LS2
set logical-systems LS1 interfaces lt-0/1/0 unit 2 encapsulation ethernet
set logical-systems LS1 interfaces lt-0/1/0 unit 2 peer-unit 1
set logical-systems LS1 interfaces lt-0/1/0 unit 2 family inet address 10.0.0.1/30
set logical-systems LS1 interfaces lt-0/1/0 unit 2 family iso
set logical-systems LS1 interfaces lt-0/1/0 unit 0 description LS1->LS3
set logical-systems LS1 interfaces lt-0/1/0 unit 0 encapsulation ethernet
set logical-systems LS1 interfaces lt-0/1/0 unit 0 peer-unit 5
set logical-systems LS1 interfaces lt-0/1/0 unit 0 family inet address 10.0.1.2/30
set logical-systems LS1 interfaces lt-0/1/0 unit 0 family iso
set logical-systems LS1 interfaces lo0 unit 1 family iso address 49.0001.1720.1600.1001.00
set logical-systems LS1 protocols isis interface lt-0/1/0.0
set logical-systems LS1 protocols isis interface lt-0/1/0.2
set logical-systems LS1 protocols isis interface lo0.1 passive
```

```

set logical-systems LS2 interfaces lt-0/1/0 unit 1 description LS2->LS1
set logical-systems LS2 interfaces lt-0/1/0 unit 1 encapsulation ethernet
set logical-systems LS2 interfaces lt-0/1/0 unit 1 peer-unit 2
set logical-systems LS2 interfaces lt-0/1/0 unit 1 family inet address 10.0.0.2/30
set logical-systems LS2 interfaces lt-0/1/0 unit 1 family iso
set logical-systems LS2 interfaces lt-0/1/0 unit 4 description LS2->LS3
set logical-systems LS2 interfaces lt-0/1/0 unit 4 encapsulation ethernet
set logical-systems LS2 interfaces lt-0/1/0 unit 4 peer-unit 3
set logical-systems LS2 interfaces lt-0/1/0 unit 4 family inet address 10.0.2.2/30
set logical-systems LS2 interfaces lt-0/1/0 unit 4 family iso
set logical-systems LS2 interfaces lo0 unit 2 family iso address
  49.0001.1720.1600.2002.00
set logical-systems LS2 protocols isis interface lt-0/1/0.1
set logical-systems LS2 protocols isis interface lt-0/1/0.4
set logical-systems LS2 protocols isis interface lo0.2 passive
set logical-systems LS3 interfaces lt-0/1/0 unit 3 description LS3->LS2
set logical-systems LS3 interfaces lt-0/1/0 unit 3 encapsulation ethernet
set logical-systems LS3 interfaces lt-0/1/0 unit 3 peer-unit 4
set logical-systems LS3 interfaces lt-0/1/0 unit 3 family inet address 10.0.2.1/30
set logical-systems LS3 interfaces lt-0/1/0 unit 3 family iso
set logical-systems LS3 interfaces lt-0/1/0 unit 5 description LS3->LS1
set logical-systems LS3 interfaces lt-0/1/0 unit 5 encapsulation ethernet
set logical-systems LS3 interfaces lt-0/1/0 unit 5 peer-unit 0
set logical-systems LS3 interfaces lt-0/1/0 unit 5 family inet address 10.0.1.1/30
set logical-systems LS3 interfaces lt-0/1/0 unit 5 family iso
set logical-systems LS3 interfaces lo0 unit 3 family iso address 49.0001.1234.1600.2231.00
set logical-systems LS3 protocols isis interface lt-0/1/0.5
set logical-systems LS3 protocols isis interface lt-0/1/0.3
set logical-systems LS3 protocols isis interface lo0.3 passive

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS on logical systems:

1. Configure the logical tunnel interface on Logical System LS1 connecting to Logical System LS2.

```

[edit logical-systems LS1]
user@host# set interfaces lt-0/1/0 unit 2 description LS1->LS2
user@host# set interfaces lt-0/1/0 unit 2 encapsulation ethernet
user@host# set interfaces lt-0/1/0 unit 2 peer-unit 1
user@host# set interfaces lt-0/1/0 unit 2 family inet address 10.0.0.1/30
user@host# set interfaces lt-0/1/0 unit 2 family iso

```

2. Configure the logical tunnel interface on Logical System LS1 connecting to Logical System LS3.

```

[edit logical-systems LS1]
user@host# set interfaces lt-0/1/0 unit 0 description LS1->LS3
user@host# set interfaces lt-0/1/0 unit 0 encapsulation ethernet

```

```

user@host# set interfaces lt-0/1/0 unit 0 peer-unit 5
user@host# set interfaces lt-0/1/0 unit 0 family inet address 10.0.1.2/30
user@host# set interfaces lt-0/1/0 unit 0 family iso

```

3. Configure the logical tunnel interface on Logical System LS2 connecting to Logical System LS1.

```

[edit logical-systems LS2]
user@host# set interfaces lt-0/1/0 unit 1 description LS2->LS1
user@host# set interfaces lt-0/1/0 unit 1 encapsulation ethernet
user@host# set interfaces lt-0/1/0 unit 1 peer-unit 2
user@host# set interfaces lt-0/1/0 unit 1 family inet address 10.0.0.2/30
user@host# set interfaces lt-0/1/0 unit 1 family iso

```

4. Configure the logical tunnel interface on Logical System LS2 connecting to Logical System LS3.

```

[edit logical-systems LS2]
user@host# set interfaces lt-0/1/0 unit 4 description LS2->LS3
user@host# set interfaces lt-0/1/0 unit 4 encapsulation ethernet
user@host# set interfaces lt-0/1/0 unit 4 peer-unit 3
user@host# set interfaces lt-0/1/0 unit 4 family inet address 10.0.2.2/30
user@host# set interfaces lt-0/1/0 unit 4 family iso

```

5. Configure the logical tunnel interface on Logical System LS3 connecting to Logical System LS2.

```

[edit logical-systems LS3]
user@host# set interfaces lt-0/1/0 unit 3 description LS3->LS2
user@host# set interfaces lt-0/1/0 unit 3 encapsulation ethernet
user@host# set interfaces lt-0/1/0 unit 3 peer-unit 4
user@host# set interfaces lt-0/1/0 unit 3 family inet address 10.0.2.1/30
user@host# set interfaces lt-0/1/0 unit 3 family iso

```

6. Configure the logical tunnel interface on Logical System LS3 connecting to Logical System LS1.

```

[edit logical-systems LS3]
user@host# set interfaces lt-0/1/0 unit 5 description LS3->LS1
user@host# set interfaces lt-0/1/0 unit 5 encapsulation ethernet
user@host# set interfaces lt-0/1/0 unit 5 peer-unit 0
user@host# set interfaces lt-0/1/0 unit 5 family inet address 10.0.1.1/30
user@host# set interfaces lt-0/1/0 unit 5 family iso

```

7. Configure the ISO address on the loopback interface for the three logical systems.

```

[edit logical-systems LS1]
user@host# set interfaces lo0 unit 1 family iso address 49.0001.1720.1600.1001.00

```

```
user@host# set protocols isis interface lo0.1 passive
```

```
[edit logical-systems LS2]
user@host# set interfaces lo0 unit 2 family iso address 49.0001.1720.1600.2002.00
user@host# set protocols isis interface lo0.2 passive
```

```
[edit logical-systems LS3]
user@host# set interfaces lo0 unit 3 family iso address 49.0001.1234.1600.2231.00
user@host# set protocols isis interface lo0.3 passive
```

8. Configure IS-IS on all the interfaces.

```
[edit logical-systems LS1 protocols isis]
user@host# set interface lt-0/1/0.0
user@host# set interface lt-0/1/0.2
```

```
[edit logical-systems LS2 protocols isis]
user@host# set interface lt-0/1/0.1
user@host# set interface lt-0/1/0.4
```

```
[edit logical-systems LS3 protocols isis]
user@host# set interface lt-0/1/0.5
user@host# set interface lt-0/1/0.3
```

9. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

## Results

From configuration mode, confirm your configuration by issuing the **show logical-systems** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show logical-systems
LS1 {
  interfaces {
    lt-0/1/0 {
      unit 0 {
        description LS1->LS3;
        encapsulation ethernet;
        peer-unit 5;
        family inet {
          address 10.0.1.2/30;
        }
        family iso;
      }
      unit 2 {
```

```

        description LS1->LS2;
        encapsulation ethernet;
        peer-unit 1;
        family inet {
            address 10.0.0.1/30;
        }
        family iso;
    }
}
lo0 {
    unit 1 {
        family iso {
            address 49.0001.1720.1600.1001.00;
        }
    }
}
}
protocols {
    isis {
        interface lt-0/1/0.0;
        interface lt-0/1/0.2;
        interface lo0.1 {
            passive;
        }
    }
}
}
LS2 {
    interfaces {
        lt-0/1/0 {
            unit 1 {
                description LS2->LS1;
                encapsulation ethernet;
                peer-unit 2;
                family inet {
                    address 10.0.0.2/30;
                }
                family iso;
            }
            unit 4 {
                description LS2->LS3;
                encapsulation ethernet;
                peer-unit 3;
                family inet {
                    address 10.0.2.2/30;
                }
                family iso;
            }
        }
    }
    lo0 {
        unit 2 {
            family iso {
                address 49.0001.1720.1600.2002.00;
            }
        }
    }
}
}
protocols {
    isis {
        interface lt-0/1/0.1;
    }
}
}

```



```

        interface lt-0/1/0.4;
        interface lo0.2 {
            passive;
        }
    }
}
LS3 {
    interfaces {
        lt-0/1/0 {
            unit 3 {
                description LS3->LS2;
                encapsulation ethernet;
                peer-unit 4;
                family inet {
                    address 10.0.2.1/30;
                }
                family iso;
            }
            unit 5 {
                description LS3->LS1;
                encapsulation ethernet;
                peer-unit 0;
                family inet {
                    address 10.0.1.1/30;
                }
                family iso;
            }
        }
        lo0 {
            unit 3 {
                family iso {
                    address 49.0001.1234.1600.2231.00;
                }
            }
        }
    }
    protocols {
        isis {
            interface lt-0/1/0.3;
            interface lt-0/1/0.5;
            interface lo0.3 {
                passive;
            }
        }
    }
}

```

## Verification

Confirm that the configuration is working properly.

- [Verifying That the Logical Systems Are Up on page 390](#)
- [Verifying Connectivity Between the Logical Systems on page 390](#)

### Verifying That the Logical Systems Are Up

**Purpose** Make sure that the interfaces are properly configured.

**Action** user@host> show interfaces terse

| Interface  | Admin | Link | Proto | Local       | Remote |
|------------|-------|------|-------|-------------|--------|
| ...        |       |      |       |             |        |
| lt-0/1/0   | up    | up   |       |             |        |
| lt-0/1/0.0 | up    | up   | inet  | 10.0.1.2/30 |        |
|            |       |      | iso   |             |        |
| lt-0/1/0.1 | up    | up   | inet  | 10.0.0.2/30 |        |
|            |       |      | iso   |             |        |
| lt-0/1/0.2 | up    | up   | inet  | 10.0.0.1/30 |        |
|            |       |      | iso   |             |        |
| lt-0/1/0.3 | up    | up   | inet  | 10.0.2.1/30 |        |
|            |       |      | iso   |             |        |
| lt-0/1/0.4 | up    | up   | inet  | 10.0.2.2/30 |        |
|            |       |      | iso   |             |        |
| lt-0/1/0.5 | up    | up   | inet  | 10.0.1.1/30 |        |
|            |       |      | iso   |             |        |
| ...        |       |      |       |             |        |

### Verifying Connectivity Between the Logical Systems

**Purpose** Make sure that the IS-IS adjacencies are established by checking the logical system routing entries and by pinging the logical systems.

**Action** user@host> show route logical-system LS1

```
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30      *[Direct/0] 3w0d 01:37:52
                 > via lt-0/1/0.2
10.0.0.1/32     *[Local/0] 3w0d 01:37:52
                 Local via lt-0/1/0.2
10.0.1.0/30     *[Direct/0] 3w0d 01:37:52
                 > via lt-0/1/0.0
10.0.1.2/32     *[Local/0] 3w0d 01:37:52
                 Local via lt-0/1/0.0
10.0.2.0/30     *[IS-IS/15] 3w0d 01:37:13, metric 20
                 > to 10.0.1.1 via lt-0/1/0.0
                 to 10.0.0.2 via lt-0/1/0.2

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

49.0001.1720.1600.1001/72
                 *[Direct/0] 3w0d 01:37:52
                 > via lo0.1
```

user@host> show route logical-system LS2

```
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30      *[Direct/0] 3w0d 01:38:01
                 > via lt-0/1/0.1
10.0.0.2/32     *[Local/0] 3w0d 01:38:01
                 Local via lt-0/1/0.1
10.0.1.0/30     *[IS-IS/15] 3w0d 01:37:01, metric 20
                 to 10.0.0.1 via lt-0/1/0.1
                 > to 10.0.2.1 via lt-0/1/0.4
10.0.2.0/30     *[Direct/0] 3w0d 01:38:01
                 > via lt-0/1/0.4
10.0.2.2/32     *[Local/0] 3w0d 01:38:01
                 Local via lt-0/1/0.4

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

49.0001.1720.1600.2002/72
                 *[Direct/0] 3w0d 01:38:01
                 > via lo0.2
```

user@host> show route logical-system LS3

```
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/30     *[IS-IS/15] 3w0d 01:37:10, metric 20
                 to 10.0.2.2 via lt-0/1/0.3
                 > to 10.0.1.2 via lt-0/1/0.5
10.0.1.0/30     *[Direct/0] 3w0d 01:38:10
                 > via lt-0/1/0.5
```

```

10.0.1.1/32      *[Local/0] 3w0d 01:38:11
                  Local via lt-0/1/0.5
10.0.2.0/30      *[Direct/0] 3w0d 01:38:11
                  > via lt-0/1/0.3
10.0.2.1/32      *[Local/0] 3w0d 01:38:11
                  Local via lt-0/1/0.3

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

49.0001.1234.1600.2231/72
                  *[Direct/0] 3w0d 01:38:11
                  > via lo0.3

```

### From LS1, Ping LS3

```

user@host> set cli logical-system LS1

user@host:LS1> ping 10.0.2.1

PING 10.0.2.1 (10.0.2.1): 56 data bytes
64 bytes from 10.0.2.1: icmp_seq=0 ttl=63 time=1.264 ms
64 bytes from 10.0.2.1: icmp_seq=1 ttl=63 time=1.189 ms
64 bytes from 10.0.2.1: icmp_seq=2 ttl=63 time=1.165 ms
^C
--- 10.0.2.1 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.165/1.206/1.264/0.042 ms

```

### From LS3, Ping LS1

```

user@host> set cli logical-system LS3

user@host:LS3> ping 10.0.0.1

PING 10.0.0.1 (10.0.0.1): 56 data bytes
64 bytes from 10.0.0.1: icmp_seq=0 ttl=63 time=1.254 ms
64 bytes from 10.0.0.1: icmp_seq=1 ttl=63 time=1.210 ms
^C
--- 10.0.0.1 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.210/1.232/1.254/0.022 ms

```

### From LS1, Ping LS2

```

user@host> set cli logical-system LS1

user@host:LS1> ping 10.0.2.2

PING 10.0.2.2 (10.0.2.2): 56 data bytes
64 bytes from 10.0.2.2: icmp_seq=0 ttl=64 time=1.240 ms
64 bytes from 10.0.2.2: icmp_seq=1 ttl=64 time=1.204 ms
64 bytes from 10.0.2.2: icmp_seq=2 ttl=64 time=1.217 ms
^C
--- 10.0.2.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.204/1.220/1.240/0.015 ms

```

## From LS2, Ping LS1

```

user@host> set cli logical-system LS2

user@host:LS2> ping 10.0.1.2
PING 10.0.1.2 (10.0.1.2): 56 data bytes
64 bytes from 10.0.1.2: icmp_seq=0 ttl=64 time=1.308 ms
64 bytes from 10.0.1.2: icmp_seq=1 ttl=64 time=1.235 ms
^C
--- 10.0.1.2 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.235/1.272/1.308/0.037 ms

```

## From LS2, Ping LS3

```

user@host> set cli logical-system LS2

user@host:LS2> ping 10.0.1.1
PING 10.0.1.1 (10.0.1.1): 56 data bytes
64 bytes from 10.0.1.1: icmp_seq=0 ttl=64 time=1.253 ms
64 bytes from 10.0.1.1: icmp_seq=1 ttl=64 time=1.194 ms
64 bytes from 10.0.1.1: icmp_seq=2 ttl=64 time=1.212 ms
64 bytes from 10.0.1.1: icmp_seq=3 ttl=64 time=1.221 ms
64 bytes from 10.0.1.1: icmp_seq=4 ttl=64 time=1.195 ms
^C
--- 10.0.1.1 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.194/1.215/1.253/0.022 ms

```

## From LS3, Ping LS2

```

user@host> set cli logical-system LS3

user@host:LS3> ping 10.0.0.2
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: icmp_seq=0 ttl=64 time=1.240 ms
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.217 ms
^C
--- 10.0.0.2 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.217/1.228/1.240/0.012 ms

```

**Related  
Documentation**

- *Example: Creating an Interface on a Logical System*
- *Example: Connecting Logical Systems Within the Same Device Using Logical Tunnel Interfaces on MX Series Routers and EX Series Switches*

## Example: Configuring an IS-IS Default Route Policy on Logical Systems

This example shows logical systems configured on a single physical router and explains how to configure a default route on one logical system.

- [Requirements on page 394](#)
- [Overview on page 394](#)
- [Configuration on page 395](#)
- [Verification on page 397](#)

### Requirements

No special configuration beyond device initialization is required before configuring this example.


### Overview

This example shows a logical system redistributing a default route to other logical systems. All logical systems are running IS-IS. A common reason for a default route is to provide a path for sending traffic destined outside the IS-IS domain.

In this example, the default route is not used for forwarding traffic. The **no-install** statement prevents the route from being installed in the forwarding table of Logical System LS3. If you configure a route so it is not installed in the forwarding table, the route is still eligible to be exported from the routing table to other protocols. The **discard** statement silently drops packets without notice.

[Figure 38 on page 394](#) shows the sample network.

*Figure 38: IS-IS with a Default Route to an ISP*

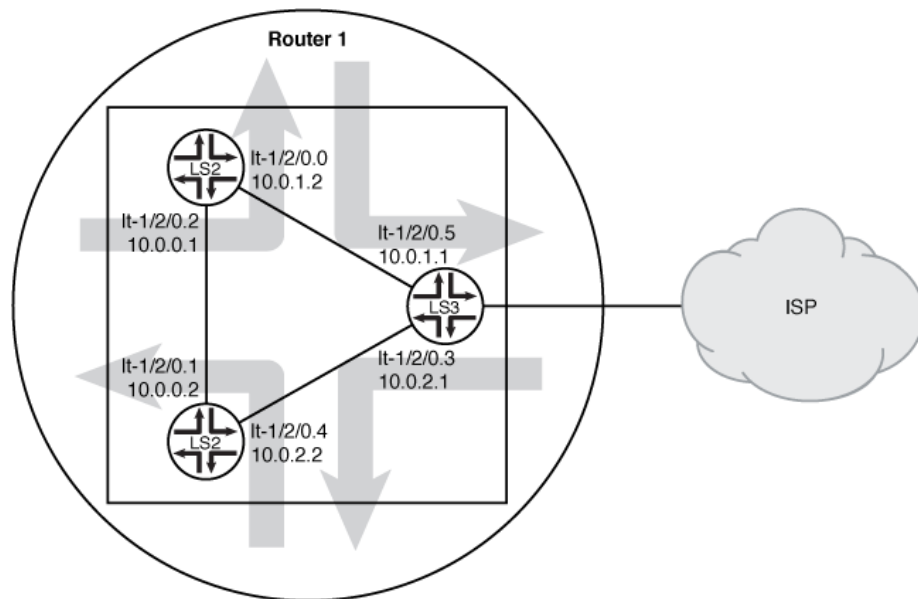

90-40918

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter commit from configuration mode.

```
set logical-systems LS3 interfaces lt-1/2/0 unit 3 description LS3->LS2
set logical-systems LS3 interfaces lt-1/2/0 unit 3 encapsulation ethernet
set logical-systems LS3 interfaces lt-1/2/0 unit 3 peer-unit 4
set logical-systems LS3 interfaces lt-1/2/0 unit 3 family inet address 10.0.2.1/30
set logical-systems LS3 interfaces lt-1/2/0 unit 3 family iso
set logical-systems LS3 interfaces lt-1/2/0 unit 5 description LS3->LS1
set logical-systems LS3 interfaces lt-1/2/0 unit 5 encapsulation ethernet
set logical-systems LS3 interfaces lt-1/2/0 unit 5 peer-unit 0
set logical-systems LS3 interfaces lt-1/2/0 unit 5 family inet address 10.0.1.1/30
set logical-systems LS3 interfaces lt-1/2/0 unit 5 family iso
set logical-systems LS3 interfaces lo0 unit 3 family iso address 49.0001.1234.1600.2231.00
set logical-systems LS3 protocols isis export isis-default
set logical-systems LS3 protocols isis interface lt-1/2/0.3
set logical-systems LS3 protocols isis interface lt-1/2/0.5
set logical-systems LS3 protocols isis interface lo0.3 passive
set logical-systems LS3 routing-options static route 0.0.0.0/0 discard
set logical-systems LS3 routing-options static route 0.0.0.0/0 no-install
set logical-systems LS3 policy-options policy-statement isis-default from protocol static
set logical-systems LS3 policy-options policy-statement isis-default from route-filter
  0.0.0.0/0 exact
set logical-systems LS3 policy-options policy-statement isis-default then accept
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure an IS-IS default route policy on logical systems:

1. Configure the logical tunnel interfaces.

```
[edit logical-systems LS3 interfaces lt-1/2/0]
user@R1# set unit 3 description LS3->LS2
user@R1# set unit 3 encapsulation ethernet
user@R1# set unit 3 peer-unit 4
user@R1# set unit 3 family inet address 10.0.2.1/30
user@R1# set unit 3 family iso
user@R1# set unit 5 description LS3->LS1
user@R1# set unit 5 encapsulation ethernet
user@R1# set unit 5 peer-unit 0
user@R1# set unit 5 family inet address 10.0.1.1/30
user@R1# set unit 5 family iso
[edit logical-systems LS3 interfaces lo0 unit 3]
user@R1# set family iso address 49.0001.1234.1600.2231.00
```

2. Enable IS-IS on the interfaces.

```
[edit logical-systems LS3 protocols isis]
user@R1# set interface lt-1/2/0.3
user@R1# set interface lt-1/2/0.5
user@R1# set interface lo0.3 passive
```

3. Configure the default route on Logical System LS3.

```
[edit logical-systems LS3 routing-options]
user@R1# set static route 0.0.0.0/0 discard
user@R1# set static route 0.0.0.0/0 no-install
```

4. Configure the default route policy on Logical System LS3.

```
[edit logical-systems LS3 policy-options]
user@R1# set policy-statement isis-default from protocol static
user@R1# set policy-statement isis-default from route-filter 0.0.0.0/0 exact
user@R1# set policy-statement isis-default then accept
```

5. Apply the export policy to IS-IS on Logical System LS3.

```
[edit logical-systems LS3 protocols isis]
user@R1# set export isis-default
```

6. If you are done configuring the device, commit the configuration.

```
[edit]
user@R1# commit
```

---

## Results

From configuration mode, confirm your configuration by issuing the **show logical-systems LS3** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show logical-systems LS3
interfaces {
  lt-1/2/0 {
    unit 3 {
      description LS3->LS2;
      encapsulation ethernet;
      peer-unit 4;
      family inet {
        address 10.0.2.1/30;
      }
    }
  }
}
```



```

    family iso;
  }
  unit 5 {
    description LS3->LS1;
    encapsulation ethernet;
    peer-unit 0;
    family inet {
      address 10.0.1.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 3 {
    family iso {
      address 49.0001.1234.1600.2231.00;
    }
  }
}
}
protocols {
  isis {
    export isis-default;
    interface lt-1/2/0.3;
    interface lt-1/2/0.5;
    interface lo0.3 {
      passive;
    }
  }
}
policy-options {
  policy-statement isis-default {
    from {
      protocol static;
      route-filter 0.0.0.0/0 exact;
    }
    then accept;
  }
}
routing-options {
  static {
    route 0.0.0.0/0 {
      discard;
      no-install;
    }
  }
}
}
}

```

## Verification

Confirm that the configuration is working properly.

### Verifying That the Static Route Is Redistributed

---

**Purpose** Make sure that the IS-IS policy is working by checking the routing tables.

**Action** user@R1> show route logical-system LS3

```
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
0.0.0.0/0      *[Static/5] 00:00:45
                Discard
10.0.0.0/30    *[IS-IS/15] 1w0d 10:14:14, metric 20
                to 10.0.2.2 via lt-1/2/0.3
                > to 10.0.1.2 via lt-1/2/0.5
10.0.1.0/30    *[Direct/0] 1w0d 10:15:18
                > via lt-1/2/0.5
10.0.1.1/32    *[Local/0] 1w0d 10:15:18
                Local via lt-1/2/0.5
10.0.2.0/30    *[Direct/0] 1w0d 10:15:18
                > via lt-1/2/0.3
10.0.2.1/32    *[Local/0] 1w0d 10:15:18
                Local via lt-1/2/0.3
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
49.0001.1234.1600.2231/72
                *[Direct/0] 1w0d 10:17:19
                > via lo0.3
```

## user@R1&gt; show route logical-system LS2

```
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
0.0.0.0/0      *[IS-IS/160] 00:01:38, metric 10
                > to 10.0.2.1 via lt-1/2/0.4
10.0.0.0/30    *[Direct/0] 1w0d 10:16:11
                > via lt-1/2/0.1
10.0.0.2/32    *[Local/0] 1w0d 10:16:11
                Local via lt-1/2/0.1
10.0.1.0/30    *[IS-IS/15] 1w0d 10:15:07, metric 20
                > to 10.0.0.1 via lt-1/2/0.1
                to 10.0.2.1 via lt-1/2/0.4
10.0.2.0/30    *[Direct/0] 1w0d 10:16:11
                > via lt-1/2/0.4
10.0.2.2/32    *[Local/0] 1w0d 10:16:11
                Local via lt-1/2/0.4
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
49.0001.1720.1600.2002/72
                *[Direct/0] 1w0d 10:18:12
                > via lo0.2
```

## user@R1&gt; show route logical-system LS1

```
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
0.0.0.0/0      *[IS-IS/160] 00:02:01, metric 10
                > to 10.0.1.1 via lt-1/2/0.0
```

```

10.0.0.0/30      *[Direct/0] 1w0d 10:16:34
                  > via lt-1/2/0.2
10.0.0.1/32     *[Local/0] 1w0d 10:16:34
                  Local via lt-1/2/0.2
10.0.1.0/30     *[Direct/0] 1w0d 10:16:34
                  > via lt-1/2/0.0
10.0.1.2/32     *[Local/0] 1w0d 10:16:34
                  Local via lt-1/2/0.0
10.0.2.0/30     *[IS-IS/15] 1w0d 10:15:55, metric 20
                  to 10.0.1.1 via lt-1/2/0.0
                  > to 10.0.0.2 via lt-1/2/0.2

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

49.0001.1720.1600.1001/72
                  *[Direct/0] 1w0d 10:18:35
                  > via lo0.1

```

**Meaning** The routing table on Logical System LS3 contains the default 0.0.0.0/0 route from protocol **IS-IS**. The routing tables on Logical System LS1 and Logical System LS2 contain the default 0.0.0.0/0 route from protocol **IS-IS**. If Logical System LS1 and Logical System LS2 receive packets destined for networks not specified in their routing tables, those packets will be sent to Logical System LS3 for further processing. This configuration assumes that Logical System LS3 has a connection to an ISP or another external network.

**Related Documentation**

- *Example: Creating an Interface on a Logical System*

## PART 3

# Monitoring and Troubleshooting Network Issues

- [Monitoring Networks on page 403](#)
- [Troubleshooting Network Issues on page 409](#)
- [Troubleshooting IS-IS on page 417](#)



## CHAPTER 13

# Monitoring Networks

- [Example: Tracing Global Routing Protocol Operations on page 403](#)
- [IS-IS Purge Originator Identification Overview on page 407](#)

### Example: Tracing Global Routing Protocol Operations

---

This example shows how to list and view files that are created when you enable global routing trace operations.

- [Requirements on page 403](#)
- [Overview on page 403](#)
- [Configuration on page 404](#)
- [Verification on page 407](#)

#### Requirements

You must have the **view** privilege.

#### Overview

To configure global routing protocol tracing, include the **traceoptions** statement at the **[edit routing-options]** hierarchy level:

```
traceoptions {  
  file filename <files number> <size size> <world-readable | no-world-readable>;  
  flag flag <disable>;  
}
```

The flags in a **traceoptions flag** statement are identifiers. When you use the **set** command to configure a flag, any flags that might already be set are not modified. In the following example, setting the **timer** tracing flag has no effect on the already configured **task** flag. Use the **delete** command to delete a particular flag.

```
[edit routing-options traceoptions]  
user@host# show  
flag task;  
user@host# set traceoptions flag timer  
user@host# show  
flag task;
```

```
flag timer;
user@host# delete traceoptions flag task
user@host# show
flag timer;
```

This example shows how to configure and view a trace file that tracks changes in the routing table. The steps can be adapted to apply to trace operations for any Junos OS hierarchy level that supports trace operations.



**TIP:** To view a list of hierarchy levels that support tracing operations, enter the `help apropos traceoptions` command in configuration mode.

## Configuration

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options traceoptions file routing-table-changes
set routing-options traceoptions file size 10m
set routing-options traceoptions file files 10
set routing-options traceoptions flag route
set routing-options static route 1.1.1.2/32 next-hop 10.0.45.6
```

## Configuring Trace Operations

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the trace operations:

1. Configure trace operations.

```
[edit routing-options traceoptions]
user@host# set file routing-table-changes
user@host# set file size 10m
user@host# set file files 10
user@host# set flag route
```

2. Configure a static route to cause a change in the routing table.

```
[edit routing-options static]
user@host# set route 1.1.1.2/32 next-hop 10.0.45.6
```



3. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

### Viewing the Trace File

#### Step-by-Step Procedure

To view the trace file:

1. In operational mode, list the log files on the system.

```
user@host> file list /var/log
/var/log:
...
routing-table-changes
...
```

2. View the contents of the **routing-table-changes** file.

```
user@host> file show /var/log/routing-table-changes
Dec 15 11:09:29 trace_on: Tracing to "/var/log/routing-table-changes" started
Dec 15 11:09:29.496507
Dec 15 11:09:29.496507 Tracing flags enabled: route
Dec 15 11:09:29.496507
Dec 15 11:09:29.533203 inet_routerid_notify: Router ID: 192.168.4.1
Dec 15 11:09:29.533334 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.533381 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.533420 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.534915 inet_routerid_notify: Router ID: 192.168.4.1
Dec 15 11:09:29.542934 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.549253 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.556878 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.582990 rt_static_reinit: examined 3 static nexthops, 0
unreferenced
Dec 15 11:09:29.589920
Dec 15 11:09:29.589920 task_reconfigure reinitializing done
...
```

3. Filter the output of the log file.

```
user@host> file show /var/log/routing-table-changes | match 1.1.1.2
Dec 15 11:15:30.780314 ADD      1.1.1.2/32      nhid 0 gw 10.0.45.6
      Static pref 5/0 metric at-0/2/0.0 <ctive Int Ext>
Dec 15 11:15:30.782276 KRT Request: send len 216 v104 seq 0 ADD route/user
af 2 table 0 infot 0 addr 1.1.1.2 nhop-type unicast nhindex 663
```

4. View the tracing operations in real time by running the **monitor start** command with an optional **match** condition.

```
user@host> monitor start routing-table-changes | match 1.1.1.2
Aug 10 19:21:40.773467 BGP RECV      0.0.0.0/0
Aug 10 19:21:40.773685 bgp_rcv_nlr: 0.0.0.0/0
```

```
Aug 10 19:21:40.773778 bgp_rcv_nlri: 0.0.0.0/0 belongs to meshgroup
Aug 10 19:21:40.773832 bgp_rcv_nlri: 0.0.0.0/0 qualified bnp->ribact 0x0
12afcb 0x0
```

5. Deactivate the static route.

```
user@host# deactivate routing-options static route 1.1.1.2/32
user@host# commit
```

```
*** routing-table-changes ***
Dec 15 11:42:59.355557 CHANGE 1.1.1.2/32 nhid 663 gw 10.0.45.6
Static pref 5/0 metric at-0/2/0.0 <Delete Int Ext>
Dec 15 11:42:59.426887 KRT Request: send len 216 v104 seq 0 DELETE route/user
af 2 table 0 infot 0 addr 1.1.1.2 nhop-type discard filtidx 0
Dec 15 11:42:59.427366 RELEASE 1.1.1.2/32 nhid 663 gw 10.0.45.6
Static pref 5/0 metric at-0/2/0.0 <Release Delete Int Ext>
```

6. Halt the **monitor** command by pressing Enter and typing **monitor stop**.

```
[Enter]
user@host> monitor stop
```

7. When you are finished troubleshooting, consider deactivating trace logging to avoid any unnecessary impact to system resources.

When configuration is deactivated, it appears in the configuration with the **inactive** tag.

```
[edit routing-options]
user@host# deactivate traceoptions
user@host# commit
```

```
[edit routing-options]
user@host# show
```

```
inactive: traceoptions {
  file routing-table-changes size 10m files 10;
  flag route;
}
static {
  inactive: route 1.1.1.2/32 next-hop 10.0.45.6;
}
```

8. To reactivate trace operations, use the **activate** configuration-mode statement.

```
[edit routing-options]
user@host# activate traceoptions
user@host# commit
```

## Results

From configuration mode, confirm your configuration by entering the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options
traceoptions {
  file routing-table-changes size 10m files 10;
  flag route;
}
static {
  route 1.1.1.2/32 next-hop 10.0.45.6;
}
```

## Verification

Confirm that the configuration is working properly.

### Verifying That the Trace Log File Is Operating

**Purpose** Make sure that events are being written to the log file.

**Action** user@host> show log routing-table-changes

```
Dec 15 11:09:29 trace_on: Tracing to "/var/log/routing-table-changes" started
```

**Related Documentation**

- [Understanding Global Routing Protocol Tracing Operations](#)
- [CLI Explorer](#)

## IS-IS Purge Originator Identification Overview

Starting in Junos OS release 16.2R1, when the IS-IS protocol purges entries from IS-IS link-state database, there is no way to identify the origin of the purge. If there is a need to investigate the cause of the purge, it is difficult to determine the Intermediate system (IS) that initiated the purge. RFC 6232, *Purge Originator Identification TLV for IS-IS* defines a type, length, and value (TLV) that can be added to the purges, to record the system ID of the IS that had initiated the purge. If an IS generates a purge, this TLV is included in the purge, which also has the system ID of the IS. If an IS receives a purge, the Link State Protocol Data Unit (LSP) flooding does not change the LSP contents, and the TLV is propagated with the purge itself. If an IS receives a purge that does not include this TLV, it adds this TLV with both its own system ID and the system ID of the IS from which it received the purge. This allows the IS that receives this purge to log the system ID of the originator, or the upstream source of the purge. This makes it easier to locate the origin of the purge and its cause. This TLV is also helpful in lab environments.

There is a possibility that during a network attack, a low lifetime is generated maliciously for an LSP, which can initiate a purge on timeout. These LSPs with low lifetime need to be filtered out to avoid purges triggered by a low lifetime LSP.

**Release History Table**

| Release | Description                                                                                                                                                      |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16.1    | Starting in Junos OS release 16.2R1, when the IS-IS protocol purges entries from IS-IS link-state database, there is no way to identify the origin of the purge. |

**Related  
Documentation**

- [purge-originator on page 567](#)

## CHAPTER 14

# Troubleshooting Network Issues

- [Working with Problems on Your Network on page 409](#)
- [Isolating a Broken Network Connection on page 410](#)
- [Identifying the Symptoms of a Broken Network Connection on page 411](#)
- [Isolating the Causes of a Network Problem on page 412](#)
- [Taking Appropriate Action for Resolving the Network Problem on page 413](#)
- [Evaluating the Solution to Check Whether the Network Problem Is Resolved on page 414](#)

### Working with Problems on Your Network

**Problem** **Description:** This checklist provides links to troubleshooting basics, an example network, and includes a summary of the commands you might use to diagnose problems with the router and network.


**Table 7: Checklist for Working with Problems on Your Network**

| Tasks                                                                                                   | Command or Action                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>"Isolating a Broken Network Connection" on page 410</b>                                              |                                                                                                                                                                          |
| 1. <a href="#">Identifying the Symptoms of a Broken Network Connection on page 411</a>                  | <code>ping (ip-address   hostname)</code><br><code>show route (ip-address   hostname)</code><br><code>tracert (ip-address   hostname)</code>                             |
| 2. <a href="#">Isolating the Causes of a Network Problem on page 412</a>                                | <code>show &lt; configuration   interfaces   protocols   route &gt;</code>                                                                                               |
| 3. <a href="#">Taking Appropriate Action for Resolving the Network Problem on page 413</a>              | <code>[edit]</code><br><code>delete routing options static route destination-prefix</code><br><code>commit and-quit</code><br><code>show route destination-prefix</code> |
| 4. <a href="#">Evaluating the Solution to Check Whether the Network Problem Is Resolved on page 414</a> | <code>show route (ip-address   hostname)</code><br><code>ping (ip-address   hostname) count 3</code><br><code>tracert (ip-address   hostname)</code>                     |

## Isolating a Broken Network Connection

By applying the standard four-step process illustrated in [Figure 39 on page 410](#), you can isolate a failed node in the network. Note that the functionality described in this section is not supported in versions 15.1X49, 15.1X49-D30, or 15.1X49-D40.


**Figure 39: Process for Diagnosing Problems in Your Network**

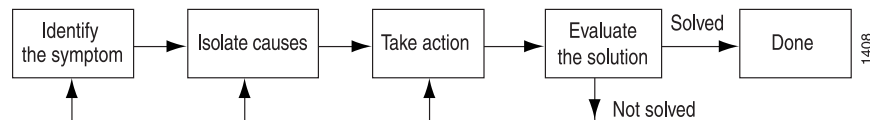

Before you embark on the four-step process, however, it is important that you are prepared for the inevitable problems that occur on all networks. While you might find a solution to a problem by simply trying a variety of actions, you can reach an appropriate solution more quickly if you are systematic in your approach to the maintenance and monitoring of your network. To prepare for problems on your network, understand how the network functions under normal conditions, have records of baseline network activity, and carefully observe the behavior of your network during a problem situation.

[Figure 40 on page 410](#) shows the network topology used in this topic to illustrate the process of diagnosing problems in a network.

**Figure 40: Network with a Problem**

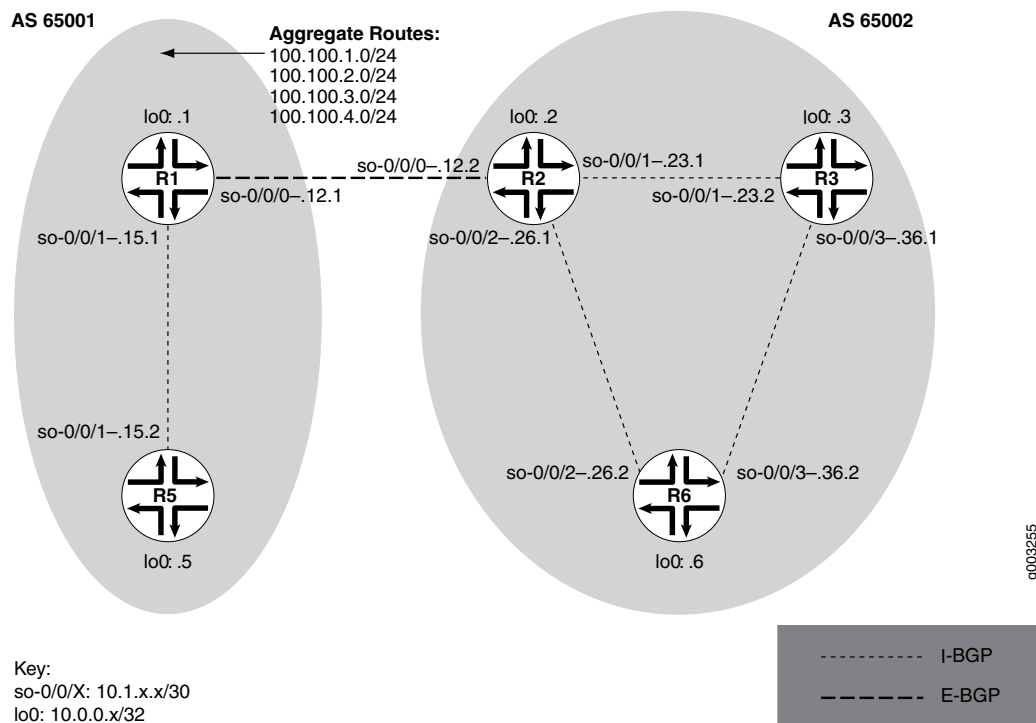

The network in [Figure 40 on page 410](#) consists of two autonomous systems (ASs). AS 65001 includes two routers, and AS 65002 includes three routers. The border router (R1) in AS 65001 announces aggregated prefixes **100.100.0/24** to the AS 65002 network. The

problem in this network is that **R6** does not have access to **R5** because of a loop between **R2** and **R6**.

To isolate a failed connection in your network, follow the steps in these topics:

- [Identifying the Symptoms of a Broken Network Connection on page 411](#)
- [Isolating the Causes of a Network Problem on page 412](#)
- [Taking Appropriate Action for Resolving the Network Problem on page 413](#)
- [Taking Appropriate Action for Resolving the Network Problem on page 413](#)
- [Evaluating the Solution to Check Whether the Network Problem Is Resolved on page 414](#)

## Identifying the Symptoms of a Broken Network Connection

**Problem**    **Description:** The symptoms of a problem in your network are usually quite obvious, such as the failure to reach a remote host.

**Solution**    To identify the symptoms of a problem on your network, start at one end of your network and follow the routes to the other end, entering all or one of the following Junos OS command-line interfaces (CLI) operational mode commands:

```
user@host> ping (ip-address | host-name)
user@host> show route (ip-address | host-name)
user@host> traceroute (ip-address | host-name)
```

### Sample Output

```
user@R6> ping 10.0.0.5
PING 10.0.0.5 (10.0.0.5): 56 data bytes
36 bytes from 10.1.26.1: Time to live exceeded
Vr HL TOS Len ID Flg off TTL Pro cks Src Dst
 4 5 00 0054 e2db 0 0000 01 01 a8c6 10.1.26.2 10.0.0.5

36 bytes from 10.1.26.1: Time to live exceeded
Vr HL TOS Len ID Flg off TTL Pro cks Src Dst
 4 5 00 0054 e2de 0 0000 01 01 a8c3 10.1.26.2 10.0.0.5

36 bytes from 10.1.26.1: Time to live exceeded
Vr HL TOS Len ID Flg off TTL Pro cks Src Dst
 4 5 00 0054 e2e2 0 0000 01 01 a8bf 10.1.26.2 10.0.0.5

^C
--- 10.0.0.5 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss

user@R6> show route 10.0.0.5

inet.0: 20 destinations, 20 routes (20 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.5/32          *[IS-IS/165] 00:02:39, metric 10
                    > to 10.1.26.1 via so-0/0/2.0
```

```

user@R6> traceroute 10.0.0.5
traceroute to 10.0.0.5 (10.0.0.5), 30 hops max, 40 byte packets
 1  10.1.26.1 (10.1.26.1)  0.649 ms  0.521 ms  0.490 ms
 2  10.1.26.2 (10.1.26.2)  0.521 ms  0.537 ms  0.507 ms
 3  10.1.26.1 (10.1.26.1)  0.523 ms  0.536 ms  0.514 ms
 4  10.1.26.2 (10.1.26.2)  0.528 ms  0.551 ms  0.523 ms
 5  10.1.26.1 (10.1.26.1)  0.531 ms  0.550 ms  0.524 ms

```

### Meaning

The sample output shows an unsuccessful **ping** command in which the packets are being rejected because the time to live is exceeded. The output for the **show route** command shows the interface (10.1.26.1) that you can examine further for possible problems. The **traceroute** command shows the loop between 10.1.26.1 (R2) and 10.1.26.2 (R6), as indicated by the continuous repetition of the two interface addresses.

## Isolating the Causes of a Network Problem

**Problem**    **Description:** A particular symptom can be the result of one or more causes. Narrow down the focus of your search to find each individual cause of the unwanted behavior.

**Solution**    To isolate the cause of a particular problem, enter one or all of the following Junos OS CLI operational mode command:

```
user@host> show < configuration | bgp | interfaces | isis | ospf | route >
```

Your particular problem may require the use of more than just the commands listed above. See the appropriate command reference for a more exhaustive list of commonly used operational mode commands.

### Sample Output

```

user@R6> show interfaces terse
Interface           Admin Link Proto Local Remote
so-0/0/0            up   up   inet  10.1.56.2/30
so-0/0/0.0          up   up   inet  10.1.56.2/30
                    up   up   iso
so-0/0/2            up   up   inet  10.1.26.2/30
so-0/0/2.0          up   up   inet  10.1.26.2/30
                    up   up   iso
so-0/0/3            up   up   inet  10.1.36.2/30
so-0/0/3.0          up   up   inet  10.1.36.2/30
                    up   up   iso
[...Output truncated...]

```

The following sample output is from R2:

```

user@R2> show route 10.0.0.5

inet.0: 22 destinations, 25 routes (22 active, 0 holddown, 0 hidden)

```



```

+ = Active Route, - = Last Active, * = Both

10.0.0.5/32          *[Static/5] 00:16:21
                    > to 10.1.26.2 via so-0/0/2.0
                    [BGP/170] 3d 20:23:35, MED 5, localpref 100
                    AS path: 65001 I
                    > to 10.1.12.1 via so-0/0/0.0

```

### Meaning

The sample output shows that all interfaces on **R6** are up. The output from **R2** shows that a static route **[Static/5]** configured on **R2** points to **R6 (10.1.26.2)** and is the preferred route to **R5** because of its low preference value. However, the route is looping from **R2** to **R6**, as indicated by the missing reference to **R5 (10.1.15.2)**.

## Taking Appropriate Action for Resolving the Network Problem

**Problem**    **Description:** The appropriate action depends on the type of problem you have isolated. In this example, a static route configured on **R2** is deleted from the **[routing-options]** hierarchy level. Other appropriate actions might include the following:

**Solution**

- Check the local router's configuration and edit it if appropriate.
- Troubleshoot the intermediate router.
- Check the remote host configuration and edit it if appropriate.
- Troubleshoot routing protocols.
- Identify additional possible causes.

To resolve the problem in this example, enter the following Junos OS CLI commands:

```

[edit]
user@R2# delete routing-options static route destination-prefix
user@R2# commit and-quit
user@R2# show route destination-prefix

```

### Sample Output

```

[edit]
user@R2# delete routing-options static route 10.0.0.5/32

[edit]
user@R2# commit and-quit
commit complete
Exiting configuration mode

user@R2> show route 10.0.0.5

inet.0: 22 destinations, 24 routes (22 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```
10.0.0.5/32          *[BGP/170] 3d 20:26:17, MED 5, localpref 100
                     AS path: 65001 I
                     > to 10.1.12.1 via so-0/0/0.0
```

### Meaning

The sample output shows the static route deleted from the [routing-options] hierarchy and the new configuration committed. The output for the **show route** command now shows the BGP route as the preferred route, as indicated by the asterisk (\*).

## Evaluating the Solution to Check Whether the Network Problem Is Resolved

**Problem Description:** If the problem is solved, you are finished. If the problem remains or a new problem is identified, start the process over again.

You can address possible causes in any order. In relation to the network in [“Isolating a Broken Network Connection” on page 410](#), we chose to work from the local router toward the remote router, but you might start at a different point, particularly if you have reason to believe that the problem is related to a known issue, such as a recent change in configuration.

**Solution** To evaluate the solution, enter the following Junos OS CLI commands:

```
user@host> show route (ip-address | host-name)
user@host> ping (ip-address | host-name)
user@host> traceroute (ip-address | host-name)
```

### Sample Output

```
user@R6> show route 10.0.0.5

inet.0: 20 destinations, 20 routes (20 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.5/32          *[BGP/170] 00:01:35, MED 5, localpref 100, from 10.0.0.2
                     AS path: 65001 I
                     > to 10.1.26.1 via so-0/0/2.0

user@R6> ping 10.0.0.5
PING 10.0.0.5 (10.0.0.5): 56 data bytes
64 bytes from 10.0.0.5: icmp_seq=0 ttl=253 time=0.866 ms
64 bytes from 10.0.0.5: icmp_seq=1 ttl=253 time=0.837 ms
64 bytes from 10.0.0.5: icmp_seq=2 ttl=253 time=0.796 ms
^C
--- 10.0.0.5 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.796/0.833/0.866/0.029 ms

user@R6> traceroute 10.0.0.5
traceroute to 10.0.0.5 (10.0.0.5), 30 hops max, 40 byte packets
 1 10.1.26.1 (10.1.26.1) 0.629 ms 0.538 ms 0.497 ms
```

```
2 10.1.12.1 (10.1.12.1) 0.534 ms 0.538 ms 0.510 ms
3 10.0.0.5 (10.0.0.5) 0.776 ms 0.705 ms 0.672 ms
```

### Meaning

The sample output shows that there is now a connection between **R6** and **R5**. The **show route** command shows that the BGP route to **R5** is preferred, as indicated by the asterisk (\*). The **ping** command is successful and the **traceroute** command shows that the path from **R6** to **R5** is through **R2** (10.1.26.1), and then through **R1** (10.1.12.1).



## CHAPTER 15

# Troubleshooting IS-IS

- [Verifying the IS-IS Protocol on page 417](#)
- [Verifying the IS-IS Configuration on a Router in a Network on page 426](#)
- [Displaying the Status of IS-IS Adjacencies on page 433](#)
- [Displaying Detailed IS-IS Protocol Information on page 437](#)
- [Analyzing IS-IS Link-State PDUs in Detail on page 439](#)
- [Displaying Sent or Received IS-IS Protocol Packets on page 441](#)

### Verifying the IS-IS Protocol


---

#### Purpose

If your MPLS network is configured with IS-IS as the interior gateway protocol (IGP), and the output of the **show mpls lsp extensive** command shows that there is a problem, check the IP and IS-IS layers. Because IS-IS and IP are independent of each other, you can check either layer first. For more information about checking the IP layer, see *Verifying the IP Layer*.

After you have checked the IP layer and determined that there is still a problem, check the IS-IS layer, verify that IS-IS adjacencies are up, and make sure that the interfaces and IS-IS protocol are configured correctly.

Figure 41: MPLS Network Broken at the IS-IS Protocol Layer

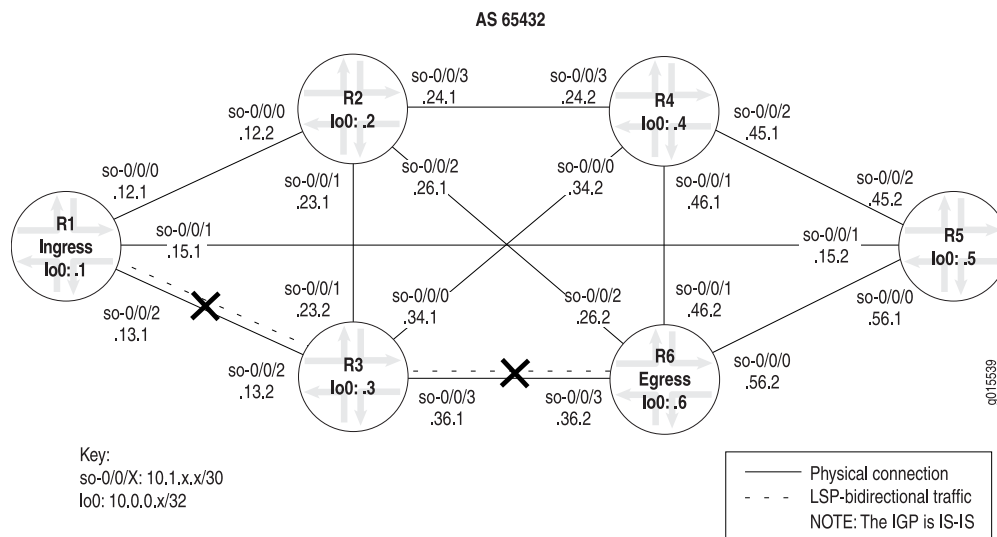

To check the IS-IS protocol, follow these steps:

1. [Verify the LSP on page 418](#)
2. [Verify IS-IS Adjacencies and Interfaces on page 420](#)
3. [Verify the IS-IS Configuration on page 421](#)
4. [Take Appropriate Action on page 422](#)
5. [Verify the LSP Again on page 423](#)

## Verify the LSP

**Purpose** Confirm that interfaces are configured for IS-IS, that the IS-IS protocol is configured correctly, and that adjacencies are established.

**Action** To verify the label-switched path (LSP), enter the following command on the ingress, transit, and egress routers:

```
user@host> show mpls lsp extensive
```

## Sample Output 1

```
user@R1> show mpls lsp extensive
Ingress LSP: 1 sessions

10.0.0.6
  From: 10.0.0.1, State: Dn,  ActiveRoute: 0 , LSPname: R1-to-R6
  ActivePath: (none)
  LoadBalance: Random
  Encoding type: Packet, Switching type: Packet, GPID: IPv4
  Primary                               State: Dn
    24 Oct 21 13:48:01  No Route toward dest [3 times]
    23 Oct 21 13:47:44  Deselected as active
```

```

22 Oct 21 13:47:43 No Route toward dest[2 times]
21 Oct 21 13:47:43 ResvTear received
20 Oct 21 13:47:43 Down
19 Oct 21 13:47:43 10.1.13.2: No Route toward dest[2 times]
18 Oct 21 13:47:38 Record Route: 10.1.13.2 10.1.36.2
[...Output truncated...]
Created: Tue Oct 19 21:22:53 2004
Total 1 displayed, Up 0, Down 1

Egress LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

Transit LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

## Sample Output 2

```

user@R3> show mpls lsp extensive
Ingress LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

Egress LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

Transit LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

## Sample Output 3

```

user@R6> show mpls lsp extensive
Ingress LSP: 1 sessions

10.0.0.1
  From: 10.0.0.6, State: Dn, ActiveRoute: 0 , LSPname: R6-to-R1
  ActivePath: (none)
  LoadBalance: Random
  Encoding type: Packet, Switching type: Packet, GPID: IPv4
  Primary State: Dn
    Will be enqueued for recomputation in 3 second(s).
  13 Oct 21 14:23:33 CSPF failed: no route toward 10.0.0.1[90 times]
  12 Oct 21 13:39:56 Deselected as active
  11 Oct 21 13:39:56 CSPF: could not determine self
  [...Output truncated...]
  Created: Tue Oct 19 22:28:30 2004
Total 1 displayed, Up 0, Down 1

Egress LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

Transit LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

**Meaning** The sample output shows that LSP **R1-to-R6** and the reverse LSP **R6-to-R1** are down, and there are no LSP sessions on transit router R3.

## Verify IS-IS Adjacencies and Interfaces

- Purpose** When you check the IS-IS layer, you verify that IS-IS adjacencies are up and that the IS-IS interfaces are included at the protocol level.
- Action** To verify the functioning of adjacent interfaces, enter the following commands from the relevant routers:

```
user@host> show isis adjacency
user@host> show isis interface
```

### Sample Output 1

```
user@R1> show isis adjacency
Interface          System      L State      Hold (secs) SNPA
so-0/0/0.0         R2          2 Up         20
so-0/0/1.0         R5          2 Up         23
so-0/0/2.0         R3          2 Up         26

user@R3> show isis adjacency
Interface          System      L State      Hold (secs) SNPA
so-0/0/0.0         R4          2 Up         23
so-0/0/1.0         R2          2 Up         21
so-0/0/2.0         R1          2 Up         19
so-0/0/3.0         R6          2 Down      0

user@R6> show isis adjacency
IS-IS instance is not running
```

### Sample Output 2

```
user@R1> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
lo0.0              0  0x1 Passive           Passive         0/0
so-0/0/0.0         2  0x1 Disabled         Point to Point  10/10
so-0/0/1.0         2  0x1 Disabled         Point to Point  10/10
so-0/0/2.0         2  0x1 Disabled         Point to Point  10/10

user@R3> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
lo0.0              0  0x1 Passive           Passive         0/0
so-0/0/0.0         2  0x1 Disabled         Point to Point  10/10
so-0/0/1.0         2  0x1 Disabled         Point to Point  10/10
so-0/0/2.0         2  0x1 Disabled         Point to Point  10/10
so-0/0/3.0         2  0x1 Disabled         Point to Point  10/10

user@R6> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
lo0.0              0  0x1 Passive           Passive         0/0
so-0/0/0.0         1  0x1 Point to Point    Disabled        10/10
```



|            |   |                    |          |       |
|------------|---|--------------------|----------|-------|
| so-0/0/1.0 | 1 | 0x1 Down           | Disabled | 10/10 |
| so-0/0/2.0 | 1 | 0x1 Point to Point | Disabled | 10/10 |
| so-0/0/3.0 | 1 | 0x1 Point to Point | Disabled | 10/10 |

**Meaning** Sample Output 1 shows that ingress router R1 has established adjacencies with the relevant routers. Transit router R3 does not have an adjacency with egress router R6, and egress router R6 has no adjacencies established in the network shown in *MPLS Network Broken at the IP and IGP Layers*, indicating that the problem might be at the IS-IS protocol level.

Sample Output 2 shows that R1 and R2 are Level 2 routers, in contrast to R6 which is a Level 1 router. When a router is configured explicitly as a Level 1 or Level 2 router, it does not communicate with routers configured at a different level. Level 1 routers communicate with other Level 1 routers within their area, while Level 2 routers communicate with other Level 2 routers, and toward other autonomous systems. Because all the routers in this network are configured for Level 2, they cannot form an adjacency with R6, which is incorrectly configured as a Level 1 router.

- See Also**
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)
  - [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)

## Verify the IS-IS Configuration

**Purpose** When you have determined that the problem is probably at the IS-IS protocol level, check the IS-IS configuration of the routers in your network.

**Action** To verify the IS-IS configuration, enter the following command from the relevant routers:

```
user@host> show configuration protocols isis
```

## Sample Output

```
user@R1> show configuration protocols isis
level 1 disable;
interface so-0/0/0.0;
interface so-0/0/1.0;
interface so-0/0/2.0;
interface lo0.0; {
    passive
}

user@R3> show configuration protocols isis
level 1 disable;
interface all {
    level 2 metric 10;
}
```

```
interface fxp0.0 {
    disable;
}
interface lo0.0; {
    passive

user@R6> show configuration protocols isis
level 2 disable; <<< Incorrect level disabled
interface all {
    level 2 metric 10;
}
interface fxp0.0 {
    disable;
}
interface lo0.0; {
    passive
```

**Meaning** The sample output shows that R6 has Level 2 disabled, while R1 and R3 have Level 1 disabled. For IS-IS adjacencies to establish, routers need to be at the same level. Another common configuration error is to omit the loopback interface (lo0) from the configuration at the **[edit protocols isis]** hierarchy level. IS-IS does not function correctly if the loopback interface (lo0) is not configured at this level. In addition, including the **passive** statement ensures that protocols are not run over the loopback interface (lo0) and that the loopback interface (lo0) is advertised correctly throughout the network.

## Take Appropriate Action

**Problem** **Description:** Depending on the error you encountered in your investigation, you must take the appropriate action to correct the problem. In the example below, the routers are configured to function at different levels of the IS-IS protocol.

**Solution** To correct the error in this example, enter the following commands:

### Sample Output

---

```
[edit protocols isis]
user@R6# show
level 2 disable;
interface all {
    level 2 metric 10;
}
interface fxp0.0 {
    disable;
}
interface lo0.0; {
    passive

[edit protocols isis]
user@R6# delete level 2

[edit protocols isis]
```

```

user@R6# set level 1 disable

[edit protocols isis]
user@R6# show
level 1 disable;
interface all {
    level 2 metric 10;
}
interface fxp0.0 {
    disable;
}
interface lo0.0; {
    passive

[edit protocols isis]
user@R6# commit
commit complete

[edit protocols isis]
user@R6# run show isis adjacency

```

| Interface  | System | L State | Hold (secs) | SNPA |
|------------|--------|---------|-------------|------|
| so-0/0/0.0 | R5     | 2 Up    | 22          |      |
| so-0/0/1.0 | R4     | 2 Up    | 22          |      |
| so-0/0/2.0 | R2     | 2 Up    | 22          |      |
| so-0/0/3.0 | R3     | 2 Up    | 22          |      |

### Meaning

The sample output shows that the configuration error on egress router R6 has been corrected, and IS-IS adjacencies are now established.

**See Also** • *IS-IS Feature Guide*

### Verify the LSP Again

**Purpose** After taking the appropriate action to correct the error, the label-switched path (LSP) needs to be checked again to confirm that the problem in the RSVP layer has been resolved.

**Action** To verify that the LSP is up and traversing the network as expected, enter the following command from the ingress, egress, and transit routers:

```
user@host> show mpls lsp extensive
```

### Sample Output 1

```

user@R1> show mpls lsp extensive
Ingress LSP: 1 sessions

10.0.0.6
  From: 10.0.0.1, State: Up,  ActiveRoute: 1, LSPname: R1-to-R6

```

```

ActivePath: (primary)
LoadBalance: Random
Encoding type: Packet, Switching type: Packet, GPID: IPv4
*Primary State: Up
  Computed ERO (S [L] denotes strict [loose] hops): (CSPF metric: 20)
  10.1.13.2 S 10.1.36.2 S
    Received RRO (ProtectionFlag 1=Available 2=InUse 4=B/W 8=Node 10=SoftPreempt):

      10.1.13.2 10.1.36.2
    5 Oct 21 15:52:07 Selected as active path
    4 Oct 21 15:52:07 Record Route: 10.1.13.2 10.1.36.2
    3 Oct 21 15:52:07 Up
    2 Oct 21 15:52:07 Originate Call
    1 Oct 21 15:52:07 CSPF: computation result accepted
  Created: Thu Oct 21 15:52:06 2004
Total 1 displayed, Up 1, Down 0

Egress LSP: 1 sessions

10.0.0.1
  From: 10.0.0.6, LSPstate: Up, ActiveRoute: 0
  LSPname: R6-to-R1, LSPpath: Primary
  Suggested label received: -, Suggested label sent: -
  Recovery label received: -, Recovery label sent: -
  Resv style: 1 FF, Label in: 3, Label out: -
  Time left: 142, Since: Thu Oct 21 15:41:59 2004
  Tspec: rate 0bps size 0bps peak Infbps m 20 M 1500
  Port number: sender 2 receiver 39082 protocol 0
  PATH rcvfrom: 10.1.13.2 (so-0/0/2.0) 17 pkts
  Adspec: received MTU 1500
  PATH sentto: localclient
  RESV rcvfrom: localclient
  Record route: 10.1.36.2 10.1.13.2 <self>
Total 1 displayed, Up 1, Down 0

Transit LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

```

## Sample Output 2

```

user@R3> show mpls lsp extensive
Ingress LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

Egress LSP: 0 sessions
Total 0 displayed, Up 0, Down 0

Transit LSP: 2 sessions

10.0.0.1
  From: 10.0.0.6, LSPstate: Up, ActiveRoute: 1
  LSPname: R6-to-R1, LSPpath: Primary
  Suggested label received: -, Suggested label sent: -
  Recovery label received: -, Recovery label sent: 3
  Resv style: 1 FF, Label in: 100528, Label out: 3
  Time left: 125, Since: Thu Oct 21 15:29:26 2004
  Tspec: rate 0bps size 0bps peak Infbps m 20 M 1500
  Port number: sender 2 receiver 39082 protocol 0

```

```

PATH rcvfrom: 10.1.36.2 (so-0/0/3.0) 17 pkts
Adspec: received MTU 1500 sent MTU 1500
PATH sentto: 10.1.13.1 (so-0/0/2.0) 17 pkts
RESV rcvfrom: 10.1.13.1 (so-0/0/2.0) 17 pkts
Explct route: 10.1.13.1
Record route: 10.1.36.2 <self> 10.1.13.1

10.0.0.6
From: 10.0.0.1, LSPstate: Up, ActiveRoute: 1
  LSPname: R1-to-R6 , LSPpath: Primary
Suggested label received: -, Suggested label sent: -
Recovery label received: -, Recovery label sent: 3
Resv style: 1 FF, Label in: 100544, Label out: 3
Time left: 147, Since: Thu Oct 21 15:39:33 2004
Tspec: rate Obps size Obps peak Infbps m 20 M 1500
Port number: sender 1 receiver 47963 protocol 0
PATH rcvfrom: 10.1.13.1 (so-0/0/2.0) 4 pkts
Adspec: received MTU 1500 sent MTU 1500
PATH sentto: 10.1.36.2 (so-0/0/3.0) 4 pkts
RESV rcvfrom: 10.1.36.2 (so-0/0/3.0) 4 pkts
Explct route: 10.1.36.2
Record route: 10.1.13.1 <self> 10.1.36.2
Total 2 displayed, Up 2, Down 0

```

### Sample Output 3

```

user@R6> show mpls lsp extensive
Ingress LSP: 1 sessions

10.0.0.1
From: 10.0.0.6, State: Up, ActiveRoute: 1,  LSPname: R6-to-R1
ActivePath: (primary)
LoadBalance: Random
Encoding type: Packet, Switching type: Packet, GPID: IPv4
*Primary                               State: Up
  Computed ERO (S [L] denotes strict [loose] hops): (CSPF metric: 20)
10.1.36.1S 10.1.13.1S
  Received RRO (ProtectionFlag 1=Available 2=InUse 4=B/W 8=Node 10=SoftPreempt):

      10.1.36.1 10.1.13.1
18 Oct 21 15:34:18 Selected as active path
17 Oct 21 15:34:17 Record Route: 10.1.36.1 10.1.13.1
16 Oct 21 15:34:17 Up
15 Oct 21 15:34:17 Originate Call
14 Oct 21 15:34:17 CSPF: computation result accepted
[...Output truncated...]
Created: Tue Oct 19 22:28:30 2004
Total 1 displayed, Up 1, Down 0

Egress LSP: 1 sessions

10.0.0.6
From: 10.0.0.1, LSPstate: Up, ActiveRoute: 0
  LSPname: R1-to-R6 , LSPpath: Primary
Suggested label received: -, Suggested label sent: -
Recovery label received: -, Recovery label sent: -
Resv style: 1 FF, Label in: 3, Label out: -
Time left: 126, Since: Thu Oct 21 15:44:25 2004

```

```
Tspec: rate 0bps size 0bps peak Infbps m 20 M 1500
Port number: sender 1 receiver 47963 protocol 0
PATH rcvfrom: 10.1.36.1 (so-0/0/3.0) 4 pkts
Adspec: received MTU 1500
PATH sentto: localclient
RESV rcvfrom: localclient
Record route: 10.1.13.1 10.1.36.1 <self>
Total 1 displayed, Up 1, Down 0

Transit LSP: 0 sessions
Total 0 displayed, Up 0, Down 0
```

**Meaning** Sample Outputs 1 and 3 from ingress router R1 and egress router R6 show that the LSP is now traversing the network along the expected path, from R1 through R3 to R6, and the reverse LSP, from R6 through R3 to R1. In addition, Sample Output 2 from transit router R3 shows that there are two transit LSP sessions, one from R1 to R6, and the other from R6 to R1.


---

## Verifying the IS-IS Configuration on a Router in a Network

### Purpose

For IS-IS to run on a router (intermediate system) in your network, you must enable IS-IS on the router, configure a network entity title (NET) on the loopback interface (lo0), and configure **family iso** on all interfaces on which you want to run IS-IS. When you enable IS-IS on a router, Level 1 and Level 2 are enabled by default.

[Figure 42 on page 427](#) illustrates an example of routers at different levels in an IS-IS topology.

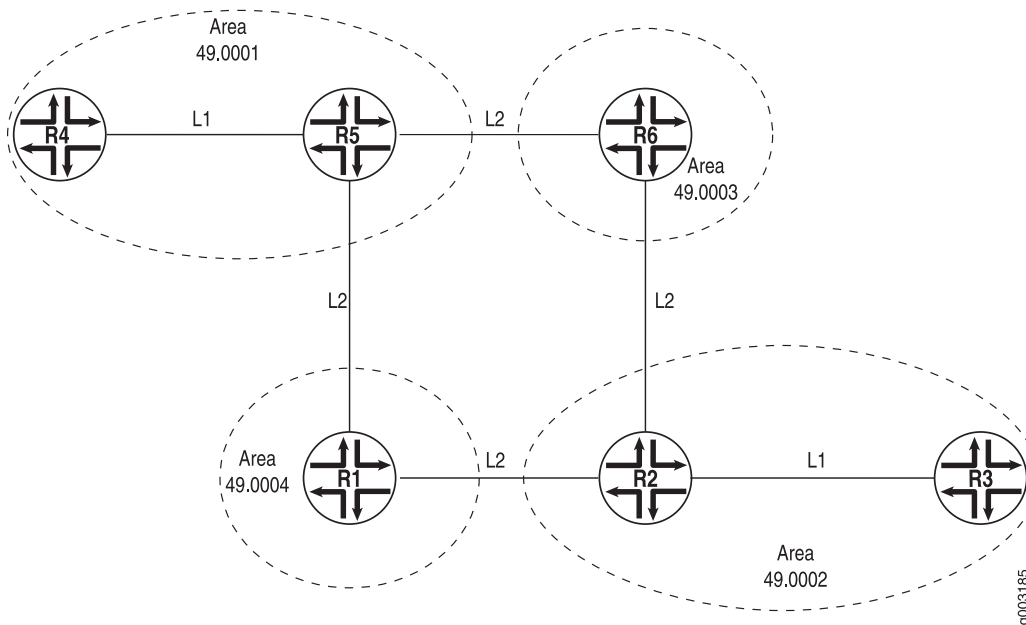
*Figure 42: Levels in an IS-IS Network Topology*

The network in [Figure 42 on page 427](#) is organized hierarchically and consists of Level 2, Level 1/Level 2, and Level 1 routers in one autonomous system (AS) divided into four areas: 49.0001, 49.0002, 49.0003, and 49.0004. The Level 2 routers route toward other autonomous systems. The Level 1/Level 2 routers route between areas and to other autonomous systems. The Level 1 routers route within an area, and when the destination is outside the local area, they route toward a Level1/Level2 system.

In the following topics, the configuration of the various types of routers is examined.

[Figure 43 on page 428](#) provides more details about the IS-IS network topology in [Figure 42 on page 427](#) so that you can verify the configuration output of the various routers.

Figure 43: IS-IS Network Topology with Details

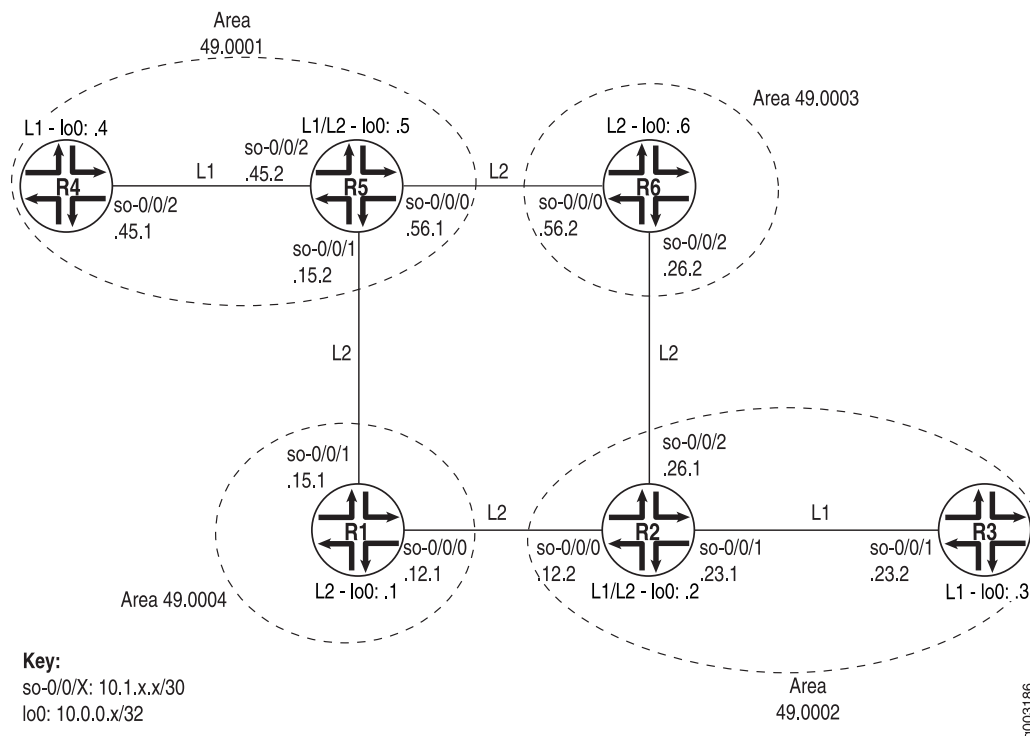

To verify that IS-IS is configured correctly on routers at different levels, follow these steps:

1. [Check the Configuration of a Level 1/Level 2 Router on page 428](#)
2. [Check the Configuration of a Level 1 Router on page 430](#)
3. [Check the Configuration of a Level 2 Router on page 432](#)

## Check the Configuration of a Level 1/Level 2 Router

**Purpose** Check the configuration of a Level 1/Level 2 router.

**Action** To verify the IS-IS configuration of a Level 1/Level 2 router in your network, enter the following Junos OS command-line interface (CLI) commands:

```
user@host# [edit protocols isis] show
user@host# [edit protocols isis]
user@host# run show isis interface
user@host# [edit] edit interfaces
user@host# [edit interfaces] show
```

The following output is for an IS-IS configuration on R2, a Level 1/Level 2 router in the network shown.



## Sample Output

```
[edit protocols isis]
user@R2# show
interface so-0/0/0.0 {
    level 2 metric 10;
    level 1 disable;
}
interface so-0/0/1.0 {
    level 2 disable;
    level 1 metric 10;
}
interface so-0/0/2.0 {
    level 2 metric 10;
    level 1 disable;
}
interface fxp0.0 {
    disable;
}
interface lo0.0;

[edit protocols isis]
user@R2# run show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
lo0.0              0  0x1 Passive           Passive          0/0
so-0/0/0.0         2  0x1 Disabled          Point to Point   10/10
so-0/0/1.0         3  0x1 Point to Point    Point to Point   10/10
so-0/0/2.0         2  0x1 Disabled          Point to Point   10/10
[edit interfaces]
user@R2# show
so-0/0/0 {
    unit 0 {
        family inet {
            address 10.1.12.2/30;
        }
        family iso;
    }
}
so-0/0/1 {
    unit 0 {
        family inet {
            address 10.1.23.1/30;
        }
        family iso;
    }
}
so-0/0/2 {
    unit 0 {
        family inet {
            address 10.1.26.1/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.2/32;
        }
    }
}
```

```

    }
    family iso {
        address 49.0002.1000.0000.0002.00;
    }
}

```

**Meaning** The sample output shows a basic configuration of IS-IS on R2, a Level 1/Level 2 router. The basic configuration is at the **[edit protocols isis]** and **[edit interfaces]** hierarchy levels.

At the **[edit protocols isis]** level, five interfaces are included: so-0/0/0, so-0/0/1, so-0/0/2, fxp0, and the loopback interface (lo0). Two interfaces, so-0/0/0.0 and so-0/0/2.0, have Level 1 disabled, making them Level 2 interfaces. One interface, so-0/0/1.0, has Level 2 disabled, making it a Level 1 interface. The management interface (fxp0) is disabled so that IS-IS packets are not sent over it, and the loopback interface (lo0) is included because it becomes a point of connection from the router to the IS-IS network.

At the **[edit interfaces]** hierarchy level, all of the interfaces included in the **[edit protocols isis]** hierarchy level are configured with **family iso**, and the loopback interface (lo0) is configured with the NET address 49.0002.1000.0000.0002.00. Every router in an IS-IS network must have at least one NET address that identifies a point of connection to the IS-IS network. The NET address is generally configured on the loopback interface (lo0). Routers that participate in multiple areas can have multiple NET addresses.

**See Also** • [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## Check the Configuration of a Level 1 Router

**Purpose** To check the configuration of a Level 1 router.

**Action** To check the configuration of a Level 1 router, enter the following CLI commands:

```

user@host# [edit protocols isis] show
user@host# [edit protocols isis] run show isis interface
user@host# [edit] edit interfaces
user@host# [edit interfaces] show

```

The following sample output is for R4, a Level 1 router in the network shown in The following output is for an IS-IS configuration on R2, a Level 1/Level 2 router in the network shown.

## Sample Output

```

[edit protocols isis]

user@R4# show

```

```

level 2 disable;
interface so-0/0/2.0 {
    level 1 metric 10;
}
interface fxp0.0 {
    disable;
}
interface lo0.0;
[edit protocols isis]

user@R4# run show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
lo0.0               0   0x1 Passive           Passive         0/0
so-0/0/2.0          1   0x1 Point to Point    Disabled        10/10
[edit interfaces]
user@R4# show
so-0/0/2 {
    unit 0 {
        family inet {
            address 10.1.45.1/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.4/32;
        }
        family iso {
            address 49.0001.1000.0000.0004.00;
        }
    }
}

```

**Meaning** The sample output shows a basic configuration of IS-IS on R4, a Level 1 router. The basic configuration is at the **[edit protocols isis]** and **[edit interfaces]** hierarchy levels.

At the **[edit protocols isis]** hierarchy level, three interfaces are included: so-0/0/2.0, fxp0, and the loopback interface (lo0). Level 2 is disabled on the router, making it a Level 1 router that sends packets within its local area, 49.0001. When a packet destination is outside the local area, R4 establishes an adjacency with the nearest Level 1/Level 2 router (R5) that forwards the packets. For more information about adjacencies, see [“Displaying the Status of IS-IS Adjacencies” on page 433](#).

One interface, so-0/0/2.0, is configured for IS-IS. The management interface (fxp0) is disabled so that IS-IS packets are not sent over it, and the loopback interface (lo0) is included because it becomes a point of connection from the router to the IS-IS network.

At the **[edit interfaces]** hierarchy level, the interface included in the **[edit protocols isis]** hierarchy level is also configured with **family iso**, and the loopback interface (lo0) is configured with the NET address of 49.0001.1000.0000.0004.00. Every router in an IS-IS network must have at least one NET address that identifies a point of connection

to the IS-IS network. The NET address is generally configured on the loopback interface (lo0). Routers that participate in multiple areas can have multiple NET addresses.

**See Also** • [Example: Configuring IS-IS on page 14](#)

## Check the Configuration of a Level 2 Router

**Purpose** Check the configuration of a Level 2 router.

**Action** To check the configuration of a Level 2 router, enter the following CLI commands:

```
user@host# [edit protocols isis] show
user@host# [edit protocols isis] run show isis interface
user@host# [edit] edit interfaces
user@host# [edit interfaces] show
```

The following sample output is for R6, a Level 2 router in the network shown.

## Sample Output

```
[edit protocols isis]
user@R6# show
level 1 disable;
interface so-0/0/0.0 {
    level 2 metric 10;
}
interface so-0/0/2.0 {
    level 2 metric 10;
}
interface fxp0.0 {
    disable;
}
interface lo0.0;

[edit protocols isis]
user@R6# run show isis interface
IS-IS interface database:
Interface          L CirID Level1 DR      Level 2 DR      L1/L2 Metric
lo0.0              0  0x1 Passive           Passive          0/0
so-0/0/0.0         2  0x1 Disabled         Point to Point   10/10
so-0/0/2.0         2  0x1 Disabled         Point to Point   10/10

[edit interfaces]
user@R6# show
so-0/0/0 {
    unit 0 {
        family inet {
            address 10.1.56.2/30;
        }
        family iso;
    }
}
so-0/0/2 {
    unit 0 {
```

```

        family inet {
            address 10.1.26.2/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.6/32;
        }
        family iso {
            address 49.0003.1000.0000.0006.00;
        }
    }
}

```

**Meaning** The sample output shows a basic configuration of IS-IS on R6, a Level 2 router. The basic configuration is at the **[edit protocols isis]** and **[edit interfaces]** hierarchy levels.

At the **[edit protocols isis]** level, four interfaces are included: so-0/0/0.0, so-0/0/2.0, fxp0, and the loopback interface (lo0). Level 1 is disabled on the two SONET/SDH interfaces, making this a Level 2 router that routes between areas and toward other ASs. The management interface (fxp0) is disabled so that IS-IS packets are not sent over it, and the loopback interface (lo0) is included because it becomes a point of connection from the router to the IS-IS network.

At the **[edit interfaces]** hierarchy level, the interfaces included in the **[edit protocols isis]** hierarchy level are also configured with **family iso**, and the loopback interface (lo0) is configured with the NET address of 49.0003.1000.0000.0006.00. Every router in an IS-IS network must have at least one NET address that identifies a point of connection to the IS-IS network. The NET address is generally configured on the loopback interface (lo0). Routers that participate in multiple areas can have multiple NET addresses.

**See Also** • [Example: Configuring IS-IS on page 14](#)

**Related Documentation**

- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## Displaying the Status of IS-IS Adjacencies


### Purpose

Assuming that all the routers are correctly configured for IS-IS, you can verify which neighbors are adjacent and able to exchange IS-IS data. In addition, you can examine

the set of routes installed in the forwarding table to verify that the routing protocol process (rpd) has relayed the correct information into the forwarding table.

Figure 44 on page 434 illustrates the example IS-IS topology used for the procedures in this topic.

Figure 44: IS-IS Network Topology

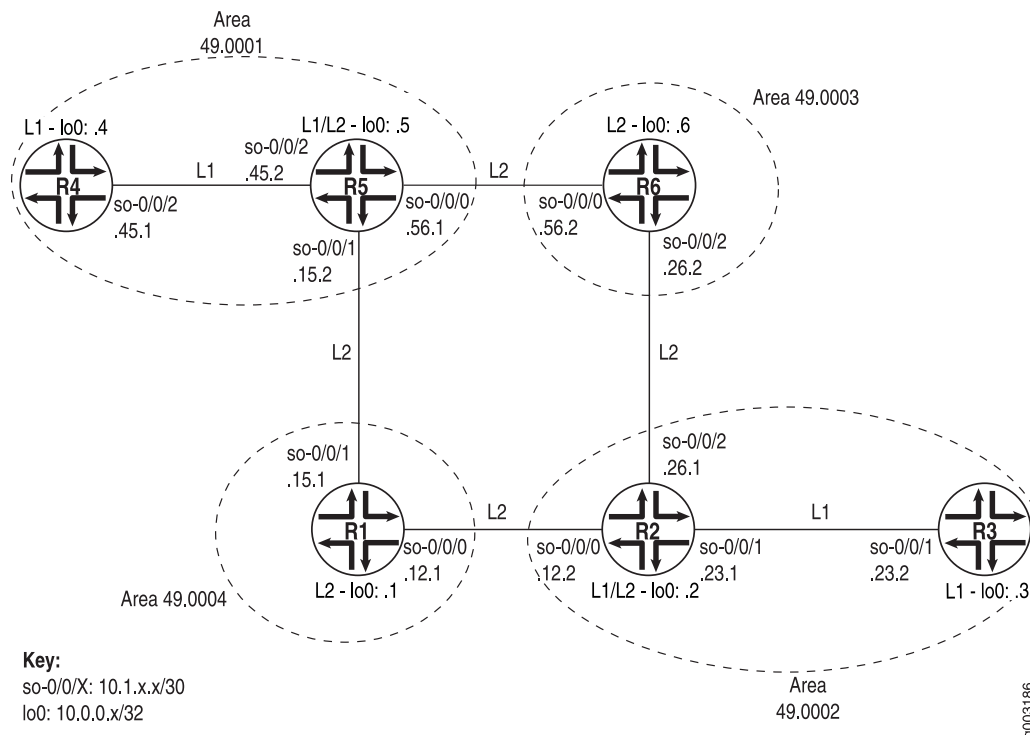

The network consists of Level 1 and Level 2 adjacencies. Level 1 adjacencies are within areas 49.0001 and 49.0002. Level 2 adjacencies occur between all directly connected Level 2 routers regardless of which area they are in. For example, R5 is in area 49.0001, R6 is in area 49.0003, R1 is in area 49.0004, and R2 is in area 49.0002. The network in Figure 44 on page 434 should have the following adjacencies:

- Level 2 adjacencies between all directly connected Level 2 routers (R1, R2, R5, and R6).
- Level 1 adjacencies between routers in area 49.0001 (R4 and R5) and between routers in area 49.0002 (R2 and R3).

To verify that routers are adjacent and able to exchange IS-IS data, follow these steps:

1. [Verifying Adjacent Routers on page 434](#)
2. [Examine the Forwarding Table on page 436](#)

## Verifying Adjacent Routers

**Purpose** Verify that routers are adjacent and able to exchange IS-IS data.

**Action** To verify that routers are adjacent and able to exchange IS-IS data, enter the following CLI operational mode command:

```
user@host> show isis adjacency
```

The following sample output shows the adjacencies that formed for all routers shown in [“Displaying the Status of IS-IS Adjacencies” on page 433](#).

## Sample Output

```
user@R1> show isis adjacency
Interface      System      L State      Hold (secs) SNPA
so-0/0/0.0     R2          2 Up         19
so-0/0/1.0     R5          2 Up         18

user@R2> show isis adjacency
Interface      System      L State      Hold (secs) SNPA
so-0/0/0.0     R1          2 Up         19
so-0/0/1.0     R3          1 Up         26
so-0/0/2.0     R6          2 Up         21

user@R3> show isis adjacency
Interface      System      L State      Hold (secs) SNPA
so-0/0/1.0     R2          1 Up         24

user@R4> show isis adjacency
Interface      System      L State      Hold (secs) SNPA
so-0/0/2.0     R5          1 Up         23

user@R5> show isis adjacency
Interface      System      L State      Hold (secs) SNPA
so-0/0/0.0     R6          2 Up         22
so-0/0/1.0     R1          2 Up         20
so-0/0/2.0     R4          1 Up         20

user@R6> show isis adjacency
Interface      System      L State      Hold (secs) SNPA
so-0/0/0.0     R5          2 Up         21
so-0/0/2.0     R2          2 Up         20
```

**Meaning** The sample output shows the adjacencies that formed in the network illustrated in [“Displaying the Status of IS-IS Adjacencies” on page 433](#). The Level 1/Level 2 routers (R2 and R5) formed Level 1 adjacencies with Level 1 routers (R3 and R4), and Level 2 adjacencies with the Level 2 routers (R1 and R6). To view the status of the adjacency, examine the State column. In this example, all adjacencies in the network are up.

If the state is not **Up** for a particular neighbor, you must first examine the IS-IS configuration for the particular interface. Make sure that the NET address is correct and that the loopback interface (lo0) is configured. Use the **show isis interface** or **show isis interface detail** command to display the IS-IS parameters for all interfaces configured with IS-IS. With these two commands, you can see which interfaces are configured for IS-IS, whether they are configured for Level 1 or Level 2, the IS-IS metric, and other IS-IS information.

- See Also**
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## Examine the Forwarding Table

**Purpose** You can display the set of routes installed in the forwarding table to verify that the routing protocol process (rpd) has relayed the correct information into the forwarding table. This is especially important when there are network problems, such as connectivity. In this procedure, you verify that the routes displayed in Step 2 appear in the forwarding table for Router R5.

**Action** To examine the forwarding table for a router, enter the following CLI command:

```
user@host> show route forwarding-table destination destination-prefix
```

## Sample Output

```
user@R5> show route forwarding-table destination 10.0.0.3
```

```
Routing table: inet
```

```
Internet:
```

| Destination | Type | RtRef | Next hop  | Type | Index | NhRef | Netif      |
|-------------|------|-------|-----------|------|-------|-------|------------|
| 10.0.0.3/32 | user | 0     | 10.1.15.0 | ucst | 285   | 7     | so-0/0/1.0 |

```
user@R5> show route forwarding-table destination 10.0.0.3
```

```
Routing table: inet
```

```
Internet:
```

| Destination | Type | RtRef | Next hop  | Type | Index | NhRef | Netif      |
|-------------|------|-------|-----------|------|-------|-------|------------|
| 10.0.0.3/32 | user | 0     | 10.1.56.0 | ucst | 281   | 9     | so-0/0/0.0 |

**Meaning** The sample output shows the selected next hop between Routers R5 and R3 sent from the inet routing table and installed into the forwarding table. The first instance shows the route through Router R1, and the second instance shows the route through Router R6. In both instances, the preferred route displayed in Step 2 is installed in the forwarding table.

In general, the sample output includes the destination address and destination type, the next-hop address and next-hop type, the number of references to the next hop, an index number into an internal next-hop database, and the interface used to reach the next hop.

- See Also**
- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)

**Related Documentation**

- [Verifying the IS-IS Protocol on page 417](#)



## Displaying Detailed IS-IS Protocol Information

**Action** To trace IS-IS messages in detail, follow these steps:

1. Configure the flag to display detailed IS-IS protocol messages.

```
[edit protocols isis traceoptions]
user@host# set flag hello detail
```

2. Verify the configuration.

```
user@host# show
```

For example:

```
[edit protocols isis traceoptions]
user@host# show
file isislog size 10k files 10;
flag hello detail;
```

3. Commit the configuration.

```
user@host# commit
```

4. View the contents of the file containing the detailed messages.

```
user@host# run show log filename
```

For example:

```
user@host# run show log isislog
```

```
Nov 29 23:17:50 trace_on: Tracing to "/var/log/isislog" started
Nov 29 23:17:50 Sending PTP IIH on so-1/1/1.0
Nov 29 23:17:53 Sending PTP IIH on so-1/1/0.0
Nov 29 23:17:54 Received PTP IIH, source id abc-core-01 on so-1/1/0.0
Nov 29 23:17:54   from interface index 11
Nov 29 23:17:54   max area 0, circuit type 12, packet length 4469
Nov 29 23:17:54   hold time 30, circuit id 6
Nov 29 23:17:54   neighbor state up
Nov 29 23:17:54   speaks IP
Nov 29 23:17:54   area address 99.0008 (1)
Nov 29 23:17:54   IP address 10.10.10.29
Nov 29 23:17:54   4396 bytes of total padding
Nov 29 23:17:54   updating neighbor abc-core-01
Nov 29 23:17:55 Received PTP IIH, source id abc-core-02 on so-1/1/1.0
Nov 29 23:17:55   from interface index 12
Nov 29 23:17:55   max area 0, circuit type 12, packet length 4469
Nov 29 23:17:55   hold time 30, circuit id 6
Nov 29 23:17:55   neighbor state up
Nov 29 23:17:55   speaks IP
Nov 29 23:17:55   area address 99.0000 (1)
Nov 29 23:17:55   IP address 10.10.10.33
```

```
Nov 29 23:17:55      4396 bytes of total padding
Nov 29 23:17:55      updating neighbor abc-core-02
```

**Meaning** Table 8 on page 438 lists tracing flags that can be configured specific to IS-IS and presents example output for some of the flags.

*Table 8: IS-IS Protocol Tracing Flags*

| Tracing Flags         | Description                         | Example Output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>csn</b>            | Complete sequence number PDU (CSNP) | <p>Nov 28 20:02:48 Sending L2 CSN on interface so-1/1/0.0Nov 28 20:02:48 Sending L2 CSN on interface so-1/1/1.0</p> <p>With the <b>detail</b> option.</p> <p>Nov 28 20:06:08 Sending L2 CSN on interface so-1/1/1.0Nov 28 20:06:08 LSP abc-core-01.00-00 lifetime 1146Nov 28 20:06:08 sequence 0x1c4f8 checksum 0xa1e9Nov 28 20:06:08 LSP abc-core-02.00-00 lifetime 411Nov 28 20:06:08 sequence 0x7435 checksum 0x5424Nov 28 20:06:08 LSP abc-brdr-01.00-00 lifetime 465Nov 28 20:06:08 sequence 0xf73 checksum 0xab10Nov 28 20:06:08 LSP abc-edge-01.00-00 lifetime 1089Nov 28 20:06:08 sequence 0x1616 checksum 0xdb29Nov 28 20:06:08 LSP abc-edge-02.00-00 lifetime 1103Nov 28 20:06:08 sequence 0x45cc checksum 0x6883</p> |
| <b>hello</b>          | Hello packet                        | <p>Nov 28 20:13:50 Sending PTP IIH on so-1/1/1.0Nov 28 20:13:50 Received PTP IIH, source id abc-core-01 on so-1/1/0.0Nov 28 20:13:53 Received PTP IIH, source id abc-core-02 on so-1/1/1.0Nov 28 20:13:57 Sending PTP IIH on so-1/1/0.0Nov 28 20:13:58 Received PTP IIH, source id abc-core-01 on so-1/1/0.0Nov 28 20:13:59 Sending PTP IIH on so-1/1/1.0</p>                                                                                                                                                                                                                                                                                                                                                                   |
| <b>lsp</b>            | Link-state PDUs (LSPs)              | <p>Nov 28 20:15:46 Received L2 LSP abc-edge-01.00-00, interface so-1/1/0.0Nov 28 20:15:46 from abc-core-01Nov 28 20:15:46 sequence 0x1617, checksum 0xd92a, lifetime 1197Nov 28 20:15:46 Updating L2 LSP abc-edge-01.00-00 in TEDNov 28 20:15:47 Received L2 LSP abc-edge-01.00-00, interface so-1/1/1.0Nov 28 20:15:47 from abc-core-02Nov 28 20:15:47 sequence 0x1617, checksum 0xd92a, lifetime 1197</p>                                                                                                                                                                                                                                                                                                                     |
| <b>lsp-generation</b> | Link-state PDU generation packets   | <p>Nov 28 20:21:24 Regenerating L1 LSP abc-edge-03.00-00, old sequence 0x682Nov 28 20:21:27 Rebuilding L1, fragment abc-edge-03.00-00Nov 28 20:21:27 Rebuilt L1 fragment abc-edge-03.00-00, size 59Nov 28 20:31:52 Regenerating L2 LSP abc-edge-03.00-00, old sequence 0x689Nov 28 20:31:54 Rebuilding L2, fragment abc-edge-03.00-00Nov 28 20:31:54 Rebuilt L2 fragment abc-edge-03.00-00, size 256Nov 28 20:34:05 Regenerating L1 LSP abc-edge-03.00-00, old sequence 0x683Nov 28 20:34:08 Rebuilding L1, fragment abc-edge-03.00-00Nov 28 20:34:08 Rebuilt L1 fragment abc-edge-03.00-00, size 59</p>                                                                                                                        |
| <b>packets</b>        | All IS-IS protocol packets          | Not available.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

Table 8: IS-IS Protocol Tracing Flags (continued)

| Tracing Flags | Description                                | Example Output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| psn           | Partial sequence number PDU (PSNP) packets | Nov 28 20:40:39 Received L2 PSN, source abc-core-01, interface so-1/1/0.0Nov 28 20:40:39 Received L2 PSN, source abc-core-02, interface so-1/1/1.0Nov 28 20:41:36 Sending L2 PSN on interface so-1/1/1.0Nov 28 20:41:36 Sending L2 PSN on interface so-1/1/0.0Nov 28 20:42:35 Received L2 PSN, source abc-core-02, interface so-1/1/1.0Nov 28 20:42:35 LSP abc-edge-03.00-00 lifetime 1196Nov 28 20:42:35 sequence 0x68c checksum 0x746dNov 28 20:42:35 Received L2 PSN, source abc-core-01, interface so-1/1/0.0Nov 28 20:42:35 LSP abc-edge-03.00-00 lifetime 1196Nov 28 20:42:35 sequence 0x68c checksum 0x746dNov 28 20:42:49 Sending L2 PSN on interface so-1/1/1.0Nov 28 20:42:49 LSP abc-core-01.00-00 lifetime 1197Nov 28 20:42:49 sequence 0x1c4fb checksum 0x9becNov 28 20:42:49 Sending L2 PSN on interface so-1/1/0.0Nov 28 20:42:49 LSP abc-core-01.00-00 lifetime 1197Nov 28 20:42:49 sequence 0x1c4fb checksum 0x9bec |
| spf           | Shortest-path-first (SPF) calculations     | Nov 28 20:44:01 Scheduling SPF for L1: ReconfigNov 28 20:44:01 Scheduling multicast SPF for L1: ReconfigNov 28 20:44:01 Scheduling SPF for L2: ReconfigNov 28 20:44:01 Scheduling multicast SPF for L2: ReconfigNov 28 20:44:02 Running L1 SPFNov 28 20:44:02 L1 SPF initialization complete: 0.000099s cumulative timeNov 28 20:44:02 L1 SPF primary processing complete: 0.000303s cumulative timeNov 28 20:44:02 L1 SPF result postprocessing complete: 0.000497s cumulative timeNov 28 20:44:02 L1 SPF RIB postprocessing complete: 0.000626s cumulative timeNov 28 20:44:02 L1 SPF routing table postprocessing complete: 0.000736s cumulative time                                                                                                                                                                                                                                                                             |

#### Related Documentation

- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## Analyzing IS-IS Link-State PDUs in Detail

To analyze IS-IS link-state PDUs in detail, follow these steps:

1. Configure IS-IS open messages.

```
[edit protocols isis traceoptions]
user@host# set flag lsp detail
```

2. Verify the configuration.

```
user@host# show
```

For example:

```
[edit protocols isis traceoptions]
user@host# show
file isislog size 5m world-readable;
flag error;
flag lsp detail;
```

3. Commit the configuration.

```
user@host# commit
```

4. View the contents of the file containing the detailed messages.

```
user@host# run show log filename
```

For example:

```
user@host# run show log isislog
Nov 28 20:17:24 Received L2 LSP abc-core-01.00-00, interface so-1/1/0.0
Nov 28 20:17:24     from abc-core-01
Nov 28 20:17:24     sequence 0x1c4f9, checksum 0x9fea, lifetime 1199
Nov 28 20:17:24     max area 0, length 426
Nov 28 20:17:24     no partition repair, no database overload
Nov 28 20:17:24     IS type 3, metric type 0
Nov 28 20:17:24     area address 99.0908 (1)
Nov 28 20:17:24     speaks CLNP
Nov 28 20:17:24     speaks IP
Nov 28 20:17:24     dyn hostname abc-core-01
Nov 28 20:17:24     IP address 10.10.134.11
Nov 28 20:17:24     IP prefix: 10.10.10.0/30 metric 1 up
Nov 28 20:17:24     IP prefix: 10.10.10.4/30 metric 5 up
Nov 28 20:17:24     IP prefix: 10.10.10.56/30 metric 5 up
Nov 28 20:17:24     IP prefix: 10.10.10.52/30 metric 1 up
Nov 28 20:17:24     IP prefix: 10.10.10.64/30 metric 5 up
Nov 28 20:17:24     IP prefix: 10.10.10.20/30 metric 5 up
Nov 28 20:17:24     IP prefix: 10.10.10.28/30 metric 5 up
Nov 28 20:17:24     IP prefix: 10.10.10.44/30 metric 5 up
Nov 28 20:17:24     IP prefix 10.10.10.0 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 1
Nov 28 20:17:24     IP prefix 10.10.10.4 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IP prefix 10.10.10.56 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IP prefix 10.10.10.52 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 1
Nov 28 20:17:24     IP prefix 10.10.10.64 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IP prefix 10.10.10.20 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IP prefix 10.10.10.28 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IP prefix 10.10.10.44 255.255.255.252
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IS neighbors:
Nov 28 20:17:24     IS neighbor abc-core-02.00
Nov 28 20:17:24     internal, metrics: default 1
Nov 28 20:17:24     [...Output truncated...]
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IS neighbor abc-brdr-01.00
Nov 28 20:17:24     internal, metrics: default 5
Nov 28 20:17:24     IS neighbor abc-core-02.00, metric: 1
Nov 28 20:17:24     IS neighbor abc-esr-02.00, metric: 5
Nov 28 20:17:24     IS neighbor abc-edge-03.00, metric: 5
Nov 28 20:17:24     IS neighbor abc-edge-01.00, metric: 5
Nov 28 20:17:24     IS neighbor abc-edge-02.00, metric: 5
Nov 28 20:17:24     IS neighbor abc-brdr-01.00, metric: 5
```

```

Nov 28 20:17:24 IP prefix: 10.10.134.11/32 metric 0 up
Nov 28 20:17:24 IP prefix: 10.11.0.0/16 metric 5 up
Nov 28 20:17:24 IP prefix: 10.211.0.0/16 metric 0 up
Nov 28 20:17:24 IP prefix 10.10.134.11 255.255.255.255
Nov 28 20:17:24 internal, metrics: default 0
Nov 28 20:17:24 IP prefix 10.11.0.0 255.255.0.0
Nov 28 20:17:24 internal, metrics: default 5
Nov 28 20:17:24 IP prefix 10.211.0.0 255.255.0.0
Nov 28 20:17:24 internal, metrics: default 0
Nov 28 20:17:24 Updating LSP
Nov 28 20:17:24 Updating L2 LSP abc-core-01.00-00 in TED
Nov 28 20:17:24 Analyzing subtlv's for abc-core-02.00
Nov 28 20:17:24 Analysis complete
Nov 28 20:17:24 Analyzing subtlv's for abc-esr-02.00
Nov 28 20:17:24 Analysis complete
Nov 28 20:17:24 Analyzing subtlv's for abc-edge-03.00
Nov 28 20:17:24 Analysis complete
Nov 28 20:17:24 Analyzing subtlv's for abc-edge-01.00
Nov 28 20:17:24 Analysis complete
Nov 28 20:17:24 Analyzing subtlv's for abc-edge-02.00
Nov 28 20:17:24 Analysis complete
Nov 28 20:17:24 Analyzing subtlv's for abc-brdr-01.00
Nov 28 20:17:24 Analysis complete
Nov 28 20:17:24 Scheduling L2 LSP abc-core-01.00-00 sequence 0x1c4f9 on
interface so-1/1/1.0

```

- Related Documentation**
- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)
  - [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## Displaying Sent or Received IS-IS Protocol Packets

To configure the tracing for only sent or received IS-IS protocol packets, follow these steps:

1. Configure the flag to display sent, received, or both sent and received packets.

```

[edit protocols isis traceoptions]
user@host# set flag hello send

```

or

```

[edit protocols isis traceoptions]
user@host# set flag hello receive

```

or

```

[edit protocols isis traceoptions]
user@host# set flag hello

```

2. Verify the configuration.

```
user@host# show
```

For example:

```
[edit protocols isis traceoptions]  
user@host# show  
file isislog size 10k files 10;  
flag hello send;
```

or

```
[edit protocols isis traceoptions]  
user@host# show  
file isislog size 10k files 10;  
flag hello receive;
```

or

```
[edit protocols isis traceoptions]  
user@host# show  
file isislog size 10k files 10;  
flag hello send receive;
```

3. Commit the configuration.

```
user@host# commit
```

4. View the contents of the file containing the detailed messages.

```
user@host# run show log filename
```

For example:

```
user@host# run show log isislog  
Sep 27 18:17:01 ISIS periodic xmit to 01:80:c2:00:00:15 (IFL 2)  
Sep 27 18:17:01 ISIS periodic xmit to 01:80:c2:00:00:14 (IFL 2)  
Sep 27 18:17:03 ISIS periodic xmit to 01:80:c2:00:00:15 (IFL 2)  
Sep 27 18:17:04 ISIS periodic xmit to 01:80:c2:00:00:14 (IFL 2)  
Sep 27 18:17:06 ISIS L2 hello from 0000.0000.0008 (IFL 2) absorbed  
Sep 27 18:17:06 ISIS periodic xmit to 01:80:c2:00:00:15 (IFL 2)  
Sep 27 18:17:06 ISIS L1 hello from 0000.0000.0008 (IFL 2) absorbed
```

#### Related Documentation

- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## PART 4

# Configuration Statements and Operational Commands

- Configuration Statements on page 445
- Operational Commands on page 597





## CHAPTER 16

# Configuration Statements

- [admin-group](#) on page 449
- [adjacency-segment](#) on page 451
- [authentication-key \(Protocols IS-IS\)](#) on page 452
- [authentication-key-chain \(Protocols IS-IS\)](#) on page 453
- [authentication-type \(Protocols IS-IS\)](#) on page 454
- [auto-bandwidth](#) on page 455
- [backup-selection \(Protocols IS-IS\)](#) on page 457
- [backup-spf-options \(Protocols IS-IS\)](#) on page 459
- [bfd-liveness-detection \(Protocols IS-IS\)](#) on page 461
- [checksum \(Protocols IS-IS\)](#) on page 464
- [clns-routing](#) on page 465
- [clns-updown-compatibility](#) on page 466
- [context-identifier \(Protocols IS-IS\)](#) on page 467
- [csnp-interval](#) on page 468
- [destination](#) on page 469
- [disable \(Protocols IS-IS\)](#) on page 471
- [disable \(LDP Synchronization for IS-IS\)](#) on page 472
- [export](#) on page 473
- [external-preference \(Protocols IS-IS\)](#) on page 474
- [family \(Protocols IS-IS\)](#) on page 475
- [flood-group \(Protocols IS-IS\)](#) on page 476
- [graceful-restart \(Protocols IS-IS\)](#) on page 477
- [hello-authentication-key](#) on page 478
- [hello-authentication-key-chain](#) on page 479
- [hello-authentication-type](#) on page 480
- [hello-interval \(Protocols IS-IS\)](#) on page 482
- [hello-padding](#) on page 484
- [hold-time \(Protocols IS-IS\)](#) on page 486

- [hold-time \(LDP Synchronization for IS-IS\) on page 488](#)
- [ignore-attached-bit on page 489](#)
- [ignore-lsp-metrics \(Protocols IS-IS\) on page 490](#)
- [import \(Protocols IS-IS\) on page 491](#)
- [interface \(Protocols IS-IS\) on page 492](#)
- [interface-group-holddown-delay on page 494](#)
- [interface \(Protocols ISIS\) on page 495](#)
- [ipv4-multicast on page 499](#)
- [ipv4-multicast-metric on page 500](#)
- [ipv6-multicast on page 501](#)
- [ipv6-multicast-metric on page 502](#)
- [ipv6-unicast on page 503](#)
- [ipv6-unicast-metric on page 504](#)
- [isis on page 505](#)
- [label-switched-path \(Protocols IS-IS\) on page 506](#)
- [layer2-map on page 507](#)
- [ldp-synchronization on page 508](#)
- [level \(Global IS-IS\) on page 509](#)
- [level \(IS-IS Interfaces\) on page 511](#)
- [link-group-protection \(Protocols IS-IS\) on page 512](#)
- [link-protection \(Protocols IS-IS\) on page 513](#)
- [loose-authentication-check on page 514](#)
- [lsp-equal-cost on page 515](#)
- [lsp-interval on page 516](#)
- [lsp-lifetime on page 518](#)
- [max-areas on page 520](#)
- [max-hello-size on page 521](#)
- [max-lsp-size on page 522](#)
- [max-snp-size on page 523](#)
- [mesh-group \(Protocols IS-IS\) on page 524](#)
- [metric \(Protocols IS-IS\) on page 525](#)
- [multicast-rpf-routes on page 526](#)
- [multipath \(Protocols IS-IS\) on page 527](#)
- [multipath \(SPF Options\) on page 528](#)
- [no-adjacency-down-notification \(Protocols IS-IS\) on page 529](#)
- [no-adjacency-holddown on page 530](#)
- [no-authentication-check on page 531](#)

- [no-advertise-adjacency-segment \(Protocols IS-IS\) on page 532](#)
- [no-csnp-authentication on page 533](#)
- [node on page 534](#)
- [node-protection on page 535](#)
- [node-segment \(Protocols IS-IS\) on page 536](#)
- [node-tag on page 538](#)
- [node-link-protection \(Protocols IS-IS\) on page 540](#)
- [no-eligible-backup \(Protocols IS-IS\) on page 541](#)
- [no-eligible-remote-backup on page 542](#)
- [no-hello-authentication on page 543](#)
- [no-ipv4-multicast on page 544](#)
- [no-ipv4-routing on page 545](#)
- [no-ipv6-multicast on page 546](#)
- [no-ipv6-routing on page 547](#)
- [no-ipv6-unicast on page 548](#)
- [no-psnp-authentication on page 549](#)
- [no-unicast-topology on page 550](#)
- [overload \(Protocols IS-IS\) on page 551](#)
- [passive \(Protocols IS-IS\) on page 554](#)
- [per-interface-per-member-link on page 556](#)
- [per-sid on page 557](#)
- [point-to-point on page 558](#)
- [post-convergence-lfa on page 559](#)
- [preference \(Protocols IS-IS\) on page 560](#)
- [prefix-export-limit \(Protocols IS-IS\) on page 561](#)
- [prefix-segment on page 562](#)
- [priority \(Protocols IS-IS\) on page 563](#)
- [protocols on page 564](#)
- [purge-originator on page 567](#)
- [reference-bandwidth \(Protocols IS-IS\) on page 568](#)
- [remote-backup-calculation on page 569](#)
- [rib-group \(Protocols IS-IS\) on page 570](#)
- [routing-instances \(Multiple Routing Entities\) on page 571](#)
- [sensor-based-stats \(Protocols IS-IS\) on page 572](#)
- [shortcuts \(Protocols IS-IS\) on page 573](#)
- [spf-options \(Protocols IS-IS\) on page 574](#)
- [static-host-mapping on page 576](#)

- [source-packet-routing-disable \(Protocols IS-IS\) on page 577](#)
- [source-packet-routing \(Protocols IS-IS and OSPF\) on page 578](#)
- [srgb on page 580](#)
- [te-metric \(Protocols IS-IS\) on page 581](#)
- [topologies \(Protocols IS-IS\) on page 582](#)
- [traceoptions \(Protocols IS-IS\) on page 583](#)
- [traffic-engineering \(Protocols IS-IS\) on page 586](#)
- [traffic-statistics on page 590](#)
- [update-threshold-max-reservable on page 591](#)
- [use-source-packet-routing \(Protocols IS-IS\) on page 592](#)
- [use-post-convergence-lfa on page 593](#)
- [use-for-post-convergence-lfa on page 594](#)
- [wide-metrics-only on page 595](#)

## admin-group

**Syntax**

```
admin-group {
  exclude [ group-name ];
  include-all [ group-name ];
  include-any [ group-name ];
  preference [ group-name ];
}
```

**Hierarchy Level**

```
[edit logical-systems logical-system-name routing-options backup-selection destination
prefix interface interface-name],
[edit logical-systems logical-system-name routing-instances instance-name routing-options
backup-selection destination prefix interface interface-name],
[edit routing-instances instance-name routing-options backup-selection destination prefix
interface interface-name],
[edit routing-options backup-selection destination prefix interface interface name]
```

**Release Information** Statement introduced in Junos OS Release 14.1.

**Description** Define the administrative groups criteria for the selection of the backup path.



**NOTE:** Configure group names of admin-group under the [edit protocols mpls] hierarchy level.

**Options** **exclude [ group-name ]**— Specify the administrative groups to be excluded. The backup path is not selected as the loop-free alternate (LFA) or backup next hop if any of the links in the path have any one of the listed administrative groups.

**group-name**— Name of one or more admin-group defined under the [edit protocols mpls] hierarchy level.

**include-all [ group-name ]**— Require each link in the backup path to have all the listed administrative groups in order to accept the path.

**group-name**— Name of one or more admin-group defined under the [edit protocols mpls] hierarchy level.

**include-any [ group-name ]**— Require each link in the backup path to have at least one of the listed administrative groups in order to select the path.

**group-name**— Name of one or more admin-group defined under the [edit protocols mpls] hierarchy level.

**preference [ *group-name* ]**— Define an ordered set of administrative groups that specifies the preference of the backup path. The leftmost element in the set is given the highest preference.

***group-name***— Name of one or more admin-group defined under the **[edit protocols mpls]** hierarchy level.


|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Understanding Backup Selection Policy for IS-IS Protocol on page 48</a></li><li>• <i>Configuring Backup Selection Policy for IS-IS Protocol</i></li><li>• <i>Understanding Backup Selection Policy for OSPF Protocol</i></li><li>• <a href="#">backup-selection (Protocols ISIS) on page 457</a></li><li>• <a href="#">destination on page 469</a></li><li>• <a href="#">interface on page 495</a></li></ul> |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## adjacency-segment

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | adjacency-segment {<br>hold-time <i>hold-time</i> ;<br>}                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>name</i> protocols isis <a href="#">source-packet-routing</a> ],<br>[edit logical-systems <i>name</i> routing-instances <i>name</i> protocols isis <a href="#">source-packet-routing</a> ],<br>[edit protocols isis source-packet-routing],<br>[edit routing-instances <i>name</i> protocols isis <a href="#">source-packet-routing</a> ]                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.2R1 for MX Series routers, PTX Series routers, QFX5100 switches, and QFX10000 switches.<br>Statement introduced in Junos OS Release 17.3R1 for QFX5110 and QFX5200 switches.                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Configure attributes for adjacency segments in source packet routing in networking (SPRING), or configure segment routing (SR) to ensure that the adjacency segment identifiers are retained during adjacency or link flaps. The adjacency segments are not released immediately and are retained for the configured hold time duration.                                                                                                                                         |
| <b>Options</b>                  | <b>hold-time</b> —Duration, in milliseconds, to retain adjacency segments after isolating from an interface.<br><b>Range:</b> 180,000 through 900,000                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292</a></li> <li>• <a href="#">Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol on page 326</a></li> <li>• <a href="#">source-packet-routing on page 578</a></li> <li>• <a href="#">traffic-engineering on page 586</a></li> <li>• <a href="#">prefix-segment on page 562</a></li> </ul> |

## authentication-key (Protocols IS-IS)

|                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                           | <code>authentication-key key;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>                                                                                                                                                                                  | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>]</p>                                                                                                       |
| <b>Release Information</b>                                                                                                                                                                              | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                        |
| <b>Description</b>                                                                                                                                                                                      | <p>Authentication key (password). Neighboring routing devices use the password to verify the authenticity of packets sent from this interface. For the key to work, you also must include the <b>authentication-type</b> statement.</p> <p>All routing devices must use the same password. If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces adjacent to the Juniper Networks routing device.</p> |
| <b>Default</b>                                                                                                                                                                                          | If you do not include this statement and the <b>authentication-type</b> statement, IS-IS authentication is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                                                                                                                                                                          | <p><b>key</b>—Authentication password. The password can be up to 1024 characters long. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>                                                                                                                                                                                                                                                                                                                                         |
| <div>  <p><b>CAUTION:</b> A simple password for authentication is truncated if it exceeds 254 characters.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                                                                                                                                                                         | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 35</a></li> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36</a></li> </ul>                                                                                                                                                                                                                                                                                                  |



## authentication-key-chain (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-key-chain <i>key-chain-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>name</i> protocols isis level <i>level-number</i>],</code><br><code>[edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis level <i>level-number</i>],</code><br><code>[edit protocols isis level <i>level-number</i>],</code><br><code>[edit routing-instances <i>instance-name</i> protocols isis level <i>level-number</i>]</code>                                                                                             |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Apply and enable an authentication keychain to the routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b><i>key-chain</i></b>—Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36</a></li> <li>• <a href="#">Example: Configuring Router Authentication for BGP</a></li> <li>• <a href="#">Example: Configuring BFD Authentication for Securing Static Routes</a></li> <li>• <a href="#">Configuring Authentication Key Updates</a></li> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 35</a></li> </ul> |

## authentication-type (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-type <i>authentication</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                       |
| <b>Description</b>              | Enable authentication and specify the authentication scheme for IS-IS. If you enable authentication, you must specify a password by including the <b>authentication-key</b> statement.                                                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                  | If you do not include this statement and the <b>authentication-key</b> statement, IS-IS authentication is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b><i>authentication</i></b>—Authentication scheme:</p> <ul style="list-style-type: none"> <li>• <b>md5</b>—Use HMAC authentication in combination with MD5. HMAC-MD5 authentication is defined in RFC 2104, <i>HMAC: Keyed-Hashing for Message Authentication</i>.</li> <li>• <b>simple</b>—Use a simple password for authentication. The password is included in the transmitted packet, making this method of authentication relatively insecure. We recommend that you <i>not</i> use this authentication method.</li> </ul> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 452</a></li> <li>• <a href="#">no-authentication-check on page 531</a></li> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 35</a></li> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36</a></li> </ul>                                                                                                                                                        |

## auto-bandwidth

**Syntax**

```

auto-bandwidth {
  template name {
    adjust-interval adjust-interval;
    adjust-threshold adjust-threshold;
    auto-bandwidth-subscription auto-bandwidth-subscription;
    statistic-collection-interval statistic-collection-interval;
  }
  traceoptions {
    file filename <files files> <size size> <(world-readable | no-world-readable)>;
    flag (all | state | timer) {
      detail detail;
      disable disable;
      receive receive;
      send send;
    }
  }
}

```

**Hierarchy Level** [edit logical-systems *name* routing-instances *name* routing-options],  
 [edit logical-systems *name* routing-options],  
 [edit routing-instances *name* routing-options],  
 [edit routing-options]

**Release Information** Statement introduced in Junos OS Release 17.3R1 for MX Series and PTX Series.

**Description** Configure an auto-bandwidth template to define parameters that measure the available bandwidth and periodically trigger updates to RSVP and IGP. You can configure this option both at the IS-IS protocol level or at the IS-IS interface level.

Traffic samples are collected periodically at each statistics interval and the average SPRING bandwidth utilization is calculated. If this average value increases beyond the configured adjust threshold percentage, that is the last reported SPRING bandwidth, then RSVP adjusts the subscription percentage accordingly. which might cause RSVP LSP preemption, IGP updates, and further re-routing of RSVP LSPs. However, if the SPRING bandwidth utilization drops below the configured threshold, the RSVP subscription percentage is modified to reflect the increase. You can configure parameters such as the threshold, the collection interval, and the adjust interval as per your requirements.



**CAUTION:** Configure the `adjust-interval` and `statistics-interval` options appropriately to avoid scaling issues. You can fine tune these values based on route and label-switched path (LSP) scale.

|                          |                                                                                                                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Options                  | <b>template <i>name</i></b> — Specify an auto-bandwidth template name with a maximum length of 64 characters.                                                                                               |
|                          | <b>adjust-interval</b> — Specify the time interval after which the average bandwidth utilization is measured.<br><b>Range:</b> 30 through 3600 seconds<br><b>Default:</b> 900 seconds                       |
|                          | <b>adjust-threshold</b> — Specify the percentage change threshold after which an action is triggered.<br><b>Range:</b> 0 through 100 percent<br><b>Default:</b> 10 percent                                  |
|                          | <b>auto-bandwidth-subscription</b> — Specify the threshold for RSVP subscription in percentage.<br><b>Range:</b> 0 through 200 percent<br><b>Default:</b> 100 percent                                       |
|                          | <b>statistic-collection-interval</b> — Specify the time interval after which the traffic statistics is collected from the line cards.<br><b>Range:</b> 10 through 300 seconds<br><b>Default:</b> 60 seconds |
| Required Privilege Level | routing—To view this statement in the configuration.                                                                                                                                                        |
|                          | routing-control—To add this statement to the configuration.                                                                                                                                                 |
| Related Documentation    | • <a href="#">traffic-statistics on page 590</a>                                                                                                                                                            |
|                          | • <a href="#">update-threshold-max-reservable on page 591</a>                                                                                                                                               |

## backup-selection (Protocols ISIS)

**Syntax**

```

backup-selection {
  destination prefix {
    interface (interface-name| all){
      admin-group {
        exclude [ group-name ];
        include-all [ group-name ];
        include-any [ group-name ];
        preference [ group-name ];
      }
      bandwidth-greater-equal-primary;
      dest-metric (highest | lowest);
      downstream-paths-only;
      metric-order [ root dest ];
      node {
        exclude [ node-address ];
        preference [ node-address ];
      }
      node-tag {
        exclude [ route-tag ];
        preference [ route-tag ];
      }
      protection-type (link | node | node-link);
      root-metric (highest | lowest);
      srlg (loose | strict);
      evaluation-order [ admin-group srlg bandwidth protection-type node node-tag metric
        ];
    }
  }
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-options],  
 [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options],  
 [edit routing-instances *instance-name* routing-options],  
 [edit routing-options]

**Release Information** Statement introduced in Junos OS Release 14.1.

**Description** Define backup selection policies, per prefix per primary next-hop interface, to enforce loop-free alternate (LFA) selection based on admin-group, srlg, bandwidth, protection-type, node, node-tag, and metric attributes of the backup path.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

- Related Documentation**
- [Understanding Backup Selection Policy for IS-IS Protocol on page 48](#)
  - [Example: Configuring Backup Selection Policy for IS-IS Protocol on page 50](#)

## backup-spf-options (Protocols IS-IS)

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre> backup-spf options {   node-link-degradation;   per-prefix-calculation;   remote-backup-calculation;   use-source-packet-routing; } </pre>                                                                                                                                                                                                                                                                                                                                                                       |
| Hierarchy Level          | <pre> [edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis] </pre>                                                                                                                                                                                                                            |
| Release Information      | <p>Statement introduced in Junos OS Release 11.4R3.</p> <p><b>node-link-degradation</b> option added in Junos OS Release 14.2.</p> <p><b>use-source-packet-routing</b> option introduced in Junos OS Release 16.2R1 for MX Series and PTX Series routers.</p> <p>Support for this option introduced in Junos OS Release 17.2R1 for QFX5100 and QFX10000 switches.</p> <p>Support for <b>remote-backup-calculation</b> option introduced in Junos OS Release 18.2R1 for QFX5100, QFX5110, and QFX5200 switches.</p>     |
| Description              | <p>Configure options for running the shortest-path-first (SPF) algorithm for backup next hops for protected interfaces. Use these options to override the default behavior of having Junos OS calculate backup paths for all the topologies in an instance when at least one interface is configured with link protection or node-link protection.</p> <p>This configuration option is used in conjunction with the <b>node-link-protection</b> statement to compute per-prefix loop-free alternate routes (LFAs).</p> |
| Options                  | <p><b>node-link-degradation</b>—Degrade an interface from node-link to link protection in case no node protection LFA route is found for a given destination node.</p> <p><b>per-prefix-calculation</b>—Calculate backup next hops for non-best prefix originators.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                      |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control-level—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                   |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring MPLS Egress Protection for Layer 3 VPN Services</i></li> <li>• <i>Example: Configuring Layer 3 VPN Egress Protection with RSVP and LDP</i></li> <li>• <i>link-protection</i></li> </ul>                                                                                                                                                                                                                                                               |

- *node-link-protection*
- [remote-backup-calculation on page 569](#)



## bfd-liveness-detection (Protocols IS-IS)

**Syntax**

```

bfd-liveness-detection {
  authentication {
    algorithm algorithm-name;
    key-chain key-chain-name;
    loose-check;
  }
  detection-time {
    threshold milliseconds;
  }
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  multiplier number;
  no-adaptation;
  transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
  }
  version (1 | automatic);
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols isis [interface interface-name](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
 isis [interface interface-name](#)],  
 [edit protocols isis [interface interface-name](#)],  
 [edit protocols isis [interface interface-name](#) family inet|inet6],  
 [edit routing-instances *routing-instance-name* protocols isis [interface interface-name](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
**detection-time threshold** and **transmit-interval threshold** options added in Junos OS Release 8.2.  
 Support for logical systems introduced in Junos OS Release 8.3.  
**no-adaptation** statement introduced in Junos OS Release 9.0.  
**authentication algorithm**, **authentication key-chain**, and **authentication loose-check** options introduced in Junos OS Release 9.6.  
 Statement introduced in Junos OS Release 12.1 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure bidirectional failure detection timers and authentication.



**NOTE:** Starting with Junos OS Release 16.1, you can configure IS-IS BFD sessions for the IPv6 address family. Therefore, this configuration statement is also available under the [edit protocols isis [interface interface-name](#) family inet|inet6] hierarchy level.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. For example, the timers can adapt to a higher value if the adjacency fails, or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (RX) interval by two if the local BFD instance is the reason for the session flap. The transmission (TX) interval is increased by two if the remote BFD instance is the reason for the session flap.

You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command does not affect traffic flow on the routing device.

**Options** **authentication algorithm** *algorithm-name*—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**.

**authentication key-chain** *key-chain-name*—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

**authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication might not be configured at both ends of the BFD session.

**detection-time threshold** *milliseconds*—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**minimum-interval** *milliseconds*—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the **transmit-interval minimum-interval** and **minimum-receive-interval** statements.

**Range:** 1 through 255,000

**minimum-receive-interval** *milliseconds*—Configure the minimum interval after which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**multiplier** *number*—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**no-adaptation**—Specify that BFD sessions not adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold** *milliseconds*—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**transmit-interval minimum-interval** *milliseconds*—Configure a minimum interval after which the local routing device transmits hello packets to a neighbor. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version)

**Default:** automatic

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring BFD for IS-IS on page 129](#)
- [Understanding BFD Authentication for IS-IS on page 136](#)


## checksum (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | checksum;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i> ],<br>[edit protocols isis <a href="#">interface</a> <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Enable checksums for packets on this interface.<br><br>Junos OS supports IS-IS checksums as documented in RFC 3358, <i>Optional Checksums in Intermediate System to Intermediate System (ISIS)</i> .<br><br>The checksum cannot be enabled with MD5 hello authentication on the same interface.                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                         |

## clns-routing

|                                 |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clns-routing;                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.2 for MX Series routers.                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Enable IS-IS to exchange Connectionless Network Service (CLNS) routes. CLNS is a Layer 3 protocol, similar to IPv4. CLNS uses network service access points (NSAPs) to address end systems and intermediate systems.                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS for CLNS on page 377</a></li> <li>• <i>Example: Configuring Static Routes for CLNS When No IGP is Present</i></li> <li>• <i>Example: Configuring BGP for CLNS VPNs</i></li> <li>• <i>Understanding BGP for CLNS VPNs</i></li> <li>• <i>Understanding Static Routes for CLNS</i></li> </ul> |

## clns-updown-compatibility


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clns-updown-compatibility;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.4R7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>When you enable IS-IS to exchange Connectionless Network Service (CLNS) routes, Junos OS sets the reserved (R) bit in the default metric field inside type, length, and value (TLV) type-3 (ES-Neighbor) as a marker for routing loop prevention. Junos OS uses the up/down bit for marking prefixes on the Level 2-to-Level 1 boundary as being propagated Down, such that any router in that area never propagates it Up on a Level 1-to-Level 2 boundary. For detailed information about how this works in IP routing environments, see RFC 2966, <i>Domain-wide Prefix Distribution with Two-Level IS-IS</i>.</p> <p>Some other vendors' platforms might not support up/down bit setting in CLNS route TLVs. If one of these vendors' platforms receives this TLV with the R bit set, the platform discards the information.</p> <p>When you use the <b>clns-updown-compatibility</b> statement in the IS-IS configuration, the R bit is set to 0, and the issue is resolved. The <b>clns-updown-compatibility</b> statement causes Junos OS to use the Internal/External metric-type bit in the TLV header instead of using the R bit as the up/down bit marker. This has the advantage that older end system (ES) equipment does not receive TLV headers with the R bit set.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;">  <p><b>CAUTION:</b> Not using the R bit can lead to potential routing loops. You can use the site-of-origin (SoO) extended community to prevent a looped BGP update from being injected back to IS-IS when received from a remote provider edge (PE) device. The receiving PE device can check against the SoO community, and if the value matches its own, the NLRI is not accepted.</p> </div> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS for CLNS on page 377</a></li> <li>• <a href="#">Example: Configuring Static Routes for CLNS When No IGP is Present</a></li> <li>• <a href="#">Example: Configuring BGP for CLNS VPNs</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

- *Understanding BGP for CLNS VPNs*
- *Understanding Static Routes for CLNS*

## context-identifier (Protocols IS-IS)

|                                 |                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>context-identifier <i>identifier</i>;</code>                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <i>isis</i> ],<br>[edit protocols <i>isis</i> ]                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.4.                                                                                                   |
| <b>Description</b>              | Configure IS-IS context identifier information.                                                                                                  |
| <b>Options</b>                  | <i>identifier</i> —IPv4 address that defines a protection pair. The context identifier is manually configured on both primary and protector PEs. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show isis context-identifier on page 663</a></li> </ul>                                     |

## csnp-interval

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>csnp-interval (seconds   disable);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>                                                                     |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure the interval between complete sequence number PDUs (CSNPs) on a LAN interface.</p> <p>If the routing device is the designated router on a LAN, IS-IS sends CSN packets every 10 seconds.</p> <p>.....</p> <div>  <p><b>NOTE:</b> The <code>csnp-interval</code> statement is effective only when configured on LAN interfaces.</p> <p>.....</p> </div> <p>To configure the interface not to send any CSNPs, specify the <b>disable</b> option.</p> |
| <b>Default</b>                  | By default, IS-IS sends CSNPs periodically. If the routing device is the designated router on a LAN, IS-IS sends CSNPs every 10 seconds.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>disable</b>—Do not send CSNPs on this interface.</p> <p><i>seconds</i>—Number of seconds between the sending of CSNPs.</p> <p><b>Range:</b> 1 through 65,535 seconds</p> <p><b>Default:</b> 10 seconds on LAN broadcast links</p>                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363</a></li> <li>• <a href="#">Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces on page 363</a></li> </ul>                                                                                                                                                                                                                                                                 |



## destination

**Syntax**

```
destination prefix {
  interface (interface-name | all) {
    admin-group {
      exclude [ group-name ];
      include-all [ group-name ];
      include-any [ group-name ];
      preference [ group-name ];
    }
    bandwidth-greater-equal-primary;
    dest-metric (highest | lowest);
    downstream-paths-only;
    evaluation-order [ admin-group srlg bandwidth protection-type neighbor neighbor-tag
      metric ];
    metric-order [ root dest ];
    node {
      exclude [ neighbor-address ];
      preference [ neighbor-address ];
    }
    node-tag {
      exclude [ route-tag ];
      preference [ route-tag ];
    }
    protection-type (link | node | node-link);
    root-metric (highest | lowest);
    srlg (loose | strict);
  }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-options backup-selection],  
[edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options  
backup-selection],  
[edit routing-instances *instance-name* routing-options backup-selection],  
[edit routing-options backup-selection]

**Release Information** Statement introduced in Junos OS Release 14.1.

**Description** Define the backup selection policy for a particular destination prefix or for all the prefixes.

**Options** *prefix*— Destination prefix name and prefix length. You can specify 0/0 for the IPv4 least-specific prefix or 0::0/0 for the IPv6 least-specific prefix.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

- Related Documentation**
- [Understanding Backup Selection Policy for IS-IS Protocol on page 48](#)
  - *Configuring Backup Selection Policy for IS-IS Protocol*
  - [backup-selection \(Protocols ISIS\) on page 457](#)

## disable (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>disable;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | <pre> [edit logical-systems <i>logical-system-name</i> protocols <b>isis</b>], [edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> protocols isis <b>traffic-engineering</b>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>isis</b>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>traffic-engineering</b>], [edit protocols <b>isis</b>], [edit protocols isis <b>interface</b> <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit protocols isis <b>traffic-engineering</b>], [edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b>], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>traffic-engineering</b>] </pre> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>         | <p>Disable IS-IS on the routing device, on an interface, or on a level.</p> <p>At the <b>[edit protocols isis traffic-engineering]</b> hierarchy level, disable IS-IS support for traffic engineering.</p> <p>Enabling IS-IS on an interface (by including the <b>interface</b> statement at the <b>[edit protocols isis]</b> or the <b>[edit routing-instances routing-instance-name protocols isis]</b> hierarchy level), disabling it (by including the <b>disable</b> statement), and not actually having IS-IS run on an interface (by including the <b>passive</b> statement) are mutually exclusive states.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>             | <p>IS-IS is enabled for Level 1 and Level 2 routers on all interfaces on which <b>family iso</b> is enabled.</p> <p>IS-IS support for traffic engineering is enabled.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)
- [IS-IS Overview on page 3](#)

---

## disable (LDP Synchronization for IS-IS)

---

**Syntax** disable;

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols isis [interface interface-name](#) ldp-synchronization],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols isis [interface interface-name](#) ldp-synchronization],  
[edit protocols isis [interface interface-name](#) ldp-synchronization],  
[edit routing-instances *routing-instance-name* protocols isis [interface interface-name](#) ldp-synchronization]

**Release Information** Statement introduced in Junos OS Release 7.5.


**Description** Disable LDP synchronization for IS-IS.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding LDP-IGP Synchronization on page 274](#)
- [Example: Configuring Synchronization Between IS-IS and LDP on page 276](#)

## export

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],<br/>         [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],<br/>         [edit protocols <i>isis</i>],<br/>         [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.<br/>         Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>         Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/>         Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Apply one or more policies to routes being exported from the routing table into IS-IS.</p> <p>All routing protocols store the routes that they learn in the routing table. The routing table uses this collected route information to determine the active routes to destinations. The routing table then installs the active routes into its forwarding table and exports them into the routing protocols. It is these exported routes that the protocols advertise.</p> <p>For each protocol, you control which routes the protocol stores in the routing table and which routes the routing table exports into the protocol from the routing table by defining a <i>routing policy</i> for that protocol.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;"> <p> <b>NOTE:</b> For IS-IS, you cannot apply routing policies that affect how routes are imported into the routing table; doing so with a link-state protocol can easily lead to an inconsistent topology database.</p> </div> |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.<br/>         routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## external-preference (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>external-preference <i>preference</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>]</p>                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Configure the preference of external routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b><i>preference</i></b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)</p>                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Route Preferences Overview</a></li> <li>• <a href="#">Example: Redistributing OSPF Routes into IS-IS on page 87</a></li> <li>• <a href="#">Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS on page 104</a></li> <li>• <a href="#">Understanding BGP Communities, Extended Communities, and Large Communities as Routing Policy Match Conditions on page 103</a></li> <li>• <a href="#">Understanding Routing Policies on page 45</a></li> <li>• <a href="#">preference on page 560</a></li> </ul> |

## family (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> family inet {   shortcuts {     multicast-rpf-routes;   } } family inet-mpls {   shortcuts; } family inet6 {   shortcuts; } family inet6-mpls {   shortcuts; } </pre>                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering],<br/> [edit protocols isis traffic-engineering],<br/> [edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering]</p>                                                                                        |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.3.<br/> Support for IPv6 for IGP shortcuts introduced in Junos OS Release 9.3.<br/> Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/> Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.<br/> Support for <b>inet-mpls</b> and <b>inet6-mpls</b> statements introduced in Junos OS Release 17.2 for the MX Series routers, PTX Series routers, QFX5100, and QFX10000 switches.</p> |
| <b>Description</b>              | Configure the address family for traffic engineering IS-IS interior gateway protocol (IGP) shortcuts.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p>inet—IPv4 address family</p> <p>inet-mpls—IPv4-MPLS address family</p> <p>inet6—IPv6 address family</p> <p>inet6-mpls—IPv6-MPLS address family</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                              |

## flood-group (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | flood-group;                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 16.2.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | IS-IS supports flood-group. This feature limits link-state packet data unit (PDU) flooding over IS-IS interfaces.                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                             |



## graceful-restart (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>graceful-restart {   disable;   helper-disable;   restart-duration <i>seconds</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <i>isis</i> ],<br>[edit protocols <i>isis</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure graceful restart parameters for IS-IS.</p> <p>Graceful restart allows a routing device to restart with minimal effects to the network, and is enabled for all routing protocols at the <b>[edit routing-options]</b> hierarchy level. When graceful restart is enabled, the restarting routing device is not removed from the network topology during the restart period. The adjacencies are reestablished after restart is complete.</p> <p>On LAN interfaces where IS-IS is configured on a transit router that serves as the designated router (DR), a graceful restart causes:</p> <ul style="list-style-type: none"> <li>• The ingress router of the label-switched path (LSP), which passes through the DR, to break the LSP.</li> <li>• The ingress router to re-signal the LSP.</li> </ul> |
| <b>Options</b>                  | <p><b>disable</b>—Disable graceful restart for IS-IS.</p> <p><b>helper-disable</b>—Disable graceful restart helper capability. Helper mode is enabled by default.</p> <p><b>restart-duration <i>seconds</i></b>—Time period for the restart to last, in seconds.<br/> <b>Range:</b> 30 through 300 seconds<br/> <b>Default:</b> 30 seconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Routing Protocols Graceful Restart</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |


## hello-authentication-key

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>hello-authentication-key password;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <a href="#">level number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <a href="#">level number</a>],</p> <p>[edit protocols isis interface <i>interface-name</i> <a href="#">level number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <a href="#">level number</a>]</p> |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                  |
| Description              | Configure an authentication key (password) for hello packets. Neighboring routing devices use the password to verify the authenticity of packets sent from an interface. For the key to work, you also must include the <b>hello-authentication-type</b> statement.                                                                                                                                                                                                                                                                                            |
| Default                  | By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.                                                                                                                                                                                                                                                                                                                                                      |
| Options                  | <p><b>password</b>—Authentication password. The password can be up to 255 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>                                                                                                                                                                                                                                                                                                                                                    |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 452</a></li> <li>• <a href="#">authentication-type on page 454</a></li> <li>• <a href="#">hello-authentication-type on page 480</a></li> </ul>                                                                                                                                                                                                                                                                                                                                 |

## hello-authentication-key-chain

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>hello-authentication-key-chain <i>key-chain-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</code><br><code>[edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis interface</code><br><code>    <i>interface-name</i> level <i>level-number</i>],</code><br><code>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</code><br><code>[edit routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level</code><br><code>    <i>level-number</i>]</code> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Apply an authentication keychain to the IS-IS interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b><i>key-chain-name</i></b>—Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 35</a></li> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36</a></li> </ul>                                                                                                                                                                                                                                                                                                                           |

## hello-authentication-type

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | hello-authentication-type (md5   simple);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <a href="#">level number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <a href="#">level number</a>],</p> <p>[edit protocols isis interface <i>interface-name</i> <a href="#">level number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <a href="#">level number</a>]</p>                                                                                                                                                                                                                                                                                |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Description              | <p>Enable authentication on an interface for hello packets. If you enable authentication on hello packets, you must specify a password by including the <b>hello-authentication-key</b> statement.</p> <p>You can configure authentication for a given IS-IS level on an interface. On a point-to-point link, if you enable hello authentication for both IS-IS levels, the password configured for Level 1 is used for both levels.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;">  <p><b>CAUTION:</b> If no authentication is configured for Level 1 on a point-to-point link with both levels enabled, the hello packets are sent without any password, regardless of the Level 2 authentication configurations.</p> </div> |
| Default                  | By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Options                  | <p><b>md5</b>—Specifies Message Digest 5 as the packet verification type.</p> <p><b>simple</b>—Specifies simple authentication as the packet verification type.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 452</a></li> <li>• <a href="#">authentication-type on page 454</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

- [hello-authentication-key on page 478](#)

## hello-interval (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>hello-interval <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>     | <pre>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level   <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level   <i>level-number</i>]</pre> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                           |
| <b>Description</b>         | <p>Modify the frequency with which the routing device sends hello packets out of an interface, in seconds.</p> <p>Routing devices send hello packets at a fixed interval on all interfaces to establish and maintain neighbor relationships. This interval is advertised in the hello interval field in the hello packet.</p> <p>You can send out hello packets in subsecond intervals. To send out hello packets every 333 milliseconds, set the <b>hold-time</b> value to 1.</p>                                                      |
| <b>Options</b>             | <p><b><i>seconds</i></b>—Frequency of transmission for hello packets.</p> <p><b>Range:</b> 1 through 20,000 seconds</p> <p><b>Default:</b> 3 seconds (for designated intermediate system [DIS] routers), 9 seconds (for non-DIS routers)</p>                                                                                                                                                                                                                                                                                            |



**NOTE:** When elected as a designated intermediate system [DIS] router on any LAN adjacency, the hello and hold-timer intervals are scaled down by a factor of 3. This means the default values of 9 and 27 seconds of ISIS hello and hold time intervals are scaled down to 3 and 9 seconds for LAN adjacencies. During switchovers, this hello interval is too short to form LAN adjacencies. Therefore, you can configure one of the following solutions:

- Set the hello and hold time interval for LAN adjacencies to 30 seconds and 90 seconds respectively on both the DIS and a neighboring router.
- Convert the LAN interfaces to point-to-point IS-IS interfaces.



**BEST PRACTICE:** On QFX10000 switches, we strongly recommend that you configure all IS-IS interfaces, including peer interfaces, as point-to-point interfaces. If you do not, you might experience session flaps, that is, IS-IS sessions that go down and then come back up, when IS-IS is configured in virtual routing and forwarding (VRF) instances. When you scale IS-IS in any scenario, you might also experience scaling issues if you do not configure IS-IS interfaces as point-to-point interfaces.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation** • [hold-time on page 488](#)

## hello-padding

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | hello-padding (adaptive   loose   strict);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Hierarchy Level     | [edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Release Information | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description         | <p>Configure padding on hello packets to accommodate asymmetrical maximum transfer units (MTUs) from different hosts.</p> <p>This helps to prevent a premature adjacency Up state when one routing device's MTU does not meet the requirements to establish the adjacency.</p> <p>As an OSI Layer 2 protocol, IS-IS does not support data fragmentation. Therefore, maximum packet sizes must be established and supported between two routers. During adjacency establishment, the IS-IS protocol makes sure that the link supports a packet size of 1492 bytes by padding outgoing hello packets up to the maximum packet size of 1492 bytes.</p> <p>This is the default behavior of the Junos OS IS-IS implementation. However, Junos OS provides an option to disable hello padding that can override this behavior.</p> <p>There are four types of hello padding:</p> <ul style="list-style-type: none"><li>• Adaptive padding—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state type, length, and value (TLV) tuple. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface. Adaptive padding has more overhead than loose padding and is able to detect MTU asymmetry from one side of the connection. This one-sided detection can result in generation of extra link-state PDUs that are flooded throughout the network. Specify the <b>adaptive</b> option to configure enough padding to establish an adjacency to neighbors.</li><li>• Disabled padding—Padding is disabled on all types of interfaces for all adjacency states. Specify the <b>disable</b> option to accommodate interfaces that support less than the default packet size of 1492 bytes.</li><li>• Loose padding (the default)—The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state. Loose padding might</li></ul> |



not be able to detect certain situations such as asymmetrical MTUs between the routing devices. Specify the **loose** option to configure enough padding to initialize an adjacency to neighbors.

- **Strict padding**—Padding is done on all interface types and for all adjacency states, and is continuous. Strict padding has the most overhead. The advantage is that strict padding detects MTU issues on both sides of a link. Specify the **strict** option to configure padding to allow all adjacency states with neighbors.

**Options**    **adaptive**—Configure padding until the neighbor adjacency is established and active.

**disable**—Disable padding on all types of interfaces for all adjacency states.

**loose**—Configure padding until the state of the adjacency is initialized.

**strict**—Configure padding for all adjacency states.

**Required Privilege**    routing—To view this statement in the configuration.

**Level**    routing-control—To add this statement to the configuration.

## hold-time (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>hold-time <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | <pre>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>         | <p>Set the length of time a neighbor considers this router to be operative (up) after receiving a hello packet. If the neighbor does not receive another hello packet within the specified time, it marks this routing device as inoperative (down). The hold time itself is advertised in the hello packets.</p> <p>The hold time specifies how long a neighbor should consider this routing device to be operative without receiving another hello packet. If the neighbor does not receive a hello packet from this routing device within the hold time, it marks the routing device as being unavailable.</p> <p>For systems configured with graceful routing switchover (GRES) with Graceful Restart, the hold time for Master and Backup Routing Engines should be set to a value higher than 40 seconds. This ensures that adjacencies between the Routing Engine and the neighboring peer 'helper' routers do not time out, stopping graceful restart, and all traffic.</p> |
| <b>Options</b>             | <p><b><i>seconds</i></b>—Hold-time value, in seconds.</p> <p><b>Range:</b> 3 through 65,535 seconds, or 1 to send out hello packets every 333 milliseconds</p> <p><b>Default:</b> 9 seconds (for designated intermediate system [DIS] routers), 27 seconds (for non-DIS routers; three times the default hello interval)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



**NOTE:** When elected as a designated intermediate system [DIS] router on any LAN adjacency, the hello and hold-timer intervals are scaled down by a factor of 3. This means the default values of 9 and 27 seconds of ISIS hello and hold time intervals are scaled down to 3 and 9 seconds for LAN adjacencies. During switchovers, this hold time is too short to form LAN adjacencies. Therefore, you can configure one of the following solutions:

- Set the hello and hold time interval for LAN adjacencies to 30 seconds and 90 seconds respectively on both the DIS router and a neighboring router.

- Convert the LAN interfaces to point-to-point IS-IS interfaces.




**BEST PRACTICE:** On QFX10000 switches, we strongly recommend that you configure all IS-IS interfaces, including peer interfaces, as point-to-point interfaces. If you do not, you might experience session flaps, that is, IS-IS sessions that go down and then come back up, when IS-IS is configured in virtual routing and forwarding (VRF) instances. When you scale IS-IS in any scenario, you might also experience scaling issues if you do not configure IS-IS interfaces as point-to-point interfaces.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Graceful Routing Engine Switchover*
- [Example: Configuring IS-IS on page 14](#)
- *Example: Configuring IS-IS for GRES with Graceful Restart*
- [Understanding IS-IS Configuration on page 13](#)
- [hello-interval on page 482](#)

## hold-time (LDP Synchronization for IS-IS)

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>hold-time seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <a href="#">ldp-synchronization</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <a href="#">ldp-synchronization</a>],</p> <p>[edit protocols isis interface <i>interface-name</i> <a href="#">ldp-synchronization</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <a href="#">ldp-synchronization</a>]</p> |
| Release Information      | Statement introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Description              | Configure the time period to advertise the maximum cost metric for a link that is not fully operational.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                          | <div>  <p><b>NOTE:</b> When an interface has been in the holddown state for more than 3 minutes, a system log message with a warning level is sent. This message appears in both the messages file and the trace file.</p> </div>                                                                                                                                                                                                                                                                        |
| Options                  | <p><b>seconds</b>—Hold-time value, in seconds.</p> <p><b>Range:</b> 1 through 65,535 seconds</p> <p><b>Default:</b> Infinity</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Synchronization Between IS-IS and LDP on page 276</a></li> <li>• <a href="#">Understanding LDP-IGP Synchronization on page 274</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                    |

## ignore-attached-bit

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ignore-attached-bit;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</code><br><code>[edit protocols <i>isis</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Ignore the attached bit on IS-IS Level 1 routers. Configuring this statement enables the routing device to ignore the attached bit on incoming Level 1 link-state PDUs. If the attached bit is ignored, no default route, which points to the routing device which has set the attached bit, is installed.</p> <p>There might be times, such as during a denial-of-service (DoS) attack, that you do not want a Level 1 router to be able to forward traffic based on a default route.</p> <p>To prevent a routing device from being able to reach interarea destinations, you can prevent the routing device from installing the default route without affecting the status of its IS-IS adjacencies. The <b>ignore-attached-bit</b> statement is used to tell the routing device to ignore the presence of the attached bit in Level 1 link-state PDUs, which blocks the installation of the IS-IS default route.</p> |
| <b>Default</b>                  | The <b>ignore-attached-bit</b> statement is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## ignore-lsp-metrics (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ignore-lsp-metrics;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering],<br>[edit protocols isis traffic-engineering],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering]                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Ignore the metrics for RSVP label-switched paths (LSPs) in IS-IS traffic engineering shortcut calculations or when you configure LDP over RSVP LSPs.</p> <p>If you are using RSVP for traffic engineering, you can run LDP simultaneously to eliminate the distribution of external routes in the core. The LSPs established by LDP are tunneled through the LSPs established by RSVP. LDP effectively treats the traffic-engineered LSPs as single hops. Ignoring the metric of RSVP LSPs avoids mutual dependency between IS-IS and RSVP, eliminating the time period when the RSVP metric used for tunneling traffic is not up to date.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Enabling IS-IS Traffic Engineering Support on page 248</a></li><li>• <a href="#">Example: Advertising Label-Switched Paths into IS-IS on page 263</a></li><li>• <a href="#">Example: Enabling Wide IS-IS Metrics for Traffic Engineering on page 272</a></li><li>• <a href="#">Example: Configuring Synchronization Between IS-IS and LDP on page 276</a></li><li>• <a href="#">shortcuts on page 573</a></li></ul>                                                                                                                                                                  |

## import (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis],</code><br><code>[edit protocols isis],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis]</code> |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.1.                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Apply one or more routing policies to routes being imported into the Junos OS routing table from IS-IS. You can import a routing policy to filter or restrict routes.                                                                                                                                                                       |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more routing policies.                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring a Routing Policy to Prioritize IS-IS Routes on page 115</a></li> <li>• <a href="#">Understanding Routing Policies</a></li> </ul>                                                                                                                                  |

## interface (Protocols IS-IS)

```
Syntax interface (all | interface-name) {
    disable;
    bfd-liveness-detection {
        authentication {
            algorithm algorithm-name;
            key-chain key-chain-name;
            loose-check;
        }
        detection-time {
            threshold milliseconds;
        }
        minimum-interval milliseconds;
        minimum-receive-interval milliseconds;
        transmit-interval {
            threshold milliseconds;
            minimum-interval milliseconds;
        }
        multiplier number;
    }
    checksum;
    flood-group;
    csnp-interval (seconds | disable);
    hello-padding (adaptive | loose | strict);
    interface-group-holddown-delay
    ldp-synchronization {
        disable;
        hold-time seconds;
    }
    lsp-interval milliseconds;
    max-hello-size size;
    mesh-group (value | blocked);
    no-adjacency-holddown;
    no-eligible-remote-backup;
    no-ipv4-multicast;
    no-ipv6-multicast;
    no-ipv6-unicast;
    no-unicast-topology;
    passive;
    point-to-point;
    level level-number {
        disable;
        hello-authentication-key key;
        hello-authentication-key-chain key-chain-name;
        hello-authentication-type authentication;
        hello-interval seconds;
        hold-time seconds;
        ipv4-multicast-metric metric;
        ipv6-multicast-metric metric;
        ipv6-unicast-metric metric;
        metric metric;
        passive;
    }
}
```



```

    priority number;
    te-metric metric;
  }
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols *isis*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols *isis*],  
 [edit protocols *isis*],  
 [edit routing-instances *routing-instance-name* protocols *isis*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 12.1 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.  
**no-eligible-remote-backup** option introduced in Junos OS Release 14.2 for the MX Series.  
**interface-group-holddown-delay** option introduced in Junos OS Release 15.2 for the MX Series.  
**max-hello-size** option introduced in Junos OS Release 17.1 for the MX Series.

**Description** Configure interface-specific IS-IS properties. To configure more than one interface, include the **interface** statement multiple times.

Enabling IS-IS on an interface (by including the **interface** statement at the [edit protocols *isis*] or the [edit routing-instances *routing-instance-name* protocols *isis*] hierarchy level), disabling it (by including the **disable** statement), and not actually having IS-IS run on an interface (by including the **passive** statement) are mutually exclusive states.

**Options** **all**—Have Junos OS create IS-IS interfaces automatically. If you include this option, disable IS-IS on the management interface (fxp0).

**interface-name**—Name of an interface. Specify the full interface name, including the physical and logical address components.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding IS-IS Configuration on page 13](#)
- [Example: Configuring IS-IS on page 14](#)
- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)

## interface-group-holddown-delay

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interface-group-holddown-delay <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code>isis <a href="#">interface</a> <i>interface-name</i>],</code><br><code>[edit protocols isis <a href="#">interface</a> <i>interface-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface</a> <i>interface-name</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 16.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure the time interval that the IS-IS takes before replacing the metric with the new metric value and before flooding the new metric to the labeled-switched paths (LSPs). When the bundle changes from a worse bandwidth based metric to a better metric the system waits for the configured time before switching to the new metric. The system also uses this time delay when a link status changes from down to up or when a member link changes status from degrade to non-degrade.                                                               |
| <b>Default</b>                  | By default, the time delay for a routing device is 20 seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <b><i>seconds</i></b> —Number of seconds before the routing device replaces the bandwidth based metric.<br><b>Default:</b> 20 seconds                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">interface on page 492</a></li><li>• <a href="#">show isis interface-group on page 687</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                     |

## interface (Protocols ISIS)

**Syntax**

```
interface (interface-name | all) {
  admin-group {
    exclude [ group-name ];
    include-all [ group-name ];
    include-any [ group-name ];
    preference [ group-name ];
  }
  bandwidth-greater-equal-primary;
  dest-metric (highest | lowest);
  downstream-paths-only;
  evaluation-order [ admin-group srlg bandwidth protection-type neighbor neighbor-tag
    metric ];
  metric-order [ root dest ];
  node {
    exclude [ neighbor-address ];
    preference [ neighbor-address ];
  }
  node-tag {
    exclude [ route-tag ];
    preference [ route-tag ];
  }
  protection-type (link | node| node-link);
  root-metric (highest | lowest);
  srlg (loose |strict);
}
```

**Hierarchy Level**

```
[edit logical-systems logical-system-name routing-options backup-selection destination
  prefix],
[edit logical-systems logical-system-name routing-instances instance-name routing-options
  backup-selection destination prefix],
[edit routing-instances instance-name routing-options backup-selection prefix],
[edit routing-options backup-selection destination prefix]
```

**Release Information** Statement introduced in Junos OS Release 14.1.

**Description** Define the backup selection policy for a specific primary next hop.

**Options** *interface-name*— Name of the primary next-hop interface.

**all**— All the interfaces.

**bandwidth-greater-equal-primary**— Allow the selection of the backup next hop only if the bandwidth is greater than or equal to the bandwidth of the primary next hop.

**dest-metric (highest | lowest)**—Specify the metric from the one-hop neighbor or from the remote router such as an RSVP backup label-switched-path (LSP) tail-end router to the final destination.

**highest**— Select the backup path that has the highest destination metric.

**lowest**— Select the backup path that has the lowest destination metric.

**downstream-paths-only**— Select the backup path that is a downstream path to the destination.

**evaluation-order [ admin-group srlg bandwidth protection-type neighbor neighbor-tag metric ]**—Control the order and the criteria of evaluating the backup path. The default order of evaluation is admin-group, srlg, bandwidth, protection-type, neighbor, neighbor-tag, and metric.



---

**NOTE:** For the explicitly configured evaluation order, only the listed attributes influence the selection of the backup path.

---

**metric-order [ root dest ]**— Specify the order of preference of the root and the destination metric during the backup path selection. The preference order can be:

- **[root dest]** — Backup path selection or preference is first based on the root-metric criteria. If the criteria of all the root-metric is the same, then the selection or preference is based on the dest-metric.
- **[dest root]** — Backup path selection or preference is first based on the dest-metric criteria. If the criteria of all the dest-metric is the same, then the selection is based on the root-metric.



**NOTE:** By default, backup paths with lower destination metric criteria are selected or preferred. If the criteria is the same, then the lowest root metric criteria is preferred or selected.

**root**— The metric to a one-hop neighbor or a remote router.

**dest**— The metric from a one-hop neighbor or remote router to the final destination.

**protection-type (link | node | node-link)**—Specify the required protection type of the backup path.



**NOTE:** If no protection-type is configured, then by default the first best path that matches all the other criteria is executed.

**link**— Select the backup path that provides link protection.

**node**— Select the backup path that provides node protection.

**node-link**— Allow either node or link protection LFA where node-protection LFA is preferred over link-protection LFA.

**root-metric (highest | lowest)**—Specify the metric to the one-hop neighbor or to the remote router such as an RSVP backup label-switched-path (LSP) tail-end router.

**highest**— Select the highest root metric.

**lowest**— Select the lowest root metric.

**srlg (loose | strict)**—Define the backup selection to either allow or reject the common shared risk link groups (SRLGs) between the primary link and any link in the backup path.

**loose**— Allow the backup path that has common srlgs between the primary link and any link in the backup path. A backup path with a fewer number of srlg collisions is preferred.


**strict**— Reject the backup path that has common srlgs between the primary link and each link in the backup path.

The remaining statements are explained separately. See [CLI Explorer](#).

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Understanding Backup Selection Policy for IS-IS Protocol on page 48</a></li><li>• <a href="#">Configuring Backup Selection Policy for IS-IS Protocol</a></li><li>• <a href="#">backup-selection (Protocols ISIS) on page 457</a></li><li>• <a href="#">destination on page 469</a></li></ul> |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## ipv4-multicast

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ipv4-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit protocols isis <a href="#">topologies</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ]                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                    |
| <b>Description</b>              | Configure alternate IPv4 multicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                 | <div>  <p><b>NOTE:</b> The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p> </div> |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li> </ul>                                                                                                                                                                                                                                                      |

## ipv4-multicast-metric

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>ipv4-multicast-metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Hierarchy Level          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</code> |
| Release Information      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                      |
| Description              | Specify the multicast topology metric value for the level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Options                  | <b>metric</b> —Metric value.<br><b>Range:</b> 0 through 16,777,215                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                           |



## ipv6-multicast


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ipv6-multicast;                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit protocols isis <a href="#">topologies</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Configure alternate IPv6 multicast topologies.                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li> </ul>                                                                                                                                                                                                |

## ipv6-multicast-metric

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>ipv6-multicast-metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Hierarchy Level          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</code> |
| Release Information      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description              | Specify the IPv6 alternate multicast topology metric value for the level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Options                  | <b>metric</b> —Metric value.<br><b>Range:</b> 0 through 16,777,215                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                           |

## ipv6-unicast

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ipv6-unicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit protocols isis <a href="#">topologies</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ]                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Configure alternate IPv6 unicast topologies.</p> <p>This statement causes IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p> <b>NOTE:</b> The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p> </div> |
| <b>Default</b>                  | IPv6 unicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177</a></li> <li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## ipv6-unicast-metric

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ipv6-unicast-metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Specify the IPv6 unicast topology metric value for the level. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <b><i>metric</i></b> —Metric value.<br><b>Range:</b> 0 through 16,777,215                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178</a></li><li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                            |

## isis

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | isis { ... }                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br>[edit protocols],<br>[edit routing-instances <i>routing-instance-name</i> protocols]        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | Enable IS-IS routing on the routing device or for a routing instance.<br><br>The <b>isis</b> statement is the one statement you must include in the configuration to run IS-IS on the routing device or in a routing instance.                                             |
| <b>Default</b>                  | IS-IS is disabled on the routing device.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS on page 14</a></li> <li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21</a></li> </ul>                                            |

## label-switched-path (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>label-switched-path <i>name</i> level <i>level-number</i> metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Advertise label-switched paths (LSPs) into IS-IS as point-to-point links. The LSP is advertised in the appropriate IS-IS levels as a point-to-point link and contains a local address and a remote address.</p> <p>When you advertise LSPs into IS-IS as point-to-point links, the LSPs are used in SPF calculations. The advertisement contains a local address (the <b>from</b> address of the LSP), a remote address (the <b>to</b> address of the LSP), and a metric.</p> <p>Before a single-hop LSP between a multiaccess link can be announced as up and used in SPF calculations, you must configure an LSP in both directions between two label-switched routers.</p> |
| <b>Options</b>                  | <p><i>name</i>—Identifies the LSP.</p> <p><i>level-number</i>—IS-IS level number.</p> <p><b>Values:</b> 1 or 2</p> <p><i>metric</i>—Metric value.</p> <p><b>Range:</b> 1 through 63, or 1 through 16,777,215 (if you have configured wide metrics)</p> <p><b>Default:</b> 0 (for lo0), 10 (for all other interfaces)</p>                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Advertising Label-Switched Paths into IS-IS on page 263</a></li> <li>• <a href="#">Understanding Forwarding Adjacencies on page 263</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## layer2-map

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>layer2-map;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>], [edit logical-systems <i>logical-system-name</i> protocols <i>isis</i> interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>], [edit protocols <i>isis</i>], [edit protocols <i>isis</i> interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</pre>                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 16.1 for the MX Series and PTX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Enable Layer 2 mapping of ARP or neighbor discovery next hops in the kernel for the specified instance or interface. IS-IS Layer 2 mapping ensures that forwarding next-hop resolution is topology-driven rather than traffic-driven, which results in minimal traffic loss while activating an Ethernet link.</p> <p>IS-IS LAN and point-to-point Hellos supply all relevant Layer 2 and Layer 3 binding address information for address resolution. The device at the receiving end can extract the information and populate the ARP or neighbor discovery cache of the kernel even before the route installation time. When Layer 2 mapping is enabled, IS-IS installs ARP or neighbor discovery next-hop entries into the forwarding table. Because this provides Layer 2 next-hop bindings ahead of time, IS-IS networks do not experience traffic loss while bringing up a link.</p> |
| <b>Default</b>                  | The default setting is <b>no-layer2-map</b> for both instances and interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Layer 2 Mapping for IS-IS on page 281</a></li> <li>• <a href="#">Example: Configuring Layer 2 Mapping for IS-IS on page 282</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## ldp-synchronization

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>ldp-synchronization {   disable;   hold-time seconds; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Release Information      | Statement introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description              | <p>Enable synchronization by advertising the maximum cost metric until LDP is operational on the link.</p> <p>LDP distributes labels in non-traffic-engineered applications. Labels are distributed along the best path determined by IS-IS. If the synchronization between LDP and IS-IS is lost, the label-switched path (LSP) goes down. Therefore, IS-IS and LDP synchronization is beneficial. When LDP synchronization is configured and when LDP is not fully operational on a given link (a session is not established and labels are not exchanged), IS-IS advertises the link with the maximum cost metric. The link is not preferred but remains in the network topology.</p> <p>LDP synchronization is supported only on point-to-point interfaces and LAN interfaces configured as point-to-point interfaces under IS-IS. LDP synchronization is not supported during graceful restart.</p> <p>To advertise the maximum cost metric until LDP is operational for LDP synchronization, include the <b>ldp-synchronization</b> statement.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring Synchronization Between LDP and OSPF</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## level (Global IS-IS)

**Syntax**

```
level level-number {
    authentication-key key;
    authentication-key-chain (Protocols IS-IS) key-chain-name;
    authentication-type type;
    disable;
    external-preference preference;
    no-csnp-authentication;
    no-hello-authentication;
    no-psnp-authentication;
    preference preference;
    purge-originator {
        empty|self;
    }
    wide-metrics-only;
}
```

**Hierarchy Level**

```
[edit logical-systems logical-system-name protocols isis],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
isis],
[edit protocols isis],
[edit routing-instances routing-instance-name protocols isis]
```

**Release Information**

Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 12.1 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure the global-level properties.

You can administratively divide a single AS into smaller groups called areas. You configure each routing device interface to be in an area. Any interface can be in any area. The area address applies to the entire routing device. You cannot specify one interface to be in one area and another interface in a different area. To route between areas, you must have two adjacent Level 2 routers that communicate with each other.

Level 1 routers can only route within their IS-IS area. To send traffic outside their area, Level 1 routers must send packets to the nearest intra-area Level 2 router. A routing device can be a Level 1 router, a Level 2 router, or both. You specify the router level on a per-interface basis, and a routing device becomes adjacent to other routing devices on the same level on that link only.

You can configure one Level 1 routing process and one Level 2 routing process on each interface, and you can configure the two levels differently.

**Options** *level-number*—IS-IS level number.  
**Values:** 1 or 2

The remaining statements are explained separately. See [CLI Explorer](#).

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Understanding IS-IS Configuration on page 13</a></li><li>• <a href="#">Example: Configuring IS-IS on page 14</a></li><li>• <a href="#">Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20</a></li><li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21</a></li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## level (IS-IS Interfaces)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> level <i>level-number</i> {   level (IS-IS Interfaces);   hello-authentication-key <i>key</i>;   hello-authentication-key-chain <i>key-chain-name</i>;   hello-authentication-type <i>authentication</i>;   hello-interval <i>seconds</i>;   hold-time <i>seconds</i>;   ipv4-multicast-metric <i>number</i>;   ipv6-unicast-metric <i>number</i>;   metric <i>metric</i>;   passive;   priority <i>number</i>;   te-metric <i>metric</i>; } </pre> |
| <b>Hierarchy Level</b>          | <pre> [edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols   isis <b>interface</b> <i>interface-name</i>], [edit protocols isis <b>interface</b> <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>] </pre> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure the IS-IS level. You can configure one instance of Level 1 routing and one instance of Level 2 routing on each interface, and you can configure the two levels differently.</p>                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b><i>level-number</i></b>—IS-IS level number.</p> <p><b>Values:</b> 1 or 2</p> <p><b>Default:</b> The routing device operates as both a Level 1 and Level 2 router.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS Configuration on page 13</a></li> <li>• <a href="#">Example: Configuring IS-IS on page 14</a></li> <li>• <a href="#">Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20</a></li> <li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21</a></li> </ul>                                |

## link-group-protection (Protocols IS-IS)

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>link-group-protection {<br/>  minimum-bandwidth <i>rate</i>;<br/>  revert-bandwidth <i>rate</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>isis</b> interface-group <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>isis</b> interface-group <i>group-name</i>],</p> <p>[edit protocols <b>isis</b> interface-group <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b> interface-group <i>group-name</i>]</p>                                                                                                                                                                                                                                                                                                     |
| Release Information      | Statement introduced in Junos OS Release 16.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description              | Configure link group protection. This enables Packet Forwarding Engine-based local repair by pre-downloading suboptimal backup paths with appropriate weights in the Packet Forwarding Engine.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Options                  | <p><b>minimum-bandwidth <i>rate</i></b>—Minimum bandwidth to carry traffic. This is the minimum bandwidth below which the outgoing traffic can no longer be carried on this link group. The Packet Forwarding Engine needs to load-balance across links of best or suboptimal interface groups as well.</p> <p><b>Range:</b> 9600 through 1,000,000,000,000</p> <p><b>revert-bandwidth <i>rate</i></b>—Revert bandwidth to carry traffic. This is the bandwidth above which the outgoing traffic can be carried over the members of this link group. There is no need for the Packet Forwarding Engine to load-balance across member links of other suboptimal link groups if it provides a path with the shortest metric.</p> <p><b>Range:</b> 9600 through 1,000,000,000,000</p> |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## link-protection (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | link-protection;                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis interface <i>interface-name</i> ],<br>[edit protocols isis interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                         |
| <b>Description</b>              | Enable link protection on the specified IS-IS interface. Junos OS creates a backup loop-free alternate path to the primary next hop for all destination routes that traverse the protected interface.                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li> <li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li> <li>• <a href="#">node-link-protection on page 540</a></li> </ul>                                                                                                              |

## loose-authentication-check

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>loose-authentication-check;</code>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</code><br><code>[edit protocols <a href="#">isis</a>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                  |
| <b>Description</b>              | Allow the use of MD5 authentication without requiring network-wide deployment.                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 35</a></li><li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 36</a></li></ul>                                                                                                                                                            |

## **lsp-equal-cost**

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>lsp-equal-cost;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering multipath],<br>[edit protocols isis traffic-engineering multipath]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure label-switched paths (LSPs) to be retained as equal cost paths for load balancing when a better path metric is found during the IS-IS internal routing table calculation.</p> <p>When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default IS-IS behavior, include the <b>lsp-equal-cost</b> statement for load balancing, so that the equal cost path information is retained in the routing table.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246</a></li> <li>• <a href="#">Example: Enabling IS-IS Traffic Engineering Support on page 248</a></li> <li>• <a href="#">multipath on page 527</a></li> <li>• <a href="#">traffic-engineering on page 586</a></li> </ul>                                                                                                                                                                                                                                                                                                                          |

## lsp-interval

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>lsp-interval <i>milliseconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Configure the link-state PDU interval time.</p> <p>By default, the routing device sends one link-state PDU packet out an interface every 100 milliseconds. To disable the transmission of all link-state PDUs, set the interval to 0.</p> <p>Link-state PDU throttling by use of the <b>lsp-interval</b> statement controls the flooding pace to neighboring routing devices in order to not overload them.</p> <p>Also, consider that control traffic (such as link-state PDUs and related packets) might delay user traffic (information packets) because control traffic always has precedence in terms of scheduling on the routing device interface cards. Unfortunately, the control traffic transmission rate is not decreased on low-bandwidth interfaces, such as DS-0 or fractional T1 and E1 interface. Line control traffic stays the same. On a low-bandwidth circuit that is transmitting 30 full-MTU-sized packets, there is not much bandwidth left over for other types of packets.</p> |
| <b>Default</b>                  | By default, the routing device sends one link-state PDU out an interface every 100 milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b><i>milliseconds</i></b>—Number of milliseconds between the sending of link-state PDUs. Specifying a value of 0 blocks all link-state PDU transmission.</p> <p><b>Range:</b> 0 through 1000 milliseconds</p> <p><b>Default:</b> 100 milliseconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces on page 358</a></li> <li>• <a href="#">Understanding Link-State PDU Throttling for IS-IS Interfaces on page 357</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



- [Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363](#)
- [Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces on page 363](#)

## lsp-lifetime

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>lsp-lifetime <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</code><br><code>[edit protocols <i>isis</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Specify how long a link-state PDU originating from the routing device should persist in the network. The routing device sends link-state PDUs often enough so that the link-state PDU lifetime never expires.</p> <p>Because link-state PDUs have a maximum lifetime, they need to be refreshed. Refreshing means that a routing device needs to re-originate its link-state PDUs periodically. The re-origination interval must be less than the link-state PDU's lifetime. For example, if the link-state PDU is valid for 1200 seconds, the routing device needs to refresh the link-state PDU in less than 1200 seconds to avoid removal of the link-state PDU from the link-state database by other routing devices. The recommended maximum link-state PDU origination interval is the lifetime minus 300 seconds. So, in a default environment this would be 900 seconds. In Junos OS, the refresh interval is derived from the lifetime and is equal to the lifetime minus 317 seconds. You can change the lifetime to a higher value to reduce the number of refreshes in the network. (You would rarely want to increase the number of refreshes.) Often these periodic link-state PDU refreshes are referred to as refresh noise, and network administrators want to reduce this noise as much as possible.</p> <p>The <a href="#">show isis overview</a> command displays the link-state PDU lifetime.</p> |
| <b>Default</b>                  | By default, link-state PDUs are maintained in network databases for 1200 seconds (20 minutes) before being considered invalid. This length of time, called the <i>LSP lifetime</i> , normally is sufficient to guarantee that link-state PDUs never expire.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b><i>seconds</i></b>—link-state PDU lifetime, in seconds.</p> <p><b>Range:</b> 350 through 65,535 seconds</p> <p><b>Default:</b> 1200 seconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

- Related Documentation**
- [Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363](#)
  - [Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces on page 358](#)
  - [Understanding Link-State PDU Throttling for IS-IS Interfaces on page 357](#)
  - [Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces on page 363](#)
  - [https://www.juniper.net/us/en/training/certification/JNCIP\\_studyguide.pdf](https://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf)

## max-areas

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>max-areas <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                    |
| <b>Description</b>              | <p>Modify the maximum number of IS-IS areas advertised.</p> <p>This value is included in the Maximum Address Area field of the IS-IS common PDU header included in all outgoing PDUs.</p> <p>The maximum number of areas you can advertise is restricted to 36 to ensure that the IIH PDUs have enough space to include other type, length, and value (TLV) fields, such as the Authentication and IPv4 and IPv6 Interface Address TLVs.</p> |
| <b>Options</b>                  | <p><b><i>number</i></b>—Maximum number of areas to include in the IS-IS hello (IIH) PDUs and link-state PDUs.</p> <p><b>Range:</b> 3 through 36</p> <p><b>Default:</b> 3</p>                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups on page 20</a></li> <li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21</a></li> </ul>                                                                                                                                                            |

## max-hello-size

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>max-hello-size size;</code>                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],<br/>         [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],<br/>         [edit protocols <i>isis</i>],<br/>         [edit protocols <i>isis</i> interface <i>interface-name</i>],<br/>         [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.1.</p> <p><b>interface <i>interface-name</i></b> option introduced in Junos OS Release 17.1 for the MX Series.</p>                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Modify the maximum size of IS-IS hello packets. IS-IS sends hello packets out of all IS-IS enabled interfaces to discover neighbors and form adjacencies between the devices. Based on the actual MTU of the physical interface, you can configure upto 16000 bytes as the maximum size for IS-IS packets.</p>                                                                                                                   |
| <b>Options</b>                  | <p><b>size</b>—Maximum size allocated for IS-IS hello packets.</p> <p><b>Range:</b> 512 through 16000 bytes</p> <p><b>Default:</b> 1492 bytes</p>                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS Configuration on page 13</a></li> <li>• <a href="#">Example: Configuring IS-IS on page 14</a></li> </ul>                                                                                                                                                                                                                                                   |

## max-lsp-size

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>max-lsp-size size;</code>                                                                                                                                                                                                                                                                                                                                                                             |
| Hierarchy Level          | <code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</code><br><code>[edit protocols <a href="#">isis</a>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</code> |
| Release Information      | Statement introduced in Junos OS Release 12.1.                                                                                                                                                                                                                                                                                                                                                              |
| Description              | Modify the maximum size of IS-IS link-state PDUs. IS-IS sends link-state PDUs out of IS-IS enabled interfaces to distribute routing information between the IS-IS nodes.                                                                                                                                                                                                                                    |
| Options                  | <b>size</b> —Maximum size allocated for IS-IS link-state PDUs.<br><b>Range:</b> 512 through 1492 bytes<br><b>Default:</b> 1492 bytes                                                                                                                                                                                                                                                                        |
| Required Privilege Level | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                             |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Understanding IS-IS Configuration on page 13</a></li><li>• <a href="#">Example: Configuring IS-IS on page 14</a></li></ul>                                                                                                                                                                                                                              |

## max-snp-size

|                                 |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>max-snp-size size;</code>                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p> |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1.                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Modify the maximum size of partial or complete IS-IS sequence number PDUs. IS-IS sends sequence number packets out of IS-IS enabled interfaces to control the distribution of link-state PDUs between the IS-IS nodes. Sequence number packets provide a mechanism to synchronize the link-state databases of routers in the same area.                                    |
| <b>Options</b>                  | <p><b>size</b>—Maximum size allocated for sequence number of partial or complete IS-IS packets.</p> <p><b>Range:</b> 512 through 1400 bytes</p> <p><b>Default:</b> 1400 bytes</p>                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS Configuration on page 13</a></li> <li>• <a href="#">Example: Configuring IS-IS on page 14</a></li> </ul>                                                                                                                                                                                          |

## mesh-group (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mesh-group (blocked   <i>value</i>);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Configure an interface to be part of a mesh group, which is a set of fully connected nodes.</p> <p>A <i>mesh group</i> is a set of routing devices that are fully connected. That is, they have a fully meshed topology. When link-state PDUs are being flooded throughout an area, each router within a mesh group receives only a single copy of a link-state PDU instead of receiving one copy from each neighbor, thus minimizing the overhead associated with the flooding of link-state PDUs.</p> <p>To create a mesh group and designate that an interface be part of the group, assign a mesh-group number to all the routing device interfaces in the group. To prevent an interface in the mesh group from flooding link-state PDUs, configure blocking on that interface.</p> |
| <b>Options</b>                  | <p><b>blocked</b>—Configure the interface so that it does not flood link-state PDUs.</p> <p><b>value</b>—Number that identifies the mesh group.</p> <p><b>Range:</b> 1 through 4,294,967,295 (<math>2^{32} - 1</math>; 32 bits are allocated to identify a mesh group)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Mesh Groups of IS-IS Interfaces on page 369</a></li> <li>• <a href="#">Understanding IS-IS Mesh Groups on page 368</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## metric (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</p>                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>         | <p>Specify the IPv4 unicast topology metric value for the level. The IS-IS interface metrics for the IPv6 topology can be configured independently of the IPv4 metrics.</p> <p>All IS-IS routes have a cost, which is a routing metric that is used in the IS-IS link-state calculation. The cost is an arbitrary, dimensionless integer that can be from 1 through 63, or from 1 through 16,777,215 (<math>2^{24} - 1</math>) if you are using wide metrics.</p> <p>Similar to other routing protocols, IS-IS provides a way of exporting routes from the routing table into the IS-IS network. When a route is exported into the IS-IS network without a specified metric, IS-IS uses default metric values for the route, depending on the protocol that was used to learn the route.</p> <p><a href="#">Table 9 on page 525</a> depicts IS-IS route export metric default values.</p> |

**Table 9: Default Metric Values for Routes Exported into IS-IS**

| Protocol Used for Learning the Route | Default Metric Value                                          |
|--------------------------------------|---------------------------------------------------------------|
| Direct                               | 10                                                            |
| Static                               | Same as reported by the protocol used for exporting the route |
| Aggregate                            | 10                                                            |
| Generate                             | 10                                                            |
| RIP                                  | Same as reported by the protocol used for exporting the route |
| OSPF                                 | Same as reported by the protocol used for exporting the route |
| BGP                                  | 10                                                            |

The default metric values behavior can be customized by using routing policies.

|                                 |                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <p><i>metric</i>—Metric value.</p> <p><b>Range:</b> 1 through 63, or 1 through 16,777,215 (if you have configured wide metrics)</p> <p><b>Default:</b> 10 (for all interfaces except lo0), 0 (for the lo0 interface)</p>                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Enabling Wide IS-IS Metrics for Traffic Engineering on page 272</a></li> <li>• <a href="#">Understanding Wide IS-IS Metrics for Traffic Engineering on page 272</a></li> <li>• <a href="#">te-metric on page 581</a></li> <li>• <a href="#">wide-metrics-only on page 595</a></li> </ul> |


## multicast-rpf-routes

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | multicast-rpf-routes;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering family inet <a href="#">shortcuts</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances traffic-engineering family inet <a href="#">shortcuts</a>],</p> <p>[edit protocols isis traffic-engineering family inet <a href="#">shortcuts</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering family inet <a href="#">shortcuts</a>]</p> |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.3.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Install unicast IPv4 routes into the multicast routing table (inet.2) for multicast reverse-path-forwarding (RPF) checks.</p> <p>Traffic engineering shortcuts must be enabled. IPv4 multicast topology must not be enabled. Label-switched paths (LSPs) must not be advertised into IS-IS.</p>                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Enabling IS-IS Traffic Engineering Support on page 248</a></li> <li>• <a href="#">Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246</a></li> </ul>                                                                                                                                                                                                                                                        |

## multipath (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> multipath {   lsp-equal-cost; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">traffic-engineering</a> ],<br>[edit protocols isis <a href="#">traffic-engineering</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Enable load balancing for multiple label-switched paths (LSPs).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>lsp-equal-cost</b>—Configure LSPs to be retained as equal cost paths for load balancing when a better route metric is added to the routing table.</p> <p>When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) path combinations can be lost during route calculation. To override this default IS-IS behavior, include the <b>lsp-equal-cost</b> statement for load balancing, so that the equal cost path information is retained in the routing table.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246</a></li> <li>• <a href="#">Example: Enabling IS-IS Traffic Engineering Support on page 248</a></li> <li>• <a href="#">lsp-equal-cost on page 515</a></li> <li>• <a href="#">multipath (Protocols BGP)</a></li> <li>• <a href="#">multipath (Routing Options)</a></li> <li>• <a href="#">traffic-engineering on page 586</a></li> </ul>                                                                                                                                                                               |

## multipath (SPF Options)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> multipath [   weighted {     one-hop;   } ] </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit protocols isis spf-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1F4 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Enable weighted equal-cost multipath (ECMP) for load-sharing data based on the bandwidth for incoming traffic destined to IS-IS neighbors that are at a one-hop distance. The IS-IS protocol gets the logical interface bandwidth information associated with the gateways of ECMP next hop and shares this information with the routing protocol process (rpd) and the Packet Forwarding Engine.</p> <p>Instead of distributing traffic equally over multiple paths, weighted equal-cost multipath (ECMP) routing distributes traffic based on the total available bandwidth for each gateway of a next hop. It thereby distributes traffic unequally over multiple paths and utilizes available bandwidth more efficiently for better load balancing.</p> |
|                                 | <p> <b>NOTE:</b> Weighted equal-cost multipath routing displays unequal traffic distribution prominently when the traffic flow is as heavy as 10000 flows.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>weighted</b>—Enable weighted ECMP for efficient load sharing.</p> <p><b>one-hop</b>—Enable weighted ECMP load balancing on IS-IS neighbors that are just one hop away based on the interface bandwidth.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show route on page 720</a></li> <li>• <a href="#">Example: Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors on page 221</a></li> <li>• <a href="#">Understanding Weighted ECMP Traffic Distribution on One-Hop IS-IS Neighbors on page 220</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## no-adjacency-down-notification (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-adjacency-down-notification;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> ],<br>[edit protocols isis interface <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Disable adjacency down notification for IS-IS to allow for migration from IS-IS to OSPF without disruption of the RSVP neighbors and associated RSVP-signaled label-switched paths (LSPs).</p> <p>Whenever IS-IS is deactivated, the IS-IS adjacencies are brought down. IS-IS signals to RSVP to bring down any RSVP neighbors associated with the IS-IS adjacencies, and this further causes the associated LSPs signaled by RSVP to go down as well.</p> <p>A similar process occurs whenever OSPF is deactivated. The OSPF neighbors are brought down. OSPF signals to RSVP to bring down any of the RSVP neighbors associated with the OSPF neighbors, and this further causes the associated LSPs signaled by RSVP to go down as well.</p> <p>If you need to migrate from IS-IS to OSPF or from OSPF to IS-IS, the internal gateway protocol (IGP) notification to RSVP for an adjacency or neighbor down event needs to be ignored. Using the <b>no-adjacency-down-notification</b> or <b>no-neighbor-down-notification</b> statements, you can disable IS-IS adjacency down notification or OSPF neighbor down notification, respectively, until the migration is complete. The network administrator is responsible for configuring the statements before the migration, and then removing them from the configuration afterward, so that IGP notification can function normally.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><i>no-neighbor-down-notification</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## no-adjacency-holddown

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-adjacency-holddown;                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                              |
| <b>Description</b>              | <p>Disable the hold-down timer for IS-IS adjacencies.</p> <p>A hold-down timer delays the advertising of adjacencies by waiting until a time period has elapsed before labeling adjacencies in the up state. You can disable this hold-down timer, which labels adjacencies up faster. However, disabling the hold-down timer creates more frequent link-state PDU updates and SPF computation.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">hold-time on page 486</a></li></ul>                                                                                                                                                                                                                                                                                                             |

## no-authentication-check

|                                 |                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-authentication-check;                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                  |
| <b>Description</b>              | Generate authenticated packets and check the authentication on received packets, but do not reject packets that cannot be authenticated.                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">csnp-interval on page 468</a></li> <li>• <a href="#">hello-authentication-type on page 480</a></li> </ul>                                                                                                                                                                                              |

## no-advertise-adjacency-segment (Protocols IS-IS)

---


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-advertise-adjacency-segment;                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ], |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 16.2 for MX Series routers and PTX Series routers.<br>Statement introduced in Junos OS Release 17.2R1 for QFX5100 and QFX10000 switches.<br>Statement introduced in Junos OS Release 17.3R1 for QFX5100 and QFX5200 switches.                                                                                                                                                                                           |
| <b>Description</b>              | Disable advertising of the adjacency segment on all levels for the specified interface.                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>                  | Enabled                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">isis on page 505</a></li><li>• <a href="#">source-packet-routing on page 578</a></li></ul>                                                                                                                                                                                                                                                                                                                   |



## no-csnp-authentication

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-csnp-authentication;                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                              |
| <b>Description</b>              | Suppress authentication check on complete sequence number PDU (CSNP) packets.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">csnp-interval on page 468</a></li> </ul>                                                                                                                                                                                                                                                                                                                                           |

## node



|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>node {   exclude [ <i>node-address</i> ];   preference [ <i>node-address</i> ]; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Hierarchy Level          | <p>[edit logical systems <i>logical-system-name</i> routing-options <b>backup-selection (Protocols ISIS)</b> destination <i>prefix</i> interface <i>interface name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> routing-options backup-selection destination <i>prefix</i> interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>instance-name</i> routing-options backup-selection destination <i>prefix</i> interface <i>interface-name</i>],</p> <p>[edit routing-options <b>backup-selection (Protocols ISIS)</b> destination <i>prefix</i> interface <i>interface name</i>]</p> |
| Release Information      | Statement introduced in Junos OS Release 14.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description              | <p>Define a list of loop-back IP addresses of the adjacent nodes to either prefer or exclude in the backup path selection. The node can be a local (adjacent router) node, remote node, or any other router in the backup path.</p>                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                          | <p> <b>NOTE:</b> The nodes are identified through the TE-router-ID TLV advertised by a node in the LSP.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Options                  | <p><b>exclude [ <i>node-address</i> ]</b>— Specify the list of nodes to be excluded. The backup path that has a router from the list is not selected as the loop-free alternative or backup next hop.</p> <p><b>node-address</b>— Name of one or more nodes to be excluded during backup path selection.</p> <p><b>preference [ <i>node-address</i> ]</b>— Define an ordered set of nodes to be preferred. The backup path having the leftmost node is selected.</p> <p><b>node-address</b>— Name of one or more nodes to be preferred in the backup path selection.</p>                                                                                   |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Backup Selection Policy for IS-IS Protocol on page 48</a></li> <li>• <a href="#">Configuring Backup Selection Policy for IS-IS Protocol</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                  |

- [backup-selection \(Protocols ISIS\) on page 457](#)
- [destination on page 469](#)
- [interface on page 495](#)

## node-protection

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>node-protection &lt;cost cost&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Hierarchy Level          | <pre>[edit logical-systems <i>name</i> protocols isis <i>interface name level number</i> post-convergence-lfa ], [edit logical-systems <i>name</i> routing-instances <i>name</i> protocols isis <i>interface name level number</i> post-convergence-lfa ], [edit protocols isis <i>interface name level number</i> post-convergence-lfa ], [edit routing-instances <i>name</i> protocols isis <i>interface name level number</i> post-convergence-lfa ]</pre>                                    |
| Release Information      | Statement introduced in Junos OS Release 17.4R1 for MX Series, PTX Series, and QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description              | Enable node protection mode for topology-independent loop-free alternate (TI-LFA) routes for IS-IS. You can configure the cost of all the links used for calculating the TI-LFA post-convergence failure path cost. If node protection is enabled without configuring a cost value, then the cost is set to the maximum cost.                                                                                                                                                                    |
| Options                  | <b>cost</b> —Cost for node protection.<br><b>Range:</b> 0 through 16,777,215                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Required Privilege Level | routing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330</a></li> <li>• <a href="#">Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333</a></li> <li>• <a href="#">post-convergence-lfa on page 559</a></li> <li>• <a href="#">use-post-convergence-lfa on page 593</a></li> <li>• <a href="#">use-for-post-convergence-lfa on page 594</a></li> </ul> |

## node-segment (Protocols IS-IS)

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre>node-segment {   index-range <i>index range</i>;   ipv4-index <i>index</i>;   ipv6-index <i>index</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                |
| Hierarchy Level     | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis source-packet-routing</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis source-packet-routing</a>],</p> <p>[edit protocols <a href="#">isis source-packet-routing</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis source-packet-routing</a>]</p> |
| Release Information | <p>Statement introduced in Junos OS Release 16.2R1 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 16.1X65 for the PTX1000 routers.</p> <p>Statement introduced in Junos OS Release 17.2R1 for QFX5100 and QFX10000 switches.</p> <p>Statement introduced in Junos OS Release 17.3R1 for QFX5110 and QFX5200 switches.</p>                                                                                                                  |
| Description         | <p>Enable source packet routing in networking (SPRING) at all levels. SPRING or segment routing is a control-plane architecture that enables an ingress router to steer a packet through a specific set of nodes and links in the network without relying on the intermediate nodes in the network to determine the actual path it should take.</p>                                                                                                                |
|                     | <p> <b>NOTE:</b> Provisioning the IPv4 and IPv6 node segment index is allowed per routing-instance, and will NOT be allowed per IS-IS level. Node segment index is attached to the IPv4 and IPv6 router-id, if the router-ids are configured on the loopback interface. Else, lowest IP address on the loopback is chosen to attach the node-sid.</p>                           |
| Options             | <p><b>index-range <i>index range</i></b>— Range of node segment indices allowed.</p> <p>Default: 4096</p> <p>Range: 32 through 16384</p> <p><b>ipv4-index <i>index</i></b>— IPv4 node segment index.</p> <p>Range: 0 through 199999</p>                                                                                                                                                                                                                            |
|                     | <p> <b>NOTE:</b> Starting with Junos OS Release 17.2, the maximum index for IPv4 node segment index is 199999.</p>                                                                                                                                                                                                                                                              |
|                     | <p><b>ipv6-index <i>index</i></b>— IPv6 node segment index.</p>                                                                                                                                                                                                                                                                                                                                                                                                    |

**Range:** 0 through 199999




**NOTE:** Starting with Junos OS Release 17.2, the maximum index for IPv6 node segment index is 199999.

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">isis on page 505</a></li></ul> |
|------------------------------|------------------------------------------------------------------------------------|

## node-tag

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>node-tag {   exclude [ route-tag ];   preference [ route-tag ]; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">backup-selection (Protocols ISIS)</a> destination <i>prefix</i> interface <i>interface name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>instance-name</i> routing-options backup-selection destination <i>prefix</i> interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>instance-name</i> routing-options backup-selection destination <i>prefix</i> interface <i>interface-name</i>],</p> <p>[edit routing-options backup-selection destination <i>prefix</i> interface <i>interface name</i>]</p>                                  |
| Release Information      | Statement introduced in Junos OS Release 14.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Description              | Define per-neighbor policy to either prefer or exclude a backup path.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                          | <p> <b>NOTE:</b> This statement identifies a group of nodes in the network based on criteria such as the same neighbor tag values for all PE nodes. This is implemented using IS-IS admin-tags.</p>                                                                                                                                                                                                                                                                                                                                                                                        |
| Options                  | <p><b>exclude [ route-tag ]</b>— Specify that the backup path which has any node or router with route-tag from this list is not selected as the loop-free alternative or backup-next hop.</p> <p><b>route-tag</b>— Name of one or more tags advertised as part of extended IP reachability with a /32 prefix length that represents the TE-router-ID or node ID of a router.</p> <p><b>preference [ route-tag ]</b>— Specify the set of route tags in descending order of preference.</p> <p><b>route-tag</b>— Name of one or more tags advertised as part of extended IP reachability with a /32 prefix length that represents the TE-router-ID or node ID of a router.</p> |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Backup Selection Policy for IS-IS Protocol on page 48</a></li> <li>• <a href="#">Configuring Backup Selection Policy for IS-IS Protocol</a></li> <li>• <a href="#">backup-selection (Protocols ISIS) on page 457</a></li> <li>• <a href="#">destination on page 469</a></li> </ul>                                                                                                                                                                                                                                                                                                                        |

- [interface on page 495](#)

## node-link-protection (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | node-link-protection;                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> ],<br>[edit logical-routers <i>logical-router-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis interface <i>interface-name</i> ],<br>[edit protocols isis interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5.<br>Statement introduced in Junos OS Release 9.5 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                         |
| <b>Description</b>              | Enable node-link protection on the specified IS-IS interface. Junos OS creates an alternate loop-free path to the primary next hop for all destination routes that traverse a protected interface. This alternate path avoids the primary next-hop routing device altogether and establishes a path through a different routing device.                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li><li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li><li>• <a href="#">link-protection on page 513</a></li></ul>                                                                                                                       |



## no-eligible-backup (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-eligible-backup;                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis interface <i>interface-name</i> ],<br>[edit protocols isis interface <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5.<br>Statement introduced in Junos OS Release 9.5 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                         |
| <b>Description</b>              | Exclude the specified interface as a backup interface for IS-IS interfaces on which link protection or node-link protection is enabled.                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li> <li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li> <li>• <a href="#">link-protection on page 513</a></li> <li>• <a href="#">node-link-protection on page 540</a></li> </ul>                                                       |

## no-eligible-remote-backup

---

|                                 |                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-eligible-remote-backup;                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> ],<br>[edit protocols isis interface <i>interface-name</i> ]<br>[edit protocols (ospf   ospf3) area <i>area-id</i> interface <i>interface-name</i> ]             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.2.                                                                                                                                                                                                                   |
| <b>Description</b>              | Disable remote LFA backup calculation for the specified interface. If remote LFA is disabled, Junos OS does not consider the interface for calculating the remote LFA next hop.                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">auto-targeted-session</a></li><li>• <a href="#">backup-spf-options on page 459</a></li><li>• <a href="#">interface on page 492</a></li><li>• <a href="#">remote-backup-calculation on page 569</a></li></ul> |

## no-hello-authentication


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-hello-authentication;                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                 |
| <b>Description</b>              | Suppress authentication check on complete sequence number hello packets.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">hello-authentication-type on page 480</a></li> </ul>                                                                                                                                                                                                                                                                                                                                  |

## no-ipv4-multicast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv4-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                      |
| <b>Description</b>              | Exclude an interface from IPv4 multicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li></ul>                                                                                                                                                                                                                                                           |

## no-ipv4-routing

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv4-routing;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <i>isis</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i> ],<br>[edit protocols <i>isis</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i> ]                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Disable IP version 4 (IPv4) routing.</p> <p>Disabling IPv4 routing has the following results:</p> <ul style="list-style-type: none"> <li>• The routing device does not advertise the network layer protocol identifier (NLPID) for IPv4 in the Junos OS link-state PDU fragment zero.</li> <li>• The routing device does not advertise any IPv4 prefixes in Junos OS link-state PDUs.</li> <li>• The routing device does not advertise the NLPID for IPv4 in Junos OS hello packets.</li> <li>• The routing device does not advertise any IPv4 addresses in Junos OS hello packets.</li> <li>• The routing device does not calculate any IPv4 routes.</li> </ul> |
|                                 | <div>  <p><b>NOTE:</b> Note: Even when no-ipv4-routing is configured, an IS-IS traceoptions log can list rejected IPv4 addresses. When a configuration is committed, IS-IS schedules a scan of the routing table to determine whether any routes need to be exported into the IS-IS link state database. The implicit default export policy action is to reject everything. IPv4 addresses from the routing table are examined for export, rejected by the default policy, and the rejections are logged.</p> </div>                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178</a></li> <li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                             |

## no-ipv6-multicast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv6-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Exclude an interface from the IPv6 multicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li></ul>                                                                                                                                                                                                                                                              |

## no-ipv6-routing

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv6-routing;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Disable IP version 6 (IPv6) routing.<br><br>Disabling IPv6 routing has the following results: <ul style="list-style-type: none"> <li>• The routing device does not advertise the network layer protocol identifier (NLPID) for IPv6 in the Junos OS link-state PDU fragment zero.</li> <li>• The routing device does not advertise any IPv6 prefixes in Junos OS link-state PDUs.</li> <li>• The routing device does not advertise the NLPID for IPv6 in Junos OS hello packets.</li> <li>• The routing device does not advertise any IPv6 addresses in Junos OS hello packets.</li> <li>• The routing device does not calculate any IPv6 routes.</li> </ul> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178</a></li> <li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                      |

## no-ipv6-unicast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv6-unicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Exclude an interface from the IPv6 unicast topologies. This enables you to exercise control over the paths that unicast data takes through a network.                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | IPv6 unicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178</a></li><li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177</a></li></ul>                                                                                                                                                                                                                            |



## no-psnp-authentication

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-psnp-authentication;                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                              |
| <b>Description</b>              | Suppress authentication check on partial sequence number PDU (PSNP) packets.                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring IS-IS Authentication on page 33</a></li> </ul>                                                                                                                                                                                                                                                                                                                         |

## no-unicast-topology

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-unicast-topology;                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                      |
| <b>Description</b>              | Exclude an interface from the IPv4 unicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>                  | IPv4 unicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li></ul>                                                                                                                                                                                                                                                           |

## overload (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> overload {   advertise-high-metrics;   allow-route-leaking;   external-prefixes;   internal-prefixes;   timeout <i>seconds</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],<br/> [edit protocols <i>isis</i>],<br/> [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.<br/> Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/> Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/> Statement introduced in Junos OS Release 14.<br/> <b>external-prefixes</b> and <b>internal-prefixes</b> options introduced in Junos OS Release 18.3R1.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>         | <p>Configure the local routing device so that it appears to be overloaded. This statement causes the routing device to continue participating in IS-IS routing, but prevents it from being used for transit traffic. Traffic destined to immediately attached subnets continues to transit the routing device.</p> <p>You can also advertise maximum link metrics in network layer reachability information (NLRI) instead of setting the overload bit.</p> <p>You configure or disable overload mode in IS-IS with or without a timeout. Without a timeout, overload mode is set until it is explicitly deleted from the configuration. With a timeout, overload mode is set if the time elapsed since the IS-IS instance started is less than the specified timeout.</p> <p>A timer is started for the difference between the timeout and the time elapsed since the instance started. If the time elapsed after the IS-IS instance is enabled is less than the specified timeout, overload mode is set. When the timer expires, overload mode is cleared. In overload mode, the routing device IS-IS advertisements are originated with the overload bit set. This causes the transit traffic to take paths around the routing device. However, the overloaded routing device's own links are still accessible.</p> <p>The value of the overload bit depends on these three scenarios:</p> <ol style="list-style-type: none"> <li>1. When the overload bit has already been set to a given value and the routing process is restarted: Link-state PDUs are regenerated with the overload bit cleared.</li> <li>2. When the overload bit is reset to a lesser value while the routing process is running: Link-state PDUs are regenerated with the overload bit cleared.</li> </ol> |

3. When the overload bit is reset to a greater value while the routing process is running: Link-state PDUs are regenerated with the overload bit set to the difference between the old and new value.

In overload mode, the routing device advertisement is originated with all the transit routing device links (except stub) set to a metric of 0xFFFF. The stub routing device links are advertised with the actual cost of the interfaces corresponding to the stub. This causes the transit traffic to avoid the overloaded routing device and take paths around the routing device.

To understand the reason for setting the overload bit, consider that BGP converges slowly. It is not very good at detecting that a neighbor is down because it has slow-paced keepalive timers. Once the BGP neighbor is determined to be down, it can take up to 2 minutes for a BGP router to declare the neighbor down. IS-IS is much quicker. IS-IS only takes 10-30 seconds to detect absent peers. It is the slowness of BGP, more precisely the slowness of internal BGP (IBGP), that necessitates the use of the overload bit. IS-IS and BGP routing are mutually dependent on each other. If both do not converge at the same time, traffic is dropped without notification (black holed).

You might want to configure the routing device so that it appears to be overloaded when you are restarting routing on the device. Setting the overload bit for a fixed amount of time right after a restart of the routing protocol process (rpd) ensures that the router does not receive transit traffic while the routing protocols (especially IBGP) are still converging.

Setting the overload bit is useful when performing hardware or software maintenance work on a routing device. After the maintenance work, clear the overload bit to carry on forwarding transit traffic. Manual clearing of the overload bit is not always possible. What is needed is an automated way of clearing the overload bit after some amount of time. Most networks use a time value of 300 seconds. This 5-minute value provides a good balance, allowing time to bring up even large internal IBGP meshes, while still relatively quick.

Another appropriate application for setting for the overload bit is on dedicated devices such as BGP route reflectors, which are intentionally not meant to carry any transit traffic. In this case, you would not use the timer.

You can verify that the overload bit is set by running the **show isis database** command.

**Options** **advertise-high-metrics**—Advertise maximum link metrics in NLRI instead of setting the overload bit.

The **advertise-high-metric** setting is only valid while the routing device is in overload mode.

When **advertise-high-metric** is configured, IS-IS does not set the overload bit. Rather, it sets the metric to 63 or 16,777,214, depending whether wide metrics are enabled. This allows the overloaded routing device to be used for transit as a last resort.

An L1-L2 router in overload mode stops leaking route information between L1 and L2 levels and clears its attached bit. This is also true when **advertise-high-metrics** is configured.

**allow-route-leaking**—Enable leaking of route information into the network even if the overload bit is set.



**NOTE:** The **allow-route-leaking** option does not work if the routing device is in dynamic overload mode. Dynamic overload can occur if the device has exceeded its resource limits, such as the prefix limit.

**external-prefixes**—Enable this option to stop receiving local traffic destined to external prefixes unless this is the only router in the network that hosts the prefix. External prefixes are prefixes that IS-IS receives from other protocols. The overloaded router advertises these external prefixes with a high metric to stop receiving traffic. After the configured **timeout** lapses regular metric is restored to resume traffic reception.

**internal-prefixes**—Enable this option to stop receiving local traffic destined to internal prefixes unless this is the only router in the network that hosts the prefix. Internal prefixes are local IS-IS prefixes that the overloaded router advertises with a high metric to stop receiving traffic. After the configured **timeout** lapses regular metric is restored to resume traffic reception.

**timeout seconds**—Number of seconds at which the overloading is reset.

**Range:** 60 through 1800 seconds

**Default:** 0 seconds

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

## passive (Protocols IS-IS)

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre> passive {     remote-node-id address;     remote-node-iso iso-id; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Hierarchy Level     | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],<br/> [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],<br/> [edit protocols isis <b>interface</b> <i>interface-name</i>],<br/> [edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],<br/> [edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],<br/> [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</p> |
| Release Information | <p>Statement introduced before Junos OS Release 7.4.<br/> Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/> Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/> <b>remote-node-id</b> <i>address</i> option introduced in Junos OS Release 14.2.<br/> <b>remote-node-iso</b> <i>iso-id</i> option introduced in Junos OS Release 14.2.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Description         | <p>Advertise the direct interface addresses on an interface or into a level on the interface without actually running IS-IS on that interface or level.</p> <p>This statement effectively prevents IS-IS from running on the interface. To enable IS-IS on an interface, include the <b>interface</b> statement at the [edit protocols isis] or the [edit routing-instances <i>routing-instance-name</i> protocols isis] hierarchy level. To disable it, include the <b>disable</b> statement at those hierarchy levels. The three states—enabling, disabling, or not running IS-IS on an interface—are mutually exclusive.</p>                                                                                                                                                                                                                                                                                                                                                                                                          |



**NOTE:** Configuring IS-IS on a loopback interface automatically renders it as a passive interface, irrespective of whether the **passive** statement was used in the configuration of the interface.

If neither passive mode nor the **family iso** option is configured on the IS-IS interface, then the routing device treats the interface as not being operational, and no direct IPv4/IPv6 routes are exported into IS-IS. (You configure the **family iso** option at the [edit interfaces *interface-name* unit *logical-unit-number*] hierarchy level.)

**Default** By default, IS-IS must be configured on an interface or a level for direct interface addresses to be advertised into that level.

**Options** `remote-node-id address`—IP address of the remote link.  
`remote-node-iso iso-id`—ISO ID of the remote node.



**NOTE:** The options `remote-node-id address` and `remote-node-iso iso-id` do not apply under the [edit routing-instances *routing-instance-name* protocols isis] hierarchy level.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 21](#)
- [disable on page 472](#)

## per-interface-per-member-link

---


|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>per-interface-per-member-link (egress <i>egress-interface</i>   ingress <i>ingress-interface</i>);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Hierarchy Level          | [edit protocols isis <a href="#">source-packet-routing sensor-based-stats</a> ],                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Release Information      | Statement introduced in Junos OS Release 17.4R1 on MX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description              | <p>Configure sensor-based statistics per interface.</p> <p>Sensor-based statistics is the traffic statistics in a segment routing (SR) network that can be recorded in an OpenConfig compliant format for Layer 3 interfaces. The statistics is recorded for the Source Packet Routing in Networking (SPRING) traffic only, excluding RSVP and LDP-signaled traffic, and the family MPLS statistics per interface is accounted for separately. The SR statistics also includes SPRING traffic statistics per link aggregation group (LAG) member, and per segment identifier (SID).</p> |
| Options                  | <p><b>egress <i>egress-interface</i></b>—Enable sensor based statistics on the egress interface.</p> <p><b>ingress <i>ingress-interface</i></b>—Enable sensor based statistics on the ingress interface.</p>                                                                                                                                                                                                                                                                                                                                                                            |
| Required Privilege Level | routing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Source Packet Routing in Networking (SPRING) on page 289</a></li><li>• <a href="#">sensor-based-stats on page 572</a></li><li>• <a href="#">per-sid on page 557</a></li></ul>                                                                                                                                                                                                                                                                                                                                         |



## per-sid

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>per-sid ingress <i>ingress</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit protocols isis <a href="#">source-packet-routing sensor-based-stats</a> ],                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.4R1 on MX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Configure sensor based statistics per Source Packet Routing in Networking (SPRING) route.</p> <p>Sensor-based statistics is the traffic statistics in a segment routing (SR) network that can be recorded in an OpenConfig compliant format for Layer 3 interfaces. The statistics is recorded for SPRING traffic only, excluding RSVP and LDP-signaled traffic, and the family MPLS statistics per interface is accounted for separately. The SR statistics also includes SPRING traffic statistics per link aggregation group (LAG) member, and per segment identifier (SID).</p> |
| <b>Options</b>                  | <code>ingress <i>ingress</i></code> —Enable sensor based statistics for per-sid ingress accounting.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Source Packet Routing in Networking (SPRING) on page 289</a></li> <li>• <a href="#">per-interface-per-member-link on page 556</a></li> <li>• <a href="#">sensor-based-stats on page 572</a></li> </ul>                                                                                                                                                                                                                                                                                                              |

## point-to-point

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>point-to-point;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</code><br><code>[edit protocols isis <b>interface</b> <i>interface-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Configure an IS-IS interface to behave like a point-to-point connection.</p> <p>You can use the <b>point-to-point</b> statement to configure a LAN interface to act like a point-to-point interface for IS-IS. You do not need an unnumbered LAN interface, and it has no effect if configured on an interface that is already point-to-point.</p> <p>The <b>point-to-point</b> statement affects only IS-IS protocol procedures on that interface. All other protocols continue to treat the interface as a LAN interface. Only two IS-IS routing devices can be connected to the LAN interface, and both must be configured as point-to-point.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;"> <p> <b>BEST PRACTICE:</b> On QFX10000 switches, we strongly recommend that you configure all IS-IS interfaces, including peer interfaces, as point-to-point interfaces. If you do not, you might experience session flaps, that is, IS-IS sessions that go down and then come back up, when IS-IS is configured in virtual routing and forwarding (VRF) instances. When you scale IS-IS in any scenario, you might also experience scaling issues if you do not configure IS-IS interfaces as point-to-point interfaces.</p> </div> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">IS-IS Overview on page 3</a></li> <li>• <a href="#">Example: Configuring Synchronization Between IS-IS and LDP on page 276</a></li> <li>• <a href="#">Understanding LDP-IGP Synchronization on page 274</a></li> <li>• <a href="#">Understanding IS-IS Designated Routers on page 29</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## post-convergence-lfa

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | post-convergence-lfa <fate-sharing-protection <i>fate-sharing-protection</i> > <node-protection <i>cost cost</i> >;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Hierarchy Level          | [edit logical-systems <i>name</i> protocols isis <a href="#">interface name level number</a> ],<br>[edit logical-systems <i>name</i> routing-instances <i>name</i> protocols isis <a href="#">interface name level number</a> ],<br>[edit protocols isis <a href="#">interface name level number</a> ],<br>[edit routing-instances <i>name</i> <a href="#">protocols</a> isis <a href="#">interface name level number</a> ]                                                                                                                                                                                                                                                                |
| Release Information      | Statement introduced in Junos OS Release 17.4R1 for MX Series, PTX Series, and QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Description              | Configure backup paths along post-convergence on this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Options                  | <p><b>fate-sharing-protection</b>—Enable fate-sharing protection. A list of fate-sharing groups are configured on each point of local repair (PLR) with the links in each fate-sharing group identified by their respective IP addresses. The PLR associates a cost with each fate-sharing group. The fate-sharing-aware post-convergence path is computed by assuming that the cost of each link in the same fate-sharing group as the failed link has increased the cost associated with that group.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p> |
| Required Privilege Level | routing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330</a></li> <li>• <a href="#">Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333</a></li> <li>• <a href="#">use-for-post-convergence-lfa on page 594</a></li> <li>• <a href="#">use-post-convergence-lfa on page 593</a></li> <li>• <a href="#">node-protection on page 535</a></li> </ul>                                                                                                                                                                                                |

## preference (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>preference <i>preference</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>]</p>                                                                                                                                                                            |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Configure the preference of internal routes.</p> <p>Route preferences (also known as administrative distances) are used to select which route is installed in the forwarding table when several protocols calculate routes to the same destination. The route with the lowest preference value is selected.</p> <p>To change the preference values, include the <b>preference</b> statement (for internal routes) or the <b>external-preference</b> statement.</p>                                                                                                                                                     |
| <b>Options</b>                  | <p><b><i>preference</i></b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)</p>                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Route Preferences Overview</a></li> <li>• <a href="#">Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS on page 104</a></li> <li>• <a href="#">Example: Redistributing OSPF Routes into IS-IS on page 87</a></li> <li>• <a href="#">Understanding Routing Policies on page 45</a></li> <li>• <a href="#">Understanding BGP Communities, Extended Communities, and Large Communities as Routing Policy Match Conditions on page 103</a></li> <li>• <a href="#">external-preference on page 474</a></li> </ul> |

## prefix-export-limit (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>prefix-export-limit <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure a limit to the number of prefixes exported into IS-IS.</p> <p>By default, there is no limit to the number of prefixes that can be exported into IS-IS. To configure a limit to the number of prefixes that can be exported into IS-IS, include the <b>prefix-export-limit</b> statement. The <b>prefix-export-limit</b> statement protects the rest of the network from a malicious policy by applying a threshold filter for exported routes.</p> <p>The number of prefixes depends on the size of your network. Good design advice is to set it to double the total number of IS-IS Level 1 and Level 2 routing devices in your network.</p> <p>If the number of prefixes exported into IS-IS exceeds the configured limit, the overload bit is set and the overload state is reached. When other routers detect that this bit is set, they do not use this routing device for transit traffic, but they do use it for packets destined to the overloaded routing device's directly connected networks and IP prefixes. The overload state can be cleared by using the <a href="#">clear isis overload</a> command.</p> <p>The <a href="#">show isis overview</a> command displays the prefix export limit when it is configured.</p> |
| <b>Options</b>                  | <p><b><i>number</i></b>—Prefix limit.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> None</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Redistributing OSPF Routes into IS-IS on page 87</a></li> <li>• <a href="#">Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS on page 104</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

- [Understanding BGP Communities, Extended Communities, and Large Communities as Routing Policy Match Conditions on page 103](#)
- [Understanding Routing Policies on page 45](#)

## prefix-segment

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>prefix-segment {   index <i>index</i>;   node-segment; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit policy-options policy-statement <i>policy-name</i> term <i>term-name</i> then]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 17.2 for the MX Series routers, PTX Series routers, QFX5100 switches, and QFX10000 switches.</p> <p>Statement introduced in Junos OS Release 17.3R1 for the QFX5110 and QFX5200 switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Configure prefix segment attributes such as index and node segment. Prefix segment index is the index assigned to a specific prefix. This is used by all other remote routers in the network to index the prefix into respective segment routing global blocks (SRGB) to derive the segment identifier and to forward the traffic destined for the current prefix. Prefix segment index is provisioned through policy for each prefix along with the option to mark it as a node segment.</p> <p><b>index <i>index</i></b>—Specify the prefix segment index</p> <p><b>Range:</b> 0 through 199,999</p> <p><b>node-segment</b>—Set node segment flag for this prefix segment.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292</a></li> <li>• <a href="#">Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol on page 326</a></li> <li>• <a href="#">adjacency-segment on page 451</a></li> </ul>                                                                                                                                                                                                                                                                                                                         |

## priority (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</p>                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure the interface's priority for becoming the designated router. The interface with the highest priority value becomes that level's designated router.</p> <p>The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.</p> <p>A routing device advertises its priority to become a designated router in its hello packets. On all multiaccess networks, IS-IS uses the advertised priorities to elect a designated router for the network. This routing device is responsible for sending network link-state advertisements, which describe all the routing devices attached to the network. These advertisements are flooded throughout a single area.</p> <p>A routing device's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127. Routing devices with a higher value are more likely to become the designated router.</p> |
| <b>Options</b>                  | <p><i>number</i>—Priority value.</p> <p><b>Range:</b> 0 through 127</p> <p><b>Default:</b> 64</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring IS-IS Designated Routers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## protocols

```
Syntax protocols {
    bgp {
        ... bgp-configuration ...
    }
    isis {
        ... isis-configuration ...
    }
    ldp {
        ... ldp-configuration ...
    }
    mpls {
        ... mpls-configuration ...
    }
    msdp {
        ... msdp-configuration ...
    }
    mstp {
        ... mstp-configuration ...
    }
    ospf {
        domain-id domain-id;
        domain-vpn-tag number;
        route-type-community (iana | vendor);
        traffic-engineering {
            <advertise-unnumbered-interfaces>;
            <credibility-protocol-preference>;
            ignore-lsp-metrics;
            multicast-rpf-routes;
            no-topology;
            shortcuts {
                lsp-metric-into-summary;
            }
        }
        ... ospf-configuration ...
    }
    ospf3 {
        domain-id domain-id;
        domain-vpn-tag number;
        route-type-community (iana | vendor);
        traffic-engineering {
            <advertise-unnumbered-interfaces>;
            <credibility-protocol-preference>;
            ignore-lsp-metrics;
            multicast-rpf-routes;
            no-topology;
            shortcuts {
                lsp-metric-into-summary;
            }
        }
        ... ospf3-configuration ...
    }
}
```



```

pim {
    ... pim-configuration ...
}
rip {
    ... rip-configuration ...
}
ripng {
    ... ripng-configuration ...
}
rstp {
    rstp-configuration;
}
rsvp {
    ... rsvp-configuration ...
}
vstp {
    vstp configuration;
}
vpls {
    vpls configuration;
}
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*],  
[edit routing-instances *routing-instance-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Support for RIPng introduced in Junos OS Release 9.0.  
Statement introduced in Junos OS Release 11.1 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
**mpls** and **rsvp** options added in Junos OS Release 15.1.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Specify the protocol for a routing instance. You can configure multiple instances of many protocol types. Not all protocols are supported on the switches. See the switch CLI.

- Options**
- bgp**—Specify BGP as the protocol for a routing instance.
  - isis**—Specify IS-IS as the protocol for a routing instance.
  - ldp**—Specify LDP as the protocol for a routing instance or for a virtual router instance.
  - l2vpn**—Specify Layer 2 VPN as the protocol for a routing instance.
  - mpls**—Specify MPLS as the protocol for a routing instance.
  - msdp**—Specify the Multicast Source Discovery Protocol (MSDP) for a routing instance.
  - mstp**—Specify the Multiple Spanning Tree Protocol (MSTP) for a virtual switch routing instance.
  - ospf**—Specify OSPF as the protocol for a routing instance.
  - ospf3**—Specify OSPF version 3 (OSPFv3) as the protocol for a routing instance.



**NOTE:** OSPFv3 supports the **no-forwarding**, **virtual-router**, and **vrf** routing instance types only.

---

- pim**—Specify the Protocol Independent Multicast (PIM) protocol for a routing instance.
- rip**—Specify RIP as the protocol for a routing instance.
- ripng**—Specify RIP next generation (RIPng) as the protocol for a routing instance.
- rstp**—Specify the Rapid Spanning Tree Protocol (RSTP) for a virtual switch routing instance.
- rsvp**—Specify the RSVP for a routing instance.
- vstp**—Specify the VLAN Spanning Tree Protocol (VSTP) for a virtual switch routing instance.
- vpls**—Specify VPLS as the protocol for a routing instance.

- Required Privilege Level**
- routing**—To view this statement in the configuration.
  - routing-control**—To add this statement to the configuration.

- Related Documentation**
- *Example: Configuring Multiple Routing Instances of OSPF*

## purge-originator

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>purge-originator {   empty self; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <pre>[edit protocols <b>isis</b> level <i>level-number</i>] , {edit logical-systems <i>logical-system-name</i> protocols <b>isis</b> level <i>level-number</i>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 F4 and 16.2R1 for the MX Series and PTX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Enable purge originator identification (POI) by adding the type, length and value (TLV) with the Intermediate System (IS) identification to the LSPs that do not contain POI information. If an IS generates a purge, Junos adds this TLV with the system ID of the IS to the purge.</p> <p>If an IS receives a purge that does not include this TLV, it adds this TLV with both its own system ID and the system ID of the IS from which it received the purge. This allows the IS that receives this purge to log the system ID of the originator, or the upstream source of the purge and makes it easier to locate the origin of the purge.</p> |
| <b>Options</b>                  | <p><b>empty</b>—(Optional) Add POI to a purge received from an IS that does not contain POI information</p> <p><b>self</b>—(Optional) Add POI only to self-originated purge LSPs</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show isis overview on page 691</a></li> <li>• <a href="#">show isis purge log on page 696</a></li> <li>• <a href="#">IS-IS Purge Originator Identification Overview on page 407</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                    |

## reference-bandwidth (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>reference-bandwidth <i>reference-bandwidth</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],<br/>         [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],<br/>         [edit protocols <i>isis</i>],<br/>         [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.<br/>         Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>         Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/>         Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>         | <p>Optimize routing based on bandwidth by setting the reference bandwidth used in calculating the default interface cost.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics. When there are several equal-cost routes to a destination, traffic is distributed equally among them. Tweak the reference bandwidth to route traffic across the fastest interface.</p> <p>The cost of a route is described by a single dimensionless metric that is determined using the following formula:</p> $\text{cost} = \text{reference-bandwidth} / \text{bandwidth}$ <p>For example, if you set the reference bandwidth to 1 Gbps (that is, <i>reference-bandwidth</i> is set to 1,000,000,000), a 100-Mbps interface has a routing metric of 10.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics. By default, IS-IS has a metric of 10. Modify the configured reference bandwidth to increase the cost of an interface in order to avoid a slow route or you can modify the reference bandwidth value to decrease the cost of a preferred interface. A route that has a lower cost is selected over a high cost route. Note that fractional metric values are not allowed. Therefore, if you configure a reference bandwidth that is higher than the actual bandwidth, which results in a fractional metric value then IS-IS takes the metric value as 1 because fractional metric values are not allowed.</p> |
| <b>Options</b>             | <p><i>reference-bandwidth</i>—Reference bandwidth value in bits per second.</p> <p><b>Range:</b> 9600 through 1,000,000,000,000 bps</p> <p><b>Default:</b> None</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding IS-IS Configuration on page 13](#)
- [Example: Configuring IS-IS on page 14](#)
- [https://www.juniper.net/us/en/training/certification/JNCIP\\_studyguide.pdf](https://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf)

## remote-backup-calculation

**Syntax** remote-backup-calculation;

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols isis **backup-spf-options**],  
[edit protocols isis **backup-spf-options**]

**Release Information** Statement introduced in Junos OS Release 14.2.

**Description** Determine the remote LFA backup paths from the point of local repair (PLR) in an IS-IS network. For every protected link on the PLR, Junos OS creates a dynamic LDP label-switched path to reach the remote LFA node. When the primary link fails, the PLR uses these remote LFA backup paths to reach all the destinations reachable via the primary-link.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *auto-targeted-session*
- [backup-spf-options on page 459](#)
- [no-eligible-remote-backup on page 542](#)

## rib-group (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>rib-group {<br/>  inet <i>group-name</i>;<br/>  inet6 <i>group-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],<br/>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],<br/>[edit protocols <a href="#">isis</a>],<br/>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>       |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.<br/>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                    |
| <b>Description</b>              | <p>Install routes learned from IS-IS routing instances into routing tables in the IS-IS routing table group. You can install IPv4 routes or IPv6 routes.</p> <p>Support for IPv6 routing table groups in IS-IS enables IPv6 routes that are learned from IS-IS routing instances to be installed into other routing tables defined in an IS-IS routing table group.</p> |
| <b>Options</b>                  | <p><b><i>group-name</i></b>—Name of the routing table group.</p> <p>inet—Install IPv4 IS-IS routes.</p> <p>inet6—Install IPv6 IS-IS routes.</p>                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.<br/>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i></li><li>• <i>Example: Importing Direct and Static Routes Into a Routing Instance</i></li><li>• <i>Configuring BGP Routing Table Groups</i></li></ul>                                                                                |

## routing-instances (Multiple Routing Entities)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>routing-instances <i>routing-instance-name</i> { ... }</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>     | <code>[edit],</code><br><code>[edit logical-systems <i>logical-system-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br><b>remote-vtep-v6-list</b> statement introduced in Junos OS Release 17.3 for MX Series routers with MPC and MIC interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>         | <p>Configure an additional routing entity for a router. You can create multiple instances of BGP, IS-IS, OSPF, OSPFv3, and RIP for a router. You can also create multiple routing instances for separating routing tables, routing policies, and interfaces for individual wholesale subscribers (retailers) in a Layer 3 wholesale network.</p> <p>Each routing instance consist of the following:</p> <ul style="list-style-type: none"> <li>• A set of routing tables</li> <li>• A set of interfaces that belong to these routing tables</li> <li>• A set of routing option configurations</li> </ul> <p>Each routing instance has a unique name and a corresponding IP unicast table. For example, if you configure a routing instance with the name <b>my-instance</b>, its corresponding IP unicast table is <code>my-instance.inet.0</code>. All routes for <b>my-instance</b> are installed into <code>my-instance.inet.0</code>.</p> <p>Routes are installed into the default routing instance <code>inet.0</code> by default, unless a routing instance is specified.</p> <p>In Junos OS Release 9.0 and later, you can no longer specify a routing-instance name of <i>master</i>, <i>default</i>, or <i>bgp</i> or include special characters within the name of a routing instance.</p> <p>In Junos OS Release 9.6 and later, you can include a slash (/) in a routing-instance name only if a logical system is not configured. That is, you cannot include the slash character in a routing-instance name if a logical system other than the default is explicitly configured. Routing-instance names, further, are restricted from having the form <code>__.*__</code> (beginning and ending with underscores). The colon <code>:</code> character cannot be used when multitopology routing (MTR) is enabled.</p> |
| <b>Default</b>             | Routing instances are disabled for the router.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>             | <p><b><i>routing-instance-name</i></b>—Name of the routing instance. This must be a non-reserved string of not more than 128 characters.</p> <p><b><i>remote-vtep-list</i></b>—Configure static remote VXLAN tunnel endpoints.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**remote-vtep-v6-list**—Configure static IPv6 remote VXLAN tunnel endpoints.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Configuring Interprovider Layer 3 VPN Option A*
- *Example: Configuring Interprovider Layer 3 VPN Option B*
- *Example: Configuring Interprovider Layer 3 VPN Option C*

---

## sensor-based-stats (Protocols IS-IS)

---

**Syntax** sensor-based-stats ([per-interface-per-member-link](#) | [per-sid](#));

**Hierarchy Level** [edit protocols isis [source-packet-routing](#)],

**Release Information** Statement introduced in Junos OS Release 17.4R1 on MX Series routers.

**Description** Configure traffic statistics in a segment routing (SR) network that can be recorded in an OpenConfig compliant format for Layer 3 interfaces. The statistics is recorded for the Source Packet Routing in Networking (SPRING) traffic only, excluding RSVP and LDP-signaled traffic, and the family MPLS statistics per interface is accounted for separately. The SR statistics also includes SPRING traffic statistics per link aggregation group (LAG) member, and per segment identifier (SID).

**Required Privilege Level** routing

**Related Documentation**

- [Understanding Source Packet Routing in Networking \(SPRING\) on page 289](#)
- [per-interface-per-member-link on page 556](#)
- [per-sid on page 557](#)
- *sensor (Junos Telemetry Interface)*
- *sensor-based-stats (Junos Telemetry Interface)*



## shortcuts (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>shortcuts {     multicast-rpf-routes; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering <b>family</b> (inet   inet6)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering <b>family</b> (inet   inet6)],</p> <p>[edit protocols isis traffic-engineering <b>family</b> (inet   inet6)],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering <b>family</b> (inet   inet6)]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>The <b>family</b> statement and support for IPv6 routes for IS-IS traffic engineering shortcuts introduced in Junos OS Release 9.3.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Configure IS-IS to use MPLS label-switched paths (LSPs) as next hops if possible when installing routing information into the inet.3 or inet6.3 routing table. Internal gateway protocol (IGP) shortcuts allow the IGP to install prefixes in inet.3 or inet6.3.</p> <p>It is only necessary to enable IGP shortcuts on the ingress router because that is the router performing the shortest-path-first (SPF) calculations.</p> <p>It is important to understand how IGP shortcuts affect the protocol and routing table relationship. The IGP performs SPF calculations to subnets downstream of LSP egress points, but the results of these calculations are entered into the inet.3 table only. At the same time, the IGP performs its traditional SPF calculations and enters the results of these calculations into the inet.0 table. The result is that although the IGP is making entries into the inet.3 table, BGP is still the only protocol with visibility into that table for the purposes of route resolution. Therefore, forwarding to AS-internal destinations still uses the inet.0 IGP routes, and the LSPs are only used for BGP next-hop resolution. If you want the LSPs to be used for IGP next-hop resolution, you must configure <b>traffic-engineering bgp-igp</b>.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Enabling IS-IS Traffic Engineering Support on page 248</a></li> <li>• <a href="#">Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246</a></li> <li>• <a href="#">traffic-engineering (Protocols IS-IS) on page 586</a></li> <li>• <a href="#">traffic-engineering (Protocols MPLS)</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## spf-options (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>spf-options {   delay <i>milliseconds</i>;   holddown <i>milliseconds</i>;   rapid-runs <i>number</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],<br/> [edit protocols <i>isis</i>],<br/> [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 8.5.<br/> Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>         | <p>Configure options for running the shortest-path-first (SPF) algorithm.</p> <p>Running the SPF algorithm is usually the beginning of a series of larger system-wide events. For example, the SPF algorithm can lead to interior gateway protocol (IGP) prefix changes, which then lead to BGP nexthop resolution changes. Consider what happens if there are rapid link changes in the network. The local routing device can become overwhelmed. This is why it sometimes makes sense to throttle the scheduling of the SPF algorithm.</p> <p>You can configure the following SPF options:</p> <ul style="list-style-type: none"> <li>• The delay in the time between the detection of a topology change and when the SPF algorithm actually runs.</li> <li>• The maximum number of times that the SPF algorithm can run in succession before the hold-down timer begins.</li> <li>• The time to hold down, or wait, before running another SPF calculation after the SPF algorithm has run in succession the configured maximum number of times.</li> </ul> <p>If the network stabilizes during the hold-down period and the SPF algorithm does not need to run again, the system reverts to the configured values for the <b>delay</b> and <b>rapid-runs</b> statements.</p> |
| <b>Options</b>             | <p><b>delay</b> <i>milliseconds</i>—Time interval between the detection of a topology change and when the SPF algorithm runs.</p> <p><b>Range:</b> 50 through 1000 milliseconds</p> <p><b>Default:</b> 200 milliseconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

**holddown *milliseconds***—Time interval to hold down, or wait before a subsequent SPF algorithm runs after the SPF algorithm has run the configured maximum number of times in succession.

**Range:** 2000 through 10,000 milliseconds

**Default:** 5000 milliseconds

**rapid-runs *number***—Maximum number of times the SPF algorithm can run in succession. After the maximum is reached, the holddown interval begins.

**Range:** 1 through 5

**Default:** 3

|                                 |                                                             |
|---------------------------------|-------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.        |
|                                 | routing-control—To add this statement to the configuration. |

|                              |                                                                                                           |
|------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | • <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a>                          |
|                              | • <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a> |

## static-host-mapping

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>static-host-mapping {   hostname {     alias [ <i>aliases</i> ];     inet [ <i>addresses</i> ];     inet6 [ <i>addresses</i> ];     sysid <i>system-identifier</i>;   } }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | (Optional) Statically map a hostname to one or more IP addresses and aliases, and configure an International Organization for Standardization (ISO) system identifier (system ID).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Default</b>                  | If you do not statically map the hostname, the mapping is generated dynamically, based on the system configuration. For instance, if you omit the <b>static-host-mapping hostname sysid</b> statement, the IS-IS system ID is dynamically generated from the host portion of the ISO address configured on the loopback interface (lo0) and is mapped to the <b>host-name</b> statement configured at the [edit system] hierarchy level.                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>alias <i>alias</i></b>—Alias for the hostname.</p> <p><b>hostname</b>—Fully qualified hostname.</p> <p><b>inet <i>address</i></b>—IP address. You can specify one or more IP addresses for the host.</p> <p><b>inet6 <i>address</i></b>—IP address. You can specify one or more IPv6 addresses for the host.</p> <p><b>sysid <i>system-identifier</i></b>—ISO system identifier (system ID). This is the 6-byte portion of the Intermediate System-to-Intermediate System (IS-IS) network service access point (NSAP). We recommend that you use the host's IP address represented in binary-coded decimal (BCD) format. For example, the IP address 208.197.169.18 is 2081.9716.9018 in BCD.</p> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring the Hostname of a Router or Switch by Using a Configuration Group</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## source-packet-routing-disable (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>source-packet-routing {   disable; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 16.2R1 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 16.1X65 for the PTX1000 routers.</p> <p>Statement introduced in Junos OS Release 17.2R1 for QFX5100, QFX5110, and QFX10000 switches.</p> <p>Statement introduced in Junos OS Release 17.3R1 for QFX5110 and QFX5200 switches.</p> <p>Statement introduced in Junos OS Release 18.4R1 for ACX5448 routers.</p>                |
| <b>Description</b>              | Disable source packet routing in networking (SPRING) feature at a specific level.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Default</b>                  | <p>Enabled, if <a href="#">source-packet-routing</a> is configured globally at:</p> <pre>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>], [edit protocols <a href="#">isis</a>], [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</pre>          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">isis on page 505</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                   |

## source-packet-routing (Protocols IS-IS and OSPF)

**Syntax**

```
source-packet-routing {
  adjacency-segment {
    hold-time hold-time;
  }
  disable;
  explicit-null;
  node-segment {
    index-range index range;
    ipv4-index index;
    ipv6-index index;
  }
  srgb {
    start-label start-label;
    index-range index range;
  }
}
```

**Hierarchy Level**

```
[edit logical-systems logical-system-name protocols isis],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
isis],
[edit protocols isis],
[edit routing-instances routing-instance-name protocols isis]
[edit logical-systems logical-system-name protocols isis level level-number],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
isis level level-number],
[edit protocols isis level level-number],
[edit routing-instances routing-instance-name protocols isis level level-number]
[edit logical-systems logical-system-name protocols ospf],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
ospf],
[edit protocols ospf],
[edit routing-instances routing-instance-name protocols ospf]
[edit logical-systems logical-system-name protocols ospf area-number],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols
ospf area-number],
[edit protocols ospf area-number],
[edit routing-instances routing-instance-name protocols ospf area-number]
```

**Release Information**

Statement introduced in Junos OS Release 16.2R1 for MX Series routers.

Statement introduced in Junos OS Release 16.1X65 for the PTX1000 routers.

Statement introduced in Junos OS Release 17.2R1 for QFX5100 switches and QFX10000 switches.

Support for **explicit-null** and **adjacency-segment** statements introduced in Junos OS Release 17.2R1 for MX Series routers, PTX Series routers, QFX5100 switches and QFX10000 switches.

Statement introduced in Junos OS Release 17.3R1 for QFX5110 and QFX5200 switches.

Statement introduced in Junos OS Release 18.4R1 for ACX5448 routers.

**Description** Enable source packet routing in networking (SPRING) feature on IS-IS levels or OSPF areas.



**NOTE:** Source packet routing for IPv6 is supported only for IS-IS. The `adjacency-segment`, `explicit-null`, and `srgb` statements are supported only for IS-IS.

The remaining statements are explained separately.

**Default** Disabled.

**Options** **disable**—Disable source packet routing from a specific level.  
**explicit-null**—Configure E and P bits in all prefix segment identifier (SID) advertisements.

**Required Privilege Level** routing— To view this statement in the configuration.  
routing-control— To add this statement to the configuration.

**Related Documentation**

- [Understanding Source Packet Routing in Networking \(SPRING\) on page 289](#)
- [Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292](#)
- [Configuring Anycast and Prefix segments in SPRING for IS-IS Protocol on page 326](#)

## srgb

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>srgb {   start-label <i>start-label-value</i>;   index-range <i>index range-value</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>name</i> protocols isis <a href="#">source-packet-routing</a>], [edit logical-systems <i>name</i> routing-instances <i>name</i> protocols isis <a href="#">source-packet-routing</a>], [edit protocols isis source-packet-routing], [edit routing-instances <i>name</i> protocols isis <a href="#">source-packet-routing</a>]</pre>                                                                                                                                                      |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 17.2 for the MX Series routers in Enhanced-IP mode, PTX Series routers, QFX5100 switches, and QFX10000 switches.</p> <p>Statement introduced in Junos OS Release 17.3 for QFX5110 and QFX5200 switches.</p>                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Configure the segment routing global block (SRGB) in source packet routing in networking (SPRING) or segment routing (SR). The SRGB label range is based on the start label and the index range. The value of the start label indicates the start of the label range, and the value of the index range along with the value of the start label indicate the end of the label range.</p>                                                                                                                             |
| <b>Options</b>                  | <p><b>index-range <i>index-range-value</i></b>—Index range of the SRGB label block.</p> <p><b>Range:</b> 32 through 1,048,559</p> <p><b>start-label <i>start-label-value</i></b>—Start of the SRGB label block.</p> <p><b>Range:</b> 16 through 1,048,575</p>                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Adjacency Segments, Anycast Segments, and Configurable SRGB in SPRING for IS-IS Protocol on page 292</a></li> <li>• <a href="#">Configuring Segment Routing Global Blocks Label Ranges in SPRING for IS-IS Protocol on page 324</a></li> <li>• <a href="#">Example: Configuring Segment Routing Global Blocks in SPRING for IS-IS to Increase Network Speed on page 294</a></li> <li>• <a href="#">source-packet-routing on page 578</a></li> </ul> |



## te-metric (Protocols IS-IS)


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>te-metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> <b>level</b> <i>level-number</i>]</p> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Set the metric value used by traffic engineering for information injected into the traffic engineering database. The value of the traffic engineering metric does not affect normal IS-IS forwarding.</p> <p>When traffic engineering is enabled on the routing device, you can use this statement to configure an IS-IS metric that is used exclusively for traffic engineering.</p>                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>metric</b>—Metric value.</p> <p><b>Range:</b> 1 through 16,777,215</p> <p><b>Default:</b> Value of the IGP metric</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li> <li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li> <li>• <a href="#">metric on page 525</a></li> <li>• <a href="#">wide-metrics-only on page 595</a></li> </ul>                                                                                                                                                                                                                   |

## topologies (Protocols IS-IS)

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>topologies {<br/>  ipv4-multicast;<br/>  ipv6-multicast;<br/>  ipv6-unicast;<br/>}</pre>                                                                                                                                                                                                                                                                                                      |
| Hierarchy Level          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                         |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                      |
| Description              | <p>Configure alternate IS-IS topologies.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                           |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                     |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 178</a></li><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 155</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 153</a></li><li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 177</a></li></ul> |

## traceoptions (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traceoptions {   file <i>name</i> &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;world-readable   no-world-readable&gt;;   flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],<br/> [edit protocols <i>isis</i>],<br/> [edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.<br/> Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/> Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/> Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>         | <p>Configure IS-IS protocol-level tracing options. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                            | <p> <b>NOTE:</b> The <b>traceoptions</b> statement is not supported on QFabric systems.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Default</b>             | <p>The default IS-IS protocol-level tracing options are those inherited from the routing protocols <b>traceoptions</b> statement included at the [edit routing-options] hierarchy level.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>             | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>name</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks (" "). All files are placed in the directory <b>/var/log</b>. We recommend that you place IS-IS tracing output in the file <b>isis-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files<br/> <b>Default:</b> 10 files</p> |

**flag *flag***—Tracing operation to perform. To specify more than one flag, include multiple **flag** statements.

#### IS-IS Protocol-Specific Tracing Flags

- **csn**—Complete sequence number PDU (CSNP) packets
- **error**—Errored IS-IS packets
- **graceful-restart**—Graceful restart operation
- **hello**—Hello packets
- **layer2-map**—Mapped ARP or neighbor discovery next hops in the kernel
- **ldp-synchronization**—Synchronization between IS-IS and LDP
- **lsp**—Link-state PDUs
- **lsp-generation**—Link-state PDU generation packets
- **packets**—All IS-IS protocol packets
- **psn**—Partial sequence number PDU (PSNP) packets
- **spf**—Shortest-path-first calculations

#### Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations, including adjacency changes

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

**flag-modifier**—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **receive**—Trace the packets being received.
- **send**—Trace the packets being transmitted.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p>routing and trace—To view this statement in the configuration.</p> <p>routing-control and trace-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces on page 363</a></li> <li>• <a href="#">Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page 42</a></li> <li>• <a href="#">Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces on page 358</a></li> <li>• <a href="#">Understanding Link-State PDU Throttling for IS-IS Interfaces on page 357</a></li> <li>• <a href="#">Understanding Checksums on IS-IS Interfaces for Error Checking on page 41</a></li> <li>• <a href="#">Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces on page 363</a></li> </ul> |

## traffic-engineering (Protocols IS-IS)

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre> traffic-engineering {   disable;   credibility-protocol-preference;   igp-topology;   family inet {     shortcuts {       multicast-rpf-routes;     }   }   family inet-mpls {     shortcuts;   }   family inet6 {     shortcuts;   }   family inet6-mpls {     shortcuts;   }   multipath {     lsp-equal-cost;   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Hierarchy Level     | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Release Information | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Support for the <b>family</b> statement introduced in Junos OS Release 9.3.</p> <p>Support for the <b>credibility-protocol-preference</b> statement introduced in Junos OS Release 9.4.</p> <p>Support for the <b>multipath</b> statement introduced in Junos OS Release 9.6.</p> <p>Support for the <b>lsp-equal-cost</b> statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Support for <b>inet-mpls</b> and <b>inet6-mpls</b> statements introduced in Junos OS Release 17.2 for MX Series, PTX Series, QFX5100 switches, and QFX10000 line switches.</p> <p>Support for <b>inet-mpls</b> and <b>inet6-mpls</b> statements introduced in Junos OS Release 17.3 for QFX5110 and QFX5200 switches.</p> <p>Support for <b>igp-topology</b> statement introduced in Junos OS Release 17.4R1 for MX Series, and PTX Series.</p> |
| Description         | <p>Configure traffic engineering properties for IS-IS.</p> <p>IS-IS always performs shortest-path-first (SPF) calculations to determine next hops. For prefixes reachable through a particular next hop, IS-IS places that next hop for that prefix in the inet.0 routing table. In addition, for routers running MPLS, IS-IS installs the prefix for IPv4 routes in the inet.3 routing table as well. The inet.3 table, which is present</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

on the ingress router, contains the host address of each MPLS label-switched path (LSP) egress router. BGP uses this routing table to resolve next-hop addresses.

If you enable IS-IS traffic engineering shortcuts and if there is a label-switched path to a point along the path to that prefix, IS-IS installs the prefix in the inet.3 routing table and uses the LSP as a next hop. The net result is that for BGP egress routers for which there is no LSP, BGP automatically uses an LSP along the path to reach the egress router.

In Junos OS Release 9.3 and later, IS-IS traffic engineering shortcuts support IPv6 routes. LSPs to be used for shortcuts continue to be signaled using IPv4. However, by default, shortcut routes calculated through IPv6 routes are added to the inet6.3 routing table. The default behavior is for only BGP to use LSPs in its calculations. If you configure MPLS so that both BGP and interior gateway protocols use LSPs for forwarding traffic, shortcut routes calculated through IPv6 are added to the inet6.0 routing table. IS-IS ensures that the IPv6 routes running over the IPv4 MPLS LSP are correctly de-encapsulated at the tunnel egress by pushing an extra IPv6 explicit null label between the IPv6 payload and the IPv4 transport label.

RSVP LSPs with a higher preference than IS-IS routes are not considered during the computation of traffic engineering shortcuts.

To configure IS-IS so that it uses LSPs as shortcuts when installing information in the inet.3 or inet6.3 routing table, include the following statements:

```
family inet {
  shortcuts {
    multicast-rpf-routes;
  }
}
family inet6 {
  shortcuts;
}
```

For IPv4 traffic, include the **inet** statement. For IPv6 traffic, include the **inet6** statement.

To configure IPv4 MPLS or IPv6 MPLS shortcuts explicitly for segment routing, include the **inet-mpls** statement for IPv4 MPLS traffic and the **inet6-mpls** statement for IPv6 MPLS traffic.

To configure load balancing across multiple LSPs, include the **multipath** statement.

When traffic engineering shortcuts are used, RSVP first looks at the **metric2** value, which is derived from the IGP cost. After this, RSVP considers the LSP metric value. So, if a certain path changes for an LSP and the cost changes, not all LSPs are used to load-balance the network.

When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default behavior for load balancing, include the **lsp-equal-cost** statement to retain the equal cost path information in the routing table.

```
multipath {  
  lsp-equal-cost;  
}
```

Because the inet.3 routing table is present only on ingress routers, you can configure LSP shortcuts only on these routers.

**Default** IS-IS traffic engineering support is enabled.

By default, IS-IS supports traffic engineering by exchanging basic information with the traffic engineering database. To disable this support, and to disable IS-IS shortcuts if they are configured, include the **disable** statement.



**Options** **credibility-protocol-preference**—Specify that IS-IS should use the configured protocol preference for IGP routes to determine the traffic engineering database credibility value. By default, the traffic engineering database prefers IS-IS routes even when the routes of another IGP are configured with a lower, that is, more preferred value. Use this statement to override this default behavior.

The traffic engineering database assigns a credibility value to each IGP and prefers the routes of the IGP with the highest credibility value. In Junos OS Release 9.4 and later, you can configure IS-IS to take protocol preference into account to determine the traffic engineering database credibility value. When protocol preference is used to determine the credibility value, IS-IS routes are not automatically preferred by the traffic engineering database, depending on your configuration. For example, OSPF routes have a default preference value of 10, whereas IS-IS Level 1 routes have a default preference value of 15. When protocol preference is enabled, the credibility value is determined by deducting the protocol preference value from a base value of 512. Using default protocol preference values, OSPF has a credibility value of 502, whereas IS-IS has a credibility value of 497. Because the traffic engineering database prefers IGP routes with the highest credibility value, OSPF routes are now preferred.



**NOTE:** This feature is also supported for OSPFv2.

**lsp-equal-cost**—Configure LSPs to be retained as equal cost paths for load balancing when a better path metric is found during the IS-IS internal routing table calculation. When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default IS-IS behavior, include the **lsp-equal-cost** statement for load balancing, so that the equal cost path information is retained in the routing table.

**multipath**—Enable load balancing for multiple LSPs.

**igp-topology**—Download IGP topology information into the traffic engineering database (TED). In Junos OS, the IGPs install topology information into a database called the traffic engineering database. The traffic engineering database contains the aggregated topology information. The IGP routes are installed by the traffic engineering database on behalf of the corresponding IGP into a user-visible routing table called `Isdist.0`, subject to route policies.

The remaining statements are explained separately. See [CLI Explorer](#).

|                                 |                                                                     |
|---------------------------------|---------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.        |
|                                 | <b>routing-control</b> —To add this statement to the configuration. |

- Related Documentation**
- [Example: Enabling OSPF Traffic Engineering Support](#)
  - [Example: Enabling IS-IS Traffic Engineering Support on page 248](#)
  - [traffic-engineering \(OSPF\)](#)
  - [Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts on page 246](#)

---

## traffic-statistics

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>traffic-statistics auto-bandwidth <i>auto-bandwidth</i> statistics-granularity per-interface <i>per-interface</i>;</code>                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>name</i> protocols isis <a href="#">source-packet-routing</a>],</code><br><code>[edit logical-systems <i>name</i> routing-instances <i>name</i> protocols isis <a href="#">source-packet-routing</a>],</code><br><code>[edit protocols isis <a href="#">source-packet-routing</a>],</code><br><code>[edit routing-instances <i>name</i> protocols isis <a href="#">source-packet-routing</a>]</code>    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.3R1 for the MX Series and PTX Series.                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Enable traffic measuring on the SPRING link. RSVP-TE needs to measure the bandwidth utilized by SPRING and estimate the available bandwidth at its disposal for traffic engineering. Traffic statistics are collected at a configured interval. The average of the measured SPRING bandwidth is reported to RSVP only when a set threshold is breached. RSVP then passes on this information to the IGP for reallocation of bandwidth. |
| <b>Options</b>                  | <b><code>auto-bandwidth <i>auto-bandwidth</i></code></b> — Specify the name of auto bandwidth.<br><br><b><code>statistics-granularity <i>per-interface</i></code></b> — Specify the interface where you need to measure traffic statistics of SPRING traffic.                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">auto-bandwidth on page 455</a></li><li>• <a href="#">update-threshold-max-reservable on page 591</a></li></ul>                                                                                                                                                                                                                                                                     |

## update-threshold-max-reservable


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>update-threshold-max-reservable <i>update-threshold-max-reservable</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>name</i> protocols rsvp interface],<br/>         [edit logical-systems <i>name</i> routing-instances <i>name</i> protocols rsvp interface],<br/>         [edit protocols rsvp interface],<br/>         [edit routing-instances <i>name</i> protocols rsvp interface]</p>                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 17.3R1 for MX Series and PTX Series.</p> <p><b>percent</b> option introduced in Junos OS Release 17.4R1 for MX Series and PTX Series.</p>                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure a threshold in bits per second. When SPRING bandwidth utilization exceeds this threshold, Resource Reservation Protocol (RSVP) reports this event to IGP and preempts the labeled switched paths (LSPs). However, if this threshold is not exceeded, RSVP does not make any changes to the bandwidth allocation.</p> <p>Note that the changes are not applied by modifying the <b>subscription percentage</b> at the [edit protocols rsvp interface <i>interface-name</i>] hierarchy level.</p> |
| <b>Default</b>                  | The default value is 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b><i>update-threshold-max-reservable</i></b>—Specify a threshold value for maximum SPRING bandwidth utilization in bits per second.</p> <p><b>Range:</b> 0 through 100000</p> <p><b>percent <i>percent</i></b>—Specify a bandwidth utilization change threshold in percentage beyond which RSVP triggers IGP updates. When the change in bandwidth utilization from previously advertised value is more than the percentage configured, RSVP informs IGP about the max reservable bandwidth change.</p>  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">auto-bandwidth on page 455</a></li> <li>• <a href="#">traffic-statistics on page 590</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                     |

## use-source-packet-routing (Protocols IS-IS)

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | use-source-packet-routing;                                                                                                                                                                                                                                                                                                                                                                                                              |
| Hierarchy Level          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">backup-spf-options</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">backup-spf-options</a> ],<br>[edit protocols isis <a href="#">backup-spf-options</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">backup-spf-options</a> ] |
| Release Information      | Statement introduced in Junos OS Release 16.2 for the M, MX, and PTX Series.<br>Statement introduced in Junos OS Release 17.2R1 for QFX5100 and QFX10000 switches.<br>Statement introduced in Junos OS Release 17.3R1 for QFX5110 and QFX5200 switches.<br>Statement introduced in Junos OS Release 18.4R1 for ACX5448 routers.                                                                                                         |
| Description              | Enable use of source packet routing node segment labels for computing backup paths for normal IPv4 or IPv6 IS-IS prefixes and primary IS-IS source packet routing node segments.                                                                                                                                                                                                                                                        |
| Required Privilege Level | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                     |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">isis on page 505</a></li><li>• <a href="#">source-packet-routing on page 578</a></li></ul>                                                                                                                                                                                                                                                                                          |

## use-post-convergence-lfa

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <code>use-post-convergence-lfa &lt;maximum-backup-paths <i>maximum-backup-paths</i>&gt;<br/>&lt;maximum-labels <i>maximum-labels</i>&gt; ;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Hierarchy Level          | <code>[edit logical-systems <i>name</i> protocols isis <b>backup-spf-options</b>],<br/>[edit logical-systems <i>name</i> routing-instances <i>name</i> protocols isis <b>backup-spf-options</b>],<br/>[edit protocols isis <b>backup-spf-options</b>],<br/>[edit routing-instances <i>name</i> protocols isis <b>backup-spf-options</b>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Release Information      | Statement introduced in Junos OS Release 17.4R1 for MX Series, PTX Series, and QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Description              | Calculate post-convergence MPLS fast reroute (FRR) backup next hops for the IS-IS protocol using segment routing (SR). Topology-independent loop-free alternate (TI-LFA) provides protection against link failure, node failure, and fate-sharing failures. By default, Junos OS provides link protection. Junos OS allows you to control the maximum number of equal-cost multipath (ECMP) backup paths installed for a given destination. Junos OS also allows you to control the maximum number of labels in the installed backup paths. Configure the <b>use-source-packet-routing</b> statement at <code>[edit protocols isis <b>backup-spf-options</b>]</code> hierarchy level to allow the backup paths to be available for inet.0 routing table along with inet.3 routing table. |
| Options                  | <p><b>maximum-backup-paths</b>—Set the maximum number of equal-cost post-convergence backup paths to be installed. For remote LFA, the IS-IS protocol installs only one backup path. The maximum backup path range allows you to install multiple backup paths</p> <p><b>Default:</b> 1</p> <p><b>Range:</b> 1-8</p> <p><b>maximum-labels</b>—Set the maximum number of labels used to construct a post-convergence backup path. If the backup path for a particular prefix requires more number of labels than the configured maximum labels then the backup path for that particular prefix is not installed.</p>                                                                                                                                                                      |
|                          | <div>  <p><b>NOTE:</b> If the <b>maximum-labels</b> option is not configured, then the number of labels that gets pushed stops at 3.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                          | <p><b>Default:</b> 3</p> <p><b>Range:</b> 2-5</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Required Privilege Level | routing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

- |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330</a></li><li>• <a href="#">Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333</a></li><li>• <a href="#">post-convergence-lfa on page 559</a></li><li>• <a href="#">use-for-post-convergence-lfa on page 594</a></li><li>• <a href="#">node-protection on page 535</a></li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

---

## use-for-post-convergence-lfa

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | use-for-post-convergence-lfa;                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Hierarchy Level          | [edit logical-systems <i>name</i> routing-instances <i>name</i> routing-options fate-sharing group <i>group-name</i> ],<br>[edit logical-systems <i>name</i> routing-options fate-sharing group <i>group-name</i> ],<br>[edit routing-instances <i>name</i> routing-options fate-sharing group <i>group-name</i> ],<br>[edit routing-options fate-sharing group <i>group-name</i> ]                                                                                           |
| Release Information      | Statement introduced in Junos OS Release 17.4R1 for MX Series, PTX Series, and QFX Series.                                                                                                                                                                                                                                                                                                                                                                                    |
| Description              | Use this fate-sharing group as a constraint for the backup path computed by topology-independent loop-free alternate (TI-LFA).                                                                                                                                                                                                                                                                                                                                                |
| Required Privilege Level | system                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 330</a></li><li>• <a href="#">Configuring Topology-Independent Loop-Free Alternate with Segment Routing for IS-IS on page 333</a></li><li>• <a href="#">post-convergence-lfa on page 559</a></li><li>• <a href="#">use-post-convergence-lfa on page 593</a></li><li>• <a href="#">node-protection on page 535</a></li></ul> |

## wide-metrics-only

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>wide-metrics-only;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>],</code><br><code>[edit protocols isis <b>level</b> <i>level-number</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>]</code>                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Configure IS-IS to generate metric values greater than 63 on a per IS-IS level basis.</p> <p>Normally, IS-IS metrics can have values up to 63, and IS-IS generates two type, length, and value (TLV) tuples, one for an IS-IS adjacency and the second for an IP prefix. To allow IS-IS to support traffic engineering, a second pair of TLVs has been added to IS-IS, one for IP prefixes and the second for IS-IS adjacency and traffic engineering information. With these TLVs, IS-IS metrics can have values up to 16,777,215 (<math>2^{24} - 1</math>).</p> <p>To configure IS-IS to generate only the new pair of TLVs and thus to allow the wider range of metric values, include the <b>wide-metrics-only</b> statement.</p> |
| <b>Default</b>                  | By default, Junos OS supports the sending and receiving of wide metrics. Junos OS allows a maximum metric value of 63 and generates both pairs of TLVs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">te-metric on page 581</a></li> <li>• <a href="#">Example: Enabling Wide IS-IS Metrics for Traffic Engineering on page 272</a></li> <li>• <a href="#">Understanding Wide IS-IS Metrics for Traffic Engineering on page 272</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                            |





## CHAPTER 17

# Operational Commands

- clear bfd adaptation
- clear bfd session
- clear isis adjacency
- clear isis database
- clear isis overload
- clear isis statistics
- clear isis spring traffic-statistics
- ping clns
- restart
- show auto-bandwidth
- show bfd session
- show isis adjacency
- show isis adjacency holddown
- show isis authentication
- show isis backup coverage
- show isis backup label-switched-path
- show backup-selection
- show isis backup spf results
- show isis context-identifier
- show isis database
- show isis hostname
- show isis interface
- show isis interface-group
- show isis layer2-map
- show isis overview
- show isis purge log
- show isis route
- show isis route download priority

- `show isis spf`
- `show isis spring interface traffic-statistics`
- `show isis statistics`
- `show policy`
- `show policy conditions`
- `show route`
- `show route active-path`
- `show route advertising-protocol`
- `show route all`
- `show route best`
- `show route brief`
- `show route detail`
- `show route exact`
- `show route export`
- `show route extensive`
- `show route forwarding-table`
- `show route hidden`
- `show route inactive-path`
- `show route instance`
- `show route next-hop`
- `show route output`
- `show route protocol`
- `show route receive-protocol`
- `show route table`
- `show route terse`
- `show security keychain`
- `test policy`
- `traceroute clns`

## clear bfd adaptation

**Syntax** clear bfd adaptation  
 <all>  
 <address *session-address*>  
 <discriminator *discr-number*>

**Release Information** Command introduced before Junos OS Release 7.4.

**Description** Clear adaptation for Bidirectional Forwarding Detection (BFD) sessions. BFD is a simple hello mechanism that detects failures in a network. Configured BFD interval timers can change, adapting to network situations. Use this command to return BFD interval timers to their configured values.

The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

**Options** **all**—Clear adaptation for all BFD sessions.

**address *session-address***—(Optional) Clear adaptation for all BFD sessions matching the specified address.

**discriminator *discr-number***—(Optional) Clear adaptation for the local BFD session matching the specified discriminator.

**Additional Information** For more information, see the description of the **bfd-liveness-detection** configuration statement in the *Junos Routing Protocols Configuration Guide*.

**Required Privilege Level** clear

**Related Documentation** • [show bfd session on page 627](#)

**List of Sample Output** [clear bfd adaptation on page 599](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

clear bfd adaptation

```
user@host> clear bfd adaptation
```

## clear bfd session

---

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                           | <a href="#">Syntax on page 600</a><br><a href="#">Syntax (EX Series Switch and QFX Series) on page 600</a>                                                                                                                                                                                                                                                                                                                |
| <b>Syntax</b>                                   | <pre>clear bfd session &lt;all&gt; &lt;address session-address&gt; &lt;discriminator discr-number&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switch and QFX Series)</b> | <pre>clear bfd session &lt;all&gt; &lt;address session-address&gt; &lt;discriminator discr-number&gt;</pre>                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>                              | Drop one or more Bidirectional Forwarding Detection (BFD) sessions.                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                                  | <p><b>all</b>—Drop all BFD sessions.</p> <p><b>address session-address</b>—(Optional) Drop all BFD sessions matching the specified address.</p> <p><b>discriminator discr-number</b>—(Optional) Drop the local BFD session matching the specified discriminator.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                 | clear                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>                    | <ul style="list-style-type: none"><li>• <a href="#">show bfd session on page 627</a></li></ul>                                                                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>                    | <a href="#">clear bfd session all on page 600</a>                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>                            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                     |

## Sample Output

### clear bfd session all

```
user@host> clear bfd session all
```



clear isis adjacency

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                             | <a href="#">Syntax on page 602</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 602</a>                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Syntax                                     | <pre>clear isis adjacency &lt;all&gt; &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;neighbor&gt;</pre>                                                                                                                                                                                                                                                                                                                                                      |
| Syntax (EX Series Switches and QFX Series) | <pre>clear isis adjacency &lt;all&gt; &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; &lt;neighbor&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                |
| Release Information                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>all option introduced in Junos OS Release 14.2.                                                                                                                                                                                                                                                                                                               |
| Description                                | Remove entries from the IS-IS adjacency database.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Options                                    | <p><b>all</b>—Remove all entries from the adjacency database.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Clear all adjacencies for the specified routing instance only.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear all adjacencies for the specified interface only.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>neighbor</b>—(Optional) Clear adjacencies for the specified neighbor only.</p> |
| Required Privilege Level                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Related Documentation                      | <ul style="list-style-type: none"><li><a href="#">show isis adjacency on page 638</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| List of Sample Output                      | <a href="#">clear isis adjacency on page 603</a><br><a href="#">clear isis adjacency all on page 603</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Output Fields** See [show isis adjacency](#) for an explanation of output fields.

## Sample Output

### clear isis adjacency

The following sample output displays IS-IS adjacency database information before and after the **clear isis adjacency** command is entered:

```
user@host> show isis adjacency
```

IS-IS adjacency database:

| Interface  | System         | L State | Hold (secs) | SNPA |
|------------|----------------|---------|-------------|------|
| so-1/0/0.0 | karakul        | 3 Up    | 26          |      |
| so-1/1/3.0 | 1921.6800.5080 | 3 Up    | 23          |      |
| so-5/0/0.0 | 1921.6800.5080 | 3 Up    | 19          |      |

```
user@host> clear isis adjacency karakul
```

```
user@host> show isis adjacency
```

IS-IS adjacency database:

| Interface  | System         | L State        | Hold (secs) | SNPA |
|------------|----------------|----------------|-------------|------|
| so-1/0/0.0 | karakul        | 3 Initializing | 26          |      |
| so-1/1/3.0 | 1921.6800.5080 | 3 Up           | 24          |      |
| so-5/0/0.0 | 1921.6800.5080 | 3 Up           | 21          |      |

### clear isis adjacency all

```
user@host> clear isis adjacency all
```

IS-IS adjacency database:

| Interface  | System         | L State        | Hold (secs) | SNPA |
|------------|----------------|----------------|-------------|------|
| so-1/0/0.0 | karakul        | 3 Initializing | 26          |      |
| so-1/1/3.0 | 1921.6800.5080 | 3 Initializing | 24          |      |
| so-5/0/0.0 | 1921.6800.5080 | 3 Initializing | 21          |      |

## clear isis database

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 604</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 604</a>                                                                                                                                                                                                                                                                                                                          |
| <b>Syntax</b>                                     | <pre>clear isis database &lt;all&gt; &lt;entries&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>clear isis database &lt;all&gt; &lt;entries&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.<br>Command introduced in 15.1X53-D30 for QFX10002 switch.                                                                                                          |
| <b>Description</b>                                | Remove the entries from the IS-IS link-state database, which contains prefixes and topology information.                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                    | <b>all</b> —Remove all entries from the IS-IS link-state database for all routing instances.<br><br><b>entries</b> —(Optional) Name of the database entry.<br><br><b>instance <i>instance-name</i></b> —(Optional) Clear all entries for the specified routing instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">show isis database on page 665</a></li></ul>                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>                      | <a href="#">clear isis database on page 605</a>                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>                              | See <a href="#">show isis database</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                           |



## Sample Output

### clear isis database

The following sample output displays IS-IS link-state database information before and after the **clear isis database all** command is entered:

```
user@host> show isis database
```

```
IS-IS level 1 link-state database:
```

| LSP ID       | Sequence | Checksum | Lifetime (secs) |
|--------------|----------|----------|-----------------|
| crater.00-00 | 0x12     | 0x84dd   | 1139            |

1 LSPs

```
IS-IS level 2 link-state database:
```

| LSP ID               | Sequence | Checksum | Lifetime (secs) |
|----------------------|----------|----------|-----------------|
| crater.00-00         | 0x19     | 0xe92c   | 1134            |
| badlands.00-00       | 0x16     | 0x1454   | 985             |
| carlsbad.00-00       | 0x33     | 0x220b   | 1015            |
| ranier.00-00         | 0x2e     | 0xfc31   | 1007            |
| 1921.6800.5066.00-00 | 0x11     | 0x7313   | 566             |
| 1921.6800.5067.00-00 | 0x14     | 0xd9d4   | 939             |

6 LSPs

```
user@host> clear isis database all
```

```
user@host> show isis database
```

```
IS-IS level 1 link-state database:
```

| LSP ID | Sequence | Checksum | Lifetime (secs) |
|--------|----------|----------|-----------------|
|--------|----------|----------|-----------------|

```
IS-IS level 2 link-state database:
```

| LSP ID | Sequence | Checksum | Lifetime (secs) |
|--------|----------|----------|-----------------|
|--------|----------|----------|-----------------|

## clear isis overload

---

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                             | <a href="#">Syntax on page 606</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 606</a>                                                                                                                                                                                                                                                                                                                                                                        |
| Syntax                                     | <pre>clear isis overload &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                      |
| Syntax (EX Series Switches and QFX Series) | <pre>clear isis overload &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                |
| Release Information                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                  |
| Description                                | <p>Reset the IS-IS dynamic overload bit. This command can appear to not work, continuing to display <b>overload</b> after execution. The bit is reset only if the root cause is corrected by configuration remotely or locally.</p> <p>When other routers detect that the overload bit is set, they do not use this routing device for transit traffic, but they do use it for packets destined to the overloaded routing device's directly connected networks and IP prefixes.</p> |
| Options                                    | <p><b>none</b>—Reset the IS-IS dynamic overload bit.</p> <p><b>instance</b> <i>instance-name</i>—(Optional) Reset the IS-IS dynamic overload bit for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                                                                                                |
| Required Privilege Level                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Related Documentation                      | <ul style="list-style-type: none"><li>• <a href="#">show isis database on page 665</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                    |
| List of Sample Output                      | <a href="#">clear isis overload on page 607</a>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Output Fields                              | See <a href="#">show isis database</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                                                                         |

## Sample Output

### clear isis overload

The following sample output displays IS-IS database information before and after the **clear isis overload** command is entered:

```
user@host> show isis database
```

```
IS-IS level 1 link-state database:
```

| LSP ID       | Sequence | Checksum | Lifetime | Attributes            |
|--------------|----------|----------|----------|-----------------------|
| pro3-c.00-00 | 0x4      | 0x10db   | 1185     | L1 L2 <b>Overload</b> |

```
1 LSPs
```

```
IS-IS level 2 link-state database:
```

| LSP ID       | Sequence | Checksum | Lifetime | Attributes            |
|--------------|----------|----------|----------|-----------------------|
| pro3-c.00-00 | 0x5      | 0x429f   | 1185     | L1 L2 <b>Overload</b> |

|              |       |        |     |       |
|--------------|-------|--------|-----|-------|
| pro2-a.00-00 | 0x91e | 0x2589 | 874 | L1 L2 |
|--------------|-------|--------|-----|-------|

|              |     |       |     |       |
|--------------|-----|-------|-----|-------|
| pro2-a.02-00 | 0x1 | 0xcbc | 874 | L1 L2 |
|--------------|-----|-------|-----|-------|

```
3 LSPs
```

```
user@host> clear isis overload
```

```
user@host> show isis database
```

```
IS-IS level 1 link-state database:
```

| LSP ID       | Sequence | Checksum | Lifetime | Attributes |
|--------------|----------|----------|----------|------------|
| pro3-c.00-00 | 0xa      | 0x429e   | 1183     | L1 L2      |

```
1 LSPs
```

```
IS-IS level 2 link-state database:
```

| LSP ID       | Sequence | Checksum | Lifetime | Attributes |
|--------------|----------|----------|----------|------------|
| pro3-c.00-00 | 0xc      | 0x9c39   | 1183     | L1 L2      |

|              |       |        |     |       |
|--------------|-------|--------|-----|-------|
| pro2-a.00-00 | 0x91e | 0x2589 | 783 | L1 L2 |
|--------------|-------|--------|-----|-------|

|              |     |       |     |       |
|--------------|-----|-------|-----|-------|
| pro2-a.02-00 | 0x1 | 0xcbc | 783 | L1 L2 |
|--------------|-----|-------|-----|-------|

```
3 LSPs
```

## clear isis statistics

---

|                                            |                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                             | <a href="#">Syntax on page 608</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 608</a>                                                                                                                                                                                                                                                                    |
| Syntax                                     | <pre>clear isis statistics &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                |
| Syntax (EX Series Switches and QFX Series) | <pre>clear isis statistics &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                          |
| Release Information                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                              |
| Description                                | Set statistics about IS-IS traffic to zero.                                                                                                                                                                                                                                                                                                                                     |
| Options                                    | <b>none</b> —Set IS-IS traffic statistics to zero for all routing instances.<br><br><b>instance <i>instance-name</i></b> —(Optional) Set IS-IS traffic statistics to zero for the specified routing instance only.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| Required Privilege Level                   | view                                                                                                                                                                                                                                                                                                                                                                            |
| Related Documentation                      | <ul style="list-style-type: none"><li>• <a href="#">show isis statistics on page 712</a></li></ul>                                                                                                                                                                                                                                                                              |
| List of Sample Output                      | <a href="#">clear isis statistics on page 608</a>                                                                                                                                                                                                                                                                                                                               |
| Output Fields                              | See <a href="#">show isis statistics</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                   |

## Sample Output

### clear isis statistics

The following sample output displays IS-IS statistics before and after the **clear isis statistics** command is entered:

```
user@host> show isis statistics
```

IS-IS statistics for merino:

| PDU type | Received | Processed | Drops | Sent   | Rexmit |
|----------|----------|-----------|-------|--------|--------|
| LSP      | 12793    | 12793     | 0     | 8666   | 719    |
| IIH      | 116751   | 116751    | 0     | 118834 | 0      |
| CSNP     | 203956   | 203956    | 0     | 204080 | 0      |
| PSNP     | 7356     | 7350      | 6     | 8635   | 0      |
| Unknown  | 0        | 0         | 0     | 0      | 0      |
| Totals   | 340856   | 340850    | 6     | 340215 | 719    |

Total packets received: 340856 Sent: 340934

SNP queue length: 0 Drops: 0  
LSP queue length: 0 Drops: 0

SPF runs: 1064  
Fragments rebuilt: 1087  
LSP regenerations: 436  
Purges initiated: 0

user@host> clear isis statistics

user@host> show isis statistics

IS-IS statistics for merino:

| PDU type | Received | Processed | Drops | Sent | Rexmit |
|----------|----------|-----------|-------|------|--------|
| LSP      | 0        | 0         | 0     | 0    | 0      |
| IIH      | 3        | 3         | 0     | 3    | 0      |
| CSNP     | 2        | 2         | 0     | 4    | 0      |
| PSNP     | 0        | 0         | 0     | 0    | 0      |
| Unknown  | 0        | 0         | 0     | 0    | 0      |
| Totals   | 5        | 5         | 0     | 7    | 0      |

Total packets received: 5 Sent: 7

SNP queue length: 0 Drops: 0  
LSP queue length: 0 Drops: 0

SPF runs: 0  
Fragments rebuilt: 0  
LSP regenerations: 0  
Purges initiated: 0

## clear isis spring traffic-statistics

---

**Syntax**      `clear isis spring traffic-statistics`  
                 `<all>`  
                 `<interface interface>`  
                 `<logical-system (all | logical-system-name)>`

**Release Information**      Command introduced in Junos OS Release 17.3R1 on the MX Series and PTX Series.

**Description**      Clear all IS-IS SPRING traffic statistics. The Packet Forwarding Engine (PFE) does not support clearing the counters. The IS-IS routing protocol must maintain the traffic counters corresponding to the time when clear was issued and subtract it from the next sample.

Use this command when the routing protocol process (rpd) restarts and the IS-IS time stamps are lost. The existing **clear statistics** command might not clear all SPRING traffic statistics.

**Options**      **none**— Clear IS-IS SPRING traffic statistics.

**all**— (Optional) Clear IS-IS SPRING traffic statistics for all interfaces.

**interface *interface***— (Optional) Clear all IS-IS SPRING traffic statistics for an interface

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level**      clear

**Related Documentation**

- [auto-bandwidth on page 455](#)
- [traffic-statistics on page 590](#)
- [update-threshold-max-reservable on page 591](#)
- [show auto-bandwidth on page 624](#)
- [show isis spring interface traffic-statistics on page 711](#)

**Output Fields**      This command produces no output.

## ping clns

**Syntax** `ping clns host`  
`<brief>`  
`<count requests>`  
`<detail>`  
`<do-not-fragment>`  
`<interval seconds>`  
`<logical-system logical-system-name>`  
`<no-resolve>`  
`<pattern string>`  
`<rapid>`  
`<routing-instance routing-instance-name>`  
`<size bytes>`  
`<source source-address>`  
`<ttl value>`  
`<verbose>`  
`<wait seconds>`

**Release Information** Command introduced before Junos OS Release 7.4.

**Description** Check the reachability of a remote Connectionless Network Service (CLNS) node. Type Ctrl+c to interrupt a **ping clns** command.

**Options** ***host***—IP address or hostname of the remote system to ping.

***brief***—(Optional) Display brief information.

***count requests***—(Optional) Number of ping requests to send. The range of values is 1 through 2,000,000,000. The default is an unlimited number of requests.

***detail***—(Optional) Include in the output the interface on which the ping reply was received.

***do-not-fragment***—(Optional) Set the do-not-fragment (DF) bit in the IP header of the ping packets.

***interval seconds***—(Optional) How often to send ping requests. The range of values, in seconds, is 1 through infinity. The default value is 1.

***logical-system logical-system-name***—(Optional) Run the command from the specified logical system.

***no-resolve***—(Optional) Do not attempt to determine the hostname that corresponds to the IP address.

***pattern string***—(Optional) Specify a hexadecimal fill pattern to include in the ping packet.

***rapid***—(Optional) Send ping requests rapidly. The results are reported in a single message, not in individual messages for each ping request. By default, five ping requests are sent before the results are reported. To change the number of request, include the count option.

**routing-instance *routing-instance-name***—(Optional) Name of the routing instance for the ping attempt.

**size *bytes***—(Optional) Size of ping request packets. The range of values, in bytes, is **0** through **65,468**. The default value is **56**, which is effectively 64 bytes because 8 bytes of ICMP header data are added to the packet.

**source *source-address***—(Optional) IP address of the outgoing interface. This address is sent in the IP source address field of the ping request. If this option is not specified, the default address is usually the loopback interface.

**ttl *value***—(Optional) Time-to-live (TTL) value to include in the ping request (IPv6). The range of values is **0** through **255**.

**verbose**—(Optional) Display detailed output.

**wait *seconds***—(Optional) Maximum wait time, in seconds, after the final packet is sent. If this option is not specified, the default delay is **10** seconds. If this option is used without the count option, a default count of **5** packets is used.

**Required Privilege Level** network

**List of Sample Output** [ping clns on page 612](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request. An exclamation point (!) indicates that an echo reply was received. A period (.) indicates that an echo reply was not received within the timeout period. An x indicates that an echo reply was received with an error code. Packets with an error code are not counted in the received packets count. They are accounted for separately.

## Sample Output

### ping clns

```
user@host> ping clns 47.0005.9000.f800.0000.0108.0001.1921.6812.4058.00
PING 47.0005.9000.f800.0000.0108.0001.1921.6812.4058.00
(47.0005.9000.f800.0000.0108.0001.1921.6812.4058.00): 55 data bytes
64 bytes from 47.0005.9000.f800.0000.0108.0001.1921.6812.4058.00: seq=0 ttl=30
time=15.051 ms
64 bytes from 47.0005.9000.f800.0000.0108.0001.1921.6812.4058.00: seq=1 ttl=30
time=10.370 ms
64 bytes from 47.0005.9000.f800.0000.0108.0001.1921.6812.4058.00: seq=2 ttl=30
time=10.367 ms
--- ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 10.367/11.929/15.051/2.207 ms
```



## restart

- List of Syntax**
- Syntax on page 613
  - Syntax (ACX Series Routers) on page 613
  - Syntax (EX Series Switches) on page 613
  - Syntax (MX Series Routers) on page 614
  - Syntax (QFX Series) on page 614
  - Syntax (Routing Matrix) on page 614
  - Syntax (TX Matrix Routers) on page 615
  - Syntax (TX Matrix Plus Routers) on page 615
  - Syntax (QFX Series) on page 615

**Syntax** restart  
 <adaptive-services | ancpd-service | application-identification | audit-process |  
 auto-configuration | captive-portal-content-delivery | ce-l2tp-service | chassis-control |  
 class-of-service | clksyncd-service | database-replication | datapath-trace-service  
 | dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture |  
 ecc-error-logging | ethernet-connectivity-fault-management  
 | ethernet-link-fault-management | event-processing | firewall  
 | general-authentication-service | gracefully | iccp-service | idp-policy | immediately  
 | interface-control | ipsec-key-management | kernel-replication | l2-learning | l2cpd-service  
 | l2tp-service | l2tp-universal-edge | lacp | license-service | link-management  
 | local-policy-decision-function | mac-validation | mib-process | mounstd-service  
 | mpls-traceroute | mspd | multicast-snooping | named-service | nfsd-service |  
 packet-triggered-subscribers | peer-selection-service | pgm | pic-services-logging | pki-service  
 | ppp | ppp-service | pppoe | protected-system-domain-service |  
 redundancy-interface-process | remote-operations | root-system-domain-service | routing  
 <logical-system *logical-system-name* > | sampling | sbc-configuration-process | sdk-service  
 | service-deployment | services | snmp | soft | static-subscribers | statistics-service |  
 subscriber-management | subscriber-management-helper | tunnel-oamd | usb-control |  
 vrrp | web-management >  
 <gracefully | immediately | soft >

**Syntax (ACX Series Routers)** restart  
 <adaptive-services | audit-process | auto-configuration | autoinstallation | chassis-control |  
 class-of-service | clksyncd-service | database-replication | dhcp-service | diameter-service  
 | disk-monitoring | dynamic-flow-capture | ethernet-connectivity-fault-management  
 | ethernet-link-fault-management | event-processing | firewall  
 | general-authentication-service | gracefully | immediately | interface-control |  
 ipsec-key-management | l2-learning | lacp | link-management | mib-process | mounstd-service  
 | mpls-traceroute | mspd | named-service | nfsd-service | pgm | pki-service | ppp | pppoe |  
 redundancy-interface-process | remote-operations | routing | sampling | sdk-service  
 | secure-neighbor-discovery | service-deployment | services | snmp | soft | statistics-service |  
 subscriber-management | subscriber-management-helper | tunnel-oamd | vrrp >

**Syntax (EX Series Switches)** restart  
 <autoinstallation | chassis-control | class-of-service | database-replication | dhcp |  
 dhcp-service | diameter-service | dot1x-protocol | ethernet-link-fault-management |  
 ethernet-switching | event-processing | firewall | general-authentication-service |

```
interface-control | kernel-replication | l2-learning | lacp | license-service | link-management
| lldpd-service | mib-process | mounstd-service | multicast-snooping | pgm |
redundancy-interface-process | remote-operations | routing | secure-neighbor-discovery
| service-deployment | sflow-service | snmp | vrrp | web-management>
```

#### Syntax (MX Series Routers)

```
restart
<adaptive-services | ancpd-service | application-identification | audit-process |
auto-configuration | bbe-stats-service | captive-portal-content-delivery | ce-l2tp-service
| chassis-control | class-of-service | clksyncd-service | database-replication |
datapath-trace-service | dhcp-service | diameter-service | disk-monitoring |
dynamic-flow-capture | ecc-error-logging | ethernet-connectivity-fault-management |
ethernet-link-fault-management | event-processing | firewall |
general-authentication-service | gracefully | iccp-service | idp-policy | immediately
| interface-control | ipsec-key-management | kernel-replication | l2-learning | l2cpd-service
| l2tp-service | l2tp-universal-edge | lacp | license-service | link-management |
local-policy-decision-function | mac-validation | mib-process | mounstd-service |
mpls-traceroute | mspd | multicast-snooping | named-service | nfsd-service |
packet-triggered-subscribers | peer-selection-service | pgm | pic-services-logging |
pki-service | ppp | ppp-service | pppoe | protected-system-domain-service |
redundancy-interface-process | remote-operations | root-system-domain-service | routing
| routing <logical-system logical-system-name> | sampling | sbc-configuration-process |
sdk-service | service-deployment | services | snmp | soft | static-subscribers
| statistics-service | subscriber-management | subscriber-management-helper | tunnel-oamd
| usb-control | vrrp | web-management>
<all-members>
<gracefully | immediately | soft>
<local>
<member member-id>
```

#### Syntax (QFX Series)

```
restart
<adaptive-services | audit-process | chassis-control | class-of-service | dialer-services |
diameter-service | dlsw | ethernet-connectivity | event-processing | fibre-channel | firewall
| general-authentication-service | igmp-host-services | interface-control |
ipsec-key-management | isdn-signaling | l2ald | l2-learning | l2tp-service | mib-process |
named-service | network-access-service | nstrace-process | pgm | ppp | pppoe |
redundancy-interface-process | remote-operations | logical-system-name> | routing |
sampling | secure-neighbor-discovery | service-deployment | snmp | usb-control |
web-management>
<gracefully | immediately | soft>
```

#### Syntax (Routing Matrix)

```
restart
<adaptive-services | audit-process | chassis-control | class-of-service | disk-monitoring |
dynamic-flow-capture | ecc-error-logging | event-processing | firewall | interface-control
| ipsec-key-management | kernel-replication | l2-learning | l2tp-service | lacp |
link-management | mib-process | pgm | pic-services-logging | ppp | pppoe |
redundancy-interface-process | remote-operations | routing <logical-system
logical-system-name> | sampling | service-deployment | snmp>
<all | all-lcc | lcc number>
<gracefully | immediately | soft>
```

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax (TX Matrix Routers)      | <pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system logical-system-name&gt;   sampling   service-deployment   snmp  statistics-service&gt; &lt;all-chassis   all-lcc   lcc number   scc&gt; &lt;gracefully   immediately   soft&gt;</pre>                                                                                                                                                   |
| Syntax (TX Matrix Plus Routers) | <pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system logical-system-name&gt;   sampling   service-deployment   snmp  statistics-service&gt; &lt;all-chassis   all-lcc   all-sfc   lcc number   sfc number&gt; &lt;gracefully   immediately   soft&gt;</pre>                                                                                                                                  |
| Syntax (QFX Series)             | <pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dialer-services   diameter-service   dlsw   ethernet-connectivity   event-processing   fibre-channel   firewall   general-authentication-service   igmp-host-services   interface-control   ipsec-key-management   isdn-signaling   l2ald   l2-learning   l2tp-service   mib-process   named-service   network-access-service   nstrace-process   pgm   ppp   pppoe   redundancy-interface-process   remote-operations  logical-system-name&gt;   routing   sampling  secure-neighbor-discovery   service-deployment   snmp   usb-control   web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>                                                                                                                      |
| Release Information             | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series routers.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Options added:</p> <ul style="list-style-type: none"> <li>• <b>dynamic-flow-capture</b> in Junos OS Release 7.4.</li> <li>• <b>dlsw</b> in Junos OS Release 7.5.</li> <li>• <b>event-processing</b> in Junos OS Release 7.5.</li> <li>• <b>ppp</b> in Junos OS Release 7.5.</li> <li>• <b>l2ald</b> in Junos OS Release 8.0.</li> <li>• <b>link-management</b> in Junos Release 8.0.</li> <li>• <b>pgcp-service</b> in Junos OS Release 8.4.</li> </ul> |

- **sbc-configuration-process** in Junos OS Release 9.5.
- **services pgcp gateway** in Junos OS Release 9.6.
- **sfc** and **all-sfc** for the TX Matrix Router in Junos OS Release 9.6.
- **bbe-stats-service** in Junos OS Release 18.4R1 on MX Series routers.

**Description** Restart a Junos OS process.



**CAUTION:** Never restart a software process unless instructed to do so by a customer support engineer. A restart might cause the router or switch to drop calls and interrupt transmission, resulting in possible loss of data.

**Options** **none**—Same as **gracefully**.

**adaptive-services**—(Optional) Restart the configuration management process that manages the configuration for stateful firewall, Network Address Translation (NAT), intrusion detection services (IDS), and IP Security (IPsec) services on the Adaptive Services PIC.

**all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Restart the software process on all chassis.

**all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process on all T640 routers connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process on all T1600 routers connected to the TX Matrix Plus router.

**all-members**—(MX Series routers only) (Optional) Restart the software process for all members of the Virtual Chassis configuration.

**all-sfc**—(TX Matrix Plus routers only) (Optional) For a TX Matrix Plus router, restart the software processes for the TX Matrix Plus router (or switch-fabric chassis).

**ancpd-service**—(Optional) Restart the Access Node Control Protocol (ANCP) process, which works with a special Internet Group Management Protocol (IGMP) session to collect outgoing interface mapping events in a scalable manner.

**application-identification**—(Optional) Restart the process that identifies an application using intrusion detection and prevention (IDP) to allow or deny traffic based on applications running on standard or nonstandard ports.

**audit-process**—(Optional) Restart the RADIUS accounting process that gathers statistical data that can be used for general network monitoring, analyzing, and tracking usage patterns, for billing a user based on the amount of time or type of services accessed.

**auto-configuration**—(Optional) Restart the Interface Auto-Configuration process.

**autoinstallation**—(EX Series switches only) (Optional) Restart the autoinstallation process.

**bbe-stats-service**—(MX Series routers only) (Optional) Restart bbe-statsd, the BBE statistics collection and management process.

**captive-portal-content-delivery**—(Optional) Restart the HTTP redirect service by specifying the location to which a subscriber's initial Web browser session is redirected, enabling initial provisioning and service selection for the subscriber.

**ce-l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Universal Edge Layer 2 Tunneling Protocol (L2TP) process, which establishes L2TP tunnels and Point-to-Point Protocol (PPP) sessions through L2TP tunnels.

**chassis-control**—(Optional) Restart the chassis management process.

**class-of-service**—(Optional) Restart the class-of-service (CoS) process, which controls the router's or switch's CoS configuration.

**clksyncd-service**—(Optional) Restart the external clock synchronization process, which uses synchronous Ethernet (SyncE).

**database-replication**—(EX Series switches and MX Series routers only) (Optional) Restart the database replication process.

**datapath-trace-service**—(Optional) Restart the packet path tracing process.

**dhcp**—(EX Series switches only) (Optional) Restart the software process for a Dynamic Host Configuration Protocol (DHCP) server. A DHCP server allocates network IP addresses and delivers configuration settings to client hosts without user intervention.

**dhcp-service**—(Optional) Restart the Dynamic Host Configuration Protocol process.

**dialer-services**—(EX Series switches only) (Optional) Restart the ISDN dial-out process.

**diameter-service**—(Optional) Restart the diameter process.

**disk-monitoring**—(Optional) Restart disk monitoring, which checks the health of the hard disk drive on the Routing Engine.

**dls**—(QFX Series only) (Optional) Restart the data link switching (DLSw) service.

**dot1x-protocol**—(EX Series switches only) (Optional) Restart the port-based network access control process.

**dynamic-flow-capture**—(Optional) Restart the dynamic flow capture (DFC) process, which controls DFC configurations on Monitoring Services III PICs.

**ecc-error-logging**—(Optional) Restart the error checking and correction (ECC) process, which logs ECC parity errors in memory on the Routing Engine.

**ethernet-connectivity-fault-management**—(Optional) Restart the process that provides IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault

management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.

**ethernet-link-fault-management**—(EX Series switches and MX Series routers only) (Optional) Restart the process that provides the OAM link fault management (LFM) information for Ethernet interfaces.

**ethernet-switching**—(EX Series switches only) (Optional) Restart the Ethernet switching process.

**event-processing**—(Optional) Restart the event process (eventd).

**fibre-channel**—(QFX Series only) (Optional) Restart the Fibre Channel process.

**firewall**—(Optional) Restart the firewall management process, which manages the firewall configuration and enables accepting or rejecting packets that are transiting an interface on a router or switch.

**general-authentication-service**—(EX Series switches and MX Series routers only) (Optional) Restart the general authentication process.

**gracefully**—(Optional) Restart the software process.

**iccp-service**—(Optional) Restart the Inter-Chassis Communication Protocol (ICCP) process.

**idp-policy**—(Optional) Restart the intrusion detection and prevention (IDP) protocol process.

**immediately**—(Optional) Immediately restart the software process.

**interface-control**—(Optional) Restart the interface process, which controls the router's or switch's physical interface devices and logical interfaces.

**ipsec-key-management**—(Optional) Restart the IPsec key management process.

**isdn-signaling**—(QFX Series only) (Optional) Restart the ISDN signaling process, which initiates ISDN connections.

**kernel-replication**—(Optional) Restart the kernel replication process, which replicates the state of the backup Routing Engine when graceful Routing Engine switchover (GRES) is configured.

**l2-learning**—(Optional) Restart the Layer 2 address flooding and learning process.

**l2cpd-service**—(Optional) Restart the Layer 2 Control Protocol process, which enables features such as Layer 2 protocol tunneling and nonstop bridging.

**l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Layer 2 Tunneling Protocol (L2TP) process, which sets up client services for establishing Point-to-Point Protocol (PPP) tunnels across a network and negotiating Multilink PPP if it is implemented.

**l2tp-universal-edge**—(MX Series routers only) (Optional) Restart the L2TP process, which establishes L2TP tunnels and PPP sessions through L2TP tunnels.

**lACP**—(Optional) Restart the Link Aggregation Control Protocol (LACP) process. LACP provides a standardized means for exchanging information between partner systems on a link to allow their link aggregation control instances to reach agreement on the identity of the LAG to which the link belongs, and then to move the link to that LAG, and to enable the transmission and reception processes for the link to function in an orderly manner.

**lcc *number***—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process for a specific T640 router that is connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process for a specific router that is connected to the TX Matrix Plus router.

Replace *number* with the following values depending on the LCC configuration:

- 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix.
- 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix.
- 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
- 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.

**license-service**—(EX Series switches only) (Optional) Restart the feature license management process.

**link-management**— (TX Matrix and TX Matrix Plus routers and EX Series switches only) (Optional) Restart the Link Management Protocol (LMP) process, which establishes and maintains LMP control channels.

**lldpd-service**—(EX Series switches only) (Optional) Restart the Link Layer Discovery Protocol (LLDP) process.

**local**—(MX Series routers only) (Optional) Restart the software process for the local Virtual Chassis member.

**local-policy-decision-function**— (Optional) Restart the process for the Local Policy Decision Function, which regulates collection of statistics related to applications and application groups and tracking of information about dynamic subscribers and static interfaces.

**mac-validation**— (Optional) Restart the Media Access Control (MAC) validation process, which configures MAC address validation for subscriber interfaces created on demux interfaces in dynamic profiles on MX Series routers.

**member *member-id***—(MX Series routers only) (Optional) Restart the software process for a specific member of the Virtual Chassis configuration. Replace ***member-id*** with a value of **0** or **1**.

**mib-process**—(Optional) Restart the Management Information Base (MIB) version II process, which provides the router's MIB II agent.

**mobile-ip**—(Optional) Restart the Mobile IP process, which configures Junos OS Mobile IP features.

**moundd-service**—(EX Series switches and MX Series routers only) (Optional) Restart the service for NFS mount requests.

**mpls-traceroute**—(Optional) Restart the MPLS Periodic Traceroute process.

**mspd**—(Optional) Restart the Multiservice process.

**multicast-snooping**—(EX Series switches and MX Series routers only) (Optional) Restart the multicast snooping process, which makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.

**named-service**—(Optional) Restart the DNS Server process, which is used by a router or a switch to resolve hostnames into addresses.

**network-access-service**—(QFX Series only) (Optional) Restart the network access process, which provides the router's Challenge Handshake Authentication Protocol (CHAP) authentication service.

**nfsd-service**—(Optional) Restart the Remote NFS Server process, which provides remote file access for applications that need NFS-based transport.

**packet-triggered-subscribers**—(Optional) Restart the packet-triggered subscribers and policy control (PTSP) process, which allows the application of policies to dynamic subscribers that are controlled by a subscriber termination device.

**peer-selection-service**—(Optional) Restart the Peer Selection Service process.

**pgcp-service**—(Optional) Restart the pgcpd service process running on the Routing Engine. This option does not restart pgcpd processes running on mobile station PICs. To restart pgcpd processes running on mobile station PICs, use the **services pgcp gateway** option.

**pgm**—(Optional) Restart the process that implements the Pragmatic General Multicast (PGM) protocol for assisting in the reliable delivery of multicast packets.

**pic-services-logging**—(Optional) Restart the logging process for some PICs. With this process, also known as fsad (the file system access daemon), PICs send special logging information to the Routing Engine for archiving on the hard disk.

**pki-service**—(Optional) Restart the PKI Service process.



**ppp**—(Optional) Restart the Point-to-Point Protocol (PPP) process, which is the encapsulation protocol process for transporting IP traffic across point-to-point links.

**ppp-service**—(Optional) Restart the Universal edge PPP process, which is the encapsulation protocol process for transporting IP traffic across universal edge routers.

**pppoe**—(Optional) Restart the Point-to-Point Protocol over Ethernet (PPPoE) process, which combines PPP that typically runs over broadband connections with the Ethernet link-layer protocol that allows users to connect to a network of hosts over a bridge or access concentrator.

**protected-system-domain-service**—(Optional) Restart the Protected System Domain (PSD) process.

**redundancy-interface-process**—(Optional) Restart the ASP redundancy process.

**remote-operations**—(Optional) Restart the remote operations process, which provides the ping and traceroute MIBs.

**root-system-domain-service**—(Optional) Restart the Root System Domain (RSD) service.

**routing**—(ACX Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the routing protocol process.

**routing <logical-system *logical-system-name*>**—(Optional) Restart the routing protocol process, which controls the routing protocols that run on the router or switch and maintains the routing tables. Optionally, restart the routing protocol process for the specified logical system only.

**sampling**—(Optional) Restart the sampling process, which performs packet sampling based on particular input interfaces and various fields in the packet header.

**sbc-configuration-process**—(Optional) Restart the session border controller (SBC) process of the border signaling gateway (BSG).

**scc**—(TX Matrix routers only) (Optional) Restart the software process on the TX Matrix router (or switch-card chassis).

**sdk-service**—(Optional) Restart the SDK Service process, which runs on the Routing Engine and is responsible for communications between the SDK application and Junos OS. Although the SDK Service process is present on the router, it is turned off by default.

**secure-neighbor-discovery**—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the secure Neighbor Discovery Protocol (NDP) process, which provides support for protecting NDP messages.

**sfc *number***—(TX Matrix Plus routers only) (Optional) Restart the software process on the TX Matrix Plus router (or switch-fabric chassis). Replace ***number*** with **0**.

**service-deployment**—(Optional) Restart the service deployment process, which enables Junos OS to work with the Session and Resource Control (SRC) software.

**services**—(Optional) Restart a service.

**services pgcp gateway *gateway-name***—(Optional) Restart the pgcpd process for a specific border gateway function (BGF) running on an MS-PIC. This option does not restart the pgcpd process running on the Routing Engine. To restart the pgcpd process on the Routing Engine, use the **pgcp-service** option.

**sflow-service**—(EX Series switches only) (Optional) Restart the flow sampling (sFlow technology) process.

**snmp**—(Optional) Restart the SNMP process, which enables the monitoring of network devices from a central location and provides the router's or switch's SNMP master agent.

**soft**—(Optional) Reread and reactivate the configuration without completely restarting the software processes. For example, BGP peers stay up and the routing table stays constant. Omitting this option results in a graceful restart of the software process.

**static-subscribers**—(Optional) Restart the static subscribers process, which associates subscribers with statically configured interfaces and provides dynamic service activation and activation for these subscribers.

**statistics-service**—(Optional) Restart the process that manages the Packet Forwarding Engine statistics.

**subscriber-management**—(Optional) Restart the Subscriber Management process.

**subscriber-management-helper**—(Optional) Restart the Subscriber Management Helper process.

**tunnel-oamd**—(Optional) Restart the Tunnel OAM process, which enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol tunneling (L2PT) allows service providers to send Layer 2 protocol data units (PDUs) across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.

**usb-control**—(MX Series routers) (Optional) Restart the USB control process.

**vrrp**—(ACX Series routers, EX Series switches, and MX Series routers only) (Optional) Restart the Virtual Router Redundancy Protocol (VRRP) process, which enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

**web-management**—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the Web management process.

**Required Privilege Level**    reset

**Related Documentation** • [Overview of Junos OS CLI Operational Mode Commands](#)

**List of Sample Output** [restart interface-control gracefully on page 623](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[restart interface-control gracefully](#)

```
user@host> restart interface-control gracefully
Interface control process started, pid 41129
```

## show auto-bandwidth

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show auto-bandwidth</code><br><code>history-log</code><br><code>traffic (<i>sensor-name</i> brief detail)</code>                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 17.3R1 for MX Series and PTX Series.                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Display the auto-bandwidth information. You can view the traffic or the history log information in the output.                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <b>history-log</b> — Display the log of the sensor in the threshold activation period.<br><br><b>traffic (<i>sensor-name</i> brief   detail)</b> —Display the traffic details and the configured auto-bandwidth parameters.                                                                                                                                                                |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">auto-bandwidth on page 455</a></li><li>• <a href="#">traffic-statistics on page 590</a></li><li>• <a href="#">update-threshold-max-reservable on page 591</a></li><li>• <a href="#">clear isis spring traffic-statistics on page 610</a></li><li>• <a href="#">show isis spring interface traffic-statistics on page 711</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">show auto-bandwidth (traffic) on page 625</a><br><a href="#">show auto-bandwidth (history-log) on page 626</a>                                                                                                                                                                                                                                                                 |

| Field Name                 | Field Description                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Collection Interval</b> | Time in seconds between two traffic sample collections.                                                 |
| <b>Adjust Interval</b>     | Time interval after which the average bandwidth utilization is measured.                                |
| <b>Adjust threshold</b>    | Percentage change threshold after which an action is triggered.                                         |
| <b>Adjust Subscription</b> | Threshold for RSVP subscription in percentage.                                                          |
| <b>Pkt Recv</b>            | Number of packets received.                                                                             |
| <b>Byte Recv</b>           | Number of bytes received.                                                                               |
| <b>Poll Count</b>          | Number of times the data was collected.                                                                 |
| <b>Average</b>             | Average bandwidth utilization across the SPRING traffic samples collected.                              |
| <b>Last Report</b>         | Traffic statistics that was last reported indicating the number of packets received in the last report. |
| <b>Last Report time</b>    | Time stamp of the last reporting time.                                                                  |
| <b>Last Query Time</b>     | Time stamp of the last query.                                                                           |
| <b>Last Resp Time</b>      | Time stamp of the last response time.                                                                   |
| <b>Byte Bucket</b>         | Count of bytes sent on the link measured periodically as per the configured collection interval.        |
| <b>Packet Bucket</b>       | Count of packets sent on the link measured periodically as per the configured collection interval.      |

## Sample Output

### show auto-bandwidth (traffic)

```
user@host> show auto-bandwidth traffic
```

| Name       | Stats-Id   | packets | bytes |
|------------|------------|---------|-------|
| ge-0/0/2.0 | 0xc0000002 | 0       | 0     |
| ge-0/0/0.0 | 0xc0000003 | 0       | 0     |
| lo0.0      | 0xc0000004 | 0       | 0     |

```
user@host> show auto-bandwidth traffic detail
```

```
ge-0/0/0.0:
Collection Interval: 10, Adjust Interval : 200, Adjust threshold : 10
Adjust Subscription : 100
Pkt Recv: 1536 Byte Recv: 135168 Poll Count:29 Average:0
Last Report: 2829 Last Report time:Mon Jan 2 11:07:59 2017
Byte Bucket:
      0      0      0      0      0
```

|                |   |   |   |   |
|----------------|---|---|---|---|
| 0              | 0 | 0 | 0 | 0 |
| 0              | 0 | 0 | 0 | 0 |
| 0              | 0 | 0 | 0 | 0 |
| Packet Bucket: |   |   |   |   |
| 0              | 0 | 0 | 0 | 0 |
| 0              | 0 | 0 | 0 | 0 |
| 0              | 0 | 0 | 0 | 0 |
| 0              | 0 | 0 | 0 | 0 |

**show auto-bandwidth (history-log)**

```
user@host> show auto-bandwidth history-log
```

```
Tue Jan 3 18:39:36
```

```
ge-0/0/0.0:
```

```
Threshold crossed firsttime, waiting for 5sec (adjust-interval - collection period)
```

```
Byte Recv:4M Poll Count:1 Average:5Mbps
```

```
Last Report:0
```

```
Last Report time:Tue Jan 3 18:39:26 2017
```

```
Chronological order: First bucket is the most recent
```

```
2000000 0 0 0
```

```
Tue Jan 3 18:39:46
```

```
ge-0/0/0.0:
```

```
Threshold crossed early, waiting for 5sec
```

```
Byte Recv:6M Poll Count:2 Average:1Mbps
```

```
Last Report:0
```

```
Last Report time:Tue Jan 3 18:39:26 2017
```

```
Chronological order: First bucket is the most recent
```

```
2000000 2000000 0 0
```

```
Tue Jan 3 18:39:56
```

```
ge-0/0/0.0:
```

```
Threshold crossed early, waiting for 5sec
```

```
Byte Recv:8M Poll Count:3 Average:1.5Mbps
```

```
Last Report:0
```

```
Last Report time:Tue Jan 3 18:39:26 2017
```

```
Chronological order: First bucket is the most recent
```

```
2000000 2000000 2000000 0
```

```
Tue Jan 3 18:40:06
```

```
ge-0/0/0.0:
```

```
Threshold crossed, reporting 0 MBps to RSVP
```

```
Byte Recv:10M Poll Count:4 Average:2 Mbps
```

```
Last Report:0
```

```
Last Report time:Tue Jan 3 18:39:26 2017
```

```
Chronological order: First bucket is the most recent
```

```
2000000 2000000 2000000 2000000
```

## show bfd session

**List of Syntax**    [Syntax on page 627](#)  
                          [Syntax \(EX Series Switch and QFX Series\) on page 627](#)

**Syntax**    show bfd session  
                  <brief | detail | extensive | summary>  
                  <address *address*>  
                  <client rsvp-oam (brief | detail | extensive | summary) | vpls-oam (brief | detail | extensive |  
                         instance *instance-name* | summary)>  
                  <discriminator *discriminator*>  
                  <logical-system (all | *logical-system-name*)>  
                  <prefix *address*>  
                  <subscriber (address *destination-address* | discriminator *discriminator* | extensive)>

**Syntax (EX Series Switch and QFX Series)**    show bfd session  
                  <brief | detail | extensive | summary>  
                  <address *address*>  
                  <client rsvp-oam (brief | detail | extensive | summary) | vpls-oam (brief | detail | extensive |  
                         instance *instance-name* | summary)>  
                  <discriminator *discriminator*>  
                  <prefix *address*>

**Release Information**    Command introduced before Junos OS Release 7.4.  
                  Options **discriminator** and **address** introduced in Junos OS Release 8.2.  
                  Option **prefix** introduced in Junos OS Release 9.0.  
                  Command introduced in Junos OS Release 12.1 for the QFX Series.  
                  Option **client** introduced in Junos OS Release 12.3R3.  
                  Option **subscriber** introduced in Junos OS Release 15.1 for the MX Series.

**Description**    Display information about active Bidirectional Forwarding Detection (BFD) sessions.

**Options**    **none**—(Same as **brief**) Display information about active BFD sessions.

**brief | detail | extensive | summary**—(Optional) Display the specified level of output.

**address *address***—(Optional) Display information about the BFD session for the specified neighbor address.

**client rsvp-oam**  
                         (**brief | detail | extensive | summary**)  
                         | **vpls-oam**  
                         (**brief | detail | extensive | instance *instance-name* | summary**)—(Optional) Display information about RSVP-OAM or VPLS-OAM BFD sessions in the specified level of output. For VPLS-OAM, display the specified level of output or display information about all of the BFD sessions for the specified VPLS routing instance.

**discriminator** *discriminator*—(Optional) Display information about the BFD session using the specified local discriminator.

**logical-system** (all | *logical-system-name*)—(Optional) Perform this operation on all logical systems or on a particular logical system.

**<subscriber (address *destination-address* | discriminator *discriminator* | extensive)>**—(Optional) Display information about all BFD sessions for subscribers, or for a single BFD subscriber session with a particular destination address, or with a particular denominator.

**Required Privilege Level**

view

**Related Documentation**

- [clear bfd session on page 600](#)
- *Understanding BFD for Static Routes for Faster Network Failure Detection*
- *Example: Configuring BFD for Static Routes for Faster Network Failure Detection*
- *Understanding BFD for OSPF*
- *Example: Configuring BFD for OSPF*
- *Understanding BFD for BGP*
- *Example: Configuring BFD on Internal BGP Peer Sessions*
- *Understanding Bidirectional Forwarding Detection Authentication for PIM*
- *Configuring BFD for PIM*
- [Understanding BFD for IS-IS on page 127](#)

**List of Sample Output**

[show bfd session on page 632](#)  
[show bfd session brief on page 633](#)  
[show bfd session detail on page 633](#)  
[show bfd session detail \(with Authentication\) on page 633](#)  
[show bfd session address extensive on page 633](#)  
[show bfd session client rsvp-oam on page 634](#)  
[show bfd session client vpls-oam summary on page 634](#)  
[show bfd session client vpls-oam instance instance-name on page 634](#)  
[show bfd session extensive on page 634](#)  
[show bfd session extensive \(with Authentication\) on page 635](#)  
[show bfd session summary on page 636](#)  
[show bfd session subscriber on page 636](#)  
[show bfd session subscriber address on page 636](#)  
[show bfd session subscriber extensive on page 636](#)  
[show bfd session subscriber discriminator extensive on page 637](#)

**Output Fields**

[Table 10 on page 629](#) describes the output fields for the **show bfd session** command. Output fields are listed in the approximate order in which they appear.



Table 10: show bfd session Output Fields

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output                |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| Address           | Address on which the BFD session is active.                                                                                                                                                                                                                                                                                                                                                                        | brief detail extensive<br>none |
| State             | State of the BFD session: <b>Up</b> , <b>Down</b> , <b>Init</b> (initializing), or <b>Failing</b> .                                                                                                                                                                                                                                                                                                                | brief detail extensive<br>none |
| Interface         | Interface on which the BFD session is active.                                                                                                                                                                                                                                                                                                                                                                      | brief detail extensive<br>none |
| Detect Time       | Negotiated time interval, in seconds, used to detect BFD control packets.                                                                                                                                                                                                                                                                                                                                          | brief detail extensive<br>none |
| Transmit Interval | Time interval, in seconds, used by the transmitting system to send BFD control packets.                                                                                                                                                                                                                                                                                                                            | brief detail extensive<br>none |
| Multiplier        | Negotiated multiplier by which the time interval is multiplied to determine the detection time for the transmitting system.                                                                                                                                                                                                                                                                                        | detail extensive               |
| Session up time   | How long a BFD session has been established.                                                                                                                                                                                                                                                                                                                                                                       | detail extensive               |
| Client            | Protocol or process for which the BFD session is active: <b>ISIS</b> , <b>OSPF</b> , <b>DHCP</b> , <b>Static</b> , or <b>VGD</b> .                                                                                                                                                                                                                                                                                 | detail extensive               |
| TX interval       | Time interval, in seconds, used by the host system to transmit BFD control packets.                                                                                                                                                                                                                                                                                                                                | brief detail extensive<br>none |
| RX interval       | Time interval, in seconds, used by the host system to receive BFD control packets.                                                                                                                                                                                                                                                                                                                                 | brief detail extensive<br>none |
| Authenticate      | Indicates that BFD authentication is configured.                                                                                                                                                                                                                                                                                                                                                                   | detail extensive               |
| keychain          | Name of the security authentication keychain being used by a specific client.<br><br>BFD authentication information for a client is provided in a single line and includes the <b>keychain</b> , <b>algo</b> , and <b>mode</b> parameters. Multiple clients can be configured on a BFD session.                                                                                                                    | extensive                      |
| algo              | BFD authentication algorithm being used for a specific client: <b>keyed-md5</b> , <b>keyed-sha-1</b> , <b>meticulous-keyed-md5</b> , <b>meticulous-keyed-sha-1</b> , or <b>simple-password</b> .<br><br>BFD authentication information for a client is provided in a single line and includes the <b>keychain</b> , <b>algo</b> , and <b>mode</b> parameters. Multiple clients can be configured on a BFD session. | extensive                      |

Table 10: show bfd session Output Fields (continued)

| Field Name         | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output  |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| mode               | <p>Level of BFD authentication enforcement being used by a specific client: <b>strict</b> or <b>loose</b>. Strict enforcement indicates that authentication is configured at both ends of the session (the default). Loose enforcement indicates that one end of the session might not be authenticated.</p> <p>BFD authentication information for a client is provided in a single line and includes the <b>keychain</b>, <b>algo</b>, and <b>mode</b> parameters. Multiple clients can be configured on a BFD session.</p>                                                                                      | extensive        |
| Local diagnostic   | <p>Local diagnostic information about failing BFD sessions.</p> <p>Following are the expected values for Local Diagnostic output field:</p> <ul style="list-style-type: none"> <li>• <b>None</b>—No diagnostic</li> <li>• <b>CtlExpire</b>—Control detection time expired</li> <li>• <b>EchoExpire</b>—Echo detection time expired</li> <li>• <b>NbrSignal</b>—Neighbor signalled session down</li> <li>• <b>FwdPlaneReset</b>—Forwarding plane reset</li> <li>• <b>PathDown</b>—Path down</li> <li>• <b>ConcatPathDown</b>—Concatenated path down</li> <li>• <b>AdminDown</b>—Administratively down</li> </ul>   | detail extensive |
| Remote diagnostic  | <p>Remote diagnostic information about failing BFD sessions.</p> <p>Following are the expected values for Remote Diagnostic output field:</p> <ul style="list-style-type: none"> <li>• <b>None</b>—No diagnostic</li> <li>• <b>CtlExpire</b>—Control detection time expired</li> <li>• <b>EchoExpire</b>—Echo detection time expired</li> <li>• <b>NbrSignal</b>—Neighbor signalled session down</li> <li>• <b>FwdPlaneReset</b>—Forwarding plane reset</li> <li>• <b>PathDown</b>—Path down</li> <li>• <b>ConcatPathDown</b>—Concatenated path down</li> <li>• <b>AdminDown</b>—Administratively down</li> </ul> | detail extensive |
| Remote state       | Reports whether the remote system's BFD packets have been received and whether the remote system is receiving transmitted control packets.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | detail extensive |
| Version            | BFD version: <b>0</b> or <b>1</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | extensive        |
| Replicated         | The <b>replicated</b> flag appears when nonstop routing or graceful Routing Engine switchover is configured and the BFD session has been replicated to the backup Routing Engine.                                                                                                                                                                                                                                                                                                                                                                                                                                 | detail extensive |
| Min async interval | Minimum amount of time, in seconds, between asynchronous control packet transmissions across the BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | extensive        |
| Min slow interval  | Minimum amount of time, in seconds, between synchronous control packet transmissions across the BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | extensive        |

Table 10: show bfd session Output Fields (continued)

| Field Name                          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Adaptive async TX interval          | Transmission interval being used because of adaptation.                                                                                                                                                                                                                                                                                                                                                            | extensive       |
| RX interval                         | Minimum required receive interval.                                                                                                                                                                                                                                                                                                                                                                                 | extensive       |
| Local min TX interval               | Minimum amount of time, in seconds, between control packet transmissions on the local system.                                                                                                                                                                                                                                                                                                                      | extensive       |
| Local min RX interval               | Minimum amount of time, in seconds, between control packet detections on the local system.                                                                                                                                                                                                                                                                                                                         | extensive       |
| Remote min TX interval              | Minimum amount of time, in seconds, between control packet transmissions on the remote system.                                                                                                                                                                                                                                                                                                                     | extensive       |
| Remote min RX interval              | Minimum amount of time, in seconds, between control packet detections on the remote system.                                                                                                                                                                                                                                                                                                                        | extensive       |
| Threshold transmission interval     | Threshold for notification if the transmission interval increases.                                                                                                                                                                                                                                                                                                                                                 | extensive       |
| Threshold for detection time        | Threshold for notification if the detection time increases.                                                                                                                                                                                                                                                                                                                                                        | extensive       |
| Local discriminator                 | Authentication code used by the local system to identify that BFD session.                                                                                                                                                                                                                                                                                                                                         | extensive       |
| Remote discriminator                | Authentication code used by the remote system to identify that BFD session.                                                                                                                                                                                                                                                                                                                                        | extensive       |
| Echo mode                           | Information about the state of echo transmissions on the BFD session.                                                                                                                                                                                                                                                                                                                                              | extensive       |
| Prefix                              | LDP FEC address associated with the BFD session.                                                                                                                                                                                                                                                                                                                                                                   | All levels      |
| Egress, Destination                 | Displays the LDP FEC destination address. This field is displayed only on a router at the egress of an LDP FEC, where the BFD session has an LDP Operation, Administration, and Maintenance (OAM) client.                                                                                                                                                                                                          | All levels      |
| Remote is control-plane independent | <p>The BFD session on the remote peer is running on its Packet Forwarding Engine. In this case, when the remote node undergoes a graceful restart, the local peer can help the remote peer with the graceful restart.</p> <p>The following BFD sessions are not distributed to the Packet Forwarding Engine: tunnel-encapsulated sessions, and sessions over integrated routing and bridging (IRB) interfaces.</p> | extensive       |

Table 10: show bfd session Output Fields (continued)

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Level of Output         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Authentication           | <p>Summary status of BFD authentication:</p> <ul style="list-style-type: none"> <li><b>status</b>—<b>enabled/active</b> indicates authentication is configured and active. <b>enabled/inactive</b> indicates authentication is configured but not active. This only occurs when the remote end of the session does not support authentication and loose checking is configured.</li> <li><b>keychain</b>—Name of the security authentication keychain associated with the specified BFD session.</li> <li><b>algo</b>—BFD authentication algorithm being used: <b>keyed-md5</b>, <b>keyed-sha-1</b>, <b>meticulous-keyed-md5</b>, <b>meticulous-keyed-sha-1</b>, or <b>simple-password</b>.</li> <li><b>mode</b>—Level of BFD authentication enforcement: <b>strict</b> or <b>loose</b>. Strict enforcement indicates authentication is configured at both ends of the session (the default). Loose enforcement indicates that one end of the session might not be authenticated.</li> </ul> <p>This information is only shown if BFD authentication is configured.</p> | <b>extensive</b>        |
| Session ID               | The BFD session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>detail extensive</b> |
| sessions                 | Total number of active BFD sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels              |
| clients                  | Total number of clients that are hosting active BFD sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels              |
| Cumulative transmit rate | Total number of BFD control packets transmitted per second on all active sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | All levels              |
| Cumulative receive rate  | Total number of BFD control packets received per second on all active sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | All levels              |
| Multi-hop, min-recv-TTL  | Minimum time to live (TTL) accepted if the session is configured for multihop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>extensive</b>        |
| route table              | Route table used if the session is configured for multihop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>extensive</b>        |
| local address            | <p>Local address of the source used if the session is configured for multihop.</p> <p>The source IP address for outgoing BFD packets from the egress side of an MPLS BFD session is based on the outgoing interface IP address.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>extensive</b>        |

## Sample Output

### show bfd session

```
user@host> show bfd session
```

| Address   | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|------------|-------------|-------------------|------------|
| 10.9.1.33 | Up    | so-7/1/0.0 | 0.600       | 0.200             | 3          |
| 10.9.1.29 | Up    | ge-4/0/0.0 | 0.600       | 0.200             | 3          |

```
2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps
```

### show bfd session brief

The output for the **show bfd session brief** command is identical to that for the **show bfd session** command.

### show bfd session detail

```
user@host> show bfd session detail
```

| Address                                                            | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|--------------------------------------------------------------------|-------|------------|-------------|-------------------|------------|
| 10.9.1.33                                                          | Up    | so-7/1/0.0 | 0.600       | 0.200             | 3          |
| Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3    |       |            |             |                   |            |
| Session up time 3d 00:34:02                                        |       |            |             |                   |            |
| Local diagnostic None, remote diagnostic None                      |       |            |             |                   |            |
| Remote state Up, version 1                                         |       |            |             |                   |            |
| Replicated                                                         |       |            |             |                   |            |
| 10.9.1.29                                                          | Up    | ge-4/0/0.0 | 0.600       | 0.200             | 3          |
| Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3 |       |            |             |                   |            |
| Session up time 3d 00:29:04, previous down time 00:00:01           |       |            |             |                   |            |
| Local diagnostic NbrSignal, remote diagnostic AdminDown            |       |            |             |                   |            |
| Remote state Up, version 1                                         |       |            |             |                   |            |

```
2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps
```

### show bfd session detail (with Authentication)

```
user@host> show bfd session detail
```

| Address                                                                              | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|--------------------------------------------------------------------------------------|-------|------------|-------------|-------------------|------------|
| 10.9.1.33                                                                            | Up    | so-7/1/0.0 | 0.600       | 0.200             | 3          |
| Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3, <b>Authenticate</b> |       |            |             |                   |            |
| Session up time 3d 00:34:18                                                          |       |            |             |                   |            |
| Local diagnostic None, remote diagnostic None                                        |       |            |             |                   |            |
| Remote state Up, version 1                                                           |       |            |             |                   |            |
| Replicated                                                                           |       |            |             |                   |            |
| 10.9.1.29                                                                            | Up    | ge-4/0/0.0 | 0.600       | 0.200             | 3          |
| Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3                   |       |            |             |                   |            |
| Session up time 3d 00:29:12, previous down time 00:00:01                             |       |            |             |                   |            |
| Local diagnostic NbrSignal, remote diagnostic AdminDown                              |       |            |             |                   |            |
| Remote state Up, version 1                                                           |       |            |             |                   |            |

```
2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps
```

### show bfd session address extensive

```
user@host> show bfd session 10.255.245.212 extensive
```

| Address                                                           | State | Interface | Detect Time | Transmit Interval | Multiplier |
|-------------------------------------------------------------------|-------|-----------|-------------|-------------------|------------|
| 10.255.245.212                                                    | Up    |           | 1.200       | 0.400             | 3          |
| Client Static, TX interval 0.400, RX interval 0.400, multiplier 3 |       |           |             |                   |            |

```

Session up time 00:17:03, previous down time 00:00:14
Local diagnostic CtlExpire, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 0.400, min slow interval 1.000
Adaptive async tx interval 0.400, rx interval 0.400
Local min tx interval 0.400, min rx interval 0.400, multiplier 3
Remote min tx interval 0.400, min rx interval 0.400, multiplier 3
Threshold transmission interval 0.000, Threshold for detection time 0.000
Local discriminator 6, remote discriminator 16
Echo mode disabled/inactive
Multi-hop, min-recv-TTL 255, route-table 0, local-address 10.255.245.205

```

```

1 sessions, 1 clients
Cumulative transmit rate 2.5 pps, cumulative receive rate 2.5 pps

```

### show bfd session client rsvp-oam

```
user@host> show bfd session client rsvp-oam
```

| Address       | State | Interface | Detect Time | Transmit Interval | Multiplier |
|---------------|-------|-----------|-------------|-------------------|------------|
| 192.168.0.223 | Up    |           | 540.000     | 180.000           | 3          |

```

1 Up sessions, 0 Down sessions
1 sessions, 1 clients
Cumulative transmit rate 0.0 pps, cumulative receive rate 0.0 pps

```

### show bfd session client vpls-oam summary

```
user@host> show bfd session client vpls-oam summary
```

```

1 Up sessions, 1 Down sessions
2 sessions, 2 clients
Cumulative transmit rate 2.0 pps, cumulative receive rate 1.0 pps

```

### show bfd session client vpls-oam instance instance-name

```
user@host> show bfd session client vpls-oam instance vpls
```

| Address   | State | Interface | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|-----------|-------------|-------------------|------------|
| 127.0.0.1 | Up    | ae9.0     | 3.000       | 1.000             | 3          |

```

1 Up Sessions, 0 Down Sessions
1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

### show bfd session extensive

```
user@host> show bfd session extensive
```

| Address   | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|------------|-------------|-------------------|------------|
| 10.31.1.2 | Up    | ge-2/1/8.0 | 0.030       | 0.010             | 3          |

Client OSPF realm ospf-v2 Area 0.0.0.0, TX interval 0.010, RX interval 0.010

```

Session up time 00:10:13
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated
Min async interval 0.010, min slow interval 1.000
Adaptive async TX interval 0.010, RX interval 0.010
Local min TX interval 0.010, minimum RX interval 0.010, multiplier 3
Remote min TX interval 0.010, min RX interval 0.010, multiplier 3
Local discriminator 12, remote discriminator 4
Echo mode disabled/inactive
Remote is control-plane independent
  Session ID: 0x201
  Micro-BFD Session

```

| Address   | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|------------|-------------|-------------------|------------|
| 10.31.2.2 | Up    | ge-2/1/4.0 | 0.030       | 0.010             | 3          |

```

Client OSPF realm ospf-v2 Area 0.0.0.0, TX interval 0.010, RX interval 0.010
Session up time 00:10:14
Local diagnostic None, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 0.010, min slow interval 1.000
Adaptive async TX interval 0.010, RX interval 0.010
Local min TX interval 0.010, minimum RX interval 0.010, multiplier 3
Remote min TX interval 0.010, min RX interval 0.010, multiplier 3
Local discriminator 13, remote discriminator 5
Echo mode disabled/inactive
Remote is control-plane independent
  Session ID: 0x202

```

2 sessions, 2 clients  
Cumulative transmit rate 200.0 pps, cumulative receive rate 200.0 pps

#### show bfd session extensive (with Authentication)

```

user@host> show bfd session extensive

```

| Address        | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------------|-------|------------|-------------|-------------------|------------|
| 192.168.208.26 | Up    | so-1/0/0.0 | 2.400       | 0.800             | 10         |

```

Client Static, TX interval 0.600, RX interval 0.600, Authenticate
  keychain bfd, algo keyed-md5, mode loose
Session up time 00:18:07
Local diagnostic None, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 0.600, min slow interval 1.000
Adaptive async TX interval 0.600, RX interval 0.600
Local min TX interval 0.600, minimum RX interval 0.600, multiplier 10
Remote min TX interval 0.800, min RX interval 0.800, multiplier 3
Local discriminator 2, remote discriminator 3
Echo mode disabled/inactive
Authentication enabled/active, keychain bfd, algo keyed-md5, mode loose

```

1 sessions, 1 clients  
Cumulative transmit rate 1.2 pps, cumulative receive rate 1.2 pps

### show bfd session summary

```
user@host> show bfd session summary

2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps
```

### show bfd session subscriber

```
user@host> show bfd session subscriber

      Detect Transmit
Address State Interface Time Interval Multiplier
1.0.0.2 Up ae0.0 90.000 30.000 3
1.0.0.6 Up ae0.1 90.000 30.000 3
1.0.0.10 Up ae0.2 90.000 30.000 3
1.0.0.14 Up ae0.3 90.000 30.000 3
1.0.0.18 Up ae0.4 90.000 30.000 3

20 sessions, 20 clients
```

### show bfd session subscriber address

```
user@host> show bfd session subscriber address 1.0.0.2

      Detect Transmit
Address State Interface Time Interval Multiplier
1.0.0.2 Up ae0.0 90.000 30.000 3

1 sessions, 1 clients
Cumulative transmit rate 5.0 pps, cumulative receive rate 5.0 pps
```

### show bfd session subscriber extensive

```
user@host> show bfd session subscriber extensive

      Detect Transmit
Address State Interface Time Interval Multiplier
1.0.0.2 Up ae0.0 90.000 30.000 3

Client DHCP, TX interval 30.000, RX interval 30.000
Session up time 09:11:50
Local diagnostic None, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 30.000, min slow interval 30.000
Adaptive async TX interval 30.000, RX interval 30.000
Local min TX interval 30.000, minimum RX interval 30.000, multiplier 3
Remote min TX interval 30.000, min RX interval 30.000, multiplier 3
Local discriminator 20, remote discriminator 16
Echo mode disabled/inactive
Remote is control-plane independent
Session ID: 0x1

      Detect Transmit
Address State Interface Time Interval Multiplier
1.0.0.6 Up ae0.1 90.000 30.000 3

Client DHCP, TX interval 30.000, RX interval 30.000
Session up time 09:11:50
```



```

Local diagnostic None, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 30.000, min slow interval 30.000
Adaptive async TX interval 30.000, RX interval 30.000
Local min TX interval 30.000, minimum RX interval 30.000, multiplier 3
Remote min TX interval 30.000, min RX interval 30.000, multiplier 3
Local discriminator 21, remote discriminator 17
Echo mode disabled/inactive
Remote is control-plane independent
Session ID: 0x2

```

### show bfd session subscriber discriminator extensive

```
user@host> show bfd session subscriber discriminator 20 extensive
```

```

      Detect   Transmit
Address State Interface Time   Interval Multiplier
1.0.0.2 Up    ae0.0  90.000  30.000   3

Client DHCP, TX interval 30.000, RX interval 30.000
Session up time 09:11:50
Local diagnostic None, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 30.000, min slow interval 30.000
Adaptive async TX interval 30.000, RX interval 30.000
Local min TX interval 30.000, minimum RX interval 30.000, multiplier 3
Remote min TX interval 30.000, min RX interval 30.000, multiplier 3
Local discriminator 20, remote discriminator 16
Echo mode disabled/inactive
Remote is control-plane independent
Session ID: 0x1

1 sessions, 1 clients
Cumulative transmit rate 5.0 pps, cumulative receive rate 5.0 pps

```

## show isis adjacency

---

**List of Syntax**    [Syntax on page 638](#)  
                         [Syntax \(EX Series Switches and QFX Series\) on page 638](#)

**Syntax**    show isis adjacency  
                 <system-id>  
                 <brief | detail | extensive>  
                 <instance *instance-name*>  
                 <logical-system (all | *logical-system-name*)>

**Syntax (EX Series Switches and QFX Series)**    show isis adjacency  
                 <system-id>  
                 <brief | detail | extensive>  
                 <instance *instance-name*>

**Release Information**    Command introduced before Junos OS Release 7.4.  
                              Command introduced in Junos OS Release 9.0 for EX Series switches.  
                              Command introduced in Junos OS Release 12.1 for the QFX Series.  
                              Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description**    Display information about IS-IS neighbors.

**Options**    **none**—Display standard information about IS-IS neighbors for all routing instances.

**system id**—(Optional) Display information about IS-IS neighbors for the specified intermediate system.

**brief | detail | extensive**—(Optional) Display standard information about IS-IS neighbors with the specified level of output.

**instance *instance-name***—(Optional) Display information about IS-IS neighbors for the specified routing instance.

**logical-system (all | *logical-system-name*)**—(Optional) Display information about IS-IS neighbors for all logical systems or for a particular logical system.

**Required Privilege Level**    view

**Related Documentation**    • [clear isis adjacency on page 602](#)

**List of Sample Output**    [show isis adjacency on page 641](#)  
                                  [show isis adjacency brief on page 641](#)  
                                  [show isis adjacency detail on page 642](#)  
                                  [show isis adjacency extensive on page 642](#)

**Output Fields** Table 11 on page 639 describes the output fields for the **show isis adjacency** command. Output fields are listed in the approximate order in which they appear.

*Table 11: show isis adjacency Output Fields*

| Field Name                                | Field Description                                                                                                                                                                                                                               | Level of Output         |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Interface</b>                          | Interface through which the neighbor is reachable.                                                                                                                                                                                              | All levels              |
| <b>System</b>                             | System identifier ( <b>sysid</b> ), displayed as a name, if possible.                                                                                                                                                                           | <b>brief</b>            |
| <b>L or Level</b>                         | Level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> An exclamation point (!) preceding the level number indicates that the adjacency is missing an IP address. | All levels              |
| <b>State</b>                              | State of the adjacency: <b>Up</b> , <b>Down</b> , <b>New</b> , <b>One-way</b> , <b>Initializing</b> , or <b>Rejected</b> .                                                                                                                      | All levels              |
| <b>Hold (secs)</b>                        | Remaining hold time of the adjacency.                                                                                                                                                                                                           | <b>brief</b>            |
| <b>SNPA</b>                               | Subnetwork point of attachment (MAC address of the next hop).                                                                                                                                                                                   | <b>brief</b>            |
| <b>Expires in</b>                         | How long until the adjacency expires, in seconds.                                                                                                                                                                                               | <b>detail</b>           |
| <b>Priority</b>                           | Priority to become the designated intermediate system.                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>Up/Down transitions</b>                | Count of adjacency status changes from <b>Up</b> to <b>Down</b> or from <b>Down</b> to <b>Up</b> .                                                                                                                                              | <b>detail</b>           |
| <b>Last transition</b>                    | Time of the last <b>Up/Down</b> transition.                                                                                                                                                                                                     | <b>detail</b>           |
| <b>Circuit type</b>                       | Bit mask of levels on this interface: 1=Level 1 router; 2=Level 2 router; 3=both Level 1 and Level 2 router.                                                                                                                                    | <b>detail</b>           |
| <b>Speaks</b>                             | Protocols supported by this neighbor.                                                                                                                                                                                                           | <b>detail extensive</b> |
| <b>MAC address</b>                        | MAC address of the interface.                                                                                                                                                                                                                   | <b>detail extensive</b> |
| <b>Topologies</b>                         | Supported topologies.                                                                                                                                                                                                                           | <b>detail extensive</b> |
| <b>Restart capable</b>                    | Whether a neighbor is capable of graceful restart: <b>Yes</b> or <b>No</b> .                                                                                                                                                                    | <b>detail extensive</b> |
| <b>Adjacency advertisement: Advertise</b> | This routing device has signaled to advertise this interface to its neighbors in their link-state PDUs.                                                                                                                                         | <b>detail extensive</b> |
| <b>Adjacency advertisement: Suppress</b>  | This neighbor has signaled not to advertise the interface in the routing device's outbound link-state PDUs.                                                                                                                                     | <b>detail extensive</b> |

*Table 11: show isis adjacency Output Fields (continued)*

| Field Name           | Field Description                               | Level of Output         |
|----------------------|-------------------------------------------------|-------------------------|
| <b>IP addresses</b>  | IP address of this neighbor.                    | <b>detail extensive</b> |
| IPv6 Address         | IPv6 address of the neighbor.                   | <b>detail extensive</b> |
| Level 1 IPv4 Adj-SID | Level 1 IPv4 node-SID of the adjacent neighbor. | <b>detail extensive</b> |
| Level 1 IPv6 Adj-SID | Level 1 IPv6 node-SID of the adjacent neighbor. |                         |
| Level 2 IPv4 Adj-SID | Level 2 IPv4 node-SID of the adjacent neighbor. | <b>detail extensive</b> |
| Level 2 IPv6 Adj-SID | Level 2 IPv6 node-SID of the adjacent neighbor. | <b>detail extensive</b> |

Table 11: *show isis adjacency Output Fields (continued)*

| Field Name     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Transition log | <p>List of recent transitions, including:</p> <ul style="list-style-type: none"> <li>• <b>When</b>—Time at which an IS-IS adjacency transition occurred.</li> <li>• <b>State</b>—Current state of the IS-IS adjacency (<b>up</b>, <b>down</b>, or <b>rejected</b>). <ul style="list-style-type: none"> <li>• <b>Up</b>—Adjacency is up and operational.</li> <li>• <b>Down</b>—Adjacency is down and not available.</li> <li>• <b>Rejected</b>—Adjacency has been rejected.</li> </ul> </li> <li>• <b>Event</b>—Type of transition that occurred. <ul style="list-style-type: none"> <li>• <b>Seenself</b>—Possible routing loop has been detected.</li> <li>• <b>Interface down</b>—IS-IS interface has gone down and is no longer available.</li> <li>• <b>Error</b>—Adjacency error.</li> </ul> </li> <li>• <b>Down reason</b>—Reason that an IS-IS adjacency is down: <ul style="list-style-type: none"> <li>• <b>3-Way Handshake Failed</b>—Connection establishment failed.</li> <li>• <b>Address Mismatch</b>—Address mismatch caused link failure.</li> <li>• <b>Aged Out</b>—Link expired.</li> <li>• <b>ISO Area Mismatch</b>—IS-IS area mismatch caused link failure.</li> <li>• <b>Bad Hello</b>—Unacceptable hello message caused link failure.</li> <li>• <b>BFD Session Down</b>—Bidirectional failure detection caused link failure.</li> <li>• <b>Interface Disabled</b>—IS-IS interface is disabled.</li> <li>• <b>Interface Down</b>—IS-IS interface is unavailable.</li> <li>• <b>Interface Level Disabled</b>—IS-IS level is disabled.</li> <li>• <b>Level Changed</b>—IS-IS level has changed on the adjacency.</li> <li>• <b>Level Mismatch</b>—Levels on adjacency are not compatible.</li> <li>• <b>MPLS LSP Down</b>—Label-switched path (LSP) is unavailable.</li> <li>• <b>MT Topology Changed</b>—IS-IS topology has changed.</li> <li>• <b>MT Topology Mismatch</b>—IS-IS topology is mismatched.</li> <li>• <b>Remote System ID Changed</b>—Adjacency peer system ID changed.</li> <li>• <b>Protocol Shutdown</b>—IS-IS protocol is disabled.</li> <li>• <b>CLI Command</b>—Adjacency brought down by user.</li> <li>• <b>Unknown</b>—Unknown.</li> </ul> </li> </ul> | extensive       |

## Sample Output

### show isis adjacency

```
user@host> show isis adjacency
```

| Interface  | System | L State | Hold (secs) | SNPA |
|------------|--------|---------|-------------|------|
| at-2/3/0.0 | ranier | 3 Up    | 23          |      |

### show isis adjacency brief

The output for the **show isis adjacency brief** command is identical to that for the **show isis adjacency** command. For sample output, see [show isis adjacency on page 641](#).

### show isis adjacency detail

```
user@host> show isis adjacency detail
```

```
ranier
```

```
Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:01:09 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast Restart capable: Yes, Adjacency advertisement:
Advertise
LAN id: pro-bng3-c-F.02, IP addresses: 11.1.1.2
IPv6 addresses: fe80::2a0:a514:0:4745
Level 1 IPv4 Adj-SID: 299808, IPv6 Adj-SID: 299824
```

### show isis adjacency extensive

```
user@host> show isis adjacency extensive
```

```
ranier
```

```
Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 22 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:01:16 ago
Circuit type: 3, Speaks: IP, IPv6
```

```
Topologies: Unicast, IPV6-Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 11.1.1.2
```

```
IPv6 addresses: fe80::2a0:a514:0:3e45
```

```
Level 1 IPv4 Adj-SID: 300112, IPv6 Adj-SID: 300304
```

```
Level 2 IPv4 Adj-SID: 300320, IPv6 Adj-SID: 300336
```

```
Transition log:
```

| When                | State | Event    | Down reason |
|---------------------|-------|----------|-------------|
| Thu Mar 26 06:13:18 | Up    | SeenseIf |             |

## show isis adjacency holddown

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show isis adjacency holddown &lt;level&gt; &lt;brief   detail   extensive&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced in Junos OS Release 16.1 for the MX Series and PTX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Display holddown status and time when IS-IS adjacencies are being formed. Adjacency holddown process takes place on an IS-IS level basis. When adjacency holddown is enabled, IS-IS adjacencies are formed sequentially. There is a holddown time between each adjacency and the process is completed when all IS-IS adjacencies are formed. This holddown time might cause network instability.</p> <p>This command is useful to verify whether the adjacency holddown is enabled and facilitates troubleshooting when there are adjacency issues due to IS-IS adjacency holddown .</p>                                                                                        |
| <b>Options</b>                  | <p><b>none</b>—Display standard overview information about IS-IS adjacency holddown for all routing instances.</p> <p><b>brief   detail   extensive</b>—(Optional) Display standard information about IS-IS adjacency holddown with the specified level of output.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display IS-IS adjacency holddown information for the specified routing instance.</p> <p><b>level</b>—(Optional) Display information about IS-IS neighbors for the specified IS-IS level.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show isis adjacency on page 638</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>    | <p><a href="#">show isis adjacency holddown on page 644</a></p> <p><a href="#">show isis adjacency holddown extensive on page 644</a></p> <p><a href="#">show isis adjacency holddown detail on page 645</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

| Field         | Field Description                                                                                                                                                                                                                                                                     |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Level</b>  | <b>Output Fields</b> IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 information</li> <li>• 2—Level 2 information</li> </ul>                                                                                                                                          |
| <b>status</b> | IS-IS Adjacency holddown status: <ul style="list-style-type: none"> <li>• <b>active</b>—IS-IS adjacency holddown is in process.</li> <li>• <b>inactive</b>—IS-IS adjacency holddown process is completed.</li> <li>• <b>disabled</b>—IS-IS adjacency holddown is disabled.</li> </ul> |
| <b>when</b>   | The time stamp for the IS-IS adjacency holddown.                                                                                                                                                                                                                                      |
| <b>Event</b>  | <ul style="list-style-type: none"> <li>• <b>seenself</b>—IS-IS has changed the IS-IS adjacency holddown status.</li> <li>• <b>status change</b>—IS-IS adjacency holddown status has changed.</li> </ul>                                                                               |
| <b>reason</b> | The reason for change in the IS-IS adjacency holddown state.                                                                                                                                                                                                                          |

## Sample Output

### show isis adjacency holddown

```
user@host> show isis adjacency holddown
```

```
Level      status
1          active
2          active
```

### show isis adjacency holddown extensive

```
user@host> show isis adjacency holddown extensive
```

```
Level: 1
Adjacency holddown is active, Adjacency holddown reset is not completed
Holddown process has not started, Network might not be stable
Holddown Started 0 secs ago
First adjacency up since 0 secs
Total adjacency up count: 0
Transition log:
When                State      Event      reason
Mon Jun 22 05:35:03 Active     Seenself
Tue Jun 23 02:13:30 Active     Seenself
Tue Jun 23 02:14:40 Inactive   Status change  holddown complete
Tue Jun 23 02:15:52 Active     Seenself

Level: 2
Adjacency holddown is active, Adjacency holddown reset is not completed
Holddown process has not started, Network might not be stable
Holddown Started 0 secs ago
First adjacency up since 0 secs
Total adjacency up count: 0
Transition log:
When                State      Event      reason
Mon Jun 22 05:35:03 Active     Seenself
```



|                     |          |               |                   |
|---------------------|----------|---------------|-------------------|
| Tue Jun 23 02:13:30 | Active   | Seenself      |                   |
| Tue Jun 23 02:14:40 | Inactive | Status change | holddown complete |
| Tue Jun 23 02:15:52 | Active   | Seenself      |                   |

### show isis adjacency holddown detail

```
user@host> show isis adjacency holddown detail
```

```
Level: 1
```

```
Adjacency holddown is active, Adjacency holddown reset is not completed  
Holddown process has not started, Network might not be stable  
Holddown Started 0 secs ago  
First adjacency up since 0 secs  
Total adjacency up count: 0
```

```
Level: 2
```

```
Adjacency holddown is active, Adjacency holddown reset is not completed  
Holddown process has not started, Network might not be stable  
Holddown Started 0 secs ago  
First adjacency up since 0 secs  
Total adjacency up count: 0
```

## show isis authentication

---

|                                            |                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                             | <a href="#">Syntax on page 646</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 646</a>                                                                                                                                                                                                                                           |
| Syntax                                     | <pre>show isis authentication &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                    |
| Syntax (EX Series Switches and QFX Series) | <pre>show isis authentication &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                              |
| Release Information                        | Command introduced in Junos OS Release 7.5.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for hitless authentication key rollover introduced in Junos OS Release 11.2.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| Description                                | Display information about Intermediate System-to-Intermediate System (IS-IS) authentication.                                                                                                                                                                                                                                                           |
| Options                                    | <b>none</b> —Display information about IS-IS authentication.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display IS-IS authentication for the specified routing instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.     |
| Required Privilege Level                   | view                                                                                                                                                                                                                                                                                                                                                   |
| Related Documentation                      | <ul style="list-style-type: none"><li>• <a href="#">show security keychain on page 916</a></li></ul>                                                                                                                                                                                                                                                   |
| List of Sample Output                      | <a href="#">show isis authentication on page 647</a><br><a href="#">show isis authentication (With Hitless Authentication Key Rollover Configured) on page 647</a>                                                                                                                                                                                     |
| Output Fields                              | <a href="#">Table 12 on page 647</a> describes the output fields for the <b>show isis authentication</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                              |

*Table 12: show isis authentication Output Fields*

| Field Name                   | Field Description                                                                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface</b>             | Interface name.                                                                                                                                     |
| <b>Level</b>                 | IS-IS level.                                                                                                                                        |
| <b>IIH Auth</b>              | IS-IS Hello (IIH) packet authentication type.<br><br>Displays the name of the active keychain if hitless authentication key rollover is configured. |
| <b>CSN Auth</b>              | Complete sequence number authentication type.                                                                                                       |
| <b>PSN Auth</b>              | Partial sequence number authentication type.                                                                                                        |
| <b>L1 LSP Authentication</b> | Layer 1 link-state PDU authentication type.                                                                                                         |
| <b>L2 LSP Authentication</b> | Layer 2 link-state PDU authentication type.                                                                                                         |

## Sample Output

### show isis authentication

```
user@host> show isis authentication
```

| Interface  | Level | IIH Auth | CSN Auth | PSN Auth |
|------------|-------|----------|----------|----------|
| at-2/3/0.0 | 1     | Simple   | Simple   | Simple   |
|            | 2     | MD5      | MD5      | MD5      |

```
L1 LSP Authentication: Simple
L2 LSP Authentication: MD5
```

### show isis authentication (With Hitless Authentication Key Rollover Configured)

```
user@host> show isis authentication
```

| Interface  | Level | IIH Auth  | CSN Auth | PSN Auth |
|------------|-------|-----------|----------|----------|
| so-0/1/3.0 | 2     | hakrhello | MD5      | MD5      |

```
L2 LSP Authentication: MD5
```

## show isis backup coverage

| Syntax                                     | <pre>show isis backup coverage &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                       |            |                   |          |                                                                                  |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------|----------|----------------------------------------------------------------------------------|
| Syntax (EX Series Switches and QFX Series) | <pre>show isis backup coverage &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                 |            |                   |          |                                                                                  |
| Release Information                        | <p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                          |            |                   |          |                                                                                  |
| Description                                | Display information about the level of backup coverage available.                                                                                                                                                                                                                                                                                                                                                                                          |            |                   |          |                                                                                  |
| Options                                    | <p><b>none</b>—Display information about the level of backup coverage available for all the nodes and prefixes in the network.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display information about the level of backup coverage for a specific IS-IS routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>        |            |                   |          |                                                                                  |
| Required Privilege Level                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                       |            |                   |          |                                                                                  |
| Related Documentation                      | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li> <li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li> <li>• <a href="#">show isis backup label-switched-path on page 650</a></li> </ul>                                                                                                                          |            |                   |          |                                                                                  |
| List of Sample Output                      | <a href="#">show isis backup coverage on page 649</a>                                                                                                                                                                                                                                                                                                                                                                                                      |            |                   |          |                                                                                  |
| Output Fields                              | <p><a href="#">Table 13 on page 648</a> lists the output fields for the <b>show isis backup coverage</b> command. Output fields are listed in the approximate order in which they appear.</p> <p><i>Table 13: show isis backup coverage Output Fields</i></p> <table> <tr> <th>Field Name</th><th>Field Description</th></tr> <tr> <td>Topology</td><td>Type of topology or address family: <b>IPV4 Unicast</b> or <b>IPV6 Unicast</b>.</td></tr> </table> | Field Name | Field Description | Topology | Type of topology or address family: <b>IPV4 Unicast</b> or <b>IPV6 Unicast</b> . |
| Field Name                                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                          |            |                   |          |                                                                                  |
| Topology                                   | Type of topology or address family: <b>IPV4 Unicast</b> or <b>IPV6 Unicast</b> .                                                                                                                                                                                                                                                                                                                                                                           |            |                   |          |                                                                                  |

*Table 13: show isis backup coverage Output Fields (continued)*

| Field Name   | Field Description                                                                                            |
|--------------|--------------------------------------------------------------------------------------------------------------|
| <b>Level</b> | IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1</li> <li>• 2—Level 2</li> </ul>              |
| <b>Node</b>  | By topology, the percentage of all routes configured on the node that are protected through backup coverage. |
| <b>IPv4</b>  | Percentage of IPv4 unicast routes that are protected through backup coverage.                                |
| <b>IPv6</b>  | Percentage of IPv6 unicast routes that are protected through backup coverage.                                |
| <b>CLNS</b>  | Percentage of Connectionless Network Service (CLNS) routes that are protected through backup coverage.       |

## Sample Output

### show isis backup coverage

```
user@host> show isis backup coverage
```

```
Backup Coverage:
  Topology    Level  Node    IPv4    IPv6    CLNS
  IPV4 Unicast  2    28.57%  22.22%  0.00%  0.00%
  IPV6 Unicast  2     0.00%  0.00%  0.00%  0.00%
```

## show isis backup label-switched-path

|                                                   |                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <code>show isis backup label-switched-path</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                            |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <code>show isis backup label-switched-path</code>                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                        | <p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                      |
| <b>Description</b>                                | Display information about MPLS label-switched-paths (LSPs) designated as backup routes for IS-IS routes.                                                                                                                                                                                                               |
| <b>Options</b>                                    | <p><b>none</b>—Display information about MPLS LSPs designated as backup routes for IS-IS routes.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                       |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li> <li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li> <li>• <a href="#">show isis backup coverage on page 648</a></li> </ul> |
| <b>List of Sample Output</b>                      | <a href="#">show isis backup label-switched-path on page 651</a>                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>                              | <a href="#">Table 14 on page 650</a> lists the output fields for the <code>show isis backup label-switched-path</code> command. Output fields are listed in the approximate order in which they appear.                                                                                                                |

Table 14: show isis backup label-switched-path Output Fields

| Field Name       | Field Description                                              |
|------------------|----------------------------------------------------------------|
| Backup MPLS LSPs | List of MPLS LSPs designated as backup paths for IS-IS routes. |
| Egress           | IP address of the egress routing device for the LSP.           |

Table 14: show isis backup label-switched-path Output Fields (continued)

| Field Name  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Status      | <p>State of the LSP:</p> <ul style="list-style-type: none"> <li>• <b>Up</b>—The routing device can detect RSVP hello messages from the neighbor.</li> <li>• <b>Down</b>—The routing device has received one of the following indications: <ul style="list-style-type: none"> <li>• Communication failure from the neighbor.</li> <li>• Communication from IGP that the neighbor is unavailable.</li> <li>• Change in the sequence numbers in the RSVP hello messages sent by the neighbor.</li> </ul> </li> <li>• <b>Deleted</b>—LSP is no longer available as a backup path.</li> </ul> |
| Last change | Time elapsed since the neighbor state changed either from up to down or from down to up. The format is <i>hh:mm:ss</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| TE-metric   | Configured traffic engineering metric.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Metric      | Configured metric.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Sample Output

### show isis backup label-switched-path

```

user@host> show isis backup label-switched-path
Backup MPLS LSPs:
f-to-g, Egress: 192.168.1.4, Status: up, Last change: 06:12:03
TE-metric: 9, Metric: 0

```

## show backup-selection

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show backup-selection &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical-system <i>logical-system-name</i>&gt; &lt;prefix <i>prefix</i>&gt;</pre>                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Display the configured policies for each destination (IPv4 and IPv6) and a primary next-hop interface.                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>instance <i>instance-name</i></b>—(Optional) Display configured policy for the routing instance.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display configured policy for the interface.</p> <p><b>logical-system <i>logical-system-name</i></b>—(Optional) Display configured policy for a particular logical system or for all logical systems.</p> <p><b>prefix <i>prefix</i></b>—(Optional) Display configured policy for the destination.</p>                                |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>    | <p><a href="#">show backup-selection on page 654</a></p> <p><a href="#">show backup-selection instance <i>instance-name</i> on page 654</a></p> <p><a href="#">show backup-selection interface <i>interface-name</i> on page 655</a></p> <p><a href="#">show backup-selection logical-system all on page 655</a></p> <p><a href="#">show backup-selection logical-system <i>logical-system-name</i> on page 657</a></p> <p><a href="#">show backup-selection prefix <i>prefix</i> on page 658</a></p> |
| <b>Output Fields</b>            | <p><a href="#">Table 15 on page 652</a> describes the output fields for the <b>show backup-selection</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                         |

*Table 15: show backup-selection Output Fields*

| Field Name                 | Field Description                                                                                                                                                                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Prefix</b>              | Destination prefix .                                                                                                                                                                                                                                     |
| <b>Interface</b>           | <p>Primary interface to reach the destination.</p> <ul style="list-style-type: none"> <li>all — All the interfaces on the router which requires backup path.</li> <li>&lt;interface-name&gt; — Specific primary interface in the backup path.</li> </ul> |
| <b>admin-group exclude</b> | Specifies the administrative groups to be excluded. The backup path is not selected as the loop free alternative or backup next hop if any of the links in the path have any one of the listed administrative groups.                                    |



Table 15: show backup-selection Output Fields (continued)

| Field Name                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>admin-group include-all</b> | Requires each link in the backup path to have all the listed administrative groups in order to accept the path.                                                                                                                                                                                                                                                                                                                                         |
| <b>admin-group include-any</b> | Requires each link in the backup path to have at least one of the listed administrative groups in order to select the path.                                                                                                                                                                                                                                                                                                                             |
| <b>admin-group preference</b>  | Defines an ordered set of administrative groups that specifies the preference of the backup path. The leftmost element in the set is given the highest preference.                                                                                                                                                                                                                                                                                      |
| <b>nodes excluded</b>          | Specifies the list of nodes to be excluded. The backup path that has a router from the list is not selected as the loop free alternative or backup next hop.                                                                                                                                                                                                                                                                                            |
| <b>nodes preference</b>        | Defines an ordered set of nodes to be preferred. The backup path having the leftmost node is selected.                                                                                                                                                                                                                                                                                                                                                  |
| <b>node-tags excluded</b>      | Specifies the backup selection to exclude the set of route tags in the backup path selection.                                                                                                                                                                                                                                                                                                                                                           |
| <b>node-tags preference</b>    | Specifies the set of route tags in descending order of preference.                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>protection-type</b>         | Specifies the required protection type of the backup path. <ul style="list-style-type: none"> <li>• node — Selects a backup path that provides node protection.</li> <li>• link — Selects the backup path that provides link protection.</li> <li>• node-link — Allows either node or link protection LFA where node-protection LFA is preferred over link-protection LFA.</li> </ul>                                                                   |
| <b>downstream paths only</b>   | Selects the backup path that is a downstream path to the destination.                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>srfg</b>                    | Evaluates common srlgs between the primary link and each link in the backup path. <ul style="list-style-type: none"> <li>• strict — Rejects the backup path that has common srlgs between the primary link and any link in the backup path.</li> <li>• loose — Allows the backup path that has common srlgs between the primary link and any link in the backup path. The backup path with the fewer number of srlg collisions is preferred.</li> </ul> |
| <b>B/W &gt;= primary</b>       | Uses backup next hop only if the bandwidth is greater than or equal to the primary next hop.                                                                                                                                                                                                                                                                                                                                                            |
| <b>root-metric</b>             | Metric to one-hop node or remote router such as an RSVP backup label switched path (LSP) tail-end router.                                                                                                                                                                                                                                                                                                                                               |
| <b>dest-metric</b>             | Metric from one-hop node or remote router such as an RSVP backup label switched path (LSP) tail-end router to the final destination.                                                                                                                                                                                                                                                                                                                    |
| <b>metric evaluation order</b> | Defines the evaluation order of the metric (root and dest metrics) results.                                                                                                                                                                                                                                                                                                                                                                             |
| <b>policy evaluation order</b> | Defines the evaluation order of the backup policy.                                                                                                                                                                                                                                                                                                                                                                                                      |

## Sample Output

### show backup-selection

```
user@host> show backup-selection
```

```
Prefix: 0.0.0.0/0
Interface: all
  Admin-group exclude: c6
  Admin-group include-all: c1 c2
  Admin-group include-any: c3 c4
  Admin-group preference: c8
  Nodes excluded: 100.0.7.2
  Node preference: 100.2.6.2
  Node-tags excluded: 1004
  Node-tag preference: 1007
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Root-metric, Dest-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Node-Tag, Metric
Interface: ge-1/2/5.0
  Admin-group include-all: c1
  Admin-group include-any: c2
  Admin-group preference: c4
  Nodes excluded: 10.218.32.0
  Node preference: 10.92.8.0
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Root-metric, Dest-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection
Prefix: 10.150.0.0/16
Interface: all
  Admin-group include-all: c1
  Admin-group include-any: c2
  Admin-group preference: c5
  Nodes excluded: 10.218.32.0
  Node preference: 10.92.8.0
  Node-tags excluded: 1004
  Node-tag preference: 1007
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth
Prefix: ::/0
Interface: all
  Admin-group exclude: c2
  Admin-group include-all: c1 c3
  Admin-group include-any: c4 c5
  Admin-group preference: c6
  Node preference: 100.0.1.2
  Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth
```

### show backup-selection instance instance-name

```
user@host> show backup-selection instance r
```

```

Prefix: 0.0.0.0/0
Interface: all
  Admin-group include-any: c4
  Admin-group preference: c6 c0
  Nodes excluded: 100.0.4.2
  Node preference: 100.4.5.1
  Node-tags excluded: 1007
  Node-tag preference: 1004
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
Policy Evaluation Order: Admin-group, SRLG, Bandwidth

```

### show backup-selection interface interface-name

```
user@host> show backup-selection interface ge-1/2/5.0
```

```

Prefix: 0.0.0.0/0
Interface: ge-1/2/5.0
  Admin-group include-all: c1
  Admin-group include-any: c2
  Admin-group preference: c4
  Nodes excluded: 10.218.32.0
  Node preference: 10.92.8.0
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Root-metric, Dest-metric
Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection
Prefix: 10.150.0.0/16
Prefix: ::/0

```

### show backup-selection logical-system all

```
user@host> show backup-selection logical-system all
```

```

logical-system: R0
Prefix: 0.0.0.0/0
Interface: all
  Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Root-metric, Dest-metric
-----

logical-system: R5
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 0.0.0.0/0
Interface: all
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: R1
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag

```

```

Prefix: 0.0.0.0/0
  Interface: all
    Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: R4
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 0.0.0.0/0
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Loose, B/w >=
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: R3
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth
Prefix: 0.0.0.0/0
  Interface: all
    Admin-group include-all: c1
    Admin-group include-any: c2
    Admin-group preference: c3
    Node preference: 10.255.102.178
    Node-tag preference: 1004
    Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth
Prefix: 100.0.1.0/24
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 100.0.7.0/24
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: R7
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 0.0.0.0/0
  Interface: all
    Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
  Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: R2
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 0.0.0.0/0
  Interface: all
    Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Strict, B/w >=

```

```

Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: R6
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 0.0.0.0/0
  Interface: all
    Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
-----

logical-system: default
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag

```

### show backup-selection logical-system logical-system-name

```
user@host> show backup-selection logical-system R3
```

```

Prefix: 100.0.1.0/24
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 100.0.7.0/24
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag

Prefix: 0.0.0.0/0
  Interface: all
    Admin-group include-all: c1
    Admin-group include-any: c2
    Admin-group preference: c3
    Node preference: 10.255.102.178
    Node-tag preference: 1004
    Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth
Prefix: 100.0.1.0/24
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
  Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
Prefix: 100.0.7.0/24
  Interface: all
    Protection Type: Link, Downstream Paths Only: Disabled, SRLG: Strict, B/w >=

```

```
Primary: Disabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
Policy Evaluation Order: Admin-group, SRLG, Bandwidth, Protection, Node,
Metric, Node-Tag
```

### `show backup-selection prefix prefix`

```
user@host> show backup-selection prefix 10.150.0.0
```

```
Prefix: 10.150.0.0/16
Interface: all
  Admin-group include-all: c1
  Admin-group include-any: c2
  Admin-group preference: c5
  Nodes excluded: 10.218.32.0
  Node preference: 10.92.8.0
  Node-tags excluded: 1004
  Node-tag preference: 1007
  Protection Type: Link, Downstream Paths Only: Enabled, SRLG: Loose, B/w >=
Primary: Enabled, Root-metric: lowest, Dest-metric: lowest
Metric Evaluation Order: Dest-metric, Root-metric
Policy Evaluation Order: Admin-group, SRLG, Bandwidth
```

## show isis backup spf results

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <pre>show isis backup spf results &lt;instance <i>instance-name</i>&gt; &lt;level (1   2)&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;no-coverage&gt; &lt;topology (ipv4-unicast   ipv6-multicast   ipv6-unicast   unicast)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switches)</b> | <pre>show isis backup spf results &lt;instance <i>instance-name</i>&gt; &lt;level (1   2)&gt; &lt;no-coverage&gt; &lt;topology (ipv4-unicast   unicast)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>         | Command introduced in Junos OS Release 9.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                 | Display information about IS-IS shortest-path-first (SPF) calculations for backup paths.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                     | <p><b>none</b>—Display information about IS-IS SPF calculations for all backup paths for all destination nodes.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display SPF calculations for backup paths for the specified routing instance.</p> <p><b>level (1   2)</b>—(Optional) Display SPF calculations for the backup paths for the specified IS-IS level.</p> <p><b>logical-system <i>logical-system-name</i></b>—(Optional) Display SPF calculations for the backup paths for all logical systems or on a particular logical system.</p> <p><b>no-coverage</b>—(Optional) Display SPF calculations only for destinations that do not have backup coverage.</p> <p><b>topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)</b>—(Optional) Display SPF calculations for backup paths for the specified topology only.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <i>Example: Configuring Link and Node Protection for IS-IS Routes</i></li> <li>• <a href="#">show isis backup coverage on page 648</a></li> <li>• <a href="#">Understanding Loop-Free Alternate Routes for IS-IS on page 189</a></li> <li>• <a href="#">Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 193</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**List of Sample Output** [show isis backup spf results on page 660](#)  
[show isis backup spf results no-coverage on page 661](#)

**Output Fields** [Table 16 on page 660](#) lists the output fields for the **show isis backup spf results** command. Output fields are listed in the approximate order in which they appear.

*Table 16: show isis backup spf results Output Fields*

| Field Name              | Field Description                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------|
| <b>node-name</b>        | Name of the destination node.                                                                      |
| <b>Address</b>          | Address of the destination node.                                                                   |
| <b>Primary next-hop</b> | Interface and name of the node of the primary next hop to reach the destination.                   |
| <b>Root</b>             | Name of the next-hop neighbor.                                                                     |
| <b>Metric</b>           | Metric to the node.                                                                                |
| <b>Eligible</b>         | Indicates that the next-hop neighbor has been designated as a backup path to the destination node. |
| <b>Backup next-hop</b>  | Name of the interface of the backup next hop.                                                      |
| <b>SNPA</b>             | Subnetwork point of attachment (MAC address of the next hop).                                      |
| <b>LSP</b>              | Name of the MPLS label-switched path (LSP) designated as a backup path.                            |
| <b>Not eligible</b>     | Indicates that the next-hop neighbor cannot function as a backup path to the destination.          |
| <b>Reason</b>           | Describes why the next-hop neighbor is designated as <b>Not eligible</b> as a backup path.         |

## Sample Output

### show isis backup spf results

```
user@host> show isis backup spf results
```

```
IS-IS level 1 SPF results:
  0 nodes

IS-IS level 2 SPF results:
banff.00
  Primary next-hop: so-6/0/0.0, IPV4, olympic
  Primary next-hop: ae0.0, IPV4, camaro, SNPA: 0:90:69:f:67:f0
  Primary next-hop: so-6/0/0.0, IPV6, olympic
  Primary next-hop: ae0.0, IPV6, camaro, SNPA: 0:90:69:f:67:f0
  Root: camaro, Root Metric: 10, Metric: 10
```



```

    Not eligible, Reason: Primary next-hop multipath
    Root: olympic, Root Metric: 10, Metric: 10
    Not eligible, Reason: Primary next-hop multipath
    Root: glacier, Root Metric: 10, Metric: 25
    Not eligible, Reason: Primary next-hop multipath
crater.00
    Primary next-hop: so-6/0/0.0, IPV4, olympic
    Primary next-hop: so-6/0/0.0, IPV6, olympic
    Root: olympic, Root Metric: 10, Metric: 10
    Not eligible, Reason: Primary next-hop link fate sharing
    Root: glacier, Root Metric: 10, Metric: 15
    Eligible, Backup next-hop: as0.0, IPV4, glacier
    Eligible, Backup next-hop: as0.0, IPV6, glacier
    Root: camaro, Root Metric: 10, Metric: 20
    Not eligible, Reason: Interface is already covered
olympic.00
    Primary next-hop: so-6/0/0.0, IPV4, olympic
    Primary next-hop: so-6/0/0.0, IPV6, olympic
    Root: olympic, Root Metric: 10, Metric: 0
    Not eligible, Reason: Primary next-hop link fate sharing
    Root: camaro, Root Metric: 10, Metric: 20
    track-item: olympic.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
    Root: glacier, Root Metric: 10, Metric: 20
    track-item: olympic.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
camaro.00
    Primary next-hop: ae0.0, IPV4, camaro, SNPA: 0:90:69:f:67:f0
    Primary next-hop: ae0.0, IPV6, camaro, SNPA: 0:90:69:f:67:f0
    Root: camaro, Root Metric: 10, Metric: 0
    Not eligible, Reason: Primary next-hop link fate sharing
    Root: glacier, Root Metric: 10, Metric: 20
    track-item: camaro.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
    Root: olympic, Root Metric: 10, Metric: 20
    track-item: camaro.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
glacier.00
    Primary next-hop: as0.0, IPV4, glacier
    Primary next-hop: as0.0, IPV6, glacier
    Root: glacier, Root Metric: 10, Metric: 0
    Not eligible, Reason: Primary next-hop link fate sharing
    Root: camaro, Root Metric: 10, Metric: 20
    track-item: glacier.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
    Root: olympic, Root Metric: 10, Metric: 20
    track-item: glacier.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
5 nodes

```

### show isis backup spf results no-coverage

```
user@host> show isis backup spf results no-coverage
```

## IS-IS level 1 SPF results:

## pro-bng3-k.00

Primary next-hop: fe-1/3/3.0, IPV4, pro-bng3-k, SNPA: b0:c6:9a:2c:f0:de

Primary next-hop: fe-1/3/3.0, IPV6, pro-bng3-k, SNPA: b0:c6:9a:2c:f0:de

Root: pro-bng3-k, Root Metric: 10, Metric: 0, Root Preference: 0x0

Root: pro-bng3-i, Root Metric: 10, Metric: 20, Root Preference: 0x0

track-item: pro-bng3-k.00-00

track-item: pro-bng3-j.00-00

## pro-bng3-i.00

Primary next-hop: fe-0/1/2.0, IPV4, pro-bng3-i, SNPA: b0:c6:9a:2a:f4:21

Primary next-hop: fe-0/1/2.0, IPV6, pro-bng3-i, SNPA: b0:c6:9a:2a:f4:21

Root: pro-bng3-i, Root Metric: 10, Metric: 0, Root Preference: 0x0

Root: pro-bng3-k, Root Metric: 10, Metric: 20, Root Preference: 0x0

track-item: pro-bng3-j.00-00

track-item: pro-bng3-i.00-00

2 nodes

## IS-IS level 2 SPF results:

## olympic.00

Primary next-hop: so-6/0/0.0, IPV4, olympic

Primary next-hop: so-6/0/0.0, IPV6, olympic

Root: olympic, Root Metric: 10, Metric: 0

Not eligible, Reason: Primary next-hop link fate sharing

Root: camaro, Root Metric: 10, Metric: 20

track-item: olympic.00-00

track-item: kobuk.00-00

Not eligible, Reason: Path loops

Root: glacier, Root Metric: 10, Metric: 20

track-item: olympic.00-00

track-item: kobuk.00-00

Not eligible, Reason: Path loops

## camaro.00

Primary next-hop: ae0.0, IPV4, camaro, SNPA: 0:90:69:f:67:f0

Primary next-hop: ae0.0, IPV6, camaro, SNPA: 0:90:69:f:67:f0

Root: camaro, Root Metric: 10, Metric: 0

Not eligible, Reason: Primary next-hop link fate sharing

Root: glacier, Root Metric: 10, Metric: 20

track-item: camaro.00-00

track-item: kobuk.00-00

Not eligible, Reason: Path loops

Root: olympic, Root Metric: 10, Metric: 20

track-item: camaro.00-00

track-item: kobuk.00-00

Not eligible, Reason: Path loops

## glacier.00

Primary next-hop: as0.0, IPV4, glacier

Primary next-hop: as0.0, IPV6, glacier

Root: glacier, Root Metric: 10, Metric: 0

Not eligible, Reason: Primary next-hop link fate sharing

Root: camaro, Root Metric: 10, Metric: 20

track-item: glacier.00-00

track-item: kobuk.00-00

Not eligible, Reason: Path loops

Root: olympic, Root Metric: 10, Metric: 20

track-item: glacier.00-00

track-item: kobuk.00-00

Not eligible, Reason: Path loops

3 nodes

## show isis context-identifier

**Syntax** show isis context-identifier  
 <brief | detail | extensive>  
 <identifier name>  
 <instance instance-name>  
 <logical-system (all | logical-system-name)>

**Release Information** Command introduced in Junos OS Release 10.4.

**Description** Display IS-IS context identifier information.

**Options** **brief | detail | extensive**—(Optional) Display the specified level of output.

**identifier name**—(Optional) Display information about the specified context identifier.

**instance instance-name**—(Optional) Display entries for the specified routing instance.

**logical-system (all | logical-system-name)**—(Optional) Display the context identifier information for all logical systems or for a particular logical system.

**Required Privilege Level** View

**Output Fields** [Table 17 on page 663](#) lists the output fields for the **show isis context-identifier** command. Output fields are listed in the approximate order in which they appear.

*Table 17: show isis context-identifier Output Fields*

| Field Name | Field Description                                                                                                  | Level of Output |
|------------|--------------------------------------------------------------------------------------------------------------------|-----------------|
| Context    | IPv4 address that defines a protection pair. The context is manually configured on both primary and protector PEs. | detail          |
| Owner      | Protocol that requires the context.                                                                                | detail          |
| Role       | Role of the PE, which is either primary or protector.                                                              | detail          |
| Primary    | Name of the primary PE.                                                                                            | detail          |
| Metric     | Advertised interior gateway protocol (IGP) metric.                                                                 | detail          |

## Sample Output

```
user@host> show isis context-identifier detail
```

```
IS-IS context database:
Context          Owner      Role      Primary    Metric
```

```
2.2.4.3          MPLS      Primary    pro3-e          1
Advertiser pro3-e, Router ID 10.255.245.198, Metric 1, Level 1
Advertiser pro3-e, Router ID 10.255.245.198, Metric 1, Level 2
Advertiser pro3-c, Router ID 10.255.245.196, Metric 11, Level 2
```

## show isis database

**List of Syntax**    [Syntax on page 665](#)  
                          [Syntax \(EX Series Switches and QFX Series\) on page 665](#)

**Syntax**    show isis database  
                  <system-id>  
                  <brief | detail | extensive>  
                  <instance *instance-name*>  
                  <level (1 | 2)>  
                  <logical-system (all | *logical-system-name*)>

**Syntax (EX Series Switches and QFX Series)**    show isis database  
                  <system-id>  
                  <brief | detail | extensive>  
                  <level (1 | 2)>  
                  <instance *instance-name*>

**Release Information**    Command introduced before Junos OS Release 7.4.  
                                  Command introduced in Junos OS Release 9.0 for EX Series switches.  
                                  Command introduced in Junos OS Release 12.1 for the QFX Series.  
                                  Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.  
                                  Command introduced in Junos OS Release 15.1X53-D30 for the QFX10002 switch.

**Description**    Display the entries in the Intermediate System-to-Intermediate System (IS-IS) link-state database, which contains data about PDU packets.

**Options**    **none**—Display standard information about IS-IS link-state database entries for all routing instances.

***system id***—(Optional) Display IS-IS link-state database entries for the specified intermediate system.

**brief | detail | extensive**—(Optional) Display the specified level of output.

**instance *instance-name***—(Optional) Display IS-IS link-state database entries for the specified routing instance.

**level (1 | 2)**—(Optional) Display IS-IS link-state database entries for the specified IS-IS level.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level**    view

**Related Documentation** • [clear isis database on page 604](#)

**List of Sample Output** [show isis database on page 667](#)  
[show isis database brief on page 668](#)  
[show isis database detail on page 668](#)  
[show isis database extensive on page 669](#)  
[show isis database extensive \(SPRING\) on page 678](#)

**Output Fields** [Table 18 on page 666](#) describes the output fields for the **show isis database** command. Output fields are listed in the approximate order in which they appear. Fields that contain internal IS-IS information useful only in troubleshooting obscure problems are not described in the table. For more details about these fields, contact your customer support representative.

*Table 18: show isis database Output Fields*

| Field Name            | Field Description                                                                                                                                                                                                                                                                      | Level of Output         |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Interface name</b> | Name of the interface on which the link-state PDU has been received; always <b>IS-IS</b> for this command.                                                                                                                                                                             | All levels              |
| level                 | Level of intermediate system: <ul style="list-style-type: none"> <li>• 1—Intermediate system routes within an area; when the destination is outside an area, it routes toward a Level 2 system.</li> <li>• 2—Intermediate system routes between areas and toward other ASs.</li> </ul> | All levels              |
| LSP ID                | Link-state PDU identifier.                                                                                                                                                                                                                                                             | All levels              |
| Sequence              | Sequence number of the link-state PDU.                                                                                                                                                                                                                                                 | All levels              |
| Checksum              | Checksum value of the link-state PDU.                                                                                                                                                                                                                                                  | All levels              |
| Lifetime (secs)       | Remaining lifetime of the link-state PDU, in seconds.                                                                                                                                                                                                                                  | All levels              |
| Attributes            | Attributes of the specified database: <b>L1</b> , <b>L2</b> , <b>Overload</b> , or <b>Attached</b> (L1 only).                                                                                                                                                                          | none <b>brief</b>       |
| # LSPs                | Total number of link-state PDUs in the specified link-state database.                                                                                                                                                                                                                  | none <b>brief</b>       |
| IP prefix             | Prefix advertised by this link-state PDU.                                                                                                                                                                                                                                              | <b>detail extensive</b> |
| IS neighbor           | IS-IS neighbor of the advertising system.                                                                                                                                                                                                                                              | <b>detail extensive</b> |
| IP prefix             | IPv4 prefix advertised by this link-state PDU.                                                                                                                                                                                                                                         | <b>detail extensive</b> |
| V6 prefix             | IPv6 prefix advertised by this link-state PDU.                                                                                                                                                                                                                                         | <b>detail extensive</b> |
| Metric                | Metric of the prefix or neighbor.                                                                                                                                                                                                                                                      | <b>detail extensive</b> |

Table 18: show isis database Output Fields (continued)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Level of Output |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Header                       | <ul style="list-style-type: none"> <li>• <b>LSP ID</b>—Link state PDU identifier of the header.</li> <li>• <b>Length</b>—Header length.</li> <li>• <b>Allocated Length</b>—Amount of length available for the header.</li> <li>• <b>Router ID</b>—Address of the local routing device.</li> <li>• <b>Remaining Lifetime</b>—Remaining lifetime of the link-state PDU, in seconds.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | extensive       |
| Packet                       | <ul style="list-style-type: none"> <li>• <b>LSP ID</b>—The identifier for the link-state PDU.</li> <li>• <b>Length</b>—Packet length.</li> <li>• <b>Lifetime</b>—Remaining lifetime, in seconds.</li> <li>• <b>Checksum</b>—The checksum of the link-state PDU.</li> <li>• <b>Sequence</b>—The sequence number of the link-state PDU. Every time the link-state PDU is updated, this number increments.</li> <li>• <b>Attributes</b>—Packet attributes.</li> <li>• <b>NLPID</b>—Network layer protocol identifier.</li> <li>• <b>Fixed length</b>—Specifies the set length for the packet.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | extensive       |
| TLVs                         | <ul style="list-style-type: none"> <li>• <b>Area Address</b>—Area addresses that the routing device can reach.</li> <li>• <b>Speaks</b>—Supported routing protocols.</li> <li>• <b>IP router id</b>—ID of the routing device (usually the IP address).</li> <li>• <b>IP address</b>—IPv4 address.</li> <li>• <b>Hostname</b>—Assigned name of the routing device.</li> <li>• <b>IP prefix</b>—IP prefix of the routing device.</li> <li>• <b>Metric</b>—IS-IS metric that measures the cost of the adjacency between the originating routing device and the advertised routing device.</li> <li>• <b>IP extended prefix</b>—Extended IP prefix of the routing device.</li> <li>• <b>IS neighbor</b>—Directly attached neighbor's name and metric.</li> <li>• <b>IS extended neighbor</b>—Directly attached neighbor's name, metric, IP address, local interface index, and remote interface index.<br/><br/>The interface indexes enable Junos OS to support unnumbered extensions for IS-IS, as described in RFC 4205.</li> <li>• <b>Router Capability</b>—ID of the routing device and flag.</li> </ul> <p><b>NOTE:</b> Router capability also specifies SPRING capability and SPRING algorithm when segment routing is enabled on the routing device.</p> | extensive       |
| Extended IS Reachability TLV | Type and length of the TLV is useful to identify the IS extended neighbors packed in this TLV.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | extensive       |
| SubTLV len                   | The length of the SubTLV of IS extended neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | extensive       |

## Sample Output

### show isis database

```
user@host> show isis database
```

## IS-IS level 1 link-state database:

| LSP ID         | Sequence | Checksum | Lifetime | Attributes |
|----------------|----------|----------|----------|------------|
| kobuk.00-00    | 0x3      | 0x3167   | 1057     | L1 L2      |
| camaro.00-00   | 0x5      | 0x770e   | 1091     | L1 L2      |
| ranier.00-00   | 0x4      | 0xaa95   | 1091     | L1 L2      |
| glacier.00-00  | 0x4      | 0x206f   | 1089     | L1 L2      |
| glacier.02-00  | 0x1      | 0xd141   | 1089     | L1 L2      |
| badlands.00-00 | 0x3      | 0x87a2   | 1093     | L1 L2      |

6 LSPs

## IS-IS level 2 link-state database:

| LSP ID         | Sequence | Checksum | Lifetime | Attributes |
|----------------|----------|----------|----------|------------|
| kobuk.00-00    | 0x6      | 0x8d6b   | 1096     | L1 L2      |
| camaro.00-00   | 0x9      | 0x877b   | 1101     | L1 L2      |
| ranier.00-00   | 0x8      | 0x855d   | 1103     | L1 L2      |
| glacier.00-00  | 0x7      | 0xf892   | 1098     | L1 L2      |
| glacier.02-00  | 0x1      | 0xd141   | 1089     | L1 L2      |
| badlands.00-00 | 0x6      | 0x562    | 1105     | L1 L2      |

6 LSPs

**show isis database brief**

The output for the **show isis database brief** command is identical to that for the **show isis database** command. For sample output, see [show isis database on page 667](#).

**show isis database detail**

```
user@host> show isis database logical-system CE3 sisira.00-00 detail
```

## IS-IS level 1 link-state database:

sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 975 secs

|                              |         |                  |
|------------------------------|---------|------------------|
| IS neighbor: hemantha-CE3.02 | Metric: | 10               |
| ES neighbor: 0015.0015.0015  | Metric: | 10 Down          |
| ES neighbor: 0025.0025.0025  | Metric: | 10 Down          |
| ES neighbor: 0030.0030.0030  | Metric: | 10 Down          |
| ES neighbor: 0040.0040.0040  | Metric: | 10 Down          |
| ES neighbor: sisira          | Metric: | 0                |
| IP prefix: 1.0.0.0/24        | Metric: | 10 External Down |
| IP prefix: 3.0.0.0/24        | Metric: | 10 External Down |
| IP prefix: 4.0.0.0/24        | Metric: | 10 External Down |
| IP prefix: 5.0.0.0/24        | Metric: | 10 Internal Up   |
| IP prefix: 15.15.15.15/32    | Metric: | 10 External Down |
| IP prefix: 25.25.25.25/32    | Metric: | 10 External Down |
| IP prefix: 30.30.30.30/32    | Metric: | 10 External Down |
| IP prefix: 40.40.40.40/32    | Metric: | 10 External Down |
| IP prefix: 60.60.60.60/32    | Metric: | 0 Internal Up    |

## IS-IS level 2 link-state database:

sisira.00-00 Sequence: 0x13, Checksum: 0x69ac, Lifetime: 993 secs

|                              |         |                  |
|------------------------------|---------|------------------|
| IS neighbor: hemantha-CE3.02 | Metric: | 10               |
| IP prefix: 1.0.0.0/24        | Metric: | 10 External Down |
| IP prefix: 3.0.0.0/24        | Metric: | 10 External Down |
| IP prefix: 4.0.0.0/24        | Metric: | 10 External Down |
| IP prefix: 5.0.0.0/24        | Metric: | 10 Internal Up   |
| IP prefix: 15.15.15.15/32    | Metric: | 10 External Down |
| IP prefix: 25.25.25.25/32    | Metric: | 10 External Down |



```

IP prefix: 30.30.30.30/32          Metric:      10 External Down
IP prefix: 40.40.40.40/32          Metric:      10 External Down
IP prefix: 50.50.50.50/32          Metric:      10 Internal Up
IP prefix: 60.60.60.60/32          Metric:       0 Internal Up
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
                                          Metric:      10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
                                          Metric:       0 Internal Up

```

### show isis database extensive

```
user@host> show isis database extensive
```

```
IS-IS level 1 link-state database:
```

```
sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 970 secs
```

```
IS neighbor: hemantha-CE3.02          Metric:      10
```

```
Two-way fragment: hemantha-CE3.02-00, Two-way first fragment:
```

```
hemantha-CE3.02-00
```

```
ES neighbor: 0015.0015.0015          Metric:      10 Down
```

```
ES neighbor: 0025.0025.0025          Metric:      10 Down
```

```
ES neighbor: 0030.0030.0030          Metric:      10 Down
```

```
ES neighbor: 0040.0040.0040          Metric:      10 Down
```

```
ES neighbor: sisira                  Metric:       0
```

```
IP prefix: 1.0.0.0/24                Metric:      10 External Down
```

```
IP prefix: 3.0.0.0/24                Metric:      10 External Down
```

```
IP prefix: 4.0.0.0/24                Metric:      10 External Down
```

```
IP prefix: 5.0.0.0/24                Metric:      10 Internal Up
```

```
IP prefix: 15.15.15.15/32            Metric:      10 External Down
```

```
IP prefix: 25.25.25.25/32            Metric:      10 External Down
```

```
IP prefix: 30.30.30.30/32            Metric:      10 External Down
```

```
IP prefix: 40.40.40.40/32            Metric:      10 External Down
```

```
IP prefix: 60.60.60.60/32            Metric:       0 Internal Up
```

```
Header: LSP ID: sisira.00-00, Length: 336 bytes
```

```
Allocated length: 336 bytes, Router ID: 0.0.0.0
```

```
Remaining lifetime: 970 secs, Level: 1, Interface: 333
```

```
Estimated free bytes: 144, Actual free bytes: 0
```

```
Aging timer expires in: 970 secs
```

```
Protocols: IP, IPv6, CLNS
```

```
Packet: LSP ID: sisira.00-00, Length: 336 bytes, Lifetime : 1198 secs
```

```
Checksum: 0x10fc, Sequence: 0x11, Attributes: 0xb L1 L2 Attached
```

```
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
```

```
Packet type: 18, Packet version: 1, Max area: 0
```

```
TLVs:
```

```
Area address: 60.0006.80ff.f800.0000.0108.0001 (13)
```

```
Speaks: IP
```

```
Speaks: IPv6
```

```
Speaks: CLNP
```

```
Hostname: sisira
```

```
ES neighbor TLV: Internal, Metric: default 0, Up
```

```

    ES: sisira
    IS neighbor: hemantha-CE3.02, Internal, Metric: default 10
    IS extended neighbor: hemantha-CE3.02, Metric: default 10
    ES neighbor TLV: External, Metric: default 10, Down
    ES: 0040.0040.0040
    ES neighbor TLV: External, Metric: default 10, Down
    ES: 0025.0025.0025
    ES neighbor TLV: External, Metric: default 10, Down
    ES: 0015.0015.0015
    ES neighbor TLV: External, Metric: default 10, Down
    ES: 0030.0030.0030
    IP external prefix: 3.0.0.0/24, Internal, Metric: default 10, Down
    IP external prefix: 40.40.40.40/32, Internal, Metric: default 10, Down
    IP external prefix: 4.0.0.0/24, Internal, Metric: default 10, Down
    IP external prefix: 25.25.25.25/32, Internal, Metric: default 10, Down
    IP external prefix: 15.15.15.15/32, Internal, Metric: default 10, Down
    IP external prefix: 1.0.0.0/24, Internal, Metric: default 10, Down
    IP external prefix: 30.30.30.30/32, Internal, Metric: default 10, Down
    IP extended prefix: 3.0.0.0/24 metric 10 down
    IP extended prefix: 40.40.40.40/32 metric 10 down
    IP extended prefix: 4.0.0.0/24 metric 10 down
    IP extended prefix: 25.25.25.25/32 metric 10 down
    IP extended prefix: 15.15.15.15/32 metric 10 down
    IP extended prefix: 1.0.0.0/24 metric 10 down
    IP extended prefix: 30.30.30.30/32 metric 10 down
    IP prefix: 60.60.60.60/32, Internal, Metric: default 0, Up
    IP prefix: 5.0.0.0/24, Internal, Metric: default 10, Up
    IP extended prefix: 60.60.60.60/32 metric 0 up
    IP extended prefix: 5.0.0.0/24 metric 10 up
    No queued transmissions

```

#### IS-IS level 2 link-state database:

```

Router-A.00-00 Sequence: 0x5, Checksum: 0x3196, Lifetime: 1158 secs
  IS neighbor: Router-B.02 Metric: 10
    Two-way fragment: Router-B.02-00, Two-way first fragment: Router-B.02-00
  IS neighbor: Router-E.02 Metric: 10
    Two-way fragment: Router-E.02-00, Two-way first fragment: Router-E.02-00
IP prefix: 10.0.0.0/30 Metric: 10 Internal Up
IP prefix: 10.0.0.4/30 Metric: 10 Internal Up
IP prefix: 192.168.0.1/32 Metric: 0 Internal Up

```

```

Header: LSP ID: Router-A.00-00, Length: 208 bytes
  Allocated length: 1492 bytes, Router ID: 192.168.0.1
  Remaining lifetime: 1158 secs, Level: 2, Interface: 0
  Estimated free bytes: 1233, Actual free bytes: 1284
  Aging timer expires in: 1158 secs
  Protocols: IP, IPv6

```

```

Packet: LSP ID: Router-A.00-00, Length: 208 bytes, Lifetime : 1198 secs
  Checksum: 0x3196, Sequence: 0x5, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

```

```

TLVs:
  Area address: 49.0002 (3)
  LSP Buffer Size: 1492
  Speaks: IP
  Speaks: IPv6
  IP router id: 192.168.0.1

```

```

IP address: 192.168.0.1
Hostname: Router-A
IP prefix: 192.168.0.1/32, Internal, Metric: default 0, Up
IP prefix: 10.0.0.4/30, Internal, Metric: default 10, Up
IP prefix: 10.0.0.0/30, Internal, Metric: default 10, Up
IP extended prefix: 192.168.0.1/32 metric 0 up
IP extended prefix: 10.0.0.4/30 metric 10 up
IP extended prefix: 10.0.0.0/30 metric 10 up
IS neighbor: Router-E.02, Internal, Metric: default 10
IS neighbor: Router-B.02, Internal, Metric: default 10
IS extended neighbor: Router-E.02, Metric: default 10
  IP address: 10.0.0.1
  Local interface index: 101, Remote interface index: 0
IS extended neighbor: Router-B.02, Metric: default 10
  IP address: 10.0.0.5
  Local interface index: 102, Remote interface index: 0
No queued transmissions

Router-B.00-00 Sequence: 0x5, Checksum: 0xf8f, Lifetime: 1183 secs
IS neighbor: Router-B.02 Metric: 10
  Two-way fragment: Router-B.02-00, Two-way first fragment: Router-B.02-00
IS neighbor: Router-C.02 Metric: 10
  Two-way fragment: Router-C.02-00, Two-way first fragment: Router-C.02-00
IP prefix: 10.0.0.4/30 Metric: 10 Internal Up
IP prefix: 10.0.0.8/30 Metric: 10 Internal Up
IP prefix: 192.168.0.2/32 Metric: 0 Internal Up

Header: LSP ID: Router-B.00-00, Length: 208 bytes
Allocated length: 284 bytes, Router ID: 192.168.0.2
Remaining lifetime: 1183 secs, Level: 2, Interface: 102
Estimated free bytes: 114, Actual free bytes: 76
Aging timer expires in: 1183 secs
Protocols: IP, IPv6

Packet: LSP ID: Router-B.00-00, Length: 208 bytes, Lifetime : 1196 secs
Checksum: 0xf8f, Sequence: 0x5, Attributes: 0x3 <L1 L2>
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 20, Packet version: 1, Max area: 0

TLVs:
Area address: 49.0002 (3)
LSP Buffer Size: 1492
Speaks: IP
Speaks: IPV6
IP router id: 192.168.0.2
IP address: 192.168.0.2
Hostname: Router-B
IP prefix: 192.168.0.2/32, Internal, Metric: default 0, Up
IP prefix: 10.0.0.4/30, Internal, Metric: default 10, Up
IP prefix: 10.0.0.8/30, Internal, Metric: default 10, Up
IP extended prefix: 192.168.0.2/32 metric 0 up
IP extended prefix: 10.0.0.4/30 metric 10 up
IP extended prefix: 10.0.0.8/30 metric 10 up
IS neighbor: Router-B.02, Internal, Metric: default 10
IS neighbor: Router-C.02, Internal, Metric: default 10
IS extended neighbor: Router-B.02, Metric: default 10
  IP address: 10.0.0.6
  Local interface index: 108, Remote interface index: 0
IS extended neighbor: Router-C.02, Metric: default 10
  IP address: 10.0.0.9

```

```

    Local interface index: 109, Remote interface index: 0
    No queued transmissions

Router-B.02-00 Sequence: 0x1, Checksum: 0x3c7c, Lifetime: 1156 secs
  IS neighbor: Router-A.00                      Metric: 0
    Two-way fragment: Router-A.00-00, Two-way first fragment: Router-A.00-00
  IS neighbor: Router-B.00                      Metric: 0
    Two-way fragment: Router-B.00-00, Two-way first fragment: Router-B.00-00

Header: LSP ID: Router-B.02-00, Length: 76 bytes
  Allocated length: 284 bytes, Router ID: 0.0.0.0
  Remaining lifetime: 1156 secs, Level: 2, Interface: 102
  Estimated free bytes: 208, Actual free bytes: 208
  Aging timer expires in: 1156 secs

Packet: LSP ID: Router-B.02-00, Length: 76 bytes, Lifetime : 1196 secs
  Checksum: 0x3c7c, Sequence: 0x1, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

TLVs:
  IS neighbor: Router-B.00, Internal, Metric: default 0
  IS neighbor: Router-A.00, Internal, Metric: default 0
  IS extended neighbor: Router-B.00, Metric: default 0
  IS extended neighbor: Router-A.00, Metric: default 0
  No queued transmissions

Router-C.00-00 Sequence: 0x5, Checksum: 0x255b, Lifetime: 1182 secs
  IS neighbor: Router-C.02                      Metric: 10
    Two-way fragment: Router-C.02-00, Two-way first fragment: Router-C.02-00
  IS neighbor: Router-D.03                      Metric: 10
    Two-way fragment: Router-D.03-00, Two-way first fragment: Router-D.03-00
  IP prefix: 10.0.0.8/30                      Metric: 10 Internal Up
  IP prefix: 10.0.0.12/30                     Metric: 10 Internal Up
  IP prefix: 192.168.0.3/32                   Metric: 0 Internal Up

Header: LSP ID: Router-C.00-00, Length: 208 bytes
  Allocated length: 284 bytes, Router ID: 192.168.0.3
  Remaining lifetime: 1182 secs, Level: 2, Interface: 102
  Estimated free bytes: 114, Actual free bytes: 76
  Aging timer expires in: 1182 secs
  Protocols: IP, IPv6

Packet: LSP ID: Router-C.00-00, Length: 208 bytes, Lifetime : 1196 secs
  Checksum: 0x255b, Sequence: 0x5, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

TLVs:
  Area address: 49.0002 (3)
  LSP Buffer Size: 1492
  Speaks: IP
  Speaks: IPV6
  IP router id: 192.168.0.3
  IP address: 192.168.0.3
  Hostname: Router-C
  IP prefix: 192.168.0.3/32, Internal, Metric: default 0, Up
  IP prefix: 10.0.0.8/30, Internal, Metric: default 10, Up
  IP prefix: 10.0.0.12/30, Internal, Metric: default 10, Up
  IP extended prefix: 192.168.0.3/32 metric 0 up

```

```

IP extended prefix: 10.0.0.8/30 metric 10 up
IP extended prefix: 10.0.0.12/30 metric 10 up
IS neighbor: Router-C.02, Internal, Metric: default 10
IS neighbor: Router-D.03, Internal, Metric: default 10
IS extended neighbor: Router-C.02, Metric: default 10
  IP address: 10.0.0.10
  Local interface index: 105, Remote interface index: 0
IS extended neighbor: Router-D.03, Metric: default 10
  IP address: 10.0.0.13
  Local interface index: 106, Remote interface index: 0
No queued transmissions

Router-C.02-00 Sequence: 0x1, Checksum: 0xaa09, Lifetime: 1181 secs
  IS neighbor: Router-B.00 Metric: 0
    Two-way fragment: Router-B.00-00, Two-way first fragment: Router-B.00-00
  IS neighbor: Router-C.00 Metric: 0
    Two-way fragment: Router-C.00-00, Two-way first fragment: Router-C.00-00

Header: LSP ID: Router-C.02-00, Length: 76 bytes
  Allocated length: 284 bytes, Router ID: 0.0.0.0
  Remaining lifetime: 1181 secs, Level: 2, Interface: 102
  Estimated free bytes: 208, Actual free bytes: 208
  Aging timer expires in: 1181 secs

Packet: LSP ID: Router-C.02-00, Length: 76 bytes, Lifetime : 1194 secs
  Checksum: 0xaa09, Sequence: 0x1, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

TLVs:
  IS neighbor: Router-C.00, Internal, Metric: default 0
  IS neighbor: Router-B.00, Internal, Metric: default 0
  IS extended neighbor: Router-C.00, Metric: default 0
  IS extended neighbor: Router-B.00, Metric: default 0
No queued transmissions

Router-D.00-00 Sequence: 0x4, Checksum: 0x8ab7, Lifetime: 1180 secs
  IS neighbor: Router-D.02 Metric: 10
    Two-way fragment: Router-D.02-00, Two-way first fragment: Router-D.02-00
  IS neighbor: Router-D.03 Metric: 10
    Two-way fragment: Router-D.03-00, Two-way first fragment: Router-D.03-00
  IP prefix: 10.0.0.12/30 Metric: 10 Internal Up
  IP prefix: 10.0.0.20/30 Metric: 10 Internal Up
  IP prefix: 192.168.0.4/32 Metric: 0 Internal Up

Header: LSP ID: Router-D.00-00, Length: 208 bytes
  Allocated length: 284 bytes, Router ID: 192.168.0.4
  Remaining lifetime: 1180 secs, Level: 2, Interface: 102
  Estimated free bytes: 114, Actual free bytes: 76
  Aging timer expires in: 1180 secs
  Protocols: IP, IPv6

Packet: LSP ID: Router-D.00-00, Length: 208 bytes, Lifetime : 1192 secs
  Checksum: 0x8ab7, Sequence: 0x4, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

TLVs:
  Area address: 49.0002 (3)
  LSP Buffer Size: 1492

```

```

Speaks: IP
Speaks: IPV6
IP router id: 192.168.0.4
IP address: 192.168.0.4
Hostname: Router-D
IP prefix: 192.168.0.4/32, Internal, Metric: default 0, Up
IP prefix: 10.0.0.12/30, Internal, Metric: default 10, Up
IP prefix: 10.0.0.20/30, Internal, Metric: default 10, Up
IP extended prefix: 192.168.0.4/32 metric 0 up
IP extended prefix: 10.0.0.12/30 metric 10 up
IP extended prefix: 10.0.0.20/30 metric 10 up
IS neighbor: Router-D.02, Internal, Metric: default 10
IS neighbor: Router-D.03, Internal, Metric: default 10
IS extended neighbor: Router-D.02, Metric: default 10
    IP address: 10.0.0.22
    Local interface index: 115, Remote interface index: 0
IS extended neighbor: Router-D.03, Metric: default 10
    IP address: 10.0.0.14
    Local interface index: 114, Remote interface index: 0
No queued transmissions

Router-D.02-00 Sequence: 0x1, Checksum: 0xebbc, Lifetime: 1128 secs
IS neighbor: Router-D.00                      Metric: 0
    Two-way fragment: Router-D.00-00, Two-way first fragment: Router-D.00-00
IS neighbor: Router-F.00                      Metric: 0
    Two-way fragment: Router-F.00-00, Two-way first fragment: Router-F.00-00

Header: LSP ID: Router-D.02-00, Length: 76 bytes
    Allocated length: 284 bytes, Router ID: 0.0.0.0
    Remaining lifetime: 1128 secs, Level: 2, Interface: 101
    Estimated free bytes: 208, Actual free bytes: 208
    Aging timer expires in: 1128 secs

Packet: LSP ID: Router-D.02-00, Length: 76 bytes, Lifetime : 1160 secs
    Checksum: 0xebbc, Sequence: 0x1, Attributes: 0x3 <L1 L2>
    NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
    Packet type: 20, Packet version: 1, Max area: 0

TLVs:
    IS neighbor: Router-D.00, Internal, Metric: default 0
    IS neighbor: Router-F.00, Internal, Metric: default 0
    IS extended neighbor: Router-D.00, Metric: default 0
    IS extended neighbor: Router-F.00, Metric: default 0
No queued transmissions

Router-D.03-00 Sequence: 0x1, Checksum: 0x129b, Lifetime: 1180 secs
IS neighbor: Router-C.00                      Metric: 0
    Two-way fragment: Router-C.00-00, Two-way first fragment: Router-C.00-00
IS neighbor: Router-D.00                      Metric: 0
    Two-way fragment: Router-D.00-00, Two-way first fragment: Router-D.00-00

Header: LSP ID: Router-D.03-00, Length: 76 bytes
    Allocated length: 284 bytes, Router ID: 0.0.0.0
    Remaining lifetime: 1180 secs, Level: 2, Interface: 101
    Estimated free bytes: 208, Actual free bytes: 208
    Aging timer expires in: 1180 secs

Packet: LSP ID: Router-D.03-00, Length: 76 bytes, Lifetime : 1192 secs
    Checksum: 0x129b, Sequence: 0x1, Attributes: 0x3 <L1 L2>
    NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes

```

Packet type: 20, Packet version: 1, Max area: 0

TLVs:

IS neighbor: Router-D.00, Internal, Metric: default 0  
 IS neighbor: Router-C.00, Internal, Metric: default 0  
 IS extended neighbor: Router-D.00, Metric: default 0  
 IS extended neighbor: Router-C.00, Metric: default 0

No queued transmissions

Router-E.00-00 Sequence: 0x4, Checksum: 0x9da9, Lifetime: 1155 secs

IS neighbor: Router-E.02 Metric: 10  
 Two-way fragment: Router-E.02-00, Two-way first fragment: Router-E.02-00  
 IS neighbor: Router-F.02 Metric: 20  
 Two-way fragment: Router-F.02-00, Two-way first fragment: Router-F.02-00  
 IP prefix: 10.0.0.0/30 Metric: 10 Internal Up  
 IP prefix: 10.0.0.16/30 Metric: 20 Internal Up  
 IP prefix: 192.168.0.5/32 Metric: 0 Internal Up

Header: LSP ID: Router-E.00-00, Length: 208 bytes

Allocated length: 284 bytes, Router ID: 192.168.0.5  
 Remaining lifetime: 1155 secs, Level: 2, Interface: 101  
 Estimated free bytes: 114, Actual free bytes: 76  
 Aging timer expires in: 1155 secs  
 Protocols: IP, IPv6

Packet: LSP ID: Router-E.00-00, Length: 208 bytes, Lifetime : 1185 secs

Checksum: 0x9da9, Sequence: 0x4, Attributes: 0x3 <L1 L2>  
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
 Packet type: 20, Packet version: 1, Max area: 0

TLVs:

Area address: 49.0002 (3)  
 LSP Buffer Size: 1492  
 Speaks: IP  
 Speaks: IPV6  
 IP router id: 192.168.0.5  
 IP address: 192.168.0.5  
 Hostname: Router-E  
 IP prefix: 192.168.0.5/32, Internal, Metric: default 0, Up  
 IP prefix: 10.0.0.16/30, Internal, Metric: default 20, Up  
 IP prefix: 10.0.0.0/30, Internal, Metric: default 10, Up  
 IP extended prefix: 192.168.0.5/32 metric 0 up  
 IP extended prefix: 10.0.0.16/30 metric 20 up  
 IP extended prefix: 10.0.0.0/30 metric 10 up  
 IS neighbor: Router-E.02, Internal, Metric: default 10  
 IS neighbor: Router-F.02, Internal, Metric: default 20  
 IS extended neighbor: Router-E.02, Metric: default 10  
 IP address: 10.0.0.2  
 Local interface index: 112, Remote interface index: 0  
 IS extended neighbor: Router-F.02, Metric: default 20  
 IP address: 10.0.0.17  
 Local interface index: 111, Remote interface index: 0

No queued transmissions

Router-E.02-00 Sequence: 0x1, Checksum: 0xb4fa, Lifetime: 1130 secs

IS neighbor: Router-A.00 Metric: 0  
 Two-way fragment: Router-A.00-00, Two-way first fragment: Router-A.00-00  
 IS neighbor: Router-E.00 Metric: 0  
 Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00

```

Header: LSP ID: Router-E.02-00, Length: 76 bytes
        Allocated length: 284 bytes, Router ID: 0.0.0.0
        Remaining lifetime: 1130 secs, Level: 2, Interface: 101
        Estimated free bytes: 208, Actual free bytes: 208
        Aging timer expires in: 1130 secs

Packet: LSP ID: Router-E.02-00, Length: 76 bytes, Lifetime : 1161 secs
        Checksum: 0xb4fa, Sequence: 0x1, Attributes: 0x3 <L1 L2>
        NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
        Packet type: 20, Packet version: 1, Max area: 0

```

```

TLVs:
  IS neighbor: Router-E.00, Internal, Metric: default 0
  IS neighbor: Router-A.00, Internal, Metric: default 0
  IS extended neighbor: Router-E.00, Metric: default 0
  IS extended neighbor: Router-A.00, Metric: default 0
  No queued transmissions

```

```

Router-F.00-00 Sequence: 0x5, Checksum: 0x94bd, Lifetime: 1153 secs
  IS neighbor: Router-D.02                               Metric: 10
    Two-way fragment: Router-D.02-00, Two-way first fragment: Router-D.02-00
  IS neighbor: Router-F.02                               Metric: 10
    Two-way fragment: Router-F.02-00, Two-way first fragment: Router-F.02-00
  IP prefix: 10.0.0.16/30                                Metric: 10 Internal Up
  IP prefix: 10.0.0.20/30                                Metric: 10 Internal Up
  IP prefix: 192.168.0.6/32                              Metric: 0 Internal Up

```

```

Header: LSP ID: Router-F.00-00, Length: 208 bytes
        Allocated length: 284 bytes, Router ID: 192.168.0.6
        Remaining lifetime: 1153 secs, Level: 2, Interface: 101
        Estimated free bytes: 76, Actual free bytes: 76
        Aging timer expires in: 1153 secs
        Protocols: IP, IPv6

```

```

Packet: LSP ID: Router-F.00-00, Length: 208 bytes, Lifetime : 1183 secs
        Checksum: 0x94bd, Sequence: 0x5, Attributes: 0x3 <L1 L2>
        NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
        Packet type: 20, Packet version: 1, Max area: 0

```

```

TLVs:
  Area address: 49.0002 (3)
  LSP Buffer Size: 1492
  Speaks: IP
  Speaks: IPV6
  IP router id: 192.168.0.6
  IP address: 192.168.0.6
  Hostname: Router-F
  IP prefix: 192.168.0.6/32, Internal, Metric: default 0, Up
  IP prefix: 10.0.0.16/30, Internal, Metric: default 10, Up
  IP prefix: 10.0.0.20/30, Internal, Metric: default 10, Up
  IP extended prefix: 192.168.0.6/32 metric 0 up
  IP extended prefix: 10.0.0.16/30 metric 10 up
  IP extended prefix: 10.0.0.20/30 metric 10 up
  IS neighbor: Router-D.02, Internal, Metric: default 10
  IS neighbor: Router-F.02, Internal, Metric: default 10
  IS extended neighbor: Router-D.02, Metric: default 10
    IP address: 10.0.0.21
    Local interface index: 94, Remote interface index: 0
  IS extended neighbor: Router-F.02, Metric: default 10
    IP address: 10.0.0.18

```



```

    Local interface index: 93, Remote interface index: 0
    No queued transmissions

Router-E.02-00 Sequence: 0x1, Checksum: 0xb4fa, Lifetime: 1130 secs
  IS neighbor: Router-A.00                      Metric: 0
    Two-way fragment: Router-A.00-00, Two-way first fragment: Router-A.00-00
  IS neighbor: Router-E.00                      Metric: 0
    Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00

Header: LSP ID: Router-E.02-00, Length: 76 bytes
  Allocated length: 284 bytes, Router ID: 0.0.0.0
  Remaining lifetime: 1130 secs, Level: 2, Interface: 101
  Estimated free bytes: 208, Actual free bytes: 208
  Aging timer expires in: 1130 secs

Packet: LSP ID: Router-E.02-00, Length: 76 bytes, Lifetime : 1161 secs
  Checksum: 0xb4fa, Sequence: 0x1, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

TLVs:
  IS neighbor: Router-E.00, Internal, Metric: default 0
  IS neighbor: Router-A.00, Internal, Metric: default 0
  IS extended neighbor: Router-E.00, Metric: default 0
  IS extended neighbor: Router-A.00, Metric: default 0
  No queued transmissions

Router-F.00-00 Sequence: 0x5, Checksum: 0x94bd, Lifetime: 1153 secs
  IS neighbor: Router-D.02                      Metric: 10
    Two-way fragment: Router-D.02-00, Two-way first fragment: Router-D.02-00
  IS neighbor: Router-F.02                      Metric: 10
    Two-way fragment: Router-F.02-00, Two-way first fragment: Router-F.02-00
  IP prefix: 10.0.0.16/30                      Metric: 10 Internal Up
  IP prefix: 10.0.0.20/30                      Metric: 10 Internal Up
  IP prefix: 192.168.0.6/32                   Metric: 0 Internal Up

Header: LSP ID: Router-F.00-00, Length: 208 bytes
  Allocated length: 284 bytes, Router ID: 192.168.0.6
  Remaining lifetime: 1153 secs, Level: 2, Interface: 101
  Estimated free bytes: 76, Actual free bytes: 76
  Aging timer expires in: 1153 secs
  Protocols: IP, IPv6

Packet: LSP ID: Router-F.00-00, Length: 208 bytes, Lifetime : 1183 secs
  Checksum: 0x94bd, Sequence: 0x5, Attributes: 0x3 <L1 L2>
  NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
  Packet type: 20, Packet version: 1, Max area: 0

TLVs:
  Area address: 49.0002 (3)
  LSP Buffer Size: 1492
  Speaks: IP
  Speaks: IPV6
  IP router id: 192.168.0.6
  IP address: 192.168.0.6
  Hostname: Router-F
  IP prefix: 192.168.0.6/32, Internal, Metric: default 0, Up
  IP prefix: 10.0.0.16/30, Internal, Metric: default 10, Up
  IP prefix: 10.0.0.20/30, Internal, Metric: default 10, Up
  IP extended prefix: 192.168.0.6/32 metric 0 up

```

```

IP extended prefix: 10.0.0.16/30 metric 10 up
IP extended prefix: 10.0.0.20/30 metric 10 up
IS neighbor: Router-D.02, Internal, Metric: default 10
IS neighbor: Router-F.02, Internal, Metric: default 10
IS extended neighbor: Router-D.02, Metric: default 10
  IP address: 10.0.0.21
  Local interface index: 94, Remote interface index: 0
IS extended neighbor: Router-F.02, Metric: default 10
  IP address: 10.0.0.18
  Local interface index: 93, Remote interface index: 0
No queued transmissions

Router-F.02-00 Sequence: 0x1, Checksum: 0xf5ae, Lifetime: 1153 secs
IS neighbor: Router-E.00 Metric: 0
  Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00
IS neighbor: Router-F.00 Metric: 0
  Two-way fragment: Router-F.00-00, Two-way first fragment: Router-F.00-00

Header: LSP ID: Router-F.02-00, Length: 76 bytes
Allocated length: 284 bytes, Router ID: 0.0.0.0
Remaining lifetime: 1153 secs, Level: 2, Interface: 101
Estimated free bytes: 208, Actual free bytes: 208
Aging timer expires in: 1153 secs

Packet: LSP ID: Router-F.02-00, Length: 76 bytes, Lifetime : 1183 secs
Checksum: 0xf5ae, Sequence: 0x1, Attributes: 0x3 <L1 L2>
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 20, Packet version: 1, Max area: 0

TLVs:
IS neighbor: Router-F.00, Internal, Metric: default 0
IS neighbor: Router-E.00, Internal, Metric: default 0
IS extended neighbor: Router-F.00, Metric: default 0
IS extended neighbor: Router-E.00, Metric: default 0
No queued transmissions

```

### show isis database extensive (SPRING)

```

user@host> show isis database extensive

Extended IS Reachability TLV, Type: 22, Length: 99
IS extended neighbor: r0.00, Metric: default 10 SubTLV len: 88
  IP address: 11.1.1.2
  Neighbor's IP address: 11.1.1.1
  Local interface index: 333, Remote interface index: 342
  Current reservable bandwidth:
    Priority 0 : 1000Mbps
    Priority 1 : 1000Mbps
    Priority 2 : 1000Mbps
    Priority 3 : 1000Mbps
    Priority 4 : 1000Mbps
    Priority 5 : 1000Mbps
    Priority 6 : 1000Mbps
    Priority 7 : 1000Mbps
Maximum reservable bandwidth: 1000Mbps
Maximum bandwidth: 1000Mbps
Administrative groups: 0 <none>
P2P IPV6 Adj-SID - Flags:0xf0(F:1,B:1,V:1,L:1,S:0,P:0), Weight:0, Label: 401
P2P IPV6 Adj-SID:      401, Weight: 0, Flags: FBVL--
P2P IPV4 Adj-SID - Flags:0x70(F:0,B:1,V:1,L:1,S:0,P:0), Weight:0, Label:

```

400

```

P2P IPv4 Adj-SID:      400, Weight:    0, Flags: -BVL--
Extended IS Reachability TLV, Type: 22, Length: 144
IS extended neighbor: r1.06, Metric: default 10 SubTLV len: 133
IP address: 12.1.1.1
Local interface index: 336, Remote interface index: 0
Current reservable bandwidth:
  Priority 0 : 1000Mbps
  Priority 1 : 1000Mbps
  Priority 2 : 1000Mbps
  Priority 3 : 1000Mbps
  Priority 4 : 1000Mbps
  Priority 5 : 1000Mbps
  Priority 6 : 1000Mbps
  Priority 7 : 1000Mbps
Maximum reservable bandwidth: 1000Mbps
Maximum bandwidth: 1000Mbps
Administrative groups: 0 <none>
LAN IPV6 Adj-SID -, Flags:0xfc(F:1,B:1,V:1,L:1,S:1,P:1), Weight:1
  Neighbor:r2, Label:803125
LAN IPV6 Adj-SID: 803125, Weight:    1, Neighbor: r2, Flags: FBVLSP
LAN IPV4 Adj-SID -, Flags:0x3c(F:0,B:0,V:1,L:1,S:1,P:1), Weight:1
  Neighbor:r2, Label:803122
LAN IPV4 Adj-SID: 803122, Weight:    1, Neighbor: r2, Flags: --VLSP
LAN IPV4 Adj-SID -, Flags:0x7c(F:0,B:1,V:1,L:1,S:1,P:1), Weight:1
  Neighbor:r2, Label:803123
LAN IPV4 Adj-SID: 803123, Weight:    1, Neighbor: r2, Flags: -BVLSP
LAN IPV6 Adj-SID -, Flags:0xf0(F:1,B:1,V:1,L:1,S:0,P:0), Weight:0
  Neighbor:r2, Label:37
LAN IPV6 Adj-SID:    37, Weight:    0, Neighbor: r2, Flags: FBVL--
LAN IPV4 Adj-SID -, Flags:0x70(F:0,B:1,V:1,L:1,S:0,P:0), Weight:0
  Neighbor:r2, Label:36
LAN IPV4 Adj-SID:    36, Weight:    0, Neighbor: r2, Flags: -BVL--

```

## show isis hostname

**List of Syntax** [Syntax on page 680](#)  
[Syntax \(EX Series Switches and QFX Series\) on page 680](#)

**Syntax** `show isis hostname`  
`<logical-system (all | logical-system-name)>`

**Syntax (EX Series Switches and QFX Series)** `show isis hostname`

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 12.1 for the QFX Series.  
 Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Display IS-IS hostname database information.

This command displays the system ID-to-name cache. The output shows if the mapping has been learned by receipt of a Hostname TLV #137 (type dynamic) configured in Junos OS with the `set system host-name` command, or a static mapping defined in Junos OS with the `set system static-host-mapping hostname sysid` command (type static). The local router always has its type set to static even if `static-host-mapping` is not configured.

**Options** **none**—Display IS-IS hostname database information.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level** view

**List of Sample Output** [show isis hostname on page 681](#)

**Output Fields** [Table 19 on page 680](#) describes the output fields for the `show isis hostname` command. Output fields are listed in the approximate order in which they appear.

*Table 19: show isis hostname Output Fields*

| Field Name | Field Description                         |
|------------|-------------------------------------------|
| System Id  | System identifier mapped to the hostname. |
| Hostname   | Hostname mapped to the system identifier. |

Table 19: *show isis hostname* Output Fields (continued)

| Field Name | Field Description                                                                                                                                                                                                                                                                                 |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | Type of mapping between system identifier and hostname. <ul style="list-style-type: none"><li>• <b>Dynamic</b>—Hostname mapping determined as described in RFC 2763, <i>Dynamic Hostname Exchange Mechanism for IS-IS</i>.</li><li>• <b>Static</b>—Hostname mapping configured by user.</li></ul> |

## Sample Output

### show isis hostname

```
user@host> show isis hostname
```

```
IS-IS hostname database:
System Id      Hostname      Type
1921.6800.4201 isis1         Dynamic
1921.6800.4202 isis2         Static
1921.6800.4203 isis3         Dynamic
```

## show isis interface

**List of Syntax**   [Syntax on page 682](#)  
[Syntax \(EX Series Switches and QFX Series\) on page 682](#)

**Syntax**

```
show isis interface
<brief | detail | extensive>
<interface-name>
<logical-system (all | logical-system-name)>
```

**Syntax (EX Series Switches and QFX Series)**

```
show isis interface
<brief | detail | extensive>
<interface-name>
```

**Release Information**   Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 12.1 for the QFX Series.

**Description**   Display status information about Intermediate System-to-Intermediate System (IS-IS)-enabled interfaces.



**NOTE:** If the configured metric for an IS-IS level is above 63, and the **wide-metrics-only** statement is not configured, the **show isis interface detail** command and the **show isis interface extensive** command display 63 as the metric value for that level. Configure the **wide-metrics-only** statement to generate metric values greater than 63 on a per IS-IS level basis.

The **show isis interface** command displays the configured metric value for an IS-IS level irrespective of whether is configured or not.

**Options**   **none**—Display standard information about all IS-IS-enabled interfaces.

**brief | detail | extensive**—(Optional) Display the specified level of output.

**interface-name**—(Optional) Display information about the specified interface only.

**logical-system (all | logical-system-name)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level**   view

**Related Documentation**

- [Understanding Wide IS-IS Metrics for Traffic Engineering on page 272](#)
- [Example: Enabling Wide IS-IS Metrics for Traffic Engineering on page 272](#)

**List of Sample Output** [show isis interface on page 685](#)  
[show isis interface brief on page 685](#)  
[show isis interface detail on page 685](#)  
[show isis interface extensive on page 685](#)

**Output Fields** [Table 20 on page 683](#) describes the output fields for the **show isis interface** command. Output fields are listed in the approximate order in which they appear.

*Table 20: show isis interface Output Fields*

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                     | Level of Output         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>interface-name</b>    | Name of the interface.                                                                                                                                                                                                                                                                                                                                                | <b>detail</b>           |
| <b>Designated router</b> | Routing device selected by other routers that is responsible for sending link-state advertisements that describe the network. Used only on broadcast networks.                                                                                                                                                                                                        | <b>detail</b>           |
| <b>Index</b>             | Interface index assigned by the Junos OS kernel.                                                                                                                                                                                                                                                                                                                      | <b>detail</b>           |
| <b>State</b>             | Internal implementation information.                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>           |
| <b>Circuit id</b>        | Circuit identifier.<br><br><b>NOTE:</b> Each IS-IS interface is assigned a circuit ID value to identify the interface within the linkstate database. All interfaces (loopback, broadcast, and so on) and all point-to-point links share the locally significant value of 0x01, and this value is not incremented.                                                     | <b>detail</b>           |
| <b>Circuit type</b>      | Circuit type: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul>                                                                                                                                                                                                                           | <b>detail</b>           |
| <b>LSP interval</b>      | Interval between link-state PDUs sent from the interface.                                                                                                                                                                                                                                                                                                             | <b>detail</b>           |
| <b>CSNP interval</b>     | Interval between complete sequence number PDUs sent from the interface.                                                                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| <b>Sysid</b>             | System identifier.                                                                                                                                                                                                                                                                                                                                                    | <b>detail</b>           |
| <b>Interface</b>         | Interface through which the adjacency is made.                                                                                                                                                                                                                                                                                                                        | <b>none brief</b>       |
| <b>L or Level</b>        | Level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> <b>NOTE:</b> The default IS-IS level on loopback interfaces are always same as the IS-IS level configured on other IS-IS interfaces in a router. You can also configure IS-IS level on loopback interfaces per your requirement. | All levels              |
| <b>CirID</b>             | Circuit identifier.                                                                                                                                                                                                                                                                                                                                                   | <b>none brief</b>       |

Table 20: show isis interface Output Fields (continued)

| Field Name                         | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output         |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Level 1 DR                         | Level 1 designated intermediate system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | none <b>brief</b>       |
| Level 2 DR                         | Level 2 designated intermediate system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | none <b>brief</b>       |
| L1/L2 Metric                       | Interface's metric for Level 1 and Level 2. If there is no information, the metric is 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | none <b>brief</b>       |
| Flood-group Area-ID                | Flood-group is configured on a specific IS-IS interface<br><br><b>NOTE:</b> Seen only when Flood-group is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>detail extensive</b> |
| Adjacency advertisement: Advertise | This routing device has signaled to advertise this interface to its neighbors in their label-switched paths (LSPs).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| Adjacency advertisement: Suppress  | This neighbor has signaled not to advertise this interface in the routing device's outbound LSPs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail extensive</b> |
| Adjacencies                        | Number of adjacencies established on this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>detail</b>           |
| Priority                           | Priority value for this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>detail</b>           |
| Metric                             | Metric value for this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>           |
| Hello(s) / Hello Interval          | Interface's hello interval.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail extensive</b> |
| Hold(s) / Hold Time                | Interface's hold time.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>detail extensive</b> |
| Designated Router                  | Router responsible for sending network link-state advertisements, which describe all the routing devices attached to the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail</b>           |
| Hello padding                      | Type of hello padding: <ul style="list-style-type: none"> <li>• <b>Adaptive</b>—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state TLV. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface.</li> <li>• <b>Loose</b>—(Default) The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state.</li> <li>• <b>Strict</b>—Padding is performed on all interface types and for all adjacency states, and is continuous.</li> </ul> | <b>extensive</b>        |
| LDP sync state                     | Current LDP synchronization state: <b>in sync</b> , <b>in holddown</b> , or <b>not supported</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>extensive</b>        |
| reason                             | Reason for being in the LDP sync state.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>extensive</b>        |



Table 20: show isis interface Output Fields (continued)

| Field Name             | Field Description                                                                                                           | Level of Output  |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>config holdtime</b> | Configured value of the hold timer.                                                                                         | <b>extensive</b> |
| <b>remaining</b>       | If the state is not in sync and the hold time is not infinity, then this field displays the remaining hold time in seconds. | <b>extensive</b> |
| <b>IIH max size</b>    | Configured value of IS-IS hello packets                                                                                     | <b>extensive</b> |

## Sample Output

### show isis interface

```
user@host> show isis interface
```

```
IS-IS interface database:
```

| Interface  | L | CirID | Level 1        | DR | Level 2        | DR | L1/L2 | Metric |
|------------|---|-------|----------------|----|----------------|----|-------|--------|
| at-2/3/0.0 | 3 | 0x1   | Point to Point |    | Point to Point |    | 10/10 |        |
| lo0.0      | 3 | 0x1   | Passive        |    | Passive        |    | 0/0   |        |

### show isis interface brief

The output for the **show isis interface brief** command is identical to that for the **show isis interface** command. For sample output, see [show isis interface on page 685](#).

### show isis interface detail

```
user@host> show isis interface detail
```

```
IS-IS interface database:
```

```
at-2/3/0.0
```

```
Index: 66, State: 0x6, Circuit id: 0x1, Circuit type: 3
```

```
LSP interval: 100 ms, CSNP interval: 5 s
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
1 1 64 10 9.000 27
```

```
2 1 64 10 9.000 27
```

```
lo0.0
```

```
Index: 64, State: 0x6, Circuit id: 0x1, Circuit type: 0
```

```
LSP interval: 100 ms, CSNP interval: disabled
```

```
Adjacency advertisement: Advertise
```

```
Protection Type: Node Link, No eligible Backup
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
1 0 64 0 Passive
```

```
2 0 64 0 Passive
```

### show isis interface extensive

```
user@host> show isis interface extensive
```

```
IS-IS interface database:
```

```
xe-6/1/0.0
```

```
Index: 75, State: 0x6, Circuit id: 0x1, Circuit type: 2
```

```
LSP interval: 100 ms, CSNP interval: 10 s, Loose Hello padding, IIH max size: 1505
```

Adjacency advertisement: Advertise

Flood-group Area-ID: 49.0001

Level 1

Adjacencies: 0, Priority: 64, Metric: 10

Disabled

Level 2

Adjacencies: 1, Priority: 64, Metric: 10

Hello Interval: 20.000 s, Hold Time: 60 s

Designated Router: nemean.03

## show isis interface-group

|                                 |                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show isis interface-group<br><instance <i>instance</i> ><br><logical-system ( <i>all</i>   <i>logical-system-name</i> )>                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Command introduced in Junos OS Release 16.1 for the M Series and MX Series.                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Display status information about the specified interface group.                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>none</b>— Display standard status information about the interface group.</p> <p><b>instance</b>— Display the status information about the interface group for the specified instance.</p> <p><b>logical-system (all   logical-system-name)</b>— (Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">interface-group-holddown-delay on page 494</a></li> </ul>                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>    | <a href="#">show isis interface-group on page 688</a>                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>            | Table 21 on page 687 describes the output fields for the <b>show isis interface-group</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                            |

Table 21: show layer2-map Output Fields

| Field Name                     | Field Description                                                                                                                           |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface-group</b>         | Name of the interface group followed by the interfaces that belong to the specified group and their status.                                 |
| <b>Total Nominal Bandwidth</b> | Minimum bandwidth reserved for this interface group.                                                                                        |
| <b>Total Actual Bandwidth</b>  | Total bandwidth that is actually available.                                                                                                 |
| <b>Level</b>                   | IS-IS Level <ul style="list-style-type: none"> <li>1—Level 1</li> <li>2—Level 2</li> </ul>                                                  |
| <b>Address family</b>          | Address family can have one of the following values: <ul style="list-style-type: none"> <li>IPv6 Unicast</li> <li>IPv6 Multicast</li> </ul> |

Table 21: show layer2-map Output Fields (continued)

| Field Name                 | Field Description                                       |
|----------------------------|---------------------------------------------------------|
| <b>Metric</b>              | Metric value for this interface group.                  |
| <b>Bandwidth Threshold</b> | The maximum bandwidth allowed for this interface group. |

## Sample Output

### show isis interface-group

```
user@host> show isis interface-group
Interface-group: R2-B
  et-8/0/0.0, 100Gbps, Up
  et-9/0/0.0, 100Gbps, Up
  Total Nominal Bandwidth: 200Gbps, Total Actual Bandwidth: 200Gbps
  Level 1
    IPV6 Unicast, Metric: 30
      Bandwidth Threshold: 100Gbps, Metric: 1000
      Bandwidth Threshold: 200Gbps, Metric: 30
    IPV6 Multicast, Metric: 30
      Bandwidth Threshold: 100Gbps, Metric: 1000
      Bandwidth Threshold: 200Gbps, Metric: 30
```

## show isis layer2-map

**Syntax** `show isis layer2-map`  
`<destination>`  
`<instance instance-name>`  
`<logical-system (all | logical-system-name)>`

**Release Information** Command introduced in Junos OS Release 16.1 for the MX Series and PTX Series.

**Description** Display the details of the Layer 2 ARP or neighbor discovery next hops and the mapped data link address in the kernel for the routing instances.

**Options** **none**— Display all the Layer 2 mappings in the kernel for all supported address families for all routing instances.

**destination**— (Optional) Display the Layer 2 mapping for a specified destination address.

**instance instance-name**— (Optional) Display the Layer 2 mapping for the specified routing instance only.

**logical-system (all | logical-system-name)**— (Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level** view

**Related Documentation**

- [Layer 2 Mapping for IS-IS on page 281](#)
- [layer2-map on page 507](#)
- [Example: Configuring Layer 2 Mapping for IS-IS on page 282](#)

**List of Sample Output** [show isis layer2-map on page 690](#)

**Output Fields** [Table 21 on page 687](#) describes the output fields for the **show isis layer2-map** command. Output fields are listed in the approximate order in which they appear.

*Table 22: show isis layer2-map Output Fields*

| Field Name   | Field Description                   |
|--------------|-------------------------------------|
| Interface    | The interface name of the next hop. |
| IP address   | IP address of the next hop.         |
| IPv4 records | Total number of IPv4 records.       |
| IPv6 records | Total number of IPv6 records.       |

Table 22: show isis layer2-map Output Fields (continued)

| Field Name     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SNPA</b>    | The subnetwork point of attachment (SNPA) indicates the data link address of the next hop.                                                                                                                                                                                                                                                                                                                                            |
| <b>State</b>   | State of the next hop. This field can have one of the following values: <ul style="list-style-type: none"> <li>• <b>Delete</b>—The specified entry is deleted.</li> <li>• <b>Disabled</b>—The Layer 2 mapping is disabled.</li> <li>• <b>Rexmit</b>—This additional state is displayed along with other states for entries that need to be retransmitted</li> <li>• <b>Sent</b>—The entry was sent or added to the kernel.</li> </ul> |
| <b>Refresh</b> | Time in seconds before the next hop is refreshed.                                                                                                                                                                                                                                                                                                                                                                                     |

## Sample Output

### show isis layer2-map

```

user@host> show isis layer2-map logical-system all

logical-system: r2
Layer2 mapping database for instance master

IP Address                    Interface SNPA                Refresh State
12.0.0.1                      1t-1/2/0.21 b0:c6:9a:2c:d8:bc 00:14:34
Sent

    IPv4 records: 1
    IPv6 records: 0

-----

logical-system: r1
Layer2 mapping database for instance master

IP Address                    Interface SNPA                Refresh State
12.0.0.2                      1t-1/2/0.12 b0:c6:9a:2c:d8:bd 00:14:34
Sent

    IPv4 records: 1
    IPv6 records: 0

```

## show isis overview

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <pre>show isis overview &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                       |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis overview &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>                        | <p>Command introduced in Junos OS Release 8.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                   |
| <b>Description</b>                                | Display IS-IS overview information.                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                    | <p><b>none</b>—Display standard overview information about IS-IS for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display overview information for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>                      | <a href="#">show isis overview on page 693</a>                                                                                                                                                                                                                                                                                                                                      |
| <b>Output Fields</b>                              | <a href="#">Table 23 on page 691</a> lists the output fields for the <b>show isis overview</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                     |

Table 23: show isis overview Output Fields

| Field Name         | Field Description                                                  |
|--------------------|--------------------------------------------------------------------|
| Hostname           | Name of the router.                                                |
| Sysid              | Part of the ISO address of the routing device.                     |
| Areaid             | The area number of the routing device.                             |
| Instance           | IS-IS routing instance.                                            |
| Router ID          | Router ID of the routing device.                                   |
| Adjacency holddown | Adjacency holddown capability: <b>enabled</b> or <b>disabled</b> . |

Table 23: show isis overview Output Fields (continued)

| Field Name                        | Field Description                                                                                                        |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Maximum Areas                     | Maximum number of IS-IS areas advertised by the routing device.                                                          |
| LSP life time                     | Lifetime of the link-state PDU, in seconds.                                                                              |
| Filter low life time LSPs up to   | LSPs with a lifetime lower than this value are filtered out.                                                             |
| Attached bit evaluation           | Attached bit capability: <b>enabled</b> or <b>disabled</b> .                                                             |
| SPF delay                         | Delay before performing consecutive shortest-path-first (SPF) calculations.                                              |
| SPF holddown                      | Delay before performing additional SPF calculations after the maximum number of consecutive SPF calculations is reached. |
| SPF rapid runs                    | Maximum number of SPF calculations that can be performed in succession before the holddown timer begins.                 |
| Overload bit at startup is set    | Overload bit capability is enabled.                                                                                      |
| Overload high metrics             | Overload high metrics capability: <b>enabled</b> or <b>disabled</b> .                                                    |
| Allow internal prefix overloading | Allow internal prefixes to be advertised with high metric: <b>enabled</b> or <b>disabled</b>                             |
| Allow external prefix overloading | Allow external prefixes to be advertised with high metric: <b>enabled</b> or <b>disabled</b>                             |
| Overload timeout                  | Time period after which overload is reset and the time that remains before the timer is set to expire.                   |
| Traffic engineering               | Traffic engineering capability: <b>enabled</b> or <b>disabled</b> .                                                      |
| Restart                           | Graceful restart capability: <b>enabled</b> or <b>disabled</b> .                                                         |
| Restart duration                  | Time period for complete reacquisition of IS-IS neighbors.                                                               |
| Helper mode                       | Graceful restart helper capability: <b>enabled</b> or <b>disabled</b> .                                                  |
| Level                             | IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 information</li> <li>• 2—Level 2 information</li> </ul>  |
| IPv4 is enabled                   | IP Protocol version 4 capability is enabled.                                                                             |
| IPv6 is enabled                   | IP Protocol version 6 capability is enabled.                                                                             |



Table 23: show isis overview Output Fields (continued)

| Field Name                    | Field Description                                                                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Micro-loop avoidance          | Micro-loop avoidance is enabled. Generally adjacent nodes converge faster than neighboring nodes causing traffic to loop. A route convergence delay is configured to avoid such micro loops. |
| Internal route preference     | Preference value of internal routes.                                                                                                                                                         |
| External route preference     | Preference value of external routes.                                                                                                                                                         |
| Prefix export limit           | Number of prefixes allowed to be exported, as configured by the <code>prefix-export-limit</code> statement.                                                                                  |
| Prefix export count           | Number of prefixes exported.                                                                                                                                                                 |
| Wide area metrics are enabled | Wide area metrics capability is enabled.                                                                                                                                                     |
| Narrow metrics are enabled    | Narrow metrics capability is enabled.                                                                                                                                                        |
| Adjacency holddown is active  | IS-IS adjacencies come up one after another when adjacency holddown is enabled.                                                                                                              |

## Sample Output

### show isis overview

```

user@host> show isis overview
Instance: master
  Router ID: 10.255.107.183
  Hostname: pro-bng3-a
  Sysid: 0192.0168.0001
  Areaid: 49.0002
  Adjacency holddown: enabled
  Maximum Areas: 3
  LSP life time: 1200
  Filter low life time LSPs up to: 300
  Attached bit evaluation: enabled
  SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
  Overload bit at startup is set
    Overload high metrics: disabled
    Allow route leaking: disabled
    Allow internal prefix overloading: enabled
    Allow external prefix overloading: enabled
    Overload timeout: 60 sec
  IPv4 is enabled, IPv6 is enabled
Micro-loop avoidance: Enabled
  Method: Route Convergence Delay, Route convergence delay: 5000 msec
Traffic engineering: enabled
Restart: Disabled
  Helper mode: Enabled
Level 1

```

```

Internal route preference: 15
External route preference: 160
Wide metrics are enabled, Narrow metrics are enabled
Adjacency holddown is active
Level 2
Internal route preference: 18
External route preference: 165
Prefix export limit: 5, Prefix export count: 5
Wide metrics are enabled
Adjacency holddown is active

```

user@host> show isis overview logical-system R2

```

Instance: master
Router ID: 192.168.0.2
Hostname: pro-bng3-a-R2
Sysid: 0192.0168.0002
Areaid: 49.0002
Adjacency holddown: enabled
Maximum Areas: 3
LSP life time: 1200
Attached bit evaluation: enabled
SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
IPv4 is enabled, IPv6 is enabled
Traffic engineering: enabled
Restart: Disabled
  Helper mode: Enabled
Level 1
  Internal route preference: 15
  External route preference: 160
  Prefix export count: 0
  Wide metrics are enabled, Narrow metrics are enabled
Level 2
  Internal route preference: 18
  External route preference: 165
  Prefix export count: 0
  Wide metrics are enabled, Narrow metrics are enabled

```

user@host> show isis overview logical-system R3

```

Instance: master
Router ID: 192.168.0.3
Hostname: pro-bng3-a-R3
Sysid: 0192.0168.0003
Areaid: 49.0002
Adjacency holddown: enabled
Maximum Areas: 3
LSP life time: 1200
Attached bit evaluation: enabled
SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
IPv4 is enabled, IPv6 is enabled
Traffic engineering: enabled
Restart: Disabled
  Helper mode: Enabled
Level 1
  Internal route preference: 15
  External route preference: 160
  Prefix export count: 0
  Wide metrics are enabled, Narrow metrics are enabled
Level 2

```

```
Internal route preference: 18  
External route preference: 165  
Prefix export count: 0  
Wide metrics are enabled, Narrow metrics are enabled
```

## show isis purge log

**Syntax** `show isis purge log`  
`<instance instance-name>`  
`<level level>`  
`<logical-system (all | logical-system-name)>`

**Release Information** Command introduced in Junos OS Release 16.2R1 for the MX Series and PTX Series.

**Description** Displays the purge log history received from adjacent devices. The purge log can include the type, length and value (TLV) details and the Intermediate System (IS) identification. Use this command to identify the purge originator and view other details of recent purges. You can display the last 50 entries in the IS-IS purge log and filter the log history based on the IS-IS level or by routing instance.

**Options** **none**—Display purge log of all routing instances.

**instance *instance-name***—(Optional) Display purge log of the specified routing instance.

**level *level***—(Optional) Display purge log of IS-IS routers that belong to the specified level.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level** view

**Related Documentation**

- [purge-originator on page 567](#)

**List of Sample Output** [show isis purge log on page 697](#)

**Output Fields** [Table 24 on page 696](#) describes the output fields for the **show isis purge log** command. Output fields are listed in the approximate order in which they appear.

*Table 24: show isis purge log Output Fields*

| Field Name  | Field Description                                                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IS-IS Level | <p>Level:</p> <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> <p>An exclamation point (!) preceding the level number indicates that the adjacency is missing an IP address.</p> |

Table 24: show isis purge log Output Fields (continued)

| Field Name | Field Description                                                     |
|------------|-----------------------------------------------------------------------|
| Time       | Date and time in hours, minutes, and seconds when the purge occurred. |
| LSP Name   | Name of the LSP where the purge occurred                              |
| Originator | Source of the purge                                                   |
| Received   | Router that received the purge instruction                            |

## Sample Output

show isis purge log

```
user@host> show isis purge log
```

```
IS-IS level Level: 1 Purge log:
```

| Time               | LSP Name        | Originator | Received       |
|--------------------|-----------------|------------|----------------|
| Wed Aug 5 17:52:32 | VMX_R5_re.00-00 | VMX_R6_re  | VMX_R4_re      |
| Wed Aug 5 17:52:32 | VMX_R5_re.02-00 | VMX_R6_re  | VMX_R4_re      |
| Wed Aug 5 17:52:32 | VMX_R2_re.00-00 | VMX_R6_re  | VMX_R4_re      |
| Wed Aug 5 17:52:32 | VMX_R3_re.00-00 | VMX_R6_re  | VMX_R4_re      |
| Wed Aug 5 17:52:32 | VMX_R1_re.00-00 | VMX_R6_re  | VMX_R4_re      |
| Wed Aug 5 17:52:32 | VMX_R6_re.00-00 | VMX_R6_re  | 0000.0000.0000 |
| Wed Aug 5 17:52:45 | VMX_R6_re.00-00 | VMX_R3_re  | VMX_R3_re      |
| Wed Aug 5 17:52:45 | VMX_R6_re.00-00 | VMX_R3_re  | VMX_R3_re      |
| Wed Aug 5 17:52:45 | VMX_R5_re.00-00 | VMX_R3_re  | VMX_R3_re      |
| Wed Aug 5 17:52:45 | VMX_R5_re.02-00 | VMX_R3_re  | VMX_R3_re      |
| Wed Aug 5 17:52:45 | VMX_R2_re.00-00 | VMX_R3_re  | VMX_R3_re      |
| Wed Aug 5 17:52:45 | VMX_R2_re.02-00 | VMX_R3_re  | VMX_R3_re      |

## show isis route

**List of Syntax**    [Syntax on page 698](#)  
[Syntax \(EX Series Switches and QFX Series\) on page 698](#)

**Syntax**

```
show isis route
<destination>
[inet | inet6]
[instance instance-name]
[logical-system (all | logical-system-name)]
[topology (ipv4-multicast | ipv6-multicast | ipv6-unicast | unicast)]
```

**Syntax (EX Series Switches and QFX Series)**

```
show isis route
<destination>
[inet | inet6]
[instance instance-name]
[topology (ipv4-multicast | ipv6-multicast | ipv6-unicast | unicast)]
```

**Release Information**    Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 12.1 for the QFX Series.  
 Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description**    Display the routes in the IS-IS routing table.

**Options**    **none**—Display all routes in the IS-IS routing table for all supported address families for all routing instances.

***destination***—(Optional) Destination address for the route.

**inet | inet6**—(Optional) Display inet (IPv4) or inet6 (IPv6) routes, respectively.

**instance *instance-name***—(Optional) Display routes for the specified routing instance only.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**topology (ipv4-multicast | ipv6-multicast | ipv6-unicast | unicast)**—(Optional) Display routes for the specified topology only, or use unicast to display information, if available, for both IPv4 and IPv6 unicast topologies.

**Required Privilege Level**    view

**List of Sample Output**    [show isis route logical-system on page 699](#)  
[show isis route floodgroup on page 700](#)  
[show isis route \(CLNS\) on page 700](#)

[show isis route on page 700](#)

**Output Fields** [Table 25 on page 699](#) describes the output fields for the **show isis route** command. Output fields are listed in the approximate order in which they appear.

*Table 25: show isis route Output Fields*

| Field Name             | Field Description                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current version</b> | Number of the current version of the IS-IS routing table.                                                                                  |
| <b>L1</b>              | Version of Level 1 SPF that was run.                                                                                                       |
| <b>L2</b>              | Version of Level 2 SPF that was run.                                                                                                       |
| <b>Prefix or Label</b> | Destination of the route.                                                                                                                  |
| <b>L</b>               | IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> |
| <b>Version</b>         | Version of SPF that generated the route.                                                                                                   |
| <b>Metric</b>          | Metric value associated with the route.                                                                                                    |
| <b>Type</b>            | Metric type: <b>int</b> (internal) or <b>ext</b> (external).                                                                               |
| <b>Interface</b>       | Interface to the next hop.                                                                                                                 |
| <b>Via</b>             | System identifier of the next hop, displayed as a name if possible.                                                                        |
| <b>ISO Routes</b>      | ISO routing table entries.                                                                                                                 |
| <b>snpa</b>            | MAC address.                                                                                                                               |

## Sample Output

### show isis route logical-system

```
user@host> show isis route logical-system ls1
```

```
IS-IS routing table           Current version: L1: 8 L2: 11
Prefix      L Version Metric Type Interface  Via
10.9.7.0/30  2    11    20 int  gr-0/2/0.0  h
10.9.201.1/32 2    11    60 int  gr-0/2/0.0  h
IPv6 Unicast IS-IS routing table   Current version: L1: 9 L2: 11
Prefix      L Version Metric Type Interface  Via
8009:3::a09:3200/126 2    11    20 int  gr-0/2/0.0  h
```

## show isis route floodgroup

```
user@R2> show isis route floodgroup 49.0001
```

```
IS-IS routing table          Current version: L1: 14 L2: 27
IPv4/IPv6 Routes
-----
Prefix          L Version  Metric Type Interface    NH   Via
  Backup Score
0.0.0.0/0        1      14      10 int  ge-0/0/8.0      IPV4 R1
81.3.3.3/32      1      14      10 int  ge-0/0/8.0      IPV4 R1
128.220.17.202/32 1      14      10 int  ge-0/0/8.0      IPV4 R1
```

## show isis route (CLNS)

```
user@host> show isis route
```

```
IS-IS routing table          Current version: L1: 10 L2: 8
IPv4/IPv6 Routes
Prefix          L Version  Metric Type Interface    Via
0.0.0.0/0        1      10      10 int  fe-0/0/1.0      ISIS.0
ISO Routes
Prefix L   Version  Metric Type Interface    Via    snpa
0/0
      1      10      10 int  fe-0/0/1.0      isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001/104
      1      10      0 int
47.0005.80ff.f800.0000.0108.0001.1921.6800.4001/152
      1      10      10 int  fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001.1921.6800.4002/152
      1      10      20 int  fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0002/104
      1      10      0 int
47.0005.80ff.f800.0000.0108.0002.1921.6800.4001/152
      1      10      10 int  fe-0/0/1.0 isis.0 0:12:0:34:0:56
```

## show isis route

```
user@host> show isis route
```

```
IS-IS routing table          Current version: L1: 4 L2: 13
IPv4/IPv6 Routes
-----
Prefix          L   Version  Metric Type Interface    NH   Via
10.255.71.52/32  2    13      10   int  ae0.0              IPV4 camaro
10.255.71.238/32  2    13      20   int  so-6/0/0.0        IPV4 olympic
                  as0.0              IPV4 glacier
10.255.71.239/32  2    13      20   int  so-6/0/0.0        IPV4 olympic
                  ae0.0              IPV4 camaro
10.255.71.242/32  2    13      10   int  as0.0              IPV4 glacier
10.255.71.243/32  2    13      10   int  so-6/0/0.0        IPV4 olympic
12.13.0.0/30      2    13      20   int  so-6/0/0.0        IPV4 olympic
```



|                         |   |    |    |     |            |              |
|-------------------------|---|----|----|-----|------------|--------------|
| 12.15.0.0/30            | 2 | 13 | 20 | int | so-6/0/0.0 | IPv4 olympic |
| 13.15.0.0/30            | 2 | 13 | 30 | int | ae0.0      | IPv4 camaro  |
|                         |   |    |    |     | so-6/0/0.0 | IPv4 olympic |
|                         |   |    |    |     | as0.0      | IPv4 glacier |
| 13.16.0.0/30            | 2 | 13 | 25 | int | as0.0      | IPv4 glacier |
| 14.15.0.0/30            | 2 | 13 | 20 | int | ae0.0      | IPv4 camaro  |
| 192.2.1.0/30            | 2 | 13 | 30 | int | so-6/0/0.0 | IPv4 olympic |
|                         |   |    |    |     | as0.0      | IPv4 glacier |
| 1eee::/64               | 2 | 13 | 30 | int | so-6/0/0.0 | IPv6 olympic |
|                         |   |    |    |     | as0.0      | IPv6 glacier |
| abcd::10:255:71:52/128  | 2 | 13 | 10 | int | ae0.0      | IPv6 camaro  |
| abcd::10:255:71:238/128 | 2 | 13 | 20 | int | so-6/0/0.0 | IPv6 olympic |
|                         |   |    |    |     | as0.0      | IPv6 glacier |
| abcd::10:255:71:239/128 | 2 | 13 | 20 | int | so-6/0/0.0 | IPv6 olympic |
|                         |   |    |    |     | ae0.0      | IPv6 camaro  |
| abcd::10:255:71:242/128 | 2 | 13 | 10 | int | as0.0      | IPv6 glacier |
| abcd::10:255:71:243/128 | 2 | 13 | 10 | int | so-6/0/0.0 | IPv6 olympic |

## MPLS Routes

| Label                       | L | Version | Metric | Type | Interface   | NH   | Via            |
|-----------------------------|---|---------|--------|------|-------------|------|----------------|
| 300032 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300048 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300064 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300080 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300096 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 299920 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299936 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299952 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299968 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299984 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |

|                            |   |    |       |             |      |                |
|----------------------------|---|----|-------|-------------|------|----------------|
| 300000 /52                 | 1 | 27 | 0 int | 1t-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E) |   |    |       |             |      |                |
| 300016 /52                 | 2 | 38 | 0 int | 1t-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E) |   |    |       |             |      |                |

## show isis route download priority

**Syntax** show isis route download priority  
 <destination>  
 <floodgroup floodgroup>  
 <inet | inet6>  
 <instance instance-name>  
 <iso>  
 <logical-system (all | logical-system-name)>  
 <nexthop interface | neighbor>  
 <topology (ipv4-multicast | ipv6-multicast | ipv6-unicast | unicast)>

**Release Information** Command introduced in Junos OS Release 17.1.

**Description** Display the routes in the IS-IS routing table in the sequence of set priority. IS-IS routes set with a high priority are displayed first followed by medium and low priority prefixes. Internet Service Providers (ISP) can configure route priority to ensure faster convergence for important customers.

Configure a routing policy to assign a priority to IS-IS routes. These routes are updated in the routing table in the order of their priority. In the event of an IS-IS topology change, high priority prefixes are updated in the routing table first followed by medium and then low priority prefixes.

**Options** **none**—Display all routes in the IS-IS routing table in order of their priority for all supported address families for all routing instances.

**destination**—(Optional) Destination address for the route for which you want to display the priority.

**floodgroup floodgroup**—(Optional) Display the priority of routes that belong to a specific floodgroup.

**inet | inet6**—(Optional) Display IS-IS route priority for inet (IPv4) or inet6 (IPv6) routes, respectively.

**instance instance-name**—(Optional) Display route priority for the specified routing instance only.

**iso**—(Optional) Display the priority of Connectionless Network Service (CLNS) routes.

**nexthop interface | neighbor**—Display the priority of routes reachable through a specific next hop.

**logical-system (all | logical-system-name)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**topology (ipv4-multicast | ipv6-multicast | ipv6-unicast | unicast)**—(Optional) Display routes in order of the set priority for the specified topology only, or use unicast to display information, if available, for both IPv4 and IPv6 unicast topologies.

**Required Privilege Level** view

**Related Documentation**

- [show isis route on page 698](#)
- [Example: Configuring a Routing Policy to Prioritize IS-IS Routes on page 115](#)
- [import \(Protocols IS-IS\) on page 491](#)

**List of Sample Output** [show isis route download-priority on page 704](#)

**Output Fields** [Table 25 on page 699](#) describes the output fields for the **show isis route** command. Output fields are listed in the approximate order in which they appear.

*Table 26: show isis route Output Fields*

| Field Name      | Field Description                                                                                                                          |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Current version | Number of the current version of the IS-IS routing table.                                                                                  |
| L1              | Version of Level 1 SPF that was run.                                                                                                       |
| L2              | Version of Level 2 SPF that was run.                                                                                                       |
| Prefix or Label | Destination of the route.                                                                                                                  |
| L               | IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> |
| Version         | Version of SPF that generated the route.                                                                                                   |
| Metric          | Metric value associated with the route.                                                                                                    |
| Type            | Metric type: <b>int</b> (internal) or <b>ext</b> (external).                                                                               |
| Interface       | Interface to the next hop.                                                                                                                 |
| Via             | System identifier of the next hop, displayed as a name if possible.                                                                        |
| NH              | Next hop address type: <b>IPv4</b> , <b>IPv6</b> , or <b>MPLS</b> .                                                                        |
| Backup Score    | Count of available backup paths.                                                                                                           |

## Sample Output

[show isis route download-priority](#)

```
user@host> show isis route download-priority
```

```

IS-IS routing table                      Current version: L1: 0 L2: 122
IPv4/IPv6 Routes
-----
Prefix          L Version  Metric Type Interface      NH   Via
  Backup Score
3.3.3.3/32      2    122    20 int ge-1/0/1.0  IPV4 R2
                ge-5/0/9.0  IPV4 R2
2.2.2.2/32      2    122    10 int ge-1/0/1.0  IPV4 R2
                ge-5/0/9.0  IPV4 R2
198.1.1.0/24    2    122    20 int ge-1/0/1.0  IPV4 R2
                ge-5/0/9.0  IPV4 R2
198.1.2.0/24    2    122    20 int ge-1/0/1.0  IPV4 R2
                ge-5/0/9.0  IPV4 R2
2001:db8:2:2::1/128 2    122    10 int ge-1/0/1.0  IPV6 R2
                ge-5/0/9.0  IPV6 R2
2001:db8:3:3::3/128 2    122    20 int ge-1/0/1.0  IPV6 R2
                ge-5/0/9.0  IPV6 R2
2001:db8:1:1::/64  2    122    20 int ge-1/0/1.0  IPV6 R2
                ge-5/0/9.0  IPV6 R2
2001:db8:1:2::/64  2    122    20 int ge-1/0/1.0  IPV6 R2
                ge-5/0/9.0  IPV6 R2

```

## show isis spf

---

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 706</a><br><a href="#">Syntax (EX Series Switches) on page 706</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax</b>                      | <pre>show isis spf (brief   log   results) &lt;instance <i>instance-name</i>&gt; &lt;level (1   2)&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast) &gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switches)</b> | <pre>show isis spf (brief   log   results) &lt;instance <i>instance-name</i>&gt; &lt;level (1   2)&gt; &lt;topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast) &gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                 | Display information about IS-IS shortest-path-first (SPF) calculations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                     | <p><b>brief</b>—Display an overview of SPF calculations.</p> <p><b>log</b>—Display the log of SPF calculations.</p> <p><b>results</b>—Display the results of SPF calculations.</p> <p><b>instance <i>instance instance-name</i></b>—(Optional) Display SPF calculations for the specified routing instance.</p> <p><b>level (1   2)</b>—(Optional) Display SPF calculations for the specified IS-IS level.</p> <p><b>log</b>—Display the log of SPF calculations.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>results</b>—Display the results of SPF calculations.</p> <p><b>topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)</b>—(Optional) Display SPF calculations for the specified topology only.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>       | <a href="#">show isis spf log on page 707</a><br><a href="#">show isis spf results logical-system on page 708</a><br><a href="#">show isis spf results (CLNS) on page 709</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Output Fields** Table 27 on page 707 describes the output fields for the **show isis spf** command. Output fields are listed in the approximate order in which they appear.

*Table 27: show isis spf Output Fields*

| Field Name     | Field Description                                                                       |
|----------------|-----------------------------------------------------------------------------------------|
| Node           | System ID of a node.                                                                    |
| Metric         | Metric to the node.                                                                     |
| Interface      | Interface of the next hop.                                                              |
| Via            | System ID of the next hop.                                                              |
| SNPA           | Subnetwork point of attachment (MAC address of the next hop).                           |
| Start time     | (log option only) Time that the SPF computation started.                                |
| Elapsed (secs) | (log option only) Length of time, in seconds, required to complete the SPF computation. |
| Count          | (log option only) Number of times the SPF was triggered.                                |
| Reason         | (log option only) Reason that the SPF computation was completed.                        |

## Sample Output

### show isis spf log

```
user@host> show isis spf log logical-system lsl
```

```
IS-IS level 1 SPF log:
Start time      Elapsed (secs) Count Reason
Fri Oct 31 12:41:18 0.000069 1 Reconfig
Fri Oct 31 12:41:18 0.000107 3 Updated LSP fix.00-00
Fri Oct 31 12:41:18 0.000050 3 Address change on so-1/2/2.0
Fri Oct 31 12:41:23 0.000033 1 Updated LSP fix.00-00
Fri Oct 31 12:41:28 0.000178 5 New adjacency scat on ge-1/1/0.0
Fri Oct 31 12:41:59 0.000060 1 Updated LSP fix.00-00
Fri Oct 31 12:42:30 0.000161 2 Multi area attachment change
Fri Oct 31 12:56:58 0.000198 1 Periodic SPF
Fri Oct 31 13:10:29 0.000209 1 Periodic SPF
IS-IS level 2 SPF log:
```

```
Start time      Elapsed (secs) Count Reason
Fri Oct 31 12:41:18 0.000035 1 Reconfig
Fri Oct 31 12:41:18 0.000047 2 Updated LSP fix.00-00
Fri Oct 31 12:41:18 0.000043 5 Address change on gr-0/2/0.0
Fri Oct 31 12:41:23 0.000022 1 Updated LSP fix.00-00
Fri Oct 31 12:41:59 0.000144 3 New adjacency h on gr-0/2/0.0
Fri Oct 31 12:42:30 0.000257 3 New LSP skag.00-00
Fri Oct 31 12:54:37 0.000195 1 Periodic SPF
Fri Oct 31 12:55:50 0.000178 1 Updated LSP fix.00-00
Fri Oct 31 12:55:55 0.000174 1 Updated LSP h.00-00
```

```

Fri Oct 31 12:55:58      0.000176    1 Updated LSP skag.00-00
Fri Oct 31 13:08:14      0.000198    1 Periodic SPF
IPv6 Unicast IS-IS level 1 SPF log:

Start time              Elapsed (secs) Count Reason
Fri Oct 31 12:41:18      0.000028    1 Reconfig
Fri Oct 31 12:41:18      0.000043    3 Updated LSP fix.00-00
Fri Oct 31 12:41:18      0.000112    4 Updated LSP fix.00-00
Fri Oct 31 12:41:23      0.000059    1 Updated LSP fix.00-00
Fri Oct 31 12:41:25      0.000041    1 Updated LSP fix.00-00
Fri Oct 31 12:41:28      0.000103    5 New adjacency scat on ge-1/1/0.0
Fri Oct 31 12:41:59      0.000040    1 Updated LSP fix.00-00
Fri Oct 31 12:42:30      0.000118    2 Multi area attachment change
Fri Oct 31 12:56:08      0.000289    1 Periodic SPF
Fri Oct 31 13:11:07      0.000214    1 Periodic SPF
IPv6 Unicast IS-IS level 2 SPF log:

Start time              Elapsed (secs) Count Reason
Fri Oct 31 12:41:18      0.000027    1 Reconfig
Fri Oct 31 12:41:18      0.000039    2 Updated LSP fix.00-00
Fri Oct 31 12:41:18      0.000049    6 Updated LSP fix.00-00
Fri Oct 31 12:41:23      0.000025    1 Updated LSP fix.00-00
Fri Oct 31 12:41:25      0.000023    1 Updated LSP fix.00-00
Fri Oct 31 12:41:59      0.000087    3 New adjacency h on gr-0/2/0.0
Fri Oct 31 12:42:30      0.000123    3 New LSP skag.00-00
Fri Oct 31 12:55:50      0.000121    1 Updated LSP fix.00-00
Fri Oct 31 12:55:55      0.000121    1 Updated LSP h.00-00
Fri Oct 31 12:55:58      0.000121    1 Updated LSP skag.00-00
Fri Oct 31 13:09:46      0.000201    1 Periodic SPF
...

```

### show isis spf results logical-system

```
user@host> show isis spf results logical-system ls1
```

IS-IS level 1 SPF results:

| Node    | Metric | Interface     | Via  | SNPA             |
|---------|--------|---------------|------|------------------|
| scat.00 | 10     | ge-1/1/0.0    | scat | 0:90:69:a6:48:9d |
|         | 20     | 10.9.1.0/30   |      |                  |
| fix.02  | 10     |               |      |                  |
| fix.00  | 0      |               |      |                  |
|         | 10     | 10.9.1.0/30   |      |                  |
|         | 10     | 10.9.5.0/30   |      |                  |
|         | 10     | 10.9.6.0/30   |      |                  |
|         | 20     | 10.9.7.0/30   |      |                  |
|         | 60     | 10.9.201.1/32 |      |                  |
| 3 nodes |        |               |      |                  |

IS-IS level 2 SPF results:

| Node    | Metric | Interface     | Via | SNPA |
|---------|--------|---------------|-----|------|
| skag.00 | 20     | gr-0/2/0.0    | h   |      |
|         | 30     | 10.9.7.0/30   |     |      |
| skag.02 | 20     | gr-0/2/0.0    | h   |      |
| h.00    | 10     | gr-0/2/0.0    | h   |      |
|         | 20     | 10.9.6.0/30   |     |      |
|         | 20     | 10.9.7.0/30   |     |      |
|         | 60     | 10.9.201.1/32 |     |      |
| fix.00  | 0      |               |     |      |
|         | 10     | 10.9.1.0/30   |     |      |
|         | 10     | 10.9.5.0/30   |     |      |



```

    10          10.9.6.0/30
4 nodes
IPv6 Unicast IS-IS level 1 SPF results:
Node      Metric  Interface      Via      SNPA
scat.00   10          ge-1/1/0.0     scat     0:90:69:a6:48:9d
          20          ge-1/1/0.0     scat     0:90:69:a6:48:9d
          20          8009:1::a09:1400/126
fix.02    10
fix.00    0
          10          8009:1::a09:1400/126
          10          8009:2::a09:1e00/126
          20          8009:3::a09:3200/126
          10          8009:4::a09:2800/126
3 nodes
IPv6 Unicast IS-IS level 2 SPF results:
Node      Metric  Interface      Via      SNPA
skag.00   20          gr-0/2/0.0     h
          30          gr-0/2/0.0     h
          30          8009:3::a09:3200/126
skag.02   20          gr-0/2/0.0     h
          20          gr-0/2/0.0     h
h.00      10          gr-0/2/0.0     h
          20          gr-0/2/0.0     h
          20          8009:3::a09:3200/126
          20          8009:4::a09:2800/126
fix.00    0
          10          8009:1::a09:1400/126
          10          8009:2::a09:1e00/126
          10          8009:4::a09:2800/126
4 nodes
Multicast IS-IS level 1 SPF results:
Node      Metric  Interface      Via      SNPA
scat.00   10          ge-1/1/0.0     scat     0:90:69:a6:48:9d
fix.02    10
fix.00    0
3 nodes
Multicast IS-IS level 2 SPF results:
Node      Metric  Interface      Via      SNPA
skag.00   20          gr-0/2/0.0     h
skag.02   20          gr-0/2/0.0     h
h.00      10          gr-0/2/0.0     h
fix.00    0
4 nodes
...

```

### show isis spf results (CLNS)

```
user@host> show isis spf results
```

```

IS-IS level 1 SPF results:
Node      Metric  Interface      Via      SNPA
skag.00 10          fe-0/0/1.0     toothache 0:12:0:34:0:56
          20          fe-0/0/1.0     toothache 0:12:0:34:0:56
          20          192.168.37.64/29
          10          1921.6800.4001
          20          1921.6800.4002

```

```

pro1-a.02      10
pro1-a.00      0
               0      10.255.245.1/32
               10     192.168.37.64/29
               0      1921.6800.4211
3 nodes

IS-IS level 2 SPF results:
Node      Metric  Interface      Via      SNPA
skag.00 10      fe-0/0/1.0     toothache 0:12:0:34:0:56
          20      fe-0/0/1.0     toothache 0:12:0:34:0:56
          20      10.255.245.1/32
          20      192.168.37.64/29
          20      47.0005.80ff.f800.0000.0109.0010/104
pro1-a.02    10
pro1-a.00    0
             0      10.255.245.1/32
             10     192.168.37.64/29
3 nodes

```

## show isis spring interface traffic-statistics

**Syntax**     show isis spring interface traffic-statistics  
                  logical-system (all | *logical-system-name*)

**Release Information**     Command introduced in Junos OS Release 17.3R1 for MX Series and PTX Series.

**Description**     Display the traffic statistics of an IS-IS SPRING link. SPRING traffic is measured to recalculate the actual available bandwidth to RSVP for traffic engineering.

**Options**     **none**— Display the traffic statistics of an IS-IS SPRING link.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level**     view

**Related Documentation**

- [auto-bandwidth on page 455](#)
- [traffic-statistics on page 590](#)
- [update-threshold-max-reservable on page 591](#)
- [clear isis spring traffic-statistics on page 610](#)
- [show auto-bandwidth on page 624](#)

**List of Sample Output**     [show isis spring interface traffic-statistics on page 711](#)

### Sample Output

show isis spring interface traffic-statistics

```
user@host> show isis spring interface traffic-statistics
```

| Interface name | Bytes      | Packets |
|----------------|------------|---------|
| ge-0/0/1.0     | 1287495    | 3000    |
| ae0.0          | 2332435435 | 10233   |

## show isis statistics

---

|                                            |                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                             | <a href="#">Syntax on page 712</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 712</a>                                                                                                                                                                                                                                         |
| Syntax                                     | <pre>show isis statistics &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                      |
| Syntax (EX Series Switches and QFX Series) | <pre>show isis statistics &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                |
| Release Information                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                   |
| Description                                | Display statistics about IS-IS traffic.                                                                                                                                                                                                                                                                                                              |
| Options                                    | <b>none</b> —Display IS-IS traffic statistics for all routing instances.<br><br><b>instance <i>instance-name</i></b> —(Optional) Display statistics for the specified routing instance.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| Required Privilege Level                   | view                                                                                                                                                                                                                                                                                                                                                 |
| Related Documentation                      | <ul style="list-style-type: none"><li>• <a href="#">clear isis statistics on page 608</a></li></ul>                                                                                                                                                                                                                                                  |
| List of Sample Output                      | <a href="#">show isis statistics on page 714</a>                                                                                                                                                                                                                                                                                                     |
| Output Fields                              | <a href="#">Table 28 on page 713</a> describes the output fields for the <b>show isis statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                |

Table 28: show isis statistics Output Fields

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDU type                    | <p>PDU type:</p> <ul style="list-style-type: none"> <li>• <b>CSNP</b>—Complete sequence number PDUs contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.</li> <li>• <b>IIH</b>—IS-IS hello packets are broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.</li> <li>• <b>LSP</b>—Link-state PDUs contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.</li> <li>• <b>PSNP</b>—Partial sequence number PDUs are sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.</li> <li>• <b>Unknown</b>—The PDU type is unknown.</li> </ul> |
| Received                    | Number of PDUs received since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Processed                   | Number of PDUs received less the number dropped.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Drops                       | Number of PDUs dropped.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Sent                        | Number of PDUs transmitted since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Rexmit                      | Number of PDUs retransmitted since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Total packets received/sent | Total number of PDUs received and transmitted since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SNP queue length            | Number of CSPN and PSNP packets currently waiting in the queue for processing. This value is almost always 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| LSP queue length            | Number of link-state PDUs waiting in the queue for processing. This value is almost always 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SPF runs                    | Number of shortest-path-first (SPF) calculations that have been performed. If this number is incrementing rapidly, it indicates that the network is unstable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Fragments rebuilt           | Number of link-state PDU fragments that the local system has computed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| LSP regenerations           | Number of link-state PDUs that have been regenerated. A link-state PDU is regenerated when it is nearing the end of its lifetime and it has not changed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Purges initiated            | Number of purges that the system initiated. A purge is initiated if the software decides that a link-state PDU must be removed from the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## Sample Output

### show isis statistics

```
user@host> show isis statistics
```

```
IS-IS statistics for merino:
```

| PDU type | Received | Processed | Drops | Sent   | Rexmit |
|----------|----------|-----------|-------|--------|--------|
| LSP      | 12227    | 12227     | 0     | 8184   | 683    |
| IIH      | 113808   | 113808    | 0     | 115817 | 0      |
| CSNP     | 198868   | 198868    | 0     | 198934 | 0      |
| PSNP     | 6985     | 6979      | 6     | 8274   | 0      |
| Unknown  | 0        | 0         | 0     | 0      | 0      |
| Totals   | 331888   | 331882    | 6     | 331209 | 683    |

```
Total packets received: 331888 Sent: 331892
```

```
SNP queue length:      0 Drops:      0  
LSP queue length:      0 Drops:      0
```

```
SPF runs:              1014  
Fragments rebuilt:     1038  
LSP regenerations:     425  
Purges initiated:      0
```

## show policy

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 715</a><br><a href="#">Syntax (EX Series Switches) on page 715</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax</b>                      | <pre>show policy &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;<i>policy-name</i>&gt; &lt;<i>statistics</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Syntax (EX Series Switches)</b> | <pre>show policy &lt;<i>policy-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>statistics</b> option introduced in Junos OS Release 16.1 for MX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                 | Display information about configured routing policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                     | <p><b>none</b>—List the names of all configured routing policies.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>policy-name</i></b>—(Optional) Show the contents of the specified policy.</p> <p><b>statistics</b>—(Optional) Use in conjunction with the <b>test policy</b> command to show the length of time (in microseconds) required to evaluate a given policy and the number of times it has been executed. This information can be used, for example, to help structure a policy so it is evaluated efficiently. Timers shown are per route; times are not cumulative. Statistics are incremented even when the router is learning (and thus evaluating) routes from peering routers.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li><a href="#">show policy damping</a></li> <li><a href="#">test policy on page 919</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>       | <a href="#">show policy on page 716</a><br><a href="#">show policy policy-name on page 716</a><br><a href="#">show policy statistics policy-name on page 716</a><br><a href="#">show policy (Multicast Scoping) on page 717</a><br><a href="#">show policy (Route Filter and source Address Filter Lists) on page 717</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Output Fields** Table 29 on page 716 lists the output fields for the **show policy** command. Output fields are listed in the approximate order in which they appear.

Table 29: *show policy* Output Fields

| Field Name         | Field Description                                                                                                                       |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <i>policy-name</i> | Name of the policy listed.                                                                                                              |
| <i>term</i>        | Name of the user-defined policy term. The term name <b>unnamed</b> is used for policy elements that occur outside of user defined terms |
| <i>from</i>        | Match condition for the policy.                                                                                                         |
| <i>then</i>        | Action for the policy.                                                                                                                  |

## Sample Output

### show policy

```
user@host> show policy
Configured policies:
__vrf-export-red-internal__
__vrf-import-red-internal__
red-export
rf-test-policy
multicast-scoping
```

### show policy policy-name

```
user@host> show policy vrf-import-red-internal
Policy vrf-import-red-internal:
  from
    203.0.113.0/28 accept
    203.0.113.32/28 accept
  then reject
```

### show policy statistics policy-name

```
user@host> show policy statistics iBGP-v4-RR-Import
Policy iBGP-v4-RR-Import:
  [1243328] Term Lab-Infra:
    from [1243328 0] proto BGP
      [28 0] route filter:
        10.11.0.0/8 orlonger
        10.13.0.0/8 orlonger
    then [28 0] accept
  [1243300] Term External:
    from [1243300 1] proto BGP
      [1243296 0] community Ext-Com1 [64496:1515 ]
      [1243296 0] prefix-list-filter Customer-Routes
      [1243296 0] aspath AS6221
      [1243296 1] route filter:
```



```

172.16.49.0/12 orlonger
172.16.50.0/12 orlonger
172.16.51.0/12 orlonger
172.16.52.0/12 orlonger
172.16.56.0/12 orlonger
172.16.60.0/12 orlonger
then [1243296 2] community + Ext-Com2 [64496:2000 ] [1243296 0] accept
[4] Term Final:
then [4 0] reject

```

### show policy (Multicast Scoping)

```
user@host> show policy multicast-scoping
```

```

Policy multicast-scoping:
  from
    multicast-scope == 8
  then
    accept

```

### show policy (Route Filter and source Address Filter Lists)

```
user@host> show policy rf-test-policy
```

```

Policy rf-test-policy:
  Term term1:
    from source-address-filter-list saf-list-1
    source-address filter:
      192.0.2.0/29 longer
      192.0.2.64/28 exact
      192.0.2.128/28 exact
      192.0.2.160/28 orlonger
  Term term2:
    from route-filter-list rf-list-1
    route filter:
      198.51.100.0/29 upto 198.51.100.0/30
      198.51.100.8/29 upto 198.51.100.8/30 accept
  Term unnamed:
    then reject

```

## show policy conditions

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                      | <pre>show policy conditions &lt;condition-name&gt; &lt;detail&gt; &lt;dynamic&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                         |
| Syntax (EX Series Switches) | <pre>show policy conditions &lt;condition-name&gt; &lt;detail&gt; &lt;dynamic&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Release Information         | <p>Command introduced in Junos OS Release 9.0.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                       |
| Description                 | <p>Display all the configured conditions as well as the routing tables with which the configuration manager is interacting. If the <b>detail</b> keyword is included, the output also displays dependent routes for each condition.</p>                                                                                                                                                                                                                                                                            |
| Options                     | <p><b>none</b>—Display all configured conditions and associated routing tables.</p> <p><b>condition-name</b>—(Optional) Display information about the specified condition only.</p> <p><b>detail</b>—(Optional) Display the specified level of output.</p> <p><b>dynamic</b>—(Optional) Display information about the conditions in the dynamic database.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| Required Privilege Level    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| List of Sample Output       | <a href="#">show policy conditions detail on page 719</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Output Fields               | <p><a href="#">Table 30 on page 718</a> lists the output fields for the <b>show policy conditions</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                         |

Table 30: show policy conditions Output Fields

| Field Name | Field Description                                                                                                                           | Level of Output |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Condition  | Name of configured condition.                                                                                                               | All levels      |
| event      | Condition type. If the <b>if-route-exists</b> option is configured, the event type is:<br>Existence of a route in a specific routing table. | All levels      |

Table 30: show policy conditions Output Fields (continued)

| Field Name                        | Field Description                                                                                                         | Level of Output |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Dependent routes</b>           | List of routes dependent on the condition, along with the latest generation number.                                       | <b>detail</b>   |
| <b>Condition tables</b>           | List of routing tables associated with the condition, along with the latest generation number and number of dependencies. | All levels      |
| <b>If-route-exists conditions</b> | List of conditions configured to look for a route in the specified table.                                                 | All levels      |

## Sample Output

### show policy conditions detail

```

user@host> show policy conditions detail

Configured conditions:
Condition cond1, event: Existence of a route in a specific routing table
Dependent routes:
  172.16.4.4/32, generation 3
  6.6.6.6/32, generation 3
  10.10.10.10/32, generation 3

Condition cond2, event: Existence of a route in a specific routing table
Dependent routes:
None

Condition tables:
Table inet.0, generation 4, dependencies 3, If-route-exists conditions: cond1
(static) cond2 (static)

```

## show route

**List of Syntax**    [Syntax on page 720](#)  
                          [Syntax \(EX Series Switches\) on page 720](#)

**Syntax**

```
show route
<all>
<destination-prefix>
<logical-system (all | logical-system-name)>
<private>
<te-ipv4-prefix-ip te-ipv4-prefix-ip>
<te-ipv4-prefix-node-ip te-ipv4-prefix-node-ip>
<te-ipv4-prefix-node-iso te-ipv4-prefix-node-iso>
```

**Syntax (EX Series Switches)**

```
show route
<all>
<destination-prefix>
<private>
```

**Release Information**

Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Option **private** introduced in Junos OS Release 9.5.  
 Option **private** introduced in Junos OS Release 9.5 for EX Series switches.  
 Command introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management.  
 Option **display-client-data** introduced in Junos OS Release 16.2R1 on MX80, MX104, MX240, MX480, MX960, MX2010, MX2020, vMX Series routers.  
 Options **te-ipv4-prefix-ip**, **te-ipv4-prefix-node-ip**, and **te-ipv4-prefix-node-iso** introduced in Junos OS Release 17.2R1 on MX Series and PTX Series.

**Description**    Display the active entries in the routing tables.

**Options**

**none**—Display brief information about all active entries in the routing tables.

**all**—(Optional) Display information about all routing tables, including private, or internal, routing tables.

**destination-prefix**—(Optional) Display active entries for the specified address or range of addresses.

**logical-system (all | logical-system-name)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**private**—(Optional) Display information only about all private, or internal, routing tables.

**display-client-data** —(Optional) Display client id and cookie information for routes installed by the routing protocol process client applications.

**te-ipv4-prefix-ip** *te-ipv4-prefix-ip*—(Optional) Display IPv4 address of the traffic-engineering prefix, without the mask length if present in the routing table.

**te-ipv4-prefix-node-ip** *te-ipv4-prefix-node-ip*—(Optional) Display all prefixes that have originated from the traffic-engineering node. You can filter IPv4 node addresses from the traffic-engineered routes in the **lsdist.0** table.

**te-ipv4-prefix-node-iso** *te-ipv4-prefix-node-iso*—(Optional) Display all prefixes that have originated from the traffic-engineering node. You can filter IPv4 routes with the specified ISO circuit ID from the **lsdist.0** table.

**Required Privilege Level** view

- Related Documentation**
- [Understanding IS-IS Configuration on page 13](#)
  - [Example: Configuring IS-IS on page 14](#)
  - [Examples: Configuring Internal BGP Peering](#)
  - [Examples: Configuring External BGP Peering](#)
  - [Examples: Configuring OSPF Routing Policy](#)
  - [Verifying and Managing Junos OS Enhanced Subscriber Management](#)

- List of Sample Output**
- [show route on page 724](#)
  - [show route \(VPN\) on page 725](#)
  - [show route \(with Destination Prefix\) on page 725](#)
  - [show route destination-prefix detail on page 725](#)
  - [show route extensive on page 725](#)
  - [show route extensive \( ECMP\) on page 726](#)
  - [show route extensive \(Multipath Resolution\) on page 726](#)
  - [show route \(Enhanced Subscriber Management\) on page 731](#)
  - [show route \(IPv6 Flow Specification\) on page 731](#)
  - [show route display-client-data detail on page 731](#)
  - [show route te-ipv4-prefix-ip on page 732](#)
  - [show route te-ipv4-prefix-ip extensive on page 733](#)
  - [show route te-ipv4-prefix-node-iso on page 735](#)
  - [show route te-ipv4-prefix-node-iso extensive on page 736](#)
  - [show route te-ipv4-prefix-node-iso detail on page 738](#)

**Output Fields** [Table 31 on page 721](#) describes the output fields for the **show route** command. Output fields are listed in the approximate order in which they appear.

*Table 31: show route Output Fields*

| Field Name                | Field Description                                |
|---------------------------|--------------------------------------------------|
| <i>routing-table-name</i> | Name of the routing table (for example, inet.0). |

Table 31: show route Output Fields (continued)

| Field Name                                        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>number destinations</i>                        | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <i>number routes</i>                              | <p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active).</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive). A holddown route was once the active route and is no longer the active route. The route is in the holddown state because a protocol still has interest in the route, meaning that the interest bit is set. A protocol might have its interest bit set on the previously active route because the protocol is still advertising the route. The route will be deleted after all protocols withdraw their advertisement of the route and remove their interest bit. A persistent holddown state often means that the interested protocol is not releasing its interest bit properly.</li> </ul> <p>However, if you have configured advertisement of multiple routes (with the <b>add-path</b> or <b>advertise-inactive</b> statement), the holddown bit is most likely set because BGP is advertising the route as an active route. In this case, you can ignore the holddown state because nothing is wrong.</p> <ul style="list-style-type: none"> <li>• <b>hidden</b> (routes that are not used because of a routing policy).</li> </ul> |
| <i>destination-prefix</i>                         | <p>Route destination (for example:10.0.0.1/24). Sometimes the route information is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only. For example, 10.1.1.195:NoCtrlWord:1:1:Local/96): <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>                                                                                                                                                                      |
| [ <i>protocol, preference</i> ]                   | <p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>                                                                                                                                                                                                                               |
| <i>weeks:days</i><br><i>hours:minutes:seconds</i> | How long the route been known (for example, <b>2w4d 13:11:14</b> , or 2 weeks, 4 days, 13 hours, 11 minutes, and 14 seconds).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table 31: show route Output Fields (continued)

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>metric</b>           | Cost value of the indicated route. For routes within an AS, the cost is determined by the IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>localpref</b>        | Local preference value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>from</b>             | Interface from which the route was received.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>AS path</b>          | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> |
| <b>encapsulated</b>     | Extended next-hop encoding capability enabled for the specified BGP community for routing IPv4 traffic over IPv6 tunnels. When BGP receives routes without the tunnel community, IPv4-Over IPv6 tunnels are not created and BGP routes are resolved without encapsulation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Route Labels</b>     | Stack of labels carried in the BGP route update.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>validation-state</b> | <p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>to</b>               | <p>Next hop to the destination. An angle bracket (&gt;) indicates that the route is the selected route.</p> <p>If the destination is <b>Discard</b>, traffic is dropped.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

Table 31: show route Output Fields (continued)

| Field Name      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| via             | <p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li><b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li><b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> <li><b>lsp-path-name</b>—Name of the LSP used to reach the next hop.</li> <li><b>label-action</b>—MPLS label and operation occurring at the next hop. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label). For VPNs, expect to see multiple <b>push</b> operations, corresponding to the inner and outer labels required for VPN routes (in the case of a direct PE-to-PE connection, the VPN route would have the inner label push only).</li> </ul> |
| Private unicast | (Enhanced subscriber management for MX Series routers) Indicates that an access-internal route is managed by enhanced subscriber management. By contrast, access-internal routes <i>not</i> managed by enhanced subscriber management are displayed with associated next-hop and media access control (MAC) address information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| balance         | Distribution of the load based on the underlying operational interface bandwidth for equal-cost multipaths (ECMP) across the nexthop gateways in percentages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## Sample Output

### show route

```

user@host> show route

inet.0: 11 destinations, 12 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:65500:1:10.0.0.20/240
    *[MVPN/70] 19:53:41, metric2 1
    Indirect
1:65500:1:10.0.0.40/240
    *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
    AS path: I
    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
    [BGP/170] 19:53:26, localpref 100, from 10.0.0.33
    AS path: I
    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
1:65500:1:10.0.0.60/240
    *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
    AS path: I
    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
    [BGP/170] 19:53:25, localpref 100, from 10.0.0.33
    AS path: I
    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF

```



### show route (VPN)

The following sample output shows a VPN route with composite next hops enabled. The first **Push** operation corresponds to the outer label. The second **Push** operation corresponds to the inner label.

```
user@host> show route 192.0.2.0
```

```
13979:665001.inet.0: 871 destinations, 3556 routes (871 active, 0 holddown, 0 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

```
192.0.2.0/24      [BGP/170] 00:28:32, localpref 100, from 10.9.9.160
                  AS path: 13980 ?, validation-state: unverified
                  > to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
                  [BGP/170] 00:28:28, localpref 100, from 10.9.9.169
                  AS path: 13980 ?, validation-state: unverified
                  > to 10.100.0.42 via ae2.0, Push 126016, Push 300368(top)
                  #[Multipath/255] 00:28:28, metric2 102
                  > to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
                  to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
```

### show route (with Destination Prefix)

```
user@host> show route 192.168.0.0/12
```

```
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

```
192.168.0.0/12    *[Static/5] 2w4d 12:54:27
                  > to 192.168.167.254 via fxp0.0
```

### show route destination-prefix detail

```
user@host> show route 198.51.100.0 detail
```

```
inet.0: 15 destinations, 20 routes (15 active, 0 holddown, 0 hidden)
```

```
198.51.100.0/24 (2 entries, 2 announced)
```

```
*BGP Preference: 170/-101
```

```
...
```

```
BGP-Static Preference: 4294967292
```

```
Next hop type: Discard
```

```
Address: 0x9041ae4
```

```
Next-hop reference count: 2
```

```
State: <NoReadvrt Int Ext AlwaysFlash>
```

```
Inactive reason: Route Preference
```

```
Local AS: 200
```

```
Age: 4d 1:40:40
```

```
Validation State: unverified
```

```
Task: RT
```

```
Announcement bits (1): 2-BGP_RT_Background
```

```
AS path: 4 5 6 I
```

### show route extensive

```
user@host> show route extensive
```

```

v1.mvpn.0: 5 destinations, 8 routes (5 active, 1 holddown, 0 hidden)
1:65500:1:10.0.0.40/240 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    PMSI: Flags 0x0: Label[0:0:0]: PIM-SM: Sender 10.0.0.40 Group
203.0.113.1
  Next hop type: Indirect
  Address: 0x92455b8
  Next-hop reference count: 2
  Source: 10.0.0.30
  Protocol next hop: 10.0.0.40
  Indirect next hop: 2 no-forward
  State: <Active Int Ext>
    Local AS: 64510 Peer AS: 64511
  Age: 3 Metric2: 1
  Validation State: unverified
  Task: BGP_64510.10.0.0.30+179
  Announcement bits (2): 0-PIM.v1 1-mvpn global task
  AS path: I (Originator) Cluster list: 10.0.0.30
  AS path: Originator ID: 10.0.0.40
  Communities: target:64502:100 encapsulation:0L:14 Import
Accepted
  Localpref: 100
  Router ID: 10.0.0.30
  Primary Routing Table bgp.mvpn.0
  Indirect next hops: 1
    Protocol next hop: 10.0.0.40 Metric: 1
    Indirect next hop: 2 no-forward
    Indirect path forwarding next hops: 1
      Next hop type: Router
      Next hop: 10.0.24.4 via lt-0/3/0.24 weight 0x1
    10.0.0.40/32 Originating RIB: inet.3
      Metric: 1 Node path count: 1
      Forwarding nexthops: 1
      Nexthop: 10.0.24.4 via lt-0/3/0.24

```

### show route extensive ( ECMP)

```

user@host> show route extensive
*IS-IS Preference: 15
  Level: 1
  Next hop type: Router, Next hop index: 1048577
  Address: 0xFFFFFFFF
  Next-hop reference count: YY
  Next hop: 198.51.100.2 via ae1.0 balance 43%, selected
  Session Id: 0x141
  Next hop: 192.0.2.2 via ae0.0 balance 57%

```

### show route extensive (Multipath Resolution)

```

user@host> show route extensive
inet.0: 37 destinations, 37 routes (36 active, 0 holddown, 1 hidden)
10.1.1.2/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.1.1.2/32 -> {indirect(1048574)}
  *Static Preference: 5
  Next hop type: Indirect, Next hop index: 0
  Address: 0xb39d1b0

```

```

Next-hop reference count: 2
Next hop type: Router, Next hop index: 581
Next hop: 10.1.1.2 via ge-2/0/1.0, selected
Session Id: 0x144
Next hop: 10.2.1.2 via ge-2/0/2.0, selected
Session Id: 0x145
Protocol next hop: 10.1.1.1
Indirect next hop: 0xb2b20f0 1048574 INH Session ID: 0x143
State: <Active Int Ext>
Age: 2:53 Metric2: 0
Validation State: unverified
Task: RT
Announcement bits (2): 0-KRT 2-Resolve tree 1
AS path: I
Indirect next hops: 1
  Protocol next hop: 10.1.1.1
  Indirect next hop: 0xb2b20f0 1048574 INH Session ID: 0x143

  Indirect path forwarding next hops: 2
    Next hop type: Router
    Next hop: 10.1.1.2 via ge-2/0/1.0
    Session Id: 0x144
    Next hop: 10.2.1.2 via ge-2/0/2.0
    Session Id: 0x145
10.1.1.1/32 Originating RIB: inet.0
  Node path count: 1
  Node flags: 1
  Forwarding nexthops: 2 (Merged)
  Nexthop: 10.1.1.2 via ge-2/0/1.0
  Nexthop: 10.2.1.2 via ge-2/0/2.0

```

```
user@host> show route active-path extensive
```

```
user@host> show route 198.51.100.1 active-path extensive
```

```

inet.0: 1000061 destinations, 1000082 routes (1000061 active, 0 holddown, 0 hidden)
198.51.100.1/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 198.51.100.1/32 -> {indirect(1051215)}
unicast reverse-path: 0
[ae0.0 ae1.0]
Page 0 idx 0, (group Internet-IPv4 type External) Type 1 val 0xbb2e53d8 (adv_entry)
Advertised metrics:
Nexthop: Self
AS path: [500] 410 I
Communities:
Path 198.51.100.1 from 10.0.0.11 Vector len 4. Val: 0
*BGP Preference: 170/-101
Next hop type: Indirect, Next hop index: 0
Address: 0x2e9aacdc
Next-hop reference count: 500000
Source: 10.0.0.11
Next hop type: Router, Next hop index: 0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 25, Push 20(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 20: None;
Label element ptr: 0xb5dc1780
Label parent element ptr: 0x18d48080
Label element references: 2
Label element child references: 0

```

```
Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 25, Push 22(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 22: None;
Label element ptr: 0xb5dc1700
Label parent element ptr: 0x18d41000
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 24, Push 48(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 48: None;
Label element ptr: 0x18d40800
Label parent element ptr: 0x18d49780
Label element references: 3
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 24, Push 49(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 49: None;
Label element ptr: 0xb5dc1680
Label parent element ptr: 0x18d48f00
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Label operation: Push 3851, Push 25, Push 21(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 21: None;
Label element ptr: 0xb5dc1600
Label parent element ptr: 0x18d44d80
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Label operation: Push 3851, Push 25, Push 25(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 25: None;
Label element ptr: 0xb5dc1580
Label parent element ptr: 0x18d3da80
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1, selected
Label operation: Push 3851, Push 24, Push 68(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 68: None;
Label element ptr: 0x18d41500
Label parent element ptr: 0x18d49000
Label element references: 3
Label element child references: 0
```

```

Label element lsp id: 0
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Label operation: Push 3851, Push 24, Push 69(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 69: None;
Label element ptr: 0xb5dc1500
Label parent element ptr: 0x18d48300
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Protocol next hop: 10.0.0.11
Label operation: Push 3851
Label TTL action: prop-ttl
Load balance label: Label 3851: None;
Indirect next hop: 0x1883e200 1051215 INH Session ID: 0xb0d
State:
Local AS: 500 Peer AS: 500
Age: 1:40:03 Metric2: 2
Validation State: unverified
Task: BGP_500.10.0.0.11
Announcement bits (5): 0-KRT 8-KRT 9-BGP_RT_Background 10-Resolve tree 5 11-Resolve
tree 8
AS path: 410 I
Accepted
Route Label: 3851
Localpref: 100
Router ID: 10.0.0.11
Indirect next hops: 1
Protocol next hop: 10.0.0.11 Metric: 2
Label operation: Push 3851
Label TTL action: prop-ttl
Load balance label: Label 3851: None;
Indirect next hop: 0x1883e200 1051215 INH Session ID: 0xb0d
Indirect path forwarding next hops (Merged): 8
Next hop type: Router
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
Next hop: 10.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
10.0.0.11/32 Originating RIB: inet.3
Metric: 1 Node path count: 4
Node flags: 1
Indirect nexthops: 4
Protocol Nexthop: 10.0.0.4 Metric: 1 Push 24
Indirect nexthop: 0x1880f200 1048597 INH Session ID: 0xb0c
Path forwarding nexthops link: 0x36120400

```

```
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
10.0.0.4/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
Protocol Nexthop: 10.0.0.5 Metric: 1 Push 24
Indirect nexthop: 0x18810000 1048596 INH Session ID: 0xb0b
Path forwarding nexthops link: 0x1545be00
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
10.0.0.5/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
Protocol Nexthop: 10.0.0.6 Metric: 1 Push 25
Indirect nexthop: 0x1880e600 1048588 INH Session ID: 0xb0a
Path forwarding nexthops link: 0x3611f440
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
10.0.0.6/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
Protocol Nexthop: 10.0.0.7 Metric: 1 Push 25
Indirect nexthop: 0x1880dc00 1048586 INH Session ID: 0xb09
Path forwarding nexthops link: 0x15466d80
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
Nexthop: 10.0.13.3 via ae1.0
Session Id: 0
10.0.0.7/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 10.0.12.2 via ae0.0
Session Id: 0
```

```

Nextthop: 10.0.13.3 via ae1.0
Session Id: 0

```

### show route (Enhanced Subscriber Management)

```

user@host> show route

inet.0: 41 destinations, 41 routes (40 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

198.51.100.11/24    *[Access-internal/12] 00:00:08
                  > to #0 10.0.0.1.93.65 via demux0.1073741824
198.51.100.12/24    *[Access-internal/12] 00:00:08
                  Private unicast

```

### show route (IPv6 Flow Specification)

```

user@host> show route

inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::10:255:185:19/128
                  *[Direct/0] 05:11:27
                  > via lo0.0
2001:db8::11:11:11:0/120
                  *[BGP/170] 00:28:58, localpref 100
                  AS path: 2000 I, validation-state: unverified
                  > to 2001:db8::13:14:2:2 via ge-1/1/4.0
2001:db8::13:14:2:0/120*[Direct/0] 00:45:07
                  > via ge-1/1/4.0
2001:db8::13:14:2:1/128*[Local/0] 00:45:18
                  Local via ge-1/1/4.0
fe80::2a0:a50f:fc71:71d5/128
                  *[Direct/0] 05:11:27
                  > via lo0.0
fe80::5e5e:abff:feb0:933e/128
                  *[Local/0] 00:45:18
                  Local via ge-1/1/4.0

inet6flow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::11:11:11:10/128,* ,proto=6,dstport=80,srcport=65535/term:1
                  *[BGP/170] 00:28:58, localpref 100, from 2001:db8::13:14:2:2
                  AS path: 2000 I, validation-state: unverified
                  Fictitious
2001:db8::11:11:11:30/128,* ,icmp6-type=128,len=100,dscp=10/term:2
                  *[BGP/170] 00:20:54, localpref 100, from 2001:db8::13:14:2:2
                  AS path: 2000 I, validation-state: unverified
                  Fictitious

```

### show route display-client-data detail

```

user@host> show route 198.51.100.0/24 display-client-data detail

inet.0: 59 destinations, 70 routes (59 active, 0 holddown, 0 hidden)
198.51.100.0/24 (1 entry, 1 announced)

```

```

State: <FlashAll>
*BGP-Static Preference: 5/-101
  Next hop type: Indirect, Next hop index: 0
  Address: 0xa5c2af8
  Next-hop reference count: 2
  Next hop type: Router, Next hop index: 1641
  Next hop: 192.0.2.1 via ge-2/1/1.0, selected
  Session Id: 0x160
  Protocol next hop: 192.0.2.1
  Indirect next hop: 0xa732cb0 1048621 INH Session ID: 0x17e
  State: <Active Int Ext AlwaysFlash NSR-incapable Programmed>
  Age: 3:13      Metric2: 0
  Validation State: unverified
  Announcement bits (3): 0-KRT 5-LDP 6-Resolve tree 3
  AS path: I
  Client id: 1, Cookie: 1

```

### show route te-ipv4-prefix-ip

```
user@host> show route te-ipv4-prefix-ip 10.10.10.10
```

```

lsdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
  }/1152
      *[IS-IS/15] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0101.0101.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0202.0202.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0303.0303.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0404.0404.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0505.0505.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0606.0606.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0707.0707.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
  }/1152

```



```
*[IS-IS/18] 00:01:01
Fictitious
```

### show route te-ipv4-prefix-ip extensive

```
user@host>show route te-ipv4-prefix-ip 10.10.10.10 extensive
Isdist.0: 298 destinations, 298 routes (298 active, 0 holddown, 0 hidden)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 7:58
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0101.0101.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 7:58
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0xe0, Algo: 0>

PREFIX { Node { AS:64496 ISO:0100.0202.0202.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 7:58
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0303.0303.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
```

```

        Next-hop reference count: 298
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 7:58
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0404.0404.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 298
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 7:58
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0505.0505.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 298
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 7:58
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0606.0606.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 298
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 7:58
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0707.0707.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)

```

```

*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 298
Next hop:
State: <Active NotInstall>
Local AS: 64496
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 298
Next hop:
State: <Active NotInstall>
Local AS: 64496
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0x40, Algo: 0

```

### show route te-ipv4-prefix-node-iso

```

user@host> show route te-ipv4-prefix-node-iso 0100.0a0a.0a0a.00

Isdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
}/1152
          *[IS-IS/15] 00:05:20
          Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.1.1.1/32 } ISIS-L2:0
}/1152
          *[IS-IS/18] 00:05:20
          Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.2.2.2/32 } ISIS-L2:0
}/1152
          *[IS-IS/18] 00:05:20
          Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.3.3.3/32 } ISIS-L2:0
}/1152
          *[IS-IS/18] 00:05:20
          Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.4.4.4/32 } ISIS-L2:0
}/1152
          *[IS-IS/18] 00:05:20
          Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.5.5.5/32 } ISIS-L2:0
}/1152
          *[IS-IS/18] 00:05:20
          Fictitious

```

```

Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.6.6.6/32 } ISIS-L2:0
}/1152
*[IS-IS/18] 00:05:20
Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.7.7.7/32 } ISIS-L2:0
}/1152
*[IS-IS/18] 00:05:20
Fictitious
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
*[IS-IS/18] 00:05:20
Fictitious

```

### show route te-ipv4-prefix-node-iso extensive

```

user@host> show route te-ipv4-prefix-node-iso 0100.0a0a.0a0a.00 extensive

Isdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.1.1.1/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1001, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.2.2.2/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:

```

```

        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:47
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1002, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.3.3.3/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:47
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1003, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.4.4.4/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:47
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1004, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.5.5.5/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:47
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1005, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.6.6.6/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2

```

```

        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:47
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1006, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.7.7.7/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1007, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

```

#### show route te-ipv4-prefix-node-iso detail

```

user@host> show route te-ipv4-prefix-node-iso 0100.0a0a.0a0a.00 detail

Isdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496

```

```

Age: 6:54
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0x40, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.1.1.1/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1001, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.2.2.2/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1002, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.3.3.3/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 64496
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1003, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.4.4.4/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4

```

```

        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:54
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1004, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.5.5.5/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:54
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1005, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.6.6.6/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:54
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1006, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.7.7.7/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
    *IS-IS Preference: 18
        Level: 2
        Next hop type: Fictitious, Next hop index: 0
        Address: 0xa1a2ac4
        Next-hop reference count: 283
        Next hop:
        State: <Active NotInstall>
        Local AS: 64496
        Age: 6:54
        Validation State: unverified
        Task: IS-IS
        AS path: I
        Prefix SID: 1007, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:64496 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)

```



```
*IS-IS Preference: 18
      Level: 2
      Next hop type: Fictitious, Next hop index: 0
      Address: 0xa1a2ac4
      Next-hop reference count: 283
      Next hop:
      State: <Active NotInstall>
      Local AS: 64496
      Age: 6:54
      Validation State: unverified
      Task: IS-IS
      AS path: I
      Prefix SID: 1000, Flags: 0x40, Algo: 0
```

## show route active-path

|                                    |                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 742</a><br><a href="#">Syntax (EX Series Switches) on page 742</a>                                                                                                                                                                                                                                                                                              |
| <b>Syntax</b>                      | <pre>show route active-path &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switches)</b> | <pre>show route active-path &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | <p>Command introduced in Junos OS Release 8.0.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                               |
| <b>Description</b>                 | Display all active routes for destinations. An active route is a route that is selected as the best path. Inactive routes are not displayed.                                                                                                                                                                                                                                               |
| <b>Options</b>                     | <p><b>none</b>—Display all active routes.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>       | <a href="#">show route active-path on page 742</a><br><a href="#">show route active-path brief on page 743</a><br><a href="#">show route active-path detail on page 743</a><br><a href="#">show route active-path extensive on page 744</a><br><a href="#">show route active-path terse on page 746</a>                                                                                    |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                             |

## Sample Output

### show route active-path

```
user@host> show route active-path
```

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
```

```

+ = Active Route, - = Last Active, * = Both

10.255.70.19/32    *[Direct/0] 21:33:52
                  > via lo0.0
10.255.71.50/32    *[IS-IS/15] 00:18:13, metric 10
                  > to 172.16.100.1 via so-2/1/3.0
172.16.100.1/24    *[Direct/0] 00:18:36
                  > via so-2/1/3.0
172.16.100.1/32    *[Local/0] 00:18:41
                  Local via so-2/1/3.0
192.168.64.0/21    *[Direct/0] 21:33:52
                  > via fxp0.0
192.168.70.19/32   *[Local/0] 21:33:52
                  Local via fxp0.0

```

### show route active-path brief

The output for the **show route active-path brief** command is identical to that for the **show route active-path** command. For sample output, see [show route active-path on page 742](#).

### show route active-path detail

```
user@host> show route active-path detail
```

```

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)

10.255.70.19/32 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

    AS path: I

10.255.71.50/32 (1 entry, 1 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 172.16.100.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:31 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3

    AS path: I

172.16.100.0/24 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via so-2/1/3.0, selected

```

```

        State: <Active Int>
        Local AS: 200
        Age: 21:54
        Task: IF
        Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

        AS path: I

172.16.100.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: so-2/1/3.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:59
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.64.0/21 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via fxp0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.70.19/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: fxp0.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

```

### show route active-path extensive

```
user@host> show route active-path extensive
```

```

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
10.255.70.19/32 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200

```

```

Age: 21:39:47
Task: IF
Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

AS path: I

10.255.71.50/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.255.71.50/32 -> {172.16.100.1}
IS-IS level 2, LSP fragment 0
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 172.16.100.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 24:08 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
    AS path: I

172.16.100.1/24 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 24:31
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

    AS path: I

172.16.100.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: so-2/1/3.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 24:36
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.64.0/21 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via fxp0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:39:47
    Task: IF

```

```

Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I
192.168.70.19/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: fxp0.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:39:47
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

```

### show route active-path terse

```
user@host> show route active-path terse
```

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

| A | Destination      | P | Prf | Metric 1 | Metric 2 | Next hop       | AS path |
|---|------------------|---|-----|----------|----------|----------------|---------|
| * | 10.255.70.19/32  | D | 0   |          |          | >100.0         |         |
| * | 10.255.71.50/32  | I | 15  | 10       |          | >172.16.100.1. |         |
| * | 172.16.100.0/24  | D | 0   |          |          | >so-2/1/3.0    |         |
| * | 172.16.100.2/32  | L | 0   |          |          | Local          |         |
| * | 192.168.64.0/21  | D | 0   |          |          | >fxp0.0        |         |
| * | 192.168.70.19/32 | L | 0   |          |          | Local          |         |

## show route advertising-protocol

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show route advertising-protocol <i>protocol</i> <i>neighbor-address</i></code><br><code>&lt;brief   detail   extensive   terse&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Display the routing information as it has been prepared for advertisement to a particular neighbor of a particular dynamic routing protocol.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>neighbor-address</i></b>—Address of the neighboring router to which the route entry is being transmitted.</p> <p><b><i>protocol</i></b>—Protocol transmitting the route:</p> <ul style="list-style-type: none"> <li>• <b>bgp</b>—Border Gateway Protocol</li> <li>• <b>dvmrp</b>—Distance Vector Multicast Routing Protocol</li> <li>• <b>msdp</b>—Multicast Source Discovery Protocol</li> <li>• <b>pim</b>—Protocol Independent Multicast</li> <li>• <b>rip</b>—Routing Information Protocol</li> <li>• <b>ripng</b>—Routing Information Protocol next generation</li> </ul> |
| <b>Additional Information</b>   | Routes displayed are routes that the routing table has exported into the routing protocol and that have been filtered by the associated protocol's <b>export</b> routing policy statements. Starting with Junos OS Release 13.3, you can display the routing instance table <b>foo</b> for any address family, on a VPN route reflector, or a VPN AS boundary router that is advertising local VPN routes. However, If you do not specify the <b>table</b> in the command, the output displays each VRF prefix twice.                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring the MED Attribute That Determines the Exit Point in an AS</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>    | <a href="#">show route advertising-protocol bgp (Layer 3 VPN) on page 750</a><br><a href="#">show route advertising-protocol bgp detail on page 750</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

[show route advertising-protocol bgp detail \(Aggregate Extended Community Bandwidth\) on page 750](#)  
[show route advertising-protocol bgp detail \(Labeled Unicast\) on page 751](#)  
[show route advertising-protocol bgp detail \(Layer 2 VPN\) on page 751](#)  
[show route advertising-protocol bgp detail \(Layer 3 VPN\) on page 751](#)  
[show route advertising-protocol bgp extensive all \(Next Hop Self with RIB-out IP Address\) on page 752](#)

**Output Fields** Table 32 on page 748 lists the output fields for the **show route advertising-protocol** command. Output fields are listed in the approximate order in which they appear.

*Table 32: show route advertising-protocol Output Fields*

| Field Name                                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                   | Level of Output         |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <i>routing-table-name</i>                    | Name of the routing table—for example, inet.0.                                                                                                                                                                                                                                                                                                                                                                                      | All levels              |
| <i>number destinations</i>                   | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                                                                                             | All levels              |
| <i>number routes</i>                         | Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>                                                               | All levels              |
| <b>Prefix</b>                                | Destination prefix.                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>brief none</b>       |
| <i>destination-prefix (entry, announced)</i> | Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| <b>BGP group and type</b>                    | BGP group name and type ( <b>Internal</b> or <b>External</b> ).                                                                                                                                                                                                                                                                                                                                                                     | <b>detail extensive</b> |
| <b>Route Distinguisher</b>                   | Unique 64-bit prefix augmenting each IP subnet.                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail extensive</b> |
| <b>Advertised Label</b>                      | Incoming label advertised by the Label Distribution Protocol (LDP). When an IP packet enters a label-switched path (LSP), the ingress router examines the packet and assigns it a label based on its destination, placing the label in the packet's header. The label transforms the packet from one that is forwarded based on its IP routing information to one that is forwarded based on information associated with the label. | <b>detail extensive</b> |
| <b>Label-Base, range</b>                     | First label in a block of labels and label block size. A remote PE router uses this first label when sending traffic toward the advertising PE router.                                                                                                                                                                                                                                                                              | <b>detail extensive</b> |
| <b>VPN Label</b>                             | Virtual private network (VPN) label. Packets are sent between CE and PE routers by advertising VPN labels. VPN labels transit over either a Resource Reservation Protocol (RSVP) or a Label Distribution Protocol (LDP) label-switched path (LSP) tunnel.                                                                                                                                                                           | <b>detail extensive</b> |



Table 32: show route advertising-protocol Output Fields (continued)

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Level of Output                |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| <b>Nexthop</b>              | <p>Next hop to the destination. An angle bracket (&gt;) indicates that the route is the selected route.</p> <p>If the next-hop advertisement to the peer is <b>Self</b>, and the RIB-out next hop is a specific IP address, the RIB-out IP address is included in the extensive output. See <a href="#">show route advertising-protocol bgp extensive all (Next Hop Self with RIB-out IP Address)</a> on page 752.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | All levels                     |
| <b>MED</b>                  | Multiple exit discriminator value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>brief</b>                   |
| <b>Lclpref or Localpref</b> | Local preference value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels                     |
| <b>Queued</b>               | When BGP route prioritization is enabled and a route is present in a priority queue, this shows which priority queue the route is in.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | All levels except <b>brief</b> |
| <b>AS path</b>              | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if configured on the router, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> | All levels                     |
| <b>Route Labels</b>         | Stack of labels carried in the BGP route update.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>detail extensive</b>        |
| <b>Cluster list</b>         | (For route reflected output only) Cluster ID sent by the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail extensive</b>        |
| <b>Originator ID</b>        | (For route reflected output only) Address of routing device that originally sent the route to the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail extensive</b>        |
| <b>Communities</b>          | Community path attribute for the route. See the output field table for the <a href="#">show route detail</a> command for all possible values for this field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive</b>        |
| <b>AIGP</b>                 | Accumulated interior gateway protocol (AIGP) BGP attribute.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>detail extensive</b>        |

Table 32: show route advertising-protocol Output Fields (continued)

| Field Name                | Field Description                                                                                                                                                              | Level of Output         |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Attrset AS</b>         | Number, local preference, and path of the autonomous system (AS) that originated the route. These values are stored in the <b>Attrset</b> attribute at the originating router. | <b>detail extensive</b> |
| <b>Layer2-info:encaps</b> | Layer 2 encapsulation (for example, VPLS).                                                                                                                                     | <b>detail extensive</b> |
| <b>control flags</b>      | Control flags: <b>none</b> or <b>Site Down</b> .                                                                                                                               | <b>detail extensive</b> |
| <b>mtu</b>                | Maximum transmission unit (MTU) of the Layer 2 circuit.                                                                                                                        | <b>detail extensive</b> |

## Sample Output

### show route advertising-protocol bgp (Layer 3 VPN)

```
user@host> show route advertising-protocol bgp 10.255.14.171

VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.172/32 Self              1      100 I
VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.181/32 Self              2      100 I
```

### show route advertising-protocol bgp detail

```
user@host> show route advertising-protocol bgp 111.222.1.3 detail

bgp20.inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
111.222.1.11/32 (1 entry, 1 announced)
  BGP group pe-pe type Internal
  Route Distinguisher: 111.255.14.11:69
  Advertised Label: 100000
  next hop: Self
  Localpref: 100
  AS path: 2 I
  Communities: target:69:20
  AIGP 210
111.8.0.0/16 (1 entry, 1 announced)
  BGP group pe-pe type Internal
  Route Distinguisher: 111.255.14.11:69
  Advertised Label: 100000
  Next hop: Self
  Localpref: 100
  AS path: 2 I
  Communities: target:69:20
  AIGP 210
```

### show route advertising-protocol bgp detail (Aggregate Extended Community Bandwidth)

```
user@host> show route advertising-protocol bgp 10.0.4.2 10.0.2.0/30 detail

inet.0: 20 destinations, 26 routes (20 active, 0 holddown, 0 hidden)
* 10.0.2.0/30 (2 entries, 1 announced)
```

```
BGP group external2 type External
  Nexthop: Self
  AS path: [65000] 65001 I
  Communities: bandwidth:65000:80000000
```

### show route advertising-protocol bgp detail (Labeled Unicast)

```
user@host>show route advertising bgp 1.1.1.3 detail

inet.0: 69 destinations, 70 routes (69 active, 0 holddown, 0 hidden)
* 1.1.1.8/32 (2 entries, 2 announced)
BGP group ibgp type Internal
Route Labels: 1000123(top) 1000124 1000125 1000126
Nexthop: 1.1.1.4
MED: 7
Localpref: 100
AS path: [5] I
Cluster ID: 3.3.3.3
Originator ID: 1.1.1.1
Entropy label capable
inet6.0: 26 destinations, 28 routes (26 active, 0 holddown, 0 hidden)
* 100::1/128 (2 entries, 1 announced)
BGP group ibgp type Internal
Labels: 1000123(top) 1000124 1000125 1000126
Nexthop: ::ffff:1.1.1.4
Localpref: 100
AS path: [5] I
Cluster ID: 3.3.3.3
Originator ID: 1.1.1.1
```

### show route advertising-protocol bgp detail (Layer 2 VPN)

```
user@host> show route advertising-protocol bgp 192.168.24.1 detail

vpn-a.12vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
192.168.16.1:1:1:1/96 (1 entry, 1 announced)
  BGP group int type Internal
    Route Distinguisher: 192.168.16.1:1
    Label-base : 32768, range : 3
    Nexthop: Self
    Localpref: 100
    AS path: I
    Communities: target:65412:100
    AIGP 210
    Layer2-info: encaps:VLAN, control flags:, mtu:
```

### show route advertising-protocol bgp detail (Layer 3 VPN)

```
user@host> show route advertising-protocol bgp 10.255.14.176 detail

vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
  BGP group ibgp type Internal
    Route Distinguisher: 10.255.14.174:2
    VPN Label: 101264
    Nexthop: Self
    Localpref: 100
    AS path: I
    Communities: target:200:100
```

```
AIGP 210
AttrSet AS: 100
  Localpref: 100
  AS path: I
...
```

#### show route advertising-protocol bgp extensive all (Next Hop Self with RIB-out IP Address)

```
user@host> show route advertising-protocol bgp 200.0.0.2 170.0.1.0/24 extensive all
inet.0: 13 destinations, 19 routes (13 active, 0 holddown, 6 hidden)
  170.0.1.0/24 (2 entries, 1 announced)
    BGP group eBGP-INTEROP type External
      Nexthop: Self (rib-out 10.100.3.2)
      AS path: [4713] 200 I
...
```

## show route all

|                                    |                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 753</a><br><a href="#">Syntax (EX Series Switches) on page 753</a>                                                                                                                                                                                                                                               |
| <b>Syntax</b>                      | <pre>show route all &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                         |
| <b>Syntax (EX Series Switches)</b> | <pre>show route all</pre>                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                            |
| <b>Description</b>                 | <p>Display information about all routes in all routing tables, including private, or internal, tables.</p>                                                                                                                                                                                                                                  |
| <b>Options</b>                     | <p><b>none</b>—Display information about all routes in all routing tables, including private, or internal, tables.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                          |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <a href="#">show route brief on page 758</a></li> <li>• <a href="#">show route detail on page 760</a></li> </ul>                                                                                                                                                                                   |
| <b>List of Sample Output</b>       | <a href="#">show route all on page 753</a>                                                                                                                                                                                                                                                                                                  |
| <b>Output Fields</b>               | <p>In Junos OS Release 9.5 and later, only the output fields for the <b>show route all</b> command display all routing tables, including private, or hidden, routing tables. The output field table of the <b>show route</b> command does not display entries for private, or hidden, routing tables in Junos OS Release 9.5 and later.</p> |

## Sample Output

### show route all

The following example displays a snippet of output from the **show route** command and then displays the same snippet of output from the **show route all** command:

```
user@host> show route
```

```

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
1          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
2          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
800017     *[VPLS/7] 1d 14:00:16
            > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 14:00:26
            > via vt-3/2/0.32772, Pop

```

```
user@host> show route all
```

```

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
1          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
2          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
800017     *[VPLS/7] 1d 13:54:49
            > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 13:54:59
            > via vt-3/2/0.32772, Pop
vt-3/2/0.32769 [VPLS/7] 1d 13:54:49
                Unusable
vt-3/2/0.32772 [VPLS/7] 1d 13:54:59
                Unusable

```

## show route best

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 755</a><br><a href="#">Syntax (EX Series Switches) on page 755</a>                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax</b>                      | <pre>show route best <i>destination-prefix</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switches)</b> | <pre>show route best <i>destination-prefix</i> &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                 | <p>Display the route in the routing table that is the best route to the specified address or range of addresses. The best route is the longest matching route.</p>                                                                                                                                                                                                                                                  |
| <b>Options</b>                     | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b><i>destination-prefix</i></b>—Address or range of addresses.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <a href="#">show route brief on page 758</a></li> <li>• <a href="#">show route detail on page 760</a></li> </ul>                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>       | <a href="#">show route best on page 756</a><br><a href="#">show route best detail on page 756</a><br><a href="#">show route best extensive on page 757</a><br><a href="#">show route best terse on page 757</a>                                                                                                                                                                                                     |
| <b>Output Fields</b>               | <p>For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.</p>                                                                                                                                               |

## Sample Output

### show route best

```

user@host> show route best 10.255.70.103

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32  * [OSPF/10] 1d 13:19:20, metric 2
                  > to 10.31.1.6 via ge-3/1/0.0
                  via so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32  * [RSVP/7] 1d 13:20:13, metric 2
                  > via so-0/3/0.0, label-switched-path green-r1-r3

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.0.0.0/8        * [Direct/0] 2d 01:43:34
                  > via fxp2.0
                  [Direct/0] 2d 01:43:34
                  > via fxp1.0

```

### show route best detail

```

user@host> show route best 10.255.70.103 detail

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
    *OSPF  Preference: 10
           Next-hop reference count: 9
           Next hop: 10.31.1.6 via ge-3/1/0.0, selected
           Next hop: via so-0/3/0.0
           State: <Active Int>
           Local AS: 69
           Age: 1d 13:20:06      Metric: 2
           Area: 0.0.0.0
           Task: OSPF
           Announcement bits (2): 0-KRT 3-Resolve tree 2
           AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
    State: <FlashAll>
    *RSVP  Preference: 7
           Next-hop reference count: 5
           Next hop: via so-0/3/0.0 weight 0x1, selected
           Label-switched-path green-r1-r3
           Label operation: Push 100016
           State: <Active Int>
           Local AS: 69
           Age: 1d 13:20:59      Metric: 2
           Task: RSVP
           Announcement bits (1): 1-Resolve tree 2
           AS path: I

```



```

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
10.0.0.0/8 (2 entries, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via fxp2.0, selected
    State: <Active Int>
    Age: 2d 1:44:20
    Task: IF
    AS path: I
  Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via fxp1.0, selected
    State: <NotBest Int>
    Inactive reason: No difference
    Age: 2d 1:44:20
    Task: IF
    AS path: I

```

### show route best extensive

The output for the **show route best extensive** command is identical to that for the **show route best detail** command. For sample output, see [show route best detail on page 756](#).

### show route best terse

```

user@host> show route best 10.255.70.103 terse

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  0  10      2           >10.31.1.6
                               so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  R   7      2           >so-0/3/0.0

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.0.0.0/8        D   0           >fxp2.0
                    D   0           >fxp1.0

```

## show route brief

---

|                                    |                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 758</a><br><a href="#">Syntax (EX Series Switches) on page 758</a>                                                                                                                                                                                                                                                |
| <b>Syntax</b>                      | <pre>show route brief &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                    |
| <b>Syntax (EX Series Switches)</b> | <pre>show route brief &lt;destination-prefix&gt;</pre>                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                        |
| <b>Description</b>                 | Display brief information about the active entries in the routing tables.                                                                                                                                                                                                                                                                    |
| <b>Options</b>                     | <p><b>none</b>—Display all active entries in the routing table.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"><li>• <a href="#">show route all on page 753</a></li><li>• <a href="#">show route best on page 755</a></li></ul>                                                                                                                                                                                           |
| <b>List of Sample Output</b>       | <a href="#">show route brief on page 758</a>                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>               | For information about output fields, see the Output Field table of the <a href="#">show route</a> command.                                                                                                                                                                                                                                   |

## Sample Output

### show route brief

```
user@host> show route brief

inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 1w5d 20:30:29
```

```

Discard
10.255.245.51/32 *[Direct/0] 2w4d 13:11:14
> via lo0.0
172.16.0.0/12 *[Static/5] 2w4d 13:11:14
> to 192.168.167.254 via fxp0.0
192.168.0.0/18 *[Static/5] 1w5d 20:30:29
> to 192.168.167.254 via fxp0.0
192.168.40.0/22 *[Static/5] 2w4d 13:11:14
> to 192.168.167.254 via fxp0.0
192.168.64.0/18 *[Static/5] 2w4d 13:11:14
> to 192.168.167.254 via fxp0.0
192.168.164.0/22 *[Direct/0] 2w4d 13:11:14
> via fxp0.0
192.168.164.51/32 *[Local/0] 2w4d 13:11:14
Local via fxp0.0
207.17.136.192/32 *[Static/5] 2w4d 13:11:14
> to 192.168.167.254 via fxp0.0
green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16 *[Direct/0] 1w5d 20:30:28
> via fe-0/0/3.0
100.101.2.3/32 *[Local/0] 1w5d 20:30:28
Local via fe-0/0/3.0
172.16.233.5/32 *[OSPF/10] 1w5d 20:30:29, metric 1
MultiRecv

```

## show route detail

|                                    |                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 760</a><br><a href="#">Syntax (EX Series Switches) on page 760</a>                                                                                                                                                                                                                                                               |
| <b>Syntax</b>                      | <pre>show route detail &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                                  |
| <b>Syntax (EX Series Switches)</b> | <pre>show route detail &lt;destination-prefix&gt;</pre>                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 13.2X51-D15 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                |
| <b>Description</b>                 | Display detailed information about the active entries in the routing tables.                                                                                                                                                                                                                                                                                |
| <b>Options</b>                     | <p><b>none</b>—Display all active entries in the routing table on all systems.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>       | <a href="#">show route detail on page 771</a><br><a href="#">show route detail (with BGP Multipath) on page 777</a><br><a href="#">show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 778</a><br><a href="#">show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 778</a>          |
| <b>Output Fields</b>               | <p><a href="#">Table 33 on page 760</a> describes the output fields for the <b>show route detail</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                   |

Table 33: show route detail Output Fields

| Field Name                 | Field Description                                                       |
|----------------------------|-------------------------------------------------------------------------|
| <i>routing-table-name</i>  | Name of the routing table (for example, inet.0).                        |
| <i>number destinations</i> | Number of destinations for which there are routes in the routing table. |

Table 33: show route detail Output Fields (continued)

| Field Name                                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>number routes</i>                           | <p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <i>route-destination</i><br>(entry, announced) | <p>Route destination (for example:10.0.0.1/24). The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul> |
| <i>label stacking</i>                          | <p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Table 33: show route detail Output Fields (continued)

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [protocol, preference] | <p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• - —A hyphen indicates the last active route.</li> <li>• *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value.</p> <p><b>Preference2</b> values are signed integers, that is, <b>Preference2</b> values can be either positive or negative values. However, Junos OS evaluates <b>Preference2</b> values as unsigned integers that are represented by positive values. Based on the <b>Preference2</b> values, Junos OS evaluates a preferred route differently in the following scenarios:</p> <ul style="list-style-type: none"> <li>• <b>Both Signed Preference2 values</b> <ul style="list-style-type: none"> <li>• Route A = -101</li> <li>• Route B = -156</li> </ul> <p>Where both the <b>Preference2</b> values are signed, Junos OS evaluates only the unsigned value of <b>Preference2</b> and Route A, which has a lower <b>Preference2</b> value is preferred.</p> </li> <li>• <b>Unsigned Preference2 values</b> <p>Now consider both unsigned <b>Preference2</b> values:</p> <ul style="list-style-type: none"> <li>• Route A = 4294967096</li> <li>• Route B = 200</li> </ul> <p>Here, Junos OS considers the lesser <b>Preference2</b> value and Route B with a <b>Preference2</b> value of 200 is preferred because it is less than 4294967096.</p> </li> <li>• <b>Combination of signed and unsigned Preference2 values</b> <p>When <b>Preference2</b> values of two routes are compared, and for one route the <b>Preference2</b> is a signed value, and for the other route it is an unsigned value, Junos OS prefers the route with the positive <b>Preference2</b> value over the negative <b>Preference2</b> value. For example, consider the following signed and unsigned <b>Preference2</b> values:</p> <ul style="list-style-type: none"> <li>• Route A = -200</li> <li>• Route B = 200</li> </ul> <p>In this case, Route B with a <b>Preference2</b> value of 200 is preferred although this value is greater than -200, because Junos OS evaluates only the unsigned value of the <b>Preference2</b> value.</p> </li> </ul> |
| Level                  | (IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Route Distinguisher    | IP subnet augmented with a 64-bit prefix.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| PMSI                   | Provider multicast service interface (MVPN routing table).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Table 33: show route detail Output Fields (continued)

| Field Name                                           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Next-hop type</b>                                 | Type of next hop. For a description of possible values for this field, see <a href="#">Table 34 on page 766</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Next-hop reference count</b>                      | Number of references made to the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Flood nexthop branches exceed maximum message</b> | Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Source</b>                                        | IP address of the route source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Next hop</b>                                      | Network layer address of the directly reachable neighboring system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>via</b>                                           | <p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul> |
| <b>Label-switched-path<br/>lsp-path-name</b>         | Name of the LSP used to reach the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Label operation</b>                               | MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Interface</b>                                     | (Local only) Local interface name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Protocol next hop</b>                             | Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Indirect next hop</b>                             | Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>State</b>                                         | State of the route (a route can be in more than one state). See <a href="#">Table 35 on page 768</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Local AS</b>                                      | AS number of the local routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Age</b>                                           | How long the route has been known.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>AIGP</b>                                          | Accumulated interior gateway protocol (AIGP) BGP attribute.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Table 33: show route detail Output Fields (continued)

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Metric</b>            | Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>MED-plus-IGP</b>      | Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>TTL-Action</b>        | For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.<br><br>For sample output, see <a href="#">show route table</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Task</b>              | Name of the protocol that has added the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Announcement bits</b> | The number of BGP peers or protocols to which Junos OS has announced this route, followed by the list of the recipients of the announcement. Junos OS can also announce the route to the KRT for installing the route into the Packet Forwarding Engine, to a resolve tree, a L2 VC, or even a VPN. For example, <b>n-Resolve inet</b> indicates that the specified route is used for route resolution for next hops found in the routing table.<br><br><ul style="list-style-type: none"> <li><b>n</b>—An index used by Juniper Networks customer support only.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>AS path</b>           | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li><b>I</b>—IGP.</li> <li><b>E</b>—EGP.</li> <li><b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li><b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li><b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893.</li> <li><b>[ ]</b>—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li><b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li><b>( )</b>—Parentheses enclose a confederation.</li> <li><b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> |



Table 33: show route detail Output Fields (continued)

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>validation-state</b> | <p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul> |
| ORR Generation-ID       | Displays the optimal route reflection (ORR) generation identifier. ISIS and OSPF interior gateway protocol (IGP) updates filed whenever any of the corresponding ORR route has its metric valued changed, or if the ORR route is added or deleted.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| FECs bound to route     | Point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Primary Upstream        | When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| RPF Nexthops            | When multipoint LDP with MoFRR is configured, the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Label                   | Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| weight                  | Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| VC Label                | MPLS label assigned to the Layer 2 circuit virtual connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| MTU                     | Maximum transmission unit (MTU) of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| VLAN ID                 | VLAN identifier of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Prefixes bound to route | Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Communities             | Community path attribute for the route. See <a href="#">Table 36 on page 770</a> for all possible values for this field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Layer2-info: encaps     | Layer 2 encapsulation (for example, VPLS).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| control flags           | Control flags: <b>none</b> or <b>Site Down</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| mtu                     | Maximum transmission unit (MTU) information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Table 33: show route detail Output Fields (continued)**

| Field Name                                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Label-Base, range</b>                   | First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.                                                                                                                                                                                                                                                                                                               |
| <b>status vector</b>                       | Layer 2 VPN and VPLS network layer reachability information (NLRI).                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Accepted Multipath</b>                  | Current active path when BGP multipath is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Accepted LongLivedStale</b>             | The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.                                                                                                                                                                  |
| <b>Accepted LongLivedStaleImport</b>       | <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.</p> <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table</p> |
| <b>ImportAccepted LongLivedStaleImport</b> | <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table</p> <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.</p>                                                                                                                                                                      |
| <b>Accepted MultipathContrib</b>           | Path currently contributing to BGP multipath.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Localpref</b>                           | Local preference value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Router ID</b>                           | BGP router ID as advertised by the neighbor in the open message.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Primary Routing Table</b>               | In a routing table group, the name of the primary routing table in which the route resides.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Secondary Tables</b>                    | In a routing table group, the name of one or more secondary tables in which the route resides.                                                                                                                                                                                                                                                                                                                                                                                       |

[Table 34 on page 766](#) describes all possible values for the Next-hop Types output field.

**Table 34: Next-hop Types Output Field Values**

| Next-Hop Type            | Description           |
|--------------------------|-----------------------|
| <b>Broadcast (bcast)</b> | Broadcast next hop.   |
| <b>Deny</b>              | Deny next hop.        |
| <b>Discard</b>           | Discard next hop.     |
| <b>Dynamic List</b>      | Dynamic list next hop |

Table 34: Next-hop Types Output Field Values (continued)

| Next-Hop Type                   | Description                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flood</b>                    | Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.                                                                                                                             |
| <b>Hold</b>                     | Next hop is waiting to be resolved into a unicast or multicast type.                                                                                                                                                                                                                                                                                                                                       |
| <b>Indexed (idxd)</b>           | Indexed next hop.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Indirect (indr)</b>          | Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.                                                                                                                                                                               |
| <b>Interface</b>                | Used for a network address assigned to an interface. Unlike the router next hop, the interface next hop does not reference any specific node on the network.                                                                                                                                                                                                                                               |
| <b>Local (locl)</b>             | Local address on an interface. This next-hop type causes packets with this destination address to be received locally.                                                                                                                                                                                                                                                                                     |
| <b>Multicast (mcst)</b>         | Wire multicast next hop (limited to the LAN).                                                                                                                                                                                                                                                                                                                                                              |
| <b>Multicast discard (mdsc)</b> | Multicast discard.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Multicast group (mgrp)</b>   | Multicast group member.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Receive (recv)</b>           | Receive.                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Reject (rjct)</b>            | Discard. An ICMP unreachable message was sent.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Resolve (rslv)</b>           | Resolving next hop.                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Routed multicast (mcrt)</b>  | Regular multicast next hop.                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Router</b>                   | <p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> <li>• Must not be a direct or local subnet for the routing device.</li> <li>• Must have a next hop that is directly connected to the routing device.</li> </ul> |
| <b>Table</b>                    | Routing table next hop.                                                                                                                                                                                                                                                                                                                                                                                    |

*Table 34: Next-hop Types Output Field Values (continued)*

| Next-Hop Type  | Description                                                                                 |
|----------------|---------------------------------------------------------------------------------------------|
| Unicast (ucst) | Unicast.                                                                                    |
| Unilist (ulst) | List of unicast next hops. A packet sent to this next hop goes to any next hop in the list. |

Table 35 on page 768 describes all possible values for the State output field. A route can be in more than one state (for example, **<Active NoReadvrt Int Ext>**).

*Table 35: State Output Field Values*

| Value                                 | Description                                                                                                                                                                          |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accounting                            | Route needs accounting.                                                                                                                                                              |
| Active                                | Route is active.                                                                                                                                                                     |
| Always Compare MED                    | Path with a lower multiple exit discriminator (MED) is available.                                                                                                                    |
| AS path                               | Shorter AS path is available.                                                                                                                                                        |
| Cisco Non-deterministic MED selection | Cisco nondeterministic MED is enabled, and a path with a lower MED is available.                                                                                                     |
| Clone                                 | Route is a clone.                                                                                                                                                                    |
| Cluster list length                   | Length of cluster list sent by the route reflector.                                                                                                                                  |
| Delete                                | Route has been deleted.                                                                                                                                                              |
| Ex                                    | Exterior route.                                                                                                                                                                      |
| Ext                                   | BGP route received from an external BGP neighbor.                                                                                                                                    |
| FlashAll                              | Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes. |
| Hidden                                | Route not used because of routing policy.                                                                                                                                            |
| IfCheck                               | Route needs forwarding RPF check.                                                                                                                                                    |
| IGP metric                            | Path through next hop with lower IGP metric is available.                                                                                                                            |
| Inactive reason                       | Flags for this route, which was not selected as best for a particular destination.                                                                                                   |
| Initial                               | Route being added.                                                                                                                                                                   |

*Table 35: State Output Field Values (continued)*

| Value                                                    | Description                                                                  |
|----------------------------------------------------------|------------------------------------------------------------------------------|
| <b>Int</b>                                               | Interior route.                                                              |
| <b>Int Ext</b>                                           | BGP route received from an internal BGP peer or a BGP confederation peer.    |
| <b>Interior &gt; Exterior &gt; Exterior via Interior</b> | Direct, static, IGP, or EBGp path is available.                              |
| <b>Local Preference</b>                                  | Path with a higher local preference value is available.                      |
| <b>Martian</b>                                           | Route is a martian (ignored because it is obviously invalid).                |
| <b>MartianOK</b>                                         | Route exempt from martian filtering.                                         |
| <b>Next hop address</b>                                  | Path with lower metric next hop is available.                                |
| <b>No difference</b>                                     | Path from neighbor with lower IP address is available.                       |
| <b>NoReadvrt</b>                                         | Route not to be advertised.                                                  |
| <b>NotBest</b>                                           | Route not chosen because it does not have the lowest MED.                    |
| <b>Not Best in its group</b>                             | Incoming BGP AS is not the best of a group (only one AS can be the best).    |
| <b>NotInstall</b>                                        | Route not to be installed in the forwarding table.                           |
| <b>NSR-incapable</b>                                     | Route added by non-NSR supported protocols.                                  |
| <b>Number of gateways</b>                                | Path with a greater number of next hops is available.                        |
| <b>Origin</b>                                            | Path with a lower origin code is available.                                  |
| <b>Pending</b>                                           | Route pending because of a hold-down configured on another route.            |
| <b>Programmed</b>                                        | Route installed programatically by on-box or off-box applications using API. |
| <b>Release</b>                                           | Route scheduled for release.                                                 |
| <b>RIB preference</b>                                    | Route from a higher-numbered routing table is available.                     |
| <b>Route Distinguisher</b>                               | 64-bit prefix added to IP subnets to make them unique.                       |
| <b>Route Metric or MED comparison</b>                    | Route with a lower metric or MED is available.                               |
| <b>Route Preference</b>                                  | Route with lower preference value is available                               |

Table 35: State Output Field Values (continued)

| Value          | Description                                                                                                                                                                                                                 |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Router ID      | Path through a neighbor with lower ID is available.                                                                                                                                                                         |
| Secondary      | Route not a primary route.                                                                                                                                                                                                  |
| Unusable path  | Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> <li>The route is damped.</li> <li>The route is rejected by an import policy.</li> <li>The route is unresolved.</li> </ul> |
| Update source  | Last tiebreaker is the lowest IP address value.                                                                                                                                                                             |
| ProtectionCand | Indicates paths requesting protection.                                                                                                                                                                                      |
| ProtectionPath | Indicates the route entry that can be used as a protection path.                                                                                                                                                            |

Table 36 on page 770 describes the possible values for the Communities output field.

Table 36: Communities Output Field Values

| Value                                                       | Description                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>area-number</i>                                          | 4 bytes, encoding a 32-bit area number. For AS-external routes, the value is <b>0</b> . A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.                                                  |
| <b>bandwidth: local AS<br/>number:link-bandwidth-number</b> | Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.                   |
| <b>domain-id</b>                                            | Unique configurable number that identifies the OSPF domain.                                                                                                                                                                                                                                             |
| <b>domain-id-vendor</b>                                     | Unique configurable number that further identifies the OSPF domain.                                                                                                                                                                                                                                     |
| <i>link-bandwidth-number</i>                                | Link-bandwidth number: from <b>0</b> through <b>4,294,967,295</b> (bytes per second).                                                                                                                                                                                                                   |
| <i>local AS number</i>                                      | Local AS number: from <b>1</b> through <b>65,535</b> .                                                                                                                                                                                                                                                  |
| <i>options</i>                                              | 1 byte. Currently this is only used if the route type is <b>5</b> or <b>7</b> . Setting the least significant bit in the field indicates that the route carries a type 2 metric.                                                                                                                        |
| <b>origin</b>                                               | (Used with VPNs) Identifies where the route came from.                                                                                                                                                                                                                                                  |
| <i>ospf-route-type</i>                                      | 1 byte, encoded as <b>1</b> or <b>2</b> for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); <b>3</b> for summary routes; <b>5</b> for external routes (area number must be <b>0</b> ); <b>7</b> for NSSA routes; or <b>129</b> for sham link endpoint addresses. |

Table 36: Communities Output Field Values (continued)

| Value                                | Description                                                                                                                                                                                                  |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>route-type-vendor</b>             | Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x8000</b> . The format is <b>area-number:ospf-route-type:options</b> . |
| <b>rte-type</b>                      | Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x0306</b> . The format is <b>area-number:ospf-route-type:options</b> . |
| <b>target</b>                        | Defines which VPN the route participates in; <b>target</b> has the format <b>32-bit IP address:16-bit number</b> . For example, 10.19.0.0:100.                                                               |
| <b>unknown IANA</b>                  | Incoming IANA codes with a value between <b>0x1</b> and <b>0x7fff</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.                                             |
| <b>unknown OSPF vendor community</b> | Incoming IANA codes with a value above <b>0x8000</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.                                                              |

## Sample Output

### show route detail

```
user@host> show route detail
```

```
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:31:43
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I
10.31.1.0/30 (2 entries, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 2
    Next hop: via so-0/3/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:30:17
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I
  OSPF Preference: 10
    Next-hop reference count: 1
    Next hop: via so-0/3/0.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Local AS: 69
```

```

        Age: 1:30:17    Metric: 1
        ORR Generation-ID: 1
Area: 0.0.0.0
    Task: OSPF
    AS path: I

10.31.1.1/32 (1 entry, 1 announced)
    *Local Preference: 0
        Next hop type: Local
        Next-hop reference count: 7
        Interface: so-0/3/0.0
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:30:20
        Task: IF
        Announcement bits (1): 3-Resolve tree 2
        AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
    *OSPF Preference: 10
        Next-hop reference count: 9
        Next hop: via so-0/3/0.0
        Next hop: 10.31.1.6 via ge-3/1/0.0, selected
        State: <Active Int>
        Local AS: 69
        Age: 1:29:56    Metric: 2
        Area: 0.0.0.0
        ORR Generation-ID: 1
    Task: OSPF
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

...

172.16.233.2/32 (1 entry, 1 announced)
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:31:45
        Task: PIM Recv
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

...

172.16.233.22/32 (1 entry, 1 announced)
    *IGMP Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:31:43
        Task: IGMP
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```



```

10.255.70.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
    Label-switched-path green-r1-r3
    Label operation: Push 100096
    State: <Active Int>
    Local AS: 69
    Age: 1:25:49 Metric: 2
    Task: RSVP
    Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
    AS path: I

10.255.71.238/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: via so-0/3/0.0 weight 0x1, selected
    Label-switched-path green-r1-r2
    State: <Active Int>
    Local AS: 69
    Age: 1:25:49 Metric: 1
    Task: RSVP
    Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
    AS path: I

private__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:31:44
    Task: IF
    AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
0 (1 entry, 1 announced)
  *MPLS Preference: 0
    Next hop type: Receive
    Next-hop reference count: 6
    State: <Active Int>
    Local AS: 69
    Age: 1:31:45 Metric: 1
    Task: MPLS
    Announcement bits (1): 0-KRT
    AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

299840 (1 entry, 1 announced)
TSI:

```

```

KRT in-kerne1 299840 /52 -> {indirect(1048575)}
    *RSVP    Preference: 7/2
              Next hop type: Flood
              Address: 0x9174a30
              Next-hop reference count: 4
              Next hop type: Router, Next hop index: 798
              Address: 0x9174c28
              Next-hop reference count: 2
              Next hop: 172.16.0.2 via lt-1/2/0.9 weight 0x1
              Label-switched-path R2-to-R4-2p2mp
              Label operation: Pop
              Next hop type: Router, Next hop index: 1048574
              Address: 0x92544f0
              Next-hop reference count: 2
              Next hop: 172.16.0.2 via lt-1/2/0.7 weight 0x1
              Label-switched-path R2-to-R200-p2mp
              Label operation: Pop
              Next hop: 172.16.0.2 via lt-1/2/0.5 weight 0x8001
              Label operation: Pop
              State: <Active Int>
              Age: 1:29      Metric: 1
              Task: RSVP
              Announcement bits (1): 0-KRT
              AS path: I...

800010 (1 entry, 1 announced)
    *VPLS    Preference: 7
              Next-hop reference count: 2
              Next hop: via vt-3/2/0.32769, selected
              Label operation: Pop
              State: <Active Int>
              Age: 1:29:30
              Task: Common L2 VC
              Announcement bits (1): 0-KRT
              AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
    *VPLS    Preference: 7
              Next-hop reference count: 2
              Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
              Label-switched-path green-r1-r3
              Label operation: Push 800012, Push 100096(top)
              Protocol next hop: 10.255.70.103
              Push 800012
              Indirect next hop: 87272e4 1048574
              State: <Active Int>
              Age: 1:29:30   Metric2: 2
              Task: Common L2 VC
              Announcement bits (2): 0-KRT 1-Common L2 VC
              AS path: I
              Communities: target:11111:1 Layer2-info: encaps:VPLS,
              control flags:, mtu: 0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
    *Direct Preference: 0
              Next hop type: Interface
              Next-hop reference count: 1
              Next hop: via lo0.0, selected

```

```

        State: <Active Int>
        Local AS: 69
        Age: 1:31:44
        Task: IF
        AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:31:44
        Task: IF
        AS path: I

ff02::2/128 (1 entry, 1 announced)
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:31:45
        Task: PIM Recv6
        Announcement bits (1): 0-KRT
        AS path: I

ff02::d/128 (1 entry, 1 announced)
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:31:45
        Task: PIM Recv6
        Announcement bits (1): 0-KRT
        AS path: I

ff02::16/128 (1 entry, 1 announced)
    *MLD Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:31:43
        Task: MLD
        Announcement bits (1): 0-KRT
        AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.16385, selected
        State: <Active NoReadvrt Int>
        Age: 1:31:44
        Task: IF
        AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

```

```

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP   Preference: 170/-101
        Route Distinguisher: 10.255.70.103:1
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Secondary Active Int Ext>
        Local AS: 69 Peer AS: 69
        Age: 1:25:49 Metric2: 1
        AIGP 210
        Task: BGP_69.10.255.70.103+179
        Announcement bits (1): 0-green-l2vpn
        AS path: I
        Communities: target:11111:1 Layer2-info: encaps:VPLS,
        control flags:, mtu: 0
        Label-base: 800008, range: 8
        Localpref: 100
        Router ID: 10.255.70.103
        Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-1
        Next-hop reference count: 5
        Protocol next hop: 10.255.71.52
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:31:40 Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
        mtu: 0
        Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-101
        Next-hop reference count: 5
        Protocol next hop: 10.255.71.52
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:31:40 Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
        Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
        Next hop: via so-1/1/2.0 weight 1, selected
        Label-switched-path my-lsp
        Label operation: Push 100000[0]
        Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
        State: <Active Int>
        Local AS: 99

```

```

Age: 10:21
Task: 12 circuit
Announcement bits (1): 0-LDP
AS path: I
VC Label 100000, MTU 1500, VLAN ID 512

inet.0: 45 destinations, 47 routes (44 active, 0 holddown, 1 hidden)
1.1.1.3/32 (1 entry, 1 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Router, Next hop index: 580
    Address: 0x9db6ed0
    Next-hop reference count: 8
    Next hop: 10.1.1.6 via lt-1/0/10.5, selected
    Session Id: 0x18a
    State: <Active Int>
    Local AS: 2
    Age: 1:32 Metric: 10
    Validation State: unverified
    ORR Generation-ID: 1
    Task: IS-IS
    Announcement bits (3): 0-KRT 5-Resolve tree 4 6-Resolve_IGP_FRR
task
    AS path: I

inet.0: 61 destinations, 77 routes (61 active, 1 holddown, 0 hidden)
1.1.1.1/32 (2 entries, 1 announced)
  *OSPF Preference: 10
    Next hop type: Router, Next hop index: 673
    Address: 0xc008830
    Next-hop reference count: 3
    Next hop: 10.1.1.1 via ge-0/0/2.0, selected
    Session Id: 0x1b7
    State: <Active Int>
    Local AS: 1
    Age: 3:06:59 Metric: 100
    Validation State: unverified
    ORR Generation-ID: 1
    Area: 0.0.0.0
    Task: OSPF
    Announcement bits (2): 1-KRT 9-Resolve tree 2
    AS path: I

```

### show route detail (with BGP Multipath)

```
user@host> show route detail
```

```

10.1.1.8/30 (2 entries, 1 announced)
  *BGP Preference: 170/-101
    Next hop type: Router, Next hop index: 262142
    Address: 0x901a010
    Next-hop reference count: 2
    Source: 10.1.1.2
    Next hop: 10.1.1.2 via ge-0/3/0.1, selected
    Next hop: 10.1.1.6 via ge-0/3/0.5
    State: <Active Ext>
    Local AS: 1 Peer AS: 2
    Age: 5:04:43
    Validation State: unverified

```

```

Task: BGP_2.10.1.1.2+59955
Announcement bits (1): 0-KRT
AS path: 2 I
Accepted Multipath
Localpref: 100
Router ID: 172.16.1.2
BGP Preference: 170/-101
Next hop type: Router, Next hop index: 678
Address: 0x8f97520
Next-hop reference count: 9
Source: 10.1.1.6
Next hop: 10.1.1.6 via ge-0/3/0.5, selected
State: <NotBest Ext>
Inactive reason: Not Best in its group - Active preferred
Local AS: 1 Peer AS: 2
Age: 5:04:43
Validation State: unverified
Task: BGP_2.10.1.1.6+58198
AS path: 2 I
Accepted MultipathContrib
Localpref: 100
Router ID: 172.16.1.3

```

#### show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail

mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
  *LDP Preference: 9
    Next hop type: Flood
    Next-hop reference count: 3
    Address: 0x9097d90
    Next hop: via vt-0/1/0.1
    Next-hop index: 661
    Label operation: Pop
    Address: 0x9172130
    Next hop: via so-0/0/3.0
    Next-hop index: 654
    Label operation: Swap 299872
    State: **Active Int>
    Local AS: 1001
    Age: 8:20 Metric: 1
    Task: LDP
    Announcement bits (1): 0-KRT
    AS path: I
    FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2

```

#### show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```

user@host> show route label 301568 detail

mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP Preference: 9
    Next hop type: Flood
    Address: 0x2735208

```

```

Next-hop reference count: 3
Next hop type: Router, Next hop index: 1397
Address: 0x2735d2c
Next-hop reference count: 3
Next hop: 1.3.8.2 via ge-1/2/22.0
Label operation: Pop
Load balance label: None;
Next hop type: Router, Next hop index: 1395
Address: 0x2736290
Next-hop reference count: 3
Next hop: 1.3.4.2 via ge-1/2/18.0
Label operation: Pop
Load balance label: None;
State: <Active Int AckRequest MulticastRPF>
Local AS: 10
Age: 54:05 Metric: 1
Validation State: unverified
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 172.16.1.1, grp: 232.1.1.1,
src: 192.168.219.11
Primary Upstream : 172.16.1.3:0--172.16.1.2:0
RPF Nexthops :
    ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
    ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
Backup Upstream : 172.16.1.3:0--172.16.1.6:0
RPF Nexthops :
    ge-1/2/20.0, 1.2.96.1, Label: 301584, weight: 0xffff
    ge-1/2/19.0, 1.3.6.1, Label: 301584, weight: 0xffff

```

## show route exact

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 780</a><br><a href="#">Syntax (EX Series Switches) on page 780</a>                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax</b>                      | <pre>show route exact <i>destination-prefix</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                          |
| <b>Syntax (EX Series Switches)</b> | <pre>show route exact <i>destination-prefix</i> &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                 | Display only the routes that exactly match the specified address or range of addresses.                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                     | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b><i>destination-prefix</i></b>—Address or range of addresses.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>       | <a href="#">show route exact on page 780</a><br><a href="#">show route exact detail on page 781</a><br><a href="#">show route exact extensive on page 781</a><br><a href="#">show route exact terse on page 781</a>                                                                                                                                                                                                 |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                                                      |

## Sample Output

### show route exact

```
user@host> show route exact 207.17.136.0/24
```

```
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
```



```
207.17.136.0/24    *[Static/5] 2d 03:30:22
                  > to 192.168.71.254 via fxp0.0
```

### show route exact detail

```
user@host> show route exact 207.17.136.0/24 detail
```

```
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2d 3:30:26
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I
```

### show route exact extensive

```
user@host> show route exact 207.17.136.0/24 extensive
```

```
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:25:18
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I
```

### show route exact terse

```
user@host> show route exact 207.17.136.0/24 terse
```

```
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 207.17.136.0/24  S  5                               >192.168.71.254
```

## show route export

---

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax              | <a href="#">Syntax on page 782</a><br><a href="#">Syntax (EX Series Switches) on page 782</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Syntax                      | <pre>show route export &lt;brief   detail&gt; &lt;instance &lt;instance-name&gt;   routing-table-name&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Syntax (EX Series Switches) | <pre>show route export &lt;brief   detail&gt; &lt;instance &lt;instance-name&gt;   routing-table-name&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Release Information         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description                 | Display policy-based route export information. Policy-based export simplifies the process of exchanging route information between routing instances.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Options                     | <p><b>none</b>—(Same as <b>brief</b>.) Display standard information about policy-based export for all instances and routing tables on all systems.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>instance &lt;instance-name&gt;</b>—(Optional) Display a particular routing instance for which policy-based export is currently enabled.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>routing-table-name</b>—(Optional) Display information about policy-based export for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route export inet</b> command).</p> |
| Required Privilege Level    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| List of Sample Output       | <a href="#">show route export on page 783</a><br><a href="#">show route export detail on page 783</a><br><a href="#">show route export instance detail on page 784</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Output Fields               | <a href="#">Table 37 on page 783</a> lists the output fields for the <b>show route export</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table 37: show route export Output Fields

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                           | Level of Output   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| Table or <i>table-name</i> | Name of the routing tables that either import or export routes.                                                                                                                                                                                                                                                                                                             | All levels        |
| Routes                     | Number of routes exported from this table into other tables. If a particular route is exported to different tables, the counter will only increment by one.                                                                                                                                                                                                                 | <b>brief</b> none |
| Export                     | Whether the table is currently exporting routes to other tables: <b>Y</b> or <b>N</b> (Yes or No).                                                                                                                                                                                                                                                                          | <b>brief</b> none |
| Import                     | Tables currently importing routes from the originator table. (Not displayed for tables that are not exporting any routes.)                                                                                                                                                                                                                                                  | <b>detail</b>     |
| Flags                      | ( <b>instance</b> keyword only) Flags for this feature on this instance: <ul style="list-style-type: none"> <li><b>config auto-policy</b>—The policy was deduced from the configured IGP export policies.</li> <li><b>cleanup</b>—Configuration information for this instance is no longer valid.</li> <li><b>config</b>—The instance was explicitly configured.</li> </ul> | <b>detail</b>     |
| Options                    | ( <b>instance</b> keyword only) Configured option displays the type of routing tables the feature handles: <ul style="list-style-type: none"> <li><b>unicast</b>—Indicates <i>instance.inet.0</i>.</li> <li><b>multicast</b>—Indicates <i>instance.inet.2</i>.</li> <li><b>unicast multicast</b>—Indicates <i>instance.inet.0</i> and <i>instance.inet.2</i>.</li> </ul>    | <b>detail</b>     |
| Import policy              | ( <b>instance</b> keyword only) Policy that <b>route export</b> uses to construct the import-export matrix. Not displayed if the instance type is <b>vrf</b> .                                                                                                                                                                                                              | <b>detail</b>     |
| Instance                   | ( <b>instance</b> keyword only) Name of the routing instance.                                                                                                                                                                                                                                                                                                               | <b>detail</b>     |
| Type                       | ( <b>instance</b> keyword only) Type of routing instance: <b>forwarding</b> , <b>non-forwarding</b> , or <b>vrf</b> .                                                                                                                                                                                                                                                       | <b>detail</b>     |

## Sample Output

### show route export

```
user@host> show route export
```

| Table        | Export | Routes |
|--------------|--------|--------|
| inet.0       | N      | 0      |
| black.inet.0 | Y      | 3      |
| red.inet.0   | Y      | 4      |

### show route export detail

```
user@host> show route export detail
```

|                    |         |   |
|--------------------|---------|---|
| inet.0             | Routes: | 0 |
| black.inet.0       | Routes: | 3 |
| Import: [ inet.0 ] |         |   |

|                    |         |   |
|--------------------|---------|---|
| red.inet.0         | Routes: | 4 |
| Import: [ inet.0 ] |         |   |

#### show route export instance detail

```
user@host> show route export instance detail
```

|                                                                     |                              |
|---------------------------------------------------------------------|------------------------------|
| Instance: master                                                    | Type: forwarding             |
| Flags: <config auto-policy>                                         | Options: <unicast multicast> |
| Import policy: [ (ospf-master-from-red    isis-master-from-black) ] |                              |
| Instance: black                                                     | Type: non-forwarding         |
| Instance: red                                                       | Type: non-forwarding         |

## show route extensive

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 785</a><br><a href="#">Syntax (EX Series Switches) on page 785</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax</b>                      | <pre>show route extensive &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax (EX Series Switches)</b> | <pre>show route extensive &lt;destination-prefix&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>                 | Display extensive information about the active entries in the routing tables.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                     | <p><b>none</b>—Display all active entries in the routing table.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>       | <a href="#">show route extensive on page 792</a><br><a href="#">show route extensive (Access Route) on page 799</a><br><a href="#">show route extensive (BGP PIC Edge) on page 800</a><br><a href="#">show route extensive (FRR and LFA) on page 800</a><br><a href="#">show route extensive (IS-IS) on page 801</a><br><a href="#">show route extensive (Route Reflector) on page 801</a><br><a href="#">show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 802</a><br><a href="#">show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 802</a> |
| <b>Output Fields</b>               | <p><a href="#">Table 38 on page 785</a> describes the output fields for the <b>show route extensive</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                              |

Table 38: show route extensive Output Fields

| Field Name                | Field Description                                |
|---------------------------|--------------------------------------------------|
| <i>routing-table-name</i> | Name of the routing table (for example, inet.0). |

Table 38: show route extensive Output Fields (continued)

| Field Name                                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>number destinations</i>                     | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <i>number routes</i>                           | <p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active).</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive).</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <i>route-destination</i><br>(entry, announced) | <p>Route destination (for example: 10.0.0.1/24). The <b>entry</b> value is the number of route for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul> |
| <b>TSI</b>                                     | Protocol header information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>label stacking</b>                          | <p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of two or more exits this router with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>[protocol, preference]</b>                  | <p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+—</b>A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>- —</b>A hyphen indicates the last active route.</li> <li>• <b>*—</b>An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>                                                                                                                                                                                                                           |

Table 38: show route extensive Output Fields (continued)

| Field Name                                           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Level</b>                                         | (IS-IS only). In IS-IS, a single autonomous system (AS) can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Route Distinguisher</b>                           | IP subnet augmented with a 64-bit prefix.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>PMSI</b>                                          | Provider multicast service interface (MVPN routing table).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Next-hop type</b>                                 | Type of next hop. For a description of possible values for this field, see the Output Field table in the <a href="#">show route detail</a> command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Next-hop reference count</b>                      | Number of references made to the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Flood nexthop branches exceed maximum message</b> | Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Source</b>                                        | IP address of the route source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Next hop</b>                                      | Network layer address of the directly reachable neighboring system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>via</b>                                           | <p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul> |
| <b>Label-switched-path lsp-path-name</b>             | Name of the LSP used to reach the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Label operation</b>                               | MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Offset</b>                                        | Whether the metric has been increased or decreased by an offset value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Interface</b>                                     | (Local only) Local interface name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Protocol next hop</b>                             | Network layer address of the remote routing device that advertised the prefix. This address is used to recursively derive a forwarding next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

Table 38: show route extensive Output Fields (continued)

| Field Name                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>label-operation</b>    | MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).                                                                                                                                                                                                                                              |
| <b>Indirect next hops</b> | <p>When present, a list of nodes that are used to resolve the path to the next-hop destination, in the order that they are resolved.</p> <p>When BGP PIC Edge is enabled, the output lines that contain <b>Indirect next hop: weight</b> follow next hops that the software can use to repair paths where a link failure occurs. The next-hop weight has one of the following values:</p> <ul style="list-style-type: none"><li>• 0x1 indicates active next hops.</li><li>• 0x4000 indicates passive next hops.</li></ul> |
| <b>State</b>              | State of the route (a route can be in more than one state). See the Output Field table in the <a href="#">show route detail</a> command.                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Session ID</b>         | The BFD session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Weight</b>             | <p>Weight for the backup path. If the weight of an indirect next hop is larger than zero, the weight value is shown.</p> <p>For sample output, see <a href="#">show route table</a>.</p>                                                                                                                                                                                                                                                                                                                                  |



Table 38: show route extensive Output Fields (continued)

| Field Name      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Inactive reason | <p>If the route is inactive, the reason for its current state is indicated. Typical reasons include:</p> <ul style="list-style-type: none"> <li>• <b>Active preferred</b>—Currently active route was selected over this route.</li> <li>• <b>Always compare MED</b>—Path with a lower multiple exit discriminator (MED) is available.</li> <li>• <b>AS path</b>—Shorter AS path is available.</li> <li>• <b>Cisco Non-deterministic MED selection</b>—Cisco nondeterministic MED is enabled and a path with a lower MED is available.</li> <li>• <b>Cluster list length</b>—Path with a shorter cluster list length is available.</li> <li>• <b>Forwarding use only</b>—Path is only available for forwarding purposes.</li> <li>• <b>IGP metric</b>—Path through the next hop with a lower IGP metric is available.</li> <li>• <b>IGP metric type</b>—Path with a lower OSPF link-state advertisement type is available.</li> <li>• <b>Interior &gt; Exterior &gt; Exterior via Interior</b>—Direct, static, IGP, or EBGp path is available.</li> <li>• <b>Local preference</b>—Path with a higher local preference value is available.</li> <li>• <b>Next hop address</b>—Path with a lower metric next hop is available.</li> <li>• <b>No difference</b>—Path from a neighbor with a lower IP address is available.</li> <li>• <b>Not Best in its group</b>—Occurs when multiple peers of the same external AS advertise the same prefix and are grouped together in the selection process. When this reason is displayed, an additional reason is provided (typically one of the other reasons listed).</li> <li>• <b>Number of gateways</b>—Path with a higher number of next hops is available.</li> <li>• <b>Origin</b>—Path with a lower origin code is available.</li> <li>• <b>OSPF version</b>—Path does not support the indicated OSPF version.</li> <li>• <b>RIB preference</b>—Route from a higher-numbered routing table is available.</li> <li>• <b>Route distinguisher</b>—64-bit prefix added to IP subnets to make them unique.</li> <li>• <b>Route metric or MED comparison</b>—Route with a lower metric or MED is available.</li> <li>• <b>Route preference</b>—Route with a lower preference value is available.</li> <li>• <b>Router ID</b>—Path through a neighbor with a lower ID is available.</li> <li>• <b>Unusable path</b>—Path is not usable because of one of the following conditions: the route is damped, the route is rejected by an import policy, or the route is unresolved.</li> <li>• <b>Update source</b>—Last tiebreaker is the lowest IP address value.</li> </ul> |
| Local AS        | Autonomous system (AS) number of the local routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Age             | How long the route has been known.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| AI GP           | Accumulated interior gateway protocol (AIGP) BGP attribute.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Metric          | Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| MED-plus-IGP    | Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| TTL-Action      | <p>For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.</p> <p>For sample output, see <a href="#">show route table</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

Table 38: show route extensive Output Fields (continued)

| Field Name                           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Task</b>                          | Name of the protocol that has added the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Announcement bits</b>             | <p>List of protocols that are consumers of the route. Using the following output as an example, <b>Announcement bits (3): 0-KRT 5-Resolve tree 2 8-BGP RT Background</b> there are (3) announcement bits to reflect the three clients (protocols) that have state for this route: Kernel (0-KRT), 5 (resolution tree process 2), and 8 (BGP).</p> <p>The notation <b><i>n</i>-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <i>n</i> is an index used by Juniper Networks customer support only.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>AS path</b>                       | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> |
| <b>validation-state</b>              | <p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>FECs bound to route</b>           | Point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>AS path: I &lt;Originator&gt;</b> | (For route reflected output only) Originator ID attribute set by the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 38: show route extensive Output Fields (continued)

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>route status</b>     | <p>Indicates the status of a BGP route:</p> <ul style="list-style-type: none"> <li>• <b>Accepted</b>—The specified BGP route is imported by the default BGP policy.</li> <li>• <b>Import</b>—The route is imported into a Layer 3 VPN routing instance.</li> <li>• <b>Import-Protect</b>—A remote instance egress that is protected.</li> <li>• <b>Multipath</b>—A BGP multipath active route.</li> <li>• <b>MultipathContrib</b>—The route is not active but contributes to the BGP multipath.</li> <li>• <b>Protect</b>—An egress route that is protected.</li> <li>• <b>Stale</b>—A route that is marked stale due to graceful restart.</li> </ul> |
| Primary Upstream        | When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.                                                                                                                                                                                                                                                                                                                                   |
| RPF Nexthops            | When multipoint LDP with MoFRR is configured, the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.                                                                                                                                                                                                                                                                                                                                                                               |
| Label                   | Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.                                                                                                                                                                                                                                                                                                                                                           |
| weight                  | Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| VC Label                | MPLS label assigned to the Layer 2 circuit virtual connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| MTU                     | Maximum transmission unit (MTU) of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| VLAN ID                 | VLAN identifier of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Cluster list            | (For route reflected output only) Cluster ID sent by the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Originator ID           | (For route reflected output only) Address of router that originally sent the route to the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Prefixes bound to route | Forwarding Equivalent Class (FEC) bound to this route. Applicable only to routes installed by LDP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Communities             | Community path attribute for the route. See the Output Field table in the <a href="#">show route detail</a> command for all possible values for this field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Layer2-info: encaps     | Layer 2 encapsulation (for example, VPLS).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| control flags           | Control flags: <b>none</b> or Site Down.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| mtu                     | Maximum transmission unit (MTU) information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Label-Base, range       | First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table 38: show route extensive Output Fields (continued)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>status vector</b>         | Layer 2 VPN and VPLS network layer reachability information (NLRI).                                                                                                                                                                                                                                              |
| <b>Localpref</b>             | Local preference value included in the route.                                                                                                                                                                                                                                                                    |
| <b>Router ID</b>             | BGP router ID as advertised by the neighbor in the open message.                                                                                                                                                                                                                                                 |
| <b>Primary Routing Table</b> | In a routing table group, the name of the primary routing table in which the route resides.                                                                                                                                                                                                                      |
| <b>Secondary Tables</b>      | In a routing table group, the name of one or more secondary tables in which the route resides.                                                                                                                                                                                                                   |
| <b>Originating RIB</b>       | Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of inet.0 resolving through inet.0 and inet.3, this field indicates which routing table, inet.0 or inet.3, provided the best path for a particular prefix. |
| <b>Node path count</b>       | Number of nodes in the path.                                                                                                                                                                                                                                                                                     |
| <b>Forwarding nexthops</b>   | Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.                                                                                                                            |

## Sample Output

### show route extensive

```

user@host> show route extensive

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
203.0.113.10/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 203.0.113.10/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 64496
    Age: 1:34:06
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

203.0.113.30/30 (2 entries, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 2
    Next hop: via so-0/3/0.0, selected
    State: <Active Int>
    Local AS: 64496
    Age: 1:32:40
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I
  OSPF Preference: 10
    Next-hop reference count: 1

```

```

        Next hop: via so-0/3/0.0, selected
        State: <Int>
        Inactive reason: Route Preference
        Local AS: 64496
        Age: 1:32:40    Metric: 1
        Area: 0.0.0.0
        Task: OSPF
        AS path: I

203.0.113.103/32 (1 entry, 1 announced)
    *Local Preference: 0
        Next hop type: Local
        Next-hop reference count: 7
        Interface: so-0/3/0.0
        State: <Active NoReadvrt Int>
        Local AS: 644969
        Age: 1:32:43
        Task: IF
        Announcement bits (1): 3-Resolve tree 2
        AS path: I

...

203.0.113.203/30 (1 entry, 1 announced)
TSI:
KRT in-kerne 203.0.113.203/30 -> {203.0.113.216}
    *OSPF Preference: 10
        Next-hop reference count: 9
        Next hop: via so-0/3/0.0
        Next hop: 203.0.113.216 via ge-3/1/0.0, selected
        State: <Active Int>
        Local AS: 64496
        Age: 1:32:19    Metric: 2
        Area: 0.0.0.0
        Task: OSPF
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

...

198.51.100.2/32 (1 entry, 1 announced)
TSI:
KRT in-kerne 198.51.100.2/32 -> {}
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 64496
        Age: 1:34:08
        Task: PIM Recv
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

...

198.51.100.22/32 (1 entry, 1 announced)
TSI:
KRT in-kerne 198.51.100.22/32 -> {}
    *IGMP Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>

```

```

        Local AS:    64496
        Age: 1:34:06
        Task: IGMP
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

203.0.113.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP   Preference: 7
          Next-hop reference count: 6
          Next hop: 203.0.113.216 via ge-3/1/0.0 weight 0x1, selected
          Label-switched-path green-r1-r3
          Label operation: Push 100096
          State: <Active Int>
          Local AS:    64496
          Age: 1:28:12   Metric: 2
          Task: RSVP
          Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
          AS path: I

203.0.113.238/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP   Preference: 7
          Next-hop reference count: 6
          Next hop: via so-0/3/0.0 weight 0x1, selected
          Label-switched-path green-r1-r2
          State: <Active Int>
          Local AS:    64496
          Age: 1:28:12   Metric: 1
          Task: RSVP
          Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
          AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

...

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
  *Direct Preference: 0
          Next hop type: Interface
          Next-hop reference count: 1
          Next hop: via lo0.0, selected
          State: <Active Int>
          Local AS:    64496
          Age: 1:34:07
          Task: IF
          AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

0 (1 entry, 1 announced)
TSI:
KRT in-kernel 0      /36 -> {}
  *MPLS   Preference: 0
          Next hop type: Receive
          Next-hop reference count: 6

```

```

        State: <Active Int>
        Local AS: 64496
        Age: 1:34:08 Metric: 1
        Task: MPLS
        Announcement bits (1): 0-KRT
        AS path: I
...
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
299840 (1 entry, 1 announced)
TSI:
KRT in-kernel 299840 /52 -> {indirect(1048575)}
    *RSVP Preference: 7/2
        Next hop type: Flood
        Address: 0x9174a30
        Next-hop reference count: 4
        Next hop type: Router, Next hop index: 798
        Address: 0x9174c28
        Next-hop reference count: 2
        Next hop: 198.51.100.2 via lt-1/2/0.9 weight 0x1
        Label-switched-path R2-to-R4-2p2mp
        Label operation: Pop
        Next hop type: Router, Next hop index: 1048574
        Address: 0x92544f0
        Next-hop reference count: 2
        Next hop: 198.51.100.2 via lt-1/2/0.7 weight 0x1
        Label-switched-path R2-to-R200-p2mp
        Label operation: Pop
        Next hop: 198.51.100.2 via lt-1/2/0.5 weight 0x8001
        Label operation: Pop
        State: <Active Int>
        Age: 1:29 Metric: 1
        Task: RSVP
        Announcement bits (1): 0-KRT
        AS path: I...

800010 (1 entry, 1 announced)
TSI:
KRT in-kernel 800010 /36 -> {vt-3/2/0.32769}
    *VPLS Preference: 7
        Next-hop reference count: 2
        Next hop: via vt-3/2/0.32769, selected
        Label operation: Pop
        State: <Active Int>
        Age: 1:31:53
        Task: Common L2 VC
        Announcement bits (1): 0-KRT
        AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
TSI:
KRT in-kernel vt-3/2/0.32769.0 /16 -> {indirect(1048574)}
    *VPLS Preference: 7
        Next-hop reference count: 2
        Next hop: 203.0.113.216 via ge-3/1/0.0 weight 0x1, selected
        Label-switched-path green-r1-r3
        Label operation: Push 800012, Push 100096(top)
        Protocol next hop: 203.0.113.103

```

```

Push 800012
Indirect next hop: 87272e4 1048574
State: <Active Int>
Age: 1:31:53    Metric2: 2
Task: Common L2 VC
Announcement bits (2): 0-KRT 1-Common L2 VC
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0
Indirect next hops: 1
    Protocol next hop: 203.0.113.103 Metric: 2
    Push 800012
    Indirect next hop: 87272e4 1048574
    Indirect path forwarding next hops: 1
        Next hop: 203.0.113.216 via ge-3/1/0.0 weight 0x1

    203.0.113.103/32 Originating RIB: inet.3
        Metric: 2                                Node path count: 1
        Forwarding nexthops: 1
            Nexthop: 203.0.113.216 via ge-3/1/0.0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

2001:db8::10:255:71:52/128 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active Int>
        Local AS:    64496
        Age: 1:34:07
        Task: IF
        AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active NoReadvrt Int>
        Local AS:    64496
        Age: 1:34:07
        Task: IF
        AS path: I

ff02::2/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::2/128 -> {}
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS:    64496
        Age: 1:34:08
        Task: PIM Recv6
        Announcement bits (1): 0-KRT
        AS path: I

ff02::d/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::d/128 -> {}

```



```

    *PIM      Preference: 0
             Next-hop reference count: 18
             State: <Active NoReadvrt Int>
             Local AS:      64496
             Age: 1:34:08
             Task: PIM Recv6
             Announcement bits (1): 0-KRT
             AS path: I

ff02::16/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::16/128 -> {}
    *MLD      Preference: 0
             Next-hop reference count: 18
             State: <Active NoReadvrt Int>
             Local AS:      64496
             Age: 1:34:06
             Task: MLD
             Announcement bits (1): 0-KRT
             AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
    *Direct Preference: 0
             Next hop type: Interface
             Next-hop reference count: 1
             Next hop: via lo0.16385, selected
             State: <Active NoReadvrt Int>
             Age: 1:34:07
             Task: IF
             AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

203.0.113.103:1:3:1/96 (1 entry, 1 announced)
    *BGP      Preference: 170/-101
             Route Distinguisher: 203.0.113.103:1
             Next-hop reference count: 7
             Source: 203.0.113.103
             Protocol next hop: 203.0.113.103
             Indirect next hop: 2 no-forward
             State: <Secondary Active Int Ext>
             Local AS:      64496 Peer AS:      64496
             Age: 1:28:12   Metric2: 1
             Task: BGP_69.203.0.113.103+179
             Announcement bits (1): 0-green-l2vpn
             AS path: I
             Communities: target:11111:1 Layer2-info: encaps:VPLS,
             control flags:, mtu: 0
             Label-base: 800008, range: 8
             Localpref: 100
             Router ID: 203.0.113.103
             Primary Routing Table bgp.l2vpn.0

203.0.113.152:1:1:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699540
    *L2VPN    Preference: 170/-1
             Next-hop reference count: 5

```

```

        Protocol next hop: 203.0.113.152
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:34:03    Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
        mtu: 0
        Label-base: 800016, range: 8, status-vector: 0x9F

203.0.113.152:1:5:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699528
    *L2VPN Preference: 170/-101
        Next-hop reference count: 5
        Protocol next hop: 203.0.113.152
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:34:03    Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
        Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
TSI:

203.0.113.163:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
    *L2CKT Preference: 7
        Next hop: via so-1/1/2.0 weight 1, selected
        Label-switched-path my-lsp
        Label operation: Push 100000[0]
        Protocol next hop: 203.0.113.163 Indirect next hop: 86af000 296
        State: <Active Int>
        Local AS: 64499
        Age: 10:21
        Task: l2 circuit
        Announcement bits (1): 0-LDP
        AS path: I
        VC Label 100000, MTU 1500, VLAN ID 512

203.0.113.55/24 (1 entry, 1 announced)
TSI:
KRT queued (pending) add
    198.51.100.0/24 -> {Push 300112}
    *BGP Preference: 170/-101
        Next hop type: Router
        Address: 0x925c208
        Next-hop reference count: 2
        Source: 203.0.113.9
        Next hop: 203.0.113.9 via ge-1/2/0.15, selected
        Label operation: Push 300112
        Label TTL action: prop-ttl
        State: <Active Ext>

```

```

Local AS: 64509 Peer AS: 65539
Age: 1w0d 23:06:56
AIGP: 25
Task: BGP_65539.203.0.113.9+56732
Announcement bits (1): 0-KRT
AS path: 65539 64508 I
Accepted
Route Label: 300112
Localpref: 100
Router ID: 213.0.113.99

```

### show route extensive (Access Route)

```
user@host> show route 203.0.113.102 extensive
```

```

inet.0: 39256 destinations, 39258 routes (39255 active, 0 holddown, 1 hidden)
203.0.113.102/32 (1 entry, 1 announced)
TSI:
KRT in-kerne1 203.0.113.102/32 -> {192.0.2.2}
OSPF area : 0.0.0.0, LSA ID : 203.0.113.102, LSA type : Extern
  *Access Preference: 13
    Next-hop reference count: 78472
    Next hop: 192.0.2.2 via fe-0/0/0.0, selected
    State: <Active Int>
  Age: 12
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 1-OSPFv2
    AS path: I

```

```
user@host> show route 2001:db8:4641:1::/48 extensive
```

```

inet6.0: 75 destinations, 81 routes (75 active, 0 holddown, 0 hidden)
2001:db8:4641:1::/48 (1 entry, 1 announced)
TSI:
KRT in-kerne1 2001:db8:4641:1::/48 -> {#0 0.13.1.0.0.1}
  *Access Preference: 13
    Next hop type: Router, Next hop index: 74548
    Address: 0x1638c1d8
    Next-hop reference count: 6
    Next hop: #0 0.13.1.0.0.1 via demux0.1073753267, selected
    Session Id: 0x0
    State: <Active Int>
    Age: 4:17
    Validation State: unverified
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 4-Resolve tree 2
    AS path: I
2001:db8:4641:1::/128 (1 entry, 1 announced)
TSI:
KRT in-kerne1 2001:db8:4641:1::/128 -> {#0 0.13.1.0.0.1}
  *Access-internal Preference: 12
    Next hop type: Router, Next hop index: 74548
    Address: 0x1638c1d8
    Next-hop reference count: 6
    Next hop: #0 0.13.1.0.0.1 via demux0.1073753267, selected
    Session Id: 0x0
    State: <Active Int>
    Age: 4:17

```

```

Validation State: unverified
Task: RPD Unix Domain Server./var/run/rpd_serv.local
Announcement bits (2): 0-KRT 4-Resolve tree 2
AS path: I

```

### show route extensive (BGP PIC Edge)

```

user@host> show route 198.51.100.6 extensive

ed.inet.0: 6 destinations, 9 routes (6 active, 0 holddown, 0 hidden)
 198.51.100.6/32 (3 entries, 2 announced)
    State: <CalcForwarding>
    TSI:
    KRT in-kerne1 198.51.100.6/32 -> {indirect(1048574), indirect(1048577)}
    Page 0 idx 0 Type 1 val 9219e30
    Nexthop: Self
    AS path: [2] 3 I
    Communities: target:2:1
    Path 198.51.100.6 from 198.51.100.4 Vector len 4. Val: 0
..
    #Multipath Preference: 255
    Next hop type: Indirect
    Address: 0x93f4010
    Next-hop reference count: 2
..
    Protocol next hop: 198.51.1001.4
    Push 299824
    Indirect next hop: 944c000 1048574 INH Session ID: 0x3
    Indirect next hop: weight 0x1
    Protocol next hop: 198.51.100.5
    Push 299824
    Indirect next hop: 944c1d8 1048577 INH Session ID: 0x4
    Indirect next hop: weight 0x4000
    State: <ForwardingOnly Int Ext>
    Inactive reason: Forwarding use only
    Age: 25 Metric2: 15
    Validation State: unverified
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: 3 I
    Communities: target:2:1

```

### show route extensive (FRR and LFA)

```

user@host> show route 203.0.113.20 extensive

inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
 203.0.113.20/24 (2 entries, 1 announced)
    State: FlashAll
    TSI:
    KRT in-kerne1 203.0.113.20/24 -> {Push 299776, Push 299792}
    *RSVP Preference: 7/1
    Next hop type: Router, Next hop index: 1048574
    Address: 0xbbbc010
    Next-hop reference count: 5
    Next hop: 203.0.113.112 via ge-2/1/8.0 weight 0x1, selected
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299776
    Label TTL action: prop-ttl

```

```

Session Id: 0x201
Next hop: 203.0.113.122 via ge-2/1/4.0 weight 0x4001
Label-switched-path europa-d-to-europa-e
Label operation: Push 299792
Label TTL action: prop-ttl
Session Id: 0x202
State: Active Int
Local AS: 64500
Age: 5:31 Metric: 2
Task: RSVP
Announcement bits (1): 0-KRT
AS path: I
OSPF Preference: 10
Next hop type: Router, Next hop index: 615
Address: 0xb9d78c4
Next-hop reference count: 7
Next hop: 203.0.113.112 via ge-2/1/8.0, selected
Session Id: 0x201
State: Int
Inactive reason: Route Preference
Local AS: 64500
Age: 5:35 Metric: 3
Area: 0.0.0.0
Task: OSPF
AS path: I

```

### show route extensive (IS-IS)

```

user@host> show route extensive
IS-IS Preference: 15
Level: 1
Next hop type: Router, Next hop index: 1048577
Address: 0XXXXXXXXXX
Next-hop reference count: YY
Next hop: 203.0.113.22 via ae1.0 balance 43%, selected
Session Id: 0x141
Next hop: 203.0.113.22 via ae0.0 balance 57%

```

### show route extensive (Route Reflector)

```

user@host> show route extensive
203.0.113.0/8 (1 entry, 1 announced)

TSI:
KRT in-kernel 203.0.113.0/8 -> {indirect(40)}
  *BGP Preference: 170/-101
    Source: 192.168.4.214
    Protocol next hop: 198.51.100.192 Indirect next hop: 84ac908 40
    State: <Active Int Ext>
    Local AS: 65548 Peer AS: 65548
    Age: 3:09 Metric: 0 Metric2: 0
    Task: BGP_65548.192.168.4.214+1033
    Announcement bits (2): 0-KRT 4-Resolve inet.0
    AS path: 65544 64507 I <Originator>
    Cluster list: 198.51.100.1
    Originator ID: 203.0.113.88
    Communities: 7777:7777

```

```

Localpref: 100
Router ID: 203.0.113.4
Indirect next hops: 1
    Protocol next hop: 203.0.113.192 Metric: 0
    Indirect next hop: 84ac908 40
    Indirect path forwarding next hops: 0
    Next hop type: Discard

```

### show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail

mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
    *LDP      Preference: 9
              Next hop type: Flood
              Next-hop reference count: 3
              Address: 0x9097d90
              Next hop: via vt-0/1/0.1
              Next-hop index: 661
              Label operation: Pop
              Address: 0x9172130
              Next hop: via so-0/0/3.0
              Next-hop index: 654
              Label operation: Swap 299872
              State: **Active Int>
              Local AS: 64511
              Age: 8:20      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              FECs bound to route: P2MP root-addr 203.0.113.166, grp 203.0.113.1,
src 192.168.142.2

```

### show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```

user@host> show route label 301568 detail

mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
    *LDP      Preference: 9
              Next hop type: Flood
              Address: 0x2735208
              Next-hop reference count: 3
              Next hop type: Router, Next hop index: 1397
              Address: 0x2735d2c
              Next-hop reference count: 3
              Next hop: 203.0.113.82 via ge-1/2/22.0
              Label operation: Pop
              Load balance label: None;
              Next hop type: Router, Next hop index: 1395
              Address: 0x2736290
              Next-hop reference count: 3
              Next hop: 203.0.113.2 via ge-1/2/18.0
              Label operation: Pop
              Load balance label: None;
              State: <Active Int AckRequest MulticastRPF>
              Local AS: 64500

```

```
Age: 54:05      Metric: 1
Validation State: unverified
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 198.51.100.1, grp: 203.0.113.1,
src: 192.168.219.11
Primary Upstream : 198.51.100.3:0--198.51.100.2:0
RPF Nexthops :
    ge-1/2/15.0, 10.2.94.1, Label: 301568, weight: 0x1
    ge-1/2/14.0, 10.2.3.1, Label: 301568, weight: 0x1
Backup Upstream : 198.51.100.3:0--198.51.100.6:0
RPF Nexthops :
    ge-1/2/20.0, 198.51.100.96, Label: 301584, weight: 0xffff
    ge-1/2/19.0, 198.51.100.36, Label: 301584, weight: 0xffff
```

## show route forwarding-table

- List of Syntax**   [Syntax on page 804](#)  
                           [Syntax \(MX Series Routers\) on page 804](#)  
                           [Syntax \(TX Matrix and TX Matrix Plus Routers\) on page 804](#)

**Syntax**

```
show route forwarding-table
<detail | extensive | summary>
<all>
<ccc interface-name>
<destination destination-prefix>
<family family | matching matching>
<interface-name interface-name>
<label name>
<matching matching>
<multicast>
<table (default | logical-system-name/routing-instance-name | routing-instance-name)>
<vlan (all | vlan-name)>
<vpn vpn>
```

**Syntax (MX Series Routers)**

```
show route forwarding-table
<detail | extensive | summary>
<all>
<bridge-domain (all | domain-name)>
<ccc interface-name>
<destination destination-prefix>
<family family | matching matching>
<interface-name interface-name>
<label name>
<learning-vlan-id learning-vlan-id>
<matching matching>
<multicast>
<table (default | logical-system-name/routing-instance-name | routing-instance-name)>
<vlan (all | vlan-name)>
<vpn vpn>
```

**Syntax (TX Matrix and TX Matrix Plus Routers)**

```
show route forwarding-table
<detail | extensive | summary>
<all>
<ccc interface-name>
<destination destination-prefix>
<family family | matching matching>
<interface-name interface-name>
<matching matching>
<label name>
<lcc number>
<multicast>
<table routing-instance-name>
<vpn vpn>
```



- Release Information** Command introduced before Junos OS Release 7.4.  
Option **bridge-domain** introduced in Junos OS Release 7.5  
Option **learning-vlan-id** introduced in Junos OS Release 8.4  
Options **all** and **vlan** introduced in Junos OS Release 9.6.  
Command introduced in Junos OS Release 11.3 for the QFX Series.  
Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
- Description** Display the Routing Engine's forwarding table, including the network-layer prefixes and their next hops. This command is used to help verify that the routing protocol process has relayed the correction information to the forwarding table. The Routing Engine constructs and maintains one or more routing tables. From the routing tables, the Routing Engine derives a table of active routes, called the forwarding table.



**NOTE:** The Routing Engine copies the forwarding table to the Packet Forwarding Engine, the part of the router that is responsible for forwarding packets. To display the entries in the Packet Forwarding Engine's forwarding table, use the **show pfe route** command.

- Options** **none**—Display the routes in the forwarding tables. By default, the **show route forwarding-table** command does not display information about private, or internal, forwarding tables.
- detail | extensive | summary**—(Optional) Display the specified level of output.
- all**—(Optional) Display routing table entries for all forwarding tables, including private, or internal, tables.
- bridge-domain (all | bridge-domain-name)**—(MX Series routers only) (Optional) Display route entries for all bridge domains or the specified bridge domain.
- ccc interface-name**—(Optional) Display route entries for the specified circuit cross-connect interface.
- destination destination-prefix**—(Optional) Destination prefix.
- family family**—(Optional) Display routing table entries for the specified family: **bridge** (ccc | destination | detail | extensive | interface-name | label | learning-vlan-id | matching | multicast | summary | table | vlan | vpn), **ethernet-switching**, **evpn**, **fibre-channel**, **fmembers**, **inet**, **inet6**, **iso**, **mcsnoop-inet**, **mcsnoop-inet6**, **mpls**, **satellite-inet**, **satellite-inet6**, **satellite-vpls**, **tnp**, **unix**, **vpls**, or **vlan-classification**.
- interface-name interface-name**—(Optional) Display routing table entries for the specified interface.
- label name**—(Optional) Display route entries for the specified label.
- lcc number**—(TX Matrix and TX matrix Plus routers only) (Optional) On a routing matrix composed of a TX Matrix router and T640 routers, display information for the

specified T640 router (or line-card chassis) connected to the TX Matrix router. On a routing matrix composed of the TX Matrix Plus router and T1600 or T4000 routers, display information for the specified router (line-card chassis) connected to the TX Matrix Plus router.

Replace *number* with the following values depending on the LCC configuration:

- 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix.
- 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix.
- 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
- 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.

**learning-vlan-id *learning-vlan-id***—(MX Series routers only) (Optional) Display learned information for all VLANs or for the specified VLAN.

**matching *matching***—(Optional) Display routing table entries matching the specified prefix or prefix length.

**multicast**—(Optional) Display routing table entries for multicast routes.

**table** —(Optional) Display route entries for all the routing tables in the main routing instance or for the specified routing instance. If your device supports logical systems, you can also display route entries for the specified logical system and routing instance. To view the routing instances on your device, use the [show route instance](#) command.

**vlan (all | *vlan-name*)**—(Optional) Display information for all VLANs or for the specified VLAN.

**vpn *vpn***—(Optional) Display routing table entries for a specified VPN.

**Required Privilege Level**

view

**List of Sample Output**

[show route forwarding-table on page 811](#)  
[show route forwarding-table detail on page 812](#)  
[show route forwarding-table destination extensive \(Weights and Balances\) on page 812](#)  
[show route forwarding-table extensive on page 813](#)  
[show route forwarding-table extensive \(RPF\) on page 814](#)  
[show route forwarding-table \(dynamic list next hop\) on page 815](#)  
[show route forwarding-table family mpls on page 816](#)  
[show route forwarding-table family mpls ccc ge-0/0/1.1004 on page 816](#)  
[show route forwarding-table family vpls on page 816](#)  
[show route forwarding-table vpls \(Broadcast, unknown unicast, and multicast \(BUM\) hashing is enabled\) on page 817](#)

[show route forwarding-table vpls \(Broadcast, unknown unicast, and multicast \(BUM\) hashing is enabled with MAC Statistics\) on page 817](#)  
[show route forwarding-table family vpls extensive on page 817](#)  
[show route forwarding-table table default on page 819](#)  
[show route forwarding-table table logical-system-name/routing-instance-name on page 820](#)  
[show route forwarding-table vpn on page 820](#)

**Output Fields** [Table 39 on page 807](#) lists the output fields for the **show route forwarding-table** command. Output fields are listed in the approximate order in which they appear. Field names might be abbreviated (as shown in parentheses) when no level of output is specified, or when the **detail** keyword is used instead of the **extensive** keyword.

*Table 39: show route forwarding-table Output Fields*

| Field Name     | Field Description                                                                                                                                                                                     | Level of Output |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Logical system | Name of the logical system. This field is displayed if you specify the <b>table logical-system-name/routing-instance-name</b> option on a device that is configured for and supports logical systems. | All levels      |
| Routing table  | Name of the routing table (for example, inet, inet6, mpls).                                                                                                                                           | All levels      |

Table 39: show route forwarding-table Output Fields (continued)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Level of Output  |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Enabled protocols | <p>The features and protocols that have been enabled for a given routing table. This field can contain the following values:</p> <ul style="list-style-type: none"> <li>• BUM hashing—BUM hashing is enabled.</li> <li>• MAC Stats—Mac Statistics is enabled.</li> <li>• Bridging—Routing instance is a normal layer 2 bridge.</li> <li>• No VLAN—No VLANs are associated with the bridge domain.</li> <li>• All VLANs—The <b>vlan-id all</b> statement has been enabled for this bridge domain.</li> <li>• Single VLAN—Single VLAN ID is associated with the bridge domain.</li> <li>• MAC action drop—New MACs will be dropped when the MAC address limit is reached.</li> <li>• Dual VLAN—Dual VLAN tags are associated with the bridge domain</li> <li>• No local switching—No local switching is enabled for this routing instance..</li> <li>• Learning disabled—Layer 2 learning is disabled for this routing instance.</li> <li>• MAC limit reached—The maximum number of MAC addresses that was configured for this routing instance has been reached.</li> <li>• VPLS—The VPLS protocol is enabled.</li> <li>• No IRB I2-copy—The no-irb-layer-2-copy feature is enabled for this routing instance.</li> <li>• ACKed by all peers—All peers have acknowledged this routing instance.</li> <li>• BUM Pruning—BUM pruning is enabled on the VPLS instance.</li> <li>• Def BD VXLAN—VXLAN is enabled for the default bridge domain.</li> <li>• EVPN—EVPN protocol is enabled for this routing instance.</li> <li>• Def BD OVSDb—Open vSwitch Database (OVSDb) is enabled on the default bridge domain.</li> <li>• Def BD Ingress replication—VXLAN ingress node replication is enabled on the default bridge domain.</li> <li>• L2 backhaul—Layer 2 backhaul is enabled.</li> <li>• FRR optimize—Fast reroute optimization</li> <li>• MAC pinning—MAC pinning is enabled for this bridge domain.</li> <li>• MAC Aging Timer—The MAC table aging time is set per routing instance.</li> <li>• EVPN VXLAN—This routing instance supports EVPN with VXLAN encapsulation.</li> <li>• PBBN—This routing instance is configured as a provider backbone bridged network.</li> <li>• PBN—This routing instance is configured as a provider bridge network.</li> <li>• ETREE—The ETREE protocol is enabled on this EVPN routing instance.</li> <li>• ARP/NDP suppression—EVPN ARP NDP suppression is enabled in this routing instance.</li> <li>• Def BD EVPN VXLAN—EVPN VXLAN is enabled for the default bridge domain.</li> <li>• MPLS control word—Control word is enabled for this MPLS routing instance.</li> </ul> | All levels       |
| Address family    | Address family (for example, IP, IPv6, ISO, MPLS, and VPLS).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels       |
| Destination       | Destination of the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | detail extensive |

Table 39: *show route forwarding-table* Output Fields (continued)

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Level of Output         |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Route Type (Type)       | <p>How the route was placed into the forwarding table. When the <b>detail</b> keyword is used, the route type might be abbreviated (as shown in parentheses):</p> <ul style="list-style-type: none"> <li>• <b>cloned (clon)</b>—(TCP or multicast only) Cloned route.</li> <li>• <b>destination (dest)</b>—Remote addresses directly reachable through an interface.</li> <li>• <b>destination down (iddn)</b>—Destination route for which the interface is unreachable.</li> <li>• <b>interface cloned (ifcl)</b>—Cloned route for which the interface is unreachable.</li> <li>• <b>route down (ifdn)</b>—Interface route for which the interface is unreachable.</li> <li>• <b>ignore (ignr)</b>—Ignore this route.</li> <li>• <b>interface (intf)</b>—Installed as a result of configuring an interface.</li> <li>• <b>permanent (perm)</b>—Routes installed by the kernel when the routing table is initialized.</li> <li>• <b>user</b>—Routes installed by the routing protocol process or as a result of the configuration.</li> </ul> | All levels              |
| Route Reference (RtRef) | Number of routes to reference.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>detail extensive</b> |
| Flags                   | <p>Route type flags:</p> <ul style="list-style-type: none"> <li>• <b>none</b>—No flags are enabled.</li> <li>• <b>accounting</b>—Route has accounting enabled.</li> <li>• <b>cached</b>—Cache route.</li> <li>• <b>incoming-iface interface-number</b>—Check against incoming interface.</li> <li>• <b>prefix load balance</b>—Load balancing is enabled for this prefix.</li> <li>• <b>rt nh decoupled</b>—Route has been decoupled from the next hop to the destination.</li> <li>• <b>sent to PFE</b>—Route has been sent to the Packet Forwarding Engine.</li> <li>• <b>static</b>—Static route.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>extensive</b>        |
| Next hop                | IP address of the next hop to the destination.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>detail extensive</b> |

Table 39: show route forwarding-table Output Fields (continued)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| Next hop Type (Type)       | <p>Next-hop type. When the <b>detail</b> keyword is used, the next-hop type might be abbreviated (as indicated in parentheses):</p> <ul style="list-style-type: none"> <li>• <b>broadcast (bcst)</b>—Broadcast.</li> <li>• <b>deny</b>—Deny.</li> <li>• <b>discard (dscd)</b> —Discard.</li> <li>• <b>hold</b>—Next hop is waiting to be resolved into a unicast or multicast type.</li> <li>• <b>indexed (idxd)</b>—Indexed next hop.</li> <li>• <b>indirect (indr)</b>—Indirect next hop.</li> <li>• <b>local (locl)</b>—Local address on an interface.</li> <li>• <b>routed multicast (mcrt)</b>—Regular multicast next hop.</li> <li>• <b>multicast (mcst)</b>—Wire multicast next hop (limited to the LAN).</li> <li>• <b>multicast discard (mdsc)</b>—Multicast discard.</li> <li>• <b>multicast group (mgrp)</b>—Multicast group member.</li> <li>• <b>receive (rcv)</b>—Receive.</li> <li>• <b>reject (rjct)</b>—Discard. An ICMP unreachable message was sent.</li> <li>• <b>resolve (rslv)</b>—Resolving the next hop.</li> <li>• <b>unicast (ucst)</b>—Unicast.</li> <li>• <b>unilist (ulst)</b>—List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.</li> </ul> | <b>detail extensive</b>      |
| Index                      | Software index of the next hop that is used to route the traffic for a given prefix.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive none</b> |
| Route interface-index      | Logical interface index from which the route is learned. For example, for interface routes, this is the logical interface index of the route itself. For static routes, this field is zero. For routes learned through routing protocols, this is the logical interface index from which the route is learned.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>extensive</b>             |
| Reference (NhRef)          | Number of routes that refer to this next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail extensive none</b> |
| Next-hop interface (Netif) | Interface used to reach the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>detail extensive none</b> |
| Weight                     | Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible (see the <b>Balance</b> field description).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>extensive</b>             |
| Balance                    | Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a router is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>extensive</b>             |
| RPF interface              | List of interfaces from which the prefix can be accepted. Reverse path forwarding (RPF) information is displayed only when <b>rpf-check</b> is configured on the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>extensive</b>             |

## Sample Output

### show route forwarding-table

```
user@host> show route forwarding-table
```

```
Routing table: default.inet
```

```
Internet:
```

| Destination      | Type | RtRef | Next hop          | Type | Index | NhRef | Netif      |
|------------------|------|-------|-------------------|------|-------|-------|------------|
| default          | perm | 0     |                   | rjct | 46    | 4     |            |
| 0.0.0.0/32       | perm | 0     |                   | dscd | 44    | 1     |            |
| 172.16.1.0/24    | ifdn | 0     |                   | rslv | 608   | 1     | ge-2/0/1.0 |
| 172.16.1.0/32    | iddn | 0     | 172.16.1.0        | recv | 606   | 1     | ge-2/0/1.0 |
| 172.16.1.1/32    | user | 0     |                   | rjct | 46    | 4     |            |
| 172.16.1.1/32    | intf | 0     | 172.16.1.1        | loc1 | 607   | 2     |            |
| 172.16.1.1/32    | iddn | 0     | 172.16.1.1        | loc1 | 607   | 2     |            |
| 172.16.1.255/32  | iddn | 0     | ff:ff:ff:ff:ff:ff | bcst | 605   | 1     | ge-2/0/1.0 |
| 10.0.0.0/24      | intf | 0     |                   | rslv | 616   | 1     | ge-2/0/0.0 |
| 10.0.0.0/32      | dest | 0     | 10.0.0.0          | recv | 614   | 1     | ge-2/0/0.0 |
| 10.0.0.1/32      | intf | 0     | 10.0.0.1          | loc1 | 615   | 2     |            |
| 10.0.0.1/32      | dest | 0     | 10.0.0.1          | loc1 | 615   | 2     |            |
| 10.0.0.255/32    | dest | 0     | 10.0.0.255        | bcst | 613   | 1     | ge-2/0/0.0 |
| 10.1.1.0/24      | ifdn | 0     |                   | rslv | 612   | 1     | ge-2/0/1.0 |
| 10.1.1.0/32      | iddn | 0     | 10.1.1.0          | recv | 610   | 1     | ge-2/0/1.0 |
| 10.1.1.1/32      | user | 0     |                   | rjct | 46    | 4     |            |
| 10.1.1.1/32      | intf | 0     | 10.1.1.1          | loc1 | 611   | 2     |            |
| 10.1.1.1/32      | iddn | 0     | 10.1.1.1          | loc1 | 611   | 2     |            |
| 10.1.1.255/32    | iddn | 0     | ff:ff:ff:ff:ff:ff | bcst | 609   | 1     | ge-2/0/1.0 |
| 10.206.0.0/16    | user | 0     | 10.209.63.254     | ucst | 419   | 20    | fxp0.0     |
| 10.209.0.0/16    | user | 1     | 0:12:1e:ca:98:0   | ucst | 419   | 20    | fxp0.0     |
| 10.209.0.0/18    | intf | 0     |                   | rslv | 418   | 1     | fxp0.0     |
| 10.209.0.0/32    | dest | 0     | 10.209.0.0        | recv | 416   | 1     | fxp0.0     |
| 10.209.2.131/32  | intf | 0     | 10.209.2.131      | loc1 | 417   | 2     |            |
| 10.209.2.131/32  | dest | 0     | 10.209.2.131      | loc1 | 417   | 2     |            |
| 10.209.17.55/32  | dest | 0     | 0:30:48:5b:78:d2  | ucst | 435   | 1     | fxp0.0     |
| 10.209.63.42/32  | dest | 0     | 0:23:7d:58:92:ca  | ucst | 434   | 1     | fxp0.0     |
| 10.209.63.254/32 | dest | 0     | 0:12:1e:ca:98:0   | ucst | 419   | 20    | fxp0.0     |
| 10.209.63.255/32 | dest | 0     | 10.209.63.255     | bcst | 415   | 1     | fxp0.0     |
| 10.227.0.0/16    | user | 0     | 10.209.63.254     | ucst | 419   | 20    | fxp0.0     |

```
...
```

```
Routing table: iso
```

```
ISO:
```

| Destination                                        | Type | RtRef | Next hop  | Type | Index | NhRef | Netif |
|----------------------------------------------------|------|-------|-----------|------|-------|-------|-------|
| default                                            | perm | 0     |           | rjct | 27    | 1     |       |
| 47.0005.80ff.f800.0000.0108.0003.0102.5524.5220.00 |      |       |           |      |       |       |       |
| intf 0                                             |      |       | loc1 28 1 |      |       |       |       |

```
Routing table: inet6
```

```
Internet6:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-------------|------|-------|----------|------|-------|-------|-------|
| default     | perm | 0     |          | rjct | 6     | 1     |       |
| ff00::/8    | perm | 0     |          | mdsc | 4     | 1     |       |
| ff02::1/128 | perm | 0     | ff02::1  | mcst | 3     | 1     |       |

```
Routing table: ccc
```

```
MPLS:
```

| Interface.Label | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-----------------|------|-------|----------|------|-------|-------|-------|
|-----------------|------|-------|----------|------|-------|-------|-------|

```
default          perm      0          rjct 16      1
100004(top)fe-0/0/1.0
```

### show route forwarding-table detail

```
user@host> show route forwarding-table detail
```

```
Routing table: inet
```

```
Internet:
```

| Destination     | Type | RtRef | Next hop         | Type | Index | NhRef | Netif      |
|-----------------|------|-------|------------------|------|-------|-------|------------|
| default         | user | 2     | 0:90:69:8e:b1:1b | ucst | 132   | 4     | fxp0.0     |
| default         | perm | 0     |                  | rjct | 14    | 1     |            |
| 10.1.1.0/24     | intf | 0     | ff.3.0.21        | ucst | 322   | 1     | so-5/3/0.0 |
| 10.1.1.0/32     | dest | 0     | 10.1.1.0         | recv | 324   | 1     | so-5/3/0.0 |
| 10.1.1.1/32     | intf | 0     | 10.1.1.1         | loc1 | 321   | 1     |            |
| 10.1.1.255/32   | dest | 0     | 10.1.1.255       | bcst | 323   | 1     | so-5/3/0.0 |
| 10.21.21.0/24   | intf | 0     | ff.3.0.21        | ucst | 326   | 1     | so-5/3/0.0 |
| 10.21.21.0/32   | dest | 0     | 10.21.21.0       | recv | 328   | 1     | so-5/3/0.0 |
| 10.21.21.1/32   | intf | 0     | 10.21.21.1       | loc1 | 325   | 1     |            |
| 10.21.21.255/32 | dest | 0     | 10.21.21.255     | bcst | 327   | 1     | so-5/3/0.0 |
| 127.0.0.1/32    | intf | 0     | 127.0.0.1        | loc1 | 320   | 1     |            |
| 172.17.28.19/32 | clon | 1     | 192.168.4.254    | ucst | 132   | 4     | fxp0.0     |
| 172.17.28.44/32 | clon | 1     | 192.168.4.254    | ucst | 132   | 4     | fxp0.0     |

```
...
```

```
Routing table: private1__inet
```

```
Internet:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif  |
|-------------|------|-------|----------|------|-------|-------|--------|
| default     | perm | 0     |          | rjct | 46    | 1     |        |
| 10.0.0.0/8  | intf | 0     |          | rs1v | 136   | 1     | fxp1.0 |
| 10.0.0.0/32 | dest | 0     | 10.0.0.0 | recv | 134   | 1     | fxp1.0 |
| 10.0.0.4/32 | intf | 0     | 10.0.0.4 | loc1 | 135   | 2     |        |
| 10.0.0.4/32 | dest | 0     | 10.0.0.4 | loc1 | 135   | 2     |        |

```
...
```

```
Routing table: iso
```

```
ISO:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-------------|------|-------|----------|------|-------|-------|-------|
| default     | perm | 0     |          | rjct | 38    | 1     |       |

```
Routing table: inet6
```

```
Internet6:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-------------|------|-------|----------|------|-------|-------|-------|
| default     | perm | 0     |          | rjct | 22    | 1     |       |
| ff00::/8    | perm | 0     |          | mdsc | 21    | 1     |       |
| ff02::1/128 | perm | 0     | ff02::1  | mcst | 17    | 1     |       |

```
...
```

```
Routing table: mpls
```

```
MPLS:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-------------|------|-------|----------|------|-------|-------|-------|
| default     | perm | 0     |          | rjct | 28    | 1     |       |

### show route forwarding-table destination extensive (Weights and Balances)

```
user@host> show route forwarding-table destination 3.4.2.1 extensive
```



```

Routing table: inet [Index 0]
Internet:

Destination: 3.4.2.1/32
  Route type: user
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: unicast
  Nexthop: 172.16.4.4
  Next-hop type: unicast
  Next-hop interface: so-1/1/0.0
  Nexthop: 145.12.1.2
  Next-hop type: unicast
  Next-hop interface: so-0/1/2.0
  Route interface-index: 0
  Index: 262143   Reference: 1
  Index: 335     Reference: 2
  Weight: 22     Balance: 3
  Index: 337     Reference: 2
  Weight: 33     Balance: 33

```

### show route forwarding-table extensive

```

user@host> show route forwarding-table extensive

Routing table: inet [Index 0]
Internet:

Destination: default
  Route type: user
  Route reference: 2
  Flags: sent to PFE
  Nexthop: 00:00:5E:00:53:1b
  Next-hop type: unicast
  Next-hop interface: fxp0.0
  Route interface-index: 0
  Index: 132     Reference: 4

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: none
  Next-hop type: reject
  Route interface-index: 0
  Index: 14      Reference: 1

Destination: 127.0.0.1/32
  Route type: interface
  Route reference: 0
  Flags: sent to PFE
  Nexthop: 127.0.0.1
  Next-hop type: local
  Route interface-index: 0
  Index: 320     Reference: 1
...

Routing table: private1__inet [Index 1]
Internet:

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: reject
  Route interface-index: 0
  Index: 46      Reference: 1

Destination: 10.0.0.0/8
  Route type: interface
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: resolve
  Next-hop interface: fxp1.0
  Route interface-index: 3
  Index: 136     Reference: 1

```

```

...

Routing table: iso [Index 0]
ISO:

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: reject
                                Route interface-index: 0
                                Index: 38      Reference: 1

Routing table: inet6 [Index 0]
Internet6:

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: reject
                                Route interface-index: 0
                                Index: 22      Reference: 1

Destination: ff00::/8
  Route type: permanent
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: multicast discard
                                Route interface-index: 0
                                Index: 21      Reference: 1

...

Routing table: private1__inet6 [Index 1]
Internet6:

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: reject
                                Route interface-index: 0
                                Index: 54      Reference: 1

Destination: fe80::2a0:a5ff:fe3d:375/128
  Route type: interface
  Route reference: 0
  Flags: sent to PFE
  Nexthop: fe80::2a0:a5ff:fe3d:375
  Next-hop type: local
                                Route interface-index: 0
                                Index: 75      Reference: 1

...

```

### show route forwarding-table extensive (RPF)

The next example is based on the following configuration, which enables an RPF check on all routes that are learned from this interface, including the interface route:

```

so-1/1/0 {
  unit 0 {
    family inet {
      rpf-check;
      address 192.0.2.2/30;
    }
  }
}

```

```
}
}
```

```
user@host> show route forwarding-table extensive
```

```
Routing table: inet [Index 0]
Internet:
...
...
Destination: 192.0.2.3/32
Route type: destination
Route reference: 0                      Route interface-index: 67
Flags: sent to PFE
Nexthop: 192.0.2.3
Next-hop type: broadcast                Index: 328      Reference: 1
Next-hop interface: so-1/1/0.0
RPF interface: so-1/1/0.0
```

### show route forwarding-table (dynamic list next hop)

The **show route forwarding table** output shows the two next hop elements for a multihomed EVPN destination.

```
user@host> show route forwarding-table label 299952 extensive
```

```
MPLS:

Destination: 299952
Route type: user
Route reference: 0                      Route interface-index: 0
Multicast RPF nh index: 0
P2mpidx: 0
Flags: sent to PFE, rt nh decoupled
Next-hop type: indirect                 Index: 1048575  Reference: 2
Nexthop:
Next-hop type: composite                Index: 601      Reference: 2
Next-hop type: indirect                 Index: 1048574  Reference: 3
Nexthop: 1.0.0.4
Next-hop type: Push 301632, Push 299776(top) Index: 600 Reference: 2
Load Balance Label: None
Next-hop interface: ge-0/0/1.0
Next-hop type: indirect                 Index: 1048577  Reference: 3
Nexthop: 1.0.0.4
Next-hop type: Push 301344, Push 299792(top) Index: 619 Reference: 2
Load Balance Label: None
Next-hop interface: ge-0/0/1.0
```

After one of the PE router has been disabled in the EVPN multihomed network, the same **show route forwarding table** output command shows one next hop element and one empty next hop element.

```
user@host> show route forwarding-table label 299952 extensive
```

```
Routing table: default.mpls [Index 0]
MPLS:

Destination: 299952
Route type: user
```

```

Route reference: 0                               Route interface-index: 0
Multicast RPF nh index: 0
P2mpidx: 0
Flags: sent to PFE, rt nh decoupled
Next-hop type: indirect                         Index: 1048575 Reference: 2
Nexthop:
Next-hop type: composite                       Index: 601      Reference: 2
Next-hop type: indirect                       Index: 1048577 Reference: 3
Nexthop: 1.0.0.4
Next-hop type: Push 301344, Push 299792(top) Index: 619 Reference: 2
Load Balance Label: None
Next-hop interface: ge-0/0/1.0

```

### show route forwarding-table family mpls

```
user@host> show route forwarding-table family mpls
```

```

Routing table: mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm   0
0                user   0
1                user   0
2                user   0
100000           user   0 10.31.1.6      swap 100001 fe-1/1/0.0
800002           user   0                Pop          vt-0/3/0.32770

vt-0/3/0.32770 (VPLS)
                user   0                indr 351      4
                Push 800000, Push 100002(top)
so-0/0/0.0

```

### show route forwarding-table family mpls ccc ge-0/0/1.1004

```
user@host> show route forwarding-table mpls ccc ge-0/0/1.1004
```

```

Routing table: default.mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
ge-0/0/1.1004    (CCC) user   0                ulst 1048577 2
                comp    754        3
                comp    755        3
                comp    756        3

Routing table: __mpls-oam__.mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm   0                dscd 556      1

```

### show route forwarding-table family vpls

```
user@host> show route forwarding-table family vpls
```

```

Routing table: green.vpls
VPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          dymn   0                flood 353      1
default          perm   0                rjct 298      1

```

```

fe-0/1/0.0      dnm  0      flood  355    1
00:00:5E:00:53:1f/48      <<<<<Remote CE

                        dnm  0      indr   351    4
                        Push 800000, Push 100002(top)

so-0/0/0.0
00:00:5E:00:53:1f/48      <<<<<<Local CE

                        dnm  0      ucst   354    2 fe-0/1/0.0

```

### show route forwarding-table vpls (Broadcast, unknown unicast, and multicast (BUM) hashing is enabled)

```

user@host> show route forwarding-table vpls

Routing table: green.vpls
VPLS:
Enabled protocols: BUM hashing
Destination      Type RtRef Next hop      Type Index  NhRef Netif
default          perm  0          172.16.3.2    dscd   519      1
lsi.1048832      intf  0          172.16.3.2    indr  1048574   4
                        Push 262145    621    2

ge-3/0/0.0
00:00:5E:00:53:01/48 user  0          ucst   590      5 ge-2/3/9.0
0x30003/51       user  0          comp   627      2
ge-2/3/9.0       intf  0          ucst   590      5 ge-2/3/9.0
ge-3/1/3.0       intf  0          ucst   619      4 ge-3/1/3.0
0x30002/51       user  0          comp   600      2
0x30001/51       user  0          comp   597      2

```

### show route forwarding-table vpls (Broadcast, unknown unicast, and multicast (BUM) hashing is enabled with MAC Statistics)

```

user@host> show route forwarding-table vpls

Routing table: green.vpls
VPLS:
Enabled protocols: BUM hashing, MAC Stats
Destination      Type RtRef Next hop      Type Index  NhRef Netif
default          perm  0          172.16.3.2    dscd   519      1
lsi.1048834      intf  0          172.16.3.2    indr  1048574   4
                        Push 262145    592    2

ge-3/0/0.0
00:19:e2:25:d0:01/48 user  0          ucst   590      5 ge-2/3/9.0
0x30003/51       user  0          comp   630      2
ge-2/3/9.0       intf  0          ucst   590      5 ge-2/3/9.0
ge-3/1/3.0       intf  0          ucst   591      4 ge-3/1/3.0
0x30002/51       user  0          comp   627      2
0x30001/51       user  0          comp   624      2

```

### show route forwarding-table family vpls extensive

```

user@host> show route forwarding-table family vpls extensive

Routing table: green.vpls [Index 2]
VPLS:

Destination: default
Route type: dynamic
Route reference: 0          Route interface-index: 72

```

```

Flags: sent to PFE
Next-hop type: flood                      Index: 289      Reference: 1
Next-hop type: unicast                    Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0
Next-hop type: unicast                    Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0

Destination: default
Route type: permanent
Route reference: 0                        Route interface-index: 0
Flags: none
Next-hop type: discard                    Index: 341      Reference: 1

Destination: fe-0/1/2.0
Route type: dynamic
Route reference: 0                        Route interface-index: 69
Flags: sent to PFE
Next-hop type: flood                      Index: 293      Reference: 1
Next-hop type: indirect                    Index: 363      Reference: 4
Next-hop type: Push 800016
Next-hop interface: at-1/0/1.0
Next-hop type: indirect                    Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast                    Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0

Destination: fe-0/1/3.0
Route type: dynamic
Route reference: 0                        Route interface-index: 70
Flags: sent to PFE
Next-hop type: flood                      Index: 292      Reference: 1
Next-hop type: indirect                    Index: 363      Reference: 4
Next-hop type: Push 800016
Next-hop interface: at-1/0/1.0
Next-hop type: indirect                    Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast                    Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0

Destination: 00:00:5E:00:53:01/48
Route type: dynamic
Route reference: 0                        Route interface-index: 70
Flags: sent to PFE, prefix load balance
Next-hop type: unicast                    Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0
Route used as destination:
  Packet count:      6640    Byte count:      675786
Route used as source:
  Packet count:      6894    Byte count:      696424

Destination: 00:00:5E:00:53:04/48
Route type: dynamic
Route reference: 0                        Route interface-index: 69
Flags: sent to PFE, prefix load balance
Next-hop type: unicast                    Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0

```

```

Route used as destination:
  Packet count:      96      Byte count:      8079
Route used as source:
  Packet count:      296     Byte count:      24955

Destination: 00:00:5E:00:53:05/48
Route type: dynamic
Route reference: 0                      Route interface-index: 74
Flags: sent to PFE, prefix load balance
Next-hop type: indirect                 Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0

```

### show route forwarding-table table default

```
user@host> show route forwarding-table table default
```

```
Routing table: default.inet
```

```
Internet:
```

| Destination    | Type | RtRef | Next hop        | Type | Index | NhRef | Netif      |
|----------------|------|-------|-----------------|------|-------|-------|------------|
| default        | perm | 0     |                 | rjct | 36    | 2     |            |
| 0.0.0.0/32     | perm | 0     |                 | dscd | 34    | 1     |            |
| 10.0.60.0/30   | user | 0     | 10.0.60.13      | ucst | 713   | 5     | fe-0/1/3.0 |
| 10.0.60.12/30  | intf | 0     |                 | rslv | 688   | 1     | fe-0/1/3.0 |
| 10.0.60.12/32  | dest | 0     | 10.0.60.12      | recv | 686   | 1     | fe-0/1/3.0 |
| 10.0.60.13/32  | dest | 0     | 0:5:85:8b:bc:22 | ucst | 713   | 5     | fe-0/1/3.0 |
| 10.0.60.14/32  | intf | 0     | 10.0.60.14      | loc1 | 687   | 2     |            |
| 10.0.60.14/32  | dest | 0     | 10.0.60.14      | loc1 | 687   | 2     |            |
| 10.0.60.15/32  | dest | 0     | 10.0.60.15      | bcst | 685   | 1     | fe-0/1/3.0 |
| 10.0.67.12/30  | user | 0     | 10.0.60.13      | ucst | 713   | 5     | fe-0/1/3.0 |
| 10.0.80.0/30   | ifdn | 0     | ff.3.0.21       | ucst | 676   | 1     | so-0/0/1.0 |
| 10.0.80.0/32   | dest | 0     | 10.0.80.0       | recv | 678   | 1     | so-0/0/1.0 |
| 10.0.80.2/32   | user | 0     |                 | rjct | 36    | 2     |            |
| 10.0.80.2/32   | intf | 0     | 10.0.80.2       | loc1 | 675   | 1     |            |
| 10.0.80.3/32   | dest | 0     | 10.0.80.3       | bcst | 677   | 1     | so-0/0/1.0 |
| 10.0.90.12/30  | intf | 0     |                 | rslv | 684   | 1     | fe-0/1/0.0 |
| 10.0.90.12/32  | dest | 0     | 10.0.90.12      | recv | 682   | 1     | fe-0/1/0.0 |
| 10.0.90.14/32  | intf | 0     | 10.0.90.14      | loc1 | 683   | 2     |            |
| 10.0.90.14/32  | dest | 0     | 10.0.90.14      | loc1 | 683   | 2     |            |
| 10.0.90.15/32  | dest | 0     | 10.0.90.15      | bcst | 681   | 1     | fe-0/1/0.0 |
| 10.5.0.0/16    | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |
| 10.10.0.0/16   | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |
| 10.13.10.0/23  | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |
| 10.84.0.0/16   | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |
| 10.150.0.0/16  | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |
| 10.157.64.0/19 | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |
| 10.209.0.0/16  | user | 0     | 192.168.187.126 | ucst | 324   | 15    | fxp0.0     |

```
...
```

```
Routing table: default.iso
```

```
ISO:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-------------|------|-------|----------|------|-------|-------|-------|
| default     | perm | 0     |          | rjct | 60    | 1     |       |

```
Routing table: default.inet6
```

```
Internet6:
```

| Destination | Type | RtRef | Next hop | Type | Index | NhRef | Netif |
|-------------|------|-------|----------|------|-------|-------|-------|
| default     | perm | 0     |          | rjct | 44    | 1     |       |

```

::/128          perm    0          dscd    42    1
ff00::/8        perm    0          mdsc    43    1
ff02::1/128     perm    0 ff02::1  mcst    39    1

Routing table: default.mpls
MPLS:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm    0          dscd    50    1

```

### show route forwarding-table table logical-system-name/routing-instance-name

```

user@host> show route forwarding-table table R4/vpn-red

Logical system: R4
Routing table: vpn-red.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm    0          rjct    563    1
0.0.0.0/32       perm    0          dscd    561    2
172.16.0.1/32    user    0          dscd    561    2
172.16.2.0/24    intf    0          rslv    771    1 ge-1/2/0.3
172.16.2.0/32    dest    0 172.16.2.0      recv    769    1 ge-1/2/0.3
172.16.2.1/32    intf    0 172.16.2.1      locl    770    2
172.16.2.1/32    dest    0 172.16.2.1      locl    770    2
172.16.2.2/32    dest    0 0.4.80.3.0.1b.c0.d5.e4.bd.0.1b.c0.d5.e4.bc.8.0
ucst    789    1 ge-1/2/0.3
172.16.2.255/32 dest    0 172.16.2.255    bcst    768    1 ge-1/2/0.3
172.16.233.0/4   perm    1          mdsc    562    1
172.16.233.1/32 perm    0 172.16.233.1    mcst    558    1
255.255.255.255/32 perm    0          bcst    559    1

Logical system: R4
Routing table: vpn-red.iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm    0          rjct    608    1

Logical system: R4
Routing table: vpn-red.inet6
Internet6:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm    0          rjct    708    1
::/128          perm    0          dscd    706    1
ff00::/8        perm    0          mdsc    707    1
ff02::1/128     perm    0 ff02::1          mcst    704    1

Logical system: R4
Routing table: vpn-red.mpls
MPLS:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm    0          dscd    638

```

### show route forwarding-table vpn

```

user@host> show route forwarding-table vpn VPN-A

Routing table:: VPN-A.inet
Internet:
Destination      Type RtRef Nexthop          Type Index NhRef Netif

```



|                        |      |   |              |              |      |   |
|------------------------|------|---|--------------|--------------|------|---|
| default                | perm | 0 |              | rjct         | 4    | 4 |
| 10.39.10.20/30         | intf | 0 | ff.3.0.21    | ucst         | 40   | 1 |
| so-0/0/0.0             |      |   |              |              |      |   |
| 10.39.10.21/32         | intf | 0 | 10.39.10.21  | loc1         | 36   | 1 |
| 10.255.14.172/32       | user | 0 |              | ucst         | 69   | 2 |
| so-0/0/0.0             |      |   |              |              |      |   |
| 10.255.14.175/32       | user | 0 |              | indr         | 81   | 3 |
|                        |      |   |              | Push 100004, | Push |   |
| 100004(top) so-1/0/0.0 |      |   |              |              |      |   |
| 172.16.233.0/4         | perm | 2 |              | mdsc         | 5    | 3 |
| 172.16.233.1/32        | perm | 0 | 172.16.233.1 | mcst         | 1    | 8 |
| 172.16.233.5/32        | user | 1 | 172.16.233.5 | mcst         | 1    | 8 |
| 255.255.255.255/32     | perm | 0 |              | bcst         | 2    | 3 |

On QFX5200, the results for this command look like this:

```
show route forwarding-table family mpls
```

```
Routing table: default.mpls
```

```
MPLS:
```

```
Destination Type RtRef Next hop Type Index NhRef Netif
```

```
default perm 0 dscd 65 1
```

```
0 user 0 recv 64 4
```

```
1 user 0 recv 64 4
```

```
2 user 0 recv 64 4
```

```
13 user 0 recv 64 4
```

```
300384 user 0 9.1.1.1 Pop 1711 2 xe-0/0/34.0
```

```
300384(S=0) user 0 9.1.1.1 Pop 1712 2 xe-0/0/34.0
```

```
300400 user 0 ulst 131071 2
```

```
10.1.1.2 Pop 1713 1 xe-0/0/38.0
```

```
172.16.11.2 Pop 1714 1 xe-0/0/40.0
```

```
300400(S=0) user 0 ulst 131072 2
```

```
10.1.1.2 Pop 1715 1 xe-0/0/38.0
```

```
172.16.11.2 Pop 1716 1 xe-0/0/40.0
```

```
Routing table: __mpls-oam__.mpls
```

```
MPLS:
```

```
Destination Type RtRef Next hop Type Index NhRef Netif
```

```
default perm 0 dscd 1681 1
```

## show route hidden

|                                 |                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show route hidden &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Display only hidden route information. A hidden route is unusable, even if it is the best path.                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Hidden Routes</a></li> </ul>                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>    | <a href="#">show route hidden on page 822</a><br><a href="#">show route hidden detail on page 823</a><br><a href="#">show route hidden extensive on page 823</a><br><a href="#">show route hidden terse on page 824</a>                                                                                                                      |
| <b>Output Fields</b>            | For information about output fields, see the output field table for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                |

## Sample Output

### show route hidden

```
user@host> show route hidden

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
127.0.0.1/32      [Direct/0] 04:26:38
                  > via lo0.0

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
```

```

10.5.5.5/32      [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
                  AS path: 100 I
                  Unusable
10.12.1.0/24     [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
                  AS path: 100 I
                  Unusable
10.12.80.4/30    [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
                  AS path: I
                  Unusable
...

```

### show route hidden detail

```

user@host> show route hidden detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
127.0.0.1/32 (1 entry, 0 announced)
    Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Hidden Martian Int>
        Local AS:      1
        Age: 4:27:37
        Task: IF
        AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.5.5.5/32 (1 entry, 0 announced)
    BGP      Preference: 170/-101
        Route Distinguisher: 10.4.4.4:4
        Next hop type: Unusable
        Next-hop reference count: 6
        State: <Secondary Hidden Int Ext>
        Local AS:      1 Peer AS:      1
        Age: 3:45:09
        Task: BGP_1.10.4.4.4+2493
        AS path: 100 I
        Communities: target:1:999
        VPN Label: 100064
        Localpref: 100
        Router ID: 10.4.4.4
        Primary Routing Table bgp.13vpn.0

...

```

### show route hidden extensive

The output for the **show route hidden extensive** command is identical to that of the **show route hidden detail** command. For sample output, see [show route hidden detail on page 823](#).

## show route hidden terse

```
user@host> show route hidden terse
```

```
inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
```

```
Restart Complete
```

```
+ = Active Route, - = Last Active, * = Both
```

| A Destination | P Prf | Metric 1 | Metric 2 | Next hop | AS path |
|---------------|-------|----------|----------|----------|---------|
| 127.0.0.1/32  | D 0   |          |          | >1o0.0   |         |

```
private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
```

```
red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
```

```
Restart Complete
```

```
+ = Active Route, - = Last Active, * = Both
```

| A Destination | P Prf | Metric 1 | Metric 2 | Next hop | AS path |
|---------------|-------|----------|----------|----------|---------|
| 10.5.5.5/32   | B 170 | 100      |          | Unusable | 100 I   |
| 10.12.1.0/24  | B 170 | 100      |          | Unusable | 100 I   |
| 10.12.80.4/30 | B 170 | 100      |          | Unusable | I       |

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
```

```
Restart Complete
```

```
+ = Active Route, - = Last Active, * = Both
```

| A Destination            | P Prf | Metric 1 | Metric 2 | Next hop | AS path |
|--------------------------|-------|----------|----------|----------|---------|
| 10.4.4.4:4:10.5.5.5/32   | B 170 | 100      |          | Unusable | 100 I   |
| 10.4.4.4:4:10.12.1.0/24  | B 170 | 100      |          | Unusable | 100 I   |
| 10.4.4.4:4:10.12.80.4/30 | B 170 | 100      |          | Unusable | I       |

```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

## show route inactive-path

|                                    |                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 825</a><br><a href="#">Syntax (EX Series Switches) on page 825</a>                                                                                                                                                                                                                                                                                                |
| <b>Syntax</b>                      | <pre>show route inactive-path &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switches)</b> | <pre>show route inactive-path &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                             |
| <b>Description</b>                 | Display routes for destinations that have no active route. An inactive route is a route that was not selected as the best path.                                                                                                                                                                                                                                                              |
| <b>Options</b>                     | <p><b>none</b>—Display all inactive routes.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <a href="#">show route active-path on page 742</a></li> </ul>                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>       | <a href="#">show route inactive-path on page 825</a><br><a href="#">show route inactive-path detail on page 826</a><br><a href="#">show route inactive-path extensive on page 827</a><br><a href="#">show route inactive-path terse on page 827</a>                                                                                                                                          |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                               |

## Sample Output

### show route inactive-path

```
user@host> show route inactive-path
```

```

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.100.12/30      [OSPF/10] 03:57:28, metric 1
                    > via so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/8          [Direct/0] 04:39:56
                    > via fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.80.0/30       [BGP/170] 04:38:17, localpref 100
                    AS path: 100 I
                    > to 10.12.80.1 via ge-6/3/2.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

### show route inactive-path detail

```
user@host> show route inactive-path detail
```

```

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete

10.12.100.12/30 (2 entries, 1 announced)
  OSPF Preference: 10
    Next-hop reference count: 1
    Next hop: via so-0/3/0.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Local AS: 1
    Age: 3:58:24 Metric: 1
    Area: 0.0.0.0
    Task: OSPF
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

10.0.0.0/8 (2 entries, 0 announced)
  Direct Preference: 0

```

```

Next hop type: Interface
Next-hop reference count: 1
Next hop: via fxp1.0, selected
State: <NotBest Int>
Inactive reason: No difference
Age: 4:40:52
Task: IF
AS path: I

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.12.80.0/30 (2 entries, 1 announced)
  BGP      Preference: 170/-101
           Next-hop reference count: 6
           Source: 10.12.80.1
           Next hop: 10.12.80.1 via ge-6/3/2.0, selected
           State: <Ext>
           Inactive reason: Route Preference
           Peer AS: 100
           Age: 4:39:13
           Task: BGP_100.10.12.80.1+179
           AS path: 100 I
           Localpref: 100
           Router ID: 10.0.0.0

```

### show route inactive-path extensive

The output for the **show route inactive-path extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-path detail on page 826](#).

### show route inactive-path terse

```

user@host> show route inactive-path terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.12.100.12/30   0  10           1           >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.0.0.0/8        D   0           0           >fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.12.80.0/30     B 170          100           >10.12.80.1    100 I

```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
```

```
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
```

```
bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete
```

```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
```

```
private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```



## show route instance

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 829</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 829</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax</b>                                     | <pre>show route instance &lt;brief   detail   summary&gt; &lt;instance-name&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;operational&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show route instance &lt;brief   detail   summary&gt; &lt;instance-name&gt; &lt;operational&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>                        | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                                | Display routing instance information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                    | <p><b>none</b>—(Same as <b>brief</b>) Display standard information about all routing instances.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>. (These options are not available with the <b>operational</b> keyword.)</p> <p><b>instance-name</b>—(Optional) Display information for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show route instance cust1</b> command).</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>operational</b>—(Optional) Display operational routing instances.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li>• <i>Example: Transporting IPv6 Traffic Across IPv4 Using Filter-Based Tunneling</i></li> <li>• <i>Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>                      | <a href="#">show route instance on page 831</a><br><a href="#">show route instance detail (Graceful Restart Complete) on page 831</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

[show route instance detail \(Graceful Restart Incomplete\) on page 833](#)

[show route instance detail \(VPLS Routing Instance\) on page 835](#)

[show route instance operational on page 835](#)

[show route instance summary on page 835](#)

**Output Fields** Table 40 on page 830 lists the output fields for the **show route instance** command. Output fields are listed in the approximate order in which they appear.

Table 40: show route instance Output Fields

| Field Name                       | Field Description                                                                                                                                                                                                                                                  | Level of Output          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Instance or <i>instance-name</i> | Name of the routing instance.                                                                                                                                                                                                                                      | All levels               |
| Operational Routing Instances    | ( <b>operational</b> keyword only) Names of all operational routing instances.                                                                                                                                                                                     | —                        |
| Type                             | Type of routing instance: <b>forwarding</b> , <b>l2vpn</b> , <b>no-forwarding</b> , <b>vpls</b> , <b>virtual-router</b> , or <b>vrf</b> .                                                                                                                          | All levels               |
| State                            | State of the routing instance: <b>active</b> or <b>inactive</b> .                                                                                                                                                                                                  | <b>brief detail none</b> |
| Interfaces                       | Name of interfaces belonging to this routing instance.                                                                                                                                                                                                             | <b>brief detail none</b> |
| Restart State                    | Status of graceful restart for this instance: <b>Pending</b> or <b>Complete</b> .                                                                                                                                                                                  | <b>detail</b>            |
| Path selection timeout           | Maximum amount of time, in seconds, remaining until graceful restart is declared complete. The default is <b>300</b> .                                                                                                                                             | <b>detail</b>            |
| Tables                           | Tables (and number of routes) associated with this routing instance.                                                                                                                                                                                               | <b>brief detail none</b> |
| Route-distinguisher              | Unique route distinguisher associated with this routing instance.                                                                                                                                                                                                  | <b>detail</b>            |
| Vrf-import                       | VPN routing and forwarding instance import policy name.                                                                                                                                                                                                            | <b>detail</b>            |
| Vrf-export                       | VPN routing and forwarding instance export policy name.                                                                                                                                                                                                            | <b>detail</b>            |
| Vrf-import-target                | VPN routing and forwarding instance import target community name.                                                                                                                                                                                                  | <b>detail</b>            |
| Vrf-export-target                | VPN routing and forwarding instance export target community name.                                                                                                                                                                                                  | <b>detail</b>            |
| Vrf-edge-protection-id           | Context identifier configured for edge-protection.                                                                                                                                                                                                                 | <b>detail</b>            |
| Fast-reroute-priority            | Fast reroute priority setting for a VPLS routing instance: <b>high</b> , <b>medium</b> , or <b>low</b> . The default is <b>low</b> .                                                                                                                               | <b>detail</b>            |
| Restart State                    | Restart state: <ul style="list-style-type: none"> <li><b>Pending:protocol-name</b>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li><b>Complete</b>—All protocols have restarted for this routing table.</li> </ul> | <b>detail</b>            |

Table 40: show route instance Output Fields (continued)

| Field Name             | Field Description                               | Level of Output                  |
|------------------------|-------------------------------------------------|----------------------------------|
| Primary rib            | Primary table for this routing instance.        | <b>brief</b> none <b>summary</b> |
| Active/holddown/hidden | Number of active, hold-down, and hidden routes. | All levels                       |

## Sample Output

### show route instance

```

user@host> show route instance

Instance          Type
Primary RIB
master            forwarding
  inet.0           16/0/1
  iso.0            1/0/0
  mpls.0           0/0/0
  inet6.0          2/0/0
  l2circuit.0     0/0/0
__juniper_private1__ forwarding
  __juniper_private1__.inet.0 12/0/0
  __juniper_private1__.inet6.0 1/0/0

```

### show route instance detail (Graceful Restart Complete)

```

user@host> show route instance detail

master:
  Router ID: 10.255.14.176
  Type: forwarding      State: Active
  Restart State: Complete Path selection timeout: 300
  Tables:
    inet.0               : 17 routes (15 active, 0 holddown, 1 hidden)
    Restart Complete
    inet.3               : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    iso.0                : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0              : 19 routes (19 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Complete
    inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0        : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
  BGP-INET:
    Router ID: 10.69.103.1
    Type: vrf           State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
      t3-0/0/0.103
    Route-distinguisher: 10.255.14.176:103
    Vrf-import: [ BGP-INET-import ]
    Vrf-export: [ BGP-INET-export ]

```

```

Tables:
  BGP-INET.inet.0      : 4 routes (4 active, 0 holddown, 0 hidden)
  Restart Complete
BGP-L:
  Router ID: 10.69.104.1
  Type: vrf             State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.104
  Route-distinguisher: 10.255.14.176:104
  Vrf-import: [ BGP-L-import ]
  Vrf-export: [ BGP-L-export ]
  Tables:
    BGP-L.inet.0       : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
    BGP-L.mpls.0       : 3 routes (3 active, 0 holddown, 0 hidden)
    Restart Complete
L2VPN:
  Router ID: 0.0.0.0
  Type: l2vpn           State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.512
  Route-distinguisher: 10.255.14.176:512
  Vrf-import: [ L2VPN-import ]
  Vrf-export: [ L2VPN-export ]
  Tables:
    L2VPN.l2vpn.0      : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
LDP:
  Router ID: 10.69.105.1
  Type: vrf             State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.105
  Route-distinguisher: 10.255.14.176:105
  Vrf-import: [ LDP-import ]
  Vrf-export: [ LDP-export ]
  Tables:
    LDP.inet.0         : 5 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
OSPF:
  Router ID: 10.69.101.1
  Type: vrf             State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.101
  Route-distinguisher: 10.255.14.176:101
  Vrf-import: [ OSPF-import ]
  Vrf-export: [ OSPF-export ]
  Vrf-import-target: [ target:11111
  Tables:
    OSPF.inet.0        : 8 routes (7 active, 0 holddown, 0 hidden)
    Restart Complete
RIP:
  Router ID: 10.69.102.1
  Type: vrf             State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.102

```

```

Route-distinguisher: 10.255.14.176:102
Vrf-import: [ RIP-import ]
Vrf-export: [ RIP-export ]
Tables:
  RIP.inet.0          : 6 routes (6 active, 0 holddown, 0 hidden)
  Restart Complete
STATIC:
  Router ID: 10.69.100.1
  Type: vrf           State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.255.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
    STATIC.inet.0      : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete

```

### show route instance detail (Graceful Restart Incomplete)

```
user@host> show route instance detail
```

```

master:
  Router ID: 10.255.14.176
  Type: forwarding      State: Active
  Restart State: Pending Path selection timeout: 300
  Tables:
    inet.0              : 17 routes (15 active, 1 holddown, 1 hidden)
    Restart Pending: OSPF LDP
    inet.3              : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: OSPF LDP
    iso.0               : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0              : 23 routes (23 active, 0 holddown, 0 hidden)
    Restart Pending: LDP VPN
    bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
    inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0         : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
BGP-INET:
  Router ID: 10.69.103.1
  Type: vrf             State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.103
  Route-distinguisher: 10.255.14.176:103
  Vrf-import: [ BGP-INET-import ]
  Vrf-export: [ BGP-INET-export ]
  Tables:
    BGP-INET.inet.0     : 6 routes (5 active, 0 holddown, 0 hidden)
    Restart Pending: VPN
BGP-L:
  Router ID: 10.69.104.1
  Type: vrf             State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.104

```

```

Route-distinguisher: 10.255.14.176:104
Vrf-import: [ BGP-L-import ]
Vrf-export: [ BGP-L-export ]
Tables:
  BGP-L.inet.0          : 6 routes (5 active, 0 holddown, 0 hidden)
  Restart Pending: VPN
  BGP-L.mpls.0         : 2 routes (2 active, 0 holddown, 0 hidden)
  Restart Pending: VPN
L2VPN:
  Router ID: 0.0.0.0
  Type: l2vpn           State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.512
  Route-distinguisher: 10.255.14.176:512
  Vrf-import: [ L2VPN-import ]
  Vrf-export: [ L2VPN-export ]
  Tables:
    L2VPN.l2vpn.0       : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: VPN L2VPN
LDP:
  Router ID: 10.69.105.1
  Type: vrf             State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.105
  Route-distinguisher: 10.255.14.176:105
  Vrf-import: [ LDP-import ]
  Vrf-export: [ LDP-export ]
  Tables:
    LDP.inet.0          : 5 routes (4 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF LDP VPN
OSPF:
  Router ID: 10.69.101.1
  Type: vrf             State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.101
  Route-distinguisher: 10.255.14.176:101
  Vrf-import: [ OSPF-import ]
  Vrf-export: [ OSPF-export ]
  Tables:
    OSPF.inet.0         : 8 routes (7 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF VPN
RIP:
  Router ID: 10.69.102.1
  Type: vrf             State: Active
  Restart State: Pending Path selection timeout: 300
  Interfaces:
    t3-0/0/0.102
  Route-distinguisher: 10.255.14.176:102
  Vrf-import: [ RIP-import ]
  Vrf-export: [ RIP-export ]
  Tables:
    RIP.inet.0          : 8 routes (6 active, 2 holddown, 0 hidden)
    Restart Pending: RIP VPN
STATIC:
  Router ID: 10.69.100.1
  Type: vrf             State: Active
  Restart State: Pending Path selection timeout: 300

```

```

Interfaces:
  t3-0/0/0.100
Route-distinguisher: 10.255.14.176:100
Vrf-import: [ STATIC-import ]
Vrf-export: [ STATIC-export ]
Tables:
  STATIC.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
  Restart Pending: VPN

```

### show route instance detail (VPLS Routing Instance)

```

user@host> show route instance detail test-vpls

test-vpls:
  Router ID: 0.0.0.0
  Type: vpls          State: Active
  Interfaces:
    lsi.1048833
    lsi.1048832
    fe-0/1/0.513
  Route-distinguisher: 10.255.37.65:1
  Vrf-import: [ __vrf-import-test-vpls-internal__ ]
  Vrf-export: [ __vrf-export-test-vpls-internal__ ]
  Vrf-import-target: [ target:300:1 ]
  Vrf-export-target: [ target:300:1 ]
  Vrf-edge-protection-id: 166.1.3.1 Fast-reroute-priority: high
  Tables:
    test-vpls.l2vpn.0          : 3 routes (3 active, 0 holddown, 0 hidden)

```

### show route instance operational

```

user@host> show route instance operational

Operational Routing Instances:

master
default

```

### show route instance summary

```

user@host> show route instance summary

```

| Instance | Type       | Primary rib      | Active/holddown/hidden |
|----------|------------|------------------|------------------------|
| master   | forwarding | inet.0           | 15/0/1                 |
|          |            | iso.0            | 1/0/0                  |
|          |            | mpls.0           | 35/0/0                 |
|          |            | l3vpn.0          | 0/0/0                  |
|          |            | inet6.0          | 2/0/0                  |
|          |            | l2vpn.0          | 0/0/0                  |
|          |            | l2circuit.0      | 0/0/0                  |
| BGP-INET | vrf        | BGP-INET.inet.0  | 5/0/0                  |
|          |            | BGP-INET.iso.0   | 0/0/0                  |
|          |            | BGP-INET.inet6.0 | 0/0/0                  |
| BGP-L    | vrf        | BGP-L.inet.0     | 5/0/0                  |
|          |            | BGP-L.iso.0      | 0/0/0                  |
|          |            | BGP-L.mpls.0     | 4/0/0                  |

|        |       |                 |       |
|--------|-------|-----------------|-------|
| L2VPN  | l2vpn | BGP-L.inet6.0   | 0/0/0 |
|        |       | L2VPN.inet.0    | 0/0/0 |
|        |       | L2VPN.iso.0     | 0/0/0 |
|        |       | L2VPN.inet6.0   | 0/0/0 |
|        |       | L2VPN.l2vpn.0   | 2/0/0 |
| LDP    | vrf   | LDP.inet.0      | 4/0/0 |
|        |       | LDP.iso.0       | 0/0/0 |
|        |       | LDP.mpls.0      | 0/0/0 |
|        |       | LDP.inet6.0     | 0/0/0 |
|        |       | LDP.l2circuit.0 | 0/0/0 |
| OSPF   | vrf   | OSPF.inet.0     | 7/0/0 |
|        |       | OSPF.iso.0      | 0/0/0 |
|        |       | OSPF.inet6.0    | 0/0/0 |
| RIP    | vrf   | RIP.inet.0      | 6/0/0 |
|        |       | RIP.iso.0       | 0/0/0 |
|        |       | RIP.inet6.0     | 0/0/0 |
| STATIC | vrf   | STATIC.inet.0   | 4/0/0 |
|        |       | STATIC.iso.0    | 0/0/0 |
|        |       | STATIC.inet6.0  | 0/0/0 |



## show route next-hop

|                                    |                                                                                                                                                                                                                                                                                                                |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 837</a><br><a href="#">Syntax (EX Series Switches) on page 837</a>                                                                                                                                                                                                                  |
| <b>Syntax</b>                      | <pre>show route next-hop <i>next-hop</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                            |
| <b>Syntax (EX Series Switches)</b> | <pre>show route next-hop <i>next-hop</i> &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                      |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                               |
| <b>Description</b>                 | Display the entries in the routing table that are being sent to the specified next-hop address.                                                                                                                                                                                                                |
| <b>Options</b>                     | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>next-hop</i></b>—Next-hop address.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>       | <a href="#">show route next-hop on page 837</a><br><a href="#">show route next-hop detail on page 838</a><br><a href="#">show route next-hop extensive on page 840</a><br><a href="#">show route next-hop terse on page 842</a>                                                                                |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                 |

## Sample Output

### show route next-hop

```
user@host> show route next-hop 192.168.71.254
```

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
```

```

10.10.0.0/16      *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
172.16.0.0/12    *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
192.168.0.0/16   *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
192.168.102.0/23 *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
207.17.136.0/24  *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
207.17.136.192/32 *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

### show route next-hop detail

```
user@host> show route next-hop 192.168.71.254 detail
```

```

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
10.10.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 36
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 1
        Age: 6:27:41
        Task: RT
        Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
        AS path: I

10.209.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 36
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 1
        Age: 6:27:41
        Task: RT
        Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
        AS path: I

```

```

172.16.0.0/12 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

192.168.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

192.168.102.0/23 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.192/32 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route next-hop extensive

```
user@host> show route next-hop 192.168.71.254 extensive
```

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

192.168.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
```

```

        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 69
        Age: 2:02:28
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

192.168.102.0/23 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.102.0/23 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 69
        Age: 2:02:28
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 69
        Age: 2:02:28
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

207.17.136.192/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.192/32 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 69
        Age: 2:02:28
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.12vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```

```
red.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route next-hop terse

```
user@host> show route next-hop 192.168.71.254 terse
```

```
inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
```

```
Restart Complete
```

```
+ = Active Route, - = Last Active, * = Both
```

| A | Destination       | P | Prf | Metric 1 | Metric 2 | Next hop        | AS path |
|---|-------------------|---|-----|----------|----------|-----------------|---------|
| * | 10.10.0.0/16      | S | 5   |          |          | >192.168.71.254 |         |
| * | 10.209.0.0/16     | S | 5   |          |          | >192.168.71.254 |         |
| * | 172.16.0.0/12     | S | 5   |          |          | >192.168.71.254 |         |
| * | 192.168.0.0/16    | S | 5   |          |          | >192.168.71.254 |         |
| * | 192.168.102.0/23  | S | 5   |          |          | >192.168.71.254 |         |
| * | 207.17.136.0/24   | S | 5   |          |          | >192.168.71.254 |         |
| * | 207.17.136.192/32 | S | 5   |          |          | >192.168.71.254 |         |

```
private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
```

```
red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

## show route output

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 843</a><br><a href="#">Syntax (EX Series Switches) on page 843</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax</b>                      | <pre>show route output (address <i>ip-address</i>   interface <i>interface-name</i>) &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Syntax (EX Series Switches)</b> | <pre>show route output (address <i>ip-address</i>   interface <i>interface-name</i>) &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>                 | <p>Display the entries in the routing table learned through static routes and interior gateway protocols that are to be sent out the interface with either the specified IP address or specified name.</p> <p>To view routes advertised to a neighbor or received from a neighbor for the BGP protocol, use the <b>show route advertising-protocol bgp</b> and <b>show route receive-protocol bgp</b> commands instead.</p>                                                                                                                                                                                                                      |
| <b>Options</b>                     | <p><b>address <i>ip-address</i></b>—Display entries in the routing table that are to be sent out the interface with the specified IP address.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>interface <i>interface-name</i></b>—Display entries in the routing table that are to be sent out the interface with the specified name.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>       | <a href="#">show route output address on page 844</a><br><a href="#">show route output address detail on page 844</a><br><a href="#">show route output address extensive on page 845</a><br><a href="#">show route output address terse on page 845</a><br><a href="#">show route output interface on page 845</a><br><a href="#">show route output interface detail on page 846</a><br><a href="#">show route output interface extensive on page 846</a><br><a href="#">show route output interface terse on page 846</a>                                                                                                                       |

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

## Sample Output

### show route output address

```
user@host> show route output address 172.16.36.1/24

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.36.0/24          *[Direct/0] 00:19:56
                        > via so-0/1/2.0
                        [OSPF/10] 00:19:55, metric 1
                        > via so-0/1/2.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route output address detail

```
user@host> show route output address 172.16.36.1 detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
172.16.36.0/24 (2 entries, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via so-0/1/2.0, selected
    State: <Active Int>
    Age: 23:00
    Task: IF
    AS path: I
  OSPF Preference: 10
    Next-hop reference count: 1
    Next hop: via so-0/1/2.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Age: 22:59      Metric: 1
    Area: 0.0.0.0
    Task: OSPF
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
```



```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route output address extensive

The output for the **show route output address extensive** command is identical to that of the **show route output address detail** command. For sample output, see [show route output address detail on page 844](#).

### show route output address terse

```
user@host> show route output address 172.16.36.1 terse

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 172.16.36.0/24    D  0                >so-0/1/2.0
                        0 10                >so-0/1/2.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route output interface

```
user@host> show route output interface so-0/1/2.0

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.71.240/32    *[OSPF/10] 00:13:00, metric 2
                    via so-0/1/2.0
                    > via so-0/3/2.0
10.255.71.241/32    *[OSPF/10] 00:13:10, metric 1
                    > via so-0/1/2.0
172.16.14.0/24      *[OSPF/10] 00:05:11, metric 3
                    to 35.1.1.2 via ge-3/1/0.0
                    > via so-0/1/2.0
                    via so-0/3/2.0
172.16.16.0/24      *[OSPF/10] 00:13:10, metric 2
                    > via so-0/1/2.0
172.16.36.0/24      *[Direct/0] 00:13:21
                    > via so-0/1/2.0
                    [OSPF/10] 00:13:20, metric 1
                    > via so-0/1/2.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
private1__inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route output interface detail

```
user@host> show route output interface so-0/1/2.0 detail
```

```
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
10.255.71.240/32 (1 entry, 1 announced)
    *OSPF   Preference: 10
           Next-hop reference count: 2
           Next hop: via so-0/1/2.0
           Next hop: via so-0/3/2.0, selected
           State: <Active Int>
           Age: 14:52      Metric: 2
           Area: 0.0.0.0
           Task: OSPF
           Announcement bits (1): 0-KRT
           AS path: I
10.255.71.241/32 (1 entry, 1 announced)
    *OSPF   Preference: 10
           Next-hop reference count: 4
           Next hop: via so-0/1/2.0, selected
           State: <Active Int>
           Age: 15:02      Metric: 1
           Area: 0.0.0.0
           Task: OSPF
           Announcement bits (1): 0-KRT
           AS path: I
...
```

### show route output interface extensive

The output for the **show route output interface extensive** command is identical to that of the **show route output interface detail** command. For sample output, see [show route output interface detail on page 846](#).

### show route output interface terse

```
user@host> show route output interface so-0/1/2.0 terse
```

```
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

| A | Destination      | P | Prf | Metric 1 | Metric 2 | Next hop    | AS path |
|---|------------------|---|-----|----------|----------|-------------|---------|
| * | 10.255.71.240/32 | 0 | 10  | 2        |          | so-0/1/2.0  |         |
|   |                  |   |     |          |          | >so-0/3/2.0 |         |
| * | 10.255.71.241/32 | 0 | 10  | 1        |          | >so-0/1/2.0 |         |
| * | 172.16.14.0/24   | 0 | 10  | 3        |          | 35.1.1.2    |         |

```

>so-0/1/2.0
so-0/3/2.0
* 172.16.16.0/24      0 10      2      >so-0/1/2.0
* 172.16.36.0/24      D  0      >so-0/1/2.0
                     0 10      1      >so-0/1/2.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

## show route protocol

---

**List of Syntax**    [Syntax on page 848](#)  
                          [Syntax \(EX Series Switches\) on page 848](#)

**Syntax**    `show route protocol protocol`  
              `<brief | detail | extensive | terse>`  
              `<logical-system (all | logical-system-name)>`

**Syntax (EX Series Switches)**    `show route protocol protocol`  
                                          `<brief | detail | extensive | terse>`

**Release Information**    Command introduced before Junos OS Release 7.4.  
                              Command introduced in Junos OS Release 9.0 for EX Series switches.  
                              **ospf2** and **ospf3** options introduced in Junos OS Release 9.2.  
                              **ospf2** and **ospf3** options introduced in Junos OS Release 9.2 for EX Series switches.  
                              **flow** option introduced in Junos OS Release 10.0.  
                              **flow** option introduced in Junos OS Release 10.0 for EX Series switches.

**Description**    Display the route entries in the routing table that were learned from a particular protocol.

**Options**    **brief | detail | extensive | terse**—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to **brief**.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

***protocol***—Protocol from which the route was learned:

- **access**—Access route for use by DHCP application
- **access-internal**—Access-internal route for use by DHCP application
- **aggregate**—Locally generated aggregate route
- **arp**—Route learned through the Address Resolution Protocol
- **atmvpn**—Asynchronous Transfer Mode virtual private network
- **bgp**—Border Gateway Protocol
- **ccc**—Circuit cross-connect
- **direct**—Directly connected route
- **dvmrp**—Distance Vector Multicast Routing Protocol
- **esis**—End System-to-Intermediate System
- **flow**—Locally defined flow-specification route
- **frr**—Precomputed protection route or backup route used when a link goes down

- **isis**—Intermediate System-to-Intermediate System
- **ldp**—Label Distribution Protocol
- **l2circuit**—Layer 2 circuit
- **l2vpn**—Layer 2 virtual private network
- **local**—Local address
- **mpls**—Multiprotocol Label Switching
- **msdp**—Multicast Source Discovery Protocol
- **ospf**—Open Shortest Path First versions 2 and 3
- **ospf2**—Open Shortest Path First versions 2 only
- **ospf3**—Open Shortest Path First version 3 only
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation
- **rsvp**—Resource Reservation Protocol
- **rtarget**—Local route target virtual private network
- **static**—Statically defined route
- **tunnel**—Dynamic tunnel
- **vpn**—Virtual private network



**NOTE:** EX Series switches run a subset of these protocols. See the switch CLI for details.

**Required Privilege Level** view

**List of Sample Output**

- [show route protocol access on page 850](#)
- [show route protocol access-internal extensive on page 850](#)
- [show route protocol arp on page 850](#)
- [show route protocol bgp on page 851](#)
- [show route protocol bgp detail on page 851](#)
- [show route protocol bgp detail \(Labeled Unicast\) on page 852](#)
- [show route protocol bgp detail \(Aggregate Extended Community Bandwidth\) on page 852](#)
- [show route protocol bgp extensive on page 853](#)
- [show route protocol bgp terse on page 854](#)
- [show route protocol direct on page 854](#)

[show route protocol frr on page 855](#)  
[show route protocol l2circuit detail on page 855](#)  
[show route protocol l2vpn extensive on page 856](#)  
[show route protocol ldp on page 857](#)  
[show route protocol ldp extensive on page 857](#)  
[show route protocol ospf \(Layer 3 VPN\) on page 858](#)  
[show route protocol ospf detail on page 859](#)  
[show route protocol rip on page 859](#)  
[show route protocol rip detail on page 859](#)  
[show route protocol ripng table inet6 on page 860](#)  
[show route protocol static detail on page 860](#)

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

## Sample Output

### show route protocol access

```

user@host> show route protocol access

inet.0: 30380 destinations, 30382 routes (30379 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

13.160.0.3/32      *[Access/13] 00:00:09
                   > to 13.160.0.2 via fe-0/0/0.0
13.160.0.4/32      *[Access/13] 00:00:09
                   > to 13.160.0.2 via fe-0/0/0.0
13.160.0.5/32      *[Access/13] 00:00:09
                   > to 13.160.0.2 via fe-0/0/0.0

```

### show route protocol access-internal extensive

```

user@host> show route protocol access-internal 13.160.0.19 extensive

inet.0: 100020 destinations, 100022 routes (100019 active, 0 holddown, 1 hidden)
13.160.0.19/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.19/32 -> {13.160.0.2}
    *Access-internal Preference: 12
        Next-hop reference count: 200000
        Next hop: 13.160.0.2 via fe-0/0/0.0, selected
        State: <Active Int>
    Age: 36
        Task: RPD Unix Domain Server./var/run/rpd_serv.local
        Announcement bits (1): 0-KRT
        AS path: I

```

### show route protocol arp

```

user@host> show route protocol arp

inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

```

```

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.4/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.5/32      [ARP/4294967293] 00:04:32, from 20.20.1.1
                  Unusable
20.20.1.6/32      [ARP/4294967293] 00:04:34, from 20.20.1.1
                  Unusable
20.20.1.7/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.8/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.9/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.10/32     [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.11/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
                  Unusable
20.20.1.12/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
                  Unusable
20.20.1.13/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
                  Unusable
...

```

### show route protocol bgp

```

user@host> show route protocol bgp 192.168.64.0/21

inet.0: 335832 destinations, 335833 routes (335383 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.64.0/21   *[BGP/170] 6d 10:41:16, localpref 100, from 192.168.69.71
                  AS path: 10458 14203 2914 4788 4788 I
                  > to 192.168.167.254 via fxp0.0

```

### show route protocol bgp detail

```

user@host> show route protocol bgp 66.117.63.0/24 detail

inet.0: 335805 destinations, 335806 routes (335356 active, 0 holddown, 450 hidden)
66.117.63.0/24   (1 entry, 1 announced)
  *BGP           Preference: 170/-101
                  Next hop type: Indirect
                  Next-hop reference count: 1006436
                  Source: 192.168.69.71
                  Next hop type: Router, Next hop index: 324
                  Next hop: 192.168.167.254 via fxp0.0, selected
                  Protocol next hop: 192.168.69.71
                  Indirect next hop: 8e166c0 342
                  State: <Active Ext>
                  Local AS: 69 Peer AS: 10458
                  Age: 6d 10:42:42 Metric2: 0
                  Task: BGP_10458.192.168.69.71+179
                  Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
1

```

```

AS path: 10458 14203 2914 4788 4788 I
Communities: 2914:410 2914:2403 2914:3400
Accepted
Localpref: 100
Router ID: 207.17.136.192

```

### show route protocol bgp detail (Labeled Unicast)

```

user@host> show route protocol bgp 1.1.1.8/32 detail

inet.0: 45 destinations, 46 routes (45 active, 0 holddown, 0 hidden)
1.1.1.8/32 (2 entries, 2 announced)
State:
*BGP Preference: 1/-101
Next hop type: Indirect, Next hop index: 0
Address: 0xc007f30
Next-hop reference count: 2
Source: 1.1.1.1
Next hop type: Router, Next hop index: 614
Next hop: 20.1.1.2 via ge-0/0/1.0, selected
Label-switched-path lsp1
Label operation: Push 1000126, Push 1000125, Push 1000124, Push 1000123, Push
299872(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 1000126: None; Label 1000125: None; Label 1000124: None;
Label 1000123: None; Label 299872: None;
Label element ptr: 0xc007860
Label parent element ptr: 0xc0089a0
Label element references: 1
Label element child references: 0
Label element lsp id: 0
Session Id: 0x140
Protocol next hop: 1.1.1.4
Label operation: Push 1000126, Push 1000125, Push 1000124, Push 1000123(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl, prop-ttl
Load balance label: Label 1000126: None; Label 1000125: None; Label 1000124: None;
Label 1000123: None;
Indirect next hop: 0xae8d300 1048576 INH Session ID: 0x142
State:
Local AS: 5 Peer AS: 5
Age: 22:43 Metric2: 2
Validation State: unverified
Task: BGP_5.1.1.1.1
Announcement bits (2): 0-KRT 7-Resolve tree 2
AS path: I
Accepted
Route Labels: 1000123(top) 1000124 1000125 1000126
Localpref: 100
Router ID: 1.1.1.1

```

### show route protocol bgp detail (Aggregate Extended Community Bandwidth)

```

user@host> show route 10.0.2.0 protocol bgp detail

inet.0: 20 destinations, 26 routes (20 active, 0 holddown, 0 hidden)
10.0.2.0/30 (2 entries, 1 announced)
*BGP Preference: 170/-101
Next hop type: Router, Next hop index: 0
Address: 0xb618990

```



```

Next-hop reference count: 3
Source: 10.0.1.1
Next hop: 10.0.0.2 via ge-0/0/0.0 balance 40%
Session Id: 0x0
Next hop: 10.0.1.1 via ge-0/0/1.0 balance 60%, selected
Session Id: 0x0
State: <Active Ext>
Local AS: 65000 Peer AS: 65001
Age: 20:33
Validation State: unverified
Task: BGP_65001.10.0.1.1
Announcement bits (3): 0-KRT 2-BGP_Listen.0.0.0.0+179
3-BGP_RT_Background
AS path: 65001 I
Communities: bandwidth:65000:60000000
Accepted Multipath
Localpref: 100
Router ID: 128.49.121.137
BGP Preference: 170/-101
Next hop type: Router, Next hop index: 595
Address: 0xb7a1330
Next-hop reference count: 9
Source: 10.0.0.2
Next hop: 10.0.0.2 via ge-0/0/0.0, selected
Session Id: 0x141
State: <NotBest Ext>
Inactive reason: Not Best in its group - Active preferred
Local AS: 65000 Peer AS: 65001
Age: 20:33
Validation State: unverified
Task: BGP_65001.10.0.0.2
AS path: 65001 I
Communities: bandwidth:65000:40000000
Accepted MultipathContrib
Localpref: 100
Router ID: 128.49.121.132

```

### show route protocol bgp extensive

```
user@host> show route protocol bgp 192.168.64.0/21 extensive
```

```

inet.0: 335827 destinations, 335828 routes (335378 active, 0 holddown, 450 hidden)
192.168.64.0/21 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
  Nexthop: Self
  AS path: [69] 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4. Val: 1
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Next-hop reference count: 1006502
    Source: 192.168.69.71
    Next hop type: Router, Next hop index: 324
    Next hop: 192.168.167.254 via fxp0.0, selected
    Protocol next hop: 192.168.69.71
    Indirect next hop: 8e166c0 342
    State: <Active Ext>

```

```

Local AS: 69 Peer AS: 10458
Age: 6d 10:44:45 Metric2: 0
Task: BGP_10458.192.168.69.71+179
Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
1
AS path: 10458 14203 2914 4788 4788 I
Communities: 2914:410 2914:2403 2914:3400
Accepted
Localpref: 100
Router ID: 207.17.136.192
Indirect next hops: 1
  Protocol next hop: 192.168.69.71
  Indirect next hop: 8e166c0 342
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 192.168.167.254 via fxp0.0
  192.168.0.0/16 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
    Nexthop: 192.168.167.254 via fxp0.0

```

### show route protocol bgp terse

```
user@host> show route protocol bgp 192.168.64.0/21 terse
```

```

inet.0: 24 destinations, 32 routes (23 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
192.168.64.0/21    B 170      100          >172.16.100.1 10023 21 I

```

### show route protocol direct

```
user@host> show route protocol direct
```

```

inet.0: 335843 destinations, 335844 routes (335394 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.8.0/24      *[Direct/0] 17w0d 10:31:49
> via fe-1/3/1.0
10.255.165.1/32    *[Direct/0] 25w4d 04:13:18
> via lo0.0
172.16.30.0/24     *[Direct/0] 17w0d 23:06:26
> via fe-1/3/2.0
192.168.164.0/22   *[Direct/0] 25w4d 04:13:20
> via fxp0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

47.0005.80ff.f800.0000.0108.0001.0102.5516.5001/152
*[Direct/0] 25w4d 04:13:21
> via lo0.0

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

2001:db8::10:255:165:1/128
    *[Direct/0] 25w4d 04:13:21
    > via lo0.0
fe80::2a0:a5ff:fe12:ad7/128
    *[Direct/0] 25w4d 04:13:21
    > via lo0.0

```

### show route protocol frr

```

user@host> show route protocol frr

inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.3 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.4/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.4 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.5/32      *[FRR/200] 00:05:35, from 20.20.1.1
                  > to 20.20.1.5 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.6/32      *[FRR/200] 00:05:37, from 20.20.1.1
                  > to 20.20.1.6 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.7/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.7 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.8/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.8 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.9/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.9 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.10/32     *[FRR/200] 00:05:38, from 20.20.1.1
...

```

### show route protocol l2circuit detail

```

user@host> show route protocol l2circuit detail

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
100000 (1 entry, 1 announced)
    *L2CKT Preference: 7
      Next hop: via ge-2/0/0.0, selected
      Label operation: Pop      Offset: 4
      State: <Active Int>
      Local AS: 99
      Age: 9:52
      Task: Common L2 VC
      Announcement bits (1): 0-KRT
      AS path: I

```

```

ge-2/0/0.0 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000, Push 100000(top)[0] Offset: -4
    Protocol next hop: 10.245.255.63
    Push 100000 Offset: -4
    Indirect next hop: 86af0c0 298
    State: <Active Int>
    Local AS: 99
    Age: 9:52
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 1-Common L2 VC
    AS path: I

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000[0]
    Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
    State: <Active Int>
    Local AS: 99
    Age: 10:21
    Task: l2 circuit
    Announcement bits (1): 0-LDP
    AS path: I
    VC Label 100000, MTU 1500, VLAN ID 512

```

### show route protocol l2vpn extensive

```

user@host> show route protocol l2vpn extensive

inet.0: 14 destinations, 15 routes (13 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
800001 (1 entry, 1 announced)
TSI:
KRT in-kernel 800001 /36 -> {so-0/0/0.0}
  *L2VPN Preference: 7
    Next hop: via so-0/0/0.0 weight 49087 balance 97%, selected
    Label operation: Pop Offset: 4
    State: <Active Int>
    Local AS: 69
    Age: 7:48
    Task: Common L2 VC
    Announcement bits (1): 0-KRT
    AS path: I

so-0/0/0.0 (1 entry, 1 announced)
TSI:
KRT in-kernel so-0/0/0.0 /16 -> {indirect(288)}
  *L2VPN Preference: 7

```

```

Next hop: via so-0/0/1.0, selected
Label operation: Push 800000 Offset: -4
Protocol next hop: 10.255.14.220
Push 800000 Offset: -4
  Indirect next hop: 85142a0 288
State: <Active Int>
Local AS: 69
Age: 7:48
Task: Common L2 VC
Announcement bits (2): 0-KRT 1-Common L2 VC
AS path: I
Communities: target:69:1 Layer2-info: encaps:PPP,
control flags:2, mtu: 0

```

### show route protocol ldp

```

user@host> show route protocol ldp

inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.16.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Push 100000
192.168.17.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0

private1__inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100064            *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Pop
100064(S=0)        *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Pop
100080            *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Swap 100000

```

### show route protocol ldp extensive

```

user@host> show route protocol ldp extensive

192.168.16.1/32 (1 entry, 1 announced)
  State: <FlashAll>
    *LDP    Preference: 9
            Next-hop reference count: 3
            Next hop: via t1-4/0/0.0, selected
            Label operation: Push 100000
            State: <Active Int>
            Local AS: 64500
            Age: 1d 23:03:58      Metric: 1
            Task: LDP
            Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
            AS path: I

192.168.17.1/32 (1 entry, 1 announced)
  State: <FlashAll>

```

```

    *LDP      Preference: 9
              Next-hop reference count: 3
              Next hop: via t1-4/0/0.0, selected
              State: <Active Int>
              Local AS: 64500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
              AS path: I

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)

100064 (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /36 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              State: <Active Int>
              Local AS: 64500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              Prefixes bound to route: 192.168.17.1/32

100064(S=0) (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /40 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              Label operation: Pop
              State: <Active Int>
              Local AS: 64500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I

100080 (1 entry, 1 announced)
TSI:
KRT in-kernel 100080 /36 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              Label operation: Swap 100000
              State: <Active Int>
              Local AS: 64500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              Prefixes bound to route: 192.168.16.1/32

```

### show route protocol ospf (Layer 3 VPN)

```
user@host> show route protocol ospf
```

```

inet.0: 40 destinations, 40 routes (39 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.4/30      *[OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.39.1.8/30      [OSPF/10] 00:05:18, metric 2
                  > via t3-3/2/0.0
10.255.14.171/32  *[OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.255.14.179/32  *[OSPF/10] 00:05:18, metric 2
                  > via t3-3/2/0.0
172.16.233.5/32   *[OSPF/10] 20:25:55, metric 1

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30     [OSPF/10] 00:05:43, metric 1
                  > via so-0/2/2.0
10.255.14.173/32  *[OSPF/10] 00:05:43, metric 1
                  > via so-0/2/2.0
172.16.233.5/32   *[OSPF/10] 20:26:20, metric 1

```

### show route protocol ospf detail

```

user@host> show route protocol ospf detail

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 (2 entries, 0 announced)
    OSPF   Preference: 10
           Nexthop: via so-0/2/2.0, selected
           State: <Int>
           Inactive reason: Route Preference
           Age: 6:25      Metric: 1
           Area: 0.0.0.0
           Task: VPN-AB-OSPF
           AS path: I
           Communities: Route-Type:0.0.0.0:1:0

...

```

### show route protocol rip

```

user@host> show route protocol rip

inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32  *[RIP/100] 20:24:34, metric 2
                  > to 10.39.1.22 via t3-0/2/2.0
172.16.233.9/32   *[RIP/100] 00:03:59, metric 1

```

### show route protocol rip detail

```

user@host> show route protocol rip detail

```

```

inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 (1 entry, 1 announced)
  *RIP      Preference: 100
            Nexthop: 10.39.1.22 via t3-0/2/2.0, selected
            State: <Active Int>
            Age: 20:25:02   Metric: 2
            Task: VPN-AB-RIPv2
            Announcement bits (2): 0-KRT 2-BGP.0.0.0.0+179
            AS path: I
            Route learned from 10.39.1.22 expires in 96 seconds

```

### show route protocol ripng table inet6

```

user@host> show route protocol ripng table inet6

inet6.0: 4215 destinations, 4215 routes (4214 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

1111::1/128      * [RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::2/128      * [RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::3/128      * [RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::4/128      * [RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::5/128      * [RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::6/128      * [RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0

```

### show route protocol static detail

```

user@host> show route protocol static detail

inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
10.5.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next hop type: Router, Next hop index: 324
    Address: 0x9274010
    Next-hop reference count: 27
    Next hop: 192.168.187.126 via fxp0.0, selected
    Session Id: 0x0
    State: <Active NoReadvrt Int Ext>
    Age: 7w3d 21:24:25
    Validation State: unverified
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next hop type: Router, Next hop index: 324
    Address: 0x9274010
    Next-hop reference count: 27

```



```
Next hop: 192.168.187.126 via fxp0.0, selected
Session Id: 0x0
State: <Active NoReadvrt Int Ext>
Age: 7w3d 21:24:25
Validation State: unverified
Task: RT
Announcement bits (1): 0-KRT
AS path: I

10.13.10.0/23 (1 entry, 1 announced)
  *Static Preference: 5
    Next hop type: Router, Next hop index: 324
    Address: 0x9274010
    Next-hop reference count: 27
    Next hop: 192.168.187.126 via fxp0.0, selected
    Session Id: 0x0
    State: <Active NoReadvrt Int Ext>
    Age: 7w3d 21:24:25
    Validation State: unverified
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I
```

## show route receive-protocol

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>              | <a href="#">Syntax on page 862</a><br><a href="#">Syntax (EX Series Switches) on page 862</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax</b>                      | <pre>show route receive-protocol <i>protocol neighbor-address</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax (EX Series Switches)</b> | <pre>show route receive-protocol <i>protocol neighbor-address</i> &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                 | Display the routing information as it was received through a particular neighbor using a particular dynamic routing protocol.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                     | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>protocol neighbor-address</i></b>—Protocol transmitting the route (<b>bgp</b>, <b>dvmrp</b>, <b>msdp</b>, <b>pim</b>, <b>rip</b>, or <b>ripng</b>) and address of the neighboring router from which the route entry was received.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Additional Information</b>      | The output displays the selected routes and the attributes with which they were received, but does not show the effects of import policy on the routing attributes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>       | <a href="#">show route receive-protocol bgp on page 865</a><br><a href="#">show route receive-protocol bgp extensive on page 865</a><br><a href="#">show route receive-protocol bgp table extensive on page 866</a><br><a href="#">show route receive-protocol bgp logical-system extensive on page 866</a><br><a href="#">show route receive-protocol bgp detail (Layer 2 VPN) on page 867</a><br><a href="#">show route receive-protocol bgp extensive (Layer 2 VPN) on page 867</a><br><a href="#">show route receive-protocol bgp (Layer 3 VPN) on page 868</a><br><a href="#">show route receive-protocol bgp detail (Layer 3 VPN) on page 868</a><br><a href="#">show route receive-protocol bgp detail (Long-Lived Graceful Restart) on page 869</a><br><a href="#">show route receive-protocol bgp detail (Labeled Unicast) on page 870</a><br><a href="#">show route receive-protocol bgp extensive (Layer 3 VPN) on page 870</a><br><a href="#">Show route receive protocol (Segment Routing Traffic Engineering) on page 871</a> |

**Output Fields** Table 41 on page 863 describes the output fields for the **show route receive-protocol** command. Output fields are listed in the approximate order in which they appear.

*Table 41: show route receive-protocol Output Fields*

| Field Name                                      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Level of Output         |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <i>routing-table-name</i>                       | Name of the routing table—for example, inet.0.                                                                                                                                                                                                                                                                                                                                                                                                                                | All levels              |
| <i>number destinations</i>                      | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                                                                                                                                       | All levels              |
| <i>number routes</i>                            | Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b></li> <li>• <b>holddown</b> (routes that are in pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>                                                                                                                                      | All levels              |
| Prefix                                          | Destination prefix.                                                                                                                                                                                                                                                                                                                                                                                                                                                           | none <b>brief</b>       |
| MED                                             | Multiple exit discriminator value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                      | none <b>brief</b>       |
| <i>destination-prefix</i><br>(entry, announced) | Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.                                                                                                                                                                                                                                                                                         | <b>detail extensive</b> |
| <b>Accepted LongLivedStale</b>                  | The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.                                                                                                                                                           | <b>detail extensive</b> |
| <b>Accepted LongLivedStaleImport</b>            | The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.<br><br>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table | <b>detail extensive</b> |
| <b>ImportAccepted LongLivedStaleImport</b>      | Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table<br><br>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.                                                                                                                                                                      | <b>detail extensive</b> |
| <b>Route Distinguisher</b>                      | 64-bit prefix added to IP subnets to make them unique.                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>detail extensive</b> |
| <b>Label-Base, range</b>                        | First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.                                                                                                                                                                                                                                                                                                        | <b>detail extensive</b> |

Table 41: show route receive-protocol Output Fields (continued)

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Level of Output         |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>VPN Label</b>            | Virtual private network (VPN) label. Packets are sent between CE and PE routing devices by advertising VPN labels. VPN labels transit over either an RSVP or an LDP label-switched path (LSP) tunnel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>Next hop</b>             | Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels              |
| <b>Localpref or Lclpref</b> | Local preference value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | All levels              |
| <b>AS path</b>              | <p>Autonomous system (AS) path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• I—IGP.</li> <li>• E—EGP.</li> <li>• ?—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• [ ]—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used the AS-path merge process, as defined in RFC 4893.</li> <li>• [ ]—If more than one AS number is configured on the router, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li>• { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• ( )—Parentheses enclose a confederation.</li> <li>• ( [ ] )—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> | All levels              |
| <b>Route Labels</b>         | Stack of labels carried in the BGP route update.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| <b>Cluster list</b>         | (For route reflected output only) Cluster ID sent by the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail extensive</b> |
| <b>Originator ID</b>        | (For route reflected output only) Address of routing device that originally sent the route to the route reflector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>detail extensive</b> |
| <b>Communities</b>          | Community path attribute for the route. See the Output Field table in the <a href="#">show route detail</a> command for all possible values for this field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail extensive</b> |
| <b>AIGP</b>                 | Accumulated interior gateway protocol (AIGP) BGP attribute.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail extensive</b> |
| <b>Attrset AS</b>           | Number, local preference, and path of the AS that originated the route. These values are stored in the <b>Attrset</b> attribute at the originating routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>detail extensive</b> |

Table 41: show route receive-protocol Output Fields (continued)

| Field Name          | Field Description                                       | Level of Output  |
|---------------------|---------------------------------------------------------|------------------|
| Layer2-info: encaps | Layer 2 encapsulation (for example, VPLS).              | detail extensive |
| control flags       | Control flags: none or Site Down.                       | detail extensive |
| mtu                 | Maximum transmission unit (MTU) of the Layer 2 circuit. | detail extensive |

## Sample Output

### show route receive-protocol bgp

```
user@host> show route receive-protocol bgp 10.255.245.215

inet.0: 28 destinations, 33 routes (27 active, 0 holddown, 1 hidden)
Prefix          Next hop          MED      Lclpref  AS path
10.22.1.0/24     10.255.245.215    0        100      I
10.22.2.0/24     10.255.245.215    0        100      I
```

### show route receive-protocol bgp extensive

```
user@host> show route receive-protocol bgp 10.255.245.63 extensive

inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
Prefix          Next hop          MED      Lclpref  AS path
172.16.1.0/24 (1 entry, 1 announced)
  Next hop: 10.0.50.3
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
172.16.163.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
172.16.164.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
172.16.195.0/24 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref  AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref  AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

| Prefix                                                               | Next hop | MED | Lc1pref | AS path |
|----------------------------------------------------------------------|----------|-----|---------|---------|
| mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden) |          |     |         |         |

### show route receive-protocol bgp table extensive

```
user@host> show route receive-protocol bgp 207.17.136.192 table inet.0 66.117.68.0/24 extensive
inet.0: 227315 destinations, 227316 routes (227302 active, 0 holddown, 13 hidden)
* 66.117.63.0/24 (1 entry, 1 announced)
  Nexthop: 207.17.136.29
  Localpref: 100
  AS path: AS2 PA[6]: 14203 2914 3356 29748 33437 AS_TRANS
  AS path: AS4 PA[2]: 33437 393219
  AS path: Merged[6]: 14203 2914 3356 29748 33437 393219 I
  Communities: 2914:420
```

### show route receive-protocol bgp logical-system extensive

```
user@host> show route receive-protocol bgp 10.0.0.9 logical-system PE4 extensive
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)
* 10.0.0.0/30 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.0.0.4/30 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

10.0.0.8/30 (2 entries, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.9.9.1/32 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.100.1.1/32 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 172.16.44.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300096
  Nexthop: 10.0.0.9
  AS path: 13979 I
  AIGP: 203

* 172.16.55.0/24 (1 entry, 1 announced)
```

```

Accepted
Route Label: 300112
Nexthop: 10.0.0.9
AS path: 13979 7018 I
AIGP: 25

* 172.16.66.0/24 (1 entry, 1 announced)
Accepted
Route Label: 300144
Nexthop: 10.0.0.9
AS path: 13979 7018 I

* 172.16.99.0/24 (1 entry, 1 announced)
Accepted
Route Label: 300160
Nexthop: 10.0.0.9
AS path: 13979 7018 I

```

### show route receive-protocol bgp detail (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 detail

inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED    Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0
hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags: 0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0

```

### show route receive-protocol bgp extensive (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 extensive

inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED    Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

```

```

Prefix          Nexthop          MED    Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
  control flags:0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
  control flags:0, mtu: 0

```

### show route receive-protocol bgp (Layer 3 VPN)

```
user@host> show route receive-protocol bgp 10.255.14.171
```

```

inet.0: 33 destinations, 33 routes (32 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED    Lclpref AS path
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.175/32  10.255.14.171          100 2 I
10.255.14.179/32  10.255.14.171          2    100 I
VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.175/32  10.255.14.171          100 2 I
10.255.14.177/32  10.255.14.171          100 I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
mpls.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.171:300:10.255.14.177/32
                  10.255.14.171          100 I
10.255.14.171:100:10.255.14.179/32
                  10.255.14.171          2    100 I
10.255.14.171:200:10.255.14.175/32
                  10.255.14.171          100 2 I

```

### show route receive-protocol bgp detail (Layer 3 VPN)

```
user@host> show route receive-protocol bgp 10.255.14.174 detail
```



```

inet.0: 16 destinations, 17 routes (15 active, 0 holddown, 1 hidden)
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
  Route Distinguisher: 10.255.14.176:2
  VPN Label: 101264
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
* 10.255.14.172/32 (1 entry, 1 announced)
  Route Distinguisher: 10.255.14.176:2
  VPN Label: 101280
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
* 10.255.14.174:2:10.49.0.0/30 (1 entry, 0 announced)
  Route Distinguisher: 10.255.14.174:2
  VPN Label: 101264
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
* 10.255.14.174:2:10.255.14.172/32 (1 entry, 0 announced)
  Route Distinguisher: 10.255.14.174:2
  VPN Label: 101280
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```

### show route receive-protocol bgp detail (Long-Lived Graceful Restart)

```
user@host> show route receive-protocol bgp 10.4.12.11 detail
```

```

bgp.l2vpn.0: 38 destinations, 39 routes (37 active, 0 holddown, 1 hidden)
* 172.16.1.4:100:172.16.1.4/96 AD (1 entry, 1 announced)
  Accepted LongLivedStale LongLivedStaleImport
  Nexthop: 10.4.12.11
  Localpref: 100
  AS path: I

```

**show route receive-protocol bgp detail (Labeled Unicast)**

```

user@host> show route receive-protocol bgp 1.1.1.1 detail

inet.0: 45 destinations, 46 routes (45 active, 0 holddown, 0 hidden)
* 1.1.1.8/32 (2 entries, 2 announced)
Accepted
Route Labels: 1000123(top) 1000124 1000125 1000126
Nexthop: 1.1.1.4
Localpref: 100
AS path: I
Entropy label capable, next hop field matches route next hop

inet.3: 15 destinations, 21 routes (6 active, 0 holddown, 14 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)

inet6.0: 26 destinations, 28 routes (26 active, 0 holddown, 0 hidden)
* 100::1/128 (2 entries, 2 announced)
Accepted
Route Labels: 1000123(top) 1000124 1000125 1000126
Nexthop: ::ffff:1.1.1.4
Localpref: 100
AS path: I

inet6.3: 22 destinations, 23 routes (22 active, 0 holddown, 0 hidden)

```

**show route receive-protocol bgp extensive (Layer 3 VPN)**

```

user@host> show route receive-protocol bgp 10.255.245.63 extensive

inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
  Prefix                Nexthop                MED    Lclpref AS path
  172.16.1.0/24 (1 entry, 1 announced)
    Nexthop: 10.0.50.3
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.45
  172.16.163.0/16 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.68
  172.16.164.0/16 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.45
  172.16.195.0/24 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.68

```

```

inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)

```

### Show route receive protocol (Segment Routing Traffic Engineering)

```

show route receive protocol bgp 10.1.1.4

bgp.inetcolor.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

* 50-4.4.4.4-1234<sr6>/96 (1 entry, 0 announced)
  Import Accepted
  Distinguisher: 50
  Color: 1234
  Nexthop: 10.1.1.4
  Localpref: 100
  AS path: 3 I
  Communities: target:1.1.1.1:1

inetcolor.0: 6 destinations, 7 routes (6 active, 0 holddown, 0 hidden)
* 4.4.4.4-1234<c6>/64 (1 entry, 1 announced)
  Import Accepted
  Color: 1234
  Nexthop: 10.1.1.4
  Localpref: 100
  AS path: 3 I
  Communities: target:1.1.1.1:1

user@host# run show route receive-protocol bgp 5001:1::4

bgp.inet6color.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

* 50-2001:1::4-1234<sr6>/192 (1 entry, 0 announced)
  Import Accepted
  Distinguisher: 50
  Color: 1234
  Nexthop: ::ffff:1.1.1.4
  Localpref: 100
  AS path: 3 I
  Communities: target:1.1.1.1:1

inet6color.0: 6 destinations, 7 routes (6 active, 0 holddown, 0 hidden)
* 2001::5-1234<c6>/160 (1 entry, 1 announced)
  Import Accepted
  Color: 1234
  Nexthop: ::ffff:1.1.1.5
  Localpref: 100
  AS path: 3 I
  Communities: target:2:1

```

## show route table

|                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                                   | <a href="#">Syntax on page 872</a><br><a href="#">Syntax (EX Series Switches, QFX Series Switches) on page 872</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax</b>                                           | <pre>show route table <i>routing-table-name</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switches, QFX Series Switches)</b> | <pre>show route table <i>routing-table-name</i> &lt;brief   detail   extensive   terse&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                              | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 14.1X53-D15 for QFX Series switches.</p> <p>Show route table evpn statement introduced in Junos OS Release 15.1X53-D30 for QFX Series switches.</p>                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                                      | Display the route entries in a particular routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                          | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>routing-table-name</i></b>—Display route entries for all routing tables whose names begin with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route table inet</b> command).</p>                                                                                                                    |
| <b>Required Privilege Level</b>                         | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>                            | <ul style="list-style-type: none"> <li><a href="#">show route summary</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>                            | <a href="#">show route table bgp.l2.vpn on page 884</a><br><a href="#">show route table bgp.l3vpn.0 on page 884</a><br><a href="#">show route table bgp.l3vpn.0 detail on page 884</a><br><a href="#">show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured) on page 886</a><br><a href="#">show route table bgp.evpn.0 on page 886</a><br><a href="#">show route table evpna.evpn.0 on page 886</a><br><a href="#">show route table inet.0 on page 887</a><br><a href="#">show route table inet.3 on page 887</a><br><a href="#">show route table inet.3 protocol ospf on page 887</a> |

[show route table inet6.0 on page 888](#)  
[show route table inet6.3 on page 888](#)  
[show route table inetflow detail on page 888](#)  
[show route table inetflow.0 extensive \(BGP Flowspec Redirect to IP\) on page 889](#)  
[show route table lsdist.0 extensive on page 890](#)  
[show route table l2circuit.0 on page 892](#)  
[show route table mpls on page 892](#)  
[show route table mpls extensive on page 892](#)  
[show route table mpls.0 on page 893](#)  
[show route table mpls.0 detail \(PTX Series\) on page 894](#)  
[show route table mpls.0 ccc ge-0/0/1.1004 detail on page 894](#)  
[show route table mpls.0 protocol evpn on page 895](#)  
[show route table mpls.0 protocol ospf on page 901](#)  
[show route table mpls.0 extensive \(PTX Series\) on page 902](#)  
[show route table mpls.0 \(RSVP Route—Transit LSP\) on page 903](#)  
[show route table vpls\\_1 detail on page 903](#)  
[show route table vpn-a on page 903](#)  
[show route table vpn-a.mdt.0 on page 904](#)  
[show route table VPN-A detail on page 904](#)  
[show route table VPN-AB.inet.0 on page 904](#)  
[show route table VPN\\_blue.mvpn-inet6.0 on page 905](#)  
[show route table vrf1.mvpn.0 extensive on page 905](#)  
[show route table inetflow detail on page 906](#)  
[show route table bgp.evpn.0 extensive |no-more \(EVPN\) on page 909](#)

**Output Fields** [Table 31 on page 721](#) describes the output fields for the **show route table** command. Output fields are listed in the approximate order in which they appear.

*Table 42: show route table Output Fields*

| Field Name                | Field Description                                |
|---------------------------|--------------------------------------------------|
| <i>routing-table-name</i> | Name of the routing table (for example, inet.0). |

Table 42: show route table Output Fields (continued)

| Field Name          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Restart complete    | <p>All protocols have restarted for this routing table.</p> <p>Restart state:</p> <ul style="list-style-type: none"> <li>• <b>Pending;protocol-name</b>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li>• <b>Complete</b>—All protocols have restarted for this routing table.</li> </ul> <p>For example, if the output shows-</p> <pre> • LDP.inet.0          : 5 routes (4 active, 1 holddown, 0 hidden)   Restart Pending: OSPF LDP VPN </pre> <p>This indicates that <b>OSPF</b>, <b>LDP</b>, and <b>VPN</b> protocols did not restart for the <b>LDP.inet.0</b> routing table.</p> <pre> • vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)   Restart Complete </pre> <p>This indicates that all protocols have restarted for the <b>vpls_1.l2vpn.0</b> routing table.</p> |
| number destinations | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| number routes       | <p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 42: show route table Output Fields (continued)

| Field Name                                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>route-destination</i><br>(entry, announced) | <p>Route destination (for example:10.0.0.1/24). The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> <li>• <b>inclusive multicast Ethernet tag route</b>—Type of route destination represented by (for example, 3:100.100.100.10:100::0::10::100.100.100.10/384): <ul style="list-style-type: none"> <li>• <b>route distinguisher</b>—(8 octets) Route distinguisher (RD) must be the RD of the EVPN instance (EVI) that is advertising the NLRI.</li> <li>• <b>Ethernet tag ID</b>—(4 octets) Identifier of the Ethernet tag. Can set to 0 or to a valid Ethernet tag value.</li> <li>• <b>IP address length</b>—(1 octet) Length of IP address in bits.</li> <li>• <b>originating router's IP address</b>—(4 or 16 octets) Must set to the provider edge (PE) device's IP address. This address should be common for all EVIs on the PE device, and may be the PE device's loopback address.</li> </ul> </li> </ul> |
| label stacking                                 | <p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| [ <i>protocol, preference</i> ]                | <p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

Table 42: show route table Output Fields (continued)

| Field Name                                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Level                                         | (IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Route Distinguisher                           | IP subnet augmented with a 64-bit prefix.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| PMSI                                          | Provider multicast service interface (MVPN routing table).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Next-hop type                                 | Type of next hop. For a description of possible values for this field, see <a href="#">Table 34 on page 766</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Next-hop reference count                      | Number of references made to the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Flood nexthop branches exceed maximum message | Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Source                                        | IP address of the route source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Next hop                                      | Network layer address of the directly reachable neighboring system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| via                                           | Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b> . This field can also contain the following information: <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul> |
| Label-switched-path <i>lsp-path-name</i>      | Name of the LSP used to reach the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Label operation                               | MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Interface                                     | (Local only) Local interface name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Protocol next hop                             | Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Indirect next hop                             | Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| State                                         | State of the route (a route can be in more than one state). See <a href="#">Table 35 on page 768</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



Table 42: show route table Output Fields (continued)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Local AS          | AS number of the local routing devices.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Age               | How long the route has been known.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| AI GP             | Accumulated interior gateway protocol (AI GP) BGP attribute.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Metric <i>n</i>   | Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| MED-plus-IGP      | Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| TTL-Action        | For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Task              | Name of the protocol that has added the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Announcement bits | <p>The number of BGP peers or protocols to which Junos OS has announced this route, followed by the list of the recipients of the announcement. Junos OS can also announce the route to the kernel routing table (KRT) for installing the route into the Packet Forwarding Engine, to a resolve tree, a Layer 2 VC, or even a VPN. For example, <i>n-Resolve inet</i> indicates that the specified route is used for route resolution for next hops found in the routing table.</p> <ul style="list-style-type: none"> <li><i>n</i>—An index used by Juniper Networks customer support only.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| AS path           | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li><b>I</b>—IGP.</li> <li><b>E</b>—EGP.</li> <li><b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li><b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li><b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893.</li> <li><b>[ ]</b>—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li><b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li><b>( )</b>—Parentheses enclose a confederation.</li> <li><b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> |

Table 42: show route table Output Fields (continued)

| Field Name              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| validation-state        | <p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul> |
| FECs bound to route     | Indicates point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Primary Upstream        | When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, indicates the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| RPF Nexthops            | When multipoint LDP with MoFRR is configured, indicates the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Label                   | Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| weight                  | Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| VC Label                | MPLS label assigned to the Layer 2 circuit virtual connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| MTU                     | Maximum transmission unit (MTU) of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| VLAN ID                 | VLAN identifier of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Prefixes bound to route | Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Communities             | Community path attribute for the route. See <a href="#">Table 36 on page 770</a> for all possible values for this field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Layer2-info: encaps     | Layer 2 encapsulation (for example, VPLS).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| control flags           | Control flags: <b>none</b> or <b>Site Down</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| mtu                     | Maximum transmission unit (MTU) information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Label-Base, range       | First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| status vector           | Layer 2 VPN and VPLS network layer reachability information (NLRI).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 42: show route table Output Fields (continued)**

| Field Name                          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accepted Multipath                  | Current active path when BGP multipath is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Accepted LongLivedStale             | The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag might be displayed for a route. Neither of these flags is displayed at the same time as the Stale (ordinary GR stale) flag.                                                                                                                                                                  |
| Accepted LongLivedStaleImport       | <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag might be displayed for a route. Neither of these flags is displayed at the same time as the Stale (ordinary GR stale) flag.</p> <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table</p> |
| ImportAccepted LongLivedStaleImport | <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table</p> <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.</p>                                                                                                                                                                       |
| Accepted MultipathContrib           | Path currently contributing to BGP multipath.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Localpref                           | Local preference value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Router ID                           | BGP router ID as advertised by the neighbor in the open message.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Primary Routing Table               | In a routing table group, the name of the primary routing table in which the route resides.                                                                                                                                                                                                                                                                                                                                                                                           |
| Secondary Tables                    | In a routing table group, the name of one or more secondary tables in which the route resides.                                                                                                                                                                                                                                                                                                                                                                                        |

[Table 34 on page 766](#) describes all possible values for the Next-hop Types output field.

**Table 43: Next-hop Types Output Field Values**

| Next-Hop Type     | Description                                                                                                                                                                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Broadcast (bcast) | Broadcast next hop.                                                                                                                                                                                                                                                            |
| Deny              | Deny next hop.                                                                                                                                                                                                                                                                 |
| Discard           | Discard next hop.                                                                                                                                                                                                                                                              |
| Flood             | Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast. |

Table 43: Next-hop Types Output Field Values (continued)

| Next-Hop Type            | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hold                     | Next hop is waiting to be resolved into a unicast or multicast type.                                                                                                                                                                                                                                                                                                                                         |
| Indexed (idxd)           | Indexed next hop.                                                                                                                                                                                                                                                                                                                                                                                            |
| Indirect (indr)          | Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.                                                                                                                                                                                 |
| Interface                | Used for a network address assigned to an interface. Unlike the router next hop, the interface next hop does not reference any specific node on the network.                                                                                                                                                                                                                                                 |
| Local (locl)             | Local address on an interface. This next-hop type causes packets with this destination address to be received locally.                                                                                                                                                                                                                                                                                       |
| Multicast (mcst)         | Wire multicast next hop (limited to the LAN).                                                                                                                                                                                                                                                                                                                                                                |
| Multicast discard (mdsc) | Multicast discard.                                                                                                                                                                                                                                                                                                                                                                                           |
| Multicast group (mgrp)   | Multicast group member.                                                                                                                                                                                                                                                                                                                                                                                      |
| Receive (recv)           | Receive.                                                                                                                                                                                                                                                                                                                                                                                                     |
| Reject (rjct)            | Discard. An ICMP unreachable message was sent.                                                                                                                                                                                                                                                                                                                                                               |
| Resolve (rslv)           | Resolving next hop.                                                                                                                                                                                                                                                                                                                                                                                          |
| Routed multicast (mcrtr) | Regular multicast next hop.                                                                                                                                                                                                                                                                                                                                                                                  |
| Router                   | <p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as a next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> <li>• Must not be a direct or local subnet for the routing device.</li> <li>• Must have a next hop that is directly connected to the routing device.</li> </ul> |
| Table                    | Routing table next hop.                                                                                                                                                                                                                                                                                                                                                                                      |
| Unicast (ucst)           | Unicast.                                                                                                                                                                                                                                                                                                                                                                                                     |
| Unilist (ulst)           | List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.                                                                                                                                                                                                                                                                                                                  |

Table 35 on page 768 describes all possible values for the State output field. A route can be in more than one state (for example, <Active NoReadvrt Int Ext>).

**Table 44: State Output Field Values**

| Value                                       | Description                                                                                                                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accounting                                  | Route needs accounting.                                                                                                                                                              |
| Active                                      | Route is active.                                                                                                                                                                     |
| Always Compare MED                          | Path with a lower multiple exit discriminator (MED) is available.                                                                                                                    |
| AS path                                     | Shorter AS path is available.                                                                                                                                                        |
| Cisco Non-deterministic MED selection       | Cisco nondeterministic MED is enabled, and a path with a lower MED is available.                                                                                                     |
| Clone                                       | Route is a clone.                                                                                                                                                                    |
| Cluster list length                         | Length of cluster list sent by the route reflector.                                                                                                                                  |
| Delete                                      | Route has been deleted.                                                                                                                                                              |
| Ex                                          | Exterior route.                                                                                                                                                                      |
| Ext                                         | BGP route received from an external BGP neighbor.                                                                                                                                    |
| FlashAll                                    | Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes. |
| Hidden                                      | Route not used because of routing policy.                                                                                                                                            |
| IfCheck                                     | Route needs forwarding RPF check.                                                                                                                                                    |
| IGP metric                                  | Path through next hop with lower IGP metric is available.                                                                                                                            |
| Inactive reason                             | Flags for this route, which was not selected as best for a particular destination.                                                                                                   |
| Initial                                     | Route being added.                                                                                                                                                                   |
| Int                                         | Interior route.                                                                                                                                                                      |
| Int Ext                                     | BGP route received from an internal BGP peer or a BGP confederation peer.                                                                                                            |
| Interior > Exterior > Exterior via Interior | Direct, static, IGP, or EBGp path is available.                                                                                                                                      |

Table 44: State Output Field Values (continued)

| Value                          | Description                                                                                                                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Local Preference               | Path with a higher local preference value is available.                                                                                                                                                                           |
| Martian                        | Route is a martian (ignored because it is obviously invalid).                                                                                                                                                                     |
| MartianOK                      | Route exempt from martian filtering.                                                                                                                                                                                              |
| Next hop address               | Path with lower metric next hop is available.                                                                                                                                                                                     |
| No difference                  | Path from neighbor with lower IP address is available.                                                                                                                                                                            |
| NoReadvrt                      | Route not to be advertised.                                                                                                                                                                                                       |
| NotBest                        | Route not chosen because it does not have the lowest MED.                                                                                                                                                                         |
| Not Best in its group          | Incoming BGP AS is not the best of a group (only one AS can be the best).                                                                                                                                                         |
| NotInstall                     | Route not to be installed in the forwarding table.                                                                                                                                                                                |
| Number of gateways             | Path with a greater number of next hops is available.                                                                                                                                                                             |
| Origin                         | Path with a lower origin code is available.                                                                                                                                                                                       |
| Pending                        | Route pending because of a hold-down configured on another route.                                                                                                                                                                 |
| Release                        | Route scheduled for release.                                                                                                                                                                                                      |
| RIB preference                 | Route from a higher-numbered routing table is available.                                                                                                                                                                          |
| Route Distinguisher            | 64-bit prefix added to IP subnets to make them unique.                                                                                                                                                                            |
| Route Metric or MED comparison | Route with a lower metric or MED is available.                                                                                                                                                                                    |
| Route Preference               | Route with lower preference value is available.                                                                                                                                                                                   |
| Router ID                      | Path through a neighbor with lower ID is available.                                                                                                                                                                               |
| Secondary                      | Route not a primary route.                                                                                                                                                                                                        |
| Unusable path                  | Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> <li>• The route is damped.</li> <li>• The route is rejected by an import policy.</li> <li>• The route is unresolved.</li> </ul> |
| Update source                  | Last tiebreaker is the lowest IP address value.                                                                                                                                                                                   |

Table 36 on page 770 describes the possible values for the Communities output field.

Table 45: Communities Output Field Values

| Value                                                   | Description                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>area-number</i>                                      | 4 bytes, encoding a 32-bit area number. For AS-external routes, the value is 0. A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.                                        |
| <b>bandwidth: local AS number:link-bandwidth-number</b> | Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute. |
| <b>domain-id</b>                                        | Unique configurable number that identifies the OSPF domain.                                                                                                                                                                                                                           |
| <b>domain-id-vendor</b>                                 | Unique configurable number that further identifies the OSPF domain.                                                                                                                                                                                                                   |
| <i>link-bandwidth-number</i>                            | Link-bandwidth number: from 0 through 4,294,967,295 (bytes per second).                                                                                                                                                                                                               |
| <i>local AS number</i>                                  | Local AS number: from 1 through 65,535.                                                                                                                                                                                                                                               |
| <i>options</i>                                          | 1 byte. Currently this is only used if the route type is 5 or 7. Setting the least significant bit in the field indicates that the route carries a type 2 metric.                                                                                                                     |
| <b>origin</b>                                           | (Used with VPNs) Identifies where the route came from.                                                                                                                                                                                                                                |
| <i>ospf-route-type</i>                                  | 1 byte, encoded as 1 or 2 for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); 3 for summary routes; 5 for external routes (area number must be 0); 7 for NSSA routes; or 129 for sham link endpoint addresses.                                 |
| <b>route-type-vendor</b>                                | Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x8000. The format is <b>area-number:ospf-route-type:options</b> .                                                                                  |
| <b>rte-type</b>                                         | Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x0306. The format is <b>area-number:ospf-route-type:options</b> .                                                                                  |
| <b>target</b>                                           | Defines which VPN the route participates in; <b>target</b> has the format <b>32-bit IP address:16-bit number</b> . For example, 10.19.0.0:100.                                                                                                                                        |
| <b>unknown IANA</b>                                     | Incoming IANA codes with a value between 0x1 and 0x7fff. This code of the BGP extended community attribute is accepted, but it is not recognized.                                                                                                                                     |
| <b>unknown OSPF vendor community</b>                    | Incoming IANA codes with a value above 0x8000. This code of the BGP extended community attribute is accepted, but it is not recognized.                                                                                                                                               |

## Sample Output

### show route table bgp.l2vpn

```
user@host> show route table bgp.l2vpn

bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.24.1:1:4:1/96
    *[BGP/170] 01:08:58, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
```

### show route table bgp.l3vpn.0

```
user@host> show route table bgp.l3vpn.0

bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.71.15:100:10.255.71.17/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.15:200:10.255.71.18/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100021, Push 100011(top)
```

### show route table bgp.l3vpn.0 detail

```
user@host> show route table bgp.l3vpn.0 detail

bgp.l3vpn.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)

10.255.245.12:1:172.16.4.0/8 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182449
    Protocol next hop: 10.255.245.12
    Push 182449
    Indirect next hop: 863a630 297
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0+179
    AS path: 30 10458 14203 2914 3356 I (Atomic) Aggregator: 3356 4.68.0.11

    Communities: 2914:420 target:11111:1 origin:56:78
    VPN Label: 182449
    Localpref: 100
    Router ID: 10.255.245.12
```



```

10.255.245.12:1:4.17.225.0/24 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182465
    Protocol next hop: 10.255.245.12
    Push 182465
    Indirect next hop: 863a8f0 305
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496 I
    Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
    VPN Label: 182465
    Localpref: 100
    Router ID: 10.255.245.12

10.255.245.12:1:4.17.226.0/23 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182465
    Protocol next hop: 10.255.245.12
    Push 182465
    Indirect next hop: 86bd210 330
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
    Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
    VPN Label: 182465
    Localpref: 100
    Router ID: 10.255.245.12

10.255.245.12:1:4.17.251.0/24 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182465
    Protocol next hop: 10.255.245.12
    Push 182465
    Indirect next hop: 86bd210 330
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
    Communities: 2914:410 target:12:34 target:11111:1 origin:12:34

```

```
VPN Label: 182465
Localpref: 100
```

### show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured)

```
user@host> show route table bgp.rtarget.0

bgp.rtarget.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100:100:100/96
    * [RTarget/5] 00:03:14
      Type Proxy
        for 10.255.165.103
        for 10.255.166.124
      Local
```

### show route table bgp.evpn.0

```
user@host> show route table bgp.evpn.0

bgp.evpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2:100.100.100.2:100::0::00:26:88:5f:67:b0/304
    * [BGP/170] 11:00:05, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1
2:100.100.100.2:100::0::00:51:51:51:51:51/304
    * [BGP/170] 11:00:05, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1
2:100.100.100.3:100::0::00:52:52:52:52:52/304
    * [BGP/170] 10:59:58, localpref 100, from 100.100.100.3
      AS path: I, validation-state: unverified
      > to 100.64.13.3 via ge-2/0/8.0, label-switched-path R0toR2
2:100.100.100.3:100::0::a8:d0:e5:5b:01:c8/304
    * [BGP/170] 10:59:58, localpref 100, from 100.100.100.3
      AS path: I, validation-state: unverified
      > to 100.64.13.3 via ge-2/0/8.0, label-switched-path R0toR2
3:100.100.100.2:100::1000::100.100.100.2/304
    * [BGP/170] 11:00:16, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1
3:100.100.100.2:100::2000::100.100.100.2/304
    * [BGP/170] 11:00:16, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1
```

### show route table evpna.evpn.0

```
user@host> show route table evpna.evpn.0

evpna.evpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

3:100.100.100.10:100::0::10::100.100.100.10/384
    * [EVPN/170] 01:37:09
      Indirect
```

```
3:100.100.100.2:100::2000::100.100.100.2/304
    *[EVPN/170] 01:37:12
    Indirect
```

### show route table inet.0

```
user@host> show route table inet.0

inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 00:51:57
                   > to 172.16.5.254 via fxp0.0
10.0.0.1/32        *[Direct/0] 00:51:58
                   > via at-5/3/0.0
10.0.0.2/32        *[Local/0] 00:51:58
                   Local
10.12.12.21/32     *[Local/0] 00:51:57
                   Reject
10.13.13.13/32     *[Direct/0] 00:51:58
                   > via t3-5/2/1.0
10.13.13.14/32     *[Local/0] 00:51:58
                   Local
10.13.13.21/32     *[Local/0] 00:51:58
                   Local
10.13.13.22/32     *[Direct/0] 00:33:59
                   > via t3-5/2/0.0
127.0.0.1/32       [Direct/0] 00:51:58
                   > via lo0.0
10.222.5.0/24      *[Direct/0] 00:51:58
                   > via fxp0.0
10.222.5.81/32     *[Local/0] 00:51:58
                   Local
```

### show route table inet.3

```
user@host> show route table inet.3

inet.3: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.5/32        *[LDP/9] 00:25:43, metric 10, tag 200
                   to 10.2.94.2 via lt-1/2/0.49
                   > to 10.2.3.2 via lt-1/2/0.23
```

### show route table inet.3 protocol ospf

```
user@host> show route table inet.3 protocol ospf

inet.3: 9 destinations, 18 routes (9 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.20/32        [L-OSPF/10] 1d 00:00:56, metric 2
                   > to 10.0.10.70 via lt-1/2/0.14, Push 800020
                   to 10.0.6.60 via lt-1/2/0.12, Push 800020, Push 800030(top)
1.1.1.30/32        [L-OSPF/10] 1d 00:01:01, metric 3
                   > to 10.0.10.70 via lt-1/2/0.14, Push 800030
                   to 10.0.6.60 via lt-1/2/0.12, Push 800030
1.1.1.40/32        [L-OSPF/10] 1d 00:01:01, metric 4
```

```

1.1.1.50/32      > to 10.0.10.70 via lt-1/2/0.14, Push 800040
                  to 10.0.6.60 via lt-1/2/0.12, Push 800040
                  [L-OSPF/10] 1d 00:01:01, metric 5
1.1.1.60/32      > to 10.0.10.70 via lt-1/2/0.14, Push 800050
                  to 10.0.6.60 via lt-1/2/0.12, Push 800050
                  [L-OSPF/10] 1d 00:01:01, metric 6
                  > to 10.0.10.70 via lt-1/2/0.14, Push 800060
                  to 10.0.6.60 via lt-1/2/0.12, Pop

```

### show route table inet6.0

```

user@host> show route table inet6.0

inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Route, * = Both

fec0:0:0:3::/64 *[Direct/0] 00:01:34
>via fe-0/1/0.0

fec0:0:0:3::/128 *[Local/0] 00:01:34
>Local

fec0:0:0:4::/64 *[Static/5] 00:01:34
>to fec0:0:0:3::ffff via fe-0/1/0.0

```

### show route table inet6.3

```

user@router> show route table inet6.3

inet6.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::10.255.245.195/128
                  *[LDP/9] 00:00:22, metric 1
                  > via so-1/0/0.0
::10.255.245.196/128
                  *[LDP/9] 00:00:08, metric 1
                  > via so-1/0/0.0, Push 100008

```

### show route table inetflow detail

```

user@host> show route table inetflow detail

inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
  *BGP      Preference: 170/-101
            Next-hop reference count: 2
            State: <Active Ext>
            Local AS: 64502 Peer AS: 64500
            Age: 4
            Task: BGP_64500.10.12.99.5+3792
            Announcement bits (1): 0-Flow
            AS path: 64500 I
            Communities: traffic-rate:0:0
            Validation state: Accept, Originator: 10.12.99.5
            Via: 10.12.44.0/24, Active
            Localpref: 100
            Router ID: 10.255.71.161

```

```

10.12.56.1,*/48 (1 entry, 1 announced)
  *Flow Preference: 5
    Next-hop reference count: 2
    State: <Active>
    Local AS: 64502
    Age: 6:30
    Task: RT Flow
    Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
    AS path: I
    Communities: 1:1

```

### show route table inetflow.0 extensive (BGP Flowspec Redirect to IP)

```

user@host> show route table inetflow.0 extensive

inetflow.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
2.2.2.2,*/term:1 (1 entry, 1 announced)
TSI:
KRT in dfwd;
Page 0 idx 0, (group ibgp type Internal) Type 1 val 0xb209500 (adv_entry)
Advertised metrics:
Nexthop: 21.1.4.5
Localpref: 100
AS path: [100] I
Communities: redirect-to-ip:21.1.4.5:0
Action(s): accept,count
*Flow Preference: 5
Next hop type: Indirect, Next hop index: 0
Address: 0xa2b931c
Next-hop reference count: 1Next hop:
State: <Active> L
ocal AS: 69
Age: 2
Validation State: unverified
Task: RT Flow
Announcement bits (1): 0-Flow
AS path: I
Communities: redirect-to-ip:21.1.4.5:0

```

```

user@host> show route table inetflow.) extensive

inetflow.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
2.2.2.2,*/term:1 (1 entry, 1 announced)
TSI:
KRT in dfwd;
Page 0 idx 0, (group ibgp type Internal) Type 1 val 0xb209500 (adv_entry)
Advertised metrics:
Nexthop: 21.1.4.5
Localpref: 100
AS path: [100] I
Communities: redirect-to-nexthop
Action(s): accept,count
*Flow Preference: 5
Next hop type: Indirect, Next hop index: 0
Address: 0xa2b931c
Next-hop reference count: 1
Next hop:
State: <Active>
Local AS: 69
Age: 2

```

```

Validation State: unverified
Task: RT Flow
Announcement bits (1): 0-Flow
AS path: I
Communities: redirect-to-nexthop
regress@10.102.178.210> show route table inetflow.0 extensive
inetflow.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
4.4.4.4,*/term:1 (1 entry, 1 announced)
TSI:
KRT in dfwd;
Action(s): accept,count
*BGP Preference: 170/-101
Next hop type: Fictitious, Next hop index: 0
Address: 0xc5e3c30
Next-hop reference count: 3
Next hop: 21.1.4.5
State: <Active Int Ext>
Local AS: 100 Peer AS: 100
Age: 10
Validation State: unverified
Task: BGP_100.1.1.1+179
Announcement bits (1): 0-Flow
AS path: I
Communities: redirect-to-nexthop
Accepted
Localpref: 100
Router ID: 1.1.1.1

```

### show route table lsdist.0 extensive

```

user@host> show route table lsdist.0 extensive

lsdist.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
NODE { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 ISIS-L1:0 }/1152
(1 entry, 1 announced)
TSI:
Page 0 idx 0, (group ibgp type Internal) Type 1 val 0xa62f378 (adv_entry)
  Advertised metrics:
    Nexthop: Self
    Localpref: 100
    AS path: [4170512532] I
    Communities:
Path NODE { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 ISIS-L1:0 }
Vector len 4. Val: 0
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0x95dfc64
    Next-hop reference count: 9
    State: <Active NotInstall>
    Local AS: 4170512532
    Age: 6:05
    Validation State: unverified
    Task: IS-IS
    Announcement bits (1): 0-BGP_RT_Background
    AS path: I
    IPv4 Router-ids:
      128.220.11.197
    Area membership:
      47 00 05 80 ff f8 00 00 00 01 08 00 01

```

```

    SPRING-Capabilities:                - SRGB block [Start: 800000,
Range: 256, Flags: 0xc0]
    SPRING-Algorithms:
    - Algo: 0
    LINK { Local { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 }.{
IPv4:8.65.1.105 } Remote { AS:4170512532 BGP-LS ID:4170512532 ISO:4284.3300.5067)
TSI:
Page 0 idx 0, (group ibgp type Internal) Type 1 val 0xa62f3cc (adv_entry)
    Advertised metrics:
    Nexthop: Self
    Localpref: 100
    AS path: [4170512532] I
    Communities:
Path LINK { Local { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 }.{
IPv4:8.65.1.105 } Remote { AS:4170512532 BGP-LS ID:4170512532 ISO:4284.33000
    *IS-IS Preference: 15
        Level: 1
        Next hop type: Fictitious, Next hop index: 0
        Address: 0x95dfc64
        Next-hop reference count: 9
        State: <Active NotInstall>
        Local AS: 4170512532
        Age: 6:05
        Validation State: unverified
        Task: IS-IS
        Announcement bits (1): 0-BGP_RT_Background
        AS path: I
        Color: 32768
        Maximum bandwidth: 1000Mbps
        Reservable bandwidth: 1000Mbps
        Unreserved bandwidth by priority:
            0 1000Mbps
            1 1000Mbps
            2 1000Mbps
            3 1000Mbps
            4 1000Mbps
            5 1000Mbps
            6 1000Mbps
            7 1000Mbps
        Metric: 10
        TE Metric: 10
        LAN IPV4 Adj-SID - Label: 299776, Flags: 0x30,
Weight: 0, Nbr: 10.220.1.83

PREFIX { Node { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 } {
IPv4:128.220.11.197/32 } ISIS-L1:0 }/1152 (1 entry, 1 announced) TSI: Page 0 idx
0, (group ibgp type Internal) Type 1 val 0xa62f43c (adv_entry)
    Advertised metrics:
    Nexthop: Self
    Localpref: 100
    AS path: [4170512532] I
    Communities:
Path PREFIX { Node { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 }
{ IPv4:128.220.11.197/32 } ISIS-L1:0 } Vector len 4. Val: 0
    *IS-IS Preference: 15
        Level: 1
        Next hop type: Fictitious, Next hop index: 0
        Address: 0x95dfc64
        Next-hop reference count: 9
        State:<Active NotInstall>

```

```

Local AS: 4170512532
Age: 6:05
Validation State: unverified
Task: IS-IS
Announcement bits (1): 0-BGP_RT_Background
AS path: I
Prefix SID: 67, Flags: 0x40, Algo: 0

```

### show route table l2circuit.0

```

user@host> show route table l2circuit.0

l2circuit.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.195:NoCtrlWord:1:1:Local/96
    *[L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    via so-0/1/3.0, Push 100049
10.1.1.195:NoCtrlWord:1:1:Remote/96
    *[LDP/9] 00:50:14
    Discard
10.1.1.195:CtrlWord:1:2:Local/96
    *[L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    via so-0/1/3.0, Push 100049
10.1.1.195:CtrlWord:1:2:Remote/96
    *[LDP/9] 00:50:14
    Discard

```

### show route table mpls

```

user@host> show route table mpls

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 00:13:55, metric 1
           Receive
1          *[MPLS/0] 00:13:55, metric 1
           Receive
2          *[MPLS/0] 00:13:55, metric 1
           Receive
1024       *[VPN/0] 00:04:18
           to table red.inet.0, Pop

```

### show route table mpls extensive

```

user@host> show route table mpls extensive

100000 (1 entry, 1 announced)
TSI:
KRT in-kernel 100000 /36 -> {so-1/0/0.0}
    *LDP   Preference: 9
           Next hop: via so-1/0/0.0, selected
           Pop
           State: <Active Int>
           Age: 29:50      Metric: 1
           Task: LDP

```



```
Announcement bits (1): 0-KRT
AS path: I
Prefixes bound to route: 10.0.0.194/32
```

### show route table mpls.0

```
user@host> show route table mpls.0
```

```
mpls.0: 18 destinations, 19 routes (18 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0                *[MPLS/0] 11:39:56, metric 1
                  to table inet.0
0(S=0)           *[MPLS/0] 11:39:56, metric 1
                  to table mpls.0
1                *[MPLS/0] 11:39:56, metric 1
                  Receive
2                *[MPLS/0] 11:39:56, metric 1
                  to table inet6.0
2(S=0)           *[MPLS/0] 11:39:56, metric 1
                  to table mpls.0
13               *[MPLS/0] 11:39:56, metric 1
                  Receive
303168           *[EVPN/7] 11:00:49, routing-instance pbbn10, route-type
Ingress-MAC, ISID 0
                  to table pbbn10.evpn-mac.0
303184           *[EVPN/7] 11:00:53, routing-instance pbbn10, route-type
Ingress-IM, ISID 1000
                  to table pbbn10.evpn-mac.0
                  [EVPN/7] 11:00:53, routing-instance pbbn10, route-type
Ingress-IM, ISID 2000
                  to table pbbn10.evpn-mac.0
303264           *[EVPN/7] 11:00:53, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-IM, ISID 1000
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303280           *[EVPN/7] 11:00:53, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-IM, ISID 2000
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303328           *[EVPN/7] 11:00:49, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303344           *[EVPN/7] 11:00:49, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303360           *[EVPN/7] 11:00:47, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:26:88:5f:67:b0
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303376           *[EVPN/7] 11:00:47, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:51:51:51:51:51
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303392           *[EVPN/7] 11:00:35, remote-pe 100.100.100.3, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303408           *[EVPN/7] 11:00:35, remote-pe 100.100.100.3, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303424           *[EVPN/7] 11:00:33, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC a8:d0:e5:5b:01:c8
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303440           *[EVPN/7] 11:00:33, routing-instance pbbn10, route-type
```

```
Egress-MAC, ISID 0, BMAC 00:52:52:52:52:52
> to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
```

### show route table mpls.0 detail (PTX Series)

```
user@host> show route table mpls.0 detail
ge-0/0/2.600 (1 entry, 1 announced)
  *L2VPN Preference: 7
    Next hop type: Indirect
    Address: 0x9438f34
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 567
    Next hop: 10.0.0.1 via ge-0/0/1.0, selected
    Label operation: Push 299808
    Label TTL action: prop-ttl
    Load balance label: Label 299808:None;
    Session Id: 0x1
    Protocol next hop: 10.255.255.1
    Label operation: Push 299872 Offset: 252
    Label TTL action: no-prop-ttl
    Load balance label: Label 299872:Flow label PUSH;
    Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
    Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
    State: <Active Int>
    Age: 21 Metric2: 1
    Validation State: unverified
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 2-Common L2 VC
    AS path: I
```

### show route table mpls.0 ccc ge-0/0/1.1004 detail

```
user@host> show route table mpls.0 ccc ge-0/0/1.1004 detail
mpls.0: 121 destinations, 121 routes (121 active, 0 holddown, 0 hidden)
ge-0/0/1.1004 (1 entry, 1 announced)
  *EVPN Preference: 7
    Next hop type: List, Next hop index: 1048577
    Address: 0xdc14770
    Next-hop reference count: 3
    Next hop: ELNH Address 0xd011e30
      Next hop type: Indirect, Next hop index: 0
      Address: 0xd011e30
      Next-hop reference count: 3
      Protocol next hop: 100.100.100.1
      Label operation: Push 301952
      Composite next hop: 0xd011dc0 754 INH Session ID: 0x146
      Indirect next hop: 0xb69a890 1048615 INH Session ID: 0x146
        Next hop type: Router, Next hop index: 735
        Address: 0xd00e530
        Next-hop reference count: 23
        Next hop: 100.46.1.2 via ge-0/0/5.0
        Label-switched-path pe4_to_pe1
        Label operation: Push 300320
        Label TTL action: prop-ttl
        Load balance label: Label 300320: None;
        Label element ptr: 0xd00e580
        Label parent element ptr: 0x0
```

```

        Label element references: 18
        Label element child references: 16
        Label element lsp id: 5
Next hop: ELNH Address 0xd012070
  Next hop type: Indirect, Next hop index: 0
  Address: 0xd012070
  Next-hop reference count: 3
  Protocol next hop: 100.100.100.2
  Label operation: Push 301888
  Composite next hop: 0xd012000 755 INH Session ID: 0x143
  Indirect next hop: 0xb69a9a0 1048641 INH Session ID: 0x143
    Next hop type: Router, Next hop index: 716
    Address: 0xd00e710
    Next-hop reference count: 23
    Next hop: 100.46.1.2 via ge-0/0/5.0
    Label-switched-path pe4_to_pe2
    Label operation: Push 300304
    Label TTL action: prop-ttl
    Load balance label: Label 300304: None;
    Label element ptr: 0xd00e760
    Label parent element ptr: 0x0
    Label element references: 15
    Label element child references: 13
    Label element lsp id: 6
Next hop: ELNH Address 0xd0121f0, selected
  Next hop type: Indirect, Next hop index: 0
  Address: 0xd0121f0
  Next-hop reference count: 3
  Protocol next hop: 100.100.100.3
  Label operation: Push 301984
  Composite next hop: 0xd012180 756 INH Session ID: 0x145
  Indirect next hop: 0xb69aab0 1048642 INH Session ID: 0x145
    Next hop type: Router, Next hop index: 801
    Address: 0xd010ed0
    Next-hop reference count: 32
    Next hop: 100.46.1.2 via ge-0/0/5.0
    Label-switched-path pe4_to_pe3
    Label operation: Push 300336
    Label TTL action: prop-ttl
    Load balance label: Label 300336: None;
    Label element ptr: 0xd0108c0
    Label parent element ptr: 0x0
    Label element references: 22
    Label element child references: 20
    Label element lsp id: 7
State: < Active Int >
Age: 2:06:50
Validation State: unverified
Task: evpn global task
Announcement bits (1): 1-KRT
AS path: I

```

### show route table mpls.0 protocol evpn

```

user@host>show route table mpls.0 protocol evpn

mpls.0: 121 destinations, 121 routes (121 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

299872          *[EVPN/7] 02:30:58, routing-instance mhevpn, route-type

```

```

Ingress-IM, vlan-id 10
    to table mhevpn.evpn-mac.0
300016          *[EVPN/7] 02:30:38, routing-instance VS-1, route-type
Ingress-IM, vlan-id 110
    to table VS-1.evpn-mac.0
300032          *[EVPN/7] 02:30:38, routing-instance VS-1, route-type
Ingress-IM, vlan-id 120
    to table VS-1.evpn-mac.0
300048          *[EVPN/7] 02:30:38, routing-instance VS-1, route-type
Ingress-IM, vlan-id 130
    to table VS-1.evpn-mac.0
300064          *[EVPN/7] 02:30:38, routing-instance VS-2, route-type
Ingress-IM, vlan-id 210
    to table VS-2.evpn-mac.0
300080          *[EVPN/7] 02:30:38, routing-instance VS-2, route-type
Ingress-IM, vlan-id 220
    to table VS-2.evpn-mac.0
300096          *[EVPN/7] 02:30:38, routing-instance VS-2, route-type
Ingress-IM, vlan-id 230
    to table VS-2.evpn-mac.0
300112          *[EVPN/7] 02:27:06, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:44:44:44:44:44:44:44
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300128          *[EVPN/7] 02:29:22, routing-instance mhevpn, route-type
Ingress-Aliasing
    to table mhevpn.evpn-mac.0
300144          *[EVPN/7] 02:27:06, routing-instance VS-1, route-type
Egress-MAC, ESI 00:44:44:44:44:44:44:44
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300160          *[EVPN/7] 02:29:22, routing-instance VS-1, route-type
Ingress-Aliasing
    to table VS-1.evpn-mac.0
300176          *[EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:44:44:44:44:44:44:44
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300192          *[EVPN/7] 02:29:22, routing-instance VS-2, route-type
Ingress-Aliasing
    to table VS-2.evpn-mac.0
300208          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-IM, vlan-id 120
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300224          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
mhevpn, route-type Egress-IM, vlan-id 10
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300240          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-IM, vlan-id 110
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300256          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-IM, vlan-id 130
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300272          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-IM, vlan-id 210
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300288          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-IM, vlan-id 220
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300304          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-IM, vlan-id 230
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300320          *[EVPN/7] 02:27:06, routing-instance VS-1, route-type

```

```

Egress-MAC, ESI 00:11:11:11:11:11:11:11:11
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300336      *[EVPN/7] 02:27:06, routing-instance VS-1, route-type
Egress-MAC, ESI 00:33:33:33:33:33:33:33:33
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300368      *[EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:33:33:33:33:33:33:33:33
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300384      *[EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:11:11:11:11:11:11:11:11
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300416      *[EVPN/7] 02:27:06, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:33:33:33:33:33:33:33:33
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300432      *[EVPN/7] 02:27:06, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:11:11:11:11:11:11:11:11
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300480      *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300496      *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300560      *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300592      *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300608      *[EVPN/7] 02:29:23
    > via ge-0/0/1.1001, Pop
300624      *[EVPN/7] 02:29:23
    > via ge-0/0/1.2001, Pop
301232      *[EVPN/7] 02:29:17
    > via ge-0/0/1.1002, Pop
301296      *[EVPN/7] 02:29:10
    > via ge-0/0/1.1003, Pop
301312      *[EVPN/7] 02:27:06
    > via ae10.2003, Pop
    to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301360      *[EVPN/7] 02:29:01
    > via ge-0/0/1.1004, Pop

```

```

301408          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
vpws1004, route-type Egress, vlan-id 2004
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301456          *[EVPN/7] 02:27:06
> via ae10.1010, Pop
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301552          *[EVPN/7] 02:27:07, routing-instance VS-1, route-type
Egress-MAC, ESI 00:22:22:22:22:22:22:22:22
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301568          *[EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:22:22:22:22:22:22:22:22
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301648          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
vpws1010, route-type Egress, vlan-id 2010
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301664          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301680          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301696          *[EVPN/7] 02:27:07, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:22:22:22:22:22:22:22:22
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301712          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301728          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301744          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-IM, vlan-id 230
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301760          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
vpws1010, route-type Egress, vlan-id 2010
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301776          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301792          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-IM, vlan-id 130
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301808          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
vpws1004, route-type Egress, vlan-id 2004
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301824          *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-IM, vlan-id 10
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301840          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1002, route-type Egress, vlan-id 2002
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301856          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1003, route-type Egress, vlan-id 2003
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301872          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1003, route-type Egress Protection, vlan-id 2003
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301888          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1010, route-type Egress Protection, vlan-id 1010
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3

```

```

301904      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-IM, vlan-id 220
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301920      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-IM, vlan-id 210
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301936      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-IM, vlan-id 230
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301952      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-SH, vlan-id 230
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301968      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-IM, vlan-id 220
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301984      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-SH, vlan-id 220
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302000      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-IM, vlan-id 210
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302016      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-SH, vlan-id 210
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302032      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302048      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302064      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302080      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302096      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302112      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302128      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302144      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302160      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-IM, vlan-id 120
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302176      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-IM, vlan-id 110
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302192      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-IM, vlan-id 130
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302208      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-SH, vlan-id 130
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3

```

```

302224          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-IM, vlan-id 120
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302240          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-SH, vlan-id 120
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302256          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-IM, vlan-id 110
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302272          *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-SH, vlan-id 110
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302288          *[EVPN/7] 02:27:06, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302304          *[EVPN/7] 02:27:06, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302320          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302336          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302352          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
vpws1004, route-type Egress, vlan-id 2004
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302368          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-IM, vlan-id 10
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302384          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-SH, vlan-id 10
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302400          *[EVPN/7] 02:26:21
> via ge-0/0/1.3001, Pop
302432          *[EVPN/7] 02:26:21, remote-pe 100.100.100.3, routing-instance
vpws3001, route-type Egress, vlan-id 40000
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302448          *[EVPN/7] 02:26:21, remote-pe 100.100.100.1, routing-instance
vpws3001, route-type Egress, vlan-id 40000
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302464          *[EVPN/7] 02:26:20, remote-pe 100.100.100.2, routing-instance
vpws3001, route-type Egress, vlan-id 40000
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302480          *[EVPN/7] 02:26:14
> via ge-0/0/1.3016, Pop
302512          *[EVPN/7] 02:26:14, remote-pe 100.100.100.1, routing-instance
vpws3016, route-type Egress, vlan-id 40016
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302528          *[EVPN/7] 02:26:14, remote-pe 100.100.100.2, routing-instance
vpws3016, route-type Egress, vlan-id 40016
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302560          *[EVPN/7] 02:26:06
> via ae10.3011, Pop
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302592          *[EVPN/7] 02:26:07, remote-pe 100.100.100.1, routing-instance
vpws3011, route-type Egress, vlan-id 401100
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302608          *[EVPN/7] 02:26:07, remote-pe 100.100.100.2, routing-instance
vpws3011, route-type Egress, vlan-id 401100

```



```

> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302624      *[EVPN/7] 02:26:07, remote-pe 100.100.100.3, routing-instance
vpws3011, route-type Egress Protection, vlan-id 301100
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302656      *[EVPN/7] 02:25:59
> via ae10.3006, Pop
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302688      *[EVPN/7] 02:26:00, remote-pe 100.100.100.2, routing-instance
vpws3006, route-type Egress, vlan-id 400600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302704      *[EVPN/7] 02:26:00, remote-pe 100.100.100.1, routing-instance
vpws3006, route-type Egress, vlan-id 400600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302720      *[EVPN/7] 02:25:59, remote-pe 100.100.100.3, routing-instance
vpws3006, route-type Egress, vlan-id 400600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302736      *[EVPN/7] 02:25:59, remote-pe 100.100.100.3, routing-instance
vpws3006, route-type Egress Protection, vlan-id 300600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ge-0/0/1.1001  *[EVPN/7] 02:29:23
> via ge-0/0/1.2001
ge-0/0/1.2001  *[EVPN/7] 02:29:23
> via ge-0/0/1.1001
ge-0/0/1.1002  *[EVPN/7] 02:27:06
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ae10.2003      *[EVPN/7] 02:29:10
> via ge-0/0/1.1003
ge-0/0/1.1003  *[EVPN/7] 02:27:06
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3

> via ae10.2003
ge-0/0/1.1004  *[EVPN/7] 02:27:06
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ae10.1010      *[EVPN/7] 02:27:06
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
ge-0/0/1.3001  *[EVPN/7] 02:26:20
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ge-0/0/1.3016  *[EVPN/7] 02:26:13
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
ae10.3011      *[EVPN/7] 02:26:06
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
ae10.3006      *[EVPN/7] 02:25:59
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3

```

### show route table mpls.0 protocol ospf

```
user@host> show route table mpls.0 protocol ospf
```

```

mpls.0: 29 destinations, 29 routes (29 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

299952          *[L-OSPF/10] 23:59:42, metric 0
                > to 10.0.10.70 via lt-1/2/0.14, Pop
                to 10.0.6.60 via lt-1/2/0.12, Swap 800070, Push 800030(top)
299952(S=0)     *[L-OSPF/10] 23:59:42, metric 0
                > to 10.0.10.70 via lt-1/2/0.14, Pop
                to 10.0.6.60 via lt-1/2/0.12, Swap 800070, Push 800030(top)
299968          *[L-OSPF/10] 23:59:48, metric 0
                > to 10.0.6.60 via lt-1/2/0.12, Pop

```

### show route table mpls.0 extensive (PTX Series)

```

user@host> show route table mpls.0 extensive

ge-0/0/2.600 (1 entry, 1 announced)
TSI:
KRT in-kernel ge-0/0/2.600.0      /32 -> {composite(570)}
  *L2VPN Preference: 7
    Next hop type: Indirect
    Address: 0x9438f34
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 567
    Next hop: 10.0.0.1 via ge-0/0/1.0, selected
    Label operation: Push 299808
    Label TTL action: prop-ttl
    Load balance label: Label 299808:None;
    Session Id: 0x1
    Protocol next hop: 10.255.255.1
    Label operation: Push 299872 Offset: 252
    Label TTL action: no-prop-ttl
    Load balance label: Label 299872:Flow label PUSH;
    Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
    Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
    State: <Active Int>
    Age: 47      Metric2: 1
    Validation State: unverified
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 2-Common L2 VC
    AS path: I
    Composite next hops: 1
      Protocol next hop: 10.255.255.1 Metric: 1
      Label operation: Push 299872 Offset: 252
      Label TTL action: no-prop-ttl
      Load balance label: Label 299872:Flow label PUSH;
      Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
      Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
      Indirect path forwarding next hops: 1
        Next hop type: Router
        Next hop: 10.0.0.1 via ge-0/0/1.0
        Session Id: 0x1
      10.255.255.1/32 Originating RIB: inet.3
        Metric: 1      Node path count: 1
        Forwarding nexthops: 1
        Nexthop: 10.0.0.1 via ge-0/0/1.0

```

**show route table mpls.0 (RSVP Route—Transit LSP)**

```

user@host> show route table mpls.0

mpls.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0                *[MPLS/0] 00:37:31, metric 1
                  Receive
1                *[MPLS/0] 00:37:31, metric 1
                  Receive
2                *[MPLS/0] 00:37:31, metric 1
                  Receive
13               *[MPLS/0] 00:37:31, metric 1
                  Receive
300352            *[RSVP/7/1] 00:08:00, metric 1
                  > to 10.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300352(S=0)       *[RSVP/7/1] 00:08:00, metric 1
                  > to 10.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300384            *[RSVP/7/2] 00:05:20, metric 1
                  > to 10.64.1.106 via ge-1/0/0.0, Pop
300384(S=0)       *[RSVP/7/2] 00:05:20, metric 1
                  > to 10.64.1.106 via ge-1/0/0.0, Pop

```

**show route table vpls\_1 detail**

```

user@host> show route table vpls_1 detail

vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

172.16.1.11:1000:1:1/96 (1 entry, 1 announced)
*L2VPN Preference: 170/-1
Receive table: vpls_1.l2vpn.0
Next-hop reference count: 2
State: <Active Int Ext>
Age: 4:29:47 Metric2: 1
Task: vpls_1-l2vpn
Announcement bits (1): 1-BGP.0.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down
Label-base: 800000, range: 8, status-vector: 0xFF

```

**show route table vpn-a**

```

user@host> show route table vpn-a

vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

+ = Active Route, - = Last Active, * = Both
192.168.16.1:1:1:1/96
                  *[VPN/7] 05:48:27
                  Discard
192.168.24.1:1:2:1/96
                  *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
                  AS path: I
                  > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
192.168.24.1:1:3:1/96
                  *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1

```

```

AS path: I
> to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

```

### show route table vpn-a.mdt.0

```

user@host> show route table vpn-a.mdt.0

vpn-a.mdt.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:1:0:10.255.14.216:232.1.1.1/144
    * [MVPN/70] 01:23:05, metric2 1
    Indirect
1:1:1:10.255.14.218:232.1.1.1/144
    * [BGP/170] 00:57:49, localpref 100, from 10.255.14.218
    AS path: I
    > via so-0/0/0.0, label-switched-path r0e-to-r1
1:1:2:10.255.14.217:232.1.1.1/144
    * [BGP/170] 00:57:49, localpref 100, from 10.255.14.217
    AS path: I
    > via so-0/0/1.0, label-switched-path r0-to-r2

```

### show route table VPN-A detail

```

user@host> show route table VPN-A detail

VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
    *BGP Preference: 170/-101
    Route Distinguisher: 10.255.179.13:200
    Next hop type: Indirect
    Next-hop reference count: 5
    Source: 10.255.179.13
    Next hop type: Router, Next hop index: 732
    Next hop: 10.39.1.14 via fe-0/3/0.0, selected
    Label operation: Push 299824, Push 299824(top)
    Protocol next hop: 10.255.179.13
    Push 299824
    Indirect next hop: 8f275a0 1048574
    State: (Secondary Active Int Ext)
    Local AS: 1 Peer AS: 1
    Age: 3:41:06 Metric: 1 Metric2: 1
    Task: BGP_1.10.255.179.13+64309
    Announcement bits (2): 0-KRT 1-BGP RT Background
    AS path: I
    Communities: target:1:200 rte-type:0.0.0.0:1:0
    Import Accepted
    VPN Label: 299824 TTL Action: vrf-ttl-propagate
    Localpref: 100
    Router ID: 10.255.179.13
    Primary Routing Table bgp.13vpn.0

```

### show route table VPN-AB.inet.0

```

user@host> show route table VPN-AB.inet.0

VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

10.39.1.0/30      *[OSPF/10] 00:07:24, metric 1
                  > via so-7/3/1.0
10.39.1.4/30      *[Direct/0] 00:08:42
                  > via so-5/1/0.0
10.39.1.6/32      *[Local/0] 00:08:46
                  Local
10.255.71.16/32   *[Static/5] 00:07:24
                  > via so-2/0/0.0
10.255.71.17/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
                  AS path: I
                  > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.18/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
                  AS path: I
                  > via so-2/1/0.0, Push 100021, Push 100011(top)
10.255.245.245/32 *[BGP/170] 00:08:35, localpref 100
                  AS path: 2 I
                  > to 10.39.1.5 via so-5/1/0.0
10.255.245.246/32 *[OSPF/10] 00:07:24, metric 1
                  > via so-7/3/1.0

```

#### show route table VPN\_blue.mvpn-inet6.0

```
user@host> show route table VPN_blue.mvpn-inet6.0
```

```
vpn_blue.mvpn-inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

1:10.255.2.202:65536:10.255.2.202/432
    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
    AS path: I
    > via so-0/1/3.0
1:10.255.2.203:65536:10.255.2.203/432
    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.203
    AS path: I
    > via so-0/1/0.0
1:10.255.2.204:65536:10.255.2.204/432
    *[MVPN/70] 00:57:23, metric2 1
    Indirect
5:10.255.2.202:65536:128::192.168.90.2:128:ffff::1/432
    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
    AS path: I
    > via so-0/1/3.0
6:10.255.2.203:65536:64500:128::10.12.53.12:128:ffff::1/432
    *[PIM/105] 00:02:37
    Multicast (IPv6)
7:10.255.2.202:65536:64500:128::192.168.90.2:128:ffff::1/432
    *[MVPN/70] 00:02:37, metric2 1
    Indirect

```

#### show route table vrf1.mvpn.0 extensive

```
user@host> show route table vrf1.mvpn.0 extensive
```

```

1:10.255.50.77:1:10.255.50.77/240 (1 entry, 1 announced)
    *MVPN    Preference: 70
    PMSI: Flags 0x0: Label 0: RSVP-TE:
Session_13[10.255.50.77:0:25624:10.255.50.77]

```

```

Next hop type: Indirect
Address: 0xbb2c944
Next-hop reference count: 360
Protocol next hop: 10.255.50.77
Indirect next hop: 0x0 - INH Session ID: 0x0
State: <Active Int Ext>
Age: 53:03      Metric2: 1
Validation State: unverified
Task: mvpn global task
Announcement bits (3): 0-PIM.vrf1 1-mvpn global task 2-rt-export

AS path: I

```

### show route table inetflow detail

```
user@host> show route table inetflow detail
```

```

inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
    *BGP      Preference: 170/-101
                Next-hop reference count: 2
                State: <Active Ext>
                Local AS: 64502 Peer AS: 64500
                Age: 4
                Task: BGP_64500.10.12.99.5+3792
                Announcement bits (1): 0-Flow
                AS path: 64500 I
                Communities: traffic-rate:0:0
                Validation state: Accept, Originator: 10.12.99.5
                Via: 10.12.44.0/24, Active
                Localpref: 100
                Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
    *Flow      Preference: 5
                Next-hop reference count: 2
                State: <Active>
                Local AS: 64502
                Age: 6:30
                Task: RT Flow
                Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
                AS path: I
                Communities: 1:1

```

```
user@host> show route table green.l2vpn.0 (VPLS Multihoming with FEC 129)
```

```

green.l2vpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.2:100:10.1.1.2/96 AD
    *[VPLS/170] 1d 03:11:03, metric2 1
                Indirect
10.1.1.4:100:10.1.1.4/96 AD
    *[BGP/170] 1d 03:11:02, localpref 100, from 10.1.1.4
                AS path: I, validation-state: unverified
                > via ge-1/2/1.5
10.1.1.2:100:1:0/96 MH
    *[VPLS/170] 1d 03:11:03, metric2 1
                Indirect

```

```

10.1.1.4:100:1:0/96 MH
    *[BGP/170] 1d 03:11:02, localpref 100, from 10.1.1.4
    AS path: I, validation-state: unverified
    > via ge-1/2/1.5
10.1.1.4:NoCtrlWord:5:100:100:10.1.1.2:10.1.1.4/176
    *[VPLS/7] 1d 03:11:02, metric2 1
    > via ge-1/2/1.5
10.1.1.4:NoCtrlWord:5:100:100:10.1.1.4:10.1.1.2/176
    *[LDP/9] 1d 03:11:02
    Discard

```

user@host> show route table red extensive

```

red.inet.0: 364481 destinations, 714087 routes (364480 active, 48448 holddown, 1
hidden)
10.0.0.0/32 (3 entries, 1 announced)
    State: <OnList CalcForwarding>
TSI:
KRT in-kerne 10.0.0.0/32 -> {composite(1048575)} Page 0 idx 1 Type 1 val 0x934342c

```

```

    Nexthop: Self
    AS path: [2] I
    Communities: target:2:1
Path 10.0.0.0 from 10.3.0.0 Vector len 4. Val: 1
    @BGP Preference: 170/-1
        Route Distinguisher: 2:1
        Next hop type: Indirect
        Address: 0x258059e4
        Next-hop reference count: 2
        Source: 2.2.0.0
        Next hop type: Router
        Next hop: 10.1.1.1 via ge-1/1/9.0, selected
        Label operation: Push 707633
        Label TTL action: prop-ttl
        Session Id: 0x17d8
        Protocol next hop: 10.2.0.0
        Push 16
        Composite next hop: 0x25805988 - INH Session ID: 0x193c
        Indirect next hop: 0x23eea900 - INH Session ID: 0x193c
        State: <Secondary Active Int Ext ProtectionPath ProtectionCand>
        Local AS: 2 Peer AS: 2
        Age: 23 Metric2: 35
        Validation State: unverified
        Task: BGP_172.16.2.0.0+34549
        AS path: I
        Communities: target:2:1
        Import Accepted
        VPN Label: 16
        Localpref: 0
        Router ID: 10.2.0.0
        Primary Routing Table bgp.l3vpn.0
        Composite next hops: 1
            Protocol next hop: 10.2.0.0 Metric: 35
            Push 16
            Composite next hop: 0x25805988 - INH Session ID: 0x193c
            Indirect next hop: 0x23eea900 - INH Session ID: 0x193c
            Indirect path forwarding next hops: 1
                Next hop type: Router
                Next hop: 10.1.1.1 via ge-1/1/9.0

```

```

                Session Id: 0x17d8
                2.2.0.0/32 Originating RIB: inet.3
                Metric: 35                      Node path count: 1
                Forwarding nexthops: 1
                Nexthop: 10.1.1.1 via ge-1/1/9.0
BGP    Preference: 170/-1
        Route Distinguisher: 2:1
        Next hop type: Indirect
        Address: 0x9347028
        Next-hop reference count: 3
        Source: 10.3.0.0
        Next hop type: Router, Next hop index: 702
        Next hop: 10.1.4.2 via ge-1/0/0.0, selected
        Label operation: Push 634278
        Label TTL action: prop-ttl
        Session Id: 0x17d9
        Protocol next hop: 10.3.0.0
        Push 16
        Composite next hop: 0x93463a0 1048575 INH Session ID: 0x17da
        Indirect next hop: 0x91e8800 1048574 INH Session ID: 0x17da
        State: <Secondary NotBest Int Ext ProtectionPath ProtectionCand>

        Inactive reason: Not Best in its group - IGP metric
        Local AS:      2 Peer AS:      2
        Age: 3:34      Metric2: 70
        Validation State: unverified
        Task: BGP_172.16.3.0.0+32805
        Announcement bits (2): 0-KRT 1-BGP_RT_Background
        AS path: I
        Communities: target:2:1
        Import Accepted
        VPN Label: 16
        Localpref: 0
        Router ID: 10.3.0.0
        Primary Routing Table bgp.l3vpn.0
        Composite next hops: 1
            Protocol next hop: 10.3.0.0 Metric: 70
            Push 16
            Composite next hop: 0x93463a0 1048575 INH Session ID:
0x17da      Indirect next hop: 0x91e8800 1048574 INH Session ID:
0x17da      Indirect path forwarding next hops: 1
            Next hop type: Router
            Next hop: 10.1.4.2 via ge-1/0/0.0
            Session Id: 0x17d9
            10.3.0.0/32 Originating RIB: inet.3
            Metric: 70                      Node path count: 1
            Forwarding nexthops: 1
            Nexthop: 10.1.4.2 via ge-1/0/0.0
#Multipath Preference: 255
        Next hop type: Indirect
        Address: 0x24afca30
        Next-hop reference count: 1
        Next hop type: Router
        Next hop: 10.1.1.1 via ge-1/1/9.0, selected
        Label operation: Push 707633
        Label TTL action: prop-ttl
        Session Id: 0x17d8
        Next hop type: Router, Next hop index: 702

```



```

Next hop: 10.1.4.2 via ge-1/0/0.0
Label operation: Push 634278
Label TTL action: prop-ttl
Session Id: 0x17d9
Protocol next hop: 10.2.0.0
Push 16
Composite next hop: 0x25805988 - INH Session ID: 0x193c
Indirect next hop: 0x23eea900 - INH Session ID: 0x193c Weight 0x1

Protocol next hop: 10.3.0.0
Push 16
Composite next hop: 0x93463a0 1048575 INH Session ID: 0x17da
Indirect next hop: 0x91e8800 1048574 INH Session ID: 0x17da Weight

0x4000
State: <ForwardingOnly Int Ext>
Inactive reason: Forwarding use only
Age: 23 Metric2: 35
Validation State: unverified
Task: RT
AS path: I
Communities: target:2:1

```

### show route table bgp.evpn.0 extensive |no-more (EVPN)

```

show route table bgp.evpn.0 extensive | no-more

bgp.evpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
2:1000:10::100::00:aa:aa:aa:aa/304 (1 entry, 0 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 1000:10
    Next hop type: Indirect
    Address: 0x9420fd0
    Next-hop reference count: 12
    Source: 10.2.3.4
    Protocol next hop: 10.2.3.4
    Indirect next hop: 0x2 no-forward INH Session ID: 0x0
    State: Local AS: 17 Peer AS:17 Age:21:12 Metric2:1 Validation State:
unverified
    Task: BGP_17.1.2.3.4+50756
    AS path: I
    Communities: target:1111:8388708 encapsulation0:0:0:0:3
    Import Accepted
    Route Label: 100
    ESI: 00:00:00:00:00:00:00:00:00
    Localpref: 100
    Router ID: 10.2.3.4
    Secondary Tables: default-switch.evpn.0
    Indirect next hops: 1
      Protocol next hop: 10.2.3.4 Metric: 1
      Indirect next hop: 0x2 no-forward INH Session ID: 0x0
      Indirect path forwarding next hops: 1
        Next hop type: Router
        Next hop: 10.10.10.1 via xe-0/0/1.0
        Session Id: 0x2
        1.2.3.4/32 Originating RIB: inet.0
        Metric: 1 Node path count: 1
        Forwarding nexthops: 2
          Nexthop: 10.92.78.102 via em0.0

2:1000:10::200::00:bb:bb:bb:bb/304 (1 entry, 0 announced)

```

```

*BGP      Preference: 170/-101
          Route Distinguisher: 1000:10
          Next hop type: Indirect
          Address: 0x9420fd0
          Next-hop reference count: 12
          Source: 10.2.3.4
          Protocol next hop: 10.2.3.4
          Indirect next hop: 0x2 no-forward INH Session ID: 0x0
          State: Local AS:17 Peer AS:17 Age:19:43 Metric2:1 Validation
State:unverified
          Task: BGP_17.1.2.3.4+50756
          AS path: I
          Communities: target:2222:22 encapsulation0:0:0:0:3
          Import Accepted
          Route Label: 200
          ESI: 00:00:00:00:00:00:00:00:00:00:00
          Localpref: 100
          Router ID: 10.2.3.4
          Secondary Tables: default-switch.evpn.0
          Indirect next hops: 1
            Protocol next hop: 10.2.3.4 Metric: 1
            Indirect next hop: 0x2 no-forward INH Session ID: 0x0
            Indirect path forwarding next hops: 1
              Next hop type: Router
              Next hop: 10.10.10.1 via xe-0/0/1.0
              Session Id: 0x2
            10.2.3.4/32 Originating RIB: inet.0
              Metric: 1                      Node path count: 1
              Forwarding nexthops: 2
                Nexthop: 10.92.78.102 via em0.0

2:1000:10::300::00:cc:cc:cc:cc/304 (1 entry, 0 announced)
*BGP      Preference: 170/-101
          Route Distinguisher: 1000:10
          Next hop type: Indirect
          Address: 0x9420fd0
          Next-hop reference count: 12
          Source: 10.2.3.4
          Protocol next hop: 10.2.3.4
          Indirect next hop: 0x2 no-forward INH Session ID: 0x0
          State: Local AS:17 Peer AS:17 Age:17:21 Metric2:1 Validation State:
unverified Task: BGP 17,1,2,3,4+50756
          AS path: I
          Communities: target:3333:33 encapsulation0:0:0:0:3
          Import Accepted
          Route Label: 300
          ESI: 00:00:00:00:00:00:00:00:00:00:00
          Localpref: 100
          Router ID: 10.2.3.4
          Secondary Tables: default-switch.evpn.0
          Indirect next hops: 1
            Protocol next hop: 10.2.3.4 Metric: 1
            Indirect next hop: 0x2 no-forward INH Session ID: 0x0
            Indirect path forwarding next hops: 1
              Next hop type: Router
              Next hop: 10.10.10.1 via xe-0/0/1.0
              Session Id: 0x2
            10.2.3.4/32 Originating RIB: inet.0
              Metric: 1                      Node path count: 1
              Forwarding nexthops: 2

```

```

                                Nexthop: 10.92.78.102 via em0.0
3:1000:10::100::1.2.3.4/304 (1 entry, 0 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 1000:10
          PMSI: Flags 0x0: Label 100: Type INGRESS-REPLICATION 1.2.3.4
          Next hop type: Indirect
          Address: 0x9420fd0
          Next-hop reference count: 12
          Source: 10.2.3.4
          Protocol next hop: 10.2.3.4
          Indirect next hop: 0x2 no-forward INH Session ID: 0x0
          State: Local AS:17 Peer AS:17 Age:37:01 Metric2:1 Validation State:
unverified Task: BGP 17.1.2.3.4+50756
          AS path: I
          Communities: target:1111:8388708 encapsulation0:0:0:0:3
          Import Accepted
          Localpref: 100
          Router ID: 10.2.3.4
          Secondary Tables: default-switch.evpn.0
          Indirect next hops: 1
            Protocol next hop: 10.2.3.4 Metric: 1
            Indirect next hop: 0x2 no-forward INH Session ID: 0x0
            Indirect path forwarding next hops: 1
              Next hop type: Router
              Next hop: 10.10.10.1 via xe-0/0/1.0
              Session Id: 0x2
            10.2.3.4/32 Originating RIB: inet.0
              Metric: 1                      Node path count: 1
              Forwarding nexthops: 2
                Nexthop: 10.92.78.102 via em0.0
3:1000:10::200::1.2.3.4/304 (1 entry, 0 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 1000:10
          PMSI: Flags 0x0: Label 200: Type INGRESS-REPLICATION 1.2.3.4
          Next hop type: Indirect
          Address: 0x9420fd0
          Next-hop reference count: 12
          Source: 10.2.3.4
          Protocol next hop: 10.2.3.4
          Indirect next hop: 0x2 no-forward INH Session ID: 0x0
          State: Local AS: 17 Peer AS: 17 Age:35:22 Metric2:1 Validation
State:unverified Task: BGP 17.1.2.3.4+50756
          AS path:I Communities: target:2222:22 encapsulation):0:0:0:0:3
          Import Accepted
          Localpref: 100
          Router ID: 10.2.3.4
          Secondary Tables: default-switch.evpn.0
          Indirect next hops: 1
            Protocol next hop: 10.2.3.4 Metric: 1
            Indirect next hop: 0x2 no-forward INH Session ID: 0x0
            Indirect path forwarding next hops: 1
              Next hop type: Router
              Next hop: 10.10.10.1 via xe-0/0/1.0
              Session Id: 0x2
            10.2.3.4/32 Originating RIB: inet.0
              Metric: 1                      Node path count: 1
              Forwarding nexthops: 2

```

```

                                Nexthop: 10.92.78.102 via em0.0
3:1000:10::300::1.2.3.4/304 (1 entry, 0 announced)
  *BGP      Preference: 170/-101
            Route Distinguisher: 1000:10
            PMSI: Flags 0x0: Label 300: Type INGRESS-REPLICATION 1.2.3.4
            Next hop type: Indirect
            Address: 0x9420fd0
            Next-hop reference count: 12
            Source: 10.2.3.4
            Protocol next hop: 10.2.3.4
            Indirect next hop: 0x2 no-forward INH Session ID: 0x0
            State: Local AS: 17 Peer AS: 17 Age 35:22 Metric2:1 Validation State:
unverified Task: BGP 17.1.2.3.4+5075
            6 AS path: I Communities: target:3333:33 encapsulation0:0:0:0:3
Import Accepted Localpref:100
            Router ID: 10.2.3.4
            Secondary Tables: default-switch.evpn.0
            Indirect next hops: 1
              Protocol next hop: 10.2.3.4 Metric: 1
              Indirect next hop: 0x2 no-forward INH Session ID: 0x0
              Indirect path forwarding next hops: 1
                Next hop type: Router
                Next hop: 10.10.10.1 via xe-0/0/1.0
                Session Id: 0x2
              10.2.3.4/32 Originating RIB: inet.0
                Metric: 1 Node path count: 1
                Forwarding nexthops: 2
                  Nexthop: 10.92.78.102 via em0.0

```

## show route terse

**List of Syntax** [Syntax on page 913](#)  
[Syntax \(EX Series Switches\) on page 913](#)

**Syntax** `show route terse`  
`<logical-system (all | logical-system-name)>`

**Syntax (EX Series Switches)** `show route terse`

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Display a high-level summary of the routes in the routing table.



**NOTE:** For BGP routes, the `show route terse` command displays the local preference attribute and MED instead of the metric1 and metric2 values. This is mostly due to historical reasons.

To display the metric1 and metric2 value of a BGP route, use the [show route extensive](#) command.

**Options** **none**—Display a high-level summary of the routes in the routing table.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level** view

**List of Sample Output** [show route terse on page 915](#)

**Output Fields** [Table 46 on page 913](#) describes the output fields for the `show route terse` command. Output fields are listed in the approximate order in which they appear.

*Table 46: show route terse Output Fields*

| Field Name                 | Field Description                                                       |
|----------------------------|-------------------------------------------------------------------------|
| <i>routing-table-name</i>  | Name of the routing table (for example, inet.0).                        |
| <i>number destinations</i> | Number of destinations for which there are routes in the routing table. |

Table 46: show route terse Output Fields (continued)

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>number routes</i> | Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>                                                                                                                                                                                                                                                                                                                |
| <i>route key</i>     | Key for the state of the route: <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul>                                                                                                                                                                                                                |
| <b>A</b>             | Active route. An asterisk (*) indicates this is the active route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>V</b>             | Validation status of the route: <ul style="list-style-type: none"> <li>• <b>?</b>—Not evaluated. Indicates that the route was not learned through BGP.</li> <li>• <b>I</b>—Invalid. Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>N</b>—Unknown. Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>V</b>—Valid. Indicates that the prefix and autonomous system pair are found in the database.</li> </ul> |
| <i>Destination</i>   | Destination of the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>P</b>             | Protocol through which the route was learned: <ul style="list-style-type: none"> <li>• <b>A</b>—Aggregate</li> <li>• <b>B</b>—BGP</li> <li>• <b>C</b>—CCC</li> <li>• <b>D</b>—Direct</li> <li>• <b>G</b>—GMPLS</li> <li>• <b>I</b>—IS-IS</li> <li>• <b>L</b>—L2CKT, L2VPN, LDP, Local</li> <li>• <b>K</b>—Kernel</li> <li>• <b>M</b>—MPLS, MSDP</li> <li>• <b>O</b>—OSPF</li> <li>• <b>P</b>—PIM</li> <li>• <b>R</b>—RIP, RIPng</li> <li>• <b>S</b>—Static</li> <li>• <b>T</b>—Tunnel</li> </ul>                                                                                                                                                                                     |
| <b>Prf</b>           | Preference value of the route. In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.                                                                                              |

Table 46: show route terse Output Fields (continued)

| Field Name | Field Description                                                                                                                                                                                                                                                                                                                                          |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Metric 1   | First metric value in the route. For routes learned from BGP, this is the MED metric.                                                                                                                                                                                                                                                                      |
| Metric 2   | Second metric value in the route. For routes learned from BGP, this is the IGP metric.                                                                                                                                                                                                                                                                     |
| Next hop   | Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.                                                                                                                                                                                                                                                          |
| AS path    | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>I—IGP.</li> <li>E—EGP.</li> <li>?—Incomplete; typically, the AS path was aggregated.</li> </ul> |

## Sample Output

### show route terse

```
user@host> show route terse
```

```
inet.0: 10 destinations, 12 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

A V Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* ? 172.16.1.1/32    0 10      1          >10.0.0.2
?                               B 170      100          I
  unverified
* ? 172.16.1.1/32    D 0          >10.0.0.2
* V 2.2.0.2/32       B 170      110          200 I
  valid
* ? 10.0.0.0/30      D 0          >1t-1/2/0.1
?                               B 170      100          I
  unverified
* ? 10.0.0.1/32      L 0          Local
* ? 10.0.0.4/30      B 170      100          I
  unverified
* ? 10.0.0.8/30      B 170      100          I
  unverified
* I 172.16.1.1/32    B 170      90          200 I
  invalid
* N 192.168.2.3/32   B 170      100          200 I
  unknown
* ? 172.16.233.5/32  0 10      1          >10.0.0.2
                               MultiRecv
```

## show security keychain

|                                 |                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security keychain<br><brief   detail>                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 12.3X50 for the QFX Series.                                                                                                                                                                      |
| <b>Description</b>              | Display information about authentication keychains configured for the Border Gateway Protocol (BGP), the Label Distribution Protocol (LDP) routing protocols, the Bidirectional Forwarding Detection (BFD) protocol, and the Intermediate System-to-Intermediate System (IS-IS) protocol. |
| <b>Options</b>                  | <b>none</b> —Display information about authentication keychains.<br><b>brief   detail</b> —(Optional) Display the specified level of output.                                                                                                                                              |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">show security keychain brief on page 918</a><br><a href="#">show security keychain detail on page 918</a>                                                                                                                                                                     |
| <b>Output Fields</b>            | <a href="#">Table 12 on page 647</a> describes the output fields for the <b>show security keychain</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                   |

*Table 47: show security keychain Output Fields*

| Field Name               | Field Description                                                                        | Level of Output |
|--------------------------|------------------------------------------------------------------------------------------|-----------------|
| <b>keychain</b>          | The name of the keychain in operation.                                                   | All levels      |
| <b>Active-ID Send</b>    | Number of routing protocols packets sent with the active key.                            | All levels      |
| <b>Active-ID Receive</b> | Number of routing protocols packets received with the active key.                        | All levels      |
| <b>Next-ID Send</b>      | Number of routing protocols packets sent with the next key.                              | All levels      |
| <b>Next-ID Receive</b>   | Number of routing protocols packets received with the next key.                          | All levels      |
| <b>Transition</b>        | Amount of time until the current key will be replaced with the next key in the keychain. | All levels      |
| <b>Tolerance</b>         | Configured clock-skew tolerance, in seconds, for accepting keys for a key chain.         | All levels      |
| <b>Id</b>                | Identification number configured for the current key.                                    | <b>detail</b>   |



Table 47: show security keychain Output Fields (continued)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Level of Output |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Algorithm</b>  | Authentication algorithm configured for the current key.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>State</b>      | <p>State of the current key.</p> <p>The value can be:</p> <ul style="list-style-type: none"> <li>• <b>receive</b></li> <li>• <b>send</b></li> <li>• <b>send-receive</b></li> </ul> <p>For the active key, the <b>State</b> can be <b>send-receive</b>, <b>send</b>, or <b>receive</b>. For keys that have a future start time, the <b>State</b> is <b>inactive</b>. Compare the <b>State</b> field to the <b>Mode</b> field.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail</b>   |
| <b>Option</b>     | <p>For IS-IS only, the option determines how Junos OS encodes the message authentication code in routing protocol packets.</p> <p>The values can be:</p> <ul style="list-style-type: none"> <li>• <b>basic</b>—Based on RFC 5304.</li> <li>• <b>isis-enhanced</b>—Based on RFC 5310.</li> </ul> <p>The default value is <b>basic</b>. When you configure the <b>isis-enhanced</b> option, Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.</p> <p>When you configure <b>basic</b> (or do not include the <b>options</b> statement in the key configuration) Junos OS sends and receives RFC 5304-encoded routing protocols packets, and drops 5310-encoded routing protocol packets that are received from other devices.</p> <p>Because this setting is for IS-IS only, the TCP and the BFD protocol ignore the encoding option configured in the key.</p> | <b>detail</b>   |
| <b>Start-time</b> | Time that the current key became active.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Mode</b>       | <p>Mode of each key (Informational only.)</p> <p>The value can be</p> <ul style="list-style-type: none"> <li>• <b>receive</b></li> <li>• <b>send</b></li> <li>• <b>send-receive</b></li> </ul> <p>The mode of the key is based on the configuration. Suppose you configure two keys, one with a start-time of today and the other with a start-time of next week. For both keys, the <b>Mode</b> can be <b>send-receive</b>, <b>send</b>, or <b>receive</b>, regardless of the configured start-time. Compare the <b>Mode</b> field to the <b>State</b> field.</p>                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>detail</b>   |

## Sample Output

### show security keychain brief

```
user@host> show security keychain brief
```


| keychain | Active-ID |         | Next-ID |         | Transition | Tolerance |
|----------|-----------|---------|---------|---------|------------|-----------|
|          | Send      | Receive | Send    | Receive |            |           |
| hakr     | 3         | 3       | 1       | 1       | 1d 23:58   | 3600      |

### show security keychain detail

```
user@host> show security keychain detail
```

| keychain                                                   | Active-ID |         | Next-ID |         | Transition | Tolerance |
|------------------------------------------------------------|-----------|---------|---------|---------|------------|-----------|
|                                                            | Send      | Receive | Send    | Receive |            |           |
| hakr                                                       | 3         | 3       | 1       | 1       | 1d 23:58   | 3600      |
| Id 3, Algorithm hmac-md5, State send-receive, Option basic |           |         |         |         |            |           |
| Start-time Wed Aug 11 16:28:00 2010, Mode send-receive     |           |         |         |         |            |           |
| Id 1, Algorithm hmac-md5, State inactive, Option basic     |           |         |         |         |            |           |
| Start-time Fri Aug 20 11:30:57 2010, Mode send-receive     |           |         |         |         |            |           |

## test policy

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>test policy <i>policy-name</i> <i>prefix</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Test a policy configuration to determine which prefixes match routes in the routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                 | <div>  <p><b>NOTE:</b> If you are using the <code>test policy</code> command on a logical system, you must first set the CLI to the logical system context. For example, if you want to test a routing policy that is configured on logical system R2, first run the <code>set cli logical-system R2</code> command.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><i>policy-name</i>—Name of a policy.</p> <p><i>prefix</i>—Destination prefix to match.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Additional Information</b>   | <p>All prefixes in the default unicast routing table (inet.0) that match prefixes that are the same as or longer than the specific prefix are processed by the <b>from</b> clause in the specified policy. All prefixes accepted by the policy are displayed. The <b>test policy</b> command evaluates a policy differently from the BGP import process. When testing a policy that contains an <b>interface</b> match condition in the <b>from</b> clause, the <b>test policy</b> command uses the match condition. In contrast, BGP does not use the <b>interface</b> match condition when evaluating the policy against routes learned from internal BGP (IBGP) or external BGP (EGBP) multihop peers.</p> <p>When testing a policy, you can see the length of time (in microseconds) required to evaluate the policy and the number of times it has been executed by running the <code>show policy <i>policy-name</i> statistics</code> command.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Understanding Routing Policy Tests</i></li> <li>• <i>Example: Testing a Routing Policy with Complex Regular Expressions</i></li> <li>• <a href="#">show policy on page 715</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>    | <a href="#">test policy on page 920</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

## Sample Output

### test policy

```
user@host> test policy test-statics 172.16.0.1/8

inet.0: 44 destinations, 44 routes (44 active, 0 holddown, 0 hidden)
Prefixes passing policy:

172.16.3.0/8      *[BGP/170] 16:22:46, localpref 100, from 10.255.255.41
                  AS Path: 50888 I
                  > to 10.11.4.32 via en0.2, label-switched-path l2
172.16.3.1/32    *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                  > to 10.0.4.7 via fxp0.0
172.16.3.2/32    *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                  > to 10.0.4.7 via fxp0.0
172.16.3.3/32    *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                  > to 10.0.4.7 via fxp0.0
172.16.3.4/32    *[IS-IS/18] 2d 00:21:46, metric 0, tag 2
                  > to 10.0.4.7 via fxp0.0
Policy test-statics: 5 prefixes accepted, 0 prefixes rejected
```

## traceroute clns

**Syntax** `traceroute clns <host>  
routing-instance <name>  
source <source-address>  
ttl <value>  
wait <seconds>`

**Release Information** Command introduced in Junos OS Release 8.0

**Description** Trace the route belonging to Connectionless Network Service (CLNS).

**Options** *host*—IP address or name of remote host.

*routing-instance name*—Name of the routing instance for a traceroute attempt.

*source source address*—Source address to be used in outgoing packets.

*ttl value*—CLNP maximum time-to-live value. The range of values is 1 through 255.

*wait seconds*—Number of seconds to wait for a response. The range of values is 1 second through 1 day.

**Required Privilege Level** network

**List of Sample Output** [traceroute clns on page 921](#)

**Output Fields** [Table 48 on page 921](#) describes the output fields for the **traceroute clns** command. Output fields are listed in the approximate order in which they appear.

*Table 48: Traceroute clns Output Fields*

| Field Name    | Field Description                        |
|---------------|------------------------------------------|
| source        | Source address used in outgoing packets. |
| traceroute to | IP address of the receiver.              |
| hops max      | Maximum number of hops allowed.          |
| byte packets  | Size of packets being sent.              |

## Sample Output

### traceroute clns

```
user@host>traceroute clns <ISO address of the destination> source <ISO address of the source>
```

```
traceroute c\ls 49.0005.80ff.f800.0000.0108.0001.0102.5522.4145.00 source
47.0005.80ff.f800.0000.0108.0001.0102.5522.4143.00
c\lstraceroute to 49.0005.80ff.f800.0000.0108.0001.0102.5522.4145.00 from
47.0005.80ff.f800.0000.0108.0001.0102.5522.4143.00, 30 hops max, 17 byte packets

 1  47.0005.80ff.f800.0000.0108.0001.0010.0010.0010.00  7.080 ms  5.579 ms  5.882
ms
 2  * * *
 3  * * *
 4  * * *
 5  49.0005.80ff.f800.0000.0108.0001.0102.5522.4145.00 11.325 ms  7.704 ms  5.261
ms
```