

# Junos<sup>®</sup> OS for EX Series Ethernet Switches

## Class of Service Feature Guide (EX Series Switches Except EX4600 and EX9200 Switches)



Juniper Networks, Inc.  
1133 Innovation Way  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

*Junos® OS for EX Series Ethernet Switches Class of Service Feature Guide (EX Series Switches Except EX4600 and EX9200 Switches)*  
Copyright © 2019 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	xv
	Documentation and Release Notes . . . . .	xv
	Using the Examples in This Manual . . . . .	xv
	Merging a Full Example . . . . .	xvi
	Merging a Snippet . . . . .	xvi
	Documentation Conventions . . . . .	xvii
	Documentation Feedback . . . . .	xix
	Requesting Technical Support . . . . .	xix
	Self-Help Online Tools and Resources . . . . .	xx
	Creating a Service Request with JTAC . . . . .	xx
<b>Part 1</b>	<b>Basic CoS Configuration</b>	
<b>Chapter 1</b>	<b>CoS Overview . . . . .</b>	<b>3</b>
	Junos OS CoS for EX Series Switches Overview . . . . .	4
	How Junos OS CoS Works . . . . .	4
	Default CoS Behavior on EX Series Switches . . . . .	5
	Configuring CoS on EX Series Switches . . . . .	6
	Understanding Junos OS CoS Components for EX Series Switches . . . . .	8
	Code-Point Aliases . . . . .	8
	Policers . . . . .	8
	Classifiers . . . . .	8
	Forwarding Classes . . . . .	9
	Tail Drop Profiles . . . . .	9
	Schedulers . . . . .	9
	Rewrite Rules . . . . .	9
	Understanding CoS Two-Color Marking . . . . .	10
	Understanding CoS Queues on EX8200 Line Cards That Include Oversubscribed	
	Ports . . . . .	11
	Oversubscribed Ports on Line Cards . . . . .	11
	EX8200 Line Cards That Include Oversubscribed Ports . . . . .	11
	Ingress Queueing . . . . .	12
	Preclassification of Packets and Port Ingress Queueing . . . . .	12
	Full Classification of Packets and Fabric Ingress Queueing . . . . .	13
	Egress Queues . . . . .	13
	Example: Configuring CoS on EX Series Switches . . . . .	14

<b>Chapter 2</b>	<b>Junos OS EZQoS and J-Web</b> . . . . .	<b>41</b>
	Understanding Junos OS EZQoS for CoS Configurations on EX Series Switches . . . . .	41
	Configuring Junos OS EZQoS for CoS (CLI Procedure) . . . . .	42
	Configuring CoS (J-Web Procedure) . . . . .	43
<b>Chapter 3</b>	<b>CoS on Interfaces</b> . . . . .	<b>45</b>
	Assigning CoS Components to Interfaces (CLI Procedure) . . . . .	45
	Assigning CoS Components to Interfaces (J-Web Procedure) . . . . .	46
	Monitoring Interfaces That Have CoS Components . . . . .	47
<b>Chapter 4</b>	<b>CoS Code-Point Aliases</b> . . . . .	<b>49</b>
	Understanding CoS Code-Point Aliases . . . . .	49
	Default Code-Point Aliases . . . . .	49
	Defining CoS Code-Point Aliases (CLI Procedure) . . . . .	52
	Defining CoS Code-Point Aliases (J-Web Procedure) . . . . .	52
	Monitoring CoS Value Aliases . . . . .	53
<b>Chapter 5</b>	<b>CoS Classifiers</b> . . . . .	<b>55</b>
	Understanding CoS Classifiers . . . . .	56
	Behavior Aggregate Classifiers . . . . .	56
	Default Behavior Aggregate Classification . . . . .	57
	Multifield Classifiers . . . . .	58
	Defining CoS Classifiers (CLI Procedure) . . . . .	59
	Defining CoS Classifiers (J-Web Procedure) . . . . .	61
	Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers . . . . .	62
	Configuring and Applying IEEE 802.1ad Classifiers . . . . .	66
	Configuring the IEEE 802.1p Field for CoS Host Outbound Traffic . . . . .	67
	Configuring a Global Default IEEE 802.1p Value for All Host Outbound Traffic . . . . .	68
	Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards (CLI Procedure) . . . . .	69
	Monitoring CoS Classifiers . . . . .	70
	Troubleshooting a CoS Classifier Configuration for a TCAM Space Error . . . . .	71
<b>Chapter 6</b>	<b>CoS Rewrite</b> . . . . .	<b>75</b>
	Understanding CoS Rewrite Rules . . . . .	75
	How Rewrite Rules Work . . . . .	75
	Default Rewrite Rule . . . . .	76
	Defining CoS Rewrite Rules (CLI Procedure) . . . . .	78
	Defining CoS Rewrite Rules (J-Web Procedure) . . . . .	79
	Classifiers and Rewrite Rules at the Global, Physical and Logical Interface Levels Overview . . . . .	82
	Configuring Classifiers and Rewrite Rules at the Global and Physical Interface Levels . . . . .	83
	Applying Egress Interface Rewrite Rules to the IEEE 802.1p Field for All Host Outbound Traffic on the Interface . . . . .	84
	Monitoring CoS Rewrite Rules . . . . .	86

<b>Chapter 7</b>	<b>Forwarding Classes</b> . . . . .	<b>89</b>
	Understanding CoS Forwarding Classes . . . . .	90
	Default Forwarding Classes . . . . .	91
	Defining CoS Forwarding Classes (CLI Procedure) . . . . .	93
	Defining CoS Forwarding Classes (J-Web Procedure) . . . . .	93
	Monitoring CoS Forwarding Classes . . . . .	95
<b>Chapter 8</b>	<b>Flow Control</b> . . . . .	<b>99</b>
	Understanding Priority-Based Flow Control . . . . .	99
	Reliability of Packet Delivery in Standard Ethernet Networks and in Layer 2 Networks . . . . .	99
	Calculations for Buffer Requirements When Using PFC PAUSE . . . . .	100
	How PFC and Congestion Notification Profiles Work With or Without DCBX . . . . .	100
	Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure) . . . . .	102
<b>Chapter 9</b>	<b>CoS Queue Schedulers and Scheduler Maps</b> . . . . .	<b>105</b>
	Understanding CoS Schedulers . . . . .	105
	Default Schedulers . . . . .	105
	Excess Rate . . . . .	106
	Transmission Rate . . . . .	106
	Scheduler Buffer Size . . . . .	107
	Priority Scheduling . . . . .	108
	Scheduler Drop-Profile Maps . . . . .	108
	Scheduler Maps . . . . .	108
	Defining CoS Schedulers and Scheduler Maps (CLI Procedure) . . . . .	112
	Configuring a Scheduler and a Scheduler Map . . . . .	112
	Assigning a Scheduler Map to Interfaces . . . . .	113
	Assigning Scheduler Maps to Interfaces on EX8200 Line Cards That Include Oversubscribed Ports . . . . .	114
	Defining CoS Schedulers (J-Web Procedure) . . . . .	115
	Defining CoS Scheduler Maps (J-Web Procedure) . . . . .	117
	Monitoring CoS Scheduler Maps . . . . .	119
	Troubleshooting CoS Schedulers on a 40-port SFP+ Line Card in an EX8200 Switch . . . . .	120
<b>Part 2</b>	<b>Congestion Management, Tail Drop Profiles, Queue Shaping, and Explicit Congestion Notification (ECN)</b>	
<b>Chapter 10</b>	<b>Congestion Management</b> . . . . .	<b>125</b>
	Understanding CoS Congestion Management . . . . .	125
	Weighted Tail Drop Congestion Management . . . . .	125
	Weighted Random Early Detection Congestion Management . . . . .	126
	Segmented Drop Profile . . . . .	127
	Interpolated Drop Profile . . . . .	127
	Drop Profile Parameters . . . . .	129
	Configuring CoS Congestion Management (CLI Procedure) . . . . .	130
	Configuring a Weighted Tail Drop Profile . . . . .	130
	Configuring a Weighted Random Early Detection Drop Profile . . . . .	131

<b>Chapter 11</b>	<b>Tail Drop Profiles . . . . .</b>	<b>133</b>
	Understanding CoS Tail Drop Profiles . . . . .	133
	Configuring CoS Tail Drop Profiles (CLI Procedure) . . . . .	134
	Defining CoS Drop Profiles (J-Web Procedure) . . . . .	134
	Monitoring CoS Drop Profiles . . . . .	135
<b>Chapter 12</b>	<b>Queue Shaping . . . . .</b>	<b>137</b>
	Understanding Port Shaping and Queue Shaping for CoS on EX Series Switches . . . . .	137
	Port Shaping . . . . .	137
	Queue Shaping . . . . .	138
	Configuring Shaping for CoS (CLI Procedure) . . . . .	138
	Configuring Port Shaping for CoS on an EX Series Switch . . . . .	139
	Configuring Queue Shaping for CoS on an EX Series Switch . . . . .	139
	Applying a Shaping Rate to Physical Interfaces Overview . . . . .	140
	Configuring the Shaping Rate for Physical Interfaces . . . . .	140
<b>Chapter 13</b>	<b>Explicit Congestion Notification (ECN) . . . . .</b>	<b>143</b>
	Understanding CoS Explicit Congestion Notification . . . . .	144
	How ECN Works . . . . .	144
	ECN Bits in the DiffServ Field . . . . .	145
	End-to-End ECN Behavior . . . . .	146
	ECN Compared to PFC and Ethernet PAUSE . . . . .	148
	WRED Drop Profile Control of ECN Thresholds . . . . .	149
	Support, Limitations, and Notes . . . . .	152
	Example: Configuring ECN . . . . .	153
<b>Part 3</b>	<b>CoS on MPLS Networks</b>	
<b>Chapter 14</b>	<b>Configuring CoS on MPLS Networks . . . . .</b>	<b>161</b>
	Understanding Using CoS with MPLS Networks on EX Series Switches . . . . .	161
	EXP Classifiers and EXP rewrite Rules . . . . .	162
	Guidelines for Using CoS Classifiers on CCCs . . . . .	162
	Using CoS Classifiers with IP over MPLS . . . . .	163
	Setting CoS Bits in an MPLS Header . . . . .	163
	EXP Rewrite Rules . . . . .	165
	Policer . . . . .	165
	Schedulers . . . . .	165
	Example: Combining CoS with MPLS on EX Series Switches . . . . .	166
	Configuring CoS on an MPLS Provider Edge Switch Using IP Over MPLS (CLI Procedure) . . . . .	178
	Configuring CoS . . . . .	178
	Configuring an LSP Policer . . . . .	179
	Configuring CoS on an MPLS Provider Edge Switch Using Circuit Cross-Connect (CLI Procedure) . . . . .	180
	Configuring CoS . . . . .	180
	Configuring an LSP Policer . . . . .	181
	Configuring CoS on Provider Switches of an MPLS Network (CLI Procedure) . . . . .	182
	Configuring MPLS on EX8200 and EX4500 Provider Switches (CLI Procedure) . . . . .	183

<b>Part 4</b>	<b>Configuration Statements and Operational Commands</b>	
<b>Chapter 15</b>	<b>Configuration Statements</b>	<b>187</b>
	broadcast	188
	buffer-size	189
	class	190
	class-of-service	191
	classifiers	194
	code-point (Congestion Notification)	195
	code-point-aliases	196
	code-points	197
	congestion-notification-profile (Priority-Based Flow Control)	198
	drop-probability (Fill Level)	199
	drop-profile-map	200
	dscp	201
	dscp-ipv6	202
	ethernet (CoS for Multidestination Traffic)	203
	excess-rate (Schedulers)	204
	exp	205
	explicit-congestion-notification	206
	family	207
	forwarding-class	208
	forwarding-classes	209
	ieee-802.1	210
	ieee-802.1 (Congestion Notification)	211
	import	212
	inet (CoS)	213
	inet6 (CoS Multidestination)	214
	inet-precedence	215
	input (Congestion Notification)	216
	interfaces	217
	loss-priority (Classifiers and Rewrite Rules)	218
	multi-destination	220
	policing	221
	priority (Schedulers)	222
	protocol (Drop Profiles)	223
	rewrite-rules	224
	scheduler-map	225
	scheduler-maps	226
	schedulers (CoS)	227
	shaping-rate	228
	shared-buffer	229
	transmit-rate (EX Series Switches)	230
	tri-color (EX Series Switches)	231
	unit	234
<b>Chapter 16</b>	<b>Operational Commands</b>	<b>235</b>
	show class-of-service	236
	show class-of-service classifier	242
	show class-of-service code-point-aliases	245

show class-of-service drop-profile .....	247
show class-of-service forwarding-class .....	251
show class-of-service forwarding-table .....	254
show class-of-service forwarding-table classifier .....	258
show class-of-service forwarding-table classifier mapping .....	260
show class-of-service forwarding-table drop-profile .....	262
show class-of-service forwarding-table rewrite-rule .....	264
show class-of-service forwarding-table rewrite-rule mapping .....	266
show class-of-service forwarding-table scheduler-map .....	268
show class-of-service interface .....	270
show class-of-service multi-destination .....	301
show class-of-service rewrite-rule .....	303
show class-of-service scheduler-map .....	305
OBSOLETE: show interfaces queue .....	308
show pfe statistics traffic cpu .....	314
show pfe statistics traffic egress-queues .....	318
show pfe statistics traffic multicast .....	320



# List of Figures

<b>Part 1</b>	<b>Basic CoS Configuration</b>	
<b>Chapter 1</b>	<b>CoS Overview</b> .....	<b>3</b>
	Figure 1: Packet Flow Across the Network .....	5
	Figure 2: Topology for Configuring CoS .....	15
<b>Part 2</b>	<b>Congestion Management, Tail Drop Profiles, Queue Shaping, and Explicit Congestion Notification (ECN)</b>	
<b>Chapter 10</b>	<b>Congestion Management</b> .....	<b>125</b>
	Figure 3: Graphical Representation of a Segmented Drop Profile .....	127
	Figure 4: Graphical Representation of an Interpolated Drop Profile on EX Series Switches Except EX4300 Switches .....	128
	Figure 5: Tail-Drop Profile Packet Drop on EX4300 Switches .....	129
<b>Chapter 13</b>	<b>Explicit Congestion Notification (ECN)</b> .....	<b>143</b>
	Figure 6: Explicit Congestion Notification .....	146



# List of Tables

	<b>About the Documentation</b> . . . . .	<b>xv</b>
	Table 1: Notice Icons . . . . .	xvii
	Table 2: Text and Syntax Conventions . . . . .	xviii
<b>Part 1</b>	<b>Basic CoS Configuration</b>	
<b>Chapter 1</b>	<b>CoS Overview</b> . . . . .	<b>3</b>
	Table 3: CoS Configuration Tasks . . . . .	7
	Table 4: EX8200 Line Cards That Include Oversubscribed Ports . . . . .	11
	Table 5: Configuration Components: VLANs . . . . .	16
	Table 6: Configuration Components: Switch Interfaces Assigned to VLANs and Devices on a 48-Port All-PoE Switch . . . . .	16
<b>Chapter 3</b>	<b>CoS on Interfaces</b> . . . . .	<b>45</b>
	Table 7: Assigning CoS Components to Logical Interfaces . . . . .	47
	Table 8: Summary of Key CoS Interfaces Output Fields . . . . .	48
<b>Chapter 4</b>	<b>CoS Code-Point Aliases</b> . . . . .	<b>49</b>
	Table 9: Default Code-Point Aliases . . . . .	50
	Table 10: CoS Value Aliases Configuration Fields . . . . .	53
	Table 11: Summary of Key CoS Value Alias Output Fields . . . . .	54
<b>Chapter 5</b>	<b>CoS Classifiers</b> . . . . .	<b>55</b>
	Table 12: Default BA Classification . . . . .	57
	Table 13: Allowed BA Classification . . . . .	58
	Table 14: BA-classifier Loss Priority Assignments . . . . .	60
	Table 15: Classifiers Configuration Fields . . . . .	62
	Table 16: BA-mcast-classifier Loss Priority Assignments . . . . .	64
	Table 17: Summary of Key CoS Classifier Output Fields . . . . .	70
<b>Chapter 6</b>	<b>CoS Rewrite</b> . . . . .	<b>75</b>
	Table 18: Default Packet Header Rewrite Mappings . . . . .	76
	Table 19: Rewrite Rules Configuration Page Summary . . . . .	80
	Table 20: Summary of Key CoS Rewrite Rules Output Fields . . . . .	86
<b>Chapter 7</b>	<b>Forwarding Classes</b> . . . . .	<b>89</b>
	Table 21: Default Forwarding Classes for Unicast Traffic . . . . .	91
	Table 22: Default Forwarding Classes for Multicast Traffic on EX8200 Virtual Chassis and EX4300 Switches . . . . .	91
	Table 23: Forwarding Classes Configuration Fields . . . . .	94
	Table 24: Summary of Key CoS Forwarding Class Output Fields . . . . .	96
<b>Chapter 8</b>	<b>Flow Control</b> . . . . .	<b>99</b>

	Table 25: Input for PFC Congestion Notification Profile and Mapping to Traffic Class and Egress Queue . . . . .	101
<b>Chapter 9</b>	<b>CoS Queue Schedulers and Scheduler Maps . . . . .</b>	<b>105</b>
	Table 26: Support for Scheduler Maps on Switches and Line Cards . . . . .	109
	Table 27: Schedulers Configuration Page . . . . .	116
	Table 28: Scheduler Maps Configuration Fields . . . . .	118
	Table 29: Summary of Key CoS Scheduler Maps Output Fields . . . . .	119
<b>Part 2</b>	<b>Congestion Management, Tail Drop Profiles, Queue Shaping, and Explicit Congestion Notification (ECN)</b>	
<b>Chapter 11</b>	<b>Tail Drop Profiles . . . . .</b>	<b>133</b>
	Table 30: Drop Profiles Configuration parameters . . . . .	135
	Table 31: Summary of the Key Output Fields for CoS Red Drop Profiles . . . . .	136
<b>Chapter 13</b>	<b>Explicit Congestion Notification (ECN) . . . . .</b>	<b>143</b>
	Table 32: ECN Bit Codes . . . . .	145
	Table 33: Traffic Behavior on ECN-Enabled Queues . . . . .	148
	Table 34: Components of the ECN Configuration Example . . . . .	154
<b>Part 3</b>	<b>CoS on MPLS Networks</b>	
<b>Chapter 14</b>	<b>Configuring CoS on MPLS Networks . . . . .</b>	<b>161</b>
	Table 35: MPLS CoS Values . . . . .	164
	Table 36: CoS Configuration Components on the Ingress PE Switch . . . . .	167
	Table 37: CoS Configuration Components of the Egress PE Switch . . . . .	168
	Table 38: CoS Configuration Components of the Provider Switch . . . . .	168
<b>Part 4</b>	<b>Configuration Statements and Operational Commands</b>	
<b>Chapter 16</b>	<b>Operational Commands . . . . .</b>	<b>235</b>
	Table 39: show class-of-service Output Fields . . . . .	236
	Table 40: show class-of-service classifier Output Fields . . . . .	242
	Table 41: show class-of-service code-point-aliases Output Fields . . . . .	245
	Table 42: show class-of-service drop-profile Output Fields . . . . .	247
	Table 43: show class-of-service forwarding-class Output Fields . . . . .	251
	Table 44: show class-of-service forwarding-table classifier Output Fields . . . . .	258
	Table 45: show class-of-service forwarding-table classifier mapping Output Fields . . . . .	260
	Table 46: show class-of-service forwarding-table drop-profile Output Fields . . . . .	262
	Table 47: show class-of-service forwarding-table rewrite-rule Output Fields . . . . .	264
	Table 48: show class-of-service forwarding-table rewrite-rule mapping Output Fields . . . . .	266
	Table 49: show class-of-service forwarding-table scheduler-map Output Fields . . . . .	268
	Table 50: show class-of-service interface Output Fields . . . . .	271
	Table 51: show class-of-service multi-destination Output Fields . . . . .	301
	Table 52: show class-of-service rewrite-rule Output Fields . . . . .	303
	Table 53: show class-of-service scheduler-map Output Fields . . . . .	305
	Table 54: show interfaces queue Output Fields . . . . .	308

Table 55: show pfe statistics traffic cpu Output Fields . . . . .	314
Table 56: show pfe statistics traffic egress-queues Output Fields . . . . .	319
Table 57: show pfe statistics traffic multicast Output Fields . . . . .	321



# About the Documentation

- Documentation and Release Notes on page xv
- Using the Examples in This Manual on page xv
- Documentation Conventions on page xvii
- Documentation Feedback on page xix
- Requesting Technical Support on page xix

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <https://www.juniper.net/documentation/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <https://www.juniper.net/books>.

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```



2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

## Documentation Conventions

Table 1 on page xvii defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xviii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b>  No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies guide names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS CLI User Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Encloses optional keywords or variables.	<b>stub</b> <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast</b>   <b>multicast</b>  ( <i>string1</i>   <i>string2</i>   <i>string3</i> )
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Encloses a variable for which you can substitute one or more values.	<b>community name members</b> [ <b>community-ids</b> ]
Indentation and braces ( { } )	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	

## GUI Conventions

Table 2: Text and Syntax Conventions (continued)

Convention	Description	Examples
<b>Bold text like this</b>	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

We encourage you to provide feedback so that we can improve our documentation. You can use either of the following methods:

- Online feedback system—Click TechLibrary Feedback, on the lower right of any page on the [Juniper Networks TechLibrary](#) site, and do one of the following:



- Click the thumbs-up icon if the information on the page was helpful to you.
- Click the thumbs-down icon if the information on the page was not helpful to you or if you have suggestions for improvement, and use the pop-up form to provide feedback.
- E-mail—Send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net). Include the document or topic name, URL or page number, and software version (if applicable).

## Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active Juniper Care or Partner Support Services support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <https://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <https://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <https://www.juniper.net/customers/support/>
- Search for known bugs: <https://prsearch.juniper.net/>
- Find product documentation: <https://www.juniper.net/documentation/>
- Find solutions and answer questions using our Knowledge Base: <https://kb.juniper.net/>
- Download the latest versions of software and review release notes: <https://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <https://www.juniper.net/company/communities/>
- Create a service request online: <https://myjuniper.juniper.net>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://entitlementsearch.juniper.net/entitlementsearch/>

## Creating a Service Request with JTAC

You can create a service request with JTAC on the Web or by telephone.

- Visit <https://myjuniper.juniper.net>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <https://support.juniper.net/support/requesting-support/>.

## PART 1

# Basic CoS Configuration

- [CoS Overview on page 3](#)
- [Junos OS EZQoS and J-Web on page 41](#)
- [CoS on Interfaces on page 45](#)
- [CoS Code-Point Aliases on page 49](#)
- [CoS Classifiers on page 55](#)
- [CoS Rewrite on page 75](#)
- [Forwarding Classes on page 89](#)
- [Flow Control on page 99](#)
- [CoS Queue Schedulers and Scheduler Maps on page 105](#)



## CHAPTER 1

# CoS Overview

- [Junos OS CoS for EX Series Switches Overview on page 4](#)
- [Configuring CoS on EX Series Switches on page 6](#)
- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Understanding CoS Two-Color Marking on page 10](#)
- [Understanding CoS Queues on EX8200 Line Cards That Include Oversubscribed Ports on page 11](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

## Junos OS CoS for EX Series Switches Overview

---

When a network experiences congestion and delay, some packets must be dropped. Junos operating system (Junos OS) class of service (CoS) divides traffic into classes to which you can apply different levels of throughput and packet loss when congestion occurs. This allows packet loss to happen according to rules that you configure.

For interfaces that carry IPv4, IPv6, and MPLS traffic, you can configure Junos OS CoS features to provide multiple classes of service for different applications. CoS also allows you to rewrite the Differentiated Services code point (DSCP), IP precedence, 802.1p, or EXP CoS bits of packets egressing out of an interface, thus allowing you to tailor packets for the remote peers' network requirements. See [“Understanding Using CoS with MPLS Networks on EX Series Switches” on page 161](#) for more information about CoS for MPLS networks.

CoS provides multiple classes of service for different applications. You can configure multiple forwarding classes for transmitting packets, define which packets are placed into each output queue, and schedule the transmission service level for each queue.

In designing CoS applications, you must give careful consideration to your service needs and thoroughly plan and design your CoS configuration to ensure consistency and interoperability across all platforms in a CoS domain.

Because Juniper Networks EX Series Ethernet Switches implement CoS in hardware rather than in software, you can experiment with and deploy CoS features without affecting packet-forwarding and switching performance.



**NOTE:** CoS policies can be enabled or disabled on each interface of an EX Series switch. Also, each physical and logical interface on the switch can have custom CoS rules associated with it. When CoS is used in an MPLS network, there are some additional restrictions. See [“Understanding Using CoS with MPLS Networks on EX Series Switches” on page 161](#).

- [How Junos OS CoS Works on page 4](#)
- [Default CoS Behavior on EX Series Switches on page 5](#)

## How Junos OS CoS Works

Junos OS CoS works by examining traffic entering at the edge of your network. The switches classify traffic into defined service groups to provide the special treatment of traffic across the network. For example, voice traffic can be sent across certain links, and data traffic can use other links. In addition, the data traffic streams can be serviced differently along the network path. As the traffic leaves the network at the far edge, you can rewrite the traffic to meet the policies of the targeted peer.

To support CoS, you must configure each switch in the network. Generally, each switch examines the packets that enter it to determine their CoS settings. These settings then dictate which packets are transmitted first to the next downstream switch. Switches at




the edges of the network might be required to alter the CoS settings of the packets that enter the network to classify the packets into the appropriate service groups.

[Figure 1 on page 5](#) represents the network scenario of an enterprise. Switch A is receiving traffic from various network nodes such as desktop computers, servers, surveillance cameras, and VoIP telephones. As each packet enters, Switch A examines the packet's CoS settings and classifies the traffic into one of the groupings defined by the enterprise. This definition allows Switch A to prioritize resources for servicing the traffic streams it receives. Switch A might alter the CoS settings of the packets to better match the enterprise's traffic groups.

When Switch B receives the packets, it examines the CoS settings, determines the appropriate traffic groups, and processes the packets according to those settings. It then transmits the packets to Switch C, which performs the same actions. Switch D also examines the packets and determines the appropriate groups. Because Switch D sits at the far end of the network, it can rewrite the CoS bits of the packets before transmitting them.

*Figure 1: Packet Flow Across the Network*

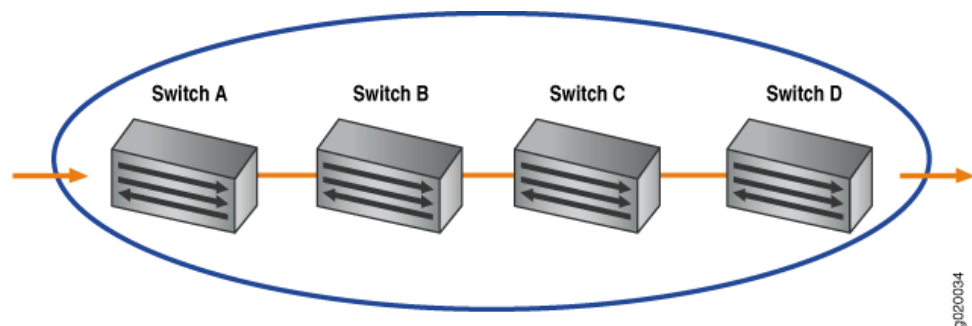

## Default CoS Behavior on EX Series Switches

If you do not configure any CoS settings on the switch, the software still ensures that user traffic and protocol packets are forwarded with minimum delay when the network is experiencing congestion. Some CoS settings, such as classifiers, are automatically applied to each logical interface that you configure. Other settings, such as rewrite rules, are applied only if you explicitly associate them with an interface.

### Related Documentation

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Understanding Junos OS EZQoS for CoS Configurations on EX Series Switches on page 41](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Example: Combining CoS with MPLS on EX Series Switches on page 166](#)

## Configuring CoS on EX Series Switches

---

The topics in this guide describe how to configure the Junos OS class-of-service (CoS) components. Junos CoS provides a flexible set of tools that enable you to fine tune control over the traffic on your network.

- Define classifiers that classify incoming traffic into forwarding classes to place traffic in groups for transmission.
- Map forwarding classes to output queues to define the type of traffic on each output queue.
- Configure schedulers for each output queue to control the service level (priority, bandwidth characteristics) of each type of traffic.
- Provide different service levels for the same forwarding classes on different interfaces.
- Provide congestion management with tail drop profiles, queue shaping, and congestion notification.
- Configure CoS on MPLS networks.
- Configure various CoS components individually or in combination to define CoS services.



**NOTE:** When you change the CoS configuration or when you deactivate and then reactivate the CoS configuration, the system experiences packet drops because the system momentarily blocks traffic to change the mapping of incoming traffic to input queues.

[Table 3 on page 7](#) lists the primary CoS configuration tasks, includes platform limitations, and provides links to those tasks.

Table 3: CoS Configuration Tasks

CoS Configuration Task	Links
<p>Basic CoS Configuration:</p> <ul style="list-style-type: none"> <li>• Configure CoS using EZQoS with templates for key traffic classes, or a browser and the J-Web interface.</li> <li>• Configure code-point aliases to assign a name to a pattern of code-point bits that you can use instead of the bit pattern when you configure CoS components such as classifiers and rewrite rules.</li> <li>• Configure classifiers and multdestination classifiers. <ul style="list-style-type: none"> <li>• Configure rewrite rules to alter code-point bit values in outgoing packets on the outbound interfaces of a switch so that the CoS treatment matches the policies of a targeted peer.</li> <li>• Set the forwarding class and loss priority of a packet based on the incoming CoS value and assign packets to output queues based on the associated forwarding class.</li> </ul> </li> <li>• Configure forwarding classes.</li> <li>• Configure priority-based flow control to apply link-level flow control on a specific traffic class so that different types of traffic can efficiently use the same network interface card (NIC).</li> <li>• Configure CoS schedulers to define the properties of output queues on EX Series switches. These properties include the amount of interface bandwidth assigned to the queue, the size of the memory buffer allocated for storing packets, the priority of the queue, and the drop profiles associated with the queue.</li> <li>• Assign the following CoS components to physical or logical interfaces: <ul style="list-style-type: none"> <li>• Classifiers (logical interfaces only)</li> <li>• Forwarding classes (logical interfaces only)</li> <li>• Scheduler maps</li> <li>• Rewrite rules</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Junos OS EZQoS for CoS (CLI Procedure) on page 42</a></li> <li>• <a href="#">Configuring CoS (J-Web Procedure) on page 43</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases (CLI Procedure) on page 52</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a></li> <li>• (EX4300 and EX4600 only) <a href="#">“Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers” on page 62</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a></li> <li>• <a href="#">Defining CoS Forwarding Classes (CLI Procedure) on page 93</a></li> <li>• (EX4500 only) <a href="#">“Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure)” on page 102</a></li> <li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces (CLI Procedure) on page 45</a></li> </ul>
<p>Configure congestion management mechanisms for a switch to drop arriving packets based on certain parameters when a queue is full. Based on the EX Series switch that you are using, packets are dropped depending on the priority of a packet or on both priority and drop probability of a packet.</p> <ul style="list-style-type: none"> <li>• Configure a weighted tail drop profile, a simple and effective traffic congestion avoidance mechanism. When you apply this mechanism to manage congestion, packets are dropped when the output queue is full.</li> <li>• Configure a weighted random early detection (WRED) drop profile. When the configured capacity (fill level) is reached, packets marked with a packet loss priority (PLP) of high are discarded.</li> <li>• Configure port shaping and queue shaping to enable you to limit traffic on an interface or queue, respectively, so that you can control the amount of traffic passing through the interface or the queue.</li> <li>• Configure explicit congestion notification (ECN) to enable end-to-end congestion notification between two endpoints on TCP/IP based networks. Apply WRED drop profiles to forwarding classes to control how the switch marks ECN-capable packets.</li> </ul>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring CoS Congestion Management (CLI Procedure) on page 130</a></li> <li>• <a href="#">Configuring Shaping for CoS (CLI Procedure) on page 138</a></li> <li>• (EX4300 and EX4600 only) <a href="#">“Example: Configuring ECN” on page 153</a></li> </ul>
<p>Configure CoS on MPLS networks to ensure better performance for low-latency applications such as VoIP and other business-critical functions.</p>	<ul style="list-style-type: none"> <li>• (EX4500 and EX8200 only) <a href="#">“Example: Combining CoS with MPLS on EX Series Switches” on page 166</a></li> </ul>

## Understanding Junos OS CoS Components for EX Series Switches

---

This topic describes the Juniper Networks Junos operating system (Junos OS) class-of-service (CoS) components for Juniper Networks EX Series Ethernet Switches:

- [Code-Point Aliases on page 8](#)
- [Policers on page 8](#)
- [Classifiers on page 8](#)
- [Forwarding Classes on page 9](#)
- [Tail Drop Profiles on page 9](#)
- [Schedulers on page 9](#)
- [Rewrite Rules on page 9](#)

### Code-Point Aliases

A code-point alias assigns a name to a pattern of code-point bits. You can use this name instead of the bit pattern when you configure other CoS components such as classifiers, drop-profile maps, and rewrite rules.

### Policers

Policers limit traffic of a certain class to a specified bandwidth and *burst size*. Packets exceeding the policer limits can be discarded. You define policers with filters that can be associated with input interfaces.

For more information about policers, see *Understanding the Use of Policers in Firewall Filters*.



**NOTE:** You can configure policers to discard packets that exceed the rate limits. If you want to configure CoS parameters such as **loss-priority** and **forwarding-class**, you must use firewall filters.

### Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. In Juniper Networks Junos operating system (Junos OS), *classifiers* associate packets with a forwarding class and loss priority and assign packets to output queues based on the associated forwarding class. Junos OS supports two general types of classifiers:

- Behavior aggregate or CoS value traffic classifiers—Examines the CoS value in the packet header. The value in this single field determines the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the Differentiated Services code point (DSCP) value, IP precedence value, and IEEE 802.1p value.
- Multifield traffic classifiers—Examines multiple fields in the packet such as source and destination addresses and source and destination port numbers of the packet. With

multifield classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.

## Forwarding Classes

Forwarding classes group the packets for transmission. Based on forwarding classes, you assign packets to output queues. Forwarding classes affect the forwarding, scheduling, and marking policies applied to packets as they transit a switch. By default, four categories of forwarding classes are defined: best effort, assured forwarding, expedited forwarding, and network control. For EX Series switches, 16 forwarding classes are supported, providing granular classification capability.

## Tail Drop Profiles

Drop profile is a mechanism that defines parameters that allow packets to be dropped from the network. Drop profiles define the meanings of the loss priorities. When you configure drop profiles you are essentially setting the value for queue fullness. The queue fullness represents a percentage of the queue used to store packets in relation to the total amount that has been allocated for that specific queue.

Loss priorities set the priority of dropping a packet. Loss priority affects the scheduling of a packet without affecting the packet's relative ordering. You can use the loss priority setting to identify packets that have experienced congestion. Typically you mark packets exceeding some service level with a high loss priority.

## Schedulers

Each switch interface has multiple queues assigned to store packets. The switch determines which queue to service based on a particular method of scheduling. This process often involves determining which type of packet should be transmitted before another. You can define the priority, bandwidth, delay buffer size, and tail drop profiles to be applied to a particular queue for packet transmission.

A scheduler map associates a specified forwarding class with a scheduler configuration. You can associate up to four user-defined scheduler maps with the interfaces.

## Rewrite Rules

A *rewrite rule* sets the appropriate CoS bits in the outgoing packet, thus allowing the next downstream device to classify the packet into the appropriate service group. Rewriting, or marking, outbound packets is useful when the switch is at the border of a network and must alter the CoS values to meet the policies of the targeted peer.



**NOTE:** Egress firewall filters can also assign forwarding class and loss priority so that the packets are rewritten based on forwarding class and loss priority.

### Related Documentation

- [Understanding CoS Code-Point Aliases on page 49](#)
- [Understanding CoS Classifiers on page 56](#)

- [Understanding CoS Forwarding Classes on page 90](#)
- [Understanding CoS Tail Drop Profiles on page 133](#)
- [Understanding CoS Schedulers on page 105](#)
- [Understanding CoS Two-Color Marking on page 10](#)
- [Understanding CoS Rewrite Rules on page 75](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

---

## Understanding CoS Two-Color Marking

---

Networks police traffic by limiting the input or output transmission rate of a class of traffic on the basis of user-defined criteria. Policing traffic allows you to control the maximum rate of traffic sent or received on an interface and to partition a network into multiple priority levels or classes of service.

Policers require you to apply limits to the traffic flow and set a consequence for packets that exceed these limits—usually a higher loss priority, so that packets exceeding the policer limits are discarded first.

Juniper Networks EX Series Ethernet Switches support a single-rate two-color marking type of policer, which is a simplified version of Single-Rate-Three-Color marking, defined in RFC 2697, *A Single Rate Three Color Marker*. This type of policer meters traffic based on the configured committed information rate (CIR) and committed burst size (CBS).

The single-rate two-color marker meters traffic and marks incoming packets depending on whether they are smaller than the committed burst size (CBS)—marked green—or exceed it—marked red.

The single-rate two-color marking policer operates in color-blind mode. In this mode, the policer's actions are not affected by any previous marking or metering of the examined packets. In other words, the policer is “blind” to any previous coloring a packet might have had.

### Related Documentation

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Understanding the Use of Policers in Firewall Filters](#)
- [Configuring Policers to Control Traffic Rates \(CLI Procedure\)](#)

## Understanding CoS Queues on EX8200 Line Cards That Include Oversubscribed Ports

Some line cards available for Juniper Networks EX8200 Ethernet Switches include oversubscribed ports that are combined in logical port groups that share bandwidth. These oversubscribed ports handle traffic differently than ports that provide continuous line-rate bandwidth. You might need to configure CoS queues differently for oversubscribed ports than for line-rate ports.

This topic describes:

- [Oversubscribed Ports on Line Cards on page 11](#)
- [EX8200 Line Cards That Include Oversubscribed Ports on page 11](#)
- [Ingress Queueing on page 12](#)
- [Egress Queues on page 13](#)

### Oversubscribed Ports on Line Cards

Oversubscribed ports on a line card are grouped into logical port groups. A port group collectively supports a certain bandwidth.

An EX8200 switch supports different line cards that provide line-rate and oversubscribed ports. Based on your requirement, you can choose the appropriate line card for an EX8200 switch. Line cards are field-replaceable units (FRUs) that can be installed in the line card slots in an EX8200 switch. In a line-rate EX8200 line card, each port in the line card supports the same amount of bandwidth and a single port can utilize that complete bandwidth. In an oversubscribed line card, a group of ports collectively support a certain total bandwidth and each port in that group can use either a portion or all of the available bandwidth. However, the total utilization of bandwidth by the ports in the group cannot exceed the bandwidth available for that group.

Because the port groups share bandwidth, class-of-service (CoS) ingress and egress queues are handled differently for these shared-bandwidth ports in logical port groups than they are for ports that individually support line-rate bandwidth. Some EX8200 line cards combine both port types, those that share bandwidth across port groups and those that individually support line-rate bandwidth.

### EX8200 Line Cards That Include Oversubscribed Ports

[Table 4 on page 11](#) lists EX8200 line cards that include oversubscribed ports in logical port groups.

*Table 4: EX8200 Line Cards That Include Oversubscribed Ports*

Line Card Model	Name	Number of Oversubscribed Ports/Port Connector
EX8200-40XS	40-port SFP+	40 oversubscribed 10-gigabit SFP+ ports

*Table 4: EX8200 Line Cards That Include Oversubscribed Ports (continued)*

Line Card Model	Name	Number of Oversubscribed Ports/Port Connector
EX8200-2XS-40P	40-port PoE+ with 4-port SFP and 2-port SFP+	40 oversubscribed 10/100/1000 Gigabit Ethernet ports with RJ-45 connectors, four small form-factor pluggable (SFP) ports (in which you can install 1-gigabit SFP transceivers) and two SFP+ ports
EX8200-2XS-40T	40-port RJ-45 with 4-port SFP and 2-port SFP+	40 oversubscribed 10/100/1000 Gigabit Ethernet ports with RJ-45 connectors, four SFP ports (in which you can install 1-gigabit small form-factor pluggable (SFP) transceivers) and two SFP+ ports
EX8200-48PL	48-port PoE+ 20 Gbps	48 oversubscribed 10/100/1000 Gigabit Ethernet ports with RJ-45 connectors
EX8200-48TL	48-port RJ-45 20 Gbps	48 oversubscribed 10/100/1000 Gigabit Ethernet ports with RJ-45 connectors

## Ingress Queuing

Classification of packets occurs in two phases for the oversubscribed ports in the port groups.

- [Preclassification of Packets and Port Ingress Queuing on page 12](#)
- [Full Classification of Packets and Fabric Ingress Queuing on page 13](#)

### Preclassification of Packets and Port Ingress Queuing

Packets entering ports are forwarded to one of the ingress queues. The ingress queues schedule traffic from ports into the Packet Forwarding Engine.

The ingress queues are:

- **Low-priority queue**—Each interface in the line card has one low-priority queue. Traffic on these queues is scheduled using the shaped deficit weighted round-robin (SDWRR) algorithm, with each interface's queue having equal weight. On EX4300 switches, traffic is queued using the weighted deficit round-robin (WDRR) algorithm.
- **High-priority queue**—A set of interfaces in the line card shares a single high-priority queue. Traffic on this queue is scheduled by strict-high priority. The switch always sends critical network control packets on the high-priority queue.
- **Line-rate priority queue**—The packets entering line-rate ports are forwarded to this queue. Traffic on this queue is scheduled by strict priority and is always given higher priority than the traffic on the high-priority queue. This queue is used only in the following oversubscribed line cards for an EX8200 switch:
  - EX8200-2XS-40P
  - EX8200-2XS-40T



For the purpose of port ingress queuing on oversubscribed ports, packets are classified only by behavior aggregate (BA) classification. To control the ingress queue (high priority or low priority) to which packets are sent, configure a BA classifier on the physical port and specify switch fabric priorities for the forwarding classes. On EX8200 switches, fabric priority determines the priority of packets ingressing the switch fabric. For the EX8200-40XS line card, fabric priority also determines the priority of packets ingressing the port group.

By default, the fabric priority for all forwarding classes is low. To direct packets belonging to a forwarding class to the high-priority ingress queue, set the fabric priority to high for that class.

Critical network-control packets and line-rate packets are handled differently from other packets. Instead of using the BA classifier to classify critical network-control packets, the switch always sends critical network packets to the high-priority queue. The line-rate packets are always sent to the line-rate priority queue. This difference in handling of network-control packets and line-rate packets ensures that these packets are not dropped because of congestion on the shared-bandwidth ports.

### Full Classification of Packets and Fabric Ingress Queuing

When packets (apart from line-rate and critical network-control packets) from an oversubscribed port reach the Packet Forwarding Engine, it performs full packet classification, along with other actions, such as multifield (MF) classification, traffic policing, and storm control. It then schedules and queues the packets for ingressing the fabric. The fabric priority associated with the forwarding class determines whether packets are sent to the low priority or high-priority ingress queues.

## Egress Queues

On EX Series switches except EX4300 switches, each interface supports eight egress CoS queues. You can map up to 16 forwarding classes to these queues. An EX4300 switch interface supports 12 egress CoS queues.

In the EX8200-40XS line card, all interfaces in a port group share a single set of eight egress queues at the Packet Forwarding Engine. Egress traffic is fanned out from the Packet Forwarding Engine queues to the corresponding queues for the individual ports. For this reason, the interfaces in a port group must share the same scheduler map configuration. If you configure different scheduler map configurations for the different interfaces in a port group, an error is logged in the system log and the default scheduler map is used for all ports in the port group.

### Related Documentation

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Understanding CoS Schedulers on page 105](#)
- [Understanding CoS Forwarding Classes on page 90](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards \(CLI Procedure\) on page 69](#)

## Example: Configuring CoS on EX Series Switches

---

Configure class of service (CoS) on your switch to manage traffic so that when the network experiences congestion and delay, critical applications are protected. Using CoS, you can divide traffic on your switch into classes and provide various levels of throughput and packet loss. This is especially important for traffic that is sensitive to jitter and delay, such as voice traffic.

This example shows how to configure CoS on a single EX Series switch in the network.

- [Requirements on page 14](#)
- [Overview and Topology on page 14](#)
- [Configuration on page 17](#)
- [Verification on page 29](#)

### Requirements


This example uses the following hardware and software components:

- EX3200 and EX4200 switches
- Junos OS Release 9.0 or later for EX Series switches

### Overview and Topology

This example uses the topology shown in [Figure 2 on page 15](#).

Figure 2: Topology for Configuring CoS

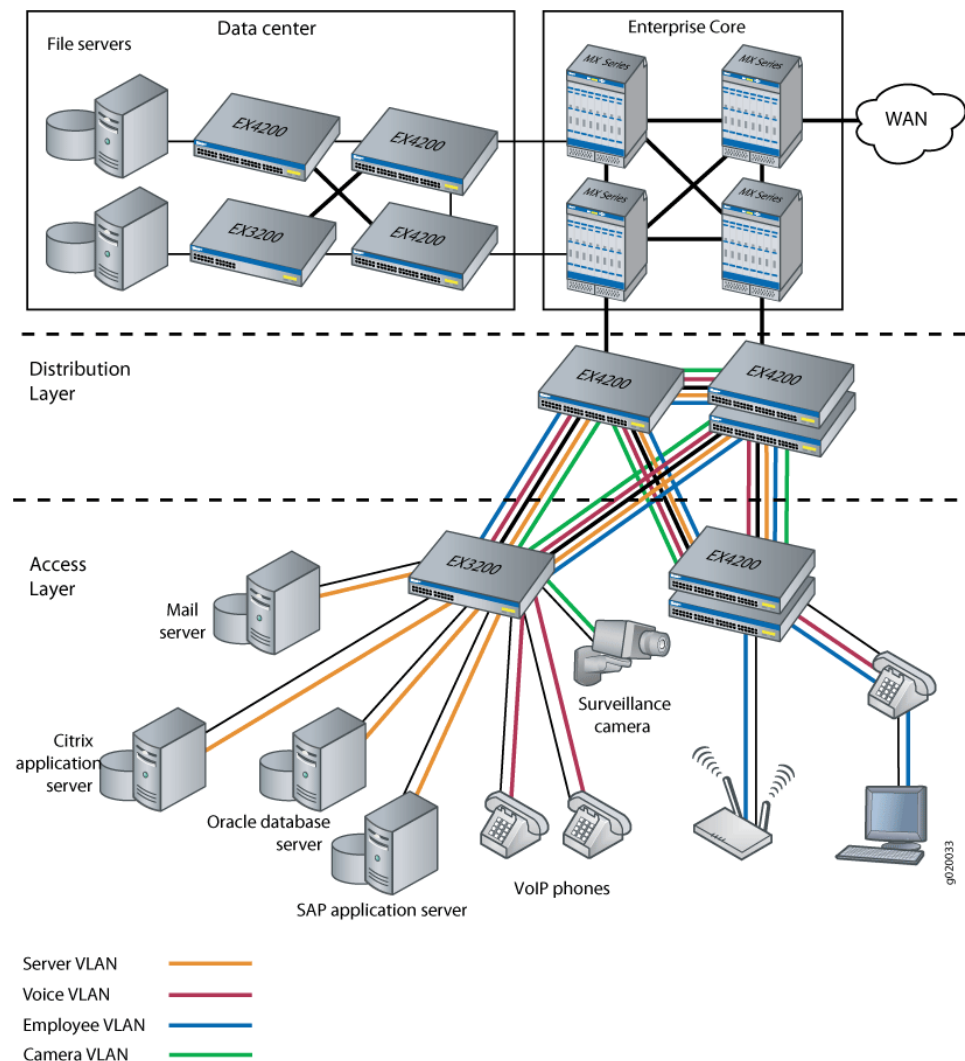

The topology for this configuration example consists of EX3200 and EX4200 switches at the access layer.

The EX Series access switches are configured to support VLAN membership. On the EX3200 access layer switch, interfaces **ge-0/0/0** and **ge-0/0/1** are assigned to the voice VLAN (**voice-vlan**) for two VoIP IP phones. Switch interface **ge-0/0/2** is assigned to the camera VLAN (**camera-vlan**) for the surveillance camera. Switch interfaces **ge-0/0/3**, **ge-0/0/4**, **ge-0/0/5**, and **ge-0/0/6** are assigned to the server VLAN (**server-vlan**) for the servers hosting various applications such as those provided by Citrix, Microsoft, Oracle, and SAP. The EX3200 trunk ports, **ge-0/0/20** and **ge-0/0/21**, are assigned to the server, voice, employee, and camera VLANs and used as uplink ports to connect the distribution layer switches.

EX4200 switches are also included in the access layer to similarly connect employee and voice VLANs, although this example does not show configuration details for those switches.

Table 5 on page 16 shows the VLAN configuration components.

**Table 5: Configuration Components: VLANs**

VLAN Name	VLAN ID	VLAN Subnet and Available IP Addresses	VLAN Description
voice-vlan	10	192.168.1.0/28 192.168.1.1 through 192.168.1.14  192.168.1.15 is the subnet's broadcast address.	Voice VLAN used for employee VoIP communication.
camera-vlan	20	192.168.1.16/28 192.168.1.17 through 192.168.1.30  192.168.1.31 is the subnet's broadcast address.	VLAN for the surveillance cameras.
server-vlan	30	192.168.1.32/28 192.168.1.33 through 192.168.1.46  192.168.1.47 is the subnet's broadcast address.	VLAN for the servers hosting enterprise applications.

PoE-capable ports on EX Series switches support Power over Ethernet (PoE) to provide both network connectivity and power for VoIP telephones connecting to the ports. Table 6 on page 16 shows the switch interfaces that are assigned to the VLANs and the IP addresses for devices connected to the switch ports on a 48-port switch, all ports of which are PoE-capable.

**Table 6: Configuration Components: Switch Interfaces Assigned to VLANs and Devices on a 48-Port All-PoE Switch**

Interfaces	VLAN Membership	IP Addresses	Port Devices
ge-0/0/0, ge-0/0/1	voice-vlan	192.168.1.1/28 through 192.168.1.2/28	Two VoIP telephones.
ge-0/0/2	camera-vlan	192.168.1.17/28	Surveillance camera.
ge-0/0/3, ge-0/0/4, ge-0/0/5, ge-0/0/6	server-vlan	192.168.1.33/28 through 192.168.1.36/28	Four servers hosting applications such as those provided by Citrix, Microsoft, Oracle, and SAP.



**NOTE:** This example shows how to configure CoS on a standalone EX Series switch. This example does not consider across-the-network applications of CoS in which you might implement different configurations on ingress and egress switches to provide differentiated treatment to different classes across a set of nodes in a network.



**NOTE:** Although you will sometimes see schedulers configured for strict-high priority with a transmit-rate configured, that configuration is misleading because strict-high priority schedulers get unlimited bandwidth and the transmit-rate parameter has no effect on them. With this configuration, lower priority queues can suffer starvation if there is congestion. It is better that schedulers with strict-high priority have shaping-rate parameters configured, which is the correct way to limit their bandwidth.

## Configuration

### CLI Quick Configuration

To quickly configure CoS, copy the following commands and paste them into the switch terminal window:

```
[edit]
set class-of-service forwarding-classes class app queue-num 5
set class-of-service forwarding-classes class mail queue-num 1
set class-of-service forwarding-classes class db queue-num 2
set class-of-service forwarding-classes class erp queue-num 3
set class-of-service forwarding-classes class video queue-num 4
set class-of-service forwarding-classes class best-effort queue-num 0
set class-of-service forwarding-classes class voice queue-num 6
set class-of-service forwarding-classes class network-control queue-num 7
set firewall family ethernet-switching filter voip_class term voip from source-address 192.168.1.1/28
set firewall family ethernet-switching filter voip_class term voip from source-address 192.168.1.2/28
set firewall family ethernet-switching filter voip_class term voip from protocol udp
set firewall family ethernet-switching filter voip_class term voip from source-port 2698
set firewall family ethernet-switching filter voip_class term voip then forwarding-class voice
loss-priority low
set firewall family ethernet-switching filter voip_class term network_control from precedence
[net-control internet-control]
set firewall family ethernet-switching filter voip_class term network_control then forwarding-class
network-control loss-priority low
set firewall family ethernet-switching filter voip_class term best_effort_traffic then
forwarding-class best-effort loss-priority low
set interfaces ge-0/0/0 description phone1-voip-ingress-port
set interfaces ge-0/0/0 unit 0 family ethernet-switching filter input voip_class
set class-of-service interfaces ge-0/0/0 shaping-rate 100m
set interfaces ge-0/0/1 description phone2-voip-ingress-port
set interfaces ge-0/0/1 unit 0 family ethernet-switching filter input voip_class
set firewall family ethernet-switching filter video_class term video from source-address
192.168.1.17/28
set firewall family ethernet-switching filter video_class term video from protocol udp
set firewall family ethernet-switching filter video_class term video from source-port 2979
set firewall family ethernet-switching filter video_class term video then forwarding-class video
loss-priority low
```

```
set firewall family ethernet-switching filter video_class term network_control from precedence
[net-control internet-control]
set firewall family ethernet-switching filter video_class term network_control then forwarding-class
network-control loss-priority low
set firewall family ethernet-switching filter video_class term best_effort_traffic then
forwarding-class best-effort loss-priority low
set interfaces ge-0/0/2 description video-ingress-port
set interfaces ge-0/0/2 unit 0 family ethernet-switching filter input video_class
set firewall family ethernet-switching filter app_class term app from source-address
192.168.1.33/28
set firewall family ethernet-switching filter app_class term app from protocol tcp
set firewall family ethernet-switching filter app_class term app from source-port [1494 2512 2513
2598 2897]
set firewall family ethernet-switching filter app_class term app then forwarding-class app
loss-priority low
set firewall family ethernet-switching filter app_class term mail from source-address
192.168.1.34/28
set firewall family ethernet-switching filter app_class term mail from protocol tcp
set firewall family ethernet-switching filter app_class term mail from source-port [25 143 389
691 993 3268 3269]
set firewall family ethernet-switching filter app_class term mail then forwarding-class mail
loss-priority low
set firewall family ethernet-switching filter app_class term db from source-address 192.168.1.35/28
set firewall family ethernet-switching filter app_class term db from protocol tcp
set firewall family ethernet-switching filter app_class term db from source-port [1521 1525 1527
1571 1810 2481]
set firewall family ethernet-switching filter app_class term db then forwarding-class db loss-priority
low
set firewall family ethernet-switching filter app_class term erp from source-address 192.168.1.36/28
set firewall family ethernet-switching filter app_class term erp from protocol tcp
set firewall family ethernet-switching filter app_class term erp from source-port [3200 3300
3301 3600]
set firewall family ethernet-switching filter app_class term erp then forwarding-class erp
loss-priority low
set firewall family ethernet-switching filter app_class term network_control from precedence
[net-control internet-control]
set firewall family ethernet-switching filter app_class term network_control then forwarding-class
network-control loss-priority low
set firewall family ethernet-switching filter app_class term best_effort_traffic then forwarding-class
best-effort loss-priority low
set interfaces ge-0/0/3 unit 0 family ethernet-switching filter input app_class
set interfaces ge-0/0/4 unit 0 family ethernet-switching filter input app_class
set interfaces ge-0/0/5 unit 0 family ethernet-switching filter input app_class
set interfaces ge-0/0/6 unit 0 family ethernet-switching filter input app_class
set class-of-service schedulers voice-sched shaping-rate percent 10
set class-of-service schedulers voice-sched buffer-size percent 10
set class-of-service schedulers voice-sched priority strict-high
set class-of-service schedulers video-sched priority low
set class-of-service schedulers video-sched transmit-rate percent 15
set class-of-service schedulers app-sched buffer-size percent 10
set class-of-service schedulers app-sched priority low
set class-of-service schedulers app-sched transmit-rate percent 10
set class-of-service schedulers mail-sched buffer-size percent 5
set class-of-service schedulers mail-sched priority low
set class-of-service schedulers mail-sched transmit-rate percent 5
set class-of-service schedulers db-sched buffer-size percent 10
set class-of-service schedulers db-sched priority low
set class-of-service schedulers db-sched transmit-rate percent 10
set class-of-service schedulers erp-sched buffer-size percent 10
set class-of-service schedulers erp-sched priority low
```

```

set class-of-service schedulers erp-sched transmit-rate percent 10
set class-of-service schedulers nc-sched shaping-rate percent 5
set class-of-service schedulers nc-sched buffer-size percent 5
set class-of-service schedulers nc-sched priority strict-high
set class-of-service schedulers be-sched buffer-size percent 35
set class-of-service schedulers be-sched priority low
set class-of-service schedulers be-sched transmit-rate percent 35
set class-of-service scheduler-maps ethernet-cos-map forwarding-class voice scheduler
voice-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class video scheduler
video-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class app scheduler app-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class mail scheduler mail-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class db scheduler db-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class erp scheduler erp-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class network-control
scheduler nc-sched
set class-of-service scheduler-maps ethernet-cos-map forwarding-class best-effort scheduler
be-sched
set class-of-service interfaces ge-0/0/20 scheduler-map ethernet-cos-map
set class-of-service interfaces ge-0/0/21 scheduler-map ethernet-cos-map
set class-of-service schedulers voice-sched-queue-shap shaping-rate 30m
set class-of-service scheduler-maps sched-map-be forwarding-class best-effort scheduler
voice-sched-queue-shap
set class-of-service interfaces ge-0/0/2 scheduler-map sched-map-be

```

### Step-by-Step Procedure

To configure and apply CoS:

1. Configure one-to-one mappings between eight forwarding classes and eight queues:

```

[edit class-of-service]
user@switch# set forwarding-classes class app queue-num 5
user@switch# set forwarding-classes class mail queue-num 1
user@switch# set forwarding-classes class db queue-num 2
user@switch# set forwarding-classes class erp queue-num 3
user@switch# set forwarding-classes class video queue-num 4
user@switch# set forwarding-classes class best-effort queue-num 0
user@switch# set forwarding-classes class voice queue-num 6
user@switch# set forwarding-classes class network-control queue-num 7

```

2. Define the firewall filter **voip\_class** to classify the VoIP traffic:

```

[edit firewall]
user@switch# set family ethernet-switching filter voip_class

```

3. Define the term **voip**:

```

[edit firewall]
user@switch# set family ethernet-switching filter voip_class term voip from source-address
192.168.1.1/28
user@switch# set family ethernet-switching filter voip_class term voip from source-address
192.168.1.2/28
user@switch# set family ethernet-switching filter voip_class term voip protocol udp
user@switch# set family ethernet-switching filter voip_class term voip source-port 2698
user@switch# set family ethernet-switching filter voip_class term voip then forwarding-class
voice loss-priority low

```

4. Define the term **network\_control** (for the **voip\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter voip_class term network_control from
precedence [net-control internet-control]
user@switch# set family ethernet-switching filter voip_class term network_control then
forwarding-class network-control loss-priority low
```

5. Define the term **best\_effort\_traffic** with no match conditions (for the **voip\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter voip_class term best_effort_traffic then
forwarding-class best-effort loss-priority low
```

6. Apply the firewall filter **voip\_class** as an input filter to the interfaces for the VoIP phones:

```
[edit interfaces]
user@switch# set ge-0/0/0 description phone1-voip-ingress-port
user@switch# set ge-0/0/0 unit 0 family ethernet-switching filter input voip_class
user@switch# set ge-0/0/1 description phone2-voip-ingress-port
user@switch# set ge-0/0/1 unit 0 family ethernet-switching filter input voip_class
```

7. Apply port shaping on the interface ge-0/0/0:

```
[edit]
user@switch# set class-of-service interfaces ge-0/0/0 shaping-rate 100m
```

8. Define the firewall filter **video\_class** to classify the video traffic:

```
[edit firewall]
user@switch# set family ethernet-switching filter video_class
```

9. Define the term **video**:

```
[edit firewall]
user@switch# set family ethernet-switching filter video_class term video from
source-address 192.168.1.17/28
user@switch# set family ethernet-switching filter video_class term video protocol udp
user@switch# set family ethernet-switching filter video_class term video source-port 2979
user@switch# set family ethernet-switching filter video_class term video then
forwarding-class video loss-priority low
```

10. Define the term **network\_control** (for the **video\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter video_class term network_control from
precedence [net-control internet-control]
user@switch# set family ethernet-switching filter video_class term network_control then
forwarding-class network-control loss-priority low
```

11. Define the term **best\_effort\_traffic** with no match conditions (for the **video\_class** filter):

```
[edit firewall]
```



```
user@switch# set family ethernet-switching filter video_class term best_effort_traffic then forwarding-class best-effort loss-priority low
```

12. Apply the firewall filter **video\_class** as an input filter to the interface for the surveillance camera:

```
[edit interfaces]
user@switch# set ge-0/0/2 description video-ingress-port
user@switch# set ge-0/0/2 unit 0 family ethernet-switching filter input video_class
```

13. Define the firewall filter **app\_class** to classify the application server traffic:

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class
```

14. Define the term **app** (for the **app\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class term app from source-address 192.168.1.33/28
user@switch# set family ethernet-switching filter app_class term app protocol tcp
user@switch# set family ethernet-switching filter app_class term app source-port [1494 2512 2513 2598 2897]
user@switch# set family ethernet-switching filter app_class term app then forwarding-class app loss-priority low
```

15. Define the term **mail** (for the **app\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class term mail from source-address 192.168.1.34/28
user@switch# set family ethernet-switching filter app_class term mail protocol tcp
user@switch# set family ethernet-switching filter app_class term mail source-port [25 143 389 691 993 3268 3269]
user@switch# set family ethernet-switching filter app_class term mail then forwarding-class mail loss-priority low
```

16. Define the term **db** (for the **app\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class term db from source-address 192.168.1.35/28
user@switch# set family ethernet-switching filter app_class term db protocol tcp
user@switch# set family ethernet-switching filter app_class term db source-port [1521 1525 1527 1571 1810 2481]
user@switch# set family ethernet-switching filter app_class term db then forwarding-class db loss-priority low
```

17. Define the term **erp** (for the **app\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class term erp from source-address 192.168.1.36/28
user@switch# set family ethernet-switching filter app_class term erp protocol tcp
user@switch# set family ethernet-switching filter app_class term erp source-port [3200 3300 3301 3600]
```

```
user@switch# set family ethernet-switching filter app_class term erp then forwarding-class
erp loss-priority low
```

18. Define the term **network\_control** (for the **app\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class term network_control from
precedence [net-control internet-control]
user@switch# set family ethernet-switching filter app_class term network_control then
forwarding-class network-control loss-priority low
```

19. Define the term **best\_effort\_traffic** (for the **app\_class** filter):

```
[edit firewall]
user@switch# set family ethernet-switching filter app_class term best_effort_traffic then
forwarding-class best-effort loss-priority low
```

20. Apply the firewall filter **app\_class** as an input filter to the interfaces for the servers hosting applications:

```
[edit interfaces]
user@switch# set ge-0/0/3 unit 0 family ethernet-switching filter input app_class
user@switch# set ge-0/0/4 unit 0 family ethernet-switching filter input app_class
user@switch# set ge-0/0/5 unit 0 family ethernet-switching filter input app_class
user@switch# set ge-0/0/6 unit 0 family ethernet-switching filter input app_class
```

21. Configure schedulers:

```
[edit class-of-service]
user@switch# set schedulers voice-sched shaping-rate percent 10
user@switch# set schedulers voice-sched buffer-size percent 10
user@switch# set schedulers voice-sched priority strict-high
user@switch# set schedulers video-sched priority low
user@switch# set schedulers video-sched transmit-rate percent 15
user@switch# set schedulers app-sched buffer-size percent 10
user@switch# set schedulers app-sched priority low
user@switch# set schedulers app-sched transmit-rate percent 10
user@switch# set schedulers mail-sched buffer-size percent 5
user@switch# set schedulers mail-sched priority low
user@switch# set schedulers mail-sched transmit-rate percent 5
user@switch# set schedulers db-sched buffer-size percent 10
user@switch# set schedulers db-sched priority low
user@switch# set schedulers db-sched transmit-rate percent 10
user@switch# set schedulers erp-sched buffer-size percent 10
user@switch# set schedulers erp-sched priority low
user@switch# set schedulers erp-sched transmit-rate percent 10
user@switch# set schedulers nc-sched shaping-rate percent 5
user@switch# set schedulers nc-sched buffer-size percent 5
user@switch# set schedulers nc-sched priority strict-high
user@switch# set schedulers nc-sched transmit-rate percent 5
user@switch# set schedulers be-sched buffer-size percent 35
user@switch# set schedulers be-sched priority low
user@switch# set schedulers be-sched transmit-rate percent 35
```

22. Assign the forwarding classes to schedulers with the scheduler map **ethernet-cos-map**:

```
[edit class-of-service]
user@switch# set scheduler-maps ethernet-cos-map forwarding-class voice scheduler
voice-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class video scheduler
video-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class app scheduler
app-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class mail scheduler
mail-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class db scheduler
db-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class erp scheduler
erp-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class network-control
scheduler nc-sched
user@switch# set scheduler-maps ethernet-cos-map forwarding-class best-effort scheduler
be-sched
```

23. Associate the scheduler map with the outgoing interfaces:

```
[edit class-of-service interfaces]
user@switch# set ge-0/0/20 scheduler-map ethernet-cos-map
user@switch# set ge-0/0/21 scheduler-map ethernet-cos-map
```

24. Apply queue shaping for the best-effort queue:

```
[edit]
user@switch# set class-of-service schedulers voice-sched-queue-shap shaping-rate 30m
user@switch# set class-of-service scheduler-maps sched-map-be forwarding-class
best-effort scheduler voice-sched-queue-shap
user@switch# set class-of-service interfaces ge-0/0/2 scheduler-map sched-map-be
```

**Results** Display the results of the configuration:

```
user@switch> show firewall
```

```
firewall family ethernet-switching {
  filter voip_class {
    term voip {
      from {
        source-address {
          192.168.1.1/28;
          192.168.1.2/28;
        }
        protocol udp;
        source-port 2698;
      }
      then {
        forwarding-class voice;
        loss-priority low;
      }
    }
  }
  term network control {
    from {
```

```
        precedence [net-control internet-control];
    }
    then {
        forwarding-class network-control;
        loss-priority low;
    }
}
term best_effort_traffic {
    then {
        forwarding-class best-effort;
        loss-priority low;
    }
}
}
filter video_class {
    term video {
        from {
            source-address {
                192.168.1.17/28;
            }
            protocol udp;
            source-port 2979;
        }
        then {
            forwarding-class video;
            loss-priority low;
        }
    }
}
term network_control {
    from {
        precedence [net-control internet-control];
    }
    then {
        forwarding-class network-control;
        loss-priority low;
    }
}
term best_effort_traffic {
    then {
        forwarding-class best-effort;
        loss-priority low;
    }
}
}
filter app_class {
    term app {
        from {
            source-address {
                192.168.1.33/28;
            }
            protocol tcp;
            source-port [1491 2512 2513 2598 2897];
        }
        then {
            forwarding-class app;
        }
    }
}
```

```
        loss-priority low;
    }
}
term mail {
    from {
        source-address {
            192.168.1.34/28;
        }
        protocol tcp;
        source-port [25 143 389 691 993 3268 3269];
    }
    then {
        forwarding-class mail;
        loss-priority low;
    }
}
term db {
    from {
        source-address {
            192.168.1.35/28;
        }
        protocol tcp;
        source-port [1521 1525 1527 1571 1810 2481];
    }
    then {
        forwarding-class db;
        loss-priority low;
    }
}
term erp {
    from {
        source-address {
            192.168.1.36/28;
        }
        protocol tcp;
        source-port [3200 3300 3301 3600];
    }
    then {
        forwarding-class erp;
        loss-priority low;
    }
}
term network control {
    from {
        precedence [net-control internet-control];
    }
    then {
        forwarding-class network-control;
        loss-priority low;
    }
}
term best_effort_traffic {
    then {
        forwarding-class best-effort;
        loss-priority low;
    }
}
```

```
    }  
  }  
}  
}
```

user@switch# show class-of-service

```
forwarding-classes {  
  class app queue-num 5;  
  class mail queue-num 1;  
  class db queue-num 2;  
  class erp queue-num 3;  
  class video queue-num 4;  
  class best-effort queue-num 0;  
  class voice queue-num 6;  
  class network-control queue-num 7;  
}  
interfaces {  
  ge-0/0/0 {  
    shaping-rate 100m;  
  }  
  ge-0/0/2 {  
    scheduler-map sched-map-be;  
  }  
  ge-0/0/20 {  
    scheduler-map ethernet-cos-map;  
  }  
  ge-0/0/21 {  
    scheduler-map ethernet-cos-map;  
  }  
}  
schedulers {  
  voice-sched-queue-shap {  
    shaping-rate 30m;  
  }  
  voice-sched {  
    shaping-rate percent 10;  
    buffer-size percent 10;  
    priority strict-high;  
  }  
  video-sched {  
    buffer-size percent 15;  
    priority low;  
    transmit-rate percent 15;  
  }  
  app-sched {  
    buffer-size percent 10;  
    priority low;  
    transmit-rate percent 10;  
  }  
  mail-sched {  
    buffer-size percent 5;  
    priority low;  
    transmit-rate percent 5;  
  }  
}
```

```

}
db-sched {
    buffer-size percent 10;
    priority low;
    transmit-rate percent 10;
}
erp-sched {
    buffer-size percent 10;
    priority low;
    transmit-rate percent 10;
}
nc-sched {
    shaping-rate percent 5;
    buffer-size percent 5;
    priority strict-high;
}
be-sched {
    buffer-size percent 35;
    priority low;
    transmit-rate percent 35;
}
}
scheduler-maps {
    ethernet-cos-map {
        forwarding-class voice scheduler voice-sched;
        forwarding-class video scheduler video-sched;
        forwarding-class app scheduler app-sched;
        forwarding-class mail scheduler mail-sched;
        forwarding-class db scheduler db-sched;
        forwarding-class erp scheduler erp-sched;
        forwarding-class network-control scheduler nc-sched;
        forwarding-class best-effort scheduler be-sched;
    }
    sched-map-be {
        forwarding-class best-effort scheduler voice-sched-queue-shap;
    }
}

```

```
user@switch# show interfaces
```

```

ge-0/0/0 {
    unit 0 {
        family ethernet {
            filter {
                input voip_class;
            }
        }
    }
}
ge-0/0/1 {
    unit 0 {
        family ethernet {
            filter {
                input voip_class;
            }
        }
    }
}

```

```
    }
  }
}
ge-0/0/2 {
  unit 0 {
    family ethernet {
      filter {
        input video_class;
      }
    }
  }
}
ge-0/0/3 {
  unit 0 {
    family ethernet {
      filter {
        input app_class;
      }
    }
  }
}
ge-0/0/4 {
  unit 0 {
    family ethernet {
      filter {
        input app_class;
      }
    }
  }
}
ge-0/0/5 {
  unit 0 {
    family ethernet {
      filter {
        input app_class;
      }
    }
  }
}
ge-0/0/6 {
  unit 0 {
    family ethernet {
      filter {
        input app_class;
      }
    }
  }
}
```



## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That the Defined Forwarding Classes Exist and Are Mapped to Queues on page 29](#)
- [Verifying That the Forwarding Classes Have Been Assigned to Schedulers on page 29](#)
- [Verifying That the Scheduler Map Has Been Applied to the Interfaces on page 31](#)
- [Verifying That Port Shaping Has Been Applied on page 31](#)
- [Verifying That Queue Shaping Has Been Applied on page 35](#)

### Verifying That the Defined Forwarding Classes Exist and Are Mapped to Queues

**Purpose** Verify that the forwarding classes **app**, **best-effort**, **db**, **erp**, **mail**, **network-control**, **video**, and **voice** have been defined and mapped to queues.

**Action** user@switch> show class-of-service forwarding-class

Forwarding class	ID	Queue
app	0	5
db	1	2
erp	2	3
best-effort	3	0
mail	4	1
voice	5	6
video	6	4
network-control	7	7

**Meaning** This output shows that the forwarding classes have been defined and mapped to appropriate queues.

### Verifying That the Forwarding Classes Have Been Assigned to Schedulers

**Purpose** Verify that the forwarding classes have been assigned to schedulers.

**Action** user@switch> show class-of-service scheduler-map

```
Scheduler map: ethernet-cos-map, Index: 2
Scheduler: voice-sched, Forwarding class: voice, Index: 22
  Shaping rate: 10 percent, Rate Limit: none, Buffer size: 10 percent,
  Priority: Strict-high
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: video-sched, Forwarding class: video, Index: 22
  Transmit rate: 10 percent, Rate Limit: none, Buffer size: 10 percent,
  Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: app-sched, Forwarding class: app, Index: 22
  Transmit rate: 10 percent, Rate Limit: none, Buffer size: 10 percent,
  Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: mail-sched, Forwarding class: mail, Index: 22
  Transmit rate: 5 percent, Rate Limit: none, Buffer size: 5 percent,
  Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: db-sched, Forwarding class: db, Index: 22
  Transmit rate: 10 percent, Rate Limit: none, Buffer size: 10 percent,
  Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: erp-sched, Forwarding class: erp, Index: 22
  Transmit rate: 10 percent, Rate Limit: none, Buffer size: 10 percent,
  Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: be-sched, Forwarding class: best-effort, Index: 20
  Transmit rate: 35 percent, Rate Limit: none, Buffer size: 35 percent,
  Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP   1      <default-drop-profile>
    High          TCP      1      <default-drop-profile>

Scheduler: nc-sched, Forwarding class: network-control, Index: 22
```

```

Shaping rate: 5 percent, Rate Limit: none, Buffer size: 5 percent,
Priority: Strict-high
Drop profiles:
  Loss priority  Protocol  Index  Name
  High          non-TCP   1      <default-drop-profile>
  High          TCP      1      <default-drop-profile>

```

**Meaning** This output shows that the forwarding classes have been assigned to schedulers.

### Verifying That the Scheduler Map Has Been Applied to the Interfaces

**Purpose** Verify that the scheduler map has been applied to the interfaces.

**Action** user@switch> show class-of-service interface

```

...
Physical interface: ge-0/0/20, Index: 149
Queues supported: 8, Queues in use: 8
  Scheduler map: ethernet-cos-map, Index: 43366
  Input scheduler map: <default>, Index: 3
...
Physical interface: ge-0/0/21, Index: 150
Queues supported: 8, Queues in use: 8
  Scheduler map: ethernet-cos-map, Index: 15103
  Input scheduler map: <default>, Index: 5
...

```

**Meaning** This output includes details of the interfaces to which the scheduler map (**ethernet-cos-map**) has been applied (**ge-0/0/20** and **ge-0/0/21**).

### Verifying That Port Shaping Has Been Applied

**Purpose** Verify that the port shaping has been applied to an interface.

**Action** Following is the output before port shaping is applied to the interface **ge-0/0/0**, when there is egress traffic of 400 Mbps exiting on that interface:

user@switch> show interfaces ge-0/0/0 extensive

```

Physical interface: ge-0/0/0, Enabled, Physical link is Up
  Interface index: 239, SNMP ifIndex: 548, Generation: 242
  Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto, BPDU Error:
None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled,
Flow control: Enabled, Auto-negotiation: Enabled, Remote fault: Online,
  Media type: Copper
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x0

```

```

Link flags      : None
CoS queues     : 8 supported, 8 maximum usable queues
Hold-times     : Up 0 ms, Down 0 ms
Current address: 00:23:9c:0b:ae:8d, Hardware address: 00:23:9c:0b:ae:8d
Last flapped   : 2012-07-07 03:21:52 UTC (1d 18:02 ago)
Statistics last cleared: 2012-07-07 23:54:34 UTC (21:29:59 ago)
Traffic statistics:
  Input bytes   : 0 0 bps
  Output bytes  : 2299853696 345934816 bps
  Input packets : 0 0 pps
  Output packets: 17967609 337827 pps
IPv6 transit statistics:
  Input bytes   : 0
  Output bytes  : 0
  Input packets : 0
  Output packets: 0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 4 in use
Queue counters:
  Queued packets  Transmitted packets  Dropped packets

  0 best-effort    0 18302337 0
  1 assured-forw   0 0 0
  5 expedited-fo   0 0 0
  7 network-cont   0 0 0

Queue number:      Mapped forwarding classes
0                  best-effort
1                  assured-forwarding
5                  expedited-forwarding
7                  network-control
Active alarms : None
Active defects : None
MAC statistics:
  Receive  Transmit
Total octets 0 2299853696
Total packets 0 17967609
Unicast packets 0 17967609
Broadcast packets 0 0
Multicast packets 0 0
CRC/Align errors 0 0
FIFO errors 0 0
MAC control frames 0 0
MAC pause frames 0 0
Oversized frames 0
Jabber frames 0
Fragment frames 0
Code violations 0
Autonegotiation information:
  Negotiation status: Complete
  Link partner:
    Link mode: Full-duplex, Flow control: Symmetric, Remote fault: OK, Link
partner Speed: 1000 Mbps

```

```

Local resolution:
  Flow control: Symmetric, Remote fault: Link OK
Packet Forwarding Engine configuration:
  Destination slot: 1
CoS information:
  Direction : Output
  CoS transmit queue      Bandwidth      Buffer Priority  Limit

                                %      bps      %      usec
0 best-effort             95      950000000    95      NA      low      none

7 network-control         5       50000000     5       NA      low      none

Interface transmit statistics: Disabled

Logical interface ge-1/0/10.0 (Index 69) (SNMP ifIndex 638) (Generation 138)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0      0 bps
  Output bytes : 0      0 bps
  Input packets: 0      0 pps
  Output packets: 0      0 pps
Protocol eth-switch, Generation: 163, Route table: 0
Flags: Trunk-Mode

```

The Traffic statistics: field in this output shows that egress traffic is ~400 Mbps (345,934,816 bps). When a port shaping of 100 Mbps is applied to the ge-0/0/0 interface, you see the following outputs for the **show interfaces ge-0/0/0 statistics** and the **show class-of-service interface ge-0/0/0** commands:

```
user@switch> show interfaces ge-0/0/0 statistics
```

```

Physical interface: ge-0/0/0, Enabled, Physical link is Up
Interface index: 239, SNMP ifIndex: 548, Generation: 242
Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto, BPDU Error:
None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled,
Flow control: Enabled, Auto-negotiation: Enabled, Remote fault: Online,
Media type: Copper
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags : None
CoS queues : 8 supported, 8 maximum usable queues
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:23:9c:0b:ae:8d, Hardware address: 00:23:9c:0b:ae:8d
Last flapped : 2012-07-07 03:21:52 UTC (1d 18:10 ago)
Statistics last cleared: 2012-07-07 23:54:34 UTC (21:37:58 ago)
Traffic statistics:
  Input bytes : 0      0 bps

```

```

Output bytes :          15779512832          100223104 bps
Input packets:          0                0 pps
Output packets:        123277444          97874 pps
IPv6 transit statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:         0
  Output packets:        0
Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

  0 best-effort              0          123350092          57012484

  1 assured-forw              0              0              0

  5 expedited-fo              0              0              0

  7 network-cont              0              0              0

Queue number:      Mapped forwarding classes
  0                best-effort
  1                assured-forwarding
  5                expedited-forwarding
  7                network-control
Active alarms : None
Active defects : None
MAC statistics:
  Total octets          0          15779512832
  Total packets         0          123277444
  Unicast packets       0          123277444
  Broadcast packets     0              0
  Multicast packets     0              0
  CRC/Align errors      0              0
  FIFO errors           0              0
  MAC control frames    0              0
  MAC pause frames      0              0
  Oversized frames      0
  Jabber frames         0
  Fragment frames       0
  Code violations       0
Autonegotiation information:
  Negotiation status: Complete
  Link partner:
    Link mode: Full-duplex, Flow control: Symmetric, Remote fault: OK, Link
partner Speed: 1000 Mbps
  Local resolution:
    Flow control: Symmetric, Remote fault: Link OK
Packet Forwarding Engine configuration:
  Destination slot: 1
CoS information:
  Direction : Output
  CoS transmit queue      Bandwidth      Buffer Priority
Limit

```

```

      0 best-effort          %          bps          %          usec          low
none                        95      95000000      95          NA
      7 network-control      5          5000000      5          NA          low
none
Interface transmit statistics: Disabled

Logical interface ge-1/0/10.0 (Index 69) (SNMP ifIndex 638) (Generation 138)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes :              0
  Output bytes :             0
  Input packets:             0
  Output packets:            0
Local statistics:
  Input bytes :              0
  Output bytes :             0
  Input packets:             0
  Output packets:            0
Transit statistics:
  Input bytes :              0          0 bps
  Output bytes :             0          0 bps
  Input packets:             0          0 pps
  Output packets:            0          0 pps
Protocol eth-switch, Generation: 163, Route table: 0
Flags: Trunk-Mode

```

```
user@switch> show class-of-service interface ge-0/0/0
```

```

Physical interface: ge-0/0/0, Index: 165
Queues supported: 8, Queues in use: 4
  Shaping rate: 100000000 bps
  ...
  ...

```

**Meaning** In the output for the **show interfaces ge-0/0/0 statistics** command, the Traffic statistics: field shows that egress traffic is ~100 Mbps (100,223,104 bps). The output for the **show class-of-service interface ge-0/0/0** command shows that the shaping rate is 100,000,000 bps, which indicates that a port shaping of 100 Mbps is applied to the ge-0/0/0 interface.

### Verifying That Queue Shaping Has Been Applied

**Purpose** Verify that the queue shaping has been applied to the best-effort queue.

**Action** Following is the output before queue shaping is applied to the best-effort queue when there is egress traffic of 400 Mbps exiting on that interface:

```
user@switch> show interfaces ge-0/0/2 extensive
```

```

Physical interface: ge-0/0/2, Enabled, Physical link is Up
Interface index: 239, SNMP ifIndex: 548, Generation: 242
Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto, BPDU Error:
None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled,
Flow control: Enabled, Auto-negotiation: Enabled, Remote fault: Online,

```

```

Media type: Copper
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags : None
CoS queues : 8 supported, 8 maximum usable queues
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:23:9c:0b:ae:8d, Hardware address: 00:23:9c:0b:ae:8d
Last flapped : 2012-07-07 03:21:52 UTC (1d 18:02 ago)
Statistics last cleared: 2012-07-07 23:54:34 UTC (21:29:59 ago)
Traffic statistics:
Input bytes : 0 0 bps
Output bytes : 2299853696 345934816 bps
Input packets: 0 0 pps
Output packets: 17967609 337827 pps
IPv6 transit statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 4 in use
Queue counters: Queued packets Transmitted packets Dropped packets

0 best-effort 0 18302337 0
1 assured-forw 0 0 0
5 expedited-fo 0 0 0
7 network-cont 0 0 0

Queue number: Mapped forwarding classes
0 best-effort
1 assured-forwarding
5 expedited-forwarding
7 network-control
Active alarms : None
Active defects : None
MAC statistics:
Receive Transmit
Total octets 0 2299853696
Total packets 0 17967609
Unicast packets 0 17967609
Broadcast packets 0 0
Multicast packets 0 0
CRC/Align errors 0 0
FIFO errors 0 0
MAC control frames 0 0
MAC pause frames 0 0
Oversized frames 0
Jabber frames 0
Fragment frames 0
Code violations 0
Autonegotiation information:
Negotiation status: Complete

```



```

Link partner:
  Link mode: Full-duplex, Flow control: Symmetric, Remote fault: OK, Link
partner Speed: 1000 Mbps
Local resolution:
  Flow control: Symmetric, Remote fault: Link OK
Packet Forwarding Engine configuration:
  Destination slot: 1
CoS information:
  Direction : Output
  CoS transmit queue          Bandwidth          Buffer Priority
Limit
      %          bps          %          usec          low
0 best-effort          95          950000000          95          NA
none
7 network-control          5          50000000          5          NA          low
none
Interface transmit statistics: Disabled

Logical interface ge-1/0/10.0 (Index 69) (SNMP ifIndex 638) (Generation 138)
Flags: SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Local statistics:
  Input bytes :          0
  Output bytes :          0
  Input packets:          0
  Output packets:          0
Transit statistics:
  Input bytes :          0          0 bps
  Output bytes :          0          0 bps
  Input packets:          0          0 pps
  Output packets:          0          0 pps
Protocol eth-switch, Generation: 163, Route table: 0
Flags: Trunk-Mode

```

The Traffic statistics: field in this output shows that the egress traffic is ~400 Mbps (345,934,816 bps). When a queue shaping of 30 Mbps is applied to the best-effort queue, you see the following output for the **show interfaces ge-0/0/2 statistics** and **show class-of-service scheduler-map sched-map-be** commands:

```
user@switch> show interfaces ge-0/0/2 statistics
```

```

Physical interface: ge-0/0/2, Enabled, Physical link is Up
Interface index: 239, SNMP ifIndex: 548, Generation: 242
Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto, BPDU Error:
None, MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled,
Flow control: Enabled, Auto-negotiation: Enabled, Remote fault: Online,
Media type: Copper
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags : None
CoS queues : 8 supported, 8 maximum usable queues
Hold-times : Up 0 ms, Down 0 ms
Current address: 00:23:9c:0b:ae:8d, Hardware address: 00:23:9c:0b:ae:8d
Last flapped : 2012-07-07 03:21:52 UTC (1d 18:29 ago)

```

```

Statistics last cleared: 2012-07-08 21:46:22 UTC (00:04:56 ago)
Traffic statistics:
Input bytes :                0                0 bps
Output bytes :            5376128896        30097712 bps
Input packets:                0                0 pps
Output packets:          42001003        29392 pps
IPv6 transit statistics:
Input bytes :                0
Output bytes :                0
Input packets:                0
Output packets:              0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets      Dropped packets

0 best-effort                0            41986978            57813642

1 assured-forw                0                0                0

5 expedited-fo                0                0                0

7 network-cont                0                0                0

Queue number:      Mapped forwarding classes
0                  best-effort
1                  assured-forwarding
5                  expedited-forwarding
7                  network-control

Active alarms : None
Active defects : None
MAC statistics:
Total octets      Receive      Transmit
Total packets      0        5376128896
Unicast packets    0        42001003
Broadcast packets  0          0
Multicast packets  0          0
CRC/Align errors   0          0
FIFO errors        0          0
MAC control frames 0          0
MAC pause frames   0          0
Oversized frames   0
Jabber frames      0
Fragment frames    0
Code violations     0

Autonegotiation information:
Negotiation status: Complete
Link partner:
Link mode: Full-duplex, Flow control: Symmetric, Remote fault: OK, Link
partner Speed: 1000 Mbps
Local resolution:
Flow control: Symmetric, Remote fault: Link OK
Packet Forwarding Engine configuration:
Destination slot: 1
CoS information:

```

```

    Direction : Output
    CoS transmit queue
    Limit
    0 best-effort
    none
    Interface transmit statistics: Disabled

    Logical interface ge-1/0/10.0 (Index 69) (SNMP ifIndex 638) (Generation 138)
    Flags: SNMP-Traps 0x0 Encapsulation: ENET2
    Traffic statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
    Local statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
    Transit statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
    Protocol eth-switch, Generation: 163, Route table: 0
    Flags: Trunk-Mode

```

```

user@switch> show class-of-service scheduler-map sched-map-be

```

```

Scheduler map: sched-map-be, Index: 31271

Scheduler: voice-sched-queue-shap, Forwarding class: best-effort, Index: 64106

Transmit rate: remainder, Rate Limit: none, Buffer size: remainder,
Buffer Limit: none, Priority: low
Excess Priority: unspecified
Shaping rate: 30000000 bps
Drop profiles:
  Loss priority  Protocol  Index  Name
  High          non-TCP   1      <default-drop-profile>
  High          TCP      1      <default-drop-profile>

```

**Meaning** In the output for the **show interfaces ge-0/0/2 statistics** command, the Traffic statistics: field shows that the egress traffic is ~30 Mbps (30,097,712 bps). The output for the **show class-of-service scheduler-map sched-map-be** command, shows that a shaping rate of 30,000,000 bps (that is 30 Mbps) is applied to the best-effort queue.

**Related Documentation**

- [Defining CoS Code-Point Aliases \(CLI Procedure\) on page 52](#)
- [Defining CoS Classifiers \(CLI Procedure\) on page 59](#)
- [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93](#)

- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
- [Configuring CoS Tail Drop Profiles \(CLI Procedure\) on page 134](#)
- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- *Configuring Firewall Filters (CLI Procedure)*

## CHAPTER 2

# Junos OS EZQoS and J-Web

- Understanding Junos OS EZQoS for CoS Configurations on EX Series Switches on page 41
- Configuring Junos OS EZQoS for CoS (CLI Procedure) on page 42
- Configuring CoS (J-Web Procedure) on page 43

### Understanding Junos OS EZQoS for CoS Configurations on EX Series Switches

Junos operating system (Junos OS) EZQoS on Juniper Networks EX Series Ethernet Switches eliminates the complexities involved in configuring class of service (CoS) across the network. EZQoS offers templates for key traffic classes.

Junos OS CoS allows you to divide traffic into classes and offer various levels of throughput and packet loss when congestion occurs. You can use CoS to ensure that different types of traffic (voice, video, and data) get the bandwidth and consideration they need to meet user expectations and business objectives.

Configuring CoS requires careful consideration of your service needs and thorough planning and design to ensure consistency across all switches in a CoS domain. To configure CoS manually, you must define and fine-tune all CoS components such as classifiers, rewrite rules, forwarding classes, schedulers, and scheduler-maps and then apply these components to the interfaces. Therefore, configuring CoS can be a fairly complex and time-consuming task.

EZQoS works by automatically assigning preconfigured values to all CoS parameters based on the typical application requirements. These preconfigured values are stored in a template with a unique name. You can change the preconfigured values of these parameters to suit your particular application needs.

For using EZQoS, you must identify which switch ports are being used for a specific application (such as VoIP, video, and data) and manually apply the corresponding application-specific EZQoS template to these switch ports.



**NOTE:** Currently, we provide an EZQoS template for configuring CoS for VoIP.



**NOTE:** We recommend that you do not use the term EZQoS for defining a classifier.

**Related Documentation**

- [Junos OS CoS for EX Series Switches Overview on page 4](#)
- [Configuring Junos OS EZQoS for CoS \(CLI Procedure\) on page 42](#)

## Configuring Junos OS EZQoS for CoS (CLI Procedure)

You use Junos OS EZQoS on EX Series switches to eliminate the complexities involved in configuring class of service (CoS) across the network. EZQoS offers templates for key traffic classes.

When you configure EZQoS on EX Series switches, preconfigured values are assigned to all CoS parameters based on the typical application requirements. These preconfigured values are stored in a template with a unique name.



**NOTE:** Currently, we provide an EZQoS template for configuring CoS for VoIP applications. The EZQoS VoIP template is stored in `/etc/config/ezqos-voip.conf`.

To configure EZQoS using the CLI:

1. Load the EZQoS configuration file (`/etc/config/ezqos-voip.conf`):

```
[edit]
user@switch# load merge /etc/config/ezqos-voip.conf
```

2. Apply the EZQoS group (`ezqos-voip`):

```
[edit]
user@switch# set apply-groups ezqos-voip
```

3. Apply the DSCP classifier (`ezqos-dscp-classifier`) to a Gigabit Ethernet interface (`ge-0/0/0`):

```
[edit class-of-service interfaces]
user@switch# set ge-0/0/0 unit 0 classifiers dscp ezqos-dscp-classifier
```

4. Apply the scheduler map (`ezqos-voip-sched-maps`) to a Gigabit Ethernet interface (`ge-0/0/1`):

```
[edit class-of-service interfaces]
user@switch# set ge-0/0/1 scheduler-map ezqos-voip-sched-maps
```

**Related Documentation**

- [Example: Configuring CoS on EX Series Switches on page 14](#)

- [Understanding Junos OS EZQoS for CoS Configurations on EX Series Switches on page 41](#)

## Configuring CoS (J-Web Procedure)

The Class of Service Configuration pages allow you to configure the Junos CoS components. You can configure forwarding classes for transmitting packets, define which packets are placed into each output queue, and schedule the transmission service level for each queue. After defining the CoS components you must assign classifiers to the required physical and logical interfaces.

Using the Class of Service Configuration pages, you can configure various CoS components individually or in combination to define particular CoS services.

To configure CoS components :

1. In the J-Web interface, select **Configure>Class of Service**.
2. On the Class of Service Configuration page, select one of the following options depending on the CoS component that you want to define. Enter information into the pages as described in the respective table:
  - To define or edit CoS value aliases, select **CoS Value Aliases**.
  - To define or edit forwarding classes and assign queues, select **Forwarding Classes**.
  - To define or edit classifiers, select **Classifiers**.
  - To define or edit rewrite rules, select **Rewrite Rules**.
  - To define or edit schedulers, select **Schedulers**.
  - To define or edit virtual channel groups, select **Interface Associations**.
3. Click **Apply** after completing configuration on any Configuration page.

### Related Documentation

- [Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)
- [Defining CoS Code-Point Aliases \(J-Web Procedure\) on page 52](#)
- [Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)
- [Defining CoS Rewrite Rules \(J-Web Procedure\) on page 79](#)
- [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
- [Assigning CoS Components to Interfaces \(J-Web Procedure\) on page 46](#)





## CHAPTER 3

# CoS on Interfaces

- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- [Assigning CoS Components to Interfaces \(J-Web Procedure\) on page 46](#)
- [Monitoring Interfaces That Have CoS Components on page 47](#)

### Assigning CoS Components to Interfaces (CLI Procedure)

---

After you have defined the following CoS components, you must assign them to logical or physical interfaces.

- Forwarding classes—Assign only to logical interfaces.
- Classifiers—Assign only to logical interfaces.
- Scheduler maps—Assign to either physical or logical interfaces.
- Rewrite rules—Assign to either physical or logical interfaces.

You can assign a CoS component to a single interface or to multiple interfaces using wild cards.

To assign CoS components to interfaces:

- To assign CoS components to a single interface, associate a CoS component (for example a scheduler map named **ethernet-cos-map**) with an interface:

```
[edit class-of-service interfaces]  
user@switch# set ge-0/0/20 scheduler-map ethernet-cos-map
```

- To assign a CoS component to multiple interfaces, associate a CoS component (for example, a rewrite rule named **customup-rw**) to all Gigabit Ethernet interfaces on the switch, use wild characters for the interface name and logical-interface (unit) number:

```
[edit class-of-service interfaces]  
user@switch# set ge-* unit * rewrite-rules ieee-802.1 customup-rw
```

#### Related Documentation

- [Assigning CoS Components to Interfaces \(J-Web Procedure\) on page 46](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Monitoring Interfaces That Have CoS Components on page 47](#)

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)

## Assigning CoS Components to Interfaces (J-Web Procedure)

---



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

After you have defined CoS components on an EX Series switch, you must assign them to logical or physical interfaces. You can use the J-Web interface to assign scheduler maps to physical or logical interfaces and to assign forwarding classes or classifiers to logical interfaces.

To assign CoS components to interfaces:

1. Select **Configure > Class of Service > Assign to Interface**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. To configure an interface association, select an interface from the list and click **Edit**. For an EX8200 Virtual Chassis configuration, select the member, the FPC, and the interface from the list, and click **Edit**.
3. Select one of the following:
  - **Associate system default scheduler map**—Associates the interface with the default scheduler map.
  - **Select the scheduler map**—Associates the interface with a configured scheduler map. Select the scheduler map from the list.



**NOTE:** On the 40-port SFP+ line card for EX8200 switches, you cannot commit your changes using the J-Web interface unless you assign the same scheduler map or the default scheduler map to all interfaces in a port group.

4. Click **OK**.
5. To manage a CoS assignment on a logical interface, Click one of the following options:
  - **Add**—Adds a CoS service to a logical interface on a specified physical interface. Enter information as described in [Table 7 on page 47](#).
  - **Edit**—Modifies a CoS service assignment to a logical interface. Enter information as described in [Table 7 on page 47](#).
  - **Delete**—Deletes the CoS service assignment to a logical interface.

**Table 7: Assigning CoS Components to Logical Interfaces**

Field	Function	Your Action
Unit	Specifies the name of a logical interface. Enables you to assign CoS components when you configure a logical interface on a physical interface.	Type the interface name.  To assign CoS to all logical interfaces configured on this physical interface, type the wildcard character (*).
Forwarding Class	Assigns a predefined forwarding class to incoming packets on a logical interface.	To assign a forwarding class to an interface, select the forwarding class.
Classifiers	Enables you to apply classification maps to a logical interface. Classifiers assign a forwarding class and loss priority to an incoming packet based on its CoS value.	To assign a classification map to an interface, select an appropriate classifier for each CoS value type used on the interface.
Rewrite Rules	Enables you to alter the CoS values in outgoing packets to meet the requirements of the targeted peer. A rewrite rule examines the forwarding class and loss priority of a packet and sets its bits to a corresponding value specified in the rule.  <b>NOTE:</b> In EX4300 switches, this option is available only when you click <b>Edit</b> button in the Configure Interface Association table.	To assign rewrite rules to the interface, select the appropriate rewrite rule for each CoS value type used on the interface.

- Related Documentation**
- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)
  - [Monitoring Interfaces That Have CoS Components on page 47](#)

## Monitoring Interfaces That Have CoS Components

### Purpose



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

Use the monitoring functionality to display details about the physical and logical interfaces and the CoS components assigned to them.

**Action** To monitor interfaces that have CoS components in the J-Web interface, select **Monitor > Class of Service > Interface Association**.

To monitor interfaces that have CoS components in the CLI, enter the following command:

```
show class-of-service interface interface
```

**Meaning** [Table 8 on page 48](#) summarizes key output fields for CoS interfaces.

*Table 8: Summary of Key CoS Interfaces Output Fields*

Field	Values	Additional Information
Interface	Name of a physical interface to which CoS components are assigned.	To display names of logical interfaces configured on this physical interface, click the plus sign (+).
Scheduler Map	Name of the scheduler map associated with this interface.	
Queues Supported	Number of queues you can configure on the interface.	
Queues in Use	Number of queues currently configured.	
Logical Interface	Name of a logical interface on the physical interface to which CoS components are assigned.	
Object	Category of an object—for example, <b>classifier</b> , <b>scheduler-map</b> , or <b>rewrite</b> .	
Name	Name that you have given to an object—for example, <b>ba-classifier</b> .	
Type	Type of an object—for example, <b>dscp</b> for a classifier.	
Index	Index of this interface or the internal index of a specific object.	

**Related Documentation**

- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- [Assigning CoS Components to Interfaces \(J-Web Procedure\) on page 46](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

## CHAPTER 4

# CoS Code-Point Aliases

- [Understanding CoS Code-Point Aliases on page 49](#)
- [Defining CoS Code-Point Aliases \(CLI Procedure\) on page 52](#)
- [Defining CoS Code-Point Aliases \(J-Web Procedure\) on page 52](#)
- [Monitoring CoS Value Aliases on page 53](#)

## Understanding CoS Code-Point Aliases

---

A code-point alias assigns a name to a pattern of code-point bits. You can use this name instead of the bit pattern when you configure other CoS components such as classifiers, drop-profile maps, and rewrite rules.



**NOTE:** This topic applies to all EX Series switches except the EX4600. Because the EX4600 uses a different chipset than other EX Series switches, the code-point aliases on EX4600 match those on QFX Series switches. For EX4600 code-point aliases, see *Understanding CoS Code-Point Aliases*.

Behavior aggregate classifiers use class-of-service (CoS) values such as Differentiated Services code points (DSCPs), IP precedence, and IEEE 802.1p bits to associate incoming packets with a particular CoS servicing level. On a switch, you can assign a meaningful name or alias to the CoS values and use this alias instead of bits when configuring CoS components. These aliases are not part of the specifications but are well known through usage. For example, the alias for DSCP 101110 is widely accepted as ef (expedited forwarding).

When you configure classes and define classifiers, you can refer to the markers by alias names. You can configure user-defined classifiers in terms of alias names. If the value of an alias changes, it alters the behavior of any classifier that references it.

This topic covers:

- [Default Code-Point Aliases on page 49](#)

## Default Code-Point Aliases

[Table 9 on page 50](#) shows the default mappings between the bit values and standard aliases.

**Table 9: Default Code-Point Aliases**

CoS Value Types	Mapping
<b>DSCP CoS Values</b>	
ef	101110
af11	001010
af12	001100
af13	001110
af21	010010
af22	010100
af23	010110
af31	011010
af32	011100
af33	011110
af41	100010
af42	100100
af43	100110
be	000000
cs1	001000
cs2	010000
cs3	011000
cs4	100000
cs5	101000
nc1/cs6	110000
nc2/cs7	111000
<b>IEEE 802.1p CoS Values</b>	
be	000

*Table 9: Default Code-Point Aliases (continued)*

CoS Value Types	Mapping
be1	001
ef	100
ef1	101
af11	010
af12	011
nc1/cs6	110
nc2/cs7	111
<b>Legacy IP Precedence CoS Values</b>	
be	000
be1	001
ef	010
ef1	011
af11	100
af12	101
nc1/cs6	110
nc2/cs7	111

**Related Documentation**

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Defining CoS Code-Point Aliases \(CLI Procedure\) on page 52](#)
- [Defining CoS Code-Point Aliases \(J-Web Procedure\) on page 52](#)

## Defining CoS Code-Point Aliases (CLI Procedure)

---

You can use code-point aliases to streamline the process of configuring CoS features on your EX Series switch. A code-point alias assigns a name to a pattern of code-point bits. You can use this name instead of the bit pattern when you configure other CoS components such as classifiers, drop-profile maps, and rewrite rules.

You can configure code-point aliases for the following CoS marker types:

- **dscp** and **dscp-ipv6**—Handles incoming IPv4 and IPv6 packets, respectively.
- **ieee-802.1**—Handles Layer 2 CoS.
- **inet-precedence**—Handles incoming IPv4 packets. IP precedence mapping requires only the higher order three bits of the DSCP field.

To configure a code-point alias for a specified CoS marker type (**dscp**), assign an alias (**my1**) to the code-point (**110001**):

```
[edit class-of-service code-point-aliases]  
user@switch# set dscp my1 110001
```

The **my1** alias will be applicable for incoming IPv4 packets.

### Related Documentation

- [Defining CoS Code-Point Aliases \(J-Web Procedure\) on page 52](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Monitoring CoS Value Aliases on page 53](#)
- [Understanding CoS Code-Point Aliases on page 49](#)

## Defining CoS Code-Point Aliases (J-Web Procedure)

---



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

You can use the J-Web interface to define CoS code-point aliases on an EX Series switch. By defining aliases, you can assign meaningful names to a particular set of bit values and refer to them when configuring CoS components.

To define CoS code-point aliases:

1. Select **Configure > Class of Service > CoS Value Aliases**.





**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Click one of the following options:

- **Add**—Adds a code-point alias. Enter information into the code point alias page as described in [Table 10 on page 53](#).
- **Edit**—Modifies an existing code-point alias. Enter information into the code point alias page as described in [Table 10 on page 53](#).
- **Delete**—Deletes an existing code-point alias.

[Table 10 on page 53](#) describes the related fields.

**Table 10: CoS Value Aliases Configuration Fields**

Field	Function	Your Action
Code point name	Specifies the name for a code-point—for example, <b>af11</b> or <b>be</b> .	Enter a name.
Code point type	Specifies a code-point type. The code-point type can be DSCP or IP precedence.	Select a value.
Code point value bits	Specifies the CoS value for which an alias is defined.  Changing this value alters the behavior of all classifiers that refer to this alias.	To specify a CoS value, type it in the appropriate format: <ul style="list-style-type: none"> <li>• For DSCP CoS values, use the format xxxxxx, where x is 1 or 0—for example, <b>101110</b>.</li> <li>• For IP precedence CoS values, use the format xxx, where x is 1 or 0—for example, <b>111</b>.</li> </ul>

**Related Documentation**

- [Defining CoS Code-Point Aliases \(CLI Procedure\) on page 52](#)
- [Monitoring CoS Value Aliases on page 53](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

## Monitoring CoS Value Aliases

**Purpose**



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

Use the monitoring functionality to display information about the CoS value aliases that the system is currently using to represent DSCP, IEEE 802.1p, and IPv4 precedence bits.

**Action** To monitor CoS value aliases in the J-Web interface, select **Monitor > Class of Service > CoS Value Aliases**.

To monitor CoS value aliases in the CLI, enter the following command:

```
show class-of-service code-point-aliases
```

**Meaning** [Table 11 on page 54](#) summarizes key output fields for CoS value aliases.

*Table 11: Summary of Key CoS Value Alias Output Fields*

Field	Values	Additional Information
CoS Value Type	Type of the CoS value: <ul style="list-style-type: none"> <li><b>dscp</b>—Examines Layer 3 packet headers for IP packet classification.</li> <li><b>ieee-802.1</b>—Examines Layer 2 packet headers for packet classification.</li> <li><b>inet-precedence</b>—Examines Layer 3 packet headers for IP packet classification.</li> </ul>	To display aliases and bit patterns, click the plus sign (+).
CoS Value Alias	Name given to a set of bits—for example, <b>af11</b> is a name for <b>001010</b> bits.	
CoS Value	Set of bits associated with an alias.	

**Related Documentation**

- [Defining CoS Code-Point Aliases \(CLI Procedure\) on page 52](#)
- [Defining CoS Code-Point Aliases \(J-Web Procedure\) on page 52](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

## CHAPTER 5

# CoS Classifiers

- [Understanding CoS Classifiers on page 56](#)
- [Defining CoS Classifiers \(CLI Procedure\) on page 59](#)
- [Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)
- [Example: Configuring Multidestination \(Multicast, Broadcast, DLF\) Classifiers on page 62](#)
- [Configuring and Applying IEEE 802.1ad Classifiers on page 66](#)
- [Configuring the IEEE 802.1p Field for CoS Host Outbound Traffic on page 67](#)
- [Configuring a Global Default IEEE 802.1p Value for All Host Outbound Traffic on page 68](#)
- [Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards \(CLI Procedure\) on page 69](#)
- [Monitoring CoS Classifiers on page 70](#)
- [Troubleshooting a CoS Classifier Configuration for a TCAM Space Error on page 71](#)

## Understanding CoS Classifiers

---

Packet classification associates incoming packets with a particular class-of-service (CoS) servicing level. Classifiers associate packets with a forwarding class and loss priority, and packets are associated to an output queue based on the forwarding class. You can define classifiers for the following interfaces:

- IPv4 and IPv6 traffic to network interfaces, aggregated Ethernet interfaces (also known as link aggregation groups (LAGs))
- On switches that support the ELS configuration style, inter-VLAN routing functions use an integrated routing and bridging (IRB) interface named `irb`
- On switches that do not support the ELS configuration style, inter-VLAN routing functions use a routed VLAN interface (RVI) named `vlan`

There are two general types of classifiers:

- Behavior aggregate (BA) classifiers
- Multifield (MF) classifiers

You can configure both a BA classifier and an MF classifier on an interface. If you do this, the BA classification is performed first and then the MF classification. If the two classification results conflict, the MF classification result overrides the BA classification result.

On Juniper Networks EX8200 Ethernet Switches, you can specify BA classifiers for bridged multdestination traffic and for IP multdestination traffic. A BA classifier for multicast packets is applied to all interfaces on the EX8200 switch.



**NOTE:** EX8200 switches implement the on-demand allocation of memory space for ternary content addressable memory (TCAM) so that when additional TCAM space is required for CoS classifiers, it is allocated from the free TCAM space or from the unused TCAM space. An error log message is generated when you configure CoS classifiers to use memory space that exceeds the available TCAM space that includes both the free and unused space.

---

This topic describes:

- [Behavior Aggregate Classifiers on page 56](#)
- [Multifield Classifiers on page 58](#)

### Behavior Aggregate Classifiers

BA classifiers are based on fixed-length fields in the packet header, which makes them computationally more efficient than MF classifiers. Therefore core devices that handle high traffic volumes are normally configured to perform BA classification. The BA classifier maps packets to a forwarding class and a loss priority. The forwarding class determines

the output queue for a packet. The loss priority is used by a scheduler to control packet discard during periods of congestion.

There are the following types of BA classifiers:

- **dscp**—Differentiated Services Code Point (DSCP) for IP DiffServ. Handles incoming IPv4 packets.
- **dscp-ipv6**—Handles incoming IPv6 packets.
- **ieee-802.1**—Handles Layer 2 CoS (IEEE 802.1p).
- **inet-precedence**—Handles incoming IPv4 packets. IP precedence mapping requires only the upper three bits of the DSCP field.

A BA classifier takes a specified CoS value as either the literal bit pattern or as a defined alias and attempts to match it to the type of packet arriving on the interface. If the information in the packet's header matches the specified pattern, the packet is sent to the appropriate queue, defined by the forwarding class associated with the classifier.

### Default Behavior Aggregate Classification

Juniper Networks Junos operating system (Junos OS) automatically assigns implicit default BA classifiers to logical interfaces based on the type of interface.

[Table 12 on page 57](#) lists different types of interfaces and the corresponding implicit default BA classification.

**Table 12: Default BA Classification**

Type of Interface	Default BA Classification
Trunk and Circuit Cross-Connect (CCC) interfaces	<b>ieee8021p-default</b>  <b>NOTE:</b> This BA classification for a CCC interface is applicable only for EX8200 switches.
Layer 3 interface (IPv4)	<b>dscp-default</b>
Layer 3 interface (IPv6)	<b>dscp-ipv6-default</b>
Access interface	Untrusted
Routed VLAN interface (RVI)	No default classification
MPLS	EXP  <b>NOTE:</b> This BA classification is applicable only for EX8200 switches.

When you explicitly associate a BA classifier with a logical interface, you are overriding the implicit (default) BA classifier with an explicit BA classifier.

[Table 13 on page 58](#) describes the BA classifier types you can configure on Layer 2 and Layer 3 interfaces.

**Table 13: Allowed BA Classification**

Type of Interface	Allowed BA Classification
Layer 2 interface	IEEE 802.1p, IP precedence, DSCP, DSCP IPv6
Layer 3 interface (IPv4)	IEEE 802.1p, IP precedence, DSCP
Layer 3 interface (IPv6)	IEEE 802.1p, IP precedence, DSCP IPv6

You cannot apply DSCP and IP precedence classifiers to the same interface. You also cannot apply IEEE 802.1p classifiers to an interface with classifiers of any other type. DSCP IPv6 classifiers can be applied to an interface with either DSCP or IP precedence classifiers, because they apply to different types of packets.

If you have not explicitly configured a classifier on a logical interface, the default classifiers are assigned and classification works as follows:

- To a logical interface configured with an IPv4 address, a DSCP classifier is assigned by default, and IPv4 and IPv6 packets are classified using the DSCP classifier.
- To logical interface configured with an IPv6 address, a DSCP IPv6 classifier is assigned by default, and IPv4 and IPv6 packets are classified using the DSCP IPv6 classifier.



**NOTE:** On EX8200 switches, you can configure either one classifier of type DSCP or IEEE802.1p, or you can configure one classifier each of type DSCP and IEEE802.1p.

You can configure IRB interfaces on switches that support the ELS configuration style, or routed VLAN interfaces on switches that do not support the ELS configuration style. After you do this, the User Priority (UP) bits in the incoming packets are rewritten according to the default IEEE 802.1p rewrite rule, except on EX8200 switches. On EX8200 switches, you must explicitly assign the default IEEE 802.1p rewrite rule to RVIs.



**NOTE:** By default, all BA classifiers classify traffic into either the best-effort forwarding class or the network-control forwarding class.

## Multifield Classifiers

Multifield (MF) classifiers examine multiple fields in a packet such as source and destination addresses and source and destination port numbers of the packet. With MF classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.

MF classification is normally performed at the network edge because of the general lack of support for DSCP or IP precedence classifiers in end-user applications. On an edge switch, an MF classifier provides the filtering functionality that scans through a variety

of packet fields to determine the forwarding class for a packet. Typically, any classifier performs matching operations on the selected fields against a configured value.

**Related Documentation**

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Defining CoS Classifiers \(CLI Procedure\) on page 59](#)
- [Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)

## Defining CoS Classifiers (CLI Procedure)

Packet classification associates incoming packets with a particular CoS servicing level. Classifiers associate packets with a forwarding class and loss priority and assign packets to output queues based on the associated forwarding class. Junos OS supports two general types of classifiers:

- Behavior aggregate (BA) classifier—Examine the CoS value in the packet header. The value in this single field determines the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the Differentiated Services code point (DSCP) value, IP precedence value, or IEEE 802.1p value. EX Series switches except EX4300 switches support two types of loss priorities: **high** and **low**. EX4300 switches support three types of loss priorities: **high**, **medium-high**, and **low**.

You can configure BA classifiers for the following CoS marker types:

- **dscp** and **dscp-ipv6**—Handles incoming IPv4 and IPv6 packets, respectively.
- **ieee-802.1**—Handles Layer 2 CoS.
- **inet-precedence**—Handles incoming IPv4 packets. IP precedence mapping requires only the higher order three bits of the DSCP field.
- Multifield (MF) classifier—Examine multiple fields in the packet such as source and destination addresses and source and destination port numbers of the packet. With MF classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.



**NOTE:** Juniper Networks EX8200 Ethernet Switches implement the on-demand ternary content addressable memory (TCAM) allocation of memory so that when additional TCAM space is required for CoS, the space is allocated from the free TCAM space or from the unused TCAM space. An error log message is generated when you configure CoS classifiers beyond the available TCAM space that includes both the free and unused space.

The following example describes how to configure a BA classifier (**ba-classifier**) as the default DSCP map for handling IPv4 traffic and to apply the BA classifier to either a specific Gigabit Ethernet interface or to all the Gigabit Ethernet interfaces on the switch.

The BA classifier assigns loss priorities, as shown in [Table 14 on page 60](#), to incoming packets in the four forwarding classes.

You can use the same procedure to set MF classifiers (except that you would use firewall filter rules).

**Table 14: BA-classifier Loss Priority Assignments**

Forwarding Class	For CoS Traffic Type	ba-classifier Assignment
<b>be</b>	Best-effort traffic	High-priority code point: <b>000001</b>
<b>ef</b>	Expedited-forwarding traffic	High-priority code point: <b>101110</b>
<b>af</b>	Assured-forwarding traffic	High-priority code point: <b>001100</b>
<b>nc</b>	Network-control traffic	High-priority code point: <b>110001</b>

To configure a DSCP BA classifier named **ba-classifier** as the default DSCP map:

- Associate code point **000001** with forwarding class **be** and loss priority **high**:

```
[edit class-of-service classifiers]
user@switch# set dscp ba-classifier import default forwarding-class be loss-priority high
code-points 000001
```

- Associate code point **101110** with forwarding class **ef** and loss priority **high**:

```
[edit class-of-service classifiers]
user@switch# set dscp ba-classifier forwarding-class ef loss-priority high code-points 101110
```

- Associate code point **001100** with forwarding class **af** and loss priority **high**:

```
[edit class-of-service classifiers]
user@switch# set dscp ba-classifier forwarding-class af loss-priority high code-points 001100
```

- Associate code point **110001** with forwarding class **nc** and loss priority **high**:

```
[edit class-of-service classifiers]
user@switch# set dscp ba-classifier forwarding-class nc loss-priority high code-points 110001
```

- Apply the classifier to a specific interface or to all Gigabit Ethernet interfaces on the switch.

- To apply the classifier to a specific interface:

```
[edit class-of-service interfaces]
user@switch# set ge-0/0/0 unit 0 classifiers dscp ba-classifier
```

- To apply the classifier to all Gigabit Ethernet interfaces on the switch, use wildcards for the interface name and the logical-interface (unit) number:

```
[edit class-of-service interfaces]
user@switch# set ge-* unit * classifiers dscp ba-classifier
```





**NOTE:** On EX8200 switches, it can take a long time to install code-point classifiers on multiple interfaces (for example, approximately 25 minutes to install 64 code-point classifiers on multiple interfaces in the order of 280 or more).

#### Related Documentation

- [Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- [Monitoring CoS Classifiers on page 70](#)
- [Understanding CoS Classifiers on page 56](#)
- [Troubleshooting a CoS Classifier Configuration for a TCAM Space Error on page 71](#)

## Defining CoS Classifiers (J-Web Procedure)



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service on EX4600 switches.

You can use the J-Web interface to define CoS classifiers on an EX Series switch. Classifiers examine the CoS value or alias of an incoming packet and assign the packet a level of service by setting its forwarding class and loss priority.

To define CoS classifiers:

1. Select **Configure > Class of Service > Classifiers**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Click one of the following options:
  - **Add**—Adds a classifier. Enter information into the classifier page as described in [Table 15 on page 62](#).
  - **Edit**—Modifies an existing classifier. Enter information into the classifier page as described in [Table 15 on page 62](#).

- **Delete**—Deletes an existing classifier.

*Table 15: Classifiers Configuration Fields*

Field	Function	Your Action
Classifier Name	Specifies the name for a classifier.	To name a classifier, type the name—for example, <b>ba-classifier</b> .
Classifier Type	Specifies the type of classifier: <b>dscp</b> , <b>ieee-802.1</b> , or <b>inet-precedence</b> .	Select a value from the list.
Code Point Mapping	Sets the forwarding classes and the packet loss priorities (PLPs) for specific CoS values and aliases.	<p>To add a code point mapping:</p> <ol style="list-style-type: none"> <li>1. Click <b>Add</b>.</li> <li>2. Select the code point.</li> <li>3. Select a forwarding class from the following list: <ul style="list-style-type: none"> <li>• <b>expedited-forwarding</b>—Provides low loss, low delay, low jitter, assured bandwidth, and end-to-end service. Packets can be forwarded out of sequence or dropped.</li> <li>• <b>best-effort</b>—Provides no special CoS handling of packets. Typically, RED drop profile is aggressive and no loss priority is defined.</li> <li>• <b>assured-forwarding</b>—Provides high assurance for packets within the specified service profile. Excess packets are dropped.</li> <li>• <b>network-control</b>—Packets can be delayed but not dropped.</li> </ul> </li> <li>4. Select the loss priority. <p>To assign a loss priority, select one:</p> <ul style="list-style-type: none"> <li>• <b>high</b>—Packet has a high loss priority.</li> <li>• <b>low</b>—Packet has a low loss priority.</li> </ul> </li> </ol>

**Related Documentation**

- [Defining CoS Classifiers \(CLI Procedure\) on page 59](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Monitoring CoS Classifiers on page 70](#)
- [Understanding CoS Classifiers on page 56](#)

## Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers

Packet classification associates incoming packets with a particular CoS servicing level. Behavior aggregate (BA) classifiers examine the CoS value in the packet header to

determine the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the incoming CoS value.

Beginning with Junos OS Release 17.1, EX4300 switches support multdestination classifiers. On EX4300 switches, you can apply multdestination classifiers globally or to a specific interface. If you apply multdestination classifiers both globally and to a specific interface, the classifications on the interface take precedence.

Multdestination classifiers apply to all of the switch interfaces and handle multicast, broadcast, and destination lookup fail (DLF) traffic. You cannot apply a multdestination classifier to a single interface or to a range of interfaces, except on an EX4300 switch.

Unicast and multdestination traffic must use different classifiers.

- [Requirements on page 63](#)
- [Overview on page 63](#)
- [Configuring Multidestination Classifiers on page 64](#)
- [Verification on page 64](#)

## Requirements

This example uses the following hardware and software components:

- One switch (this example was tested on a Juniper Networks QFX3500 Switch)
- Junos OS Release 11.1 or later for the QFX Series.

## Overview

Junos OS supports three general types of classifiers:

- Behavior aggregate or CoS value traffic classifiers—Examine the CoS value in the packet header. The value in this single field determines the CoS settings applied to the packet. BA classifiers allow you to set the forwarding class and loss priority of a packet based on the CoS value.
- Fixed classifiers. Fixed classifiers classify all ingress traffic on a physical interface into one forwarding class, regardless of the CoS bits in the VLAN header or the DSCP bits in the packet header.
- Multifield traffic classifiers—Examine multiple fields in the packet such as source and destination addresses and source and destination port numbers of the packet. With multifield classifiers, you set the forwarding class and loss priority of a packet based on firewall filter rules.

Multdestination classifiers apply to all of the switch interfaces and handle multicast, broadcast, and destination lookup fail (DLF) traffic. You cannot apply a multdestination classifier to a single interface or to a range of interfaces.



**NOTE:** You must assign unicast traffic and multicast traffic to different classifiers. One classifier cannot include both unicast and multicast forwarding classes. A multidestination classifier can include only forwarding classes for multicast traffic.

The following example describes how to configure a BA classifier called **ba-mcast-classifier**, which is applied to all of the switch interfaces. The BA classifier assigns loss priorities, as shown in [Table 14 on page 60](#), to incoming packets in the multidestination forwarding class.

You can also use firewall filters to set multifield classifiers.

**Table 16: BA-mcast-classifier Loss Priority Assignments**

Multicast Forwarding Class	Traffic Type	ba-mcast-classifier Assignment
<b>mcast</b>	Best-effort multicast traffic	Low loss priority code point: <b>000</b>

## Configuring Multidestination Classifiers

To configure a multicast IEEE 802.1 BA classifier named **ba-mcast-classifier**:

1. Associate code point **000** with forwarding class **mcast** and loss priority **low**:

```
[edit class-of-service classifiers]
user@switch# set ieee-802.1 ba-mcast-classifier forwarding-class mcast loss-priority low
code-points 000
```

2. Configure the classifier as a multidestination classifier:

```
[edit class-of-service]
user@switch# set multi-destination classifiers ieee-802.1 ba-mcast-classifier
```

## Verification

To verify the multidestination classifier configuration, perform these tasks:

- [Verifying the IEEE 802.1 Multidestination Classifier on page 64](#)
- [Verifying the Multidestination Classifier Configuration on page 65](#)

### Verifying the IEEE 802.1 Multidestination Classifier

**Purpose** Verify that the classifier **ba-mcast-classifier** is configured as the IEEE 802.1 multidestination classifier:

**Action** Verify the results of the classifier configuration using the operational mode command **show configuration class-of-service multi-destination classifiers ieee-802.1**:

```
user@switch> show configuration class-of-service multi-destination classifiers ieee-802.1
ba-mcast-classifier;
```

### Verifying the Multidestination Classifier Configuration

**Purpose** Verify that you configured the multidestination classifier with the correct forwarding classes, loss priorities, and code points.

**Action** List the classifier configuration using the operational mode command **show configuration class-of-service classifiers ieee-802.1 ba-mcast-classifier**:

```
user@switch> show configuration class-of-service classifiers ieee-802.1 ba-mcast-classifier
    forwarding-class mcast {
        loss-priority low code-points 000;
    }
```

### Release History Table

Release	Description
17.1	Beginning with Junos OS Release 17.1, EX4300 switches support multidestination classifiers.

### Related Documentation

- *Example: Configuring Unicast Classifiers*
- *Defining CoS BA Classifiers (DSCP, DSCP IPv6, IEEE 802.1p)*
- *Monitoring CoS Classifiers*
- *Understanding CoS Classifiers*
- *Understanding CoS Classifiers*
- *Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces*

## Configuring and Applying IEEE 802.1ad Classifiers

If you apply an IEEE 802.1ad classifier to a logical interface, this classifier takes precedence and is not compatible with any other classifier type. For Juniper Networks MX Series 5G Universal Routing Platform interfaces or IQ2 PICs with IEEE 802.1ad frame formats or EX Series switches, you can set the forwarding class and loss priority for traffic on the basis of the three IEEE 802.1p bits (three bits in either the inner virtual LAN (VLAN) tag or the outer VLAN tag) and the drop eligible indicator (DEI) bit. You can apply the default map or customize one or more of the default values.

You then apply the classifier to the interface on which you configure IEEE 802.1ad frame formats.

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Define the custom IEEE 802.1ad map:
  - a. Create the classifier by specifying a name for it and defining it as an IEEE-802.1ad (DEI) classifier.

```
[edit]
user@host# edit class-of-service classifiers ieee-802.1ad dot1p_dei_class
```

- b. Assign the forwarding class and loss priority to the code-point alias.

```
[edit class-of-service classifiers ieee-802.1ad dot1p_dei_class]
user@host# set forwarding-class best-effort loss-priority low code-points [0000
1101]
```

2. Apply the classifier to the logical interface:
  - a. Specify the interface to which you want to apply the classifier.

```
[edit]
user@host# edit class-of-service interfaces ge-2/0/0 unit 0
```

- b. Specify the name of the classifier you want to apply to the interface.

```
[edit class-of-service interfaces ge-2/0/0 unit 0]
user@host# set classifiers ieee-802.1ad dot1p_dei_class
```

3. Verify the custom IEEE 802.1ad map configuration:

```
[edit]
user@host# show
```

```
class-of-service {
  classifiers {
    ieee-802.1ad dot1p_dei_class {
      forwarding-class best-effort {
```

```

        loss-priority low code-points [ 0000 1101 ];
    }
}
}

```

```

class-of-service {
  interfaces {
    ge-2/0/0 {
      unit 0 {
        classifiers {
          ieee-802.1ad dot1p_dei_class;
        }
      }
    }
  }
}
]

```

**Related  
Documentation**

- *Understanding How Behavior Aggregate Classifiers Prioritize Trusted Traffic*
- *Applying Behavior Aggregate Classifiers to Logical Interfaces*

## Configuring the IEEE 802.1p Field for CoS Host Outbound Traffic

This topic provides a summary of the configuration for setting the IEEE 802.1p field in the Ethernet frame header for host outbound traffic (control plane traffic). You can set a global value for the priority code point that applies to all host outbound traffic. Additionally, or alternatively, you can specify that rewrite rules are applied to all host outbound traffic on egress logical interfaces. These are rules that have been previously configured to set the IEEE 802.1p field for data traffic on those interfaces.

Configuration of 802.1p bits is supported only on the following hardware and software components:

- EX Series switches
- MX Series 5G Universal Routing Platforms
- Enhanced Queuing DPCs
- MPCs
- Junos OS Release 12.3 or later

To configure the IEEE 802.1p field settings:

1. (Optional) Specify a global default value for the IEEE 802.1p field for all host outbound traffic.

See [“Configuring a Global Default IEEE 802.1p Value for All Host Outbound Traffic” on page 68.](#)

2. (Optional) Specify that the IEEE 802.1p rewrite rules for the egress logical interfaces are applied to all host outbound traffic on those interfaces.

See [“Applying Egress Interface Rewrite Rules to the IEEE 802.1p Field for All Host Outbound Traffic on the Interface” on page 84.](#)

**Related Documentation**

- [Rewriting Packet Headers to Ensure Forwarding Behavior](#)

---

## Configuring a Global Default IEEE 802.1p Value for All Host Outbound Traffic

---

This topic describes how to configure a global default value for the IEEE 802.1p field for all host outbound traffic on MX Series routers and EX Series switches.

To configure a global default value for the IEEE 802.1p field:

- Specify the value.

```
[edit class-of-service host-outbound-traffic ieee-802.1]
user@host# set default value
```

For example, specify that a value of 010 is applied to all host outbound traffic:

```
[edit class-of-service host-outbound-traffic ieee-802.1]
user@host# set default 010
```

**Related Documentation**

- [Configuring the IEEE 802.1p Field for CoS Host Outbound Traffic on page 67](#)
- [Rewriting Packet Headers to Ensure Forwarding Behavior](#)



## Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards (CLI Procedure)

EX8200 switches provide certain line cards that include oversubscribed ports. These ports are logically grouped into a port group and each port group share a certain fixed bandwidth. Because oversubscribed ports handle traffic differently than ports that provide continuous line-rate bandwidth, configuring CoS queues is different for oversubscribed ports than for line-rate ports.

Packets arriving on an oversubscribed port in a line card are directed to a high-priority, low priority, or line-rate queue. These queues are used for scheduling traffic from the port into the Packet Forwarding Engine. The fabric priority associated with the packet's forwarding class determines which queue the packet is sent to. The forwarding class of the packet in turn is determined by the behavior aggregate (BA) classifier assigned to the port. By default, the fabric priority of all forwarding classes is low. Thus all packets, with the exception of critical network packets and line-rate packets, are sent to the low-priority ingress queue by default. The critical network packets and line-rate packets do not need a BA classifier as they are always sent on the high-priority and line-rate queues, respectively.

This procedure describes how you can direct traffic into the high-priority ingress queue and thus avoid congestion at the port group.

To direct traffic to the high-priority ingress queue for a port group:

1. Create the BA classifier for the forwarding class:

```
[edit class-of-service]
user@switch# set classifiers classifier-type classifier-name
forwarding-class class-name loss-priority level code-points code-point
```

2. Assign a queue number and fabric priority to the forwarding class:

```
[edit class-of-service]
user@switch# set forwarding-classes class class-name queue-num number
priority level
```

3. Assign the BA classifier to the physical interface:

```
[edit class-of-service]
user@switch# set interfaces interface-name unit 0
classifiers classifier-type classifier-name
```

For example, to direct voice traffic to the high-priority ingress queue for interface **xe-1/0/2**:

```
[edit class-of-service]
user@switch# set classifiers dscp dscp1 forwarding-class cos-voice
loss-priority low code-points ef
```

```
[edit class-of-service]
user@switch# set forwarding-classes class cos-voice queue-num 5 priority high

[edit class-of-service]
user@switch# set interfaces xe-1/0/2 unit 0 classifiers dscp dscp1
```



**NOTE:** You must use a BA classifier to classify traffic for ingress queuing. Multifield (MF) classification and port classification (that is, assigning a forwarding class to the interface) are not supported for classifying traffic for ingress queuing. The BA classifier must be assigned to a physical interface, not a Layer 3 tagged interface or a routed VLAN interface (RVI).

**Related Documentation**

- [Understanding CoS Queues on EX8200 Line Cards That Include Oversubscribed Ports on page 11](#)

## Monitoring CoS Classifiers

### Purpose



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

Use the monitoring functionality to display the mapping of incoming CoS values to the forwarding class and loss priority for each classifier.

### Action

To monitor CoS classifiers in the J-Web interface, select **Monitor > Class of Service > Classifiers**.

To monitor CoS classifiers in the CLI, enter the following CLI command:

```
show class-of-service classifier
```

### Meaning

[Table 17 on page 70](#) summarizes key output fields for CoS classifiers.

*Table 17: Summary of Key CoS Classifier Output Fields*

Field	Values	Additional Information
Classifier Name	Name of a classifier.	To display classifier assignments, click the plus sign (+).

Table 17: Summary of Key CoS Classifier Output Fields (continued)

Field	Values	Additional Information
CoS Value Type	<p>The classifiers are displayed by type:</p> <ul style="list-style-type: none"> <li>• <b>dscp</b>—All classifiers of the DSCP type.</li> <li>• <b>ieee-802.1</b>—All classifiers of the IEEE 802.1 type.</li> <li>• <b>inet-precedence</b>—All classifiers of the IP precedence type.</li> </ul>	
Index	Internal index of the classifier.	
Incoming CoS Value	CoS value of the incoming packets, in bits. These values are used for classification.	
Assign to Forwarding Class	Forwarding class that the classifier assigns to an incoming packet. This class affects the forwarding and scheduling policies that are applied to the packet as it transits the switch.	
Assign to Loss Priority	Loss priority value that the classifier assigns to the incoming packet based on its CoS value.	

- Related Documentation**
- [Defining CoS Classifiers \(CLI Procedure\) on page 59](#)
  - [Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)

## Troubleshooting a CoS Classifier Configuration for a TCAM Space Error

**Problem**    **Description:** When a CoS classifier configuration exceeds the amount of available ternary content addressable memory (TCAM) space, the switch returns the following system log message:

```
<number_of_rules_being_added> rules for <filter_name> class <filter_class> will
not be installed, key: <bind_point>. no space in tcam db(<shared_pool_information>)
```

The switch returns this message during the commit operation if the number of classifiers defined in the CoS configuration or the number of bind points (interfaces) to which classifiers are bound causes the CoS configuration to exceed the amount of available TCAM space. However, the commit operation for the CoS configuration is completed in the CLI module.

**Solution** When a CoS configuration exceeds the amount of available TCAM table space, you must either define fewer classifiers or bind them to fewer interfaces, or both, so that the space requirements for the CoS configuration do not exceed the available space in TCAM.

To delete classifier definitions and bind points in a CoS configuration, and to apply a new CoS classifier definition to fewer bind points:

1. Delete either the CoS classifier definition or the bind points:

- To delete the CoS classifier definition:

- For behavioral classifiers:

```
[edit class-of-service]
user@switch# delete classifier dscp d1
```

- For multifield classifiers:

```
[edit]
user@switch# delete interfaces ge-3/0/2 unit 0 family ethernet-switching filter input
ipacl
```

This command deletes a multifield classifier defined for a port. Similarly, you can delete a multifield classifier defined for a VLAN or router.

You can also delete terms defined in a single multifield classifier:

```
[edit]
user@switch# delete firewall family inet filter f1 term t1
```

In both these examples (for behavioral and multifield classifiers), the assumption is that too many classifier definitions resulted in the error message.

- To delete the bind points:

```
[edit class-of-service]
user@switch# delete class-of-service interfaces ge-0/0/0
user@switch# delete class-of-service interfaces ge-0/0/1
user@switch# delete class-of-service interfaces ge-0/0/2
user@switch# delete class-of-service interfaces ge-0/0/3
user@switch# delete class-of-service interfaces ge-0/0/4
user@switch# delete class-of-service interfaces ge-0/0/5
user@switch# delete class-of-service interfaces ge-0/0/6
user@switch# delete class-of-service interfaces ge-0/0/7
user@switch# delete class-of-service interfaces ge-0/0/8
```

Here the assumption is that too many bind points (nine) in the configuration resulted in the error message.

2. Commit the operation:

```
[edit]
user@switch# commit
```

3. Define fewer classifiers in the CoS configuration or bind classifiers to fewer interfaces, or both, so that the CoS classifier configuration does not exceed the amount of available TCAM space on the switch:

- To define CoS classifiers:
  - For behavioral classifiers:

```
[edit]
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc1 loss-priority
low code-points 000001
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc2 loss-priority
low code-points 000010
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc3 loss-priority
low code-points 000011
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc4 loss-priority
low code-points 000100
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc5 loss-priority
low code-points 000101
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc6 loss-priority
low code-points 000110
user@switch# set class-of-service classifiers dscp d2 forwarding-class fc7 loss-priority
low code-points 000111
```

- For multifield Classifiers:

```
[edit]
user@switch# set firewall family inet filter f1 term t1 from protocol tcp
user@switch# set firewall family inet filter f1 term t1 then loss-priority high
user@switch# set firewall family inet filter f1 term t1 then forwarding-class best-effort
user@switch# set firewall family inet filter f1 term t2 from protocol udp
user@switch# set firewall family inet filter f1 term t2 then loss-priority high
user@switch# set firewall family inet filter f1 term t2 then forwarding-class
assured-forwarding
user@switch# set firewall family inet filter f1 term t3 from source-port ssh
user@switch# set firewall family inet filter f1 term t3 then loss-priority low
user@switch# set firewall family inet filter f1 term t3 then forwarding-class fc8
user@switch# set class-of-service forwarding-classes best-effort, assured-forwarding,
fc8
```

- To bind classifiers to fewer interfaces:

```
[edit]
user@switch# set class-of-service interfaces ge-0/0/0 unit 0 classifiers dscp d2
user@switch# set class-of-service interfaces ge-0/0/1 unit 0 classifiers dscp d2
user@switch# set class-of-service interfaces ge-0/0/2 unit 0 forwarding-class best-effort
user@switch# set class-of-service interfaces ge-0/0/3 unit 0 forwarding-class
assured-forwarding
user@switch# set class-of-service interfaces ge-0/0/4 unit 0 forwarding-class fc8
```

4. Commit the operation:

```
[edit]
user@switch# commit
```

5. Check system log for an error message. If an error message is not logged, then your classifier configuration has not exceeded the TCAM space limit.

If an error message is logged, then repeat this procedure by defining fewer classifiers or binding classifiers to fewer bind points.

- Related Documentation**
- [Understanding CoS Classifiers on page 56](#)
  - [Defining CoS Classifiers \(CLI Procedure\) on page 59](#)

## CHAPTER 6

# CoS Rewrite

- [Understanding CoS Rewrite Rules on page 75](#)
- [Defining CoS Rewrite Rules \(CLI Procedure\) on page 78](#)
- [Defining CoS Rewrite Rules \(J-Web Procedure\) on page 79](#)
- [Classifiers and Rewrite Rules at the Global, Physical and Logical Interface Levels Overview on page 82](#)
- [Configuring Classifiers and Rewrite Rules at the Global and Physical Interface Levels on page 83](#)
- [Applying Egress Interface Rewrite Rules to the IEEE 802.1p Field for All Host Outbound Traffic on the Interface on page 84](#)
- [Monitoring CoS Rewrite Rules on page 86](#)

## Understanding CoS Rewrite Rules

---

As packets enter or exit a network, edge switches might be required to alter the class-of-service (CoS) settings of the packets. This topic describes how to use rewrite rules to alter the CoS settings. It covers:

This topic covers:

- [How Rewrite Rules Work on page 75](#)
- [Default Rewrite Rule on page 76](#)

## How Rewrite Rules Work

Rewrite rules set the value of the CoS bits within a packet's header. Each rewrite rule reads the current forwarding class and loss priority associated with the packet, locates the chosen CoS value from a table, and writes this CoS value into the packet header. For rewrites to occur, rewrite rules must be explicitly assigned to an interface.

On EX Series switches, you can define rewrite rules for IPv4 and IPv6 traffic to network interfaces, aggregated Ethernet interfaces (also known as link aggregation groups (LAGs)), routed VLAN interfaces (RVIs), Layer 3 interfaces, and Layer 3 VLAN-tagged sub-interfaces. Multiple rewrite rules of different types can be assigned to a single interface.

On EX4300 switches, you cannot configure separate DSCPv4 and DSCPv6 rewrite rules on network interfaces, aggregated Ethernet interfaces, Layer 3 interfaces, and integrated routing and bridging (IRB) interfaces. If you configure a DSCPv4 rewrite rule on an interface to rewrite IPv4 traffic, then the same rewrite rule is applied to IPv6 traffic also on that interface, and vice versa. You can define only DSCPv4 rewrite rules on integrated routing and bridging (IRB) interfaces and Layer 3 VLAN-tagged logical interfaces.

In effect, the rewrite rule performs the reverse function of the behavior aggregate (BA) classifier, which is used when the packet enters the switch. As the packet leaves the switch, the final CoS action is generally the application of a rewrite rule.

You configure rewrite rules to alter CoS values in outgoing packets on the outbound interfaces of an edge switch to meet the policies of a targeted peer. This allows the downstream switch in a neighboring network to classify each packet into the appropriate service group.



**NOTE:** When an IP precedence rewrite rule is active, bits 3, 4, and 5 of the type-of-service (ToS) byte are always reset to zero when code points are rewritten.

## Default Rewrite Rule

To define a rewrite rule on an interface, you can either create your own rewrite rule and enable it on the interface or enable a default rewrite rule. See [“Defining CoS Rewrite Rules \(CLI Procedure\)” on page 78](#).

Table 18 on page 76 shows the default rewrite-rule mappings. These are based on the default bit definitions of Differentiated Services code point (DSCP), IEEE 802.1p, and IP precedence values and the default forwarding classes. You can configure multiple CoS rewrite rules for DSCP, IP precedence and IEEE 802.1p.



**NOTE:** By default, rewrite rules are not assigned to an interface. You must explicitly assign a user-defined or system-defined rewrite rule to an interface for the rewrites to occur.

When the CoS values of a packet match the forwarding class and packet-loss-priority (PLP) values, the switch rewrites markings on the packet based on the rewrite table.

**Table 18: Default Packet Header Rewrite Mappings**

Map from Forwarding Class	PLP Value	Map to DSCP/IEEE 802.1p/IP Precedence Value
expedited-forwarding	low	ef
expedited-forwarding	high	ef
assured-forwarding	low	af11



*Table 18: Default Packet Header Rewrite Mappings (continued)*

Map from Forwarding Class	PLP Value	Map to DSCP/IEEE 802.1p/IP Precedence Value
assured-forwarding	high	af12 (DSCP)
best-effort	low	be
best-effort	high	be
network-control	low	nc1/cs6
network-control	high	nc2/cs7

**Related  
Documentation**

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Defining CoS Rewrite Rules \(CLI Procedure\) on page 78](#)
- [Defining CoS Rewrite Rules \(J-Web Procedure\) on page 79](#)

## Defining CoS Rewrite Rules (CLI Procedure)

You configure rewrite rules to alter CoS values in outgoing packets on the outbound interfaces of an EX Series switch to match the policies of a targeted peer. Policy matching allows the downstream routing platform or switch in a neighboring network to classify each packet into the appropriate service group.

To configure a CoS rewrite rule, create the rule by giving it a name and associating it with a forwarding class, loss priority, and a code point, thus creating a rewrite table, and you can enable the rewrite rule on an interface. On EX Series switches except EX4300 switches, you can also enable a rewrite rule on routed VLAN interfaces (RVIs). On EX4300 switches, you can also enable rewrite rules on integrated routing and bridging (IRB) interfaces. If you need to customize a rewrite rule, you can create a customized rewrite rule using a firewall filter configuration. You can configure CoS rewrite rules for DSCP, IP precedence and IEEE 802.1p.

You can configure rewrite rules for the following CoS marker types:

- **dscp** and **dscp-ipv6**—Handles incoming IPv4 and IPv6 packets, respectively. On EX4300 switches, you cannot configure DSCP IPv4 and DSCP IPv6 rewrite rules on the same interface. If you configure a DSCP IPv4 rewrite rule on an interface to rewrite IPv4 traffic, then the same rewrite rule is applied to IPv6 traffic also on that interface, and vice versa.
- **ieee-802.1**—Handles Layer 2 CoS.
- **inet-precedence**—Handles incoming IPv4 packets. IP precedence mapping requires only the higher order three bits of the DSCP field.



**NOTE:** To replace an existing rewrite rule on the interface with a new rewrite rule of the same type, first explicitly remove the rewrite rule and then apply the new rule.

To create IEEE 802.1p rewrite rules and enable them on Layer 2 interfaces:

- To create an IEEE 802.1p rewrite rule named customup-rw in the rewrite table for all Layer 2 interfaces:

```
[edit class-of-service rewrite-rules]
user@switch# set ieee-802.1 customup-rw forwarding-class be loss-priority low code-point 000
user@switch# set ieee-802.1 customup-rw forwarding-class be loss-priority high code-point 001
user@switch# set ieee-802.1 customup-rw forwarding-class af loss-priority low code-point 010
user@switch# set ieee-802.1 customup-rw forwarding-class af loss-priority high code-point 011
user@switch# set ieee-802.1 customup-rw forwarding-class ef loss-priority low code-point 100
user@switch# set ieee-802.1 customup-rw forwarding-class ef loss-priority high code-point 101
```

```

user@switch# set ieee-802.1p customup-rw forwarding-class nc loss-priority low code-point
110
user@switch# set ieee-802.1p customup-rw forwarding-class nc loss-priority high code-point
111

```

- To enable an IEEE 802.1p rewrite rule named customup-rw on a Layer 2 interface:

```

[edit]
user@switch# set class-of-service interfaces ge-0/0/0 unit 0 rewrite-rules ieee-802.1
customup-rw

```

(On EX4300 switches) To enable an IEEE 802.1p rewrite rule named customup-rw on a Layer 2 interface:

```

[edit]
user@switch# set class-of-service interfaces ge-0/0/0 rewrite-rules ieee-802.1 customup-rw

```

- To enable an IEEE 802.1p rewrite rule named customup-rw on all Gigabit Ethernet interfaces on the switch, use wildcards for the interface name and logical-interface (unit) number:

```

[edit]
user@switch# set class-of-service interfaces ge-* unit * rewrite-rules customup-rw

```

(On EX4300 switches) To enable an IEEE 802.1p rewrite rule named customup-rw on all Gigabit Ethernet interfaces on the switch, use wildcards for the interface name:

```

[edit]
user@switch# set class-of-service interfaces ge-* rewrite-rules customup-rw

```

#### Related Documentation

- [Defining CoS Rewrite Rules \(J-Web Procedure\) on page 79](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Monitoring CoS Rewrite Rules on page 86](#)
- [Understanding CoS Rewrite Rules on page 75](#)

## Defining CoS Rewrite Rules (J-Web Procedure)



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

You can use the J-Web interface to define CoS rewrite rules. Use the rewrite rules to alter the CoS values in outgoing packets to meet the requirements of the targeted peer. A rewrite rule examines the forwarding class and loss priority of a packet and sets its bits to a corresponding value specified in the rule.

To define rewrite rules:

1. Select **Configure > Class of Service > Rewrite Rules**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Select one of the following options:
  - **Add**—Adds a rewrite rule. Enter information into the rewrite rule page as described in [Table 19 on page 80](#).
  - **Edit**—Modifies an existing rewrite rule. Enter information into the rewrite rule page as described in [Table 19 on page 80](#).
  - **Delete**—Deletes an existing rewrite rule.

*Table 19: Rewrite Rules Configuration Page Summary*

Field	Function	Your Action
Rewrite Rule Name	Specifies the name for the rewrite rule.	To name a rule, type the name—for example, <b>rewrite-dscps</b> .
Rewrite rule type	Specifies the type of rewrite rule: <b>dscp</b> , <b>ieee-802.1</b> , or <b>inet-precedence</b> .	Select a value from the list.

Table 19: Rewrite Rules Configuration Page Summary (continued)

Field	Function	Your Action
Code Point Mapping	<p>Rewrites outgoing CoS values of a packet based on the forwarding class and loss priority.</p> <p>Allows you to remove a code point mapping entry.</p>	<p>To configure a CoS value assignment, follow these steps:</p> <p>To add a code point mapping:</p> <ol style="list-style-type: none"> <li>1. Click <b>Add</b>.</li> <li>2. Select the code point.</li> <li>3. Select a forwarding class from the following list: <ul style="list-style-type: none"> <li>• <b>expedited-forwarding</b>—Provides low loss, low delay, low jitter, assured bandwidth, and end-to-end service. Packets can be forwarded out of sequence or dropped.</li> <li>• <b>best-effort</b>—Provides no special CoS handling of packets. Typically, RED drop profile is aggressive and no loss priority is defined.</li> <li>• <b>assured-forwarding</b>—Provides high assurance for packets within the specified service profile. Excess packets are dropped.</li> <li>• <b>network-control</b>—Packets can be delayed but not dropped.</li> </ul> </li> <li>4. Select the loss priority. <p>To assign a loss priority, select one:</p> <ul style="list-style-type: none"> <li>• <b>high</b>—Packet has a high loss priority.</li> <li>• <b>low</b>—Packet has a low loss priority.</li> </ul> <p>To edit an existing code point mapping, select it and click <b>Edit</b>.</p> <p>To remove a code point mapping entry, select it and click <b>Remove</b>.</p> </li> </ol>

- Related Documentation**
- [Defining CoS Rewrite Rules \(CLI Procedure\) on page 78](#)
  - [Understanding CoS Rewrite Rules on page 75](#)
  - [Monitoring CoS Rewrite Rules on page 86](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)

## Classifiers and Rewrite Rules at the Global, Physical and Logical Interface Levels Overview

On ACX Series Universal Metro Routers and EX Series switches, CoS supports classification and rewrite at the global level and physical interface levels.

At a global level, you can define EXP classification.

At a physical interface level, you can define the following features:

- DSCP, DSCP-IPV6, and IPv4 precedence classifiers
- DSCP, DSCP-IPV6, and IPv4 precedence rewrites
- IEEE 802.1 and IEEE 802.1ad classifiers (inner and outer)
- IEEE 802.1 and IEEE 802.1ad rewrites (outer)

The IEEE 802.1ad classifier uses IEEE 802.1p and DEI bits together.



**NOTE:** You cannot configure both IEEE 802.1p and IEEE 802.1ad classifiers together at the physical interface level.

At a logical interface level, you can define the fixed classification and EXP rewrites.

To configure global EXP classifiers, include the **classifiers exp classifier-name** statement at the **[edit class-of-service system-defaults]** hierarchy level.

To configure classifiers or rewrite rules at the physical interface, include either the **classifiers** statement or the **rewrite-rules** statement at the **[edit class-of-service interfaces interface-name ]** hierarchy level.

To configure fixed classifiers at the logical interface, include the **[edit class-of-service interfaces interface-name unit number forwarding-class fc]** or the **rewrite-rules** statement at the **[edit class-of-service interfaces interface-name ]** hierarchy level.

To configure EXP rewrite at the logical interface, include the **[edit class-of-service interfaces interface-name unit number rewrite-rules exp rewrite-rule]** statement.

To display classifiers configured under **system-defaults**, enter the **show class-of-service system-defaults** command.

To display classifiers and rewrite rules bound to physical interfaces, enter the **show class-of-service interfaces interface-name** command.

### Related Documentation

- [Configuring Classifiers and Rewrite Rules at the Global and Physical Interface Levels on page 83](#)

## Configuring Classifiers and Rewrite Rules at the Global and Physical Interface Levels

On ACX Series Universal Metro Routers and EX Series switches, CoS supports classification and rewrite at the global and physical interface levels.

To configure the global EXP classifier, include the following statements at the **[edit class-of-service] system-defaults** hierarchy level.

```
[edit class-of-service]
{
  system-defaults
  {
    classifiers exp classifier-name
  }
}
```

CoS supports one global system default classifier of the EXP type, as shown in the following example:

```
[edit class-of-service]
{
  system-defaults {
    classifiers {
      exp exp-classf-core;
    }
  }
}
```

To configure classifiers and rewrite rules at the physical interface level, include the following statements at the **[edit class-of-service] interfaces** hierarchy level.

```
[edit class-of-service]
interfaces {
  interface-name
  classifiers dscp classifier-name
  classifiers inet-precedence classifier-name
  classifiers ieee-802.1 [vlan-tag (outer | inner)] classifier-name
  rewrite-rules dscp rewrite-name
  rewrite-rules inet-prec rewrite-name
  rewrite-rules ieee-802.1 rewrite-name
}
```

The following example shows classifiers and rewrite rules configured on physical interfaces:

```
ge-0/1/0 {
  unit 0 {
    rewrite-rules {
      exp custom-exp;
    }
  }
  classifiers {
```

```
dscp d1;  
ieee-802.1 ci;  
}  
rewrite-rules {  
    dscp default;  
}  
}  
ge-0/1/2 {  
    classifiers {  
        ieee-802.1 ci;  
    }  
    rewrite-rules {  
        ieee-802.1 ri;  
    }  
}  
ge-0/1/3 {  
    unit 0 {  
        rewrite-rules {  
            exp custom-exp2;  
        }  
    }  
}  
ge-0/1/7 {  
    classifiers {  
        dscp d1;  
    }  
}  
ge-0/1/8 {  
    classifiers {  
        dscp d1;  
    }  
}
```

**Related  
Documentation**

- [Classifiers and Rewrite Rules at the Global, Physical and Logical Interface Levels Overview on page 82](#)

## Applying Egress Interface Rewrite Rules to the IEEE 802.1p Field for All Host Outbound Traffic on the Interface

This topic describes how to apply rewrite rules for egress logical interfaces to the IEEE 802.1p field for all host outbound traffic on those interfaces on MX Series routers and EX Series switches.

This task requires separately configured rewrite rules that map packet loss priority information to the code point value in the 802.1p field for data traffic on egress logical interfaces. See *Rewriting Packet Headers to Ensure Forwarding Behavior*.

To configure the rewrite rules:

1. Configure the CoS rewrite rules to map the forwarding class to the desired value for the 802.1p field.



See *Configuring Rewrite Rules*.

2. Associate the rewrite rules to the desired egress logical interfaces.

See *Applying Rewrite Rules to Output Logical Interfaces*.

3. (Optional) Configure the forwarding class for host outbound traffic. Do not configure this forwarding class if you want to use the default forwarding class assignment (input classification).

See *Overriding the Input Classification*.

To configure the rewrite rules to apply to the host outbound traffic IEEE 802.1p field:

- Configure the rewrite rules.

```
[edit class-of-service host-outbound-traffic ieee-802.1]
user@host# set rewrite-rules
```



**NOTE:** Enabling IEEE 802.1p rewrite rules for host outbound traffic on a DPC without creating any corresponding IEEE 802.1p rewrite rules on a logical interface on the DPC causes the IEEE 802.1p code point to be automatically set to 000 for all host generated traffic that exits that logical interface.

```
[edit class-of-service]
rewrite-rules {
  ieee-802.1 rewrite_foo {
    forwarding-class network-control {
      loss-priority low code-point 101;
    }
  }
}
interfaces {
  ge-1/0/0 {
    unit 100 {
      rewrite-rules {
        ieee-802.1 rewrite_foo vlan-tag outer-and-inner;
      }
    }
  }
}
host-outbound-traffic {
  forwarding-class network-control;
}
host-outbound-traffic {
  ieee-802.1 {
    rewrite-rules;
  }
}
```

- Related Documentation**
- [Configuring the IEEE 802.1p Field for CoS Host Outbound Traffic on page 67](#)
  - [Rewriting Packet Headers to Ensure Forwarding Behavior](#)

## Monitoring CoS Rewrite Rules

### Purpose



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

Use the monitoring functionality to display information about CoS value rewrite rules, which are based on the forwarding class and loss priority.

**Action** To monitor CoS rewrite rules in the J-Web interface, select **Monitor > Class of Service > Rewrite Rules**.

To monitor CoS rewrite rules in the CLI, enter the following command:

```
show class-of-service rewrite-rules
```

**Meaning** [Table 20 on page 86](#) summarizes key output fields for CoS rewrite rules.

**Table 20: Summary of Key CoS Rewrite Rules Output Fields**

Field	Values	Additional Information
Rewrite Rule Name	Names of rewrite rules.	
CoS Value Type	Rewrite rule type: <ul style="list-style-type: none"> <li>• <b>dscp</b>—For IPv4 DiffServ traffic.</li> <li>• <b>exp</b>—For MPLS traffic.</li> <li>• <b>ieee-802.1</b>—For Layer 2 traffic.</li> <li>• <b>inet-precedence</b>—For IPv4 traffic.</li> </ul>	To display forwarding classes, loss priorities, and rewritten CoS values, click the plus sign (+).
Index	Internal index for this particular rewrite rule.	
Forwarding Class	Forwarding class that is used to determine CoS values for rewriting in combination with loss priority.	Rewrite rules are applied to CoS values in outgoing packets based on forwarding class and loss priority setting.
Loss Priority	Loss priority that is used to determine CoS values for rewriting in combination with forwarding class.	
Rewrite CoS Value To	Value that the CoS value is rewritten to.	

- Related Documentation**
- [Defining CoS Rewrite Rules \(CLI Procedure\) on page 78](#)
  - [Defining CoS Rewrite Rules \(J-Web Procedure\) on page 79](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)



## CHAPTER 7

# Forwarding Classes

- [Understanding CoS Forwarding Classes on page 90](#)
- [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93](#)
- [Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)
- [Monitoring CoS Forwarding Classes on page 95](#)

## Understanding CoS Forwarding Classes

Class-of-Service (CoS) forwarding classes can be thought of as output queues. In effect, the result of classifying packets is the identification of an output queue for a particular packet. For a classifier to assign an output queue to a packet, it must associate the packet with one of the following forwarding classes:

- best-effort (be)—Provides no service profile. Loss priority is typically not carried in a CoS value.
- expedited-forwarding (ef)—Provides a low loss, low latency, low jitter, assured bandwidth, end-to-end service.
- assured-forwarding (af)—Provides a group of values you can define and includes four subclasses: AF1, AF2, AF3, and AF4, each with two drop probabilities: low and high.
- network-control (nc)—Supports protocol control and thus is typically high priority.
- multicast best-effort (mcast-be)—Provides no service profile for multicast packets.
- multicast expedited forwarding (mcast-ef)—Supports high-priority multicast packets.
- multicast assured-forwarding (mcast-af)—Provides two drop profiles; high, and low, for multicast packets.
- multicast network-control (mcast-nc)—Supports high-priority multicast packets that are not delay-sensitive.



**NOTE:** The forwarding classes multicast expedited-forwarding, multicast assured-forwarding, and multicast best-effort are applicable only to Juniper Networks EX8200 and EX4300 Ethernet Switches. The forwarding class multicast network-control is applicable only to EX4300 switches.

Juniper Networks EX Series Ethernet Switches support up to 16 forwarding classes, thus allowing granular packet classification. For example, you can configure multiple classes of expedited forwarding (EF) traffic such as EF, EF1, and EF2.

EX Series switches support up to eight output queues, except EX4300 switches that support 12 output queues. Therefore, if you configure more forwarding classes than the number of queues supported, you must map multiple forwarding classes to one or more output queues. On EX8200 Virtual Chassis, you can configure only eight forwarding classes and you can assign only one forwarding class to each output queue.



**NOTE:** On EX8200 Virtual Chassis, the queue number seven carries Virtual Chassis port (VCP) traffic and can also carry high-priority user traffic.

This topic describes:

- [Default Forwarding Classes on page 91](#)

## Default Forwarding Classes

Table 21 on page 91 shows the four default forwarding classes defined for unicast traffic, and Table 22 on page 91 shows the default forwarding classes defined for multicast traffic.



**NOTE:** The default forwarding classes for multicast traffic are applicable only to EX8200 Virtual Chassis and EX4300 switches.

You can rename the forwarding classes associated with the queues supported on your switch. Assigning a new class name to an output queue does not alter the default classification or scheduling that is applicable to that queue. However, because CoS configurations can be quite complicated, we recommend that you avoid altering the default class names or queue number associations.

**Table 21: Default Forwarding Classes for Unicast Traffic**

Forwarding Class Name	Comments
best-effort (be)	The software does not apply any special CoS handling to packets with 000000 in the DiffServ field. This is a backward compatibility feature. These packets are usually dropped under congested network conditions.
expedited-forwarding (ef)	The software delivers assured bandwidth, low loss, low delay, and low delay variation (jitter) end-to-end for packets in this service class. The software accepts excess traffic in this class, but in contrast to the assured forwarding class, the out-of-profile expedited-forwarding class packets can be forwarded out of sequence or dropped.
assured-forwarding (af)	<p>The software offers a high level of assurance that the packets are delivered as long as the packet flow from the customer stays within a certain service profile that you define.</p> <p>The software accepts excess traffic, but it applies a tail drop profile to determine that excess packets are dropped, and not forwarded.</p> <p>Two drop probabilities (low and high) are defined for this service class.</p>
network-control (nc)	<p>The software delivers packets in this service class with a high priority. (These packets are not delay-sensitive.)</p> <p>Typically, these packets represent routing protocol hello or keep alive messages. Because loss of these packets jeopardizes proper network operation, packet delay is preferable to packet discard for these packets.</p>

**Table 22: Default Forwarding Classes for Multicast Traffic on EX8200 Virtual Chassis and EX4300 Switches**

Forwarding Class Name	Comments
multicast best-effort (mcast-be)	The software does not apply any special CoS handling to multicast packets. These packets are usually dropped under congested network conditions.

**Table 22: Default Forwarding Classes for Multicast Traffic on EX8200 Virtual Chassis and EX4300 Switches (continued)**

Forwarding Class Name	Comments
multicast expedited-forwarding (mcast-ef)	The software delivers assured bandwidth, low loss, low delay, and low delay variation (jitter) end-to-end for multicast packets in this service class. The software accepts excess traffic in this class, but in contrast to the multicast assured forwarding class, out-of-profile multicast expedited-forwarding class packets can be forwarded out of sequence or dropped.
multicast assured-forwarding (mcast-af)	<p>The software offers a high level of assurance that the multicast packets are delivered as long as the packet flow from the customer stays within a certain service profile that you define.</p> <p>The software accepts excess traffic, but it applies a tail drop profile to determine if the excess packets are dropped and not forwarded.</p> <p>Two drop probabilities (low and high) are defined for this service class.</p>
multicast network-control (mcast-nc)	<p>(EX4300 switches only) The software delivers packets in this service class with a high priority. (These packets are not delay-sensitive.)</p> <p>Typically, these packets represent routing protocol hello or keep alive messages. Because loss of these packets jeopardizes proper network operation, packet delay is preferable to packet discard for these packets.</p>

The following rules govern queue assignment:

- CoS configurations that specify more queues than the switch can support are not accepted. If you commit such a configuration, the commit fails and a message displays that states the number of queues available.
- All default CoS configurations are based on queue number. The name of the forwarding class that is displayed in the default configuration for a queue number is that of the forwarding class currently associated with that queue.

**Related Documentation**

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Example: Prioritizing Snooped and Inspected Packet](#)
- [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93](#)
- [Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)



## Defining CoS Forwarding Classes (CLI Procedure)

Forwarding classes allow you to group packets for transmission. Based on forwarding classes, you assign packets to output queues.

By default, four categories of forwarding classes are defined: best effort, assured forwarding, expedited forwarding, and network control. EX Series switches support up to 16 forwarding classes.

You can configure forwarding classes in one of the following ways:

- Using **class** statement—You can configure up to 16 forwarding classes and you can map multiple forwarding classes to single queue.
- Using **queue** statement—You can configure up to 8 forwarding classes and you can map one forwarding class to one queue.

This example uses the **class** statement to configure forwarding classes.

To configure CoS forwarding classes, map the forwarding classes to queues:

```
[edit class-of-service forwarding-classes]
user@switch# set class be queue-num 0
user@switch# set class ef queue-num 1
user@switch# set class af queue-num 2
user@switch# set class nc queue-num 3
user@switch# set class ef1 queue-num 4
user@switch# set class ef2 queue-num 5
user@switch# set class af1 queue-num 6
user@switch# set class nc1 queue-num 7
```

### Related Documentation

- [Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Example: Prioritizing Snooped and Inspected Packet](#)
- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- [Monitoring CoS Forwarding Classes on page 95](#)
- [Understanding CoS Forwarding Classes on page 90](#)

## Defining CoS Forwarding Classes (J-Web Procedure)



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

You can define CoS forwarding classes on an EX Series switch using the J-Web interface. Assigning a forwarding class to a queue number affects the scheduling and marking of a packet as it transits a switch.

To define forwarding classes:

1. Select **Configure > Class of Service > Forwarding Classes**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Select one of the following options:
  - **Add**—Adds a forwarding class. Enter information into the forwarding class page as described in [Table 23 on page 94](#).
  - **Edit**—Modifies an existing forwarding class. Enter information into the forwarding class page as described in [Table 23 on page 94](#).
  - **Delete**—Deletes an existing forwarding class.

**Table 23: Forwarding Classes Configuration Fields**

Field	Function	Your Action
<b>Forwarding Class Summary</b>		
Queue #	<p>Specifies the internal queue numbers to which forwarding classes are assigned.</p> <p>By default, if a packet is not classified, it is assigned to the class associated with queue 0. You can have more than one forwarding class to a queue number.</p>	<p>To specify an internal queue number, select an integer from 0 through 11, appropriate for your platform as follows:</p> <p><b>NOTE:</b> For EX3400 and EX4300 switches, to specify an internal queue number, select an integer from 0 through 11.</p> <p><b>NOTE:</b> For EX2300 and EX2300-C switches, a maximum of eight egress queues are supported per port. To specify an internal queue number select an integer from 0 through 7.</p>

Table 23: Forwarding Classes Configuration Fields (continued)

Field	Function	Your Action
Forwarding Class Name	<p>Specifies the forwarding class names assigned to specific internal queue numbers.</p> <p>By default, four forwarding classes are assigned to queue numbers 0 (best-effort), 1 (assured-forwarding), 5 (expedited-forwarding), and 7 (network-connect).</p> <p><b>NOTE:</b> For EX4300 switches, by default the forwarding classes are assigned to queue numbers 0 (best-effort), 1 (expedited-forwarding), 2 (assured-forwarding), 3 (network-connect), 8 (mcast-be), 9 (mcast-ef), 10 (mcast-af), and 11 (mcast-nc).</p>	Type the name—for example, <b>be-class</b> .

Release History Table	Release	Description
	14.1X53-A2	J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

#### Related Documentation

- [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Example: Prioritizing Snooped and Inspected Packet](#)
- [Monitoring CoS Forwarding Classes on page 95](#)
- [Assigning CoS Components to Interfaces \(J-Web Procedure\) on page 46](#)
- [Understanding CoS Forwarding Classes on page 90](#)

## Monitoring CoS Forwarding Classes

### Purpose



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

View the current assignment of CoS forwarding classes to queues on the switch.

### Action

To monitor CoS forwarding classes in the J-Web interface, select **Monitor > Class of Service > Forwarding Classes**.

To monitor CoS forwarding classes in the CLI, enter the following CLI command:

**show class-of-service forwarding-class**

**Meaning** Table 24 on page 96 summarizes key output fields for CoS forwarding classes.

*Table 24: Summary of Key CoS Forwarding Class Output Fields*

Field	Values
Forwarding Class	<p>Names of forwarding classes assigned to queue numbers. The following are the default forwarding classes:</p> <ul style="list-style-type: none"> <li>• <b>best-effort</b>—Provides no special CoS handling of packets. Loss priority is typically not carried in a CoS value.</li> <li>• <b>expedited-forwarding</b>—Provides low loss, low delay, low jitter, assured bandwidth, and end-to-end service.</li> <li>• <b>assured-forwarding</b>—Provides high assurance for packets within the specified service profile. Excess packets are dropped.</li> <li>• <b>network-control</b>—Packets can be delayed but not dropped.</li> </ul> <p>EX8200 switches have the following additional default forwarding classes:</p> <ul style="list-style-type: none"> <li>• <b>mcast-be</b>—Provides no special CoS handling of packets.</li> <li>• <b>mcast-ef</b>—Provides low loss, low delay, low jitter, assured bandwidth, and end-to-end service.</li> <li>• <b>mcast-af</b>—Provides high assurance for packets within the specified service profile. Excess packets are dropped.</li> </ul> <p>EX4300 switches supports all the forwarding classes mentioned above and the one mentioned in this section:</p> <ul style="list-style-type: none"> <li>• <b>mcast-nc</b>—Provides multicast network-control traffic.</li> </ul>
Queue	<p>Queue number corresponding to the forwarding class name. The default forwarding classes are assigned as follows:</p> <ul style="list-style-type: none"> <li>• <b>best-effort</b>—0</li> <li>• <b>expedited-forwarding</b>—5</li> <li>• <b>assured-forwarding</b>—1</li> <li>• <b>network-control</b>—7</li> <li>• <b>mcast-be</b>—2</li> <li>• <b>mcast-ef</b>—4</li> <li>• <b>mcast-af</b>—6</li> </ul> <p>EX4300 switches have the following queue numbers for the forwarding classes:</p> <ul style="list-style-type: none"> <li>• <b>best-effort</b>—0</li> <li>• <b>expedited-forwarding</b>—1</li> <li>• <b>assured-forwarding</b>—2</li> <li>• <b>network-control</b>—3</li> <li>• <b>mcast-be</b>—8</li> <li>• <b>mcast-ef</b>—9</li> <li>• <b>mcast-af</b>—10</li> <li>• <b>mcast-nc</b>—11</li> </ul>

*Table 24: Summary of Key CoS Forwarding Class Output Fields (continued)*

Field	Values
<b>Fabric Priority</b>	(EX8200 switches only) Fabric priority for the forwarding class, either <b>high</b> or <b>low</b> . The fabric priority determines the priority of packets entering the switch fabric.

**Related  
Documentation**

- [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93](#)
- [Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)
- [Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards \(CLI Procedure\) on page 69](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)



## CHAPTER 8

# Flow Control

- [Understanding Priority-Based Flow Control on page 99](#)
- [Configuring Priority-Based Flow Control for an EX Series Switch \(CLI Procedure\) on page 102](#)

### Understanding Priority-Based Flow Control

---

Priority-based flow control (PFC), IEEE standard 802.1Qbb, is a link-level flow control mechanism. The flow control mechanism is similar to that used by IEEE 802.3x Ethernet PAUSE, but it operates on individual priorities. Instead of pausing all traffic on a link, PFC allows you to selectively pause traffic according to its class.

This topic describes:

- [Reliability of Packet Delivery in Standard Ethernet Networks and in Layer 2 Networks on page 99](#)
- [Calculations for Buffer Requirements When Using PFC PAUSE on page 100](#)
- [How PFC and Congestion Notification Profiles Work With or Without DCBX on page 100](#)

### Reliability of Packet Delivery in Standard Ethernet Networks and in Layer 2 Networks

Standard Ethernet does not guarantee that a packet injected into the network will arrive at its intended destination. Reliability is provided by upper-layer protocols. Generally, a network path consists of multiple hops between the source and destination. A problem arises when transmitters send packets faster than receivers can accept them. When receivers run out of available buffer space to hold incoming flows, they silently drop additional incoming packets. This problem is generally resolved by upper-layer protocols that detect the drops and request retransmission.

Applications that require reliability in Layer 2 must have flow control that includes feedback from a receiver to a sender regarding buffer availability. Using IEEE 802.3x Ethernet PAUSE control frames, a receiver can generate a MAC control frame and send a PAUSE request to a sender when a specified threshold of receiver buffer has been filled to prevent buffer overflow. Upon receiving a PAUSE request, the sender stops transmission of any new packets until the receiver notifies the sender that it has sufficient buffer space to accept them again. The disadvantage of using Ethernet PAUSE is that it operates on the entire link, which might be carrying multiple traffic flows. Some traffic flows do not need flow control in Layer 2, because they are carrying applications that rely on upper-layer

protocols for reliability. PFC enables you to configure Layer 2 flow control selectively for the traffic that requires it, such as Fibre Channel over Ethernet (FCoE) traffic, without impacting other traffic on the link. You can also enable PFC for other traffic types, such as iSCSI.

## Calculations for Buffer Requirements When Using PFC PAUSE

The receive buffer must be large enough to accommodate all data that is received while the system is responding to a PFC PAUSE frame.

When you calculate buffer requirements, consider the following factors:

- Processing and queuing delay of the PFC PAUSE—In general, the time to detect the lack of sufficient buffer space and to transmit the PFC PAUSE is negligible. However, delays can occur if the switch detects a reduction in buffer space just as the transmitter is beginning to transmit a maximum length frame.
- Propagation delay across the media—The delay amount depends on the length and speed of the physical link.
- Response time to the PFC PAUSE frame
- Propagation delay across the media on the return path



**NOTE:** We recommend that you configure at least 20 percent of the buffer size for the queue that is using PFC and that you do not specify the exact option.

Because it is mandatory to explicitly configure a certain percentage of buffer size for PFC, you must also explicitly configure some buffer size for any other forwarding classes that you are planning to use (including the default forwarding classes and the user-defined forwarding classes). The percentage that you allocate depends on the usage of the respective classes.

## How PFC and Congestion Notification Profiles Work With or Without DCBX

PFC can be applied to an interface regardless of whether the Data Center Bridging Capability Exchange protocol (DCBX) is enabled (DCBX is enabled by default for 10-Gigabit Ethernet interfaces on EX4500 CEE-enabled switches).

However, automatic control and advertisement of PFC requires DCBX:

- When DCBX is enabled—DCBX detects the data center bridging (DCB) neighbor's PFC configuration, uses autonegotiation to advertise local and peer PFC configuration, and then enables or disables PFC depending on whether the configurations are compatible or not. When PFC is enabled, it uses the congestion notification profile, which you have configured and applied to the interface.
- When DCBX is not enabled—Class of service (CoS) triggers PFC when the incoming frame has a User Priority (UP) field that matches the three-bit pattern specified for the congestion notification profile.



To manually control the use of PFC on the interface regardless of the configuration of the peer data center devices, you can explicitly change the configuration of DCBX on the interface to disable PFC autonegotiation. See *Disabling DCBX to Disable PFC Autonegotiation on EX Series Switches (CLI Procedure)*. When PFC autonegotiation is disabled, PFC is triggered by the congestion notification profile for PFC regardless of the configuration of the DCB peer.



**NOTE:** PFC functions effectively only when the peer devices connected to the local interface are also using PFC and are configured compatibly with the local interface. PFC must be symmetrical—if PFC is not configured to use the same traffic class (code point) on both the local and the peer interface, it does not have any impact on the traffic.

Table 25 on page 101 shows the one-to-one mapping between the UP field of an IEEE 802.1Q tagged frame, the traffic class, and the egress queue. In addition to setting a PFC congestion notification profile on an ingress port, you must set a forwarding class to match the priority specified in the PFC congestion notification profile and to forward the frame to the appropriate queue.

Juniper Networks EX Series Ethernet Switches support up to six traffic classes and allow you to associate those classes with six different congestion notification profiles. (The switches support up to 16 forwarding classes.)

**Table 25: Input for PFC Congestion Notification Profile and Mapping to Traffic Class and Egress Queue**

UP Field of IEEE-802.1Q Tagged Frame	Traffic Class	Egress Queue
000	TC 0	queue 0
001	TC 1	queue 1
010	TC 2	queue 2
011	TC 3	queue 3
100	TC 4	queue 4
101	TC 5	queue 5

**Related Documentation**

- [Understanding Data Center Bridging Capability Exchange Protocol for EX Series Switches](#)
- [Example: Configuring an FCoE Transit Switch](#)
- [Configuring Priority-Based Flow Control for an EX Series Switch \(CLI Procedure\) on page 102](#)
- [schedulers on page 227](#)
- [congestion-notification-profile on page 198](#)

## Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure)

---

You can configure priority-based flow control (PFC) on EX4500 switches to apply link-level flow control on a specific traffic class so that different types of traffic can efficiently use the same network interface card (NIC). You must configure PFC for all interfaces carrying Fibre Channel over Ethernet (FCoE) traffic. You can also configure PFC on interfaces carrying other traffic types, such as Internet small computer system interface (iSCSI) traffic. Using PFC is optional for traffic types other than FCoE.



**NOTE:**

- PFC is supported only on 10-Gigabit Ethernet interfaces.
- If you are using PFC for a non-FCoE DCBX application, use the same 802.1p code points for the PFC congestion notification profile and for the application map that is carrying that application traffic.

Data Center Bridging Capability Exchange protocol (DCBX) is enabled by default on all 10-Gigabit Ethernet interfaces on EX4500 switches. DCBX enables or disables PFC on the local interface depending on whether the PFC configuration on that interface is the same as the PFC configuration of the connected interface on the data center bridging (DCB) peer.



**NOTE:** When you configure PFC, we recommend that you:

- Configure at least 20 percent of the buffer for the queue that is using PFC.
- Configure an appropriate percent of the buffer for any other forwarding classes (default forwarding classes and the user-defined forwarding classes) that you are using.
- Do not specify the exact option when configuring the buffer for the queue that is using PFC.
- Configure the loss-priority statement to low for a traffic class that is using PFC.
- Verify that the PFC configurations of the local interfaces are the same as the PFC configurations of the connected interfaces on the DCB peer. See *show dcbx neighbors*.

EX Series switches support up to six congestion notification profiles for PFC.

To configure PFC:

1. Configure a congestion notification profile, specifying the name of the profile and specifying the three-bit pattern of the User Priority bits in an incoming frame that will trigger the priority-based flow control on that traffic class:

```
[edit class-of-service]
user@switch# set congestion-notification-profile profile-name input ieee-802.1 code-point
up-bits pfc
```

2. Disable standard Ethernet flow control on the interfaces that will be used for the traffic class that you have selected for PFC:

```
[edit interfaces]
user@switch# set interface-name ether-options no-flow-control
```



**NOTE:** You cannot apply PFC to interfaces that are using standard Ethernet flow control. You must first disable flow control on those interfaces.

3. Bind the congestion notification profile to the interfaces that will be used for the traffic class that you have selected for PFC:

```
[edit class-of-service]
user@switch# set interfaces interface-name congestion-notification-profile profile-name
```

4. Create a CoS classifier for a traffic class that will use PFC:

```
[edit class-of-service]
user@switch# set classifiers ieee-802.1 classifier-name import default
```

5. Configure this traffic class (*classifier-name*) to use a user-defined or default forwarding class with a low loss priority value and specify the 802.1p code points::

```
[edit class-of-service]
user@switch# set classifiers ieee-802.1 classifier-name forwarding-class class-name
loss-priority low code-points 3 bit-patterns
```

6. Bind the *classifier-name* classifier to all interfaces that require PFC:

```
[edit class-of-service]
user@switch# set interfaces interface-name unit logical-unit-number classifiers ieee-802.1
classifier-name
```

7. Assign the specified forwarding-class to an egress queue:

```
[edit class-of-service]
user@switch# set forwarding-classes class-name queue-number
```

8. Set a scheduler for this queue, allocating at least 20 percent of the buffer to be used for FCoE traffic:

```
[edit class-of-service]
```

```
user@switch# set schedulers scheduler-name buffer-size percent
```

9. Set a scheduler to allocate buffer space for forwarding classes carrying other traffic:



**NOTE:** You must explicitly allocate some buffer space for the other forwarding classes. The default allocation of buffer space for forwarding classes is overridden when you manually configure the requisite amount of buffer space for the FCoE traffic.

```
[edit class-of-service]
user@switch# set scheduler-name buffer-size percent
```

10. Configure a scheduler map that associates the specified scheduler with the specified forwarding class:

```
[edit class-of-service]
user@switch# set scheduler-maps map-name forwarding-class class-name scheduler
scheduler-name
```

For example:

```
[edit class-of-service]
user@switch# set scheduler-maps pfc-map forwarding-class af2 scheduler pfc-sched
user@switch# set scheduler-maps pfc-map forwarding-class best-effort scheduler
default-sched user@switch# set scheduler-maps pfc-map forwarding-class network-control
scheduler default-sched
user@switch# set scheduler-maps pfc-map forwarding-class expedited-forwarding scheduler
default-sched
```

11. Assign the scheduler map to the egress interface:

```
[edit class-of-service]
user@switch# set interfaces interface-name scheduler-map pfc-map
```

#### Related Documentation

- [Example: Configuring an FCoE Transit Switch](#)
- [Understanding Priority-Based Flow Control on page 99](#)

## CHAPTER 9

# CoS Queue Schedulers and Scheduler Maps

- [Understanding CoS Schedulers on page 105](#)
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
- [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
- [Defining CoS Scheduler Maps \(J-Web Procedure\) on page 117](#)
- [Monitoring CoS Scheduler Maps on page 119](#)
- [Troubleshooting CoS Schedulers on a 40-port SFP+ Line Card in an EX8200 Switch on page 120](#)

### Understanding CoS Schedulers

---

You use class-of-service (CoS) schedulers to define the properties of output queues on Juniper Networks EX Series Ethernet Switches. These properties include the amount of interface bandwidth assigned to the queue, the size of the memory buffer allocated for storing packets, the priority of the queue, and the drop profiles associated with the queue.

You associate the schedulers with forwarding classes by means of scheduler maps. You can then associate each scheduler map with an interface, thereby configuring the queues, packet schedulers, and tail drop processes that operate according to this mapping.

This topic describes:

- [Default Schedulers on page 105](#)
- [Excess Rate on page 106](#)
- [Transmission Rate on page 106](#)
- [Scheduler Buffer Size on page 107](#)
- [Priority Scheduling on page 108](#)
- [Scheduler Drop-Profile Maps on page 108](#)
- [Scheduler Maps on page 108](#)

### Default Schedulers

Each forwarding class has an associated scheduler priority. On EX Series switches other than Juniper Networks EX8200, EX4300, and EX3400 Ethernet Switches, only two

forwarding classes—best-effort (queue 0) and network-control (queue 7)—are used in the default configuration. By default on these switches, the best-effort forwarding class (queue 0) receives 95 percent of the bandwidth and the buffer space for the output link, and the network-control forwarding class (queue 7) receives 5 percent. The default drop profile causes the buffer to fill completely and then to discard all incoming packets until it has free space.

On EX8200 switches three forwarding classes—best-effort (queue 0), multicast best-effort (queue 2), and network-control (queue 7)—are used in the default configuration. By default, the best-effort forwarding class (queue 0) receives 75 percent of the bandwidth, the multicast best-effort forwarding class (queue 2) receives 20 percent, and the network-control forwarding class (queue 7) receives 5 percent of the bandwidth and buffer space for the output link.

On EX4300 and EX 3400 switches, four forwarding classes—best-effort (queue 0), multicast best-effort (queue 8), network-control (queue 3), and multicast network-control (queue 11)—are used in the default configuration. By default, all the multicast traffic flows through the multicast best-effort queue. EX4300 and EX3400 switches support 12 queues (0–11), and the default scheduler transmission rates for queues 0 through 11 are 75, 0, 0, 5, 0, 0, 0, 0, 15, 0, 0 and 5 percent, respectively, of the total available bandwidth.

On EX Series switches other than EX4300 switches, the expedited-forwarding (queue 5) and assured-forwarding (queue 1) classes have no scheduler because no resources are assigned to queue 5 or queue 1, by default. However, you can manually configure resources to be assigned to the expedited-forwarding and assured-forwarding classes. On EX4300 switches, the expedited-forwarding (queue 1) and assured-forwarding (queue 2) classes have no scheduler because no resources are assigned to queue 1 or queue 2, by default. However, you can manually configure resources to be assigned to the expedited-forwarding and assured-forwarding classes.

Also by default, any queue can exceed the assigned bandwidth if additional bandwidth is available from other queues. When a forwarding class does not fully use the allocated transmission bandwidth, the remaining bandwidth can be used by other forwarding classes if they have a traffic load that exceeds their allocated bandwidth.

## Excess Rate

Excess rate traffic determines the percentage of the excess bandwidth to share when a queue receives traffic in excess of its bandwidth allocation. By default, the excess bandwidth is shared in the ratio of the transmit rates. You can control this distribution by configuring the **excess-rate** statement at the **[edit class-of-service schedulers *scheduler-name*]** hierarchy. You can specify the excess rate sharing in percentage.

## Transmission Rate

Transmission-rate control determines the actual traffic bandwidth for each forwarding class you configure. The transmission rate is specified in bits per second. Each queue is allocated some portion of the bandwidth of the interface. This bandwidth can be a fixed value, such as 1 megabit per second (Mbps), a percentage of the total available bandwidth, or the rest of the available bandwidth. In case of congestion, the configured transmission

rate is guaranteed for the queue. Transmission-rate control allows you to ensure that each queue receives the bandwidth appropriate for its level of service.

## Scheduler Buffer Size

To control congestion at the output stage, you can configure the delay-buffer bandwidth by using the `buffer-size` configuration statement. The delay-buffer bandwidth provides packet buffer space to absorb burst traffic up to the specified duration of delay. When the specified delay buffer becomes full, packets with 100 percent drop probability are dropped from the tail of the buffer.

On EX Series switches other than EX8200, EX4300, and EX3400 switches, the default scheduler transmission rates for queues 0 through 7 are 95, 0, 0, 0, 0, 0, 0, and 5 percent, respectively, of the total available bandwidth. The default buffer-size percentages for queues 0 through 7 are 95, 0, 0, 0, 0, 0, 0, and 5 percent, respectively, of the total available buffer.

On EX8200 switches, the default scheduler transmission rates for queues 0 through 7 are 75, 0, 20, 0, 0, 0, 0, and 5 percent, respectively, of the total available bandwidth. The default buffer-size percentages for queues 0 through 7 are 75, 0, 20, 0, 0, 0, 0, and 5 percent, respectively, of the total available buffer.

On EX4300 and EX3400 switches, the default scheduler transmission rates for queues 0 through 11 are 75, 0, 0, 5, 0, 0, 0, 0, 15, 0, 0, and 5 percent, respectively, of the total available buffer. The default buffer-size percentages for queues 0 through 11 are 75, 0, 0, 5, 0, 0, 0, 0, 15, 0, 0, and 5 percent, respectively, of the total available buffer.

For each scheduler on EX Series switches other than EX8200 switches, you can configure the buffer size as one of the following:

- The exact buffer size.
- A percentage of the total buffer.
- The remaining buffer available. The remainder is the buffer percentage that is not assigned to other queues. For example, if you assign 40 percent of the delay buffer to queue 0, allow queue 2 to keep the default allotment of 20 percent, allow queue 7 to keep the default allotment of 5 percent, and assign the remainder to queue 3, then queue 3 uses 35 percent of the delay buffer.

On EX8200 switches, you can configure the buffer size as a temporal value (in microseconds), percentage of the total buffer, or the remaining buffer available. You can configure the buffer size as a temporal value on Juniper Networks EX4200 and EX4300 Ethernet Switches also.

When you configure buffer size as a temporal value on EX4200 switches, if sufficient buffer size is not available in the shared pool, an error message is logged in the system log (syslog) file and the default profile is applied to the interface. After the temporal buffer space is allocated successfully, if the shared buffer size is less than the current value (which was set using the `set class-of-service shared-buffer percent value` command), the new reduced value must be greater than a sum of the existing reserved temporal

buffer size and the required minimum buffer size. Otherwise, the modification to the shared-buffer configuration fails and an error message is logged in the system log.

## Priority Scheduling

Priority scheduling determines the order in which an interface transmits traffic from queues, thus ensuring that queues containing important traffic are provided faster access.

Priority scheduling is accomplished through a procedure in which the scheduler examines the priority of the queue. Juniper Networks Junos operating system (Junos OS) supports two levels of transmission priority:

- **Low**—The scheduler determines whether the individual queue is within its defined bandwidth profile or not. This binary decision, which is re-evaluated on a regular time cycle, involves comparing the amount of data transmitted by the queue against the bandwidth allocated to it by the scheduler. If the transmitted amount is less than the allocated amount, the queue is considered to be in profile. A queue is out of profile when the amount of traffic that it transmits is larger than the queue's allocated limit. An out-of-profile queue is transmitted only if bandwidth is available. Otherwise, it is buffered.

On EX Series switches other than EX4300 switches, a queue from a set of queues is selected based on the shaped deficit weighted round robin (SDWRR) algorithm, which operates within the set. On EX4300 switches, the weighted deficit round-robin (WDRR) algorithm is used to select a queue from a set of queues.

- **Strict-high**—A strict-high priority queue receives preferential treatment over a low-priority queue. Unlimited bandwidth is assigned to a strict-high priority queue. On EX Series switches other than EX4300 switches, queues are scheduled according to the queue number, starting with the highest queue, 7, with decreasing priority down through queue 0. Traffic in higher-numbered queues is always scheduled prior to traffic in lower-numbered queues. In other words, if there are two high-priority queues, the queue with the higher queue number is processed first. On EX4300 switches, you can configure multiple strict-high priority queues on an interface and an EX4300 switch processes these queues in a round-robin method.

Packets in low-priority queues are transmitted only when strict-high priority queues are empty.

## Scheduler Drop-Profile Maps

Drop-profile maps associate drop profiles with a scheduler. A drop-profile map sets the drop profile for a specific packet loss priority (PLP) and protocol type. The inputs for a drop-profile map are the PLP and the protocol type. The output is the drop profile.

## Scheduler Maps

A scheduler map associates a specified forwarding class with a scheduler configuration. After configuring a scheduler, you must include it in a scheduler map and then associate the scheduler map with an output interface.

On EX Series switches, if you configure more than the supported number of scheduler maps on a switch or for a port group in a line card, an error is logged in the system log.



On any interface in a port group on a line card or on a switch, if you configure a scheduler map that causes the number of scheduler maps for that port group to exceed the maximum number supported, the default scheduler map is bound to that interface. We recommend that you check the system log for errors after the commit operation to verify that you have not configured more than the maximum permitted number of scheduler maps.



**NOTE:** On EX Series switches, you cannot configure a scheduler map on an individual interface that is a member of a link aggregation group (LAG). Instead, you must configure the scheduler map on the LAG itself (that is, on the aggregated Ethernet (ae) interface).

Table 26 on page 109 shows the number of scheduler maps supported for each port group in a switch or line card.

**Table 26: Support for Scheduler Maps on Switches and Line Cards**

Switch/Line Card	Number of Port Groups	Port Grouping Details	Number of Scheduler Maps Supported for Each Port Group
EX2200-C-12T and EX2200-C-12P switches	1	Port 0–11 and 2 uplink ports form a port group.	6
EX2200-24T and EX2200-24P switches	1	Ports 0–23 and 4 SFP uplink ports form a port group.	5
EX2200-48T and EX2200-48P switches	2	<ul style="list-style-type: none"> <li>Ports 0–23 and SFP uplink ports 0 and 1 form a port group.</li> <li>Ports 24–47 and SFP uplink ports 2 and 3 form a port group.</li> </ul>	5
EX3200-24T and EX3200-24P switches	1	<ul style="list-style-type: none"> <li>Ports 0–23 and the uplink ports form a port group.</li> </ul> <p><b>NOTE:</b> Uplink ports include 2 SFP+ or XFP uplink ports, or 4 SFP uplink ports.</p>	4
EX3200-24T and EX3200-24P switches	1	<ul style="list-style-type: none"> <li>Ports 0–23 and the uplink ports form a port group.</li> </ul> <p><b>NOTE:</b> Uplink ports include 2 SFP+ or XFP uplink ports or 4 SFP uplink ports.</p>	4
EX3200-48T and EX3200-48P switches	2	<ul style="list-style-type: none"> <li>Ports 0–23 and 1 SFP+ or XFP uplink port or 4 SFP uplink ports form a port group.</li> <li>Ports 24–47 and 1 SFP+ or XFP uplink port form a port group.</li> </ul>	4

Table 26: Support for Scheduler Maps on Switches and Line Cards (continued)

Switch/Line Card	Number of Port Groups	Port Grouping Details	Number of Scheduler Maps Supported for Each Port Group
EX4200-48T and EX4200-48P switches	3	<ul style="list-style-type: none"> <li>Ports 0–23 form a port group.</li> <li>Ports 24–47 form a port group.</li> <li>2 SFP+ or XFP uplink ports or 4 SFP uplink ports form a port group.</li> </ul>	4
EX4200-24T and EX4200-24P switches	2	<ul style="list-style-type: none"> <li>Ports 0–23 form a port group.</li> <li>2 SFP+ or XFP uplink ports or 4 SFP uplink ports form a port group.</li> </ul>	4
EX4300-24T and EX4300-24P switches	1	<ul style="list-style-type: none"> <li>Ports 0–23 ports, 4 uplink ports, and 4 ports on the rear panel form a port group.</li> </ul> <p><b>NOTE:</b> Uplink ports in the front panel contains SFP or SFP+ ports 0–3, and uplink ports in the rear panel contains QSFP+ ports 0–3.</p>	64
EX4300-48T and EX4300-48P switches	1	<ul style="list-style-type: none"> <li>Ports 0–47, 4 uplink ports, and 4 ports on the rear panel form a port group.</li> </ul> <p><b>NOTE:</b> Uplink ports in the front panel contains SFP or SFP+ ports 0–3, and uplink ports in the rear panel contains QSFP+ ports 0–3.</p>	64
EX4500-40F switch	2	<ul style="list-style-type: none"> <li>SFP or SFP+ ports 0–19 and the first SFP or SFP+ port 0–4 form a port group.</li> <li>SFP or SFP+ ports 20–39 and the second SFP or SFP+ uplink port 0–4 form a port group.</li> </ul>	4
EX4550-32F switch	1	<ul style="list-style-type: none"> <li>SFP or SFP+ ports 0–31 and the uplink ports in the front and rear panels form a port group.</li> </ul> <p><b>NOTE:</b> Uplink ports in the front panel contains SFP, SFP+, or RJ-45 ports 0–7, and uplink ports in the rear panel contains SFP, SFP+, or RJ-45 ports 0–7.</p>	5
EX6200-48T (48-port RJ-45) and EX6200-48P (48-port PoE+) line cards	2	<ul style="list-style-type: none"> <li>Ports 0–23 form a port group.</li> <li>Ports 24–47 form a port group.</li> </ul>	5

Table 26: Support for Scheduler Maps on Switches and Line Cards (continued)

Switch/Line Card	Number of Port Groups	Port Grouping Details	Number of Scheduler Maps Supported for Each Port Group
EX6200-SRE64-4XS	1	SFP+ ports 0–3 form a port group.	4
EX8200-8XS (8-port SFP+) line card	4	<ul style="list-style-type: none"> <li>SFP+ ports 0 and 1 form a port group.</li> <li>SFP+ ports 2 and 3 form a port group.</li> <li>SFP+ ports 4 and 5 form a port group.</li> <li>SFP+ ports 6 and 7 form a port group.</li> </ul>	6
EX8200-40XS (40-port SFP+) line card	8	<ul style="list-style-type: none"> <li>SFP+ ports 0–4 form a port group.</li> <li>SFP+ ports 5–9 form a port group.</li> <li>SFP+ ports 10–14 form a port group.</li> <li>SFP+ ports 15–19 form a port group.</li> <li>SFP+ ports 20–24 form a port group.</li> <li>SFP+ ports 25–29 form a port group.</li> <li>SFP+ ports 30–34 form a port group.</li> <li>SFP+ ports 35–39 form a port group.</li> </ul>	6
EX8200-48-F (48-port SFP) and EX8200-48T (48-port RJ-45) line cards	2	<ul style="list-style-type: none"> <li>SFP or RJ-45 ports 0–23 form a port group.</li> <li>SFP or RJ-45 ports 24–47 form a port group.</li> </ul>	6
EX8200-2XS-40P (40-port PoE+ with 4-port SFP and 2-port SFP+) line card	3	<ul style="list-style-type: none"> <li>Ports 0–19 and SFP ports 0 and 1 form a port group.</li> <li>Ports 20–39 and SFP ports 2 and 3 form a port group.</li> </ul>	5
		<ul style="list-style-type: none"> <li>2 SFP+ ports form a port group.</li> </ul>	6
EX8200-2XS-40T (40-port RJ-45 with 4-port SFP and 2-port SFP+) line card	3	<ul style="list-style-type: none"> <li>Ports 0–19, and SFP ports 0 and 1 form a port group.</li> <li>Ports 20–39 and SFP ports 2 and 3 form a port group.</li> </ul>	5
		<ul style="list-style-type: none"> <li>2 SFP+ ports form a port group.</li> </ul>	6

Table 26: Support for Scheduler Maps on Switches and Line Cards (continued)

Switch/Line Card	Number of Port Groups	Port Grouping Details	Number of Scheduler Maps Supported for Each Port Group
EX8200-48PL (48-port PoE+ 20 Gbps) and EX8200-48TL (48-port RJ-45 20 Gbps) line cards	2	<ul style="list-style-type: none"> <li>PoE+ or RJ-45 ports 0–23 form a port group.</li> <li>PoE+ or RJ-45 ports 24–47 form a port group.</li> </ul>	5

#### Related Documentation

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
- [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)

## Defining CoS Schedulers and Scheduler Maps (CLI Procedure)

You use schedulers to define the class-of-service (CoS) properties of output queues. These properties include the amount of interface bandwidth assigned to the queue, the size of the memory buffer allocated for storing packets, the priority of the queue, and the drop profiles associated with the queue.

You associate the schedulers with forwarding classes by means of scheduler maps. You can then associate each scheduler map with an interface, thereby configuring the queues and packet schedulers that operate according to this mapping.



**NOTE:** On EX Series switches, you cannot configure a scheduler map on an individual interface that is a member of a link aggregation group (LAG). Instead, you must configure the scheduler map on the LAG itself (that is, on the aggregated Ethernet (ae) interface).

You can associate up to four user-defined scheduler maps with an interface.

This topic describes:

- [Configuring a Scheduler and a Scheduler Map on page 112](#)
- [Assigning a Scheduler Map to Interfaces on page 113](#)
- [Assigning Scheduler Maps to Interfaces on EX8200 Line Cards That Include Oversubscribed Ports on page 114](#)

### Configuring a Scheduler and a Scheduler Map

You can define the properties for an output queue by configuring a scheduler. You can then define a scheduler map to associate a forwarding class with a scheduler.

To configure a scheduler and a scheduler map:

1. Create a scheduler, and assign one or more output queue properties to it:

```
[edit class-of-service]
user@switch# set schedulers scheduler-name output-queue-properties
```

For various properties that you can define for an output queue, see the [schedulers](#) hierarchy.

2. Configure a scheduler map that associates the scheduler with the forwarding class:

```
[edit class-of-service]
user@switch# set scheduler-maps map-name forwarding-class class-name scheduler
scheduler-name
```

## Assigning a Scheduler Map to Interfaces

After defining a scheduler map, you can assign the scheduler map to one or more interfaces. You can also assign the scheduler map to multiple interfaces by using a wildcard representation of the interface or Virtual Chassis Ports (VCPs).

Following are sample syntaxes and examples for assigning a scheduler map to a single or to multiple interfaces:

- To assign the scheduler map to one interface:

```
[edit class-of-service interfaces]
user@switch# set interface-name scheduler-map map-name
```

- To assign the scheduler map to more than one interface, you can use a wildcard representation of the interface:

```
[edit class-of-service interfaces]
user@switch# set wild-card-representation-of-interface-name scheduler-map map-name
```

For example, following is the configuration to assign the **be-map** scheduler map to all Gigabit Ethernet interfaces (**ge-\***):

```
[edit class-of-service interfaces]
user@switch# set ge-* scheduler-map be-map
```

- To assign the scheduler map to all VCPs:

```
[edit class-of-service interfaces]
user@switch# set wild-card-representation-of-vcp scheduler-map map-name
```



**NOTE:** You can assign a scheduler map to a VCP only on EX4200, EX4300 or EX4500 switches that are members of Virtual Chassis composed exclusively either of EX4200 switches, EX4300 switches or of EX4500 switches, or that are members of a mixed Virtual Chassis composed of EX4200, EX4300, and EX4500 switches.

For example, following is the configuration to assign the **be-map** scheduler map to all VCPs:

```
[edit class-of-service interfaces]
user@switch# set vcp-* scheduler-map be-map
```

## Assigning Scheduler Maps to Interfaces on EX8200 Line Cards That Include Oversubscribed Ports

Some line cards available for Juniper Networks EX8200 Ethernet Switches include oversubscribed ports that are combined in logical port groups that share bandwidth. These oversubscribed ports handle traffic differently than ports that provide continuous line-rate bandwidth. You might need to configure CoS queues differently for oversubscribed ports than for line-rate ports. For more information about EX8200 line cards that include oversubscribed ports, see [“Understanding CoS Queues on EX8200 Line Cards That Include Oversubscribed Ports” on page 11](#).

For interfaces on oversubscribed EX8200 line cards, you use the same procedure to configure CoS schedulers as you do for other interfaces. However, you must assign the same scheduler map to all the interfaces in a port group. When you assign a scheduler map to one interface in a port group, you do not need to assign the scheduler map to the remaining interfaces in the port group. The switch automatically uses that scheduler map for all the interfaces in the port group when you bring the interfaces up. Therefore, you do not need to assign the scheduler map to the remaining interfaces in that port group.

If you assign different scheduler maps to different interfaces in a port group, you do not receive an error when you commit the configuration. Instead, an error is logged in the system log. When you bring an interface in the port group up, the default scheduler map is assigned to all interfaces in the port group. If you assign a scheduler map to an interface that is down and if that scheduler map is different from the scheduler map being used by the currently operating interfaces in the port group, then the default scheduler map is used by all interfaces in the port group, even the currently operating ones, when you bring the interface up.

To assign a scheduler map to a port group, assign a scheduler map to at least one interface in the port group:

```
[edit class-of-service interfaces]
user@switch# set interface-name scheduler-map map-name
```

Considering that the xe-0/0/2 interface is part of a port group, following is the configuration to assign a scheduler map named **ef-map** to a port group that contains xe-0/0/2:

```
[edit class-of-service interfaces]
user@switch# set xe-0/0/2 scheduler-map ef-map
```

#### Related Documentation

- [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- [Monitoring CoS Scheduler Maps on page 119](#)
- [Understanding CoS Schedulers on page 105](#)

## Defining CoS Schedulers (J-Web Procedure)



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

You can use the J-Web interface to define CoS schedulers on an EX Series switch. Using schedulers, you can assign attributes to queues and thereby provide congestion control for a particular class of traffic. These attributes include the amount of interface bandwidth, memory buffer size, transmit rate, and schedule priority.

To configure schedulers:

1. Select **Configure > Class of Service > Schedulers**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Select one of the following options:

- **Add**—Adds a scheduler. Enter information into the Schedulers page as described in [Table 27 on page 116](#).
- **Edit**—Modifies an existing scheduler. Enter information into the Schedulers page as described in [Table 27 on page 116](#).
- **Delete**—Deletes an existing scheduler.

Table 27: Schedulers Configuration Page

Field	Function	Your Action
Scheduler name	Specifies the name for a scheduler.	To name a scheduler, type the name—for example, <b>be-scheduler</b> .
Scheduling priority	<p>Sets the transmission priority of the scheduler, which determines the order in which an output interface transmits traffic from the queues.</p> <p>You can set the scheduling priority at different levels in the order of increasing priority from low to high.</p> <p>A high-priority queue with a high transmission rate might lock out lower-priority traffic.</p>	<p>To set a priority, select one:</p> <ul style="list-style-type: none"> <li>• <b>low</b>—Packets in this queue are transmitted last.</li> <li>• <b>strict-high</b>—Packets in this queue are transmitted first.</li> </ul> <p>To specify no scheduling priority, select the blank check box.</p>
Buffer size	<p>Defines the size of the delay buffer.</p> <p>By default, queues 0 through 11 are allotted the following percentages of the total available buffer space:</p> <ul style="list-style-type: none"> <li>• Queue 0—75 percent</li> <li>• Queue 1—0 percent</li> <li>• Queue 2—0 percent</li> <li>• Queue 3—5 percent</li> <li>• Queue 4—0 percent</li> <li>• Queue 5—0 percent</li> <li>• Queue 6—0 percent</li> <li>• Queue 7—0 percent</li> <li>• Queue 8—15 percent</li> <li>• Queue 9—0 percent</li> <li>• Queue 10—0 percent</li> <li>• Queue 11—5 percent</li> </ul> <p><b>NOTE:</b> A large buffer size value correlates with a greater possibility of packet delays. Such a value might not be practical for sensitive traffic such as voice or video.</p>	<p>To define a delay buffer size for a scheduler, select the appropriate option:</p> <ul style="list-style-type: none"> <li>• To specify no buffer size, select the blank check box.</li> <li>• To specify buffer size as a percentage of the total buffer, select <b>Percent</b> and type an integer from 1 through 100.</li> <li>• To specify buffer size as the remaining available buffer, select <b>Remainder</b>.</li> </ul> <p><b>NOTE:</b> On EX8200 and EX4300 switches, you can specify the buffer size as a temporal value. The queuing algorithm then drop packets after it has queued a computed number of bytes. This number is the product of the logical interface speed and the configured temporal value.</p>
Shaping rate	Specifies the rate at which queues transmit packets.	<ul style="list-style-type: none"> <li>• To specify shaping rate as a percentage, select <b>Percent</b> and type an integer from 1 through 100.</li> <li>• To specify shaping rate as a number, select <b>Rate</b> and enter a value.</li> <li>• To specify no shaping rate, select the blank check box.</li> </ul>



Table 27: Schedulers Configuration Page (continued)

Field	Function	Your Action
Transmit rate	<p>Defines the transmission rate of a scheduler.</p> <p>The transmit rate determines the traffic bandwidth from each forwarding class you configure.</p> <p>By default, queues 0 through 11 are allotted the following percentages of the transmission capacity:</p> <ul style="list-style-type: none"> <li>Queue 0—75 percent</li> <li>Queue 1—0 percent</li> <li>Queue 2—0 percent</li> <li>Queue 3—5 percent</li> <li>Queue 4—0 percent</li> <li>Queue 5—0 percent</li> <li>Queue 6—0 percent</li> <li>Queue 7—0 percent</li> <li>Queue 8—15 percent</li> <li>Queue 9—0 percent</li> <li>Queue 10—0 percent</li> <li>Queue 11—5 percent</li> </ul>	<p>To define a transmit rate, select the appropriate option:</p> <ul style="list-style-type: none"> <li>To enforce the exact transmission rate, select <b>Rate</b> and enter a value.</li> <li>To specify the remaining transmission capacity, select <b>Remainder Available</b>.</li> <li>To specify a percentage of transmission capacity, select <b>Percent</b> and type an integer from 1 through 100.</li> <li>To specify no transmit rate, select the blank check box.</li> </ul>
Excess rate	<p>Defines the excess rate of a scheduler.</p> <p><b>NOTE:</b> This option is supported only on EX4300 switches.</p>	<p>To define the excess rate, select the appropriate option:</p> <ul style="list-style-type: none"> <li>To specify a percentage of the excess rate, select <b>Percent</b> and type an integer from 1 through 100.</li> <li>To specify no excess rate, select the blank check box.</li> </ul>

- Related Documentation**
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)
  - [Monitoring CoS Scheduler Maps on page 119](#)

## Defining CoS Scheduler Maps (J-Web Procedure)



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) for EX4600 switches.

You can use the J-Web interface to configure CoS scheduler maps on an EX Series switch.



**NOTE:** On EX Series switches, you cannot configure a scheduler map on an individual interface that is a member of a link aggregation group (LAG). Instead, you must configure the scheduler map on the LAG itself—that is, on the aggregated Ethernet (ae) interface.

To configure scheduler maps:

1. Select **Configure > Class of Service > Scheduler Maps**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Select one of the following options:
  - **Add**—Adds a scheduler map. Enter information into the scheduler map page as described in [Table 28 on page 118](#).
  - **Edit**—Modifies an existing scheduler map. Enter information into the scheduler map page as described in [Table 28 on page 118](#).
  - **Delete**—Deletes an existing scheduler map.

**Table 28: Scheduler Maps Configuration Fields**

Field	Function	Your Action
Scheduler Map Name	Specifies the name for a scheduler map.	To name a map, type the name—for example, <b>be-scheduler-map</b> .
Scheduler Mapping	<p>Enables you to associate a preconfigured scheduler with a forwarding class.</p> <p>After scheduler maps have been applied to an interface, they affect the hardware queues and packet schedulers.</p>	<p>To associate a scheduler with a forwarding class, locate the forwarding class and select the scheduler in the box next to it.</p> <p>For example, for the <b>best-effort</b> forwarding class, select the configured scheduler from the list.</p>

**Related Documentation**

- [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Monitoring CoS Scheduler Maps on page 119](#)

## Monitoring CoS Scheduler Maps

### Purpose



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

Use the monitoring functionality to display assignments of CoS forwarding classes to schedulers.

**Action** To monitor CoS scheduler maps in the J-Web interface, select **Monitor > Class of Service > Scheduler Maps**.

To monitor CoS scheduler maps in the CLI, enter the following CLI command:

```
show class-of-service scheduler-map
```

**Meaning** [Table 29 on page 119](#) summarizes key output fields for CoS scheduler maps.

*Table 29: Summary of Key CoS Scheduler Maps Output Fields*

Field	Values	Additional Information
Scheduler Map	Name of a scheduler map.	For details, click the plus sign (+).
Index	Index of a specific object—scheduler maps, schedulers, or drop profiles.	
Scheduler Name	Name of a scheduler.	
Forwarding Class	Forwarding classes this scheduler is assigned to.	
Transmit Rate	Configured transmit rate of the scheduler in bits per second (bps). The rate value can be either of the following: <ul style="list-style-type: none"> <li>A percentage—The scheduler receives the specified percentage of the total interface bandwidth.</li> <li><b>remainder</b>—The scheduler receives the remaining bandwidth of the interface after bandwidth allocation to other schedulers.</li> </ul>	

Table 29: Summary of Key CoS Scheduler Maps Output Fields (continued)

Field	Values	Additional Information
Buffer Size	Delay buffer size in the queue or the amount of transmit delay (in milliseconds). The buffer size can be either of the following: <ul style="list-style-type: none"> <li>A percentage—The buffer is a percentage of the total buffer allocation.</li> <li><b>remainder</b>—The buffer is sized according to what remains after other scheduler buffer allocations.</li> </ul>	
Priority	Scheduling priority of a queue: <ul style="list-style-type: none"> <li><b>strict-high</b>—Packets in this queue are transmitted first.</li> <li><b>low</b>—Packets in this queue are transmitted last.</li> </ul>	
Excess rate	The percentage of excess bandwidth traffic to share.	
Drop Profiles	Name and index of a drop profile that is assigned to a specific loss priority and protocol pair.	
Loss Priority	Packet loss priority corresponding to a drop profile.	
Protocol	Transport protocol corresponding to a drop profile.	
Drop Profile Name	Name of the drop profile.	
Index	Index of a specific object—scheduler maps, schedulers, or drop profiles.	

- Related Documentation**
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
  - [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)

## Troubleshooting CoS Schedulers on a 40-port SFP+ Line Card in an EX8200 Switch

- Problem**    **Description:** After you configure a scheduler map on an interface on the 40-port SFP+ line card, you notice one or both of the following:
- All packets are being dropped on a class-of-service queue configured on the interface.
  - A message in the system log states that the interface is using the default scheduler map, not the scheduler map you configured. For example:

```
Sep 19 21:26:50 hostname cosd[907]: COSD_SCHED_MAP_GROUP_CONFLICT:
Interface xe-5/0/15 cannot be bound to scheduler-map m1. It will be bound to
default scheduler-map
```

**Cause** The ports in a 40-port SFP+ line card are divided into eight groups, each group comprising five ports. The ports in a port group share 10 gigabits of bandwidth. Because the port groups share bandwidth, only one scheduler map can be active at a time in a port group. If you configure different scheduler maps for different interfaces in a port group, you do not receive an error when you commit the configuration. Instead, default scheduler map becomes the active scheduler map for all interfaces in the port group, and messages in the system log report that the default scheduler map is in use for the affected interfaces. If the default scheduler map does not define a queue, all traffic is dropped on that queue.

**Solution** Check your CoS configuration for the interfaces in the port group. If you have different scheduler maps assigned to different interfaces in the port group:

1. Delete the scheduler map configuration for all interfaces in the port group.
2. Determine the scheduler map that you want all interfaces in the port group to use.
3. Assign that scheduler map to at least one interface in the port group. The remaining interfaces in the port group will adopt this scheduler map.



**BEST PRACTICE:** To prevent confusion and future configuration conflicts, explicitly assign the scheduler map to each interface in the port group.

4. After you commit the configuration, verify that the scheduler map is the active scheduler map for the interfaces in the port group by using the **show class-of-service forwarding-table scheduler-map** command.

**Related  
Documentation**

- [40-port SFP+ Line Card in an EX8200 Switch](#)
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)
- [Understanding CoS Queues on EX8200 Line Cards That Include Oversubscribed Ports on page 11](#)



## PART 2

# Congestion Management, Tail Drop Profiles, Queue Shaping, and Explicit Congestion Notification (ECN)

- [Congestion Management on page 125](#)
- [Tail Drop Profiles on page 133](#)
- [Queue Shaping on page 137](#)
- [Explicit Congestion Notification \(ECN\) on page 143](#)





## CHAPTER 10

# Congestion Management

- [Understanding CoS Congestion Management on page 125](#)
- [Configuring CoS Congestion Management \(CLI Procedure\) on page 130](#)

## Understanding CoS Congestion Management

---

A congestion in a network occurs because of various parameters and some packets must be dropped to avoid congestion and to facilitate easy flow of traffic in the network. On Juniper Networks EX Series Ethernet Switches, class of service (CoS) provides congestion management mechanisms for a switch to drop arriving packets based on certain parameters when a queue is full. Based on the EX Series switch that you are using, packets are dropped depending on the priority of a packet or on both priority and drop probability of a packet.

You can specify parameters at the **[edit class-of-service drop-profiles]** hierarchy level for dropping packets and reference the parameters in a scheduler configuration.

This topic describes:

- [Weighted Tail Drop Congestion Management on page 125](#)
- [Weighted Random Early Detection Congestion Management on page 126](#)

## Weighted Tail Drop Congestion Management

A weighted tail drop (WTD) is a congestion management mechanism for packets to be dropped from the tail of the queue when the queue reaches a certain buffer capacity (that is, the fill level), and hence the name weighted tail drop. The packets that are dropped are based on priority and are those marked with a packet loss priority (PLP) of *high*. You can configure a WTD profile (a WTD mechanism) usually on edge devices in a network.



**NOTE:** A WTD profile is supported only on the Juniper Networks EX2200, EX3200, EX3300, EX4200, EX4500, EX4550, and EX6200 Ethernet Switches.

When you configure a WTD profile, you are essentially setting the value for queue fullness. The queue fullness represents a percentage of the memory, known as delay-buffer bandwidth, that is used to store packets in relation to the total amount of memory that

has been allocated for that specific queue. The delay-buffer bandwidth provides packet buffer space to absorb burst traffic up to the specified duration of delay. When the specified delay buffer becomes full, packets are dropped from the tail of the buffer.

By default, if you do not configure any drop profile, WTD profile is in effect and functions as the primary mechanism for managing congestion.



**NOTE:** The default WTD profile associated with the packets whose PLP is *low* cannot be modified. You can configure custom drop profile only for those packets whose PLP is *high*.

## Weighted Random Early Detection Congestion Management

In a weighted random early detection (WRED) congestion management mechanism, random packets with a PLP of low or high are gradually dropped (based on drop probability) when the queue reaches a certain buffer capacity (that is, fill level).



**NOTE:** The WRED mechanism is supported only on Juniper Networks EX4300 standalone switches, EX4300 Virtual Chassis, EX4600 standalone switches, EX8200 standalone switches, and EX8200 Virtual Chassis.

Following are the different implementations of WRED:

- Segmented Drop Profile
- Interpolated Drop Profile

From a high level, segmented drop profile is a stair-step-like drop profile, whereas interpolated drop profile is a smother (curve) drop profile. [Figure 3 on page 127](#) and [Figure 4 on page 128](#) show a graphical representation of segmented and interpolated drop profiles. Regardless of the implementation, a drop profile represents a graph where the x-axis represents the percentage of fill level (l) and the y-axis represents the percentage of drop probability (p). The origin (0,0) represents the drop profile in which the drop probability is 0 percent when the queue fullness is 0 percent, and the point (100,100) represents that the drop probability is 100 percent when the queue fullness is 100 percent. Although the formation of graph lines in [Figure 3 on page 127](#) and [Figure 4 on page 128](#) is different, the application of the profile is the same. When a packet reaches the head of the queue, a random number between 0 and 100 is calculated. This random number is plotted against the drop profile graph using the current queue fullness of that particular queue. When the random number falls above the graph line, the packet is transmitted. When the number falls below the graph line, the packet is dropped from the network.


The following sections discuss the WRED drop profile implementations and parameters:

- [Segmented Drop Profile on page 127](#)
- [Interpolated Drop Profile on page 127](#)
- [Drop Profile Parameters on page 129](#)

### Segmented Drop Profile

In a segmented drop profile configuration, you can define multiple data points for fill level and drop probability. [Figure 3 on page 127](#) shows a graphical representation of a segmented drop profile.

*Figure 3: Graphical Representation of a Segmented Drop Profile*

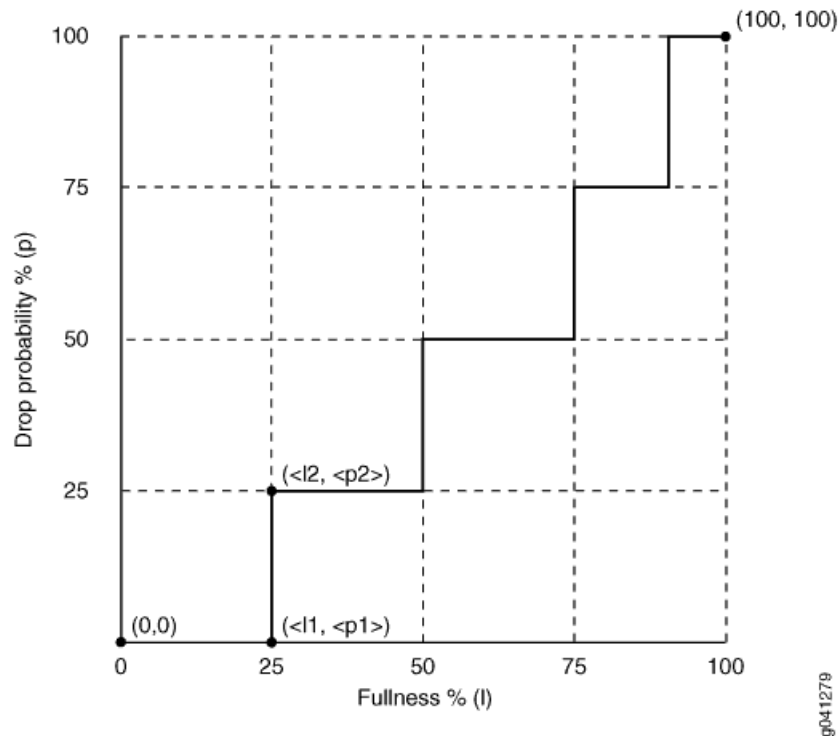

To create the profile's graph line, the software begins at the bottom-left corner of the graph, representing a 0 percent fill level and a 0 percent drop probability (that is the point (0,0)). The configuration draws a line directly to the right until it reaches the first defined fill level (that is, 25 percent represented in the graph on the x-axis). The software then continues the line vertically until the first drop probability is reached (that is, 25 percent represented in the graph in the y-axis). This process is repeated for all of the defined fill levels and drop probabilities until the top-right corner of the graph is reached (that is point (100,100) in the graph).

### Interpolated Drop Profile

An interpolated drop profile configuration forms a smoother graph line compared to the graph in a segmented drop profile configuration. In this method of congestion management also, a switch uses multiple drop profile values to drop incoming packets to reduce congestion in the output queue.

Following are interpolated drop profile configurations on EX Series switches:


- [Interpolated Drop Profile Configuration on EX Series Switches Except EX4300 Switches on page 128](#)
- [Interpolated Drop Profile Configuration on EX4300 Switches on page 128](#)

#### ***Interpolated Drop Profile Configuration on EX Series Switches Except EX4300 Switches***

An interpolated drop profile on all EX Series switches except EX4300 switches automatically generates 64 pairs of data points on the graph beginning at (0, 0) and ending at (100, 100). Along the way, the graph line intersects specific data points that you define for fullness and drop probability.

[Figure 4 on page 128](#) shows a graphical representation of an interpolated drop profile.

**Figure 4: Graphical Representation of an Interpolated Drop Profile on EX Series Switches Except EX4300 Switches**

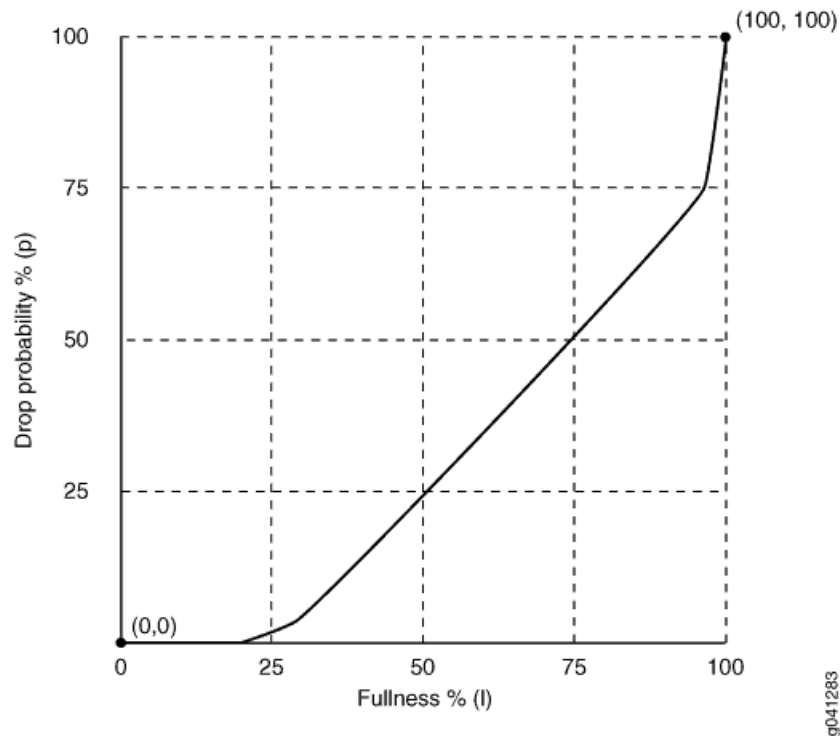

#### ***Interpolated Drop Profile Configuration on EX4300 Switches***

On EX4300 switches, you can set two queue fill levels and two drop probabilities in each drop profile. The two fill levels and the two drop probabilities create two pairs of values. The first fill level and the first drop probability create one value pair and the second fill level and the second drop probability create the second value pair.




**NOTE:** You can configure a maximum of 64 drop profiles on EX4300 switches.

The first fill level value specifies the percentage of queue fullness at which packets begin to drop, known as the drop start point. Until the queue reaches this level of fullness, no packets are dropped. The second fill level value specifies the percentage of queue fullness at which all packets are dropped, known as the drop end point.

The first drop probability value is always 0 (zero). This pairs with the drop start point and specifies that until the queue fullness level reaches the first fill level, no packets drop. When the queue fullness exceeds the drop start point, packets begin to drop until the queue exceeds the second fill level, when all packets drop. The second drop probability value, known as the maximum drop rate, specifies the likelihood of dropping packets when the queue fullness reaches the drop end point. As the queue fills from the drop start point to the drop end point, packets drop in a smooth, linear pattern (called an interpolated graph) as shown in [Figure 5 on page 129](#). After the drop end point, all packets drop.

**Figure 5: Tail-Drop Profile Packet Drop on EX4300 Switches**

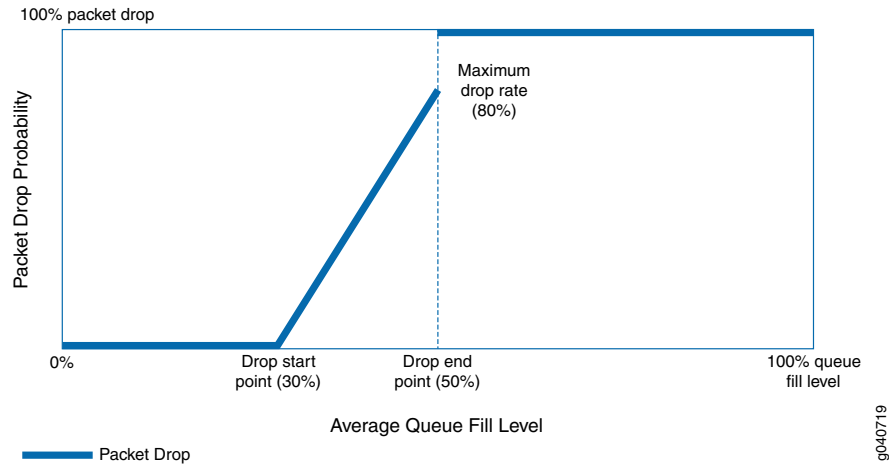

The thick line in [Figure 5 on page 129](#) shows the packet drop characteristics for a sample tail drop profile. At the drop start point, the queue reaches a fill level of 30 percent. At the drop end point, the queue fill level reaches 50 percent, and the maximum drop rate is 80 percent.

No packets drop until the queue fill level reaches the drop start point of 30 percent. When the queue reaches the 30 percent fill level, packets begin to drop. As the queue fills, the percentage of packets dropped increases in a linear fashion. When the queue fills to the drop end point of 50 percent, the rate of packet drop has increased to the maximum drop rate of 80 percent. When the queue fill level exceeds the drop end point of 50 percent, all of the packets drop until the queue fill level drops below 50 percent.

### Drop Profile Parameters

You can specify the following two values in drop profile configuration:

- **Fill level**—The queue fullness value, which represents a percentage of the memory used to store packets in relation to the total amount of memory allocated to the queue.

- Drop probability—The percentage value that corresponds to the likelihood that an individual packet is dropped.

**Related Documentation**

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Configuring CoS Congestion Management \(CLI Procedure\) on page 130](#)

---

## Configuring CoS Congestion Management (CLI Procedure)

An effective congestion management mechanism is imperative to ensure smooth flow of traffic in a network and also to ensure minimum packet drops in the network. Class of service (CoS) provides congestion management methods that allow you to define parameters based on which packets can be dropped when the output queue is full. These parameters vary depending on the EX Series switch that you are using in a network.

You can specify parameters for dropping packets at the **[edit class-of-service drop-profiles]** hierarchy level and reference them in a scheduler configuration. The parameters that you can specify are **fill-level** and **drop-probability**. The first parameter defines the delay-buffer bandwidth, which provides packet buffer space to absorb burst traffic up to the specified duration of delay. When the specified delay buffer becomes full, packets with 100 percent drop probability are dropped from the head of the buffer. The second parameter represents a percentage value that correlates to the likelihood that an individual packet is dropped from the network.

Depending on the switch on which you are configuring a drop profile, you can configure either a weighted tail drop (WTD) profile or a weighted random early detection (WRED) profile.

This topic describes:

- [Configuring a Weighted Tail Drop Profile on page 130](#)
- [Configuring a Weighted Random Early Detection Drop Profile on page 131](#)

### Configuring a Weighted Tail Drop Profile

A weighted tail drop (WTD) is a congestion management mechanism in which packets are dropped from the tail of the queue when the queue reaches a certain buffer capacity (that is, the fill level), and hence the name weighted tail drop. When that level is reached on EX2200, EX3200, or EX4200 Switches, packets marked with a packet loss priority (PLP) of high are prevented from entering the queue (that is, they are discarded).

To configure a WTD profile, create a drop profile name and assign a fill level:

```
[edit class-of-service drop-profiles]  
user@switch# set profile-name fill-level percentage
```

Following is a sample WTD profile in which the fill level is set to 80 percent:

```
[edit class-of-service drop-profiles]
```

```
user@switch# set wtd-profile fill-level 80
```

## Configuring a Weighted Random Early Detection Drop Profile

A WRED drop profile enables you to define multiple data points for fill level and drop probability so that packets are dropped at various levels of queue fullness, and for various drop probabilities. Unlike the WTD drop profile that can be defined only for packets with a PLP of high, WRED can be defined for packets with a PLP of high and also for packets with a PLP of low.



**NOTE:** The WRED drop profile is supported only on EX4300 standalone switches, EX4300 Virtual Chassis, EX8200 standalone switches and EX8200 Virtual Chassis.

WRED has two implementations: segmented and interpolated. From a high level, segmented is a stair-step-like drop profile, whereas interpolated is a smoother (curve) drop profile. For a graphical representation of both these implementations, see [“Understanding CoS Congestion Management” on page 125](#). Although the formation of graph lines is different for both these implementations, the application of the profile is the same. On EX Series switches except EX4300 switches, when a packet reaches the head of the queue, a random number between 0 and 100 is calculated. This random number is plotted against the drop profile using the current queue fullness of that particular queue. When the random number falls above the graph line, the packet is transmitted. When the number falls below the graph line, the packet is dropped from the network.

For information about congestion management on EX4300 switches, see [“Understanding CoS Congestion Management” on page 125](#).



**NOTE:** On EX4300 switches, you cannot enable WRED on multidestination (multicast) queues. You can enable WRED only on unicast queues.

Following is the procedure to define a segmented and an interpolated drop profiles:

- To configure a segmented drop profile, specify multiple data points for fill level (l) and drop probability (p) as follows:

**[edit class-of-service drop-profiles]**

```
user@switch# set profile-name fill-level percentage-l1 drop-probability percentage-p1
user@switch# set profile-name fill-level percentage-l2 drop-probability percentage-p2
user@switch# set profile-name fill-level percentage-l3 drop-probability percentage-p3
user@switch# set profile-name fill-level percentage-l4 drop-probability percentage-p4
```

Following is a sample segmented drop profile:

**[edit class-of-service drop-profiles]**

```
user@switch# set seg-prof fill-level 20 drop-probability 25
user@switch# set seg-prof fill-level 40 drop-probability 50
user@switch# set seg-prof fill-level 60 drop-probability 75
user@switch# set seg-prof fill-level 80 drop-probability 100
```

- To configure an interpolated drop profile on EX Series switches except EX4300 switches, specify multiple data points for fill level (**l**) and drop probability (**p**) using the **interpolate** statement as follows:

```
[edit class-of-service drop-profiles ]
user@switch# set profile-name interpolate fill-level percentage-l1 drop-probability
percentage-l1
user@switch# set profile-name interpolate fill-level percentage-l2 drop-probability
percentage-l2
user@switch# set profile-name interpolate fill-level percentage-l3 drop-probability
percentage-p3
user@switch# set profile-name interpolate fill-level percentage-l4 drop-probability
percentage-p4
```

Following is a sample interpolated drop profile:

```
[edit class-of-service drop-profiles]
user@switch# set inter-prof interpolate fill-level 20 drop-probability 25
user@switch# set inter-prof interpolate fill-level 40 drop-probability 50
user@switch# set inter-prof interpolate fill-level 60 drop-probability 75
user@switch# set inter-prof interpolate fill-level 80 drop-probability 100
```

- To configure an interpolated drop profile EX4300 switches, specify two data points for fill level (**l**) and drop probability (**p**) by using the **interpolate** statement as follows:

```
[edit class-of-service drop-profiles ]
user@switch# set profile-name interpolate fill-level percentage-l1 fill-level percentage-l2
drop-probability percentage-l1 percentage-l2
```

Following is a sample interpolated drop profile:

```
[edit class-of-service drop-profiles]
user@switch# set inter-prof interpolate fill-level 20 fill-level 80 drop-probability 25
drop-probability 100
```

#### Related Documentation

- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Understanding CoS Congestion Management on page 125](#)



# Tail Drop Profiles

- [Understanding CoS Tail Drop Profiles on page 133](#)
- [Configuring CoS Tail Drop Profiles \(CLI Procedure\) on page 134](#)
- [Defining CoS Drop Profiles \(J-Web Procedure\) on page 134](#)
- [Monitoring CoS Drop Profiles on page 135](#)

## Understanding CoS Tail Drop Profiles

---

Tail drop profile is a congestion management mechanism that allows switch to drop arriving packets when queue buffers become full or begin to overflow.

Tail drop profiles define the meanings of the loss priorities. When you configure tail drop profiles you are essentially setting the value for queue fullness. The queue fullness represents a percentage of the memory used to store packets in relation to the total amount that has been allocated for that specific queue.

The queue fullness defines the delay-buffer bandwidth, which provides packet buffer space to absorb burst traffic up to the specified duration of delay. Once the specified delay buffer becomes full, packets with 100 percent drop probability are dropped from the tail of the buffer.

You specify drop probabilities in the drop profile section of the CoS configuration hierarchy and reference them in each scheduler configuration.

By default, if you do not configure any drop profile, tail drop profile is in effect and functions as the primary mechanism for managing congestion. In the default tail drop profile, when the fill level is 0 percent, the drop probability is 0 percent. When the fill level is 100 percent, the drop probability is 100 percent.



**NOTE:** The default drop profile associated with the packets whose loss priority is low cannot be modified. You can configure custom drop profile only for those packets whose loss priority is high.

**Related  
Documentation**

- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

- [Configuring CoS Tail Drop Profiles \(CLI Procedure\) on page 134](#)

## Configuring CoS Tail Drop Profiles (CLI Procedure)

Tail drop is a simple and effective traffic congestion avoidance mechanism. When you apply this mechanism to manage congestion, packets are dropped when the output queue is full.

To configure CoS tail-drop profiles, create a drop profile name (**be-dp**) and assign a fill level (**25**):

```
[edit class-of-service drop-profiles]
user@switch# set be-dp fill-level 25
```

### Related Documentation

- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Understanding CoS Tail Drop Profiles on page 133](#)

## Defining CoS Drop Profiles (J-Web Procedure)



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

You can use the J-Web interface to define CoS drop profiles on EX4500 and EX8200 switches.

To configure CoS drop profiles:

1. Select **Configure > Class of Service > Drop Profile**.



**NOTE:** After you make changes to the configuration on this page, you must commit the changes immediately for them to take effect. To commit all changes to the active configuration, select **Commit Options > Commit**. See *Using the Commit Options to Commit Configuration Changes (J-Web Procedure)* for details about all commit options.

2. Select one of the following options:

- **Add**—Adds a drop profile. Enter information into the drop profiles page as described in [Table 30 on page 135](#).
- **Edit**—Modifies an existing drop file. Enter information into the drop profiles page as described in [Table 30 on page 135](#).
- **Delete**—Deletes an existing drop profile.

Table 30: Drop Profiles Configuration parameters

Field	Function	Your Action
Drop Profile Name	Specifies the name for a drop profile.	Type the name.
Drop profile graph	Specifies the drop profile graph type	Select one: <b>Segmented</b> or <b>Interpolated</b> .
Drop profile values	<p>Specifies values for the following two parameters of the drop profile: the queue fill level and the drop probability.</p> <p>The queue fill level represents a percentage of the memory used to store packets in relation to the total amount that has been allocated for that specific queue.</p> <p>The drop probability is a percentage value that correlates to the likelihood that an individual packet is dropped from the network.</p>	<p>To add new values:</p> <ol style="list-style-type: none"> <li>1. Click <b>Add</b>.</li> <li>2. Enter the fill level.</li> <li>3. Enter the drop probability.</li> <li>4. Click <b>OK</b>.</li> </ol> <p>To edit an existing value, click <b>Edit</b> and modify the fill level and drop probability.</p> <p>To delete a value, select it and click <b>Delete</b>.</p>

Release History Table	Release	Description
	14.1X53-A2	J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

#### Related Documentation

- [Monitoring CoS Drop Profiles on page 135](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

## Monitoring CoS Drop Profiles

### Purpose



**NOTE:** This topic applies only to the J-Web Application package.

J-Web Application package Release 14.1X53-A2 does not support Class of Service (CoS) on EX4600 switches.

Use the monitoring functionality to view data point information for each CoS random early detection (RED) drop profile on the EX8200 switch.

### Action

To monitor CoS RED drop profiles in the J-Web interface, select **Monitor > Class of Service > RED Drop Profiles**.

To monitor CoS RED drop profiles in the CLI, enter the following CLI command:

```
show class-of-service drop-profile
```

**Meaning** [Table 31 on page 136](#) summarizes the key output fields for CoS RED drop profiles.

*Table 31: Summary of the Key Output Fields for CoS Red Drop Profiles*

Field	Values	Additional Information
RED Drop Profile Name	<p>Name of the RED drop profile.</p> <p>A drop profile consists of pairs of values between 0 and 100, one for queue buffer fill level and the other for drop probability, that determine the relationship between a buffer's fullness and the likelihood it will drop packets.</p>	To display profile values, click the plus sign (+).
Graph RED Profile	Links to a graph of a RED curve that the system uses to determine the drop probability based on queue buffer fullness.	The x axis represents the queue buffer fill level, and the y axis represents the drop probability.
Type	<p>Type of a specific drop profile:</p> <ul style="list-style-type: none"> <li>• <b>interpolated</b>—The two coordinates (x and y) of the graph are interpolated to produce a smooth profile.</li> <li>• <b>segmented</b>—The two coordinates (x and y) of the graph are represented by line fragments to produce a segmented profile.</li> </ul>	
Index	Internal index of this drop profile.	
Fill Level	Percentage fullness of a buffer queue. This value is the x coordinate of the RED drop profile graph.	
Drop Probability	Drop probability of a packet corresponding to a specific queue buffer fill level. This value is the y coordinate of the RED drop profile graph.	

- Related Documentation**
- [Defining CoS Drop Profiles \(J-Web Procedure\) on page 134](#)
  - [Example: Configuring CoS on EX Series Switches on page 14](#)

## CHAPTER 12

# Queue Shaping

- [Understanding Port Shaping and Queue Shaping for CoS on EX Series Switches on page 137](#)
- [Configuring Shaping for CoS \(CLI Procedure\) on page 138](#)
- [Applying a Shaping Rate to Physical Interfaces Overview on page 140](#)
- [Configuring the Shaping Rate for Physical Interfaces on page 140](#)

## Understanding Port Shaping and Queue Shaping for CoS on EX Series Switches

---

When the amount of traffic on a switch's network exceeds the maximum bandwidth, packets are lost because of congestion in the network. The excess traffic in the network must be handled carefully to ensure minimum or no data loss in the network. A class-of-service (CoS) configuration includes several parameters that classify traffic into different queues and also define packet loss priorities (PLPs) to ensure smooth transmission of data in the network. You can use these configuration parameters to control or shape traffic for a specific port on a switch or for a specific CoS queue. While port shaping defines the maximum bandwidth allocated to an interface, queue shaping defines a limit on excess-bandwidth usage for each queue.

This topic covers:

- [Port Shaping on page 137](#)
- [Queue Shaping on page 138](#)

### Port Shaping

Port shaping enables you to shape the aggregate traffic through a port or channel to a rate that is less than the line rate. You can configure interfaces to shape traffic based on the rate-limited bandwidth of the total interface bandwidth. This allows you to shape the output of the interface so that the interface transmits less traffic than it is capable of transmitting. For port shaping, you can specify shaping rate as the peak rate at which traffic can pass through the interface. You can specify rate as a value in bits per second (bps) either as a decimal number or as a decimal number followed by the abbreviation k (1000), m (1,000,000), or g (1,000,000,000) and the value can range from 1000 through 160,000,000,000 bps.

By default, shaping is not configured on an interface. If you do not configure a shaping rate on an interface, the default shaping rate is 100 percent, which is the equivalent to no shaping configured for that interface.

On EX Series switches except EX4300 switches, when you configure a shaping rate on an aggregated Ethernet (ae) interface, all members of the ae interface are shaped at the configured shaping rate. For example, consider an interface ae0 that consists of three interfaces: ge-0/0/0, ge-0/0/1, and ge-0/0/2. If a shaping rate of X Mbps is configured on ae0, traffic at the rate of X Mbps flows through each of the three interfaces. Therefore, the total traffic flowing through ae0 would be at the rate of 3X Mbps. On EX4300 switches, when you configure a shaping rate on an ae interface, the traffic is equally divided among the members of the ae interface.

## Queue Shaping

Queue shaping throttles the rate at which queues transmit packets. For example, using queue shaping, you can rate-limit a strict-priority queue so that the strict-priority queue does not lock out (or starve) low-priority queues. Similarly, for any queue, you can configure queue shaping.

You can specify queue shaping as the maximum rate at which traffic can pass through the queue or as a percentage of the available bandwidth. On EX Series switches except EX4300 switches, you can specify the rate as a value between 3200 and 160,000,000,000 bps and the percentage as a value from 0 to 100 percent. On EX4300 switches, you can specify the rate as a value between 8000 and 160,000,000,000 bps and the percentage as a value from 0 to 100 percent.

### Related Documentation

- [Understanding CoS Schedulers on page 105](#)
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#)

## Configuring Shaping for CoS (CLI Procedure)

---

Port shaping and queue shaping enable you to limit traffic on an interface or queue, respectively, so that you can control the amount of traffic passing through the interface or the queue. Port shaping enables you to shape the aggregate traffic through an interface to a rate that is less than the line rate for that interface. When you configure port shaping on an interface, you are essentially specifying a value that indicates the maximum amount of traffic that can pass through the interface. This value must be less than the maximum bandwidth for that interface. Queue shaping enables you to throttle the rate at which a queue transmits packets. When you configure queue shaping, you can specify either as the maximum rate at which traffic can pass through the queue or as a percentage of the available bandwidth.

This topic describes:

- [Configuring Port Shaping for CoS on an EX Series Switch on page 139](#)
- [Configuring Queue Shaping for CoS on an EX Series Switch on page 139](#)

## Configuring Port Shaping for CoS on an EX Series Switch

You can configure port shaping on network interfaces, aggregated Ethernet interfaces (also known as link aggregation groups (LAGs)), and loopback interfaces.

To configure port shaping on an interface:

1. Ensure that the interface on which you want to configure port shaping is up and running.
2. Assign a shaping rate for the interface:

[edit]

```
user@switch# set class-of-service interfaces interface-name shaping-rate value
```

The value indicates the maximum amount of traffic (in bps) that can pass through the interface. This value must be less than the maximum bandwidth for that interface.

## Configuring Queue Shaping for CoS on an EX Series Switch

Queue shaping enables you to restrict the rate at which queues transmit traffic. You can configure queue shaping on any queue supported by CoS on an EX Series switch that supports up to eight output queues and 16 forwarding classes. Forwarding classes can be thought of as output queues. In effect, the result of classifying packets into forwarding classes is the identification of an output queue for a particular packet. For a classifier to assign an output queue to a packet, it must associate the packet with one of the forwarding classes discussed in [“Understanding CoS Forwarding Classes” on page 90](#).

To configure queue shaping:

1. Ensure that the interface on which you want to configure queue shaping is up and running.
2. Configure queue shaping:
  - a. Define a scheduler and assign a shaping rate to the scheduler:

[edit]

```
user@switch# set class-of-service schedulers scheduler-name shaping-rate (rate | percent percentage)
```

You can assign a **rate** (a value in bits per second (bps)) or a percentage value for **shaping-rate**.

- b. Define a scheduler map and assign a forwarding class and scheduler (that you defined in the previous step) to the scheduler map:

[edit]

```
user@switch# set class-of-service scheduler-maps scheduler-map-name forwarding-class class-name scheduler scheduler-name
```

- c. Assign the scheduler map to an interface:

[edit]

```
user@switch# set class-of-service interfaces interface-name scheduler-map  
scheduler-map-name
```

**Related  
Documentation**

- [Understanding Port Shaping and Queue Shaping for CoS on EX Series Switches on page 137](#)
- [Understanding CoS Schedulers on page 105](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)

---

## Applying a Shaping Rate to Physical Interfaces Overview

On T4000 routers with Type 5 FPCs and on EX Series switches, you can configure physical interfaces to shape traffic based on the rate-limited bandwidth of the total interface bandwidth. This allows you to shape the output of the physical interface, so that the interface transmits less traffic than it is physically capable of carrying.

If you do not configure a shaping rate on the physical interface, the default physical interface bandwidth is based on the channel bandwidth and the time slot allocation.

In general, the physical interface speed is the basis for calculating the various queue parameters for a physical interface such as delay buffer size, weighted round-robin (WRR) weight, drop profile, and so forth. However, when you apply a shaping rate by including the **shaping-rate** statement, the shaping rate on that physical interface becomes the basis for calculating all the queue parameters for that physical interface.

On T4000 routers with Type 5 FPCs, the shaping rate value for the physical interface must be a minimum of 292 Kbps. The maximum value of shaping rate is limited by the maximum transmission rate of the interface.

**Related  
Documentation**

- [Configuring the Shaping Rate for Physical Interfaces on page 140](#)

---

## Configuring the Shaping Rate for Physical Interfaces

To configure the shaping rate on the physical interface, either include the **shaping-rate** statement at the **[edit class-of-service interfaces *interface-name*]** hierarchy level or include the **output-traffic-control-profile** statement at the **[edit class-of-service interfaces *interface-name*]** hierarchy level.

You can specify a peak bandwidth rate in bps, either as a complete decimal number or as a decimal number followed by the abbreviation **k** (1000), **m** (1,000,000), or **g** (1,000,000,000). For physical interfaces, the range is from 1000 through 6,400,000,000,000 bps.

For physical interfaces on T4000 routers with Type 5 FPCs, the shaping rate value for the physical interface must be a minimum of 292 Kbps. The maximum value of **shaping-rate** is limited by the maximum transmission rate of the interface.



The following are two example configurations for applying a shaping rate of 5 Gbps on a T4000 12x10 Gbps physical interface (xe-4/0/0):

Applying a shaping rate at the [edit class-of-service interfaces *interface-name*] hierarchy:

```
[edit class-of-service]
interfaces {
  xe-4/0/0 {
    shaping-rate 5g;
  }
}
```

Applying a shaping rate using traffic-control-profiles:

```
[edit class-of-service]
traffic-control-profiles {
  output {
    shaping-rate 5g;
  }
}
interfaces {
  xe-4/0/0 {
    output-traffic-control-profile output;
  }
}
```

To view the results of your configuration, issue the following **show** commands:

- **show class-of-service interface *interface-name***
- **show interfaces *interface-name* extensive**

#### Related Documentation

- [Applying a Shaping Rate to Physical Interfaces Overview on page 140](#)



## CHAPTER 13

# Explicit Congestion Notification (ECN)

- [Understanding CoS Explicit Congestion Notification on page 144](#)
- [Example: Configuring ECN on page 153](#)

## Understanding CoS Explicit Congestion Notification

Explicit congestion notification (ECN) enables end-to-end congestion notification between two endpoints on TCP/IP based networks. The two endpoints are an ECN-enabled sender and an ECN-enabled receiver. ECN must be enabled on both endpoints and on all of the intermediate devices between the endpoints for ECN to work properly. Any device in the transmission path that does not support ECN breaks the end-to-end ECN functionality.

ECN notifies networks about congestion with the goal of reducing packet loss and delay by making the sending device decrease the transmission rate until the congestion clears, without dropping packets. RFC 3168, *The Addition of Explicit Congestion Notification (ECN) to IP*, defines ECN.

ECN is disabled by default. Normally, you enable ECN only on queues that handle best-effort traffic because other traffic types use different methods of congestion notification—lossless traffic uses priority-based flow control (PFC) and strict-high priority traffic receives all of the port bandwidth it requires up to the point of a configured maximum rate.



**NOTE:** OCX Series switches do not support lossless transport and do not support PFC.

You enable ECN on individual output queues (as represented by forwarding classes) by enabling ECN in the queue scheduler configuration, mapping the scheduler to forwarding classes (queues), and then applying the scheduler to interfaces.



**NOTE:** For ECN to work on a queue, you must also apply a weighted random early detection (WRED) packet drop profile to the queue.

- [How ECN Works on page 144](#)
- [WRED Drop Profile Control of ECN Thresholds on page 149](#)
- [Support, Limitations, and Notes on page 152](#)

### How ECN Works

Without ECN, switches respond to network congestion by dropping TCP/IP packets. Dropped packets signal the network that congestion is occurring. Devices on the IP network respond to TCP packet drops by reducing the packet transmission rate to allow the congestion to clear. However, the packet drop method of congestion notification and management has some disadvantages. For example, packets are dropped and must be retransmitted. Also, bursty traffic can cause the network to reduce the transmission rate too much, resulting in inefficient bandwidth utilization.

Instead of dropping packets to signal network congestion, ECN marks packets to signal network congestion, without dropping the packets. For ECN to work, all of the switches

in the path between two ECN-enabled endpoints must have ECN enabled. ECN is negotiated during the establishment of the TCP connection between the endpoints.

ECN-enabled switches determine the queue congestion state based on the WRED packet drop profile configuration applied to the queue, so each ECN-enabled queue must also have a WRED drop profile. If a queue fills to the level at which the WRED drop profile has a packet drop probability greater than zero (0), the switch might mark a packet as experiencing congestion. Whether or not a switch marks a packet as experiencing congestion is the same probability as the drop probability of the queue at that fill level.

ECN communicates whether or not congestion is experienced by marking the two least-significant bits in the differentiated services (DiffServ) field in the IP header. The most significant six bits in the DiffServ field contain the Differentiated Services Code Point (DSCP) bits. The state of the two ECN bits signals whether or not the packet is an ECN-capable packet and whether or not congestion has been experienced.

ECN-capable senders mark packets as ECN-capable. If a sender is not ECN-capable, it marks packets as not ECN-capable. If an ECN-capable packet experiences congestion at the egress queue of a switch, the switch marks the packet as experiencing congestion. When the packet reaches the ECN-capable receiver (destination endpoint), the receiver echoes the congestion indicator to the sender (source endpoint) by sending a packet marked to indicate congestion.

After receiving the congestion indicator from the receiver, the source endpoint reduces the transmission rate to relieve the congestion. This is similar to the result of TCP congestion notification and management, but instead of dropping the packet to signal network congestion, ECN marks the packet and the receiver echoes the congestion notification to the sender. Because the packet is not dropped, the packet does not need to be retransmitted.

- [ECN Bits in the DiffServ Field on page 145](#)
- [End-to-End ECN Behavior on page 146](#)
- [ECN Compared to PFC and Ethernet PAUSE on page 148](#)

### ECN Bits in the DiffServ Field

The two ECN bits in the DiffServ field provide four codes that determine if a packet is marked as an ECN-capable transport (ECT) packet, meaning that both endpoints of the transport protocol are ECN-capable, and if there is congestion experienced (CE), as shown in [Table 32 on page 145](#):

**Table 32: ECN Bit Codes**

ECN Bits (Code)	Meaning
00	Non-ECT—Packet is marked as not ECN-capable
01	ECT(1)—Endpoints of the transport protocol are ECN-capable
10	ECT(0)—Endpoints of the transport protocol are ECN-capable

Table 32: ECN Bit Codes (continued)

ECN Bits (Code)	Meaning
11	CE—Congestion experienced

Codes 01 and 10 have the same meaning: the sending and receiving endpoints of the transport protocol are ECN-capable. There is no difference between these codes.

### End-to-End ECN Behavior

After the sending and receiving endpoints negotiate ECN, the sending endpoint marks packets as ECN-capable by setting the DiffServ ECN field to ECT(1) (01) or ECT(0) (10). Every intermediate switch between the endpoints must have ECN enabled or it does not work.


When a packet traverses a switch and experiences congestion at an output queue that uses the WRED packet drop mechanism, the switch marks the packet as experiencing congestion by setting the DiffServ ECN field to CE (11). Instead of dropping the packet (as with TCP congestion notification), the switch forwards the packet.



**NOTE:** At the egress queue, the WRED algorithm determines whether or not a packet is drop eligible based on the queue fill level (how full the queue is). If a packet is drop eligible and marked as ECN-capable, the packet can be marked CE and forwarded. If a packet is drop eligible and is not marked as ECN-capable, it might be dropped. See “WRED Drop Profile Control of ECN Thresholds” on page 149 for more information about the WRED algorithm.

When the packet reaches the receiver endpoint, the CE mark tells the receiver that there is network congestion. The receiver then sends (echoes) a message to the sender that indicates there is congestion on the network. The sender acknowledges the congestion notification message and reduces its transmission rate. Figure 6 on page 146 summarizes how ECN works to mitigate network congestion:

Figure 6: Explicit Congestion Notification

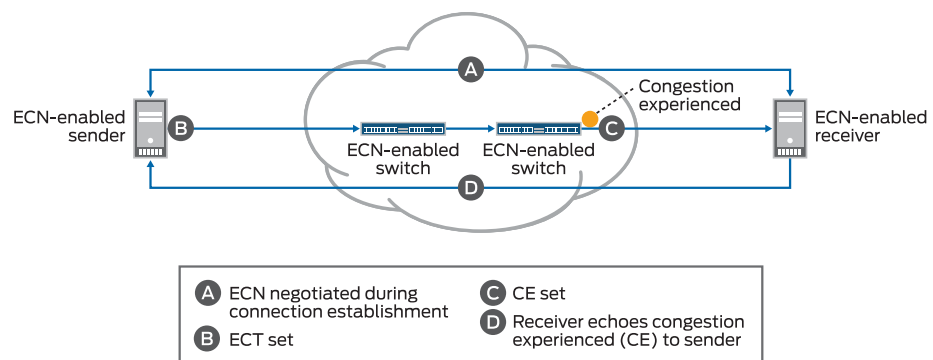

804295

End-to-end ECN behavior includes:

1. The ECN-capable sender and receiver negotiate ECN capability during the establishment of their connection.
2. After successful negotiation of ECN capability, the ECN-capable sender sends IP packets with the ECT field set to the receiver.



**NOTE:** All of the intermediate devices in the path between the sender and the receiver must be ECN-enabled.

3. If the WRED algorithm on a switch egress queue determines that the queue is experiencing congestion and the packet is drop eligible, the switch can mark the packet as “congestion experienced” (CE) to indicate to the receiver that there is congestion on the network. If the packet has already been marked CE (congestion has already been experienced at the egress of another switch), the switch forwards the packet with CE marked.

If there is no congestion at the switch egress queue, the switch forwards the packet and does not change the ECT-enabled marking of the ECN bits, so the packet is still marked as ECN-capable but not as experiencing congestion.

On QFX5210, QFX5200, QFX5100, EX4600, QFX3500, and QFX3600 switches, and on QFabric systems, packets that are not marked as ECN-capable (ECT, 00) are treated according to the WRED drop profile configuration and might be dropped during periods of congestion.

On QFX10000 switches, the switch uses the tail-drop algorithm to drop packets that are marked ECT (00) during periods of congestion. (When a queue fills to its maximum level of fullness, tail-drop simply drops all subsequently arriving packets until there is space in the queue to buffer more packets. All non-ECN-capable packets are treated the same.)

4. The receiver receives a packet marked CE to indicate that congestion was experienced along the congestion path.
5. The receiver echoes (sends) a packet back to the sender with the ECE bit (bit 9) marked in the flag field of the TCP header. The ECE bit is the ECN echo flag bit, which notifies the sender that there is congestion on the network.
6. The sender reduces the data transmission rate and sends a packet to the receiver with the CWR bit (bit 8) marked in the flag field of the TCP header. The CWR bit is the congestion window reduced flag bit, which acknowledges to the receiver that the congestion experienced notification was received.
7. When the receiver receives the CWR flag, the receiver stops setting the ECE bit in replies to the sender.

Table 33 on page 148 summarizes the behavior of traffic on ECN-enabled queues.

**Table 33: Traffic Behavior on ECN-Enabled Queues**

Incoming IP Packet Marking of ECN Bits	ECN Configuration on the Output Queue	Action if WRED Algorithm Determines Packet is Drop Eligible	Outgoing Packet Marking of ECN Bits
Non-ECT (00)	Does not matter	Drop (QFX5210, QFX5200, QFX5100, EX4600, QFX3500, QFX3600, QFabric systems).  Tail drop occurs when queue reaches maximum fullness because no WRED drop probability is applied (QFX10000 switches).	No ECN bits marked
ECT (10 or 01)	ECN disabled	Drop	Packet dropped—no ECN bits marked
ECT (10 or 01)	ECN enabled	Do not drop. Mark packet as experiencing congestion (CE, bits 11).	Packet marked ECT (11) to indicate congestion
CE (11)	ECN disabled	Drop	Packet dropped—no ECN bits marked
CE (11)	ECN enabled	Do not drop. Packet is already marked as experiencing congestion, forward packet without changing the ECN marking.	Packet marked ECT (11) to indicate congestion

When an output queue is not experiencing congestion as defined by the WRED drop profile mapped to the queue, all packets are forwarded, and no packets are dropped.

### ECN Compared to PFC and Ethernet PAUSE

ECN is an end-to-end network congestion notification mechanism for IP traffic. Priority-based flow control (PFC) (IEEE 802.1Qbb) and Ethernet PAUSE (IEEE 802.3X) are different types of congestion management mechanisms.



**NOTE:** QFX10000 switches do not support Ethernet PAUSE.

OCX Series switches do not support PFC. OCX Series switches support Ethernet PAUSE on tagged Layer 3 interfaces.

ECN requires that an output queue must also have an associated WRED packet drop profile. Output queues used for traffic on which PFC is enabled should not have an associated WRED drop profile. Interfaces on which Ethernet PAUSE is enabled should not have an associated WRED drop profile.



PFC is a peer-to-peer flow control mechanism to support lossless traffic. PFC enables connected peer devices to pause flow transmission during periods of congestion. PFC enables you to pause traffic on a specified type of flow on a link instead of on all traffic on a link. For example, you can (and should) enable PFC on lossless traffic classes such as the **fcoe** forwarding class. Ethernet PAUSE is also a peer-to-peer flow control mechanism, but instead of pausing only specified traffic flows, Ethernet PAUSE pauses all traffic on a physical link.

With PFC and Ethernet PAUSE, the sending and receiving endpoints of a flow do not communicate congestion information to each other across the intermediate switches. Instead, PFC controls flows between two PFC-enabled peer devices (for example, switches) that support data center bridging (DCB) standards. PFC works by sending a pause message to the connected peer when the flow output queue becomes congested. Ethernet PAUSE simply pauses all traffic on a link during periods of congestion and does not require DCB.

PFC works this way: if a switch output queue fills to a certain threshold, the switch sends a PFC pause message to the connected peer device that is transmitting data. The pause message tells the transmitting switch to pause transmission of the flow. When the congestion clears, the switch sends another PFC message to tell the connected peer to resume transmission. (If the output queue of the transmitting switch also reaches a certain threshold, that switch can in turn send a PFC pause message to the connected peer that is transmitting to it. In this way, PFC can propagate a transmission pause back through the network.)

See *Understanding CoS Flow Control (Ethernet PAUSE and PFC)* for more information. For QFX5100 and EX4600 switches only, you can also refer to *Understanding PFC Functionality Across Layer 3 Interfaces*.

## WRED Drop Profile Control of ECN Thresholds

You apply WRED drop profiles to forwarding classes (which are mapped to output queues) to control how the switch marks ECN-capable packets. A scheduler map associates a drop profile with a scheduler and a forwarding class, and then you apply the scheduler map to interfaces to implement the scheduling properties for the forwarding class on those interfaces.

Drop profiles define queue fill level (the percentage of queue fullness) and drop probability (the percentage probability that a packet is dropped) pairs. When a queue fills to a specified level, traffic that matches the drop profile has the drop probability paired with that fill level. When you configure a drop profile, you configure pairs of fill levels and drop probabilities to control how packets drop at different levels of queue fullness.

The first fill level and drop probability pair is the drop start point. Until the queue reaches the first fill level, packets are not dropped. When the queue reaches the first fill level, packets that exceed the fill level have a probability of being dropped that equals the drop probability paired with the fill level.

The last fill level and drop probability pair is the drop end point. When the queue reaches the last fill level, all packets are dropped unless they are configured for ECN.



**NOTE:** Lossless queues (forwarding class configured with the no-loss packet drop attribute) and strict-high priority queues do not use drop profiles. Lossless queues use PFC to control the flow of traffic. Strict-high priority queues receive all of the port bandwidth they require up to the configured maximum bandwidth limit (scheduler transmit-rate on QFX10000 switches, and shaping-rate on QFX5210, QFX5200, QFX5100, QFX3500, QFX3600, and EX4600 switches, and QFabric systems).

Different switches support different amounts of fill level/drop probability pairs in drop profiles. For example, QFX10000 switches support 32 fill level/drop probability pairs, so there can be as many as 30 intermediate fill level/drop probability pairs between the drop start and drop endpoints. QFX5210, QFX5200, QFX5100, QFX3500, QFX3600, and EX4600 switches, and QFabric systems support two fill level/drop probability pairs—by definition, the two pairs you configure on these switches are the drop start and drop end points.



**NOTE:** Do not configure the last fill level as 100 percent.

The drop profile configuration affects ECN packets as follows:

- Drop start point—ECN-capable packets might be marked as congestion experienced (CE).
- Drop end point—ECN-capable packets are always marked CE.

As a queue fills from the drop start point to the drop end point, the probability that an ECN packet is marked CE is the same as the probability that a non-ECN packet is dropped if you apply the drop profile to best-effort traffic. As the queue fills, the probability of an ECN packet being marked CE increases, just as the probability of a non-ECN packet being dropped increases when you apply the drop profile to best-effort traffic.

At the drop end point, all ECN packets are marked CE, but the ECN packets are not dropped. When the queue fill level exceeds the drop end point, all ECN packets are marked CE. (At this point on QFX5210, QFX5200, QFX5100, EX4600, QFX3500, and QFX3600 switches, and on QFabric systems, all non-ECN packets are dropped.) ECN packets (and all other packets) are tail-dropped if the queue fills completely.

To configure a WRED packet drop profile and apply it to an output queue (using hierarchical scheduling on switches that support ETS):

1. Configure a drop profile using the statement **set class-of-service drop-profiles *profile-name* interpolate fill-level *drop-start-point* fill-level *drop-end-point* drop-probability 0 drop-probability *percentage***.
2. Map the drop profile to a queue scheduler using the statement **set class-of-service schedulers *scheduler-name* drop-profile-map loss-priority (low | medium-high | high)**

**protocol any drop-profile *profile-name*.** The name of the drop-profile is the name of the WRED profile configured in Step 1.

3. Map the scheduler, which Step 2 associates with the drop profile, to the output queue using the statement **set class-of-service scheduler-maps *map-name* forwarding-class *forwarding-class-name* scheduler *scheduler-name*.** The forwarding class identifies the output queue. Forwarding classes are mapped to output queues by default, and can be remapped to different queues by explicit user configuration. The scheduler name is the scheduler configured in Step 2.
4. Associate the scheduler map with a traffic control profile using the statement **set class-of-service traffic-control-profiles *tcp-name* scheduler-map *map-name*.** The scheduler map name is the name configured in Step 3.
5. Associate the traffic control profile with an interface using the statement **set class-of-service interface *interface-name* forwarding-class-set *forwarding-class-set-name* output-traffic-control-profile *tcp-name*.** The output traffic control profile name is the name of the traffic control profile configured in Step 4.

The interface uses the scheduler map in the traffic control profile to apply the drop profile (and other attributes, including the enable ECN attribute) to the output queue (forwarding class) on that interface. Because you can use different traffic control profiles to map different schedulers to different interfaces, the same queue number on different interfaces can handle traffic in different ways.

Starting in Release 15.1, you can configure a WRED packet drop profile and apply it to an output queue on switches that support port scheduling (ETS hierarchical scheduling is either not supported or not used). To configure a WRED packet drop profile and apply it to an output queue on switches that support port scheduling (ETS hierarchical scheduling is either not supported or not used):

1. Configure a drop profile using the statement **set class-of-service drop-profiles *profile-name* interpolate fill-level *level1* *level2* ... *level32* drop-probability *probability1* *probability2* ... *probability32*.** You can specify as few as two fill level/drop probability pairs or as many as 32 pairs.
2. Map the drop profile to a queue scheduler using the statement **set class-of-service schedulers *scheduler-name* drop-profile-map loss-priority (low | medium-high | high) drop-profile *profile-name*.** The name of the drop-profile is the name of the WRED profile configured in Step 1.
3. Map the scheduler, which Step 2 associates with the drop profile, to the output queue using the statement **set class-of-service scheduler-maps *map-name* forwarding-class *forwarding-class-name* scheduler *scheduler-name*.** The forwarding class identifies the output queue. Forwarding classes are mapped to output queues by default, and can

be remapped to different queues by explicit user configuration. The scheduler name is the scheduler configured in Step 2.

4. Associate the scheduler map with an interface using the statement **set class-of-service interfaces *interface-name* scheduler-map *scheduler-map-name***.

The interface uses the scheduler map to apply the drop profile (and other attributes) to the output queue mapped to the forwarding class on that interface. Because you can use different scheduler maps on different interfaces, the same queue number on different interfaces can handle traffic in different ways.

## Support, Limitations, and Notes

If the WRED algorithm that is mapped to a queue does not find a packet drop eligible, then the ECN configuration and ECN bits marking does not matter. The packet transport behavior is the same as when ECN is not enabled.

ECN is disabled by default. Normally, you enable ECN only on queues that handle best-effort traffic, and you do not enable ECN on queues that handle lossless traffic or strict-high priority traffic.

ECN supports the following:

- IPv4 and IPv6 packets
- Untagged, single-tagged, and double-tagged packets
- The outer IP header of IP tunneled packets (but not the inner IP header)

ECN does not support the following:

- IP packets with MPLS encapsulation
- The inner IP header of IP tunneled packets (however, ECN works on the outer IP header)
- Multicast, broadcast, and destination lookup fail (DLF) traffic
- Non-IP traffic



**NOTE:** On QFX10000 switches, when you enable a queue for ECN and apply a WRED drop profile to the queue, the WRED drop profile only sets the thresholds for marking ECN traffic as experiencing congestion (CE, 11). On ECN-enabled queues, the WRED drop profile does not set drop thresholds for non-ECT (00) traffic (traffic that is not ECN-capable). Instead, the switch uses the tail-drop algorithm on traffic that is marked non-ECT on ECN-enabled queues during periods of congestion.

To apply a WRED drop profile to non-ECT traffic, configure a multifield (MF) classifier to assign non-ECT traffic to a different output queue that is not ECN-enabled, and then apply the WRED drop profile to that queue.

---

**Release History Table**

Release	Description
15.1	Starting in Release 15.1, you can configure a WRED packet drop profile and apply it to an output queue on switches that support port scheduling (ETS hierarchical scheduling is either not supported or not used).

**Related Documentation**

- [Example: Configuring ECN on page 153](#)

**Example: Configuring ECN**

This example shows how to enable explicit congestion notification (ECN) on an output queue.

- [Requirements on page 153](#)
- [Overview on page 153](#)
- [Configuration on page 155](#)
- [Verification on page 157](#)

**Requirements**

This example uses the following hardware and software components:

- One switch.
- Junos OS Release 13.2X51-D25 or later for the QFX Series or Junos OS Release 14.1X53-D20 for the OCX Series

**Overview**

ECN enables end-to-end congestion notification between two endpoints on TCP/IP based networks. The two endpoints are an ECN-enabled sender and an ECN-enabled receiver. ECN must be enabled on both endpoints and on all of the intermediate devices between the endpoints for ECN to work properly. Any device in the transmission path that does not support ECN breaks the end-to-end ECN functionality.

A weighted random early detection (WRED) packet drop profile must be applied to the output queues on which ECN is enabled. ECN uses the WRED drop profile thresholds to mark packets when the output queue experiences congestion.

ECN reduces packet loss by forwarding ECN-capable packets during periods of network congestion instead of dropping those packets. (TCP notifies the network about congestion by dropping packets.) During periods of congestion, ECN marks ECN-capable packets that egress from congested queues. When the receiver receives an ECN packet that is marked as experiencing congestion, the receiver echoes the congestion state back to the sender. The sender then reduces its transmission rate to clear the congestion.

ECN is disabled by default. You can enable ECN on best-effort traffic. ECN should not be enabled on lossless traffic queues, which uses priority-based flow control (PFC) for

congestion notification, and ECN should not be enabled on strict-high priority traffic queues.

To enable ECN on an output queue, you not only need to enable ECN in the queue scheduler, you also need to:

- Configure a WRED packet drop profile.
- Configure a queue scheduler that includes the WRED drop profile and enables ECN. (This example shows only ECN and drop profile configuration; you can also configure bandwidth, priority, and buffer settings in a scheduler.)
- Map the queue scheduler to a forwarding class (output queue) in a scheduler map.
- Starting in Junos OS 15.1, enhanced transmission selection (ETS) hierarchical scheduling is supported. If you are using enhanced transmission selection (ETS) hierarchical scheduling, add the forwarding class to a forwarding class set (priority group).
- If you are using ETS, associate the queue scheduler map with a traffic control profile (priority group scheduler for hierarchical scheduling).
- If you are using ETS, apply the traffic control profile and the forwarding class set to an interface. On that interface, the output queue uses the scheduler mapped to the forwarding class, as specified by the scheduler map attached to the traffic control profile. This enables ECN on the queue and applies the WRED drop profile to the queue.

If you are using port scheduling, apply the scheduler map to an interface. On that interface, the output queue uses the scheduler mapped to the forwarding class in the scheduler map, which enables ECN on the queue and applies the WRED drop profile to the queue.

Table 34 on page 154 shows the configuration components for this example.

**Table 34: Components of the ECN Configuration Example**

Component	Settings
Hardware	QFX Series switch
Drop profile (with two fill level/drop probability pairs)	Name: <b>be-dp</b> Drop start fill level: <b>30</b> percent Drop end fill level: <b>75</b> percent Drop probability at drop start (minimum drop rate): <b>0</b> percent Drop probability at drop end (maximum drop rate): <b>80</b> percent
Scheduler	Name: <b>be-sched</b> ECN: enabled Drop profile: <b>be-dp</b> Transmit rate: <b>25%</b> Buffer size: <b>25%</b> Priority: <b>low</b>

Table 34: Components of the ECN Configuration Example (continued)

Component	Settings
Scheduler map	Name: <b>be-map</b> Forwarding class: <b>best-effort</b> Scheduler: <b>be-sched</b>  <b>NOTE:</b> By default, the <b>best-effort</b> forwarding class is mapped to output queue 0.
Forwarding class set (ETS only)	Name: <b>be-pg</b> Forwarding class: <b>best-effort</b> (queue 0)
Traffic control profile (ETS only)	Name: <b>be-tcp</b> Scheduler map: <b>be-map</b>
Interface (ETS only)	Name: <b>xe-0/0/20</b> Forwarding class set: <b>be-pg</b> (Output) traffic control profile: <b>be-tcp</b>
Interface (port scheduling only)	Name: <b>xe-0/0/20</b>



**NOTE:** Only switches that support ETS hierarchical scheduling support forwarding class set and traffic control profile configuration. Direct port scheduling does not use the hierarchical scheduling structure.



**NOTE:** On QFX5100, EX4600, QFX3500, and QFX3600 switches, and on QFabric systems, the WRED drop profile also controls packet drop behavior for traffic that is not ECN-capable (packets marked non-ECT, ECN bit code 00).

On QFX10000 switches, when ECN is enabled on a queue, the WRED drop profile only sets the ECN thresholds, it does not control packet drop on non-ECN packets. On ECN-enabled queues, QFX10000 switches use the tail-drop algorithm on non-ECN packets during periods of congestion. If you do not enable ECN, then the queue uses the WRED packet drop mechanism.

## Configuration

### CLI Quick Configuration

To quickly configure the drop profile, scheduler with ECN enabled, and to map the scheduler to an output queue on an interface, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

## ETS Quick Configuration

```
[edit class-of-service]
set drop-profile be-dp interpolate fill-level 30 fill-level 75 drop-probability 0 drop-probability 80
set schedulers be-sched explicit-congestion-notification
set schedulers be-sched drop-profile-map loss-priority low protocol any drop-profile be-dp
set schedulers be-sched transmit-rate percent 25
set schedulers be-sched buffer-size percent 25
set schedulers be-sched priority low
set scheduler-maps be-map forwarding-class best-effort scheduler be-sched
set forwarding-class-sets be-pg class best-effort
set traffic-control-profiles be-tcp scheduler-map be-map
set interfaces xe-0/0/20 forwarding-class-set be-pg output-traffic-control-profile be-tcp
```

## Port Scheduling Quick Configuration (QFX10000 Switches)

```
[edit class-of-service]
set drop-profile be-dp interpolate fill-level 30 fill-level 75 drop-probability 0 drop-probability 80
set schedulers be-sched explicit-congestion-notification
set schedulers be-sched drop-profile-map loss-priority low protocol any drop-profile be-dp
set schedulers be-sched transmit-rate percent 25
set schedulers be-sched buffer-size percent 25
set schedulers be-sched priority low
set scheduler-maps be-map forwarding-class best-effort scheduler be-sched
set interfaces xe-0/0/20 scheduler-map be-map
```

## Configuring ECN

### Step-by-Step Procedure

To configure ECN:

1. Configure the WRED packet drop profile **be-dp**. This example uses a drop start point of **30** percent, a drop end point of **75** percent, a minimum drop rate of **0** percent, and a maximum drop rate of **80** percent:

```
[edit class-of-service]
user@switch# set drop-profile be-dp interpolate fill-level 30 fill-level 75 drop-probability 0 drop-probability 80
```

2. Create the scheduler **be-sched** with ECN enabled and associate the drop profile **be-dp** with the scheduler:

```
[edit class-of-service]
user@switch# set schedulers be-sched explicit-congestion-notification
user@switch# set schedulers be-sched drop-profile-map loss-priority low protocol any drop-profile be-dp
user@switch# set be-sched transmit-rate percent 25
user@switch# set be-sched buffer-size percent 25
user@switch# set be-sched priority low
```



3. Map the scheduler **be-sched** to the **best-effort** forwarding class (output queue 0) using scheduler map **be-map**:

```
[edit class-of-service]
user@switch# set scheduler-maps be-map forwarding-class best-effort scheduler be-sched
```

4. If you are using ETS, add the forwarding class **best-effort** to the forwarding class set **be-pg**; if you are using direct port scheduling, skip this step:

```
[edit class-of-service]
user@switch# set forwarding-class-sets be-pg class best-effort
```

5. If you are using ETS, associate the scheduler map **be-map** with the traffic control profile **be-tcp**; if you are using direct port scheduling, skip this step:

```
[edit class-of-service]
user@switch# set traffic-control-profiles be-tcp scheduler-map be-map
```

6. If you are using ETS, associate the traffic control profile **be-tcp** and the forwarding class set **be-pg** with the interface on which you want to enable ECN on the best-effort queue:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 forwarding-class-set be-pg
output-traffic-control-profile be-tcp
```

If you are using direct port scheduling, associate the scheduler map **be-map** with the interface on which you want to enable ECN on the best-effort queue:

```
[edit class-of-service]
user@switch# set interfaces xe-0/0/20 scheduler-map be-map
```

## Verification

### Verifying That ECN Is Enabled

- Purpose** Verify that ECN is enabled in the scheduler **be-sched** by showing the configuration for the scheduler map **be-map**.

**Action** Display the scheduler map configuration using the operational mode command **show class-of-service scheduler-map be-map**:

```
user@switch> show class-of-service scheduler-map be-map
```

```
Scheduler map: be-map, Index: 12240
```

```
Scheduler:be-sched, Forwarding class: best-effort, Index: 115
  Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent,
  Buffer Limit: none, Priority: low
  Excess Priority: unspecified, Explicit Congestion Notification: enable
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low            any       3312   be-dp
    Medium-high    any       1      <default-drop-profile>
    High           any       1      <default-drop-profile>
```

**Meaning** The **show class-of-service scheduler-map** operational command shows the configuration of the scheduler associated with the scheduler map and the forwarding class mapped to that scheduler. The output shows that:

- The scheduler associated with the scheduler map is **be-sched**.
- The scheduler map applies to the forwarding class **best-effort** (output queue 0).
- The scheduler **be-sched** has a transmit rate of **25** percent, a queue buffer size of **25** percent, and a drop priority of **low**.
- Explicit congestion notification state is **enable**.
- The WRED drop profile used for low drop priority traffic is **be-dp**.

#### Release History Table

Release	Description
15.1	Starting in Junos OS 15.1, enhanced transmission selection (ETS) hierarchical scheduling is supported.

#### Related Documentation

- [Understanding CoS Explicit Congestion Notification on page 144](#)

## PART 3

# CoS on MPLS Networks

- [Configuring CoS on MPLS Networks on page 161](#)



# Configuring CoS on MPLS Networks

- [Understanding Using CoS with MPLS Networks on EX Series Switches on page 161](#)
- [Example: Combining CoS with MPLS on EX Series Switches on page 166](#)
- [Configuring CoS on an MPLS Provider Edge Switch Using IP Over MPLS \(CLI Procedure\) on page 178](#)
- [Configuring CoS on an MPLS Provider Edge Switch Using Circuit Cross-Connect \(CLI Procedure\) on page 180](#)
- [Configuring CoS on Provider Switches of an MPLS Network \(CLI Procedure\) on page 182](#)
- [Configuring MPLS on EX8200 and EX4500 Provider Switches \(CLI Procedure\) on page 183](#)

## Understanding Using CoS with MPLS Networks on EX Series Switches

---

You can use class of service (CoS) within MPLS networks to prioritize certain types of traffic during periods of congestion. See *EX Series Switch Software Features Overview* for a complete list of the Junos OS MPLS features that are supported on specific EX Series switches.

Juniper Networks EX Series Ethernet Switches support Differentiated Service Code Point (DSCP) or IP precedence and IEEE 802.1p CoS classifiers on the customer-edge interfaces of the ingress provider edge (PE) switch. DSCP or IP precedence classifiers are used for Layer 3 packets. IEEE 802.1p is used for Layer 2 packets.

When a packet enters a customer-edge interface of the ingress PE switch, the switch associates the packet with a particular CoS servicing level before putting the packet onto the label-switched path (LSP). The switches within the LSP utilize the CoS value set at the ingress PE switch. The CoS value that was embedded in the classifier is translated and encoded in the MPLS header by means of the EXP or experimental bits. EX Series switches enable a default EXP classifier and a default EXP rewrite rule. For more information about EXP classifiers and EXP rewrite rules, see [EXP Classifiers](#) and [EXP rewrite Rules](#).

This topic includes:

- [EXP Classifiers and EXP rewrite Rules on page 162](#)
- [Guidelines for Using CoS Classifiers on CCCs on page 162](#)
- [Using CoS Classifiers with IP over MPLS on page 163](#)

- [Setting CoS Bits in an MPLS Header on page 163](#)
- [EXP Rewrite Rules on page 165](#)
- [Policer on page 165](#)
- [Schedulers on page 165](#)

## EXP Classifiers and EXP rewrite Rules

EX Series switches enable a default EXP classifier and a default EXP rewrite rule. You can configure a custom EXP classifier and a custom EXP rewrite rule if you prefer. However, the switch supports only one type of EXP classifier (default or custom) and only one EXP rewrite rule (default or custom).

You do not bind the EXP classifier or the EXP rewrite rule to individual interfaces. The switch automatically and implicitly applies the default or the custom EXP classifier and the default or the custom EXP rewrite rule to the appropriate MPLS-enabled interfaces. Because rewrite rules affect only egress interfaces, the switch applies the EXP rewrite rule only to those MPLS interfaces that are transmitting MPLS packets (not to the MPLS interfaces that are receiving the packets).

After traversing the MPLS tunnel, the traffic flows out from the egress provider edge (PE) switch. Before the traffic leaves the egress interface, the egress PE switch copies the EXP bits from the MPLS header to the most significant bits in the original IP packet---that is, to the IP precedence bits. Note that this is the default behavior only on Juniper Networks EX8200 Ethernet Switches (standalone or Virtual Chassis) that are configured for MPLS.

## Guidelines for Using CoS Classifiers on CCCs

When you are configuring CoS for MPLS over circuit cross-connect (CCC), there are some additional guidelines, as follows:

- You *must* explicitly bind a CoS classifier to the CCC interface on the ingress PE switch.
- You *must* use the same DSCP, IP precedence, or IEEE 802.1p classifier on CCC interfaces. However, if the CCC interfaces are on the same switch, you cannot configure both a DSCP and an IP precedence classifier on these interfaces. Thus, if you configure one CCC interface to use a DSCP classifier DSCP1, you cannot configure another CCC interface to use another DSCP classifier DSCP2. All the CCC interfaces on the switch must use the same DSCP (or IP precedence) classifier and the same IEEE 802.1p classifier.
- You *cannot* configure one CCC interface to use a DSCP classifier and another CCC interface to use an IP precedence classifier, because these classifier types overlap.
- You *can* configure one CCC interface to use a DSCP classifier and another CCC interface to use IEEE 802.1p classifier.
- You *can* configure one CCC interface to use both a DSCP and an IEEE 802.1p classifier. If you configure a CCC interface to use both these classifiers, the DSCP classifier is

used for routing Layer 3 packets and the IEEE 802.1p classifier is used for routing Layer 2 packets.

- You can configure one CCC interface to use both an IP precedence and an IEEE 802.1p classifier. If you configure a CCC interface to use both these classifiers, the IP precedence classifier is used for routing Layer 3 packets and the IEEE 802.1p classifier is used for routing Layer 2 packets.



**NOTE:** These guidelines are not applicable to Juniper Networks EX8200 Ethernet Switches (standalone or Virtual Chassis).

You can define multiple DSCP, IP precedence, and IEEE 802.1p classifiers for the non-CCC interfaces on a switch.

## Using CoS Classifiers with IP over MPLS

When you are configuring CoS for IP over MPLS, the customer-edge interface uses the CoS configuration for the switch as the default. You do not have to bind a classifier to the customer-edge interface in this case. There are no restrictions on using multiple DSCP, IP precedence, and IEEE 802.1p classifiers on the same switch.

- You can modify the CoS classifier for a particular interface, but it is not required.
- You can configure a DSCP classifier, DSCP1 on the first interface, another DSCP classifier, DSCP2 on the second interface, and an IP precedence classifier on a third interface, and so forth.

## Setting CoS Bits in an MPLS Header

When traffic enters an LSP tunnel, the CoS bits in the MPLS header are set in one of two ways:

- The number of the output queue into which the packet was buffered and the packet loss priority (PLP) bit are written into the MPLS header and are used as the packet's CoS value. This behavior is the default, and no configuration is required. The *Class of Service Feature Guide (Routers and EX9200 Switches)* explains the IP CoS values, and summarizes how the CoS bits are treated.
- You set a fixed CoS value on all packets entering the LSP tunnel. A fixed CoS value means that all packets entering the LSP receive the same class of service.

The CoS value can be a decimal number from 0 through 7. This number corresponds to a 3-bit binary number. The high-order 2 bits of the CoS value select which transmit queue to use on the outbound interface card.

The low-order bit of the CoS value is treated as the PLP bit and is used to select the RED drop profile to use on the output queue. If the low-order bit is 0, the non-PLP drop profile is used, and if the low-order bit is 1, the PLP drop profile is used. It is generally expected that random early detection (RED) will more aggressively drop packets that have the PLP bit set. For more information about RED and drop profiles, see the *Class of Service Feature Guide (Routers and EX9200 Switches)*.



**NOTE:** Configuring the PLP drop profile to drop packets more aggressively (for example, setting the CoS value from 6 to 7) decreases the likelihood of traffic getting through.

Table 35 on page 164 summarizes how MPLS CoS values correspond to the transmit queue and PLP bit. Note that in MPLS, the mapping between the CoS bit value and the output queue is hard-coded. You cannot configure the mapping for MPLS; you can configure it only for IPv4 traffic flows, as described in the *Class of Service Feature Guide (Routers and EX9200 Switches)*.

**Table 35: MPLS CoS Values**

MPLS CoS Value	Bits	Transmit Queue	PLP Bit
0	000	0	Not set
1	001	0	Set
2	010	1	Not set
3	011	1	Set
4	100	2	Not set
5	101	2	Set
6	110	3	Not set
7	111	3	Set

Because the CoS value is part of the MPLS header, the value is associated with the packets only while they travel through the LSP tunnel. The value is not copied back to the IP header when the packets exit from the LSP tunnel.



**NOTE:** On EX8200 switches that run MPLS-based Layer 2 virtual private networks (VPNs):

- If you configure an LSP CoS, the EXP bits of the MPLS packet continue to use the same CoS values that are configured at the interface level.
- For Virtual Chassis, if the input and output interfaces are on different line cards, then the loss priority value that you configured on the first line card is not carried to the subsequent line cards. The loss priority for the outgoing traffic from the subsequent line cards is always set to low.



## EXP Rewrite Rules

When traffic passes from the customer-edge interface to an MPLS interface, the DSCP, IP precedence, or IEEE 802.1p CoS classifier is translated into the EXP bits within the MPLS header. You cannot disable the default EXP rewrite rule, but you can configure your own custom EXP classifier and a custom EXP rewrite rule. You cannot bind the EXP classifier to individual MPLS interfaces; the switch applies it globally to all the MPLS-enabled interfaces on the switch.

Only one EXP rewrite rule (either default or custom) is supported on a switch. The switch applies it to all the egress interfaces on which MPLS is enabled. This is, however, not the case with EX8200 switches. With EX8200 switches, you must explicitly apply the rewrite rule on each of the egress interfaces.

## Policer

Policing helps to ensure that the amount of traffic forwarded through an LSP never exceeds the requested bandwidth allocation. During periods of congestion (when the total rate of queuing packets exceeds the rate of transmission), any new packets being sent to an interface can be dropped because there is no place to store them. You can configure a policer on the ingress PE switch to prevent this:

- If you are using MPLS over CCC, you bind the policer to the LSP. You cannot bind a policer to a CCC interface.
- If you are using IP over MPLS, you bind the policer to the **inet-family** customer-edge interface. You cannot bind a policer to the LSP when you are using IP over MPLS.



**NOTE:** You cannot configure LSP policers on EX8200 switches.

## Schedulers

The schedulers for using CoS with MPLS are the same as for the other CoS configurations on EX Series switches. Default schedulers are provided for best-effort and network-control forwarding classes. If you are using assured-forwarding, expedited-forwarding, or any custom forwarding class, we recommend that you configure a scheduler to support that forwarding class. See “[Understanding CoS Schedulers](#)” on page 105.

### Related Documentation

- [Understanding CoS Classifiers on page 56](#)
- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Configuring CoS on an MPLS Provider Edge Switch Using Circuit Cross-Connect \(CLI Procedure\) on page 180](#)
- [Configuring CoS on an MPLS Provider Edge Switch Using IP Over MPLS \(CLI Procedure\) on page 178](#)
- [Configuring Rewrite Rules for EXP Classifiers on MPLS Networks \(CLI Procedure\)](#)
- [Configuring CoS on Provider Switches of an MPLS Network \(CLI Procedure\) on page 182](#)

### *Configuring CoS Bits for an MPLS Network (CLI Procedure)*

## **Example: Combining CoS with MPLS on EX Series Switches**

---

You can use class of service (CoS) within MPLS networks to prioritize certain types of traffic during periods of congestion. The CoS value is included within the MPLS label, which is passed through the network, enabling end-to-end CoS across the network.

MPLS services are often used to ensure better performance for low-latency applications such as VoIP and other business-critical functions. These applications place specific demands on a network for successful transmission. CoS gives you the ability to control the mix of bandwidth, delay, jitter, and packet loss while taking advantage of the MPLS labeling mechanism.

This example shows how to configure CoS on an MPLS network that is using a unidirectional circuit cross-connect (CCC) from the ingress provider edge (PE) switch to the egress PE switch. for the customer-edge interface of the ingress provider edge (PE) switch. It describes adding the configuration of CoS components to the ingress PE switch, the egress PE switch, and the core provider switches of the existing MPLS network. Because of the unidirectional configuration, the DSCP classifier needs to be configured only on the ingress PE switch.

- [Requirements on page 166](#)
- [Overview and Topology on page 166](#)
- [Configuring the Local PE Switch on page 169](#)
- [Configuring the Remote PE Switch on page 171](#)
- [Configuring the Provider Switch on page 172](#)
- [Verification on page 173](#)

## **Requirements**

This example uses the following hardware and software components:

- Junos OS Release 10.1 or later for EX Series switches
- Three EX Series switches

Before you configure CoS with MPLS, be sure you have:

Configured an MPLS network with two PE switches and one provider switch. See *Example: Configuring MPLS on EX8200 and EX4500 Switches*. This example assumes that an MPLS network has been configured using a cross circuit-connect (CCC).

## **Overview and Topology**

This example describes adding custom classifiers and custom rewrite rules to switches in an MPLS network that is using MPLS over CCC.

It is a unidirectional configuration. Therefore, you need to configure custom classifiers and custom rewrite rules as follows:

- On the ingress PE switch: custom DSCP classifier and custom EXP rewrite rule
- On the egress PE switch: custom EXP classifier
- On the provider switch: customer EXP classifier and custom EXP rewrite rule



**NOTE:** You can also configure schedulers and shapers as needed. If you are using assured-forwarding, expedited-forwarding, or other custom forwarding classes, we recommend that you configure a scheduler to support that forwarding class. See [“Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\)” on page 112.](#)

The example creates a custom DSCP classifier (**dscp1**) on the ingress PE switch and binds this classifier to the CCC interface. It includes configuration of a policer on the ingress PE switch. The policer is applied as a filter on the label-switched path (LSP) **lsp\_to\_pe2\_ge1** (created in *Example: Configuring MPLS on EX8200 and EX4500 Switches*) to ensure that the amount of traffic forwarded through the LSP never exceeds the requested bandwidth allocation.

This example creates a custom EXP rewrite rule (**exp1**) on the ingress PE switch, specifying a loss-priority and code point to be used for the expedited-forwarding class as the packet travels through the LSP. The switch applies this custom rewrite rule on the core interfaces **ge-0/0/5.0** and **ge-0/0/6.0**, which are the egress interfaces for this switch.

[Table 36 on page 167](#) shows the CoS configuration components added to the ingress PE switch.

**Table 36: CoS Configuration Components on the Ingress PE Switch**

Property	Settings	Description
Local PE switch hardware	EX Series switch	PE-1
Policing filter configured and applied to the LSP.	<b>policing filter mypolicer</b>	Name of the rate-limiting policer.
	<b>filter myfilter</b>	Name of the filter, which refers to the policer
Custom DSCP classifier	<b>dscp1</b>	Specifies the name of the custom DSCP classifier
Custom EXP rewrite rule	<b>e1</b>	Name of the custom EXP rewrite rule.
Customer-edge interface	<b>ge-0/0/1.0</b>	Interface that receives packets from devices outside the network.
		The custom DSCP classifier must be specified on this CCC interface.

**Table 36: CoS Configuration Components on the Ingress PE Switch (continued)**

Property	Settings	Description
Core interfaces	<b>ge-0/0/5.0</b> and <b>ge-0/0/6.0</b>	Interfaces that transmit MPLS packets to other switches within the MPLS network.  The EXP rewrite rule is applied implicitly to these interfaces.

[Table 37 on page 168](#) shows the CoS configuration components added to the egress PE switch in this example.

**Table 37: CoS Configuration Components of the Egress PE Switch**

Property	Settings	Description
Remote provider edge switch hardware	EX Series switch	PE-2
Custom EXP classifier	<b>exp1</b>	Name of custom EXP classifier
Customer-edge interface	<b>ge-0/0/1.0</b>	Interface that transmits packets from this network to devices outside the network. No CoS classifier is specified for this interface. A scheduler can be specified.
Core interfaces	<b>ge-0/0/7.0</b> and <b>ge-0/0/8.0</b>	Core interfaces on PE-2 that receive MPLS packets from the provider switch. The EXP classifier is enabled by default on the switch and applied implicitly to these interfaces.

[Table 38 on page 168](#) shows the MPLS configuration components used for the provider switch in this example.

**Table 38: CoS Configuration Components of the Provider Switch**

Property	Settings	Description
Provider switch hardware	EX Series switch	Transit switch within the MPLS network configuration.
Custom EXP classifier	<b>exp1</b>	Name of the custom EXP classifier.
Custom EXP rewrite rule	<b>e1</b>	Name of the custom EXP rewrite rule.
Core interfaces receiving packets from other MPLS switches.	<b>ge-0/0/5.0</b> and <b>ge-0/0/6.0</b>	Interfaces that connect the provider switch to the ingress PE switch (PE-1). The EXP classifier is enabled by default on the switch and applied implicitly to these interfaces.

Table 38: CoS Configuration Components of the Provider Switch (continued)

Property	Settings	Description
Core interfaces transmitting packets to other switches within the MPLS network.	<b>ge-0/0/7.0</b> and <b>ge-0/0/8.0</b>	Interfaces that transmit packets to the egress PE (PE-2). The EXP rewrite rule is applied implicitly on these interfaces. Schedulers can also be specified and will be applied to these interfaces.

## Configuring the Local PE Switch

**CLI Quick Configuration** To quickly configure a custom DSCP classifier, custom EXP rewrite rule, and a policer on the local PE switch, copy the following commands and paste them into the switch terminal window of PE-1:

```
[edit]
set class-of-service classifiers dscp dscp1 import default
set class-of-service classifiers dscp dscp1 forwarding-class expedited-forwarding loss-priority
low code-points 000111
set class-of-service rewrite-rules exp e1 forwarding-class expedited-forwarding loss-priority low
code-point 111
set class-of-service interfaces ge-0/0/1 unit 0 classifier dscp1
set firewall policer mypolicer if-exceeding bandwidth-limit 500m
set firewall policer mypolicer if-exceeding burst-size-limit 33553920
set firewall policer mypolicer then discard
set firewall family any filter myfilter term t1 then policer mypolicer
set protocols mpls label-switched-path lsp_to_pe2_ge1 to 127.1.1.3 policing filter myfilter
```

**Step-by-Step Procedure** To configure a custom DSCP classifier, custom EXP rewrite rule, and a policer on the ingress PE switch:

1. Import the default DSCP classifier classes to the custom DSCP classifier that you are creating:

```
[edit class-of-service]
user@switch# set classifiers dscp dscp1 import default
```

2. Add the expedited-forwarding class to this custom DSCP classifier, specifying a loss priority and code point:

```
[edit class-of-service]
user@switch# set classifiers dscp dscp1 forwarding-class expedited-forwarding loss-priority
low code-points 000111
```

3. Specify the values for the custom EXP rewrite rule, **e1**:

```
[edit class-of-service]
user@switch# set rewrite-rules exp e1 forwarding-class expedited-forwarding loss-priority
low code-point 111
```

4. Bind the DSCP classifier to the CCC interface:

```
[edit ]
```

```
user@switch# set class-of-service interfaces ge-0/0/1 unit 0 classifier dscp1
```

5. Specify the number of bits per second permitted, on average, for the firewall policer, which will later be applied to the LSP:

```
[edit firewall]
set policer mypolicer if-exceeding bandwidth-limit 500m
```

6. Specify the maximum size permitted for bursts of data that exceed the given bandwidth limit for this policer:

```
[edit firewall policer]
set mypolicer if-exceeding burst-size-limit 33553920
```

7. Discard traffic that exceeds the rate limits for this policer:

```
[edit firewall policer]
set mypolicer then discard
```

8. To reference the policer, configure a filter term that includes the policer action:

```
[edit firewall]
user@switch# set family any filter myfilter term t1 then policer mypolicer
```

9. Apply the filter to the LSP:

```
[edit protocols mpls]
set label-switched-path lsp_to_pe2_ge1 policing filter myfilter
```

**Results** Display the results of the configuration:

```
[edit]
user@switch# show
class-of-service {
  classifiers {
    dscp dscp1 {
      import default;
      forwarding-class expedited-forwarding {
        loss-priority low code-points 000111;
      }
    }
  }
  interfaces {
    ge-0/0/1 {
      unit 0 {
        classifiers {
          dscp dscp1;
        }
      }
    }
  }
  rewrite-rules {
    exp e1 {
```

```

        forwarding-class expedited-forwarding {
            loss-priority low code-point 111;
        }
    }
}
firewall {
    family any {
        filter myfilter {
            term t1 {
                then policer mypolicer;
            }
        }
    }
    policer mypolicer {
        if-exceeding {
            bandwidth-limit 500m;
            burst-size-limit 33553920;
        }
        then discard;
    }
}
}

```

## Configuring the Remote PE Switch

**CLI Quick Configuration** To quickly configure a custom EXP classifier on the remote PE switch, copy the following commands and paste them into the switch terminal window of PE-2:

```

[edit]
set class-of-service classifiers exp exp1 import default
set class-of-service classifiers exp exp1 forwarding-class expedited-forwarding loss-priority low
code-points 010

```

**Step-by-Step Procedure** To configure a custom EXP classifier on the egress PE switch:

1. Import the default EXP classifier classes to the custom EXP classifier that you are creating:

```

[edit class-of-service]
user@switch# set classifiers exp exp1 import default

```

2. Add the expedited-forwarding class to this custom EXP classifier, specifying a loss priority and code point:

```

[edit class-of-service]
user@switch# set classifiers exp exp1 forwarding-class expedited-forwarding loss-priority
low code-points 010

```

**Results** Display the results of the configuration:

```

[edit]

```

```

user@switch# show
class-of-service {
  classifiers {
    exp exp1 {
      import default;
      forwarding-class expedited-forwarding {
        loss-priority low code-points 010;
      }
    }
  }
}

```

## Configuring the Provider Switch

**CLI Quick Configuration** To quickly configure a custom EXP classifier and a custom EXP rewrite rule on the provider switch, copy the following commands and paste them into the switch terminal window of the provider switch:

```

[edit]
set class-of-service classifiers exp exp1 import default
set class-of-service classifiers exp exp1 forwarding-class expedited-forwarding loss-priority low
code-points 010
set class-of-service rewrite-rules exp e1 forwarding-class expedited-forwarding loss-priority low
code-point 111

```

**Step-by-Step Procedure** To configure a custom EXP classifier and a custom EXP rewrite rule on the provider switch:

1. Import the default EXP classifier classes to the custom EXP classifier that you are creating:

```

[edit class-of-service]
user@switch# set classifiers exp exp1 import default

```

2. Add the expedited-forwarding class to this custom EXP classifier, specifying a loss priority and code point:

```

[edit class-of-service]
user@switch# set classifiers exp exp1 forwarding-class expedited-forwarding loss-priority
low code-points 010

```

3. Specify the values for the custom EXP rewrite rule, **e1**:

```

[edit class-of-service]
user@switch# set rewrite-rules exp e1 forwarding-class expedited-forwarding loss-priority
low code-point 111

```

**Results** Display the results of the configuration:

```

[edit]
user@switch# show
class-of-service {
  classifiers {

```



```

exp exp1 {
  import default;
  forwarding-class expedited-forwarding {
    loss-priority low code-points 010;
  }
}
rewrite-rules {
  exp e1 {
    forwarding-class expedited-forwarding {
      loss-priority low code-point 111;
    }
  }
}
}

```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That the Policer Firewall Filter Is Operational on page 173](#)
- [Verifying That the CoS Classifiers Are Going to the Right Queue on page 173](#)
- [Verifying the CoS Forwarding Table Mapping on page 177](#)
- [Verifying the Rewrite Rules on page 177](#)

### Verifying That the Policer Firewall Filter Is Operational

**Purpose** Verify the operational state of the policer that is configured on the ingress PE switch.

**Action** user@switch> show firewall

```

Filter: myfilter
Policers:
Name                               Packets
mypolicer-t1                       0

```

**Meaning** This output shows that the firewall filter **mypolicer** has been created.

### Verifying That the CoS Classifiers Are Going to the Right Queue

**Purpose** Verify that the CoS classifiers are going to the right queue.

**Action** user@switch> `show class-of-service forwarding-table classifier`

Classifier table index: 7, # entries: 64, Table type: DSCP

Entry #	Code point	Forwarding-class #	PLP
0	000000	0	0
1	000001	0	0
2	000010	0	0
3	000011	0	0
4	000100	0	0
5	000101	0	0
6	000110	0	0
7	000111	0	0
8	001000	0	0
9	001001	0	0
10	001010	0	0
11	001011	0	0
12	001100	0	0
13	001101	0	0
14	001110	0	0
15	001111	0	0
16	010000	0	0
17	010001	0	0
18	010010	0	0
19	010011	0	0
20	010100	0	0
21	010101	0	0
22	010110	0	0
23	010111	0	0
24	011000	0	0
25	011001	0	0
26	011010	0	0
27	011011	0	0
28	011100	0	0
29	011101	0	0
30	011110	0	0
31	011111	0	0
32	100000	0	0
33	100001	0	0
34	100010	0	0
35	100011	0	0
36	100100	0	0
37	100101	0	0
38	100110	0	0
39	100111	0	0
40	101000	0	0
41	101001	0	0
42	101010	0	0
43	101011	0	0
44	101100	0	0
45	101101	0	0
46	101110	0	0
47	101111	0	0
48	110000	3	0
49	110001	3	0
50	110010	3	0
51	110011	3	0
52	110100	3	0
53	110101	3	0
54	110110	3	0

55	110111	3	0
56	111000	3	0
57	111001	3	0
58	111010	3	0
59	111011	3	0
60	111100	3	0
61	111101	3	0
62	111110	3	0
63	111111	3	0

Classifier table index: 11, # entries: 8, Table type: IEEE 802.1

Entry #	Code point	Forwarding-class #	PLP
0	000	0	0
1	001	0	0
2	010	0	0
3	011	0	0
4	100	0	0
5	101	0	0
6	110	3	0
7	111	3	0

Classifier table index: 12, # entries: 8, Table type: IPv4 precedence

Entry #	Code point	Forwarding-class #	PLP
0	000	0	0
1	001	0	0
2	010	0	0
3	011	0	0
4	100	0	0
5	101	0	0
6	110	3	0
7	111	3	0

Classifier table index: 16, # entries: 8, Table type: Untrust

Entry #	Code point	Forwarding-class #	PLP
0	000	0	0
1	001	0	0
2	010	0	0
3	011	0	0
4	100	0	0
5	101	0	0
6	110	0	0
7	111	0	0

Classifier table index: 9346, # entries: 64, Table type: DSCP

Entry #	Code point	Forwarding-class #	PLP
0	000000	0	0
1	000001	0	0
2	000010	0	0
3	000011	0	0
4	000100	0	0
5	000101	0	0
6	000110	0	0
7	000111	1	0
8	001000	0	0
9	001001	0	0
10	001010	0	0
11	001011	0	0
12	001100	0	0
13	001101	0	0
14	001110	0	0

15	001111	0	0
16	010000	0	0
17	010001	0	0
18	010010	0	0
19	010011	0	0
20	010100	0	0
21	010101	0	0
22	010110	0	0
23	010111	0	0
24	011000	0	0
25	011001	0	0
26	011010	0	0
27	011011	0	0
28	011100	0	0
29	011101	0	0
30	011110	0	0
31	011111	0	0
32	100000	0	0
33	100001	0	0
34	100010	0	0
35	100011	0	0
36	100100	0	0
37	100101	0	0
38	100110	0	0
39	100111	0	0
40	101000	0	0
41	101001	0	0
42	101010	0	0
43	101011	0	0
44	101100	0	0
45	101101	0	0
46	101110	0	0
47	101111	0	0
48	110000	3	0
49	110001	3	0
50	110010	3	0
51	110011	3	0
52	110100	3	0
53	110101	3	0
54	110110	3	0
55	110111	3	0
56	111000	3	0
57	111001	3	0
58	111010	3	0
59	111011	3	0
60	111100	3	0
61	111101	3	0
62	111110	3	0
63	111111	3	0

**Meaning** This output shows that a new DSCP classifier has been created, index **9346**, on the ingress PE switch (PE-1).

### Verifying the CoS Forwarding Table Mapping

**Purpose** For each logical interface, display either the table index of the classifier for a given code point type or the queue number (if it is a fixed classification) in the forwarding table.

**Action** user@switch>show class-of-service forwarding-table classifier mapping

Interface	Index	Table Index/	
		Q num	Table type
ge-0/0/1.0	92	9346	DSCP

**Meaning** The results show that the new DSCP classifier, index number **9346**, is bound to interface **ge-0/0/1.0**.

### Verifying the Rewrite Rules

**Purpose** Display mapping of the queue number and loss priority to code point value for each rewrite rule as it exists in the forwarding table.

**Action** user@switch>show class-of-service forwarding-table rewrite-rule

```

Rewrite table index: 31, # entries: 4, Table type: DSCP
FC#    Low bits  State    High bits  State
0       000000   Enabled   000000   Enabled
1       101110   Enabled   101110   Enabled
2       001010   Enabled   001100   Enabled
3       110000   Enabled   111000   Enabled

Rewrite table index: 34, # entries: 4, Table type: IEEE 802.1
FC#    Low bits  State    High bits  State
0         000   Enabled       001   Enabled
1         010   Enabled       011   Enabled
2         100   Enabled       101   Enabled
3         110   Enabled       111   Enabled

Rewrite table index: 35, # entries: 4, Table type: IPv4 precedence
FC#    Low bits  State    High bits  State
0         000   Enabled       000   Enabled
1         101   Enabled       101   Enabled
2         001   Enabled       001   Enabled
3         110   Enabled       111   Enabled

Rewrite table index: 9281, # entries: 1, Table type: EXP
FC#    Low bits  State    High bits  State
1         111   Enabled       000   Disabled

```

**Meaning** This output shows that a new EXP classifier with the index number **9281** has been created.

- Related Documentation**
- [Configuring MPLS on Provider Edge EX8200 and EX4500 Switches Using Circuit Cross-Connect \(CLI Procedure\)](#)
  - [Configuring MPLS on Provider Edge Switches Using IP Over MPLS \(CLI Procedure\)](#)
  - [Understanding Using CoS with MPLS Networks on EX Series Switches on page 161](#)
  - [Monitoring CoS Forwarding Classes on page 95](#)

## Configuring CoS on an MPLS Provider Edge Switch Using IP Over MPLS (CLI Procedure)

You can use class of service (CoS) within MPLS networks to prioritize certain types of traffic during periods of congestion. This topic describes configuring CoS components on a provider edge (PE) switch that is using IP Over MPLS.

This task describes how to create a custom DSCP classifier and a custom EXP rewrite rule on the ingress PE switch. It includes configuring a policer firewall filter and applying it to the customer-edge interface of the ingress PE switch. The policer firewall filter ensures that the amount of traffic forwarded through the MPLS tunnel never exceeds the requested bandwidth allocation.

Before you begin, configure the basic components for an MPLS network:

- Configure two PE switches. See [Configuring MPLS on Provider Edge EX8200 and EX4500 Switches Using Circuit Cross-Connect \(CLI Procedure\)](#).
- Configure one or more provider switches. See [“Configuring MPLS on EX8200 and EX4500 Provider Switches \(CLI Procedure\)” on page 183](#).

This topic includes:

1. [Configuring CoS on page 178](#)
2. [Configuring an LSP Policer on page 179](#)

### Configuring CoS

To configure CoS on a provider edge switch:

1. Import the default DSCP classifier classes to the custom DSCP classifier that you are creating:

```
[edit class-of-service]
user@switch# set classifiers dscp classifier-name import default
```

2. Add a forwarding class to this custom DSCP classifier and specify a loss priority and code point:

```
[edit class-of-service]
user@switch# set classifiers dscp classifier-name forwarding-class forwarding-class
loss-priority loss-priority code-points code-point
```

3. Specify the values for the custom EXP rewrite rule, **e1**:

```
[edit class-of-service]
user@switch# set rewrite-rules exp e1 forwarding-class forwarding-class loss-priority
loss-priority code-points code-point
```

4. On EX8200 switches only, bind the custom EXP rewrite rule to the interface:

```
[edit class-of-service]
user@switch# set class-of-service interfaces interface unit unit rewrite-rules exp e1
```

## Configuring an LSP Policer

To configure an LSP policer:



**NOTE:** You cannot configure LSP policers on EX8200 switches. EX8200 switches do not support LSP policers.

1. Specify the number of bits per second permitted, on average, for the firewall policer, which will later be applied to the customer-edge-interface:

```
[edit firewall]
user@switch# set policer mypolicer if-exceeding bandwidth-limit 500m
```

2. Specify the maximum size permitted for bursts of data that exceed the given bandwidth limit for this policer:

```
[edit firewall policer]
user@switch# set mypolicer if-exceeding burst-size-limit 33553920
```

3. Discard traffic that exceeds the rate limits for this policer:

```
[edit firewall policer]
user@switch# set mypolicer then discard
```

4. To reference the policer, configure a filter term that includes the policer action:

```
[edit firewall]
user@switch# set family inet filter myfilter term t1 then policer mypolicer
```

5. Apply the filter to the customer-edge interface:

```
[edit interfaces]
user@switch# set ge-2/0/3 unit 0 family inet address 192.168.121.1/16 policing filter myfilter
```



**NOTE:** You can also configure schedulers and shapers as needed. See [“Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\)” on page 112](#).

### Related Documentation

- [Configuring MPLS on Provider Edge EX8200 and EX4500 Switches Using Circuit Cross-Connect \(CLI Procedure\)](#)

- [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45](#)
- [Configuring Policers to Control Traffic Rates \(CLI Procedure\)](#)
- [Understanding the Use of Policers in Firewall Filters](#)

## Configuring CoS on an MPLS Provider Edge Switch Using Circuit Cross-Connect (CLI Procedure)

You can use class of service (CoS) within MPLS networks to prioritize certain types of traffic during periods of congestion. This topic describes configuring CoS components on a provider edge (PE) switch that is using MPLS over circuit-cross connect (CCC).



**NOTE:** On EX Series switches other than EX8200 switches, if you are using MPLS over CCC, you can use only one DSCP or IP precedence classifier and only one IEEE 802.1p classifier on the CCC interfaces.

This procedure is for creating a custom DSCP classifier and a custom EXP rewrite rule on the ingress PE. It also includes enabling a policer on the label-switched path (LSP) of the ingress PE to ensure that the amount of traffic forwarded through the LSP never exceeds the requested bandwidth allocation.

This topic includes:

1. [Configuring CoS on page 180](#)
2. [Configuring an LSP Policer on page 181](#)

### Configuring CoS

To configure CoS on a provider edge switch:

1. Import the default DSCP classifier classes to the custom DSCP classifier that you are creating:

```
[edit class-of-service]
user@switch# set classifiers dscp classifier-name import default
```

2. Add the expedited-forwarding class to this custom DSCP classifier, specifying a loss priority and code point:

```
[edit class-of-service]
user@switch# set classifiers dscp classifier-name forwarding-class forwarding-class
loss-priority loss-priority code-points code-point
```

3. Specify the values for the custom EXP rewrite rule, **e1**:

```
[edit class-of-service]
user@switch# set rewrite-rules exp e1 forwarding-class forwarding-class loss-priority
loss-priority code-point code-point
```



4. Bind the DSCP classifier to the CCC interface:

```
[edit ]
user@switch# set class-of-service interfaces interface unit unit classifier classifier-name
```

5. On EX8200 switches only, bind the custom EXP rewrite rule to the interface:

```
[edit class-of-service]
user@switch# set class-of-service interfaces interface unit unit rewrite-rules exp e1
```

## Configuring an LSP Policer

To configure an LSP policer:



**NOTE:** You cannot configure LSP policers on EX8200 switches. EX8200 switches do not support LSP policers.

1. Specify the number of bits per second permitted, on average, for the policer, which will later be applied to the LSP:

```
[edit firewall]
set policer mypolicer if-exceeding bandwidth-limit 500m
```

2. Specify the maximum size permitted for bursts of data that exceed the given bandwidth limit for this policer:

```
[edit firewall policer]
set mypolicer if-exceeding burst-size-limit 33553920
```

3. Discard traffic that exceeds the rate limits for this policer:

```
[edit firewall policer]
set mypolicer then discard
```

4. To reference the policer, configure a filter term that includes the policer action:

```
[edit firewall]
user@switch# set family any filter myfilter term t1 then policer mypolicer
```

5. Apply the filter to the LSP:

```
[edit protocols mpls]
set label-switched-path lsp_to_pe2_ge1 policing filter myfilter
```



**NOTE:** You can also configure schedulers and shapers as needed. See [“Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\)” on page 112](#).

### Related Documentation

- [Configuring MPLS on Provider Edge EX8200 and EX4500 Switches Using Circuit Cross-Connect \(CLI Procedure\)](#)

- [Assigning CoS Components to Interfaces \(CLI Procedure\)](#) on page 45
- [Configuring Policers to Control Traffic Rates \(CLI Procedure\)](#)
- [Understanding the Use of Policers in Firewall Filters](#)

## Configuring CoS on Provider Switches of an MPLS Network (CLI Procedure)

You can add class-of-service (CoS) components to your MPLS networks on EX Series switches to achieve end-to-end Differentiated Services to match your specific business requirements. The configuration of CoS components on the provider switches is the same regardless of whether the provider edge (PE) switches are using MPLS over CCC or IP over MPLS.

This task shows how to configure a custom EXP classifier and custom EXP rewrite rule on the provider switch.

1. Import the default EXP classifier classes to the custom EXP classifier that you are creating:

```
[edit class-of-service]
user@switch# set classifiers exp exp1 import default
```

2. Add the expedited-forwarding class to this custom EXP classifier, specifying a loss priority and code point:

```
[edit class-of-service]
user@switch# set classifiers exp exp1 forwarding-class expedited-forwarding loss-priority
low code-points 010
```

3. Specify the values for the custom EXP rewrite rule, **e1**:

```
[edit class-of-service]
user@switch# set rewrite-rules exp e1 forwarding-class expedited-forwarding loss-priority
low code-point 111
```

4. On EX8200 switches only, bind the custom EXP rewrite rule to the interface:

```
[edit class-of-service]
user@switch# set class-of-service interfaces ge-0/0/2 unit 0 rewrite-rules exp e1
```



**NOTE:** You can also configure schedulers and shapers as needed. See [“Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\)”](#) on page 112.

### Related Documentation

- [Example: Configuring CoS on EX Series Switches](#) on page 14

## Configuring MPLS on EX8200 and EX4500 Provider Switches (CLI Procedure)

You can configure MPLS on EX8200 and EX4500 switches to increase transport efficiency in your network. MPLS services can be used to connect various sites to a backbone network and to ensure better performance for low-latency applications such as VoIP and other business-critical functions.

To implement MPLS on EX Series switches, you must configure at least one provider switch as a transit switch for the MPLS packets. The configuration of all the provider switches remains the same regardless of whether the provider edge (PE) switches are using circuit cross-connect (CCC) or using MPLS over IP for the customer edge interfaces. Likewise, you do not need to change the configuration of the provider switches if you implement an MPLS-based Layer 2 VPN, Layer 3 VPN, or a Layer 2 circuit configuration.

MPLS requires the configuration of a routing protocol (OSPF or IS-IS) on the core interfaces and the loopback interface of all the switches. This procedure includes the configuration of OSPF on the provider switch. For information on configuring IS-IS as the routing protocol, see [Junos OS Routing Protocols Configuration Guide](#).

To configure the provider switch, complete the following tasks:

1. Enable the routing protocol (OSPF or IS-IS) on the loopback interface and on the core interfaces:



**NOTE:** You can use the switch address as an alternative to the loopback interface.

```
[edit protocols]
user@switch# set ospf area 0.0.0.0 interface lo0.0
user@switch# set ospf area 0.0.0.0 interface ge-0/0/5.0
user@switch# set ospf area 0.0.0.0 interface ge-0/0/6.0
user@switch# set ospf area 0.0.0.0 interface ae0
```

2. Enable traffic engineering for the routing protocol (traffic engineering must be explicitly enabled for OSPF):

```
[edit protocols]
user@switch# set ospf traffic-engineering
```

3. Enable MPLS within the **protocols** stanza and apply it to the core interfaces:

```
[edit protocols]
user@switch# set mpls interface ge-0/0/5.0
user@switch# set mpls interface ge-0/0/6.0
user@switch# set mpls interface ae0
```

4. Configure RSVP on the loopback interface and the core interfaces:

```
[edit protocols]
user@switch# set rsvp interface lo0.0
user@switch# set rsvp interface ge-0/0/5.0
```

```
user@switch# set rsvp interface ge-0/0/6.0
user@switch# set rsvp interface ae0
```

5. Configure an IP address for the loopback interface and for the core interfaces:

```
[edit]
user@switch# set interfaces lo0 unit 0 family inet address 127.1.1.1/32
user@switch# set interfaces ge-0/0/5 unit 0 family inet address 10.1.5.1/24
user@switch# set interfaces ge-0/0/6 unit 0 family inet address 10.1.6.1/24
user@switch# set interfaces ae0 unit 0 family inet address 10.1.9.2/24
```

6. Configure **family mpls** on the logical units of the core interfaces:

```
[edit]
user@switch# set interfaces ge-0/0/5 unit 0 family mpls
user@switch# set interfaces ge-0/0/6 unit 0 family mpls
user@switch# set interfaces ae0 unit 0 family mpls
```



**NOTE:** You can enable **family mpls** on either individual interfaces or aggregated Ethernet interfaces. You cannot enable it on tagged VLAN interfaces.

#### Related Documentation

- *Example: Configuring MPLS on EX8200 and EX4500 Switches*
- *Configuring MPLS on Provider Edge EX8200 and EX4500 Switches Using Circuit Cross-Connect (CLI Procedure)*
- *Configuring MPLS on Provider Edge Switches Using IP Over MPLS (CLI Procedure)*
- *Configuring an MPLS-Based Layer 2 VPN (CLI Procedure)*
- *Configuring an MPLS-Based Layer 3 VPN (CLI Procedure)*

## PART 4

# Configuration Statements and Operational Commands

- [Configuration Statements on page 187](#)
- [Operational Commands on page 235](#)



## CHAPTER 15

# Configuration Statements

- [broadcast](#) on page 188
- [buffer-size](#) on page 189
- [class](#) on page 190
- [class-of-service](#) on page 191
- [classifiers](#) on page 194
- [code-point \(Congestion Notification\)](#) on page 195
- [code-point-aliases](#) on page 196
- [code-points](#) on page 197
- [congestion-notification-profile \(Priority-Based Flow Control\)](#) on page 198
- [drop-probability \(Fill Level\)](#) on page 199
- [drop-profile-map](#) on page 200
- [dscp](#) on page 201
- [dscp-ipv6](#) on page 202
- [ethernet \(CoS for Multidestination Traffic\)](#) on page 203
- [excess-rate \(Schedulers\)](#) on page 204
- [exp](#) on page 205
- [explicit-congestion-notification](#) on page 206
- [family](#) on page 207
- [forwarding-class](#) on page 208
- [forwarding-classes](#) on page 209
- [ieee-802.1](#) on page 210
- [ieee-802.1 \(Congestion Notification\)](#) on page 211
- [import](#) on page 212
- [inet \(CoS\)](#) on page 213
- [inet6 \(CoS Multidestination\)](#) on page 214
- [inet-precedence](#) on page 215
- [input \(Congestion Notification\)](#) on page 216
- [interfaces](#) on page 217

- [loss-priority \(Classifiers and Rewrite Rules\) on page 218](#)
- [multi-destination on page 220](#)
- [policing on page 221](#)
- [priority \(Schedulers\) on page 222](#)
- [protocol \(Drop Profiles\) on page 223](#)
- [rewrite-rules on page 224](#)
- [scheduler-map on page 225](#)
- [scheduler-maps on page 226](#)
- [schedulers \(CoS\) on page 227](#)
- [shaping-rate on page 228](#)
- [shared-buffer on page 229](#)
- [transmit-rate \(EX Series Switches\) on page 230](#)
- [tri-color \(EX Series Switches\) on page 231](#)
- [unit on page 234](#)

## broadcast

Syntax	<code>broadcast forwarding-class-name;</code>
Hierarchy Level	<code>[edit class-of-service multi-destination family ethernet]</code>
Release Information	Statement introduced in Junos OS Release 9.5 for EX Series switches.
Description	Specify the forwarding class for the broadcast traffic belonging to the Ethernet family.
Options	<p><b>forwarding-class-name</b> —Name of the forwarding class:</p> <ul style="list-style-type: none"> <li>• <b>mcast-af</b>—Default forwarding class for assured forwarding of multicast traffic.</li> <li>• <b>mcast-be</b>—Default best-effort forwarding class for multicast traffic.</li> <li>• <b>mcast-ef</b>—Default forwarding class for expedited forwarding of multicast traffic.</li> </ul>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Understanding CoS Schedulers on page 105</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 90</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> </ul>



## buffer-size

<b>Syntax</b>	<code>buffer-size (exact   percent <i>percentage</i>   remainder   temporal);</code>
<b>Hierarchy Level</b>	[edit <code>class-of-service schedulers <i>scheduler-name</i></code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Specify buffer size in a scheduler configuration.
<b>Default</b>	On EX Series switches except EX4300 switches, the default scheduler transmission rate and buffer size percentages for queues 0 through 7 are 95, 0, 0, 0, 0, 0, 0, and 5 percent, respectively. On EX4300 switches, the default scheduler transmission rate and buffer size for queues 0 through 11 are 75, 0, 0, 0, 5, 0, 0, 0, 0, 15, 0, 0 and 5 percent, respectively, of the total available buffer.
<b>Options</b>	<p><b>exact</b>—(Except on EX8200 standalone switches and EX8200 Virtual Chassis) Enforce the exact buffer size. When this option is configured, sharing is disabled on the queue, restricting the usage to guaranteed buffers only.</p> <p><b>percent <i>percentage</i></b>—Buffer size as a percentage of the total buffer.</p> <p><b>remainder</b>—Remaining buffer available.</p> <p><b>temporal</b>—(EX4200 standalone switches, EX4200 Virtual Chassis, EX4300 standalong switches, EX4300 Virtual Chassis, EX8200 standalone switches, and EX8200 Virtual Chassis only) Buffer size as a temporal value.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112</a> or <a href="#">Defining CoS Schedulers (J-Web Procedure) on page 115</a></li> <li>• <a href="#">Understanding CoS Schedulers on page 105</a></li> </ul>

## class

Syntax	<code>class <i>class-name</i> queue-num <i>queue-number</i> priority ( <i>high</i>   <i>low</i> );</code>
Hierarchy Level	[edit <a href="#">class-of-service forwarding-classes</a> ]
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Configure up to 16 forwarding classes with multiple forwarding classes mapped to single queues. If you want to configure up to eight forwarding classes with one-to-one mapping to output queues, use the <b>queue</b> statement instead of the <b>class</b> statement at the <b>[edit class-of-service forwarding-classes]</b> hierarchy level.</p> <p>On EX8200 switches, you can assign a fabric priority to a forwarding class. The fabric priority determines scheduling priority of packets ingressing the switch fabric. In addition, for interfaces on the 40-port SFP+ line card, the fabric priority determines whether packets are sent to the high or low priority queue for ingressing the port group. The primary use of this option is to prevent high priority input traffic from being dropped due to congestion on the port group of a 40-port SFP+ line card.</p>
Options	<p><b><i>class-name</i></b>—Name of forwarding class.</p> <p><b>priority (high   low)</b>—(Optional) (EX8200 switches only) Fabric priority.  <b>Values:</b> high or low  <b>Default:</b> low</p> <p><b>queue-num <i>queue-number</i></b>—Output queue number.  <b>Range:</b> 0 through 7</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Forwarding Classes (CLI Procedure) on page 93</a> or <a href="#">Defining CoS Forwarding Classes (J-Web Procedure) on page 93</a></li> <li>• <a href="#">Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards (CLI Procedure) on page 69</a></li> </ul>

## class-of-service

```
Syntax class-of-service {
  classifiers {
    (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) classifier-name {
      import (classifier-name | default);
      forwarding-class class-name {
        loss-priority level {
          code-points [aliases] [6 bit-patterns];
        }
      }
    }
  }
  code-point-aliases {
    (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) {
      alias-name bits;
    }
  }
  forwarding-classes {
    class class-name queue-num queue-number priority (high | low);
  }
  interfaces {
    interface-name {
      scheduler-map map-name;
      unit logical-unit-number {
        forwarding-class class-name;
        classifiers {
          (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) (classifier-name | default);
        }
      }
    }
  }
  multi-destination {
    family {
      ethernet {
        broadcast forwarding-class-name;
      }
      inet {
        classifiers {
          (dscp | dscp-ipv6 | inet-precedence) classifier-name;
        }
      }
    }
    scheduler-map map-name;
  }
  rewrite-rules {
    (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) rewrite-name {
      import (rewrite-name | default);
      forwarding-class class-name {
        loss-priority priority code-point (alias | bits);
      }
    }
  }
}
```

```

scheduler-maps {
  map-name {
    forwarding-class class-name scheduler scheduler-name;
  }
}
schedulers {
  scheduler-name {
    buffer-size (percent percentage | remainder);
    drop-profile-map loss-priority loss-priority protocol protocol drop-profile profile-name;
    priority priority;
    shaping-rate (rate | percent percentage);
    transmit-rate (EX Series Switches) (rate | percent percentage | remainder);
  }
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Configure class-of-service (CoS) parameters on EX Series switches.

The remaining statements are explained separately. See [CLI Explorer](#).

**Default** If you do not configure any CoS features, the default CoS settings are used.

**Required Privilege Level** interface—To view this statement in the configuration.interface-control—To add this statement to the configuration.

- Related Documentation**
- [Example: Configuring CoS on EX Series Switches on page 14](#)
  - [Defining CoS Code-Point Aliases \(CLI Procedure\) on page 52 or Defining CoS Code-Point Aliases \(J-Web Procedure\) on page 52](#)
  - [Defining CoS Classifiers \(CLI Procedure\) on page 59 or Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)
  - [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93 or Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)
  - [Configuring CoS Tail Drop Profiles \(CLI Procedure\) on page 134](#)
  - [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112 or Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
  - [Defining CoS Rewrite Rules \(CLI Procedure\) on page 78 or Defining CoS Rewrite Rules \(J-Web Procedure\) on page 79](#)
  - [Assigning CoS Components to Interfaces \(CLI Procedure\) on page 45 or Assigning CoS Components to Interfaces \(J-Web Procedure\) on page 46](#)
  - [Configuring CoS Traffic Classification for Ingress Queuing on Oversubscribed Ports on EX8200 Line Cards \(CLI Procedure\) on page 69](#)

## classifiers

<b>Syntax</b>	<pre> classifiers {   (dscp   dscp-ipv6   ieee-802.1   inet-precedence   exp) classifier-name {     import (classifier-name   default);     forwarding-class class-name {       loss-priority level {         code-points [aliases] [6-bit-patterns];       }     }   } } </pre>
<b>Hierarchy Level</b>	<pre> [edit class-of-service], [edit class-of-service interfaces interface-name unit logical-unit-number] </pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Expanded to include EXP classifiers in Junos OS Release 10.1 for EX Series switches.</p>
<b>Description</b>	<p>Apply a CoS aggregate behavior classifier to a logical interface. You can apply a default classifier or a custom classifier.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Example: Combining CoS with MPLS on EX Series Switches on page 166</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces (CLI Procedure) on page 45</a> or <a href="#">Assigning CoS Components to Interfaces (J-Web Procedure) on page 46</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> </ul>

## code-point (Congestion Notification)

<b>Syntax</b>	<code>code-point <i>up-bits</i> pfc;</code>
<b>Hierarchy Level</b>	<p>[edit <a href="#">class-of-service congestion-notification-profile (Priority-Based Flow Control)</a> <i>profile-name</i> <a href="#">input ieee-802.1</a>],</p> <p>[edit class-of-service interfaces <i>interface-name</i> congestion-notification-profile <i>profile-name</i> <a href="#">input ieee-802.1</a>]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4 for EX Series switches.
<b>Description</b>	Configure the IEEE 802.1p (User Priority) code point bits as input for creating the priority-based flow control (PFC) congestion notification profile, which you will associate with a particular traffic class.
<b>Options</b>	<ul style="list-style-type: none"> <li>• <b>pfc</b>—PFC flow control method</li> <li>• <b>up-bits</b>—Three-bit pattern of the User Priority field in an IEEE 802.1Q tag</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure) on page 102</a></li> </ul>

## code-point-aliases


<b>Syntax</b>	<pre>code-point-aliases {   (dscp   dscp-ipv6   ieee-802.1   inet-precedence) [{     alias-name bits;   } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	<p>Define an alias for a CoS marker.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases (CLI Procedure) on page 52</a> or <a href="#">Defining CoS Code-Point Aliases (J-Web Procedure) on page 52</a></li> <li>• <a href="#">Understanding CoS Code-Point Aliases on page 49</a></li> </ul>



## code-points

<b>Syntax</b>	<code>code-points [ <i>aliases</i> ] [ <i>6 bit-patterns</i> ];</code>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service classifiers</a> ( <a href="#">dscp</a>   <a href="#">ieee-802.1</a>   <a href="#">inet-precedence</a> ) <a href="#">forwarding-class</a> <i>class-name</i> <a href="#">loss-priority level</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Specify one or more DSCP code-point aliases or bit sets for association with a forwarding class.
<b>Options</b>	<p><i>aliases</i> —Name of the DSCP alias.</p> <p><i>6 bit-patterns</i> —Value of the code-point bits, in decimal form.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> </ul>

## congestion-notification-profile (Priority-Based Flow Control)

Syntax	<pre>congestion-notification-profile <i>profile-name</i> {   input {     ieee-802.1 {       code-point <i>up-bits</i> pfc;     }   } }</pre>
Hierarchy Level	<pre>[edit <a href="#">class-of-service</a>], [edit <a href="#">class-of-service interfaces</a> <i>interface-name</i>]</pre>
Release Information	Statement introduced in Junos OS Release 10.4 for EX Series switches.
Description	(EX4500 and EX4550 switches only) Configure a congestion notification profile for priority-based flow control (PFC).
<div>  <p><b>NOTE:</b> You must configure PFC for FCoE traffic. The interface where PFC is enabled must be a 10-Gigabit Ethernet interface.</p> </div>	
The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .	
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li><i>Example: Configuring an FCoE Transit Switch</i></li> <li><a href="#">Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure) on page 102</a></li> </ul>

---

## drop-probability (Fill Level)

---

Syntax	<code>drop-probability <i>percentage</i>;</code>
Hierarchy Level	<code>[edit class-of-service drop-profiles <i>profile-name</i> fill-level <i>percentage</i>]</code>
Release Information	Statement introduced before Junos OS 11.4 for EX Series switches.
Description	(EX8200 standalone switches and EX8200 Virtual Chassis only) Drop packets at the rate of the drop-probability value when the queue fills to the percentage configured with the fill-level value. This way you can manage network congestion.
Options	<b><i>percentage</i></b> —The probability (expressed in percentage) for a packet to be dropped from the queue. <b>Range:</b> 0 through 100
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring CoS Tail Drop Profiles (CLI Procedure) on page 134</a></li><li>• <a href="#">Understanding Junos OS CoS Components for EX Series Switches on page 8</a></li></ul>

## drop-profile-map

Syntax	<code>drop-profile-map <b>loss-priority</b> <i>loss-priority</i> <b>protocol</b> <i>protocol</i> drop-profile <i>profile-name</i>;</code>
Hierarchy Level	[edit <b>class-of-service schedulers</b> <i>scheduler-name</i> ]
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Define the loss priority value for the specified drop profile.
Options	<b>drop-profile</b> <i>profile-name</i> —Name of the drop profile.  The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li><li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112</a> or <a href="#">Defining CoS Schedulers (J-Web Procedure) on page 115</a></li><li>• <a href="#">Understanding CoS Schedulers on page 105</a></li></ul>

## dscp

<b>Syntax</b>	<pre> dscp classifier-name {   import (classifier-name   default);   forwarding-class class-name {     loss-priority level {       code-points [ aliases ] [ 6-bit-patterns ];     }   } } </pre>
<b>Hierarchy Level</b>	<pre> [edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers], [edit class-of-service rewrite-rules] </pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Define the Differentiated Services code point (DSCP) mapping that is applied to the packets.
<b>Options</b>	<p><b>classifier-name</b>—Name of the classifier.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases (CLI Procedure) on page 52</a> or <a href="#">Defining CoS Code-Point Aliases (J-Web Procedure) on page 52</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces (CLI Procedure) on page 45</a> or <a href="#">Assigning CoS Components to Interfaces (J-Web Procedure) on page 46</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> </ul>

## dscp-ipv6

<b>Syntax</b>	<pre> dscp-ipv6 classifier-name {   import (classifier-name   default);   forwarding-class class-name {     loss-priority level {       code-points [aliases] [6-bit-patterns];     }   } } </pre>
<b>Hierarchy Level</b>	<pre> [edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers] [edit class-of-service interfaces interface-name unit logical-unit-number rewrite-rules] [edit class-of-service rewrite-rules] </pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.2 for EX Series switches.
<b>Description</b>	Define the Differentiated Services code point (DSCP) mapping that is applied to the IPv6 packets.
<b>Options</b>	<p><b>classifier-name</b>—Name of the classifier.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases (CLI Procedure) on page 52</a> or <a href="#">Defining CoS Code-Point Aliases (J-Web Procedure) on page 52</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces (CLI Procedure) on page 45</a> or <a href="#">Assigning CoS Components to Interfaces (J-Web Procedure) on page 46</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> </ul>

## ethernet (CoS for Multidestination Traffic)

**Syntax** ethernet {  
     **broadcast** *forwarding-class-name*;  
 }

**Hierarchy Level** [edit **class-of-service multi-destination family**]

**Release Information** Statement introduced in Junos OS Release 9.5 for EX Series switches.

**Description** Specify the Ethernet broadcast traffic family.



**NOTE:** On EX4300 switches, including switches in a virtual chassis or virtual chassis fabric configuration, you cannot explicitly configure multi-destination (broadcast, multicast, and destination lookup fail) traffic classification. By default, all multi-destination traffic uses output queue 8. This means all multicast (multi-destination) traffic always uses Q8 and there is no control to modify the queue.

The remaining statement is explained separately. See [CLI Explorer](#).

**Required Privilege Level** interface—To view this statement in the configuration.  
 interface-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding CoS Schedulers on page 105](#)
- [Understanding CoS Forwarding Classes on page 90](#)
- [Understanding CoS Classifiers on page 56](#)

## excess-rate (Schedulers)

<b>Syntax</b>	<pre>excess-rate {     percent <i>percentage</i>; }</pre>
<b>Hierarchy Level</b>	[edit class-of-service <a href="#">schedulers</a> <i>scheduler-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.
<b>Description</b>	(EX4300 switches only) Specify the percentage of excess bandwidth traffic to share.
<b>Default</b>	Excess bandwidth is shared in proportion to the configured transmit rate of each queue.
<b>Options</b>	<ul style="list-style-type: none"><li>• <b>percent</b>—Percentage of the excess bandwidth to share.</li></ul>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding CoS Schedulers on page 105</a></li><li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112</a> or <a href="#">Defining CoS Schedulers (J-Web Procedure) on page 115</a></li><li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li></ul>



## exp

Syntax	<pre>exp classifier-name {   import (classifier-name   default);   forwarding-class class-name {     loss-priority level {       code-points [aliases] [3-bit-patterns];     }   } }</pre>
Hierarchy Level	<pre>[edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service interfaces interface-name unit logical-unit-number rewrite-rules], [edit class-of-service rewrite-rules]</pre>
Release Information	Statement introduced in Junos OS Release 10.1 for EX Series switches.
Description	<p>Define the experimental bits (EXP) code point mapping that is applied to MPLS packets. You can define an <b>exp</b> classifier only on EX3200 switches, EX4200 and EX8200 standalone switches, and EX8200 Virtual Chassis. You can bind an <b>exp</b> rewrite rule on EX8200 standalone switches and EX8200 Virtual Chassis.</p> <p>EX Series switches support only one EXP code mapping on the switch (either default or custom). It is applied globally and implicitly to all the MPLS-enabled interfaces on the switch. You cannot bind it or disable it on individual interfaces.</p>
Options	<p><b>classifier-name</b>—Name of the classifier.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Understanding Using CoS with MPLS Networks on EX Series Switches on page 161</a></li> <li>• <a href="#">Configuring MPLS on Provider Edge EX8200 and EX4500 Switches Using Circuit Cross-Connect (CLI Procedure)</a></li> <li>• <a href="#">Configuring MPLS on Provider Edge Switches Using IP Over MPLS (CLI Procedure)</a></li> <li>• <a href="#">Configuring CoS on Provider Switches of an MPLS Network (CLI Procedure) on page 182</a></li> </ul>

## explicit-congestion-notification

<b>Syntax</b>	<code>explicit-congestion-notification;</code>
<b>Hierarchy Level</b>	<code>[edit class-of-service schedulers <i>scheduler-name</i>]</code>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 13.2X51 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2X51-D20 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Enable explicit congestion notification (ECN) on the output queue (forwarding class) or output queues (forwarding classes) mapped to the scheduler. ECN enables end-to-end congestion notification between two endpoints on TCP/IP based networks. The two endpoints are an ECN-enabled sender and an ECN-enabled receiver. ECN must be enabled on both endpoints and on all of the intermediate devices between the endpoints for ECN to work properly. Any device in the transmission path that does not support ECN breaks the end-to-end ECN functionality.</p> <p>A weighted random early detection (WRED) packet drop profile must be applied to the output queues on which ECN is enabled. ECN uses the WRED drop profile thresholds to mark packets when the output queue experiences congestion.</p> <p>ECN reduces packet loss by forwarding ECN-capable packets during periods of network congestion instead of dropping those packets. (TCP notifies the network about congestion by dropping packets.) During periods of congestion, ECN marks ECN-capable packets that egress from congested queues. When the receiver receives an ECN packet that is marked as experiencing congestion, the receiver echoes the congestion state back to the sender. The sender then reduces its transmission rate to clear the congestion.</p>
<b>Required Privilege Level</b>	<p>interfaces—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring ECN on page 153</a></li> <li>• <a href="#">Understanding CoS Explicit Congestion Notification on page 144</a></li> </ul>

## family

**Syntax**

```
family {
  ethernet {
    broadcast forwarding-class-name;
  }
  inet {
    classifiers {
      (dscp | inet-precedence) classifier-name;
    }
  }
}
```

**Hierarchy Level** [edit [class-of-service multi-destination](#)]

**Release Information** Statement introduced in Junos OS Release 9.5 for EX Series switches.

**Description** Specify the multidestination traffic family.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** interface—To view this statement in the configuration.interface-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding CoS Schedulers on page 105](#)
- [Understanding CoS Forwarding Classes on page 90](#)
- [Understanding CoS Classifiers on page 56](#)

## forwarding-class

Syntax	<pre>forwarding-class <i>class-name</i> {   loss-priority <i>level</i> {     code-points [<i>aliases</i>] [<i>6-bit-patterns</i>];   } }</pre>
Hierarchy Level	<pre>[edit class-of-service classifiers (<i>dscp</i>   <i>ieee-802.1</i>   <i>inet-precedence</i>) <i>classifier-name</i>], [edit class-of-service interfaces <i>interface-name</i> <i>unit</i> <i>logical-unit-number</i>], [edit class-of-service rewrite-rules] (<i>dscp</i>   <i>ieee-802.1</i>   <i>inet-precedence</i>) <i>rewrite-rule-name</i>], [edit class-of-service scheduler-maps <i>map-name</i>], [edit class-of-service host-outbound-traffic]</pre>
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Define forwarding class name and option values.
Options	<p><b><i>class-name</i></b> —Name of the forwarding class.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Forwarding Classes (CLI Procedure) on page 93</a> or <a href="#">Defining CoS Forwarding Classes (J-Web Procedure) on page 93</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 90</a></li> </ul>

## forwarding-classes

<b>List of Syntax</b>	<a href="#">EX Series Except EX4300 on page 209</a> <a href="#">EX Series (merged from topic 82508 forwarding-classes 170913) on page 209</a> <a href="#">EX4300 on page 209</a>
<b>EX Series Except EX4300</b>	<pre>forwarding-classes {   class <i>class-name</i> queue-num <i>queue-number</i> priority (high   low); }</pre>
<b>EX Series (merged from topic 82508 forwarding-classes 170913)</b>	<pre>forwarding-classes {   class <i>class-name</i> queue-num <i>queue-number</i> priority (high   medium-high   low       medium-low); }</pre>
<b>EX4300</b>	<pre>forwarding-classes {   class <i>class-name</i> queue-num <i>queue-number</i>; }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Associate the forwarding class with a class name and queue number. Define the fabric queuing priority as either high or low.
<b>Options</b>	<p><b>queue-num <i>queue-number</i></b>—Output queue number to associate with forwarding class.</p> <p><b>Range:</b> 0 through 7.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Forwarding Classes (CLI Procedure) on page 93</a> or <a href="#">Defining CoS Forwarding Classes (J-Web Procedure) on page 93</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 90</a></li> </ul>

## ieee-802.1

Syntax	<pre> ieee-802.1 classifier-name {   import (classifier-name   default);   forwarding-class class-name {     loss-priority level {       code-points [ aliases ] [ 6 bit-patterns ];     }   } } </pre>
Hierarchy Level	<pre> [edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers], [edit class-of-service rewrite-rules] </pre>
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Apply an IEEE-802.1 rewrite rule.
Options	<p><b>classifier-name</b> —Name of the classifier.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases (CLI Procedure) on page 52</a> or <a href="#">Defining CoS Code-Point Aliases (J-Web Procedure) on page 52</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> <li>• <a href="#">Understanding CoS Rewrite Rules on page 75</a></li> </ul>

## ieee-802.1 (Congestion Notification)

<b>Syntax</b>	<pre>ieee-802.1 {   code-point up-bits pfc ; }</pre>
<b>Hierarchy Level</b>	<pre>[edit class-of-service congestion-notification-profile <i>profile-name</i>], [edit class-of-service interfaces interface-name congestion-notification-profile <i>profile-name</i>]</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4 for EX Series switches.
<b>Description</b>	<p>Set an association between the traffic class and the congestion notification profile.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring an FCoE Transit Switch</i></li> <li>• <a href="#">Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure)</a> on page 102</li> </ul>

## import

<b>Syntax</b>	<code>import (classifier-name   default);</code>
<b>Hierarchy Level</b>	<code>[edit class-of-service classifiers (dscp   ieee-802.1   inet-precedence) classifier-name],</code> <code>[edit class-of-service rewrite-rules (dscp   ieee-802.1   inet-precedence) rewrite-name]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Specify a default or previously defined classifier.
<b>Options</b>	<b>classifier-name</b> —Name of the classifier mapping configured at the <code>[edit class-of-service classifiers]</code> hierarchy level.  <b>default</b> —Default classifier mapping.
<b>Required Privilege Level</b>	<b>interface</b> —To view this statement in the configuration. <b>interface-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> <li>• <a href="#">Understanding CoS Rewrite Rules on page 75</a></li> </ul>



## inet (CoS)

<b>Syntax</b>	<pre>inet {   classifiers {     (dscp   inet-precedence) classifier-name ;   } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service multi-destination family</a> ]
<b>Release Information</b>	Option <b>inet</b> introduced in Junos OS Release 9.5 for EX Series switches. The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .
<b>Description</b>	<p>Specify the IP multicast family.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration.interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Understanding CoS Schedulers on page 105</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 90</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> </ul>

## inet6 (CoS Multidestination)

<b>Syntax</b>	<pre>inet6 {   classifiers {     dscp-ipv6 classifier-name;   } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service multi-destination family</a> ]
<b>Release Information</b>	Option <b>inet6</b> introduced in Junos OS Release before Junos OS 11.4 for EX Series switches.
<b>Description</b>	<p>(EX8200 standalone switches and EX8200 Virtual Chassis only) Specify the IPv6 multicast family.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Understanding CoS Schedulers on page 105</a></li><li>• <a href="#">Understanding CoS Forwarding Classes on page 90</a></li><li>• <a href="#">Understanding CoS Classifiers on page 56</a></li></ul>

## inet-precedence

<b>Syntax</b>	<pre>inet-precedence classifier-name {   import (classifier-name   default);   forwarding-class class-name {     loss-priority level {       code-points [ aliases ] [ 6-bit-patterns ];     }   } }</pre>
<b>Hierarchy Level</b>	<pre>[edit class-of-service classifiers], [edit class-of-service code-point-aliases], [edit class-of-service interfaces interface-name unit logical-unit-number classifiers], [edit class-of-service rewrite-rules]</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Apply an IPv4 precedence rewrite rule.
<b>Options</b>	<p><i>classifier-name</i>—Name of the classifier.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li>• <a href="#">Defining CoS Code-Point Aliases (CLI Procedure) on page 52</a> or <a href="#">Defining CoS Code-Point Aliases (J-Web Procedure) on page 52</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> <li>• <a href="#">Understanding CoS Classifiers on page 56</a></li> <li>• <a href="#">Understanding CoS Rewrite Rules on page 75</a></li> </ul>

## input (Congestion Notification)

<b>Syntax</b>	<pre>input {   ieee-802.1 {     code-point <i>up-bits</i> pfc ;   } }</pre>
<b>Hierarchy Level</b>	<p>[edit <a href="#">class-of-service congestion-notification-profile (Priority-Based Flow Control)</a> <i>profile-name</i>],</p> <p>[edit class-of-service interfaces <i>interface-name</i> congestion-notification-profile <i>profile-name</i>]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4 for EX Series switches.
<b>Description</b>	<p>Identify the three-bit pattern of the User Priority field that triggers the priority-based congestion notification profile for a specified traffic class.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> <li>• <a href="#">Configuring Priority-Based Flow Control for an EX Series Switch (CLI Procedure) on page 102</a></li> </ul>

## interfaces

**Syntax**

```

interfaces {
  interface-name {
    congestion-notification-profile profile-name {
      input {
        ieee-802.1 {
          code-point up-bits pfc;
        }
      }
    }
    scheduler-map map-name;
    unit logical-unit-number {
      forwarding-class class-name;
      classifiers {
        (dscp | ieee-802.1 | inet-precedence) (classifier-name | default);
      }
    }
  }
}

```

**Hierarchy Level** [edit [class-of-service](#)]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Configure interface-specific class-of-service (CoS) properties for incoming packets.

**Options** *interface-name*—Name of the interface.


The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Defining CoS Classifiers \(CLI Procedure\) on page 59](#) or [Defining CoS Classifiers \(J-Web Procedure\) on page 61](#)
- [Defining CoS Forwarding Classes \(CLI Procedure\) on page 93](#) or [Defining CoS Forwarding Classes \(J-Web Procedure\) on page 93](#)
- [Defining CoS Schedulers and Scheduler Maps \(CLI Procedure\) on page 112](#) or [Defining CoS Schedulers \(J-Web Procedure\) on page 115](#)
- [Configuring Priority-Based Flow Control for an EX Series Switch \(CLI Procedure\) on page 102](#)

## loss-priority (Classifiers and Rewrite Rules)

<b>Syntax</b>	<pre>loss-priority level {   code-points [aliases] [6-bit-patterns   3-bit-patterns]; }</pre>
<b>Hierarchy Level</b>	<pre>[edit class-of-service classifiers (dscp   ieee-802.1   inet-precedence   exp) classifier-name   forwarding-class class-name], [edit class-of-service rewrite-rules (dscp   ieee-802.1   inet-precedence   exp)   rewrite-rule-name forwarding-class class-name]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement expanded to apply to EXP classifiers in Junos OS Release 10.1 for EX Series switches.</p>
<b>Description</b>	Specify packet loss priority value for a specific set of code-point aliases and bit patterns.
<b>Options</b>	<p><b>level</b>—Can be one of the following:</p> <ul style="list-style-type: none"> <li><b>high</b>—Packet has high loss priority.</li> <li><b>medium-high</b>— (On EX3200, EX4200, EX4300, and EX4500 switches only) Code points to classify to loss priority medium-high.</li> <li><b>low</b>—Packet has low loss priority.</li> <li><b>medium-low</b> — (On EX3200, EX4200, EX4300, and EX4500 switches only) Code points to classify to loss priority medium-low.</li> </ul>
	<p> <b>NOTE:</b> The EX4300 hardware supports only three levels of loss priority — high, medium-high, and low. You can configure a loss priority of medium-low on the EX4300, but the hardware will convert it to medium-high.</p>
	The remaining statement is explained separately. See <a href="#">CLI Explorer</a> .
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li><a href="#">Defining CoS Classifiers (CLI Procedure) on page 59</a> or <a href="#">Defining CoS Classifiers (J-Web Procedure) on page 61</a></li> <li><a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> </ul>

- [Understanding CoS Classifiers on page 56](#)
- [Understanding CoS Rewrite Rules on page 75](#)

## multi-destination

**List of Syntax**    [EX4300 on page 220](#)  
                          [EX8200 on page 220](#)

**EX4300**    `(dscp | dscp-ipv6 | ieee-802.1 | inet-precedence | exp) classifier-name {  
 forwarding-class class-name {`

**EX8200**    `multi-destination {  
     classifiers {  
       dscp classifier-name;  
     }  
     family {  
       ethernet {  
         broadcast (forwarding-class-name );  
       }  
       inet {  
         classifiers {  
           (dscp | inet-precedence) classifier-name;  
         }  
       }  
       inet6 {  
         classifiers {  
           dscp-ipv6 classifier-name;  
         }  
       }  
     }  
     scheduler-map map-name;  
 }`

**Hierarchy Level**    [\[edit class-of-service\]](#)  
                          [\[edit class-of-service interfaces interface-name\]](#) (EX4300 only)

**Release Information**    Statement introduced in Junos OS Release 9.5 for EX Series switches.  
                          Statement introduced in Junos OS Release 17.1 for the EX4300 switch.

**Description**    (EX8200 standalone switches, EX8200 Virtual Chassis, and EX4300 only) Define the CoS configuration for multidestination traffic.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level**    interface—To view this statement in the configuration.  
                          interface-control—To add this statement to the configuration.

**Related Documentation**    • [Understanding CoS Schedulers on page 105](#)  
                          • [Understanding CoS Forwarding Classes on page 90](#)



- [Understanding CoS Classifiers on page 56](#)

## policing

<b>Syntax</b>	<code>policing (filter <i>filter-name</i>   no-automatic-policing);</code>
<b>Hierarchy Level</b>	<code>[edit protocols mpls label-switched-path <i>lsp-name</i>]</code> <code>[edit interfaces <i>interface-id</i> unit <i>number-of-logical-unit</i> family inet address <i>ip-address</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.1 for EX Series switches.
<b>Description</b>	<p>Apply a rate-limiting policer as the specified policing filter:</p> <ul style="list-style-type: none"> <li>• To the LSP for MPLS over CCC.</li> <li>• To the customer-edge interface for IP over MPLS.</li> </ul>
<b>Options</b>	<p><b>filter <i>filter-name</i></b>—Specify the name of the policing filter.</p> <p><b>no-automatic-policing</b>—Disable automatic policing on this LSP.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>policer</i></li> <li>• <i>Configuring Policers to Control Traffic Rates (CLI Procedure)</i></li> <li>• <a href="#">Configuring CoS on an MPLS Provider Edge Switch Using Circuit Cross-Connect (CLI Procedure) on page 180</a></li> <li>• <a href="#">Configuring CoS on an MPLS Provider Edge Switch Using IP Over MPLS (CLI Procedure) on page 178</a></li> </ul>

## priority (Schedulers)

<b>Syntax</b>	<code>priority <i>priority</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service schedulers</a> <i>scheduler-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Specify packet-scheduling priority value.
<b>Options</b>	<b><i>priority</i></b> —It can be one of the following: <ul style="list-style-type: none"><li>• <b>low</b>—Scheduler has low priority.</li><li>• <b>strict-high</b>—Scheduler has strictly high priority.</li></ul>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li><li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112</a> or <a href="#">Defining CoS Schedulers (J-Web Procedure) on page 115</a></li><li>• <a href="#">Understanding CoS Schedulers on page 105</a></li></ul>

## protocol (Drop Profiles)

Syntax	<code>protocol <i>protocol</i> drop-profile <i>profile-name</i>;</code>
Hierarchy Level	[edit <a href="#">class-of-service schedulers</a> <i>scheduler-name</i> ]
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the protocol type for the specified drop profile.
Options	<p><b>drop-profile <i>profile-name</i></b> —Name of the drop profile.</p> <p><b><i>protocol</i></b> —Type of protocol. It can be:</p> <ul style="list-style-type: none"> <li>• <b>any</b>—Accept any protocol type.</li> </ul>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Configuring CoS Tail Drop Profiles (CLI Procedure) on page 134</a></li> <li>• <a href="#">Understanding CoS Tail Drop Profiles on page 133</a></li> </ul>

## rewrite-rules

<b>Syntax</b>	<pre>rewrite-rules {   ( dscp   dscp-ipv6   exp   ieee-802.1   inet-precedence ) rewrite-name {     import ( default   rewrite-name );     forwarding-class class-name {       loss-priority level code-point ( alias   bits );     }   } }</pre>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service</a> ]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement expanded for use with global EXP classifiers in Junos OS Release 10.1 for EX Series switches.</p>
<b>Description</b>	<p>Specify a rewrite-rules mapping for the traffic that passes through all queues on the interface.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Rewrite Rules (CLI Procedure) on page 78</a> or <a href="#">Defining CoS Rewrite Rules (J-Web Procedure) on page 79</a></li> <li>• <a href="#">Understanding CoS Rewrite Rules on page 75</a></li> <li>• <a href="#">Understanding Using CoS with MPLS Networks on EX Series Switches on page 161</a></li> </ul>

## scheduler-map

<b>Syntax</b>	<code>scheduler-map <i>map-name</i>;</code>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service interfaces</a> ], [edit <a href="#">class-of-service multi-destination</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Associate a scheduler map name with an interface or with a multidestination traffic configuration.
<b>Options</b>	<i>map-name</i> —Name of the scheduler map.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li><li>• <a href="#">Assigning CoS Components to Interfaces (CLI Procedure) on page 45</a> or <a href="#">Assigning CoS Components to Interfaces (J-Web Procedure) on page 46</a></li><li>• <a href="#">Understanding CoS Schedulers on page 105</a></li><li>• <a href="#">Understanding CoS Classifiers on page 56</a></li></ul>

## scheduler-maps

<b>Syntax</b>	<pre> scheduler-maps {   map-name {     forwarding-class class-name scheduler scheduler-name;   } } </pre>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Specify a scheduler map name and associate it with the scheduler configuration and forwarding class.
<b>Options</b>	<p><b>map-name</b> —Name of the scheduler map.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Forwarding Classes (CLI Procedure) on page 93</a> or <a href="#">Defining CoS Forwarding Classes (J-Web Procedure) on page 93</a></li> <li>• <a href="#">Understanding CoS Schedulers on page 105</a></li> <li>• <a href="#">Understanding CoS Forwarding Classes on page 90</a></li> </ul>

## schedulers (CoS)

Syntax	<pre> schedulers {   scheduler-name {     buffer-size (percent <i>percentage</i>   remainder);     drop-profile-map loss-priority <i>loss-priority</i> protocol <i>protocol</i> drop-profile <i>profile-name</i>;     excess-rate (percent <i>percentage</i>);     explicit-congestion-notification;     priority <i>priority</i>;     shaping-rate (<i>rate</i>   percent <i>percentage</i>);     transmit-rate (<i>rate</i>   percent <i>percentage</i>   remainder);   } } </pre>
Hierarchy Level	[edit <a href="#">class-of-service</a> ]
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify scheduler name and parameter values.
Options	<p><b><i>scheduler-name</i></b> —Name of the scheduler.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112</a> or <a href="#">Defining CoS Schedulers (J-Web Procedure) on page 115</a></li> <li>• <a href="#">Understanding CoS Schedulers on page 105</a></li> </ul>

## shaping-rate

<b>Syntax</b>	<code>shaping-rate (percent <i>percentage</i>   rate);</code>
<b>Hierarchy Level</b>	[edit <code>class-of-service schedulers (CoS) scheduler-name</code> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.3 for EX Series switches.
<b>Description</b>	<p>Configure shaping rate to throttle the rate at which queues transmit packets.</p> <p>We recommend that you configure the shaping rate as an absolute maximum usage and not as additional usage beyond the configured transmit rate.</p>
<b>Default</b>	If you do not include this statement, the default shaping rate is 100 percent, which is the same as no shaping at all.
<b>Options</b>	<p><b>percentpercentage</b>—Shaping rate as a percentage of the available interface bandwidth.  <b>Range:</b> 0 through 100 percent</p> <p><b>rate</b>—Peak rate, in bits per second (bps). You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation k (1000), m (1,000,000), or g (1,000,000,000).  <b>Range:</b> 3200 through 32,000,000,000 bps          (EX4300 switches only) 8000 through 160,000,000,000 bps</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Understanding Junos OS CoS Components for EX Series Switches on page 8</a></li> </ul>



## shared-buffer

Syntax	<code>shared-buffer percent <i>percentage</i></code>
Hierarchy Level	[edit <a href="#">class-of-service</a> ],
Release Information	Statement introduced in Junos OS Release 10.1 for EX Series switches.
Description	Configure the buffer allocation for the shared buffer pool.
Options	<b>percent <i>percentage</i></b> —Size of the shared buffer as a percentage of the buffer allocated to the shared buffer pool.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li><li>• <a href="#">Understanding Junos OS CoS Components for EX Series Switches on page 8</a></li></ul>

## transmit-rate (EX Series Switches)

<b>Syntax</b>	<code>transmit-rate (<i>rate</i>   percent <i>percentage</i>   remainder);</code>
<b>Hierarchy Level</b>	[edit <a href="#">class-of-service schedulers</a> <i>scheduler-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Specify the transmit rate or percentage for a scheduler.
<b>Default</b>	If you do not include this statement, the default scheduler transmission rate and buffer size percentages for queues 0 through 7 are 95, 0, 0, 0, 0, 0, 0, and 5 percent.
<b>Options</b>	<p><b>rate</b> —Transmission rate, in bps. You can specify a value in bits per second either as a complete decimal number or as a decimal number followed by the abbreviation k (1000), m (1,000,000), or g (1,000,000,000).</p> <p><b>Range:</b> 3200 through 160,000,000,000 bps</p> <p>(EX4300 switches only) 8000 through 160,000,000,000 bps</p> <p><b>percent <i>percentage</i></b> —Percentage of transmission capacity. A percentage of zero drops all packets in the queue.</p> <p><b>Range:</b> 0 through 100 percent</p> <p><b>remainder</b>—Remaining rate available</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Defining CoS Schedulers and Scheduler Maps (CLI Procedure) on page 112 or Defining CoS Schedulers (J-Web Procedure) on page 115</a></li> <li>• <a href="#">Understanding CoS Schedulers on page 105</a></li> </ul>

## tri-color (EX Series Switches)

```
Syntax tri-color {
  classifiers {
    (dscp | dscp-ipv6 | exp | ieee-802.1 | inet-precedence) classifier-name {
      forwarding-class (class-name | assured-forwarding | best-effort | expedited-forwarding
        | network-control) {
        loss-priority (high | low | medium-high | medium-low) {
          code-points [aliases] [6 bit-patterns];
        }
      }
    }
    import (classifier-name | default);
  }
}
code-point-aliases {
  (dscp | dscp-ipv6 | exp | ieee-802.1 | inet-precedence) {
    alias-name bits;
  }
}
drop-profiles {
  profile-name {
    fill-level percentage drop-probability percentage;
    interpolate {
      drop-probability [values];
      fill-level [values]
    }
  }
}
forwarding-classes {
  class class-name {
    priority (high | low);
    queue-num queue-number;
  }
  queue queue-number;
}
host-outbound-traffic {
  forwarding-class class-name;
  dscp-code-point value;
}
interfaces {
  interface-name {
    congestion-notification-profile profile-name {
      input {
        ieee-802.1 {
          code-point up-bits pfc;
        }
      }
    }
  }
}
scheduler-map map-name;
shaping-rate;
unit (logical-unit-number | * ) {
  classifiers {
```

```

        (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) (classifier-name | default);
    }
    forwarding-class (class-name | assured-forwarding | best-effort |
        expedited-forwarding | network-control) ; {
        rewrite-rules {
            (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) (rewrite-rule-name | default);
        }
        classifiers {
            (dscp | dscp-ipv6 | ieee-802.1 | inet-precedence) classifier-name;
        }
    }
    rewrite-rules {
        (dscp | dscp-ipv6 | exp | ieee-802.1 | inet-precedence) rewrite-rule-name;
    }
}
}
rewrite-rules {
    (dscp | dscp-ipv6 | exp | ieee-802.1 | inet-precedence) rewrite-rule-name {
        forwarding-class (class-name | assured-forwarding | best-effort | expedited-forwarding
            | network-control) {
            loss-priority (high | low | medium-high | medium-low) code-point (alias | bits);
        }
        import (rewrite-rule-name | default);
    }
}
scheduler-maps {
    map-name {
        forwarding-class (class-name | assured-forwarding | best-effort | expedited-forwarding
            | network-control) {
            scheduler scheduler-name;
        }
    }
}
schedulers {
    scheduler-name {
        buffer-size (exact | percent percentage | remainder | temporal);
        drop-profile-map {
            loss-priority (high | low);
            protocol any;
        }
        priority (low | strict-high);
        shaping-rate (rate | percent percentage);
        transmit-rate (EX Series Switches) (rate | percent percentage | remainder);
    }
}
shared-buffer {
    percent percentage;
}
traceoptions {
    file (file-name | files files | match match | no-world-readable | size size | world-readable);
    flag ( all | asynch | chassis-scheduler | cos-adjustment | dynamic | hardware-database
        | init | parse | performance-monitor | process | restart | route-socket | show | snmp |
        util);
    no-remote-trace;
}

```

```
}  
}
```

**Hierarchy Level** [edit [class-of-service](#)]

**Release Information** Statement introduced before Junos OS 11.4 for EX Series switches.

**Description** (EX4500 and EX4550 switches only) Enable tricolor marking.

**Options** **percent *percentage***—Size of the shared buffer as a percentage of the buffer allocated to the shared buffer pool.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring CoS on EX Series Switches on page 14](#)
- [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)

## unit

Syntax	<pre>unit <i>logical-unit-number</i> {     forwarding-class <i>class-name</i>;     classifiers {         (<i>dscp</i>   <i>ieee-802.1</i>   <i>inet-precedence</i>) (<i>classifier-name</i>   default);     } }</pre>
Hierarchy Level	[edit <a href="#">class-of-service interfaces</a> <i>interface-name</i> ]
Release Information	Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure a logical interface on the physical device. You must configure a logical interface to be able to use the physical device.
Options	<p><b><i>logical-unit-number</i></b> —Number of the logical unit.</p> <p><b>Range:</b> 0 through 16,385</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Assigning CoS Components to Interfaces (CLI Procedure) on page 45</a> or <a href="#">Assigning CoS Components to Interfaces (J-Web Procedure) on page 46</a></li> </ul>

## CHAPTER 16

# Operational Commands

- `show class-of-service`
- `show class-of-service classifier`
- `show class-of-service code-point-aliases`
- `show class-of-service drop-profile`
- `show class-of-service forwarding-class`
- `show class-of-service forwarding-table`
- `show class-of-service forwarding-table classifier`
- `show class-of-service forwarding-table classifier mapping`
- `show class-of-service forwarding-table drop-profile`
- `show class-of-service forwarding-table rewrite-rule`
- `show class-of-service forwarding-table rewrite-rule mapping`
- `show class-of-service forwarding-table scheduler-map`
- `show class-of-service interface`
- `show class-of-service multi-destination`
- `show class-of-service rewrite-rule`
- `show class-of-service scheduler-map`
- `OBSOLETE: show interfaces queue`
- `show pfe statistics traffic cpu`
- `show pfe statistics traffic egress-queues`
- `show pfe statistics traffic multicast`

## show class-of-service

<b>Syntax</b>	<code>show class-of-service</code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0 for EX Series switches. EXP classifiers added in Junos OS Release 10.1 for EX Series switches.
<b>Description</b>	Display the class-of-service (CoS) information.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring CoS on EX Series Switches on page 14</a></li> <li>• <a href="#">Monitoring CoS Value Aliases on page 53</a></li> <li>• <a href="#">Monitoring CoS Classifiers on page 70</a></li> <li>• <a href="#">Monitoring CoS Forwarding Classes on page 95</a></li> <li>• <a href="#">Monitoring CoS Scheduler Maps on page 119</a></li> <li>• <a href="#">Monitoring CoS Rewrite Rules on page 86</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show class-of- service on page 237</a> <a href="#">show class-of-service rewrite-rule on page 240</a>
<b>Output Fields</b>	<a href="#">Table 39 on page 236</a> lists the output fields for the <b>show class-of-service</b> command. Output fields are listed in the approximate order in which they appear.

*Table 39: show class-of-service Output Fields*

Field Name	Field Description	Level of Output
<b>Forwarding class</b>	The forwarding class configuration: <ul style="list-style-type: none"> <li>• <b>Forwarding class</b>—Name of the forwarding class.</li> <li>• <b>ID</b>—Forwarding class ID.</li> <li>• <b>Queue</b>—Queue number.</li> <li>• <b>Fabric Priority</b>—(EX8200 switches only) Fabric priority: either <b>high</b> or <b>low</b>. The fabric priority determines which CoS ingress queues packets are sent to.</li> </ul>	All levels
<b>Code point type</b>	The type of code-point alias: <ul style="list-style-type: none"> <li>• <b>dscp</b>—Aliases for DiffServ code point (DSCP) values.</li> <li>• <b>ieee-802.1</b>—Aliases for IEEE 802.1p values.</li> <li>• <b>inet-precedence</b>—Aliases for IP precedence values.</li> <li>• <b>exp</b>—Aliases for experimental (EXP) values.</li> </ul>	All levels
<b>Alias</b>	Names given to CoS values.	All levels



Table 39: show class-of-service Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Bit pattern</b>	Set of bits associated with an alias.	All levels
<b>Classifier</b>	Name of the classifier.	All levels
<b>Code point</b>	Code-point values.	All levels
<b>Loss priority</b>	Loss priority assigned to specific CoS values and aliases of the classifier.	All levels
<b>Rewrite rule</b>	Name of the rewrite-rule.	All levels
<b>Drop profile</b>	Name of the drop profile.	All levels
<b>Type</b>	Type of drop profile. EX Series switches support only the <b>discrete</b> type of drop profile.	All levels
<b>Fill level</b>	Percentage of queue buffer fullness of <i>high</i> packets beyond which <i>high</i> packets are dropped.	All levels
<b>Scheduler</b>	Name of the scheduler.	All levels
<b>Transmit rate</b>	Transmission rate of the scheduler.	All levels
<b>Excess rate</b>	Percentage of excess bandwidth traffic to share.	All levels
<b>Buffer size</b>	Delay buffer size in the queue.	All levels
<b>Drop profiles</b>	Drop profiles configured for the specified scheduler.	All levels
<b>Protocol</b>	Transport protocol corresponding to the drop profile.	All levels
<b>Name</b>	Name of the drop profile.	All levels
<b>Queues supported</b>	Number of queues that can be configured on the interface.	All levels
<b>Queues in use</b>	Number of queues currently configured.	All levels
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Scheduler map</b>	Name of the scheduler map.	All levels
<b>Index</b>	Internal index of a specific object.	All levels

## Sample Output

### show class-of- service

```
user@switch> show class-of-service
```

Forwarding class	ID	Queue
best-effort	0	0
expedited-forwarding	1	5
assured-forwarding	2	1
network-control	3	7

Code point type: dscp	
Alias	Bit pattern
af11	001010
af12	001100
...	...

Code point type: ieee-802.1	
Alias	Bit pattern
af11	010
...	...

Code point type: inet-precedence	
Alias	Bit pattern
af11	001
...	...

Classifier: dscp-default, Code point type: dscp, Index: 7		
Code point	Forwarding class	Loss priority
000000	best-effort	low
000001	best-effort	low
...	...	...

Classifier: ieee8021p-default, Code point type: ieee-802.1, Index: 11		
Code point	Forwarding class	Loss priority
000	best-effort	low
001	best-effort	low
010	best-effort	low
011	best-effort	low
100	best-effort	low
101	best-effort	low
110	network-control	low
111	network-control	low

Classifier: ipprec-default, Code point type: inet-precedence, Index: 12		
Code point	Forwarding class	Loss priority
000	best-effort	low
001	best-effort	low
010	best-effort	low
011	best-effort	low
100	best-effort	low
101	best-effort	low
110	network-control	low
111	network-control	low

Classifier: ieee8021p-untrust, Code point type: ieee-802.1, Index: 16		
Code point	Forwarding class	Loss priority
000	best-effort	low
001	best-effort	low
010	best-effort	low
011	best-effort	low
100	best-effort	low
101	best-effort	low
110	best-effort	low
111	best-effort	low

```

Rewrite rule: dscp-default, Code point type: dscp, Index: 27
  Forwarding class      Loss priority  Code point
  best-effort           low             000000
  best-effort           high            000000
  expedited-forwarding  low             101110
  expedited-forwarding  high            101110
  assured-forwarding    low             001010
  assured-forwarding    high            001100
  network-control       low             110000
  network-control       high            111000

Rewrite rule: ieee8021p-default, Code point type: ieee-802.1, Index: 30
  Forwarding class      Loss priority  Code point
  best-effort           low             000
  best-effort           high            001
  expedited-forwarding  low             100
  expedited-forwarding  high            101
  assured-forwarding    low             010
  assured-forwarding    high            011
  network-control       low             110
  network-control       high            111

Rewrite rule: ipprec-default, Code point type: inet-precedence, Index: 31
  Forwarding class      Loss priority  Code point
  best-effort           low             000
  best-effort           high            000
  expedited-forwarding  low             101
  expedited-forwarding  high            101
  assured-forwarding    low             001
  assured-forwarding    high            001
  network-control       low             110
  network-control       high            111

Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level
    100

Scheduler map: <default>, Index: 2

  Scheduler: <default-be>, Forwarding class: best-effort, Index: 20
    Transmit rate: 95 percent, Rate Limit: none, Buffer size: 95 percent,
    Priority: low
    Drop profiles:
      Loss priority  Protocol  Index  Name
      High          non-TCP    1      <default-drop-profile>
      High          TCP        1      <default-drop-profile>

  Scheduler: <default-nc>, Forwarding class: network-control, Index: 22
    Transmit rate: 5 percent, Rate Limit: none, Buffer size: 5 percent,
    Priority: low
    Drop profiles:
      Loss priority  Protocol  Index  Name
      High          non-TCP    1      <default-drop-profile>
      High          TCP        1      <default-drop-profile>

Physical interface: ge-0/0/0, Index: 129
Queues supported: 8, Queues in use: 4
Scheduler map: <default>, Index: 2

```

```
Physical interface: ge-0/0/1, Index: 130
Queues supported: 8, Queues in use: 4
  Scheduler map: <default>, Index: 2

...           ...           ...

Fabric priority: low
  Scheduler: <default-fabric>, Index: 23
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP    1      <default-drop-profile>
    High          TCP        1      <default-drop-profile>

Fabric priority: high
  Scheduler: <default-fabric>, Index: 23
  Drop profiles:
    Loss priority  Protocol  Index  Name
    High          non-TCP    1      <default-drop-profile>
    High          TCP        1      <default-drop-profile>
```

### show class-of-service rewrite-rule

```
user@switch> show class-of-service rewrite-rule

Rewrite rule: dscp-default, Code point type: dscp, Index: 31
  Forwarding class      Loss priority  Code point
  best-effort           low           000000
  best-effort           high          000000
  expedited-forwarding  low           101110
  expedited-forwarding  high          101110
  fw-class              low           001010
  fw-class              high          001100
  network-control       low           110000
  network-control       high          111000

Rewrite rule: exp-default, Code point type: exp, Index: 33
  Forwarding class      Loss priority  Code point
  best-effort           low           000
  best-effort           high          001
  expedited-forwarding  low           010
  expedited-forwarding  high          011
  fw-class              low           100
  fw-class              high          101
  network-control       low           110
  network-control       high          111

Rewrite rule: ieee8021p-default, Code point type: ieee-802.1, Index: 34
  Forwarding class      Loss priority  Code point
  best-effort           low           000
  best-effort           high          001
  expedited-forwarding  low           010
  expedited-forwarding  high          011
  fw-class              low           100
  fw-class              high          101
  network-control       low           110
  network-control       high          111

Rewrite rule: ipprec-default, Code point type: inet-precedence, Index: 35
  Forwarding class      Loss priority  Code point
  best-effort           low           000
```

best-effort	high	000
expedited-forwarding	low	101
expedited-forwarding	high	101
fw-class	low	001
fw-class	high	001
network-control	low	110
network-control	high	111

## show class-of-service classifier

<b>Syntax</b>	<pre>show class-of-service classifier &lt;name <i>name</i>&gt; &lt;type dscp   type dscp-ipv6   type exp   type ieee-802.1   type inet-precedence&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	For each class-of-service (CoS) classifier, display the mapping of code point value to forwarding class and loss priority.
<b>Options</b>	<p><b>none</b>—Display all classifiers.</p> <p><b>name <i>name</i></b>—(Optional) Display named classifier.</p> <p><b>type dscp</b>—(Optional) Display all classifiers of the Differentiated Services code point (DSCP) type.</p> <p><b>type dscp-ipv6</b>—(Optional) Display all classifiers of the DSCP for IPv6 type.</p> <p><b>type exp</b>—(Optional) Display all classifiers of the MPLS experimental (EXP) type.</p> <p><b>type ieee-802.1</b>—(Optional) Display all classifiers of the ieee-802.1 type.</p> <p><b>type inet-precedence</b>—(Optional) Display all classifiers of the inet-precedence type.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show class-of-service classifier type ieee-802.1 on page 243</a></p> <p><a href="#">show class-of-service classifier type ieee-802.1 (QFX Series) on page 243</a></p>
<b>Output Fields</b>	<p><a href="#">Table 40 on page 242</a> describes the output fields for the <b>show class-of-service classifier</b> command. Output fields are listed in the approximate order in which they appear.</p>

*Table 40: show class-of-service classifier Output Fields*

Field Name	Field Description
Classifier	Name of the classifier.
Code point type	Type of the classifier: <b>exp</b> (not on EX Series switch), <b>dscp</b> , <b>dscp-ipv6</b> (not on EX Series switch), <b>ieee-802.1</b> , or <b>inet-precedence</b> .
Index	Internal index of the classifier.

Table 40: show class-of-service classifier Output Fields (continued)

Field Name	Field Description
<b>Code point</b>	Code point value used for classification
<b>Forwarding class</b>	Classification of a packet affecting the forwarding, scheduling, and marking policies applied as the packet transits the router.
<b>Loss priority</b>	Loss priority value used for classification. For most platforms, the value is <b>high</b> or <b>low</b> . For some platforms, the value is <b>high</b> , <b>medium-high</b> , <b>medium-low</b> , or <b>low</b> .

## Sample Output

### show class-of-service classifier type ieee-802.1

```

user@host> show class-of-service classifier type ieee-802.1

Classifier: ieee802.1-default, Code point type: ieee-802.1, Index: 3
Code Point      Forwarding Class      Loss priority
000             best-effort           low
001             best-effort           high
010             expedited-forwarding  low
011             expedited-forwarding  high
100             assured-forwarding    low
101             assured-forwarding    medium-high
110             network-control       low
111             network-control       high

Classifier: users-ieee802.1, Code point type: ieee-802.1
Code point      Forwarding class      Loss priority
100             expedited-forwarding  low

```

### show class-of-service classifier type ieee-802.1 (QFX Series)

```

user@switch> show class-of-service classifier type ieee-802.1

Classifier: ieee8021p-default, Code point type: ieee-802.1, Index: 11
Code point      Forwarding class      Loss priority
000             best-effort           low
001             best-effort           low
010             best-effort           low
011             fcoe                  low
100             no-loss               low
101             best-effort           low
110             network-control       low
111             network-control       low

Classifier: ieee8021p-untrust, Code point type: ieee-802.1, Index: 16
Code point      Forwarding class      Loss priority
000             best-effort           low
001             best-effort           low
010             best-effort           low
011             best-effort           low
100             best-effort           low
101             best-effort           low
110             best-effort           low

```

111	best-effort	low
Classifier: ieee-mcast, Code point type: ieee-802.1, Index: 46		
Code point	Forwarding class	Loss priority
000	mcast	low
001	mcast	low
010	mcast	low
011	mcast	low
100	mcast	low
101	mcast	low
110	mcast	low
111	mcast	low



## show class-of-service code-point-aliases

<b>Syntax</b>	show class-of-service code-point-aliases <dscp   dscp-ipv6   exp   ieee-802.1   inet-precedence>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display the mapping of class-of-service (CoS) code point aliases to corresponding bit patterns.
<b>Options</b>	<p><b>none</b>—Display code point aliases of all code point types.</p> <p><b>dscp</b>—(Optional) Display Differentiated Services code point (DSCP) aliases.</p> <p><b>dscp-ipv6</b>—(Optional) Display IPv6 DSCP aliases.</p> <p><b>exp</b>—(Optional) Display MPLS EXP code point aliases.</p> <p><b>ieee-802.1</b>—(Optional) Display IEEE-802.1 code point aliases.</p> <p><b>inet-precedence</b>—(Optional) Display IPv4 precedence code point aliases.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service code-point-aliases exp on page 246</a>
<b>Output Fields</b>	<a href="#">Table 41 on page 245</a> describes the output fields for the <b>show class-of-service code-point-aliases</b> command. Output fields are listed in the approximate order in which they appear.

*Table 41: show class-of-service code-point-aliases Output Fields*

Field Name	Field Description
Code point type	Type of the code points displayed: <b>dscp</b> , <b>dscp-ipv6</b> (not on EX Series switch), <b>exp</b> (not on EX Series switch or the QFX Series), <b>ieee-802.1</b> , or <b>inet-precedence</b> (not on the QFX Series).
Alias	Alias for a bit pattern.
Bit pattern	Bit pattern for which the alias is displayed.

## Sample Output

`show class-of-service code-point-aliases exp`

```
user@host> show class-of-service code-point-aliases exp
```

```
Code point type: exp
```

Alias	Bit pattern
af11	100
af12	101
be	000
be1	001
cs6	110
cs7	111
ef	010
ef1	011
nc1	110
nc2	111

## show class-of-service drop-profile

<b>Syntax</b>	<code>show class-of-service drop-profile</code> <code>&lt;profile-name <i>profile-name</i>&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display data points for each class-of-service (CoS) random early detection (RED) drop profile.
<b>Options</b>	<b>none</b> —Display all drop profiles. <b>profile-name <i>profile-name</i></b> —(Optional) Display the specified profile only.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service drop-profile on page 248</a> <a href="#">show class-of-service drop-profile (EX4200 Switch) on page 248</a> <a href="#">show class-of-service drop-profile (EX8200 Switch) on page 248</a>
<b>Output Fields</b>	<a href="#">Table 42 on page 247</a> describes the output fields for the <b>show class-of-service drop-profile</b> command. Output fields are listed in the approximate order in which they appear.

*Table 42: show class-of-service drop-profile Output Fields*

Field Name	Field Description
<b>Drop profile</b>	Name of a drop profile.
<b>Type</b>	Type of drop profile: <ul style="list-style-type: none"> <li><b>discrete</b> (default)</li> <li><b>interpolated</b> (EX8200 switches, QFX Series switches, QFabric systems, EX4600 switches, OCX Series switches only)</li> </ul>
<b>Index</b>	Internal index of this drop profile.
<b>Fill Level</b>	Percentage fullness of a queue.
<b>Drop probability</b>	Drop probability at this fill level.

## Sample Output

### show class-of-service drop-profile

```

user@host> show class-of-service drop-profile

Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: user-drop-profile, Type: interpolated, Index: 2989
  Fill level    Drop probability
     0           0
     1           1
     2           2
     4           4
     5           5
     6           6
     8           8
    10          10
    12          15
    14          20
    15          23
... 64 entries total
    90          96
    92          96
    94          97
    95          98
    96          98
    98          99
    99          99
   100         100

```

### show class-of-service drop-profile (EX4200 Switch)

```

user@switch> show class-of-service drop-profile

Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level
    100
Drop profile: dp1, Type: discrete, Index: 40496
  Fill level
    10

```

### show class-of-service drop-profile (EX8200 Switch)

```

user@switch> show class-of-service drop-profile

Drop profile: <default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: dp1, Type: interpolated, Index: 40496
  Fill level    Drop probability
     0           0
     1          80
     2          90
     4          90
     5          90
     6          90
     8          90

```

10	90
12	91
14	91
15	91
16	91
18	91
20	91
22	92
24	92
25	92
26	92
28	92
30	92
32	93
34	93
35	93
36	93
38	93
40	93
42	94
44	94
45	94
46	94
48	94
49	94
51	95
52	95
54	95
55	95
56	95
58	95
60	95
62	96
64	96
65	96
66	96
68	96
70	96
72	97
74	97
75	97
76	97
78	97
80	97
82	98
84	98
85	98
86	98
88	98
90	98
92	99
94	99
95	99
96	99
98	99
99	99
100	100

Drop profile: dp2, Type: discrete, Index: 40499

Fill level	Drop probability
------------	------------------

10	5
50	50

## show class-of-service forwarding-class

<b>Syntax</b>	show class-of-service forwarding-class
<b>Release Information</b>	<p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>PFC priority output field introduced for DSCP-based PFC in Junos OS Release 17.4R1 for the QFX Series.</p>
<b>Description</b>	Display information about forwarding classes, including the mapping of forwarding classes to queue numbers.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Monitoring CoS Forwarding Classes on page 95</a></li> <li>• <i>Monitoring CoS Forwarding Classes</i></li> <li>• <i>Understanding PFC Using DSCP at Layer 3 for Untagged Traffic</i></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show class-of-service forwarding-class on page 252</a></p> <p><a href="#">show class-of-service forwarding-class (EX8200 Switch) on page 252</a></p> <p><a href="#">show class-of-service forwarding-class (QFX Series) on page 253</a></p> <p><a href="#">show class-of-service forwarding-class (QFX Series with DSCP-based PFC) on page 253</a></p>
<b>Output Fields</b>	<p><a href="#">Table 43 on page 251</a> describes the output fields for the <b>show class-of-service forwarding-class</b> command. Output fields are listed in the approximate order in which they appear.</p>

*Table 43: show class-of-service forwarding-class Output Fields*

Field Name	Field Description
<b>Forwarding class</b>	Name of the forwarding class.
<b>ID</b>	<p>Forwarding class identifier.</p> <p>(QFX5110, QFX5200, and QFX5210 switches only) For DSCP-based PFC, the forwarding class ID is assigned from (and should be the same as) the configured PFC priority for the forwarding class. See <i>Configuring DSCP-based PFC for Layer 3 Untagged Traffic</i> for details.</p>
<b>Queue</b>	CoS output queue mapped to the forwarding class.
<b>Policing priority</b>	Not supported on EX Series switches or the QFX Series and can be ignored.

Table 43: show class-of-service forwarding-class Output Fields (continued)

Field Name	Field Description
<b>Fabric priority</b>	(EX8200 switches only) Fabric priority for the forwarding class, either <b>high</b> or <b>low</b> . Determines the priority of packets entering the switch fabric.
<b>No-Loss</b>	<p>(QFX Series only) Packet loss attribute to differentiate lossless forwarding classes from lossy forwarding classes:</p> <ul style="list-style-type: none"> <li>Disabled—Lossless transport is not configured on the forwarding class (packet drop attribute is <b>drop</b>).</li> <li>Enabled—Lossless transport is configured on the forwarding class (packet drop attribute is <b>no-loss</b>).</li> </ul>
<b>PFC Priority</b>	<p>(QFX5110, QFX5200, and QFX5210 switches only) For DSCP-based PFC, the explicitly configured PFC priority configured for the forwarding class.</p> <p>The DSCP value on which PFC is enabled maps to this priority, and this priority is used in PFC pause frames sent to the peer to request to pause traffic on the mapped DSCP value when the link becomes congested. The forwarding class ID is assigned from and should match this value in the output of this command. See <i>Configuring DSCP-based PFC for Layer 3 Untagged Traffic</i> for details.</p>

## Sample Output

### show class-of-service forwarding-class

```
user@switch> show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Policing priority
best-effort	0	0	normal
expedited-forwarding	1	5	normal
assured-forwarding	2	1	normal
network-control	3	7	normal

## Sample Output

### show class-of-service forwarding-class (EX8200 Switch)

```
user@switch> show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Fabric priority
best-effort	0	0	low
expedited-forwarding	1	5	low
assured-forwarding	2	1	low
network-control	3	7	low
mcast-be	4	2	low
mcast-ef	5	4	low
mcast-af	6	6	low



## Sample Output

### show class-of-service forwarding-class (QFX Series)

```
user@switch> show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Policing priority	No-Loss
best-effort	0	0	normal	Disabled
fcoe	1	3	normal	Enabled
no-loss	2	4	normal	Enabled
network-control	3	7	normal	Disabled
mcast	8	8	normal	Disabled

### show class-of-service forwarding-class (QFX Series with DSCP-based PFC)

```
user@switch> show class-of-service forwarding-class
```

Forwarding class	ID	Queue	Policing priority	No-Loss	PFC priority
best-effort	0	0	normal	Disabled	
fcoe	1	3	normal	Enabled	
no-loss	2	4	normal	Enabled	
fc2	3	2	normal	Enabled	3
network-control	5	7	normal	Disabled	
fc1	7	1	normal	Enabled	7
mcast	8	8	normal	Disabled	

On switches that do not use different forwarding classes and output queues for unicast and multdestination (multicast, broadcast, destination lookup fail) traffic, there is no **mcast** forwarding class and there is no queue 8. (Switches that use different forwarding classes and output queues for unicast and multdestination traffic support 12 forwarding classes and output queues, of which four of each are dedicated to multdestination traffic. Switches that use the same forwarding classes and output queues for unicast and multdestination traffic support eight forwarding classes and eight output queues.)

## show class-of-service forwarding-table

<b>List of Syntax</b>	<a href="#">Syntax on page 254</a> <a href="#">Syntax (TX Matrix and TX Matrix Plus Router) on page 254</a>
<b>Syntax</b>	show class-of-service forwarding-table
<b>Syntax (TX Matrix and TX Matrix Plus Router)</b>	show class-of-service forwarding-table <lcc <i>number</i> >   <sfc <i>number</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display the entire class-of-service (CoS) configuration as it exists in the forwarding table. Executing this command is equivalent to executing all <b>show class-of-service forwarding-table</b> commands in succession.
<b>Options</b>	<p><b>lcc <i>number</i></b>—(TX Matrix and TX Matrix Plus router only) (Optional) On a TX Matrix router, display the forwarding table configuration for a specific T640 router (or line-card chassis) configured in a routing matrix. On a TX Matrix Plus router, display the forwarding table configuration for a specific router (or line-card chassis) configured in the routing matrix.</p> <p>Replace <i>number</i> with the following values depending on the LCC configuration:</p> <ul style="list-style-type: none"> <li>• 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix.</li> <li>• 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix.</li> <li>• 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.</li> <li>• 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.</li> </ul> <p><b>sfc <i>number</i></b>—(TX Matrix Plus routers only) (Optional) Display the forwarding table configuration for the TX Matrix Plus router. Replace <i>number</i> with 0.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table on page 255</a> <a href="#">show class-of-service forwarding-table lcc (TX Matrix Plus Router) on page 256</a>

**Output Fields** See the output field descriptions for **show class-of-service forwarding-table** commands:

- [show class-of-service forwarding-table classifier](#)
- [show class-of-service forwarding-table classifier mapping](#)
- [show class-of-service forwarding-table drop-profile](#)
- [show class-of-service forwarding-table fabric scheduler-map](#)
- [show class-of-service forwarding-table rewrite-rule](#)
- [show class-of-service forwarding-table rewrite-rule mapping](#)
- [show class-of-service forwarding-table scheduler-map](#)

## Sample Output

### show class-of-service forwarding-table

```
user@host> show class-of-service forwarding-table
```

```
Classifier table index: 9, # entries: 8, Table type: EXP
```

Entry #	Code point	Forwarding-class #	PLP
0	000	0	0
1	001	0	1
2	010	1	0
3	011	1	1
4	100	2	0
5	101	2	1
6	110	3	0
7	111	3	1

Interface	Index	Table Index/	
		Q num	Table type
sp-0/0/0.1001	66	11	IPv4 precedence
sp-0/0/0.2001	67	11	IPv4 precedence
sp-0/0/0.16383	68	11	IPv4 precedence
fe-0/0/0.0	69	11	IPv4 precedence

```
Interface: sp-0/0/0 (Index: 129, Map index: 2, Map type: FINAL,
Num of queues: 2):
```

```
Entry 0 (Scheduler index: 16, Forwarding-class #: 0):
Tx rate: 0 Kb (95%), Buffer size: 95 percent
```

```
Priority low
```

```
PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
```

```
Entry 1 (Scheduler index: 18, Forwarding-class #: 3):
```

```
Tx rate: 0 Kb (5%), Buffer size: 5 percent
```

```
Priority low
```

```
PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
```

```
Interface: fe-0/0/0 (Index: 137, Map index: 2, Map type: FINAL,
Num of queues: 2):
```

```
Entry 0 (Scheduler index: 16, Forwarding-class #: 0):
```

```
Tx rate: 0 Kb (95%), Buffer size: 95 percent
```

```
Priority low
```

```
PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
```

```
Entry 1 (Scheduler index: 18, Forwarding-class #: 3):
```

```
Tx rate: 0 Kb (5%), Buffer size: 5 percent
```

```
Priority low
```

```
PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
```

```

Interface: fe-0/0/1 (Index: 138, Map index: 2, Map type: FINAL,
  Num of queues: 2):
  Entry 0 (Scheduler index: 16, Forwarding-class #: 0):
    Tx rate: 0 Kb (95%), Buffer size: 95 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
  Entry 1 (Scheduler index: 18, Forwarding-class #: 3):
    Tx rate: 0 Kb (5%), Buffer size: 5 percent
  Priority low
    PLP high: 1, PLP low: 1, PLP medium-high: 1, PLP medium-low: 1
...

RED drop profile index: 1, # entries: 1
      Drop
Entry      Fullness(%)  Probability(%)
  0           100           100

```

#### show class-of-service forwarding-table lcc (TX Matrix Plus Router)

```
user@host> show class-of-service forwarding-table lcc 0
```

```
lcc0-re0:
```

```
-----
Classifier table index: 9, # entries: 64, Table type: IPv6 DSCP
```

Entry #	Code point	Forwarding-class #	PLP
0	000000	0	0
1	000001	0	0
2	000010	0	0
3	000011	0	0
4	000100	0	0
5	000101	0	0
6	000110	0	0
7	000111	0	0
8	001000	0	0
9	001001	0	0
10	001010	0	0
11	001011	0	0
12	001100	0	0
13	001101	0	0
14	001110	0	0
15	001111	0	0
16	010000	0	0
17	010001	0	0
18	010010	0	0
19	010011	0	0
20	010100	0	0
21	010101	0	0
22	010110	0	0
23	010111	0	0
24	011000	0	0
25	011001	0	0
26	011010	0	0
27	011011	0	0
28	011100	0	0
29	011101	0	0
30	011110	0	0
31	011111	0	0
32	100000	0	0

33	100001	0	0
34	100010	0	0
35	100011	0	0
36	100100	0	0
37	100101	0	0
38	100110	0	0
39	100111	0	0
40	101000	0	0
41	101001	0	0
42	101010	0	0
43	101011	0	0
44	101100	0	0
45	101101	0	0
46	101110	0	0
...			

## show class-of-service forwarding-table classifier

<b>Syntax</b>	show class-of-service forwarding-table classifier
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Display the mapping of code point value to queue number and loss priority for each classifier as it exists in the forwarding table.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table classifier on page 259</a>
<b>Output Fields</b>	<a href="#">Table 44 on page 258</a> describes the output fields for the <b>show class-of-service forwarding-table classifier</b> command. Output fields are listed in the approximate order in which they appear.

*Table 44: show class-of-service forwarding-table classifier Output Fields*

Field Name	Field Description
Classifier table index	Index of the classifier table.
entries	Total number of entries.
Table type	Type of code points in the table: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>IEEE 802.1</b> , <b>IPv4 precedence</b> (not on the QFX Series), or <b>IPv6 DSCP</b> .
Entry #	Entry number.
Code point	Code point value used for classification.
Forwarding-class #	Forwarding class to which the code point is assigned.
PLP	Packet loss priority value set by classification. For most platforms, the value can be <b>0</b> or <b>1</b> . For some platforms, the value is <b>0</b> , <b>1</b> , <b>2</b> , or <b>3</b> . The value <b>0</b> represents low PLP. The value <b>1</b> represents <b>high</b> PLP. The value <b>2</b> represents medium-low PLP. The value <b>3</b> represents medium-high PLP.

## Sample Output

### show class-of-service forwarding-table classifier

```
user@host> show class-of-service forwarding-table classifier
```

```
Classifier table index: 62436, # entries: 64, Table type: DSCP
```

Entry #	Code point	Forwarding-class #	PLP
0	000000	0	0
1	000001	0	0
2	000010	0	0
3	000011	0	0
4	000100	0	0
5	000101	0	0
6	000110	0	0
7	000111	0	0
8	001000	0	0
9	001001	0	0
10	001010	1	1
11	001011	0	0
...			
60	111100	0	0
61	111101	0	0
62	111110	0	0
63	111111	0	0

## show class-of-service forwarding-table classifier mapping

<b>Syntax</b>	show class-of-service forwarding-table classifier mapping
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	For each logical interface, display either the table index of the classifier for a given code point type or the queue number (if it is a fixed classification) in the forwarding table.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table classifier mapping on page 260</a>
<b>Output Fields</b>	<a href="#">Table 45 on page 260</a> describes the output fields for the <b>show class-of-service forwarding-table classifier mapping</b> command. Output fields are listed in the approximate order in which they appear.

*Table 45: show class-of-service forwarding-table classifier mapping Output Fields*

Field Name	Field Description
Table index/ Q num	If the table type is <b>Fixed</b> , the number of the queue to which the interface is mapped. For all other types, this value is the classifier index number.
Interface	Name of the logical interface. This field can also show the physical interface (QFX Series).
Index	Logical interface index.
Table type	Type of code points in the table: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>Fixed</b> , <b>IEEE 802.1</b> , <b>IPv4 precedence</b> (not on the QFX Series), or <b>IPv6 DSCP</b> . <b>none</b> if <b>no-default</b> option set.

## Sample Output

### show class-of-service forwarding-table classifier mapping

```
user@host> show class-of-service forwarding-table classifier mapping
```

Interface	Index	Table index/	
		Q num	Table type
so-5/0/0.0	10	62436	DSCP
so-0/1/0.0	11	62436	DSCP



so-0/2/0.0	12	1	Fixed
so-0/2/1.0	13	62436	DSCP
so-0/2/1.0	13	62437	IEEE 802.1
so-0/2/2.0	14	62436	DSCP
so-0/2/2.0	14	62438	IPv4 precedence

## show class-of-service forwarding-table drop-profile

<b>Syntax</b>	show class-of-service forwarding-table drop-profile
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display the data points of all random early detection (RED) drop profiles as they exist in the forwarding table.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table drop-profile on page 262</a>
<b>Output Fields</b>	<a href="#">Table 46 on page 262</a> describes the output fields for the <b>show class-of-service forwarding-table drop-profile</b> command. Output fields are listed in the approximate order in which they appear.

*Table 46: show class-of-service forwarding-table drop-profile Output Fields*

Field Name	Field Description
RED drop profile index	Index of this drop profile.
# entries	Number of entries in a particular RED drop profile index.
Entry	Drop profile entry number.
Fullness(%)	Percentage fullness of a queue.
Drop probability(%)	Drop probability at this fill level.

## Sample Output

### show class-of-service forwarding-table drop-profile

```

user@host> show class-of-service forwarding-table drop-profile
RED drop profile index: 4, # entries: 1
      Drop
Entry    Fullness(%)  Probability(%)
  0         100           100
RED drop profile index: 8742, # entries: 3
      Drop

```

Entry	Fullness(%)	Probability(%)
0	10	10
1	20	20
2	30	30

RED drop profile index: 24627, # entries: 64

Drop		
Entry	Fullness(%)	Probability(%)
0	0	0
1	1	1
2	2	2
3	4	4
...		
61	98	99
62	99	99
63	100	100

RED drop profile index: 25393, # entries: 64

Drop		
Entry	Fullness(%)	Probability(%)
0	0	0
1	1	1
2	2	2
3	4	4
...		
61	98	98
62	99	99
63	100	100

## show class-of-service forwarding-table rewrite-rule

<b>Syntax</b>	<code>show class-of-service forwarding-table rewrite-rule</code>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Display mapping of queue number and loss priority to code point value for each rewrite rule as it exists in the forwarding table.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table rewrite-rule on page 264</a>
<b>Output Fields</b>	<a href="#">Table 47 on page 264</a> describes the output fields for the <b>show class-of-service forwarding-table rewrite-rule</b> command. Output fields are listed in the approximate order in which they appear.

*Table 47: show class-of-service forwarding-table rewrite-rule Output Fields*

Field Name	Field Description
Rewrite table index	Index for this rewrite rule.
# entries	Number of entries in this rewrite rule.
Table type	Type of table: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>EXP-PUSH-3</b> (not on the QFX Series), <b>IEEE 802.1,IPv4 precedence</b> (not on the QFX Series), <b>IPv6 DSCP</b> , or <b>Fixed</b> .
Q#	Queue number to which this entry is assigned.
Low bits	Code point value for low-priority loss profile.
State	State of this code point: <b>enabled</b> , <b>rewritten</b> , or <b>disabled</b> .
High bits	Code point value for high-priority loss profile.

## Sample Output

### show class-of-service forwarding-table rewrite-rule

```
user@host> show class-of-service forwarding-table rewrite-rule
```

Rewrite table index: 3753, # entries: 4, Table type: DSCP

Q#	Low bits	State	High bits	State
0	000111	Enabled	001010	Enabled
2	000000	Disabled	001100	Enabled
1	101110	Enabled	110111	Enabled
3	110000	Enabled	111000	Enabled

## show class-of-service forwarding-table rewrite-rule mapping

<b>Syntax</b>	show class-of-service forwarding-table rewrite-rule mapping
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	For each logical interface, display the table identifier of the rewrite rule map for each code point type.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table rewrite-rule mapping on page 266</a>
<b>Output Fields</b>	<a href="#">Table 48 on page 266</a> describes the output fields for the <b>show class-of-service forwarding-table rewrite-rule mapping</b> command. Output fields are listed in the approximate order in which they appear.

*Table 48: show class-of-service forwarding-table rewrite-rule mapping Output Fields*

Field Name	Field Description
<b>Interface</b>	Name of the logical interface. This field can also show the physical interface (QFX Series).
<b>Index</b>	Logical interface index.
<b>Table index</b>	Rewrite table index.
<b>Type</b>	Type of classifier: <b>DSCP</b> , <b>EXP</b> (not on the QFX Series), <b>EXP-PUSH-3</b> (not on the QFX Series), <b>EXP-SWAP-PUSH-2</b> (not on the QFX Series), <b>IEEE 802.1</b> , <b>IPv4 precedence</b> (not on the QFX Series), <b>IPv6 DSCP</b> , or <b>Fixed</b> .

## Sample Output

### show class-of-service forwarding-table rewrite-rule mapping

```
user@host> show class-of-service forwarding-table rewrite-rule mapping
```

Interface	Index	Table index	Type
so-5/0/0.0	10	3753	DSCP
so-0/1/0.0	11	3753	DSCP
so-0/2/0.0	12	3753	DSCP
so-0/2/1.0	13	3753	DSCP

so-0/2/2.0	14	3753	DSCP
so-0/2/3.0	15	3753	DSCP

## show class-of-service forwarding-table scheduler-map

<b>Syntax</b>	show class-of-service forwarding-table scheduler-map
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	For each physical interface, display the scheduler map information as it exists in the forwarding table.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show class-of-service forwarding-table scheduler-map on page 269</a>
<b>Output Fields</b>	<a href="#">Table 49 on page 268</a> describes the output fields for the <b>show class-of-service forwarding-table scheduler-map</b> command. Output fields are listed in the approximate order in which they appear.

*Table 49: show class-of-service forwarding-table scheduler-map Output Fields*

Field Name	Field Description
<b>Interface</b>	Name of the physical interface.
<b>Index</b>	Physical interface index.
<b>Map index</b>	Scheduler map index.
<b>Num of queues</b>	Number of queues defined in this scheduler map.
<b>Entry</b>	Number of this entry in the scheduler map.
<b>Scheduler index</b>	Scheduler policy index.
<b>Forwarding-class #</b>	Forwarding class number to which this entry is applied.
<b>Tx rate</b>	Configured transmit rate of the scheduler (in bps). The rate is a percentage of the total interface bandwidth, or the keyword <b>remainder</b> , which indicates that the scheduler receives the remaining bandwidth of the interface.
<b>Max buffer delay</b>	Amount of transmit delay (in milliseconds) or buffer size of the queue. This amount is a percentage of the total interface buffer allocation or the keyword <b>remainder</b> , which indicates that the buffer is sized according to what remains after other scheduler buffer allocations.



Table 49: show class-of-service forwarding-table scheduler-map Output Fields (continued)

Field Name	Field Description
Priority	<ul style="list-style-type: none"> <li><b>high</b>—Queue priority is high.</li> <li><b>low</b>—Queue priority is low.</li> </ul>
PLP high	Drop profile index for a high packet loss priority profile.
PLP low	Drop profile index for a low packet loss priority profile.
PLP medium-high	Drop profile index for a medium-high packet loss priority profile.
PLP medium-low	Drop profile index for a medium-low packet loss priority profile.
TCP PLP high	Drop profile index for a high TCP packet loss priority profile.
TCP PLP low	Drop profile index for a low TCP packet loss priority profile.
Policy is exact	If this line appears in the output, exact rate limiting is enabled. Otherwise, no rate limiting is enabled.

## Sample Output

### show class-of-service forwarding-table scheduler-map

```

user@host> show class-of-service forwarding-table scheduler-map
Interface: so-5/0/0 (Index: 9, Map index: 17638, Num of queues: 2):
  Entry 0 (Scheduler index: 6090, Forwarding-class #: 0):
    Tx rate: 0 Kb (30%), Max buffer delay: 39 bytes (0%)
    Priority low
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742
    Policy is exact
  Entry 1 (Scheduler index: 38372, Forwarding-class #: 1):
    Traffic chunk: Max = 0 bytes, Min = 0 bytes
    Tx rate: 0 Kb (40%), Max buffer delay: 68 bytes (0%)
    Priority high
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742
Interface: at-6/1/0 (Index: 10, Map index: 17638, Num of queues: 2):
  Entry 0 (Scheduler index: 6090, Forwarding-class #: 0):
    Traffic chunk: Max = 0 bytes, Min = 0 bytes
    Tx rate: 0 Kb (30%), Max buffer delay: 39 bytes (0%)
    Priority high
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742
  Entry 1 (Scheduler index: 38372, Forwarding-class #: 1):
    Traffic chunk: Max = 0 bytes, Min = 0 bytes
    Tx rate: 0 Kb (40%), Max buffer delay: 68 bytes (0%)
    Priority low
    PLP high: 25393, PLP low: 24627, TCP PLP high: 25393, TCP PLP low: 8742

```

## show class-of-service interface

**Syntax** `show class-of-service interface  
<comprehensive | detail> <interface-name>`

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Forwarding class map information added in Junos OS Release 9.4.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.  
 Command introduced in Junos OS Release 12.1 for the PTX Series Packet Transport routers.  
 Command introduced in Junos OS Release 12.2 for the ACX Series Universal Metro routers.  
 Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.  
 Options **detail** and **comprehensive** introduced in Junos OS Release 11.4.  
 Command introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management.

**Description** Display the logical and physical interface associations for the classifier, rewrite rules, and scheduler map objects.



**NOTE:** On routing platforms with dual Routing Engines, running this command on the backup Routing Engine, with or without any of the available options, is not supported and produces the following error message:

**error: the class-of-service subsystem is not running**

**Options** **none**—Display CoS associations for all physical and logical interfaces.

**comprehensive**—(M Series, MX Series, and T Series routers) (Optional) Display comprehensive quality-of-service (QoS) information about all physical and logical interfaces.

**detail**—(M Series, MX Series, and T Series routers) (Optional) Display QoS and CoS information based on the interface.

If the **interface** *interface-name* is a physical interface, the output includes:

- Brief QoS information about the physical interface
- Brief QoS information about the logical interface
- CoS information about the physical interface
- Brief information about filters or policers of the logical interface
- Brief CoS information about the logical interface

If the **interface** *interface-name* is a logical interface, the output includes:

- Brief QoS information about the logical interface
- Information about filters or policers for the logical interface
- CoS information about the logical interface

**interface-name**—(Optional) Display class-of-service (CoS) associations for the specified interface.

**none**—Display CoS associations for all physical and logical interfaces.



**NOTE:** ACX5000 routers do not support classification on logical interfaces and therefore do not show CoS associations for logical interfaces with this command.

**Required Privilege Level** view

**Related Documentation** • *Verifying and Managing Junos OS Enhanced Subscriber Management*

**List of Sample Output**

- [show class-of-service interface \(Physical\) on page 283](#)
- [show class-of-service interface \(Logical\) on page 283](#)
- [show class-of-service interface \(Gigabit Ethernet\) on page 284](#)
- [show class-of-service interface \(ANCP\) on page 284](#)
- [show class-of-service interface \(PPPoE Interface\) on page 284](#)
- [show class-of-service interface \(DHCP Interface\) on page 284](#)
- [show class-of-service interface \(T4000 Routers with Type 5 FPCs\) on page 285](#)
- [show class-of-service interface detail on page 285](#)
- [show class-of-service interface comprehensive on page 286](#)
- [show class-of-service interface \(ACX Series Routers\) on page 297](#)
- [show class-of-service interface \(PPPoE Subscriber Interface for Enhanced Subscriber Management\) on page 299](#)

**Output Fields** [Table 50 on page 271](#) describes the output fields for the **show class-of-service interface** command. Output fields are listed in the approximate order in which they appear.

*Table 50: show class-of-service interface Output Fields*

Field Name	Field Description
Physical interface	Name of a physical interface.
Index	Index of this interface or the internal index of this object.  (Enhanced subscriber management for MX Series routers) Index values for dynamic CoS traffic control profiles and dynamic scheduler maps are larger for enhanced subscriber management than they are for legacy subscriber management.

Table 50: show class-of-service interface Output Fields (continued)

Field Name	Field Description
<b>Dedicated Queues</b>	<p>Status of dedicated queues configured on an interface. Supported only on Trio MPC/MIC interfaces on MX Series routers.</p> <p>(Enhanced subscriber management for MX-Series routers) This field is not displayed for enhanced subscriber management.</p>
<b>Maximum usable queues</b>	Number of queues you can configure on the interface.
<b>Maximum usable queues</b>	Maximum number of queues you can use.
<b>Total non-default queues created</b>	<p>Number of queues created in addition to the default queues. Supported only on Trio MPC/MIC interfaces on MX Series routers.</p> <p>(Enhanced subscriber management for MX Series routers) This field is not displayed for enhanced subscriber management.</p>
<b>Rewrite Input IEEE Code-point</b>	(QFX3500 switches only) IEEE 802.1p code point (priority) rewrite value. Incoming traffic from the Fibre Channel (FC) SAN is classified into the forwarding class specified in the native FC interface (NP_Port) fixed classifier and uses the priority specified as the IEEE 802.1p rewrite value.
<b>Shaping rate</b>	Maximum transmission rate on the physical interface. You can configure the shaping rate on the physical interface, or on the logical interface, but not on both. Therefore, the <b>Shaping rate</b> field is displayed for either the physical interface or the logical interface.
<b>Scheduler map</b>	<p>Name of the output scheduler map associated with this interface.</p> <p>(Enhanced subscriber management for MX Series routers) The name of the dynamic scheduler map object is associated with a generated UID (for example, <b>SMAP-1_UID1002</b>) instead of with a subscriber interface.</p>
<b>Scheduler map forwarding class sets</b>	(QFX Series only) Name of the output fabric scheduler map associated with a QFabric system Interconnect device interface.
<b>Input shaping rate</b>	For Gigabit Ethernet IQ2 PICs, maximum transmission rate on the input interface.
<b>Input scheduler map</b>	For Gigabit Ethernet IQ2 PICs, name of the input scheduler map associated with this interface.
<b>Chassis scheduler map</b>	Name of the scheduler map associated with the packet forwarding component queues.
<b>Rewrite</b>	Name and type of the rewrite rules associated with this interface.
<b>Traffic-control-profile</b>	<p>Name of the associated traffic control profile.</p> <p>(Enhanced subscriber management for MX Series routers) The name of the dynamic traffic control profile object is associated with a generated UID (for example, <b>TC_PROF_100_199_SERIES_UID1006</b>) instead of with a subscriber interface.</p>
<b>Classifier</b>	Name and type of classifiers associated with this interface.

Table 50: *show class-of-service interface* Output Fields (continued)

Field Name	Field Description
<b>Forwarding-class-map</b>	Name of the forwarding map associated with this interface.
<b>Congestion-notification</b>	(QFX Series and EX4600 switches only) Congestion notification state, <b>enabled</b> or <b>disabled</b> .
<b>Logical interface</b>	Name of a logical interface.
<b>Object</b>	Category of an object: <b>Classifier</b> , <b>Fragmentation-map</b> (for LSQ interfaces only), <b>Scheduler-map</b> , <b>Rewrite</b> , <b>Translation Table</b> (for IQE PICs only), or <b>traffic-class-map</b> (for T4000 routers with Type 5 FPCs).
<b>Name</b>	Name of an object.
<b>Type</b>	Type of an object: <b>dscp</b> , <b>dscp-ipv6</b> , <b>exp</b> , <b>ieee-802.1</b> , <b>ip</b> , <b>inet-precedence</b> , or <b>ieee-802.1ad</b> (for traffic class map on T4000 routers with Type 5 FPCs)..
<b>Link-level type</b>	Encapsulation on the physical interface.
<b>MTU</b>	MTU size on the physical interface.
<b>Speed</b>	Speed at which the interface is running.
<b>Loopback</b>	Whether loopback is enabled and the type of loopback.
<b>Source filtering</b>	Whether source filtering is enabled or disabled.
<b>Flow control</b>	Whether flow control is enabled or disabled.
<b>Auto-negotiation</b>	(Gigabit Ethernet interfaces) Whether autonegotiation is enabled or disabled.
<b>Remote-fault</b>	(Gigabit Ethernet interfaces) Remote fault status. <ul style="list-style-type: none"> <li>• <b>Online</b>—Autonegotiation is manually configured as online.</li> <li>• <b>Offline</b>—Autonegotiation is manually configured as offline.</li> </ul>

Table 50: show class-of-service interface Output Fields (continued)

Field Name	Field Description
<b>Device flags</b>	<p>The <b>Device flags</b> field provides information about the physical device and displays one or more of the following values:</p> <ul style="list-style-type: none"> <li>• <b>Down</b>—Device has been administratively disabled.</li> <li>• <b>Hear-Own-Xmit</b>—Device receives its own transmissions.</li> <li>• <b>Link-Layer-Down</b>—The link-layer protocol has failed to connect with the remote endpoint.</li> <li>• <b>Loopback</b>—Device is in physical loopback.</li> <li>• <b>Loop-Detected</b>—The link layer has received frames that it sent, thereby detecting a physical loopback.</li> <li>• <b>No-Carrier</b>—On media that support carrier recognition, no carrier is currently detected.</li> <li>• <b>No-Multicast</b>—Device does not support multicast traffic.</li> <li>• <b>Present</b>—Device is physically present and recognized.</li> <li>• <b>Promiscuous</b>—Device is in promiscuous mode and recognizes frames addressed to all physical addresses on the media.</li> <li>• <b>Quench</b>—Transmission on the device is quenched because the output buffer is overflowing.</li> <li>• <b>Recv-All-Multicasts</b>—Device is in multicast promiscuous mode and therefore provides no multicast filtering.</li> <li>• <b>Running</b>—Device is active and enabled.</li> </ul>
<b>Interface flags</b>	<p>The <b>Interface flags</b> field provides information about the physical interface and displays one or more of the following values:</p> <ul style="list-style-type: none"> <li>• <b>Admin-Test</b>—Interface is in test mode and some sanity checking, such as loop detection, is disabled.</li> <li>• <b>Disabled</b>—Interface is administratively disabled.</li> <li>• <b>Down</b>—A hardware failure has occurred.</li> <li>• <b>Hardware-Down</b>—Interface is nonfunctional or incorrectly connected.</li> <li>• <b>Link-Layer-Down</b>—Interface keepalives have indicated that the link is incomplete.</li> <li>• <b>No-Multicast</b>—Interface does not support multicast traffic.</li> <li>• <b>No-receive No-transmit</b>—Passive monitor mode is configured on the interface.</li> <li>• <b>Point-To-Point</b>—Interface is point-to-point.</li> <li>• <b>Pop all MPLS labels from packets of depth</b>—MPLS labels are removed as packets arrive on an interface that has the <b>pop-all-labels</b> statement configured. The depth value can be one of the following: <ul style="list-style-type: none"> <li>• <b>1</b>—Takes effect for incoming packets with one label only.</li> <li>• <b>2</b>—Takes effect for incoming packets with two labels only.</li> <li>• <b>[ 1 2 ]</b>—Takes effect for incoming packets with either one or two labels.</li> </ul> </li> <li>• <b>Promiscuous</b>—Interface is in promiscuous mode and recognizes frames addressed to all physical addresses.</li> <li>• <b>Recv-All-Multicasts</b>—Interface is in multicast promiscuous mode and provides no multicast filtering.</li> <li>• <b>SNMP-Traps</b>—SNMP trap notifications are enabled.</li> <li>• <b>Up</b>—Interface is enabled and operational.</li> </ul>

Table 50: show class-of-service interface Output Fields (continued)

Field Name	Field Description
<b>Flags</b>	<p>The <b>Logical interface flags</b> field provides information about the logical interface and displays one or more of the following values:</p> <ul style="list-style-type: none"> <li>• <b>ACFC Encapsulation</b>—Address control field Compression (ACFC) encapsulation is enabled (negotiated successfully with a peer).</li> <li>• <b>Device-down</b>—Device has been administratively disabled.</li> <li>• <b>Disabled</b>—Interface is administratively disabled.</li> <li>• <b>Down</b>—A hardware failure has occurred.</li> <li>• <b>Clear-DF-Bit</b>—GRE tunnel or IPsec tunnel is configured to clear the Don't Fragment (DF) bit.</li> <li>• <b>Hardware-Down</b>—Interface protocol initialization failed to complete successfully.</li> <li>• <b>PFC</b>—Protocol field compression is enabled for the PPP session.</li> <li>• <b>Point-To-Point</b>—Interface is point-to-point.</li> <li>• <b>SNMP-Traps</b>—SNMP trap notifications are enabled.</li> <li>• <b>Up</b>—Interface is enabled and operational.</li> </ul>
<b>Encapsulation</b>	Encapsulation on the logical interface.
<b>Admin</b>	Administrative state of the interface ( <b>Up</b> or <b>Down</b> )
<b>Link</b>	Status of physical link ( <b>Up</b> or <b>Down</b> ).
<b>Proto</b>	Protocol configured on the interface.
<b>Input Filter</b>	Names of any firewall filters to be evaluated when packets are received on the interface, including any filters attached through activation of dynamic service.
<b>Output Filter</b>	Names of any firewall filters to be evaluated when packets are transmitted on the interface, including any filters attached through activation of dynamic service.
<b>Link flags</b>	<p>Provides information about the physical link and displays one or more of the following values:</p> <ul style="list-style-type: none"> <li>• <b>ACFC</b>—Address control field compression is configured. The Point-to-Point Protocol (PPP) session negotiates the ACFC option.</li> <li>• <b>Give-Up</b>—Link protocol does not continue connection attempts after repeated failures.</li> <li>• <b>Loose-LCP</b>—PPP does not use the Link Control Protocol (LCP) to indicate whether the link protocol is operational.</li> <li>• <b>Loose-LMI</b>—Frame Relay does not use the Local Management Interface (LMI) to indicate whether the link protocol is operational.</li> <li>• <b>Loose-NCP</b>—PPP does not use the Network Control Protocol (NCP) to indicate whether the device is operational.</li> <li>• <b>Keepalives</b>—Link protocol keepalives are enabled.</li> <li>• <b>No-Keepalives</b>—Link protocol keepalives are disabled.</li> <li>• <b>PFC</b>—Protocol field compression is configured. The PPP session negotiates the PFC option.</li> </ul>
<b>Hold-times</b>	Current interface hold-time up and hold-time down, in milliseconds.
<b>CoS queues</b>	Number of CoS queues configured.

Table 50: show class-of-service interface Output Fields (continued)

Field Name	Field Description
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second:timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .
<b>Statistics last cleared</b>	Number and rate of bytes and packets received and transmitted on the physical interface. <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>
<b>Exclude Overhead Bytes</b>	Exclude the counting of overhead bytes from aggregate queue statistics. <ul style="list-style-type: none"> <li>• <b>Disabled</b>—Default configuration. Includes the counting of overhead bytes in aggregate queue statistics.</li> <li>• <b>Enabled</b>—Excludes the counting of overhead bytes from aggregate queue statistics for just the physical interface.</li> <li>• <b>Enabled for hierarchy</b>—Excludes the counting of overhead bytes from aggregate queue statistics for the physical interface as well as all child interfaces, including logical interfaces and interface sets.</li> </ul>
<b>IPv6 transit statistics</b>	Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.
<b>Input errors</b>	Input errors on the interface. The labels are explained in the following list: <ul style="list-style-type: none"> <li>• <b>Errors</b>—Sum of the incoming frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the input queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Number of frames received that are smaller than the runt threshold.</li> <li>• <b>Giants</b>—Number of frames received that are larger than the giant threshold.</li> <li>• <b>Bucket Drops</b>—Drops resulting from the traffic load exceeding the interface transmit or receive leaky bucket configuration.</li> <li>• <b>Policed discards</b>—Number of frames that the incoming packet match code discarded because they were not recognized or not of interest. Usually, this field reports protocols that Junos OS does not handle.</li> <li>• <b>L3 incompletes</b>—Number of incoming packets discarded because they failed Layer 3 (usually IPv4) sanity checks of the header. For example, a frame with less than 20 bytes of available IP header is discarded. Layer 3 incomplete errors can be ignored by configuring the <b>ignore-l3-incompletes</b> statement.</li> <li>• <b>L2 channel errors</b>—Number of times the software did not find a valid logical interface for an incoming frame.</li> <li>• <b>L2 mismatch timeouts</b>—Number of malformed or short packets that caused the incoming packet handler to discard the frame as unreadable.</li> <li>• <b>HS link CRC errors</b>—Number of errors on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>HS link FIFO overflows</b>—Number of FIFO overflows on the high-speed links between the ASICs responsible for handling the router interfaces.</li> </ul>



Table 50: show class-of-service interface Output Fields (continued)

Field Name	Field Description
<b>Output errors</b>	<p>Output errors on the interface. The labels are explained in the following list:</p> <ul style="list-style-type: none"> <li>• <b>Carrier transitions</b>—Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and up, or another problem occurs. If the number of carrier transitions increments quickly (perhaps once every 10 seconds), the cable, the far-end system, or the PIC is malfunctioning.</li> <li>• <b>Errors</b>—Sum of the outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet that is dropped by the ASIC's RED mechanism.</li> </ul> <p><b>NOTE:</b> Due to accounting space limitations on certain Type 3 FPCs (which are supported in M320 and T640 routers), the <b>Drops</b> field does not always use the correct value for queue 6 or queue 7 for interfaces on 10-port 1-Gigabit Ethernet PICs.</p> <ul style="list-style-type: none"> <li>• <b>Aged packets</b>—Number of packets that remained in shared packet SDRAM so long that the system automatically purged them. The value in this field should never increment. If it does, it is most likely a software bug or possibly malfunctioning hardware.</li> <li>• <b>HS link FIFO underflows</b>—Number of FIFO underflows on the high-speed links between the ASICs responsible for handling the router interfaces.</li> <li>• <b>MTU errors</b>—Number of packets whose size exceeds the MTU of the interface.</li> </ul>
<b>Egress queues</b>	Total number of egress Maximum usable queues on the specified interface.
<b>Queue counters</b>	<p>CoS queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>• <b>Queued packets</b>—Number of queued packets.</li> <li>• <b>Transmitted packets</b>—Number of transmitted packets.</li> <li>• <b>Dropped packets</b>—Number of packets dropped by the ASIC's RED mechanism.</li> </ul> <p><b>NOTE:</b> Due to accounting space limitations on certain Type 3 FPCs (which are supported in M320 and T640 routers), the <b>Dropped packets</b> field does not always display the correct value for queue 6 or queue 7 for interfaces on 10-port 1-Gigabit Ethernet PICs.</p>
<b>SONET alarms</b> <b>SONET defects</b>	<p>(SONET) SONET media-specific alarms and defects that prevent the interface from passing packets. When a defect persists for a certain period, it is promoted to an alarm. Based on the router configuration, an alarm can ring the red or yellow alarm bell on the router or light the red or yellow alarm LED on the craft interface. See these fields for possible alarms and defects: <b>SONET PHY</b>, <b>SONET section</b>, <b>SONET line</b>, and <b>SONET path</b>.</p>
<b>SONET PHY</b>	<p>Counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET PHY</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>PLL Lock</b>—Phase-locked loop</li> <li>• <b>PHY Light</b>—Loss of optical signal</li> </ul>

Table 50: show class-of-service interface Output Fields (continued)

Field Name	Field Description
<b>SONET section</b>	<p>Counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET section</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B1</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>SEF</b>—Severely errored framing</li> <li>• <b>LOS</b>—Loss of signal</li> <li>• <b>LOF</b>—Loss of frame</li> <li>• <b>ES-S</b>—Errored seconds (section)</li> <li>• <b>SES-S</b>—Severely errored seconds (section)</li> <li>• <b>SEFS-S</b>—Severely errored framing seconds (section)</li> </ul>
<b>SONET line</b>	<p>Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET line</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B2</b>—Bit interleaved parity for SONET line overhead</li> <li>• <b>REI-L</b>—Remote error indication (near-end line)</li> <li>• <b>RDI-L</b>—Remote defect indication (near-end line)</li> <li>• <b>AIS-L</b>—Alarm indication signal (near-end line)</li> <li>• <b>BERR-SF</b>—Bit error rate fault (signal failure)</li> <li>• <b>BERR-SD</b>—Bit error rate defect (signal degradation)</li> <li>• <b>ES-L</b>—Errored seconds (near-end line)</li> <li>• <b>SES-L</b>—Severely errored seconds (near-end line)</li> <li>• <b>UAS-L</b>—Unavailable seconds (near-end line)</li> <li>• <b>ES-LFE</b>—Errored seconds (far-end line)</li> <li>• <b>SES-LFE</b>—Severely errored seconds (far-end line)</li> <li>• <b>UAS-LFE</b>—Unavailable seconds (far-end line)</li> </ul>

Table 50: *show class-of-service interface Output Fields (continued)*

Field Name	Field Description
<b>SONET path</b>	<p>Active alarms and defects, plus counts of specific SONET errors with detailed information.</p> <ul style="list-style-type: none"> <li>• <b>Seconds</b>—Number of seconds the defect has been active.</li> <li>• <b>Count</b>—Number of times that the defect has gone from inactive to active.</li> <li>• <b>State</b>—State of the error. A state other than <b>OK</b> indicates a problem.</li> </ul> <p>The <b>SONET path</b> field has the following subfields:</p> <ul style="list-style-type: none"> <li>• <b>BIP-B3</b>—Bit interleaved parity for SONET section overhead</li> <li>• <b>REI-P</b>—Remote error indication</li> <li>• <b>LOP-P</b>—Loss of pointer (path)</li> <li>• <b>AIS-P</b>—Path alarm indication signal</li> <li>• <b>RDI-P</b>—Path remote defect indication</li> <li>• <b>UNEQ-P</b>—Path unequipped</li> <li>• <b>PLM-P</b>—Path payload (signal) label mismatch</li> <li>• <b>ES-P</b>—Errored seconds (near-end STS path)</li> <li>• <b>SES-P</b>—Severely errored seconds (near-end STS path)</li> <li>• <b>UAS-P</b>—Unavailable seconds (near-end STS path)</li> <li>• <b>ES-PFE</b>—Errored seconds (far-end STS path)</li> <li>• <b>SES-PFE</b>—Severely errored seconds (far-end STS path)</li> <li>• <b>UAS-PFE</b>—Unavailable seconds (far-end STS path)</li> </ul>
<b>Received SONET overhead</b>  <b>Transmitted SONET overhead</b>	<p>Values of the received and transmitted SONET overhead:</p> <ul style="list-style-type: none"> <li>• <b>C2</b>—Signal label. Allocated to identify the construction and content of the STS-level SPE and for PDI-P.</li> <li>• <b>F1</b>—Section user channel byte. This byte is set aside for the purposes of users.</li> <li>• <b>K1 and K2</b>—These bytes are allocated for APS signaling for the protection of the multiplex section.</li> <li>• <b>J0</b>—Section trace. This byte is defined for STS-1 number 1 of an STS-<i>N</i> signal. Used to transmit a 1-byte fixed-length string or a 16-byte message so that a receiving terminal in a section can verify its continued connection to the intended transmitter.</li> <li>• <b>S1</b>—Synchronization status. The S1 byte is located in the first STS-1 number of an STS-<i>N</i> signal.</li> <li>• <b>Z3 and Z4</b>—Allocated for future use.</li> </ul>
<b>Received path trace</b>  <b>Transmitted path trace</b>	<p>SONET/SDH interfaces allow path trace bytes to be sent inband across the SONET/SDH link. Juniper Networks and other router manufacturers use these bytes to help diagnose misconfigurations and network errors by setting the transmitted path trace message so that it contains the system hostname and name of the physical interface. The received path trace value is the message received from the router at the other end of the fiber. The transmitted path trace value is the message that this router transmits.</p>
<b>HDLC configuration</b>	<p>Information about the HDLC configuration.</p> <ul style="list-style-type: none"> <li>• <b>Policing bucket</b>—Configured state of the receiving policer.</li> <li>• <b>Shaping bucket</b>—Configured state of the transmitting shaper.</li> <li>• <b>Giant threshold</b>—Giant threshold programmed into the hardware.</li> <li>• <b>Runt threshold</b>—Runt threshold programmed into the hardware.</li> </ul>

Table 50: *show class-of-service interface Output Fields (continued)*

Field Name	Field Description
<b>Packet Forwarding Engine configuration</b>	Information about the configuration of the Packet Forwarding Engine: <ul style="list-style-type: none"> <li>• <b>Destination slot</b>—FPC slot number.</li> <li>• <b>PLP byte</b>—Packet Level Protocol byte.</li> </ul>
<b>CoS information</b>	Information about the CoS queue for the physical interface. <ul style="list-style-type: none"> <li>• <b>CoS transmit queue</b>—Queue number and its associated user-configured forwarding class name.</li> <li>• <b>Bandwidth %</b>—Percentage of bandwidth allocated to the queue.</li> <li>• <b>Bandwidth bps</b>—Bandwidth allocated to the queue (in bps).</li> <li>• <b>Buffer %</b>—Percentage of buffer space allocated to the queue.</li> <li>• <b>Buffer usec</b>—Amount of buffer space allocated to the queue, in microseconds. This value is nonzero only if the buffer size is configured in terms of time.</li> <li>• <b>Priority</b>—Queue priority: <b>low</b> or <b>high</b>.</li> <li>• <b>Limit</b>—Displayed if rate limiting is configured for the queue. Possible values are <b>none</b> and <b>exact</b>. If <b>exact</b> is configured, the queue transmits only up to the configured bandwidth, even if excess bandwidth is available. If <b>none</b> is configured, the queue transmits beyond the configured bandwidth if bandwidth is available.</li> </ul>
<b>Forwarding classes</b>	Total number of forwarding classes supported on the specified interface.
<b>Egress queues</b>	Total number of egress Maximum usable queues on the specified interface.
<b>Queue</b>	Queue number.
<b>Forwarding classes</b>	Forwarding class name.
<b>Queued Packets</b>	Number of packets queued to this queue.
<b>Queued Bytes</b>	Number of bytes queued to this queue. The byte counts vary by PIC type.
<b>Transmitted Packets</b>	Number of packets transmitted by this queue. When fragmentation occurs on the egress interface, the first set of packet counters shows the postfragmentation values. The second set of packet counters (displayed under the <b>Packet Forwarding Engine Chassis Queues</b> field) shows the prefragmentation values.
<b>Transmitted Bytes</b>	Number of bytes transmitted by this queue. The byte counts vary by PIC type.
<b>Tail-dropped packets</b>	Number of packets dropped because of tail drop.

Table 50: *show class-of-service interface Output Fields (continued)*

Field Name	Field Description
RED-dropped packets	<p>Number of packets dropped because of random early detection (RED).</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, the total number of dropped packets is displayed. On all other M Series routers, the output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP packets dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP packets dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP packets dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP packets dropped because of RED.</li> </ul> </li> <li>(MX Series routers with enhanced DPCs, and T Series routers with enhanced FPCs only) The output classifies dropped packets into the following categories: <ul style="list-style-type: none"> <li><b>Low</b>—Number of low-loss priority packets dropped because of RED.</li> <li><b>Medium-low</b>—Number of medium-low loss priority packets dropped because of RED.</li> <li><b>Medium-high</b>—Number of medium-high loss priority packets dropped because of RED.</li> <li><b>High</b>—Number of high-loss priority packets dropped because of RED.</li> </ul> </li> </ul> <p><b>NOTE:</b> Due to accounting space limitations on certain Type 3 FPCs (which are supported in M320 and T640 routers), this field does not always display the correct value for queue 6 or queue 7 for interfaces on 10-port 1-Gigabit Ethernet PICs.</p>
RED-dropped bytes	<p>Number of bytes dropped because of RED. The byte counts vary by PIC type.</p> <ul style="list-style-type: none"> <li>(M Series and T Series routers only) On M320 and M120 routers and the T Series routers, only the total number of dropped bytes is displayed. On all other M Series routers, the output classifies dropped bytes into the following categories: <ul style="list-style-type: none"> <li><b>Low, non-TCP</b>—Number of low-loss priority non-TCP bytes dropped because of RED.</li> <li><b>Low, TCP</b>—Number of low-loss priority TCP bytes dropped because of RED.</li> <li><b>High, non-TCP</b>—Number of high-loss priority non-TCP bytes dropped because of RED.</li> <li><b>High, TCP</b>—Number of high-loss priority TCP bytes dropped because of RED.</li> </ul> </li> </ul> <p><b>NOTE:</b> Due to accounting space limitations on certain Type 3 FPCs (which are supported in M320 and T640 routers), this field does not always display the correct value for queue 6 or queue 7 for interfaces on 10-port 1-Gigabit Ethernet PICs.</p>
Transmit rate	Configured transmit rate of the scheduler. The rate is a percentage of the total interface bandwidth.
Rate Limit	<p>Rate limiting configuration of the queue. Possible values are :</p> <ul style="list-style-type: none"> <li><b>None</b>—No rate limit.</li> <li><b>exact</b>—Queue transmits at the configured rate.</li> </ul>
Buffer size	Delay buffer size in the queue.
Priority	Scheduling priority configured as <b>low</b> or <b>high</b> .
Excess Priority	Priority of the excess bandwidth traffic on a scheduler: <b>low</b> , <b>medium-low</b> , <b>medium-high</b> , <b>high</b> , or <b>none</b> .

Table 50: *show class-of-service interface Output Fields (continued)*

Field Name	Field Description
<b>Drop profiles</b>	<p>Display the assignment of drop profiles.</p> <ul style="list-style-type: none"> <li>• <b>Loss priority</b>—Packet loss priority for drop profile assignment.</li> <li>• <b>Protocol</b>—Transport protocol for drop profile assignment.</li> <li>• <b>Index</b>—Index of the indicated object. Objects that have indexes in this output include schedulers and drop profiles.</li> <li>• <b>Name</b>—Name of the drop profile.</li> <li>• <b>Type</b>—Type of the drop profile: <b>discrete</b> or <b>interpolated</b>.</li> <li>• <b>Fill Level</b>—Percentage fullness of a queue.</li> <li>• <b>Drop probability</b>—Drop probability at this fill level.</li> </ul>
<b>Excess Priority</b>	Priority of the excess bandwidth traffic on a scheduler.
<b>Drop profiles</b>	<p>Display the assignment of drop profiles.</p> <ul style="list-style-type: none"> <li>• <b>Loss priority</b>—Packet loss priority for drop profile assignment.</li> <li>• <b>Protocol</b>—Transport protocol for drop profile assignment.</li> <li>• <b>Index</b>—Index of the indicated object. Objects that have indexes in this output include schedulers and drop profiles.</li> <li>• <b>Name</b>—Name of the drop profile.</li> <li>• <b>Type</b>—Type of the drop profile: <b>discrete</b> or <b>interpolated</b>.</li> <li>• <b>Fill Level</b>—Percentage fullness of a queue.</li> <li>• <b>Drop probability</b>—Drop probability at this fill level.</li> </ul>

Table 50: *show class-of-service interface Output Fields (continued)*

Field Name	Field Description
Adjustment information	<p>Display the assignment of shaping-rate adjustments on a scheduler node or queue.</p> <ul style="list-style-type: none"> <li> <b>Adjusting application</b>—Application that is performing the shaping-rate adjustment. <ul style="list-style-type: none"> <li>The adjusting application can appear as <b>ancp LS-0</b>, which is the Junos OS Access Node Control Profile process (<b>ancpd</b>) that performs shaping-rate adjustments on schedule nodes.</li> <li>The adjusting application can appear as <b>DHCP</b>, which adjusts the shaping-rate and overhead-accounting class-of-service attributes based on DSL Forum VSA conveyed in DHCP option 82, suboption 9 (Vendor Specific Information). The shaping rate is based on the actual-data-rate-downstream attribute. The overhead accounting value is based on the access-loop-encapsulation attribute and specifies whether the access loop uses Ethernet (frame mode) or ATM (cell mode).</li> <li>The adjusting application can also appear as <b>pppoe</b>, which adjusts the shaping-rate and overhead-accounting class-of-service attributes on dynamic subscriber interfaces in a broadband access network based on access line parameters in Point-to-Point Protocol over Ethernet (PPPoE) Tags [TR-101]. This feature is supported on MPC/MIC interfaces on MX Series routers. The shaping rate is based on the actual-data-rate-downstream attribute. The overhead accounting value is based on the access-loop-encapsulation attribute and specifies whether the access loop uses Ethernet (frame mode) or ATM (cell mode).</li> </ul> </li> <li><b>Adjustment type</b>—Type of adjustment: <b>absolute</b> or <b>delta</b>.</li> <li><b>Configured shaping rate</b>—Shaping rate configured for the scheduler node or queue.</li> <li><b>Adjustment value</b>—Value of adjusted shaping rate.</li> <li><b>Adjustment target</b>—Level of shaping-rate adjustment performed: <b>node</b> or <b>queue</b>.</li> <li><b>Adjustment overhead-accounting mode</b>—Configured shaping mode: <b>frame</b> or <b>cell</b>.</li> <li><b>Adjustment overhead bytes</b>—Number of bytes that the ANCP agent adds to or subtracts from the actual downstream frame overhead before reporting the adjusted values to CoS.</li> <li><b>Adjustment target</b>—Level of shaping-rate adjustment performed: <b>node</b> or <b>queue</b>.</li> <li><b>Adjustment multicast index</b>—</li> </ul>

## Sample Output

### show class-of-service interface (Physical)

```

user@host> show class-of-service interface so-0/2/3

Physical interface: so-0/2/3, Index: 135
Maximum usable queues: 8, Queues in use: 4
Total non-default queues created: 4
  Scheduler map: <default>, Index: 2032638653

  Logical interface: fe-0/0/1.0, Index: 68, Dedicated Queues: no
    Shaping rate: 32000
    Object          Name                Type      Index
    Scheduler-map   <default>           exp       27
    Rewrite         exp-default         exp       21
    Classifier      exp-default         exp        5
    Classifier      ipprec-compatibility ip         8
    Forwarding-class-map exp-default         exp        5

```

### show class-of-service interface (Logical)

```

user@host> show class-of-service interface so-0/2/3.0

```

```

Logical interface: so-0/2/3.0, Index: 68, Dedicated Queues: no
  Shaping rate: 32000
  Object      Name      Type      Index
  Scheduler-map <default>
  Rewrite     exp-default exp        21
  Classifier   exp-default exp         5
  Classifier   ipprec-compatibility ip         8
  Forwarding-class-map exp-default exp         5

```

### show class-of-service interface (Gigabit Ethernet)

```

user@host> show class-of-service interface ge-6/2/0

Physical interface: ge-6/2/0, Index: 175
Maximum usable queues: 4, Queues in use: 4
  Scheduler map: <default>, Index: 2
  Input scheduler map: <default>, Index: 3
  Chassis scheduler map: <default-chassis>, Index: 4

```

### show class-of-service interface (ANCP)

```

user@host> show class-of-service interface pp0.1073741842

  Logical interface: pp0.1073741842, Index: 341
  Object      Name      Type      Index
  Traffic-control-profile TCP-CVLAN      Output    12408
  Classifier   dscp-ipv6-compatibility dscp-ipv6 9
  Classifier   ipprec-compatibility ip         13

  Adjusting application: ancp LS-0
  Adjustment type: absolute
  Configured shaping rate: 4000000
  Adjustment value: 11228000
  Adjustment overhead-accounting mode: Frame Mode
  Adjustment overhead bytes: 50
  Adjustment target: node

```

### show class-of-service interface (PPPoE Interface)

```

user@host> show class-of-service interface pp0.1

Logical interface: pp0.1, Index: 85
  Object      Name      Type      Index
  Traffic-control-profile tcp-pppoe.o.pp0.1 Output    2726446535
  Classifier   ipprec-compatibility ip         13

  Adjusting application: PPPoE
  Adjustment type: absolute
  Adjustment value: 5000000
  Adjustment overhead-accounting mode: cell
  Adjustment target: node

```

### show class-of-service interface (DHCP Interface)

```

user@host> show class-of-service interface demux0.1

Logical interface: pp0.1, Index: 85
  Object      Name      Type      Index
  Traffic-control-profile tcp-dhcp.o.demux0.1 Output    2726446535

```



```

Classifier                ipprec-compatibility  ip                13

Adjusting application: DHCP
Adjustment type: absolute
Adjustment value: 5000000
Adjustment overhead-accounting mode: cell
Adjustment target: node

```

### show class-of-service interface (T4000 Routers with Type 5 FPCs)

```
user@host> show class-of-service interface xe-4/0/0
```

```

Physical interface: xe-4/0/0, Index: 153
  Maximum usable queues: 8, Queues in use: 4
  Shaping rate: 5000000000 bps
  Scheduler map: <default>, Index: 2
  Congestion-notification: Disabled

  Logical interface: xe-4/0/0.0, Index: 77
    Object      Name                Type
Index
13      Classifier      ipprec-compatibility  ip

```

### show class-of-service interface detail

```
user@host> show class-of-service interface ge-0/3/0 detail
```

```

Physical interface: ge-0/3/0, Enabled, Physical link is Up
  Link-level type: Ethernet, MTU: 1518, Speed: 1000mbps, Loopback: Disabled,
  Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,
  Remote fault: Online
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000

  Physical interface: ge-0/3/0, Index: 138
  Maximum usable queues: 4, Queues in use: 5
  Shaping rate: 50000 bps
  Scheduler map: interface-scheduler-map, Index: 58414
  Input shaping rate: 10000 bps
  Input scheduler map: scheduler-map, Index: 15103
  Chassis scheduler map: <default-chassis>, Index: 4
  Congestion-notification: Disabled

  Logical interface ge-0/3/0.0
    Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2
    inet
    mpls

Interface      Admin Link Proto Input Filter      Output Filter
ge-0/3/0.0    up   up   inet
              mpls

Interface      Admin Link Proto Input Policer      Output Policer
ge-0/3/0.0    up   up   inet
              mpls

  Logical interface: ge-0/3/0.0, Index: 68
    Object      Name                Type                Index
Rewrite        exp-default          exp (mpls-any)      33

```

Classifier	exp-default	exp	10
Classifier	ipprec-compatibility	ip	13
Logical interface ge-0/3/0.1			
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2			
inet			
Interface	Admin	Link	Proto Input Filter Output Filter
ge-0/3/0.1	up	up	inet
Interface	Admin	Link	Proto Input Policer Output Policar
ge-0/3/0.1	up	up	inet
Logical interface: ge-0/3/0.1, Index: 69			
Object	Name	Type	Index
Classifier	ipprec-compatibility	ip	13

### show class-of-service interface comprehensive

```
user@host> show class-of-service interface ge-0/3/0 comprehensive
```

```
Physical interface: ge-0/3/0, Enabled, Physical link is Up
  Interface index: 138, SNMP ifIndex: 601, Generation: 141
  Link-level type: Ethernet, MTU: 1518, Speed: 1000mbps, BPDU Error: None,
  MAC-REWRITE Error: None, Loopback: Disabled, Source filtering: Disabled, Flow
  control: Enabled,
  Auto-negotiation: Enabled, Remote fault: Online
  Device flags   : Present Running
  Interface flags: SNMP-Traps Internal: 0x4000
  CoS queues    : 4 supported, 4 maximum usable queues
  Schedulers    : 256
  Hold-times    : Up 0 ms, Down 0 ms
  Current address: 00:14:f6:f4:b4:5d, Hardware address: 00:14:f6:f4:b4:5d
  Last flapped  : 2010-09-07 06:35:22 PDT (15:14:42 ago)
  Statistics last cleared: Never  Exclude Overhead Bytes: Disabled
  Traffic statistics:
    Input bytes  : 0 0 bps
    Output bytes : 0 0 bps
    Input packets: 0 0 pps
    Output packets: 0 0 pps
  IPv6 total statistics:
    Input bytes  : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  Ingress traffic statistics at Packet Forwarding Engine:
    Input bytes  : 0 0 bps
    Input packets: 0 0 pps
    Drop bytes   : 0 0 bps
    Drop packets: 0 0 pps
  Label-switched interface (LSI) traffic statistics:
    Input bytes  : 0 0 bps
    Input packets: 0 0 pps
  Input errors:
    Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0, L3
  incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0, FIFO errors: 0,
  Resource errors: 0
  Output errors:
    Carrier transitions: 5, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,
  FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
  Ingress queues: 4 supported, 5 in use
```

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 af3	0	0	0
1 af2	0	0	0
2 ef2	0	0	0
3 ef1	0	0	0
Egress queues: 4 supported, 5 in use			
Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 af3	0	0	0
1 af2	0	0	0
2 ef2	0	0	0
3 ef1	0	0	0
Active alarms : None			
Active defects : None			
MAC statistics:	Receive	Transmit	
Total octets	0	0	
Total packets	0	0	
Unicast packets	0	0	
Broadcast packets	0	0	
Multicast packets	0	0	
CRC/Align errors	0	0	
FIFO errors	0	0	
MAC control frames	0	0	
MAC pause frames	0	0	
Oversized frames	0		
Jabber frames	0		
Fragment frames	0		
VLAN tagged frames	0		
Code violations	0		
Filter statistics:			
Input packet count	0		
Input packet rejects	0		
Input DA rejects	0		
Input SA rejects	0		
Output packet count		0	
Output packet pad count		0	
Output packet error count		0	
CAM destination filters: 0, CAM source filters: 0			
Autonegotiation information:			
Negotiation status: Complete			
Link partner:			
Link mode: Full-duplex, Flow control: Symmetric/Asymmetric, Remote fault:			
OK			
Local resolution:			
Flow control: Symmetric, Remote fault: Link OK			
Packet Forwarding Engine configuration:			
Destination slot: 0			
CoS information:			
Direction : Output			
CoS transmit queue	Bandwidth	Buffer	Priority
Limit			

2 ef2	%	bps	%	usec	high
39		19500	0	120	
none					
Direction : Input					
CoS transmit queue		Bandwidth		Buffer	Priority
Limit					
0 af3	%	bps	%	usec	low
30		3000	45	0	
none					
Physical interface: ge-0/3/0, Enabled, Physical link is Up					
Interface index: 138, SNMP ifIndex: 601					
Forwarding classes: 16 supported, 5 in use					
Ingress queues: 4 supported, 5 in use					
Queue: 0, Forwarding classes: af3					
Queued:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Transmitted:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Tail-dropped packets : Not Available					
RED-dropped packets	:	0		0 pps	
RED-dropped bytes	:	0		0 bps	
Queue: 1, Forwarding classes: af2					
Queued:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Transmitted:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Tail-dropped packets : Not Available					
RED-dropped packets	:	0		0 pps	
RED-dropped bytes	:	0		0 bps	
Queue: 2, Forwarding classes: ef2					
Queued:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Transmitted:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Tail-dropped packets : Not Available					
RED-dropped packets	:	0		0 pps	
RED-dropped bytes	:	0		0 bps	
Queue: 3, Forwarding classes: ef1					
Queued:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Transmitted:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	
Tail-dropped packets : Not Available					
RED-dropped packets	:	0		0 pps	
RED-dropped bytes	:	0		0 bps	
Forwarding classes: 16 supported, 5 in use					
Egress queues: 4 supported, 5 in use					
Queue: 0, Forwarding classes: af3					
Queued:					
Packets	:	0		0 pps	
Bytes	:	0		0 bps	

```

Transmitted:
  Packets      : 0 0 pps
  Bytes        : 0 0 bps
  Tail-dropped packets : Not Available
  RL-dropped packets : 0 0 pps
  RL-dropped bytes  : 0 0 bps
  RED-dropped packets : 0 0 pps
  RED-dropped bytes  : 0 0 bps
Queue: 1, Forwarding classes: af2
  Queued:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
  Transmitted:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
    Tail-dropped packets : Not Available
    RL-dropped packets : 0 0 pps
    RL-dropped bytes  : 0 0 bps
    RED-dropped packets : 0 0 pps
    RED-dropped bytes  : 0 0 bps
Queue: 2, Forwarding classes: ef2
  Queued:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
  Transmitted:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
    Tail-dropped packets : Not Available
    RL-dropped packets : 0 0 pps
    RL-dropped bytes  : 0 0 bps
    RED-dropped packets : 0 0 pps
    RED-dropped bytes  : 0 0 bps
Queue: 3, Forwarding classes: ef1
  Queued:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
  Transmitted:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
    Tail-dropped packets : Not Available
    RL-dropped packets : 0 0 pps
    RL-dropped bytes  : 0 0 bps
    RED-dropped packets : 0 0 pps
    RED-dropped bytes  : 0 0 bps

Packet Forwarding Engine Chassis Queues:
Queues: 4 supported, 5 in use
Queue: 0, Forwarding classes: af3
  Queued:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
  Transmitted:
    Packets      : 0 0 pps
    Bytes        : 0 0 bps
    Tail-dropped packets : 0 0 pps
    RED-dropped packets : Not Available
    RED-dropped bytes  : Not Available
Queue: 1, Forwarding classes: af2
  Queued:
    Packets      : 0 0 pps

```

```

    Bytes          :          0          0 bps
    Transmitted:
    Packets        :          0          0 pps
    Bytes          :          0          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets : Not Available
    RED-dropped bytes  : Not Available
Queue: 2, Forwarding classes: ef2
  Queued:
    Packets        :          0          0 pps
    Bytes          :          0          0 bps
  Transmitted:
    Packets        :          0          0 pps
    Bytes          :          0          0 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets : Not Available
    RED-dropped bytes  : Not Available
Queue: 3, Forwarding classes: ef1
  Queued:
    Packets        :          108546          0 pps
    Bytes          :        12754752        376 bps
  Transmitted:
    Packets        :          108546          0 pps
    Bytes          :        12754752        376 bps
    Tail-dropped packets :          0          0 pps
    RED-dropped packets : Not Available
    RED-dropped bytes  : Not Available

Physical interface: ge-0/3/0, Index: 138
Maximum usable queues: 4, Queues in use: 5
Shaping rate: 50000 bps

Scheduler map: interface-scheduler-map, Index: 58414

  Scheduler: ef2, Forwarding class: ef2, Index: 39155
    Transmit rate: 39 percent, Rate Limit: none, Buffer size: 120 us, Buffer
Limit: none, Priority: high
    Excess Priority: unspecified
    Drop profiles:
      Loss priority  Protocol  Index  Name
      Low           any       1      < default-drop-profile>
      Medium low    any       1      < default-drop-profile>
      Medium high   any       1      < default-drop-profile>
      High          any       1      < default-drop-profile>
    Drop profile: < default-drop-profile>, Type: discrete, Index: 1
      Fill level  Drop probability
      100         100
    Drop profile: < default-drop-profile>, Type: discrete, Index: 1
      Fill level  Drop probability
      100         100
    Drop profile: < default-drop-profile>, Type: discrete, Index: 1
      Fill level  Drop probability
      100         100
    Drop profile: < default-drop-profile>, Type: discrete, Index: 1
      Fill level  Drop probability
      100         100
    Input shaping rate: 10000 bps
    Input scheduler map: scheduler-map

Scheduler map: scheduler-map, Index: 15103

```

```

Scheduler: af3, Forwarding class: af3, Index: 35058
  Transmit rate: 30 percent, Rate Limit: none, Buffer size: 45 percent, Buffer
  Limit: none, Priority: low
  Excess Priority: unspecified
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       40582  green
    Medium low    any       1      < default-drop-profile>
    Medium high   any       1      < default-drop-profile>
    High          any      18928  yellow
  Drop profile: green, Type: discrete, Index: 40582
    Fill level  Drop probability
    50          0
    100         100
  Drop profile: < default-drop-profile>, Type: discrete, Index: 1
    Fill level  Drop probability
    100         100
  Drop profile: < default-drop-profile>, Type: discrete, Index: 1
    Fill level  Drop probability
    100         100
  Drop profile: yellow, Type: discrete, Index: 18928
    Fill level  Drop probability
    50          0
    100         100
  Chassis scheduler map: < default-drop-profile>
  Scheduler map: < default-drop-profile>, Index: 4

Scheduler: < default-drop-profile>, Forwarding class: af3, Index: 25
  Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer
  Limit: none, Priority: low
  Excess Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      < default-drop-profile>
    Medium low    any       1      < default-drop-profile>
    Medium high   any       1      < default-drop-profile>
    High          any       1      < default-drop-profile>
  Drop profile: < default-drop-profile>, Type: discrete, Index: 1
    Fill level  Drop probability
    100         100
  Drop profile: < default-drop-profile>, Type: discrete, Index: 1
    Fill level  Drop probability
    100         100
  Drop profile: < default-drop-profile>, Type: discrete, Index: 1
    Fill level  Drop probability
    100         100
  Drop profile: < default-drop-profile>, Type: discrete, Index: 1
    Fill level  Drop probability
    100         100

Scheduler: < default-drop-profile>, Forwarding class: af2, Index: 25
  Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer
  Limit: none, Priority: low
  Excess Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      < default-drop-profile>
    Medium low    any       1      < default-drop-profile>
    Medium high   any       1      < default-drop-profile>

```

```

    High          any          1    < default-drop-profile>
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100

Scheduler: < default-drop-profile>, Forwarding class: ef2, Index: 25
  Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer
Limit: none, Priority: low
  Excess Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      < default-drop-profile>
    Medium low    any       1      < default-drop-profile>
    Medium high   any       1      < default-drop-profile>
    High          any       1      < default-drop-profile>
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100

Scheduler: < default-drop-profile>, Forwarding class: ef1, Index: 25
  Transmit rate: 25 percent, Rate Limit: none, Buffer size: 25 percent, Buffer
Limit: none, Priority: low
  Excess Priority: low
  Drop profiles:
    Loss priority  Protocol  Index  Name
    Low           any       1      < default-drop-profile>
    Medium low    any       1      < default-drop-profile>
    Medium high   any       1      < default-drop-profile>
    High          any       1      < default-drop-profile>
Drop profile: , Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Drop profile: < default-drop-profile>, Type: discrete, Index: 1
  Fill level    Drop probability
    100          100
Congestion-notification: Disabled

```



Forwarding class	ID	Queue	Restricted queue	Fabric
priority				
af3	0	0	0	low
af2	1	1	1	low
ef2	2	2	2	high
ef1	3	3	3	high
af1	4	4	0	low
normal				

Logical interface ge-0/3/0.0 (Index 68) (SNMP ifIndex 152) (Generation 159)

Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2

Traffic statistics:

Input bytes : 0  
Output bytes : 0  
Input packets: 0  
Output packets: 0

Local statistics:

Input bytes : 0  
Output bytes : 0  
Input packets: 0  
Output packets: 0

Transit statistics:

Input bytes : 0 0 bps  
Output bytes : 0 0 bps  
Input packets: 0 0 pps  
Output packets: 0 0 pps

Protocol inet, MTU: 1500, Generation: 172, Route table: 0

Flags: Sendbcst-pkt-to-re

Input Filters: filter-in-ge-0/3/0.0-i,

Policer: Input: p1-ge-0/3/0.0-inet-i

Protocol mpls, MTU: 1488, Maximum labels: 3, Generation: 173, Route table: 0

Flags: Is-Primary

Output Filters: exp-filter,,,,,

Logical interface ge-1/2/0.0 (Index 347) (SNMP ifIndex 638) (Generation 156)

Forwarding class	ID	Queue	Restricted queue	Fabric	priority	Policing priority
SPU priority						
best-effort	0	0	0	low		normal
low						

Aggregate Forwarding-class statistics per forwarding-class

Aggregate Forwarding-class statistics:

Forwarding-class statistics:

Forwarding-class best-effort statistics:

Input unicast bytes: 0  
Output unicast bytes: 0  
Input unicast packets: 0  
Output unicast packets: 0

Input multicast bytes: 0  
Output multicast bytes: 0  
Input multicast packets: 0  
Output multicast packets: 0

## Forwarding-class expedited-forwarding statistics:

```
Input unicast bytes:    0
Output unicast bytes:   0
Input unicast packets:  0
Output unicast packets: 0

Input multicast bytes:   0
Output multicast bytes:  0
Input multicast packets: 0
Output multicast packets: 0
```

## IPv4 protocol forwarding-class statistics:

## Forwarding-class statistics:

## Forwarding-class best-effort statistics:

```
Input unicast bytes:    0
Output unicast bytes:   0
Input unicast packets:  0
Output unicast packets: 0

Input multicast bytes:   0
Output multicast bytes:  0
Input multicast packets: 0
Output multicast packets: 0
```

## Forwarding-class expedited-forwarding statistics:

```
Input unicast bytes:    0
Output unicast bytes:   0
Input unicast packets:  0
Output unicast packets: 0

Input multicast bytes:   0
Output multicast bytes:  0
Input multicast packets: 0
Output multicast packets: 0
```

## IPv6 protocol forwarding-class statistics:

## Forwarding-class statistics:

## Forwarding-class best-effort statistics:

```
Input unicast bytes:    0
Output unicast bytes:   0
Input unicast packets:  0
Output unicast packets: 0

Input multicast bytes:   0
Output multicast bytes:  0
Input multicast packets: 0
Output multicast packets: 0
```

## Forwarding-class expedited-forwarding statistics:

```
Input unicast bytes:    0
Output unicast bytes:   0
Input unicast packets:  0
Output unicast packets: 0

Input multicast bytes:   0
Output multicast bytes:  0
Input multicast packets: 0
```

```

Output multicast packets: 0

Logical interface ge-0/3/0.0 (Index 68) (SNMP ifIndex 152)
  Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.1 ] Encapsulation: ENET2
  Input packets : 0
  Output packets: 0

Interface      Admin Link Proto Input Filter      Output Filter
ge-0/3/0.0     up    up    inet filter-in-ge-0/3/0.0-i
              up    up    mpls                exp-filter

Interface      Admin Link Proto Input Policer      Output Policer
ge-0/3/0.0     up    up    inet p1-ge-0/3/0.0-inet-i
              up    up    mpls

Filter: filter-in-ge-0/3/0.0-i
Counters:
Name                                     Bytes      Packets
count-filter-in-ge-0/3/0.0-i             0           0

Filter: exp-filter
Counters:
Name                                     Bytes      Packets
count-exp-seven-match                     0           0
count-exp-zero-match                      0           0

Policers:
Name                                     Packets
p1-ge-0/3/0.0-inet-i                     0

Logical interface: ge-0/3/0.0, Index: 68
Object      Name      Type      Index
Rewrite     exp-default  exp (mpls-any)  33

Rewrite rule: exp-default, Code point type: exp, Index: 33
Forwarding class      Loss priority      Code point
af3                    low                 000
af3                    high                001
af2                    low                 010
af2                    high                011
ef2                    low                 100
ef2                    high                101
ef1                    low                 110
ef1                    high                111
Object      Name      Type      Index
Classifier   exp-default  exp      10

Classifier: exp-default, Code point type: exp, Index: 10
Code point      Forwarding class      Loss priority
000              af3                   low
001              af3                   high
010              af2                   low
011              af2                   high
100              ef2                   low
101              ef2                   high
110              ef1                   low
111              ef1                   high
Object      Name      Type      Index

```

Classifier		ipprec-compatibility		ip		13			
Classifier: ipprec-compatibility, Code point type: inet-precedence, Index: 13									
Code point		Forwarding class		Loss priority					
000		af3		low					
001		af3		high					
010		af3		low					
011		af3		high					
100		af3		low					
101		af3		high					
110		ef1		low					
111		ef1		high					
Forwarding class		ID		Queue		Restricted queue		Fabric	
priority		Policing priority							
af3		0		0		0		low	
af2		1		1		1		low	
ef2		2		2		2		high	
ef1		3		3		3		high	
af1		4		4		0		low	
normal									
Logical interface ge-0/3/0.1 (Index 69) (SNMP ifIndex 154) (Generation 160)									
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2									
Traffic statistics:									
Input bytes :		0							
Output bytes :		0							
Input packets:		0							
Output packets:		0							
Local statistics:									
Input bytes :		0							
Output bytes :		0							
Input packets:		0							
Output packets:		0							
Transit statistics:									
Input bytes :		0				0 bps			
Output bytes :		0				0 bps			
Input packets:		0				0 pps			
Output packets:		0				0 pps			
Protocol inet, MTU: 1500, Generation: 174, Route table: 0									
Flags: Sendbcst-pkt-to-re									
Logical interface ge-0/3/0.1 (Index 69) (SNMP ifIndex 154)									
Flags: SNMP-Traps 0x4000 VLAN-Tag [ 0x8100.2 ] Encapsulation: ENET2									
Input packets : 0									
Output packets: 0									
Interface		Admin Link		Proto Input Filter		Output Filter			
ge-0/3/0.1		up up		mpls					
Interface		Admin Link		Proto Input Policer		Output Policer			
ge-0/3/0.1		up up							
mpls									
Logical interface: ge-0/3/0.1, Index: 69									
Object		Name		Type		Index			

Classifier	ipprec-compatibility		ip		13	
Classifier: ipprec-compatibility, Code point type: inet-precedence, Index: 13						
Code point	Forwarding class		Loss priority			
000	af3		low			
001	af3		high			
010	af3		low			
011	af3		high			
100	af3		low			
101	af3		high			
110	ef1		low			
111	ef1		high			
Forwarding class		ID	Queue	Restricted queue		Fabric
priority	Policing priority					
af3		0	0	0		low
	normal					
af2		1	1	1		low
	normal					
ef2		2	2	2		high
	normal					
ef1		3	3	3		high
	normal					
af1		4	4	0		low
	normal					

### show class-of-service interface (ACX Series Routers)

```

user@host-g11# show class-of-service interface

Physical interface: at-0/0/0, Index: 130
Maximum usable queues: 4, Queues in use: 4
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled

Logical interface: at-0/0/0.0, Index: 69

Logical interface: at-0/0/0.32767, Index: 70

Physical interface: at-0/0/1, Index: 133
Maximum usable queues: 4, Queues in use: 4
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled

Logical interface: at-0/0/1.0, Index: 71

Logical interface: at-0/0/1.32767, Index: 72

Physical interface: ge-0/1/0, Index: 146
Maximum usable queues: 8, Queues in use: 5
Scheduler map: <default>, Index: 2
Congestion-notification: Disabled
Object      Name                Type                Index
Rewrite     dscp-default        dscp                31
Classifier  d1                  dscp                11331
Classifier  ci                  ieee8021p           583

Logical interface: ge-0/1/0.0, Index: 73

```

Object Rewrite	Name custom-exp	Type exp (mpls-any)	Index 46413
Logical interface: ge-0/1/0.1, Index: 74			
Logical interface: ge-0/1/0.32767, Index: 75			
Physical interface: ge-0/1/1, Index: 147			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			
Object Classifier	Name ipprec-compatibility	Type ip	Index 13
Logical interface: ge-0/1/1.0, Index: 76			
Physical interface: ge-0/1/2, Index: 148			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			
Object Rewrite	Name ri	Type ieee8021p (outer)	Index 35392
Classifier	ci	ieee8021p	583
Physical interface: ge-0/1/3, Index: 149			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			
Object Classifier	Name ipprec-compatibility	Type ip	Index 13
Logical interface: ge-0/1/3.0, Index: 77			
Object Rewrite	Name custom-exp2	Type exp (mpls-any)	Index 53581
Physical interface: ge-0/1/4, Index: 150			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			
Object Classifier	Name ipprec-compatibility	Type ip	Index 13
Physical interface: ge-0/1/5, Index: 151			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			
Object Classifier	Name ipprec-compatibility	Type ip	Index 13
Physical interface: ge-0/1/6, Index: 152			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			
Object Classifier	Name ipprec-compatibility	Type ip	Index 13
Physical interface: ge-0/1/7, Index: 153			
Maximum usable queues: 8, Queues in use: 5			
Scheduler map: <default>, Index: 2			
Congestion-notification: Disabled			

```

Object      Name      Type      Index
Classifier  d1         dscp      11331

Physical interface: ge-0/2/0, Index: 154
Maximum usable queues: 8, Queues in use: 5
  Scheduler map: <default>, Index: 2
  Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Physical interface: ge-0/2/1, Index: 155
Maximum usable queues: 8, Queues in use: 5
  Scheduler map: <default>, Index: 2
  Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Logical interface: ge-0/2/1.0, Index: 78

Logical interface: ge-0/2/1.32767, Index: 79

Physical interface: xe-0/3/0, Index: 156
Maximum usable queues: 8, Queues in use: 5
  Scheduler map: <default>, Index: 2
  Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Logical interface: xe-0/3/0.0, Index: 80

Physical interface: xe-0/3/1, Index: 157
Maximum usable queues: 8, Queues in use: 5
  Scheduler map: <default>, Index: 2
  Congestion-notification: Disabled
Object      Name      Type      Index
Classifier  ipprec-compatibility  ip        13

Logical interface: xe-0/3/1.0, Index: 81

[edit]
user@host-g11#

```

### show class-of-service interface (PPPoE Subscriber Interface for Enhanced Subscriber Management)

```

user@host> show class-of-service interface pp0.3221225474

Logical interface: pp0.3221225475, Index: 3221225475
Object      Name      Type      Index
Traffic-control-profile TC_PROF_100_199_SERIES_UID1006 Output    4294967312
Scheduler-map SMAP-1_UID1002 Output    4294967327
Rewrite-Output ieee-rewrite ieee8021p 60432
Rewrite-Output rule1 ip        50463

Adjusting application: PPPoE IA tags
Adjustment type: absolute
Configured shaping rate: 11000000
Adjustment value: 5000000
Adjustment target: node

Adjusting application: ucac

```

```
Adjustment type: delta
Configured shaping rate: 5000000
Adjustment value: 100000
Adjustment target: node
```



## show class-of-service multi-destination

<b>Syntax</b>	show class-of-service multi-destination
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Command introduced in Junos OS Release 17.1 for the EX4300 switch.</p>
<b>Description</b>	For each class-of-service (CoS) multidestination classifier, display the classifier type.
<b>Options</b>	<b>none</b> —Display all multidestination classifiers.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Defining CoS BA Classifiers (DSCP, DSCP IPv6, IEEE 802.1p)</i></li> <li>• <a href="#">Example: Configuring Multidestination (Multicast, Broadcast, DLF) Classifiers on page 62</a></li> <li>• <i>Understanding CoS Classifiers</i></li> <li>• <i>Understanding CoS Classifiers</i></li> <li>• <i>Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces</i></li> <li>• <i>Understanding Applying CoS Classifiers and Rewrite Rules to Interfaces</i></li> </ul>
<b>Output Fields</b>	<p><a href="#">Table 51 on page 301</a> describes the output fields for the <b>show class-of-service multi-destination</b> command. Output fields are listed in the approximate order in which they appear.</p>

*Table 51: show class-of-service multi-destination Output Fields*

Field Name	Field Description
Family ethernet	Family to which the classifier belongs.
Classifier Name	Name of the classifier.
Classifier Type	Type of the classifier: <b>dscp</b> or <b>ieee-802.1</b> .
Classifier Index	Internal index of the classifier.

## Sample Output

### show class-of-service multi-destination

```
user@switch> show class-of-service multi-destination
```

Family ethernet:		
Classifier Name	Classifier Type	Classifier Index
ba-mcast-classifier	ieee-802.1	62376

## show class-of-service rewrite-rule

**Syntax** `show class-of-service rewrite-rule  
<name name>  
<type type>`

**Release Information** Command introduced before Junos OS Release 7.4.

**Description** Display the mapping of forwarding classes and loss priority to code point values.

**Options** **none**—Display all rewrite rules.

**name *name***—(Optional) Display the specified rewrite rule.

**type *type***—(Optional) Display the rewrite rule of the specified type. The rewrite rule type can be one of the following:

- **dscp**—For IPv4 traffic.
- **dscp-ipv6**—For IPv6 traffic.
- **exp**—For MPLS traffic.
- **frame-relay-de**—(SRX Series only) For Frame Relay traffic.
- **ieee-802.1**—For Layer 2 traffic.
- **inet-precedence**—For IPv4 traffic.

**Required Privilege Level** view

**Related Documentation**

- *Rewrite Rules Overview*

**List of Sample Output** [show class-of-service rewrite-rule type dscp on page 304](#)

**Output Fields** [Table 52 on page 303](#) describes the output fields for the **show class-of-service rewrite-rule** command. Output fields are listed in the approximate order in which they appear.

*Table 52: show class-of-service rewrite-rule Output Fields*

Field Name	Field Description
Rewrite rule	Name of the rewrite rule.
Code point type	Type of rewrite rule: <b>dscp</b> , <b>dscp-ipv6</b> , <b>exp</b> , <b>frame-relay-de</b> , or <b>inet-precedence</b> .

Table 52: show class-of-service rewrite-rule Output Fields (continued)

Field Name	Field Description
<b>Forwarding class</b>	Classification of a packet affecting the forwarding, scheduling, and marking policies applied as the packet transits the router or switch.
<b>Index</b>	Internal index for this particular rewrite rule.
<b>Loss priority</b>	Loss priority for rewriting.
<b>Code point</b>	Code point value to rewrite.

## Sample Output

### show class-of-service rewrite-rule type dscp

```
user@host> show class-of-service rewrite-rule type dscp
```

```
Rewrite rule: dscp-default, Code point type: dscp
```

Forwarding class	Loss priority	Code point
gold	high	000000
silver	low	110000
silver	high	111000
bronze	low	001010
bronze	high	001100
lead	high	101110

```
Rewrite rule: abc-dscp-rewrite, Code point type: dscp, Index: 3245
```

Forwarding class	Loss priority	Code point
gold	low	000111
gold	high	001010
silver	low	110000
silver	high	111000
bronze	high	001100
lead	low	101110
lead	high	110111

## show class-of-service scheduler-map

<b>Syntax</b>	<code>show class-of-service scheduler-map</code> <code>&lt;name&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 11.1 for the QFX Series. Command introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management.
<b>Description</b>	Display the mapping of schedulers to forwarding classes and a summary of scheduler parameters for each entry.
<b>Options</b>	<b>none</b> —Display all scheduler maps.  <b>name</b> —(Optional) Display a summary of scheduler parameters for each forwarding class to which the named scheduler is assigned.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Verifying and Managing Junos OS Enhanced Subscriber Management</i></li> </ul>
<b>List of Sample Output</b>	<a href="#">show class-of-service scheduler-map on page 306</a> <a href="#">show class-of-service scheduler-map (QFX Series) on page 307</a>
<b>Output Fields</b>	Table 53 on page 305 describes the output fields for the <b>show class-of-service scheduler-map</b> command. Output fields are listed in the approximate order in which they appear.

Table 53: show class-of-service scheduler-map Output Fields

Field Name	Field Description
<b>Scheduler map</b>	<p>Name of the scheduler map.</p> <p>(Enhanced subscriber management for MX Series routers) The name of the dynamic scheduler map object is associated with a generated UID (for example, <b>SMAP-1_UID1002</b>) instead of with a subscriber interface.</p>
<b>Index</b>	<p>Index of the indicated object. Objects having indexes in this output include scheduler maps, schedulers, and drop profiles.</p> <p>(Enhanced subscriber management for MX Series routers) Index values for dynamic CoS traffic control profiles are larger for enhanced subscriber management than they are for legacy subscriber management.</p>
<b>Scheduler</b>	Name of the scheduler.

Table 53: show class-of-service scheduler-map Output Fields (continued)

Field Name	Field Description
<b>Forwarding class</b>	Classification of a packet affecting the forwarding, scheduling, and marking policies applied as the packet transits the router.
<b>Transmit rate</b>	Configured transmit rate of the scheduler (in bps). The rate is a percentage of the total interface bandwidth, or the keyword <b>remainder</b> , which indicates that the scheduler receives the remaining bandwidth of the interface.
<b>Rate Limit</b>	Rate limiting configuration of the queue. Possible values are <b>none</b> , meaning no rate limiting, and <b>exact</b> , meaning the queue only transmits at the configured rate.
<b>Maximum buffer delay</b>	Amount of transmit delay (in milliseconds) or the buffer size of the queue. The buffer size is shown as a percentage of the total interface buffer allocation, or by the keyword <b>remainder</b> to indicate that the buffer is sized according to what remains after other scheduler buffer allocations.
<b>Priority</b>	Scheduling priority: <b>low</b> or <b>high</b> .
<b>Excess priority</b>	Priority of excess bandwidth: <b>low</b> , <b>medium-low</b> , <b>medium-high</b> , <b>high</b> , or <b>none</b> .
<b>Explicit Congestion Notification</b>	(QFX Series, OCX Series, and EX4600 switches only) Explicit congestion notification (ECN) state: <ul style="list-style-type: none"> <li>• Disable—ECN is disabled on the specified scheduler</li> <li>• Enable—ECN is enabled on the specified scheduler</li> </ul> ECN is disabled by default.
<b>Adjust minimum</b>	Minimum shaping rate for an adjusted queue, in bps.
<b>Adjust percent</b>	Bandwidth adjustment applied to a queue, in percent.
<b>Drop profiles</b>	Table displaying the assignment of drop profiles by name and index to a given loss priority and protocol pair.
<b>Loss priority</b>	Packet loss priority for drop profile assignment.
<b>Protocol</b>	Transport protocol for drop profile assignment.
<b>Name</b>	Name of the drop profile.

## Sample Output

### show class-of-service scheduler-map

```

user@host> show class-of-service scheduler-map
Scheduler map: dd-scheduler-map, Index: 84

Scheduler: aa-scheduler, Index: 8721, Forwarding class: aa-forwarding-class
Transmit rate: 30 percent, Rate Limit: none, Maximum buffer delay: 39 ms,
Priority: high
Drop profiles:

```

Loss priority	Protocol	Index	Name
Low	non-TCP	8724	aa-drop-profile
Low	TCP	9874	bb-drop-profile
High	non-TCP	8833	cc-drop-profile
High	TCP	8484	dd-drop-profile

Scheduler: bb-scheduler, Forwarding class: aa-forwarding-class  
 Transmit rate: 40 percent, Rate limit: none, Maximum buffer delay: 68 ms,  
 Priority: high  
 Drop profiles:

Loss priority	Protocol	Index	Name
Low	non-TCP	8724	aa-drop-profile
Low	TCP	9874	bb-drop-profile
High	non-TCP	8833	cc-drop-profile
High	TCP	8484	dd-drop-profile

### show class-of-service scheduler-map (QFX Series)

```
user@switch# show class-of-service scheduler-map
```

```
Scheduler map: be-map, Index: 12240
```

Scheduler:be-sched, Forwarding class: best-effort, Index: 115  
 Transmit rate: 30 percent, Rate Limit: none, Buffer size: remainder,  
 Buffer Limit: none, Priority: low  
 Excess Priority: unspecified, Explicit Congestion Notification: disable

Drop profiles:

Loss priority	Protocol	Index	Name
Low	any	3312	lan-dp
Medium-high	any	2714	be-dp1
High	any	3178	be-dp2

## OBSOLETE: show interfaces queue

<b>Syntax</b>	<pre>show interfaces queue &lt;both-ingress-egress&gt; &lt;egress&gt; &lt;forwarding-class forwarding-class&gt; &lt;ingress&gt; &lt;interface-name&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display class-of-service (CoS) queue information for physical interfaces.
<b>Options</b>	<p><b>none</b>—Show detailed CoS queue statistics for all physical interfaces.</p> <p><b>both-ingress-egress</b>—(Optional) Show both ingress and egress queue statistics. (Ingress statistics are not available for all interfaces.)</p> <p><b>egress</b>—(Optional) Show egress queue statistics only.</p> <p><b>forwarding-class forwarding-class</b>—(Optional) Show queue statistics only for the specified forwarding class.</p> <p><b>ingress</b>—(Optional) Show ingress queue statistics only. (Ingress statistics are not available for all interfaces.)</p> <p><b>interface-name</b>—(Optional) Show queue statistics for the specified interface.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<p><a href="#">show interfaces queue ge-0/0/0 (EX2200 Switch) on page 310</a></p> <p><a href="#">show interfaces queue xe-6/0/39 (Line Card with Oversubscribed Ports in an EX8200 Switch) on page 311</a></p>
<b>Output Fields</b>	<p><a href="#">Table 54 on page 308</a> lists the output fields for the <b>show interfaces queue</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 54: show interfaces queue Output Fields

Field Name	Field Description
Physical Interface and Forwarding Class Information	
Physical interface	Name of the physical interface.



Table 54: show interfaces queue Output Fields (continued)

Field Name	Field Description
Enabled	<p>State of the interface. Possible values are:</p> <ul style="list-style-type: none"> <li>• <b>Administratively down, Physical link is Down</b>—The interface is turned off, and the physical link is inoperable.</li> <li>• <b>Administratively down, Physical link is Up</b>—The interface is turned off, but the physical link is operational and can pass packets when it is enabled.</li> <li>• <b>Enabled, Physical link is Down</b>—The interface is turned on, but the physical link is inoperable and cannot pass packets.</li> <li>• <b>Enabled, Physical link is Up</b>—The interface is turned on, and the physical link is operational and can pass packets.</li> </ul>
Interface index	Index number of the physical interface, which reflects its initialization sequence.
SNMP ifIndex	SNMP index number for the physical interface.
Description	User-configured interface description.
Forwarding classes	Number of forwarding classes supported and in use for the interface.
<b>Ingress Queues Information (not shown for all interfaces)</b>	
Ingress queues	Number of input queues supported and in use on the specified interface. For an interface on a line card with oversubscribed ports, the ingress queue handles low priority traffic on the interface.
Transmitted	<p>Transmission statistics for the queue:</p> <ul style="list-style-type: none"> <li>• <b>Packets</b>—Number of packets transmitted by this queue.</li> <li>• <b>Bytes</b>—Number of bytes transmitted by this queue.</li> <li>• <b>Tail-dropped packets</b>—Number of packets dropped because the queue buffers were full.</li> </ul>
PFE chassis queues	For an interface on a line card with oversubscribed ports, the number of Packet Forwarding Engine chassis queues supported and in use for the port group to which the interface belongs. The Packet Forwarding Engine chassis queue for a port group handles high priority traffic from all the interfaces in the port group.
<b>Egress Queues Information</b>	
Egress queues	Number of output queues supported and in use on the specified interface.
Queue	CoS queue number.
Queued	This counter is not supported on EX Series switches.

Table 54: show interfaces queue Output Fields (continued)

Field Name	Field Description
<b>Transmitted</b>	<p>Number of packets and bytes transmitted by this queue. Information on transmitted packets and bytes can include:</p> <ul style="list-style-type: none"> <li>• <b>Packets</b>—Number of packets transmitted.</li> <li>• <b>Bytes</b>—Number of bytes transmitted.</li> <li>• <b>Tail-dropped packets</b>—Number of arriving packets dropped because output queue buffers were full.</li> <li>• <b>RED-dropped packets</b>—Number of packets dropped because of random early detection (RED). <ul style="list-style-type: none"> <li>• <b>Low</b>—Number of low loss priority packets dropped because of RED.</li> <li>• <b>High</b>—Number of high loss priority packets dropped because of RED.</li> </ul> </li> <li>• <b>RED-dropped bytes</b>—Number of bytes dropped because of random early detection (RED). <ul style="list-style-type: none"> <li>• <b>Low</b>—Number of low loss priority bytes dropped because of RED.</li> <li>• <b>High</b>—Number of high loss priority bytes dropped because of RED.</li> </ul> </li> </ul>
<b>Packet Forwarding Engine Chassis Queues</b>	<p>For an interface on a line card with oversubscribed ports, the number of Packet Forwarding Engine chassis queues supported and in use for the port group to which the interface belongs. The queue statistics reflect the traffic flowing on all the interfaces in the port group.</p>

## Sample Output

### show interfaces queue ge-0/0/0 (EX2200 Switch)

```

user@switch> show interfaces queue ge-0/0/0

Physical interface: ge-0/0/0, Enabled, Physical link is Down
  Interface index: 130, SNMP ifIndex: 501
Forwarding classes: 16 supported, 4 in use
Egress queues: 8 supported, 4 in use
Queue: 0, Forwarding classes: best-effort
  Queued:
  Transmitted:
    Packets      : 0
    Bytes       : 0
    Tail-dropped packets : 0
Queue: 1, Forwarding classes: assured-forwarding
  Queued:
  Transmitted:
    Packets      : 0
    Bytes       : 0
    Tail-dropped packets : 0
Queue: 5, Forwarding classes: expedited-forwarding
  Queued:
  Transmitted:
    Packets      : 0
    Bytes       : 0
    Tail-dropped packets : 0
Queue: 7, Forwarding classes: network-control
  Queued:
  Transmitted:

```

Packets	:	0
Bytes	:	0
Tail-dropped packets	:	0

### show interfaces queue xe-6/0/39 (Line Card with Oversubscribed Ports in an EX8200 Switch)

```
user@switch> show interfaces queue xe-6/0/39
```

Physical interface: xe-6/0/39, Enabled, Physical link is Up

Interface index: 291, SNMP ifIndex: 1641

Forwarding classes: 16 supported, 7 in use

Ingress queues: 1 supported, 1 in use

Transmitted:

Packets	:	337069086018
Bytes	:	43144843010304
Tail-dropped packets	:	8003867575

PFE chassis queues: 1 supported, 1 in use

Transmitted:

Packets	:	0
Bytes	:	0
Tail-dropped packets	:	0

Forwarding classes: 16 supported, 7 in use

Egress queues: 8 supported, 7 in use

Queue: 0, Forwarding classes: best-effort

Queued:

Transmitted:

Packets	:	334481399932
Bytes	:	44151544791024
Tail-dropped packets	:	0

Queue: 1, Forwarding classes: assured-forwarding

Queued:

Transmitted:

Packets	:	0
Bytes	:	0
Tail-dropped packets	:	0

Queue: 2, Forwarding classes: mcast-be

Queued:

Transmitted:

Packets	:	274948977
Bytes	:	36293264964
Tail-dropped packets	:	0

Queue: 4, Forwarding classes: mcast-ef

Queued:

Transmitted:

Packets	:	0
Bytes	:	0
Tail-dropped packets	:	0

Queue: 5, Forwarding classes: expedited-forwarding

Queued:

Transmitted:

Packets	:	0
Bytes	:	0
Tail-dropped packets	:	0

Queue: 6, Forwarding classes: mcast-af

Queued:

Transmitted:

Packets	:	0
Bytes	:	0
Tail-dropped packets	:	0

```

Queue: 7, Forwarding classes: network-control
Queued:
Transmitted:
  Packets      :          46714
  Bytes       :          6901326
  Tail-dropped packets :          0

Packet Forwarding Engine Chassis Queues:
Queues: 8 supported, 7 in use
Queue: 0, Forwarding classes: best-effort
Queued:
Transmitted:
  Packets      :          739338141426
  Bytes       :          94635282101928
  Tail-dropped packets :          0
  RED-dropped packets :          5606426444
    Low       :          5606426444
    High      :          0
  RED-dropped bytes :          683262846464
    Low       :          683262846464
    High      :          0
Queue: 1, Forwarding classes: assured-forwarding
Queued:
Transmitted:
  Packets      :          0
  Bytes       :          0
  Tail-dropped packets :          0
  RED-dropped packets :          0
    Low       :          0
    High      :          0
  RED-dropped bytes :          0
    Low       :          0
    High      :          0
Queue: 2, Forwarding classes: mcast-be
Queued:
Transmitted:
  Packets      :          0
  Bytes       :          0
  Tail-dropped packets :          0
  RED-dropped packets :          0
    Low       :          0
    High      :          0
  RED-dropped bytes :          0
    Low       :          0
    High      :          0
Queue: 4, Forwarding classes: mcast-ef
Queued:
Transmitted:
  Packets      :          0
  Bytes       :          0
  Tail-dropped packets :          0
  RED-dropped packets :          0
    Low       :          0
    High      :          0
  RED-dropped bytes :          0
    Low       :          0
    High      :          0
Queue: 5, Forwarding classes: expedited-forwarding
Queued:
Transmitted:

```

```
Packets          :          0
Bytes            :          0
Tail-dropped packets :          0
RED-dropped packets :          0
  Low            :          0
  High           :          0
RED-dropped bytes :          0
  Low            :          0
  High           :          0
Queue: 6, Forwarding classes: mcast-af
Queued:
Transmitted:
  Packets          :          0
  Bytes            :          0
  Tail-dropped packets :          0
  RED-dropped packets :          0
    Low            :          0
    High           :          0
  RED-dropped bytes :          0
    Low            :          0
    High           :          0
Queue: 7, Forwarding classes: network-control
Queued:
Transmitted:
  Packets          :          97990
  Bytes            :         14987506
  Tail-dropped packets :          0
  RED-dropped packets :          0
    Low            :          0
    High           :          0
  RED-dropped bytes :          0
    Low            :          0
    High           :          0
```

## show pfe statistics traffic cpu


<b>Syntax</b>	<code>show pfe statistics traffic cpu &lt;fpc fpc-slot&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 9.5 for EX Series switches.
<b>Description</b>	(On EX8200 switches only) Display count of multidestination packets ingressing from the physical interface to the CPU.
	<div>  <p><b>NOTE:</b> Multidestination packets include unknown unicast, broadcast, and multicast packets.</p> </div>
<b>Options</b>	<p><b>none</b>—Displays the count of packets ingressing from all the physical interfaces (line cards) to the CPU.</p> <p><b>fpc fpc-slot</b>—(Optional) Displays the count of packets ingressing from the physical interface, referred to by the slot number, to the CPU.</p> <p>On an EX8200 switch, the FPC slot number is the slot number for the line card. Possible values are 0 through 7 on the EX8208 switch and 0 through 15 on the EX8216 switch.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show pfe statistics traffic multicast on page 320</a></li> <li>• <a href="#">show pfe statistics traffic egress-queues on page 318</a></li> <li>• <a href="#">show interfaces queue</a></li> <li>• <a href="#">Monitoring Interface Status and Traffic</a></li> <li>• <a href="#">Understanding Junos OS CoS Components for EX Series Switches on page 8</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show pfe statistics traffic cpu (EX8208 Switch) on page 315</a>
<b>Output Fields</b>	Table 55 on page 314 lists the output fields for the <code>show pfe statistics traffic cpu</code> command. Output fields are listed in the approximate order in which they appear.

Table 55: show pfe statistics traffic cpu Output Fields

Field Name	Field Description
Queue	CoS queue number.

Table 55: show pfe statistics traffic cpu Output Fields (continued)

Field Name	Field Description
Forwarding classes	Forwarding class name.
Queued Packets	Number of packets queued to this queue.
Queued Bytes	Number of bytes queued to this queue.
Packets	Number of packets transmitted by this queue.
Bytes	Number of bytes transmitted by this queue.
Tail-dropped packets	Count of packets dropped at the tail end of the queue because of lack of buffer space.
RED-dropped packets	Number of packets dropped because of Random Early Discard (RED): <ul style="list-style-type: none"> <li>• <b>Low</b>—Number of low-loss priority packets dropped because of RED.</li> <li>• <b>High</b>—Number of high-loss priority packets dropped because of RED.</li> </ul>
RED-dropped bytes	Number of bytes dropped because of Random Early Discard (RED): <ul style="list-style-type: none"> <li>• <b>Low</b>—Number of low-loss priority bytes dropped because of RED.</li> <li>• <b>High</b>—Number of high-loss priority bytes dropped because of RED.</li> </ul>

## Sample Output

### show pfe statistics traffic cpu (EX8208 Switch)

```
user@switch> show pfe statistics traffic cpu
```

```
Queue: 0, Forwarding classes: best-effort
Queued:
Packets      : Not Available
Bytes       : Not Available
Packets      :                0                0 pps
Bytes       :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes  :                0                0 bps
Low          :                0                0 bps
High         :                0                0 bps
RED-dropped packets :                0                0 pps
Low          :                0                0 pps
High         :                0                0 pps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
Packets      : Not Available
Bytes       : Not Available
Packets      :                0                0 pps
Bytes       :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes  :                0                0 bps
Low          :                0                0 bps
High         :                0                0 bps
```

RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 2, Forwarding classes: assured-forwarding			
Queued:			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 3, Forwarding classes: network-control			
Queued:			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 4			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 5			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 6			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps



Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 7			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps

## show pfe statistics traffic egress-queues

**Syntax** `show pfe statistics traffic egress-queues <fpc fpc-slot>`

**Release Information** Command introduced in Junos OS Release 9.5 for EX Series switches.

**Description** (On EX8200 switches only) Display count of multidestination packets dropped on egress ports when the egress queues are oversubscribed due to multidestination traffic.



**NOTE:** Multidestination packets include unknown unicast, broadcast, and multicast packets.

**Options** **none**—Displays count of packets dropped on egress ports of all physical interfaces (line cards) when egress queues are oversubscribed due to multidestination traffic.

**fpc fpc-slot**—(Optional) Displays count of packets dropped on egress ports of the physical interface (line card) referred to by the slot number.



**NOTE:** On an EX8200 switch, the FPC slot number is the slot number for the line card. Possible values are 0 through 7 on the EX8208 switch and 0 through 15 on the EX8216 switch.

**Required Privilege Level** view

- Related Documentation**
- [show pfe statistics traffic cpu on page 314](#)
  - [show pfe statistics traffic multicast on page 320](#)
  - [show interfaces queue](#)
  - [Monitoring Interface Status and Traffic](#)
  - [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)

**List of Sample Output** [show pfe statistics traffic egress-queues fpc 4 \(EX8208 Switch\) on page 319](#)

**Output Fields** [Table 56 on page 319](#) lists the output fields for the **show pfe statistics traffic egress-queues** command. Output fields are listed in the approximate order in which they appear.

*Table 56: show pfe statistics traffic egress-queues Output Fields*

Field Name	Field Description
Tail-dropped packets	Number of arriving packets dropped because the output queue buffers are full.

## Sample Output

show pfe statistics traffic egress-queues fpc 4 (EX8208 Switch)

```
user@switch> show pfe statistics traffic egress-queues fpc 4
Tail-dropped packets :                0
```

## show pfe statistics traffic multicast

**Syntax** `show pfe statistics traffic multicast <fpc fpc-slot dev-number>`

**Release Information** Command introduced in Junos OS Release 9.5 for EX Series switches.

**Description** (On EX8200 switches only) Display class-of-service (CoS) queue information for multdestination traffic on a physical interface (line card).



**NOTE:** Multidestination packets include unknown unicast, broadcast, and multicast packets.



**NOTE:** To view statistical information for unicast traffic, use the `show interfaces queue` command.

**Options** `fpc fpc-slot dev-number`—(Optional) Displays class-of-service (CoS) queue information for multdestination traffic on the physical interface (line card) referred to by the slot number and device number.



**NOTE:** On an EX8200 switch, the FPC slot number is the slot number for the line card. Possible values for the FPC slot number are 0 through 7 on the EX8208 switch and 0 through 15 on the EX8216 switch. The value for the device number ranges from 0–5, where 0–4 values correspond to the statistics only from that specific device and the value 5 corresponds to the combined statistics from all the devices in the FPC.

**Required Privilege Level** view

- Related Documentation**
- [show pfe statistics traffic cpu on page 314](#)
  - [show pfe statistics traffic egress-queues on page 318](#)
  - [show interfaces queue](#)
  - [Monitoring Interface Status and Traffic](#)
  - [Understanding Junos OS CoS Components for EX Series Switches on page 8](#)

List of Sample Output [show pfe statistics traffic multicast fpc 0 2 \(EX8208 Switch\) on page 321](#)

Output Fields [Table 57 on page 321](#) lists the output fields for the **show pfe statistics traffic multicast** command. Output fields are listed in the approximate order in which they appear.

*Table 57: show pfe statistics traffic multicast Output Fields*

Field Name	Field Description
Queue	CoS queue number.
Forwarding classes	Forwarding class name.
Queued Packets	Number of packets queued to this queue.
Queued Bytes	Number of bytes queued to this queue.
Packets	Number of packets transmitted by this queue.
Bytes	Number of bytes transmitted by this queue.
Tail-dropped packets	Count of packets dropped at the tail end of the queue because of lack of buffer space.
RED-dropped packets	Number of packets dropped because of Random Early Discard (RED): <ul style="list-style-type: none"> <li>• <b>Low</b>—Number of low-loss priority packets dropped because of RED.</li> <li>• <b>High</b>—Number of high-loss priority packets dropped because of RED.</li> </ul>
RED-dropped bytes	Number of bytes dropped because of Random Early Discard (RED): <ul style="list-style-type: none"> <li>• <b>Low</b>—Number of low-loss priority bytes dropped because of RED.</li> <li>• <b>High</b>—Number of high-loss priority bytes dropped because of RED.</li> </ul>

## Sample Output

**show pfe statistics traffic multicast fpc 0 2 (EX8208 Switch)**

```
user@switch> show pfe statistics traffic multicast fpc 0 2
```

```
Queue: 0, Forwarding classes: best-effort
Queued:
Packets           : Not Available
Bytes             : Not Available
Packets           :                0                0 pps
Bytes             :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes  :                0                0 bps
  Low              :                0                0 bps
  High             :                0                0 bps
RED-dropped packets :                0                0 pps
  Low              :                0                0 pps
  High             :                0                0 pps
Queue: 1, Forwarding classes: expedited-forwarding
Queued:
```

```

Packets          : Not Available
Bytes            : Not Available
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes :                0                0 bps
  Low            :                0                0 bps
  High           :                0                0 bps
RED-dropped packets :                0                0 pps
  Low            :                0                0 pps
  High           :                0                0 pps
Queue: 2, Forwarding classes: assured-forwarding
Queued:
Packets          : Not Available
Bytes            : Not Available
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes :                0                0 bps
  Low            :                0                0 bps
  High           :                0                0 bps
RED-dropped packets :                0                0 pps
  Low            :                0                0 pps
  High           :                0                0 pps
Queue: 3, Forwarding classes: network-control
Queued:
Packets          : Not Available
Bytes            : Not Available
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes :                0                0 bps
  Low            :                0                0 bps
  High           :                0                0 bps
RED-dropped packets :                0                0 pps
  Low            :                0                0 pps
  High           :                0                0 pps
Queue: 4
Packets          : Not Available
Bytes            : Not Available
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes :                0                0 bps
  Low            :                0                0 bps
  High           :                0                0 bps
RED-dropped packets :                0                0 pps
  Low            :                0                0 pps
  High           :                0                0 pps
Queue: 5
Packets          : Not Available
Bytes            : Not Available
Packets          :                0                0 pps
Bytes            :                0                0 bps
Tail-dropped packets :                0
RED-dropped bytes :                0                0 bps
  Low            :                0                0 bps
  High           :                0                0 bps
RED-dropped packets :                0                0 pps
  Low            :                0                0 pps

```

High	:	0	0 pps
Queue: 6			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps
Queue: 7			
Packets	:	Not Available	
Bytes	:	Not Available	
Packets	:	0	0 pps
Bytes	:	0	0 bps
Tail-dropped packets	:	0	
RED-dropped bytes	:	0	0 bps
Low	:	0	0 bps
High	:	0	0 bps
RED-dropped packets	:	0	0 pps
Low	:	0	0 pps
High	:	0	0 pps

