



---

Junos<sup>®</sup> OS

# Broadband Subscriber Access Protocols Feature Guide

Modified: 2019-06-27



Juniper Networks, Inc.  
1133 Innovation Way  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

*Junos® OS Broadband Subscriber Access Protocols Feature Guide*  
Copyright © 2019 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	xix
	Documentation and Release Notes . . . . .	xix
	Using the Examples in This Manual . . . . .	xix
	Merging a Full Example . . . . .	xx
	Merging a Snippet . . . . .	xx
	Documentation Conventions . . . . .	xxi
	Documentation Feedback . . . . .	xxiii
	Requesting Technical Support . . . . .	xxiii
	Self-Help Online Tools and Resources . . . . .	xxiv
	Creating a Service Request with JTAC . . . . .	xxiv
<b>Chapter 1</b>	<b>Broadband Subscriber Access Network Overview . . . . .</b>	<b>25</b>
	Broadband Subscriber Access Network Overview . . . . .	25
	Subscriber Access Network Overview . . . . .	25
	Multiservice Access Node Overview . . . . .	26
	Ethernet MSAN Aggregation Options . . . . .	27
	Direct Connection . . . . .	28
	Ethernet Aggregation Switch Connection . . . . .	28
	Ring Aggregation Connection . . . . .	28
	LDP Pseudowire Autosensing Overview . . . . .	29
	Pseudowire Ingress Termination Background . . . . .	29
	Pseudowire Autosensing Approach . . . . .	30
	Sample Configuration . . . . .	31
	Layer 2 Services on Pseudowire Service Interface Overview . . . . .	32
	Traffic from Customer LAN to MPLS . . . . .	32
	Traffic from Service Edge to Customer LAN . . . . .	33
	Pseudowire Service Interfaces . . . . .	34
	Sample Configuration . . . . .	34
	Broadband Access Service Delivery Options . . . . .	38
	Digital Subscriber Line . . . . .	39
	Active Ethernet . . . . .	39
	Passive Optical Networking . . . . .	39
	Hybrid Fiber Coaxial . . . . .	40
	Broadband Delivery and FTTx . . . . .	40
	Understanding BNG Support for Cascading DSLAM Deployments Over	
	Bonded DSL Channels . . . . .	41
	Benefits of Cascading DSLAM Deployments Over Bonded DSL	
	Channels . . . . .	41
	4-Level Scheduler Hierarchy . . . . .	42
	Use Cases of Cascading DSLAM Deployments Over Bonded DSL	
	Channels . . . . .	42

	Bonded DSL for Copper-To-The-Building (CuTTB) . . . . .	43
	Hybrid PON + G.fast . . . . .	43
	Supported Features . . . . .	44
	Detection of Backhaul Line Identifiers and Autogeneration of Intermediate Node Interface Sets . . . . .	44
	High Availability for Subscriber Access Networks . . . . .	48
	Unified ISSU for High Availability in Subscriber Access Networks . . . . .	48
	Verifying and Monitoring Subscriber Management Unified ISSU State . . . . .	49
	Graceful Routing Engine Switchover for Subscriber Access Networks . . . . .	49
	DHCP . . . . .	49
	L2TP . . . . .	50
	Minimize Traffic Loss Due to Stale Route Removal After a Graceful Routing Engine Switchover . . . . .	51
	Routes for DHCP and PPP Subscriber Access Networks . . . . .	52
	Access and Access-Internal Routes for Subscriber Management . . . . .	52
	Configuring Dynamic Access Routes for Subscriber Management . . . . .	53
	Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers . . . . .	55
	Suppressing DHCP Access, Access-Internal, and Destination Routes . . . . .	56
	Preventing DHCP from Installing Access, Access-Internal, and Destination Routes by Default . . . . .	56
	Verifying the Configuration of Access and Access-Internal Routes for DHCP and PPP Subscribers . . . . .	57
<b>Chapter 2</b>	<b>DHCP Subscriber Access Networks . . . . .</b>	<b>59</b>
	DHCP Subscriber Access Networks Overview . . . . .	59
	DHCP and Subscriber Management Overview . . . . .	59
	Extended DHCP Local Server and Subscriber Management Overview . . . . .	60
	Extended DHCP Relay and Subscriber Management Overview . . . . .	60
	DHCP Relay Proxy and Subscriber Management Overview . . . . .	60
	Subscriber Access Operation Flow Using DHCP Relay . . . . .	60
	Defining Various Levels of Services for DHCP Subscribers . . . . .	61
	Example: Configuring a Tiered Service Profile for Subscriber Access . . . . .	62
	DHCP Snooping for Network Security . . . . .	66
	DHCP Snooping Support . . . . .	66
	Configuring DHCP Snooped Packets Forwarding Support for DHCP Local Server . . . . .	67
	Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent . . . . .	69
	Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent . . . . .	74
	Disabling DHCP Snooping Filters . . . . .	76
	Example: Configuring DHCP Snooping Support for DHCP Relay Agent . . . . .	77
	Example: Enabling DHCP Snooping Support for DHCPv6 Relay Agent . . . . .	79
	Preventing DHCP Spoofing . . . . .	84

	DHCPv4 Duplicate Client Management . . . . .	85
	DHCPv4 Duplicate Client In Subnet Overview . . . . .	85
	Guidelines for Configuring Support for DHCPv4 Duplicate Clients . . . . .	86
	Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Option 82 Information . . . . .	87
	Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Their Incoming Interfaces . . . . .	88
	DHCPv6 Duplicate Client Management . . . . .	90
	DHCPv6 Duplicate Client DUIDs . . . . .	90
	Configuring the Router to Use Underlying Interfaces to Distinguish Between DHCPv6 Duplicate Client DUIDs . . . . .	90
<b>Chapter 3</b>	<b>PPP Subscriber Access Networks . . . . .</b>	<b>93</b>
	PPP Subscriber Access Networks Overview . . . . .	93
	Dynamic Profiles for PPP Subscriber Interfaces Overview . . . . .	93
	Understanding How the Router Processes Subscriber-Initiated PPP Fast Keepalive Requests . . . . .	94
	Benefits of PPP Fast Keepalives . . . . .	94
	How PPP Fast Keepalive Processing Works . . . . .	95
	Statistics Display for PPP Fast Keepalive . . . . .	95
	Effect of Changing the Forwarding Class Configuration . . . . .	95
	Ignoring a Magic Number Mismatch . . . . .	96
	Configuring Dynamic Profiles for PPP . . . . .	96
	Preventing the Validation of PPP Magic Numbers During PPP Keepalive Exchanges . . . . .	98
	Attaching Dynamic Profiles to Static PPP Subscriber Interfaces . . . . .	99
	Migrating Static PPP Subscriber Configurations to Dynamic Profiles Overview . . . . .	99
	Local Authentication . . . . .	99
	CPE-Sourced Address Assignment . . . . .	100
	Tag2 Route Attribute . . . . .	100
	Benefits . . . . .	100
	Configuring Local Authentication in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers . . . . .	101
	Configuring Tag2 Attributes in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers . . . . .	102
	Configuring Dynamic Authentication for PPP Subscribers . . . . .	103
	Modifying the CHAP Challenge Length . . . . .	105
	Example: Minimum PPPoE Dynamic Profile . . . . .	106
	Verifying and Managing PPP Configuration for Subscriber Management . . . . .	106
	PPP Network Control Protocol Negotiation . . . . .	107
	PPP Network Control Protocol Negotiation Mode Overview . . . . .	108
	PPP NCP Negotiation Modes . . . . .	108
	PPP NCP Negotiation Mode Supported Configurations . . . . .	109
	PPP NCP Active Negotiation Requirements for IPv4 Dynamic and Static PPP Subscribers . . . . .	109
	PPP NCP Active Negotiation Requirements for IPv6 Dynamic and Static PPP Subscribers . . . . .	110

	PPP NCP Negotiation Requirements for IPv4 and IPv6 Dual-Stack Configurations . . . . .	110
	Controlling the Negotiation Order of PPP Authentication Protocols . . . . .	111
	Configuring the PPP Network Control Protocol Negotiation Mode . . . . .	113
	Ensuring IPCP Negotiation for Primary and Secondary DNS Addresses . . . .	114
	Tracing PPP Service Events for Troubleshooting . . . . .	116
	Configuring the PPP Service Trace Log Filename . . . . .	117
	Configuring the Number and Size of PPP Service Log Files . . . . .	117
	Configuring Access to the PPP Service Log File . . . . .	118
	Configuring a Regular Expression for PPP Service Messages to Be Logged . . . . .	118
	Configuring Subscriber Filtering for PPP Service Trace Operations . . . . .	118
	Configuring the PPP Service Tracing Flags . . . . .	120
	Configuring the Severity Level to Filter Which PPP Service Messages Are Logged . . . . .	120
<b>Chapter 4</b>	<b>L2TP Subscriber Access Networks . . . . .</b>	<b>121</b>
	L2TP for Subscriber Access Overview . . . . .	121
	L2TP for Subscriber Access Overview . . . . .	121
	L2TP Terminology . . . . .	124
	L2TP Implementation . . . . .	125
	Sequence of Events on the LAC . . . . .	125
	Sequence of Events on the LNS . . . . .	126
	Retransmission of L2TP Control Messages . . . . .	127
	Configuring Retransmission Attributes for L2TP Control Messages . . . . .	128
	Enabling Tunnel and Global Counters for SNMP Statistics Collection . . . . .	131
	Verifying and Managing L2TP for Subscriber Access . . . . .	131
	L2TP Tunnel Switching For Multiple-Domain Networks . . . . .	133
	L2TP Tunnel Switching Overview . . . . .	133
	Application of Tunnel Switch Profiles . . . . .	135
	Termination of Tunnel-Switched Sessions on the LTS . . . . .	136
	Tunnel Switching Actions for L2TP AVPs at the Switching Boundary . . . . .	137
	Configuring L2TP Tunnel Switching . . . . .	141
	Setting the L2TP Receive Window Size . . . . .	143
	Setting the L2TP Tunnel Idle Timeout . . . . .	143
	Setting the L2TP Destruct Timeout . . . . .	144
	Configuring the L2TP Destination Lockout Timeout . . . . .	145
	Removing an L2TP Destination from the Destination Lockout List . . . . .	145
	Configuring L2TP Drain . . . . .	146
	Using the Same L2TP Tunnel for Injection and Duplication of IP Packets . .	147
	L2TP LAC Subscriber Configuration . . . . .	147
	Configuring an L2TP LAC . . . . .	148
	Configuring How the LAC Responds to Address and Port Changes Requested by the LNS . . . . .	150
	LAC Interoperation with Third-Party LNS Devices . . . . .	152
	Globally Configuring the LAC to Interoperate with Cisco LNS Devices . . . .	153

L2TP LAC Tunneling for Subscribers .....	154
LAC Tunnel Selection Overview .....	154
Selection When Failover Between Preference Levels Is Configured ....	157
Selection When Failover Within a Preference Level Is Configured ....	162
Selection When Distributing the Session Load Across Multiple LNSs ..	164
L2TP Session Limits Overview .....	170
Scenario 1: Chassis Limit .....	170
Scenario 2: Tunnel Limit .....	171
Scenario 3: Tunnel Group Limit .....	172
Scenario 4: Session-Limit Group Limit .....	172
Scenario 5: Individual Client Limit .....	174
Limiting the Number of L2TP Sessions Allowed by the LAC or LNS .....	175
Setting the Format for the Tunnel Name .....	176
Configuring a Tunnel Profile for Subscriber Access .....	177
Configuring the L2TP LAC Tunnel Selection Parameters .....	180
Configuring LAC Tunnel Selection Failover Within a Preference Level ....	180
Configuring Weighted Load Balancing for LAC Tunnel Sessions .....	181
Configuring Destination-Equal Load Balancing for LAC Tunnel Sessions ...	181
Enabling the LAC for IPv6 Services .....	182
Testing L2TP Tunnel Configurations from the LAC .....	182
L2TP Subscriber Access Lines and Connection Speeds .....	184
Subscriber Access Line Information Handling by the LAC and LNS	
Overview .....	185
Access Line Information Forwarding .....	185
Access Line Information AVPs .....	186
Connection Speed Updates on the LAC .....	188
Connection Speed Updates on the LNS .....	189
Interaction Between Global and Per-Destination Configurations ....	189
Transmission of Tx and Rx Connection Speeds from LAC to LNS .....	190
Methods for Determining the Speed Values Reported to the LNS ....	191
Determining Initial Connect Speeds .....	194
Fallback Mechanism for Connect Speed Values .....	195
Transmission of the Receive Connect Speed AVP When Transmit and	
Receive Connect Speeds are Equal .....	198
Configuring the Method to Derive the LAC Connection Speeds Sent to the	
LNS .....	198
Configuring the Reporting and Processing of Subscriber Access Line	
Information .....	201
Preventing the LAC from Sending Calling Number AVP 22 to the LNS ....	205
Override the Calling-Station-ID Format for the Calling Number AVP ....	206
Specifying a Rate-Limiting Service Profile for L2TP Connection Speeds ..	208
L2TP LNS Inline Service Interfaces .....	213
Configuring an L2TP LNS with Inline Service Interfaces .....	213
Applying PPP Attributes to L2TP LNS Subscribers per Inline Service	
Interface .....	216
Applying PPP Attributes to L2TP LNS Subscribers with a User Group	
Profile .....	218
Configuring an L2TP Access Profile on the LNS .....	220
Configuring a AAA Local Access Profile on the LNS .....	222

Configuring an Address-Assignment Pool for L2TP LNS with Inline Services . . . . .	222
Configuring the L2TP LNS Peer Interface . . . . .	224
Enabling Inline Service Interfaces . . . . .	225
Configuring an Inline Service Interface for L2TP LNS . . . . .	226
Configuring Options for the LNS Inline Services Logical Interface . . . . .	227
LNS 1:1 Stateful Redundancy Overview . . . . .	228
Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces . . . . .	229
Verifying LNS Aggregated Inline Service Interface 1:1 Redundancy . . . . .	231
L2TP Session Limits and Load Balancing for Service Interfaces . . . . .	233
Session Limits on Service Interfaces . . . . .	233
Session Load Balancing Across Service Interfaces . . . . .	234
Example: Configuring an L2TP LNS . . . . .	236
Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces . . . . .	248
Applying Services to an L2TP Session Without Using RADIUS . . . . .	251
Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions . . . . .	258
Configuring a Dynamic Profile for Dynamic LNS Sessions . . . . .	259
IP Packet Reassembly on Inline Service Interfaces . . . . .	261
IP Packet Fragment Reassembly for L2TP Overview . . . . .	262
Configuring IP Inline Reassembly for L2TP . . . . .	262
Peer Resynchronization After an L2TP Failover . . . . .	264
L2TP Failover and Peer Resynchronization . . . . .	264
Configuring the L2TP Peer Resynchronization Method . . . . .	265
Tracing L2TP Events for Troubleshooting . . . . .	267
Configuring the L2TP Trace Log Filename . . . . .	268
Configuring the Number and Size of L2TP Log Files . . . . .	268
Configuring Access to the L2TP Log File . . . . .	269
Configuring a Regular Expression for L2TP Messages to Be Logged . . . . .	269
Configuring Subscriber Filtering for L2TP Trace Operations . . . . .	269
Configuring the L2TP Tracing Flags . . . . .	271
Configuring the Severity Level to Filter Which L2TP Messages Are Logged . . . . .	271
<b>Chapter 5</b>	
<b>Configuring MPLS Pseudowire Subscriber Logical Interfaces . . . . .</b>	<b>273</b>
MPLS Pseudowire Subscriber Logical Interfaces . . . . .	273
Pseudowire Subscriber Logical Interfaces Overview . . . . .	274
Anchor Redundancy Pseudowire Subscriber Logical Interfaces Overview . . . . .	277
Configuring a Pseudowire Subscriber Logical Interface . . . . .	281
Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router . . . . .	283
Configuring a Pseudowire Subscriber Logical Interface Device . . . . .	284
Changing the Anchor Point for a Pseudowire Subscriber Logical Interface Device . . . . .	286
Configuring the Transport Logical Interface for a Pseudowire Subscriber Logical Interface . . . . .	288



	Configuring Layer 2 Circuit Signaling for Pseudowire Subscriber Logical Interfaces . . . . .	289
	Configuring Layer 2 VPN Signaling for Pseudowire Subscriber Logical Interfaces . . . . .	290
	Configuring the Service Logical Interface for a Pseudowire Subscriber Logical Interface . . . . .	291
<b>Chapter 6</b>	<b>Wi-Fi Access Gateways . . . . .</b>	<b>297</b>
	Wi-Fi Access Gateways . . . . .	297
	Wi-Fi Access Gateway Overview . . . . .	298
	Wi-Fi Access Gateway Deployment Model Overview . . . . .	299
	Supported Access Models for Dynamic-Bridged GRE Tunnels on the Wi-Fi Access Gateway . . . . .	300
	Dynamic VLAN-Tagged Subscribers . . . . .	301
	Untagged Subscribers . . . . .	301
	Wi-Fi Access Gateway Configuration Overview . . . . .	301
	Configuring a Pseudowire Subscriber Logical Interface Device for the Wi-Fi Access Gateway . . . . .	302
	Configuring Conditions for Enabling Dynamic-Bridged GRE Tunnel Creation . . . . .	304
	Configuring VLAN Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways . . . . .	305
	Configuring Untagged Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways . . . . .	309
<b>Chapter 7</b>	<b>Fixed Wireless Access Networks . . . . .</b>	<b>311</b>
	Fixed Wireless Access Networks . . . . .	311
	Fixed Wireless Access Network Overview . . . . .	311
	References . . . . .	314
	3GPP Fixed Wireless Access Terminology . . . . .	315
	Benefits of Fixed Wireless Access . . . . .	319
	How to Configure Fixed Wireless Access . . . . .	319
	Verifying and Monitoring Fixed Wireless Access . . . . .	323
	Tracing Fixed Wireless Access Events for Troubleshooting . . . . .	323
	Configuring the Fixed Wireless Access Trace Log Filename . . . . .	324
	Configuring the Number and Size of Fixed Wireless Access Log Files . . . . .	324
	Configuring Access to the Fixed Wireless Access Log File . . . . .	325
	Configuring a Regular Expression for Fixed Wireless Access Messages to Be Logged . . . . .	325
	Configuring the Fixed Wireless Access Tracing Flags . . . . .	326
<b>Chapter 8</b>	<b>Configuration Statements . . . . .</b>	<b>327</b>
	aaa-access-profile (L2TP LNS) . . . . .	333
	aaa-context (AAA Options) . . . . .	334
	aaa-options (Access Profile) . . . . .	335
	aaa-options (PPP Profile) . . . . .	336
	access (Dynamic Access Routes) . . . . .	338
	access-internal (Dynamic Access-Internal Routes) . . . . .	340
	access-line (Access-Line Rate Adjustment) . . . . .	342
	access-line-information (L2TP) . . . . .	353

access-profile (AAA Options) .....	354
address (L2TP Destination) .....	355
address (L2TP Tunnel Destination) .....	356
address (LNS Local Gateway) .....	357
address (Tunnel Profile Remote Gateway) .....	358
address (Tunnel Profile Source Gateway) .....	358
address-change-immediate-update .....	359
aggregated-inline-services-options (Aggregated Inline Services) .....	360
allow-snooped-clients .....	361
always-write-option-82 .....	362
anchor-point (Pseudowire Subscriber Interfaces) .....	363
apn (Fixed Wireless Access) .....	365
assignment-id-format (L2TP LAC) .....	366
authentication (Fixed Wireless Access) .....	367
authentication (Static and Dynamic PPP) .....	368
avp (L2TP Tunnel Switching) .....	369
bandwidth (Inline Services) .....	370
bandwidth (Tunnel Services) .....	371
bearer-type (L2TP Tunnel Switching) .....	372
calling-number (L2TP Tunnel Switching) .....	373
challenge-length (Static and Dynamic PPP) .....	374
chap .....	375
chap (Dynamic PPP) .....	376
chap (L2TP) .....	377
cisco-nas-port-info (L2TP Tunnel Switching) .....	378
client .....	379
control-plane (Fixed Wireless Access) .....	381
data-plane (Fixed Wireless Access) .....	382
delimiter (Access Profile) .....	383
destination (L2TP) .....	384
destination-equal-load-balancing (L2TP LAC) .....	385
destruct-timeout (L2TP) .....	386
device-count (Pseudowire Subscriber Interfaces) .....	387
dhcp-local-server .....	388
dhcp-relay .....	398
dhcpv6 (DHCP Local Server) .....	411
dhcpv6 (DHCP Relay Agent) .....	417
dial-options .....	423
dial-options (Dynamic Profiles) .....	424
disable-calling-number-avp (L2TP LAC) .....	425
disable-failover-protocol (L2TP) .....	426
drain .....	427
dual-stack-group (DHCP Local Server) .....	428
dual-stack-group (DHCP Relay Agent) .....	430
duplicate-clients (DHCPv6 Local Server and Relay Agent) .....	432
duplicate-clients-in-subnet (DHCP Local Server and DHCP Relay Agent) . . .	434
dynamic-profile (L2TP) .....	435
dynamic-profile (PPP) .....	436
dynamic-profiles .....	437

enable-ipv6-services-for-lac (L2TP) .....	446
enable-snmp-tunnel-statistics (L2TP) .....	447
encapsulation (Logical Interface) .....	448
enforce-strict-scale-limit-license (Subscriber Management) .....	452
equals (Dynamic Profile) .....	452
failover-resync .....	453
failover-within-preference (L2TP LAC) .....	454
fixed-wireless-access .....	455
flexible-vlan-tagging .....	457
forward-snooped-clients (DHCP Local Server) .....	458
forward-snooped-clients (DHCP Relay Agent) .....	459
fpc (MX Series 5G Universal Routing Platforms) .....	460
gateway-name (LNS Local Gateway) .....	461
gateway-name (Tunnel Profile Remote Gateway) .....	462
gateway-name (Tunnel Profile Source Gateway) .....	462
gres-route-flush-delay (Subscriber Management) .....	463
group (DHCP Local Server) .....	464
group (DHCP Relay Agent) .....	468
group-profile (Group Profile) .....	473
hierarchical-scheduler (Subscriber Interfaces on MX Series Routers) .....	475
hello-interval (L2TP) .....	476
identification (Tunnel Profile) .....	477
idle-timeout (Access) .....	478
idle-timeout (L2TP) .....	479
ignore-magic-number-mismatch (Access Group Profile) .....	480
ignore-magic-number-mismatch (Dynamic Profiles) .....	482
initiate-ncp (Dynamic and Static PPP) .....	484
inline-services (PIC level) .....	485
input-hierarchical-policer .....	486
interface (Dynamic Routing Instances) .....	486
interface (L2TP Service Interfaces) .....	487
interface-id .....	488
interfaces (Static and Dynamic Subscribers) .....	489
ip-reassembly .....	494
ip-reassembly (L2TP) .....	495
ip-reassembly-rules (Service Set) .....	496
ipcp-suggest-dns-option .....	497
keepalive .....	498
keepalives .....	499
keepalives (Dynamic Profiles) .....	501
l2tp .....	502
l2tp (Profile) .....	505
l2tp-access-profile .....	509
l2tp-maximum-session (Service Interfaces) .....	510
layer2-liveness-detection (Receive) .....	511
lcp-renegotiation .....	512
local-authentication (Dynamic PPP Options) .....	513
local-gateway (L2TP LNS) .....	514
lockout-timeout (L2TP Destination Lockout) .....	515

logical-system (Tunnel Profile) .....	516
mac .....	517
mac-address (Dynamic Access-Internal Routes) .....	518
match-direction (IP Reassembly Rule) .....	519
maximum-sessions (L2TP) .....	520
maximum-sessions-per-tunnel .....	521
max-sessions (Tunnel Profile) .....	522
medium (Tunnel Profile) .....	522
metric (Dynamic Access-Internal Routes) .....	523
minimum-retransmission-timeout (L2TP Tunnel) .....	524
mtu .....	525
name (L2TP Destination) .....	529
name (L2TP Tunnel Destination) .....	530
nas-port-method (L2TP LAC) .....	531
nas-port-method (Tunnel Profile) .....	532
next-hop (Dynamic Access Routes) .....	533
next-hop-service .....	534
no-allow-snooped-clients .....	535
no-gratuitous-arp-request .....	536
no-snoop (DHCP Local Server and Relay Agent) .....	537
on-demand-ip-address .....	538
options (Access Profile) .....	539
override (RADIUS Options) .....	548
overrides (DHCP Relay Agent) .....	550
overrides (Enhanced Subscriber Management) .....	552
pap .....	554
pap (Dynamic PPP) .....	555
pap (L2TP) .....	555
parse-direction (Access Profile) .....	556
pic (M Series and T Series Routers) .....	557
pool (L2TP Service Interfaces) .....	558
pp0 (Dynamic PPPoE) .....	559
ppp (Group Profile) .....	561
ppp-options .....	564
ppp-options (Dynamic PPP) .....	566
ppp-options (L2TP) .....	568
preference (Subscriber Management) .....	569
preference (Tunnel Profile) .....	570
primary-interface (Aggregated Inline Services) .....	571
profile (Access) .....	572
proxy-mode .....	578
ps0 (Pseudowire Subscriber Interfaces) .....	579
pseudowire-service (Pseudowire Subscriber Interfaces) .....	580
qualified-next-hop (Dynamic Access-Internal Routes) .....	581
radius (Access Profile) .....	582
reject-unauthorized-ipv6cp .....	585
relay-option-82 .....	586
remote-gateway (Tunnel Profile) .....	587

report-ingress-shaping-rate (Dynamic CoS Interfaces) .....	588
request services l2tp destination unlock .....	589
retransmission-count-established (L2TP) .....	590
retransmission-count-not-established (L2TP) .....	591
route (Access) .....	592
route (Access Internal) .....	593
route-suppression (DHCP Local Server and Relay Agent) .....	594
routing-instance (Tunnel Profile) .....	595
routing-instance (L2TP Destination) .....	595
routing-instance (L2TP Tunnel Destination) .....	596
routing-instances (Dynamic Profiles) .....	597
routing-options (Dynamic Profiles) .....	599
rule (IP Reassembly) .....	601
rx-connect-speed-when-equal (L2TP LAC) .....	602
rx-window-size (L2TP) .....	603
secondary-interface (Aggregated Inline Services) .....	604
secret (Tunnel Profile) .....	605
service-device-pool (L2TP) .....	605
service-device-pools (L2TP Service Interfaces) .....	606
service-interface (L2TP Processing) .....	607
service-profile (L2TP) .....	608
service-rate-limiter (Access) .....	610
session-options .....	612
sessions-limit-group (L2TP) .....	615
soft-gre .....	616
source-gateway (Tunnel Profile) .....	617
stacked-vlan-tagging .....	618
statistics (Access Profile) .....	619
strip-user-name (Access Profile) .....	620
subscriber-context (AAA Options) .....	621
subscriber-management (Subscriber Management) .....	622
tag (Access) .....	624
tag2 (Dynamic Access Routes) .....	625
tos-reflect (L2TP) .....	626
trace (DHCP Relay Agent) .....	627
traceoptions (Fixed Wireless Access) .....	628
traceoptions (Protocols PPP Service) .....	630
traceoptions (Services L2TP) .....	634
traceoptions (Subscriber Management) .....	638
tunnel (L2TP) .....	640
tunnel (Tunnel Profile) .....	641
tunnel-group .....	642
tunnel-profile (L2TP Tunnel Switching) .....	643
tunnel-profile (Tunnel Profile) .....	644
tunnel-switch-profile (L2TP Tunnel Switching, Application) .....	645
tunnel-switch-profile (L2TP Tunnel Switching, Definition) .....	646
tx-address-change (L2TP LAC) .....	647
tx-connect-speed-method (L2TP LAC) .....	648
type (Tunnel Profile) .....	651

unit (Dynamic PPPoE) . . . . .	652
unit (Dynamic Profiles Standard Interface) . . . . .	654
untagged . . . . .	657
username-include (Local Authentication) . . . . .	658
weighted-load-balancing (L2TP LAC) . . . . .	659
vlan-id (Dynamic Profiles) . . . . .	660
vlan-tagging . . . . .	661
vlan-tagging (Dynamic) . . . . .	663
vlan-tags . . . . .	664
<b>Chapter 9</b>	
<b>Operational Commands . . . . .</b>	<b>665</b>
clear services l2tp destination . . . . .	667
clear services l2tp destination lockout . . . . .	669
clear services l2tp session . . . . .	671
clear services l2tp session statistics . . . . .	674
clear services l2tp tunnel . . . . .	676
clear services l2tp tunnel statistics . . . . .	678
request interface (revert   switchover) (Aggregated Inline Service Interfaces) . .	680
restart . . . . .	682
show ancp subscriber . . . . .	693
show bfd subscriber session . . . . .	700
show dynamic-profile session . . . . .	705
show services fixed-wireless-access statistics . . . . .	710
show interfaces ps0 (Pseudowire Subscriber Interfaces) . . . . .	712
show interfaces redundancy . . . . .	717
show ppp interface . . . . .	720
show ppp statistics . . . . .	730
show ppp summary . . . . .	738
show services inline ip-reassembly statistics . . . . .	740
show services l2tp client . . . . .	746
show services l2tp destination . . . . .	748
show services l2tp destination lockout . . . . .	752
show services l2tp session . . . . .	754
show services l2tp session-limit-group . . . . .	763
show services l2tp summary . . . . .	765
show services l2tp tunnel . . . . .	771
show services l2tp tunnel-group . . . . .	777
show services l2tp tunnel-switch destination . . . . .	779
show services l2tp tunnel-switch session . . . . .	783
show services l2tp tunnel-switch summary . . . . .	788
show services l2tp tunnel-switch tunnel . . . . .	790
show services soft-gre tunnel . . . . .	795
show subscribers . . . . .	798
show subscribers summary . . . . .	834
show system subscriber-management statistics . . . . .	841
show system subscriber-management summary . . . . .	847
test services l2tp tunnel . . . . .	850

# List of Figures

<b>Chapter 1</b>	<b>Broadband Subscriber Access Network Overview . . . . .</b>	<b>25</b>
	Figure 1: Subscriber Access Network Example . . . . .	26
	Figure 2: Choosing an MSAN Type . . . . .	27
	Figure 3: Basic Control Flow of Pseudowire Autosensing . . . . .	31
	Figure 4: Layer 2 Services for Pseudowire Service on Service Logical Interface . . . . .	33
	Figure 5: Scheduler Hierarchy . . . . .	42
	Figure 6: Bonded DSL/CuTTB . . . . .	43
	Figure 7: Hybrid PON + G.fast . . . . .	43
<b>Chapter 2</b>	<b>DHCP Subscriber Access Networks . . . . .</b>	<b>59</b>
	Figure 8: Subscriber Access Operation Flow . . . . .	61
<b>Chapter 4</b>	<b>L2TP Subscriber Access Networks . . . . .</b>	<b>121</b>
	Figure 9: Typical L2TP Topology . . . . .	122
	Figure 10: Protocol Stacking for L2TP Subscribers in Pass-Through Mode . . . . .	122
	Figure 11: L2TP Tunnel Switching Network Topology . . . . .	134
	Figure 12: L2TP Tunnel Switching for Incoming Calls . . . . .	135
	Figure 13: Destination and Tunnel Selection Process with Failover Between Preference Levels . . . . .	159
	Figure 14: Sample L2TP Network Topology . . . . .	186
<b>Chapter 5</b>	<b>Configuring MPLS Pseudowire Subscriber Logical Interfaces . . . . .</b>	<b>273</b>
	Figure 15: MPLS Access Network with Subscriber Management Support . . . . .	274
	Figure 16: Pseudowire Subscriber Interface Protocol Stack . . . . .	276
	Figure 17: Pseudowire Subscriber Logical Interface Stacking over Redundant Logical Tunnel Interface . . . . .	279
<b>Chapter 6</b>	<b>Wi-Fi Access Gateways . . . . .</b>	<b>297</b>
	Figure 18: MX Series Router Deployed as a WAG . . . . .	298
	Figure 19: MX Series as Wi-Fi Access Gateway Deployment Model . . . . .	299
<b>Chapter 7</b>	<b>Fixed Wireless Access Networks . . . . .</b>	<b>311</b>
	Figure 20: Fixed Wireless Access Network Topology . . . . .	312
	Figure 21: Signaling Messages for Bringing Default Bearer Up and Down . . . . .	312
	Figure 22: DHCP Subscribers in a Fixed Wireless Access Network . . . . .	314





# List of Tables

	<b>About the Documentation</b> . . . . .	<b>xix</b>
	Table 1: Notice Icons . . . . .	xxi
	Table 2: Text and Syntax Conventions . . . . .	xxii
<b>Chapter 1</b>	<b>Broadband Subscriber Access Network Overview</b> . . . . .	<b>25</b>
	Table 3: Ethernet MSAN Aggregation Methods . . . . .	27
<b>Chapter 2</b>	<b>DHCP Subscriber Access Networks</b> . . . . .	<b>59</b>
	Table 4: Actions for DHCP Local Server Snooped Packets . . . . .	68
	Table 5: Actions for DHCP Relay Agent Snooped Packets When DHCP Snooping Is Enabled . . . . .	74
	Table 6: Actions for DHCP Relay Agent Snooped Packets When DHCP Snooping Is Disabled . . . . .	75
	Table 7: Actions for Snooped BOOTREPLY Packets . . . . .	75
<b>Chapter 3</b>	<b>PPP Subscriber Access Networks</b> . . . . .	<b>93</b>
	Table 8: PPP NCP Negotiation Mode Behavior for Dynamic and Static Subscribers . . . . .	108
<b>Chapter 4</b>	<b>L2TP Subscriber Access Networks</b> . . . . .	<b>121</b>
	Table 9: L2TP Terms . . . . .	124
	Table 10: SNMP Counters for L2TP Statistics . . . . .	131
	Table 11: Cause of CDN Message . . . . .	136
	Table 12: Cause of StopCCN Message . . . . .	136
	Table 13: LAC, LNS, and LTS Actions Taken for Switched Tunnels in Response to Administrative clear Commands . . . . .	137
	Table 14: Default Action for Handling L2TP AVPs at the Switching Boundary . . . . .	138
	Table 15: Scenario 1, Chassis Limit . . . . .	171
	Table 16: Scenario 2, Tunnel Limit . . . . .	171
	Table 17: Scenario 3, Tunnel Group Limit . . . . .	172
	Table 18: Scenario 4, Session-Limit Group Limit . . . . .	173
	Table 19: Scenario 5, Individual Client Limit . . . . .	174
	Table 20: L2TP AVPs That Provide Subscriber Access Line Information . . . . .	186
	Table 21: Methods for Determining Connect Speeds by Junos OS Release. . . . .	193
	Table 22: LAC Fallback Procedure When a Connect Speed Value is Not Set (Junos OS Release 17.2 and Higher) . . . . .	196
	Table 23: LAC Fallback Procedure When a Connect Speed Value is Not Set (Junos OS Releases 15.1, 16.1, 16.2, 17.1) . . . . .	197
	Table 24: LAC Fallback Procedure When a Connect Speed Value is Not Set (Junos OS Releases 13.3, 14.1, 14.2) . . . . .	197
	Table 25: Attributes Sent as Calling Number AVP Based on Remote Circuit ID Format and Attributes Received in PADR . . . . .	207

	Table 26: Fallback Trigger for Remote Circuit ID Format . . . . .	207
	Table 27: Maximum Bandwidth for Inline Services per MPC . . . . .	225
	Table 28: VSA and Standard RADIUS Attribute Names, Order, and Values Required for Example . . . . .	237
<b>Chapter 7</b>	<b>Fixed Wireless Access Networks . . . . .</b>	<b>311</b>
	Table 29: 3GPP Technical Specifications for Fixed Wireless Access Networks . . . . .	315
	Table 30: Terminology for a 3GPP Fixed Wireless Access Network . . . . .	315
<b>Chapter 9</b>	<b>Operational Commands . . . . .</b>	<b>665</b>
	Table 31: show ancp subscriber Output Fields . . . . .	694
	Table 32: show bfd subscriber session Output Fields . . . . .	700
	Table 33: show system subscriber-management resiliency Output . . . . .	710
	Table 34: show interfaces ps0 Output Fields . . . . .	712
	Table 35: show interfaces redundancy Output Fields . . . . .	717
	Table 36: show ppp interface Output Fields . . . . .	720
	Table 37: show ppp statistics Output Fields . . . . .	730
	Table 38: show ppp summary Output Fields . . . . .	738
	Table 39: show services inline ip-reassembly statistics Output Fields . . . . .	741
	Table 40: show services l2tp client Output Fields . . . . .	746
	Table 41: show services l2tp destination Output Fields . . . . .	749
	Table 42: show services l2tp destination lockout Output Fields . . . . .	752
	Table 43: show services l2tp session Output Fields . . . . .	755
	Table 44: show services l2tp session-limit-group Output Fields . . . . .	763
	Table 45: show services l2tp summary Output Fields . . . . .	765
	Table 46: show services l2tp tunnel Output Fields . . . . .	772
	Table 47: show services l2tp tunnel-group Output Fields . . . . .	777
	Table 48: show services l2tp tunnel-switch destination Output Fields . . . . .	779
	Table 49: show services l2tp tunnel-switch session Output Fields . . . . .	783
	Table 50: show services l2tp tunnel-switch summary Output Fields . . . . .	788
	Table 51: show services l2tp tunnel-switch tunnel Output Fields . . . . .	790
	Table 52: show services soft-gre tunnel Output Fields . . . . .	796
	Table 53: show subscribers Output Fields . . . . .	803
	Table 54: show subscribers summary Output Fields . . . . .	835
	Table 55: show system subscriber-management statistics Output Fields . . . . .	841
	Table 56: show system subscriber-management summary Output Fields . . . . .	847
	Table 57: test services l2tp tunnel Output Fields . . . . .	850

# About the Documentation

- Documentation and Release Notes on page xix
- Using the Examples in This Manual on page xix
- Documentation Conventions on page xxi
- Documentation Feedback on page xxiii
- Requesting Technical Support on page xxiii

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <https://www.juniper.net/documentation/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <https://www.juniper.net/books>.

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

## Documentation Conventions

Table 1 on page xxi defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xxii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b>  No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies guide names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS CLI User Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Encloses optional keywords or variables.	<b>stub</b> <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast</b>   <b>multicast</b>  ( <i>string1</i>   <i>string2</i>   <i>string3</i> )
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Encloses a variable for which you can substitute one or more values.	<b>community name members</b> [ <i>community-ids</i> ]
Indentation and braces ( { } )	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	

## GUI Conventions

Table 2: Text and Syntax Conventions (continued)

Convention	Description	Examples
<b>Bold text like this</b>	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
<b>&gt;</b> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

We encourage you to provide feedback so that we can improve our documentation. You can use either of the following methods:

- Online feedback system—Click TechLibrary Feedback, on the lower right of any page on the [Juniper Networks TechLibrary](#) site, and do one of the following:



- Click the thumbs-up icon if the information on the page was helpful to you.
- Click the thumbs-down icon if the information on the page was not helpful to you or if you have suggestions for improvement, and use the pop-up form to provide feedback.
- E-mail—Send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net). Include the document or topic name, URL or page number, and software version (if applicable).

## Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active Juniper Care or Partner Support Services support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <https://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <https://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <https://www.juniper.net/customers/support/>
- Search for known bugs: <https://prsearch.juniper.net/>
- Find product documentation: <https://www.juniper.net/documentation/>
- Find solutions and answer questions using our Knowledge Base: <https://kb.juniper.net/>
- Download the latest versions of software and review release notes: <https://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <https://www.juniper.net/company/communities/>
- Create a service request online: <https://myjuniper.juniper.net>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://entitlementsearch.juniper.net/entitlementsearch/>

## Creating a Service Request with JTAC

You can create a service request with JTAC on the Web or by telephone.

- Visit <https://myjuniper.juniper.net>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <https://support.juniper.net/support/requesting-support/>.



## CHAPTER 1

# Broadband Subscriber Access Network Overview

- [Broadband Subscriber Access Network Overview on page 25](#)
- [High Availability for Subscriber Access Networks on page 48](#)
- [Routes for DHCP and PPP Subscriber Access Networks on page 52](#)

## Broadband Subscriber Access Network Overview

---

- [Subscriber Access Network Overview on page 25](#)
- [Multiservice Access Node Overview on page 26](#)
- [Ethernet MSAN Aggregation Options on page 27](#)
- [LDP Pseudowire Autosensing Overview on page 29](#)
- [Layer 2 Services on Pseudowire Service Interface Overview on page 32](#)
- [Broadband Access Service Delivery Options on page 38](#)
- [Broadband Delivery and FTTx on page 40](#)
- [Understanding BNG Support for Cascading DSLAM Deployments Over Bonded DSL Channels on page 41](#)
- [Detection of Backhaul Line Identifiers and Autogeneration of Intermediate Node Interface Sets on page 44](#)

## Subscriber Access Network Overview

A subscriber access environment can include various components, including subscriber access technologies and authentication protocols.


The subscriber access technologies include:

- Dynamic Host Configuration Protocol (DHCP) server
  - Local DHCP server
  - External DHCP server
- Point-to-Point Protocol (PPP)

The subscriber authentication protocols include the RADIUS server.

Figure 1 on page 26 shows an example of a basic subscriber access network.

Figure 1: Subscriber Access Network Example

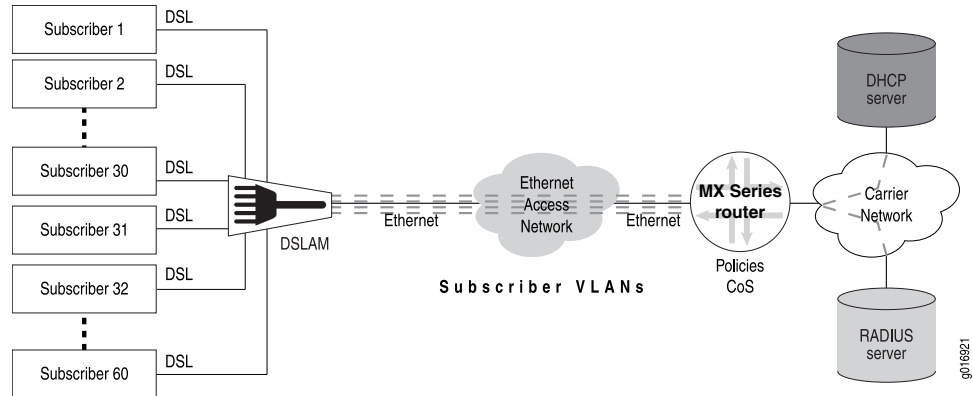

**NOTE:** This feature requires a license. To understand more about Subscriber Access Licensing, see, [Subscriber Access Licensing Overview](#). Please refer to the Juniper Licensing Guide for general information about License Management. Please refer to the product Data Sheets at [MX Series Routers](#) for details, or contact your Juniper Account Team or Juniper Partner.

## Multiservice Access Node Overview

A *multiservice access node* is a broader term that refers to a group of commonly used aggregation devices. These devices include digital subscriber line access multiplexers (DSLAMs) used in xDSL networks, optical line termination (OLT) for PON/FTTx networks, and Ethernet switches for Active Ethernet connections. Modern MSANs often support all of these connections, as well as providing connections for additional circuits such as plain old telephone service (referred to as POTS) or Digital Signal 1 (DS1 or T1).

The defining function of a multiservice access node is to aggregate traffic from multiple subscribers. At the physical level, the MSAN also converts traffic from the *last mile technology* (for example, ADSL) to Ethernet for delivery to subscribers.

You can broadly categorize MSANs into three types based on how they forward traffic in the network:

- **Layer-2 MSAN**—This type of MSAN is essentially a Layer 2 switch (though typically not a fully functioning switch) with some relevant enhancements. These MSANs use Ethernet (or ATM) switching to forward traffic. The MSAN forwards all subscriber traffic upstream to an edge router that acts as the centralized control point and prevents direct subscriber-to-subscriber communication. Ethernet Link Aggregation (LAG) provides the resiliency in this type of network.

Layer 2 DSLAMs cannot interpret IGMP, so they cannot selectively replicate IPTV channels.


- **Layer-3 aware MSAN**—This IP-aware MSAN can interpret and respond to IGMP requests by locally replicating a multicast stream and forwarding the stream to any

subscriber requesting it. Layer 3 awareness is important when supporting IPTV traffic to perform channel changes (sometimes referred to as *channel zaps*). Static IP-aware MSANs always receive all multicast television channels. They do not have the ability to request that specific channels be forwarded to the DSLAM. Dynamic IP-aware DSLAMs, however, can inform the network to begin (or discontinue) sending individual channels to the DSLAM. Configuring IGMP proxy or IGMP snooping on the DSLAM accomplishes this function.

- **Layer-3 MSAN**—These MSANs use IP routing functionality rather than Layer 2 technologies to forward traffic. The advantage of this forwarding method is the ability to support multiple upstream links going to different upstream routers and improving network resiliency. However, to accomplish this level of resiliency, you must assign a separate IP subnetwork to each MSAN, adding a level of complexity that can be more difficult to maintain or manage.

In choosing a MSAN type, refer to [Figure 2 on page 27](#):

*Figure 2: Choosing an MSAN Type*

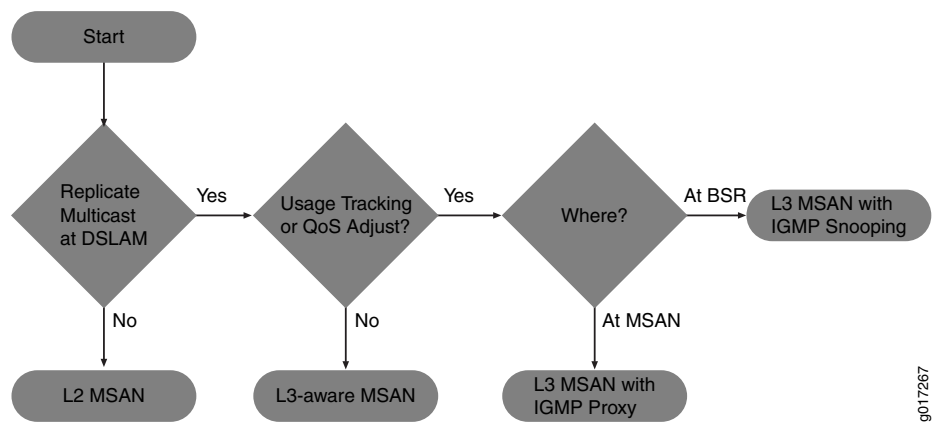

## Ethernet MSAN Aggregation Options

Each MSAN can connect directly to an edge router (broadband services router or video services router), or an intermediate device (for example, an Ethernet switch) can aggregate MSAN traffic before being sent to the services router. [Table 3 on page 27](#) lists the possible MSAN aggregation methods and under what conditions they are used.

*Table 3: Ethernet MSAN Aggregation Methods*

Method	When Used
Direct connection	Each MSAN connects directly to the broadband services router and optional video services router.
Ethernet aggregation switch connection	Each MSAN connects directly to an intermediate Ethernet switch. The switch, in turn, connects to the broadband services router or optional video services router.
Ethernet ring aggregation connection	Each MSAN connects to a ring topology of MSANs. The head-end MSAN (the device closest to the upstream edge router) connects to the broadband services router.

You can use different aggregation methods in different portions of the network. You can also create multiple layers of traffic aggregation within the network. For example, an MSAN can connect to a central office terminal (COT), which, in turn, connects to an Ethernet aggregation switch, or you can create multiple levels of Ethernet aggregation switches prior to connecting to the edge router.

### Direct Connection

---

In the direct connection method, each MSAN has a point-to-point connection to the broadband services router. If an intermediate central office exists, traffic from multiple MSANs can be combined onto a single connection using wave-division multiplexing (WDM). You can also connect the MSAN to a video services router. However, this connection method requires that you use a Layer 3 MSAN that has the ability to determine which link to use when forwarding traffic.

When using the direct connection method, keep the following in mind:

- We recommend this approach when possible to simplify network management.
- Because multiple MSANs are used to connect to the services router, and Layer 3 MSANs generally require a higher equipment cost, this method is rarely used in a multiedge subscriber management model.
- Direct connection is typically used when most MSAN links are utilized less than 33 percent and there is little value in combining traffic from multiple MSANs.

### Ethernet Aggregation Switch Connection

---

An Ethernet aggregation switch aggregates traffic from multiple downstream MSANs into a single connection to the services router (broadband services router or optional video services router).

When using the Ethernet aggregation switch connection method, keep the following in mind:

- Ethernet aggregation is typically used when most MSAN links are utilized over 33 percent or to aggregate traffic from lower speed MSANs (for example, 1 Gbps) to a higher speed connection to the services router (for example, 10 Gbps).
- You can use an MX Series router as an Ethernet aggregation switch. For information about configuring the MX Series router in Layer 2 scenarios, see the *Ethernet Networking Feature Guide for MX Series Routers*.

### Ring Aggregation Connection

---

In a ring topology, the remote MSAN that connects to subscribers is called the remote terminal (RT). This device can be located in the outside plant (OSP) or in a remote central office (CO). Traffic traverses the ring until it reaches the central office terminal (COT) at the head-end of the ring. The COT then connects directly to the services router (broadband services router or video services router).



**NOTE:** The RT and COT must support the same ring resiliency protocol.

You can use an MX Series router in an Ethernet ring aggregation topology. For information about configuring the MX Series router in Layer 2 scenarios, see the *Ethernet Networking Feature Guide for MX Series Routers*.

## LDP Pseudowire Autosensing Overview

A pseudowire is a virtual link that is used to transport a Layer 2 service across an MPLS edge or access network. In a typical broadband edge or business edge network, one end of a pseudowire is terminated as a Layer 2 circuit on an access node, and the other end is terminated as a Layer 2 circuit on a service node that serves as either an aggregation node or an MPLS core network. Traditionally, both endpoints are provisioned manually through configuration. LDP pseudowire autosensing introduces a new provisioning model that allows pseudowire endpoints to be automatically provisioned and deprovisioned on service nodes based on LDP signaling messages. This model can facilitate the provisioning of pseudowires on a large scale. An access node uses LDP to signal both pseudowire identity and attributes to a service node. The identity is authenticated by a RADIUS server, and then used together with the attributes signaled by LDP and the attributes passed down by the RADIUS server to create the pseudowire endpoint configuration, including the Layer 2 circuit.

- [Pseudowire Ingress Termination Background on page 29](#)
- [Pseudowire Autosensing Approach on page 30](#)
- [Sample Configuration on page 31](#)

### Pseudowire Ingress Termination Background

In a seamless MPLS-enabled broadband access or business edge network, Ethernet pseudowires are commonly used as virtual interfaces to connect access nodes to service nodes. Each pseudowire carries the bidirectional traffic of one or multiple broadband subscribers or business edge customers between an access node and a service node pair. The establishment of the pseudowire is usually initiated by the access node, based on either static configuration or dynamic detection of a new broadband subscriber or business edge customer arriving on a client-facing port on the access node.

Ideally, the access node should create one pseudowire per client port, where all subscribers or customers hosted by the port are mapped to the pseudowire. The alternative is where there is one pseudowire per client port (S-VLAN), and all subscribers or customers sharing a common S-VLAN on the port are mapped to the pseudowire. In either case, the pseudowire is signaled in the raw mode.

The S-VLAN, if not used to delimit service on the service node or combined with C-VLAN to distinguish subscribers or customers, will be stripped off before the traffic is encapsulated in pseudowire payload and transported to the service node. Individual subscribers or customers may be distinguished by C-VLAN, or a Layer 2 header such as DHCP and PPP, which will be carried in pseudowire payload to the service node. On the service node, the pseudowire is terminated. Individual subscribers or customers are then demultiplexed and modeled as broadband subscriber interfaces, business edge interfaces

(for example, PPPoE), Ethernet interfaces, or IP interfaces. Ethernet and IP interfaces may be further attached to service instances, such as VPLS and Layer 3 VPN instances.

In Junos OS, pseudowire ingress termination on service nodes is supported through the use of pseudowire service physical and logical interfaces. This approach is considered as superior in scalability to the old logical tunnel interface based approach, due to its capability of multiplexing and demultiplexing subscribers or customers over a single pseudowire. For each pseudowire, a pseudowire service physical interface is created on a selected Packet Forwarding Engine, which is called an anchor Packet Forwarding Engine. On top of this pseudowire service physical interface, a ps.0 logical interface (transport logical interface) is created, and a Layer 2 circuit or Layer 2 VPN is created to host the ps.0 logical interface as an attachment interface.

The Layer 2 circuit or Layer 2 VPN enables pseudowire signaling towards the access node, and the ps.0 logical interface serves the role of customer edge facing interface for the pseudowire. Further, one or multiple ps.n logical interfaces (also known as service logical interfaces, where  $n > 0$ ) may be created on the pseudowire service physical interface to model individual subscriber/customer flows as logical interfaces. These interfaces can then be attached to desired broadband and business edge services or Layer 2 or Layer 3 VPN instances.



**NOTE:** Note that the purpose of the anchor Packet Forwarding Engine is to designate the Packet Forwarding Engine to process the bidirectional traffic of the pseudowire, including encapsulation, decapsulation, VLAN mux or demux, QoS, policing, shaping, and many more.

---


For Junos OS Release 16.2 and earlier, the creation and deletion of the pseudowire service physical interfaces, pseudowire service logical interfaces, Layer 2 circuits, and Layer 2 VPNs for pseudowire ingress termination rely on static configuration. This is not considered as the best option from the perspective of scalability, efficiency, and flexibility, especially in a network where each service node may potentially host a large number of pseudowires. The objective is to help service providers come out of static configuration in provisioning and deprovisioning pseudowire ingress termination on service nodes.

### **Pseudowire Autosensing Approach**

---

In the pseudowire autosensing approach, a service node uses the LDP label mapping message received from an access node as a trigger to dynamically generate configuration for a pseudowire service physical interface, a pseudowire service logical interface, a Layer 2 circuit. Likewise, it uses the LDP label withdraw message received from the access node and LDP session down event as triggers to remove the generated configuration. In pseudowire autosensing, it is assumed that access nodes are the initiators of pseudowire signaling, and service nodes are the targets. In a network where a service may be hosted by multiple service nodes for redundancy or load balancing, this also provides access nodes with a select-and-connect model for service establishment. The basic control flow of pseudowire autosensing is shown in [Figure 3 on page 31](#)

Figure 3: Basic Control Flow of Pseudowire Autosensing

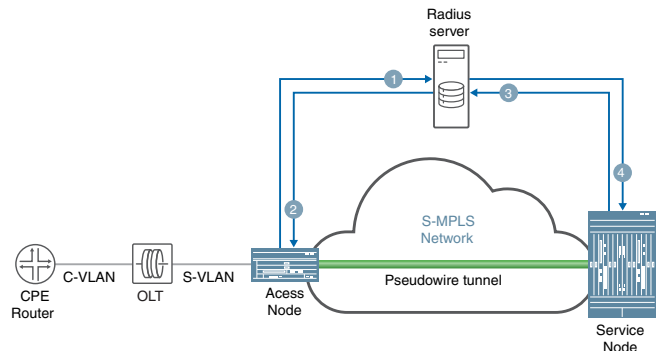

The basic control flow procedure of pseudowire autosensing is as follows:

1. Customer premises equipment (CPE) comes online and sends an Ethernet frame with C-VLAN to the optical line terminator (OLT). OLT adds S-VLAN to the frame and sends the frame to the access node. The access node checks with the RADIUS server to authorize the VLANs.
2. The RADIUS server sends an access accept to the access node. The access node creates a Layer 2 circuit and signals a pseudowire to the service node through an LDP label mapping message.
3. The service node accepts the label mapping message, and sends an access request with pseudowire information to the RADIUS server for authorization and for selection of a pseudowire service physical interface or a logical interface.
4. The RADIUS server sends an access accept to the service node with a service string specifying the selected pseudowire service physical interface or logical interface. The service node creates a Layer 2 circuit configuration, the pseudowire information, and the pseudowire service physical interface or logical interface. The service node signals the pseudowire towards the access node through an LDP label mapping message. The pseudowire comes up bidirectionally.

### Sample Configuration

The following configuration explicitly marks the Layer 2 circuit as generated by autosensing. The pseudowire service physical interface and pseudowire service logical interface configuration are optional, depending on whether they preexist.

Router 0

```
[edit]
protocols {
  Layer 2 circuit {
    neighbor 192.0.2.2 {
      interface ps0.0 {
        virtual-circuit-id 100;
        control-word;
```

```

        mtu 9100;
        auto-sensed;
    }
}
}

```

## Layer 2 Services on Pseudowire Service Interface Overview

The pseudowire service logical interface supports the transport logical interface (psn.0) on the MPLS access side and service logical interfaces (psn.1 to psn.n) on the MPLS core side of the subscriber management network.

The pseudowire service on service logical interfaces psn.1 to psn.n are configured as Layer 2 interfaces in the bridge domain or in a virtual private LAN service (VPLS) instance. There is Layer 2 circuit or the Layer 2 VPN across MPLS access between an Ethernet aggregation device and a service edge device with the pseudowire service on transport logical interface psn.0 as the terminating interface of the Layer 2 circuit or the Layer 2 VPN at the service edge device.

Junos OS supports the pseudowire service on service logical interfaces psn.1 to psn.n in the bridge domain or VPLS instance, which receives traffic egressing from the pseudowire service on the transport logical interface at the service edge device. It also enables Layer 2 ingress features such as MAC learning, VLAN manipulations, and destination MAC look up on the pseudowire service on service logical interfaces.

When the traffic is in reverse direction, the destination MAC enters the Layer 2 domain at the service edge device, which is learned as the source MAC on the pseudowire service on service logical interfaces. Starting in Junos OS Release 17.1R1, the pseudowire logical tunnel interfaces support Ethernet VPLS, Ethernet bridge, VLAN VPLS, and VLAN bridge encapsulation next hops to exit Layer 2 traffic. Starting in Junos OS Release 18.4R1, the Layer 2 service support with the pseudowire service logical interfaces is extended to pseudowire service interfaces anchored over redundant logical tunnel interfaces as well. These Layer 2 services are supported only on pseudowire service on service logical interfaces (psn.1 to psn.n) and not on transport logical interface (psn.0). The Layer 2 output features such as VLAN manipulations and others are enabled on the pseudowire service interfaces. The traffic sent out of the interfaces enter the pseudowire service on transport logical interfaces which is the Layer 2 circuit interface between Ethernet aggregation and service edge devices across the MPLS access domain.



**NOTE:** For Junos OS Release 16.2 and earlier, Layer 2 encapsulations or features could not be configured on pseudowire service on service logical interfaces.

## Traffic from Customer LAN to MPLS


VPLS-x and VPLS-y instances are configured on the MPLS core side of the service edge device (PE A). A Layer 2 circuit or Layer 2 VPN is configured between the Ethernet aggregation device (EAD1) and the service edge device. ps0.0 (transport logical interface)



is the local interface in the Layer 2 circuit or the Layer 2 VPN at PE A. Junos OS supports pseudowire service on service logical interface ps0.x ( $x > 0$ ) in VPLS instance VPLS-x (VLAN ID in VPLS-x = m) and pseudowire service on service logical interface ps0.y ( $y > 0$ ) in VPLS instance VPLS-y (VLAN ID in VPLS-y = n).

In [Figure 4 on page 33](#), when the traffic comes from EAD 1 to PE A (on either Layer 2 circuit or Layer 2 VPN) with any VLAN ID, the traffic will exit through ps0.0. Based on the VLAN ID in the traffic the pseudowire service on service logical interface is selected. For example, if VLAN ID is m, then the traffic will enter ps0.x and if VLAN ID is n, then the traffic will enter ps0.y.

**Figure 4: Layer 2 Services for Pseudowire Service on Service Logical Interface**

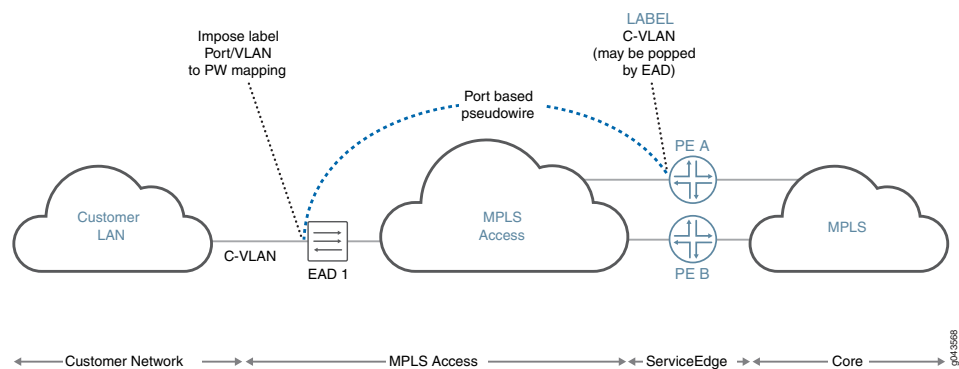

When traffic enters pseudowire service on the service logical interface ps0.n, where  $n > 0$ , the following steps are performed.

1. The source MAC learning should occur on the Layer 2 pseudowire service on the service logical interface. The source Packet Forwarding Engine for this MAC is the Packet Forwarding Engine of the logical tunnel interface on which the pseudowire service is anchored in a VPLS instance or bridge domain in the PE A device.
2. The destination MAC lookup is done at the entry side as an input bridge family feature list of pseudowire services on service logical interfaces.
  - If destination MAC lookup is successful, then the traffic is sent as unicast; otherwise, the destination MAC, broadcast MAC, and multicast MAC are flooded.
  - If destination MAC lookup fails for the traffic coming on a pseudowire service on a service logical interface, the **mlp query** command is sent to the Routing Engine and the other Packet Forwarding Engine in bridge domain or VPLS instance.
3. If a new MAC is learned on a pseudowire service on a service logical interface, then the **mlp add** command is sent to the Routing Engine and the other Packet Forwarding Engine in bridge domain or VPLS instance.

### Traffic from Service Edge to Customer LAN

When traffic enters the VPLS instance or bridge domain at the service edge device and if the destination MAC in the traffic is learned on a pseudowire service on a service logical

interface, then the token associated with that pseudowire service logical interface is set at the entry side. The traffic is then sent to the Packet Forwarding Engine on which the logical tunnel interface of the pseudowire service physical interface is anchored through a fabric. When this token is launched, it supports VLAN VPLS, VLAN bridge, Ethernet VPLS, and Ethernet bridge encapsulations. The encapsulation next hop points to the egress logical interface feature list of the pseudowire service on the service logical interface to execute all the Layer 2 output features and send the packet to the entry side of the pseudowire service on transport logical interface ps0.0.

If the MAC query reaches the Packet Forwarding Engine on which the pseudowire service is anchored, then the Packet Forwarding Engine sends the response only when the MAC learned on the pseudowire service on the service logical interface is present. The Layer 2 token associated with the pseudowire service on the service logical interface seen after destination MAC lookup for the MAC learned on the pseudowire service on service logical interface should point to the next hop associated with the access side of the pseudowire service on service the logical interface.

The pseudowire service on the transport logical interface is the local interface ps0.0 of the Layer 2 circuit or Layer 2 VPN between the service edge and the Ethernet aggregation devices. Traffic is sent to the Ethernet aggregation device through the Layer 2 circuit or Layer 2 VPN across the MPLS access domain.

If the destination MAC traffic coming from the entry and exit side of the service edge device is unknown or multicast or broadcast, the traffic needs to be flooded. This requires an customer edge device flood next hop to include the pseudowire service on service logical interface, which acts as an access logical interface for the VPLS instance or bridge domain.

---

### Pseudowire Service Interfaces

The following features are supported on pseudowire service interfaces:

- A pseudowire service interface is hosted over a logical tunnel interface (lt-x/y/z). The traffic from a transport pseudowire service on a logical interface to a subscriber pseudowire service on a logical interface is based on the available VLAN ID.
- Transfer of traffic from a subscriber pseudowire service on a logical interface to a transport pseudowire service on a logical interface is based on the channelId through an available loopback IP address.
- Pseudowire service on service logical interfaces are supported on the virtual routing and forwarding (VRF) routing instance.

---

### Sample Configuration

This sample configuration shows a pseudowire service on a transport logical interface on a Layer 2 circuit and a pseudowire service on service logical interfaces in a bridge domain and a VPLS instance in a service edge device:

**Pseudowire service on  
a service logical**

```
[edit]  
interfaces {
```

interface in bridge  
domain on router 0

```

ps0 {
  unit 0 {
    encapsulation ethernet-ccc;
  }
  unit 1 {
    encapsulation vlan-bridge;
    vlan-id 1;
  }
  unit 2 {
    encapsulation vlan-bridge;
    vlan-id 2;
  }
}
ge-0/0/0 {
  unit 1 {
    encapsulation vlan-bridge;
    vlan-id 1;
  }
  unit 2 {
    encapsulation vlan-bridge;
    vlan-id 2;
  }
}
ge-2/0/6 {
  unit 0 {
    family inet {
      address 10.11.2.1/24;
    }
    family mpls;
  }
}
}
protocols {
  mpls {
    label-switched-path to_192.0.2.2 {
      to 192.0.2.2;
    }
  }
  bgp {
    group RR {
      type internal;
      local-address 192.0.3.3;
    }
  }
  l2-circuit {
    neighbor 192.0.2.2 {
      interface ps0.0 {
        virtual-circuit-id 100;
      }
    }
  }
}
bridge-domains {
  bd1 {
    domain-type bridge;
  }
}

```

```

        vlan-id 1;
        interface ps0.1;
        interface ge-0/0/0.1;
    }
    bd2 {
        domain-type bridge;
        vlan-id 2;
        interface ps0.2;
        interface ge-0/0/0.2;
    }
}

```

Pseudowire service on  
a service logical  
interface in a VPLS  
instance on router 0

```

[edit]
interfaces {
  ps0 {
    unit 0 {
      encapsulation ethernet-ccc;
    }
    unit 1 {
      encapsulation vlan-vpls;
      vlan-id 1;
      family vpls;
    }
    unit 2 {
      encapsulation vlan-vpls;
      vlan-id 2;
      family vpls;
    }
  }
  ge-0/0/0 {
    unit 1 {
      encapsulation vlan-vpls;
      vlan-id 1;
      family vpls;
    }
    unit 2 {
      encapsulation vlan-vpls;
      vlan-id 2;
      family vpls;
    }
  }
  ge-2/0/6 {
    unit 0 {
      family inet {
        address 10.11.2.1/24;
      }
      family mpls;
    }
  }
}
protocols {
  mpls {
    label-switched-path to_192.0.2.2 {

```

```

        to 192.0.2.2;
    }
}
bgp {
    group RR {
        type internal;
        local-address 192.0.3.3;
    }
}
l2-circuit {
    neighbor 192.0.2.2 {
        interface ps0.0 {
            virtual-circuit-id 100;
        }
    }
}
}
routing-instances {
    vpls-1 {
        instance-type vpls;
        vlan-id 1;
        interface ps0.1;
        interface ge-0/0/0.1;
    }
    vpls-2 {
        instance-type vpls;
        vlan-id 2;
        interface ps0.2;
        interface ge-0/0/0.2;
    }
}
}

```

Pseudowire service on  
a service logical  
interface in a Layer 2  
circuit on router 0

```

[edit]
interfaces {
    ps0 {
        unit 0 {
            encapsulation ethernet-ccc;
        }
        unit 1 {
            encapsulation vlan-ccc;
            vlan-id 1;
        }
        unit 2 {
            encapsulation vlan-ccc;
            vlan-id 2;
        }
    }
}
ge-0/0/0 {
    unit 1 {
        encapsulation vlan-vpls;
        vlan-id 1;
        family vpls;
    }
}

```

```
    unit 2 {
        encapsulation vlan-vpls;
        vlan-id 2;
        family vpls;
    }
}
ge-2/0/6 {
    unit 0 {
        family inet {
            address 10.11.2.1/24;
        }
        family mpls;
    }
}
}
protocols {
    mpls {
        label-switched-path to_192.0.2.2 {
            to 192.0.2.2;
        }
    }
    bgp {
        group RR {
            type internal;
            local-address 192.0.3.3;
        }
    }
    l2-circuit {
        neighbor 192.0.2.2 {
            interface ps0.0 {
                virtual-circuit-id 100;
            }
        }
        neighbor 10.10.10.10 {
            interface ps0.1 {
                virtual-circuit-id 1;
            }
        }
        neighbor 10.11.11.11 {
            interface ps0.2 {
                virtual-circuit-id 2;
            }
        }
    }
}
}
```

## Broadband Access Service Delivery Options

Four primary delivery options exist today for delivering broadband network service. These options include the following:

- [Digital Subscriber Line on page 39](#)
- [Active Ethernet on page 39](#)

- [Passive Optical Networking on page 39](#)
- [Hybrid Fiber Coaxial on page 40](#)

---

### Digital Subscriber Line

Digital subscriber line (DSL) is the most widely deployed broadband technology worldwide. This delivery option uses existing telephone lines to send broadband information on a different frequency than is used for the existing voice service. Many generations of DSL are used for residential service, including Very High Speed Digital Subscriber Line 2 (VDSL2) and versions of Asymmetric Digital Subscriber Line (ADSL, ADSL2, and ADSL2+). These variations of DSL primarily offer asymmetric residential broadband service where different upstream and downstream speeds are implemented. (VDSL2 also supports symmetric operation.) Other DSL variations, like High bit rate Digital Subscriber Line (HDSL) and Symmetric Digital Subscriber Line (SDSL), provide symmetric speeds and are typically used in business applications.

The head-end to a DSL system is the Digital Subscriber Line Access Multiplexer (DSLAM). The demarcation device at the customer premise is a DSL modem. DSL service models are defined by the Broadband Forum (formerly called the DSL Forum).

---

### Active Ethernet

Active Ethernet uses traditional Ethernet technology to deliver broadband service across a fiber-optic network. Active Ethernet does not provide a separate channel for existing voice service, so VoIP (or TDM-to-VoIP) equipment is required. In addition, sending full-speed (10 or 100 Mbps) Ethernet requires significant power, necessitating distribution to Ethernet switches and optical repeaters located in cabinets outside of the central office. Due to these restrictions, early Active Ethernet deployments typically appear in densely populated areas.

---

### Passive Optical Networking

Passive Optical Networking (PON), like Active Ethernet, uses fiber-optic cable to deliver services to the premises. This delivery option provides higher speeds than DSL but lower speeds than Active Ethernet. Though PON provides higher speed to each subscriber, it requires a higher investment in cable and connectivity.

A key advantage of PON is that it does not require any powered equipment outside of the central office. Each fiber leaving the central office is split using a non-powered optical splitter. The split fiber then follows a point-to-point connection to each subscriber.

PON technologies fall into three general categories:

- ATMPON (APON), Broadband PON (BPON), and Gigabit-capable PON (GPON)—PON standards that use the following different delivery options:
  - APON—The first passive optical network standard is primarily used for business applications.
  - BPON—Based on APON, BPON adds wave division multiplexing (WDM), dynamic and higher upstream bandwidth allocation, and a standard management interface to enable mixed-vendor networks.

- GPON—The most recent PON adaptation, GPON is based on BPON but supports higher rates, enhanced security, and a choice of which Layer 2 protocol to use (ATM, Generic Equipment Model [GEM], or Ethernet).
- Ethernet PON (EPON)—Provides capabilities similar to GPON, BPON, and APON, but uses Ethernet standards. These standards are defined by the IEEE. Gigabit Ethernet PON (GEAPON) is the highest speed version.
- Wave Division Multiplexing PON (WDM-PON)—A nonstandard PON which, as the name implies, provides a separate wavelength to each subscriber.

The head-end to a PON system is an Optical Line Terminator (OLT). The demarcation device at the customer premises is an Optical Network Terminator (ONT). The ONT provides subscriber-side ports for connecting Ethernet (RJ-45), telephone wires (RJ-11) or coaxial cable (F-connector).

### Hybrid Fiber Coaxial

---

Multi-System Operators (MSOs; also known as *cable TV operators*) offer broadband service through their hybrid fiber-coaxial (HFC) network. The HFC network combines optical fiber and coaxial cable to deliver service directly to the customer. Services leave the central office (CO) using a fiber-optic cable. The service is then converted outside of the CO to a coaxial cable *tree* using a series of optical nodes and, where necessary, through a trunk radio frequency (RF) amplifier. The coaxial cables then connect to multiple subscribers. The demarcation device is a cable modem or set-top box, which talks to a Cable Modem Termination System (CMTS) at the MSO *head-end* or master facility that receives television signals for processing and distribution. Broadband traffic is carried using the Data Over Cable Service Interface Specification (DOCSIS) standard defined by CableLabs and many contributing companies.

## Broadband Delivery and FTTx

Many implementations use existing copper cabling to deliver signal to the premises, but fiber-optic cable connectivity is making its way closer to the subscriber. Most networks use a combination of both copper and fiber-optic cabling. The term *fiber to the x* (FTTx) describes how far into the network fiber-optic cabling runs before a switch to copper cabling takes place. Both PON and Active Ethernet can use fiber-optic portion of the network, while xDSL is typically used on the copper portion. This means that a single fiber-optic strand may support multiple copper-based subscribers.

Increasing the use of fiber in the network increases cost but it also increases network access speed to each subscriber.



The following terms are used to describe the termination point of fiber-optic cable in a network:

- Fiber to the Premises (FTTP), Fiber to the Home (FTTH), Fiber to the Business (FTTB)—Fiber extends all the way to the subscriber. PON is most common for residential access, although Active Ethernet can be efficiently used in dense areas such as apartment complexes. Active Ethernet is more common for delivering services to businesses.
- Fiber to the Curb (FTTC)—Fiber extends most of the way (typically, 500 feet/150 meters or less) to the subscriber. Existing copper is used for the remaining distance to the subscriber.
- Fiber to the Node/Neighborhood (FTTN)—Fiber extends to within a few thousand feet of the subscriber and converted to xDSL for the remaining distance to the subscriber.
- Fiber to the Exchange (FTTE)—A typical central office-based xDSL implementation in which fiber is used to deliver traffic to the central office and xDSL is used on the existing local loop.

## Understanding BNG Support for Cascading DSLAM Deployments Over Bonded DSL Channels

Junos OS supports configuring and maintaining the access lines between access nodes and their ANCP subscribers using DSL access multiplexer as the broadband access technology for Copper-to-the-Building (CuTTB) and Fiber-to-the-Building (FTTB). When multiple subscribers share the same access line, the access line could be one of the following types:

- PON, Fiber-to-the-Building (FTTB)
- Bonded DSL Copper-To-The-Building (CTTB)

Starting in Junos OS Release 18.2R1, Passive Optical Network (PON) access technologies are supported with four levels of quality-of-service (QoS) scheduler hierarchy for residential subscribers in a BBE deployment. This feature extends the Access Node Control Protocol (ANCP) implementation to handle network configuration for residential customers that use PON as the broadband access technology for both CuTTB and FTTB. ANCP uses a statically controlled traffic-control profile on the interface-set for shaping at the subscriber level at the intermediate node to which the subscribers are connected. New DSL types are provided to support access line rate adjustment for the new access technologies.

A new RADIUS VSA, **Inner-Tag-Protocol-Id** 26-211 is introduced to fetch the inner VLAN Tag Protocol Identifier value for L2BSA subscribers to enable maintaining one dynamic profile instead of two separate dynamic profiles. A new Junos OS dynamic profile variable `$junos-inner-vlan-tag-protocol-id` allows a VLAN map's **inner-tag-protocol-id** to be set by RADIUS or a predefined default value provided in the configuration.

### Benefits of Cascading DSLAM Deployments Over Bonded DSL Channels

This feature is useful to support access network deployments where multiple subscribers share the same access line aggregated by an intermediate node between the access node and the home routing gateways. Another benefit is to conserve Layer 2 CoS nodes.


Typically a dummy Layer 2 node is created for each residential household, which could exhaust Layer 2 CoS resources. Therefore, network models using bonded DSL, G.Fast, and PON access models can conserve Layer 2 CoS nodes.

#### 4-Level Scheduler Hierarchy

Junos OS supports 4-Level QoS scheduler hierarchy minimally supporting residential and L2BSA access over Copper-to-the-Building (CTTB) or Fiber-to-the-Building access network deployments. The following QoS scheduler hierarchy levels are supported:

- Level 1 Port (Physical interface or AE)
- Level 2 Access Line (Logical interface set, represents a collection of subscribers sharing a given access line aggregated by an intermediate node)
- Level 3 Subscriber sessions
- Level 4 Queues (services)

**Figure 5: Scheduler Hierarchy**

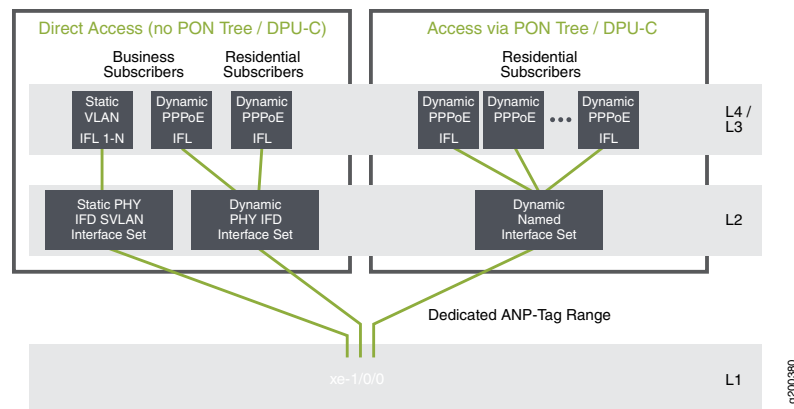

In [Figure 5 on page 42](#), residential and L2BSA access require only 4-level scheduler hierarchy. Business subscriber access is currently not supported and hence 4-level scheduler hierarchy is sufficient for CuTTB and PON services targeted to an apartment building.

#### Use Cases of Cascading DSLAM Deployments Over Bonded DSL Channels

Bonded DSL for copper to the building (CuTTB) introduces an intermediate node Distribution Point Unit-Copper (DPU-C) between the DSL access multiplexer (DSLAM) and a cluster of subscribers at the customer location. Shared access line deployment models may be of type Passive-Optical-Network (PON) or bonded DSL copper lines. Example intermediate nodes are listed below:

- DPU-C - bonded DSL for Copper-To-The-Building (CTTB)
- ONU - PON (Fiber-to-the-Building (FTTB))
- Hybrid PON and G.Fast

**Figure 6: Bonded DSL/CuTTB**

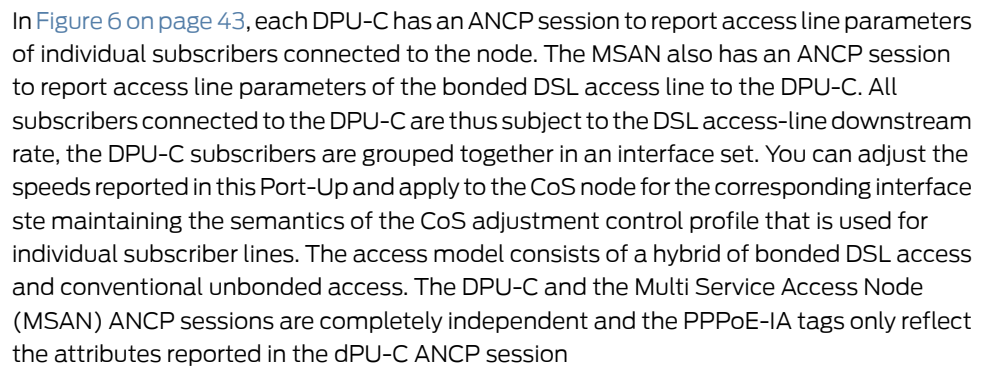


Figure 7: Hybrid PON + G.fast



In [Figure 7 on page 43](#), the OLT has an ANCP session with the BNG and proxies for all downstream native PON nodes. G.fast DSL subscribers are connected to an intermediate node, which has a PON connection to the intermediate ONU in front of the OLT.

A hybrid access network connects DSL based subscriber lines using both PON access and G.fast nodes with an intermediate node between the OLT and home gateways (HGs). Both businesses and residences are connected to the intermediate node, which is the PON leaf. Shaping is required both at the subscriber level and at the PON leaf level. The G.fast subscribers are associated with the intermediate ONU like a native PON subscriber. New DSL type TLVs are supported by the AN and their values are reported in the ANCP Port-Up for the corresponding subscriber access line. However, it is still not possible to distinguish between an intermediate node and a conventional connection for a given PPPoE session.

---

### Supported Features

- Support ANCP-based traffic shaping on dynamic ifsets.
- Preservation of PPPoE-IA and ANCP independence by CLI configuration for residential subscribers.
- New Juniper VSA, ERX-Inner-Vlan-Tag-Protocol-Id (4874-26-211) is supported to source the inner VLAN Tag Protocol Identifier value for L2BSA subscribers as an optimization to maintain two, separate dynamic profiles, one for TPID - 0x88a8 and one for 0x8100, and sourcing the desired value by returning 26-4874-174 (Client-profile-Name) in the Access-Accept.
- The following additional type values for the DSL type TLV are supported. All subscribers include these DSL type TLVs in the PPPoE PADR messages's PPPoE IA tags.
  - (8) G.fast
  - (9) VDSL2 Annex Q
  - (10) SDSL bonded
  - (11) VDSL2 bonded
  - (12) G.fast bonded
  - (13) VDSL2 Annex Q bonded

### Detection of Backhaul Line Identifiers and Autogeneration of Intermediate Node Interface Sets

You can configure the router to detect a logical intermediate node in an access network, where the node represents a DPU-C or PON tree to which a subscriber is attached in the access network. When configured, the router parses the ANCP Access-Aggregation-Circuit-ID-ASCII attribute (TLV 0x0003), received either in the ANCP Port Up message or PPPoE PADR IA tags. When the TLV string begins with the # character, the entire string is a backhaul line identifier. The same delimited string is reported in the TLV or IA for all subscribers connected to that DPU-C or PON.

The portion of the string after the # delimiter represents the logical intermediate node. It is used as the name of the dynamic interface set for the CoS Level 2 node that groups the subscribers using that intermediate node. This means that every PPPoE or VLAN

(L2BSA) logical interface with the same value for the attribute is a member of that interface set.



**NOTE:** The TLV value must match the requirements for interface set naming; it can include alphanumeric characters and the following special characters:

# % / = + - : ; @ . \_

This portion sets the value of the \$junos-aggregation-interface-set-name predefined variable in the dynamic profile. This value is used as the name of a CoS Level 2 interface set that groups the subscribers sharing that string. It overrides the predefined variable default, which uses the value of \$junos-phy-ifd-interface-set-name as the name of the interface set.

For example, if the value of the TLV string is #TEST-DPU-C-100, the value of the predefined variable and consequently the name of the interface set becomes TEST-DPU-C-100.



**NOTE:** The Access-Loop-Remote-ID (TLV (0x0002) is similarly parsed for the # character, but the resulting string is not used in the current release.



**NOTE:** Intermediate node detection is supported only for 4-level scheduler hierarchies, so business access is limited to conventional DSL access MPCs.

Before you begin, you must confirm that your existing access nodes or IAs are not already inserting strings that begin with the # character. Because this is a system-level configuration, parsing applies to all ANCP access nodes and PPPoE IAs globally. The # delimiter is not configurable. Parsing is disabled by default in case some providers use that character for some other purpose.

To enable parsing of the Access-Aggregation-Circuit-ID-ASCII and setting the interface set name:

1. Specify detection of hierarchical access networks and extraction of the node string.

```
[edit system access-line]
user@host# set hierarchical-access-network-detection
```

2. Configure the dynamic profile to use the Access-Aggregation-Circuit-ID-ASCII string for the interface set name.

```
[edit dynamic-profile interfaces]
user@host# set interface-set $junos-aggregation-interface-set-name
```

The following sample configuration shows a dynamic profile for L2BSA subscribers. Three things to note here are the following:

- A default value of \$junos-phy-ifd-interface-set-name is defined for the \$junos-aggregation-interface-set-name predefined variable.
- The name of the interface set is configured to be the value of \$junos-aggregation-interface-set-name.
- The CoS scheduler configuration specifies an interface named with the value of \$junos-aggregation-interface-set-name.

When **hierarchical-access-network-detection** is configured for the access lines, then the name of the Level 2 scheduler interface set is determined as follows:

- When TLV 0x0003 begins with #, then \$junos-aggregation-interface-set-name is the remainder of the string, excluding the initial #.
- TLV 0x0003 begins with any other character, then \$junos-aggregation-interface-set-name is the value of \$junos-phy-ifd-interface-set-name.

```
[edit dynamic-profiles L2BSA-subscriber]
predefined-variable-defaults {
  aggregation-interface-set-name phy-ifd-interface-set-name;
  cos-shaping-rate 1g;
  cos-scheduler-map schedmap_L2BSA;
  inner-vlan-tag-protocol-id 0x88a8;
}
routing-instances {
  "$junos-routing-instance" {
    interface "$junos-interface-name";
  }
}
interfaces {
  interface-set $junos-aggregation-interface-set-name {
    interface "$junos-interface-ifd-name" {
      unit "$junos-interface-unit";
    }
  }
  "$junos-interface-ifd-name" {
    unit "$junos-interface-unit" {
      encapsulation vlan-vpls;
      no-traps;
      vlan-id "$junos-vlan-id";
      input-vlan-map {
        swap-push;
        inner-tag-protocol-id "$junos-inner-vlan-tag-protocol-id";
        vlan-id "$junos-vlan-map-id";
        inner-vlan-id "$junos-inner-vlan-map-id";
      }
      output-vlan-map {
        pop-swap;
        inner-tag-protocol-id 0x8100;
      }
    }
  }
}
```

```
    }
    family vpls;
  }
}
}
class-of-service {
  traffic-control-profiles {
    L2BSAShaper {
      scheduler-map "$junos-cos-scheduler-map";
      shaping-rate "$junos-cos-shaping-rate" burst-size 17k;
      overhead-accounting frame-mode cell-mode-bytes 6;
    }
    L2iflsetShaper {
      shaping-rate 1G burst-size 17k;
    }
  }
}
interfaces {
  "$junos-interface-ifd-name" {
    unit "$junos-interface-unit" {
      output-traffic-control-profile L2BSAShaper;
      classifiers {
        ieee-802.1 L2BSA vlan-tag outer;
      }
      rewrite-rules {
        ieee-802.1 L2BSA vlan-tag outer;
      }
    }
  }
  interface-set "$junos-aggregation-interface-set-name" {
    output-traffic-control-profile L2iflsetShaper;
  }
}
}
```

Release History Table

Release	Description
18.4R1	Starting in Junos OS Release 18.4R1, the Layer 2 service support with the pseudowire service logical interfaces is extended to pseudowire service interfaces anchored over redundant logical tunnel interfaces as well.
17.1R1	Starting in Junos OS Release 17.1R1, the pseudowire logical tunnel interfaces support Ethernet VPLS, Ethernet bridge, VLAN VPLS, and VLAN bridge encapsulation next hops to exit Layer 2 traffic.

Related Documentation

- [Subscriber Management Overview](#)
- [MPLS Pseudowire Subscriber Logical Interfaces on page 273](#)
- [Juniper Networks VSAs Supported by the AAA Service Framework](#)

## High Availability for Subscriber Access Networks

---

This topic is a high-level overview of high availability for DHCP, L2TP, and PPP access networks.

- [Unified ISSU for High Availability in Subscriber Access Networks on page 48](#)
- [Verifying and Monitoring Subscriber Management Unified ISSU State on page 49](#)
- [Graceful Routing Engine Switchover for Subscriber Access Networks on page 49](#)
- [Minimize Traffic Loss Due to Stale Route Removal After a Graceful Routing Engine Switchover on page 51](#)

### Unified ISSU for High Availability in Subscriber Access Networks

A unified in-service software upgrade (unified ISSU) enables you to upgrade between two different Junos OS Releases with no disruption on the control plane and with minimal disruption of traffic. The routers preserves the active subscriber sessions and session services across the upgrade, so that they continue after the upgrade has completed.

The unified ISSU feature supports the PPPoE, DHCP, and L2TP access models for subscriber management. Unified ISSU support for the DHCP and L2TP access models was added in Junos OS Release 14.1.

- For static and dynamic PPPoE access, unified ISSU supports the following:
  - Terminated, non-tunneled PPPoE connections configured with static or dynamic PPP logical interfaces and static or dynamic underlying interfaces
  - Subscriber services on single-link PPP interfaces
  - Preservation of statistics for accounting, filter, and CoS on MPC/MIC interfaces



**NOTE:** Unified ISSU for the subscriber management PPPoE access model *does not support* Multilink Point-to-Point Protocol (MLPPP) bundle interfaces. MLPPP bundle interfaces require the use of an Adaptive Services PIC or Multiservices PIC to provide PPP subscriber services. These PICs do not support unified ISSU.

- For DHCP access, unified ISSU supports the following:
  - DHCPv4 local server, DHCPv4 relay, DHCPv6 local server, DHCPv6 relay, and DHCP relay proxy
  - Preservation of accounting, filter, and class-of-service (CoS) statistics for DHCP subscribers on MPC/MIC interfaces on MX Series routers
- For L2TP access, unified ISSU supports both the LAC and the LNS. When an upgrade is initiated, the LAC completes any L2TP negotiations that are in progress but rejects any new negotiations until the upgrade has completed. No new tunnels or sessions are established during the upgrade. Subscriber logouts are recorded during the upgrade and are completed after the upgrade has completed.



See *Getting Started with Unified In-Service Software Upgrade* for a description of the supported platforms and modules, CLI statements, and procedures you use to configure and initiate unified ISSU. You can use the **issu** flag with the **traceoptions** statement to trace subscriber management unified ISSU events. You can also use the **show system subscriber-management summary** command to display information about the unified ISSU state.

## Verifying and Monitoring Subscriber Management Unified ISSU State

**Purpose** Display the state of unified ISSU for subscriber management features.

**Action** The first example indicates that control plane quiescing as part of unified ISSU is not in progress (for example, unified ISSU has not been started, has already completed, or control plane quiescing has not started). The second example shows that unified ISSU is in progress and that a participating subscriber management daemon requires 198 seconds to quiesce the control plane.

```
user@host> show system subscriber-management summary
```

General:

Graceful Restart	Enabled
Mastership	Master
Database	Available
Chassisd ISSU State	IDLE
ISSU State	IDLE
ISSU Wait	0

```
user@host> show system subscriber-management summary
```

General:

Graceful Restart	Enabled
Mastership	Master
Database	Available
Chassisd ISSU State	DAEMON_ISSU_PREPARE
ISSU State	PREPARE
ISSU Wait	198

## Graceful Routing Engine Switchover for Subscriber Access Networks

The graceful Routing Engine switchover (GRES) feature in Junos OS enables a router with redundant Routing Engines to continue forwarding packets, even if one Routing Engine fails. GRES preserves interface and kernel information. Traffic is not interrupted. However, GRES does not preserve the control plane.

To enable GRES support on MX Series routers, include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level.

### DHCP

For MX Series routers, the extended DHCP local server and the DHCP relay agent applications both maintain the state of active DHCP client leases in the session database. The extended DHCP application can recover this state if the DHCP process fails or is

manually restarted, thus preventing the loss of active DHCP clients in either of these circumstances. However, the state of active DHCP client leases is lost if a power failure occurs or if the kernel stops operating (for example, when the router is reloaded) on a single Routing Engine.

You cannot disable graceful Routing Engine switchover support for the extended DHCP application when the router is configured to support graceful Routing Engine switchover.

For more information about using graceful Routing Engine switchover, see *Understanding Graceful Routing Engine Switchover*.

## L2TP

---

GRES is supported on MX Series routers acting as either the L2TP LAC or LNS. In the event that L2TP (jl2tpd, the L2TP universal edge process) restarts or that the router fails over from the active routing engine (RE) to the standby RE, L2TP GRES ensures that the following occurs:

- The LAC and the LNS recover destinations, tunnels, and sessions that were already established at the time of the failure or restart.
- The LAC and the LNS respond to tunnel keepalive requests received during the switchover for established tunnels, but do not generate any keepalives until the switchover is complete.
- The LAC and the LNS delete all the tunnels and sessions that are not in the Established state.
- The LAC and the LNS reject requests to create new tunnels and sessions.
- The LAC and the LNS send another disconnect notification to the peer for sessions and tunnels that are already in the Disconnecting state at the time of the failure or restart. For sessions and tunnels that were coming up at that time, the LAC and LNS send a disconnect notification to the peer.
- The LAC and the LNS restart timers for the full timeout period for recovered L2TP destinations, tunnels, and sessions.

If a graceful Routing Engine switchover (GRES) is triggered by an operational mode command, the state of aggregated services interfaces (ASIs) are not preserved. For example:

```
request interface <switchover | revert> asi-interface
```

However, if GRES is triggered by a CLI commit or FPC restart or crash, the backup Routing Engine updates the ASI state. For example:

```
set interface si-x/y/z disable  
commit
```

Or:

```
request chassis fpc restart
```

## Minimize Traffic Loss Due to Stale Route Removal After a Graceful Routing Engine Switchover

During a graceful Routing Engine switchover (GRES), access routes and access-internal routes for DHCP and PPP subscriber management can become stale. After the GRES, the router removes any such stale routes from the forwarding table. Some traffic is lost if the stale routes are removed before the routes are reinstalled.

In subscriber networks with graceful restart and routing protocols such as BGP and OSPF configured, the router purges any remaining stale access routes and access-internal routes as soon as the graceful restart operation completes, which can occur very soon after completion of the graceful Routing Engine switchover.

In subscriber networks with nonstop active routing (NSR) and routing protocols such as BGP and OSPF configured, the routing protocol process (rpd) immediately purges the stale access routes and access-internal routes that correspond to subscriber routes.

You can reduce the risk of this traffic loss by configuring the router to delay the removal of stale routes after a GRES. The delay period is a nonconfigurable 180 seconds (3 minutes). The router retains the stale routes for the duration of the period, which is long enough for the DHCP client process (jdhcpd), PPP client process (jpppd), or routing protocol process (rpd) to reinstall the access routes and access-internal routes before the router removes the stale routes from the forwarding table. The risk of traffic loss is minimized because the router always has available subscriber routes for DHCP subscribers and PPP subscribers.

To configure the router to delay removal (flushing) of access-routes and access-internal routes after a graceful Routing Engine switchover:

1. Specify that you want to configure subscriber management.

```
[edit system services]
user@host# edit subscriber-management
```

2. Configure the router to wait 180 seconds before removing access-routes and access-internal routes after a graceful Routing Engine switchover.

```
[edit system services subscriber-management]
user@host# set gres-route-flush-delay
```

### Release History Table

Release	Description
14.1	Unified ISSU support for the DHCP and L2TP access models was added in Junos OS Release 14.1.

### Related Documentation

- *Getting Started with Unified In-Service Software Upgrade*
- [Routes for DHCP and PPP Subscriber Access Networks on page 52](#)

## Routes for DHCP and PPP Subscriber Access Networks

---

- [Access and Access-Internal Routes for Subscriber Management on page 52](#)
- [Configuring Dynamic Access Routes for Subscriber Management on page 53](#)
- [Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers on page 55](#)
- [Suppressing DHCP Access, Access-Internal, and Destination Routes on page 56](#)
- [Preventing DHCP from Installing Access, Access-Internal, and Destination Routes by Default on page 56](#)
- [Verifying the Configuration of Access and Access-Internal Routes for DHCP and PPP Subscribers on page 57](#)

### Access and Access-Internal Routes for Subscriber Management

DHCP and PPP on the router use both access routes and access-internal routes to represent either the subscriber or the networks behind the attached router. An access route represents a network behind an attached router, and is set to a preference of 13. An access-internal route is a /32 route that represents a directly attached subscriber, and is set to a preference of 12.

Access routes typically are used to apply the values of the RADIUS Framed-Route attribute [22] for IPv4 routes and the Framed-IPv6-Route attribute [99] for IPv6 routes. A framed route consists of a prefix that represents a public network behind the CPE, a next-hop gateway, and optional route attributes consisting of a combination of metric, preference, and tag. The only mandatory component of the framed route is the prefix. The next-hop gateway can be specified explicitly in the framed route, as 0.0.0.0, ::0, or the subscriber's fixed address assigned by the Framed-IP-Address (8) or Framed-IPv6-Prefix (97) attribute (common practice for business subscribers). Alternatively, the absence of the gateway address implies address 0.0.0.0. The address 0.0.0.0 or ::0, whether implicit or explicitly configured, resolves to the subscriber's assigned address (host route). Consequently, the convention is that the next-hop gateway is the subscriber's IP address.

You can configure a dynamic profile to use predefined variables to dynamically configure access routes using the values specified in the RADIUS attribute. To configure access routes include the **access** stanza at the **[edit dynamic-profiles profile-name routing-options]** hierarchy level.

Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support. We recommend that you do not use access-internal routes in the dynamic profile configuration. If the RADIUS Framed-Route attribute (22) or Framed-IPv6-Route attribute [99] does not specify the next-hop gateway—as is common—the variable representing the next-hop, `$junos-framed-route-nexthop` or `$junos-framed-route-ipv6-nexthop`, automatically resolves to the subscriber's IP address. If you configure the **access-internal** statement in the dynamic profile, it is ignored.

## Configuring Dynamic Access Routes for Subscriber Management

You can dynamically configure access routes for DHCP and PPP subscribers based on the values specified in the following RADIUS attributes:

- For IPv4 access routes, use the variable, **\$junos-framed-route-ip-address-prefix**. The route prefix variable is dynamically replaced with the value in Framed-Route RADIUS attribute [22].
- For IPv6 access routes, use the variable, **\$junos-framed-route-ipv6-address-prefix**. The variable is dynamically replaced with the value in Framed-IPv6-Route RADIUS attribute [99].

To dynamically configure access routes:

1. Configure the route prefix for the access route as a variable.

For IPv4:

```
[edit dynamic-profiles profile-name routing-options]
user@host# edit access route $junos-framed-route-ip-address-prefix
```

For IPv6:

```
[edit dynamic-profiles profile-name routing-options]
user@host# edit access route $junos-framed-route-ipv6-address-prefix
```

2. Configure the next-hop address as a variable.

For IPv4:

```
[edit dynamic-profiles profile-name routing-options access route
"$junos-framed-route-ip-address-prefix"]
user@host# set next-hop $junos-framed-route-nexthop
```

For IPv6:

```
[edit dynamic-profiles profile-name routing-options access route
"$junos-framed-route-ipv6-address-prefix"]
user@host# set next-hop $junos-framed-route-ipv6-nexthop
```

3. Configure the metric as a variable.

For IPv4:

```
[edit dynamic-profiles profile-name routing-options access route
"$junos-framed-route-ip-address-prefix"]
user@host# set metric $junos-framed-route-cost
```

For IPv6:

```
[edit dynamic-profiles profile-name routing-options access route  
"$junos-framed-route-ip-address-prefix"]  
user@host# set metric $junos-framed-route-ipv6-cost
```

4. Configure the preference as a variable.

For IPv4:

```
[edit dynamic-profiles profile-name routing-options access route  
"$junos-framed-route-ip-address-prefix"]  
user@host# set preference $junos-framed-route-distance
```

For IPv6:

```
[edit dynamic-profiles profile-name routing-options access route  
"$junos-framed-route-ip-address-prefix"]  
user@host# set preference $junos-framed-route-ipv6-distance
```

5. Configure the tag as a variable.

IPv4:

```
[edit dynamic-profiles profile-name routing-options access route  
"$junos-framed-route-ip-address-prefix"]  
user@host# set tag $junos-framed-route-tag
```

IPv6:

```
[edit dynamic-profiles profile-name routing-options access route  
"$junos-framed-route-ip-address-prefix"]  
user@host# set tag $junos-framed-route-ipv6-tag
```

Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support. We recommend that you do not use access-internal routes. If the RADIUS Framed-Route attribute (22) or Framed-IPv6-Route attribute [99] does not specify the next-hop gateway—as is common—the variable representing the next-hop, `$junos-framed-route-nexthop`, is automatically resolved. If you configure the **access-internal** statement in the dynamic profile, it is ignored.

## Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers

You can dynamically configure access-internal routes. In releases earlier than Junos OS 15.1, this configuration is optional; if you include it, the values from the access-internal variables are used if the next-hop value is missing in the relevant RADIUS attribute—Framed-Route [22] for IPv4 and Framed-IPv6-Route [99] for IPv6.

Starting in Junos OS Release 15.1R1, we no longer recommend that you always include the **access-internal** stanza in the dynamic-profile when the **access** stanza is present for framed route support. The subscriber's address is stored in the session database entry before the dynamic profile installs the framed route, enabling the next-hop address to be resolved when it is not explicitly specified in the Framed-Route RADIUS attribute (22) or Framed-IPv6-Route attribute [99].

DHCP subscriber interfaces require the qualified-next-hop to identify the interface and the MAC address. For PPP subscriber interfaces, you do not need to specify the MAC address for access-internal routes.

To dynamically configure access-internal routes for DHCP or PPP subscribers:

1. Specify that you want to configure the access-internal route.

```
user@host# edit dynamic-profiles profile-name routing-options
```

2. Configure the IP address and the qualified next-hop address as variables.

```
[edit dynamic-profiles profile-name routing-options]
user@host# set access-internal route $junos-subscriber-ip-address qualified-next-hop
$junos-interface-name
```



**NOTE:** The variable used for qualified-next-hop is \$junos-interface-name.

3. (DHCP subscriber interfaces only) Configure the MAC address for the qualified next-hop as a variable.

```
[edit dynamic-profiles profile-name routing-options access-internal route
$junos-subscriber-ip-address qualified-next-hop $junos-underlying-interface]
user@host# set mac-address $junos-subscriber-mac-address
```

## Suppressing DHCP Access, Access-Internal, and Destination Routes

During the DHCP client binding operation, the DHCP process adds route information for the DHCP sessions by default. The DHCP process adds access-internal and destination routes for DHCPv4 sessions, and access-internal and access routes for DHCPv6 sessions. In some scenarios, you might want to override the default behavior and prevent DHCP from automatically installing the route information. For example, DHCP relay installs destination (host) routes by default—this action is required in certain configurations to enable address renewals from the DHCP server to work properly. However, the default installation of destination routes might cause a conflict when you configure DHCP relay with static subscriber interfaces. To avoid such configuration conflicts you can override the default behavior and prevent DHCP relay from installing the routes.



**NOTE:** You cannot suppress access-internal routes when the subscriber is configured with both IA\_NA and IA\_PD addresses over IP demux interfaces—the IA\_PD route relies on the IA\_NA route for next hop connectivity.

You can configure both DHCP local server and DHCP relay agent to override the default route installation behavior, and you can specify the override for both DHCPv4 and DHCPv6 sessions. You can override the route installation globally or for named interface groups. For DHCPv4 you can override the installation of destination routes only or access-internal routes (the access-internal option prevents installation of both destination and access-internal routes). For DHCPv6 you can specify access routes, access-internal routes, or both.

## Preventing DHCP from Installing Access, Access-Internal, and Destination Routes by Default

You can configure both DHCP local server and DHCP relay agent to override the default installation of access, access-internal, and destination routes. For DHCPv4 you can override the installation of destination routes only or access-internal routes (the access-internal option prevents installation of both destination and access-internal routes). For DHCPv6 you can specify access routes, access-internal routes, or both. You can configure the override globally or for named interface groups.



**NOTE:** You cannot suppress access-internal routes when the subscriber is configured with both IA\_NA and IA\_PD addresses over IP demux interfaces—the IA\_PD route relies on the IA\_NA route for next hop connectivity.



**NOTE:** The `no-arp` statement is deprecated and the function is replaced by the `route-suppression` statement.

To configure route suppression and prevent DHCP from installing specific types of routes:

- For DHCP local server route suppression (for example, a global configuration):



```
[edit system services dhcp-local-server]
user@host# set route-suppression access-internal
```

- For DHCP relay (for example, a group-specific configuration):

```
[edit forwarding-options dhcp-relay group southeast]
user@host# set route-suppression destination
```

- For DHCPv6 local server (for example, a group-specific configuration):

```
[edit system services dhcp-local-server group southern3]
user@host# set dhcpv6 route-suppression access access-internal
```

- For DHCPv6 relay (for example, a global configuration):

```
[edit forwarding-options dhcp-relay]
user@host# set dhcpv6 route-suppression access
```

## Verifying the Configuration of Access and Access-Internal Routes for DHCP and PPP Subscribers

**Purpose** View configuration information for access routes and access-internal routes on DHCP and PPP subscribers. The access-internal routes are those that are automatically installed when a client profile is instantiated.

- Action**
- To display extensive information about access routes and access-internal routes:

```
user@host>show route extensive
```

- To display the configuration for access routes:

```
user@host>show route protocol access
```

- To display the configuration for access-internal routes:

```
user@host> show route protocol access-internal
```

**Release History Table**

Release	Description
15.1R1	Starting in Junos OS Release 15.1R1, we no longer recommend that you always include the <b>access-internal</b> stanza in the dynamic-profile when the <b>access</b> stanza is present for framed route support.
15.1	Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support.
15.1	Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support.

**Related  
Documentation**

- *RADIUS IETF Attributes Supported by the AAA Service Framework*
- *DHCP Overview*
- *DHCPv6 Local Server*
- *DHCPv6 Relay Agent DHCPv6 Relay Agent Overview*

## CHAPTER 2

# DHCP Subscriber Access Networks

- [DHCP Subscriber Access Networks Overview on page 59](#)
- [DHCP Snooping for Network Security on page 66](#)
- [DHCPv4 Duplicate Client Management on page 85](#)
- [DHCPv6 Duplicate Client Management on page 90](#)

## DHCP Subscriber Access Networks Overview

---

- [DHCP and Subscriber Management Overview on page 59](#)
- [Subscriber Access Operation Flow Using DHCP Relay on page 60](#)
- [Defining Various Levels of Services for DHCP Subscribers on page 61](#)
- [Example: Configuring a Tiered Service Profile for Subscriber Access on page 62](#)

## DHCP and Subscriber Management Overview

You use DHCP in broadband access networks to provide IP address configuration and service provisioning. DHCP, historically a popular protocol in LANs, works well with Ethernet connectivity and is becoming increasingly popular in broadband networks as a simple, scalable solution for assigning IP addresses to subscriber home PCs, set-top boxes (STBs), and other devices.

Junos OS subscriber management supports the following DHCP allocation models:

- DHCP Local Server
- DHCP Relay
- DHCP Relay Proxy

DHCP uses address assignment pools from which to allocate subscriber addresses. Address-assignment pools support both dynamic and static address assignment:

- Dynamic address assignment—A subscriber is automatically assigned an address from the address-assignment pool.
- Static address assignment—Addresses are reserved and always used by a particular subscriber.



**NOTE:** Addresses that are reserved for static assignment are removed from the dynamic address pool and cannot be assigned to other clients.

---

### Extended DHCP Local Server and Subscriber Management Overview

You can enable the services router to function as an extended DHCP local server. As an extended DHCP local server the services router, and not an external DHCP server, provides an IP address and other configuration information in response to a client request. The extended DHCP local server supports the use of external AAA authentication services, such as RADIUS, to authenticate DHCP clients.

---

### Extended DHCP Relay and Subscriber Management Overview

You can configure extended DHCP relay options on the router and enable the router to function as a DHCP relay agent. A DHCP relay agent forwards DHCP request and reply packets between a DHCP client and a DHCP server. You can use DHCP relay in carrier edge applications such as video and IPTV to obtain configuration parameters, including an IP address, for your subscribers. The extended DHCP relay agent supports the use of external AAA authentication services, such as RADIUS, to authenticate DHCP clients.

---

### DHCP Relay Proxy and Subscriber Management Overview


DHCP relay proxy mode is an enhancement to extended DHCP relay. DHCP relay proxy supports all DHCP relay features while providing additional features and benefits. Except for the ability to add DHCP relay agent options and the gateway address (giaddr) to DHCP packets, DHCP relay is transparent to DHCP clients and DHCP servers, and simply forwards messages between DHCP clients and servers. When you configure DHCP relay to operate in proxy mode, the relay is no longer transparent. In proxy mode, DHCP relay conceals DHCP server details from DHCP clients, which interact with a DHCP relay in proxy mode as though it is the DHCP server. For DHCP servers there is no change, because proxy mode has no effect on how the DHCP server interacts with the DHCP relay.

## Subscriber Access Operation Flow Using DHCP Relay

The subscriber management feature requires that a subscriber (for example, a DHCP client) send a discover message to the router interface to initialize dynamic configuration of that interface.

Figure 8 on page 61 shows the flow of operations that occurs when the router is using DHCP relay to enable access for a subscriber.

Figure 8: Subscriber Access Operation Flow

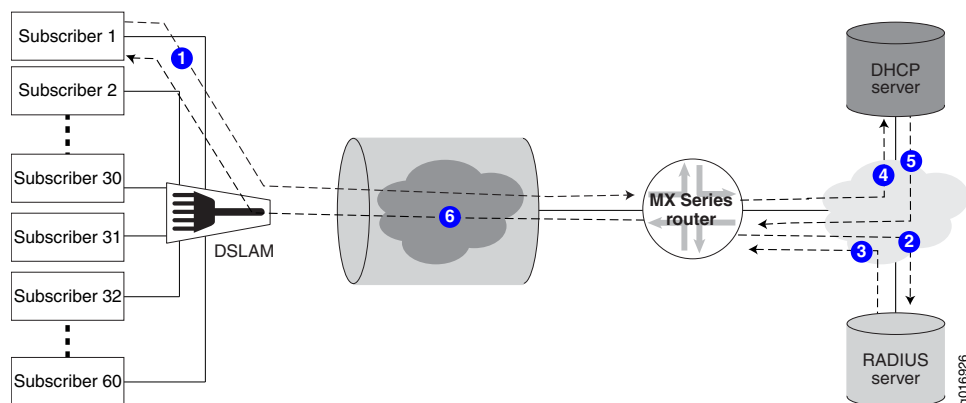

The following general sequence occurs during access configuration for a DHCP client:

1. The client issues a DHCP discover message.
2. The router issues an authorization request to the RADIUS server.
3. The RADIUS server issues an authorization response to the router.
4. The router passes the DHCP discover message through to the DHCP server.
5. The DHCP server issues an IP address for the client.
6. The router DHCP component sends an acknowledgement back to the client.

The subscriber now has access to the network and the authorized service.

## Defining Various Levels of Services for DHCP Subscribers

This topic discusses how to create dynamic profiles to define various levels of service for DHCP clients.

Before you configure dynamic profiles for client services:

1. Create a basic dynamic profile.  
*See [Configuring a Basic Dynamic Profile](#).*
2. Configure a dynamic profile that enables DHCP clients access to the network.  
*See [Configuring Dynamic DHCP Client Access to a Multicast Network](#)*



**NOTE:** You can create a basic dynamic profile that contains both access configuration and some level of basic service.

3. Ensure that the router is configured to enable communication between the client and the RADIUS server.

*See [Specifying the Authentication and Accounting Methods for Subscriber Access](#).*

4. Configure all RADIUS values that you want the profiles to use when validating DHCP clients.

*See [RADIUS Servers and Parameters for Subscriber Access](#)*

To configure an initial client access dynamic profile:

1. Access the desired service profile.

```
user@host# set dynamic-profiles basic-service-profile
```

2. (Optional) Define any IGMP protocols values as described for creating a basic access profile to combine a basic service with access in a profile.

*See [Configuring Dynamic DHCP Client Access to a Multicast Network](#).*

3. (Optional) Specify any filters for the interface.

*See [Dynamically Attaching Statically Created Filters for Any Interface Type](#), [Dynamically Attaching Statically Created Filters for a Specific Interface Family Type](#), or [Dynamically Attaching Filters Using RADIUS Variables](#).*

4. Define any CoS values for the service level you want this profile to configure on the interface.

## Example: Configuring a Tiered Service Profile for Subscriber Access

This example shows how to configure a tiered service profile for subscribers.

The profile contains three services:

- Gold—Subscribers that pay for this service are allocated 10M bandwidth for data, voice, and video services.
- Silver—Subscribers that pay for this service are allocated 5M bandwidth for data, voice, and video services.
- Bronze—Subscribers that pay for this service are allocated 1M bandwidth for the data service only.

Each subscriber is allocated a VLAN that is created statically. Subscribers log in using DHCP and authenticate using RADIUS. The subscribers can migrate from one service to another when they change subscriptions.

To configure a profile for a tiered service:

1. Configure the VLAN interfaces associated with each subscriber. Enable hierarchical scheduling for the interface.

```

interfaces {
  ge-2/0/0 {
    description subscribers;
    hierarchical-scheduler;
    stacked-vlan-tagging;
    unit 1 {
      vlan-tags outer 100 inner 100;
      family inet {
        unnumbered-address lo0.0 preferred-source-address 127.0.0.2;
      }
    }
    unit 2 {
      family inet {
        vlan-tags outer 101 inner 101;
        unnumbered-address lo0.0 preferred-source-address 127.0.0.2;
      }
    }
    unit 3 {
      vlan-tags outer 102 inner 102;
      family inet {
        unnumbered-address lo0.0 preferred-source-address 127.0.0.2;
      }
    }
  }
}

```

2. Configure the static CoS parameters.

In this example, each offering (video, voice, and data) is assigned a queue, and each service (Gold, Silver, and Bronze) is assigned a scheduler.

```

class-of-service {
  forwarding-classes {
    queue 0 data;
    queue 1 voice;
    queue 2 video;
  }
  scheduler-maps {
    bronze_service_smap {
      forwarding-class data scheduler data_sch;
    }
    silver_service_smap {
      forwarding-class data scheduler data_sch;
      forwarding-class voice scheduler silver_voice_sch;
      forwarding-class video scheduler silver_video_sch;
    }
    gold_service_smap {
      forwarding-class data scheduler data_sch;
      forwarding-class voice scheduler gold_voice_sch;
    }
  }
}

```

```
        forwarding-class video scheduler gold_video_sch;
    }
}
schedulers {
    data_sch {
        transmit-rate percent 20;
        buffer-size remainder;
        priority low;
    }
    silver_voice_sch {
        transmit-rate percent 30;
        buffer-size remainder;
        priority high;
    }
    silver_video_sch {
        transmit-rate percent 30;
        buffer-size remainder;
        priority medium;
    }
    gold_voice_sch {
        transmit-rate percent 40;
        buffer-size remainder;
        priority high;
    }
    gold_video_sch {
        transmit-rate percent 40;
        buffer-size remainder;
        priority medium;
    }
}
}
```

3. Configure the dynamic profile for the service.

The scheduler maps configured for each service are referenced in the dynamic profile.

```
dynamic-profiles {
    subscriber_profile {
        interfaces {
            "$junos-interface-ifd-name" {
                unit "$junos-underlying-interface-unit" {
                    family inet;
                }
            }
        }
        class-of-service {
            traffic-control-profiles {
                subscriber_tcp {
                    scheduler-map $smap;
                    shaping-rate $shaping-rate;
                    guaranteed-rate $guaranteed-rate;
                    delay-buffer-rate $delay-buffer-rate;
                }
            }
        }
    }
}
```



```

interfaces {
  "$junos-interface-ifd-name" {
    unit "$junos-underlying-interface-unit" {
      output-traffic-control-profile subscriber_tcp;
    }
  }
}

```

#### 4. Configure access for the subscribers.

The DHCP relay agent forwards DHCP request and reply packets between a DHCP client and a DHCP server. You use DHCP relay to obtain configuration parameters, including an IP address, for subscribers. In this example, one DHCP server, address 198.51.100.1, can be used by subscribers.

The DHCP relay configuration is attached to an active server group named `service_provider_group`.

The subscribers are grouped together within the `subscriber_group`, and identifies characteristics such as authentication, username info, and the associated interfaces for the group members. In this example, it also identifies the active server group and the dynamic interface that is used by the subscribers in the group.

```

forwarding-options {
  dhcp-relay {
    server-group {
      service_provider_group {
        198.51.100.1;
      }
    }
    group subscriber_group {
      active-server-group service_provider_group;
      dynamic-profile subscriber_profile;
      interface ge-2/0/0.1;
      interface ge-2/0/0.2;
      interface ge-2/0/0.3;
    }
  }
}

```

#### Related Documentation

- *DHCP Overview*
- *DHCPv6 Local Server*
- *DHCPv6 Relay Agent*
- *Address-Assignment Pools for Subscriber Management*
- *Introduction to Subscriber Management*
- *Dynamic Profiles for Subscriber Management*
- *CoS for Subscriber Access Overview*

## DHCP Snooping for Network Security

---

- [DHCP Snooping Support on page 66](#)
- [Configuring DHCP Snooped Packets Forwarding Support for DHCP Local Server on page 67](#)
- [Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent on page 69](#)
- [Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent on page 74](#)
- [Disabling DHCP Snooping Filters on page 76](#)
- [Example: Configuring DHCP Snooping Support for DHCP Relay Agent on page 77](#)
- [Example: Enabling DHCP Snooping Support for DHCPv6 Relay Agent on page 79](#)
- [Preventing DHCP Spoofing on page 84](#)

### DHCP Snooping Support

DHCP snooping provides DHCP security by identifying incoming DHCP packets. In the default DHCP snooping configuration, all traffic is snooped. You can optionally use the **forward-snooped-clients** statement to evaluate the snooped traffic and to determine if the traffic is forwarded or dropped, based on whether or not the interface is configured as part of a group.

In Junos OS, DHCP snooping is enabled in a routing instance when you configure either the **dhcp-relay** statement at the **[edit forwarding-options]** hierarchy level, or the **dhcp-local-server** statement at the **[edit system services]** hierarchy level in that routing instance. The router discards snooped packets by default if there is no subscriber associated with the packet. To enable normal processing of snooped packets, you must explicitly configure the **allow-snooped-clients** statement at the **[edit forwarding-options dhcp-relay]** hierarchy level.

You can configure DHCP snooping support for a specific routing instance for the following:

- DHCPv4 relay agent—Override the router's (or switch's) default snooping configuration and specify that DHCP snooping is enabled or disabled globally, for a named group of interfaces, or for a specific interface within a named group.

In a separate procedure, you can set a global configuration to specify whether the DHCPv4 relay agent forwards or drops snooped packets for all interfaces, only configured interfaces, or only nonconfigured interfaces. The router also uses the global DHCP relay agent snooping configuration to determine whether to forward or drop snooped BOOTREPLY packets. A renew request may be unicast directly to the DHCP server. This is a BOOTPREQUEST packet and is snooped.

- DHCPv6 relay agent—As you can with snooping support for the DHCPv4 relay agent, you can override the default DHCPv6 relay agent snooping configuration on the router to explicitly enable or disable snooping support globally, for a named group of interfaces, or for a specific interface with a named group of interfaces.

In multi-relay topologies where more than one DHCPv6 relay agent is between the DHCPv6 client and the DHCPv6 server, snooping enables intervening DHCPv6 relay agents between the client and the server to correctly receive and process the unicast traffic from the client and forward it to the server. The DHCPv6 relay agent snoops incoming unicast DHCPv6 packets by setting up a filter with UDP port 547 (the DHCPv6 UDP server port) on a per-forwarding table basis. The DHCPv6 relay agent then processes the packets intercepted by the filter and forwards the packets to the DHCPv6 server.

Unlike the DHCPv4 relay agent, the DHCPv6 relay agent does not support global configuration of forwarding support for DHCPv6 snooped packets.

- DHCP local server—Configure whether DHCP local server forwards or drops snooped packets for all interfaces, only configured interfaces, or only nonconfigured interfaces.
- You can also disable snooping filters. In the preceding configurations, all DHCP traffic is forwarded to the slower routing plane of the routing instance before it is either forwarded or dropped. Disabling snooping filters causes DHCP traffic that can be forwarded directly from the faster hardware control plane to bypass the routing control plane.

- See Also**
- [Configuring DHCP Snooped Packets Forwarding Support for DHCP Local Server on page 67](#)
  - [Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent on page 69](#)
  - [Disabling DHCP Snooping Filters on page 76](#)
  - [Example: Enabling DHCP Snooping Support for DHCPv6 Relay Agent on page 79](#)

## Configuring DHCP Snooped Packets Forwarding Support for DHCP Local Server

You can configure how DHCP local server handles DHCP snooped packets. Depending on the configuration, DHCP local server either forwards or drops the snooped packets it receives.

[Table 4 on page 68](#) indicates the action the router takes for DHCP local server snooped packets.



**NOTE:** Configured interfaces are those interfaces that have been configured with the `group` statement in the `[edit system services dhcp-local-server]` hierarchy. Non-configured interfaces are those that are in the logical system/routing instance but have not been configured by the `group` statement.

Table 4: Actions for DHCP Local Server Snooped Packets

forward-snooped-clients Configuration	Action on Configured Interfaces	Action on Non-Configured Interfaces
forward-snooped-clients not configured	dropped	dropped
all-interfaces	forwarded	forwarded
configured-interfaces	forwarded	dropped
non-configured-interfaces	dropped	forwarded

To configure DHCP snooped packet forwarding for DHCP local server:

1. Specify that you want to configure DHCP local server.

```
[edit]
user@host# edit system services dhcp-local-server
```

2. Enable DHCP snooped packet forwarding for DHCP local server.

```
[edit system services dhcp-local-server]
user@host# edit forward-snooped-clients
```

3. Specify the interfaces that are supported for snooped packet forwarding.

```
[edit system services dhcp-local-server forward-snooped-clients]
user@host# set (all-interfaces | configured-interfaces | non-configured-interfaces)
```

For example, to configure DHCP local server to forward DHCP snooped packets on only configured interfaces:

```
[edit]
system {
  services {
    dhcp-local-server {
      forward-snooped-clients configured-interfaces;
    }
  }
}
```

**See Also** • *DHCP Snooping Support*

## Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent

DHCP relay agent uses a two-part configuration to determine how to handle DHCP snooped packets. This topic describes the first procedure, in which you enable or disable snooping support for DHCP relay agent and, optionally, override the default snooping configuration.

The second procedure, which applies only to DHCPv4 relay agent, is described in *Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent*, and configures the forwarding action for snooped clients, which specifies whether DHCP relay agent forwards or drops snooped traffic.

You can enable or disable DHCP globally for DHCP relay, for a group of interfaces, or for a specific interface in a group.

By default, DHCP snooping is disabled for DHCP relay. To enable or disable DHCP snooping support globally:

1. Specify that you want to configure DHCP relay agent.

- For DHCP relay agent:

```
[edit]
user@host# edit forwarding-options dhcp-relay
```

- For DHCPv6 relay agent:

```
[edit]
user@host# edit forwarding-options dhcp-relay dhcpv6
```

2. Specify that you want to override the default configuration.

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay]
user@host# edit overrides
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# edit overrides
```

3. Enable or disable DHCP snooping support.

- To enable DHCP snooping:

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay overrides]
user@host# set allow-snooped-clients
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 overrides]
```

```
user@host# set allow-snooped-clients
```

- To disable DHCP snooping:
  - For DHCP relay agent:

```
[edit forwarding-options dhcp-relay overrides]  
user@host# set no-allow-snooped-clients
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 overrides]  
user@host# set no-allow-snooped-clients
```

For example, to enable global DHCP snooping support :

```
forwarding-options {  
  dhcp-relay {  
    overrides {  
      allow-snooped-clients;  
    }  
  }  
}
```

To enable or disable DHCP snooping support for a group of interfaces:

1. Specify that you want to configure DHCP relay agent.

- For DHCP relay agent:

```
[edit]  
user@host# edit forwarding-options dhcp-relay
```

- For DHCPv6 relay agent:

```
[edit]  
user@host# edit forwarding-options dhcp-relay dhcpv6
```

2. Specify the named group.

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay]  
user@host# edit group group-name
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6]  
user@host# edit group group-name
```

3. Specify that you want to override the default configuration.

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay group group-name]
user@host# edit overrides
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name]
user@host# edit overrides
```

#### 4. Enable or disable DHCP snooping support.

- To enable DHCP snooping:
  - For DHCP relay agent:

```
[edit forwarding-options dhcp-relay group group-name overrides]
user@host# set allow-snooped-clients
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name overrides]
user@host# set allow-snooped-clients
```

- To disable DHCP snooping:
  - For DHCP relay agent:

```
[edit forwarding-options dhcp-relay group group-name overrides]
user@host# set no-allow-snooped-clients
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name overrides]
user@host# set no-allow-snooped-clients
```

For example, to enable DHCP snooping support on all interfaces in group **boston**:

```
forwarding-options {
  dhcp-relay {
    group boston {
      overrides {
        allow-snooped-clients;
      }
    }
  }
}
```

To enable or disable DHCP snooping support on a specific interface:

1. Specify that you want to configure DHCP relay agent.

- For DHCP relay agent:

```
[edit]
user@host# edit forwarding-options dhcp-relay
```

- For DHCPv6 relay agent:

```
[edit]
user@host# edit forwarding-options dhcp-relay dhcpv6
```

2. Specify the named group containing the interface.

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay]
user@host# edit group group-name
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# edit group group-name
```

3. Specify the interface for which you want to configure DHCP snooping.

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay group group-name]
user@host# edit interface interface-name
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name]
user@host# edit interface interface-name
```

4. Specify that you want to override the default configuration on the interface.

- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay group group-name interface interface-name]
user@host# edit overrides
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name interface
interface-name]
user@host# edit overrides
```

5. Enable or disable DHCP snooping support.

- To enable DHCP snooping:
  - For DHCP relay agent:



```
[edit forwarding-options dhcp-relay group group-name interface interface-name
overrides]
user@host# set allow-snooped-clients
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name interface
interface-name overrides]
user@host# set allow-snooped-clients
```

- To disable DHCP snooping:
- For DHCP relay agent:

```
[edit forwarding-options dhcp-relay group group-name interface interface-name
overrides]
user@host# set no-allow-snooped-clients
```

- For DHCPv6 relay agent:

```
[edit forwarding-options dhcp-relay dhcpv6 group group-name interface
interface-name overrides]
user@host# set no-allow-snooped-clients
```

For example, to disable DHCP snooping support on interface **ge-2/1/8.0** in group **boston**:

```
forwarding-options {
  dhcp-relay {
    group boston {
      interface ge-2/1/8.0 {
        overrides {
          no-allow-snooped-clients;
        }
      }
    }
  }
}
```

To enable DHCPv6 snooping support on interface **ge-3/2/1.1** in group **sunnyvale**:

```
forwarding-options {
  dhcp-relay {
    dhcpv6 {
      group sunnyvale {
        interface ge-3/2/1.1 {
          overrides {
            allow-snooped-clients;
          }
        }
      }
    }
  }
}
```

- See Also**
- [DHCP Snooping Support](#)
  - [Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent](#)
  - [Example: Configuring DHCP Snooping Support for DHCP Relay Agent on page 77](#)
  - [Overriding the Default DHCP Relay Configuration Settings](#)

## Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent

You can configure how DHCP relay agent handles DHCP snooped packets. Depending on the configuration, DHCP relay agent either forwards or drops the snooped packets it receives.

DHCP relay uses a two-part configuration to determine how to handle DHCP snooped packets. This topic describes how you use the [forward-snooped-clients](#) statement to manage whether DHCP relay agent forwards or drops snooped packets, depending on the type of interface on which the packets are snooped. In the other part of the DHCP relay agent snooping configuration, which is described in [“Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent” on page 69](#), you enable or disable the DHCP relay snooping feature.

[Table 5 on page 74](#) shows the action the router or switch takes on snooped packets when DHCP snooping is enabled by the [allow-snooped-clients](#) statement. [Table 6 on page 75](#) shows the action the router (or switch) takes on snooped packets when DHCP snooping is disabled by the [no-allow-snooped-clients](#) statement.

The router or switch also uses the configuration of the DHCP relay agent forwarding support to determine how to handle snooped BOOTREPLY packets. [Table 7 on page 75](#) shows the action the router (or switch) takes for the snooped BOOTREPLY packets.



**NOTE:** Configured interfaces have been configured with the `group` statement in the `[edit forwarding-options dhcp-relay]` hierarchy. Non-configured interfaces are in the logical system/routing instance but have not been configured by the `group` statement.

**Table 5: Actions for DHCP Relay Agent Snooped Packets When DHCP Snooping Is Enabled**

forward-snooped-clients Configuration	Action on Configured Interfaces	Action on Non-Configured Interfaces
forward-snooped-clients not configured	snooped packets result in subscriber (DHCP client) creation	dropped
all-interfaces	forwarded	forwarded
configured-interfaces	forwarded	dropped

*Table 5: Actions for DHCP Relay Agent Snooped Packets When DHCP Snooping Is Enabled (continued)*

forward-snooped-clients Configuration	Action on Configured Interfaces	Action on Non-Configured Interfaces
non-configured-interfaces	snooped packets result in subscriber (DHCP client) creation	forwarded

*Table 6: Actions for DHCP Relay Agent Snooped Packets When DHCP Snooping Is Disabled*

forward-snooped-clients Configuration	Action on Configured Interfaces	Action on Non-Configured Interfaces
forward-snooped-clients not configured	dropped	dropped
all-interfaces	dropped	forwarded
configured-interfaces	dropped	dropped
non-configured-interfaces	dropped	forwarded

*Table 7: Actions for Snooped BOOTREPLY Packets*

forward-snooped-clients Configuration	Action
forward-snooped-clients not configured	snooped <b>BOOTREPLY</b> packets dropped if client is not found
forward-snooped-clients all configurations	snooped <b>BOOTREPLY</b> packets forwarded if client is not found

To configure DHCP snooped packet forwarding and BOOTREPLY snooped packet forwarding for DHCP relay agent:

1. Specify that you want to configure DHCP relay agent.

```
[edit]
user@host# edit forwarding-options dhcp-relay
```

2. Enable DHCP snooped packet forwarding.

```
[edit forwarding-options dhcp-relay]
user@host# edit forward-snooped-clients
```

3. Specify the interfaces that are supported for snooped packet forwarding.

```
[edit forwarding-options dhcp-relay forward-snooped-clients]
user@host# set (all-interfaces | configured-interfaces | non-configured-interfaces)
```

For example, to configure DHCP relay agent to forward DHCP snooped packets on only configured interfaces:

```
[edit]
forwarding-options {
  dhcp-relay {
    forward-snooped-clients configured-interfaces;
  }
}
```

**See Also** • [Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent on page 69](#)

## Disabling DHCP Snooping Filters

DHCP snooping provides DHCP security by identifying incoming DHCP packets. In the default DHCP snooping configuration, all traffic is snooped. You can optionally use the **forward-snooped-clients** statement to evaluate the snooped traffic and to determine whether the traffic is forwarded or dropped, based on whether or not the interface is configured as part of a group.

In both the default configuration and in configurations using the **forward-snooped-clients** statement, all DHCP traffic is forwarded from the hardware control plane to the routing plane of the routing instance to ensure that all DHCP packets are intercepted. In certain topologies, such as a Metropolitan Routing Ring topology, forwarding all DHCP traffic to the control plane can result in excessive traffic. The **no-snoop** configuration statement disables the snooping filter for DHCP traffic that can be directly forwarded on the hardware control plane, such as Layer 3 unicast packets with a valid route, causing those DHCP packets to bypass the slower routing plane. You can disable DHCP snooping filters starting in Junos OS Release 15.1R2.

To disable DHCP snooping filters on the DHCP local server:

1. Specify that you want to configure DHCP local server.

```
[edit]
user@host# edit system services dhcp-local-server
```

2. Disable DHCP snooping filters for DHCP local server.

```
[edit system services dhcp-local-server]
user@host# set no-snoop
```

3. Specify that you want to configure DHCPv6 local server.

```
[edit system services dhcp-local-server]
user@host# edit dhcpv6
```

4. Disable DHCP snooping filters for DHCPv6 local server.

```
[edit system services dhcp-local-server dhcpv6]
user@host# set no-snoop
```

To disable DHCP snooping filters on the DHCP relay server:

1. Specify that you want to configure DHCP relay server.

```
[edit]
user@host# edit forwarding-options dhcp-relay
```

2. Disable DHCP snooping filters for DHCP local server.

```
[edit forwarding-options dhcp-relay]
user@host# set no-snoop
```

3. Specify that you want to configure DHCPv6 relay server.

```
[edit forwarding-options dhcp-relay]
user@host# edit dhcpv6
```

4. Disable DHCP snooping filters for DHCPv6 local server.

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# set no-snoop
```

- See Also**
- *DHCP Snooping Support*
  - [no-snoop on page 537](#)

### Example: Configuring DHCP Snooping Support for DHCP Relay Agent

This example shows how to configure DHCP snooping support for DHCP relay agent.

- [Requirements on page 78](#)
- [Overview on page 78](#)
- [Configuration on page 78](#)

## Requirements

---

- Configure DHCP relay agent. See *Extended DHCP Relay Agent Overview*.

## Overview

---

In this example, you configure DHCP snooping support for DHCP relay agent by completing the following operations:

- Override the default DHCP snooping configuration and enable DHCP snooping support for the interfaces in group **frankfurt**.
- Configure DHCP relay agent to forward snooped packets to only configured interfaces.



**NOTE:** By default, DHCP snooping is disabled globally.

---

## Configuration

---

### Step-by-Step Procedure

To configure DHCP relay support for DHCP snooping:

1. Specify that you want to configure DHCP relay agent.

```
[edit]  
user@host# edit forwarding-options dhcp-relay
```

2. Specify the named group of interfaces on which DHCP snooping is supported.

```
[edit forwarding-options dhcp-relay]  
user@host# edit group frankfurt
```

3. Specify the interfaces that you want to include in the group. DHCP relay agent considers these as the configured interfaces when determining whether to forward or drop traffic.

```
[edit forwarding-options dhcp-relay group frankfurt]  
user@host# set interface fe-1/0/1.3 upto fe-1/0/1.9
```

4. Specify that you want to override the default configuration for the group.

```
[edit forwarding-options dhcp-relay group frankfurt]  
user@host# edit overrides
```

5. Enable DHCP snooping support for the group.

```
[edit forwarding-options dhcp-relay group frankfurt overrides]  
user@host# set allow-snooped-clients
```

6. Return to the **[edit forwarding-options dhcp-relay]** hierarchy level to configure the forwarding action and specify that DHCP relay agent forward snooped packets on only configured interfaces:

```
[edit forwarding-options dhcp-relay group frankfurt overrides]
user@host# up 2
```

7. Enable DHCP snooped packet forwarding for DHCP relay agent.

```
[edit forwarding-options dhcp-relay]
user@host# edit forward-snooped-clients
```

8. Specify that snooped packets are forwarded on only configured interfaces (the interfaces in group **frankfurt**).

```
[edit forwarding-options dhcp-relay forward-snooped-clients]
user@host# set configured-interfaces
```

**Results** From configuration mode, confirm your configuration by entering the **show forwarding-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct it. The following output also shows a range of configured interfaces in group **frankfurt**.

```
[edit]
user@host# show forwarding-options
dhcp-relay {
  forward-snooped-clients configured-interfaces;
  group frankfurt {
    overrides {
      allow-snooped-clients;
    }
    interface fe-1/0/1.3 {
      upto fe-1/0/1.9;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

**See Also** • [Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent on page 69](#)

### Example: Enabling DHCP Snooping Support for DHCPv6 Relay Agent

Snooping support for DHCPv6 relay agent is disabled on the router by default. This example shows how to override the default DHCPv6 relay agent snooping configuration

to explicitly enable DHCPv6 snooping for a named group of interfaces and for a specific interface within a different named group.



**NOTE:** You can also enable DHCPv6 snooping support globally by using the `allow-snooped-clients` statement at the `[edit forwarding-options dhcp-relay dhcpv6 overrides]` hierarchy level.

- [Requirements on page 80](#)
- [Overview on page 80](#)
- [Configuration on page 80](#)
- [Verification on page 83](#)

---

## Requirements

This example uses the following hardware and software components:

- MX Series 5G Universal Routing Platforms
- Junos OS Release 12.1 or later

Before you begin:

- Configure DHCPv6 relay agent.

*See [DHCPv6 Relay Agent Overview](#)*

- Configure named DHCPv6 relay agent interface groups to which you want to apply a common DHCP configuration.

*See [Grouping Interfaces with Common DHCP Configurations](#)*

---

## Overview

In this example, you override the default DHCPv6 relay agent snooping configuration to explicitly enable DHCP snooping for both of the following:

- All of the interfaces in the group named **boston**
- Interface **ge-3/2/1.1** in the group named **sunnyvale**

---

## Configuration

To override the default DHCPv6 relay agent snooping configuration to explicitly enable DHCPv6 snooping for a named group of interfaces and for a specific interface within a named group, perform these tasks:

- [Enabling DHCPv6 Snooping Support for a Named Group of Interfaces on page 81](#)
- [Enabling DHCPv6 Snooping Support for a Specific Interface in a Named Group on page 82](#)



**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set forwarding-options dhcp-relay dhcpv6 group boston overrides allow-snooped-clients
set forwarding-options dhcp-relay dhcpv6 group sunnyvale interface ge-3/2/1.1 overrides
allow-snooped-clients
```

### *Enabling DHCPv6 Snooping Support for a Named Group of Interfaces*

**Step-by-Step Procedure** To enable DHCPv6 snooping support for a named group of interfaces:

1. Specify that you want to configure DHCPv6 relay agent.

```
[edit]
user@host# edit forwarding-options dhcp-relay dhcpv6
```

2. Specify the named group of interfaces for which you want to enable DHCPv6 snooping.

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# edit group boston
```

3. Specify that you want to override the default DHCPv6 configuration for the interfaces in that group.

```
[edit forwarding-options dhcp-relay dhcpv6 group boston]
user@host# edit overrides
```

4. Enable DHCPv6 snooping support for all interfaces in group **boston**.

```
[edit forwarding-options dhcp-relay dhcpv6 group boston overrides]
user@host# set allow-snooped-clients
```

**Results** From configuration mode, confirm the results of your configuration by issuing the **show** statement at the **[edit forwarding-options dhcp-relay]** hierarchy level. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit forwarding-options dhcp-relay]
user@host# show
dhcpv6 {
  group boston {
    overrides {
      allow-snooped-clients;
    }
  }
}
```

```
}
}
```

If you are done configuring the router, enter **commit** from configuration mode.

### *Enabling DHCPv6 Snooping Support for a Specific Interface in a Named Group*

#### **Step-by-Step Procedure**

To enable DHCPv6 snooping support for a specific interface within a named group of interfaces:

1. Return to the **[edit forwarding-options dhcp-relay dhcpv6]** hierarchy level to specify that you want to configure DHCPv6 relay agent.

```
[edit forwarding-options dhcp-relay dhcpv6 group boston overrides]
user@host# up 2
```

2. Specify the named group containing the interface.

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# edit group sunnyvale
```

3. Specify the interface in group **sunnyvale** for which you want to enable DHCPv6 snooping.

```
[edit forwarding-options dhcp-relay dhcpv6 group sunnyvale]
user@host# edit interface ge-3/2/1.1
```

4. Specify that you want to override the default DHCPv6 configuration for interface **ge-3/2/1.1** in group **sunnyvale**.

```
[edit forwarding-options dhcp-relay dhcpv6 group sunnyvale interface ge-3/2/1.1]
user@host# edit overrides
```

5. Enable DHCPv6 snooping support for interface **ge-3/2/1.1** in group **sunnyvale**.

```
[edit forwarding-options dhcp-relay dhcpv6 group sunnyvale interface ge-3/2/1.1
overrides]
user@host# set allow-snooped-clients
```

**Results** From configuration mode, confirm the results of your configuration by issuing the **show** statement at the **[edit forwarding-options dhcp-relay]** hierarchy level. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit forwarding-options dhcp-relay]
user@host# show
```

```

dhcpv6 {
  group boston {
    overrides {
      allow-snooped-clients;
    }
  }
  group sunnyvale {
    interface ge-3/2/1.1 {
      overrides {
        allow-snooped-clients;
      }
    }
  }
}

```

If you are done configuring the router, enter **commit** from configuration mode.

### Verification

To verify the DHCPv6 configuration in a multi-relay topology, perform this task:

- [Verifying the Address Bindings for DHCPv6 Relay Agent Clients on page 83](#)

#### *Verifying the Address Bindings for DHCPv6 Relay Agent Clients*

**Purpose** Verify the DHCPv6 address bindings in the Dynamic Host Configuration Protocol (DHCP) client table.

**Action** Display detailed information about address bindings for DHCPv6 relay agent clients.

user@host > **show dhcpv6 relay binding detail**

```

Session Id: 13
  Client IPv6 Prefix:      2001:db8:0:8001::5/128
  Client DUID:             LL0x1-00:00:5e:00:53:02
  State:                   BOUND(DHCPV6_RELAY_STATE_BOUND)
  Lease Expires:           2011-11-21 06:14:50 PST
  Lease Expires in:        293 seconds
  Lease Start:             2011-11-21 06:09:50 PST
  Incoming Client Interface: ge-3/2/1.1
  Server Address:          unknown
  Next Hop Server Facing Relay: 2001:db8::2
  Server Interface:        none
  Client Id Length:        10
  Client Id:               /0x00030001/0x00006503/0x0102

```

**Meaning** The **Server Address** field in the **show dhcpv6 relay binding detail** command output typically displays the IP address of the DHCPv6 server. In this example, the value **unknown** in the **Server Address** field indicates that this is a multi-relay topology in which the DHCPv6 relay agent is not directly adjacent to the DHCPv6 server, and does not detect the IP address of the server.

In that case, the output instead includes the **Next Hop Server Facing Relay** field, which displays the next-hop address in the direction of the DHCPv6 server.

- See Also**
- *DHCPv6 Relay Agent Overview*
  - *DHCP Snooping Support*
  - *Grouping Interfaces with Common DHCP Configurations*
  - [Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent on page 69](#)

## Preventing DHCP Spoofing

A problem that sometimes occurs with DHCP is *DHCP spoofing*. In DHCP spoofing, an untrusted client floods a network with DHCP messages. Often these attacks utilize source IP address spoofing to conceal the true source of the attack.

DHCP snooping helps prevent DHCP spoofing by copying DHCP messages to the control plane and using the information in the packets to create anti-spoofing filters. The anti-spoofing filters bind a client's MAC address to its DHCP-assigned IP address and use this information to filter spoofed DHCP messages. In a typical topology, a carrier edge router (in this function also referred to as the broadband network gateway [BNG]) connects the DHCP server and the MX Series router (or broadband services aggregator [BSA]) performing the snooping. The MX Series router connects to the client and the BNG.

To configure DHCP snooping, you include the appropriate interfaces within a DHCP group. You can configure DHCP snooping for VPLS environments and bridge domains.

- In a VPLS environment, DHCP requests are forwarded over pseudowires. You configure DHCP snooping over VPLS at the **[edit routing-instances routing-instance-name]** hierarchy level.
- In bridge domains, DHCP snooping works on a per learning bridge basis. Each learning domain must have an upstream interface configured. This interface acts as the flood port for DHCP requests coming from the client side. DHCP requests are forwarded across learning domains in a bridge domain. You configure DHCP snooping on bridge domains at the **[edit routing-instances routing-instance-name bridge-domains bridge-domain-name]** hierarchy level.

To configure DHCP relay to prevent DHCP spoofing:

1. Access the appropriate hierarchy for either a VPLS or bridge domain configuration.

```
user@host# edit routing-instances blue
```

2. Specify that you want to configure DHCP relay.

```
[edit routing-instances blue]  
user@host# edit forwarding-options dhcp-relay
```

3. Create the group and assign a name.

```
[edit routing-instances blue forwarding-options dhcp-relay]
user@host# edit group svl-10
```

4. Specify the names of one or more interfaces. DHCP will trust only the MAC addresses learned on the specified interfaces.

```
[edit routing-instances blue forwarding-options dhcp-relay group svl-10]
user@host# set interface fe-1/0/1.1
user@host# set interface fe-1/0/1.2
```



**NOTE:** You can explicitly enable and disable interface support for DHCP snooped clients. See [“Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent”](#) on page 69.

- See Also**
- [Extended DHCP Relay Agent Overview](#)
  - For examples of DHCP snooping, see the *JUNOS MX Series Ethernet Services Routers Solutions Guide*.
  - [Enabling and Disabling DHCP Snooped Packets Support for DHCP Relay Agent](#) on page 69

## DHCPv4 Duplicate Client Management

- [DHCPv4 Duplicate Client In Subnet Overview](#) on page 85
- [Guidelines for Configuring Support for DHCPv4 Duplicate Clients](#) on page 86
- [Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Option 82 Information](#) on page 87
- [Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Their Incoming Interfaces](#) on page 88

### DHCPv4 Duplicate Client In Subnet Overview

In some network environments, client IDs and hardware addresses (MAC addresses) might not be unique, resulting in duplicate clients. A duplicate DHCP client occurs when a client attempts to get a lease, and that client has the same client ID or the same hardware address as an existing DHCP client—the existing client and the new client cannot exist simultaneously, unless you have configured the optional duplicate client support.

By default, DHCP local server and DHCP relay agent use the subnet information to differentiate between duplicate clients. However, in some cases, this level of differentiation is not adequate. For example, when multiple subinterfaces share the same underlying

loopback interface with the same preferred source address, the interfaces appear to be on the same subnet.

You can enable support for duplicate clients in a subnet by configuring DHCP to use additional information to uniquely identify clients—the additional information is either the client incoming interface or the option 82 information in the DHCP packets. Using the option 82 information provides the following important benefits:

- You can configure DHCP relay to preserve and use the remotely created option 82.
- DHCP local server can support an environment in which an aggregation device is present between the client and the DHCP server.

When configured to support duplicate clients in the subnet, DHCP uses the following information to distinguish between the duplicate clients:

- The subnet on which the client resides
- The client ID or hardware address
- The duplicate clients option you configure—either the client incoming interface or the option 82 information in the client's incoming DHCP packets



**NOTE:** Starting in Junos OS Release 16.1R5, 16.2R2, 17.1R2, and 17.2R1, only the ACI (suboption 1) and ARI (suboption 2) values from the option 82 information are used. Other suboptions, such as Vendor-Specific (suboption 9), are ignored.

---

## Guidelines for Configuring Support for DHCPv4 Duplicate Clients

When configuring DHCPv4 duplicate client support, consider the following guidelines:

- If you want to preserve the remotely-created option 82 information, use the **option 82** option with the **duplicate-clients-in-subnet** statement to distinguish between duplicate clients. If there is no remotely created option 82 in the incoming DHCP packets, the router locally creates the option 82 information.
- If you want to use the locally-created option-82, use the **incoming-interface** option with the **duplicate-clients-in-subnet** statement to distinguish between duplicate clients.
- Only the ACI (suboption 1) and ARI (suboption 2) values from the option 82 information are used. Other suboptions, such as Vendor-Specific (suboption 9) are ignored.
- DHCP relay agent and DHCP local server in the same routing instance must have the same the **duplicate-clients-in-subnet** configuration.
- For the Layer 3 wholesale model:
  - The wholesaler and retailer logical system/routing instances must have the same **duplicate-clients-in-subnet** statement configuration.

- For DHCP relay, the wholesaler and the retailer routing contexts must both have the **relay-option-82** statement configured with the Agent Circuit ID suboption (suboption 1) in option 82.

## Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Option 82 Information

Duplicate clients occur when two clients in a subnet have the same hardware address or the same client ID.

The following two procedures describe how to configure the router to use the option 82 information in the incoming packets to differentiate between duplicate clients. The first procedure describes the configuration for DHCP relay agent. The second procedure is for DHCP local server.



**NOTE:** Only the ACI (suboption 1) and ARI (suboption 2) values from the option 82 information are used. Other suboptions, such as Vendor-Specific (suboption 9) are ignored.

To configure the DHCP relay agent to differentiate between duplicate clients based on option 82 information:

1. Specify that you want to configure DHCP relay agent.

```
[edit forwarding-options]
user@host# edit dhcp-relay
```

2. Configure DHCP relay to insert option 82 information if there is no remotely created option 82. Use the default setting, which inserts the interface ID rather than the optional interface description.

```
[edit forwarding-options dhcp-relay]
user@host# set relay-option-82 circuit-id
```

3. Configure the router to always accept DHCP client packets that contain option 82 information.

```
[edit forwarding-options dhcp-relay]
user@host# set overrides trust-option-82
```



**NOTE:** The trust-option-82 statement must always be enabled so the router can process incoming DHCP client packets that contain option 82 information when the packets have a gateway IP address (giaddr) of 0 (zero).

4. Configure DHCP relay to use the remotely created option 82 information to distinguish between duplicate clients. If there is no remotely created option 82 in the traffic, the router locally creates the option 82 information.

```
[edit forwarding-options dhcp-relay]
user@host# set duplicate-clients-in-subnet option-82
```



**NOTE:** Make sure that the `always-write-option-82` statement is *not* enabled, as the statement will overwrite the remotely created option 82.

To configure the DHCP local server to differentiate between duplicate clients based on the option 82 information:

1. Specify that you want to configure DHCP local server.

```
[edit system services]
user@host# edit dhcp-local-server
```

2. Configure the duplicate client support with the `option-82` option.

```
[edit system services dhcp-local-server]
user@host# set duplicate-clients-in-subnet option-82
```

## Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Their Incoming Interfaces

Duplicate clients occur when two clients in a subnet have the same hardware address or the same client ID.

The following two procedures describe how to configure the router to use the clients' incoming interface to differentiate between duplicate clients. The first procedure describes the configuration for DHCP relay agent; the second procedure is for DHCP local server.

To configure the DHCP relay agent to differentiate between duplicate clients based on the client incoming interface:

1. Specify that you want to configure DHCP relay agent.

```
[edit forwarding-options]
user@host# edit dhcp-relay
```

2. Configure the duplicate client support with the `incoming-interface` option.

```
[edit forwarding-options dhcp-relay]
user@host# set duplicate-clients-in-subnet incoming-interface
```



3. Configure DHCP relay to insert option 82 information if the information is not specified remotely. Use the default setting, which inserts the interface ID rather than the optional interface description.



**NOTE:** Only the ACI (suboption 1) and ARI (suboption 2) values from the option 82 information are used. Other suboptions, such as Vendor-Specific (suboption 9) are ignored.

```
[edit forwarding-options dhcp-relay]
user@host# set relay-option-82 circuit-id
```

4. Configure the router to overwrite any remotely supplied option 82 information in incoming packets.

```
[edit forwarding-options dhcp-relay]
user@host# set overrides always-write-option-82
```

5. Configure the router to always accept DHCP client packets that contain option 82 information.

```
[edit forwarding-options dhcp-relay]
user@host# set overrides trust-option-82
```



**NOTE:** The *trust-option-82* statement must always be enabled so the router can process incoming DHCP client packets that contain option 82 information when the packets have a gateway IP address (giaddr) of 0 (zero).

To configure the DHCP local server to differentiate between duplicate clients based on the client incoming interface:

1. Specify that you want to configure DHCP local server.

```
[edit system services]
user@host# edit dhcp-local-server
```

2. Configure the duplicate client support with the *incoming-interface* option.

```
[edit system services dhcp-local-server]
user@host# set duplicate-clients-in-subnet incoming-interface
```

**Release History Table**

Release	Description
16.1R5	Starting in Junos OS Release 16.1R5, 16.2R2, 17.1R2, and 17.2R1, only the ACI (suboption 1) and ARI (suboption 2) values from the option 82 information are used.

**Related Documentation**

- [DHCPv6 Duplicate Client Management on page 90](#)

## DHCPv6 Duplicate Client Management

- [DHCPv6 Duplicate Client DUIDs on page 90](#)
- [Configuring the Router to Use Underlying Interfaces to Distinguish Between DHCPv6 Duplicate Client DUIDs on page 90](#)

### DHCPv6 Duplicate Client DUIDs

The DHCP unique identifier (DUID) is used to identify a client for the proper application of configuration parameters. The DUID is supposed to be unique across all clients. A duplicate DHCPv6 client occurs when a client attempts to obtain a lease, and that client has the same DUID as an existing DHCPv6 client. Because the DUIDs are supposed to be unique, by default the router treats the request from the duplicate client as a renegotiation by the original client, and replaces the existing client entry with a new entry.

However, in some cases the duplicate request is legitimate, because some network equipment vendors do not guarantee the uniqueness of DUIDs. In these circumstances the router can support the duplication of the DUID by accommodating the new client without affecting the existing client.

Starting in Junos OS Release 16.1, you can enable duplicate DHCPv6 client support. When enabled, the router uses the clients' underlying (incoming) interfaces to differentiate between clients with the same DUID. The router can then create a new client entry for the duplicate client and grant it a lease. The router retains the existing client entry with the original lease.

All underlying interface types are supported. Only 1:1 VLANs are supported, because the client requests are received over different underlying interfaces. N:1 VLANs are not supported, because the client requests can be received over the same underlying interface and therefore cannot be differentiated if the DUIDs are the same.

### Configuring the Router to Use Underlying Interfaces to Distinguish Between DHCPv6 Duplicate Client DUIDs

DHCPv6 duplicate clients occur when two clients in a subnet have the same DHCP Unique Identifier (DUID).

The following procedure describes how to configure the router to use the client's underlying (incoming) interface to differentiate between clients with duplicate DUIDs. The first part of the procedure describes the configuration for DHCPv6 relay agent and the second part configures the DHCPv6 local server.



**NOTE:** Duplicate client DUIDs are supported only when the clients use different underlying interfaces, as in the case of 1:1 VLANs. They are not supported when the clients share an underlying interface, as in the case of N:1 VLANs.

Before configuring duplicate client support, you must ensure the following:

- DHCPv6 relay agent is configured to insert the DHCPv6 Interface-ID option (option 18) in packets forwarded to the DHCPv6 local server.
- Option 18 specifies the interface name, not the text description of the interface.
- DHCPv6 local server must echo option 18 in the RELAY-REPLY messages returned to the DHCPv6 relay agent, as is the case for DHCPv6 local server configured on a Juniper Networks router. The relay agent uses the echoed option 18 information to find the client's interface and construct the client key.

To configure the DHCPv6 relay agent to support duplicate DUIDs:

1. Specify that you want to configure DHCPv6 relay agent.

```
[edit forwarding-options]
user@host# edit dhcp-relay dhcpv6
```

2. Configure DHCPv6 relay agent to insert DHCPv6 option 18 in the packets forwarded to the DHCPv6 local server.

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# set relay-agent-interface-id
```



**NOTE:** You must not include the `use-interface-description` statement because it specifies a text description of the interface.

3. Specify that the DHCPv6 relay agent uses the clients' incoming interfaces to differentiate between the duplicate DUIDs.

```
[edit forwarding-options dhcp-relay dhcpv6]
user@host# set duplicate-clients incoming-interface
```

To configure the DHCPv6 local server to support duplicate DUIDs:

1. Specify that you want to configure DHCPv6 local server.

```
[edit system services]
user@host# edit dhcp-local-server dhcpv6
```

2. Configure the DHCPv6 local server to support duplicate clients based on the clients' incoming interfaces.

```
[edit system services dhcp-local-server dhcpv6]  
user@host# set duplicate-clients incoming-interface
```

**Release History Table**

Release	Description
16.1	Starting in Junos OS Release 16.1, you can enable duplicate DHCPv6 client support.

**Related  
Documentation**

- [DHCPv4 Duplicate Client Management on page 85](#)

## CHAPTER 3

# PPP Subscriber Access Networks

- [PPP Subscriber Access Networks Overview on page 93](#)
- [PPP Network Control Protocol Negotiation on page 107](#)
- [Tracing PPP Service Events for Troubleshooting on page 116](#)

### PPP Subscriber Access Networks Overview

---

- [Dynamic Profiles for PPP Subscriber Interfaces Overview on page 93](#)
- [Understanding How the Router Processes Subscriber-Initiated PPP Fast Keepalive Requests on page 94](#)
- [Configuring Dynamic Profiles for PPP on page 96](#)
- [Preventing the Validation of PPP Magic Numbers During PPP Keepalive Exchanges on page 98](#)
- [Attaching Dynamic Profiles to Static PPP Subscriber Interfaces on page 99](#)
- [Migrating Static PPP Subscriber Configurations to Dynamic Profiles Overview on page 99](#)
- [Configuring Local Authentication in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers on page 101](#)
- [Configuring Tag2 Attributes in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers on page 102](#)
- [Configuring Dynamic Authentication for PPP Subscribers on page 103](#)
- [Modifying the CHAP Challenge Length on page 105](#)
- [Example: Minimum PPPoE Dynamic Profile on page 106](#)
- [Verifying and Managing PPP Configuration for Subscriber Management on page 106](#)

### Dynamic Profiles for PPP Subscriber Interfaces Overview

Subscriber management PPP support enables you to create and attach dynamic profiles for PPP subscriber interfaces. When the PPP subscriber logs in, the router instantiates the specified dynamic profile and then applies the attributes defined in the profile to the interface.

Dynamic profiles are used for both static and dynamic PPP interfaces. For static PPP interfaces, you use the CLI to attach dynamic profiles, which specify PPP options. For

dynamic PPP interfaces, the dynamic profile creates the interface, including the PPP options.



**NOTE:** Dynamically created interfaces are supported only on PPPoE interfaces.

Unlike traditional PPP support, subscriber management does not allow bi-directional PPP authentication—authentication is performed only by the router, never by the remote peer. The router's AAA process manages authentication and address assignment for subscriber management. When you configure PPP options for a dynamic profile, you can configure either Challenge Handshake Authentication Protocol (CHAP) or Password Authentication Protocol (PAP) authentication, and you can control the order in which the router negotiates the CHAP and PAP protocols. In addition, for CHAP authentication, you can modify the default length of the CHAP challenge message. Other PPP options, which are either commonly used or mandatory for a traditional PPP interface configuration, are not supported in subscriber management dynamic profiles.

## Understanding How the Router Processes Subscriber-Initiated PPP Fast Keepalive Requests

On MX Series routers with Modular Port Concentrators/Modular Interface Cards (MPCs/MICs), the Packet Forwarding Engine on an MPC/MIC processes and responds to Link Control Protocol (LCP) Echo-Request packets that the PPP subscriber (client) initiates and sends to the router. LCP Echo-Request packets and LCP Echo-Reply packets are part of the PPP keepalive mechanism that helps determine whether a link is functioning properly.

Previously, LCP Echo-Request packets and LCP Echo-Reply packets were handled on an MX Series router by the Routing Engine. The mechanism by which LCP Echo-Request packets are processed by the Packet Forwarding Engine instead of by the Routing Engine is referred to as *PPP fast keepalives*.

- [Benefits of PPP Fast Keepalives on page 94](#)
- [How PPP Fast Keepalive Processing Works on page 95](#)
- [Statistics Display for PPP Fast Keepalive on page 95](#)
- [Effect of Changing the Forwarding Class Configuration on page 95](#)
- [Ignoring a Magic Number Mismatch on page 96](#)

### Benefits of PPP Fast Keepalives

---

- PPP fast keepalives reduce the time required for keepalive exchanges by enabling the Packet Forwarding Engine to receive LCP Echo-Request packets from the PPP subscriber and respond with LCP Echo-Reply packets, without having to send the LCP packets to the Routing Engine for processing.
- PPP fast keepalives provide increased bandwidth on the router to support a larger number of subscribers with improved performance by relieving the Routing Engine from having to process the LCP Echo-Request and Echo-Reply packets.

- PPP fast keepalives use negotiated magic numbers to identify potential traffic loopbacks to the router or network issues. You can also disable validation if needed to prevent undesired PPP session termination, for example when the PPP remote peers use arbitrary numbers rather than the negotiated number.

### How PPP Fast Keepalive Processing Works

You do not need any special configuration on an MX Series router with MPCs/MICs to enable processing of PPP fast keepalive requests on the Packet Forwarding Engine. The feature is enabled by default, and cannot be disabled.

The following sequence describes how an MX Series router processes LCP Echo-Request packets and LCP Echo-Reply packets on the Packet Forwarding Engine on the MPC/MIC:

1. The Routing Engine notifies the Packet Forwarding Engine when transmission of keepalive requests is enabled on a PPP logical interface. The notification includes the magic numbers of both the server and the remote client.
2. The Packet Forwarding Engine receives the LCP Echo-Request packet initiated by the PPP subscriber (client).
3. The Packet Forwarding Engine validates the peer magic number in the LCP Echo-Request packet, and transmits the corresponding LCP Echo-Reply packet containing the magic number negotiated by the router.
4. If the Packet Forwarding Engine detects a loop condition in the link, it sends the LCP Echo-Request packet to the Routing Engine for further processing.

The Routing Engine continues to process LCP Echo-Request packets until the loop condition is cleared.

Transmission of keepalive requests from the Packet Forwarding Engine on the router is not currently enabled.

### Statistics Display for PPP Fast Keepalive

When an MX Series router with MPCs/MICs is using PPP fast keepalive for a PPP link, the **Keepalive statistics** field in the output of the **show interfaces pp0.logical statistics** operational command does not include statistics for the number of keepalive packets received or sent, or the amount of time since the router received or sent the last keepalive packet.

### Effect of Changing the Forwarding Class Configuration

To change the default queue assignment (forwarding class) for outbound traffic generated by the Routing Engine, you can include the **forwarding-class class-name** statement at the **[edit class-of-service host-outbound-traffic]** hierarchy level.

For PPP fast (inline) keepalive LCP Echo-Request and LCP Echo-Reply packets transmitted between an MX Series router with MPCs/MICs and a PPP client, changing the forwarding class configuration takes effect immediately for both new PPP-over-Ethernet (PPPoE), PPP-over-ATM (PPPoA), and L2TP network server (LNS) subscriber sessions created after the configuration change, and for existing PPPoE, PPPoA, and LNS subscriber sessions established before the configuration change.

### Ignoring a Magic Number Mismatch

When the Packet Forwarding Engine validates the peer magic number in the received LCP Echo-Request packet, it checks whether the magic number is unexpected. The received number should match the number for the remote peer that was agreed during LCP negotiation. The remote peer number must be different than the local peer number; when they are the same, the expectation is that a loopback condition (traffic is looping back to the local peer) or some other network issue exists.

When the validation check determines that a mismatch is present, meaning that the received remote peer number is different from the negotiated number, the Packet Forwarding Engine sends the failed Echo-Reply packets to the Routing Engine. If an Echo-Reply with a valid magic number is not received within a certain interval, PPP considers this to be a keepalive failure and tears down the PPP session.

Some customer equipment might not negotiate its local magic number and instead insert an arbitrary value as the magic number it sends to the router in the keepalive packets. This number is identified as a mismatch and the session is eventually dropped. Starting in Junos OS Release 18.1R1, this result can be avoided by configuring the router to not perform a magic number validation check. Because the mismatch is never identified, the router continues to exchange PPP keepalive packets with the remote peer. To configure this behavior, include the **ignore-magic-number-mismatch** statement in an L2TP group profile, in the dynamic profile for dynamic PPP subscriber connections terminated at the router, or in the dynamic profile for dynamic tunneled PPP subscribers at the LNS.

- See Also**
- *Configuring Keepalives*
  - *Disabling the Sending of PPPoE Keepalive Messages*
  - *Changing the Default Queuing and Marking of Host Outbound Traffic*
  - [Preventing the Validation of PPP Magic Numbers During PPP Keepalive Exchanges on page 98](#)

## Configuring Dynamic Profiles for PPP

A dynamic profile acts as a template that enables you to create, update, or remove a configuration that includes attributes for client access (for example, interface or protocol) or service (for example, IGMP). Using these profiles you can consolidate all of the common attributes of a client (and eventually a group of clients) and apply the attributes simultaneously.

After they are created, the profiles reside in a profile library on the router. You can then use the **dynamic-profile** statement to attach profiles to interfaces. To assign a dynamic profile to a PPP interface, you can include the **dynamic-profile** statement at the **[edit interfaces *interface-name* unit *logical-unit-number* ppp-options]** hierarchy level:

```
[edit interfaces interface-name unit logical-unit-number ppp-options]  
dynamic-profile profile-name;
```

To monitor the configuration, issue the **show interfaces *interface-name*** command.



For information about dynamic profiles, see *Dynamic Profiles Overview* in the *Junos Subscriber Access Configuration Guide*.

For information about creating dynamic profiles, see *Configuring a Basic Dynamic Profile* in the *Junos Subscriber Access Configuration Guide*.

For information about assigning a dynamic profile to a PPP interface, see [“Attaching Dynamic Profiles to Static PPP Subscriber Interfaces” on page 99](#) in the *Junos Subscriber Access Configuration Guide*.

For information about using dynamic profiles to authenticate PPP subscribers, see [“Configuring Dynamic Authentication for PPP Subscribers” on page 103](#).



**NOTE:** Dynamic profiles for PPP subscribers are supported only on PPPoE interfaces for this release.

---

## Preventing the Validation of PPP Magic Numbers During PPP Keepalive Exchanges

PPP magic numbers are negotiated between peers during LCP negotiation. The peers must have different magic numbers. When the numbers are the same, it indicates that there may be a loopback in traffic sent by the local peer. In this case, the local peer sends a new number to the remote peer. If the magic number returned by the remote peer is different than the latest number sent by the local peer, then the numbers are agreed. Otherwise, the exchange of magic numbers continues until a valid (different) number is received or the process times out, in which case the session is dropped.

After the numbers are agreed upon, the peers include their respective magic numbers when they exchange PPP keepalive (Echo-Request/Echo-Reply) packets. The Packet Forwarding Engine validates the received magic number for each exchange. A mismatch occurs when the PPP magic number received from the remote peer does not match the value agreed upon during LCP negotiation. When the validation check determines that a mismatch is present, the Packet Forwarding Engine sends the failed Echo-Request packet to the Routing Engine. If an Echo-Reply with a valid magic number is not received within a certain interval, PPP considers this to be a keepalive failure and tears down the PPP session.

In some circumstances, this behavior is not desirable. Some customer equipment does not negotiate its local magic number; instead, it inserts an arbitrary value as the magic number it sends to the router in the keepalive packets. By default, this number is identified as a mismatch and the session is eventually dropped. This result can be avoided by preventing the Packet Forwarding Engine from performing the magic number validation check. Because the mismatch is never identified, the router continues to exchange PPP keepalive packets with the remote peer.

Disable the magic number validation check by including the **ignore-magic-number-mismatch** statement as one of the PPP options applied in a dynamic PPP profile, L2TP LNS dynamic profile, or L2TP group profile. Configuring this statement has no effect on LCP magic number negotiation or on the exchange of keepalives when the remote peer magic number is the expected negotiated number.



**NOTE:** Because magic number validation is not performed, the Packet Forwarding Engine does not detect whether the remote peer sends the local peer's magic number, which would indicate a loopback or other network issue. This is considered to be an unlikely situation, because LCP negotiation completed successfully, meaning no loopback was present at that time.

---

To configure dynamic profiles to prevent the Packet Forwarding Engine from detecting mismatches in magic numbers:

Configure the PPP option.

- For dynamic PPP subscriber connections terminated at the router:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"
  ppp-options]
user@host# set ignore-magic-number-mismatch
```

- For dynamic tunneled PPP subscribers on LNS inline service interfaces:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
  "$junos-interface-unit" ppp-options]
user@host# set ignore-magic-number-mismatch
```

You can use the `show ppp interface interface-name extensive` command to view whether the magic numbers are ignored.

## Attaching Dynamic Profiles to Static PPP Subscriber Interfaces

You can attach a dynamic profile to a static PPP subscriber interface. When a PPP subscriber logs in, the specified dynamic profile is instantiated and the services defined in the profile are applied to the interface.

To attach a dynamic profile to a static PPP subscriber interface:

1. Specify that you want to configure PPP options.

```
[edit interfaces pp0 unit 0]
user@host# edit ppp-options
```

2. Specify the dynamic profile you want to associate with the interface.

```
[edit interfaces pp0 unit 0 ppp-options]
user@host# set dynamic-profile vod-profile-50
```

## Migrating Static PPP Subscriber Configurations to Dynamic Profiles Overview

This topic discusses several considerations for migrating certain static, terminated IPv4 PPP subscriber configurations to dynamic configurations using dynamic profiles. Service providers managing static subscribers on routers with legacy Junos OS releases (earlier than Junos OS Release 15.1R4) have requirements for migrating their static subscribers to being managed with dynamic profiles on routers running enhanced subscriber management (Junos OS Release 15.1R4 and later releases). Starting in Junos OS Release 18.2R1, several enhancements have been added to facilitate the transition of these static service provider configurations to dynamic profiles.

### Local Authentication

Some providers with static configurations might use CPE devices that do not support any authentication protocols, not even CHAP or PAP. The providers might use PPPoE service name tables as a rudimentary method to authenticate and authorize the subscribers on static PPPoE logical interfaces. If the subscriber ACI or ARI do not match a table entry, then the PPP PADI and PADR packets are typically dropped. Legacy Junos OS releases do not support subscribers configured with *no-authentication* for the authentication method.

For subscribers where the CPE does not support authentication protocols such as PAP and CHAP, you can configure usernames and passwords locally. The router uses these values when it contacts the RADIUS server for authentication.

- To configure the username for local authentication, include the **username-include** statement in the PPP options for the dynamic logical interface. You can define the name based on one or more of the following attributes: MAC address, Agent Circuit ID, Agent Remote ID, and domain name. By default, a period (.) is the delimiter between elements of the name, but you can define other characters instead.
- To configure the password for local authentication, include the **password** statement in the PPP options for the dynamic logical interface.

You can use the same dynamic profile to support both CPEs that do not support an authentication protocol and CPEs that do.

---

### CPE-Sourced Address Assignment

For some static configurations, the subscriber address is not assigned by using RADIUS or a local address pool on the router. Instead, the CPE has a static address configured for the subscriber; during IPCP negotiation, the CPE requests the router to assign that address to the subscriber.

Starting in Junos OS Release 18.2R1, you can assign a wildcard address of 255.255.255.255 to the Framed-Route-Address attribute [8] in the configuration for your RADIUS server. When RADIUS returns the attribute with that value, jpppd automatically accepts the subscriber IP address assignment provided by the client in an IPCP configure-request message rather than assigning another address.

---

### Tag2 Route Attribute

In some configurations, static PPP subscriber interfaces are configured in different VRFs. Each VRF configuration has static routes that point to static PPP subscriber interfaces as the next-hop address. These routes might have the tag2 attribute configured; it is required by MP-BGP to apply the appropriate local preference and community when it advertises the routes.

Starting in Junos OS Release 18.2R1, you can configure your RADIUS server to include the tag2 attribute in the Framed-Route attribute [22] when it authenticates a subscriber.

You must also configure the dynamic profile to derive the tag2 value from the Framed-Route attribute. To do so, specify the \$junos-framed-route-tag2 predefined variable to be used when the access route is dynamically instantiated. Alternatively, you can configure the dynamic profile to provide a specific tag2 value for a specific access route prefix.

See *Junos OS Predefined Variables* for more information about predefined variables.

---

### Benefits

- Local authentication enables authentication with locally stored passwords and usernames for subscribers when the CPE does not support authentication protocols such as PAP and CHAP.

- CPE-sourced address assignment enables the router to accept statically configured subscriber IP addresses requested by the CPE rather than assigning the address from a local or externally sourced address pool.
- The tag2 attribute enables more detailed specification of routes.

## Configuring Local Authentication in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers

Some providers with static configurations might use CPE devices that do not support any authentication protocols, not even CHAP or PAP. The providers might use PPPoE service name tables as a rudimentary method to authenticate and authorize the subscribers on static PPPoE logical interfaces. If the subscriber ACI or ARI does not match a table entry, then the PPP PADI and PADR packets are typically dropped.

Starting in Junos OS Release 18.2R1, you can configure usernames and passwords locally for clients that do not support authentication protocols such as PAP and CHAP. The router uses these values when it contacts the RADIUS server for authentication. This aids in the migration of the static subscribers to using dynamic profiles on a router running enhanced subscriber management.

To configure local authentication:

1. Configure the username using one or more of the available options.
  - a. (Optional) Specify that the agent circuit identifier (ACI) is included in the username. The ACI is derived from PPPoE tags.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set username-include circuit-id
```

- b. (Optional) Specify that the agent remote ID (ARI) is included in the username. The ARI is derived from PPPoE tags.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set username-include remote-id
```

- c. (Optional) Specify that the MAC address from the client PDU is included in the username. The MAC address is derived from the PPPoE packet.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set username-include mac-address
```

- d. (Optional) Specify the client domain name to end the username. The router adds the @ character as the delimiter for this option.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set username-include domain-name name
```

- e. (Optional) Specify a delimiter to separate the components that make up the username. The default delimiter is a period (.). The router always uses the @ character as the delimiter before the domain name.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set username-include delimiter character
```

2. Configure the password for the subscriber.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set password password
```

The username takes the following format when you include all the options and use the default delimiter:

```
mac-address.circuit-id.remote-id@domain-name
```

For example, consider the following sample configuration, where the ACI is aci1002, the ARI is ari349, and the MAC address is 00:00:5e:00:53:ff:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit" ppp-options local-authentication]
user@host# set username-include circuit-id
user@host# set username-include remote-id
user@host# set username-include mac-address
user@host# set username-include domain-name example.com
user@host# set username-include delimiter -
user@host# set password $ABC123$ABC123
```

This configuration results in a local password of \$ABC123\$ABC123 for the following unique local username:

```
0000.5e00.53ff-aci1002-ari349@example.com
```

## Configuring Tag2 Attributes in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers

In some configurations, PPP subscribers use static routes with a tag2 attribute. For example, MP-BGP uses tag2 to enable it to apply the appropriate local-preference and community when it advertises routes. When you migrate these subscribers to using dynamic profiles on a router running enhanced subscriber management, you can configure the tag2 attribute by configuring a specific value for a route or by deriving the value from a RADIUS server. This support is first available in Junos OS Release 18.2R1.

- To configure a specific tag2 value for a route:
  - Specify the value.

```
[edit dynamic-profiles profile-name routing-options access route prefix]
user@host# set tag2 route-tag2
```

- To derive the tag2 value from a RADIUS server:
  1. Configure your RADIUS server to include the tag2 attribute in the Framed-Route attribute [22] when it authenticates a subscriber. Consult your RADIUS server documentation for configuration information. The configuration might look something like the following example:

```
user@sub.example.com User-Password := "$ABC123"
Service-Type = Framed-User,
Framed-Protocol = PPP,
Framed-Route += "198.51.100.0/24 203.0.113.27 tag 5 distance 10 tag2
3"
```

2. Configure the dynamic profile to use the \$junos-framed-route-tag2 predefined variable to dynamically derive the tag2 value from the Framed-Route attribute.

```
[edit dynamic-profiles profile-name routing-options access route
"$junos-framed-route-ip-address-prefix]
user@host# set tag2 $junos-framed-route-tag2
```

The \$junos-framed-route-ip-address-prefix predefined variable derives the IPv4 address prefix for the access route from the Framed-Route attribute as well.

## Configuring Dynamic Authentication for PPP Subscribers

You can configure a dynamic profile that includes PPP authentication that enables PPP clients to dynamically access the network. You can specify either CHAP or PAP authentication. Optionally, you can also control the order in which the router negotiates the CHAP and PAP protocols.

For dynamic interfaces, the router supports unidirectional authentication only—the router always functions as the authenticator. When you configure PPP authentication in a dynamic profile, CHAP authentication supports the **challenge-length** option, which enables you to configure the minimum length and maximum length of the CHAP challenge message. Neither CHAP authentication nor PAP authentication supports any other configuration options, including the **passive** statement.



**NOTE:** Dynamic profiles for PPP subscribers are supported only on PPPoE interfaces.

To configure authentication in a dynamic profile for PPP subscriber interfaces:

1. Name the dynamic profile.

```
[edit]
user@host# edit dynamic-profiles vod-profile-25
```

2. Configure the interfaces and unit for the dynamic profile. Use **pp0** for the interface type and the predefined variable for the unit.

```
[edit dynamic-profiles vod-profile-25]
user@host# edit interfaces pp0 unit $junos-interface-unit
```

3. Configure PPP options.

```
[edit dynamic-profiles vod-profile-25 interfaces pp0 unit "$junos-interface-unit"]
user@host# edit ppp-options
```

4. Specify the authentication protocol used in the dynamic profile. You can configure either CHAP or PAP. There are no additional options for either authentication protocol.

```
[edit dynamic-profiles vod-profile-25 interfaces pp0 unit "$junos-interface-unit"
  ppp-options]
user@host# set chap
```

5. (Optional) Configure the minimum length and maximum length of the CHAP challenge message.

See [“Modifying the CHAP Challenge Length” on page 105](#).

6. (Optional) Configure the order in which the router negotiates the CHAP and PAP authentication protocols.

See [“Controlling the Negotiation Order of PPP Authentication Protocols” on page 111](#).

7. (Optional) Configure the router to prompt the CPE to negotiate the DNS addresses for dynamic PPPoE subscribers during IPCP negotiation.

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"
  ppp-options]
user@host# set ipcp-suggest-dns-option
```

See [“Ensuring IPCP Negotiation for Primary and Secondary DNS Addresses” on page 114](#) for more information.



## Modifying the CHAP Challenge Length

You can modify the default minimum length and maximum length of the Challenge Handshake Authentication Protocol (CHAP) challenge message that the router sends to a PPP client. The CHAP challenge message, which contains information that is unique to a particular PPP subscriber session, is used as part of the authentication mechanism between the router and the client to verify the identity of the client for access to the router.

By default, the minimum length of the CHAP challenge is 16 bytes, and the maximum length is 32 bytes. You can override this default to configure the CHAP challenge minimum length and maximum length in the range 8 bytes through 63 bytes.



**BEST PRACTICE:** We recommend that you configure both the minimum length and the maximum length of the CHAP challenge to at least 16 bytes.

Before you begin:

- Configure the CHAP protocol on the interface.
  - For dynamic PPP subscriber interfaces, see [“Configuring Dynamic Authentication for PPP Subscribers” on page 103](#).
  - For static interfaces with PPP encapsulation, see *Configuring the PPP Challenge Handshake Authentication Protocol*.

To configure the minimum and maximum length of the CHAP challenge message:

1. Specify that you want to configure PPP options.

- For dynamic PPP subscriber interfaces:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"]
user@host# edit ppp-options
```

- For static interfaces with PPP encapsulation:

```
[edit interfaces pp0 unit logical-unit-number]
user@host# edit ppp-options
```

2. Specify that you want to configure CHAP options.

- For dynamic PPP subscriber interfaces:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"
  ppp-options]
user@host# edit chap
```

- For static interfaces with PPP encapsulation:

```
[edit interfaces pp0 unit logical-unit-number ppp-options]
user@host# edit chap
```

### 3. Specify the minimum length and maximum length of the CHAP challenge.

- For dynamic PPP subscriber interfaces:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"
  ppp-options chap]
user@host# set challenge-length minimum minimum-length maximum
  maximum-length
```

- For static interfaces with PPP encapsulation:

```
[edit interfaces pp0 unit logical-unit-number ppp-options chap]
user@host# set challenge-length minimum minimum-length maximum
  maximum-length
```

For example, the following **challenge-length** statement in a dynamic profile named pppoe-client-profile sets the minimum length of the CHAP challenge to 20 bytes, and the maximum length to 40 bytes.

```
[edit dynamic-profiles pppoe-client-profile interfaces pp0 unit "$junos-interface-unit"
  ppp-options chap]
user@host# set challenge-length minimum 20 maximum 40
```

## Example: Minimum PPPoE Dynamic Profile

This example shows the minimum configuration for a dynamic profile that is used for static PPPoE interfaces. The configuration must include the **interfaces pp0** stanza.

```
dynamic-profiles {
  ppp-profile-1 {
    interfaces {
      pp0 {
        unit "$junos-interface-unit";
      }
    }
  }
}
```

## Verifying and Managing PPP Configuration for Subscriber Management

**Purpose** View or clear information about PPP configuration for subscriber management.

**Action** • To display information about PPP interfaces:

```
user@host> show ppp interface
```

- To display PPP statistics information:

```
user@host> show ppp statistics
```

- To display PPP session summary information:

```
user@host> show ppp summary
```

- To display PPP address-pool information:

```
user@host> show ppp address-pool
```

Release History Table

Release	Description
18.2R1	Starting in Junos OS Release 18.2R1, several enhancements have been added to facilitate the transition of these static service provider configurations to dynamic profiles.
18.1R1	Starting in Junos OS Release 18.1R1, this result can be avoided by configuring the router to not perform a magic number validation check.

#### Related Documentation

- *Configuring Keepalives*
- *Disabling the Sending of PPPoE Keepalive Messages*
- *Changing the Default Queuing and Marking of Host Outbound Traffic*
- [Preventing the Validation of PPP Magic Numbers During PPP Keepalive Exchanges on page 98](#)
- *Dynamic Profiles Overview*
- *Configuring a Basic Dynamic Profile*
- *Junos OS Predefined Variables*
- For L2TP group profiles: [Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218](#)

## PPP Network Control Protocol Negotiation

- [PPP Network Control Protocol Negotiation Mode Overview on page 108](#)
- [Controlling the Negotiation Order of PPP Authentication Protocols on page 111](#)
- [Configuring the PPP Network Control Protocol Negotiation Mode on page 113](#)
- [Ensuring IPCP Negotiation for Primary and Secondary DNS Addresses on page 114](#)

## PPP Network Control Protocol Negotiation Mode Overview

The *Network Control Protocol* (NCP) is a mechanism used to establish and configure different Network Layer protocols for Point-to-Point Protocol (PPP) connections. Starting in Junos OS Release 14.1, on MX Series routers with Modular Port Concentrators (MPCs), you can configure *PPP NCP negotiation* to actively or passively control subscriber connections initiated by the router functioning as a PPP server.

- [PPP NCP Negotiation Modes on page 108](#)
- [PPP NCP Negotiation Mode Supported Configurations on page 109](#)
- [PPP NCP Active Negotiation Requirements for IPv4 Dynamic and Static PPP Subscribers on page 109](#)
- [PPP NCP Active Negotiation Requirements for IPv6 Dynamic and Static PPP Subscribers on page 110](#)
- [PPP NCP Negotiation Requirements for IPv4 and IPv6 Dual-Stack Configurations on page 110](#)

### PPP NCP Negotiation Modes

PPP NCP negotiation operates in either of the following modes:

- *Active PPP NCP negotiation mode*—The router sends an NCP Configuration Request message without waiting for the PPP client to do so.
- *Passive PPP NCP negotiation mode*—The router waits for the PPP client to send an NCP Configuration Request message before sending its own Configuration Request message. Dynamic subscriber interface connections and static subscriber interface connections use passive PPP NCP negotiation by default.

Router behavior for active mode and passive mode PPP NCP negotiation differs for dynamic PPP subscribers and static PPP subscribers, as summarized in [Table 8 on page 108](#).

**Table 8: PPP NCP Negotiation Mode Behavior for Dynamic and Static Subscribers**

PPP Subscribers	PPP NCP Negotiation Mode	Router Behavior
Dynamic	Active	The router establishes the local network address and uses it to send the NCP Configuration Request message without waiting for the PPP client to send a Configuration Request.
Dynamic	Passive	The router establishes the local network address after it receives the NCP Configuration Request message from the PPP client.
Static	Active	The router sends the authentication acknowledgement to the PPP client, and then sends the NCP Configuration Request message without waiting for the PPP client to send its own Configuration Request.

**Table 8: PPP NCP Negotiation Mode Behavior for Dynamic and Static Subscribers (continued)**

PPP Subscribers	PPP NCP Negotiation Mode	Router Behavior
Static	Passive	The router sends the authentication acknowledgement to the PPP client, and then waits for an NCP Configuration Request message from the client before sending a Configuration Request.

### PPP NCP Negotiation Mode Supported Configurations

You can configure PPP Network Control Protocol (NCP) negotiation for the following single-stack and dual-stack subscriber configurations on MX Series routers with MPCs:

- Dynamic PPP subscriber connections terminated at the router
- Static PPP subscriber connections terminated at the router
- Dynamic tunneled PPP subscribers at the L2TP network server (LNS)
- Static tunneled PPP subscribers at the L2TP network server (LNS) on an inline service (si) interface

### PPP NCP Active Negotiation Requirements for IPv4 Dynamic and Static PPP Subscribers

To configure active PPP IPv4 Network Control Protocol (IPNCP) negotiation for dynamic and static PPP subscribers in a single-stack or dual-stack configuration, make sure you meet the following requirements:

- Configure the IPv4 (**inet**) protocol family in a dynamic profile (for dynamic subscribers) or at the interface level (for static subscribers).
- Assign any of the following IPv4 address attributes for the subscriber during the authentication process:
  - Framed-IP-Address (RADIUS Attribute 8)—RADIUS explicit IPv4 address
  - Framed-Pool (RADIUS Attribute 88)—RADIUS IPv4 address pool name
  - IPv4 attributes allocated from a locally configured address pool

When you have met these requirements, use the **initiate-ncp ip** statement to enable active IPNCP negotiation for dynamic and static subscribers in a single-stack or dual-stack configuration.

### PPP NCP Active Negotiation Requirements for IPv6 Dynamic and Static PPP Subscribers

---

To configure active PPP IPv6 Network Control Protocol (IPv6NCP) negotiation for dynamic and static PPP subscribers in a single-stack or dual-stack configuration, make sure you meet the following requirements:

- Configure the IPv6 (**inet6**) protocol family in a dynamic profile (for dynamic subscribers) or at the interface level (for static subscriber).
- Assign any of the following IPv6 address attributes for the subscriber during the authentication process:
  - Delegated-IPv6-Prefix (RADIUS Attribute 123)—RADIUS explicit IPv6 address
  - Framed-IPv6-Prefix (RADIUS Attribute 97)—RADIUS explicit IPv6 prefix
  - Framed-IPv6-Pool (RADIUS Attribute 100)—RADIUS explicit IPv6 address or prefix pool name
  - IPv6 attributes allocated from a locally configured Neighbor Discovery Router Advertisement (NDRA) pool

When you have met these requirements, use the **initiate-ncp ipv6** statement to enable active IPv6NCP negotiation for dynamic and static subscribers in a single-stack or dual-stack configuration.

### PPP NCP Negotiation Requirements for IPv4 and IPv6 Dual-Stack Configurations

---

You can configure either active or passive PPP NCP negotiation for the IPv4 and IPv6 subscriber interfaces in a dual-stack configuration.

To configure active negotiation in a dual-stack configuration, do all of the following:

- Make sure you meet the IPv4 and IPv6 protocol and address family requirements.
- Use the **initiate-ncp ip** statement to enable active negotiation for the IPv4 subscriber interface.
- Use the **initiate-ncp ipv6** statement to enable active negotiation for the IPv6 subscriber interface.

To configure passive negotiation in a dual-stack configuration, do both of the following:

- Make sure you meet the IPv4 and IPv6 protocol and address family requirements.
- Use the **initiate-ncp dual-stack-passive** statement to enable passive negotiation for the dual-stack configuration. The **initiate-ncp dual-stack-passive** statement overrides the **initiate-ncp ip** and **initiate-ncp ipv6** statements if they are configured.

The following additional guidelines apply when you configure PPP NCP negotiation for dual-stack subscribers:

- Dual-stack subscribers configured for either active mode or passive mode PPP NCP negotiation continue to use the same negotiation mode when the NCP mechanism is renegotiated.
- Using the **on-demand-ip-address** statement to save IPv4 addresses for dual-stack PPP subscribers when you are not using the IPv4 service has no effect on configuration of the PPP NCP negotiation mode in a dual-stack configuration.

## Controlling the Negotiation Order of PPP Authentication Protocols

You can control the order in which the router tries to negotiate PPP authentication protocols when it verifies that a PPP client can access the network. By default, the router first tries to negotiate Challenge Handshake Authentication Protocol (CHAP) authentication. If the attempt to negotiate CHAP authentication is unsuccessful, the router then tries to negotiate Password Authentication Protocol (PAP) authentication.

You can modify this default negotiation order in any of the following ways:

- Specify that the router negotiate PAP authentication first, followed by CHAP authentication if PAP negotiation is unsuccessful.

When you specify both authentication protocols in either order, you must enclose the set of protocol names in square brackets ([ ]).

- Specify that the router negotiate only CHAP authentication.
- Specify that the router negotiate only PAP authentication.

Before you begin:

- Configure the CHAP or PAP protocol on the interface.
  - For dynamic PPP subscriber interfaces, see [“Configuring Dynamic Authentication for PPP Subscribers” on page 103](#).
  - For CHAP on static interfaces with PPP encapsulation, see *Configuring the PPP Challenge Handshake Authentication Protocol*.
  - For PAP on static interfaces with PPP encapsulation, see *Configuring the PPP Password Authentication Protocol On a Physical Interface*.
  - For information about dynamic profiles for PPP subscribers, see [“Dynamic Profiles for PPP Subscriber Interfaces Overview” on page 93](#).

To control the order in which the router negotiates PPP authentication protocols:

1. Specify that you want to configure PPP options.
  - For dynamic PPP subscriber interfaces:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"]
user@host# edit ppp-options
```

- For static interfaces with PPP encapsulation:

```
[edit interfaces pp0 unit logical-unit-number]  
user@host# edit ppp-options
```

2. Specify the negotiation order for PPP authentication protocols on the router.

- For dynamic PPP subscriber interfaces:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"  
  ppp-options]  
user@host# set authentication [authentication-protocols]
```

- For static interfaces with PPP encapsulation:

```
[edit interfaces pp0 unit logical-unit-number ppp-options]  
user@host# set authentication [authentication-protocols]
```

The following sample **authentication** statements in a dynamic profile named pppoe-client-profile show the different ways you can configure the negotiation order for PPP authentication protocols. (The **authentication** statements for configuring static interfaces are identical.)

- To specify that the router negotiate PAP authentication first, followed by CHAP authentication:

```
[edit dynamic-profiles pppoe-client-profile interfaces pp0 unit "$junos-interface-unit"  
  ppp-options]  
user@host# set authentication [pap chap]
```

- To specify that the router negotiate only CHAP authentication:

```
[edit dynamic-profiles pppoe-client-profile interfaces pp0 unit "$junos-interface-unit"  
  ppp-options]  
user@host# set authentication chap
```

- To specify that the router negotiate only PAP authentication:

```
[edit dynamic-profiles pppoe-client-profile interfaces pp0 unit "$junos-interface-unit"  
  ppp-options]  
user@host# set authentication pap
```

- To restore the default negotiation order for PPP authentication protocols after you have modified it:

```
[edit dynamic-profiles pppoe-client-profile interfaces pp0 unit "$junos-interface-unit"  
  ppp-options]  
user@host# set authentication [chap pap]
```



## Configuring the PPP Network Control Protocol Negotiation Mode

Starting in Junos OS Release 14.1, configuring PPP Network Control Protocol (NCP) negotiation enables you to actively or passively control subscriber connections initiated by the router functioning as a PPP server. Both dynamic and static subscriber interface connections use passive PPP NCP negotiation by default.

You can configure the PPP NCP negotiation mode (active or passive) for the following subscriber configurations on MX Series routers with MPCs:

- Dynamic PPP subscriber connections terminated at the router, using a dynamic profile
- Static PPP subscriber connections terminated at the router, using a per-interface configuration
- Dynamic tunneled PPP subscribers at the L2TP network server (LNS), using a dynamic profile
- Static tunneled PPP subscribers at the LNS, using a per-inline service (**si**) interface configuration
- Dynamic and static tunneled PPP subscribers at the LNS, using a user-group profile

To configure PPP NCP negotiation mode:

1. Specify that you want to configure PPP-specific properties for the subscriber.

- For dynamic PPP subscriber connections terminated at the router:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"]
user@host# edit ppp-options
```

- For static PPP subscriber connections terminated at the router:

```
[edit interfaces pp0 unit logical-unit-number]
user@host# edit ppp-options
```

- For dynamic tunneled PPP subscribers at the LNS:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# edit ppp-options
```

- For static tunneled PPP subscribers at the LNS:

```
[edit interfaces si-fpc/pic/port unit logical-unit-number]
user@host# edit ppp-options
```

- In a group profile for dynamic and static tunneled PPP subscribers at the LNS:

```
[edit access group-profile profile-name ppp]
user@host# edit ppp-options
```

## 2. Configure PPP NCP negotiation mode in any of the following ways:

- To configure active PPP NCP negotiation for IPv4 subscribers in a single-stack or dual-stack configuration, use the **initiate-ncp ip** statement.

For example, to configure active negotiation for static IPv4 connections terminated at the router:

```
[edit interfaces pp0 unit logical-unit-number ppp-options]
user@host# initiate-ncp ip
```

- To configure active PPP NCP negotiation for IPv6 subscribers in a single-stack or dual-stack configuration, use the **initiate-ncp ipv6** statement.

For example, to configure active negotiation for dynamic IPv6 connections terminated at the router:

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"
 ppp-options]
user@host# initiate-ncp ipv6
```

- To configure passive PPP NCP negotiation for dynamic or static subscribers in an IPv4 and IPv6 dual-stack configuration, use the **initiate-ncp dual-stack-passive** statement, which overrides both the **initiate-ncp ip** and **initiate-ncp ipv6** statements if they are configured.

For example, to configure passive negotiation for dynamic tunneled PPP subscribers at the LNS in an IPv4 and IPv6 dual-stack configuration:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
 "$junos-interface-unit"]
user@host# initiate-ncp dual-stack-passive
```

## Ensuring IPCP Negotiation for Primary and Secondary DNS Addresses

Starting in Junos OS Release 15.1, you can configure a router to prompt any customer premises equipment (CPE) to send the IPv4 primary or secondary DNS address options in the next configuration request if the options are not included in an initial IPCP configuration request during IPCP negotiations or if the router rejects the request. This DNS option enables the router to control IPv4 DNS address provisioning for dynamic and static, terminated PPPoE and LNS subscribers. The router includes the address options in the IPCP configuration NAK message that it sends to the CPE. The CPE then negotiates both primary and secondary IPv4 DNS addresses. Using this option ensures that the CPE can use the DNS addresses available at the router.

To configure the router to prompt the CPE to negotiate the DNS addresses for dynamic PPPoE subscribers:

- Specify the DNS negotiation option.

```
[edit dynamic-profiles profile-name interfaces pp0 unit "$junos-interface-unit"
 ppp-options]
user@host# set ipcp-suggest-dns-option
```

To configure the router to prompt the CPE to negotiate the DNS addresses for static PPPoE subscribers:

- Specify the DNS negotiation option.

```
[edit interfaces interface-name ppp-options]
user@host# set ipcp-suggest-dns-option
```

To configure the router to prompt the CPE to negotiate the DNS addresses for dynamic LNS subscribers:

- Specify the DNS negotiation option.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit "
$junos-interface-unit" ppp-options]
user@host# set ipcp-suggest-dns-option
```

To configure the router to prompt the CPE to negotiate the DNS addresses for static LNS subscribers:

- Specify the DNS negotiation option.

```
[edit interfaces si-slot/pic/port unit logical-unit-number ppp-options]
user@host# set ipcp-suggest-dns-option
```

To configure the router to prompt the CPE to negotiate the DNS addresses for tunneled PPP subscribers with an LNS user group profile:

- Specify the DNS negotiation option.

```
[edit access group-profile profile-name ppp-options]
user@host# set ipcp-suggest-dns-option
```

## Release History Table

Release	Description
15.1	Starting in Junos OS Release 15.1, you can configure a router to prompt any customer premises equipment (CPE) to send the IPv4 primary or secondary DNS address options in the next configuration request if the options are not included in an initial IPCP configuration request during IPCP negotiations or if the router rejects the request.
14.1	Starting in Junos OS Release 14.1, on MX Series routers with Modular Port Concentrators (MPCs), you can configure <i>PPP NCP negotiation</i> to actively or passively control subscriber connections initiated by the router functioning as a PPP server.
14.1	Starting in Junos OS Release 14.1, configuring PPP Network Control Protocol (NCP) negotiation enables you to actively or passively control subscriber connections initiated by the router functioning as a PPP server.

## Related Documentation

- *Configuring the PPP Attributes for a Group Profile*
- [Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218](#)

- *Dynamic Profiles Overview*
- [Configuring Dynamic Authentication for PPP Subscribers on page 103](#)

## Tracing PPP Service Events for Troubleshooting

---

The Junos OS trace feature tracks PPP service operations and records events in a log file. The error descriptions captured in the log file provide detailed information to help you solve problems.

By default, nothing is traced. When you enable the tracing operation, the default tracing behavior is as follows:

1. Important events are logged in a file located in the `/var/log` directory. By default, the router uses the filename `jpppd`. You can specify a different filename, but you cannot change the directory in which trace files are located.
2. When the trace log file **filename** reaches 128 kilobytes (KB), it is compressed and renamed **filename.0.gz**. Subsequent events are logged in a new file called **filename**, until it reaches capacity again. At this point, **filename.0.gz** is renamed **filename.1.gz** and **filename** is compressed and renamed **filename.0.gz**. This process repeats until the number of archived files reaches the maximum file number. Then the oldest trace file—the one with the highest number—is overwritten.

You can optionally specify the number of trace files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB). (For more information about how log files are created, see the [System Log Explorer](#).)

By default, only the user who configures the tracing operation can access log files. You can optionally configure read-only access for all users.

To configure PPP service tracing operations:

1. (Optional) Configure a trace log filename.  
See [“Configuring the PPP Service Trace Log Filename” on page 117](#).
2. (Optional) Configure the number and size of trace logs.  
See [“Configuring the Number and Size of PPP Service Log Files” on page 117](#).
3. (Optional) Configure user access to trace logs.  
See [“Configuring Access to the PPP Service Log File” on page 118](#).
4. (Optional) Configure a regular expression to filter the information to be included in the trace log.  
See [“Configuring a Regular Expression for PPP Service Messages to Be Logged” on page 118](#).

5. (Optional) Configure flags to specify which events are logged.  
See [“Configuring the PPP Service Tracing Flags” on page 120](#).
  6. (Optional) Configure a severity level for messages to specify which event messages are logged.  
See [“Configuring the Severity Level to Filter Which PPP Service Messages Are Logged” on page 120](#).
- [Configuring the PPP Service Trace Log Filename on page 117](#)
  - [Configuring the Number and Size of PPP Service Log Files on page 117](#)
  - [Configuring Access to the PPP Service Log File on page 118](#)
  - [Configuring a Regular Expression for PPP Service Messages to Be Logged on page 118](#)
  - [Configuring Subscriber Filtering for PPP Service Trace Operations on page 118](#)
  - [Configuring the PPP Service Tracing Flags on page 120](#)
  - [Configuring the Severity Level to Filter Which PPP Service Messages Are Logged on page 120](#)

## Configuring the PPP Service Trace Log Filename

By default, the name of the file that records trace output for PPP service is `jpppd`. You can specify a different name with the `file` option.

To configure the filename for PPP service tracing operations:

- Specify the name of the file used for the trace output.

```
[edit protocols ppp-service traceoptions]
user@host# set file ppp-service_logfile_1
```

## Configuring the Number and Size of PPP Service Log Files

You can optionally specify the number of compressed, archived trace log files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB); the default size is 128 kilobytes (KB).

The archived files are differentiated by a suffix in the format `.number.gz`. The newest archived file is `.0.gz` and the oldest archived file is `.(maximum number)-1.gz`. When the current trace log file reaches the maximum size, it is compressed and renamed, and any existing archived files are renamed. This process repeats until the maximum number of archived files is reached, at which point the oldest file is overwritten.

For example, you can set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation, *filename*, reaches 2 MB, *filename* is compressed and renamed *filename.0.gz*, and a new file called *filename* is created. When the new *filename* reaches 2 MB, *filename.0.gz* is renamed *filename.1.gz* and *filename* is compressed and renamed *filename.0.gz*. This process repeats

until there are 20 trace files. Then the oldest file, *filename.19.gz*, is simply overwritten when the next oldest file, *filename.18.gz* is compressed and renamed to *filename.19.gz*.

To configure the number and size of trace files:

- Specify the name, number, and size of the file used for the trace output.

```
[edit protocols ppp-service traceoptions]  
user@host# set file ppp-service_1_logfile_1 files 20 size 2097152
```

## Configuring Access to the PPP Service Log File

By default, only the user who configures the tracing operation can access the log files. You can enable all users to read the log file and you can explicitly set the default behavior of the log file.

To specify that all users can read the log file:

- Configure the log file to be world-readable.

```
[edit protocols ppp-service traceoptions]  
user@host# set file ppp-service_1_logfile_1 world-readable
```

To explicitly set the default behavior, only the user who configured tracing can read the log file:

- Configure the log file to be no-world-readable.

```
[edit protocols ppp-service traceoptions]  
user@host# set file ppp-service_1_logfile_1 no-world-readable
```

## Configuring a Regular Expression for PPP Service Messages to Be Logged

By default, the trace operation output includes all lines relevant to the logged events.

You can refine the output by including regular expressions to be matched.

To configure regular expressions to be matched:

- Configure the regular expression.

```
[edit protocols ppp-service traceoptions]  
user@host# set file ppp-service_1_logfile_1 match regex
```

## Configuring Subscriber Filtering for PPP Service Trace Operations

You can apply filters to the PPP service to limit tracing to particular subscribers or domains. Subscriber filtering simplifies troubleshooting in a scaled environment by enabling you to focus on a reduced set of trace results.

For subscriber usernames that have the expected form of *user@domain*, you can filter on the user, the domain, or both. You can use an asterisk (\*) as a wildcard to substitute

for characters at the beginning or end of either term or both terms to match a greater number of subscribers.



**NOTE:** You cannot filter results using a wildcard in the middle of the user or domain terms. For example, the following uses of the wildcard are not supported: tom\*25@example.com, tom125@ex\*.com.

When you enable filtering by username, traces that have insufficient information to determine the username are automatically excluded.

To configure subscriber filtering:

- Specify the filter.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user user@domain
```

Consider the following examples of using the wildcard for filtering:

- Filter results for the specific subscriber with the username, tom@example.com.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user tom@example.com
```

- Filter results for all subscribers whose username begins with tom.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user tom*
```

- Filter results for all subscribers whose username ends with tom.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user *tom
```

- Filter results for subscribers with the username tom at all domains beginning with ex.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user tom@ex*
```

- Filter results for all subscribers at all domains that end with ample.com.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user *ample.com
```

- Filter results for all subscribers whose username begins with tom at domains that end with example.com.

```
[edit protocols ppp-service traceoptions]
user@host# set filter user tom*.*example.com
```

## Configuring the PPP Service Tracing Flags

By default, only important events are logged. You can specify which events and operations are logged by specifying one or more tracing flags.

To configure the flags for the events to be logged:

- Configure the flags.

```
[edit protocols ppp-service traceoptions]  
user@host# set flag flag
```

## Configuring the Severity Level to Filter Which PPP Service Messages Are Logged

The messages associated with a logged event are categorized according to severity level. You can use the severity level to determine which messages are logged for the event type. A low severity level is less restrictive—filters out fewer messages—than a higher level. When you configure a severity level, all messages at that level and all higher (more restrictive) levels are logged.

The following list presents severity levels in order from lowest (least restrictive) to highest (most restrictive). This order also represents the significance of the messages; for example, **error** messages are of greater concern than **info** messages.

- **verbose**
- **info**
- **notice**
- **warning**
- **error**

The severity level that you configure depends on the issue that you are trying to resolve. In some cases you might be interested in seeing all messages relevant to the logged event, so you specify **all**. You can also specify **verbose** with the same result, because **verbose** is the lowest (least restrictive) severity level; it has nothing to do with the terseness or verbosity of the messages. Either choice generates a large amount of output. You can specify a more restrictive severity level, such as **notice** or **info** to filter the messages. By default, the trace operation output includes only messages with a severity level of **error**.

To configure the type of messages to be logged:

- Configure the message severity level.

```
[edit protocols ppp-service traceoptions]  
user@host# set level severity
```

### Related Documentation

- [PPP Subscriber Access Networks Overview on page 93](#)



## CHAPTER 4

# L2TP Subscriber Access Networks

- [L2TP for Subscriber Access Overview on page 121](#)
- [L2TP Tunnel Switching For Multiple-Domain Networks on page 133](#)
- [L2TP LAC Subscriber Configuration on page 147](#)
- [L2TP LAC Tunneling for Subscribers on page 154](#)
- [L2TP Subscriber Access Lines and Connection Speeds on page 184](#)
- [L2TP LNS Inline Service Interfaces on page 213](#)
- [IP Packet Reassembly on Inline Service Interfaces on page 261](#)
- [Peer Resynchronization After an L2TP Failover on page 264](#)
- [Tracing L2TP Events for Troubleshooting on page 267](#)

### L2TP for Subscriber Access Overview


---

- [L2TP for Subscriber Access Overview on page 121](#)
- [L2TP Terminology on page 124](#)
- [L2TP Implementation on page 125](#)
- [Retransmission of L2TP Control Messages on page 127](#)
- [Configuring Retransmission Attributes for L2TP Control Messages on page 128](#)
- [Enabling Tunnel and Global Counters for SNMP Statistics Collection on page 131](#)
- [Verifying and Managing L2TP for Subscriber Access on page 131](#)

### L2TP for Subscriber Access Overview

The Layer 2 Tunneling Protocol (L2TP) is a client-server protocol that allows the Point-to-Point Protocol (PPP) to be tunneled across a network. L2TP encapsulates Layer 2 packets, such as PPP, for transmission across a network. An L2TP access concentrator (LAC), configured on an access device, receives packets from a remote client and forwards them to an L2TP network server (LNS) on a remote network. The LNS functions as the logical termination point of the PPP session tunneled by the LAC from the remote client. [Figure 9 on page 122](#) shows a simple L2TP topology.


Figure 9: Typical L2TP Topology

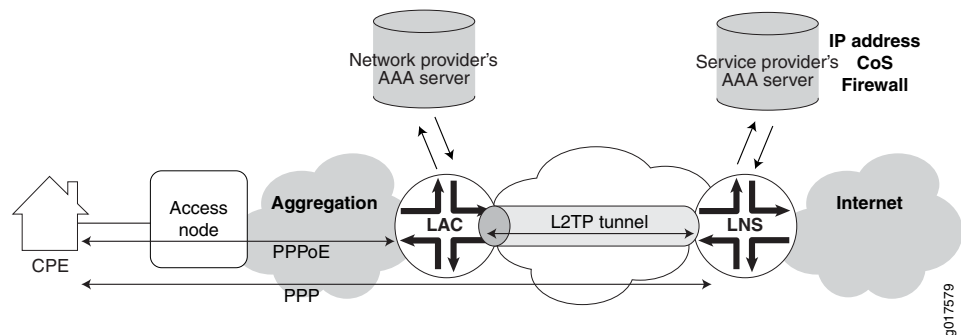

L2TP separates the termination of access technologies, such as cable or xDSL, from the termination of PPP and subsequent access to a network. This separation enables public ISPs to outsource their access technologies to competitive local exchange carriers (CLECs). L2TP provides ISPs the capability to supply VPN service; private enterprises can reduce or avoid investment in access technologies for remote workers.

You can configure your router to act as the LAC in PPP pass-through mode in which the LAC receives packets from a remote client and then forwards them at Layer 2 directly to the LNS. The PPP session is terminated on the LNS. This LAC implementation supports only Point-to-Point Protocol over Ethernet (PPPoE) subscribers over dynamic or static logical interfaces. Figure 10 on page 122 shows the protocol layer stacking for an L2TP pass-through connection.

Figure 10: Protocol Stacking for L2TP Subscribers in Pass-Through Mode

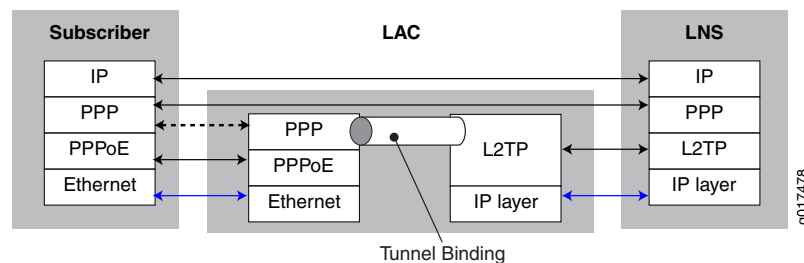

**NOTE:** On MX Series routers, the LAC and LNS functions are supported only on MPCs; they are not supported on any services PIC or MS-DPC. For details about MPC support for L2TP, see the [MX Series Interface Module Reference](#)

Certain M Series routers support LNS functions on services PICs. For more information about the L2TP implementation on M Series routers, see [L2TP Services Configuration Overview](#).

The LAC dynamically creates tunnels based on AAA authentication parameters and transmits L2TP packets to the LNS by means of the IP/User Datagram Protocol (UDP). Traffic travels in an L2TP session; a tunnel is an aggregation of one or more sessions. You can also provision a domain map that is used by AAA to determine whether to tunnel or

terminate the PPPoE subscriber on the LAC. A one-to-one mapping exists between each PPP subscriber tunneled to the LNS and an L2TP session.

When the LNS is an MX Series router, a LAC-facing peer interface on an MPC provides an IP address for the exchange of IP packets between the tunnel endpoints; the Routing Engine maintains the L2TP tunnels. The Packet Forwarding Engine hosts one or more inline services (si) interfaces. These interfaces function like a virtual physical interface and *anchor* the L2TP sessions on the LNS. The si interface enables L2TP services without requiring a special services PIC. Finally, another interface is used to transmit the subscriber data to and from the Internet.

The characteristics of the tunnel can originate either from a tunnel profile that you configure or from RADIUS tunnel attributes and vendor-specific attributes (VSAs) from the AAA server accessible at the LAC. You can include a tunnel profile in a domain map, which applies the tunnel profile before RADIUS authentication takes place. You can use RADIUS standard attributes and VSAs to override any or all characteristics configured by the tunnel profile in a domain map. Alternatively, RADIUS can itself apply a tunnel profile when the RADIUS Tunnel-Group VSA [26-64] is specified in the RADIUS login.



**NOTE:** L2TP is not supported over GRE tunnels.

The Virtual-Router VSA [26-1] in the subscriber profile on the service provider AAA server (accessible from the LNS) determines the routing instance in which the L2TP session is brought up on the LNS. When this VSA is not present, the subscriber session comes up in the same routing instance as the tunnel, because the AAA server can be accessed only from the routing instance in which the tunnel terminates on the LNS.

This behavior is different than for DHCP and non-tunneled PPPoE subscribers, which come up in the default routing instance in the absence of the Virtual-Router VSA. For L2TP subscribers, you must include this VSA in the subscriber profile when you want the subscriber session to come up in a different routing instance than the tunnel routing instance.

Starting in Junos OS Release 17.4R1, The LNS includes the following RADIUS attributes when it sends an Access-Request message to the RADIUS server:

- Tunnel-Type (64)
- Tunnel-Medium-Type (65)
- Tunnel-Client-Endpoint (66)
- Tunnel-Server-Endpoint (67)
- Acct-Tunnel-Connection (68)
- Tunnel-Assignment-Id (82)
- Tunnel-Client-Auth-Id (90)
- Tunnel-Server-Auth-Id (91)

In earlier releases, the LNS includes those attributes only in the accounting records it sends to the RADIUS server. In the Access-Request messages, they can be used to correlate on the RADIUS server the session from the LAC to the LNS.

The LAC supports RADIUS-initiated mirroring, which creates secure policies based on certain RADIUS VSAs, and uses RADIUS attributes to identify a subscriber whose traffic is to be mirrored. (This feature is not supported for an LNS configured on an MX Series router.)

The LAC and the LNS support unified ISSU. When an upgrade is initiated, the LAC completes any L2TP negotiations that are in progress but rejects any new negotiations until the upgrade has completed. No new tunnels or sessions are established during the upgrade. Subscriber logouts are recorded during the upgrade and are completed after the upgrade has completed.

## L2TP Terminology

Table 9 on page 124 describes the basic terms for L2TP.

**Table 9: L2TP Terms**

Term	Description
AVP	Attribute value pair (AVP)—Combination of a unique attribute—represented by an integer—and a value containing the actual value identified by the attribute.
Call	A connection (or attempted connection) between a remote system and the LAC.
LAC	L2TP access concentrator (LAC)—A node that acts as one side of an L2TP tunnel endpoint and is a peer to the LNS. The LAC sits between an LNS and a remote system and forwards packets to and from each.
LNS	L2TP network server (LNS)—A node that acts as one side of an L2TP tunnel endpoint and is a peer to the LAC. The LNS is the logical termination point of a PPP connection that is being tunneled from the remote system by the LAC.
Peer	In the L2TP context, either the LAC or LNS. The LAC's peer is an LNS, and vice versa.
Proxy authentication	PPP pre-authentication performed by the LAC on behalf of the LNS. The proxy data is sent by the LAC to the LNS containing attributes such as authentication type, authentication name, and authentication challenge. The LNS responds with the authentication results.
Proxy LCP	Link Control Protocol (LCP) negotiation that is performed by the LAC on behalf of the LNS. The proxy is sent by the LAC to the LNS containing attributes such as the last configuration attributes sent and received from the client.
Remote system	An end system or router attached to a remote access network, which is either the initiator or recipient of a call.

Table 9: L2TP Terms (continued)

Term	Description
Session	<p>A logical connection created between the LAC and the LNS when an end-to-end PPP connection is established between a remote system and the LNS.</p> <p><b>NOTE:</b> There is a one-to-one relationship between established L2TP sessions and their associated PPP connections.</p>
Tunnel	A connection between the LAC-LNS pair consisting of a control connection and 0 or more L2TP sessions.

## L2TP Implementation

L2TP is implemented on four levels:

- Source—The local router acting as the LAC.
- Destination—The remote router acting as the LNS.
- Tunnel—A direct path between the LAC and the LNS.
- Session—A PPP connection in a tunnel.

When the router has established destinations, tunnels, and sessions, you can control the L2TP traffic. Making a change to a destination affects all tunnels and sessions to that destination; making a change to a tunnel affects all sessions in that tunnel. For example, closing a destination closes all tunnels and sessions to that destination.

### Sequence of Events on the LAC

The router acting as the LAC creates destinations, tunnels, and sessions dynamically, as follows:

1. The client initiates a PPP connection with the router.
2. The router and the client exchange Link Control Protocol (LCP) packets. The LAC negotiates on behalf of the LNS; this is known as *proxy LCP*.
3. The LAC authenticates the client on behalf of the LNS; this is known as *proxy authentication*. By using either a local database related to the domain name or RADIUS authentication, the router determines either to terminate or to tunnel the PPP connection.
4. If the router discovers that it should tunnel the session, it does the following:
  - a. Sets up a new destination or selects an existing destination.
  - b. Sets up a new tunnel or selects an existing tunnel.

When a shared secret is configured in either the tunnel profile or the RADIUS attribute Tunnel-Password [69]—depending on which method is used to configure the tunnel—the secret is used to authenticate the tunnel during the establishment phase. The LAC includes the Challenge AVP in the SCCRP message sent to the LNS. The LNS returns the Challenge Response AVP in the SCCRP message. If the

response from the LNS does not match the value expected by the LAC, then tunnel authentication fails and the tunnel is not established.

- c. Opens a new session.
5. The router forwards the results of the LCP negotiations and authentication to the LNS.

A PPP connection now exists between the client and the LNS.



**NOTE:** The router discards received packets if the size of the variable-length, optional offset pad field in the L2TP header is too large. The router always supports packets that have an offset pad field of up to 16 bytes, and may support larger offset pad fields, depending on other information in the header. This restriction is a possible, although unlikely, cause of excessive discarding of L2TP packets.



**NOTE:** When the LAC terminates a PPP session, it generates a PPP disconnect cause and includes this information in the PPP Disconnect Cause Code (AVP 46) when it sends a Call-Disconnect-Notify (CDN) message to the LNS. The code value is 0, which indicates a global error with no information available.

---

### Sequence of Events on the LNS

---

A router acting as an LNS might be set up as follows:

1. The LAC initiates a tunnel with the router acting as the LNS.
2. The LNS verifies that a tunnel with this LAC is valid: the destination is configured, the hostname and the tunnel password are correct.
3. The LNS completes the tunnel setup with the LAC.
4. The LAC sets up a session and initiates a session request to the LNS.
5. The LNS uses a static interface or creates a dynamic interface to anchor the PPP session.
6. If they are enabled and present, the LNS accepts the proxy LCP and the proxy authentication data and passes them to PPP.
7. PPP processes the proxy LCP, if it is present, and, if the proxy LCP is acceptable, places LCP on the LNS in opened state without renegotiation of LCP.
8. PPP processes the proxy authentication data, if it is present, and passes the data to AAA for verification. (If the data is not present, PPP requests the data from the peer.)



**NOTE:** When the proxy LCP is not present or not acceptable, the LNS negotiates LCP with the peer. When LCP renegotiation is enabled on the LNS, the LNS ignores any pre-negotiated LCP parameters and renegotiates both the LCP parameters and PPP authentication with the PPP client.

9. The LNS passes the authentication results to the peer.

## Retransmission of L2TP Control Messages

L2TP peers maintain a queue of control messages that must be sent to the peer device. After the local peer (LAC or LNS) sends a message, it waits for a response from the remote peer. If a response is not received, the local peer retransmits the message. This behavior allows the remote peer more time to respond to the message.

You can control the retransmission behavior in the following two ways:

- **Retransmission count**—You can configure how many times an unacknowledged message is retransmitted by the local peer. Increasing the count provides more opportunities for the remote peer to respond, but also increases the amount of control traffic. For tunnels that have been established, include the **retransmission-count-established** statement at the **[edit services l2tp tunnel]** hierarchy level. For tunnels that are not yet established, include the **retransmission-count-not-established** statement.
- **Retransmission interval**—You can configure how long the local peer waits for the first response to a control message. If a response is not received within the first timeout interval, then the retransmission timer doubles the interval between each successive retransmission up to a maximum of 16 seconds. Increasing the interval gives the remote peer more time to respond, but also spends more resources on a potentially unavailable peer. Include the **minimum-retransmission-interval** statement at the **[edit services l2tp tunnel]** hierarchy level.

The local peer continues retransmitting the control message until one of the following occurs:

- A response is received within the current waiting period.
- The maximum retransmission count is reached.

If the maximum count is reached and no response has been received, the tunnel and all its sessions are cleared.



**NOTE:** Reaching the maximum interval of 16 seconds does not halt retransmissions. The local peer continues to wait 16 seconds after each subsequent retransmission.

The following examples describe the retransmission behavior in different circumstances:

- Example 1—The retransmission count is three and the minimum retransmission interval is 1 second.
  1. The local peer sends a control message.
  2. The local peer waits 1 second, but receives no response.
  3. The local peer retransmits the control message. This is the first retransmission.
  4. The local peer waits 2 seconds, but receives a response before the interval expires.
  5. Retransmission stops because a response is received within the interval.
- Example 2—The retransmission count is two and the minimum retransmission interval is 8 seconds.
  1. The local peer sends a control message.
  2. The local peer waits 8 seconds, but receives no response.
  3. The local peer retransmits the control message. This is the first retransmission.
  4. The local peer waits 16 seconds, but receives no response.
  5. The local peer retransmits the control message. This is the second retransmission.
  6. The local peer again waits 16 seconds, because the interval cannot increase beyond 16, but receives no response.
  7. Retransmission stops because the maximum retransmission count of two was reached.
  8. The tunnel and all its sessions are cleared.

## Configuring Retransmission Attributes for L2TP Control Messages

You can control the retransmission of unacknowledged L2TP control messages by configuring how many times the local peer retransmits the message and how long it waits for a response before retransmission.

L2TP peers maintain a queue of control messages that must be sent to the peer device. After the local peer (LAC or LNS) sends a message, it waits for a response from the remote peer. If a response is not received within the minimum retransmission interval,



the local peer retransmits the message and waits for double the retransmission interval. Each time it retransmits the message, the peer doubles how long it waits, up to a maximum of 16 seconds.

If no response is received, the local peer continues to send the message until the number of retransmissions matches the retransmission count. In this case, retransmissions stop and the tunnel and all its sessions are cleared.



**BEST PRACTICE:** Before you downgrade to a Junos OS Release that does not support these statements, we recommend that you explicitly unconfigure the feature by including the `no retransmission-count-established` statement and the `no retransmission-count-non-established` statement at the `[edit services l2tp tunnel]` hierarchy level.



**BEST PRACTICE:** During a unified in-service software upgrade (unified ISSU) on an MX Series router configured as the LAC, the LAC does not respond to control messages from the LNS. This can result in dropping LAC L2TP sessions. You can avoid this situation by ensuring that the maximum retransmission count on the LNS is set to 16 or higher.

To set the maximum retransmission count for established tunnels:

- Configure the count.

```
[edit services l2tp tunnel]
user@host# set retransmission-count-established count
```

To set the maximum retransmission count for non-established tunnels:

- Configure the count.

```
[edit services l2tp tunnel]
user@host# set retransmission-count-not-established count
```

To set the minimum interval between retransmissions:

- Configure the interval.

```
[edit services l2tp tunnel]
user@host# set minimum-retransmission-timeout seconds
```

For example, the following configuration specifies that established tunnels have a maximum retransmission count of three and a minimum retransmission interval of two seconds:

```
[edit services l2tp tunnel]
user@host# set retransmission-count-established 3
```

```
user@host# set minimum-retransmission-timeout 2
```

With this sample configuration, the following sequence applies to each control message sent by the LAC or LNS:

1. The local peer sends the control message and waits for a response from the remote peer.
2. If the response is not received within the minimum interval of 2 seconds, the local peer retransmits the message. This is the first retransmission.
3. If the response is not received within 4 seconds, the local peer retransmits the message. This is the second retransmission.
4. If the response is not received within 8 seconds, the local peer retransmits the message. This is the third and final retransmission, because the maximum count has been reached.
5. If the response is not received within 16 seconds, the tunnel and all its sessions are cleared.

## Enabling Tunnel and Global Counters for SNMP Statistics Collection

By default, SNMP polling is disabled for L2TP statistics. As a consequence, the L2TP tunnel and global counters listed in [Table 10 on page 131](#) have a default value of zero.

*Table 10: SNMP Counters for L2TP Statistics*

Counter Name	Type
jnxL2tpTunnelStatsDataTxPkts	Tunnel
jnxL2tpTunnelStatsDataRxPkts	Tunnel
jnxL2tpTunnelStatsDataTxBytes	tunnel
jnxL2tpTunnelStatsDataRxBytes	Tunnel
jnxL2tpStatsPayloadRxOctets	Global
jnxL2tpStatsPayloadRxPkts	Global
jnxL2tpStatsPayloadTxOctets	Global
jnxL2tpStatsPayloadTxPkts	Global

You can enable collection of these statistics by including the **enable-snmp-tunnel-statistics** statement at the **[edit services l2tp]** hierarchy level. When enabled, the L2TP process polls for these statistics every 30 seconds for 1000 sessions. The potential age of the statistics increases with the number of subscriber sessions; the data is refreshed more quickly as the number of sessions decreases. For example, with 60,000 sessions, none of these statistics can be more than 30 minutes old.



**BEST PRACTICE:** The system load can increase when you enable these counters and also use RADIUS interim accounting updates. We recommend you enable these counters when you are using only SNMP statistics.

To enable L2TP statistics collection for SNMP:

- Enable statistics collection.

```
[edit services l2tp]
user@host1# set enable-snmp-tunnel-statistics
```

## Verifying and Managing L2TP for Subscriber Access

**Purpose** View or clear information about L2TP tunnels and sessions.



**BEST PRACTICE:** The all option is not intended to be used as a means to perform a bulk logout of L2TP subscribers. We recommend that you do not use the all option with the clear services l2tp destination, clear services l2tp session, or clear services l2tp tunnel statements in a production environment. Instead of clearing all subscribers at once, consider clearing subscribers in smaller group, based on interface, tunnel, or destination end point.

- Action**
- To display a summary of L2TP tunnels, sessions, errors, and control and data packets:

```
user@host> show services l2tp summary
```

- To display the L2TP destinations:

```
user@host> show services l2tp destination
```

- To clear all L2TP destinations:

```
user@host> clear services l2tp destination all
```

- To clear statistics for all L2TP tunnels belonging to a destination, tunnels belonging to a specified local-gateway address, and tunnels belonging to a specified peer-gateway address:

```
user@host>clear services l2tp destination statistics all
user@host>clear services l2tp destination local-gateway 203.0.113.2
```

- To display the L2TP sessions:

```
user@host> show services l2tp session
```

- To clear all L2TP sessions, the session with a specified local session ID, or sessions associated with the local gateway specified by an IP address or name:

```
user@host>clear services l2tp session all
user@host>clear services l2tp session local-session-id 40553
user@host>clear services l2tp session local-gateway 203.0.113.2
user@host>clear services l2tp session local-gateway-name lns-mx960
```

- To clear statistics for all L2TP sessions, the session with a specified local session ID, or sessions associated with the local gateway specified by an IP address or name:

```
user@host>clear services l2tp session statistics all
user@host>clear services l2tp session statistics local-session-id 17967
user@host>clear services l2tp session statistics local-gateway 203.0.113.2
user@host>clear services l2tp session statistics local-gateway-name lns-mx960
```

- To display the L2TP tunnels:

```
user@host> show services l2tp tunnel
```

- To clear all L2TP tunnels, the tunnel with a specified local tunnel ID, or tunnels associated with the local gateway specified by an IP address or name:

```
user@host> clear services l2tp tunnel all
user@host>clear services l2tp tunnel local-tunnel-id 40553
user@host>clear services l2tp tunnel local-gateway 203.0.113.2
user@host>clear services l2tp tunnel local-gateway-name lns-mx960
```

- To clear statistics for all L2TP tunnels, the tunnel with a specified local tunnel ID, or tunnels associated with the local gateway specified by an IP address or name:

```
user@host> clear services l2tp tunnel statistics all
user@host>clear services l2tp tunnel statistics local-tunnel-id 40553
user@host>clear services l2tp tunnel statistics local-gateway 203.0.113.2
user@host>clear services l2tp tunnel statistics local-gateway-name lns-mx960
```

#### Related Documentation

- [Configuring an L2TP LAC on page 148](#)
- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
- *RADIUS IETF Attributes Supported by the AAA Service Framework*
- *Juniper Networks VSAs Supported by the AAA Service Framework*
- [Configuring a Tunnel Profile for Subscriber Access on page 177](#)
- *Domain Mapping Overview*

## L2TP Tunnel Switching For Multiple-Domain Networks

- [L2TP Tunnel Switching Overview on page 133](#)
- [Tunnel Switching Actions for L2TP AVPs at the Switching Boundary on page 137](#)
- [Configuring L2TP Tunnel Switching on page 141](#)
- [Setting the L2TP Receive Window Size on page 143](#)
- [Setting the L2TP Tunnel Idle Timeout on page 143](#)
- [Setting the L2TP Destruct Timeout on page 144](#)
- [Configuring the L2TP Destination Lockout Timeout on page 145](#)
- [Removing an L2TP Destination from the Destination Lockout List on page 145](#)
- [Configuring L2TP Drain on page 146](#)
- [Using the Same L2TP Tunnel for Injection and Duplication of IP Packets on page 147](#)


### L2TP Tunnel Switching Overview

L2TP tunnel switching, also known as L2TP multihop, simplifies the deployment of an L2TP network across multiple domains. A router that lies between a LAC and an LNS is configured as an *L2TP tunnel switch (LTS)*—sometimes referred to simply as a *tunnel switch* or a *tunnel switching aggregator (TSA)*—as shown in [Figure 11 on page 134](#). The LTS is configured as both an LNS and a LAC. When a remote LAC sends encapsulated PPP

packets to the LNS configured on the LTS, the LTS can forward or redirect the packets through a different tunnel to a different LNS beyond the LTS. The logical termination point of the original L2TP session is switched to a different endpoint.

For example, in the network shown in [Figure 11 on page 134](#), packets from the subscriber provisioned by service provider A are initially targeted at the LNS configured on the LTS. The LTS might redirect those packets to LNS1.

*Figure 11: L2TP Tunnel Switching Network Topology*

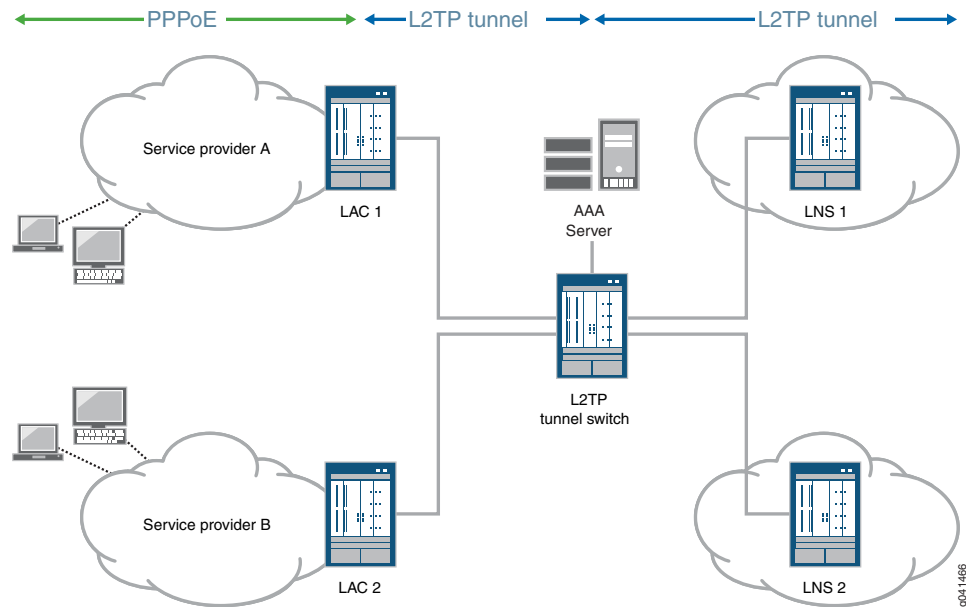

L2TP tunnel switching simplifies network configuration when the administrative domain of a LAC is different from that of the desired LNS. For example:

- The LTS acts as the LNS for multiple LACs. The individual LACs do not have to have the administrative control or capability required to identify the most appropriate LNS on which to terminate their sessions. The LTS performs that function is centralized in the LTS.
- The LTS acts as the LAC for multiple LNSs. When a new remote LAC is added to an ISP's network, the ISP does not have to reconfigure its LNS routers to accommodate the new LAC, because they connect to the LAC on the LTS.

In a Layer 2 wholesale network, the wholesaler can use L2TP tunnel switching to create a flatter network configuration that is easier to manage. The wholesaler bundles Layer 2 sessions from a LAC that are destined for different ISPs—and therefore different LNSs—onto a single L2TP tunnel. This configuration enables a common L2TP control connection to be used for the LAC.


Figure 12 on page 135 shows an example of L2TP tunnel switching for incoming calls with the following sequence of events:

1. The subscriber opens a PPP session to the LAC.
2. The LAC creates the first L2TP tunnel to the LNS configured on the LTS and the first L2TP session to carry the encapsulated PPP packets.
3. During authentication of this first session, the LTS determines whether to retunnel the session to an LNS beyond the LTS, based on the presence or absence of a tunnel switch profile configured on the LTS.

The tunnel switch profile can be a default profile or it can be applied by the RADIUS server, a domain map configuration, or a tunnel group configuration.

4. If a tunnel switch profile is configured, the LTS creates a second tunnel (if it does not already exist) to the LNS beyond the LTS as specified in the profile and creates the second session in this tunnel.

Figure 12: L2TP Tunnel Switching for Incoming Calls

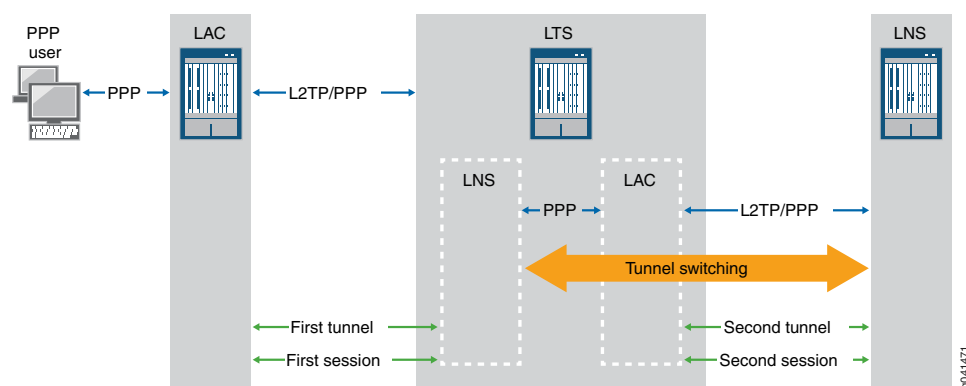

### Application of Tunnel Switch Profiles

You can configure a tunnel switch profile to be applied in several ways:

- As a default profile applied globally to traffic received from all LACs
- With a domain map applied to a subscriber session
- With a tunnel group applied to a subscriber session
- In your RADIUS server configuration, returned in the Tunnel Switch-Profile VSA (26-91)

You can configure more than one of these methods of application. When multiple tunnel switch profiles are present, the following order of precedence establishes which profile the LTS uses; the order is from highest (RADIUS) to lowest (default profile):

RADIUS VSA 26-91 > domain map > tunnel group > global tunnel switch profile

The tunnel switch profile must also reference a tunnel profile. This tunnel profile specifies the characteristics of the second tunnel, to which the subscriber packets are switched.

### Termination of Tunnel-Switched Sessions on the LTS

Tunnel switched sessions are terminated on the LTS when any of the following happens:

- Either the LAC or LNS interface on the LTS receives a Call-Disconnect-Notify (CDN) message ([Table 11 on page 136](#)).

**Table 11: Cause of CDN Message**

CDN Message Is Received On	When
LAC interface	Either of the following occurs: <ul style="list-style-type: none"> <li>• The second session cannot be established.</li> <li>• The remote LNS terminates the second session.</li> </ul>
LNS interface	Either of the following occurs: <ul style="list-style-type: none"> <li>• The PPPoE client initiates a logout.</li> <li>• The originating LAC initiates termination of the tunnel</li> </ul>

Both the first and second sessions are terminated because the LTS relays the CDN to the interface that did not receive the CDN. The disconnect cause is the same for both sessions.

- Either the LAC or LNS interface on the LTS receives a Stop-Control-Connection-Notification (StopCCN) message ([Table 12 on page 136](#)).

**Table 12: Cause of StopCCN Message**

StopCCN Message Is Received On	When
LAC interface	Either of the following occurs: <ul style="list-style-type: none"> <li>• The second session cannot be established.</li> <li>• The remote LNS terminates the second tunnel.</li> </ul>
LNS interface	The originating LAC initiates termination of the tunnel.

The LTS does not relay the StopCCN message, because a given tunnel can contain both switched and nonswitched sessions. Another reason in a wholesale scenario is that the tunnel ending on the LNS on the LTS can contain sessions from LACs from different providers. Instead, the LTS sends a CDN message to the interface that did not receive the StopCCN to terminate the tunnel-switched session. This CDN relays the error code carried in the StopCCN.

- An administrative **clear** command is issued on the LTS.

[Table 13 on page 137](#) lists the actions taken when an administrative **clear** command is issued on the LTS.



**Table 13: LAC, LNS, and LTS Actions Taken for Switched Tunnels in Response to Administrative clear Commands**

Command	LAC or LNS Action	LTS Action
<b>clear services l2tp destination</b>	Clear the destination and all associated tunnels and sessions.	For each switched session in a tunnel to the destination, clear the corresponding mapped switched session by sending it a CDN message with the cause set to Administrative.
<b>clear services l2tp destination all</b>	Clear all destinations and all associated tunnels and sessions.	None.
<b>clear services l2tp session</b>	Clear the session.	Clear the corresponding mapped switched session for this session by sending it a CDN message with the cause set to Administrative.
<b>clear services l2tp session all</b>	Clear all sessions.	None.
<b>clear services l2tp tunnel</b>	Clear the tunnel and all its sessions.	For each switched session in the tunnel, clear the corresponding mapped switched session by sending it a CDN message with the cause set to Administrative.
<b>clear services l2tp tunnel all</b>	Clear all tunnels.	None.

### Tunnel Switching Actions for L2TP AVPs at the Switching Boundary

When L2TP tunnel switching redirects packets to a different LNS, it performs one of the following default actions at the switching boundary for each AVP carried in the L2TP messages:

- **relay**—L2TP transparently forwards the AVP in the switched packet with no alteration.
- **regenerate**—L2TP ignores the received AVP that was negotiated by the first tunnel and session. It generates a new AVP for the second session based on the local policy at the LTS and sends this AVP in the switched packet. The local policy may or may not use the value for the AVP received during negotiation for the first session.

Table 14 on page 138 lists the default action for each AVP. Mandatory AVPs are always included in the L2TP messages from the LAC; optional AVPs might be included in the messages.

You can optionally override the default action taken at the switching boundary for the Bearer Type AVP (18), Calling Number AVP (22), or Cisco NAS Port Info AVP (100). You can configure any of these three AVPs to be dropped from the switched packets or regenerated, or you can restore the default relay action.



**NOTE:** L2TP AVPs that have their attribute values hidden are always regenerated at the switching boundary. The value is decoded and sent in clear text when the packet is forwarded to the remote LNS.

Table 14: Default Action for Handling L2TP AVPs at the Switching Boundary

AVP Name (Number)	AVP Type	L2TP Message Type	Default Action
Assigned Session Id (14)	Mandatory	CDN, ICRQ	Regenerate
Assigned Tunnel Id (9)	Mandatory	SCCRQ	Regenerate
Bearer Capabilities (4)	Optional	SCCRQ	Regenerate
Bearer Type (18)	Optional	ICRQ	Relay
Call Serial Number (15)	Mandatory	ICRQ	Relay
Called Number (21)	Optional	ICRQ	Relay
Calling Number (22)	Optional	ICRQ	Relay
Challenge (11)	Optional	SCCRQ	Regenerate
Challenge Response (13)	Optional	SCCCN	Regenerate
Cisco NAS Port	Optional	ICRQ	Relay
Failover Capability	Optional	SCCRQ	Regenerate
Firmware Revision (6)	Optional	SCCRQ	Regenerate
Framing Capabilities (3)	Mandatory	SCCRQ	Regenerate
Framing Type (19)	Mandatory	ICCN	Relay
Host Name (7)	Mandatory	SCCRQ	Regenerate
Initial Received LCP CONFREQ (26)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, the AVP is regenerated rather than relayed.
Last Received LCP CONFREQ (28)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, the AVP is regenerated rather than relayed.

Table 14: Default Action for Handling L2TP AVPs at the Switching Boundary (continued)

AVP Name (Number)	AVP Type	L2TP Message Type	Default Action
Last Sent LCP CONFREQ (27)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, the AVP is regenerated rather than relayed.
Message Type (0)	Mandatory	All	Regenerate
Physical Channel Id (25)	Optional	ICRQ	Regenerate
Private Group Id (37)	Optional	ICCN	Relay
Protocol Version (2)	Mandatory	SCCRQ	Regenerate
Proxy Authen Challenge (31)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, authentication is also renegotiated and the AVP is regenerated rather than relayed.
Proxy Authen ID (32)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, authentication is also renegotiated and the AVP is regenerated rather than relayed.
Proxy Authen Name (30)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, authentication is also renegotiated and the AVP is regenerated rather than relayed.

Table 14: Default Action for Handling L2TP AVPs at the Switching Boundary (continued)

AVP Name (Number)	AVP Type	L2TP Message Type	Default Action
Proxy Authen Response (33)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, authentication is also renegotiated and the AVP is regenerated rather than relayed.
Proxy Authen Type (29)	Optional	ICCN	Relay  When LCP renegotiation is enabled with the <b>lcp-negotiation</b> statement in the client profile on the LNS, authentication is also renegotiated and the AVP is regenerated rather than relayed.
Receive Window Size (10)	Optional	SCCRQ	Regenerate
Rx Connect Speed (38)	Optional	ICCN	Relay
Sequencing Required (39)	Optional	ICCN	Regenerate
Sub-Address (23)	Optional	ICRQ	Relay
Tie Breaker (5)	Optional	SCCRQ	Regenerate
Tunnel Recovery	Optional	SCCRQ	Regenerate
Tx Connect Speed (24)	Mandatory	ICCN	Relay
Vendor Name (8)	Optional	SCCRQ	Regenerate

## Configuring L2TP Tunnel Switching

L2TP tunnel switching enables a router configured as an LTS to forward PPP packets carried on one L2TP session to a second L2TP session terminated on a different LNS. To configure L2TP tunnel switching, you must define a tunnel switch profile and then assign that profile.

You can configure tunnel switch profiles for all sessions globally, all sessions in a tunnel group, all sessions in a domain or in your RADIUS server configuration to be returned in the RADIUS Tunnel Switch-Profile VSA (26-91). The order of precedence for tunnel switch profiles from various sources is as follows:

- RADIUS VSA 26-91 > domain map > tunnel group > global tunnel switch profile

To define an L2TP tunnel switch profile:

1. Create the profile.

```
[edit access]
user@host# edit tunnel-switch-profile profile-name
```

2. (Optional) Override the default actions taken for certain L2TP AVPs at the switching boundary.

```
[edit access tunnel-switch-profile profile-name]
user@host# set avp bearer-type action
user@host# set avp calling-number action
user@host# set avp cisco-nas-port-info action
```

3. Specify the tunnel profile that defines the tunnel to which the subscriber traffic is switched.



**NOTE:** This step is not required for a tunnel switch profile specified in the Tunnel Switch-Profile VSA (26-91).

```
[edit access tunnel-switch-profile profile-name]
user@host# set tunnel-profile profile-name
```

4. (Optional) Apply the profile as a global default profile to switch packets from all incoming sessions from the LAC.

```
[edit services l2tp]
user@host1# set tunnel-switch-profile profile-name
```

5. (Optional) Apply the profile as part of a tunnel group to switch packets from all sessions in the tunnel group.

```
[edit services l2tp tunnel-group name]
user@host1# set tunnel-switch-profile profile-name
```



**NOTE:** The tunnel group is part of the LTS configuration that enables it to act as the LNS for the original sessions from the LAC.

A tunnel group with a tunnel switch profile must also contain a dynamic profile, because tunnel switching supports only dynamic subscribers.

6. (Optional) Apply the profile as part of a domain map to switch packets from all sessions that are associated with the domain.

```
[edit access domain map domain-map-name]
user@host1# set tunnel-switch-profile profile-name
```



**NOTE:** A domain map cannot have both a tunnel switch profile and a tunnel profile. You must remove one if you add the other.

7. (Optional) Apply the profile by means of the Tunnel-Switch-Profile VSA [26–91] in the RADIUS Access-Accept message returned when the session from the LAC is authenticated. Refer to the documentation for your RADIUS server to determine how to configure this method.



**NOTE:** A tunnel switch profile specified by a RADIUS server in the Tunnel Switch-Profile VSA (26-91) takes precedence over the tunnel switch profile specified in the CLI configuration. If the Tunnel-Group VSA (26-64) is received in addition to the Tunnel Switch-Profile VSA (26-91), the Tunnel Switch-Profile VSA (26-91) takes precedence over the Tunnel-Group VSA (26-64), ensuring that the subscribers are tunnel switched rather than LAC tunneled.

For example, consider the following configuration, which creates three tunnel switch profiles, l2tp-tunnel-switch-profile, lts-profile-groupA, and lts-profile-example-com:

```
[edit access tunnel-switch-profile l2tp-tunnel-switch-profile]
user@host# set avp bearer-type regenerate
user@host# set avp calling-number regenerate
user@host# set avp cisco-nas-port-info drop
user@host# set tunnel-profile l2tp-tunnel-profile1
[edit access tunnel-switch-profile lts-profile-groupA]
user@host# set tunnel-profile l2tp-tunnel-profile2
[edit access tunnel-switch-profile lts-profile-example.com]
user@host# set tunnel-profile l2tp-tunnel-profile3
```

```
[edit services l2tp]
user@host1# set tunnel-switch-profile l2tp-tunnel-switch-profile
user@host1# set tunnel-group groupA tunnel-switch-profile lts-profile-groupA
[edit access domain]
user@host1# set map example.com tunnel-switch-profile lts-profile-example.com
```

The profile `l2tp-tunnel-switch-profile` is applied as the global default. When packets are switched according to this profile, the values for the Bearer Type AVP (18) and Calling Number AVP (22) in the L2TP packets are regenerated based on local policy at the L2TP tunnel switch and then sent with the packets. The Cisco NAS Port Info AVP (100) is simply dropped. Finally, `l2tp-tunnel-profile1` provides the configuration characteristics of the tunnel to which the traffic is switched.

Tunnel switch profile `lts-profile-groupA` is applied by means of a tunnel group, `groupA`; it specifies a different tunnel profile, `l2tp-tunnel-profile2` and it does not override any AVP actions. Tunnel switch profile `lts-profile-example.com` is applied by means of a domain map for the `example.com` domain; it specifies a different tunnel profile, `l2tp-tunnel-profile3` and it does not override any AVP actions.

## Setting the L2TP Receive Window Size

You can configure the L2TP receive window size for an L2TP tunnel. The receive window size specifies the number of packets a peer can send before waiting for an acknowledgment from the router.

By default, the receive window size is set to four packets. If the receive window size is set to its default value, the router does not send the Receive Window Size AVP, AVP 10, in its first packet sent during tunnel negotiation to its peer.

To configure the receive window size:

```
[edit services l2tp tunnel]
user@host# set rx-window-size packets
```

## Setting the L2TP Tunnel Idle Timeout

You can configure the LAC or the LNS to specify how long a tunnel without any sessions remains active. The idle timer starts when the last session on the tunnel is terminated. When the timer expires the tunnel is disconnected. This idle timeout frees up resources otherwise consumed by inactive tunnels.

If you set the idle timeout value to zero, the tunnel is forced to remain active indefinitely after the last session is terminated until one of the following occurs:

- You issue the `clear services l2tp tunnel` command.
- The remote peer disconnects the tunnel.



**BEST PRACTICE:** Before you downgrade to a Junos OS Release that does not support this statement, we recommend that you explicitly unconfigure

the feature by including the `no idle-timeout` statement at the `[edit services l2tp tunnel]` hierarchy level.

.....

To set the tunnel idle timeout:

- Configure the timeout period.

```
[edit services l2tp tunnel]
user@host# set idle-timeout seconds
```

## Setting the L2TP Destruct Timeout

You can configure the LAC or the LNS to specify how long the router attempts to maintain dynamic destinations, tunnels, and sessions after they have been destroyed. This destruct timeout aids debugging and other analysis by saving underlying memory structures after the destination, tunnel, or session is terminated. Any specific dynamic destination, tunnel, or session may not be maintained for this entire time period if the resources must be reclaimed early to allow new tunnels to be established.



**BEST PRACTICE:** Before you downgrade to a Junos OS Release that does not support this statement, we recommend that you explicitly unconfigure the feature by including the `no destruct-timeout` statement at the `[edit services l2tp]` hierarchy level.

.....

To set the L2TP destruct timeout:

- Configure the timeout period.

```
[edit services l2tp]
user@host# set destruct-timeout seconds
```



## Configuring the L2TP Destination Lockout Timeout

When multiple sets of tunneling parameters are available, L2TP uses a selection process to choose the best tunnel for subscriber traffic. As part of this selection process, L2TP locks out destinations it cannot connect to when a subscriber tries to reach a domain. L2TP places the destination on the destination lockout list and excludes the destination from consideration for a configurable period called the *destination lockout timeout*.

By default, the destination lockout timeout is 300 seconds (5 minutes). You can configure a value from 60 through 3600 seconds (1 minute through 1 hour). When the lockout timeout expires, L2TP assumes that the destination is now available and includes the destination when performing the tunnel selection process. The destination lockout period is a global value and is not individually configurable for particular destinations, tunnels, or tunnel groups.



**BEST PRACTICE:** Configure the lockout timeout to be equal to or shorter than the destruct timeout. Otherwise, the destruct timeout expires before the lockout timeout. In this event, the locked-out destination is destroyed and can be subsequently returned to service before the lockout timeout expires, thus negating the effectiveness of the lockout timeout.

To configure the destination lockout timeout:

- Specify the period in seconds.

```
[edit services l2tp destination]
user@host# set lockout-timeout seconds
```

The **show services l2tp destination lockout** command displays the destination lockout list and for each destination indicates how much time remains before its timeout expires. The **show services l2tp destination detail** command indicates for each destination whether it is locked and waiting for the timeout to expire or not locked.

## Removing an L2TP Destination from the Destination Lockout List

When a PPP subscriber tries to log in to a domain, L2TP selects a tunnel associated with a destination in that domain and attempts to access the destination. If the connection attempt fails, L2TP places the destination on the destination lockout list. Destinations on this list are excluded from being considered for subsequent connections for a configurable period called the *destination lockout timeout*.

You can issue the **request services l2tp destination unlock** command for a particular destination to remove it from the destination lockout list. The result is that this destination is immediately available for consideration when a subscriber logs in to the associated domain.

To remove a destination from the destination lockout list:

- Specify the name of the destination to be unlocked.

```
user@host> request services l2tp destination unlock destination-name
```

## Configuring L2TP Drain

For administrative purposes, you can set the state of an L2TP destination or tunnel to drain. This prevents the creation of new sessions, tunnels, and destinations at L2TP LAC and LNS.

You can configure L2TP drain at the global level or for a specific destination or tunnel. If the feature is configured at global L2TP level, then no new destination, tunnel, or session can be created. If the feature is configured for a specific destination, no new tunnel or session can be created at that destination. Similarly, if the feature is configured for a specific tunnel, no new sessions can be assigned to that tunnel, but new destinations and tunnels can be created.

- To prevent creation of new sessions, destinations, and tunnels for L2TP:

```
[edit services]
user@host# set l2tp drain
```

- To prevent creation of new tunnels and sessions at a particular destination:

```
[edit services]
user@host# set l2tp destination address ip-address drain
user@host# set l2tp destination address ip-address routing-instance
  routing-instance-name drain
user@host# set l2tp destination name name drain
```

- To prevent creation of new sessions at a specific tunnel:

```
[edit services]
user@host# set l2tp tunnel name name drain
user@host# set l2tp tunnel name name address ip-address drain
user@host# set l2tp tunnel name name address ip-address routing-instance
  routing-instance-name drain
```



**NOTE:** The tunnel *name* is the locally assigned name of the tunnel in the following format:

*destination-name/tunnel-name* or *tunnel-name*

When only the *tunnel-name* is provided, then you must include the address *ip-address* statement to identify the destination for the tunnel by.

When this feature is configured, the command output of **show services l2tp summary**, **show services l2tp destination**, and **show services l2tp tunnel** displays the state of the L2TP session, destination, and tunnel as **Drain**.

## Using the Same L2TP Tunnel for Injection and Duplication of IP Packets

You can configure the same L2TP tunnel that is used for subscriber secure policy mirroring to be used for duplication of packets. Packets duplicated are used to inject traffic towards the customer or towards the network. Injection or transmission of packets is supported for all subscriber access modes. A single L2TP tunnel is used for both transmission of packets and duplication of packets. A port or interface that is configured for duplication of packets on one side of an L2TP tunnel is connected to the other tunnel endpoint. The other endpoint of the tunnel can send IP packets using the L2TP tunnel to the port or interface configured for packet duplication, and the IP packets received at that interface can be either forwarded to the customer or sent as though it has been received from the customer.

The remote tunnel endpoint sends an IP tunnel packet that contains an Ethernet MAC address in the payload. If the destination MAC address of the payload packet contains the MAC address of the router, the Ethernet packet is sent in the outgoing direction towards the network, and it is processed and forwarded as though it is received on the customer port. If the source MAC address of the payload packet contains the MAC address of the router, the Ethernet packet is transmitted in the outgoing direction towards the customer port. If the tunnel does not contain the receive-cookie configured, packet injection does not happen. In such a case, any received tunnel packet is counted and dropped in the same manner in which packets that arrive with a wrong cookie are counted and dropped.

To configure the packet to be duplicated and sent towards the customer or the network (based on the MAC address in the Ethernet payload), include the **decapsulate l2tp output-interface *interface-name* cookie *l2tpv3-cookie*** statement at the **[edit firewall family *family-name* filter *filter-name* term *term-name* then]** hierarchy level. You can also configure a counter for the duplicated or decapsulated L2TP packets by including the **count counter-name** statement at the **[edit firewall family *family-name* filter *filter-name* term *term-name* then]** hierarchy level.

### Related Documentation

- [L2TP for Subscriber Access Overview on page 121](#)
- [Configuring an L2TP LAC on page 148](#)
- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
- [Specifying a Tunnel Switch Profile in a Domain Map](#)
- [LAC Tunnel Selection Overview on page 154](#)

## L2TP LAC Subscriber Configuration

- [Configuring an L2TP LAC on page 148](#)
- [Configuring How the LAC Responds to Address and Port Changes Requested by the LNS on page 150](#)
- [LAC Interoperation with Third-Party LNS Devices on page 152](#)
- [Globally Configuring the LAC to Interoperate with Cisco LNS Devices on page 153](#)

## Configuring an L2TP LAC

To configure an L2TP LAC:

1. Configure a tunnel profile to apply to subscribers.  
See [“Configuring a Tunnel Profile for Subscriber Access” on page 177.](#)
2. (Optional) Configure the method used for selecting among multiple tunnels.
  - See [“Configuring the L2TP LAC Tunnel Selection Parameters” on page 180.](#)
  - See [“Configuring Weighted Load Balancing for LAC Tunnel Sessions” on page 181.](#)
  - See [“Configuring Destination-Equal Load Balancing for LAC Tunnel Sessions” on page 181.](#)
  - See [“Configuring LAC Tunnel Selection Failover Within a Preference Level” on page 180.](#)
3. (Optional) Configure the LAC to not send Calling Number AVP 22 to the LNS.  
See [“Preventing the LAC from Sending Calling Number AVP 22 to the LNS” on page 205.](#)
4. (Optional) Specify the method for setting the transmit and receive connect speeds.  
See [“Configuring the Method to Derive the LAC Connection Speeds Sent to the LNS” on page 198.](#)
5. (Optional) Configure whether the L2TP failover protocol is negotiated or the silent failover method is used for resynchronization.  
See [“Configuring the L2TP Peer Resynchronization Method” on page 265.](#)
6. (Optional) Specify the format for the tunnel name.  
See [“Setting the Format for the Tunnel Name” on page 176.](#)
7. (Optional) Specify when and how many times L2TP retransmits unacknowledged control messages.  
See [“Configuring Retransmission Attributes for L2TP Control Messages” on page 128.](#)
8. (Optional) Specify how long a tunnel can remain idle before being torn down.  
See [“Setting the L2TP Tunnel Idle Timeout” on page 143.](#)
9. (Optional) Specify the L2TP receive window size for the L2TP tunnel. The receive window size specifies the number of packets a peer can send before waiting for an acknowledgment from the router.  
See [“Setting the L2TP Receive Window Size” on page 143.](#)

10. (Optional) Specify how long the router retains information about terminated dynamic tunnels, sessions, and destinations.  
See [“Setting the L2TP Destruct Timeout” on page 144](#).
11. (Optional) Specify how the LAC handles IP address or UDP port change requests.  
See [“Configuring How the LAC Responds to Address and Port Changes Requested by the LNS” on page 150](#).
12. (Optional) Configure all tunnels on the LAC for interoperation with Cisco LNS devices.  
See [“Globally Configuring the LAC to Interoperate with Cisco LNS Devices” on page 153](#).
13. (Optional) Specify that the LAC sends information to the LNS about subscriber access lines.  
See [“Configuring the Reporting and Processing of Subscriber Access Line Information” on page 201](#).
14. (Optional) Configure the LAC to create the IPv6 address family (inet6) when establishing a tunnel for subscribers, enabling the application of IPv6 firewall filters.  
See [“Enabling the LAC for IPv6 Services” on page 182](#).
15. (Optional) Prevent the creation of new sessions, destinations, or tunnels for L2TP.  
See [“Configuring L2TP Drain” on page 146](#).
16. (Optional) Enable SNMP statistics counters.  
See [“Enabling Tunnel and Global Counters for SNMP Statistics Collection” on page 131](#).
17. (Optional) Configure trace options for troubleshooting the configuration.  
See [“Tracing L2TP Events for Troubleshooting” on page 267](#).

## Configuring How the LAC Responds to Address and Port Changes Requested by the LNS

An LNS can use the SCCRP message that it sends the LAC when a tunnel is being established to request a change in the destination IP address or UDP port that the LAC uses to communicate with the LNS. By default, the LAC accepts the request and makes the change. You can use the **tx-address-change** statement to configure one of the following methods for the LAC to handle these change requests for all tunnels:

- **accept**—The LAC accepts the change from the LNS. It sends all subsequent packets to and receives packets from the new IP address or UDP port.
- **ignore**—The LAC continues to send packets to the original address or port, but accepts packets from the new address or port.
- **reject**—The LAC sends a StopCCN message to the original address or port and then terminates the connection to that LNS.

The LAC accepts a change in address or port only once, when the tunnel is being established. Tunnels that are already established are not affected. The LAC drops any L2TP control packets containing change requests received at any other time, or in any packet other than an SCCRP message.



**NOTE:** This statement does not support IPv6 addresses.

To configure how the LAC handles change requests for the IP address, the UDP port, or both:

- (Optional) Configure the LAC to accept all change requests. This is the default behavior.

```
[edit services l2tp tunnel]
user@host# set tx-address-change accept
```

- (Optional) Configure the LAC to ignore all change requests.

```
[edit services l2tp tunnel]
user@host# set tx-address-change ignore
```

- (Optional) Configure the LAC to ignore change requests only for the IP address.

```
[edit services l2tp tunnel]
user@host# set tx-address-change ignore-ip-address
```

- (Optional) Configure the LAC to ignore change requests only for the UDP port.

```
[edit services l2tp tunnel]
user@host# set tx-address-change ignore-udp-port
```

- (Optional) Configure the LAC to reject all change requests.

```
[edit services l2tp tunnel]
user@host# set tx-address-change reject
```

- (Optional) Configure the LAC to reject change requests only for the IP address.

```
[edit services l2tp tunnel]
user@host# set tx-address-change reject-ip-address
```

- (Optional) Configure the LAC to reject change requests only for the UDP port.

```
[edit services l2tp tunnel]
user@host# set tx-address-change reject-udp-port
```

For example, the following configuration causes the LAC to ignore requests to change the UDP port, but to reject requests to change the IP address:

```
[edit services l2tp tunnel]
user@host# set tx-address-change ignore-udp-port
user@host# set tx-address-change reject-ip-address
```



**NOTE:** Conflicting configurations are not allowed and fail the configuration commit check. You cannot. For example, the following configuration fails, because it specifies that UDP port changes are ignored, but that *all* changes are rejected:

```
[edit services l2tp tunnel]
user@host# set tx-address-change ignore-udp-port
user@host# set tx-address-change reject
```

Use the **show services l2tp summary** command to display the current behavior of the LAC:

#### show services l2tp summary

```
Failover within a preference level is Disabled
Weighted load balancing is Disabled
Tunnel authentication challenge is Enabled
Calling number avp is Enabled
Failover Protocol is Disabled
Tx Connect speed method is static
Rx speed avp when equal is Disabled
Tunnel assignment id format is assignment-id
Tunnel Tx Address Change is Ignore
Max Retransmissions for Established Tunnel is 7
Max Retransmissions for Not Established Tunnel is 5
Tunnel Idle Timeout is 60 seconds
Destruct Timeout is 300 seconds
Destination Lockout Timeout is 300 seconds
Destinations: 1, Tunnels: 0, Sessions: 0
```

Depending on the configuration, this command displays one of the following outputs:

```
Tunnel Tx Address Change is Accept
```

```
Tunnel Tx Address Change is Ignore
```

Tunnel Tx Address Change is Reject

Tunnel Tx Address Change is Ignore IP Address & Accept UDP Port

Tunnel Tx Address Change is Ignore IP Address & Reject UDP Port

Tunnel Tx Address Change is Accept IP Address & Ignore UDP Port

Tunnel Tx Address Change is Accept IP Address & Reject UDP Port

Tunnel Tx Address Change is Reject IP Address & Accept UDP Port

Tunnel Tx Address Change is Reject IP Address & Ignore UDP Port

## LAC Interoperation with Third-Party LNS Devices

In some network environments, the LAC may need to interoperate with an LNS configured on a device from another vendor that does not run Junos OS. Interoperation with Cisco Systems devices requires the LAC to communicate a NAS port type, but the LAC does not provide this information by default.

You can enable interoperation with Cisco Systems devices by configuring the NAS port method as **cisco-avp**, which causes the LAC to include the Cisco Systems NAS Port Info AVP (100) when it sends an incoming call request (ICRQ) to the LNS. The AVP includes information that identifies the NAS port and indicates whether the port type is ATM or Ethernet.

You can configure the NAS port method globally for all tunnels on the LAC or in a tunnel profile for only the tunnels instantiated by the profile.

You can also include the Tunnel-Nas-Port-Method VSA [26–30] in your RADIUS server configuration with the value set to 1 to indicate Cisco Systems CLID. In this case, RADIUS can override the global value by modifying or creating a tunnel profile. The RADIUS configuration has precedence over the tunnel profile configuration, which in turn has precedence over the global LAC configuration.

If the LNS receiving the AVP is an MX Series router instead of a Cisco Systems device, the LNS simply ignores the AVP, unless the LNS is configured for L2TP tunnel switching. In that case, the LNS preserves the value of the AVP and passes it along when it switches tunnels for the LAC.



## Globally Configuring the LAC to Interoperate with Cisco LNS Devices

Cisco LNS devices require from the LAC both the physical NAS port number identifier and the type of the physical port, such as Ethernet or ATM. By default, the LAC does not include this information. You can globally configure the LAC to provide this information by including the NAS Port Info AVP (100) in the ICRQ that it sends to the LNS. This configuration enables the LAC to interoperate with a Cisco LNS.

To globally configure the LAC to include the NAS Port Info AVP:

- Specify the NAS port method.

```
[edit services l2tp tunnel]
user@host# set nas-port-method cisco-avp
```



**NOTE:** This global configuration for the LAC can be overridden by the configuration in a tunnel profile or RADIUS.

Use the **show services l2tp tunnel extensive** command to display the current behavior of the LAC:

**show services l2tp tunnel extensive**

```
Tunnel local ID: 51872, Tunnel remote ID: 8660
Remote IP: 192.0.2.20:1701
Sessions: 5, State: Established
Tunnel Name: 1/tunnel-test-2
Local IP: 203.0.113.2:1701
Local name: testlac, Remote name: ce-lns
Effective Peer Resync Mechanism: silent failover
Nas Port Method: none
Tunnel Logical System: default, Tunnel Routing Instance: default
Max sessions: 128100, Window size: 4, Hello interval: 60
Create time: Thu Jul 25 12:55:41 2013, Up time: 11:18:14
Idle time: 00:00:00
Statistics since: Thu Jul 25 12:55:41 2013
```

	Packets	Bytes
Control Tx	702	15.5k
Control Rx	690	8.5k
Data Tx	153.3k	6.6M
Data Rx	126.3k	5.9M
Errors Tx	0	
Errors Rx	0	

### Related Documentation

- [L2TP for Subscriber Access Overview on page 121](#)
- [Configuring an L2TP LAC on page 148](#)
- [Configuring a Tunnel Profile for Subscriber Access on page 177](#)
- [Juniper Networks VSAs Supported by the AAA Service Framework](#)

## L2TP LAC Tunneling for Subscribers

---

- [LAC Tunnel Selection Overview on page 154](#)
- [L2TP Session Limits Overview on page 170](#)
- [Limiting the Number of L2TP Sessions Allowed by the LAC or LNS on page 175](#)
- [Setting the Format for the Tunnel Name on page 176](#)
- [Configuring a Tunnel Profile for Subscriber Access on page 177](#)
- [Configuring the L2TP LAC Tunnel Selection Parameters on page 180](#)
- [Configuring LAC Tunnel Selection Failover Within a Preference Level on page 180](#)
- [Configuring Weighted Load Balancing for LAC Tunnel Sessions on page 181](#)
- [Configuring Destination-Equal Load Balancing for LAC Tunnel Sessions on page 181](#)
- [Enabling the LAC for IPv6 Services on page 182](#)
- [Testing L2TP Tunnel Configurations from the LAC on page 182](#)

### LAC Tunnel Selection Overview

When a user logs in to a domain, the PPP client contacts the LAC to establish a connection. The LAC has to find a destination in the domain and a tunnel that can reach it. The association between destinations, tunnels, and domains is provided by a tunnel profile either in a domain map in the subscriber's access profile or in the Tunnel-Group attribute (VSA 26-64) received from a RADIUS server. The RADIUS attribute takes precedence over a profile specified in a domain map. The tunnel profile includes a list of tunnels; each tunnel is associated with a destination IP address and with a tunnel preference level.

L2TP enables you to specify:

- Up to 31 destinations for a domain.
- Up to eight levels of tunnel preference. The preference level determines the order in which the LAC attempts to use an existing tunnel (or establish a new one) to a destination in the user's requested domain.



**NOTE:** Zero (0) is the highest level of preference; this is the most-preferred level.

---

If two tunnels both reach valid destinations within a domain, the LAC first selects the tunnel with the highest preference level. For example, when Tunnel A has a preference level of 1 and Tunnel B has a preference level of 4, the LAC attempts to use Tunnel A first.

- Up to 31 destinations for a single preference level.

When the LAC determines that a PPP session should be tunneled, it selects a tunnel from the set of tunnels associated with either the PPP user or the PPP user's domain by a tunnel profile.

Tunnel selection is affected by the following configurations:

- **Failover between preference levels**—By default, when a tunnel to a valid destination is not selected within a preference level, the selection process fails over to the next level; that is, the LAC drops down to the next lower level to continue the search for a suitable tunnel. See [“Selection When Failover Between Preference Levels Is Configured” on page 157](#) for more information.
- **Failover within a preference level**—In this case, the LAC does not limit its attempts to establish a session to only a single tunnel at a preference level. If the attempt fails through the selected tunnel, the selection process fails over within that same level by selecting another suitable tunnel to a valid destination. The LAC continues its connection attempts within the level until no more tunnels to a valid destination are available at that level. Then the LAC drops down to the next lower level to continue the search. See [“Selection When Failover Within a Preference Level Is Configured” on page 162](#) for more information.
- **Maximum sessions per tunnel**—When the maximum number of sessions allowed per tunnel is configured, the LAC takes that setting into account during the tunnel selection process. The maximum number of sessions per tunnel can be configured by means of the RADIUS Tunnel-Max-Sessions VSA [26-33] or by including the **max-sessions** statement in a tunnel profile.

When a randomly selected tunnel has a current session count equal to its maximum session count, the LAC does not attempt to connect to a destination with that tunnel. Instead, it selects an alternate tunnel from the set of tunnels at that preference level that have valid destinations in the domain. If no such tunnels exist at the current preference level, the LAC drops to the next preference level to make the selection. This process is consistent, regardless of which failover scheme is currently running on the LAC.

When the maximum number of sessions is not configured for a tunnel, then that tunnel has no upper limit on the number of sessions it can support. By default, the maximum sessions value is 0 (zero), which allows unlimited sessions in the tunnel.

- **Weighted load balancing**—This balancing method uses a probability-based evaluation of tunnel weight to distribute sessions across tunnels. The LAC still selects tunnels randomly within a preference level, but on average the sessions are distributed across tunnels in relationship to the weight of the tunnels. The weight of a tunnel is determined by the tunnel's maximum session limit and the maximum session limits of the other tunnels at the same preference level. See [“Weighted Load Balancing” on page 164](#) for more information.
- **Destination-equal load balancing**—This session-balancing method evaluates tunnels according to the number of sessions to the destination and the number of sessions carried by the tunnel in order to spread the session load equally among all tunnels. The tunnel with a destination that has the lowest session count is determined to have the lightest load. This process operates on tunnels at the highest available preference level. See [“Destination-Equal Load Balancing” on page 165](#) for more information.

Take the following information into consideration to understand the tunnel and destination selection process and failover:

- More than one tunnel may be able to reach a destination, and those tunnels can have the same preference level or different preference levels.
- The tunnel selected to establish the subscriber session may itself already be established, meaning that it has currently active sessions. Alternatively, the LAC might have to establish a new tunnel to the destination if no tunnel capable of reaching the destination is already established.
- A *valid* destination meets the following criteria:
  - It is reachable by a tunnel that has not met its maximum session limit.
  - It has not yet been contacted for the current subscriber login request.
  - It can be either locked or unlocked.
- A *locked* destination is one for which the destination lockout timer is running. Locked destinations are placed on a lockout list until the timer expires or is cleared (reset to zero). Destinations on the list cannot be contacted to establish a session.
- An *unlocked* destination is one for which the destination lockout timer is zero.
- When the LAC discovers valid destinations that are locked, it places them on the DestinationsLockedNotContacted list, which is different than the lockout list that includes all locked-out destinations. The DestinationsLockedNotContacted list includes only locked destinations that the LAC has not yet attempted to contact for the current, in-progress subscriber login. The DestinationsLockedNotContacted list does not include destinations that the LAC locks out after it has attempted and failed to establish a connection.
- You can use the **clear services l2tp destination lockout** command to manually clear all locked destinations or only locked destinations that match the specified local or remote gateway address. You might use the command if, for example, you want to clear a specific destination so that it gets priority within a preference level.
- The failover behavior that is part of the tunnel selection process applies only when the destination is unreachable for one of the following reasons:
  - The LNS fails to return an SCCRP message in response to the SCCRQ message from the LAC after the maximum number of retransmission attempts.
  - The tunnel is established, but the LNS does not return an ICRP message in response to the ICRQ from the LAC after the maximum number of retransmission attempts.
- This failover behavior does not apply in the following circumstances:
  - The client terminates the connection.
  - The tunnel is established, but the LNS sends a CDN message while the LAC is attempting to establish the session with the LNS, resulting in the failure of the subscriber login attempt.

### Selection When Failover Between Preference Levels Is Configured

When a user tries to log in to a domain in a default configuration—that is, when failover within a preference level and load balancing are not configured—the LAC searches for valid destinations to the requested domain, starting at the highest tunnel preference level. If no valid destination is found, or the attempt to connect to a destination fails, the LAC drops down to the next lower level to continue searching. The search process is the same for all levels except for the lowest:

1. The search begins by identifying tunnels with valid destinations at the preference level from among all the tunnels specified in the domain's tunnel profile.
2. All locked, valid destinations are placed on the DestinationsLockedNotContacted list. No attempt is made to contact any of these destinations.
3. From among the unlocked, valid destinations, the LAC selects one at random and attempts to connect through the associated tunnel; if the tunnel has no current sessions, then the LAC must establish the tunnel.




**NOTE:** Random selection is the default behavior. The behavior is different when weighted load balancing or destination-equal load balancing is configured. See [“Selection When Distributing the Session Load Across Multiple LNSs” on page 164](#) for information about load balancing.

- If the attempt is successful, the LAC reports the successful login to the PPP client. The LAC also clears all destinations on the DestinationsLockedNotContacted list.
  - If the LAC receives no response, it retries the attempt up to the maximum retry number. If the LAC exhausts the retries without receiving a reply, the attempt is considered unsuccessful and the LAC marks the destination as unreachable by locking out the destination. It places the destination on the lockout list and starts the destination lockout timer.
4. What the LAC does next depends on the current preference level.
    - If it is not the lowest preference level, then the LAC drops to the next lower preference level and continues the search process.
    - If it is the lowest preference level and the DestinationsLockedNotContacted list is not empty, then the LAC unlocks all destinations in the DestinationsLockedNotContacted list and jumps back up to the highest preference level and restarts the search process.
    - If it is the lowest preference level and the DestinationsLockedNotContacted list is empty—meaning that all valid destinations have been attempted—then the LAC reports a failed login to the PPP client.
  5. When the valid destinations at one level are all locked, what the LAC does next depends on the current preference level.
    - If it is not the lowest preference level, then the LAC drops to the next lower preference level and continues the search process.

- If it is the lowest preference level, the LAC selects the locked, valid destination with the shortest remaining lockout time. It clears the lockout timer and attempts to connect to the destination and establish a session.
  - If the attempt is successful, the LAC reports the successful login to the PPP client.
  - If the attempt fails and the DestinationsLockedNotContacted list is empty—meaning that all valid destinations have been attempted—then the LAC reports a failed login to the PPP client.
  - If the attempt fails and the DestinationsLockedNotContacted list is not empty, then the LAC unlocks all destinations in the DestinationsLockedNotContacted list, jumps back up to the highest preference level, and restarts the search process.
- 6. When no valid destinations are present, what the LAC does next depends on the current preference level.
  - If it is not the lowest preference level, then the LAC drops to the next lower preference level and continues the search process.
  - If it is the lowest preference level and the DestinationsLockedNotContacted list is empty—meaning that all valid destinations have been attempted—then the LAC reports a failed login to the PPP client.
  - If it is the lowest preference level and the DestinationsLockedNotContacted list is not empty, then the LAC unlocks all destinations in the DestinationsLockedNotContacted list, jumps back up to the highest preference level, and restarts the process.
- 7. The search and failover process cycles through the levels until either a session is established or all valid destinations have been attempted—no destinations remain on the DestinationsLockedNotContacted list—and the login fails.

Figure 13 on page 159 illustrates the possible conditions and decision points that determine the selection of a destination and corresponding tunnel for the default case, where failover occurs between tunnel preference levels.

**Figure 13: Destination and Tunnel Selection Process with Failover Between Preference Levels**

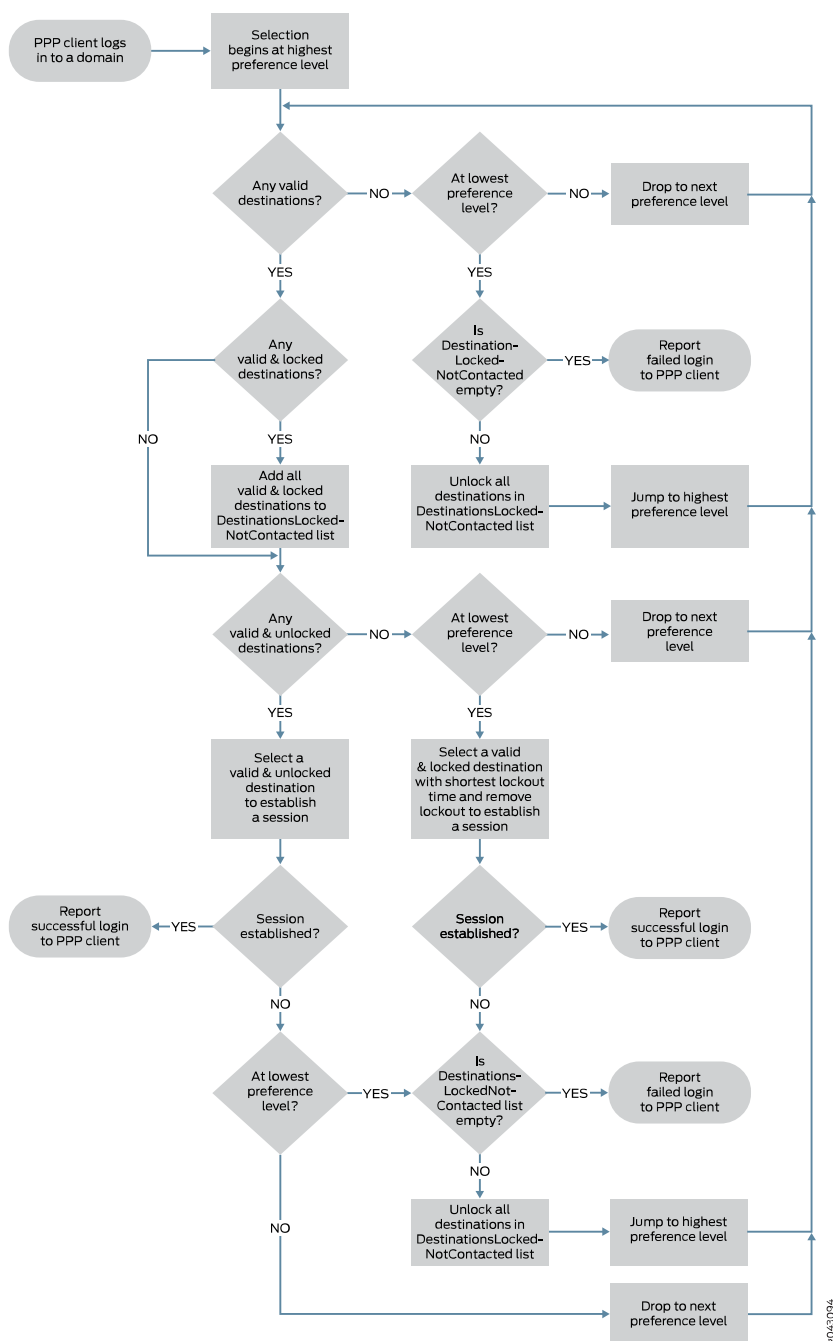

For example, suppose that the tunnel profile includes the following tunnels, each with a valid destination:

- Preference 0, Tunnel 1, 192.168.10.10
- Preference 1, Tunnel 2, 192.168.22.22

- Preference 1, Tunnel 3, 192.168.33.33
- Preference 2, Tunnel 4, 192.168.44.44

Failover within preference and load balancing are not configured.

When a PPP user tries to connect to the domain, the LAC acts as follows:

1. At the highest preference level, 0, the LAC selects Tunnel 1 because it is the only tunnel in the level with a valid destination. The LAC attempts to reach 192.168.10.10.
2. This connection attempt fails, so the LAC locks out 192.168.10.10. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
3. The LAC drops (fails over) to the next level, preference level 1, to reach a destination for the domain. The LAC randomly selects between 192.168.22.22 through Tunnel 2 and 192.168.33.33 through Tunnel 3. It selects 192.168.22.22 and attempts to connect through Tunnel 2.
4. The connection attempt to 192.168.22.22 fails, so the LAC locks out 192.168.22.22. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.



**NOTE:** Even though Tunnel 3 has an unlocked, valid destination, the LAC cannot now select that tunnel to reach 192.168.33.33, because the LAC can make only one attempt to reach a valid destination each time it searches in a level when the failover method is between preference levels.

5. The LAC drops to the final (lowest) level in this example, preference level 2. The LAC selects Tunnel 4 because it is the only tunnel in the level with a valid destination. The LAC attempts to reach 192.168.44.44.
6. The connection attempt to 192.168.44.44 also fails, so the LAC locks out 192.168.44.44. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
7. Because this is the lowest level, and the DestinationsLockedNotContacted list is empty, the LAC rejects the login request from the PPP client.

Destinations 192.168.10.10, 192.168.22.22, and 192.168.44.44 were locked out, but not added to the DestinationsLockedNotContacted list because the LAC locked them out after attempting to connect. Destination 192.168.33.33 was not contacted, but not added to the DestinationsLockedNotContacted list because it is not locked out.

8. The client tries to log in again and the LAC repeats the tunnel selection process, starting over at preference level 0 to check for an unlocked, valid destination, and cycling through the levels as needed.
9. At preference level 0, 192.168.10.10 is the only valid destination and is still locked out, so the LAC cannot attempt to connect to the destination. The LAC adds 192.168.10.10 to the DestinationsLockedNotContacted list and then drops to preference level 1.





**NOTE:** Remember that the destination lockout timer applies globally, so it persists across multiple subscriber logins. The DestinationsLockedNotContacted list applies only to a given subscriber login and does not persist. Even though the LAC contacted 192.168.10.10 for this subscriber, it was during a previous login attempt. In this login attempt, it cannot contact the destination because of the lockout, and consequently places the destination on the DestinationsLockedNotContacted list.

10. At preference level 1, 192.168.22.22 is still locked out, so the LAC adds 192.168.22.22 to the DestinationsLockedNotContacted list. 192.168.33.33 is still available. The LAC attempts to connect to 192.168.33.33 through Tunnel 3.
11. This connection attempt fails, so the LAC locks out 192.168.33.33. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires. The LAC drops to preference level 2.
12. 192.168.44.44 is still locked out, so the LAC adds 192.168.44.44 to the DestinationsLockedNotContacted list.
13. This is the lowest preference level, but this time the DestinationsLockedNotContacted list is not empty; it contains 192.168.10.10, 192.168.22.22, and 192.168.44.44. The LAC unlocks all destinations on the DestinationsLockedNotContacted list and then jumps back to the highest preference level.
14. At preference level 0, the LAC attempts to connect to 192.168.10.10 because it was unlocked. The LAC establishes the session and reports the successful login to the PPP client.

Although the LAC does not attempt to contact a destination that is locked out, there is a special case when the LAC has reached the lowest preference level. The level must have more than one valid destination and all of them must be locked out. For example, suppose that the tunnel profile includes the following tunnels, each with a valid destination:

- Preference 0, Tunnel 1, 192.168.10.10
- Preference 1, Tunnel 2, 192.168.22.22. The destination is locked out with the lockout timer currently at 245 seconds.
- Preference 1, Tunnel 3, 192.168.33.33. The destination is locked out with the lockout timer currently at 180 seconds.

Failover within preference and load balancing are not configured.

When a PPP user tries to connect to the domain, the LAC acts as follows:

1. At the highest preference level, 0, the LAC selects Tunnel 1 because it is the only tunnel in the level with a valid destination. The LAC attempts to reach 192.168.10.10.
2. This connection attempt fails, so the LAC locks out 192.168.10.10. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
3. The LAC drops to the next level, preference level 1, to reach a destination for the domain. Both valid destinations at this level, 192.168.22.22 and 192.168.33.33, are locked out.
4. The LAC adds both destinations to the DestinationsLockedNotContacted list.
5. Because this is the lowest preference level, the LAC determines which destination has a shorter remaining lockout time. It selects 192.168.33.33 because it has a shorter remaining lockout time (180 seconds) than 192.168.22.22 (245 seconds). The LAC unlocks 192.168.33.33 and attempts to connect through Tunnel 3. As a consequence, the LAC also removes 192.168.33.33 from the DestinationsLockedNotContacted list.
6. The connection attempt is successful and a session is established to 192.168.33.33. The LAC reports a successful login to the PPP client.

---

### Selection When Failover Within a Preference Level Is Configured

When you configure failover *within* a preference level, the destination and tunnel selection process is the same as for the default configuration, with one exception: the LAC is not limited to only one connection attempt at a preference level. When the LAC tries to connect to an unlocked, valid destination and is unsuccessful, it locks out that destination but does not immediately drop down to the next lower level. Instead, if another unlocked, valid destination is available at the same preference level, the LAC attempts to connect to that destination. If the LAC does not connect, then it continues to try to reach a destination within that preference level until no more unlocked, valid destinations remain to be attempted. At that point the LAC drops down to search at the next lower preference level. At each level, the LAC searches for and attempts to connect to a valid destination until no unlocked, valid destinations are available.

For example, suppose that the tunnel profile specifies the following tunnels and destinations. Load balancing is not configured. All destinations are valid; all are unlocked except 192.168.3.3. The preference levels for the tunnels are assigned as follows:

- Preference 0, Tunnel 1, 192.168.1.1, unlocked
- Preference 0, Tunnel 2, 192.168.2.2, unlocked
- Preference 0, Tunnel 3, 192.168.3.3, lockout timer 100 seconds
- Preference 1, Tunnel 4, 192.168.4.4, unlocked
- Preference 1, Tunnel 5, 192.168.5.5, unlocked

In this example, when a PPP user tries to connect to the domain, the LAC acts as follows:

1. The LAC randomly selects between the two unlocked, valid destinations at preference level 0, 192.168.1.1 through Tunnel 1 and 192.168.2.2 through Tunnel 2. It chooses 192.168.2.2 and attempts to connect through Tunnel 2.
2. The connection attempt to 192.168.2.2 fails, so the LAC locks out 192.168.2.2. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
3. The LAC then attempts to connect to 192.168.1.1 through Tunnel 1 at preference level 0.
4. The connection attempt to 192.168.1.1 fails, so the LAC locks out 192.168.1.1. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
5. 192.168.3.3 through Tunnel 3 is the only remaining valid destination at preference level 0, but it is locked. The LAC adds 192.168.3.3 to the DestinationsLockedNotContacted list. The LAC did not add 192.168.1.1 and 192.168.2.2 to the DestinationsLockedNotContacted list, because it locked them out after attempting to contact them.
6. Because level 0 has no more unlocked, valid destinations, the LAC drops to the next level, preference level 1, to reach a destination for the domain.
7. At preference level 1, the LAC randomly selects 192.168.4.4 and attempts to connect through Tunnel 4.
8. The connection attempt to 192.168.4.4 fails, so the LAC locks out 192.168.4.4. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
9. The LAC then attempts to connect to 192.168.5.5 through Tunnel 5 at preference level 1.
10. The connection attempt to 192.168.5.5 fails, so the LAC locks out 192.168.5.5. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires. Level 1 has no more unlocked, valid destinations. Because the DestinationsLockedNotContacted list is not empty, the LAC unlocks all the destinations on the list—in this case, 192.168.3.3—and jumps back up to the highest preference level, 0.
11. 192.168.3.3 is now the only unlocked destination at preference level 0, so the LAC attempts to connect to it through Tunnel 3.
12. The connection attempt to 192.168.3.3 fails, so the LAC locks out 192.168.3.3. It is not considered again during this login attempt, and cannot be considered for any login attempt until the destination lockout timer expires.
13. Because level 0 has no more unlocked, valid destinations, the LAC drops to the next level, preference level 1.
14. Preference level 1 has no unlocked, valid destinations. The DestinationsLockedNotContacted is empty because the LAC has contacted all valid

destinations at both preference levels. The LAC rejects the login request from the PPP client.

### **Selection When Distributing the Session Load Across Multiple LNSs**

---

Multiple tunnel profiles can be configured on the LAC; some tunnels may share destinations. When the LAC tunnels the session for a PPP subscriber to the LNS, a tunnel has to be selected for the subscriber session. The tunnel selection process chooses a tunnel with the highest preference that has a reachable destination. By default, the LAC selects a tunnel at random from among multiple tunnels that meet the same criteria. Alternatively, you can configure load balancing to enable different selection choices. Both load-balancing methods affect which tunnels and destinations the LAC selects, but the selection and failover process otherwise remains the same.



**NOTE:** Weighted load balancing and destination-equal load balancing are mutually exclusive. You can enable only one or the other.

---

#### ***Weighted Load Balancing***

Weighted load balancing evaluates tunnels according to their weight. The weight of a tunnel is determined by the tunnel's maximum session limit and the maximum session limits of the other tunnels at the same preference level. The tunnel with the highest maximum session limit has the highest weight in that preference level. The tunnel with the next-highest maximum session limit has the next-highest weight, and so on. The tunnel with the lowest maximum session limit has the lowest weight.



**NOTE:** Tunnel selection and session distribution are probability based; the load is not strictly distributed according to weight.

---

When you configure weighted load balancing, the LAC still selects tunnels randomly within a preference level, but on average the sessions are distributed across tunnels in relationship to the weight of the tunnels.

With weighted load balancing, the LAC generates a random number within a range equal to the aggregate total of all session limits for all tunnels in the preference level. It associates part of the range—a pool of numbers—with each tunnel proportional to the tunnel weight. A tunnel with a higher weight is associated with a greater portion of the range—a larger pool—than a tunnel with a lower weight. A tunnel is selected when the random number is in its associated pool of numbers. The random number is more likely, on average, to be in a larger pool, so a tunnel with a higher weight (larger pool) is more likely to be selected than a tunnel with a lower weight (smaller pool).

For example, consider a preference level that has only two tunnels, 1 and 2. Tunnel 1 has a maximum limit of 1000 sessions and Tunnel 2 has a limit of 2000 sessions, resulting in an aggregate total of 3000 sessions. The LAC generates a random number from a pool of 3000 in the range from 0 through 2999. A pool of 1000 numbers, the portion of the range from 0 through 999, is associated with Tunnel 1. A pool of 2000 numbers, the portion of the range from 1000 through 2999, is associated with Tunnel 2.

- When the generated number is less than 1000, then Tunnel 1 is selected, even though it has a lower weight (1000) than Tunnel 2 (2000).
- When the generated number is 1000 or larger, then Tunnel 2 is selected.

Because the pool of possible generated numbers for Tunnel 2 (2000) is twice that for Tunnel 1 (1000), Tunnel 2, *on average*, is selected twice as often as Tunnel 1.

### ***Destination-Equal Load Balancing***

Destination-equal load balancing evaluates tunnels according to the number of sessions to the destination and the number of sessions carried by the tunnel in order to spread the session load equally among all tunnels. The tunnel with a destination that has the lowest session count is considered to have the lightest load. This process operates on tunnels at the highest available preference level and uses the following guidelines:

- When each tunnel goes to a separate destination and only one destination has the lowest session count among all destinations, the LAC selects the tunnel to that destination.
- When each tunnel goes to a separate destination and more than one destination has the same lowest session count, the LAC selects a tunnel at random from among the tunnels to these destinations.
- When more than one tunnel goes to the same destination and that destination has the lowest destination session count, the LAC selects from among these tunnels the one that has the lowest total number of tunnel sessions. If the tunnel session count is the same for all these tunnels, then the LAC selects one of them at random.

Consider the following scenarios to better understand tunnel selection behavior when destination-equal load balancing is enabled.

In Scenario 1, every tunnel has a different valid destination and only the destination session count is evaluated:

- Tunnel 1, preference level 1, 192.168.1.1, destination session count = 200
- Tunnel 2, preference level 1, 192.168.2.2, destination session count = 50
- Tunnel 3, preference level 1, 192.168.3.3, destination session count = 300
- Tunnel 4, preference level 1, 192.168.4.4, destination session count = 100

When the first PPP user tries to connect to the domain, the LAC selects Tunnel 2, because it is at the highest preference level, 1, and has the valid destination, B, with the lowest session count, 50.

When additional PPP users try to connect to the domain, the LAC acts as follows:

1. Tunnel 2 continues to be selected until the session count for 192.168.2.2 equals 100, matching the next lowest session count, 192.168.4.4's in Tunnel 4.
2. When the next subscriber logs in, the LAC randomly selects between Tunnel 2 and Tunnel 4, because their destinations have the same session count, and it is lower than that for the other destinations.

3. Whichever tunnel is selected from this pair, the session count for its destination is now 101. The other tunnel is selected when the next subscriber logs in, because it has the lower destination session count of 100. This raises its destination session count to 101, matching the other tunnel.
4. As subscribers continue to log in, the LAC repeats this process, randomly selecting between Tunnel 2 and Tunnel 4 when their session counts match and then selecting the other tunnel with the next subscriber, until their destination session counts both reach 200, matching Tunnel 1.
5. When the next subscriber logs in, the LAC now randomly selects among Tunnel 1, Tunnel 2, and Tunnel 4, because 192.168.1.1, 192.168.2.2, 192.168.3.3 all have the same session count of 200. The destination session count is raised for the selected tunnel to 201, so for the next subscriber, the LAC randomly selects between the other two tunnels. Now two tunnels have a destination session count of 201, so the LAC selects the remaining tunnel for the next subscriber.
6. As subscribers continue to log in, the LAC repeats this process, randomly selecting among Tunnel 1, Tunnel 2, and Tunnel 4 when their session counts match, randomly selecting between the remaining pair for the next subscriber, and then selecting the remaining tunnel, so the destination session counts for these three tunnels match again. This pattern continues until the destination session count for all three tunnels reaches 300, matching Tunnel 3.
7. Now the destinations for all four tunnels have the same session count. Because there are only four tunnels, the final pattern is established. The LAC first randomly selects among all four tunnels, then the remaining three, then the remaining pair, and finally selects the last tunnel. When the destination session counts are all the same, the LAC starts this pattern again.

In Scenario 2, two tunnels share the same valid destination. The tunnel session count and the destination session count are both evaluated:

- Tunnel 1, preference level 1, tunnel session count = 120, 192.168.1.1, destination session count = 200
- Tunnel 2, preference level 1, tunnel session count = 80, 192.168.1.1, destination session count = 200
- Tunnel 3, preference level 1, 192.168.2.2, destination session count = 300
- Tunnel 4, preference level 2, 192.168.3.3, destination session count = 100

When the first PPP user tries to connect to the domain, the LAC first selects between destinations. The tunnels for both 192.168.1.1 and 192.168.2.2 are at preference level 1. The LAC selects 192.168.1.1, because it has a lower session count (200) than 192.168.2.2 (300). The LAC then has to choose between Tunnel 1 and Tunnel 2 because both go to 192.168.1.1. The LAC evaluates the tunnel session count. Tunnel 2 has a lower count (80) than Tunnel 1 (120), so the LAC selects Tunnel 2 for the first subscriber.

When additional PPP users try to connect to the domain, the LAC acts as follows:

1. Tunnel 2 continues to be selected until its tunnel session count increases to 120, matching Tunnel 1.
2. When the next subscriber logs in, the LAC randomly selects between Tunnel 1 and Tunnel 2, because they have the same tunnel session count. The tunnel session count of the selected tunnel is raised to 121.
3. When the next subscriber logs in, the LAC selects the other tunnel to 192.168.1.1, because it has a lower tunnel session count. From this point, the LAC continues to alternate, first making a random selection between Tunnels 1 and 2 and then selecting the other tunnel, until the destination session count rises to 300, matching the session count for 192.168.2.2 in Tunnel 3. (At this point, the tunnel session count is 150 for both Tunnel 1 and Tunnel 2.)
4. For the next subscriber, the LAC randomly selects among Tunnels 1, 2, and 3.
  - If the LAC selects either Tunnel 1 or Tunnel 2, the 192.168.1.1 session count rises to 301. Consequently the LAC selects Tunnel 3 for the next subscriber because the 192.168.2.2 session count is still 300. At this point, both destinations have the same session count again.
  - If the LAC selects Tunnel 3, the 192.168.2.2 session count rises to 301. For the next subscriber, the LAC randomly selects between Tunnel 1 and Tunnel 2 because they both go to 192.168.1.1. Whichever one the LAC selects, the 192.168.1.1 session count rises to 301. At this point, both destinations have the same session count again.



**NOTE:** The tunnel session count for Tunnels 1 and 2 is no longer evaluated; the LAC only considers the destination session count for 192.168.1.1 and 192.168.2.2.

This pattern continues for all subsequent subscribers.

In Scenario 3, each tunnel has a different valid destination and only the destination session count is evaluated:

- Tunnel 1, preference level 1, 192.168.1.1, destination session count = 100
- Tunnel 2, preference level 1, 192.168.2.2, destination session count = 100
- Tunnel 3, preference level 1, 192.168.3.3, destination session count = 100
- Tunnel 4, preference level 1, 192.168.4.4, destination session count = 100

When the first PPP user tries to connect to the domain, the LAC determines that the destination session count is the same for all destinations for all four tunnels at the preference level. Consequently, the LAC selects randomly among the four tunnels.

Suppose the LAC selects Tunnel 1 for the first subscriber.

When additional PPP users try to connect to the domain, the LAC acts as follows:

1. The LAC selects randomly among Tunnels 2, 3, and 4, because Destinations 192.168.2.2, 192.168.3.3, and 192.168.4.4 all have the same session count, 100, which is lower than the current session count for 192.168.1.1, 101.
2. Suppose the LAC selects Tunnel 2. For the next subscriber, the LAC randomly selects between Tunnels 3 and 4, because 192.168.3.3 and 192.168.4.4 all have the same session count, 100, which is lower than the current session count of 101 for 192.168.1.1 and 192.168.2.2.
3. Suppose the LAC selects Tunnel 3. For the next subscriber, the LAC selects Tunnel 4, because 192.168.4.4 has a session count of 100, and all the other destinations have a count of 101.
4. Now the destinations for all four tunnels have the same session count. Because there are only four tunnels, the final pattern is established. As subscribers continue to log in, the LAC first randomly selects among all four tunnels, then the remaining three, then the remaining pair, and finally selects the last tunnel. When the destination session counts are all the same, the LAC starts this pattern again.

In Scenario 4, the LAC evaluates both destination session limits and tunnel maximum session limits:

- Tunnel 1, preference level 1, 192.168.1.1, destination session count = 30, tunnel maximum session limit = 200
- Tunnel 2, preference level 1, 192.168.2.2, destination session count = 40, tunnel maximum session limit = 200
- Tunnel 3, preference level 1, 192.168.3.3, destination session count = 300, tunnel maximum session limit = 1000
- Tunnel 4, preference level 2, 192.168.4.4, destination session count = 100

When the first PPP user tries to connect to the domain, the LAC selects Tunnel 1, because 192.168.1.1 has the lowest session count in the preference level.

When additional PPP users try to connect to the domain, the LAC acts as follows:

1. The LAC continues to select Tunnel 1 until the destination session count for 192.168.1.1 equals 40, matching the count for 192.168.2.2 in Tunnel 2.
2. When the next subscriber logs in, the LAC randomly selects between Tunnel 1 and Tunnel 2, because their destinations have the same session count, and it is lower than that for Tunnel 3 (300).
3. Whichever tunnel is selected from this pair, the session count for its destination is now 41. The other tunnel is selected when the next subscriber logs in, because it has



the lower destination session count of 40. This raises its destination session count to 41, matching the other tunnel.

4. As subscribers continue to log in, the LAC repeats this process, randomly selecting between Tunnel 1 and Tunnel 2 when their session counts match and then selecting the other tunnel with the next subscriber, until their destination session counts both reach 200, matching their tunnel maximum session limit of 200. Because both tunnels have reached their maximum session limit, they are not available for selection.
5. As subscribers continue to log in, the LAC selects the remaining tunnel in the preference level, Tunnel 3, until the session count for its destination reaches the maximum session limit for the tunnel, 1000.
6. When the next subscriber logs in, the LAC drops to the next preference level and selects Tunnel 4, because it is the only tunnel at this level.
7. As subscribers continue to log in, the LAC continues to select Tunnel 4, because no maximum session limit is configured for this tunnel. The LAC can subsequently select a tunnel in the higher preference level only when a session is terminated for one of the tunnels at that level, dropping its session count below the maximum limit.

In Scenario 5, one of the destinations is locked:

- Tunnel 1, preference level 1, 192.168.1.1, destination session count = 100, destination locked out
- Tunnel 2, preference level 1, 192.168.2.2, destination session count = 200
- Tunnel 3, preference level 1, 192.168.3.3, destination session count = 250

When the first PPP user tries to connect to the domain, the LAC cannot select Tunnel 1, even though its destination has the lowest session count, because the tunnel is in the destination lockout state. Tunnel 1 cannot be considered until it is out of the locked state. The LAC selects Tunnel 2 because the session count for 192.168.2.2 is lower than for 192.168.3.3.

When additional PPP users try to connect to the domain, what happens next depends on when 192.168.1.1 emerges from the lockout state. For as long as 192.168.1.1 is locked out, the LAC makes the selections as follows:

1. The LAC continues to select Tunnel 2 until the session count for 192.168.2.2 equals 250, matching the count for 192.168.3.3 in Tunnel 3.
2. When the next subscriber logs in, the LAC randomly selects between Tunnel 2 and Tunnel 3, because their destinations have the same session count, 250.
3. Whichever tunnel is selected from this pair, the session count for its destination is now 251. The other tunnel is selected when the next subscriber logs in, because it has the lower destination session count of 250. This raises its destination session count to 251, matching the other tunnel.
4. As subscribers continue to log in, the LAC repeats this process, randomly selecting between Tunnel 2 and Tunnel 3 when their session counts match and then selecting the other tunnel with the next subscriber.

Whenever 192.168.1.1 emerges from the lockout state, the LAC selects Tunnel 1 for the next subscriber because 192.168.1.1 has the lowest session count. The LAC continues to do so until the session count for 192.168.1.1 matches the current session count for either of the other destinations. From that point forward, the LAC alternates making a random selection between tunnels with matching destination session counts and then subsequently selecting the tunnel with the lowest count.

Whenever 192.168.1.1 emerges from the lockout state,

1. The LAC selects Tunnel 1 for the next subscriber because 192.168.1.1 has the lowest session count.
2. The LAC continues to select Tunnel 1 until the session count for 192.168.1.1 matches the current session count for either of the other destinations.
3. From that point forward, the LAC alternates making a random selection between tunnels with matching destination session counts and then subsequently selecting the tunnel with the lowest count.

## L2TP Session Limits Overview

When an L2TP session request is initiated, the LNS or LAC checks the number of current active sessions against the maximum number of sessions allowed for the chassis, tunnels, a tunnel group, a client (requesting host device), or a group of clients. New session requests are rejected when the configured session limit is reached.

When a session is requested, the LNS checks for session limits in the following order:

chassis > tunnel > tunnel group > session-limit group > client

At each level, the LNS determines whether the current session count is less than the configured limit. When that is true or when no limit is configured, the check passes and the LNS proceeds to check the next level. If at any level the current session count is equal to the configured limit, then the LNS rejects the session request and does not check any other level. Otherwise, the session can be established.

When a session request is rejected for an existing tunnel, a Call-Disconnect-Notify (CDN) message with a result code and error code both set to 4 is returned in response to the incoming-call request (ICRQ). When the rejected request is for a new tunnel, the tunnel is established but the session fails to come up, causing the tunnel to come down because it has no sessions.

The LAC performs the same check, but only for the chassis and tunnel levels. The LAC rejects requests by returning a PPP terminate message to the client.

You can configure session limits for the chassis, all tunnels, a tunnel group, a group of clients, or an individual client. The scenarios that follow describe what happens for different configurations of session limits.

### Scenario 1: Chassis Limit

---

In [Table 15 on page 171](#), the current L2TP session count is 10,000 and the session limit is configured as 10,000 at every level. When a new session is requested, the first check at

the chassis level fails, because the current session count matches the configured limit. No further checks are performed at the other levels and the session request is rejected. No new sessions are allowed at any level until the current session count drops below 10,000.

**Table 15: Scenario 1, Chassis Limit**

Level	Configured Session Limit	Current Session Count Displayed by <code>show services l2tp summary</code> Command	Session Limit Check Result
Chassis	10,000	10,000	Fail
Tunnel A	10,000	10,000	–
Tunnel group B	10,000	10,000	–
Session-limit group	10,000	10,000	–
Client	10,000	10,000	–

#### Scenario 2: Tunnel Limit

In [Table 16 on page 171](#), the current L2TP session count is 2000. When a new session is requested, the first check at the chassis level passes because the configured limit allows up to 10,000 sessions on the chassis, but only 2000 sessions are currently active. The next check, at the tunnel level, fails, because the current session count matches the configured limit tunnel limit of 2000 for tunnel A.

No further checks are performed at the other levels and the session request is rejected.

**Table 16: Scenario 2, Tunnel Limit**

Level	Configured Session Limit	Current Session Count Displayed by <code>show services l2tp summary</code> Command	Session Limit Check Result
Chassis	10,000	2000	Pass
Tunnel A	2000	2000	Fail
Tunnel group B	10,000	2000	–
Session-limit group	6000	2000	–
Client	6000	2000	–

No new sessions are allowed on tunnel A until its current session count drops below 2000 and the session check can pass. If that happens, then the other level checks pass in this scenario because their configured limits are greater than their current counts.

The session limit of 2000 applies to all tunnels; that is, each active tunnel has an independent limit of 2000 sessions. The failure of one tunnel has no effect on other

tunnels. A session request on any other tunnel passes, as long as the current session count for that tunnel is less than 2000.

### Scenario 3: Tunnel Group Limit

In [Table 17 on page 172](#), the current L2TP session count is 2000. When a new session is requested, the first check at the chassis level passes because the configured limit allows up to 10,000 sessions on the chassis, but only 2000 sessions are currently active. The second check, at the tunnel level, also passes for the same reason. The next check, at the tunnel group level for tunnel group B, fails, because the current session count for tunnel group B matches the configured limit tunnel group limit of 2000.

No further checks are performed at the other levels and the session request is rejected.

**Table 17: Scenario 3, Tunnel Group Limit**

Level	Configured Session Limit	Current Session Count Displayed by show services l2tp summary Command	Session Limit Check Result
Chassis	10,000	2000	Pass
Tunnel A	10,000	2000	Pass
Tunnel group B	2000	2000	Fail
Session-limit group	6000	2000	—
Client	6000	2000	—

No new sessions are allowed on tunnel group B until its current session count drops below 2000 and the session check can pass. If that happens, then the other level checks can pass because their configured limits are greater than their current counts.

For tunnel groups, the session limit is configured on a per-group basis; that is, you cannot specify a single limit that applies to all tunnel groups. The failure of any tunnel group has no effect on other tunnel groups. In this scenario, a session request on any other tunnel group passes, if the current session count for that group is less than its configured session limit.

### Scenario 4: Session-Limit Group Limit

In [Table 18 on page 173](#), the current L2TP session count is 6000. When a new session is requested, the check passes for the chassis, tunnel, and tunnel group because the configured limit for each allows up to 10,000 sessions, but only 6000 sessions are currently active. The check at the session-limit group fails, because the current session count for session-limit group slg1 matches the configured limit of 6000.

No further checks are performed at the remaining level and the session request is rejected.

Table 18: Scenario 4, Session-Limit Group Limit

Level	Configured Session Limit	Current Session Count Displayed by show services l2tp summary Command	Session Limit Check Result
Chassis	10,000	6000	Pass
Tunnel A	10,000	6000	Pass
Tunnel group B	10,000	6000	Pass
Session-Limit group slg1	6000	6000	Fail
Client	8000	2000	–

No new sessions are allowed for any clients in session-limit group slg1 until the group's current session count drops below 6000 and the session check can pass. If that happens, then the remaining level check can pass because its configured limit is greater than its current count.

You can reconfigure a session-limit group by removing or adding clients without affecting any current sessions. The reconfiguration does affect the number of sessions available to be established for the client group.

- If you remove a client, then the number of new sessions that can be established increases by the number of that client's current sessions.
- If you add a client, then the number of new sessions that can be established is reduced by the number of that client's current sessions. The new total of current sessions for existing clients plus the new client can exceed the configured limit for the session-limit group. In this case, no sessions are dropped, but no new sessions can be established until the session count drops below the configured group limit.

To explore this further, consider the following sequence of events:

1. The session-limit group slg1 has two clients, ent1-serviceA with a current session count of 3500 and ent1-serviceB with a current session count of 0. Because group slg1 has a limit of 6000, no more than 2500 sessions can be added for these clients:  

$$6000 - 3500 = 2500$$
2. Then 1000 sessions are logged in for client ent1-service B. Now no more than 1500 sessions can be added for these clients:  

$$6000 - (3500 + 1000) = 1500$$
3. Next, suppose you remove client ent1-serviceA from the session-limit group. The group session capacity increases to 5000 sessions:

$$6000 - 1000 = 5000$$

4. Finally, you add a new client, ent1-serviceC, to the session-limit group. This new client currently has 8000 active sessions. In this case, the session-limit group now has 9000 sessions:

$$1000 + 8000 = 9000$$

No sessions are dropped even though the maximum session limit for the group, 6000, is exceeded. No new sessions can be added until the session count drops from 9000 to below 6000.

### Scenario 5: Individual Client Limit

In [Table 19 on page 174](#), the session check passes for the chassis, tunnel, and tunnel group because their configured limits are greater than their current session counts. The client, ent1-serviceA, does not belong to a session-limit-group. The limit check fails for the client because its current session count matches the configured limit of 6000.

**Table 19: Scenario 5, Individual Client Limit**

Level	Configured Session Limit	Current Session Count Displayed by show services l2tp summary Command	Session Limit Check Result
Chassis	10,000	6000	Pass
Tunnel A	10,000	6000	Pass
Tunnel group B	8000	6000	Pass
Client ent1-serviceA	6000	6000	Fail

No new sessions are allowed for this client until its current session count drops below 6000 and the session check can pass. The failure of any independent client has no effect on other clients. In this scenario, a session request for any other independent client passes, if the current session count for that client is less than its configured session limit.

The session limit that you set for an individual client—one that is not part of a session-limit group—applies on a per-tunnel-group basis. Multiple LACs with the same source hostname but different source IP addresses are treated as the same client.

Suppose you have three LACs, A, B, and C. All three have the same source hostname, ce-lac. LAC A and LAC B establish sessions with an LNS through the gateway address associated with tunnel group 1. LAC C establishes sessions through a different gateway associated with tunnel group 2. Because the LACs have the same hostname, the client configuration is the same for all three. However, the client session limit applies differently to the LACs because of the tunnel groups.

Suppose the client session limit is 100. Because LAC A and LAC B both create sessions in tunnel group 1, they must share the client limit. That means that the total number of sessions allowed for LAC A and LAC B combined is 100.

LAC C creates sessions in a different tunnel group, 2. Because the client session limit applies per tunnel group, then LAC C is allowed 100 sessions, regardless of how many sessions LAC A and LAC B have already established.

## Limiting the Number of L2TP Sessions Allowed by the LAC or LNS

You can place a limit on the maximum number of L2TP sessions allowed for the chassis, all tunnels, a tunnel group, a group of clients, an individual client, or an individual service interface or aggregated service interface. New session requests are rejected by the LNS or LAC when the configured session limit is reached. Session requests are also rejected when the maximum chassis limit has been reached, even when a configured limit is not exceeded. Configurable session limits provide fine-grained control of the number of sessions that a customer can have while connected over LACs in multiple locations.



**NOTE:** You cannot set the limit to be more than the default maximum limit for the chassis.

To limit the number of sessions allowed on a chassis (LAC or LNS):

- Configure the maximum number of sessions.

```
[edit services l2tp]
user@host# set maximum-sessions number
```

To limit the number of sessions per tunnel for all tunnels (LAC or LNS):

- Configure the maximum number of sessions.

```
[edit services l2tp tunnel ]
user@host# set maximum-sessions number
```

You cannot set the limit to be more than 65,535 sessions.

To limit the number of sessions for all tunnels in a specific tunnel group (LNS):

- Configure the maximum number of sessions.

```
[edit services l2tp tunnel-group tunnel-group-name]
user@host# set maximum-sessions number
```

To limit the number of sessions that are allowed on an individual service interface:

- Configure the maximum number of sessions.

```
[edit interfaces si-slot/pic/port]
user@host# set l2tp-maximum-session number
```

To limit the number of sessions that are allowed on an individual aggregated service interface:

- Configure the maximum number of sessions.

```
[edit interfaces asnumber]
user@host# set l2tp-maximum-session number
```



**NOTE:** The configuration applies to all member interfaces; the limit cannot be configured for individual member interfaces of the aggregated service interface.

To limit the number of sessions for a group of clients (LNS):

1. Configure the maximum number of sessions.

```
[edit services l2tp sessions-limit-group limit-group-name]
user@host# set maximum-sessions number
```

2. Associate a client with the session-limit group.

```
[edit access profile profile-name client client-name l2tp]
user@host# set sessions-limit-group limit-group-name
```

To limit the number of sessions for a client that is not a member of a session-limit group (LNS):

- Configure the maximum number of sessions.

```
[edit access profile profile-name client client-name]
user@host# set maximum-sessions number
```



**NOTE:** Configuring the session limit at any level to be less than the number of sessions that currently exist at that level has no effect on existing sessions. The new limit applies only if the number of sessions drops below the new limit.

## Setting the Format for the Tunnel Name

By default, the name of a tunnel corresponds to the Tunnel-Assignment-Id [82] returned by the AAA server. You can optionally configure the LAC to use more elements in the construction of a tunnel name by including the **assignment-id-format client-server-id** statement at the **[edit services l2tp tunnel]** hierarchy level. This format uses three attributes: Tunnel-Client-Auth-Id [90], Tunnel-Server-Endpoint [67], and Tunnel-Assignment-Id [82]. These attributes correspond, respectively, to the values



configured in the tunnel profile for the LAC (source gateway) name, the tunnel endpoint (remote gateway) address on the LNS, and the tunnel ID.

A consequence of the **client-server-id** format is that the LAC automatically creates a new tunnel when the AAA server returns a different Tunnel-Client-Auth-Id than previously returned.



**NOTE:** Before you downgrade to a Junos OS Release that does not support this statement, we recommend that you explicitly unconfigure the feature by including the `no assignment-id-format assignment-id` statement at the `[edit services l2tp tunnel]` hierarchy level.

To change how the tunnel name is formatted:

- Configure the format.

```
[edit services l2tp tunnel]
user@host# set assignment-id-format client-server-id
```

## Configuring a Tunnel Profile for Subscriber Access

The tunnel profile specifies a set of attributes to characterize the tunnel. The profile can be applied by a domain map or automatically when the tunnel is created.



**NOTE:** RADIUS attributes and VSAs can override the values you configured by a tunnel profile in a domain map. In the absence of a domain map, RADIUS can supply all the characteristics of a tunnel. The steps in the following procedure list the corresponding standard RADIUS attribute or VSA that you can configure on your RADIUS server to modify or configure the tunnel profile.

RADIUS-supplied attributes are associated with a tunnel by a tag carried in the attribute, which matches the tunnel identifier. A tag of 0 indicates the tag is not used. If L2TP receives a RADIUS attribute with a tag of 0, the attribute cannot be merged with the tunnel profile configuration corresponding to the subscriber domain because a tunnel profile cannot provide a tunnel tag (tunnel identifier) of 0. Only tags in the range of 1 through 31 are supported.

To configure a tunnel definition for a tunnel profile:

1. Specify the tunnel profile for which you are defining a tunnel. (Tunnel-Group [26-64])

```
[edit access]
user@host# set tunnel-profile profile-name
```

2. Specify an identifier (name) for the L2TP control connection for the tunnel.

```
[edit access tunnel-profile profile-name]  
user@host# set tunnel tunnel-id
```

3. Configure the IP address of the local L2TP tunnel endpoint, the LAC. (Tunnel-Client-Endpoint [66])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set source-gateway address client-ip-address
```

4. Configure the IP address of the remote L2TP tunnel endpoint, the LNS. (Tunnel-Server-Endpoint [67])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set remote-gateway address server-ip-address
```

5. (Optional) Configure the preference level for the tunnel. (Tunnel-Preference [83])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set preference number
```

6. (Optional) Configure the hostname of the local client (LAC). (Tunnel-Client-Auth-Id [90])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set source-gateway gateway-name client-name
```

7. (Optional) Configure the hostname of the remote server (LNS). (Tunnel-Server-Auth-Id [91])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set remote-gateway gateway-name server-name
```

8. (Optional) Specify the medium (network) type for the tunnel. (Tunnel-Medium-Type [65])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set medium type
```

9. (Optional) Specify the protocol type for the tunnel. (Tunnel-Type [64])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]  
user@host# set type tunnel-type
```

10. (Optional) Configure the assignment ID for the tunnel. (Tunnel-Assignment-Id [82])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]
user@host# set identification name
```

11. (Optional) Configure the maximum number of sessions allowed in the tunnel. (Tunnel-Max-Sessions [26-33])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]
user@host# set max-sessions number
```

12. (Optional) Configure the password for remote server authentication. (Standard RADIUS attribute Tunnel-Password [69] or VSA Tunnel-Password [26-9])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]
user@host# set secret password
```

13. (Optional) Configure the logical system to use for the tunnel.

If you configure a logical system, you must also configure a routing instance.

```
[edit access tunnel-profile profile-name tunnel tunnel-id]
user@host# set logical-system logical-system-name
```

14. (Optional) Configure the routing instance to use for the tunnel. (Tunnel-Virtual-Router [26-8])

If you configure a routing instance, configuring a logical system is optional.

```
[edit access tunnel-profile profile-name tunnel tunnel-id]
user@host# set routing-instance routing-instance-name
```

15. (Optional) Enable the LAC to interoperate with Cisco LNS devices. (Tunnel-Nas-Port-Method [26-30])

```
[edit access tunnel-profile profile-name tunnel tunnel-id]
user@host# set nas-port-method cisco-avp
```

The following example shows a complete configuration for a tunnel profile:

```
tunnel-profile marketing {
  tunnel 1 {
    preference 5;
    remote-gateway {
      address 198.51.100.4;
      gateway-name work;
    }
    source-gateway {
      address 192.0.2.10;
      gateway-name local;
    }
  }
}
```

```
}
secret $ABC123;
logical-system bos-metro-5;
routing-instance rox-12-32;
medium ipv4;
type l2tp;
identification tunnel_to_work;
max-sessions 32;
nas-port-method cisco avp;
}
}
```

## Configuring the L2TP LAC Tunnel Selection Parameters

When the LAC determines that a PPP session should be tunneled, it selects a tunnel from the set of tunnels associated with either the PPP user or the PPP user's domain. You can configure how a tunnel is selected and whether certain information is sent by the LAC to the LNS.

To configure tunnel selection parameters:

1. (Optional) Configure how a tunnel is selected when a connection attempt fails.  
See [“Configuring LAC Tunnel Selection Failover Within a Preference Level” on page 180](#).
2. (Optional) Configure how sessions are load-balanced among tunnels.  
See [“Configuring Weighted Load Balancing for LAC Tunnel Sessions” on page 181](#).
3. (Optional) Configure sessions to be load-balanced among tunnels within a preference level, by distributing the sessions equally among all tunnels.  
See [“Configuring Destination-Equal Load Balancing for LAC Tunnel Sessions” on page 181](#).

## Configuring LAC Tunnel Selection Failover Within a Preference Level

You can configure how LAC tunnel selection continues in the event of a failure to connect. By default, when the router is unable to connect to a destination at a given preference level, it attempts to connect at the next lower level. You can specify that the router instead attempt to connect to another destination at the same level as the failed attempt.

If all destinations at a preference level are marked as unreachable, the router does not attempt to connect to a destination at that level. It drops to the next lower preference level to select a destination.

If all destinations at all preference levels are marked as unreachable, the router chooses the destination that failed first and tries to make a connection. If the connection fails, the router rejects the PPP user session without attempting to contact the remote router.

For example, suppose there are four tunnels for a domain: A, B, C, and D. All tunnels are considered reachable, and the preference levels are assigned as follows:

- A and B at preference 0
- C and D at preference 1

When the router attempts to connect to the domain, suppose it randomly selects tunnel B from preference 0. If it fails to connect to tunnel B, the router excludes tunnel B for five minutes and attempts to connect to tunnel A. If this attempt also fails, the router drops to preference 1. Then suppose the router selects tunnel C. If it also fails to connect to tunnel C, the router excludes tunnel C for five minutes and attempts to connect to tunnel D.

You configure the preference level used for this tunnel selection method in the tunnel profile or the RADIUS Tunnel-Preference [83] attribute.

To enable tunnel selection failover within a preference level:

- Specify failover within preference.

```
[edit services l2tp]
user@host# set failover-within-preference
```

## Configuring Weighted Load Balancing for LAC Tunnel Sessions

By default, the L2TP LAC selects tunnels for new sessions at random from within the highest available preference level. You can configure the LAC to distribute sessions across tunnels at the highest available preference level by evaluating the weight of each tunnel. This method is known as *weighted load balancing*. The weight of a tunnel is proportional to its maximum session limit and the maximum session limits of the other tunnels at the same preference level. When you configure weighted load balancing, the LAC still selects tunnels randomly within a preference level, but on average the sessions are distributed across tunnels in relationship to the tunnel weights.

To configure weighted load balancing:

- Specify load balancing.

```
[edit services l2tp]
user@host# set weighted-load-balancing
```

## Configuring Destination-Equal Load Balancing for LAC Tunnel Sessions

By default, the L2TP LAC selects tunnels for new sessions at random from within the highest available preference level. Starting in Junos OS Release 15.1, you can configure the LAC to distribute sessions equally across all tunnels at the highest available preference level by evaluating the number of sessions to the destinations and the number of sessions carried by the tunnels. This distribution method is known as *destination-equal load balancing*. The LAC selects the tunnel with the lightest load, according to the following guidelines:

- When each tunnel goes to a separate destination and only one destination has the lowest session count among all destinations, the LAC selects the tunnel to that destination.
- When each tunnel goes to a separate destination and more than one destination has the same lowest session count, the LAC selects a tunnel at random from among the tunnels to these destinations.
- When more than one tunnel goes to the same destination and that destination has the lowest destination session count, the LAC selects from among these tunnels the one that has the lowest total number of tunnel sessions. If the tunnel session count is the same for all these tunnels, then the LAC selects one of them at random.

To configure destination-equal load balancing:

- Specify destination-equal load balancing.

```
[edit services l2tp]  
user@host# set destination-equal-load-balancing
```

## Enabling the LAC for IPv6 Services

You can configure the LAC to create the IPv6 address family (inet6) when tunneling the subscribers to the LNS. IPv6 firewall filters can then be applied by services on the LAC to subscriber traffic. By default, the LAC requires only family inet to enable forwarding into an IP tunnel. The LAC can apply IPv4 firewall filters to the session. Even when family inet6 is included in the dynamic profile, by default it is not created in order to conserve resources, because it is not needed. Consequently IPv6 firewall filters cannot be applied.

To enable IPv6 address family creation and the application of IPv6 firewall filters:

- Configure enabling.

```
[edit services l2tp]  
user@host# set enable-ipv6-services-for-lac
```

You can use the `show services l2tp summary` command to display whether the statement is enabled or disabled.

## Testing L2TP Tunnel Configurations from the LAC

You can test L2TP tunnel configurations on the LAC and successful subscriber authentication and tunneling without bringing up a PPP user and an associated tunnel.

Issue the **test services l2tp tunnel** command from CLI operational mode to map a subscriber to an L2TP tunnel, verify the L2TP tunnel configuration (both locally on the LAC and on a back-end server such as a RADIUS server), and verify that L2TP tunnels from the LAC can be established with the remote LNS.

The Junos OS LAC implementation enables you to configure multiple tunnels from which one tunnel is chosen for tunneling a PPP subscriber. You can use the **test services l2tp**

**tunnel** command to test all possible tunnel configurations to verify that each can be established. Alternatively, you can test only a specific tunnel for the subscriber.

You must specify a configured subscriber username when you issue the command. The test generates a dummy password—*testpass*—for the subscriber, or you can optionally specify the password. The test verifies whether the subscriber identified by that username can be tunneled according to the tunnel configuration. If the subscriber can be tunneled, then the test verifies whether the L2TP tunnel can be established with the LNS according to the L2TP configuration.

You can optionally specify a tunnel ID, in which case only that tunnel is tested; the tunnel must be already configured for that username. If you omit this option, the test is applied to the full set of tunnel configurations that are returned for the username. The tunnel ID you specify is the same as that used by Tunnel-Assignment-Id (RADIUS attribute 82) and specified by the **identification** statement in the tunnel profile.

To test subscriber authentication and tunnel configuration:

- Specify only the username.

Example 1:

```
user@host> test services l2tp tunnel user test-user1@example.com
Subscriber: test-user1@example.com, authentication failed
```

The user failed authentication with the generated password and consequently was not tunneled.

Example 2:

```
user@host> test services l2tp tunnel user user23@example.com
Subscriber: user23@example.com, authentication success, l2tp tunneled
  Tunnel-name  Tunnel-peer  Logical-System  Routing-Instance  Status
test1tunnel   192.168.2.3   default         default           Up
test2tunnel   192.168.30.3  default         default           Peer unresponsive
test3tunnel   192.168.50.1  default         test             Up
```

This user was authenticated with the generated password and successfully tunneled. A set of tunnels was found to be associated with that username and the entire set was tested.

- Specify the username and the user's configured password.

```
user@host> test services l2tp tunnel user test-user1@example.com password grZ98#jW
Subscriber: test-user1@example.com, authentication success, locally terminated
```

The subscriber was authenticated. However, the user was terminated locally rather than tunneled; this means that no tunnel was found to be associated with the user.

- Specify the username and a particular tunnel for the subscriber.

```
user@host> test services l2tp tunnel user rx37w@example.com tunnel-name ce-lac
```

```
Subscriber: rx37w@example.com, authentication success, l2tp tunneled
Tunnel-name Tunnel-peer Logical-System Routing-Instance Status
ce-lac 192.168.5.10 default default Up
```

The subscriber was authenticated and tunneled. The specified tunnel was found for the subscriber and the tunnel was established, confirming the tunnel configuration.

- Specify the username, the user's configured password, and a tunnel.

```
user@host> test services l2tp tunnel user fanta4-mfg-fan@example.com password dieda499
tunnel-name tunnel5
```

```
Subscriber: fanta4-mfg-fan@example.com, authentication success, l2tp tunneled
```

The subscriber was authenticated and tunneled. The absence of tunnel information in the output indicates that the specified tunnel configuration does not exist.

#### Release History Table

Release	Description
15.1	Starting in Junos OS Release 15.1, you can configure the LAC to distribute sessions equally across all tunnels at the highest available preference level by evaluating the number of sessions to the destinations and the number of sessions carried by the tunnels.

#### Related Documentation

- [L2TP for Subscriber Access Overview on page 121](#)
- [Configuring an L2TP LAC on page 148](#)
- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
- [Configuring the L2TP Destination Lockout Timeout on page 145](#)
- [Specifying a Tunnel Profile in a Domain Map](#)
- [L2TP Session Limits and Load Balancing for Service Interfaces on page 233](#)
- [Configuring L2TP Tunnel Groups](#)
- [Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248](#)
- [Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces on page 229](#)
- [Domain Mapping Overview](#)
- [LAC Interoperation with Third-Party LNS Devices on page 152](#)
- [Filtering RADIUS Attributes and VSAs from RADIUS Messages](#)

## L2TP Subscriber Access Lines and Connection Speeds

- [Subscriber Access Line Information Handling by the LAC and LNS Overview on page 185](#)
- [Transmission of Tx and Rx Connection Speeds from LAC to LNS on page 190](#)



- [Transmission of the Receive Connect Speed AVP When Transmit and Receive Connect Speeds are Equal on page 198](#)
- [Configuring the Method to Derive the LAC Connection Speeds Sent to the LNS on page 198](#)
- [Configuring the Reporting and Processing of Subscriber Access Line Information on page 201](#)
- [Preventing the LAC from Sending Calling Number AVP 22 to the LNS on page 205](#)
- [Override the Calling-Station-ID Format for the Calling Number AVP on page 206](#)
- [Specifying a Rate-Limiting Service Profile for L2TP Connection Speeds on page 208](#)

## Subscriber Access Line Information Handling by the LAC and LNS Overview

Starting in Junos OS Release 14.1, L2TP supports a set of AVPs that convey information about subscriber access lines from the LAC to the LNS. The information originates from an ANCP access node (DSLAM) and is distributed to the LAC by means of either DSL Forum VSAs in ANCP messages or PPPoE intermediate agent tags included in the PPPoE PADI and PADR messages.


- [Access Line Information Forwarding on page 185](#)
- [Access Line Information AVPs on page 186](#)
- [Connection Speed Updates on the LAC on page 188](#)
- [Connection Speed Updates on the LNS on page 189](#)
- [Interaction Between Global and Per-Destination Configurations on page 189](#)

### Access Line Information Forwarding

In the network topology shown in [Figure 14 on page 186](#), when a subscriber initiates a connection through the CPE, the DSLAM relays the subscriber's PPPoE session to the router configured as a LAC. When the router has established the PPPoE session, the LAC initiates an L2TP tunnel to forward the subscriber's encapsulated PPP packets into the provider network.

In parallel to the PPPoE session, an ANCP connection between the DSLAM and the ANCP agent on the router conveys information about the subscriber's local loop as well as the link speeds of the PPPoE sessions on the local loop. The DSLAM sends the router Agent Circuit Id (ACI) and Agent Remote Id (ARI) strings that uniquely identify the DSLAM's receiving interface; this information is encoded in the ANCP Port Up and Port Down messages as Access Line Identifying TLVs. The ANCP messages can also include line attributes such as minimum, maximum, and actual net upstream and downstream data rates in the DSL Line Attributes TLV. The DSLAM can also send the access line attributes in vendor-specific tags that it inserts in the PADI and PADR messages.

Figure 14: Sample L2TP Network Topology

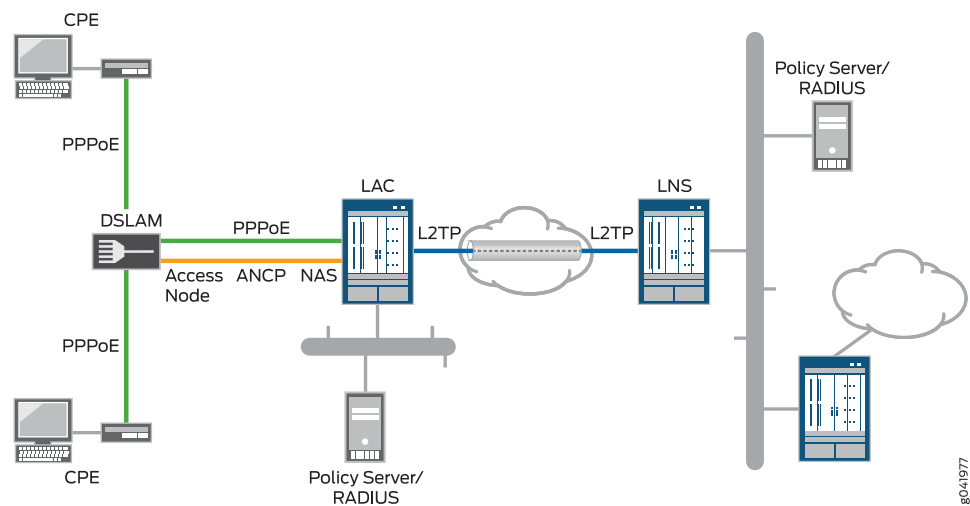

### Access Line Information AVPs

L2TP supports the AVPs listed in [Table 20 on page 186](#) to carry this information. The access line information is not required for the L2TP session to be initiated, and the establishment of that session is not delayed waiting for the values to be sent from the DSLAM.

The access line information provided by the AVPs in ICRQ messages is passed on to RADIUS in DSL Forum VSAs. It is not used for shaping the traffic rate on the subscriber access lines.

Table 20: L2TP AVPs That Provide Subscriber Access Line Information

Attribute Value Pair	AVP Type (Corresponding DSL Forum VSA)	Description	L2TP Message Type
Actual Data Rate Downstream	130 (26-130)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Actual Data Rate Upstream	129 (26-129)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Actual Interleaving Delay Downstream	142 (26-142)	32-bit unsigned integer; maximum delay in milliseconds.	ICRQ
Actual Interleaving Delay Upstream	140 (26-140)	32-bit unsigned integer; maximum delay in milliseconds.	ICRQ
Access Loop Encapsulation	144 (26-144)	Three one-octet encodings for data link, encapsulation 1, and encapsulation 2.	ICRQ

Table 20: L2TP AVPs That Provide Subscriber Access Line Information (continued)

Attribute Value Pair	AVP Type (Corresponding DSL Forum VSA)	Description	L2TP Message Type
Agent Circuit ID	1 (26-1)	2-63 octet string; ACI of the logical access loop port on the DSLAM/access node.	ICRQ
Agent Remote ID	2 (26-2)	2-63 octet statically configured string; uniquely identifies subscriber on the DSLAM (access node).	ICRQ
ANCP Access Line Type	145 (26-145)	One octet encoding for transmission system type, followed by three MBZ (must be zero) octets (total 4 bytes). This value is not supplied in the ICRQ when the access line parameters are sourced from PPPoE-IA, because the ANCP-sourced information may not be immediately available.  Starting in Junos OS Release 18.1R1, this AVP is included even when the line type is 0 for OTHER access line types.	ICRQ
Attainable Data Rate Upstream	133 (26-133)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Attainable Data Rate Downstream	134 (26-134)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Connect Speed Update Enable	98 (none)	Value does not matter: presence indicates support for CSUN, CSURQ message types for this session.	ICRQ
Connect Speed Update	97 (none)	Data structure listing remote session id and the current transmit and receive connection speeds in bits per second.	CSUN, CSURQ
IWF Session	254 (26-254)	Four-octet field indicating whether or not the internetworking function has been performed.	ICRQ
Maximum Data Rate Downstream	136 (26-136)	64-bit unsigned integer; data rate in bits per sec.	ICRQ

Table 20: L2TP AVPs That Provide Subscriber Access Line Information (continued)

Attribute Value Pair	AVP Type (Corresponding DSL Forum VSA)	Description	L2TP Message Type
Maximum Data Rate Upstream	135 (26-135)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Maximum Interleaving Delay Downstream	141 (26-141)	32-bit unsigned integer; maximum delay in milliseconds.	ICRQ
Maximum Interleaving Delay Upstream	139 (26-139)	32-bit unsigned integer; maximum delay in milliseconds.	ICRQ
Minimum Data Rate Downstream	132 (26-132)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Minimum Data Rate Downstream Low Power	138 (26-138)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Minimum Data Rate Upstream	131 (26-13)	64-bit unsigned integer; data rate in bits per sec.	ICRQ
Minimum Data Rate Upstream Low Power	137 (26-137)	64-bit unsigned integer; data rate in bits per sec.	ICRQ

### Connection Speed Updates on the LAC

You can configure the LAC to notify the LNS when the speed of the subscriber connection changes from the values initially communicated to the LNS by AVP 24 (transmit speed) and AVP 38 (receive speed) in Incoming-Call-Connected (ICCN) messages. When configured to do so, the LAC informs the LNS that it can send these updates by including the Connect Speed Update Enable AVP (98) in the ICRQ message when the L2TP session starts up. The absence of the Connect Speed Update Enable AVP (98) in the ICRQ message indicates that the LAC does not send updates for the life of the session.

When the connection speed changes, the DSLAM notifies the ANCP agent. The ANCP agent then notifies the LAC, and the LAC in turn relays this information to the LNS by sending a Connect-Speed-Update-Notification (CSUN) message that includes the updated speeds in a Connect Speed Update AVP (97) for each session. The LAC collects connection speed updates and sends them in a batch to minimize both the performance overhead on the LAC and the amount of traffic generated as a result of these notifications.

The initial speeds in the ICCN messages and updated speeds in CSUN messages are used by CoS to shape the traffic rate for subscriber access lines.

The presence of the Connect Speed Update Enable AVP (98) in the ICRQ message also informs the LNS that the LAC does respond if it receives a Connect-Speed-Update-Request (CSURQ) message from an LNS.



**NOTE:** The Junos OS does not currently support the sending of CSURQ messages by MX Series routers configured as an LNS. All discussion about CSURQ messages is strictly about how an MX Series LAC responds to a CSURQ that it receives from a third-party LNS.

A third-party LNS can send a CSURQ message at any time during the life of a tunnel to request the current transmit and receive connection speed for one or more L2TP sessions. The LNS includes the remote (relative to the LNS) session IDs in the CSURQ message. If the LAC has previously sent the Connect Speed Update Enable AVP (98) for the requested sessions, then it responds to the CSURQ with a CSUN message that includes the Connect Speed Update AVP (97) for each session. If no changes to connection speeds have occurred by this time, the LAC simply includes the initial connection speed values that were reported in AVP 24 and AVP 38.

When you enable connect speed updates either globally or for a specific LNS, the LAC does not send CSUN messages unless you have also configured the **tx-connect-speed** statement to be either **ancp** or **service-profile**.

### Connection Speed Updates on the LNS

Starting in Junos OS Release 17.4R1, an MX Series router configured as an LNS can process subscriber access line information and connection speed updates that it receives from the LAC. The MX Series router cannot send CSURQ messages to solicit updates from the LAC.

The initial speeds in the ICCN messages and updated speeds in CSUN messages are used by CoS to shape the traffic rate for subscriber access lines.

### Interaction Between Global and Per-Destination Configurations

You can configure the LAC to forward the access line information in the ICRQ message that it sends to the LNS and you can configure the LNS to receive and process that information. You can configure this globally for all destinations (endpoints) or for a specific destination. The per-destination configuration enables you to limit transmission to an individual LNS or to a set of LNSs or reception from an individual LAC or a set of LACs. This is useful when you know that some remote gateways do not support this feature or have an incorrect implementation.

Include the **access-line-information** statement at one or both of the following hierarchy levels on the LAC or LNS, respectively, to configure the LAC to forward the access line information in the ICRQ message that it sends to the LNS, or to configure the LNS to receive and process that information:

- **[edit services l2tp]**—Configures forwarding globally for all destinations.
- **[edit services l2tp destination *ip-address*]**—Configures forwarding for a specific destination.

To configure the LAC to send connection speed updates or the LNS to receive and process the updates, include the **connection-speed-update** option with the **access-line-information** statement at the appropriate hierarchy level on the LAC or LNS, respectively.

The global and per-destination settings interact in the following way:

- Access line information—When forwarding by the LAC or processing by the LNS is enabled globally, you cannot disable the global setting for a specific destination.
- Connection speed updates—When forwarding by the LAC or processing by the LNS is enabled globally, you can disable the global setting for a specific destination (LNS or LAC) by specifying **access-line-information** for the destination and omitting **connection-speed-update**.

## Transmission of Tx and Rx Connection Speeds from LAC to LNS

An L2TP access concentrator (LAC) uses Incoming-Call-Connected (ICCN) messages during the establishment of an L2TP tunnel session to send attribute-value pairs (AVP) that convey to the L2TP network server (LNS) the subscriber session's connection speed. AVP 24 includes the transmit (Tx) connect speed and AVP 38 includes the receive (Rx) connect speed.

- The L2TP transmit connect speed is the transmit connect speed in bits per second (bps) of the subscriber's access interface; that is, it represents the speed of the connection downstream from the LAC to the subscriber from the perspective of the LAC.
- The L2TP receive connect speed is the speed in bps of the connection upstream from the subscriber to the LAC, again from the perspective of the LAC. When the receive connect speed is different from the transmit connect speed, AVP 38 is included in the ICCN to convey the receive connect speed.

When the connection speed is the same in both directions, the LNS uses the value in AVP 24 for both transmit and receive connect speeds. In this case, the LAC does not send AVP 38. You can override this default behavior by including the **rx-connect-speed-when-equal** statement, which causes the LAC to send AVP 38 even when the transmit and connect speeds are the same. See [“Transmission of the Receive Connect Speed AVP When Transmit and Receive Connect Speeds are Equal” on page 198](#).

- The Tx and Rx connect speeds sent in the ICCN message are derived from the method determined by the LAC fallback procedure. Because service activation does not occur until after the ICCN is sent, the LAC always falls back to the next method when **service-profile** is configured as the method. When the service profile is later activated, corresponding speed changes are sent in update messages to the LNS.
- After the L2TP session is established, the Tx and Rx connect speeds can change at any time. When configured to do so, the LAC sends the updated values for each session to the LNS in Connect-Speed-Update-Notification (CSUN) messages. The updated speeds are conveyed in the Connect Speed Update AVP (97).

## Methods for Determining the Speed Values Reported to the LNS

The values reported to the LNS can be derived in the following ways:

- You can configure a method globally for the LAC with the **tx-connect-speed-method** statement at the **[edit services l2tp]** hierarchy level. You can specify any of the following methods to determine the source for connect speeds:



**NOTE:** Starting in Junos OS Release 13.3R1, availability and support for methods vary by Junos OS Release, as described in [Table 21 on page 193](#). The following list includes all historical methods; some of the methods may not be supported in the software release you are using.

- actual**—The speed is the actual rate of the downstream traffic enforced at the session scheduler node based on local traffic control policy. Only the transmit connect speed is available with this method, so the receive transmit speed is determined by the fallback scheme. Use the **actual** method when you need the reported value to be the downstream speed enforced by the local CoS policy. Other methods may vary from this enforced value.

The **actual** method is supported only when the **effective shaping-rate** statement is included at the **[edit chassis]** hierarchy level. The CLI commit check fails if **actual** is configured but the effective shaping rate is not configured.

No commit check is performed when the Tunnel-Tx-Speed-Method VSA (26-94) is set, so a system log message is generated in this situation to remind the user to configure the effective shaping rate.

- ancp**—The speed is the adjusted ANCP-sourced upstream and downstream value that results from a configured percentage correction to the actual ANCP values. The adjustment is applied on a per-DSL basis to account for ATM encapsulation differences between the BNG and the access-loop and for Layer 1 transport overhead. The initial rate sent to the LNS is the ANCP value reported at the time the ICCN is sent. Any subsequent changes are sent as updates to the LNS in the CSUN message.
- none**—This option prevents the LAC from sending either AVP 24 or AVP 38 in the ICCN message; consequently no CSUN messages are sent, either. The LNS has to establish its own upstream and downstream policy in the absence of these values. This option overrides the Juniper Networks RADIUS VSAs, Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163), as well as any other method configured for the connect speed.
- pppoe-ia-tags**—The speed is derived from the value sent from the DSLAM to the LAC in the Point-to-Point Protocol over Ethernet (PPPoE) intermediate agent (IA) tags. For Ethernet interfaces, the speed is an unadjusted value; for ATM interfaces, the value might be an adjusted value if the tag includes the Encapsulation Overhead attribute (0x90).

This speed value is transmitted when the L2TP session is established. Although the PPPoE IA tag value does not change during a session, the speed reported to the LAC can change. For example, suppose the configured method is **service-profile**. The

profile is not activated before the ICCN is sent, and falls back to the PPPoE IA tag, which is sent in the ICCN message. When the service profile is activated later, the service profile rates are sent in an update message (if updates are configured).

- **service-profile**—Depending on your Junos OS release, there are two ways to use service profiles to provide connection speeds. One method uses the speeds from the service profile only in CSUN messages, the other method in ICCN messages.
- In CSUN messages—The downstream (Tx) speed is derived from the actual CoS that is enforced on the L3 node based on local policy. The upstream (Rx) speed is taken from the configured value in the service profile; no adjustment is made to this value.

By default, service profiles are not activated before the subscriber session is established, so this method falls back to another method for the values sent in the ICCN. When the profile is later activated, then those rates are sent to the LNS in a CSUN message, if updates are enabled.

- In ICCN messages—Starting in Junos OS Release 18.1R1, you can use a dynamic service profile to provide the connection speeds included in AVP 38 and AVP 24 in the ICCN message when the L2TP session is negotiated. At subscriber login, authd determines whether the service profile name conveyed in the Juniper Networks Activate-Service VSA (26-65) in the RADIUS Access-Accept message matches the service profile name configured with the **service-rate-limiter** statement at the **[edit access]** hierarchy level. If the names match, the speeds are derived either from default values in the service profile or from parameters passed by the VSA. See [“Specifying a Rate-Limiting Service Profile for L2TP Connection Speeds” on page 208](#) for more information about this method.

The **service-profile** method is supported only when the **effective shaping-rate** statement is included at the **[edit chassis]** hierarchy level. The CLI commit check fails when **service-profile** is configured but the effective shaping rate is not configured.

No commit check is performed when the Tunnel-Tx-Speed-Method VSA (26-94) is set, so a system log message is generated in this situation to remind the user to configure the effective shaping rate.



**BEST PRACTICE:** We recommend that you use only one service profile per subscriber session to affect the downstream shaping rate or report an upstream rate. If more than one dynamic service profile is applied to the subscriber session such that each affects the downstream shaping rate or reports the upstream rate, the values from the most recently applied profile are reported by L2TP. Deactivation of the most recently applied service does not result in L2TP reporting the upstream speed for an existing (active) service profile.

---

- **static**—This method causes the LAC to derive the speed from the configured static Layer 2 speed. For Ethernet VLANs, this is the recommended (advisory) shaping rate configured on the PPPoE logical interface underlying the subscriber interface. If the



advisory shaping rate is not configured on the underlying interface, then the actual speed of the underlying physical port is used.

- Starting in Junos OS Release 15.1R1, you can configure speed values directly in the Juniper Networks VSAs, Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163). These VSAs may be returned in the RADIUS Access-Accept message. If only one of the VSAs is present, the LAC uses a connect speed method to determine the value for the other speed. To use these VSAs, you must configure RADIUS according to your RADIUS server documentation.
- Starting in Junos OS Release 15.1R1, you can configure a method that is conveyed in the Juniper Networks VSA, Tunnel-Tx-Speed-Method (26-94). If configured, this VSA is returned in the RADIUS Access-Accept message for individual subscribers. The VSA value applies globally rather than to a specific tunnel. The method configured in this VSA specifies the resource that the LAC uses to set the speed. To use this VSA, you must configure RADIUS according to your RADIUS server documentation.
- When the speeds cannot be determined in any other manner, the port speed of the subscriber interface is used.

Table 21 on page 193 lists the available methods by release.



**NOTE:** Some methods available in VSA 26-94 are not available in the CLI. When one of these methods is received in the VSA, it is translated to a supported method instead of being rejected, or it falls back to another method.

**Table 21: Methods for Determining Connect Speeds by Junos OS Release.**

Junos OS Release Number	CLI (tx-connect-speed-method)	VSA 26-94 (Tunnel-Tx-Speed-Method)
17.2 and higher	<ul style="list-style-type: none"> <li>• ancp</li> <li>• none</li> <li>• pppoe-ia-tags</li> <li>• service-profile</li> <li>• static (default)</li> </ul>	<ul style="list-style-type: none"> <li>• actual—Translated to service-profile</li> <li>• ancp</li> <li>• CoS—Translated to service-profile</li> <li>• dynamic Layer 2—Translated to static</li> <li>• none</li> <li>• pppoe-ia-tags</li> <li>• service-profile</li> <li>• static</li> </ul>
15.1, 16.1, 16.2, 17.1	<ul style="list-style-type: none"> <li>• actual (default)</li> <li>• ancp</li> <li>• none</li> <li>• pppoe-ia-tags</li> </ul>	<ul style="list-style-type: none"> <li>• actual</li> <li>• ancp</li> <li>• CoS—Translated to actual</li> <li>• dynamic Layer 2—Translated to static, which falls back to the port speed of the subscriber access interface</li> <li>• none</li> <li>• pppoe-ia-tags</li> <li>• static—Falls back to the port speed of the subscriber access interface</li> </ul>

Table 21: Methods for Determining Connect Speeds by Junos OS Release. (continued)

Junos OS Release Number	CLI (tx-connect-speed-method)	VSA 26–94 (Tunnel-Tx-Speed-Method)
13.3, 14.1, 14.2	<ul style="list-style-type: none"> <li>• ancp</li> <li>• none</li> <li>• pppoe-ia-tags</li> <li>• static (default)</li> </ul>	n/a



**NOTE:** Changing the connect speed method in VSA 26-94 or in the CLI configuration has no effect on existing L2TP sessions in which the ICCN has already been sent. All L2TP session negotiations subsequent to the method change use the new setting.

In Junos OS Releases 15.1, 16.1, 16.2, and 17.1 (which support the **actual** method), the speed values in AVP 24 and AVP 38 are typically not greater than the value that is enforced by CoS on the LAC side of the network. Any difference between the speed reported in these AVPs and that enforced by CoS is attributable to differences between the CoS configuration (of the source that is used to enforce a downstream speed) and the Tx connect speed method used to establish these AVPs.

### Determining Initial Connect Speeds

Before the LAC can send initial transmit and receive connect speeds in the ICCN message to the LNS, it has to do the following:

1. Select the method it uses to derive the speeds.
2. Determine the speeds.

The LAC selects the method as follows:

1. If the Tunnel-Tx-Speed-Method VSA (26-94) is present, use the method specified by the VSA value.
2. Otherwise, use the method configured in the CLI with the **tx-connect-speed-method** statement.

The LAC determines the initial speed as follows:

1. If the selected method is **none**, the LAC does not include the transmit and receive speeds in the ICCN.
2. For any other selected method, if the values in the Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163) VSAs are nonzero, the LAC sends those values in the ICCN.
3. If the VSA values are zero, use the selected method determined to derive the values to send.

Consider the following examples:

- VSA 26-94 is received with **ancp** configured as the method. The CLI method is configured as **none**. The LAC selects the VSA 26-94 value, the **ancp** method.  
VSA 26-162 and VSA 26-163 are received with nonzero values. The LAC sends these VSA values in the ICCN.
- VSA 26-94 is received with **ancp** configured as the method. The CLI method is configured as **none**. The LAC selects the VSA 26-94 value, the **ancp** method.  
VSA 26-162 and VSA 26-163 are received with zero values. The LAC uses the **ancp** method to derive the values to send in the ICCN.
- VSA 26-94 is received with **none** configured as the method. The CLI method is configured as **ancp**. The LAC selects the VSA 26-94 value, **none**, and does not send connect speeds in the ICCN.
- VSA 26-94 is not received. The CLI method is configured as **none**. The LAC does not send connect speeds in the ICCN.

### Fallback Mechanism for Connect Speed Values

When the LAC has selected a method to derive the connect speeds, it falls back to a different method in any of the following circumstances:

- One or both connect speed values has not been set by the selected method (VSA 26-94 or the CLI).
- The connect speed value is zero.

When one value is available and nonzero but the other is not, only the unset value falls back to a different method. There is no fallback when the selected method is **none**, because this method prevents the LAC from reporting the connect speeds. The fallback procedure can vary by Junos OS release.

Consider the following examples:

- The selected method is ANCP. The ANCP value for the receive speed is found to be zero. The LAC sends the ANCP value for the transmit speed, but the receive value falls back to the PPPoE IA tag method. The LAC sends the IA tag value for the receive speed.
- The selected method is ANCP. The ANCP value for the receive speed is found to be zero. The LAC sends the ANCP value for the transmit speed, but the receive value falls back to the PPPoE IA tag method. The IA tag value for the receive speed is also found to be zero, so it falls back to the static Layer 2 method. This is available, so the LAC sends the static Layer 2 value for the receive speed.
- The selected method is service profile. The service profile is not activated before the ICCN is sent, so the LAC falls back to the ANCP method. Both transmit and receive ANCP values are available and nonzero, so the LAC sends these values in the ICCN.

The service profile is activated by a Change of Authorization (CoA) at some later time for the session. If updates are enabled, the LAC sends the service profile values to the LNS in a CSUN message. If updates are not enabled, the service profile values are not reported to the LNS.

Note that updates require the method to be configured in the CLI. Consequently, VSA 26-94 must not be configured or received so that the service profile method is selected from the CLI configuration.

Starting in Junos OS Release 17.2R1, the LAC fallback procedure is as described in [Table 22 on page 196](#).

**Table 22: LAC Fallback Procedure When a Connect Speed Value is Not Set (Junos OS Release 17.2 and Higher)**

Method	Transmit and Receive Speed Not Set	Transmit Speed Not Set	Receive Speed Not Set
None	No fallback.	No fallback.	No fallback.
Service profile	Both fall back to ANCP method.	Transmit speed falls back to ANCP method.	Receive speed falls back to ANCP method.
ANCP	Both fall back to PPPoE IA tags method.	Transmit speed falls back to PPPoE IA tags method.	Receive speed falls back to PPPoE IA tags method.
PPPoE IA tags	Both fall back to static Layer 2 method.	Transmit speed falls back to static Layer 2 method.	Receive speed falls back to static Layer 2 method.
Static Layer 2	Both fall back to port speed.	Transmit speed falls back to port speed.	Receive speed falls back to transmit speed.

Starting in Junos OS Release 15.1R1, the LAC fallback procedure is as described in [Table 23 on page 197](#).

**Table 23: LAC Fallback Procedure When a Connect Speed Value is Not Set (Junos OS Releases 15.1, 16.1, 16.2, 17.1)**

Method	Transmit and Receive Speed Not Set	Transmit Speed Not Set	Receive Speed Not Set
None	No fallback.	No fallback.	No fallback.
Actual	Both fall back to ANCP method.	Transmit speed falls back to ANCP method.	Receive speed falls back to ANCP method.
ANCP	Both fall back to PPPoE IA tags method.	If PPPoE IA tags are available for both, then both fall back to PPPoE IA tags method.  Otherwise, transmit speed falls back to PPPoE IA tags method.	If PPPoE IA tags are available for both, then both fall back to PPPoE IA tags method.  Otherwise, receive speed falls back to PPPoE IA tags method.
PPPoE IA tags	Both fall back to port speed.	Transmit speed falls back to port speed.	Receive speed falls back to port speed.

Starting in Junos OS Release 13.3R1, the LAC fallback procedure is as described in [Table 24 on page 197](#).

**Table 24: LAC Fallback Procedure When a Connect Speed Value is Not Set (Junos OS Releases 13.3, 14.1, 14.2)**

Method	Transmit and Receive Speed Not Set	Transmit Speed Not Set	Receive Speed Not Set
None	No fallback.	No fallback.	No fallback.
ANCP	Both fall back to PPPoE IA tags method.	If PPPoE IA tags are available for both, then both fall back to PPPoE IA tags method.  Otherwise, transmit speed falls back to PPPoE IA tags method.	If PPPoE IA tags are available for both, then both fall back to PPPoE IA tags method.  Otherwise, receive speed falls back to PPPoE IA tags method.
PPPoE IA tags	Both fall back to static Layer 2 method.	Transmit speed falls back to static Layer 2 method.	Receive speed falls back to static Layer 2 method.
Static Layer 2	Both fall back to port speed.	Transmit speed falls back to port speed.	Receive speed falls back to transmit speed.



**NOTE:** For both Gigabit Ethernet (ge) and 10-Gigabit Ethernet (xe) interfaces, the port speed value is set to 1,000,000,000. For aggregated Ethernet (ae) interfaces, the port speed value is set to 0. The port speed value for all these interface types is reported in both AVP 24 and AVP 38.

## Transmission of the Receive Connect Speed AVP When Transmit and Receive Connect Speeds are Equal

The L2TP Rx Connect Speed (in bits per second) AVP, which is represented by AVP 38, is included in the ICCN message when the receive connect speed is different from the transmit connect speed. By default, when the connection speed is the same in both directions, AVP 38 is not sent; the LNS uses the value in AVP 24 for both transmit and receive connect speeds.

AVP 38 is generated when the receive connect speed of the access interface is set equal to the calculated transmit connect speed by issuing the **rx-connect-speed-when-equal** statement at the **[edit services l2tp]** hierarchy level. In this scenario, the LAC transmits the same value for transmit and receive connect speeds that are sent to the LNS through the AVP 24 and AVP 38 in the ICCN message.

To configure the sending of AVP 38 when the connection speeds are the same in both the downstream and upstream directions:

- Configure the transmission of the receive connect speed, AVP 38, when the receive connect speed is set equal to the calculated transmit connect speed.

```
[edit services l2tp]
user@host# set rx-connect-speed-when-equal
```

## Configuring the Method to Derive the LAC Connection Speeds Sent to the LNS

The LAC connection speeds are determined in one of several ways:

- The Juniper Networks VSAs, Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163).
- The Juniper Networks VSA, Tunnel-Tx-Speed-Method (26-94).
- The CLI configuration.
- The port speed of the subscriber access interface.

You can include the **tx-connect-speed-method** statement at the **[edit services l2tp]** hierarchy level to configure a method that specifies the resource that the LAC uses for setting these speeds when the Juniper Networks VSAs are not returned for the subscriber.

Starting in Junos OS Release 17.2R1, when you enable connect speed updates for the LAC you must include the **tx-connect-speed-method** statement. You also must specify either **ancp** or **service-profile** as the method; otherwise, the LAC does not send CSUN messages.

Changing the connect speed method in the CLI configuration or in VSA 26-94 has no effect on existing L2TP sessions in which the ICCN has already been sent. All L2TP session negotiations subsequent to the method change use the new setting.



**NOTE:** Starting in Junos OS Release 13.3R1, availability and support for methods vary by Junos OS Release. The following procedure lists all historical methods; some of the methods may not be supported in the software release you are using. See “[Transmission of Tx and Rx Connection Speeds from LAC to LNS](#)” on page 190 for a table of support by release.

To set the method for calculating the transmit connect speed:

- (Optional) Configure the LAC to use the class-of-service effective shaping rates.

```
[edit services l2tp]
user@host# set tx-connect-speed-method actual
```



**NOTE:** This method requires that the effective shaping rate statement is configured at the [edit chassis] hierarchy level. If it is not, then committing this method fails. However, if the method is received from RADIUS in VSA 26-94, a system log message is generated instead, because no commit check is performed in this case.

- (Optional) Configure the LAC to use the values derived from the ANCP value configured on the PPPoE interface underlying the subscriber interface.

```
[edit services l2tp]
user@host# set tx-connect-speed-method ancp
```

- (Optional) Configure the LAC to use the values provided in the PPPoE IA tags received from the DSLAM.

```
[edit services l2tp]
user@host# set tx-connect-speed-method pppoe-ia-tags
```

In this case, the value of Actual-Data-Rate-Downstream (VSA 26-129) is used for AVP 24. The value of Actual-Data-Rate-Upstream (VSA 26-130) is used for AVP 38 and is sent only when the VSA values differ.



**NOTE:** This speed derived from the IA tags does not apply to subscribers that are already logged in; it is effective only for subscribers that log in after this setting has been saved.

- (Optional) Configure the LAC to use the following:
    - Downstream (Tx) speed: The actual CoS rate that is enforced on the level 3 node based on local policy
    - Upstream (Rx) speed: The value configured in the dynamic service profile.
1. Specify the **service-profile** method.

```
[edit services l2tp]
user@host# set tx-connect-speed-method service-profile
```

2. In the dynamic service profile, configure the ingress shaping rate from CoS to be used by the LAC to report to the LNS as the Rx connect speed.

```
[edit dynamic-profiles profile-name class-of-service interfaces interface-name unit
logical-unit-number]
user@host# set report-ingress-shaping-rate bps
```



**NOTE:** The `service-profile` method requires that the effective shaping rate statement is configured at the `[edit chassis]` hierarchy level. If it is not, the commit check fails. However, if the `service-profile` method is received from RADIUS in VSA 26-94, a system log message is generated instead, because no commit check is performed in this case.



**NOTE:** For another method to use service profiles to provide the connection speeds, see [“Specifying a Rate-Limiting Service Profile for L2TP Connection Speeds”](#) on page 208.

- (Optional) Configure the LAC to use the underlying interface’s recommended (advisory) downstream shaping rate for AVP 24 and recommended upstream shaping rate for AVP 38. This is also referred to as the static Layer 2 shaping rate.

```
[edit services l2tp]
user@host# set tx-connect-speed-method static
```

You configure the advisory rates under the PPPoE logical interface underlying the subscriber interface with the `advisory-options` statement at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level. If the advisory speed is not configured, then the actual port speed is used. For `ge` and `xe` interfaces, the speed value is set to 10,000,000 and for `ae` interfaces, the speed value is set to 0 and sent in both AVP 24 and AVP 38.

- (Optional) Configure the LAC to disable sending AVP 24 and AVP 38.



**NOTE:** This option prevents the LAC from sending either AVP 24 or AVP 38 in the ICCN messages. This option also overrides the Juniper Networks RADIUS VSAs, Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163).

```
[edit services l2tp]
user@host# set tx-connect-speed-method none
```



## Configuring the Reporting and Processing of Subscriber Access Line Information

The L2TP AVP extensions defined in RFC 5515, *Layer 2 Tunneling Protocol (L2TP) Access Line Information Attribute Value Pair (AVP) Extension*, enable the LAC to report to the LNS characteristics of the subscriber's access line, such as identification attributes, line type, connection speed, various data rates, and so on. The LAC receives the access line information when the subscriber's CPE initiates a connection request, and forwards the available information in various AVPs included in ICRQ messages to the LNS. The LAC can also signal to the LNS that it is capable of sending updates to the subscriber connection speeds; these are conveyed by the Connect Speed Update AVP (97) in the CSUN message.

Starting in Junos OS Release 17.4R1, RFC 5515 AVP extensions are also supported on the LNS. Consequently, you can configure the LNS to process subscriber access line information and connection speed updates that it receives from the LAC.



**NOTE:** Subscriber access line information conveyed by AVPs in ICRQ messages is passed to RADIUS in DSL Forum VSA AVPs. Initial and updated connection speeds conveyed in ICCN and CSUN messages can be used by CoS to adjust traffic rates for the subscriber lines.

By default, neither the access line information forwarding or connection speed update capability are enabled on the LAC. You must configure the capabilities for all LNS endpoints or for a specific LNS endpoint. The per-destination configuration applies to all tunnels with that destination IP address. You might want to use a per-destination configuration when you know that only certain endpoints support or correctly implement this feature.

Similarly, processing of this information by the LNS is not enabled by default. You can enable processing for information received from all LAC endpoints or for specific LAC endpoints. The per-destination configuration applies to all tunnels with that destination IP address.



**NOTE:** The CLI statements are the same for both the LAC and LNS; the difference is that you include the statements in the LAC configuration or the LNS configuration.

To configure the LAC to send information about subscriber access lines to the LNS, or to configure the LNS to process this information received from the LAC:

- Configure the capability globally for all endpoints.

```
[edit services l2tp]
user@host# set access-line-information
```

- Configure the capability for a specific endpoint.

```
[edit services l2tp destination address ip-address]
user@host# set access-line-information
```



**BEST PRACTICE:** Do not configure the `connection-speed-update` option on the LAC when the LNS does not support connection speed changes. This might be an LNS that is not configured to process the updates or a noncompliant, third-party LNS. Configuring the LAC option for such an LNS generates additional control messages that are ignored.

To configure the LAC to also send updates to the LNS about changes in connection speed, or to configure the LNS to process speed updates received from the LAC:

- Include the update option when you configure the capability.

```
[edit services l2tp]
user@host# set access-line-information connection-speed-update
```

or

```
[edit services l2tp destination address ip-address]
user@host# set access-line-information connection-speed-update
```

- When you configure the LAC to send updates, you must also configure the method by which the connect speed values are derived. The method specifies the source of the update values. On the LNS, the derivation method is not relevant and cannot be configured.

```
[edit services l2tp]
user@host# set tx-connect-speed-method method
```

Consider the following examples:

- The following configuration specifies that for all tunnels with an endpoint address of 192.0.2.2, the LAC reports access line characteristics sourced from the ANCP agent or the PPPoE intermediate agent (in that order) to the LNS in the ICRQ message. The Connect Speed Update Enable AVP (98) is not included in the ICRQ; consequently no CSUN messages are sent to the LNS to report speed changes in the subscriber access lines reported by the ANCP agent. The LAC ignores any CSURQ messages that it receives from the LNS; this can be only a third-party LNS, because the sending of CSURQ messages is not supported on MX Series routers configured as an LNS.

```
[edit services l2tp destination address 192.0.2.2]
user@host# set access-line-information
```

- The following configuration specifies that for all tunnels with an endpoint address of 203.0.113.23, the LAC reports access line characteristics sourced from the ANCP agent or the PPPoE intermediate agent (in that order) to the LNS in the ICRQ message. The Connect Speed Update Enable AVP (98) is included in the ICRQ; CSUN messages are sent to the LNS to report speed changes in the subscriber access lines reported by the

ANCP agent. The LAC accepts any CSURQ messages that it receives from the LNS and responds with a CSUN message; this can be only a third-party LNS, because the sending of CSURQ messages is not supported on MX Series routers configured as an LNS.

```
[edit services l2tp]
user@host# set destination address 203.0.113.23 access-line-information
connection-speed-update
user@host# set tx-connect-speed-method ancp
```

When access line information forwarding is enabled globally, you cannot disable it for a specific destination. However, when connection speed updates are enabled globally, you can disable updates for a specific destination.

- The following configuration specifies that both forwarding of access line characteristics and connection speed updates are enabled for all destinations. For destination 198.51.100.2, the global updates configuration is overridden by repeating the access line configuration for, and omitting the connection speed updates for, that destination.

```
[edit services l2tp]
user@host# set access-line-information connection-speed-update
user@host# set tx-connect-speed-method ancp
[edit services l2tp destination address 198.51.100.2]
user@host# set access-line-information
```

The **show services l2tp summary** command displays the configuration that applies to all destinations. The following sample output confirms the global configuration in this example:

```
user@host> show services l2tp summary

Failover within a preference level is Disabled
Weighted load balancing is Disabled
Tunnel authentication challenge is Enabled
Calling number avp is Enabled
Failover Protocol is Disabled
Tx Connect speed method is static
Rx speed avp when equal is enabled
Tunnel assignment id format is assignment-id
Tunnel Tx Address Change is Accept
Min Retransmissions Timeout for control packets is 2 seconds
Max Retransmissions for Established Tunnel is 7
Max Retransmissions for Not Established Tunnel is 5
Tunnel Idle Timeout is 60 seconds
Destruct Timeout is 300 seconds
Destination Lockout Timeout is 300 seconds
Access Line Information is Enabled, Speed Updates is Enabled
Destinations: 0, Tunnels: 0, Sessions: 0, Switched sessions: 0
```

The **show services l2tp destination detail** command displays the configuration for each destination individually. The following sample output verifies that connection speed updates are disabled for 198.51.100.2:

```
user@host> show services l2tp destination detail
```

```

Local name: 1
  Remote IP: 198.51.100.2
  Tunnels: 1, Sessions: 1
  State: Enabled
  Local IP: 203.0.113.2
  Transport: ipUdp, Logical System: default, Router Instance: default
  Lockout State: not locked
  Access Line Information: Enabled, Speed Updates: Disabled
...

```

- In this example, the forwarding of access line characteristics is enabled for all destinations, but connection speed updates are enabled for only one destination, 198.51.100.21.

```

[edit services l2tp]
user@host# set access-line-information
[edit services l2tp destination address 198.51.100.21]
user@host# set access-line-information connection-speed-update
user@host# up
user@host# set tx-connect-speed-method ancp

```

The following sample output confirms that connection speed updates are disabled globally:

```

user@host> show services l2tp summary

Failover within a preference level is Disabled
Weighted load balancing is Disabled
Tunnel authentication challenge is Enabled
Calling number avp is Enabled
Failover Protocol is Disabled
Tx Connect speed method is static
Rx speed avp when equal is enabled
Tunnel assignment id format is assignment-id
Tunnel Tx Address Change is Accept
Min Retransmissions Timeout for control packets is 2 seconds
Max Retransmissions for Established Tunnel is 7
Max Retransmissions for Not Established Tunnel is 5
Tunnel Idle Timeout is 60 seconds
Destruct Timeout is 300 seconds
Destination Lockout Timeout is 300 seconds
Access Line Information is Enabled, Speed Updates is Disabled
Destinations: 0, Tunnels: 0, Sessions: 0, Switched sessions: 0

```

The following sample output confirms that connection speed updates are enabled for destination 198.51.100.21:

```

user@host> show services l2tp destination detail

Local name: 1
  Remote IP: 198.51.100.21
  Tunnels: 1, Sessions: 1
  State: Enabled
  Local IP: 203.0.113.3
  Transport: ipUdp, Logical System: default, Router Instance: default
  Lockout State: not locked

```

```
Access Line Information: Enabled, Speed Updates: Enabled
```

```
...
```

## Preventing the LAC from Sending Calling Number AVP 22 to the LNS

Calling Number AVP 22 typically identifies the interface that is connected to the customer in the access network. When RADIUS includes the Calling-Station-Id in the Access-Accept message, that value is used for the Calling Number AVP. Otherwise, the underlying interface (for example, the S-VLAN IFL) on which the PPPoE session is established is used for the Calling Number AVP value.

By default, the LAC includes this AVP in the incoming-call request (ICRQ) packets that it sends to the LNS. However, you may wish to hide your network access interface information. To do so, you can configure the tunnel so that the LAC does not send the Calling Number AVP to the LNS.

To disable sending the Calling Number AVP:

- Configure disabling.

```
[edit services l2tp]  
user@host# set disable-calling-number-avp
```

## Override the Calling-Station-ID Format for the Calling Number AVP

The LAC sends information about the access line or the subscriber to the LNS in L2TP Calling Number AVP 22. This AVP is conveyed in the incoming-call request (ICRQ) packet when the L2TP session is being established. AVP 22 by default identifies the access node interface that is connected to the customer in the access network; this is the agent circuit identifier or ACI. The LAC receives the ACI in the PPPoE Active Discovery Request (PADR) packet from the L2TP client as DSL Forum Agent-Circuit-ID VSA [26-1].

Alternatively, you can use the **calling-station-id-format** statement to change the values sent in the AVP. For example, you might specify that the agent remote identifier (ARI) received in the PADR as DSL Forum Agent-Remote-ID VSA [26-2] is used instead of the agent circuit identifier, that both are used, or that additional attributes are included. The set of values used in the AVP is known as the Calling-Station-ID format. When this is configured, then the value of the AVP is subsequently sent to the RADIUS server as Calling-Station-ID attribute (31). See *Configuring a Calling-Station-ID with Additional Options* for more information.

In some cases you may want the value of Calling Number AVP 22 to be independent from the RADIUS attribute value. You can do this by overriding the configured Calling-Station-ID format for the value. Use the **remote-circuit-id-format** statement to specify a different format for the AVP: the ACI, the ARI, or both the ACI and ARI from the PADR packet.

You can also configure fallback values that are sent in the Calling Number AVP when the values you configure with the **remote-circuit-id-format** statement are not present in the PADR. You can configure the fallback option to send the configured Calling-Station-ID or the default underlying interface as the calling number AVP.

Before you begin:

- Configure an access profile.
- Configure L2TP.
- Configure RADIUS.

To configure the override in the access profile:

1. Configure the LAC to send the calling number AVP using the configured remote circuit ID format instead of the Calling-Station-ID format.



**NOTE:** The **override** statement fails commit check if you have not configured the **remote-circuit-id-format** statement.

```
user@host# set access profile profile-name override calling-station-id remote-circuit-id
```

2. Configure the format of the values that override the Calling-Station-ID in AVP 22. You can configure the format to include the ACI, the ARI, or both the ACI and ARI.

```
user@host# set access profile profile-name radius options remote-circuit-id-format  
agent-circuit-id
```

```
user@host# set access profile profile-name radius options remote-circuit-id-format
agent-remote-id
```

[Table 25 on page 207](#) describes the attributes sent in calling number AVP 22 based on the attributes received in the PADR and the format configured in the **remote-circuit-id-format** configuration statement.

**Table 25: Attributes Sent as Calling Number AVP Based on Remote Circuit ID Format and Attributes Received in PADR**

Remote Circuit ID Format	Attributes Received in PADR	Attributes Sent in Calling Number AVP
Agent-Circuit-ID	Agent-Circuit-ID, Agent-Remote-ID	Agent-Circuit-ID
Agent-Remote-ID	Agent-Circuit-ID, Agent-Remote-ID	Agent-Remote-ID
Agent-Circuit-ID, Agent-Remote-ID	Agent-Circuit-ID, Agent-Remote-ID	Agent-Circuit-ID, Agent-Remote-ID
Agent-Circuit-ID, Agent-Remote-ID	Agent-Circuit-ID	Agent-Circuit-ID
Agent-Circuit-ID, Agent-Remote-ID	Agent-Remote-ID	Agent-Remote-ID

- (Optional) Configure the fallback value to be used. Fallback is triggered if the ACI and ARI are not present in the PADR but are configured in the remote circuit ID format. You can configure the LAC to send the configured Calling-Station-ID or the default underlying interface in the Calling number AVP 22 when fallback is triggered.

```
user@host# set access profile profile-name remote-circuit-id-fallback
configured-calling-station-id
user@host# set access profile profile-name remote-circuit-id-fallback default
```

The remote circuit ID format determines what triggers the fallback. [Table 26 on page 207](#) shows the fallback trigger based on the remote circuit ID format.

**Table 26: Fallback Trigger for Remote Circuit ID Format**

Remote Circuit ID Format	Fallback Trigger
Agent-Circuit-ID	Agent-Circuit-ID is empty
Agent-Remote-ID	Agent-Remote-ID is empty

Table 26: Fallback Trigger for Remote Circuit ID Format (continued)

Remote Circuit ID Format	Fallback Trigger
Agent-Circuit-ID, Agent-Remote-ID	Both Agent-Circuit-ID and Agent-Remote-ID are empty

4. (Optional) Configure an alternative delimiter character that the router uses to separate the concatenated values in the resulting remote circuit ID string when more than one value is specified in the remote circuit ID format. The default delimiter is a hash character (#).

```
user@host#set access profile profile-name remote-circuit-id-delimiter "delimiter"
```

## Specifying a Rate-Limiting Service Profile for L2TP Connection Speeds

When an L2TP session is negotiated, the LAC sends to the LNS an ICCN message that includes values for the Rx connection speed (in AVP 38) and Tx connection speed (in AVP 24) at the LAC. The LAC uses values from the best source available at the time of negotiation. If multiple sources are available, the selection is made based on preference hierarchy of the sources. The source is either RADIUS, ANCP, or PPPoE-IA tags.

By default, the LAC cannot use a service profile received in a RADIUS Access-Accept message as the source, because the profile is not applied until the network family is activated, which occurs after the session negotiation completes. However, if the LNS supports *RFC 5515, Layer 2 Tunneling Protocol (L2TP) Access Line Information Attribute Value Pair (AVP) Extensions*, the LAC can send a connection speed update to the LNS with values from the service profile.

Starting in Junos OS Release 18.1R1, you can use a dynamic service profile to provide the connection speeds included in AVP 38 and AVP 24 when the L2TP session is negotiated. At subscriber login, authd determines whether the configured service profile name matches the profile name conveyed in the Juniper Networks Activate-Service VSA (26-65) in the RADIUS Access-Accept message. If the names match, the speeds are derived either from default values in the service profile or from parameters passed by the VSA.

This processing by authd to establish the connection speeds takes place only at subscriber login. It does not occur in response to reauthentication or CoA requests.



**NOTE:** For this feature to work, you must also use the `tx-connect-speed-method` statement at the `[edit services l2tp]` hierarchy level to set the method to `service-profile`. You must also configure the `effective-shaping-rate` statement at the `[edit chassis]` hierarchy level.

You can define the rates directly in the service profile as default values for user-defined variables. Alternatively, you can configure the rates to be passed by RADIUS in VSA 26-65. In either case, the first value is taken as the receive speed (the upstream rate from the subscriber to the LAC) and the second value is taken as the transmit speed (the downstream rate from the LAC to the subscriber). The VSA might be configured to pass



more than two parameters, but only the first two parameters matter for the service rate-limiting function.

The rate values are specified in the profile or VSA 26-65 in Kbps, but the L2TP AVP format requires rate values in bps. When you enable this feature, default multipliers automatically convert the rates from Kbps to bps. You can also configure the multiplier options to adjust the rates up or down. The adjusted values are equivalent to the Juniper Networks RADIUS VSAs, Rx-Connect-Speed (26-163) and Tx-Connect-Speed (26-162). These values are stored as such in the session database. Because the values are available in the SDB before the L2TP connection is negotiated, the LAC includes them in the ICCN message as AVP 38 and AVP 24. They are treated as RADIUS-sourced values and consequently have the highest precedence.



**NOTE:** A parameter value of zero signifies that the rate is not set. For example, if VSA 26-65 returns *service-profile-name*(0, 0), then no value is set in the SDB for Rx or Tx.

Another circumstance that causes no values to be set in the SDB is if VSA 26-65 does not pass any parameters and you failed to set default values in the service profile. In this case, there are no values for authd to derive and so nothing to place in the SDB for Rx or Tx.

If the service used to establish the rate limiters is deactivated or deleted, authd then clears those rate limiter values from the subscriber session. If the service is reactivated, authd does not reinstate the rate limiters.

To configure LAC connection speeds to be derived at login from a dynamic service profile and to optionally adjust the rates:

1. Specify the dynamic service profile that supplies the connection speeds.

[edit access]

```
user@host# set service-rate-limiter service-name service-profile-name
```

2. (Optional) Configure a value that is multiplied with the Rx connect speed specified in the service profile.

[edit access]

```
user@host# set service-rate-limiter rx-multiplier rx-multiplier
```

3. (Optional) Configure a value that is multiplied with the Tx connect speed specified in the service profile.

[edit access]

```
user@host# set service-rate-limiter tx-multiplier tx-multiplier
```

4. Set the method for determining the connection speed.

```
[edit services l2tp]
user@host# set tx-connect-speed-method service-profile
```

5. Enable the reporting of the actual downstream rate in RADIUS accounting messages.

```
[edit chassis]
user@host# set effective-shaping-rate
```

For example, suppose you configure a dynamic service policy, l2tp-service. The policy includes user-defined variables, upstream and downstream, with default values, respectively, of 20,000 Kbps and 30,000 Kbps. The upstream variable is used for the input (ingress) filter and downstream variable is used for the output (egress) filter.

```
[edit dynamic-profiles l2tp-service]
user@host# set variables upstream default-value 20000
user@host# set variables downstream default-value 30000
user@host# set variables aggregate default-value 50000
user@host# interfaces pp0 "$junos-interface-unit" family inet filter input "$upstream"
user@host# interfaces pp0 "$junos-interface-unit" family inet filter output "$downstream"
```

Then you configure the following service rate limiter, which specifies that when a service policy named l2tp-service is returned, the Rx value in the policy, or passed by the VSA, is multiplied by 1005. The Tx value is multiplied by 1003.

```
[edit access]
user@host# set service-rate-limiter service-name l2tp-service
user@host# set service-rate-limiter rx-multiplier 1005
user@host# set service-rate-limiter tx-multiplier 1003
```

Suppose a subscriber logs in and the Access-Accept message from the RADIUS server includes the Activate-Service VSA, 26-55, specifying l2tp-service. What happens next depends on the parameters passed by the VSA.

- The VSA includes "l2tp-service" with no parameters. The following values are stored in the SDB:
  - Rx is the default value in the policy multiplied by the configured multiplier:  
20000 Kbps x 1005 = 20,100,000 bps.
  - Tx is the default value in the policy multiplied by the configured multiplier:  
30000 Kbps x 1003 = 30,090,000 bps.
- The VSA includes "l2tp-service(10000, 15000)". The following values are stored in the SDB:
  - Rx is the first parameter passed by the VSA multiplied by the configured multiplier:  
10000 Kbps x 1005 = 10,050,000 bps.
  - Tx is the second parameter passed by the VSA multiplied by the configured multiplier:  
15000 Kbps x 1003 = 15,045,000 bps.
- The VSA includes "l2tp-service(10000)". The following values are stored in the SDB:

- Rx is the first (and only) parameter passed by the VSA multiplied by the configured multiplier:  
 $10000 \text{ Kbps} \times 1005 = 10,050,000 \text{ bps}$ .
- Because the VSA does not pass a second parameter, Tx is the default value in the policy multiplied by the configured multiplier:  
 $30000 \text{ Kbps} \times 1003 = 30,090,000 \text{ bps}$ .
- The VSA includes "l2tp-service(10000, 0)". The following values are stored in the SDB:
  - Rx is the first parameter passed by the VSA multiplied by the configured multiplier:  
 $10000 \text{ Kbps} \times 1005 = 10,050,000 \text{ bps}$ .
  - Because the second parameter passed is zero, and zero means that the rate is not set, no value is stored in the SDB for Tx.
- The VSA includes "l2tp-service(0, 0)". The following values are stored in the SDB:
  - Because a passed value of zero means that the rate is not set, no value is stored in the SDB for either Rx or Tx.
- The VSA includes "l2tp-service(10000, 15000, 4000000)". The following values are stored in the SDB:
  - Rx is the first parameter passed by the VSA multiplied by the configured multiplier:  
 $10000 \text{ Kbps} \times 1005 = 10,050,000 \text{ bps}$ .
  - Tx is the second parameter passed by the VSA multiplied by the configured multiplier:  
 $15000 \text{ Kbps} \times 1003 = 15,045,000 \text{ bps}$ .

Release History Table

Release	Description
18.1R1	Starting in Junos OS Release 18.1R1, you can use a dynamic service profile to provide the connection speeds included in AVP 38 and AVP 24 in the ICCN message when the L2TP session is negotiated.
17.4R1	Starting in Junos OS Release 17.4R1, an MX Series router configured as an LNS can process subscriber access line information and connection speed updates that it receives from the LAC.
17.4R1	Starting in Junos OS Release 17.4R1, RFC 5515 AVP extensions are also supported on the LNS.
17.2R1	Starting in Junos OS Release 17.2R1, the LAC fallback procedure is as described in <a href="#">Table 22 on page 196</a> .
17.2R1	Starting in Junos OS Release 15.1R1, the LAC fallback procedure is as described in <a href="#">Table 23 on page 197</a> .
17.2R1	Starting in Junos OS Release 13.3R1, the LAC fallback procedure is as described in <a href="#">Table 24 on page 197</a> .
17.2R1	Starting in Junos OS Release 17.2R1, when you enable connect speed updates for the LAC you must include the <b>tx-connect-speed-method</b> statement.
15.1R1	Starting in Junos OS Release 15.1R1, you can configure speed values directly in the Juniper Networks VSAs, Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163).
15.1R1	Starting in Junos OS Release 15.1R1, you can configure a method that is conveyed in the Juniper Networks VSA, Tunnel-Tx-Speed-Method (26-94).
14.1	Starting in Junos OS Release 14.1, L2TP supports a set of AVPs that convey information about subscriber access lines from the LAC to the LNS.
13.3R1	Starting in Junos OS Release 13.3R1, availability and support for methods vary by Junos OS Release, as described in <a href="#">Table 21 on page 193</a> .
13.3R1	Starting in Junos OS Release 13.3R1, availability and support for methods vary by Junos OS Release.

#### Related Documentation

- [L2TP for Subscriber Access Overview on page 121](#)
- [Configuring an L2TP LAC on page 148](#)
- [LAC Tunnel Selection Overview on page 154](#)
- *DSL Forum Vendor-Specific Attributes*
- *Juniper Networks VSAs Supported by the AAA Service Framework*
- *RADIUS Servers and Parameters for Subscriber Access*
- *Filtering RADIUS Attributes and VSAs from RADIUS Messages*

---

## L2TP LNS Inline Service Interfaces

---

- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
- [Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216](#)
- [Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218](#)
- [Configuring an L2TP Access Profile on the LNS on page 220](#)
- [Configuring a AAA Local Access Profile on the LNS on page 222](#)
- [Configuring an Address-Assignment Pool for L2TP LNS with Inline Services on page 222](#)
- [Configuring the L2TP LNS Peer Interface on page 224](#)
- [Enabling Inline Service Interfaces on page 225](#)
- [Configuring an Inline Service Interface for L2TP LNS on page 226](#)
- [Configuring Options for the LNS Inline Services Logical Interface on page 227](#)
- [LNS 1:1 Stateful Redundancy Overview on page 228](#)
- [Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces on page 229](#)
- [Verifying LNS Aggregated Inline Service Interface 1:1 Redundancy on page 231](#)
- [L2TP Session Limits and Load Balancing for Service Interfaces on page 233](#)
- [Example: Configuring an L2TP LNS on page 236](#)
- [Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248](#)
- [Applying Services to an L2TP Session Without Using RADIUS on page 251](#)
- [Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions on page 258](#)
- [Configuring a Dynamic Profile for Dynamic LNS Sessions on page 259](#)

### Configuring an L2TP LNS with Inline Service Interfaces

The L2TP LNS feature license must be installed before you begin the configuration. Otherwise, a warning message is displayed when the configuration is committed.

To configure an L2TP LNS with inline service interfaces:

1. (Optional) Configure a user group profile that defines the PPP configuration for tunnel subscribers.  
  
[See “Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile” on page 218.](#)
2. (Optional) Configure PPP attributes for subscribers on inline service interfaces.  
  
[See “Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface” on page 216.](#)
3. Configure inline IP reassembly.

See [“Configuring IP Inline Reassembly for L2TP” on page 262.](#)

4. Configure an L2TP access profile that defines the L2TP parameters for each LNS client (LAC).

See [“Configuring an L2TP Access Profile on the LNS” on page 220.](#)

5. (Optional) Configure a AAA access profile to override the access profile configured under the routing instance.

See [“Configuring a AAA Local Access Profile on the LNS” on page 222.](#)

6. Configure a pool of addresses to be dynamically assigned to tunneled PPP subscribers.

See [“Configuring an Address-Assignment Pool for L2TP LNS with Inline Services” on page 222.](#)

7. Configure the peer interface to terminate the tunnel and the PPP server-side IPCP address.

See [“Configuring the L2TP LNS Peer Interface” on page 224.](#)

8. Enable inline service interfaces on an MPC.

See [“Enabling Inline Service Interfaces” on page 225.](#)

9. Configure a service interface.

See [“Configuring an Inline Service Interface for L2TP LNS” on page 226.](#)

10. Configure options for each inline service logical interface.

See [“Configuring Options for the LNS Inline Services Logical Interface” on page 227.](#)

11. (Optional) Configure an aggregated inline service interface and 1:1 stateful redundancy.

See [“Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces” on page 229](#)

12. Configure the L2TP tunnel group.

See [“Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces” on page 248.](#)

13. (Optional) Configure a dynamic profile that dynamically creates L2TP logical interfaces.

See [“Configuring a Dynamic Profile for Dynamic LNS Sessions” on page 259.](#)

14. (Optional) Configure a service interface pool for dynamic LNS sessions.

See [“Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions”](#) on page 258.

15. (Optional) Specify how many times L2TP retransmits unacknowledged control messages.

See [“Configuring Retransmission Attributes for L2TP Control Messages”](#) on page 128.

16. (Optional) Specify how long a tunnel can remain idle before being torn down.

See [“Setting the L2TP Tunnel Idle Timeout”](#) on page 143.

17. (Optional) Specify the L2TP receive window size for the L2TP tunnel. The receive window size specifies the number of packets a peer can send before waiting for an acknowledgment from the router.

See [“Setting the L2TP Receive Window Size”](#) on page 143.

18. (Optional) Specify how long the L2TP retains information about terminated dynamic tunnels, sessions, and destinations.

See [“Setting the L2TP Destruct Timeout”](#) on page 144.

19. (Optional) Configure the L2TP destination lockout timeout.

See [“Configuring the L2TP Destination Lockout Timeout”](#) on page 145.

20. (Optional) Configure L2TP tunnel switching.

See [“Configuring L2TP Tunnel Switching”](#) on page 141.

21. (Optional) Prevent the creation of new sessions, destinations, or tunnels for L2TP.

See [“Configuring L2TP Drain”](#) on page 146.

22. (Optional) Configure whether the L2TP failover protocol is negotiated or the silent failover method is used for resynchronization.

See [“Configuring the L2TP Peer Resynchronization Method”](#) on page 265.

23. (Optional) Enable SNMP statistics counters.

See [“Enabling Tunnel and Global Counters for SNMP Statistics Collection”](#) on page 131.

24. (Optional) Configure trace options for troubleshooting the configuration.

See [“Tracing L2TP Events for Troubleshooting”](#) on page 267.

You also need to configure CoS for LNS sessions. For more information, see *Configuring Dynamic CoS for an L2TP LNS Inline Service*.

## Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface

You can configure PPP attributes that are applied by the LNS on the inline service (si) interface to the PPP subscribers tunneled from the LAC. Because you are configuring the attributes per interface rather than with a user group profile, the attributes for subscribers can be varied with a finer granularity. This configuration matches that used for terminated PPPoE subscribers.

To configure the PPP attributes for dynamically created si interfaces:

1. Specify the predefined dynamic interface and logical interface variables in the dynamic profile.

```
[edit dynamic-profiles profile-name]
user@host# edit interfaces "$junos-interface-ifd-name" unit "$junos-interface-unit"
```

2. Configure the interval between PPP keepalive messages for the L2TP tunnel terminating on the LNS.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set keepalives interval seconds
```

3. Configure PPP authentication methods that apply to tunneled PPP subscribers at the LNS.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set ppp-options chap
user@host# set ppp-options pap
```

4. Specify a set of AAA options that is used for authentication and authorization of tunneled PPP subscribers at the LNS that are logging in by means of the subscriber and AAA contexts that are specified in the AAA options set.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set ppp-options aaa-options aaa-options-name
```

The option set is configured with the `aaa-options aaa-options-name` statement at the `[edit access]` hierarchy level.

5. Configure the router to prompt Customer Premises Equipment (CPE) to negotiate both primary and secondary DNS addresses during IPCP negotiation for tunneled PPP subscribers at the LNS.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
```



```
user@host# set ppp-options ipcp-suggest-dns-option
```

6. (Optional) Disable validation of the PPP magic number during LCP negotiation and in LCP keepalive (echo-request/echo-reply) exchanges. Prevents comparison of received magic number with internally generated magic number, so that a mismatch does not cause session termination.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set ppp-options ignore-magic-number-mismatch
```

To configure the PPP attributes for statically created si interfaces:

1. Specify the logical inline service interface.

```
[edit interfaces si-slot/pic/port]
user@host# edit unit logical-unit-number
```

2. Configure the interval between PPP keepalive messages for the L2TP tunnel terminating on the LNS.

```
[edit interfaces si-slot/pic/port unit logical-unit-number]
user@host# set keepalives interval seconds
```

3. Configure the number of keepalive packets a destination must fail to receive before the network takes down a link.

```
[edit interfaces si-slot/pic/port unit logical-unit-number]
user@host# set keepalives down-count number
```



**NOTE:** The keepalives up-count option is typically not used for subscriber management.

4. Configure PPP authentication methods that apply to tunneled PPP subscribers at the LNS.

```
[edit interfaces si-slot/pic/port unit logical-unit-number]
user@host# set ppp-options chap
user@host# set ppp-options pap
```

5. Configure the router to prompt the Customer Premises Equipment (CPE) to negotiate both primary and secondary DNS addresses during IPCP negotiation for tunneled PPP subscribers at the LNS.

```
[edit interfaces si-slot/pic/port unit logical-unit-number]
```

```
user@host# set ppp-options ipcp-suggest-dns-option
```



**BEST PRACTICE:** Although all other statements subordinate to `ppp-options`—including those subordinate to `chap` and `pap`—are supported, they are typically not used for subscriber management. We recommend that you leave these other statements at their default values.



**NOTE:** You can also configure PPP attributes with a user group profile that applies the attributes to all subscribers with that profile on a LAC client. See [“Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile” on page 218](#) for more information. When you configure the PPP attributes for L2TP LNS subscribers both on the `si` interface and in user group profiles, the inline service interface configuration takes precedence over the user group profile configuration.



**NOTE:** When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the subscriber only when the dynamic profile does not include any PPP option available in the group profile.

## Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile

You can configure a user group profile that enables the LNS to apply PPP attributes to the PPP subscribers tunneled from the LAC. The user group profile is associated with clients (LACs) in the L2TP access profile. Consequently all subscribers handled by a given client share the same PPP attributes.

To configure a user group profile:

1. Create the profile.

```
[edit access]
user@host# edit group-profile profile-name
```

2. Configure the interval between PPP keepalive messages for the L2TP tunnel terminating on the LNS.

```
[edit access group-profile profile-name]
user@host# set ppp keepalive seconds
```



**NOTE:** Changes to the keepalive interval in a user group profile affect only new L2TP sessions that come up after the change. Existing sessions are not affected.

3. Configure PPP authentication methods that apply to tunneled PPP subscribers at the LNS.

```
[edit access group-profile profile-name]
user@host# set ppp ppp-options chap
user@host# set ppp ppp-options pap
```

4. Specify a set of AAA options that is used for authentication and authorization of tunneled PPP subscribers at the LNS that are logging in by means of the subscriber and AAA contexts that are specified in the AAA options set.

```
[edit access group-profile profile-name]
user@host# set ppp ppp-options aaa-options aaa-options-name
```

The option set is configured with the `aaa-options aaa-options-name` statement at the `[edit access]` hierarchy level.

5. Configure the router to prompt the Customer Premises Equipment (CPE) to negotiate both primary and secondary DNS addresses during IPCP negotiation for tunneled PPP subscribers at the LNS.

```
[edit access group-profile profile-name]
user@host# set ppp ppp-options ipcp-suggest-dns-option
```

6. (Optional) Disable the Packet Forwarding Engine from performing a validation check for PPP magic numbers received from a remote peer in LCP keepalive (Echo-Request/Echo-Reply) exchanges. This prevents PPP from terminating the session when the number does not match the value agreed upon during LCP negotiation. This capability is useful when the remote PPP peers include arbitrary magic numbers in the keepalive packets. Configuring this statement has no effect on LCP magic number negotiation or on the exchange of keepalives when the remote peer magic number is the expected negotiated number.

```
[edit access group-profile profile-name]
user@host# set ppp ppp-options ignore-magic-number-mismatch
```

7. Configure how long the PPP subscriber session can be idle before it is considered to have timed out.

```
[edit access group-profile profile-name]
user@host# set ppp idle-timeout 200
```



**NOTE:** You can also configure PPP attributes on a per-interface basis. See [“Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface” on page 216](#) for more information. When you configure the PPP attributes for L2TP LNS subscribers both on the si interface and in user group profiles, the inline service interface configuration takes precedence over the user group profile configuration.



**NOTE:** When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the subscriber only when the dynamic profile does not include any PPP option available in the group profile.

## Configuring an L2TP Access Profile on the LNS

Access profiles define how to validate Layer 2 Tunneling Protocol (L2TP) connections and session requests. Within each L2TP access profile, you configure one or more clients (LACs). The client characteristics are used to authenticate LACs with matching passwords, and to establish attributes of the client tunnel and session. You can configure multiple access profiles and multiple clients within each profile.

To configure an L2TP access profile:

1. Create the access profile.

```
[edit access]
user@host# edit profile access-profile-name
```

2. Configure characteristics for one or more clients (LACs).

```
[edit access profile access-profile-name]
user@host# client client-name
```



**NOTE:** Except for the special case of the default client, the LAC client name that you configure in the access profile must match the hostname of the LAC. In the case of a Juniper Networks router acting as the LAC, the hostname is configured in the LAC tunnel profile with the gateway gateway-name statement at the [edit access tunnel-profile profile-name tunnel tunnel-id source-gateway] hierarchy level. Alternatively, the client name can be returned from RADIUS in the attribute, Tunnel-Client-Auth-Id [90].



**NOTE:** Use `default` as the client name when you want to define a default tunnel client. The default client enables the authentication of multiple LACs with the same secret and L2TP attributes. This behavior is useful when, for example, many new LACs are added to the network, because it enables the LACs to be used without additional LNS profile configuration.

Use `default` only on MX Series routers. The equivalent client name on M Series routers is `*`.

3. (Optional) Specify a local access profile that overrides the global access profile and the tunnel group AAA access profile to configure RADIUS server settings for the client.

```
[edit access profile access-profile-name client client-name]
user@host# set l2tp aaa-access-profile
```

4. Configure the LNS to renegotiate the link control protocol (LCP) with the PPP client tunneled from the client.

```
[edit access profile access-profile-name client client-name]
user@host# set l2tp lcp-renegotiation
```

5. Configure one or more dynamic service profiles to apply services to all subscribers on the LAC. You can optionally pass parameter to the services in the same statement.

```
[edit access profile access-profile-name client client-name]
user@host# set l2tp service-profile profile-name(parameter)&profile-name
```

6. Configure the maximum number of sessions allowed in a tunnel from the client (LAC).

```
[edit access profile access-profile-name client client-name]
user@host# set l2tp maximum-sessions-per-tunnel number
```

7. Configure the LNS to override result codes 4 and 5 with result code 2 in CDN messages it sends to the LAC when the number of L2TP sessions reaches the configured maximum value. Some third-party LACs cannot fail over to another LNS unless the result code has a value of 2.

```
[edit access profile access-profile-name client client-name]
user@host# set l2tp override-result-code session-out-of-resource
```

8. Configure the tunnel password used to authenticate the client (LAC).

```
[edit access profile access-profile-name client client-name]
user@host# set l2tp shared-secret shared-secret
```

9. (Optional) Associate a group profile containing PPP attributes to apply for the PPP sessions being tunneled from this LAC client.

```
[edit access profile access-profile-name client client-name]
user@host# set user-group-profile group-profile-name
```



**NOTE:** If `user-group-profile` is modified or deleted, the existing LNS subscribers, which were using this Layer 2 Tunneling Protocol client configuration, go down.

## Configuring a AAA Local Access Profile on the LNS

For some LNS tunnels, you might wish to override the access profile configured at the routing instance that hosts the tunnel with a particular RADIUS server configuration. You can configure a local access profile to do so. You can subsequently use the `aaa-access-profile` statement to apply the local access profile to a tunnel group or LAC client.

A local access profile applied to a client overrides a local access profile applied to a tunnel group, which in turn overrides the access profile for the routing instance.

To configure an AAA local access profile:

1. Create the access profile.

```
[edit access]
user@host# edit profile local-aaa-profile-name
```

2. Configure the order of AAA authentication methods.

```
[edit access profile local-aaa-profile-name]
user@host# set authentication-order radius
```

3. Configure the RADIUS server attributes, such as the authentication password.

```
[edit access profile local-aaa-profile-name]
user@host# set radius-server server-address secret password
```

## Configuring an Address-Assignment Pool for L2TP LNS with Inline Services

You can configure pools of addresses that can be dynamically assigned to the tunneled PPP subscribers. The pools must be local to the routing instance where the subscriber comes up. The configured pools are supplied in the RADIUS Framed-Pool and Framed-IPv6-Pool attributes. Pools are optional when Framed-IP-Address is sent by RADIUS.

To configure an address-assignment pool, you must specify the name of the pool and configure the addresses for the pool.

You can optionally configure multiple named ranges, or subsets, of addresses within an address-assignment pool. During dynamic address assignment, a client can be assigned an address from a specific named range. To create a named range, you specify a name for the range and define the address range.



**NOTE:** Be sure to use the address-assignment pools (`address-assignment`) statement rather than the address pools (`address-pool`) statement.

For more information about address assignment pools, see *Address-Assignment Pools Overview* and *Address-Assignment Pool Configuration Overview*.

To configure an IPv4 address-assignment pool for L2TP LNS:

1. Configure the name of the pool and specify the IPv4 family.

```
[edit access]
user@host# edit address-assignment pool pool-name family inet
```

2. Configure the network address and the prefix length of the addresses in the pool.

```
[edit access address-assignment pool pool-name family inet]
user@host# set network ip-prefix </prefix-length>
```

3. Configure the name of the range and the lower and upper boundaries of the addresses in the range.

```
[edit access address-assignment pool pool-name family inet]
user@host# set range range-name low lower-limit high upper-limit
```

For example, to configure an IPv4 address-assignment pool:

```
[edit access]
user@host# edit address-assignment pool lns-v4-pool family inet
[edit access address-assignment pool lns-v4-pool family inet]
user@host# set network 192.168.1.1/16
[edit access address-assignment pool lns-v4-pool family inet]
user@host# set range lns-v4-pool-range low 192.168.1.1 high 192.168.255.255
```

To configure an IPv6 address-assignment pool for L2TP LNS:

1. Configure the name of the pool and specify the IPv6 family.

```
[edit access]
user@host# edit address-assignment pool pool-name family inet6
```

2. Configure the IPv6 network prefix for the address pool. The prefix specification is required when you configure an IPv6 address-assignment pool.

```
[edit access address-assignment pool pool-name family inet6]
user@host# set prefix ipv6-prefix
```

3. Configure the name of the range and define the range. You can define the range based on the lower and upper boundaries of the prefixes in the range, or based on the length of the prefixes in the range.

```
[edit access address-assignment pool pool-name family inet6]
user@host# set range range-name low lower-limit high upper-limit
```

For example, to configure an IPv6 address-assignment pool:

```
[edit access]
user@host# edit address-assignment pool lns-v6-pool family inet6
[edit access address-assignment pool lns-v6-pool family inet6]
user@host# set prefix 2001:DB8::/32
[edit access address-assignment pool lns-v6-pool family inet6]
user@host# set range lns-v6-pool-range low 2001:DB8:1::/48 high 2001:DB8::ffff::/48
```

## Configuring the L2TP LNS Peer Interface

The peer interface connects the LNS to the cloud towards the LACs so that IP packets can be exchanged between the tunnel endpoints. MPLS and aggregated Ethernet can also be used to reach the LACs.



**NOTE:** On MX Series routers, you must configure the peer interface on an MPC.

To configure the LNS peer interface:

1. Specify the interface name.

```
[edit interfaces]
user@host# edit interface-name
```

2. Enable VLANs.

```
[edit interfaces interface-name]
user@host# set vlan-tagging
```

3. Specify the logical interface, bind a VLAN tag ID to the interface, and configure the address family and the IP address for the logical interface.

```
[edit interfaces interface-name]
user@host# edit unit logical-unit-number
[edit interfaces interface-name unit logical-unit-number]
user@host# set vlan-id number
```



```
user@host# set family family address ip-address
```



**NOTE:** The IPv6 address family is not supported as a tunnel endpoint.

## Enabling Inline Service Interfaces

The inline service interface is a virtual physical interface that resides on the Packet Forwarding Engine. This **si** interface, referred to as an *anchor* interface, makes it possible to provide L2TP services without a special services PIC. The inline service interface is supported only by MPCs on MX Series routers. Four inline service interfaces are configurable per MPC-occupied chassis slot.



**NOTE:** On MX80 and MX104 routers, you can configure only four inline services physical interfaces as anchor interfaces for L2TP LNS sessions: si-1/0/0, si-1/1/0, si-1/2/0, and si-1/3/0. You cannot configure si-0/0/0 for this purpose on MX80 and MX104 routers.

Although the range of bandwidth values is 1 Gbps through 400 Gbps, you cannot configure the bandwidth in absolute numbers such as 12,345,878,000 bps. You must use the options available in the CLI statement:

- **1g**
- **10g** through **100g** in 10 Gbps increments: **10g**, **20g**, **30g**, **40g**, **50g**, **60g**, **70g**, **80g**, **90g**, **100g**
- **100g** through **400g** in 100 Gbps increments: **100g**, **200g**, **300g**, **400g**

The maximum bandwidth available varies among MPCs, as shown in [Table 27 on page 225](#). A system log message is generated when you configure a bandwidth higher than is supported on the MPC.

**Table 27: Maximum Bandwidth for Inline Services per MPC**

MPC	Maximum Supported Bandwidth
MPC2E NG, MPC2E NG Q,	40 Gbps
MPC3E NG, MPC3E NG Q	40 Gbps
100GE and 40GE MPC3 and MICs	40 Gbps
MPC4E	40 Gbps
MPC5E	40 Gbps
MPC6E	40 Gbps

Table 27: Maximum Bandwidth for Inline Services per MPC (continued)

MPC	Maximum Supported Bandwidth
MPC7E	240 Gbps
MPC8E	240 Gbps 400 Gbps in 1.6 Tbps upgraded mode
MPC9E	400 Gbps

To enable inline service interfaces:

1. Access an MPC-occupied slot and the PIC where the interface is to be enabled.

```
[edit chassis]
user@host# edit fpc slot-number pic number
```

2. Enable the interface and optionally specify the amount of bandwidth reserved on each Packet Forwarding Engine for tunnel traffic using inline services. Starting in Junos OS Release 16.2, you are not required to explicitly specify a bandwidth for L2TP LNS tunnel traffic using inline services. When you do not specify a bandwidth, the maximum bandwidth supported on the PIC is automatically available for the inline services; inline services can use up to this maximum value. In earlier releases, you must specify a bandwidth when you enable inline services with the **inline-services** statement.

```
[edit chassis fpc slot-number pic number]
user@host# set inline-services bandwidth bandwidth-value
```

## Configuring an Inline Service Interface for L2TP LNS

The inline service interface is a virtual physical service interface that resides on the Packet Forwarding Engine. This **si** interface, referred to as an *anchor* interface, makes it possible to provide L2TP services without a special services PIC. The inline service interface is supported only by MPCs on MX Series routers. Four inline service interfaces are configurable per MPC-occupied chassis slot.

You can maximize the number of sessions that can be shaped in one service interface by setting the maximum number of hierarchy levels to two. In this case, each LNS session consumes one L3 node in the scheduler hierarchy for shaping.

If you do not specify the number of levels (two is the only option), then the number of LNS sessions that can be shaped on the service interface is limited to the number of L2 nodes, or 4096 sessions. Additional sessions still come up, but they are not shaped.

To configure an inline service interface:

1. Access the service interface.

```
[edit interfaces]
user@host# edit si-slot/pic/port
```

2. (Optional; for per-session shaping only) Enable the inline service interface for hierarchical schedulers and limit the number of scheduler levels to two.

```
[edit interfaces si-slot/pic/port]
user@host# set hierarchical-scheduler maximum-hierarchy-levels 2
```

3. (Optional; for per-session shaping only) Configure services encapsulation for inline service interface.

```
[edit interfaces si-slot/pic/port]
user@host# set encapsulation generic-services
```

4. Configure the IPv4 family on the reserved unit 0 logical interface.

```
[edit interfaces si-slot/pic/port]
user@host# set unit 0 family inet
```

## Configuring Options for the LNS Inline Services Logical Interface

You must specify characteristics—**dial-options**—for each of the inline services logical interfaces that you configure for the LNS. LNS on MX Series routers supports only one session per logical interface, so you must configure it as a **dedicated** interface; the **shared** option is not supported. (LNS on M Series routers supports **dedicated** and **shared** options.) You also configure an identifying name for the logical interface that matches the name you specify in the access profile.

You must specify the **inet** address family for each static logical interface or in the dynamic profile for dynamic LNS interfaces. Although the CLI accepts either **inet** or **inet6** for static logical interfaces, the subscriber cannot log in successfully unless the address family **inet** is configured.



**NOTE:** For dynamic interface configuration, see [“Configuring a Dynamic Profile for Dynamic LNS Sessions” on page 259](#).

To configure the static logical interface options:

1. Access the inline services logical interface.

```
[edit]
user@host# edit interfaces si-fpc/pic/port unit logical-unit-number
```

2. Specify an identifier for the logical interface.

```
[edit interfaces si-fpc/pic/port unit logical-unit-number]
user@host# set dial-options l2tp-interface-id name
```

3. Configure the logical interface to be used for only one session at a time.

```
[edit interfaces si-fpc/pic/port unit logical-unit-number]
user@host# set dial-options dedicated
```

4. Configure the address family for each logical interface and enable the local address on the LNS that provides local termination for the L2TP tunnel to be derived from the specified interface name.

```
[edit interfaces si-fpc/pic/port unit logical-unit-number]
user@host# set family inet unnumbered-address lo0.0
```

## LNS 1:1 Stateful Redundancy Overview

By default, when an inline service (si) anchor interface goes down—for example, when the card hosting the interface fails or restarts—L2TP subscriber traffic is lost. When the PPP keepalive timer for the tunnel subsequently expires, the control plane goes down and the PPP client is disconnected. Consequently, the client must then reconnect.

You can avoid traffic loss in these circumstances by configuring an aggregated inline service interface (asi) bundle to provide 1:1 stateful redundancy, also called hot standby or active-backup redundancy. The bundle consists of a pair of si physical interfaces, the primary (active) member link and the secondary (standby or backup) member link. These interfaces must be configured on different MPCs; redundancy is not achievable if you configure the primary and secondary interface on the same MPC because both member interfaces go down if the card goes down.

When subscribers log in and 1:1 redundancy is configured, the L2TP session is established over an underlying virtual logical interface (asix.0) over the asi0 physical interface. Individual subscriber logical interfaces are created on the underlying interface in the format, *asiX.logical-unit-number*. The session remains up in the event of a failure or a restart on the MPC hosting the primary member link interface. All the data traffic destined for this L2TP session automatically moves over to the secondary member link interface on the other MPC.

## Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces

You can create an aggregated inline service interface (asi) bundle to provide 1:1 LNS stateful redundancy for inline service (si) anchor interfaces. The bundle pairs two interfaces that reside on different MPCs as primary and secondary links. LNS sessions are subsequently established over a virtual logical interface, `asiX.logical-unit-number`. LNS session failover occurs when either the primary anchor interface goes down or the card is restarted with the **request chassis fpc restart** command. When this happens, the secondary link—on a different MPC—becomes active and all the LNS data traffic destined for the session automatically moves over to the secondary interface. The subscriber session remains up on the `asiX.logical-unit-number` virtual interface. No traffic statistics are lost. When this redundancy is not configured, subscriber traffic is lost, the keepalives expire, and the PPP client is disconnected and must reconnect.

Before you begin, you must do the following:

- Confirm that enhanced subscriber management is enabled.
- Create inline service interfaces on different MPCs to be aggregated in the bundle.

See [“Enabling Inline Service Interfaces” on page 225](#) and [“Configuring an Inline Service Interface for L2TP LNS” on page 226](#).

- If you are using pools of service interfaces, define the service pools.



### BEST PRACTICE: Follow these guidelines:

- You must configure unit 0 family inet for each bundle; otherwise, the session fails to come up.
- The primary (active) and secondary (backup) interfaces must be on different MPCs.
- The bandwidth configured at the `[edit chassis fpc slot pic number inline-services bandwidth]` hierarchy level must be the same for both member links.
- An si interface configured as a member of an aggregated inline service interface bundle cannot be configured as a member of another bundle group.
- An si interface configured as a member of an aggregated inline service interface bundle cannot also be used for any function that is not related to aggregated services; for example, it cannot be used for inline IP reassembly.
- When you configure an si interface as a member of an aggregated inline services bundle, you can no longer configure that si interface independently. You can configure only the parent bundle; the bundle's configuration is applied immediately to all member interfaces.

To configure 1:1 LNS stateful redundancy:

1. On one MPC, specify the primary (active) inline services member link in the bundle.

```
[edit interfaces asix aggregated-inline-services-options]
user@host# set primary-interface
```

2. Configure the amount of bandwidth reserved on this MPC for tunnel traffic using the primary inline service interface.

```
[edit chassis fpc slot pic number inline-services]
user@host# set bandwidth (1g | 10g)
```

3. On a different MPC, specify the secondary (backup) inline services member link in the bundle.

```
[edit interfaces asix aggregated-inline-services-options]
user@host# set secondary-interface
```



**NOTE:** If you configure the active and backup member links on the same MPC, the subsequent commit of the configuration fails.

4. Configure the amount of bandwidth reserved on this MPC for tunnel traffic using the secondary inline service interface.

```
[edit chassis fpc slot pic number inline-services]
user@host# set bandwidth (1g | 10g)
```

5. Assign the aggregated inline service interface bundle to an L2TP tunnel group by either of the following methods:

- Assign a single bundle by specifying the name of the aggregated inline service physical interface.

```
[edit services l2tp tunnel-group name]
user@host# set service-interface interface-name
```

- Assign one or more pools of bundles to the tunnel group.

```
[edit services l2tp tunnel-group name]
user@host# set service-device-pool pool-name
```



**NOTE:** A pool can be mixed; that is, it can include both aggregated inline service interface bundles and individual inline service interfaces. The individual interfaces must not be members of existing bundles.

The following sample configuration creates bundle asi0 with member links on MPCs in slot 1 and slot 2, then assigns the bundle to provide redundancy for L2TP sessions on tunnel group tg1:

```
[edit interfaces asi0]
user@host# set aggregated-inline-services-options primary-interface si-1/0/0
user@host# set aggregated-inline-services-options secondary-interface si-2/0/0
user@host# set unit 0 family inet
[edit chassis fpc 1 pic 0 inline-services]
user@host# set bandwidth 10g
[edit chassis fpc 2 pic 0 inline-services]
user@host# set bandwidth 10g
[edit services l2tp tunnel-group tg1]
user@host# set service-interface asi0
```

## Verifying LNS Aggregated Inline Service Interface 1:1 Redundancy

**Purpose** View information about aggregated inline service interface bundles, individual member links, and redundancy status.

**Action** • To view summary information about an aggregated inline service interface bundle:

```
user@host> show interfaces asi0 terse
```

Interface	Admin	Link	Proto	Local	Remote
asi0	up	up			
asi0.0	up	up	inet		

• To view detailed information about an aggregated inline service interface bundle:

```
user@host> show interfaces asi0 extensive
```

```
Physical interface: asi0, Enabled, Physical link is Up
  Interface index: 223, SNMP ifIndex: 734, Generation: 226
  Type: Adaptive-Services, Link-level type: Adaptive-Services, MTU: 9192,
  Clocking: Unspecified, Speed: 20000mbps
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
  Link type      : Full-Duplex
  Link flags     : None
  Physical info  : Unspecified
  Hold-times    : Up 0 ms, Down 0 ms
  Current address: Unspecified, Hardware address: Unspecified
  Alternate link address: Unspecified
  Last flapped   : 2014-01-20 23:35:02 PST (00:03:25 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes   : 0
    Output bytes  : 0
    Input packets : 0
    Output packets: 0
  IPv6 transit statistics:
    Input bytes   : 0
    Output bytes  : 0
    Input packets : 0
    Output packets: 0
```

```

Input errors:
  Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0, Policed
discards: 0, Resource errors: 0
Output errors:
  Carrier transitions: 0, Errors: 0, Drops: 0, MTU errors: 0, Resource errors:
0

Logical interface asi0.0 (Index 356) (SNMP ifIndex 52241) (Generation 165)
  Flags: Point-To-Point SNMP-Traps 0x4000 Encapsulation: Adaptive-Services
  Traffic statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  Local statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  Transit statistics:
    Input bytes : 0
    Output bytes : 0
    Input packets: 0
    Output packets: 0
  Protocol inet, MTU: 9192, Generation: 198, Route table: 0
  Flags: Sendbcast-pkt-to-re

```

- To view information about an individual member interface in an aggregated inline service interface bundle:

```

user@host> show interfaces si-1/0/0

Physical interface: si-1/0/0, Enabled, Physical link is Up
  Interface index: 165, SNMP ifIndex: 630
  Type: Adaptive-Services, Link-level type: Adaptive-Services, MTU: 9192, Speed:
10000mbps
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
  Link type      : Full-Duplex
  Link flags     : None
  Last flapped   : Never
  Input rate     : 0 bps (0 pps)
  Output rate    : 0 bps (0 pps)

Logical interface si-1/0/0.0 (Index 357) (SNMP ifIndex 52229)
  Flags: Point-To-Point SNMP-Traps 0x4000 Encapsulation: Adaptive-Services
  Input packets : 0
  Output packets: 0
  Protocol asi, AS bundle: asi0.0
  Flags: Function2

```

- To view redundancy status for aggregated inline service interface bundles:

```

user@host> show interfaces redundancy

```

Interface	State	Last change	Primary	Secondary	Current status
asi0	On secondary	1d 23:56	si-1/0/0	si-2/0/0	primary down
asi1	On primary	10:10:27	si-3/0/0	si-4/0/0	secondary down



ae0	On primary	00:00:02	ge-1/0/0	ge-3/0/1	backup down
ae2	On primary	00:00:01	ge-2/0/0	ge-4/0/1	both up

That sample output shows that both aggregated Ethernet and aggregated inline service interfaces are configured for redundancy. To display only one of the aggregated inline service interface bundles:

```
user@host> show interfaces redundancy asi0
```

Interface	State	Last change	Primary	Secondary	Current status
asi0	On secondary	1d 23:56	si-1/0/0	si-2/0/0	primary down

- To view detailed information about all configured redundancy interfaces:

```
user@host> show interfaces redundancy detail
```

Redundancy interfaces detail

```
Interface      : asi0
State          : On primary
Last change    : 00:00:36
Primary        : si-1/0/0
Secondary      : si-3/0/0
Current status : both up
```

```
Interface      : ae0
State          : On primary
Last change    : 00:01:30
Primary        : ge-1/0/0
Secondary      : ge-3/0/1
Current status : backup down
```

## L2TP Session Limits and Load Balancing for Service Interfaces

The LNS load balances subscriber sessions across the available service interfaces in a device pool based on the number of sessions currently active on the interfaces. You can configure a maximum limit per service interface (si) and per aggregated service interface (asi). In the case of asi interfaces, you cannot configure a limit for the individual si member interfaces in the bundle.

### Session Limits on Service Interfaces

When an L2TP session request is initiated for a service interface, the LNS checks the number of current active sessions on that interface against the maximum number of sessions allowed for the individual service interface or aggregated service interface. The LNS determines whether the current session count (displayed by the **show services l2tp summary** command) is less than the configured limit. When that is true or when no limit is configured, the check passes and the session can be established. If the current session count is equal to the configured limit, then the LNS rejects the session request. No subsequent requests can be accepted on that interface until the number of active requests drops below the configured maximum. When a session request is rejected for an si or asi interface, the LNS returns a CDN message with the result code set to 2 and the error code set to 4.

For example, suppose a single service interface is configured in the tunnel group. The current L2TP session count is 1500, with a configured limit of 2000 sessions. When a new session is requested, the limit check passes and the session request is accepted.

Interface	Configured Session Limit	Current Session Count	Session Limit Check Result
si-0/0/0	2000	1500	Pass

The limit check continues to pass and session requests are accepted until 500 requests have been accepted, making the current session count 2000, which matches the configured maximum. The session limit check fails for all subsequent requests and all requests are rejected until the current session count on the interface drops below 2000, so that the limit check can pass.

Interface	Configured Session Limit	Current Session Count	Session Limit Check Result
si-0/0/0	2000	2000	Fail

When the session limit is set to zero for an interface, no session requests can be accepted. If that is the only interface in the tunnel group, then all session requests in the group are rejected until the session limit is increased from zero or another service interface is added to the tunnel group.

When a service interface in a service device pool has reached the maximum configured limit or it has a configured limit of zero, the LNS skips that interface when a session request is made and selects another interface in the pool to check the session limit. This continues until an interface passes and the session is accepted or no other interface remains in the pool to be selected.

### Session Load Balancing Across Service Interfaces

The behavior for session load distribution in a service device pool changed in Junos OS Release 16.2. When a service interface has a lower session count than another interface in the pool and both interfaces are below their maximum session limit, subsequent sessions are distributed to the interface with fewer sessions.

In earlier releases, sessions are distributed in a strictly round-robin manner, regardless of session count. The old behavior can result in uneven session distribution when the Packet Forwarding Engine is rebooted or a service interface goes down and comes back up.

For example, consider the following scenario using the old round-robin distribution behavior for a pool with two service interfaces:

- Two hundred sessions are evenly distributed across the two service interfaces.
  - si-0/0/0 has 100 sessions.
  - si-1/0/0 has 100 sessions.
- The si-1/0/0 interface reboots. When it comes back, initially sessions are up only on si-0/0/0.

- si-0/0/0 has 100 sessions.
  - si-1/0/0 has 0 sessions.
3. As the sessions formerly on si-1/0/0 reconnect, they are distributed equally across both service interfaces. When all 100 sessions are back up, the distribution is significantly unbalanced.
    - si-0/0/0 has 150 sessions.
    - si-1/0/0 has 50 sessions.
  4. After 100 new sessions connect, si-0/0/0 reaches its maximum limit. Subsequent sessions are accepted only on si-1/0/0.
    - si-0/0/0 has 200 sessions.
    - si-1/0/0 has 100 sessions.
  5. After 100 more sessions connect, si-1/0/0 reaches its maximum limit. No more sessions can be accepted until the session count drops below 200 for one of the interfaces.
    - si-0/0/0 has 200 sessions.
    - si-1/0/0 has 200 sessions.

Now consider the same scenario using the current load distribution behavior based on the number of attached sessions. The device pool again has two service interfaces each with a configured maximum limit of 200 sessions:

1. Two hundred sessions are evenly distributed across the two service interfaces.
  - si-0/0/0 has 100 sessions.
  - si-1/0/0 has 100 sessions.
2. The si-1/0/0 interface reboots. When it comes back up, sessions are up initially only on si-0/0/0.
  - si-0/0/0 has 100 sessions.
  - si-1/0/0 has 0 sessions.
3. As the sessions formerly on si-1/0/0 reconnect, they are distributed according to the session load on each interface. Because both interfaces are below their maximum limit, and si-1/0/0 has fewer sessions than si-0/0/0, sessions are initially distributed only to si-1/0/0.
  - a. After 1 new session:
    - si-0/0/0 has 100 sessions.
    - si-1/0/0 has 1 session.
  - b. After 10 new sessions:
    - si-0/0/0 has 100 sessions.
    - si-1/0/0 has 10 sessions.
  - c. After 100 new sessions:

- si-0/0/0 has 100 sessions.
  - si-1/0/0 has 100 sessions.
4. Because both interfaces now have the same session count, the next session (#101) is distributed randomly between the two interfaces. The next session after that (#102) goes to the interface with the lower session count. That makes the interfaces equal again, so the next session (#103) is randomly distributed. This pattern repeats until the maximum limit of 200 sessions for both interfaces.
- si-0/0/0 has 200 sessions.
  - si-1/0/0 has 200 sessions.

No more sessions can be accepted on either interface until the number of sessions drops below 200 on one of the interfaces.

The load balancing behavior is the same for aggregated service interfaces. An asi interface is selected from a pool based on the current session count for the asi interface. When that count is less than the maximum, the LNS checks current session count for the active si interface in the asi bundle. When that count is less than the maximum, the session can be established on the asi interface.

In a mixed device pool that has both service interfaces and aggregated service interfaces, sessions are distributed to the interface, either asi or si, that has the lowest session count. When the session count of an interface of either type reaches its limit, it can no longer accept sessions until the count drops below the maximum.

You can use the session limit configuration to achieve a session limit on particular Packet Forwarding Engines. Suppose you want a limit of 100 sessions on a PFE0, which has two service interfaces. You can set the max limit on each interface to 50, or any other combination that adds up to 100 to establish the PFE0 limit.

## Example: Configuring an L2TP LNS

This example shows how you can configure an L2TP LNS on an MX Series router to provide tunnel endpoints for an L2TP LAC in your network. This configuration includes a dynamic profile for dual-stack subscribers.

- [Requirements on page 236](#)
- [Overview on page 237](#)
- [Configuration on page 239](#)

---

### Requirements

This L2TP LNS example requires the following hardware and software:

- MX Series 5G Universal Routing Platform
- One or more MPCs
- Junos OS Release 11.4 or later

No special configuration beyond device initialization is required before you can configure this feature.

You must configure certain standard RADIUS attributes and Juniper Networks VSAs in the attribute return list on the AAA server associated with the LNS for this example to work. Table 28 on page 237 lists the attributes with their required order setting and values. We recommend that you use the most current Juniper Networks RADIUS dictionary, available in the *Downloads* box on the *Junos OS Subscriber Management* page at [https://www.juniper.net/documentation/en\\_US/junos/information-products/pathway-pages/subscriber-access/index.html](https://www.juniper.net/documentation/en_US/junos/information-products/pathway-pages/subscriber-access/index.html).

**Table 28: VSA and Standard RADIUS Attribute Names, Order, and Values Required for Example**

VSA Name [Number]	Order	Value
CoS-Parameter-Type [26-108]	1	T01 Multiplay
CoS-Parameter-Type [26-108]	2	T02 10m
CoS-Parameter-Type [26-108]	3	T08 -36
CoS-Parameter-Type [26-108]	4	T07 cell-mode
Framed-IPv6-Pool [100]	0	jnpr_ipv6_pool
Framed-Pool [88]	0	jnpr_pool
Egress-Policy-Name [26-11]	0	classify
Ingress-Policy-Name [26-10]	0	classify
Virtual-Router [26-1]	0	default

### Overview

The LNS employs user group profiles to apply PPP attributes to the PPP subscribers that are tunneled from the LAC. LACs in the network are clients of the LNS. The clients are associated with user group profiles in the L2TP access profile configured on the LNS. In this example, the user group profile **ce-l2tp-group-profile** specifies the following PPP attributes:

- A 30-second interval between PPP keepalive messages for L2TP tunnels from the client LAC terminating on the LNS.
- A 200-second interval that defines how long the PPP subscriber session can be idle before it is considered to have timed out.
- Both PAP and CHAP as the PPP authentication methods that apply to tunneled PPP subscribers at the LNS.

The L2TP access profile **ce-l2tp-profile** defines a set of L2TP parameters for each client LAC. In this example, the user group profile **ce-l2tp-group-profile** is associated with both clients, **lac1** and **lac2**. Both clients are configured to have the LNS renegotiate the link

control protocol (LCP) with the PPP client rather than accepting the pre-negotiated LCP parameters that the LACs pass to the LNS. LCP renegotiation also causes authentication to be renegotiated by the LNS; the authentication method is specified in the user group profile. The maximum number of sessions allowed per tunnel is set to 1000 for **lac1** and to 4000 for **lac2**. A different password is configured for each LAC.

A local AAA access profile, **aaa-profile**, enables you to override the global AAA access profile, so that you can specify an authentication order, a RADIUS server that you want to use for L2TP, and a password for the server.

In this example, an address pool defines a range of IP addresses that the LNS allocates to the tunneled PPP sessions. This example defines ranges of IPv4 and IPv6 addresses.

Two inline service interfaces are enabled on the MPC located in slot 5 of the router. For each interface, 10 Gbps of bandwidth is reserved for tunnel traffic on the interface's associated PFE. These *anchor* interfaces serve as the underlying physical interface. To enable CoS queue support on the individual logical inline service interfaces, you must configure both services encapsulation (**generic-services**) and hierarchical scheduling support on the anchors. The IPv4 address family is configured for both anchor interfaces. Both anchor interfaces are specified in the **lns\_p1** service device pool. The LNS can balance traffic loads across the two anchor interfaces when the tunnel group includes the pool.

This example uses the dynamic profile **dyn-lns-profile2** to specify characteristics of the L2TP sessions that are created or assigned dynamically when a subscriber is tunneled to the LNS. For many of the characteristics, a predefined variable is set; the variables are dynamically replaced with the appropriate values when a subscriber is tunneled to the LNS.

The interface to which the tunneled PPP client connects (**\$junos-interface-name**) is dynamically created in the routing instance (**\$junos-routing-instance**) assigned to the subscriber. Routing options for access routes include the route's next hop address (**\$junos-framed-route-nexthop**), metric (**\$junos-framed-route-cost**), and preference (**\$junos-framed-route-distance**). For access-internal routes, a dynamic IP address variable (**\$junos-subscriber-ip-address**) is set.

The logical inline service interfaces are defined by the name of a configured anchor interface (**\$junos-interface-ifd-name**) and a logical unit number (**\$junos-interface-unit**). The profile assigns **l2tp-encapsulation** as the identifier for the logical interface and specifies that each interface can be used for only a single session at a time.

The IPv4 address is set to a value returned from the AAA server. For IPv4 traffic an input firewall filter **\$junos-input-filter** and an output firewall filter **\$junos-output-filter** are attached to the interface. The loopback variable (**\$junos-loopback-interface**) derives an IP address from a loopback interface (**lo**) configured in the routing instance and uses it in IPCP negotiation as the PPP server address. Because this is a dual-stack configuration, the IPv6 address family is also set, with the addresses provided by the **\$junos-ipv6-address** variable.

The **\$junos-ipv6-address** variable is used because Router Advertisement Protocol is also configured. This variable enables AAA to allocate the first address in the prefix to be reserved as the local address for the interface. The minimal configuration for the Router

Advertisement Protocol in the dynamic profile specifies the **\$junos-interface-name** and **\$junos-ipv6-ndra-prefix** variables to dynamically assign a prefix value in IPv6 neighbor discovery router advertisements.

The dynamic profile also includes the class of service configuration that is applied to the tunnel traffic. The traffic-control profile (**tc-profile**) includes variables for the scheduler map (**\$junos-cos-scheduler-map**), shaping rate (**\$junos-cos-shaping-rate**), overhead accounting (**\$junos-cos-shaping-mode**), and byte adjustment **\$junos-cos-byte-adjust**). The dynamic profile applies the CoS configuration—including the forwarding class, the output traffic-control profile, and the rewrite rules—to the dynamic service interfaces.

The **tg-dynamic** tunnel group configuration specifies the access profile **ce-l2tp-profile**, the local AAA profile **aaa-profile**, and the dynamic profile **dyn-lns-profile2** that are used to dynamically create LNS sessions and define the characteristics of the sessions. The **lns\_p1** service device pool associates a pool of service interfaces with the group to enable LNS to balance traffic across the interfaces. The local gateway address **203.0.113.2** corresponds to the remote gateway address that is configured on the LAC. The local gateway name **ce-lns** corresponds to the remote gateway name that is configured on the LAC.



**NOTE:** This example does not show all possible configuration choices.

## Configuration

### CLI Quick Configuration

To quickly configure an L2TP LNS, copy the following commands, paste them in a text file, remove any line breaks, and then copy and paste the commands into the CLI.

```
[edit]
edit access group-profile ce-l2tp-group-profile
set ppp idle-timeout 200
set ppp ppp-options pap
set ppp ppp-options chap
set ppp keepalive 30
top
edit access profile ce-l2tp-profile
set client lac1 l2tp maximum-sessions-per-tunnel 1000
set client lac1 l2tp interface-id l2tp-encapsulation-1
set client lac1 l2tp lcp-renegotiation
set client lac1 l2tp shared-secret "lac1-$ABC123"
set client lac1 user-group-profile ce-l2tp-group-profile
set client lac2 l2tp maximum-sessions-per-tunnel 4000
set client lac2 l2tp interface-id l2tp-encap-2
set client lac2 l2tp lcp-renegotiation
set client lac2 l2tp shared-secret "lac2-$ABC123"
set client lac2 user-group-profile ce-l2tp-group-profile
top
edit access profile aaa-profile
set authentication-order radius
set radius authentication-server 198.51.100.193
set radius-server 198.51.100.193 secret "$ABC123"
```

```
top
edit access address-assignment pool client-pool1 family inet
set network 192.168.1.1/16
set range lns-v4-pool-range low 192.168.1.1
set range lns-v4-pool-range high 192.168.255.255
top
edit access address-assignment pool client-ipv6-pool2 family inet6
set prefix 2001:DB8::/32
set range lns-v6-pool-range low 2001:DB8:1::/48
set range lns-v6-pool-range high 2001:DB8:ffff::/48
top
set interfaces ge-5/0/1 unit 11 vlan-id 11
set interfaces ge-5/0/1 unit 11 family inet address 203.0.113.2/24
set interfaces lo0 unit 0 family inet address 127.0.0.1/32
top
set chassis fpc 5 pic 0 inline-services bandwidth 10g
set chassis fpc 5 pic 2 inline-services bandwidth 10g
top
edit interfaces si-5/0/0
set hierarchical-scheduler maximum-hierarchy-levels 2
set encapsulation generic-services
set unit 0 family inet
top
edit interfaces si-5/2/0
set hierarchical-scheduler maximum-hierarchy-levels 2
set encapsulation generic-services
set unit 0 family inet
top
set services service-device-pools pool lns_p1 interface si-5/0/0
set services service-device-pools pool lns_p1 interface si-5/2/0
top
edit dynamic-profiles dyn-lns-profile2 routing-instances $junos-routing-instance
set interface $junos-interface-name
edit routing-options access route $junos-framed-route-ip-address-prefix
set next-hop $junos-framed-route-nexthop
set metric $junos-framed-route-cost
set preference $junos-framed-route-distance
up 2
edit access-internal route $junos-subscriber-ip-address
set qualified-next-hop $junos-interface-name
up 5
edit interfaces $junos-interface-ifd-name unit $junos-interface-unit
set dial-options l2tp-interface-id l2tp-encapsulation
set dial-options dedicated
set family inet filter input $junos-input-filter
set family inet filter output $junos-output-filter
set family inet unnumbered-address $junos-loopback-interface
set family inet6 address $junos-ipv6-address
set family inet6 filter input $junos-input-ipv6-filter
set family inet6 filter output $junos-output-ipv6-filter
up 3
edit protocols router-advertisement
set interface $junos-interface-name prefix $junos-ipv6-ndra-prefix
top
[edit class-of-service]
```



```

edit rewrite-rules dscp rewriteDSCP forwarding-class expedited-forwarding
set loss-priority high code-point af11
set loss-priority high code-point af12
top
edit dynamic-profiles dyn-lns-profile2 class-of-service traffic-control-profiles tc-profile
set scheduler-map $junos-cos-scheduler-map
set shaping-rate $junos-cos-shaping-rate
set overhead-accounting $junos-cos-shaping-mode
set overhead-accounting bytes $junos-cos-byte-adjust
up
edit interfaces $junos-interface-ifd-name unit $junos-interface-unit
set forwarding-class expedited-forwarding
set output-traffic-control-profile tc-profile
set rewrite-rules dscp rewriteDSCP
edit interfaces si-5/0/0
set output-control-profile-remaining tc-profile
top
set services l2tp tunnel-group tg-dynamic l2tp-access-profile ce-l2tp-profile
set services l2tp tunnel-group tg-dynamic aaa-access-profile aaa-profile
set services l2tp tunnel-group tg-dynamic local-gateway address 203.0.113.2
set services l2tp tunnel-group tg-dynamic local-gateway gateway-name ce-lns
set services l2tp tunnel-group tg-dynamic service-device-pool lns_p1
set services l2tp tunnel-group tg-dynamic dynamic-profile dyn-lns-profile2

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode*.

To configure an L2TP LNS with inline service interfaces:

1. Configure a user group profile that defines the PPP configuration for tunnel subscribers.

```

[edit access]
user@host# edit group-profile ce-l2tp-group-profile
[edit access group-profile ce-l2tp-group-profile]
user@host# set ppp keepalive 30
user@host# set ppp idle-timeout 200
user@host# set ppp ppp-options chap
user@host# set ppp ppp-options pap

```

2. Configure an L2TP access profile that defines the L2TP parameters for each client LAC. This includes associating a user group profile with the client and specifying the identifier for the inline services logical interface that represents an L2TP session on the LNS.

```

[edit access profile ce-l2tp-profile client lac1]
user@host# set l2tp interface-id l2tp-encapsulation
user@host# set l2tp maximum-sessions-per-tunnel 1000
user@host# set l2tp shared-secret "lac1-$ABC123"
user@host# set l2tp lcp-renegotiation

```

```

user@host# set user-group-profile ce-l2tp-group-profile
[edit access profile ce-l2tp-profile client lac2]
user@host# set l2tp interface-id interface-id
user@host# set l2tp maximum-sessions-per-tunnel 4000
user@host# set l2tp shared-secret "lac2-$ABC123"
user@host# set l2tp lcp-renegotiation
user@host# set user-group-profile ce-l2tp-group-profile

```



**NOTE:** If `user-group-profile` is modified or deleted, the existing LNS subscribers, which were using this Layer 2 Tunneling Protocol client configuration, go down.

3. Configure a AAA access profile to override the global access profile for the order of AAA authentication methods and server attributes.

```

[edit access profile aaa-profile]
user@host# set authentication-order radius
user@host# set radius authentication-server 198.51.100.193
user@host# set radius-server 198.51.100.193 secret "$ABC123"

```

4. Configure IPv4 and IPv6 address-assignment pools to allocate addresses for the clients (LACs).

```

[edit access address-assignment pool client-pool1 family inet]
user@host# set network 192.168.1.1/16
user@host# set range lns-v4-pool-range low 192.168.1.1 high 192.168.255.255
[edit access address-assignment pool client-ipv6-pool2 family inet6]
user@host# set prefix 2001:DB8::/32
user@host# set range lns-v6-pool-range low 2001:DB8:1::/48
user@host# set range lns-v6-pool-range high 2001:DB8:ffff::/48

```

5. Configure the peer interface to terminate the tunnel and the PPP server-side IPCP address (loopback address).

```

[edit interfaces ge-5/0/1]
user@host# set vlan-tagging
user@host# set unit 11
[edit interfaces ge-5/0/1.11]
user@host# set vlan-id 11
user@host# set family inet address 10.1.1.2/24
[edit interfaces lo0]
user@host# set unit 0 family inet address 127.0.0.1/32

```

6. Enable inline service interfaces on an MPC.

```

[edit chassis fpc 5]

```

```
user@host# set pic 0 inline-services bandwidth 10g
user@host# set pic 2 inline-services bandwidth 10g
```

7. Configure the anchor service interfaces with services encapsulation, hierarchical scheduling, and the address family.

```
[edit interfaces si-5/0/0]
user@host# set hierarchical-scheduler maximum hierarchy-levels 2
user@host# set encapsulation generic-services
user@host# set unit 0 family inet
[edit interfaces si-5/2/0]
user@host# set hierarchical-scheduler maximum hierarchy-levels 2
user@host# set encapsulation generic-services
user@host# set unit 0 family inet
```

8. Configure a pool of service interfaces for dynamic LNS sessions.

```
[edit services service-device-pools pool lns_p1]
user@host# set interface si-5/0/0
user@host# set interface si-5/2/0
```

9. Configure a dynamic profile that dynamically creates L2TP logical interfaces for dual-stack subscribers.

```
[edit dynamic-profiles dyn-lns-profile2]
user@host# edit routing-instances $junos-routing-instance
user@host# set interface $junos-interface-name
[edit dynamic-profiles dyn-lns-profile2 routing-instances "$junos-routing-instance"]
user@host# edit routing-options access route $junos-framed-route-ip-address-prefix
[edit dynamic-profiles dyn-lns-profile2 routing-instances "$junos-routing-instance"
  routing-options access route "$junos-framed-route-ip-address-prefix"]
user@host# set next-hop $junos-framed-route-nexthop
user@host# set metric $junos-framed-route-cost
user@host# set preference $junos-framed-route-distance
[edit dynamic-profiles dyn-lns-profile2 routing-instances "$junos-routing-instance"
  routing-options access-internal]
user@host# set route $junos-subscriber-ip-address qualified-next-hop
  $junos-interface-name
[edit dynamic-profiles dyn-lns-profile2 interfaces "$junos-interface-ifd-name" unit
  "$junos-interface-unit"]
user@host# set dial-options l2tp-interface-id l2tp-encapsulation
user@host# set dial-options dedicated
user@host# set family inet unnumbered-address $junos-loopback-interface
user@host# set family inet filter input $junos-input-filter
user@host# set family inet filter output $junos-output-filter
user@host# set family inet6 address $junos-ipv6-address
set family inet6 filter input $junos-input-ipv6-filter
set family inet6 filter output $junos-output-ipv6-filter
[edit dynamic-profiles dyn-lns-profile2 protocols router-advertisement]
user@host# set interface $junos-interface-name prefix $junos-ipv6-ndra-prefix
```

10. Configure shaping, scheduling, and rewrite rules, and apply in the dynamic profile to tunnel traffic.

```
[edit class-of-service]
user@host# edit rewrite-rules dscp rewriteDSCP forwarding-class
    expedited-forwarding
user@host# set loss-priority high code-point af11
user@host# set loss-priority high code-point af12
[edit dynamic-profiles dyn-lns-profile2 class-of-service traffic-control-profiles
    tc-profile]
user@host# set scheduler-map $junos-cos-scheduler-map
user@host# set shaping-rate $junos-cos-shaping-rate
user@host# set overhead-accounting $junos-cos-shaping-mode
user@host# set overhead-accounting bytes $junos-cos-byte-adjust
[edit dynamic-profiles dyn-lns-profile2 class-of-service interfaces
    "$junos-interface-ifd-name" unit "$junos-interface-unit"]
user@host# set forwarding-class expedited-forwarding
user@host# set output-traffic-control-profile tc-profile
user@host# set rewrite-rules dscp rewriteDSCP
[edit class-of-service interfaces si-5/0/0]
user@host# set output-traffic-control-profile-remaining tc-profile
```

11. Configure the L2TP tunnel group to bring up dynamic LNS sessions using the pool of inline service interfaces to enable load-balancing.

```
[edit services l2tp tunnel-group tg-dynamic]
user@host# set l2tp-access-profile ce-l2tp-profile
user@host# set local-gateway address 10.1.1.2
user@host# set local-gateway gateway-name ce-lns
user@host# set aaa-access-profile aaa-profile
user@host# set dynamic-profile dyn-lns-profile2
user@host# set service-device-pool lns_p1
```

**Results** From configuration mode, confirm the access profile, group profile, AAA profile, and address-assignment pools configuration by entering the **show access** command. Confirm the inline services configuration by entering the **show chassis** command. Confirm the interface configuration by entering the **show interfaces** command. Confirm the dynamic profile configuration by entering the **show dynamic-profiles** command. Confirm the tunnel group configuration by entering the **show services l2tp** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit]
user@host# show access
group-profile ce-l2tp-group-profile {
  ppp {
    idle-timeout 200;
    ppp-options {
      pap;
      chap;
    }
  }
}
```

```

    }
    keepalive 30;
  }
}
profile ce-l2tp-profile {
  client lac1 {
    l2tp {
      maximum-sessions-per-tunnel 1000;
      interface-id l2tp-encapsulation-1;
      lcp-renegotiation;
      shared-secret "lac1-$ABC123"; ## SECRET-DATA
    }
    user-group-profile ce-l2tp-group-profile;
  }
  client lac2 {
    l2tp {
      maximum-sessions-per-tunnel 4000;
      interface-id l2tp-encap-2;
      lcp-renegotiation;
      shared-secret "lac2-$ABC123"; ## SECRET-DATA
    }
    user-group-profile ce-l2tp-group-profile;
  }
}
profile aaa-profile {
  authentication-order radius;
  radius-server {
    198.51.100.193 secret "$ABC123"; ## SECRET-DATA
  }
}
address-assignment {
  pool client-pool1 {
    family inet {
      network 192.168.1.1/16;
      range lns-v4-pool-range {
        low 192.168.1.1;
        high 192.168.255.255;
      }
    }
  }
  pool client-ipv6-pool2 {
    family inet6 {
      prefix 2001:DB8::/32;
      range lns-v6-pool-range {
        low 2001:DB8:1::/48;
        high 2001:DB8:ffff::/48;
      }
    }
  }
}
[edit]
user@host# show chassis
fpc 5 {
  pic 0 {
    inline-services {

```

```
        bandwidth 10g;
    }
}
pic 2 {
    inline-services {
        bandwidth 10g;
    }
}
}
[edit]
user@host# show interfaces
ge-5/0/1 {
    vlan-tagging;;
    unit 11 {
        vlan-id 11;
        family inet {
            address 203.0.113.2/24;
        }
    }
}
si-5/0/0 {
    hierarchical-scheduler maximum-hierarchy-levels 2;
    encapsulation generic-services;
    unit 0 {
        family inet;
    }
}
si-5/2/0 {
    hierarchical-scheduler maximum-hierarchy-levels 2;
    encapsulation generic-services;
    unit 0 {
        family inet;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 127.0.0.1/32;
        }
    }
}
[edit]
user@host# show dynamic-profiles
dyn-lns-profile2 {
    routing-instances {
        "$junos-routing-instance" {
            interface "$junos-interface-name";
            routing-options {
                access {
                    route $junos-framed-route-ip-address-prefix {
                        next-hop "$junos-framed-route-nexthop";
                        metric "$junos-framed-route-cost";
                        preference "$junos-framed-route-distance";
                    }
                }
            }
        }
    }
}
```

```

        access-internal {
            route $junos-subscriber-ip-address {
                qualified-next-hop "$junos-interface-name";
            }
        }
    }
}
}
interfaces {
    "$junos-interface-ifd-name" {
        unit "$junos-interface-unit" {
            dial-options {
                l2tp-interface-id l2tp-encapsulation;
                dedicated;
            }
            family inet {
                filter {
                    input "$junos-input-filter";
                    output "$junos-output-filter";
                }
                unnumbered-address "$junos-loopback-interface";
            }
            family inet6 {
                address $junos-ipv6-address;
                input $junos-input-ipv6-filter;
                output $junos-output-ipv6-filter;
            }
        }
    }
}
protocols {
    router-advertisement {
        interface "$junos-interface-name" {
            prefix $junos-ipv6-ndra-prefix;
        }
    }
}
class-of-service {
    rewrite-rules {
        dscp rewriteDSCP {
            forwarding-class expedited-forwarding {
                loss-priority high code-point af11
                loss-priority high code-point af12
            }
        }
    }
}
traffic-control-profiles {
    tc-profile {
        scheduler-map "$junos-cos-scheduler-map";
        shaping-rate "$junos-cos-shaping-rate";
        overhead-accounting "$junos-cos-shaping-mode" bytes "$junos-cos-byte-adjust";
    }
}
interfaces {
    "$junos-interface-ifd-name" {

```

```

    unit "$junos-interface-unit" {
        forwarding-class expedited-forwarding;
        output-traffic-control-profile tc-profile;
        rewrite-rules {
            dscp rewriteDSCP;
        }
    }
}
}
}
}
[edit]
user@host# show services l2tp
tunnel-group tg-dynamic {
    l2tp-access-profile ce-l2tp-profile;
    aaa-access-profile aaa-profile;
    local-gateway {
        address 203.0.113.2;
        gateway-name ce-lns;
    }
    service-device-pool lns_p1;
    dynamic-profile dyn-lns-profile2;
}

```

When you are done configuring the device, enter **commit** from configuration mode.

## Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces

The L2TP tunnel group specifies attributes that apply to L2TP tunnels and sessions from a group of LAC clients. These attributes include the access profile used to validate L2TP connection requests made to the LNS on the local gateway address, a local access profile that overrides the global access profile, the keepalive timer, and whether the IP ToS value is reflected.



**NOTE:** If you delete a tunnel group, all L2TP sessions in that tunnel group are terminated. If you change the value of the `local-gateway-address`, `service-device-pool`, or `service-interface` statements, all L2TP sessions using those settings are terminated. If you change or delete other statements at the `[edit services l2tp tunnel-group name]` hierarchy level, new tunnels you establish use the updated values but existing tunnels and sessions are not affected.

To configure the LNS tunnel group:

1. Create the tunnel group.

```

[edit services l2tp]
user@host# edit tunnel-group group-name

```





**NOTE:** You can create up to 256 tunnel groups.

2. Specify the service anchor interface responsible for L2TP processing on the LNS.

```
[edit services l2tp tunnel-group name]  
user@host# set service-interface interface-name
```

This service anchor interface is required for static LNS sessions, and for dynamic LNS sessions that do not balance traffic across a pool of anchor interfaces. The interface is configured at the **[edit interfaces]** hierarchy level.

3. (Optional; for load-balancing dynamic LNS sessions only) Specify a pool of inline service anchor interfaces to enable load-balancing of L2TP traffic across the interfaces.

```
[edit services l2tp tunnel-group group-name]  
user@host# set service-device-pool pool-name
```

The pool is defined at the **[edit services service-device-pools]** hierarchy level.

4. (For dynamic LNS sessions only) Specify the name of the dynamic profile that defines and instantiates inline service interfaces for L2TP tunnels

```
[edit services l2tp tunnel-group group-name]  
user@host# set dynamic-profile profile-name
```

The profile is defined at the **[edit dynamic-profiles]** hierarchy level.

5. Specify the access profile that validates all L2TP connection requests to the local gateway address.

```
[edit services l2tp tunnel-group group-name]  
user@host# set l2tp-access-profile profile-name
```

6. Configure the local gateway address on the LNS; corresponds to the IP address that is used by LACs to identify the LNS.

```
[edit services l2tp tunnel-group group-name]  
user@host# set local-gateway address address
```

7. (Optional) Configure the local gateway name on the LNS, returned in the SCCRP message to the LAC. The name must match the remote gateway name configured on the LAC, or the tunnel cannot be created.

```
[edit services l2tp tunnel-group group-name]  
user@host# set local-gateway gateway-name gateway-name
```

8. (Optional) Configure the interval at which the LNS sends hello messages if it has received no messages from the LAC.

```
[edit services l2tp tunnel-group group-name]  
user@host# set hello-interval seconds
```

9. (Optional) Specify a local access profile that overrides the global access profile to configure RADIUS server settings for the tunnel group.

```
[edit services l2tp tunnel-group group-name]  
user@host# set aaa-access-profile profile-name
```

This local profile is configured at the **[edit access profile]** hierarchy level.

10. (Optional) Configure the LNS to reflect the IP ToS value from the inner IP header to the outer IP header (applies to CoS configurations).

```
[edit services l2tp tunnel-group group-name]  
user@host# set tos-reflect
```

11. (Optional) Specify a dynamic service profile to be applied to the L2TP session at login, along with any parameters to pass to the service.

```
[edit services l2tp tunnel-group group-name]  
user@host# set service-profile profile-name(parameter)&profile-name
```

## Applying Services to an L2TP Session Without Using RADIUS

Services are applied to L2TP sessions for activation or later modified by vendor-specific attributes (VSAs) from the RADIUS server or in RADIUS Change of Authorization (CoA) requests. Starting in Junos OS Release 18.1R1, you can apply services to L2TP sessions by means of dynamic service profiles without involving RADIUS. In multivendor environments, customers might use only standard RADIUS attributes to simplify management by avoiding the use of VSAs from multiple vendors. However, this complicates the application of services to L2TP sessions because VSAs are generally required to apply services. Local dynamic service profile activation enables you to avoid that problem. You can also use local service profile activation to provide default services when RADIUS servers are down.

You can apply services to all subscribers in a tunnel group or to all subscribers using a particular LAC. You can configure a maximum of 12 services per tunnel group or LAC hostname.

After configuring one or more dynamic service profiles that define services, you apply them in the tunnel group or in the access profile configuration for a LAC client by specifying the service profile names. You can list more than one profile to be activated, separated by an ampersand (&). You can also specify parameters to be used by the service profile that might override values configured in the profile itself, such as a downstream shaping rate for a CoS service.

The locally configured list of services (via service profiles) serves as local authorization that is applied by authd during client session activation. This list of services is subject to the same validation and processing as services originating from external authority, such as RADIUS. These services are presented during subscriber login.

You can still use RADIUS VSAs or CoA requests in concert with the service profiles. If services are sourced from an external authority as authorization during authentication or during subscriber session provisioning (activation), the services from the external authority take strict priority over those in the local configuration. If a service applied with RADIUS is the same as a service applied with a service profile in the CLI, but with different parameters, the RADIUS service is applied with a new session ID and takes precedence over the earlier service profile.

You can issue commands to deactivate or reactivate any service you have previously activated for a tunnel group or LAC.

Define the dynamic service profiles that you want to later apply to a tunnel group or LAC.

To apply service profiles to all subscribers in a tunnel group:

- Specify one or more service profiles and any parameters to be passed to the services.

```
[edit services l2tp tunnel-group group-name]
user@host# set service-profile profile-name(parameter)&profile-name
```

To apply service profiles to all subscribers for a particular LAC:

- Specify one or more service profiles and any parameters to be passed to the services.

```
[edit access profile profile-name client client-name l2tp]
user@host# set service-profile profile-name(parameter)&profile-name
```



**NOTE:** When service profiles are configured for a LAC client and for a tunnel group that uses that client, only the LAC client service profile is applied. It overrides the tunnel group configuration. For example, in the following configuration, the tunnel group, tg-LAC-3, uses the LAC client, LAC-3, so the LAC3 configuration overrides the tunnel group configuration. Consequently only the cos-A3 service is activated for subscribers in the tunnel group, rather than Cos2 and fw1. The shaping rate passed for the service is 24 Mbps.

```
[edit]
user@host# set services l2tp tunnel-group tg-LAC-3 service-profile
cos2(31000000)&fw1
user@host# set access profile prof-lac client LAC-3 l2tp service-profile
cos-A3(24000000)
```

You can deactivate any service applied to a subscriber session by issuing the following command:

```
user@host> request network-access aaa subscriber delete session-id subscriber-session-id
service-profile profile-name
```

You can reactivate any service applied to a subscriber session by issuing the following command:

```
user@host> request network-access aaa subscriber add session-id subscriber-session-id
service-profile profile-name
```

To display the services sessions for all current subscriber sessions, use the **show subscribers extensive** or **show network-access aaa subscribers session-id *id-number* detail** command.

To understand how local service application works, the following examples illustrate the various configuration possibilities. First, consider the following dynamic service profile configurations, cos2 and fw1:

```
dynamic-profiles {
  cos2 {
    variables {
      shaping-rate default-value 10m;
      shaping-rate-in default-value 10m;
      data-in-filter uid;
      data-in-policer uid;
    }
  }
}
```

```

    }
    interfaces {
        "$junos-interface-ifd-name" {
            unit "$junos-interface-unit" {
                family inet;
            }
        }
    }
    class-of-service {
        traffic-control-profiles {
            TrafficShaper {
                scheduler-map a;
                shaping-rate "$shaping-rate";
            }
        }
        interfaces {
            "$junos-interface-ifd-name" {
                unit "$junos-interface-unit" {
                    output-traffic-control-profile TrafficShaper;
                }
            }
        }
    }
}
|

```

```

dynamic-profiles {
    fw1 {
        variables {
            v6input default-value v6ingress;
            v6output default-value v6egress;
            input default-value upstrm-filter;
            output default-value dwnstrm-filter;
        }
        interfaces {
            "$junos-interface-ifd-name" {
                unit "$junos-interface-unit" {
                    family inet;
                }
            }
        }
    }
}

```

The following statement applies both services to all subscribers in tunnel group tg1; a parameter value of 31 Mbps is passed to the cos2 service:

```

[edit]
user@host# set services l2tp tunnel-group tg1 service-profile cos2(31000000)&fw1

```

In the cos2 service profile, the shaping rate is provided by a user-defined variable with a default value of 10m, or 1Mbps. After the L2TP session is up, cos2 and fw1 are activated with service session IDs of 34 and 35, respectively.

```
user@host1> show subscribers extensive
```

```
...
```

```
Service Session ID: 34
Service Session Name: cos2
State: Active
Family: inet
Service Activation time: 2018-02-15 15:44:16 IST

Service Session ID: 35
Service Session Name: fw1
State: Active
Family: inet
Service Activation time: 2018-02-15 15:44:16 IST
Dynamic configuration:
  input: upstrm-filter
  output: dwnstrm-filter
  v6input: v6ingress
  v6output: v6egress
```

The parameter passed to cos2 is used as the value for \$shaping-rate; consequently the shaping rate for the service is adjusted from the default value of 10 Mbps to 31 Mbps, as shown in the following command output. Although the output indicates the adjusting application is RADIUS CoA, the adjustment is a consequence of the parameter passed to the service profile. That operation uses the same internal framework as a CoA and is reported as such.

```
user@host1> show class-of-service interface si-1/0/0.3221225492
```

```
Logical interface: si-1/0/0.3221225492, Index: 3221225492
Object      Name                               Type      Index
Traffic-control-profile subscriber-tcp-2      Output    23571
Scheduler-map a                               Output    4294967354
Classifier   dscp-ipv6-compatibility dscp-ipv6  9
Classifier   ipprec-compatibility   ip         13
```

```
Adjusting application: RADIUS CoA
Adjustment type: absolute
configured-shaping-rate: 31000000
adjustment-value: 31000000
Adjustment overhead-accounting mode: frame mode
Adjustment overhead bytes: 0
Adjustment target: node
Adjustment priority: 1
```

Now the cos2 service is deactivated from the CLI for subscriber session 27.

```
user@host1> request network-access aaa subscriber delete service-profile cos2
session-id 27
```

```
Successful completion
```

The following output shows cos2 is gone, leaving only fw1 as an active service.

```
user@host1> show subscribers extensive

Type: L2TP
User Name: user@example.com
IP Address: 192.0.2.103
IP Netmask: 255.255.255.255
Logical System: default
Routing Instance: default
Interface: si-1/0/0.3221225492
Interface type: Dynamic
Underlying Interface: si-1/0/0.3221225492
Dynamic Profile Name: dyn-lns-profile
State: Active
Radius Accounting ID: 27
Session ID: 27
PFE Flow ID: 42
Login Time: 2017-08-30 07:29:39 IST
Service Sessions: 1
IP Address Pool: ipv4_pool
Accounting interval: 600
Frame/cell mode: Frame
Overhead accounting bytes: -38
Calculated downstream data rate: 1000000 kbps
Adjusted downstream data rate: 1000000 kbps
```

```
Service Session ID: 35
Service Session Name: fw1
State: Active
Family: inet
Service Activation time: 2018-02-15 15:44:16 IST
Dynamic configuration:
  input: upstrm-filter
  output: dwnstrm-filter
  v6input: v6ingress
  v6output: v6egress
```

The following command reactivates cos2 for subscriber session 27.

```
user@host1> request network-access aaa subscriber add service-profile cos2
session-id 27

Successful completion
```

The reactivated cos2 service has a new service session ID of 36.

```
user@host1> show subscribers extensive

...
Service Session ID: 35
Service Session Name: fw1
State: Active
Family: inet
Service Activation time: 2018-02-15 15:44:16 IST
Dynamic configuration:
  input: upstrm-filter
  output: dwnstrm-filter
```

```
v6input: v6ingress
v6output: v6egress
```

```
Service Session ID: 36
Service Session Name: cos2
State: Active
Family: inet
Service Activation time: 2018-02-15 15:58:23 IST
```

The reactivated cos2 service uses the default shaping rate, 10 Mbps, from the service profile.

```
user@host1> show class-of-service interface si-1/0/0.3221225492
```

```
Logical interface: si-1/0/0.3221225492, Index: 3221225492
Object      Name                               Type      Index
Traffic-control-profile subscriber-tcp-2      Output    23571
Scheduler-map      a                               Output    4294967354
Classifier         dscp-ipv6-compatibility dscp-ipv6      9
Classifier         ipprec-compatibility   ip            13
```

```
Adjusting application: RADIUS CoA
Adjustment type: absolute
configured-shaping-rate: 10000000
adjustment-value: 10000000
Adjustment overhead-accounting mode: frame mode
Adjustment overhead bytes: 0
Adjustment target: node
Adjustment priority: 1
```

Next, a RADIUS CoA request is received, which includes the Activate-Service VSA (26-65). The VSA specifies and activates the service and specifies a change in the shaping rate of cos2 from the default 10 Mbps to 12 Mbps. The cos2 service session 36 still appears in the output, but is superseded by the new service session initiated by the CoA, 49.

```
user@host1> show subscribers extensive
```

```
...
Service Session ID: 35
Service Session Name: fw1
State: Active
Family: inet
Service Activation time: 2018-02-15 15:44:16 IST
Dynamic configuration:
  input: upstrm-filter
  output: dwnstrm-filter
  v6input: v6ingress
  v6output: v6egress

Service Session ID: 36
Service Session Name: cos2
State: Active
Family: inet
Service Activation time: 2018-02-15 15:58:23 IST

Service Session ID: 49
Service Session Name: cos2
```



```

State: Active
Family: inet
Service Activation time: 2018-02-15 16:25:04 IST
Dynamic configuration:
  shaping-rate: 12000000
  shaping-rate-in: 10m

```

```
user@host1> show class-of-service interface si-1/0/0.3221225492
```

```

Logical interface: si-1/0/0.3221225492, Index: 3221225492
Object      Name      Type      Index
Traffic-control-profile subscriber-tcp-2 Output      23571
Scheduler-map a      Output      4294967354
Classifier  dscp-ipv6-compatibility dscp-ipv6      9
Classifier  ipprec-compatibility ip      13

Adjusting application: RADIUS CoA
Adjustment type: absolute
configured-shaping-rate: 12000000
adjustment-value: 12000000
Adjustment overhead-accounting mode: frame mode
Adjustment overhead bytes: 0
Adjustment target: node
Adjustment priority: 1

```

When a service is applied by both the CLI configuration and a RADIUS VSA (26-65), but with different parameters, the RADIUS configuration overrides the CLI configuration. In the following example, the CLI configuration applies the cos2 service profile with a value of 31 Mbps for the shaping rate.

```

[edit]
user@host# set services l2tp tunnel-group tg1 service-profile cos2(31000000)

```

The RADIUS Access-Accept message service activation VSA (26-65) applies cos2 with a value of 21 Mbps for the shaping rate.

```

12tp@12tp.com  User-Password := "bras"
Auth-Type = Local,
Service-Type = Framed-User,
Framed-Protocol = PPP,
ERX-Service-Activate:1 += 'cos2(21000000)',

```

The CLI configuration activates service session 22 with a shaping rate of 31 Mbps. The RADIUS VSA activates service session 23 with a shaping rate of 21 Mbps.

```
user@host1> show subscribers extensive
```

```

...
Service Session ID: 22
Service Session Name: cos2
State: Active
Family: inet
Service Activation time: 2018-02-16 08:22:03 IST
Dynamic configuration:
  shaping-rate: 31000000
  shaping-rate-in: 10m

```

```

Service Session ID: 23
Service Session Name: cos2
State: Active
Family: inet
Service Activation time: 2018-02-16 08:22:03 IST
Dynamic configuration:
  shaping-rate: 21000000
  shaping-rate-in: 10m

```

```
user@host1> show class-of-service interface si-1/0/0.3221225492
```

```

Logical interface: si-1/0/0.3221225492, Index: 3221225492
Object      Name                      Type      Index
Traffic-control-profile subscriber-tcp-2      Output    23571
Scheduler-map a                      Output    4294967354
Classifier   dscp-ipv6-compatibility dscp-ipv6  9
Classifier   ipprec-compatibility   ip         13

```

```

Adjusting application: RADIUS CoA
Adjustment type: absolute
configured-shaping-rate: 21000000
adjustment-value: 21000000
Adjustment overhead-accounting mode: frame mode
Adjustment overhead bytes: 0
Adjustment target: node
Adjustment priority: 1

```

## Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions

You can create a pool of inline service interfaces, also known as a *service device pool*, to enable load-balancing of L2TP traffic across the interfaces. The pool is supported for dynamic LNS configurations, where it provides a set of logical interfaces that can be dynamically created and allocated to L2TP sessions on the LNS. The pool is assigned to an LNS tunnel group. L2TP maintains the state of each inline service interface and uses a round-robin method to evenly distribute the load among available interfaces when new session requests are accepted.



**NOTE:** Load balancing is available only for dynamically created subscriber interfaces.

LNS sessions anchored on an MPC are not affected by a MIC failure as long as some other path to the peer LACs exists. If the MPC hosting the peer interface fails and there is no path to peer LACs, the failure initiates termination and clean-up of all the sessions on the MPC.

If the MPC anchoring the LNS sessions itself fails, the Routing Engine does not relocate sessions to another slot and all sessions are terminated immediately. New sessions can come up on another available interface when the client retries.

To configure the service device pool:

1. Create the pool.

```
[edit services service-device-pools]
user@host# edit pool pool-name
```

2. Specify the inline service interfaces that make up the pool.

```
[edit services service-device-pools pool pool-name]
user@host# set interface service-interface-name
user@host# set interface service-interface-name
```

## Configuring a Dynamic Profile for Dynamic LNS Sessions

You can configure L2TP to dynamically assign inline service interfaces for L2TP tunnels. You must define one or more dynamic profiles and assign a profile to each tunnel group. The LNS supports IPv4-only, IPv6-only, and dual-stack IPv4/IPv6 sessions.

To configure the L2TP dynamic profile:

1. Create the dynamic profile.

```
[edit]
user@host# edit dynamic-profiles profile-name
```

2. Configure the interface to be dynamically assigned to the routing instance used by the tunneled PPP clients.

```
[edit dynamic-profiles profile-name routing-instances "$junos-routing-instance"]
user@host# set interface $junos-interface-name
```

3. Configure the routing options for access routes in the routing instance.

```
[edit dynamic-profiles profile-name routing-instances "$junos-routing-instance"
 routing-options access]
user@host# set route next-hop $junos-framed-route-nexthop
user@host# set route metric $junos-framed-route-cost
user@host# set route preference $junos-framed-route-distance
```

4. Configure the routing options for access-internal routes in the routing instance.

```
[edit dynamic-profiles profile-name routing-instances "$junos-routing-instance"
 routing-options access-internal]
user@host# set route $junos-subscriber-ip-address
```

5. Define the interfaces used by the dynamic profile. The variable is dynamically replaced by one of the configured inline service interfaces.

```
[edit dynamic-profiles profile-name]
user@host# set interfaces $junos-interface-ifd-name
```

6. Configure the inline services logical interfaces to be dynamically instantiated.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name"]
user@host# set unit $junos-interface-unit
```

7. Specify an identifier for the logical interfaces.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set dial-options l2tp-interface-id name
```

8. Configure each logical interface to be used for only one session at a time.

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set dial-options dedicated
```

9. Configure the address family for the logical interfaces and enable the local address on the LNS that provides local termination for the L2TP tunnel to be derived from the specified interface name.



**NOTE:** Dynamic LNS sessions require you to include the **dial-options** statement in the dynamic profile, which in turn requires you to include the **family inet** statement. This has the following consequences:

- You must always configure **family inet** regardless of whether you configure IPv4-only, IPv6-only, or dual-stack interfaces in the profile.
- When you configure IPv4-only interfaces, you configure only **family inet** and you must configure the interface address under **family inet**.
- When you configure IPv6-only interfaces, you must also configure **family inet6** and you must configure the interface address under **family inet6**. You do not configure the address under **family inet**.
- When you configure dual-stack, IPv4/IPv6 interfaces, you configure both **family inet** and **family inet6** and an interface address under each family.

For IPv4-only interfaces:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set family inet unnumbered-address $junos-loopback-interface
```

For IPv6-only interfaces:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set family inet
user@host# set family inet6 unnumbered-address $junos-loopback-interface
```

For dual-stack IPv4/IPv6 interfaces:

```
[edit dynamic-profiles profile-name interfaces "$junos-interface-ifd-name" unit
"$junos-interface-unit"]
user@host# set family inet unnumbered-address $junos-loopback-interface
user@host# set family inet6 unnumbered-address $junos-loopback-interface
```



**NOTE:** If Router Advertisement Protocol is configured, then you configure a numbered address rather than an unnumbered address for the IPv6 local address:

```
user@host# set family inet6 address $junos-ipv6-address
```

See [Broadband Subscriber Sessions Feature Guide](#) for information about using variables for IPv6-only and dual-stack addressing in dynamic profiles.

## Release History Table

Release	Description
18.1R1	Starting in Junos OS Release 18.1R1, you can apply services to L2TP sessions by means of dynamic service profiles without involving RADIUS.
16.2R1	Starting in Junos OS Release 16.2, you are not required to explicitly specify a bandwidth for L2TP LNS tunnel traffic using inline services.

## Related Documentation

- [L2TP for Subscriber Access Overview on page 121](#)
- [Ensuring IPCP Negotiation for Primary and Secondary DNS Addresses on page 114](#)
- [L2TP Session Limits Overview on page 170](#)
- *Local and Remote Service Activation and Deactivation Using the CLI*
- *Junos OS Feature Licenses*
- *Session Options for Subscriber Access*

## IP Packet Reassembly on Inline Service Interfaces

- [IP Packet Fragment Reassembly for L2TP Overview on page 262](#)
- [Configuring IP Inline Reassembly for L2TP on page 262](#)

## IP Packet Fragment Reassembly for L2TP Overview

You can configure the service interfaces on the MX Series routers with modular port concentrators (MPCs) to support reassemble fragmented IP packets for an L2TP connection. When packets are transmitted over an L2TP connection, the packets may be fragmented during transmission and need to be reassembled before they are processed further. Efficient reassembly is important for network throughput, scalability, and graceful response to congestion.

Fragmentation of IP packets for transmission and the need to reassemble the IP packets at a destination is a feature of how Layer 2 (the frame layer) and Layer 3 (the packet layer) operate. The maximum size of a frame, set by the Maximum Transmission Unit (MTU) value, and the maximum size of a packet are determined independently. Typically the packet size can far exceed the MTU size defined for the outgoing connection. If the packet size (data plus IP and other headers) exceeds the configured frame size (usually set by the transport medium limits), the packet must be fragmented and split across multiple frames for transmission. Frames are always processed immediately, when they arrive (if error-free), but packet fragments cannot be processed until the whole packet has been reassembled. Each packet fragment inside a frame series, except the last packet fragment, has the more fragments (MF) IP header bit set, indicating that this packet is part of a whole. The last packet fragment inside a frame does not have this MF bit set and therefore ends the fragment sequence. After all of the fragments of a packet have arrived, the entire packet can be reassembled.

In an L2TP connection, packets are transmitted between the L2TP Access Concentrator (LAC) and the L2TP Network Server (LNS). For an IP packet being transmitted over an L2TP connection, the packet is fragmented at the LAC, at an LNS, or at any intermediate router. IP reassembly parameters configured on the service interfaces of the LAC and the LNS determine how the fragments are reassembled at the service interfaces to ensure efficient reassembly over an L2TP connection.

## Configuring IP Inline Reassembly for L2TP

This procedure shows how to configure a service interface on a LAC or LNS to reassemble fragmented IP packets. This example creates a service set that configures the IP reassembly parameters for L2TP fragments. The service set is then associated with the L2TP service.

Before you configure inline IP reassembly, be sure you have:

- Configured L2TP.
- Configured a valid service interface on the LAC or LNS.

To configure inline IP reassembly:

1. Configure the chassis-level bandwidth used by the inline services interface on the FPC and PIC slot for inline IP fragment reassembly.

```
[edit chassis]
user@host# set fpc 2 pic 1 inline-services bandwidth 10g
```

2. Configure the interface-level logical unit used by the inline services (si-) interface on the FPC and PIC slot for inline IP fragment reassembly.

```
[edit interfaces]
user@host# set si-2/1/0 unit 0 family inet
user@host# set si-2/1/0 unit 0 service-domain inside
```



**NOTE:** This configuration is not unique to L2TP. However, you must configure the family (inet) and service domain (inside) as shown.

3. Configure the service set (set1) for IP reassembly in the input match direction. (The local option loops the reassembled packets back to the local interface.)

```
[edit services]
user@host# set service-set set1
[edit services service-set set1]
user@host# set ip-reassembly-rules ipr_rule1
user@host# set next-hop-service inside-service-interface si-2/1/0.0
user@host# set next-hop-service outside-service-interface-type local
```



**NOTE:**

- You must configure both inside (si- interface) and outside type (local) service interfaces statements. The reassembly rule is not formulated outside of the service set; this statement simply initiates the reassembly process.
- You can configure only one service interface for each service-set.

4. Configure the IP reassembly rule parameter.

```
[edit services ip-reassembly]
user@host# set rule ipr_rule1 match-direction input;
```

5. Configure the service set (set1) for IP reassembly to bind to the L2TP service.



**NOTE:**

- The service set must be defined at the [edit services] hierarchy level.
- You cannot delete a service set instance if it is associated with an L2TP service.

```
[edit services l2tp]
user@host# set ip-reassembly service-set set1
```

- Related Documentation**
- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
  - [Protocols and Applications Supported on the MPC1E for MX Series Routers](#)

---

## Peer Resynchronization After an L2TP Failover

---

- [L2TP Failover and Peer Resynchronization on page 264](#)
- [Configuring the L2TP Peer Resynchronization Method on page 265](#)

### L2TP Failover and Peer Resynchronization

L2TP failover enables a failed L2TP endpoint to resynchronize with its nonfailed peer during recovery and restart of the L2TP protocol on the failed endpoint. L2TP failover is enabled by default.

The failover and L2TP peer resynchronization process does all of the following:

- Prevents the nonfailed endpoint from prematurely terminating a tunnel while the failed endpoint is recovering.
- Reestablishes the sequence numbers required for the operation of the L2TP control protocol.
- Resolves inconsistencies in the tunnel and session databases of the failed endpoint and the nonfailed endpoint.

The router supports both the L2TP failover protocol method (described in *RFC 4951, Fail Over Extensions for Layer 2 Tunneling Protocol (L2TP) "failover"*) and the L2TP silent failover method. The differences between these two methods are as follows:

- The L2TP failover protocol method requires a nonfailed endpoint to wait an additional recovery time period while the failed endpoint is recovering to prevent the nonfailed endpoint from prematurely disconnecting the tunnel. The additional recovery period delays the detection of tunnel keepalive failures.

If a peer on an MX series router negotiates failover protocol with an MX Series peer that is not configured for failover protocol, both use the silent failover method. If the negotiation is with a third-party device that does not support failover protocol, the MX Series peer falls back to silent failover; whether the third-party peer recovers in this case depends on how resynchronization is implemented on that device.

- Silent failover operates entirely within the failed endpoint and does not require nonfailed endpoint support—this improves interoperability between peers. Silent failover does not require additional recovery time by the nonfailed endpoint, which also eliminates the potential for degraded responsiveness to the loss of tunnel connectivity. Starting in Junos OS Release 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, silent failover is the default resynchronization method in Junos OS.



In lower-numbered releases, the default resynchronization method is *failover-protocol-fall-back-to-silent-failover*. The recovery method used depends on the results of the failover capability negotiation that takes place between L2TP peers when they establish a tunnel, which works as follows:

- L2TP on the LAC by default attempts to negotiate the L2TP failover protocol first. When L2TP determines that the remote peer supports the L2TP failover protocol, then the L2TP failover protocol method is used.
- When L2TP determines that the remote peer does not support the L2TP failover protocol, then the L2TP silent failover method is used. Falling back on this secondary method prevents the failover from forcing a disconnection of the tunnel to the peer and all its sessions.

In Junos OS releases where *failover-protocol-fall-back-to-silent-failover* is the default method, you can change the default behavior by including the [disable-failover-protocol](#) statement at the **[edit services l2tp]** hierarchy level. This statement forces the configured LAC or LNS endpoint to operate only in silent failover mode. This configuration can be used to prevent the device from negotiating failover protocol with the peer even if the peer tries to negotiate it. When you issue this statement and the peer supports only failover protocol, the nonfailed endpoint (LAC or LNS) uses silent failover for recovery. Starting in Junos OS Release 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the [disable-failover-protocol](#) statement is deprecated, because the change in default resynchronization method makes it unnecessary.

## Configuring the L2TP Peer Resynchronization Method

The L2TP implementation on MX Series routers supports resynchronization between a failed L2TP endpoint and its peer nonfailed endpoint. Peer resynchronization enables L2TP to recover from a daemon or router restart or a Routing Engine switchover.

L2TP peer resynchronization:

- Prevents the nonfailed endpoint from prematurely terminating a tunnel while the failed endpoint is recovering.
- Reestablishes the sequence numbers required for the operation of the L2TP control protocol.
- Resolves inconsistencies in the tunnel and session databases of the failed endpoint and the nonfailed endpoint.

You can configure the peer resynchronization method you want the router to use. Both the L2TP failover protocol method and the L2TP silent failover method are supported.

In Junos OS Releases through 15.1R5, 16.1R4, 16.2R1, and 17.1R1, the default behavior is for L2TP on the LAC to attempt to negotiate the L2TP failover protocol with the LNS. When the LNS supports this method and negotiation is successful, the L2TP failover protocol is used when either peer fails. When negotiation for L2TP failover protocol fails, then the peers use silent failover when either peer fails. This behavior is called *failover-protocol-fall-back-to-silent-failover*. Falling back to the silent failover method when failover protocol negotiation is unsuccessful prevents a subsequent peer failure from forcing a disconnection of the tunnel to the peer and all the associated sessions.



**NOTE:** The behavior just described applies when both peers are MX Series routers. If one endpoint is a third-party device, then the behavior for that device depends on its L2TP implementation.

You can disable the default behavior and force the LAC or the LNS to operate only in silent failover mode. This configuration can be useful when the peer routers either are configured for silent failover or incorrectly negotiate to use the failover protocol even though they do not support it. Another reason to use this statement is that the failover protocol method keeps the tunnel open with the failed peer, in case the failed peer is able to recover from the failure and resynchronize with the nonfailed peer. This behavior keeps the tunnel up and the subscribers logged in while traffic is not flowing, preventing service level agreements from being met. When you issue this statement and the peer supports only failover protocol, the nonfailed endpoint (LAC or LNS) uses silent failover for recovery.

To disable negotiation of the L2TP failover protocol:

- Configure disabling.

```
[edit services l2tp]  
user@host# set disable-failover-protocol
```

Starting in Junos OS Releases 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the default failover resynchronization method is changed to silent failover. Consequently, the **disable-failover-protocol** statement no longer needs to be used and is deprecated. If you upgrade from a lower-numbered release where the default method is failover-protocol-fall-back-to-silent-failover, and your configuration includes the **disable-failover-protocol** statement, the configuration is still supported, but the CLI notifies you that the statement is deprecated.

In these releases, you can still configure which method you want an endpoint to use, failover protocol or silent failover.

To configure the LAC or LNS to negotiate the L2TP failover protocol:

- Specify the failover protocol.

```
[edit services l2tp tunnel]  
user@host# set failover-resync failover-protocol
```

If the negotiation fails, the endpoint falls back to the silent failover method.

To restore the default resynchronization method for the LAC or LNS:

- Specify the silent failover method.

```
[edit services l2tp tunnel]  
user@host# set failover-resync silent-failover
```

Release History Table

Release	Description
15.1R6	Starting in Junos OS Release 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, silent failover is the default resynchronization method in Junos OS.
15.1R6	Starting in Junos OS Release 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the <b>disable-failover-protocol</b> statement is deprecated, because the change in default resynchronization method makes it unnecessary.
15.1R6	Starting in Junos OS Releases 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the default failover resynchronization method is changed to silent failover. Consequently, the <b>disable-failover-protocol</b> statement no longer needs to be used and is deprecated.
15.1R5	In Junos OS Releases through 15.1R5, 16.1R4, 16.2R1, and 17.1R1, the default behavior is for L2TP on the LAC to attempt to negotiate the L2TP failover protocol with the LNS.

**Related Documentation**

- [L2TP for Subscriber Access Overview on page 121](#)

## Tracing L2TP Events for Troubleshooting

The Junos OS trace feature tracks L2TP operations and records events in a log file. The error descriptions captured in the log file provide detailed information to help you solve problems.



**NOTE:** This topic refers to tracing L2TP operations on MX Series routers. To trace L2TP operations on M Series routers, see *Tracing L2TP Operations*.

By default, nothing is traced. When you enable the tracing operation, the default tracing behavior is as follows:

1. Important events are logged in a file located in the **/var/log** directory. By default, the router uses the filename **jl2tpd**. You can specify a different filename, but you cannot change the directory in which trace files are located.
2. When the trace log file **filename** reaches 128 kilobytes (KB), it is compressed and renamed **filename.0.gz**. Subsequent events are logged in a new file called **filename**, until it reaches capacity again. At this point, **filename.0.gz** is renamed **filename.1.gz** and **filename** is compressed and renamed **filename.0.gz**. This process repeats until the number of archived files reaches the maximum file number. Then the oldest trace file—the one with the highest number—is overwritten.

You can optionally specify the number of trace files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB). (For more information about how log files are created, see the [System Log Explorer](#).)

By default, only the user who configures the tracing operation can access log files. You can optionally configure read-only access for all users.

The following topics describe how to configure all aspects of tracing L2TP operations:

- [Configuring the L2TP Trace Log Filename on page 268](#)
- [Configuring the Number and Size of L2TP Log Files on page 268](#)
- [Configuring Access to the L2TP Log File on page 269](#)
- [Configuring a Regular Expression for L2TP Messages to Be Logged on page 269](#)
- [Configuring Subscriber Filtering for L2TP Trace Operations on page 269](#)
- [Configuring the L2TP Tracing Flags on page 271](#)
- [Configuring the Severity Level to Filter Which L2TP Messages Are Logged on page 271](#)

## Configuring the L2TP Trace Log Filename

By default, the name of the file that records trace output for L2TP is `jl2tpd`. You can specify a different name with the `file` option.

To configure the filename for L2TP tracing operations:

- Specify the name of the file used for the trace output.

```
[edit services l2tp traceoptions]  
user@host# set file l2tp_logfile_1
```

## Configuring the Number and Size of L2TP Log Files

You can optionally specify the number of compressed, archived trace log files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB); the default size is 128 kilobytes (KB).

The archived files are differentiated by a suffix in the format `.number.gz`. The newest archived file is `.0.gz` and the oldest archived file is `.(maximum number)-1.gz`. When the current trace log file reaches the maximum size, it is compressed and renamed, and any existing archived files are renamed. This process repeats until the maximum number of archived files is reached, at which point the oldest file is overwritten.

For example, you can set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation, *filename*, reaches 2 MB, *filename* is compressed and renamed *filename.0.gz*, and a new file called *filename* is created. When the new *filename* reaches 2 MB, *filename.0.gz* is renamed *filename.1.gz* and *filename* is compressed and renamed *filename.0.gz*. This process repeats until there are 20 trace files. Then the oldest file, *filename.19.gz*, is simply overwritten when the next oldest file, *filename.18.gz* is compressed and renamed to *filename.19.gz*.

To configure the number and size of trace files:

- Specify the name, number, and size of the file used for the trace output.

```
[edit services l2tp traceoptions]
```

```
user@host# set file l2tp_1_logfile_1 files 20 size 2097152
```

## Configuring Access to the L2TP Log File

By default, only the user who configures the tracing operation can access the log files. You can enable all users to read the log file and you can explicitly set the default behavior of the log file.

To specify that all users can read the log file:

- Configure the log file to be world-readable.

```
[edit services l2tp traceoptions]
user@host# set file l2tp_1_logfile_1 world-readable
```

To explicitly set the default behavior, only the user who configured tracing can read the log file:

- Configure the log file to be no-world-readable.

```
[edit services l2tp traceoptions]
user@host# set file l2tp_1_logfile_1 no-world-readable
```

## Configuring a Regular Expression for L2TP Messages to Be Logged

By default, the trace operation output includes all lines relevant to the logged events.

You can refine the output by including regular expressions to be matched.

To configure regular expressions to be matched:

- Configure the regular expression.

```
[edit services l2tp traceoptions]
user@host# set file l2tp_1_logfile_1 match regex
```

## Configuring Subscriber Filtering for L2TP Trace Operations

Starting in Junos OS Release 14.1, you can apply filters to L2TP to limit tracing to particular subscribers or domains. Subscriber filtering simplifies troubleshooting in a scaled environment by enabling you to focus on a reduced set of trace results.

For subscriber usernames that have the expected form of **user@domain**, you can filter on the user, the domain, or both. You can use an asterisk (\*) as a wildcard to substitute for characters at the beginning or end of either term or both terms to match a greater number of subscribers.



**NOTE:** You cannot filter results using a wildcard in the middle of the user or domain terms. For example, the following uses of the wildcard are not supported: tom\*25@example.com, tom125@ex\*.com.

When you enable filtering by username, traces that have insufficient information to determine the username are automatically excluded.

To configure subscriber filtering:

- Specify the filter.

```
[edit services l2tp traceoptions]
user@host# set filter user user@domain
```



**NOTE:** This syntax is different than the syntax used to filter subscribers on M Series routers.

Consider the following examples of using the wildcard for filtering:

- Filter results for the specific subscriber with the username, tom@example.com.

```
[edit services l2tp traceoptions]
user@host# set filter user tom@example.com
```

- Filter results for all subscribers whose username begins with tom.

```
[edit services l2tp traceoptions]
user@host# set filter user tom*
```

- Filter results for all subscribers whose username ends with tom.

```
[edit services l2tp traceoptions]
user@host# set filter user *tom
```

- Filter results for subscribers with the username tom at all domains beginning with ex.

```
[edit services l2tp traceoptions]
user@host# set filter user tom@ex*
```

- Filter results for all subscribers at all domains that end with ample.com.

```
[edit services l2tp traceoptions]
user@host# set filter user *ample.com
```

- Filter results for all subscribers whose username begins with tom at domains that end with example.com.

```
[edit services l2tp traceoptions]
user@host# set filter user tom*.*example.com
```

## Configuring the L2TP Tracing Flags

By default, only important events are logged. You can specify which events and operations are logged by specifying one or more tracing flags.

To configure the flags for the events to be logged:

- Configure the flags.

```
[edit services l2tp traceoptions]  
user@host# set flag flag
```

## Configuring the Severity Level to Filter Which L2TP Messages Are Logged

The messages associated with a logged event are categorized according to severity level. You can use the severity level to determine which messages are logged for the event type. A low severity level is less restrictive—filters out fewer messages—than a higher level. When you configure a severity level, all messages at that level and all higher (more restrictive) levels are logged.

The following list presents severity levels in order from lowest (least restrictive) to highest (most restrictive). This order also represents the significance of the messages; for example, **error** messages are of greater concern than **info** messages.

- **verbose**
- **info**
- **notice**
- **warning**
- **error**

The severity level that you configure depends on the issue that you are trying to resolve. In some cases you might be interested in seeing all messages relevant to the logged event, so you specify **all**. You can also specify **verbose** with the same result, because **verbose** is the lowest (least restrictive) severity level; it has nothing to do with the terseness or verbosity of the messages. Either choice generates a large amount of output. You can specify a more restrictive severity level, such as **notice** or **info** to filter the messages. By default, the trace operation output includes only messages with a severity level of **error**.

To configure the type of messages to be logged:

- Configure the message severity level.

```
[edit services l2tp traceoptions]  
user@host# set level severity
```

**Release History Table**

Release	Description
14.1	Starting in Junos OS Release 14.1, you can apply filters to L2TP to limit tracing to particular subscribers or domains. Subscriber filtering simplifies troubleshooting in a scaled environment by enabling you to focus on a reduced set of trace results.

**Related  
Documentation**

- [L2TP for Subscriber Access Overview on page 121](#)



## CHAPTER 5

# Configuring MPLS Pseudowire Subscriber Logical Interfaces

- [MPLS Pseudowire Subscriber Logical Interfaces on page 273](#)

## MPLS Pseudowire Subscriber Logical Interfaces

---

- [Pseudowire Subscriber Logical Interfaces Overview on page 274](#)
- [Anchor Redundancy Pseudowire Subscriber Logical Interfaces Overview on page 277](#)
- [Configuring a Pseudowire Subscriber Logical Interface on page 281](#)
- [Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router on page 283](#)
- [Configuring a Pseudowire Subscriber Logical Interface Device on page 284](#)
- [Changing the Anchor Point for a Pseudowire Subscriber Logical Interface Device on page 286](#)
- [Configuring the Transport Logical Interface for a Pseudowire Subscriber Logical Interface on page 288](#)
- [Configuring Layer 2 Circuit Signaling for Pseudowire Subscriber Logical Interfaces on page 289](#)
- [Configuring Layer 2 VPN Signaling for Pseudowire Subscriber Logical Interfaces on page 290](#)
- [Configuring the Service Logical Interface for a Pseudowire Subscriber Logical Interface on page 291](#)

## Pseudowire Subscriber Logical Interfaces Overview

Subscriber management supports the creation of subscriber interfaces over point-to-point MPLS pseudowires. The pseudowire subscriber interface capability enables service providers to extend an MPLS domain from the access-aggregation network to the service edge, where subscriber management is performed. Service providers can take advantage of MPLS capabilities such as failover, rerouting, and uniform MPLS label provisioning, while using a single pseudowire to service a large number of DHCP and PPPoE subscribers in the service network.



**NOTE:** Pseudowire subscriber logical interfaces are supported on Modular Port Concentrators (MPCs) with Ethernet Modular Interface Cards (MICs) only.

The pseudowire is a tunnel that is either an MPLS-based Layer 2 VPN or Layer 2 circuit. The pseudowire tunnel transports Ethernet encapsulated traffic from an access node (for example, a DSLAM or other aggregation device) to the MX Series router that hosts the subscriber management services. The termination of the pseudowire tunnel on the MX Series router is similar to a physical Ethernet termination, and is the point at which subscriber management functions are performed. A service provider can configure multiple pseudowires on a per-DSLAM basis and then provision support for a large number of subscribers on a specific pseudowire.

Figure 15 on page 274 shows an MPLS network that provides subscriber management support.

At the access node end of the pseudowire, the subscriber traffic can be groomed into the pseudowire in a variety of ways, limited only by the number and types of interfaces that can be stacked on the pseudowire. You specify an anchor point, which identifies the logical tunnel interface that terminates the pseudowire tunnel at the access node.

**Figure 15: MPLS Access Network with Subscriber Management Support**

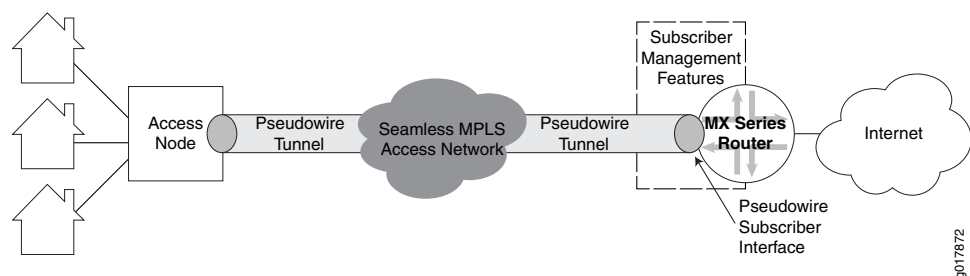


Figure 16 on page 276 shows the protocol stack for a pseudowire subscriber logical interface. The pseudowire is a virtual device that is stacked above the logical tunnel anchor point on the physical interface (the IFD), and supports a circuit-oriented Layer 2 protocol (either Layer 2 VPN or Layer 2 circuit). The Layer 2 protocol provides the transport and service logical interfaces, and supports the protocol family (IPv4, IPv6, or PPPoE).


Starting in Junos OS Release 18.3R1, on MX Series routers with MPC and MIC interfaces, the support for pseudowire subscriber service interface over redundant logical tunnels is introduced in Layer 3 VPNs and draft-rosen multicast VPNs. Earlier, Layer 3 VPNs provided support for pseudowire subscriber services over logical tunnel interfaces only, and these interfaces used unicast routing protocols, such as OSPF or BGP. With this support, you can provision a multicast routing protocol, Protocol Independent Multicast (PIM), on the pseudowire subscriber interfaces, which gets terminated on the virtual routing and forwarding (VRF) routing instance. Additionally, there is an increase in the scaling numbers of the pseudowire logical interface devices that provides additional resiliency support for pseudowire subscriber interfaces on redundant logical tunnel interfaces.



**NOTE:** When a pseudowire subscriber service interface is anchored to a redundant logical tunnel whose member interface (or FPC) does not exist, the tunnel interface comes down. In such cases, the pseudowire interfaces (physical and logical) should also be down, but however, the pseudowire subscriber logical interface state remains up, although the Layer 2 circuit services, such as ping toward a customer edge (CE) device from the service side of the pseudowire subscriber service interface, are not available.

This is because the transport side of the pseudowire subscriber logical interface stays up causing the services to be up.

Figure 16: Pseudowire Subscriber Interface Protocol Stack

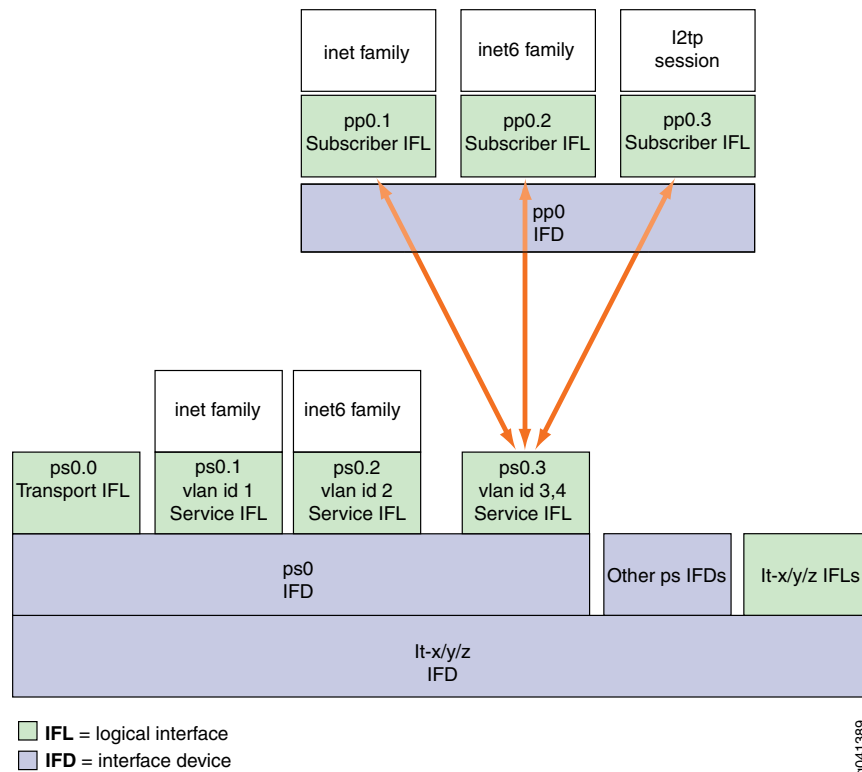

The pseudowire configuration is transparent to the subscriber management applications and has no impact on the packet payloads that are used for subscriber management. Subscriber applications such as DHCP and PPPoE can be stacked over Layer 2 similar to the way in which they are stacked over a physical interface.

Starting with Junos OS release 16.1R1, **family inet** and **family inet6** are supported on the services side of an MPLS pseudowire subscriber as well as non-subscriber logical interface.

Starting with Junos OS Release 16.1R1, Inline IPFIX is supported on the services side of an MPLS pseudowire subscriber logical interface.

Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, CCC encapsulation is supported on the transport side of an MPLS pseudowire subscriber logical interface.

Prior to Junos OS Release 19.1R1, the only supported encapsulation type on the pseudowire subscriber interfaces included:

- Transport logical interfaces—Circuit cross-connect (CCC) encapsulation.
- **Service logical interfaces:**
  - Ethernet VPLS encapsulation
  - VLAN bridge encapsulation
  - VLAN VPLS encapsulation

Starting in Junos OS Release 19.1R1, additional encapsulations are added to the pseudowire subscriber transport and service logical interfaces. The transport logical interface supports Ethernet VPLS encapsulation, and provisions for terminating the interface on the **l2backhaul-vpn** routing-instance. The service logical interface supports circuit cross-connect (CCC) encapsulation, and provisions for terminating the interface on locally switched Layer 2 circuits.

With the support of additional encapsulation types, you can benefit from demux of a **l2backhaul** VPN into multiple VPN services, such as Layer 2 circuit and Layer 3 VPN. Because pseudowire subscriber interfaces are anchored on redundant logical tunnels, this enhancement also provides line card redundancy.

Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, distributed denial-of-service (DDoS) protection is supported on the services side of an MPLS pseudowire subscriber logical interface.

Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, Policer and Filter are supported on the services side of an MPLS pseudowire subscriber logical interface.

Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, accurate transmit statistics on logical interface are supported on the services side of an MPLS pseudowire subscriber logical interface.

Starting with Junos OS Release 17.3R1 and later releases, stateful anchor point redundancy support is provided for pseudowire subscriber logical interface by the underlying redundant logical tunnel interface (rlt) in active-backup mode. This redundancy protects the access and the core facing link against anchor PFE (Packet Forwarding Engine) failure.

## Anchor Redundancy Pseudowire Subscriber Logical Interfaces Overview

In MPLS pseudowire deployments that use pseudowire subscriber logical interfaces, failure of the Packet Forwarding Engine hosting the logical tunnel that anchors those logical interfaces leads to traffic loss and subsequent subscriber session loss.

The Packet Forwarding Engine does not rely on the control plane for failure detection; instead it uses a liveness detection mechanism, with an underlying heartbeat-based algorithm, to detect the failure of other Packet Forwarding Engines in the system. The failure of a Packet Forwarding Engine also indicates the failure of the hosted logical tunnel, which ultimately lead to session loss. To avoid this session loss, a redundant anchor point is required to which the session can be moved without losing any traffic.

Starting from Junos OS Release 17.3 onward, pseudowire subscriber logical interfaces can be instantiated over an underlying redundant logical tunnel (rlt) interface in active-backup mode. This is in addition to installing pseudowires over a single logical tunnel interfaces. The most noticeable advantage of implementing the pseudowire subscriber logical interface over redundant logical tunnel interfaces is to provide redundancy of the underlying forwarding path.

Prior to Junos OS Release 18.3R1, you could specify a maximum of 2048 pseudowire subscriber redundant logical tunnel interface devices for an MX Series router or PTX Series router. Starting in Junos OS Release 18.3R1, on MX Series routers with MPC and

MIC interfaces, the pseudowire redundant logical interface devices scaling numbers has increased to 7000 devices to provide additional resiliency support.


Junos OS Release 17.3 also supports an enhanced aggregated infrastructure for a Packet Forwarding Engine to provide anchor point redundancy. Enhanced aggregated infrastructure requires a minimum of one control logical interface that needs to be created on a redundant logical tunnel interface. Both transport and services logical interfaces created for the pseudowire subscriber logical interface are stacked on the underlying control logical interface for the redundant logical tunnel. This stacking model is used for both redundant and nonredundant pseudowire subscriber logical interfaces.

The following events have to trigger the removal of the physical interface from a redundant group:

- Hardware failure on Modular PIC Concentrator (MPC) or Modular Interfaces Card (MIC).
- MPC failure due to microkernel crash.
- MPC or MIC taken offline administratively.
- Power failure on an MPC or a MIC.

[Figure 17 on page 279](#) provides the details of pseudowire subscriber logical interface stacking over a redundant logical tunnel interface.

**Figure 17: Pseudowire Subscriber Logical Interface Stacking over Redundant Logical Tunnel Interface**

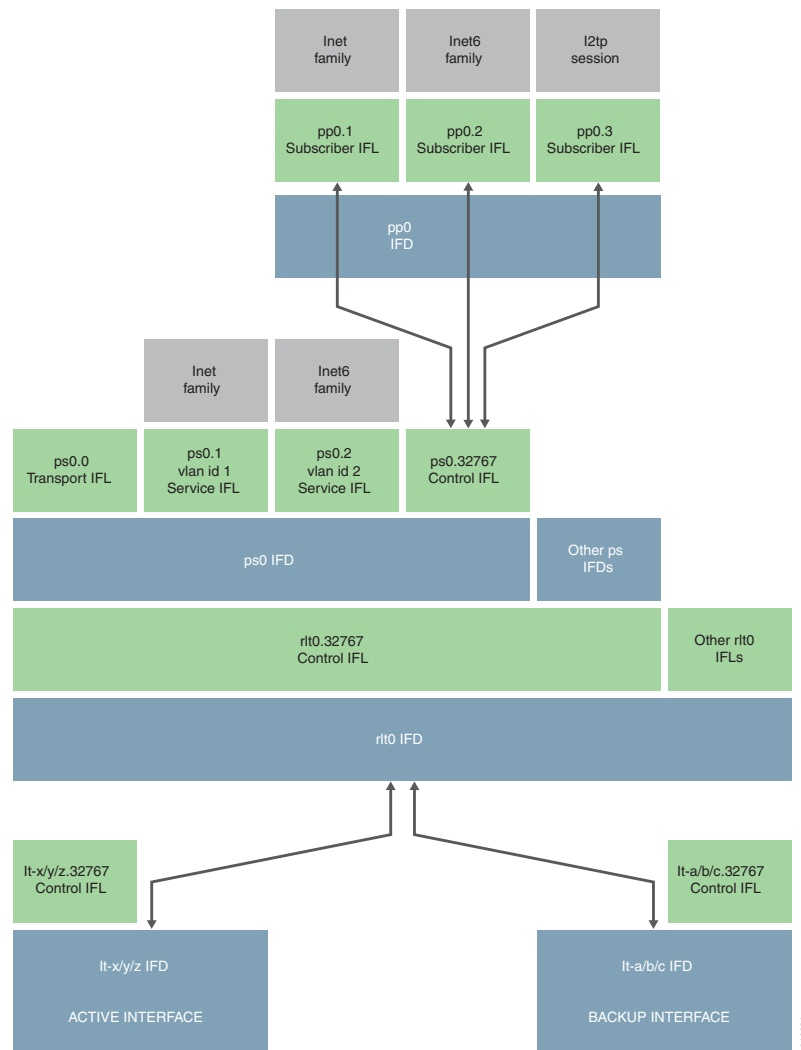

By default, *Link Protection* for redundant tunnel interfaces is revertive. In case of the active link failure, traffic is routed through the backup link. When the active link is reestablished, traffic is automatically routed back to the active link. This causes traffic loss and subscriber session loss.

To overcome the traffic and session loss, you can configure nonrevertive link protection for redundant tunnel interfaces by using the configuration statement **set interfaces rltX logical-tunnel-options link-protection non-revertive**. With this configuration, when the active link is reestablished, traffic is not routed back to the active link and continue to be forwarded on the backup link. Therefore, there is no traffic loss or subscriber session loss. You can also manually switch traffic from the backup link to the active link by using the **request interface (revert | switchover) interface-name** command.



**CAUTION:** The manual switching of the traffic incurs traffic loss.



**NOTE:**

- A control logical interface is created implicitly on an redundant tunnel interface with the pseudowire subscriber logical interface configuration and thus no additional configuration is needed.
- A redundant logical tunnel interface allows 32 member logical tunnel physical interfaces. However, a pseudowire subscriber logical interface hosted on the redundant logical tunnel interface limits the number of logical tunnel physical interfaces to two.



**NOTE:** You cannot disable the underlying redundant logical tunnel (rlt) interface or the underlying logical tunnel (lt) interface when a pseudowire is anchored on that interface. If you want to disable the underlying interface, you must first deactivate the pseudowire.

Starting in Junos OS Release 18.4R1, the support for inline distribution of single-hop Bidirectional Forwarding Detection (BFD) sessions is extended to pseudowire subscriber over redundant logical tunnel interfaces. For pseudowire subscriber over logical tunnel interfaces, the interfaces are anchored on a single Flexible PIC Concentrator (FPC), as a result, the inline distribution of single-hop BFD sessions is supported by default. With pseudowire redundant logical interfaces, the member logical tunnel interfaces can be hosted on different linecards. Because the distribution address is not available for the redundant logical interfaces, the distribution of single-hop BFD sessions was operated in a centralized mode prior to Junos OS Release 18.4R1.

With the support for inline distribution of single-hop BFD sessions over pseudowire redundant logical interfaces, there is a scaling advantage of up to 2000 single-hop BFD sessions at an interval of one second, and improvement in detection time enhancing the performance of the sessions.

The BFD operation for pseudowire subscriber over redundant logical interfaces is as follows:

1. When a new BFD session gets added it can either be anchored on an active or a backup FPC.
2. When either of the FPCs fail or reboot, all the sessions hosted on that FPC go down, and re-anchoring is triggered for the next available distribution address. The BFD sessions come back up after the sessions are installed on the other FPC and BFD packet exchange is started.



However, it is also possible that the sessions on the backup FPC might not go down when active FPC fails depending on the BFD detection time configured, as the forwarding state for the new active FPC might take some time to be programmed.

3. When the active FPC fails, all the BFD sessions get anchored on the backup FPC. Similarly, if the backup FPC fails, all the BFD sessions get anchored on the active FPC.
4. The BFD session re-anchoring is not triggered when the active FPC is online again.
5. With the non-revertive behavior enabled, when the previously active FPC is online again, the sessions are not expected to go down. With the default revertive behavior, it is possible that forwarding state needs to be updated and depending on the detection time configuration, the session may or may not flap.



**NOTE:**

Take the following into consideration with the support of inline distribution of single-hop BFD sessions on pseudowire subscriber over logical tunnel interfaces:

- On FPC type MPC 7e, with the activation of 7000 routing instance, it takes around six minutes for the 7000 BGP sessions to get established on the pseudowire subscriber interfaces anchored on redundant logical tunnel interfaces.
- A new system log error message - JTASK\_SCHED\_SLIP - is recorded during nonstop active routing (NSR). This is expected behavior of NSR with high scale and can be safely ignored, unless there are other issues, such as session flaps, that require action to be taken.

## Configuring a Pseudowire Subscriber Logical Interface

A pseudowire subscriber logical interface terminates an MPLS pseudowire tunnel from an access node to the MX Series router that hosts subscriber management, and enables you to perform subscriber management services at the interface.

To create a pseudowire subscriber logical interface:

1. Specify the number of pseudowire logical interfaces that the router can support.  
See [“Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router”](#) on page 283.
2. Configure the pseudowire subscriber logical interface device.  
See [“Configuring a Pseudowire Subscriber Logical Interface Device”](#) on page 284.
3. Configure the transport logical interface.

See [“Configuring the Transport Logical Interface for a Pseudowire Subscriber Logical Interface” on page 288](#).

4. Configure the signaling for the pseudowire subscriber interface. You can use either Layer 2 circuit signaling or Layer 2 VPN signaling. The two signaling types are mutually exclusive for a given pseudowire.

- To configure Layer 2 circuit signaling, see [“Configuring Layer 2 Circuit Signaling for Pseudowire Subscriber Logical Interfaces” on page 289](#).
- To configure Layer 2 VPN signaling, see [“Configuring Layer 2 VPN Signaling for Pseudowire Subscriber Logical Interfaces” on page 290](#).

5. Configure the service logical interface.

See [“Configuring the Service Logical Interface for a Pseudowire Subscriber Logical Interface” on page 291](#).

6. Configure the underlying interface device.

See *Configuring an Underlying Interface for Dynamic PPPoE Subscriber Interfaces*.

7. Configure CoS parameters and BA classification.

See *CoS Configuration Overview for MPLS Pseudowire Subscriber Interfaces*.

8. (Optional) Associate a dynamic profile with the pseudowire subscriber logical interface.

You can associate DHCP, PPPoE, IP demux, and VLAN dynamic profiles with pseudowire subscriber logical interfaces. The support is similar to the typical Ethernet interface support.



**NOTE:** When using a PPPoE dynamic profile to create a pseudowire subscriber logical interface over a demux interface device, the dynamic profile must explicitly specify the correct pseudowire interface device over which the interface is created. The dynamic profile does not automatically create the interface over the demux0 interface device, as is the case with a VLAN demux interface.

---

9. (Optional) Configure interface set support for pseudowire subscriber logical interfaces.

See *Configuring Interface Sets and Understanding Interface Sets*.

10. (Optional) Stack PPPoE logical interfaces over a pseudowire logical device.

## Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router

You must set the maximum number of pseudowire logical interface devices (pseudowire tunnels) that the router can use for subscriber logical interfaces.

Prior to Junos OS Release 17.2R1, you could specify a maximum of 2048 pseudowire logical interface devices for an MX Series router or PTX Series router. Starting in Junos OS Release 17.2R1, on MX Series routers with MPC and MIC interfaces, the pseudowire logical interface devices scaling numbers has increased to 7000 devices to provide additional resiliency support.

Similarly, prior to Junos OS Release 18.3R1, you could specify a maximum of 2048 pseudowire subscriber redundant logical tunnel (rlt) interface devices for an MX Series router or PTX Series router. Starting in Junos OS Release 18.3R1, on MX Series routers with MPC and MIC interfaces, the pseudowire redundant logical interface devices scaling numbers has increased to 7000 devices to provide additional resiliency support.

The PFE hosting the maximum pseudowire logical interface devices provides the configuration flexibility needed for special cases that might occur for business edge scenarios. However, you can exceed the available PFE resources as you configure additional services on the pseudowire logical interface devices ports. To support a scaled configuration, ensure that you populate the appropriate number of PFEs for the chassis, and that you distribute the pseudowire logical interface devices across the PFEs in such a way that ensures that no PFE is overwhelmed by the anticipated peak load. As part of the network planning for your particular deployment, you must consider the exact mix of the distribution of the pseudowire logical interface devices and the services associated with the devices.



**BEST PRACTICE:** A configured pseudowire logical interface device consumes resources from shared pools even when the device has no active subscriber logical interfaces. To conserve resources, do not deploy an excessive number of pseudowire devices that you do not intend to use.

To configure the number of pseudowire logical interface devices that you want the router to support:

1. Specify that you want to configure the pseudowire service.

```
[edit chassis]
user@host# edit pseudowire-service
```

2. Set the maximum number of pseudowire logical interface devices.

```
[edit chassis pseudowire-service]
user@host# set device-count 500
```

## Configuring a Pseudowire Subscriber Logical Interface Device

To configure a pseudowire logical interface device that the router uses for subscriber logical interfaces, you specify the logical tunnel that processes the pseudowire termination. You can also use redundant logical tunnels to provide redundancy for member logical tunnels. You can configure additional optional parameters for the interface device, such as VLAN tagging method, MTU, and gratuitous ARP support.



**NOTE:** You must create a logical tunnel for the pseudowire logical interface device. If you are using redundant logical tunnels, you must create the redundant tunnel.

To configure the pseudowire subscriber interface device:

1. Specify that you want to configure the pseudowire subscriber logical interface device.

```
user@host# edit interfaces ps0
```

2. Specify the logical tunnel interface that is the anchor point for the pseudowire logical interface device. The anchor point must be an **lt** device in the format **lt-fpc/pic/port**.



**CAUTION:** Do not reconfigure the logical tunnel interface that is associated with the pseudowire subscriber interface device unless you first deactivate all subscribers that are using the pseudowire subscriber interface.



**NOTE:** Tunnel services must be enabled on the **lt** interface that is the anchor point or a member link in a redundant logical tunnel. You use the command, **set chassis fpc slot-number pic pic-number tunnel-services bandwidth bandwidth** to enable tunnel services.



**NOTE:** You cannot disable the underlying logical tunnel (**lt**) interface or redundant logical tunnel (**rlt**) interface when a pseudowire is anchored on that interface. If you want to disable the underlying interface, you must first deactivate the pseudowire.

```
[edit interfaces ps0]
user@host# set anchor-point lt-1/0/10
```

3. (Optional) Specify the MAC address for the pseudowire logical interface device.



**NOTE:** You should ensure that you change the MAC address prior to passing traffic or binding subscribers on the pseudowire port. Changing the MAC address when the pseudowire port is active (for example, while an upper layer protocol is negotiating) can negatively impact network performance until adjacencies learn of the new MAC address.

```
[edit interfaces ps0]
user@host# set mac 00:00:5E:00:53:55
```

4. (Optional) Specify the VLAN tagging method used for the pseudowire logical interface device. You can specify single tagging, dual (stacked) tagging, mixed (flexible) tagging, or no tagging.

```
[edit interfaces ps0]
user@host# set flexible-vlan-tagging
```

See *Enabling VLAN Tagging* for additional information about VLAN tagging.

5. (Optional) Specify the encapsulation type for the pseudowire logical interface device.

Starting in Junos OS Release 19.1R1, you can configure additional encapsulations – Ethernet VPLS and circuit cross-connect-based encapsulations – for the transport and service pseudowire subscriber logical interface devices, respectively.

```
[edit interfaces]
user@host# set logical-interface-unit encapsulation encapsulation-type
```

6. (Optional) Specify the MTU for the pseudowire logical interface device. If you do not explicitly configure the MTU, the router uses the default value of 1500.

```
[edit interfaces ps0]
user@host# set mtu 2500
```

See *Setting the Protocol MTU* for additional information.

7. (Optional) Specify that the pseudowire logical interface device does not respond to gratuitous ARP requests.

```
[edit interfaces ps0]
user@host# set no-gratuitous-arp-request
```

See *Configuring Gratuitous ARP* for additional information.

8. (Optional) Specify that reverse-path forwarding checks are performed for traffic on the pseudowire logical interface device.

```
[edit interfaces ps0]
```

```
user@host# set rpf-check
```

See *Understanding Unicast RPF (Routers)* for additional information.

9. Configure additional optional parameters for the pseudowire logical interface device, such as *description*, *apply-groups*, *apply-groups-except*, and *traceoptions*.

## Changing the Anchor Point for a Pseudowire Subscriber Logical Interface Device

You cannot dynamically change an anchor point that has active pseudowire devices stacked above it. You must commit certain changes before you move the anchor point. Examples of this situation include moving the anchor point from one logical tunnel to another logical tunnel, from a logical tunnel to a redundant logical tunnel, and from a redundant logical tunnel to a logical tunnel.

To move the anchor point between logical tunnel interfaces:

1. Deactivate the stacked pseudowires and commit. This may require bringing down any subscribers using the pseudowires.

```
[edit interfaces]
user@host# deactivate psnumber
user@host# commit
```

2. Change the anchor on the deactivated pseudowire to the new logical tunnel interface and commit.

```
[edit interfaces]
user@host# set psnumber anchor-point lt-fpc/pic/port
user@host# commit
```

3. Reactivate the stacked pseudowires and commit.

```
[edit interfaces]
user@host# activate psnumber
user@host# commit
```

To move the anchor point from a logical tunnel interface to a redundant logical tunnel interface:

1. Deactivate the stacked pseudowires and commit. This may require bringing down any subscribers using the pseudowires.

```
[edit interfaces]
user@host# deactivate psnumber
user@host# commit
```

2. Add the new redundant logical tunnel interface and commit.

- a. Create the tunnel and set the maximum number of devices allowed.

```
[edit chassis]
user@host# set redundancy-group interface-type redundant-logical-tunnel
device-count count
```

- b. Bind each member logical tunnel to the redundant logical tunnel.



**NOTE:** Redundant logical tunnels require members to be in active-backup mode. The backup logical tunnel must be on a different FPC than the active logical tunnel. For example, if the active tunnel is on FPC 3, then the backup tunnel must be on a different FPC, such as FPC 4.

```
[edit interfaces rltnumber]
user@host# set redundancy-group member-interface lt-fpc/pic/port active
user@host# set redundancy-group member-interface lt-fpc/pic/port backup
```

- c. Commit your changes.

```
[edit interfaces rltnumber]
user@host# commit
```

3. Change the anchor on the deactivated pseudowire to the new redundant logical tunnel interface and commit.

```
[edit interfaces]
user@host# set psnumber anchor-point rltnumber
user@host# commit
```

4. Reactivate the stacked pseudowires and commit.

```
[edit interfaces]
user@host# activate psnumber
user@host# commit
```

To move the anchor point from a redundant logical tunnel interface to a logical tunnel interface that is a member of the redundant logical tunnel:

1. Deactivate the stacked pseudowires; this may require bringing down any subscribers using the pseudowires. Delete the redundant logical tunnel interface and commit your changes.

```
[edit interfaces]
user@host# deactivate psnumber
user@host# delete rltnumber
user@host# commit
```

2. Change the anchor on the deactivated pseudowire to the new logical tunnel interface and commit.

```
[edit interfaces]
user@host# set psnumber anchor-point lt-fpc/pic/port
user@host# commit
```

3. Reactivate the stacked pseudowires and commit.

```
[edit interfaces]
user@host# activate psnumber
user@host# commit
```

## Configuring the Transport Logical Interface for a Pseudowire Subscriber Logical Interface

This topic describes how to configure a pseudowire transport logical interface. A pseudowire device can have only one transport logical interface.

A pseudowire logical device and its related pseudowire logical interfaces are dependent on the state of the underlying logical transport interface device, which is either the Layer 2 VPN or Layer 2 circuit.



**NOTE:** We recommend that you use unit 0 to represent the transport logical interface for the pseudowire device. Non-zero unit numbers represent *service* logical interfaces used for pseudowire subscriber interfaces.

To configure a pseudowire transport logical interface:

1. Specify that you want to configure the pseudowire subscriber logical interface device.

```
[edit]
user@host# edit interfaces ps0
```

2. Specify that you want to configure unit 0, which represents the transport logical interface.

```
[edit interfaces ps0]
user@host# edit unit 0
```

3. (Optional) Specify the encapsulation method for the transport logical interface.

Starting in Junos OS Release 19.1R1, you can configure Ethernet VPLS encapsulation, in addition to circuit cross-connect-based encapsulations for pseudowire subscriber transport logical interfaces.

```
[edit interfaces ps0 unit 0]
user@host# set encapsulation ethernet-ccc
user@host# set encapsulation ethernet-vpls
```



```
user@host# set family vpls core-facing
```

4. (Optional) Configure the termination of the transport logical interface on **l2backhaul-vpn** routing-instance. This support is enabled from Junos OS Release 19.1R1.

```
[edit routing-instances routing-instance-name]
user@host# set vlan-model one-to-one instance-role access instance-type
l2backhaul-vpn interface ps1.0s
user@host# set no-local-switching
```

## Configuring Layer 2 Circuit Signaling for Pseudowire Subscriber Logical Interfaces

This topic describes the steps for configuring Layer 2 circuit signaling used for the pseudowire subscriber logical interface support. You can also use Layer 2 VPN signaling for pseudowire subscriber logical interfaces. The two methods are mutually exclusive; you can use only one method for a particular pseudowire.

To configure Layer 2 circuit signaling for pseudowire interfaces:

1. Specify that you want to configure Layer 2 circuit parameters at the protocols hierarchy level.

```
[edit protocols]
user@host# edit l2circuit
```

2. Specify the IP address of the neighbor, to identify the PE router used for the Layer 2 circuit.

```
[edit protocols l2circuit]
user@host# edit neighbor 192.168.102.15
```

3. Specify the interface used by the Layer 2 circuit traffic.

```
[edit protocols l2circuit neighbor 192.168.102.15]
user@host# edit interface ps1.0
```

4. Configure the virtual circuit ID that identifies the Layer 2 circuit for the pseudowire.

```
[edit protocols l2circuit neighbor 192.168.102.15 interface ps1.0]
user@host# set virtual-circuit-id 5
```

For more information about Layer 2 circuits, see *Configuring Interfaces for Layer 2 Circuits*.

## Configuring Layer 2 VPN Signaling for Pseudowire Subscriber Logical Interfaces

This topic describes the steps for configuring Layer 2 VPN signaling used for the pseudowire subscriber logical interface support. You can also use Layer 2 circuit signaling for pseudowire subscriber logical interfaces. The two methods are mutually exclusive; you can use only one method on a particular pseudowire.

To configure Layer 2 VPN signaling for pseudowire interfaces:

1. Specify the name of the routing instance you want to configure.

```
[edit]  
user@host# edit routing-instances l2vpn0
```

2. Configure the Layer 2 VPN routing instance type.

```
[edit routing-instances l2vpn0]  
user@host# set instance-type l2vpn
```

3. Associate the pseudowire logical interface for the Layer 2 VPN.

```
[edit routing-instances l2vpn0]  
user@host# set interface ps1.0
```

4. Configure the unique identifier for the routes that belong to the Layer 2 VPN.

```
[edit routing-instances l2vpn0]  
user@host# set route-distinguisher 198.51.100.101100
```

5. Configure the VPN routing and forwarding (VRF) target of the routing instance.

```
[edit routing-instances l2vpn0]  
user@host# set vrf-target target:10:100
```

6. Specify that you want to configure the Layer 2 VPN protocol for the routing instance.

```
[edit routing-instances l2vpn0]  
user@host# edit protocols l2vpn
```

7. Configure the encapsulation type for the routing instance.

```
[edit routing-instances l2vpn0 protocols l2vpn]  
user@host# set encapsulation-type ethernet
```

8. Specify the site name and site identifier for the Layer 2 VPN.

```
[edit routing-instances l2vpn0 protocols l2vpn]
user@host# set site PE1 site-identifier 1
```

9. Specify the interface that connects to the site, and the remote interface to which you want the specified interface to connect.

```
[edit routing-instances l2vpn0 protocols l2vpn]
user@host# set interface ps1.0 remote-site-id 2
```

10. Configure the tracing options for traffic that uses the Layer 2 VPN.

```
[edit routing-instances l2vpn0 protocols l2vpn]
user@host# set traceoptions file l2vpn flag all
```

## Configuring the Service Logical Interface for a Pseudowire Subscriber Logical Interface

This topic describes how to configure a pseudowire service logical interface. Service logical interfaces represent the attachment circuits for pseudowire logical interfaces.

As described in the [“Pseudowire Subscriber Logical Interfaces Overview” on page 274](#), you can choose whether to configure a service logical interface together with a higher subscriber logical interface, depending upon the business need. In a broadband edge configuration, the higher subscriber logical interface is the demarcation point for subscribers. However, in a business edge configuration, the service logical interface is the demarcation point for the business subscribers, and also serves as the subscriber logical interface, so no subscriber logical interfaces are explicitly configured.



**NOTE:** Non-zero unit numbers represent *service* logical interfaces used for pseudowire subscriber interfaces. Use unit 0 to represent the *transport* logical interface for the pseudowire device.

To configure a pseudowire service logical interface:

1. Specify that you want to configure the pseudowire subscriber logical interface device.

```
[edit]
user@host# edit interfaces ps0
```

2. Configure the unit for the service logical interface. Use a non-zero unit number.

```
[edit interfaces ps0]
user@host# edit unit 1
```

3. (Optional) Specify the encapsulation type for the service logical interface.

Starting in Junos OS Release 19.1R1, you can configure circuit cross-connect-based encapsulations, in addition to the Ethernet VPLS, VLAN bridge, and VLAN VPLS encapsulations for pseudowire subscriber service logical interfaces.

The pseudowire subscriber service logical interfaces support single-tagged traffic, double-tagged traffic, and list of VLANs on the single logical interface.

```
[edit interfaces ps0]
user@host# set unit 1 encapsulation vlan-ccc
user@host# set vlan-id vlan-ID
user@host# set vlan-tags outer outer-tag inner inner-tag
user@host# set vlan-id-list vlan-id-list
user@host# set family ccc
```

4. (Optional) Configure filters and policers on the family circuit cross-connect encapsulation.

```
[edit interfaces ps0]
user@host# set unit 1 family ccc filter group
user@host# set unit 1 family ccc filter input input-list
user@host# set unit 1 family ccc filter output output-list
user@host# set unit 1 family ccc policer input
user@host# set unit 1 family ccc policer output
```

5. Configure the VLAN tag IDs.

```
[edit interfaces ps0 unit 1]
user@host# set vlan-tags outer 1 inner 1
```

6. Configure the interface to respond to ARP requests when the device has an active route to the ARP request target address.

```
[edit interfaces ps0 unit 1]
user@host# set proxy-arp
```

7. Specify that you want to configure the protocol family information. Pseudowire service logical interfaces support IPv4 (inet), IPv6 (inet6), and PPPoE (pppoe) protocol families.

For example, to configure the IPv4 family:

- a. Specify that you want to configure IPv4.

```
[edit interfaces ps0 unit 1]
user@host# edit family inet
```

- b. Configure the parameters for the family.

```
[edit interfaces ps0 unit 1 family inet]
user@host# set filter input filter 1 output filter 4
```

```
user@host# set mac-validate loose
user@host# set input-hierarchical-policer policer-1
user@host# set unnumbered-address lo0.0 preferred-source-address 198.51.100.11
```

8. (Optional) Configure the termination of the service logical interface on locally switched Layer 2 circuits. This support is enabled from Junos OS Release 19.1R1.

```
[edit protocols]
user@host# set l2circuit local-switching interface ps0.1 encapsulation-type
  ethernet-vlan ignore-encapsulation-mismatch ignore-mtu-mismatch
```

## Release History Table

Release	Description
19.1R1	Starting in Junos OS Release 19.1R1, additional encapsulations are added to the pseudowire subscriber transport and service logical interfaces. The transport logical interface supports Ethernet VPLS encapsulation, and provisions for terminating the interface on the <b>l2backhaul-vpn</b> routing-instance. The service logical interface supports circuit cross-connect (CCC) encapsulation, and provisions for terminating the interface on locally switched Layer 2 circuits.
19.1R1	Starting in Junos OS Release 19.1R1, you can configure additional encapsulations – Ethernet VPLS and circuit cross-connect-based encapsulations – for the transport and service pseudowire subscriber logical interface devices, respectively.
19.1R1	Starting in Junos OS Release 19.1R1, you can configure Ethernet VPLS encapsulation, in addition to circuit cross-connect-based encapsulations for pseudowire subscriber transport logical interfaces.
19.1R1	Starting in Junos OS Release 19.1R1, you can configure circuit cross-connect-based encapsulations, in addition to the Ethernet VPLS, VLAN bridge, and VLAN VPLS encapsulations for pseudowire subscriber service logical interfaces.
18.4R1	Starting in Junos OS Release 18.4R1, the support for inline distribution of single-hop Bidirectional Forwarding Detection (BFD) sessions is extended to pseudowire subscriber over redundant logical tunnel interfaces.
18.3R1	Starting in Junos OS Release 18.3R1, on MX Series routers with MPC and MIC interfaces, the support for pseudowire subscriber service interface over redundant logical tunnels is introduced in Layer 3 VPNs and draft-rosen multicast VPNs.
18.3R1	Starting in Junos OS Release 18.3R1, on MX Series routers with MPC and MIC interfaces, the pseudowire redundant logical interface devices scaling numbers has increased to 7000 devices to provide additional resiliency support.
18.3R1	Starting in Junos OS Release 18.3R1, on MX Series routers with MPC and MIC interfaces, the pseudowire redundant logical interface devices scaling numbers has increased to 7000 devices to provide additional resiliency support.
17.3R1	Starting with Junos OS Release 17.3R1 and later releases, stateful anchor point redundancy support is provided for pseudowire subscriber logical interface by the underlying redundant logical tunnel interface (rlt) in active-backup mode. This redundancy protects the access and the core facing link against anchor PFE (Packet Forwarding Engine) failure.
17.2R1	Starting in Junos OS Release 17.2R1, on MX Series routers with MPC and MIC interfaces, the pseudowire logical interface devices scaling numbers has increased to 7000 devices to provide additional resiliency support.
16.1R1	Starting with Junos OS release 16.1R1, <b>family inet</b> and <b>family inet6</b> are supported on the services side of an MPLS pseudowire subscriber as well as non-subscriber logical interface.
16.1R1	Starting with Junos OS Release 16.1R1, Inline IPFIX is supported on the services side of an MPLS pseudowire subscriber logical interface.
15.1R3	Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, CCC

	encapsulation is supported on the transport side of an MPLS pseudowire subscriber logical interface.
15.1R3	Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, distributed denial-of-service (DDoS) protection is supported on the services side of an MPLS pseudowire subscriber logical interface.
15.1R3	Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, Policer and Filter are supported on the services side of an MPLS pseudowire subscriber logical interface.
15.1R3	Starting with Junos OS Release 15.1R3 and 16.1R1 and later releases, accurate transmit statistics on logical interface are supported on the services side of an MPLS pseudowire subscriber logical interface.

**Related Documentation**

- *Hierarchical CoS on MPLS Pseudowire Subscriber Interfaces Overview*
- *CoS Two-Level Hierarchical Scheduling on MPLS Pseudowire Subscriber Interfaces*
- *CoS Three-Level Hierarchical Scheduling on MPLS Pseudowire Subscriber Interfaces*
- *Tunnel Interface Configuration on MX Series Routers Overview*
- *Router Chassis Configuration Statements*



## CHAPTER 6

# Wi-Fi Access Gateways

- [Wi-Fi Access Gateways on page 297](#)

### Wi-Fi Access Gateways

---


- [Wi-Fi Access Gateway Overview on page 298](#)
- [Wi-Fi Access Gateway Deployment Model Overview on page 299](#)
- [Supported Access Models for Dynamic-Bridged GRE Tunnels on the Wi-Fi Access Gateway on page 300](#)
- [Wi-Fi Access Gateway Configuration Overview on page 301](#)
- [Configuring a Pseudowire Subscriber Logical Interface Device for the Wi-Fi Access Gateway on page 302](#)
- [Configuring Conditions for Enabling Dynamic-Bridged GRE Tunnel Creation on page 304](#)
- [Configuring VLAN Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways on page 305](#)
- [Configuring Untagged Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways on page 309](#)

## Wi-Fi Access Gateway Overview

Wi-Fi access gateway (WAG) provides the public with Wi-Fi access from a residential Wi-Fi network or from a business Wi-Fi network. At home, subscribers have their existing Wi-Fi network; however, a part of their network is available for the general public to use. Members of the public who have an account with the same Internet service provider as the subscriber has at home can access the Internet and mobile network through the public part of the subscriber's Wi-Fi connection when they are in close proximity to the subscriber's home. WAG authenticates and connects subscribers regardless of their physical location.

Starting in Junos OS Release 17.2R1, service providers can deploy the MX Series router as a broadband network gateway (BNG) within their network, and then deploy the BNG as a WAG. [Figure 18 on page 298](#) shows a sample topology.

*Figure 18: MX Series Router Deployed as a WAG*

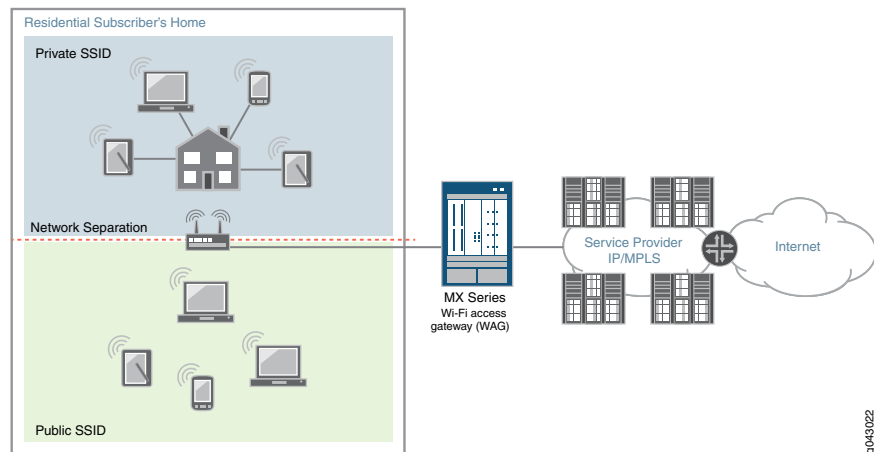

After a WAG has been deployed, service providers can configure the WAG to create secure wireless home network connections for computers, laptops, and other Wi-Fi electronic products (such as game systems, tablets, or mobile phones). WAG offers wireline and mobile service providers the following deployments and business value opportunities:

- **Wireline service providers**—The WAG deployment is based on an in-home division of access points or public access points, and works with any Wi-Fi access point that creates a generic routing encapsulation (GRE) tunnel to the MX Series router. This deployment protects subscribers and reduces churn by including free Wi-Fi with a paid wireline subscription. For added value, service providers can also sell ad hoc access or mode, such as airport, public safety, search-and-rescue, and café access.
- **Mobile service providers**—The WAG deployment is based on the mobile service provider's own access points, or wholesale and retail with the wireline service provider. Service providers that offer quadruple play, where TV, Internet, wireless, and landline phone services are combined, can leverage both wireline and wireless assets. This deployment offsets costs in mobile packet core and radio access network infrastructures with the

ability to offload mobile data. For added value, service providers can offer Wi-Fi for all devices with a mobile data place as a competitive differentiator.

Customers who purchase broadband can also receive Wi-Fi on any community Wi-Fi access point. Subscribers have a private and secure home connection, and can also access a public connection that is shared by other subscribers. To maintain a level of security and protect the private home connection, the two networks are separated. This separation ensures a strong level of bandwidth on the subscribers' personal connections.


Subscriber services such as authentication, authorization, and accounting (AAA); address assignment; hierarchical quality of service (QoS); lawful intercept; and class of service (CoS) are supported for individual Dynamic Host Configuration Protocol (DHCP) subscribers within the GRE tunnels. Using GRE tunnels for Wi-Fi provides the following benefits:

- Wi-Fi users who are not directly connected through Layer 2 to WAG are authenticated because GRE tunnels transmit Layer 2 information across any IP network.
- Services based on user equipment-specific information are applied using the media access control (MAC) address or Subscriber Identity Module (SIM) card.
- Services are applied in the network, not just at the the Wi-Fi access point.
- The soft GRE or Ethernet-over-GRE standard is supported on most Wi-Fi access points. For services using the Ethernet over GRE standard, only one side of the tunnel needs to be configured; the other end learns the remote IP addresses of all remote tunnel endpoints by examining the incoming GRE packets.

## Wi-Fi Access Gateway Deployment Model Overview

Figure 19 on page 299 shows an MX Series router broadband network gateway (BNG) deployed as a Wi-Fi access gateway (WAG). The WAG provides a multiservice edge with a full broadband feature set that is highly reliable because of the included redundant hardware. Ethernet frames from the user equipment device must be tunneled to the BNG across an IP cloud or public Internet.

*Figure 19: MX Series as Wi-Fi Access Gateway Deployment Model*

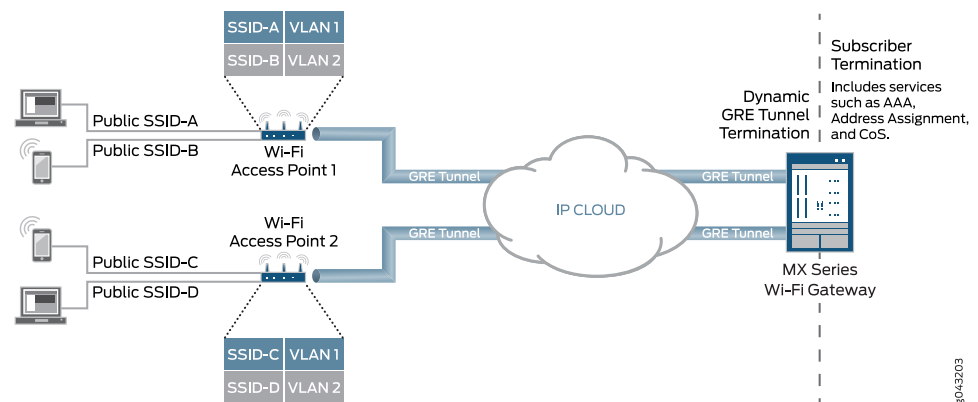

To support the MX Series BNG deployed as a WAG, dynamic-bridged generic routing encapsulation (GRE) tunnels are created and terminated at the BNG when it receives GRE traffic from the wireless access point (WAP). Dynamic Host Configuration Protocol (DHCP) subscribers are transported through GRE tunnels as either VLAN-tagged per service set identifier (SSID) or untagged. When the user equipment device connects to the SSID and begins to send traffic, the access point initiates a Layer 2 soft GRE or Ethernet-over-GRE connection to the MX Series BNG and the BNG dynamically builds the GRE tunnel. GRE tunnels are cleared after all of the subscribers within a GRE tunnel have logged out and a configurable timer has expired.

This deployment model supports a full set of services per user equipment device and per access point. Subscriber services such as authentication, authorization, and accounting (AAA); address assignment; hierarchical quality of service (QoS); lawful intercept; and class of service (CoS) are supported for individual DHCP subscribers within the GRE tunnels. No additional service cards are required for GRE or QoS because all features run inline on MPCs.

External RADIUS proxy supports Extensible Authentication Protocol (EAP) Subscriber Identity Module (SIM), Tunneled Transport Layer Security (TTLS), and Authentication and Key Agreement (AKA) protocols. The External RADIUS proxy also integrates with HTTP redirect to the Web portal.

The MX Series as WAG deployment model also supports the wholesale of access point access to multiple retail service providers. This wholesaling allows the local breakout of traffic or Layer 3 handoff to retail service providers.

## Supported Access Models for Dynamic-Bridged GRE Tunnels on the Wi-Fi Access Gateway

Dynamic-bridged generic routing encapsulation (GRE) tunnels and the Wi-Fi access gateway support interface stacks for VLAN-tagged and untagged subscribers. Subscriber features such as dynamic and service profiles for DHCP subscribers, lawful intercept, firewall filters, and change of authorization (CoA) are supported.

Scaling limitations of pseudowire subscriber interface devices (*psn* IFDs) require that multiple tunnels share the same *psn* IFD. The pseudowire is a virtual device that is stacked above the logical tunnel anchor point on the physical interface (the IFD).



**NOTE:** The *psn* IFD used to service dynamic GRE tunnel terminations cannot be simultaneously used to service MPLS pseudowire terminations.

Subscriber services and lawful intercept are supported only at the IP demultiplexing (demux) interface level.



**NOTE:** A GRE tunnel cannot have both untagged and tagged subscribers.

---

The tagged model and the untagged model are described in the following sections:

- [Dynamic VLAN-Tagged Subscribers on page 301](#)
- [Untagged Subscribers on page 301](#)

### Dynamic VLAN-Tagged Subscribers

To make provisioning and troubleshooting easier for VLAN-tagged subscribers, use the same set of VLANs on all of the Wi-Fi access points. Doing this requires that the same pseudowire subscriber interface service logical interface (*psn* IFL) (associated with a VLAN ID) on a *psn* IFD represents multiple GRE tunnels.

A dynamic VLAN demux interface (*demux0.yyyyyyyy*) is created for each VLAN tag and is stacked over the tunnel *psn* interface (*psn.xxxxxxxx*). There can be multiple VLANs (single and dual-tagged) over the same GRE tunnel. The subscribers' IP demux interfaces are then created over the VLAN demux interface.

### Untagged Subscribers

Untagged DHCP subscribers can be created directly over the GRE tunnel. For each subscriber, an IP demux interface (*demux0.yyyyyyyy*) is created and is stacked over the tunnel *psn* logical interface (*psn.xxxxxxxx*). There can be multiple subscribers over the same GRE tunnel.

## Wi-Fi Access Gateway Configuration Overview

To configure the MX Series router as a Wi-Fi access gateway (WAG):

1. Configure a pseudowire subscriber logical interface device.

See [“Configuring a Pseudowire Subscriber Logical Interface Device for the Wi-Fi Access Gateway” on page 302](#).

2. Configure the conditions for enabling dynamic-bridged GRE tunnels.

See [“Configuring Conditions for Enabling Dynamic-Bridged GRE Tunnel Creation” on page 304](#).

3. Configure the type of dynamic-bridged GRE tunnel that carries subscriber traffic to the WAG:



**NOTE:** A GRE tunnel cannot have both untagged and tagged subscribers.

- If the subscriber traffic is VLAN-tagged, see [“Configuring VLAN Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways” on page 305](#).
- If the subscriber traffic is untagged, see [“Configuring Untagged Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways” on page 309](#).

## Configuring a Pseudowire Subscriber Logical Interface Device for the Wi-Fi Access Gateway

Before you begin, you must create a logical tunnel interface:

- Configure the maximum number of pseudowire logical interfaces devices. See [“Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router” on page 283](#).
- Configure a tunnel interface. See *Tunnel Interface Configuration on MX Series Routers Overview*.

To configure the pseudowire subscriber logical interface device on which the dynamic-bridged GRE tunnel is built on the MX Series router Wi-Fi access gateway:

1. Specify that you want to configure the pseudowire subscriber logical interface device.

```
user@host# edit interfaces psn
```

For example:

```
user@host# edit interfaces ps0
```

2. Specify the logical tunnel interface that is the anchor point for the pseudowire logical device interface.

```
[edit interfaces psn]  
user@host# set anchor-point lt-fpc/pic/port
```

For example:

```
[edit interfaces ps0]  
user@host# set anchor-point lt-0/0/0
```

3. Configure three-level hierarchical scheduling on the logical tunnel interface.

```
[edit interfaces lt-fpc/pic/port]  
user@host# set hierarchical-scheduler implicit-hierarchy
```

For example:

```
[edit interfaces lt-0/0/0]  
user@host# set hierarchical-scheduler implicit-hierarchy
```

4. Configure the mixed VLAN tagging method for the pseudowire logical interface device.

```
[edit interfaces psn]  
user@host# set flexible-vlan-tagging
```



**NOTE:** You must configure **flexible-vlan-tagging** even if only untagged subscriber packets are being transported on the dynamic-bridged GRE tunnel.

For example:

```
[edit interfaces ps0]
user@host# set flexible-vlan-tagging
```

5. Specify that you want to configure unit 0, which represents the transport logical interface.

```
[edit interfaces psn]
user@host# edit unit 0
```

For example:

```
[edit interfaces ps0]
user@host# edit unit 0
```

6. Specify the Ethernet CCC encapsulation method for the transport logical interface.

```
[edit interfaces psn unit 0]
user@host# set encapsulation ethernet-ccc
```

For example:

```
[edit interfaces ps0 unit 0]
user@host# set encapsulation ethernet-ccc
```

## Configuring Conditions for Enabling Dynamic-Bridged GRE Tunnel Creation

Before you begin:

- Configure the pseudowire logical device on which to build the dynamic-bridged GRE tunnel. See [“Configuring a Pseudowire Subscriber Logical Interface Device for the Wi-Fi Access Gateway”](#) on page 302.
- Configure interface lo0 with the source IP address of the GRE tunnels for the Wi-Fi access gateway (WAG). Use the IP address of the MX Series router that you want to receive the incoming GRE traffic. This address cannot be the primary or preferred address on lo0. See *Configuring a Loopback Interface*.

To configure the conditions for enabling dynamic-bridged generic routing encapsulation (GRE) tunnel creation on the MX Series router WAG, you configure one or more GRE tunnel groups. Multiple GRE tunnel groups can have the same **source-address** or the same **destination-networks** value, but you cannot use a specific **source-address** and **destination-networks** combination in more than one GRE tunnel group.

To configure a GRE tunnel group:

1. Name the dynamic GRE tunnel group.

```
[edit services]
user@host# set soft-gre group-name
```

For example:

```
[edit services]
user@host# set soft-gre AP-Group1
```

2. Specify the source IP address of the GRE tunnels for the WAG. Use the IP address of the MX Series router that you configured to receive the incoming GRE traffic.

```
[edit services soft-gre group-name]
user@host# set source-address wag-ip-address
```

For example:

```
[edit services soft-gre AP-Group1]
user@host# set source-address 192.168.0.20
```

3. Specify the IP subnets from which GRE traffic can be processed.

```
[edit services soft-gre group-name]
user@host# set destination-networks [prefix]
```

For example:

```
[edit services soft-gre AP-Group1]
user@host# set destination-networks 192.0.2.0/24
```



- Specify the pseudowire subscriber interface device (IFD) on which to build the dynamic-bridged GRE tunnels.

```
[edit services soft-gre group-name]
user@host# set service-interface psn
```

For example:

```
[edit services soft-gre AP-Group1]
user@host# set service-interface ps0
```

- Specify the dynamic profile that configures the GRE tunnel.

```
[edit services soft-gre group-name]
user@host# set dynamic-profile profile-name
```

For example:

```
[edit services soft-gre AP-Group1]
user@host# set dynamic-profile tunnel_profile
```

- (Optional) Configure the number of seconds that a GRE tunnel remains up after the last subscriber session on the tunnel has ended.

```
[edit services soft-gre group-name]
user@host# set tunnel-idle-timeout seconds
```

The default **tunnel-idle-timeout** value is 120 seconds.

For example:

```
[edit services soft-gre AP-Group1]
user@host# set tunnel-idle-timeout 60
```

- To configure another GRE tunnel group, repeat this procedure.

## Configuring VLAN Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways

To configure subscriber interfaces for VLAN-tagged Dynamic Host Configuration Protocol (DHCP) subscribers on dynamic-bridged generic routing encapsulation (GRE) tunnels:

- Name the dynamic profile.

```
[edit]
user@host# set dynamic-profiles profile-name
```

For example:

```
[edit]
```

```
user@host# set dynamic-profiles tunnel_profile
```

2. Define the interface with the internal variable used by the router to match the interface name of the receiving interface.

```
[edit dynamic-profiles profile-name]  
user@host# edit interfaces $junos-interface-ifd-name
```

For example:

```
[edit dynamic-profiles tunnel_profile]  
user@host# edit interfaces $junos-interface-ifd-name
```

3. Define the unit with the internal variable.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name]  
user@host# set unit $junos-interface-unit
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name]  
user@host# set unit $junos-interface-unit
```

4. Define the unit family type.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit  
$junos-interface-unit]  
user@host# set family (inet | inet6)
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit  
$junos-interface-unit]  
user@host# set family inet
```

5. Enable the local address for the interface to be derived from the loopback interface address.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit  
$junos-interface-unit family (inet | inet6)]  
user@host# set unnumbered-address lo0.0
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit  
$junos-interface-unit family inet]  
user@host# set unnumbered-address lo0.0
```

6. Configure the router to respond to any ARP request.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# set proxy-arp
```

7. Configure stacked VLAN processing:

- a. Access the VLAN range configuration for stacked VLANs.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# edit auto-configure stacked-vlan-ranges
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# edit auto-configure stacked-vlan-ranges
```

- b. Specify the dynamic profile that is used to create VLANs.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure stacked-vlan-ranges]
user@host# edit dynamic-profile profile-name
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure stacked-vlan-ranges]
user@host# edit dynamic-profile auto_svlan_demux
```

- c. Specify that the VLAN dynamic profile accepts any type of VLAN Ethernet packet.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure stacked-vlan-ranges dynamic-profile
profile-name]
user@host# set accept any
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure stacked-vlan-ranges dynamic-profile
auto_svlan_demux]
user@host# set accept any
```

- d. Specify the outer and inner stacked VLAN ranges that you want the dynamic profile to use.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure stacked-vlan-ranges dynamic-profile
profile-name]
```

```
user@host# set ranges low-tag-high-tag,low-tag-high-tag
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit  
$junos-interface-unit auto-configure stacked-vlan-ranges dynamic-profile  
auto_vlan_demux]  
user@host# set ranges 1000-1100,1200-1300
```

8. Configure single-tagged VLAN processing:

- a. Access the VLAN range configuration for single VLANs.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit  
$junos-interface-unit]  
user@host# edit auto-configure vlan-ranges
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit  
$junos-interface-unit]  
user@host# edit auto-configure vlan-ranges
```

- b. Specify the dynamic profile used to create VLANs.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit  
$junos-interface-unit auto-configure vlan-ranges]  
user@host# edit dynamic-profile profile-name
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit  
$junos-interface-unit auto-configure vlan-ranges]  
user@host# edit dynamic-profile auto_vlan_demux
```

- c. Specify that the VLAN dynamic profile accepts any type of VLAN Ethernet packet.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit  
$junos-interface-unit auto-configure vlan-ranges dynamic-profile profile-name]  
user@host# set accept any
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit  
$junos-interface-unit auto-configure vlan-ranges dynamic-profile  
auto_vlan_demux]  
user@host# set accept any
```

- d. Specify the VLAN range that you want the dynamic profile to use.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure vlan-ranges dynamic-profile profile-name]
user@host# set ranges low-tag-high-tag
```

For example:

```
[edit dynamic-profiles tunnel_profile interfaces $junos-interface-ifd-name unit
$junos-interface-unit auto-configure vlan-ranges dynamic-profile
auto_vlan_demux]
user@host# set ranges 1-50
user@host# set ranges 101-150
```

## Configuring Untagged Subscriber Interfaces for Dynamic-Bridged GRE Tunnels on Wi-Fi Access Gateways

To configure subscriber interfaces for untagged Dynamic Host Configuration Protocol (DHCP) subscribers on dynamic-bridged generic routing encapsulation (GRE) tunnels:

1. Name the dynamic profile.

```
[edit]
user@host# set dynamic-profiles profile-name
```

For example:

```
[edit]
user@host# set dynamic-profiles tunnel_demux
```

2. Define the interface with the internal variable used by the router to match the interface name of the receiving interface.

```
[edit dynamic-profiles profile-name]
user@host# edit interfaces $junos-interface-ifd-name
```

For example:

```
[edit dynamic-profiles tunnel_demux]
user@host# edit interfaces $junos-interface-ifd-name
```

3. Define the unit with the internal variable.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name]
user@host# set unit $junos-interface-unit
```

For example:

```
[edit dynamic-profiles tunnel_demux interfaces $junos-interface-ifd-name]
user@host# set unit $junos-interface-unit
```

4. Configure the variable for the underlying interface of the demux interfaces.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# set demux-options underlying-interface $junos-underlying-interface
```

For example:

```
[edit dynamic-profiles tunnel_demux interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# set demux-options underlying-interface $junos-underlying-interface
```

5. Define the unit family type.

```
[edit dynamic-profiles profile-name interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# set family (inet | inet6)
```

For example:

```
[edit dynamic-profiles tunnel_demux interfaces $junos-interface-ifd-name unit
$junos-interface-unit]
user@host# set family inet
```

Release History Table

Release	Description
17.2R1	Starting in Junos OS Release 17.2R1, service providers can deploy the MX Series router as a broadband network gateway (BNG) within their network, and then deploy the BNG as a WAG.

## CHAPTER 7

# Fixed Wireless Access Networks

- [Fixed Wireless Access Networks on page 311](#)
- [Tracing Fixed Wireless Access Events for Troubleshooting on page 323](#)

### Fixed Wireless Access Networks

---

- [Fixed Wireless Access Network Overview on page 311](#)
- [How to Configure Fixed Wireless Access on page 319](#)
- [Verifying and Monitoring Fixed Wireless Access on page 323](#)

### Fixed Wireless Access Network Overview

Service providers can manage subscribers over a wireless network to the home instead of having to run fiber to the building. The subscribers are in a fixed location, typically a residence, with customer premises equipment (CPE) that exchanges wireless radio signals with the provider network. The wireless network uses a fiber backhaul tower to handle traffic for the last miles from a hard-wired network to the subscribers. Multiple towers can relay traffic between each other to and from the fiber optic network. Starting in Junos OS Release 19.2R1, MX Series routers acting as BNGs can support subscribers in Third-Generation Partnership Project (3GPP) fixed wireless access networks, enabling the integration of fixed wireless subscribers with the wireline subscriber management backend.

You can find a helpful summary of related terminology in [“Terminology for a 3GPP Fixed Wireless Access Network” on page 315](#).

[Figure 20 on page 312](#) shows a representative topology for a fixed wireless access network.

Figure 20: Fixed Wireless Access Network Topology


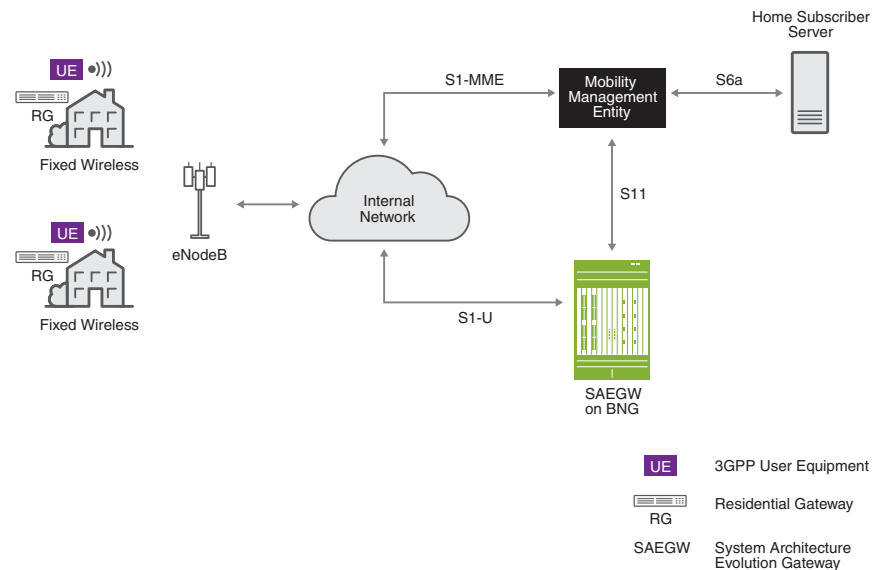


Figure 21 on page 312 shows the GPRS tunneling protocol (GTP) signaling messages in the fixed wireless access network that are necessary to activate and deactivate a default bearer. The messages are actually request and response pairs, but for simplicity the pairs are represented in the figure with bidirectional arrows. The Default Bearer Active line represents the activated default bearer that will carry data traffic.



**NOTE:** In this implementation, the UE roaming is not supported.

Figure 21: Signaling Messages for Bringing Default Bearer Up and Down

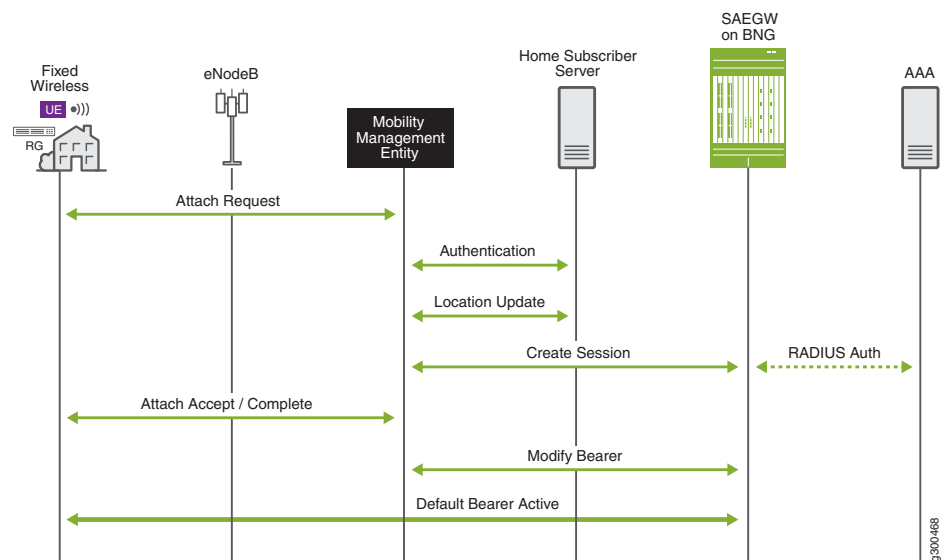



Briefly, the message exchange sequence is the following:

1. The user equipment (UE) sends an Attach Request to the eNodeB, which forwards the message to the mobility management entity (MME). The request includes the APN.
2. The MME exchanges Identity request/response messages with the UE to determine the International Mobile Subscriber Identity (IMSI) or other identifier of the UE.
3. The MME sends the identifier to the Home Subscriber Server (HSS) to authenticate the UE.
4. The MME exchanges Location Update request/response messages with the HSS. In this exchange, the MME provides the HSS with its own address. The HSS acknowledges the update and sends subscription information for the UE from its database.
5. The MME sends a Create Session Request to the System Architecture Evolution (SAEGW). The MME first compares the APN provided by the UE with the APN for which it is authorized according to the subscription information from the HSS. If there is a match, the MME includes that APN in the Create Session Request. If it does not match, then the MME instead includes the APN authorized by the HSS.
6. The SAEGW performs the following actions:
  - Validates information elements received in the request.
  - Validates the APN requested by the subscriber. If you have configured authentication, the BNG communicates with the RADIUS server to accomplish that task.
  - Receives the R-TEID-C, which consists of the IP address of the S11 interface on the MME and the MME's allocated identifier.
  - Allocates the local TEIDs:
    - The L-TEID-C is the IP address of the S11 interface on the BNG and the BNG's allocated identifier.
    - The L-TEID-U is the IP address of the S1-U interface on the BNG and the BNG's allocated identifier.
  - Allocates an IP address for the pseudowire interface it creates for the session. The address comes from either a locally configured address pool on the BNG or from the RADIUS server.
  - Creates the session and sends the Create Session response to the MME. The response includes the IP address that the SAEGW has assigned for the bearer and both L-TEID-C and L-TEID-U.
7. The MME exchanges messages with the eNodeB, which then establishes the bearer component from the UE to eNodeB.

8. The UE signals to the eNodeB that attachment is complete; the eNodeB notifies the MME.

9. The MME and SAEGW exchange Modify Bearer request/response messages to determine the final parameters for the bearer.

When the BNG receives the request, it creates the dynamic pseudowire (**ps**) interface that will receive the GTP-U encapsulated data packets from the eNodeB. The BNG creates one dynamic **ps** interface per UE. The BNG also receives the R-TEID-U from the eNodeB in the Modify Bearer request. After creating the interface, the BNG sends a Modify Bearer response to the MME.


10. The default bearer is now active and subscriber data traffic can pass back and forth between the UE through eNodeB to the SAEGW and then the connected PDN.

However, if the residential gateway is a DHCP client, it first begins the DHCP message exchange for the subscriber. The exchange takes place on the default bearer. After DHCP operations have completed to bind the subscriber and provide the DHCP configuration, then data traffic passes over the bearer.

The MME and SAEGW also exchange Delete Session request and response messages. When the SAEGW receives the request, it initiates the subscriber logout process, much as it would for a wireline DHCP subscriber.

Figure 22 on page 314 shows the DHCP connection for the case where the RG creates DHCP subscribers. The DHCP control packets are exceptioned to the Routing Engine as for any other DHCP deployment. The behavior for creating and controlling the DHCP subscribers is the same as for a wireline broadband network. When the subscriber is bound, the UE can then start sending data traffic for the subscriber.

*Figure 22: DHCP Subscribers in a Fixed Wireless Access Network*

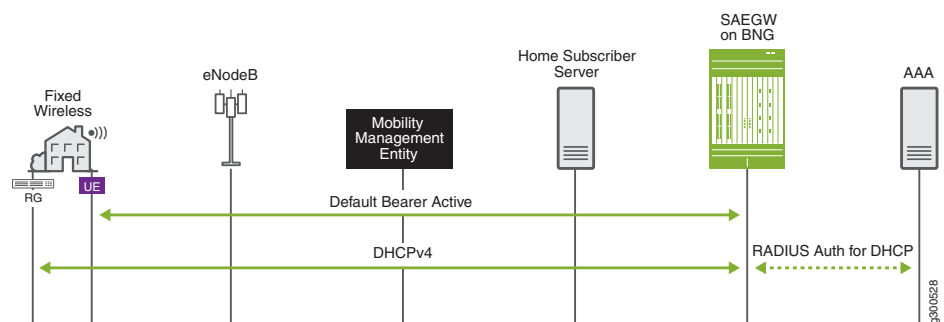

## References

For detailed information about all aspects of a fixed wireless network, read the 3GPP technical specifications that define everything. Table 29 on page 315 lists the most relevant specifications.

**Table 29: 3GPP Technical Specifications for Fixed Wireless Access Networks**

Specification Number	Title
3GPP TS 23.002 (Release 15)	Network architecture
3GPP TS 23.401 (Release 15)	General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access
3GPP TS 29.274 (Release 15)	3GPP Evolved Packet System (EPS); Evolved General Packet Radio Service (GPRS) Tunnelling Protocol for Control plane (GTPv2-C) Stage 3
3GPP TS 29.281 (Release 15)	General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)

### 3GPP Fixed Wireless Access Terminology

[Table 30 on page 315](#) explains terminology used for 3GPP fixed wireless access networks.

**Table 30: Terminology for a 3GPP Fixed Wireless Access Network**

Term	Description
3GPP	The 3rd Generation Partnership Project is an international standards organization that develops specifications and protocols for wireless telephony.

Table 30: Terminology for a 3GPP Fixed Wireless Access Network (continued)

Term	Description
APN	<p>The access point name identifies the packet data network (PDN), such as the Internet, that the subscriber wants to access. When a subscriber requests access, the UE passes the requested APN to the eNodeB, which sends it to the MME for authorization. If the subscriber does not request an APN, the MME can authorize a default APN.</p> <p>Each PDN that the user subscribes to has an APN and an associated packet data network gateway (PGW) that the UE uses to access the PDN.</p> <p>The combination of APN and PGW is called a PDN subscription context. One context is the default APN, which always connects to a PDN such as the Internet unless the user activates another APN.</p> <p>The HSS maintains subscriber profiles. The MME uses the profile from the HSS to validate whether the subscriber is actually subscribed to the requested APN.</p> <p>You can also think of the APN as the set of service-level and connection parameters—such as QoS parameters—that is authorized for the UE. A given UE can access many APNs.</p> <p>An APN has two parts:</p> <ul style="list-style-type: none"> <li>• <b>Network Identifier</b>—This defines the external PDN that the user connects to through a PGW. This part of the APN is mandatory. It can be as simple as internet or have a more complicated structure such as example.net. The network identifier can optionally specify a requested subscriber service.</li> <li>• <b>Operator Identifier</b>—(Optional) This defines the provider whose PDN the user connects to through a PGW. This part of the APN is often omitted. If present, it consists of the provider's Mobile Network Code (MNC) and Mobile Country Code (MCC).</li> </ul> <p>An APN that includes both a Network Identifier and an Operator Identifier corresponds to a DNS name for the PGW.</p> <p>The APN has the following format:</p> <pre><i>network-id.mncmnc-number.mccmcc-number.gprs</i></pre> <p>An APN can be a simple string or more complex, as shown in these examples:</p> <ul style="list-style-type: none"> <li>• fixed-wireless</li> <li>• web.example.net</li> <li>• internet.mnc99.mcc999.gprs</li> </ul>
Bearer	<p>A bearer is the tunnel that connects the UE to a PDN through the PGW. A <i>default bearer</i> is established to a default PGW whenever the UE is activated. Activation means here that the UE is on and has performed authentication.</p> <p>A UE device has a default bearer for each PGW to which it connects. For example, if user equipment connects to the Internet through one PGW and a corporate intranet through another PGW, two default bearers will be active.</p> <p>Default bearers are best-effort. The UE can establish <i>dedicated bearers</i> to other PDNs that can have different QoS requirements, such as a guaranteed bit rate (GBR).</p> <p>Bearers encapsulate user data with GTP-U. The GTP-U information is in turn sent over a UDP connection and inside IP packets.</p>

Table 30: Terminology for a 3GPP Fixed Wireless Access Network (continued)

Term	Description
eNodeB	<p>The hardware (typically in a radio tower) that connects directly to the UE over the air and to the wireless network core. Also called evolved Node B or E-UTRAN Node B.</p> <p>The eNodeB has the following functions:</p> <ul style="list-style-type: none"> <li>• Terminates the radio connection from the UE.</li> <li>• Locates the MME that authenticates the UE (SIM card) with information from the subscriber profile maintained on the HSS.</li> <li>• Maintains the S1-U data plane interface with the SAEGW on the BNG. An S1-U interface can support multiple eNodeBs.</li> </ul>
GPRS	The general packet radio service is the data standard that defines the specifications that enable wireless networks to carry IP packets to external networks.
GR	The home gateway router that provides the interface between the subscriber's network and the UE. Also called a residential gateway router.
GTP	<p>The GPRS tunneling protocol governs the creation and use of GTP tunnels that carry traffic between two GPRS support nodes (GSNs), such as an MME and an SGW.</p> <p>Each GTP tunnel is identified by a TEID. The receiving end of a tunnel assigns locally the TEID that the transmitting side uses. The tunnel endpoints on the nodes exchange messages to communicate the TEID values to each other.</p>
GTP-C	GTP-C tunnels carry packet data units and signaling messages in the control plane (S11 interface) between tunnel endpoints on the MME and the SAEGW on the BNG.
GTP-U	The GPRS tunneling protocol, user plane. GTP-U tunnels carry packet data units and signaling messages in the user (data) plane (S1-U interface) between tunnel endpoints on the eNodeB and the SAEGW on the BNG.
HSS	<p>The Home Subscriber Server maintains a database of subscriber and service information. This information supports call (connection) control and session management. The HSS has the following functions:</p> <ul style="list-style-type: none"> <li>• Provides authentication information from the subscriber profile to the MME. The MME uses that information to authenticate the UE for the wireless access network connection.</li> <li>• Identifies the APN that represents and defines the connection for the UE.</li> </ul>
IMSI	The International Mobile Subscriber Identity number that identifies a 3GPP subscriber. The IMSI consists of a mobile country code, a mobile network code, and a mobile station identification number.
MEI	The Mobile Equipment Identity number that uniquely identifies the subscriber device.

*Table 30: Terminology for a 3GPP Fixed Wireless Access Network (continued)*

Term	Description
MME	<p>The mobility management entity is the control node for the wireless access network, communicating with eNodeB, HSS, and SAEGW. Some of its functions include the following:</p> <ul style="list-style-type: none"> <li>• Maintains the S6a interface with the HSS.</li> <li>• Manages and stores contexts for the UE.</li> <li>• Authenticates the UE with the HSS by using various types of UE identification, such as IMSI, MEI, or MSISDN.</li> <li>• Maintains the S11 control plane interface with the SAEGW on the BNG. An S11 interface can support multiple MMEs.</li> <li>• Selects the SAEGW on the BNG for the subscriber session.</li> <li>• Sends messages to the SAEGW for traffic control.</li> <li>• Participates in the bearer activation/deactivation process.</li> <li>• Manages the UE idle state (so the device is reachable from other devices and services), and performs idle-mode paging of UE.</li> </ul>
MSISDN	The Mobile Subscriber International Subscriber Directory Number (telephone number) that is assigned to the mobile subscriber.
PGW	<p>The packet data network gateway provides the UE with connectivity to external networks such as the Internet. Traffic to and from the UE is processed by the PGW. The BNG functions as an SAEGW, which includes the functions of both PGW and SGW.</p> <p>The PGW performs the following functions:</p> <ul style="list-style-type: none"> <li>• Applies the APN characteristics to the UE session.</li> <li>• Allocates IP addresses to the UE during setup of the default bearer.</li> <li>• Filters packets to and from the subscriber.</li> <li>• Enforces policy.</li> <li>• Collects charging information for processing.</li> </ul>
S11	<p>The GTPv2-based control plane interface that connects the MME and the SAEGW on the BNG. GTP-C tunnels carry control messages.</p> <p>An S11 interface can support multiple MMEs.</p>
S1-MME	The GTPv2-based control plane interface that connects eNodeB and the MME.
S1-U	<p>The GTPv1-based user plane interface that connects eNodeB and the SAEGW on the BNG. S1-U is also called the data plane interface. GTP-U tunnels on the interface carry user payloads.</p> <p>An S1-U interface can support multiple eNodeBs.</p>
S6a	Interface that connects the MME and the HSS, which use this interface to exchange subscriber, service, and UE information.
SAEGW	The System Architecture Evolution gateway that includes the functions of both the SGW and the PGW. It enables the BNG to act as both SGW and PGW.

Table 30: Terminology for a 3GPP Fixed Wireless Access Network (continued)

Term	Description
SGW	<p>The serving gateway routes and forwards subscriber data packets. The BNG functions as an SAEGW, which includes the functions of both PGW and SGW.</p> <p>The SGW performs the following functions:</p> <ul style="list-style-type: none"> <li>• Terminates S1-U interfaces with eNodeBs and S11 interfaces with MMEs.</li> <li>• Subscriber management for UE DHCP subscribers.</li> </ul>
TEID	<p>A tunnel endpoint identifier that uniquely identifies a GTP tunnel endpoint in the scope of a path. A fully qualified TEID consists of an IP address concatenated with a locally allocated identifier. Four TEIDs are defined, together they uniquely identify a default bearer session:</p> <ul style="list-style-type: none"> <li>• L-TEID-C consists of the IP address of the S11 interface on the BNG and the BNG's allocated identifier.</li> <li>• L-TEID-U consists of the IP address of the S1-U interface on the BNG and the BNG's allocated identifier.</li> <li>• R-TEID-C consists of the IP address of the S11 interface on the MME and the MME's allocated identifier.</li> <li>• R-TEID-U consists of the IP address of the S1-U interface on the eNodeB and the eNodeB's allocated identifier.</li> </ul>
UE	<p>The user equipment that connects to the wireless network's eNodeB and to the subscriber's network. UE corresponds to what is called CPE in other contexts.</p> <p>In some cases, the UE consists of a SIM card and a residential gateway router (RG) that can host the SIM. In other cases the SIM might be in a separate device that connects to the RG. In both cases, the SIM provides the wireless radio connectivity to eNodeB in the fixed wireless access network.</p>

### Benefits of Fixed Wireless Access

- Reduce last-mile installation and maintenance costs by using radio backhaul towers connected to hard-wired network instead of providing fiber to the building.
- Ability to increase service offerings to underserved end users.

### How to Configure Fixed Wireless Access

The fixed wireless access configuration enables the SAEGW on the BNG. At a minimum you must configure an APN, the control plane and the data plane.

The following procedure assumes that you have configured separately any of the following that apply for your APN:

- Access profile
- Dynamic profile
- Anchor point interface
- Address pool

To configure fixed wireless access on the BNG:

1. Specify the name of the pseudowire physical interface that anchors all incoming GTP-U (S1-U interface) tunnels on the BNG.



**NOTE:** The BNG supports only a single anchor point.

```
[edit services fixed-wireless-access]
user@host# set anchor-point anchor-point-name
```

2. Define an access point name for the user equipment by specifying the connection and service parameters that the subscriber's device can use to connect to the PGW to access a PDN.

```
[edit services fixed-wireless-access]
user@host# edit apn access-point-name
```

- a. (Optional) Associate an authentication or accounting profile with the APN that specifies authentication or accounting parameters.

```
[edit services fixed-wireless-access apn access-point-name]
user@host# set aaa-profile aaa-profile-name
```

- b. (Optional) Specify one or more authentication parameters that the BNG sends to the external AAA server for subscribers using this APN. You configure details about the external server in the access profile that you associate with the APN. Some networks might not use this authentication, because the HSS has already authenticated the UE and determined subscriber access. Other networks might not use this because they use Diameter for online charging.

```
[edit services fixed-wireless-access apn access-point-name]
user@host# set authentication password password
user@host# set authentication username-include delimiter delimiter
user@host# set authentication username-include domain-name domain-name
user@host# set authentication username-include imsi
user@host# set authentication username-include mei
user@host# set authentication username-include msisdn
user@host# set authentication username-include user-prefix user-prefix
```

- c. (Optional) Specify the type of data sent to the APN.



**NOTE:** Only the ipv4 type is supported.

```
[edit services fixed-wireless-access apn access-point-name]
user@host# set apn-data-type type
```

- d. (Optional) Specify a text description for the APN. You can use this to provide more information about the APN than its name alone can convey. The description for an APN appears in subscriber profiles in the HSS database.



```
[edit services fixed-wireless-access apn access-point-name]
user@host# set description description
```

- e. Associate a dynamic profile with the APN to create the dynamic fixed wireless interface.



**NOTE:** Services such as CoS and firewall filters are applied as part of the DHCP configuration.

```
[edit services fixed-wireless-access apn access-point-name]
user@host# set dynamic-profile dynamic-profile
```

- f. (Optional) Specify the name of the address pool for IPv4 addresses assigned to the APN.



**NOTE:** Only IPv4 addresses are supported.

```
[edit services fixed-wireless-access apn access-point-name]
user@host# set ipv4-address-pool pool-name
```

- g. (Optional)

```
[edit services fixed-wireless-access apn access-point-name]
user@host# set routing-instance routing-instance-name
```

3. Configure the control plane by specifying the name of the MME and the IPv4 address of the S11 interface on the BNG. The S11 interface is the reference point or connection between the MME and the SAEGW on the BNG for control packets.

```
[edit services fixed-wireless-access]
user@host# set control-plane name s11 v4-address ip-address
```

4. Configure the data plane by specifying the name of the eNodeB and the IPv4 address for the S1-U interface on the BNG. The S1-U interface is the reference point or connection between the eNodeB and the SAEGW on the BNG for subscriber data traffic.

```
[edit services fixed-wireless-access]
user@host# set data-plane name s1-u v4-address ip-address
```

For example, the following configuration specifies the S11 interface address as 192.0.2.30 and the S1-U interface address as 192.0.2.100. The pseudowire anchor is ps0. The APN is named internet-basic; it has both an access profile for RADIUS parameters and a

dynamic client profile attached. The authentication password is \$ABC123. The username includes the domain name example.net and the subscriber's IMSI. The data type is the required IPv4. A descriptive string, fwa-basic-subscribers-phoenix, is associated with the APN.

The APN uses the default routing instance, because no other routing instance is configured. IP addresses are supplied by RADIUS, because the configuration does not specify a local pool.

```
fixed-wireless-access {
  anchor-point ps0;
  control-plane mme-45 {
    s11 {
      v4-address ip-address;
    }
  }
  data-plane x-s1u-20 {
    s1-u {
      v4-address 192.0.2.100;
    }
  }
  apn internet-basic {
    aaa-profile fwa-radius-prof;
    apn-data-type ipv4
    authentication {
      password $ABC123;
      username-include {
        domain-name example.net;
        imsi;
      }
    }
    description fwa-basic-subscribers-phoenix;
    dynamic-profile fwa-dyn-profile;
  }
}
```

The dynamic profile that you attach to the APN creates the dynamic interface for fixed wireless access. The following configuration is a simple example:

```
dynamic-profiles fwa-dyn-profile {
  interfaces {
    "$junos-interface-ifd-name" {
      unit "$junos-interface-unit" {
        family inet {
          unnumbered-address lo0.0 preferred-source-address 10.0.0.1;
        }
      }
    }
  }
}
```

The anchor point interface configuration is also very simple. For example:

```

interfaces {
  ps0 {
    anchor-point {
      rlt-0/1/10;
    }
    flexible-vlan-tagging;
  }
}

```

### Verifying and Monitoring Fixed Wireless Access

**Purpose** Determine status information and statistics for fixed wireless access configurations.

**Action** • To display a list of all interfaces on the BNG supporting fixed wireless access subscribers:

```
user@host>show subscribers client-type fixed-wireless-access
```

- To display detailed information about fixed wireless access subscribers, including username and IP address, dynamic profile, local and remote TEIDs, and remote and local IP addresses for the BNG connection to eNodeBs and MMEs:

```
user@host>show subscribers client-type fixed-wireless-access detail
```

- To view statistics for messages exchanged between the BNG, eNodeB, and MME:

```
user@host>show services fixed-wireless-access statistics
```

#### Release History Table

Release	Description
19.2R1	Starting in Junos OS Release 19.2R1, MX Series routers acting as BNGs can support subscribers in Third-Generation Partnership Project (3GPP) fixed wireless access networks, enabling the integration of fixed wireless subscribers with the wireline subscriber management backend.

#### Related Documentation

- [Tracing Fixed Wireless Access Events for Troubleshooting on page 323](#)
- *Configuring Access Profile Options for Interactions with RADIUS Servers*
- *Dynamic Profiles for Subscriber Management*
- *Address-Assignment Pools for Subscriber Management*

### Tracing Fixed Wireless Access Events for Troubleshooting

The Junos OS trace feature tracks fixed wireless access operations and records events in a log file. The error descriptions captured in the log file provide detailed information to help you solve problems.

By default, nothing is traced. When you enable the tracing operation, the default tracing behavior is as follows:

1. Important events are logged in a file located in the `/var/log` directory. By default, the router uses the filename `tcpfwdd`. You can specify a different filename, but you cannot change the directory in which trace files are located.
2. When the trace log file *filename* reaches 128 kilobytes (KB), it is compressed and renamed *filename.0.gz*. Subsequent events are logged in a new file called *filename*, until it reaches capacity again. At this point, *filename.0.gz* is renamed *filename.1.gz* and *filename* is compressed and renamed *filename.0.gz*. This process repeats until the number of archived files reaches the maximum file number. Then the oldest trace file—the one with the highest number—is overwritten.

You can optionally specify the number of trace files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB). (For more information about how log files are created, see the [System Log Explorer](#).)

By default, only the user who configures the tracing operation can access log files. You can optionally configure read-only access for all users.

The following topics describe how to configure all aspects of tracing fixed wireless access operations:

- [Configuring the Fixed Wireless Access Trace Log Filename on page 324](#)
- [Configuring the Number and Size of Fixed Wireless Access Log Files on page 324](#)
- [Configuring Access to the Fixed Wireless Access Log File on page 325](#)
- [Configuring a Regular Expression for Fixed Wireless Access Messages to Be Logged on page 325](#)
- [Configuring the Fixed Wireless Access Tracing Flags on page 326](#)

## Configuring the Fixed Wireless Access Trace Log Filename

By default, the name of the file that records trace output for fixed wireless access is `bbe-fwsd`. You can specify a different name with the `file` option.

To configure the filename for fixed wireless access tracing operations:

- Specify the name of the file used for the trace output.

```
[edit system processes tcp-forwarding traceoptions]  
user@host# set file fwsd_1
```

## Configuring the Number and Size of Fixed Wireless Access Log Files

You can optionally specify the number of compressed, archived trace log files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB); the default size is 128 kilobytes (KB).

The archived files are differentiated by a suffix in the format *.number.gz*. The newest archived file is `.0.gz` and the oldest archived file is *.(maximum number)-1.gz*. When the

current trace log file reaches the maximum size, it is compressed and renamed, and any existing archived files are renamed. This process repeats until the maximum number of archived files is reached, at which point the oldest file is overwritten.

For example, you can set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation, *filename*, reaches 2 MB, *filename* is compressed and renamed *filename.0.gz*, and a new file called *filename* is created. When the new *filename* reaches 2 MB, *filename.0.gz* is renamed *filename.1.gz* and *filename* is compressed and renamed *filename.0.gz*. This process repeats until there are 20 trace files. Then the oldest file, *filename.19.gz*, is simply overwritten when the next oldest file, *filename.18.gz* is compressed and renamed to *filename.19.gz*.

To configure the number and size of trace files:

- Specify the name, number, and size of the file used for the trace output.

```
[edit system processes tcp-forwarding traceoptions]
user@host# set file fwsd_1_logfile_1 files 20 size 2097152
```

## Configuring Access to the Fixed Wireless Access Log File

By default, only the user who configures the tracing operation can access the log files. You can enable all users to read the log file and you can explicitly set the default behavior of the log file.

To specify that all users can read the log file:

- Configure the log file to be world-readable.

```
[edit system processes tcp-forwarding traceoptions]
user@host# set file fwsd_1_logfile_1 world-readable
```

To explicitly set the default behavior, only the user who configured tracing can read the log file:

- Configure the log file to be no-world-readable.

```
[edit system processes tcp-forwarding traceoptions]
user@host# set file fwsd_1_logfile_1 no-world-readable
```

## Configuring a Regular Expression for Fixed Wireless Access Messages to Be Logged

By default, the trace operation output includes all messages relevant to the logged events.

You can refine the output by including regular expressions to be matched.

To configure regular expressions to be matched:

- Configure the regular expression.

```
[edit system processes tcp-forwarding traceoptions]  
user@host# set file fwsd_1 _logfile_1 match regex
```

## Configuring the Fixed Wireless Access Tracing Flags

By default, only important events are logged. You can specify which events and operations are logged by specifying one or more tracing flags.

To configure the flags for the events to be logged:

- Configure the flags.

```
[edit system processes tcp-forwarding traceoptions]  
user@host# set flag flag-name
```

### Related Documentation

- [Fixed Wireless Access Networks on page 311](#)

## CHAPTER 8

# Configuration Statements

- [aaa-access-profile \(L2TP LNS\)](#) on page 333
- [aaa-context \(AAA Options\)](#) on page 334
- [aaa-options \(Access Profile\)](#) on page 335
- [aaa-options \(PPP Profile\)](#) on page 336
- [access \(Dynamic Access Routes\)](#) on page 338
- [access-internal \(Dynamic Access-Internal Routes\)](#) on page 340
- [access-line \(Access-Line Rate Adjustment\)](#) on page 342
- [access-line-information \(L2TP\)](#) on page 353
- [access-profile \(AAA Options\)](#) on page 354
- [address \(L2TP Destination\)](#) on page 355
- [address \(L2TP Tunnel Destination\)](#) on page 356
- [address \(LNS Local Gateway\)](#) on page 357
- [address \(Tunnel Profile Remote Gateway\)](#) on page 358
- [address \(Tunnel Profile Source Gateway\)](#) on page 358
- [address-change-immediate-update](#) on page 359
- [aggregated-inline-services-options \(Aggregated Inline Services\)](#) on page 360
- [allow-snooped-clients](#) on page 361
- [always-write-option-82](#) on page 362
- [anchor-point \(Pseudowire Subscriber Interfaces\)](#) on page 363
- [apn \(Fixed Wireless Access\)](#) on page 365
- [assignment-id-format \(L2TP LAC\)](#) on page 366
- [authentication \(Fixed Wireless Access\)](#) on page 367
- [authentication \(Static and Dynamic PPP\)](#) on page 368
- [avp \(L2TP Tunnel Switching\)](#) on page 369
- [bandwidth \(Inline Services\)](#) on page 370
- [bandwidth \(Tunnel Services\)](#) on page 371
- [bearer-type \(L2TP Tunnel Switching\)](#) on page 372
- [calling-number \(L2TP Tunnel Switching\)](#) on page 373

- [challenge-length \(Static and Dynamic PPP\) on page 374](#)
- [chap on page 375](#)
- [chap \(Dynamic PPP\) on page 376](#)
- [chap \(L2TP\) on page 377](#)
- [cisco-nas-port-info \(L2TP Tunnel Switching\) on page 378](#)
- [client on page 379](#)
- [control-plane \(Fixed Wireless Access\) on page 381](#)
- [data-plane \(Fixed Wireless Access\) on page 382](#)
- [delimiter \(Access Profile\) on page 383](#)
- [destination \(L2TP\) on page 384](#)
- [destination-equal-load-balancing \(L2TP LAC\) on page 385](#)
- [destruct-timeout \(L2TP\) on page 386](#)
- [device-count \(Pseudowire Subscriber Interfaces\) on page 387](#)
- [dhcp-local-server on page 388](#)
- [dhcp-relay on page 398](#)
- [dhcpcv6 \(DHCP Local Server\) on page 411](#)
- [dhcpcv6 \(DHCP Relay Agent\) on page 417](#)
- [dial-options on page 423](#)
- [dial-options \(Dynamic Profiles\) on page 424](#)
- [disable-calling-number-avp \(L2TP LAC\) on page 425](#)
- [disable-failover-protocol \(L2TP\) on page 426](#)
- [drain on page 427](#)
- [dual-stack-group \(DHCP Local Server\) on page 428](#)
- [dual-stack-group \(DHCP Relay Agent\) on page 430](#)
- [duplicate-clients \(DHCPv6 Local Server and Relay Agent\) on page 432](#)
- [duplicate-clients-in-subnet \(DHCP Local Server and DHCP Relay Agent\) on page 434](#)
- [dynamic-profile \(L2TP\) on page 435](#)
- [dynamic-profile \(PPP\) on page 436](#)
- [dynamic-profiles on page 437](#)
- [enable-ipv6-services-for-lac \(L2TP\) on page 446](#)
- [enable-snmp-tunnel-statistics \(L2TP\) on page 447](#)
- [encapsulation \(Logical Interface\) on page 448](#)
- [enforce-strict-scale-limit-license \(Subscriber Management\) on page 452](#)
- [equals \(Dynamic Profile\) on page 452](#)
- [failover-resync on page 453](#)
- [failover-within-preference \(L2TP LAC\) on page 454](#)
- [fixed-wireless-access on page 455](#)



- [flexible-vlan-tagging](#) on page 457
- [forward-snooped-clients \(DHCP Local Server\)](#) on page 458
- [forward-snooped-clients \(DHCP Relay Agent\)](#) on page 459
- [fpc \(MX Series 5G Universal Routing Platforms\)](#) on page 460
- [gateway-name \(LNS Local Gateway\)](#) on page 461
- [gateway-name \(Tunnel Profile Remote Gateway\)](#) on page 462
- [gateway-name \(Tunnel Profile Source Gateway\)](#) on page 462
- [gres-route-flush-delay \(Subscriber Management\)](#) on page 463
- [group \(DHCP Local Server\)](#) on page 464
- [group \(DHCP Relay Agent\)](#) on page 468
- [group-profile \(Group Profile\)](#) on page 473
- [hierarchical-scheduler \(Subscriber Interfaces on MX Series Routers\)](#) on page 475
- [hello-interval \(L2TP\)](#) on page 476
- [identification \(Tunnel Profile\)](#) on page 477
- [idle-timeout \(Access\)](#) on page 478
- [idle-timeout \(L2TP\)](#) on page 479
- [ignore-magic-number-mismatch \(Access Group Profile\)](#) on page 480
- [ignore-magic-number-mismatch \(Dynamic Profiles\)](#) on page 482
- [initiate-ncp \(Dynamic and Static PPP\)](#) on page 484
- [inline-services \(PIC level\)](#) on page 485
- [input-hierarchical-policer](#) on page 486
- [interface \(Dynamic Routing Instances\)](#) on page 486
- [interface \(L2TP Service Interfaces\)](#) on page 487
- [interface-id](#) on page 488
- [interfaces \(Static and Dynamic Subscribers\)](#) on page 489
- [ip-reassembly](#) on page 494
- [ip-reassembly \(L2TP\)](#) on page 495
- [ip-reassembly-rules \(Service Set\)](#) on page 496
- [ipcp-suggest-dns-option](#) on page 497
- [keepalive](#) on page 498
- [keepalives](#) on page 499
- [keepalives \(Dynamic Profiles\)](#) on page 501
- [l2tp](#) on page 502
- [l2tp \(Profile\)](#) on page 505
- [l2tp-access-profile](#) on page 509
- [l2tp-maximum-session \(Service Interfaces\)](#) on page 510
- [layer2-liveness-detection \(Receive\)](#) on page 511

- [lcp-renegotiation](#) on page 512
- [local-authentication \(Dynamic PPP Options\)](#) on page 513
- [local-gateway \(L2TP LNS\)](#) on page 514
- [lockout-timeout \(L2TP Destination Lockout\)](#) on page 515
- [logical-system \(Tunnel Profile\)](#) on page 516
- [mac](#) on page 517
- [mac-address \(Dynamic Access-Internal Routes\)](#) on page 518
- [match-direction \(IP Reassembly Rule\)](#) on page 519
- [maximum-sessions \(L2TP\)](#) on page 520
- [maximum-sessions-per-tunnel](#) on page 521
- [max-sessions \(Tunnel Profile\)](#) on page 522
- [medium \(Tunnel Profile\)](#) on page 522
- [metric \(Dynamic Access-Internal Routes\)](#) on page 523
- [minimum-retransmission-timeout \(L2TP Tunnel\)](#) on page 524
- [mtu](#) on page 525
- [name \(L2TP Destination\)](#) on page 529
- [name \(L2TP Tunnel Destination\)](#) on page 530
- [nas-port-method \(L2TP LAC\)](#) on page 531
- [nas-port-method \(Tunnel Profile\)](#) on page 532
- [next-hop \(Dynamic Access Routes\)](#) on page 533
- [next-hop-service](#) on page 534
- [no-allow-snooped-clients](#) on page 535
- [no-gratuitous-arp-request](#) on page 536
- [no-snoop \(DHCP Local Server and Relay Agent\)](#) on page 537
- [on-demand-ip-address](#) on page 538
- [options \(Access Profile\)](#) on page 539
- [override \(RADIUS Options\)](#) on page 548
- [overrides \(DHCP Relay Agent\)](#) on page 550
- [overrides \(Enhanced Subscriber Management\)](#) on page 552
- [pap](#) on page 554
- [pap \(Dynamic PPP\)](#) on page 555
- [pap \(L2TP\)](#) on page 555
- [parse-direction \(Access Profile\)](#) on page 556
- [pic \(M Series and T Series Routers\)](#) on page 557
- [pool \(L2TP Service Interfaces\)](#) on page 558
- [pp0 \(Dynamic PPPoE\)](#) on page 559
- [ppp \(Group Profile\)](#) on page 561

- [ppp-options](#) on page 564
- [ppp-options \(Dynamic PPP\)](#) on page 566
- [ppp-options \(L2TP\)](#) on page 568
- [preference \(Subscriber Management\)](#) on page 569
- [preference \(Tunnel Profile\)](#) on page 570
- [primary-interface \(Aggregated Inline Services\)](#) on page 571
- [profile \(Access\)](#) on page 572
- [proxy-mode](#) on page 578
- [ps0 \(Pseudowire Subscriber Interfaces\)](#) on page 579
- [pseudowire-service \(Pseudowire Subscriber Interfaces\)](#) on page 580
- [qualified-next-hop \(Dynamic Access-Internal Routes\)](#) on page 581
- [radius \(Access Profile\)](#) on page 582
- [reject-unauthorized-ipv6cp](#) on page 585
- [relay-option-82](#) on page 586
- [remote-gateway \(Tunnel Profile\)](#) on page 587
- [report-ingress-shaping-rate \(Dynamic CoS Interfaces\)](#) on page 588
- [request services l2tp destination unlock](#)
- [retransmission-count-established \(L2TP\)](#) on page 590
- [retransmission-count-not-established \(L2TP\)](#) on page 591
- [route \(Access\)](#) on page 592
- [route \(Access Internal\)](#) on page 593
- [route-suppression \(DHCP Local Server and Relay Agent\)](#) on page 594
- [routing-instance \(Tunnel Profile\)](#) on page 595
- [routing-instance \(L2TP Destination\)](#) on page 595
- [routing-instance \(L2TP Tunnel Destination\)](#) on page 596
- [routing-instances \(Dynamic Profiles\)](#) on page 597
- [routing-options \(Dynamic Profiles\)](#) on page 599
- [rule \(IP Reassembly\)](#) on page 601
- [rx-connect-speed-when-equal \(L2TP LAC\)](#) on page 602
- [rx-window-size \(L2TP\)](#) on page 603
- [secondary-interface \(Aggregated Inline Services\)](#) on page 604
- [secret \(Tunnel Profile\)](#) on page 605
- [service-device-pool \(L2TP\)](#) on page 605
- [service-device-pools \(L2TP Service Interfaces\)](#) on page 606
- [service-interface \(L2TP Processing\)](#) on page 607
- [service-profile \(L2TP\)](#) on page 608
- [service-rate-limiter \(Access\)](#) on page 610


- [session-options](#) on page 612
- [sessions-limit-group \(L2TP\)](#) on page 615
- [soft-gre](#) on page 616
- [source-gateway \(Tunnel Profile\)](#) on page 617
- [stacked-vlan-tagging](#) on page 618
- [statistics \(Access Profile\)](#) on page 619
- [strip-user-name \(Access Profile\)](#) on page 620
- [subscriber-context \(AAA Options\)](#) on page 621
- [subscriber-management \(Subscriber Management\)](#) on page 622
- [tag \(Access\)](#) on page 624
- [tag2 \(Dynamic Access Routes\)](#) on page 625
- [tos-reflect \(L2TP\)](#) on page 626
- [trace \(DHCP Relay Agent\)](#) on page 627
- [traceoptions \(Fixed Wireless Access\)](#) on page 628
- [traceoptions \(Protocols PPP Service\)](#) on page 630
- [traceoptions \(Services L2TP\)](#) on page 634
- [traceoptions \(Subscriber Management\)](#) on page 638
- [tunnel \(L2TP\)](#) on page 640
- [tunnel \(Tunnel Profile\)](#) on page 641
- [tunnel-group](#) on page 642
- [tunnel-profile \(L2TP Tunnel Switching\)](#) on page 643
- [tunnel-profile \(Tunnel Profile\)](#) on page 644
- [tunnel-switch-profile \(L2TP Tunnel Switching, Application\)](#) on page 645
- [tunnel-switch-profile \(L2TP Tunnel Switching, Definition\)](#) on page 646
- [tx-address-change \(L2TP LAC\)](#) on page 647
- [tx-connect-speed-method \(L2TP LAC\)](#) on page 648
- [type \(Tunnel Profile\)](#) on page 651
- [unit \(Dynamic PPPoE\)](#) on page 652
- [unit \(Dynamic Profiles Standard Interface\)](#) on page 654
- [untagged](#) on page 657
- [username-include \(Local Authentication\)](#) on page 658
- [weighted-load-balancing \(L2TP LAC\)](#) on page 659
- [vlan-id \(Dynamic Profiles\)](#) on page 660
- [vlan-tagging](#) on page 661
- [vlan-tagging \(Dynamic\)](#) on page 663
- [vlan-tags](#) on page 664

## aaa-access-profile (L2TP LNS)

Syntax	<code>aaa-access-profile <i>profile-name</i>;</code>
Hierarchy Level	<code>[edit services l2tp <i>tunnel-group name</i>],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> l2tp]</code>
Release Information	Statement introduced in Junos OS Release 11.4. Support at the <code>[edit access profile <i>profile-name</i> client <i>client-name</i> l2tp]</code> hierarchy level introduced in Junos OS Release 12.1.
Description	Specify a AAA access profile that overrides the AAA access profile configured for the routing instance with the <b>access-profile</b> statement. You can configure a profile to specify the RADIUS server settings for a tunnel group or for a LAC client, or both. The AAA access profile configured for the client takes precedence over the AAA access profile configured for the tunnel group, which takes precedence over the access profile configured for the routing instance.
Options	<b><i>profile-name</i></b> —Name of the local access profile for the tunnel group or client.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> <li>• <a href="#">Configuring an L2TP Access Profile on the LNS on page 220</a></li> </ul>

## aaa-context (AAA Options)


---

Syntax	<code>aaa-context <i>aaa-context-name</i>;</code>
Hierarchy Level	[edit access <a href="#">aaa-options</a> <i>aaa-options-name</i> ]
Release Information	Statement introduced in Junos OS Release 16.2.
Description	Specify the logical-system:routing-instance (LS:RI) that the subscriber session uses for AAA (RADIUS) interactions like authenticating and accounting. For example, this may correspond to the LS:RI for a retail ISP that provides services to the subscriber.
<div> <b>NOTE:</b> Only the default (master) logical system is supported.</div>	
Options	<b><i>aaa-context-name</i></b> —Name of the logical-system:routing-instance.
Required Privilege Level	access—To view this statement in the configuration. access-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Understanding Session Options for Subscriber Access</a></li><li>• <a href="#">Configuring Username Modification for Subscriber Sessions</a></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li></ul>

## aaa-options (Access Profile)

<b>Syntax</b>	<pre>aaa-options <i>aaa-options-name</i> {   <i>aaa-context</i> <i>aaa-context-name</i>;   <i>access-profile</i> <i>profile-name</i>;   <i>subscriber-context</i> <i>subscriber-context-name</i> }</pre>
<b>Hierarchy Level</b>	[edit access]
<b>Release Information</b>	Statement introduced in Junos OS Release 16.2.
<b>Description</b>	Define a set of AAA options for authorizing and configuring a subscriber or set of subscribers with a subscriber access profile.
<b>Options</b>	<p><b><i>aaa-options-name</i></b>—Name of the set of options.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>access—To view this statement in the configuration.</p> <p>access-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Understanding Session Options for Subscriber Access</i></li> <li>• <i>Configuring Username Modification for Subscriber Sessions</i></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## aaa-options (PPP Profile)

Syntax	<code>aaa-options <i>aaa-options-name</i>;</code>
Hierarchy Level	<code>[edit access group-profile <i>profile-name</i> ppp <a href="#">ppp-options</a>],</code> <code>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit "\$junos-interface-unit" <a href="#">ppp-options</a>]</code>
Release Information	Statement introduced in Junos OS Release 16.2.
Description	<p>Specify a set of AAA options that is used for authentication of PPP subscribers. The set of options is defined globally with the <a href="#">aaa-options <i>aaa-options-name</i></a> statement at the <code>[edit access]</code> hierarchy level.</p> <p>You can specify the option set in a dynamic PPP profile or in a group profile.</p> <ul style="list-style-type: none"> <li>In a dynamic PPP profile—In this case, usernames are examined and modified for dynamic PPP subscribers logging in by means of the subscriber and AAA contexts that are specified in the AAA options set. The option set must include the <a href="#">access-profile <i>profile-name</i></a> statement to specify the name of a subscriber access profile.</li> <li>In a group profile—In this case, usernames are examined and modified for tunneled PPP subscribers on the LNS logging in by means of the subscriber and AAA contexts that are specified in the AAA options set.</li> </ul>
	<p> <b>NOTE:</b> When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the subscriber only when the dynamic profile does not include any PPP option available in the group profile.</p> <p>This meant that <code>aaa-options</code> configured in a group profile is not applied when the dynamic profile includes any PPP-option, even when the dynamic profile does not include <code>aaa-options</code>.</p>
Options	<code><i>aaa-options-name</i></code> —Name of the set of options.
Required Privilege Level	<code>access</code> —To view this statement in the configuration. <code>access-control</code> —To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li><i>Understanding Session Options for Subscriber Access</i></li> <li><i>Configuring Username Modification for Subscriber Sessions</i></li> </ul>



- [Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218](#)
- [Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216](#)

## access (Dynamic Access Routes)

**Syntax**

```
access {
  route prefix {
    next-hop next-hop;
    metric route-cost;
    preference route-distance;
    tag route-tag;
    tag2 route-tag2;
  }
}
```

**Hierarchy Level**

```
[edit dynamic-profiles profile-name routing-instances $junos-routing-instance
  routing-options],
[edit dynamic-profiles profile-name routing-instances $junos-routing-instance routing-options
  rib routing-table-name],
[edit dynamic-profiles profile-name routing-options]
```

**Release Information**

Statement introduced in Junos OS Release 9.5.  
 Support at the [edit dynamic-profiles *profile-name* routing-instances \$junos-routing-instance routing-options] and [edit dynamic-profiles *profile-name* routing-instances \$junos-routing-instance routing-options rib *routing-table-name*] hierarchy levels introduced in Junos OS Release 10.1.

**Description**

Dynamically configure access routes in a dynamic client profile.



**NOTE:** Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support. We recommend that you do not use access-internal routes. If you configure the access-internal statement in the dynamic profile, it is ignored. The subscriber's address is stored in the session database entry before the dynamic profile installs the framed route, enabling the next-hop address to be resolved when it is not explicitly specified in the Framed-Route RADIUS attribute [22] or Framed-IPv6-Route attribute [99].

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level**

routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

### Release History Table

Release	Description
15.1	Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support.

- Related Documentation**
- [Configuring Dynamic Access Routes for Subscriber Management on page 53](#)

## access-internal (Dynamic Access-Internal Routes)

**Syntax**

```
access-internal {
  route subscriber-ip-address {
    qualified-next-hop underlying-interface {
      mac-address address;
    }
  }
}
```

**Hierarchy Level**

```
[edit dynamic-profiles profile-name routing-instances $junos-routing-instance
 routing-options],
[edit dynamic-profiles profile-name routing-instances $junos-routing-instance routing-options
 rib routing-table-name],
[edit dynamic-profiles routing-options]
```

**Release Information** Statement introduced in Junos OS Release 9.5.  
Support at the `[edit dynamic-profiles profile-name routing-instances $junos-routing-instance routing-options]` and `[edit dynamic-profiles profile-name routing-instances $junos-routing-instance routing-options rib routing-table-name]` hierarchy levels introduced in Junos OS Release 10.1.

**Description** (Releases earlier than Junos OS Release 15.1) Dynamically configure access-internal routes in a dynamic client profile. Access-internal routes are optional, but are used instead of access routes if the next-hop address is not specified in the Framed-Route Attribute [22] for IPv4 or the Framed-IPv6-Route attribute [99] for IPv6.



**NOTE:** Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support. We recommend that you do not use access-internal routes. If you configure the access-internal statement in the dynamic profile, it is ignored. The subscriber's address is stored in the session database entry before the dynamic profile installs the framed route, enabling the next-hop address to be resolved when it is not explicitly specified in the Framed-Route RADIUS attribute (22) or Framed-IPv6-Route attribute [99].

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level**

routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

### Release History Table

Release	Description
15.1	Starting in Junos OS Release 15.1, we recommend that you use only access routes for framed route support.

- Related Documentation**
- [Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers on page 55](#)

## access-line (Access-Line Rate Adjustment)

```

Syntax  access-line {
        adsl-overhead-bytes bytes;
        adsl-total-adjust percentage;
        adsl2-overhead-bytes bytes;
        adsl2-total-adjust percentage;
        adsl2-plus-overhead-bytes bytes;
        adsl2-plus-total-adjust percentage;
        gfast-bonded-overhead-adjust percentage
        gfast-bonded-overhead-bytes bytes
        gfast-bonded-total-adjust percentage
        gfast-overhead-adjust percentage
        gfast-overhead-bytes bytes
        gfast-total-adjust percentage
        hierarchical-access-network-detection;
        other-overhead-adjust percentage;
        other-overhead-bytes bytes;
        other-total-adjust percentage;
        sdsl-bonded-overhead-bytes bytes
        sdsl-bonded-overhead-adjust percentage
        sdsl-bonded-total-adjust percentage
        sdsl-overhead-adjust percentage;
        sdsl-overhead-bytes bytes;
        sdsl-total-adjust percentage;
        vdsl-overhead-adjust percentage;
        vdsl-overhead-bytes bytes;
        vdsl-total-adjust percentage;
        vdsl2-annex-q-bonded-overhead-adjust percentage
        vdsl2-annex-q-bonded-overhead-bytes bytes
        vdsl2-annex-q-bonded-total-adjust percentage
        vdsl2-annex-q-overhead-adjust percentage
        vdsl2-annex-q-overhead-bytes bytes
        vdsl2-annex-q-total-adjust percentage
        vdsl2-bonded-overhead-adjust percentage
        vdsl2-bonded-overhead-bytes bytes
        vdsl2-bonded-total-adjust percentage
        vdsl2-overhead-adjust percentage;
        vdsl2-overhead-bytes bytes;
        vdsl2-total-adjust percentage;
    }

```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced in Junos OS Release 17.4R1.  
hierarchical-access-network-detection option added in Junos OS 18.4R1.

**Description** Configure values to adjust data rates by a percentage of the actual data rate, or adjust encapsulation overhead by adding to or subtracting from the total cell or frame bytes a specified number of bytes. Depending on the value, it may be reported to AAA, CoS, or both.

The actual (unadjusted) downstream and upstream data rates, DSL line type, and encapsulation mode are received from the access node by the ANCP agent in ANCP port messages, or by the PPPoE daemon from the PPPoE intermediate agent (PPPoE-IA) on PADI or PADO messages. The ANCP agent or PPPoE daemon subsequently adjusts rates and bytes based on the configuration.

Adjustments are applied to all subscribers using access lines of the specific DSL line type. Adjusted and unadjusted downstream and upstream rates are always reported to AAA in response to an AAA request. Adjusted and unadjusted downstream rates and overhead byte adjustments are reported to CoS, but only when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level. Overhead byte adjustments are not reported to AAA.

For bonded total adjust values, AAA reports the values to the RADIUS server in the Access-Request and Accounting-Request messages through Juniper VSAs 141 or 142 and to L2TP in the ICCN and CSUN messages as AVPs 24 and 38.

**Options**    **adsl-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream cell overhead for all subscribers on an ADSL access line to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **adsl-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**adsl-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on an ADSL access line. The adjusted rate is reported only to AAA.



**NOTE:** This option replaces the **qos-adjust-adsl** statement at the **[edit protocols ancp]** hierarchy level.

**Range:** 0 through 100 percent

**Default:** 100 percent

**adsl2-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream cell overhead for all subscribers on an ADSL2 access line to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **adsl2-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**adsl2-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on an ADSL2 access line. The adjusted rate is reported only to AAA.



**NOTE:** This option replaces the **qos-adjust-adsl2** statement at the **[edit protocols ancp]** hierarchy level.

**Range:** 0 through 100 percent



**Default:** 100 percent

**adsl2-plus-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream cell overhead for all subscribers on an ADSL2+ access line to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **adsl2-plus-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**adsl2-plus-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on an ADSL2+ access line. The adjusted rate is reported only to AAA.



**NOTE:** This option replaces the **qos-adjust-adsl2-plus** statement at the **[edit protocols ancp]** hierarchy level.

**Range:** 0 through 100 percent

**Default:** 100 percent

**gfast-bonded-overhead-adjust *percentage***—Adjustment factor in percent that is applied to the downstream and upstream bonded data overhead rates for all subscribers on a high speed bonded DSL line connected to a PON tree infrastructure.

**Range:** 80 through 100 percent

**Default:** 100 percent

**gfast-bonded-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream cell bonded overhead for all subscribers on a high speed bonded DSL line connected to a PON tree infrastructure. Specify G.fast bonded value in bytes.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**gfast-bonded-total-adjust *percentage***—Adjustment factor in percent that is globally applied to the downstream and upstream bonded data rates for all subscribers on a high speed bonded DSL line connected to a PON tree infrastructure.

**Range:** 0 through 100 percent

**Default:** 100 percent

**gfast-overhead-adjust *percentage***—Adjustment factor in percent that is applied to the downstream and upstream data overhead rates for all subscribers on a high speed bonded DSL line connected to a PON tree infrastructure.

**Range:** 80 through 100 percent

**Default:** 100 percent

**gfast-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream cell overhead for all subscribers on a high speed bonded DSL line connected to a PON tree infrastructure.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**gfast-total-adjust *percentage***—Adjustment factor in percent that is globally applied to the downstream and upstream data rates for all subscribers on a high speed bonded DSL line connected to a PON tree infrastructure.

**Range:** 0 through 100 percent

**Default:** 100 percent

**hierarchical-access-network-detection**—Enable parsing of ANCP subscriber access loop attributes (TLVs) for backhaul line identifiers, to recognize when the access node references a logical interface set rather than an individual subscriber. If the Access-Aggregation-Circuit-ID-ASCII attribute (TLV 0x0003) string begins with a # sign, then the remainder of the string represents a logical intermediate node (DPU-C or PON tree) in the access network to which the subscriber is attached. The string is used as the name of a CoS Level 2 interface set that groups subscribers.



**NOTE:** The Access-Loop-Remote-ID (TLV (0x0002) is similarly parsed for the # character, but the resulting string is not used in the current release.

---

These TLVs can be parsed in ANCP messages or PPPoE IA tags in PADR messages.

**Default:** Disabled, in case some users include an initial # character for some other purpose.

**other-overhead-adjust *percentage***—Adjust the actual downstream rate for an access line of DSL type OTHER by multiplying the rate by the specified percentage. The adjusted rate is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.

The router reports some access technology types—such as Gigabit passive optical network (GPON) lines—as DSL type OTHER.



**NOTE:** This option replaces the **other-overhead-adjust** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** 80 through 100 percent

**Default:** 100 percent

**other-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on an access line of DSL type OTHER to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.

The router reports some access technology types—such as Gigabit passive optical network (GPON) lines—as DSL type OTHER.



**NOTE:** This option replaces the **other-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**other-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on an access line of DSL type OTHER. The adjusted rate is reported only to AAA.

The router reports some access technology types—such as Gigabit passive optical network (GPON) lines—as DSL type OTHER.



**NOTE:** This option replaces the **qos-adjust-other** statement at the **[edit protocols ancp]** hierarchy level.

**Range:** 0 through 100 percent

**Default:** 100 percent

**sdsl-bonded-overhead-adjust *percentage***—Adjust the actual downstream rate for an SDSL bonded access line by multiplying the rate by the specified percentage.

**Range:** 80 through 100 percent

**Default:** 100 percent

**sdsl-bonded-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on an SDSL bonded access line to account for the traffic encapsulation overhead.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**sdsl-bonded-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on an SDSL bonded access line. This value is reported to AAA.

**Range:** 0 through 100 percent

**Default:** 100 percent

**sdsl-overhead-adjust *percentage***—Adjust the actual downstream rate for an SDSL access line by multiplying the rate by the specified percentage. The adjusted rate is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **sdsl-overhead-adjust** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

---

**Range:** 80 through 100 percent

**Default:** 100 percent

**sdsl-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on an SDSL access line to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **sdsl-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

---

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**sdsl-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on an SDSL access line. The adjusted rate is reported only to AAA.



**NOTE:** This option replaces the **qos-adjust-sdsl** statement at the **[edit protocols ancp]** hierarchy level.

**Range:** 0 through 100 percent

**Default:** 100 percent

**vdsl-overhead-adjust *percentage***—Adjust the actual downstream rate for a VDSL access line by multiplying the rate by the specified percentage. The adjusted rate is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **vdsl-overhead-adjust** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** 80 through 100 percent

**Default:** 100 percent

**vdsl-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on a VDSL access line to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **vdsl-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**vdsl-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on a VDSL access line. The adjusted rate is reported only to AAA.



**NOTE:** This option replaces the **qos-adjust-vdsl** statement at the [edit protocols anc] hierarchy level.

**Range:** 0 through 100 percent

**Default:** 100 percent

**vdsl2-annex-q-bonded-overhead-adjust *percentage***—Adjust the actual downstream rate for a VDSL2 annex q bonded access line by multiplying the rate by the specified percentage. The adjusted rate is reported to AAA.

**Range:** 80 through 100 percent

**Default:** 100 percent

**vdsl2-annex-q-bonded-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on a VDSL2 annex q bonded access line to account for the traffic encapsulation overhead.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**vdsl2-annex-q-bonded-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on a VDSL2 annex q bonded access line. The adjusted rate is reported to AAA.

**Range:** 0 through 100 percent

**Default:** 100 percent

**vdsl2-annex-q-overhead-adjust *percentage***—Adjust the actual downstream rate for a VDSL2 annex q access line by multiplying the rate by the specified percentage. The adjusted rate is reported to AAA.

**Range:** 80 through 100 percent

**Default:** 100 percent

**vdsl2-annex-q-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on a VDSL2 annex q access line to account for the traffic encapsulation overhead.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**vdsl2-annex-q-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on a VDSL2 annex q access line. The adjusted rate is reported to AAA.

**vdsl2-bonded-overhead-adjust *percentage***—Adjust the actual downstream rate for a VDSL2 bonded access line by multiplying the rate by the specified percentage. The adjusted rate is reported to AAA.

**Range:** 80 through 100 percent

**Default:** 100 percent

**vdsl2-bonded-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on a VDSL2 bonded access line to account for the traffic encapsulation overhead.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**vdsl2-bonded-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on a VDSL2 bonded access line. The adjusted rate is reported to AAA.

**Range:** 0 through 100 percent

**Default:** 100 percent

**vdsl2-overhead-adjust *percentage***—Adjust the actual downstream rate for a VDSL2 access line by multiplying the rate by the specified percentage. The adjusted rate is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.



**NOTE:** This option replaces the **vdsl2-overhead-adjust** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** 80 through 100 percent

**Default:** 100 percent

**vdsl2-overhead-bytes *bytes***—Number of bytes added to or subtracted from the actual downstream frame overhead for all subscribers on a VDSL2 access line to account for the traffic encapsulation overhead. The adjusted value is reported to CoS when you include the **qos-adjust** statement at the **[edit protocols ancp]** hierarchy level.

Number of bytes added to or subtracted from the actual downstream frame overhead.



**NOTE:** This option replaces the **vdsl2-bytes** statement at the **[edit protocols ancp qos-adjust]** hierarchy level.

**Range:** -100 through 100 bytes

**Default:** 0 bytes

**vdsl2-total-adjust *percentage***—Adjustment factor applied globally to the downstream and upstream data rates for all subscribers on a VDSL2 access line. The adjusted rate is reported only to AAA.



**NOTE:** This option replaces the **qos-adjust-*vdsl2*** statement at the **[edit protocols *ancp*]** hierarchy level.

---

**Range:** 0 through 100 percent

**Default:** 100 percent

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring the ANCP Agent to Report Traffic Rates to CoS</i></li><li>• <i>Traffic Rate Reporting and Adjustment by the ANCP Agent</i></li><li>• <i>Setting a Global Adjustment Factor per DSL Subscriber Line for ANCP Agent-Reported Traffic Rates</i></li><li>• <i>Configuring the ANCP Agent</i></li></ul>
------------------------------	---



## access-line-information (L2TP)

<b>Syntax</b>	<code>access-line-information &lt;connection-speed-update&gt;;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp],</code> <code>[edit services l2tp destination ip-address]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 14.1. Support at the <code>[edit services l2tp]</code> hierarchy level introduced in Junos OS Release 14.2. Support for the LNS introduced in Junos OS Release 17.4R1 on MX Series routers.
<b>Description</b>	<p>Configure a LAC to forward subscriber line identification and other DSL attributes in ICRQ messages to the LNS by means of L2TP AVPs for all tunnels to all LNSs or for only tunnels with the specified endpoint for a particular LNS. Optionally, configure the LAC to send initial line rates in ICCN messages and subsequent rate updates in CSUN messages.</p> <p>Configure an LNS to process such line information for all tunnels from all LACs or for only tunnels with the specified endpoint for a particular LAC. Optionally, configure the LNS to process rate updates received in CSUN messages from the LAC.</p> <p>Including this statement at the <code>[edit services l2tp destination ip-address]</code> hierarchy level is useful when you know that some endpoints in the network do not support this feature or have an incorrect implementation. Configuring at this level enables you to restrict the transmission or processing of this information to only LACs and LNSs, respectively, that you know support the feature.</p> <p>This statement has no effect on existing subscribers; it applies only to new subscribers.</p>
<b>Options</b>	<p><b>connection-speed-update</b>—(Optional) On the LAC, include the Connect Speed Update Enable AVP (98) in ICCN messages from the LAC to alert the LNS that the LAC might send CSUN messages that report speed changes originating with the ANCP agent.</p> <p>On the LNS, enable processing of CSUN updates. If this option is not configured on the LNS, CSUN updates cannot be processed even when the Connect Speed Update Enable AVP (98) is received from the LAC. In that case, only rates received in AVP 24 (Tx speed) and AVP 38 (Rx speed) in ICCN messages can be applied.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Reporting and Processing of Subscriber Access Line Information on page 201</a></li> </ul>

## access-profile (AAA Options)

---

Syntax	<code>access-profile <i>profile-name</i>;</code>
Hierarchy Level	[edit access <a href="#">aaa-options</a> <i>aaa-options-name</i> ]
Release Information	Statement introduced in Junos OS Release 16.2.
Description	Specify the name of the access profile that includes the username stripping configuration.
Options	<b><i>profile-name</i></b> —Name of the subscriber access profile that includes a subscriber username stripping configuration.
Required Privilege Level	access—To view this statement in the configuration. access-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <i>Understanding Session Options for Subscriber Access</i></li><li>• <i>Configuring Subscriber Session Timeout Options</i></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li></ul>

## address (L2TP Destination)

**Syntax**

```
address ip-address {
  access-line-information <connection-speed-update>;
  drain;
  routing-instance routing-instance-name {
    drain;
  }
}
```

**Hierarchy Level** [edit services l2tp [destination](#)]

**Release Information** Statement introduced in Junos OS Release 13.2.

**Description** Specify the IP address and other attributes for the L2TP destination.

**Options** *ip-address*—IP address of the destination; corresponds to the IP address that is used by LACs to identify the LNS.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring L2TP Drain on page 146](#)

## address (L2TP Tunnel Destination)

---

**Syntax**

```
address ip-address; {  
    drain;  
    routing-instance routing-instance-name {  
        drain;  
    }  
}
```

**Hierarchy Level** [edit services l2tp tunnel *name* ]

**Release Information** Statement introduced in Junos OS Release 13.2.

**Description** Specify the IP address for the L2TP tunnel destination when the **name** statement at the [edit services l2tp tunnel] hierarchy level specifies only the name of the tunnel rather than both the name and the destination address. Do not include the **address** statement when the **name** statement provides both the tunnel name and the destination address.

**Options** *ip-address*—IP address of the tunnel destination.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring L2TP Drain on page 146](#)

## address (LNS Local Gateway)

<b>Syntax</b>	<code>address <i>address</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp tunnel-group <i>name</i> <a href="#">local-gateway</a>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the local (LNS) IP address for L2TP tunnel.
<b>Options</b>	<b><i>address</i></b> —Local IP address; corresponds to the IP address that is used by LACs to identify the LNS. When the LAC is an MX Series router, this address matches the remote gateway address configured in the LAC tunnel profile.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring the Local Gateway Address and PIC.</i></li> <li>• <i>Configuring L2TP Tunnel Groups</i></li> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> </ul>

## address (Tunnel Profile Remote Gateway)

---

Syntax	<code>address <i>server-ip-address</i>;</code>
Hierarchy Level	<code>[edit access tunnel-profile <i>profile-name</i> tunnel <i>tunnel-id</i> <b>remote-gateway</b>]</code>
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify the IP address of the remote gateway device at the L2TP tunnel endpoint, the LNS.
Options	<b><i>server-ip-address</i></b> —IP address of the remote gateway device. <b>Default:</b> 0.0.0.0.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## address (Tunnel Profile Source Gateway)

---

Syntax	<code>address <i>client-ip-address</i>;</code>
Hierarchy Level	<code>[edit access tunnel-profile <i>profile-name</i> tunnel <i>tunnel-id</i> <b>source-gateway</b>]</code>
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify the IP address of the source gateway device at the local L2TP tunnel endpoint, the LAC. This value overrides the default address for the logical system or routing instance.
Options	<b><i>client-ip-address</i></b> —IP address of the source gateway device. <b>Default:</b> 0.0.0.0.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

---

## address-change-immediate-update

---

<b>Syntax</b>	address-change-immediate-update;
<b>Hierarchy Level</b>	[edit access profile <i>profile-name</i> accounting]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	<p>Configure the router to send an Interim-Accounting message to the RADIUS server immediately after on-demand IPv4 allocation and de-allocation.</p> <p>Changes to this setting take effect for new subscriber logins. Existing subscribers are not impacted by this change except when the AAA daemon restarts.</p>
<b>Default</b>	This functionality is disabled by default.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Enabling Immediate Interim Accounting Messages for On-Demand IPv4 Address Changes</i></li><li>• <i>Conserving IPv4 Addresses for Dual-Stack PPP Subscribers Using On-Demand IPv4 Address Allocation</i></li></ul>

## aggregated-inline-services-options (Aggregated Inline Services)

**Syntax**

```
aggregated-inline-services-options {
  primary-interface interface-name;
  secondary-interface interface-name;
}
```

**Hierarchy Level** [edit interfaces asix]

**Release Information** Statement introduced in Junos OS Release 16.2.

**Description** Configure the members of an aggregated inline service interface bundle to provide 1:1 stateful LNS redundancy for an LNS sessions in a tunnel group.



**BEST PRACTICE:** Follow these guidelines:

- You must configure unit 0 family inet for each bundle; otherwise, the session fails to come up.
- The primary (active) and secondary (backup) interfaces must be on different MPCs. If you configure both interfaces on the same MPC, the subsequent configuration commit fails.
- The bandwidth configured at the [edit chassis fpc slot pic number inline-services bandwidth] hierarchy level must be the same for both member links.
- An si interface configured as a member of an aggregated inline service bundle cannot be configured as a member of another bundle group.
- An si interface configured as a member of an aggregated inline service bundle cannot also be used for any function that is not related to aggregated services; for example, it cannot be used for inline IP reassembly.
- When you configure an si interface as a member of an aggregated inline services bundle, you can no longer configure that si interface independently. You can configure only the parent bundle; the bundle's configuration is applied immediately to all member interfaces.


The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.



- Related Documentation**
- [Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces on page 229](#)
  - [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)

## allow-snooped-clients

<b>Syntax</b>	<code>allow-snooped-clients;</code>
<b>Hierarchy Level</b>	<p>[edit forwarding-options dhcp-relay <b>dhcpv6</b> group <i>group-name</i> interface <i>interface-name</i> <b>overrides</b>],</p> <p>[edit forwarding-options dhcp-relay <b>dhcpv6</b> group <i>group-name</i> <b>overrides</b>],</p> <p>[edit forwarding-options dhcp-relay <b>dhcpv6 overrides</b>],</p> <p>[edit forwarding-options dhcp-relay group <i>group-name</i> interface <i>interface-name</i> <b>overrides</b>],</p> <p>[edit forwarding-options dhcp-relay group <i>group-name</i> <b>overrides</b>],</p> <p>[edit forwarding-options dhcp-relay <b>overrides</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> forwarding-options <b>dhcp-relay</b> ...],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> forwarding-options <b>dhcp-relay</b> ...],</p> <p>[edit routing-instances <i>routing-instance-name</i> forwarding-options <b>dhcp-relay</b> ...]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.2.</p> <p>Support at the [edit ... <b>dhcpv6</b>] hierarchy levels introduced in Junos OS Release 12.1.</p>
<b>Description</b>	<p>Explicitly enable DHCP snooping support on the DHCP relay agent.</p> <p>Use the statement at the [edit ... <b>dhcpv6</b>] hierarchy levels to explicitly enable snooping support on the router for DHCPv6 relay agent.</p>
<b>Default</b>	DHCP snooping is disabled by default.
	<p> <b>NOTE:</b> On EX4300 and EX9200 switches, the <code>allow-snooped-clients</code> statement is enabled by default at the [edit forwarding-options dhcp-relay overrides] hierarchy level.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Extended DHCP Relay Agent Overview</i></li> <li>• <i>Overriding the Default DHCP Relay Configuration Settings</i></li> <li>• <i>DHCP Snooping Support</i></li> <li>• <i>Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent</i></li> </ul>

## always-write-option-82

<b>Syntax</b>	<code>always-write-option-82;</code>
<b>Hierarchy Level</b>	<p>[edit forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group <i>group-name</i> interface <i>interface-name</i> <a href="#">overrides</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>
<b>Description</b>	<p>Override the DHCP relay agent information option (option 82) in DHCP packets destined for a DHCP server. The use of this option causes the DHCP relay agent to perform one of the following actions, depending on how it is configured:</p> <ul style="list-style-type: none"> <li>• If the DHCP relay agent is configured to add option 82 information to DHCP packets, it clears the existing option 82 values from the DHCP packets and inserts the new values before forwarding the packets to the DHCP server.</li> <li>• If the DHCP relay agent is not configured to add option 82 information to DHCP packets, it clears the existing option 82 values from the packets, but does not add any new values before forwarding the packets to the DHCP server.</li> </ul>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Using DHCP Relay Agent Option 82 Information</i></li> <li>• <i>Extended DHCP Relay Agent Overview</i></li> </ul>

## anchor-point (Pseudowire Subscriber Interfaces)

<b>Syntax</b>	<code>anchor-point <i>lt-device</i>;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces ps0]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	<p>Specify the anchor-point, a logical tunnel (lt) interface that identifies the logical tunnel interface that terminates the MPLS pseudowire tunnel at the access node. The other end of the tunnel terminates on the pseudowire subscriber logical interface, which is configured on an MX Series router or PTX Series router that hosts subscriber management and enables you to perform subscriber management services at the interface.</p> <p>The pseudowire is a virtual device that is stacked above the logical tunnel anchor point on the physical interface (the IFD), and supports a circuit-oriented Layer 2 protocol (either Layer 2 VPN or Layer 2 circuit). The Layer 2 protocol provides the transport and service logical interfaces, and supports the protocol family (IPv4, IPv6, or PPPoE).</p>



**NOTE:** You cannot dynamically change an anchor point that has active pseudowire devices stacked above it. If you need to change such an anchor point, you must perform the following steps:

1. Deactivate the stacked pseudowires and commit. This may require bringing down any subscribers using the pseudowires.

```
[edit interfaces]
user@host# deactivate psnumber
user@host# commit
```

2. Change the anchor on the deactivated pseudowire and commit.

```
[edit interfaces]
user@host# set psnumber anchor-point lt-new-lt-interface-number
user@host# commit
```

3. Reactivate the stacked pseudowires and commit.

```
[edit interfaces]
user@host# activate psnumber
user@host# commit
```



**NOTE:** You cannot disable the underlying logical tunnel (lt) interface or redundant logical tunnel (rlt) interface when a pseudowire is anchored on that interface. If you want to disable the underlying interface, you must first deactivate the pseudowire.

1. Deactivate the stacked pseudowires and commit. This may require bringing down any subscribers using the pseudowires.

```
[edit interfaces]
user@host# deactivate psnumber
user@host# commit
```

2. Disable the underlying interface and commit.

```
[edit interfaces]
user@host# set interfaces underlying-interface-name disable
user@host# commit
```

---

**Options**    *lt-device*—An lt device in the format *lt-fpc/pic/port*

**Required Privilege**    interface—To view this statement in the configuration.  
**Level**    interface-control—To add this statement to the configuration.

- Related Documentation**
- [Pseudowire Subscriber Logical Interfaces Overview on page 274](#)
  - [Configuring a Pseudowire Subscriber Logical Interface on page 281](#)
  - [Configuring a Pseudowire Subscriber Logical Interface Device on page 284](#)
  - [Anchor Redundancy Pseudowire Subscriber Logical Interfaces Overview on page 277](#)

## apn (Fixed Wireless Access)

**Syntax**

```

apn name {
  aaa-profile aaa-profile-name;
  apn-data-type type;
  authentication {
    password password;
    username-include {
      delimiter delimiter;
      domain-name domain-name;
      imsi;
      mei;
      msisdn;
      user-prefix user-prefix;
    }
  }
  description description;
  dynamic-profile dynamic-profile;
  ipv4-address-pool pool-name ;
  routing-instance routing-instance-name;
}

```

**Hierarchy Level** [edit services [fixed-wireless-access](#)]

**Release Information** Statement introduced in Junos OS Release 19.2R1.

**Description** Define the access point name (APN) for the user equipment. The APN identifies the PDN that the subscriber wants to access. It corresponds to the connection and service parameters that the subscriber's UE can use to connect to the service provider's gateway to the Internet or other PDN.

**Options** **aaa-profile *aaa-profile-name***—(Optional) Specify the name of an authentication or accounting profile used with the APN. You configure the profile at the **[edit access profile]** hierarchy level.

**apn-data-type *type***—(Optional) Specify the type of data being sent for the APN. Only the **ipv4** type is supported.

**description *description***—(Optional) Text description of the APN that you can use to provide more information about the APN than what the name alone can convey.

**dynamic-profile *profile-name***—Associate a dynamic profile with the APN.

**ipv4-address-pool *pool-name*** —(Optional) Local address pool from which an IPv4 address can be associated with the APN, such as the S11 and S1-U interface addresses. Only IPv4 addresses are supported.

***name***—Name of the APN. The name string can contain up to 100 letters, numbers, decimals, and dashes.

**routing-instance** *routing-instance-name*—(Optional) Name of a routing instance that APN is active.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation** • [How to Configure Fixed Wireless Access on page 319](#)

## assignment-id-format (L2TP LAC)

**Syntax** assignment-id-format (assignment-id | client-server-id);

**Hierarchy Level** [edit services l2tp [tunnel](#)]

**Release Information** Statement introduced in Junos OS Release 11.4.

**Description** Set the format for the name used for a tunnel, the tunnel assignment ID.



**NOTE:** Before you downgrade to a Junos OS Release that does not support this statement, unconfigure the statement by issuing `no services l2tp tunnel assignment-id-format`.

**Default** assignment-Id

**Options** **assignment-Id**—The tunnel name corresponds to RADIUS attribute Tunnel-Assignment-Id [82].

**client-server-id**—The tunnel name is a combination of RADIUS attributes Tunnel-Client-Auth-Id [90], Tunnel-Server-Auth-Id [91], and Tunnel-Assignment-Id [82].

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation** • [Setting the Format for the Tunnel Name on page 176](#)

## authentication (Fixed Wireless Access)

**Syntax**

```
authentication {
  password password;
  username-include {
    delimiter character;
    domain-name domain-name;
    imsi;
    mei;
    msisdn;
    user-prefix user-prefix;
  }
}
```

**Hierarchy Level** [edit services fixed-wireless-access [apn](#)]

**Release Information** Statement introduced in Junos OS Release 19.2R1.

**Description** Specify parameters that the SAEGW passes to the external AAA server. When the server authenticates the fixed wireless access subscriber, it can connect through the gateway to the Internet. Authentication by a RADIUS server is typical for corporate end users that connect to a corporate network. Some networks might not use this authentication because the HSS has already authenticated the UE and determined subscriber access. Other networks might not use this because they use Diameter for online charging.

**Options** **password** *password-string*—Password for subscriber authentication.

**username-include**—(Optional) Specify one or more of the following parameters to be included in the username created for a subscriber:

**Values:**

- **delimiter** *character*—Character that separates components that make up the concatenated username. The default value is a period (.).
- **domain-name** *name*—Domain name that ends the username created for the subscribers. The string can include the following characters: a through z, A through Z, 0 through 9, "-", or ".".
- **imsi**—International Mobile Subscriber Identity number that identifies a 3GPP subscriber. The IMSI consists of a mobile country code, a mobile network code, and a mobile station identification number.
- **mei**—Mobile Equipment Identity number that uniquely identifies the subscriber device.
- **msisdn**—Mobile Subscriber International Subscriber Directory Number (telephone number) that is assigned to the mobile subscriber.
- **user-prefix** *user-prefix*—Prefix that you design that is prepended to the username.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [How to Configure Fixed Wireless Access on page 319](#)

---

## authentication (Static and Dynamic PPP)

---

**Syntax** authentication [ *authentication-protocols* ];

**Hierarchy Level** [edit dynamic-profiles *profile-name* interfaces pp0 unit "\$junos-interface-unit" **ppp-options**],  
[edit interfaces pp0 unit *unit-number* **ppp-options**]

**Release Information** Statement introduced in Junos OS Release 12.2.

**Description** Specify the order in which the router tries to negotiate PPP authentication protocols when verifying that a PPP client can access the network. By default, the router tries to negotiate Challenge Handshake Authentication Protocol (CHAP) authentication first, and then tries Password Authentication Protocol (PAP) authentication if the attempt to negotiate CHAP authentication is unsuccessful.

You can specify one or both authentication protocols. If you specify both CHAP and PAP in either order, you must enclose the set of protocol names within square brackets ([ ]).

**Options** *authentication-protocols*—One or both of the following PPP authentication protocols:

- **chap**—Challenge Handshake Authentication Protocol
- **pap**—Password Authentication Protocol

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**


- [Controlling the Negotiation Order of PPP Authentication Protocols on page 111](#)



## avp (L2TP Tunnel Switching)

<b>Syntax</b>	<pre>avp {   bearer-type;   calling-number;   cisco-nas-port-info; }</pre>
<b>Hierarchy Level</b>	[edit access <a href="#">tunnel-switch-profile</a> <i>profile-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	<p>Specify the action taken on L2TP AVPs that are negotiated when the first session is created; these AVPs are contained in the L2TP packets that are switched by the tunnel switch profile.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Tunnel Switching on page 141</a></li></ul>

## bandwidth (Inline Services)

Syntax	<code>bandwidth <i>bandwidth-value</i>;</code>
Hierarchy Level	<code>[edit chassis <i>fpc slot-number</i> pic <i>number</i> inline-services]</code>
Release Information	<p>Statement introduced in Junos OS Release 11.4.</p> <p><b>20g</b>, <b>30g</b>, and <b>40g</b> options added in Junos OS Release 14.1R3.</p> <p><b>100g</b> option added in Junos OS Release 18.2R1 on MX Series Routers with MPC7E, MPC8E, and MPC9E line cards.</p> <p><b>50g</b>, <b>60g</b>, <b>70g</b>, <b>80g</b>, <b>90g</b>, <b>200g</b>, <b>300g</b> and <b>400g</b> options added in Junos OS Release 18.3R1.</p>
Description	<p>Configure the amount of bandwidth in gigabits per second reserved on each Packet Forwarding Engine for tunnel traffic using inline services. Configuring the bandwidth creates a virtual tunnel interface that is represented as <i>si-<b>&lt;fpc/pic/port&gt;</b></i>.</p> <p>Starting in Junos OS Release 16.2, you are not longer required to explicitly specify a bandwidth for L2TP LNS tunnel traffic using inline services. When you do not specify a bandwidth, the maximum bandwidth supported on the PIC is automatically available for the inline services; inline services can use up to this maximum value. In earlier releases, you must specify a bandwidth when you enable inline services with the <b>inline-services</b> statement.</p>
Options	<p><b><i>bandwidth-value</i></b>—Amount of bandwidth in Gbps to reserve for tunnel traffic using inline services. You can configure bandwidth values can be as follows:</p> <ul style="list-style-type: none"> <li>• <b>1g</b></li> <li>• <b>10g</b> through <b>100g</b> in 10 Gbps increments: <b>10g</b>, <b>20g</b>, <b>30g</b>, <b>40g</b>, <b>50g</b>, <b>60g</b>, <b>70g</b>, <b>80g</b>, <b>90g</b>, <b>100g</b></li> <li>• <b>100g</b> through <b>400g</b> in 100 Gbps increments: <b>100g</b>, <b>200g</b>, <b>300g</b>, <b>400g</b></li> </ul>
	<p> <b>NOTE:</b> Values of 100 Gbps and up are available only on MPC7E, MPC8E, and MPC9E line cards.</p>
	<p><b>Default:</b> Maximum bandwidth supported on the PIC.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Enabling Inline Service Interfaces on page 225</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## bandwidth (Tunnel Services)

Syntax	<code>bandwidth <i>bandwidth-value</i>;</code>
Hierarchy Level	<code>[edit chassis fpc <i>slot-number</i> pic <i>number</i> tunnel-services]</code>
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 12.3X54 for ACX Series routers.
Description	(ACX Series, MX Series 5G Universal Routing Platforms and T4000 Core Routers only) Configure the amount of bandwidth in gigabits per second reserved on each Packet Forwarding Engine for tunnel traffic using tunnel services. Configuring the bandwidth creates a virtual tunnel interface that is represented as <code>lt-&lt;fpc/pic/port&gt;</code> .
Options	<p><i>bandwidth-value</i>—Amount of bandwidth in Gbps to reserve for tunnel traffic using tunnel services:</p> <ul style="list-style-type: none"> <li>On ACX Series routers, the bandwidth values can be <b>1g</b> or <b>10g</b>.</li> <li>On MX Series routers, the bandwidth values can be as follows: <ul style="list-style-type: none"> <li><b>1g</b></li> <li><b>10g</b> through <b>100g</b> in 10 Gbps increments: <b>10g, 20g, 30g, 40g, 50g, 60g, 70g, 80g, 90g, 100g</b></li> <li><b>100g</b> through <b>400g</b> in 100 Gbps increments: <b>100g, 200g, 300g, 400g</b></li> </ul> </li> <li>On T4000 routers, the bandwidth values can be <b>10g</b> through <b>100g</b> in 10 Gbps increments: <b>10g, 20g, 30g, 40g, 50g, 60g, 70g, 80g, 90g, 100g</b>.</li> </ul>



**NOTE:** The bandwidth that you specify determines the port number of the tunnel interfaces that are created. When you specify a bandwidth of **1g**, the port number is always 10. When you specify any other bandwidth, the port number is always 0.



**NOTE:** If you specify a bandwidth that is not compatible with the type of DPCs or MPCs and their respective Packet Forwarding Engine, tunnel services are not activated. For example, you cannot specify 1 gigabit per second bandwidth for a Packet Forwarding Engine on a 10-Gigabit Ethernet 4-port DPC or 16x10GE 3D MPC.

When the tunnel bandwidth is unspecified in the Routing Engine CLI, the maximum tunnel bandwidth for MPC3E is 60G.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Configuring Tunnel Interfaces on a Gigabit Ethernet 40-Port DPC*
- *Tunnel Interface Configuration on MX Series Routers Overview*
- *Configuring Tunnel Interfaces on T4000 Routers*
- *Example: Configuring Tunnel Interfaces on a 10-Gigabit Ethernet 4-Port DPC*
- *Example: Configuring Tunnel Interfaces on the MPC3E*
- *tunnel-services (Chassis)*

---

## bearer-type (L2TP Tunnel Switching)

---

**Syntax** `bearer-type action;`

**Hierarchy Level** [edit access tunnel-switch-profile *profile-name* **avp**]

**Release Information** Statement introduced in Junos OS Release 13.2.

**Description** Specify the action taken on the Bearer Type AVP (18) in the L2TP packets during tunnel switching if the AVP is negotiated when the first session is created.

**Options** *action*—One of the following actions:

- **drop**—Drop the AVP.
- **regenerate**—Regenerate the AVP based on the local policy at the LTS and send it in the switched packet. The local policy may or may not use the value for the AVP received during negotiation for the first session.
- **relay**—Forward the AVP transparently as is and send it in the switched packet.

**Default:** relay

**Required Privilege** admin—To view this statement in the configuration.  
**Level** admin-control—To add this statement to the configuration.


**Related Documentation**

- [Configuring L2TP Tunnel Switching on page 141](#)


## calling-number (L2TP Tunnel Switching)

Syntax	calling-number <i>action</i> ;
Hierarchy Level	[edit access tunnel-switch-profile <i>profile-name</i> <i>avp</i> ]
Release Information	Statement introduced in Junos OS Release 13.2.
Description	Specify the action taken on the Calling Number AVP (22) in the L2TP packets during tunnel switching if the AVP is negotiated when the first session is created.
Options	<p><b>action</b>—One of the following actions:</p> <ul style="list-style-type: none"><li>• <b>drop</b>—Drop the AVP.</li><li>• <b>regenerate</b>—Regenerate the AVP based on the local policy at the LTS and send it in the switched packet. The local policy may or may not use the value for the AVP received during negotiation for the first session.</li><li>• <b>relay</b>—Forward the AVP transparently as is and send it in the switched packet.</li></ul> <p><b>Default:</b> relay</p>
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Tunnel Switching on page 141</a></li></ul>

## challenge-length (Static and Dynamic PPP)

Syntax	challenge-length minimum <i>minimum-length</i> maximum <i>maximum-length</i> ;
Hierarchy Level	<p>[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" unit "\$junos-interface-unit" ppp-options <a href="#">chap</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit "\$junos-interface-unit" ppp-options <a href="#">chap</a>],</p> <p>[edit interfaces pp0 unit <i>unit-number</i> ppp-options <a href="#">chap</a>]</p>
Release Information	Statement introduced in Junos OS Release 12.2.
Description	Modify the length of the Challenge Handshake Authentication Protocol (CHAP) challenge by specifying the minimum and maximum allowable length, in bytes.
<div>  <p><b>BEST PRACTICE:</b> We recommend that you configure both the minimum length and the maximum length of the CHAP challenge to at least 16 bytes.</p> </div>	
Options	<p><b><i>minimum-length</i></b>—Minimum length, in bytes, of the CHAP challenge.</p> <p><b>Range:</b> 8 through 63</p> <p><b>Default:</b> 16</p> <p><b><i>maximum-length</i></b>—Maximum length, in bytes, of the CHAP challenge. The <i>maximum-length</i> must be equal to or greater than the <i>minimum-length</i>.</p> <p><b>Range:</b> 8 through 63</p> <p><b>Default:</b> 32</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Modifying the CHAP Challenge Length on page 105</a></li> </ul>

## chap

<b>Syntax</b>	<pre> chap {   access-profile <i>name</i>;   challenge-length minimum <i>minimum-length</i> maximum <i>maximum-length</i>;   default-chap-secret <i>name</i>;   local-name <i>name</i>;   passive; } </pre>
<b>Hierarchy Level</b>	<p>[edit interfaces <i>interface-name</i> <a href="#">ppp-options</a>],</p> <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">ppp-options</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">ppp-options</a>]</p>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	<p>Allow each side of a link to challenge its peer, using a “secret” known only to the authenticator and that peer. The secret is not sent over the link.</p> <p>By default, PPP CHAP is disabled. If CHAP is not explicitly enabled, the interface makes no CHAP challenges and denies all incoming CHAP challenges.</p> <p>For ATM2 IQ interfaces only, you can configure CHAP on the logical interface unit if the logical interface is configured with one of the following PPP over ATM encapsulation types:</p> <ul style="list-style-type: none"> <li>• <b>atm-ppp-llc</b>—PPP over AAL5 LLC encapsulation.</li> <li>• <b>atm-ppp-vc-mux</b>—PPP over AAL5 multiplex encapsulation.</li> </ul> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;"> <p> <b>BEST PRACTICE:</b> On inline service (si) interfaces for L2TP, only the <code>chap</code> statement itself is typically used for subscriber management. We recommend that you leave the subordinate statements at their default values.</p> </div> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the PPP Challenge Handshake Authentication Protocol</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## chap (Dynamic PPP)

---

Syntax	<pre>chap {   challenge-length minimum <i>minimum-length</i> maximum <i>maximum-length</i>;   local-name <i>name</i>; }</pre>
Hierarchy Level	[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" unit "\$junos-interface-unit" <a href="#">ppp-options</a> ] [edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit "\$junos-interface-unit" <a href="#">ppp-options</a> ],
Release Information	Statement introduced in Junos OS Release 9.5. Support at the [edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" unit "\$junos-interface-unit" <a href="#">ppp-options</a> ] hierarchy level introduced in Junos OS Release 12.2.
Description	<p>Specify CHAP authentication in a PPP dynamic profile.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Dynamic Profiles Overview</a></li><li>• <a href="#">Configuring Dynamic Authentication for PPP Subscribers on page 103</a></li><li>• <a href="#">Attaching Dynamic Profiles to Static PPP Subscriber Interfaces on page 99</a></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li></ul>



## chap (L2TP)

<b>Syntax</b>	chap;
<b>Hierarchy Level</b>	[edit access group-profile <i>profile-name</i> ppp <a href="#">ppp-options</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	(MX Series routers only) Specify CHAP authentication for PPP subscribers in an L2TP LNS user group profile.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li><li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li></ul>

## cisco-nas-port-info (L2TP Tunnel Switching)

---

Syntax	<code>cisco-nas-port-info <i>action</i>;</code>
Hierarchy Level	<code>[edit access tunnel-switch-profile <i>profile-name</i> <i>avp</i>]</code>
Release Information	Statement introduced in Junos OS Release 13.2.
Description	<p>Define a tunnel profile for subscriber access.</p> <p>Specify the action taken on the Cisco NAS Port Info AVP (100) in the L2TP packets during tunnel switching if the AVP is negotiated when the first session is created.</p>
Options	<p><b>action</b>—One of the following actions:</p> <ul style="list-style-type: none"><li>• <b>drop</b>—Drop the AVP.</li><li>• <b>regenerate</b>—Regenerate the AVP based on the local policy at the LTS and send it in the switched packet. The local policy may or may not use the value for the AVP received during negotiation for the first session.</li><li>• <b>relay</b>—Forward the AVP transparently as is and send it in the switched packet.</li></ul> <p><b>Default:</b> relay</p>
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Tunnel Switching on page 141</a></li></ul>

## client

**Syntax**

```

client client-name {
  chap-secret chap-secret;
  group-profile profile-name;
  ike {
    allowed-proxy-pair {
      remote remote-proxy-address local local-proxy-address;
    }
    pre-shared-key (ascii-text character-string | hexadecimal hexadecimal-digits);
    ike-policy policy-name;
    interface-id string-value;
  }
  l2tp {
    aaa-access-profile profile-name;
    interface-id interface-id;
    lcp-renegotiation;
    local-chap;
    maximum-sessions number;
    maximum-sessions-per-tunnel number;
    multilink {
      drop-timeout milliseconds;
      fragment-threshold bytes;
    }
    override-result-code session-out-of-resource;
    ppp-authentication (chap | pap);
    ppp-profile profile-name;
    sessions-limit-group;
    service-profile profile-name(parameter)&profile-name;
    shared-secret shared-secret;
  }
  pap-password pap-password;
  ppp {
    cell-overhead;
    encapsulation-overhead bytes;
    framed-ip-address ip-address;
    framed-pool framed-pool;
    idle-timeout seconds;
    interface-id interface-id;
    keepalive seconds;
    primary-dns primary-dns;
    primary-wins primary-wins;
    secondary-dns secondary-dns;
    secondary-wins secondary-wins;
  }
  user-group-profile profile-name;
}

```

**Hierarchy Level** [edit access [profile](#) *profile-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Configure the peer identity.



**NOTE:** Subordinate statement support depends on the platform. See individual statement topics for more detailed support information.

**Options** **client-name**—A peer identity. For L2TP clients, you can use a special name to configure a default client. This client enables the LNS to accept any LAC to establish the session. On M Series routers, use \* for the default client configuration. On MX Series routers, use **default**.

**chap-secret**—(M Series, MX Series, SRX Series, T Series only) For interfaces with PPP encapsulation on which the PPP Challenge Handshake Authentication Protocol (CHAP) is configured, configure the shared secret (the CHAP secret key associated with a peer), as defined in RFC 1994. This statement is not supported for L2TP LNS on MX Series routers.

**Values:**

- **chap-secret**—The secret key associated with a peer.

**group-profile**—Associate a group profile with a client. This statement is not supported for L2TP LNS on MX Series routers.

**Values:**

- **profile-name**—Name assigned to the group profile.

**pap-password**—(M Series, MX Series, T Series only) Configure the Password Authentication Protocol (PAP) password. This statement is not supported for L2TP LNS on MX Series routers.

**Values:**

- **password**—PAP password.

**user-group-profile**—Apply a configured PPP group profile to PPP users. If **user-group-profile** is modified or deleted, the existing LNS subscribers, which were using this Layer 2 Tunneling Protocol client configuration, go down.

**Values:**

- **profile-name**—Name of a PPP group profile configured at the **[edit access group-profile profile-name]** hierarchy level.

The remaining statements are explained separately. Search for a statement in CLI Explorer or click a linked statement in the Syntax section for details.

**Required Privilege Level** **admin**—To view this statement in the configuration.  
**admin-control**—To add this statement to the configuration.

- Related Documentation**
- *Configuring the CHAP Secret for an L2TP Profile*
  - *Configuring PPP CHAP Authentication*
  - *Referencing the Group Profile from the L2TP Profile*
  - *Configuring the L2TP Client*
  - *Configuring Access Profiles for L2TP or PPP Parameters*
  - *Configuring the PAP Password for an L2TP Profile*
  - *Applying a Configured PPP Group Profile to a Tunnel*
  - [Configuring an L2TP Access Profile on the LNS on page 220](#)

## control-plane (Fixed Wireless Access)

<b>Syntax</b>	<pre>control-plane <i>name</i> {   s11 {     v4-address <i>ip-address</i>;   } }</pre>
<b>Hierarchy Level</b>	[edit services <a href="#">fixed-wireless-access</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 19.2R1.
<b>Description</b>	<p>Configure the control plane by specifying the IP address on the router for the S11 interface. The control plane is another term for the mobility management entity (MME) in the provider network. The MME authenticates the user equipment (UE) with the HSS and sends control messages to the SAEGW on the BNG to manage subscriber communications. The S11 interface is a reference point in the network between the MME and the SAEGW.</p>
<b>Options</b>	<p><b><i>name</i></b>—Name of the MME.</p> <p><b><i>v4-address ip-address</i></b>—Specify the IPv4 address for the S11 on the BNG.</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">How to Configure Fixed Wireless Access on page 319</a></li> </ul>

## data-plane (Fixed Wireless Access)

---

<b>Syntax</b>	<pre>data-plane <i>name</i> {   s1-u {     v4-address <i>ip-address</i>;   } }</pre>
<b>Hierarchy Level</b>	[edit services <a href="#">fixed-wireless-access</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 19.2R1.
<b>Description</b>	Configure the data plane by specifying the IP address on the router for the S1-U interface. The data plane is another term for the eNodeB in the provider network. The eNodeB interacts with the MME and is also the intermediary for subscriber data traffic between the UE and the SAEGW on the BNG. The S1-U interface is a reference point in the network between the eNodeB and the SAEGW.
<b>Options</b>	<p><b><i>name</i></b>—Name of the eNodeB.</p> <p><b><i>v4-address ip-address</i></b>—Specify the IPv4 address for the S1-U interface on the BNG.</p>
<b>Required Privilege Level</b>	<p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">How to Configure Fixed Wireless Access on page 319</a></li></ul>

## delimiter (Access Profile)

<b>Syntax</b>	<code>delimiter <i>delimiter</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access profile <i>profile-name</i> session-options <a href="#">strip-user-name</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 16.2.
<b>Description</b>	Specify up to eight characters that the router uses to determine which part of the subscriber login string to discard—leaving the remainder for use as a modified username—when subscriber username stripping is configured in a subscriber access profile. The characters to the right of the delimiter are discarded along with the delimiter. Use the <a href="#">parse-direction</a> statement when more than one delimiter appears in a username to determine the characters that are stripped by identifying the desired delimiter. A given subscriber login string can result in multiple different modified usernames depending on the number and placement of delimiters and the direction of stripping.
<b>Default</b>	None. You must always configure a delimiter.
<b>Options</b>	<b><i>delimiter</i></b> —Character that specifies the boundary between the part of the original username that is kept and the part that is discarded.
<b>Required Privilege Level</b>	access—To view this statement in the configuration. access-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Understanding Session Options for Subscriber Access</i></li> <li>• <i>Configuring Username Modification for Subscriber Sessions</i></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## destination (L2TP)

**Syntax**

```
destination {
  address ip-address {
    access-line-information <connection-speed-update>;
    drain;
    routing-instance routing-instance-name {
      drain;
    }
  }
  lockout-timeout seconds;
  name destination-name {
    drain;
  }
}
```

**Hierarchy Level** [edit services [l2tp](#)]

**Release Information** Statement introduced in Junos OS Release 13.2.

**Description** Configure attributes for all L2TP destinations or a specified L2TP destination.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring the L2TP Destination Lockout Timeout on page 145](#)
- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
- [Configuring the Reporting and Processing of Subscriber Access Line Information on page 201](#)




## destination-equal-load-balancing (L2TP LAC)

<b>Syntax</b>	destination-equal-load-balancing;
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 15.1.
<b>Description</b>	<p>Enable the LAC to balance the L2TP session load equally across multiple LNSs by selecting tunnels according to how many sessions currently exist for the destination and tunnel.</p> <p>Disabled by default. By default, tunnel selection within a preference level is strictly random. The <a href="#">weighted-load-balancing</a> statement must be disabled to successfully enable this statement.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Destination-Equal Load Balancing for LAC Tunnel Sessions on page 181</a></li><li>• <a href="#">Configuring the L2TP LAC Tunnel Selection Parameters on page 180</a></li><li>• <a href="#">LAC Tunnel Selection Overview on page 154</a></li></ul>

## destruct-timeout (L2TP)

---

Syntax	destruct-timeout <i>seconds</i> ;
Hierarchy Level	[edit services <a href="#">l2tp</a> ]
Release Information	Statement introduced in Junos OS Release 12.1.
Description	Set how long the router attempts to maintain dynamic destinations, tunnels, and sessions after they have been destroyed.
	<div> <b>BEST PRACTICE:</b> Before you downgrade to a Junos OS Release that does not support this statement, unconfigure the statement by issuing <code>no services l2tp destruct-timeout</code>.</div>
Options	<i>seconds</i> —Length of the destruct timeout. <b>Range:</b> 10 through 3600 <b>Default:</b> 300
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Setting the L2TP Destruct Timeout on page 144</a></li><li>• <a href="#">Configuring an L2TP LAC on page 148</a></li><li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li></ul>

## device-count (Pseudowire Subscriber Interfaces)

<b>Syntax</b>	<code>device-count <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit chassis pseudowire-service]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	Configure the number of pseudowire logical devices available to the router.
<b>Options</b>	<i>number</i> —Number of devices. <b>Range:</b> 1 through 7000
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Pseudowire Subscriber Logical Interfaces Overview on page 274</a></li><li>• <a href="#">Configuring a Pseudowire Subscriber Logical Interface on page 281</a></li><li>• <a href="#">Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router on page 283</a></li></ul>

## dhcp-local-server

```
Syntax  dhcp-local-server {
        access-profile profile-name;
        allow-active-leasequery {
            idle-timeout seconds;
            peer-address address;
            timeout seconds;
        }
        allow-bulk-leasequery {
            max-connections number-of-connections;
            max-empty-replies number-of-replies;
            restricted-requestor;
            timeout seconds;
        }
        allow-leasequery {
            restricted-requestor;
        }
        authentication {
            password password-string;
            username-include {
                circuit-type;
                delimiter delimiter-character;
                domain-name domain-name-string;
                interface-description (device-interface | logical-interface);
                interface-name;
                logical-system-name;
                mac-address;
                option-60;
                option-82 <circuit-id> <remote-id>;
                routing-instance-name;
                user-prefix user-prefix-string;
                vlan-tags;
            }
        }
    }
    dhcpv6 {
        access-profile profile-name;
        allow-active-leasequery {
            idle-timeout seconds;
            peer-address address;
            timeout seconds;
        }
        allow-bulk-leasequery {
            max-connections number-of-connections;
            max-empty-replies number-of-replies;
            restricted-requestor;
            timeout seconds;
        }
        allow-leasequery {
            restricted-requestor;
        }
        authentication {
            ...
        }
    }
}
```

```

}
duplicate-clients incoming-interface;
group group-name {
  access-profile profile-name;
  authentication {
    ...
  }
}
interface interface-name {
  access-profile profile-name;
  exclude;
  overrides {
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    delay-advertise {
      based-on (option-15 | option-16 | option-18 | option-37) {
        equals {
          ascii ascii-string;
          hexadecimal hexadecimal-string;
        }
        not-equals {
          ascii ascii-string;
          hexadecimal hexadecimal-string;
        }
        starts-with {
          ascii ascii-string;
          hexadecimal hexadecimal-string;
        }
      }
    }
    delay-time seconds;
  }
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  multi-address-embedded-option-response;
  process-inform {
    pool pool-name;
  }
  protocol-attributes attribute-set-name;
  rapid-commit;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
trace;
upto upto-interface-name;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    bfd {
      version (0 | 1 | automatic);
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;

```

```

        threshold milliseconds;
    }
    detection-time {
        threshold milliseconds;
    }
    session-mode (automatic | multihop | singlehop);
    holddown-interval milliseconds;
}
layer2-liveness-detection {
    max-consecutive-retries number;
    transmit-interval interval;
}
}
}
overrides {
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    delay-advertise {
        based-on (option-15 | option-16 | option-18 | option-37) {
            equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            not-equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            starts-with {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
        }
        delay-time seconds;
    }
    delegated-pool;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    multi-address-embedded-option-response;
    process-inform {
        pool pool-name;
    }
    protocol-attributes attribute-set-name;
    rapid-commit;
}
route-suppression;
server-duid-type type;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
liveness-detection {
    failure-action (clear-binding | clear-binding-if-interface-up | log-only);
    method {
        bfd {
            version (0 | 1 | automatic);
            minimum-interval milliseconds;

```

```

        minimum-receive-interval milliseconds;
        multiplier number;
        no-adaptation;
        transmit-interval {
            minimum-interval milliseconds;
            threshold milliseconds;
        }
        detection-time {
            threshold milliseconds;
        }
        session-mode (automatic | multihop | singlehop);
        holddown-interval milliseconds;
    }
    layer2-liveness-detection {
        max-consecutive-retries number;
        transmit-interval interval;
    }
}
}
overrides {
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    delay-advertise {
        based-on (option-15 | option-16 | option-18 | option-37) {
            equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            not-equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            starts-with {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
        }
        delay-time seconds;
    }
    delegated-pool;
    dual-stack dual-stack-group-name;
    include-option-82 {
        forcerenew;
        nak;
    }
    interface-client-limit number;
    multi-address-embedded-option-response;
    process-inform {
        pool pool-name;
    }
    protocol-attributes attribute-set-name;
    rapid-commit;
}
reconfigure {
    attempts attempt-count;

```

```

clear-on-abort;
strict;
support-option-pd-exclude;
timeout timeout-value;
token token-value;
trigger {
    radius-disconnect;
}
}
reauthenticate (<lease-renewal> <remote-id-mismatch >);
requested-ip-network-match subnet-mask;
route-suppression;
server-duid-type type;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
dual-stack-group name {
    access-profile access-profile;
    authentication {
        password password-string;
        username-include {
            circuit-type;
            delimiter delimiter-character;
            domain-name domain-name-string;
            interface-description (device-interface | logical-interface);
            interface-name ;
            logical-system-name;
            mac-address;
            relay-agent-interface-id;
            relay-agent-remote-id;
            routing-instance-name;
            user-prefix user-prefix-string;
            vlan-tags;
        }
    }
    classification-key {
        circuit-id circuit-id;
        mac-address mac-address;
        remote-id remote-id;
    }
    dual-stack-interface-client-limit number;
    dynamic-profile profile-name {
        aggregate-clients (merge | replace);
        use-primary primary-profile-name;
    }
    liveness-detection {
        failure-action (clear-binding | clear-binding-if-interface-up | log-only);
        method {
            layer2-liveness-detection {
                max-consecutive-retries number;
                transmit-interval interval;
            }
        }
    }
}
on-demand-address-allocation;

```



```

protocol-master (inet | inet6);
reauthenticate (<lease-renewal> <remote-id-mismatch >);
service-profile service-profile;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
duplicate-clients-in-subnet (incoming-interface | option-82);
dynamic-profile profile-name <aggregate-clients (merge | replace) | use-primary
primary-profile-name>;
forward-snooped-clients (all-interfaces | configured-interfaces |
non-configured-interfaces);
group group-name {
authentication {
...
}
dynamic-profile profile-name <aggregate-clients (merge | replace) | use-primary
primary-profile-name>;
interface interface-name {
exclude;
overrides {
asymmetric-lease-time seconds;
client-discover-match (option60-and-option82 | incoming-interface);
delay-offer {
based-on (option-60 | option-77 | option-82) {
equals {
ascii ascii-string;
hexadecimal hexadecimal-string;
}
not-equals {
ascii ascii-string;
hexadecimal hexadecimal-string;
}
starts-with {
ascii ascii-string;
hexadecimal hexadecimal-string;
}
}
}
delay-time seconds;
}
include-option-82 {
forcerenew;
nak;
}
dual-stack dual-stack-group-name;
interface-client-limit number;
process-inform {
pool pool-name;
}
protocol-attributes attribute-set-name;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
trace;
upto upto-interface-name;
}
liveness-detection {

```

```

failure-action (clear-binding | clear-binding-if-interface-up | log-only);
method {
  bfd {
    version (0 | 1 | automatic);
    minimum-interval milliseconds;
    minimum-receive-interval milliseconds;
    multiplier number;
    no-adaptation;
    transmit-interval {
      minimum-interval milliseconds;
      threshold milliseconds;
    }
    detection-time {
      threshold milliseconds;
    }
    session-mode (automatic | multihop | singlehop);
    holddown-interval milliseconds;
  }
  layer2-liveness-detection {
    max-consecutive-retries number;
    transmit-interval interval;
  }
}
overrides {
  asymmetric-lease-time seconds;
  client-discover-match (option60-and-option82 | incoming-interface);
  delay-offer {
    based-on (option-60 | option-77 | option-82) {
      equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
      not-equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
      starts-with {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
    }
    delay-time seconds;
  }
  include-option-82 {
    forcerenew;
    nak;
  }
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  process-inform {
    pool pool-name;
  }
  protocol-attributes attribute-set-name;
}

```

```

requested-ip-network-match subnet-mask
route-suppression;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    bfd {
      version (0 | 1 | automatic);
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      detection-time {
        threshold milliseconds;
      }
      session-mode (automatic | multihop | singlehop);
      holddown-interval milliseconds;
    }
    layer2-liveness-detection {
      max-consecutive-retries number;
      transmit-interval interval;
    }
  }
}
on-demand-address-allocation;
overrides {
  asymmetric-lease-time seconds;
  client-discover-match <option60-and-option82 | incoming-interface>;
  delay-offer {
    based-on (option-60 | option-77 | option-82) {
      equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
      not-equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
      starts-with {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
    }
    delay-time seconds;
  }
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  process-inform {
    pool pool-name;
  }
}

```

```

    }
    protocol-attributes attribute-set-name;
  }
  pool-match-order {
    external-authority;
    ip-address-first;
    option-82;
  }
  protocol-master;
  reauthenticate ( <lease-renewal> <remote-id-mismatch > );
  reconfigure {
    attempts attempt-count;
    clear-on-abort;
    strict;
    timeout timeout-value;
    token token-value;
    trigger {
      radius-disconnect;
    }
  }
  requested-ip-network-match subnet-mask;
  route-suppression;
  service-profile dynamic-profile-name;
  short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* system services],  
 [edit logical-systems *logical-system-name* system services],  
 [edit routing-instances *routing-instance-name* system services],  
 [edit system services]

**Release Information** Statement introduced in Junos OS Release 9.0.  
 Statement introduced in Junos OS Release 12.1 for EX Series switches.  
 Statement introduced in Junos OS Release 13.2X51 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure Dynamic Host Configuration Protocol (DHCP) local server options on the router or switch to enable the router or switch to function as an extended DHCP local server. The DHCP local server receives DHCP request and reply packets from DHCP clients and then responds with an IP address and other optional configuration information to the client.

The extended DHCP local server is incompatible with the DHCP server on J Series routers and, therefore, is not supported on J Series routers. Also, the DHCP local server and the DHCP/BOOTP relay server, which are configured under the **[edit forwarding-options helpers]** hierarchy level, cannot both be enabled on the router or switch at the same time. The extended DHCP local server is fully compatible with the extended DHCP relay feature.

The **dhcpv6** stanza configures the router or switch to support Dynamic Host Configuration Protocol for IPv6 (DHCPv6). The DHCPv6 local server is fully compatible with the extended DHCP local server and the extended DHCP relay feature.



**NOTE:** When you configure the **dhcp-local-server** statement at the routing instance hierarchy level, you must use a routing instance type of **virtual-router**.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- *Extended DHCP Local Server Overview*
- *DHCPv6 Local Server Overview*

## dhcp-relay

```
Syntax  dhcp-relay {
        access-profile profile-name;
        active-leasequery {
            idle-timeout seconds;
            peer-address address;
            timeout seconds;
            topology-discovery;
        }
        active-server-group server-group-name;
        authentication {
            password password-string;
            username-include {
                circuit-type;
                delimiter delimiter-character;
                domain-name domain-name-string;
                interface-description (device-interface | logical-interface);
                interface-name;
                logical-system-name;
                mac-address;
                option-60;
                option-82 <circuit-id> <remote-id>;
                routing-instance-name;
                user-prefix user-prefix-string;
                vlan-tags;
            }
        }
        bulk-leasequery {
            attempts number-of-attempts;
            timeout seconds;
        }
        dhcpv6 {
            access-profile profile-name;
            active-leasequery {
                idle-timeout seconds;
                peer-address address;
                timeout seconds;
                topology-discovery;
            }
            active-server-group server-group-name;
        }
        authentication {
            password password-string;
            username-include {
                circuit-type;
                client-id;
                delimiter delimiter-character;
                domain-name domain-name-string;
                interface-description (device-interface | logical-interface);
                interface-name interface-name;
                logical-system-name;
                mac-address mac-address;
            }
        }
    }
```

```

    relay-agent-interface-id;
    relay-agent-remote-id;
    relay-agent-subscriber-id;
    routing-instance-name;
    user-prefix user-prefix-string;
    vlan-tags;
}
}
bulk-leasquery {
    attempts number-of-attempts;
    timeout seconds;
    trigger automatic;
}
duplicate-clients incoming-interface;
dynamic-profile profile-name {
    aggregate-clients (merge | replace);
    use-primary primary-profile-name;
}
forward-only {
    logical-system <current | default | logical-system-name>;
    routing-instance <current | default | routing-instance-name>;
}
forward-only-replies;
}
forward-snooped-clients (all-interfaces | configured-interfaces |
    non-configured-interfaces);
group group-name {
    access-profile profile-name;
    active-server-group server-group-name;
    authentication {
        password password-string;
        username-include {
            circuit-type;
            client-id;
            delimiter delimiter-character;
            domain-name domain-name-string;
            interface-description (device-interface | logical-interface);
            interface-name interface-name;
            logical-system-name;
            mac-address mac-address;
            relay-agent-interface-id;
            relay-agent-remote-id;
            relay-agent-subscriber-id;
            routing-instance-name;
            user-prefix user-prefix-string;
            vlan-tags;
        }
    }
}
dynamic-profile profile-name {
    aggregate-clients (merge | replace);
    use-primary primary-profile-name;
}
forward-only {
    logical-system <current | default | logical-system-name>;
    routing-instance <current | default | routing-instance-name>;
}

```

```

}
interface interface-name {
  access-profile profile-name;
  dynamic-profile profile-name {
    aggregate-clients (merge | replace);
    use-primary primary-profile-name;
  }
  exclude;
  overrides {
    allow-snooped-clients;
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-negotiation-match incoming-interface;
    delay-authentication;
    delete-binding-on-renegotiation;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    no-allow-snooped-clients;
    no-bind-on-request;
    relay-source interface-name;
    send-release-on-delete;
  }
  service-profile dynamic-profile-name;
  short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
  trace;
  upto upto-interface-name;
}
}
lease-time-validation {
  lease-time-threshold seconds;
  violation-action action;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    bfd {
      version (0 | 1 | automatic);
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      detection-time {
        threshold milliseconds;
      }
      session-mode (automatic | multihop | singlehop);
      holddown-interval milliseconds;
    }
    layer2-liveness-detection {
      max-consecutive-retries number;
      transmit-interval interval;
    }
  }
}

```



```

    }
  }
  overrides {
    allow-snooped-clients;
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-negotiation-match incoming-interface;
    delay-authentication;
    delete-binding-on-renegotiation;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    no-allow-snooped-clients;
    no-bind-on-request;
    relay-source interface-name;
    send-release-on-delete;
  }
  relay-agent-interface-id {
    include-irb-and-l2;
    keep-incoming-interface-id;
    no-vlan-interface-name;
    prefix prefix;
    use-interface-description (logical | device);
    use-option-82 <strict>;
    use-vlan-id;
  }
  relay-agent-remote-id {
    include-irb-and-l2;
    keep-incoming-interface-id;
    no-vlan-interface-name;
    prefix prefix;
    use-interface-description (logical | device);
    use-option-82 <strict>;
    use-vlan-id;
  }
  relay-option {
    option-number option-number;
    default-action {
      drop;
      forward-only;
      relay-server-group relay-server-group;
    }
    equals (ascii ascii-string | hexadecimal hexadecimal-string) {
      drop;
      forward-only;
      relay-server-group relay-server-group;
    }
    starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
      drop;
      forward-only;
      relay-server-group relay-server-group;
    }
  }
  remote-id-mismatch disconnect;
  route-suppression;
  service-profile dynamic-profile-name;

```

```

    short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
  }
  leasequery {
    attempts number-of-attempts;
    timeout seconds;
  }
  lease-time-validation {
    lease-time-threshold seconds;
    violation-action action;
  }
  liveness-detection {
    failure-action (clear-binding | clear-binding-if-interface-up | log-only);
    method {
      bfd {
        version (0 | 1 | automatic);
        minimum-interval milliseconds;
        minimum-receive-interval milliseconds;
        multiplier number;
        no-adaptation;
        transmit-interval {
          minimum-interval milliseconds;
          threshold milliseconds;
        }
        detection-time {
          threshold milliseconds;
        }
        session-mode (automatic | multihop | singlehop);
        holddown-interval milliseconds;
      }
      layer2-liveness-detection {
        max-consecutive-retries number;
        transmit-interval interval;
      }
      route-suppression;
      service-profile dynamic-profile-name;
    }
  }
  no-snoop;
  overrides {
    allow-snooped-clients;
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-negotiation-match incoming-interface;
    delay-authentication;
    delete-binding-on-renegotiation;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    no-allow-snooped-clients;
    no-bind-on-request;
    relay-source interface-name;
    send-release-on-delete;
  }
  relay-agent-interface-id {
    include-irb-and-l2;
    keep-incoming-interface-id ;
  }

```

```

no-vlan-interface-name;
prefix prefix;
use-interface-description (logical | device);
use-option-82 <strict>;
use-vlan-id;
}
relay-agent-remote-id {
include-irb-and-l2;
keep-incoming-remote-id ;
no-vlan-interface-name;
prefix prefix;
use-interface-description (logical | device);
use-option-82 <strict>;
use-vlan-id;
}
relay-option {
option-number option-number;
default-action {
drop;
forward-only;
relay-server-group relay-server-group;
}
equals (ascii ascii-string | hexadecimal hexadecimal-string) {
drop;
forward-only;
relay-server-group relay-server-group;
}
starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
drop;
forward-only;
relay-server-group relay-server-group;
}
}
}
relay-option-vendor-specific{
host-name;
location;
remote-id-mismatch disconnect;
route-suppression;
server-group {
server-group-name {
server-ip-address;
}
}
server-response-time seconds;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
dual-stack-group dual-stack-group-name {
access-profile profile-name;
authentication {
password password-string;
username-include {
circuit-type;
delimiter delimiter-character;
domain-name domain-name-string;

```

```

    interface-description (device-interface | logical-interface);
    interface-name;
    logical-system-name;
    mac-address;
    relay-agent-interface-id;
    relay-agent-remote-id;
    routing-instance-name;
    user-prefix user-prefix-string;
    vlan-tags;
  }
}
classification-key {
  circuit-id circuit-id;
  mac-address mac-address;
  remote-id remote-id;
}
dual-stack-interface-client-limit number;
dynamic-profile profile-name {
  aggregate-clients (merge | replace);
  use-primary primary-profile-name;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    layer2-liveness-detection {
      max-consecutive-retries number;
      transmit-interval interval;
    }
  }
}
}
protocol-master (inet | inet6);
relay-agent-interface-id {
  include-irb-and-l2;
  keep-incoming-interface-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82 <strict>;
  use-vlan-id;
}
relay-agent-remote-id {
  include-irb-and-l2;
  keep-incoming-remote-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82 <strict>;
  use-vlan-id;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
duplicate-clients-in-subnet (incoming-interface | option-82):
dynamic-profile profile-name {
  aggregate-clients (merge | replace);

```

```

    use-primary primary-profile-name;
  }
  forward-only {
    logical-system <current | default | logical-system-name>;
    routing-instance <current | default | routing-instance-name>;
  }
  forward-only-replies;
  forward-snooped-clients (all-interfaces | configured-interfaces |
    non-configured-interfaces);
  group group-name {
    access-profile profile-name;
    active-server-group server-group-name;
    authentication {
      password password-string;
      username-include {
        circuit-type;
        delimiter delimiter-character;
        domain-name domain-name-string;
        interface-description (device-interface | logical-interface);
        interface-name interface-name;
        logical-system-name;
        mac-address;
        option-60;
        option-82 [circuit-id] [remote-id];
        routing-instance-name;
        user-prefix user-prefix-string;
      }
      vlan-tags;
    }
  }
  dynamic-profile profile-name {
    aggregate-clients (merge | replace);
    use-primary primary-profile-name;
  }
  forward-only {
    logical-system <current | default | logical-system-name>;
    routing-instance <current | default | routing-instance-name>;
  }
  forward-only {
    logical-system <current | default | logical-system-name>;
    routing-instance <current | default | routing-instance-name>;
  }
  interface interface-name {
    access-profile profile-name;
    exclude;
    liveness-detection {
      failure-action (clear-binding | clear-binding-if-interface-up | log-only);
      method {
        bfd {
          version (0 | 1 | automatic);
          minimum-interval milliseconds;
          minimum-receive-interval milliseconds;
          multiplier number;
          no-adaptation;
          transmit-interval {
            minimum-interval milliseconds;

```

```

        threshold milliseconds;
    }
    detection-time {
        threshold milliseconds;
    }
    session-mode (automatic | multihop | singlehop);
    holddown-interval milliseconds;
}
}
}
overrides {
    allow-no-end-option;
    allow-snooped-clients;
    always-write-giaddr;
    always-write-option-82;
    asymmetric-lease-time seconds;
    client-discover-match <option60-and-option82 | incoming-interface>;
    delay-authentication;
    delete-binding-on-renegotiation;
    disable-relay;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    layer2-unicast-replies;
    no-allow-snooped-clients;
    no-bind-on-request;
    proxy-mode;
    relay-source
    replace-ip-source-with;
    send-release-on-delete;
    trust-option-82;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
trace;
upto upto-interface-name;
}
overrides {
    allow-no-end-option
    allow-snooped-clients;
    always-write-giaddr;
    always-write-option-82;
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-discover-match (option60-and-option82 | incoming-interface);
    delay-authentication;
    delete-binding-on-renegotiation;
    disable-relay;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    layer2-unicast-replies;
    no-allow-snooped-clients;
    no-bind-on-request;
    proxy-mode;
    relay-source
    replace-ip-source-with;

```

```

    send-release-on-delete;
    trust-option-82;
}
relay-option {
    option-number option-number;
    default-action {
        drop;
        forward-only;
        relay-server-group group-name;
    }
    equals (ascii ascii-string | hexadecimal hexadecimal-string) {
        drop;
        forward-only;
        relay-server-group relay-server-group;
    }
    starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
        drop;
        forward-only;
        local-server-group local-server-group;
        relay-server-group relay-server-group;
    }
}
relay-option-82 {
    circuit-id {
        prefix prefix;
        use-interface-description (logical | device);
    }
    remote-id {
        prefix prefix;
        use-interface-description (logical | device);
    }
    server-id-override
}
remote-id-mismatch disconnect;
route-suppression:
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
leasequery {
    attempts number-of-attempts;
    timeout seconds;
}
lease-time-validation {
    lease-time-threshold seconds;
    violation-action action;
}
liveness-detection {
    failure-action (clear-binding | clear-binding-if-interface-up | log-only);
    method {
        bfd {
            version (0 | 1 | automatic);
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
        }
    }
}

```

```

    transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
    }
    detection-time {
        threshold milliseconds;
    }
    session-mode (automatic | multihop | singlehop);
    holddown-interval milliseconds;
}
layer2-liveness-detection {
    max-consecutive-retries number;
    transmit-interval interval;
}
}
}
no-snoop;
overrides {
    allow-no-end-option
    allow-snooped-clients;
    always-write-giaddr;
    always-write-option-82;
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-discover-match (option60-and-option82 | incoming-interface);
    delay-authentication;
    delete-binding-on-renegotiation;
    disable-relay;
    dual-stack dual-stack-group-name;
    interface-client-limit number;
    layer2-unicast-replies;
    no-allow-snooped-clients;
    no-bind-on-request;
    proxy-mode;
    relay-source
    replace-ip-source-with;
    send-release-on-delete;
    trust-option-82;
}
relay-option {
    option-number option-number;
    default-action {
        drop;
        forward-only;
        relay-server-group group-name;
    }
}
equals (ascii ascii-string | hexadecimal hexadecimal-string) {
    drop;
    forward-only;
    relay-server-group relay-server-group;
}
starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
    drop;
    forward-only;
    local-server-group local-server-group;
}

```



```

        relay-server-group relay-server-group;
    }
}
relay-option-82 {
    circuit-id {
        prefix prefix;
        use-interface-description (logical | device);
    }
    remote-id {
        prefix prefix;
        use-interface-description (logical | device);
    }
    server-id-override
}
}
remote-id-mismatch disconnect;
route-suppression:
server-group {
    server-group-name {
        server-ip-address;
    }
}
server-response-time seconds;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit forwarding-options],  
 [edit logical-systems *logical-system-name* forwarding-options],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*  
 forwarding-options],  
 [edit routing-instances *routing-instance-name* forwarding-options]

**Release Information** Statement introduced in Junos OS Release 8.3.  
 Statement introduced in Junos OS Release 12.1 for EX Series switches.  
 Statement introduced in Junos OS Release 13.2X51 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure extended Dynamic Host Configuration Protocol (DHCP) relay and DHCPv6 relay options on the router or switch to enable the router (or switch) to function as a DHCP relay agent. A DHCP relay agent forwards DHCP request and reply packets between a DHCP client and a DHCP server.

DHCP relay supports the attachment of dynamic profiles and also interacts with the local AAA Service Framework to use back-end authentication servers, such as RADIUS, to provide subscriber authentication or client authentication. You can attach dynamic profiles and configure authentication support on a global basis or for a specific group of interfaces.

The extended DHCP and DHCPv6 relay agent options configured with the **dhcp-relay** and **dhcpv6** statements are incompatible with the DHCP/BOOTP relay agent options configured with the **bootp** statement. As a result, the extended DHCP or DHCPv6 relay agent and the DHCP/BOOTP relay agent cannot both be enabled on the router (or switch) at the same time.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Extended DHCP Relay Agent Overview*
- *DHCPv6 Relay Agent Overview*
- *DHCP Relay Proxy Overview*
- *Using External AAA Authentication Services with DHCP*

## dhcpv6 (DHCP Local Server)

```
Syntax  dhcpv6 {
    access-profile profile-name;
    allow-active-leasequery {
        idle-timeout seconds;
        peer-address address;
        timeout seconds;
    }
    allow-bulk-leasequery {
        max-connections number-of-connections;
        max-empty-replies number-of-replies;
        restricted-requestor;
        timeout seconds;
    }
    allow-leasequery {
        restricted-requestor;
    }
    authentication {
        password password-string;
        username-include {
            circuit-type;
            client-id;
            delimiter delimiter-character;
            domain-name domain-name-string;
            interface-description (device-interface | logical-interface);
            logical-system-name;
            mac-address;
            relay-agent-interface-id;
            relay-agent-remote-id;
            relay-agent-subscriber-id;
            routing-instance-name;
            user-prefix user-prefix-string;
            vlan-tags;
        }
    }
    duplicate-clients incoming-interface;
    group group-name {
        access-profile profile-name;
        authentication {
            ...
        }
        interface interface-name {
            access-profile profile-name;
            exclude;
            liveness-detection {
                failure-action (clear-binding | clear-binding-if-interface-up | log-only);
                method {
                    bfd {
                        version (0 | 1 | automatic);
                        minimum-interval milliseconds;
                        minimum-receive-interval milliseconds;
                        multiplier number;
                        no-adaptation;
                    }
                }
            }
        }
    }
}
```

```

        transmit-interval {
            minimum-interval milliseconds;
            threshold milliseconds;
        }
        detection-time {
            threshold milliseconds;
        }
        session-mode(automatic | multihop | singlehop);
        holddown-interval milliseconds;
    }
}
overrides {
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-negotiation-match incoming-interface;
    delay-advertise {
        based-on (option-15 | option-16 | option-18 | option-37) {
            equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            not-equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            starts-with {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
        }
        delay-time seconds;
    }
    delete-binding-on-renegotiation;
    interface-client-limit number;
    multi-address-embedded-option-response;
    process-inform {
        pool pool-name;
    }
    protocol-attributes attribute-set-name;
    rapid-commit;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
trace;
upto upto-interface-name;
}
liveness-detection {
    failure-action (clear-binding | clear-binding-if-interface-up | log-only);
    method {
        bfd {
            version (0 | 1 | automatic);
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
        }
    }
}

```

```

        no-adaptation;
        transmit-interval {
            minimum-interval milliseconds;
            threshold milliseconds;
        }
        detection-time {
            threshold milliseconds;
        }
        session-mode(automatic | multihop | singlehop);
        holddown-interval milliseconds;
    }
    layer2-liveness-detection {
        max-consecutive-retries number;
        transmit-interval interval;
    }
}
}
overrides {
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
    client-negotiation-match incoming-interface;
    delay-advertise {
        based-on (option-15 | option-16 | option-18 | option-37) {
            equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            not-equals {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
            starts-with {
                ascii ascii-string;
                hexadecimal hexadecimal-string;
            }
        }
        delay-time seconds;
    }
    delegated-pool;
    delete-binding-on-renegotiation;
    interface-client-limit number;
    multi-address-embedded-option-response;
    process-inform {
        pool pool-name;
    }
    protocol-attributes attribute-set-name;
    rapid-commit;
}
route-suppression;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
liveness-detection {
    failure-action (clear-binding | clear-binding-if-interface-up | log-only);
    method {

```

```

bfd {
  version (0 | 1 | automatic);
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  multiplier number;
  no-adaptation;
  transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
  }
  detection-time {
    threshold milliseconds;
  }
  session-mode (automatic | multihop | singlehop);
  holddown-interval milliseconds;
}
layer2-liveness-detection {
  max-consecutive-retries number;
  transmit-interval interval;
}
}
}
overrides {
  asymmetric-lease-time seconds;
  asymmetric-prefix-lease-time seconds;
  client-negotiation-match incoming-interface;
  delay-advertise {
    based-on (option-15 | option-16 | option-18 | option-37) {
      equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
      not-equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
      starts-with {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
      }
    }
    delay-time seconds;
  }
  delegated-pool;
  delete-binding-on-renegotiation;
  interface-client-limit number;
  multi-address-embedded-option-response;
  process-inform {
    pool pool-name;
  }
  protocol-attributes attribute-set-name;
  rapid-commit;
  reconfigure {
    attempts attempt-count;
    clear-on-abort;
  }
}

```

```

    strict;
    timeout timeout-value;
    token token-value;
    trigger {
        radius-disconnect;
    }
}
}
reauthenticate (<lease-renewal> <remote-id-mismatch >);
reconfigure {
    attempts attempt-count;
    clear-on-abort;
    strict;
    support-option-pd-exclude;
    timeout timeout-value;
    token token-value;
    trigger {
        radius-disconnect;
    }
}
requested-ip-network-match subnet-mask;
route-suppression;
server-duid-type type;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* system services [dhcp-local-server](#)],  
 [edit logical-systems *logical-system-name* system services [dhcp-local-server](#)],  
 [edit routing-instances *routing-instance-name* system services [dhcp-local-server](#)],  
 [edit system services [dhcp-local-server](#)]

**Release Information** Statement introduced in Junos OS Release 9.6.  
 Statement introduced in Junos OS Release 12.3 for EX Series switches.

**Description** Configure DHCPv6 local server options on the router or switch to enable the router or switch to function as a server for the DHCP protocol for IPv6. The DHCPv6 local server sends and receives packets using the IPv6 protocol and informs IPv6 of the routing requirements of router clients. The local server works together with the AAA service framework to control subscriber access (or DHCP client access) and accounting.

The DHCPv6 local server is fully compatible with the extended DHCP local server and DHCP relay agent.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- *DHCPv6 Local Server Overview*



## dhcpv6 (DHCP Relay Agent)

```
Syntax  dhcpv6 {
    access-profile profile-name;
    active-leasequery {
        idle-timeout seconds;
        peer-address address;
        timeout seconds;
        topology-discovery;
    }
    active-server-group server-group-name;
    authentication {
        password password-string;
        username-include {
            circuit-type;
            client-id;
            delimiter delimiter-character;
            domain-name domain-name-string;
            interface-description (device-interface | logical-interface);
            interface-name interface-name;
            logical-system-name;
            mac-address mac-address;
            relay-agent-interface-id;
            relay-agent-remote-id;
            relay-agent-subscriber-id;
            routing-instance-name;
            user-prefix user-prefix-string;
            vlan-tags;
        }
    }
    bulk-leasequery {
        attempts number-of-attempts;
        timeout seconds;
        trigger automatic;
    }
    duplicate-clients incoming-interface;
    dynamic-profile profile-name {
        aggregate-clients (merge | replace);
        use-primary primary-profile-name;
    }
    forward-only {
        logical-system <current | default | logical-system-name>;
        routing-instance <current | default | routing-instance-name>;
    }
    forward-only-replies;
    forward-snooped-clients (all-interfaces | configured-interfaces |
        non-configured-interfaces);
    group group-name {
        access-profile profile-name;
        active-server-group server-group-name;
        authentication {
```

```

password password-string;
username-include {
    circuit-type;
    client-id;
    delimiter delimiter-character;
    domain-name domain-name-string;
    interface-description (device-interface | logical-interface);
    interface-name;
    logical-system-name;
    mac-address;
    relay-agent-interface-id;
    relay-agent-remote-id;
    relay-agent-subscriber-id;
    routing-instance-name;
    user-prefix user-prefix-string;
    vlan-tags;
}
}
dynamic-profile profile-name {
    aggregate-clients (merge | replace);
    use-primary primary-profile-name;
}
forward-only {
    logical-system <current | default | logical-system-name>;
    routing-instance <current | default | routing-instance-name>;
}
interface interface-name {
    access-profile profile-name;
    dynamic-profile profile-name {
        aggregate-clients (merge | replace);
        use-primary primary-profile-name;
    }
    exclude;
    overrides {
        allow-snooped-clients;
        asymmetric-lease-time seconds;
        asymmetric-prefix-lease-time seconds;
        client-negotiation-match incoming-interface;
        delay-authentication;
        delete-binding-on-renegotiation;
        dual-stack dual-stack-group-name;
        interface-client-limit number;
        no-allow-snooped-clients;
        no-bind-on-request;
        relay-source interface-name;
        send-release-on-delete;
    }
    service-profile dynamic-profile-name;
    short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
    trace;
    upto upto-interface-name;
}
}
lease-time-validation {
    lease-time-threshold seconds;

```

```

violation-action action;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    bfd {
      version (0 | 1 | automatic);
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      detection-time {
        threshold milliseconds;
      }
      session-mode (automatic | multihop | singlehop);
      holddown-interval milliseconds;
    }
    layer2-liveness-detection {
      max-consecutive-retries number;
      transmit-interval interval;
    }
  }
}
}
overrides {
  allow-snooped-clients;
  asymmetric-lease-time seconds;
  asymmetric-prefix-lease-time seconds;
  client-negotiation-match incoming-interface;
  delay-authentication;
  delete-binding-on-renegotiation;
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  no-allow-snooped-clients;
  no-bind-on-request;
  relay-source interface-name;
  send-release-on-delete;
}
relay-agent-interface-id {
  include-irb-and-l2;
  keep-incoming-interface-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82;
}
relay-agent-remote-id {
  include-irb-and-l2;
  keep-incoming-interface-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
}

```

```

    use-option-82 <strict>;
  }
  relay-option {
    option-number option-number;
    default-action {
      drop;
      forward-only;
      relay-server-group relay-server-group;
    }
    equals (ascii ascii-string | hexadecimal hexadecimal-string) {
      drop;
      forward-only;
      relay-server-group relay-server-group;
    }
    starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
      drop;
      forward-only;
      relay-server-group relay-server-group;
    }
  }
  remote-id-mismatch disconnect;
  route-suppression;
  service-profile dynamic-profile-name;
  short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
leasequery {
  attempts number-of-attempts;
  timeout seconds;
}
lease-time-validation {
  lease-time-threshold seconds;
  violation-action action;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    bfd {
      version (0 | 1 | automatic);
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      detection-time {
        threshold milliseconds;
      }
      session-mode (automatic | multihop | singlehop);
      holdddown-interval milliseconds;
    }
  }
  layer2-liveness-detection {
    max-consecutive-retries number;
    transmit-interval interval;
  }
}

```

```

    }
    route-suppression;
    service-profile dynamic-profile-name;
  }
}
no-snoop;
overrides {
  allow-snooped-clients;
  asymmetric-lease-time seconds;
  asymmetric-prefix-lease-time seconds;
  client-negotiation-match incoming-interface;
  delay-authentication;
  delete-binding-on-renegotiation;
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  no-allow-snooped-clients;
  no-bind-on-request;
  relay-source interface-name;
  send-release-on-delete;
}
relay-agent-interface-id {
  include-irb-and-l2;
  keep-incoming-interface-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82;
}
relay-agent-remote-id {
  include-irb-and-l2;
  keep-incoming-interface-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82 <strict>;
}
relay-option {
  option-number option-number;
  default-action {
    drop;
    forward-only;
    relay-server-group relay-server-group;
  }
  equals (ascii ascii-string | hexadecimal hexadecimal-string) {
    drop;
    forward-only;
    relay-server-group relay-server-group;
  }
  starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
    drop;
    forward-only;
    relay-server-group relay-server-group;
  }
}
relay-option-vendor-specific{

```

```

    host-name;
    location;
    remote-id-mismatch disconnect;
    route-suppression;
    server-group {
        server-group-name {
            server-ip-address;
        }
    }
    server-response-time seconds;
    service-profile dynamic-profile-name;
    short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit forwarding-options [dhcp-relay](#)],  
 [edit logical-systems *logical-system-name* forwarding-options [dhcp-relay](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*  
 forwarding-options [dhcp-relay](#)],  
 [edit routing-instances *routing-instance-name* forwarding-options [dhcp-relay](#)]

**Release Information** Statement introduced in Junos OS Release 11.4.  
 Statement introduced in Junos OS Release 12.3 for EX Series switches.  
 Support for **forward-snooped-clients** introduced in Junos OS Release 15.1X53-D56 for EX Series switches and Junos OS Release 17.1R1.

**Description** Configure DHCPv6 relay options on the router or switch and enable the router or switch to function as a DHCPv6 relay agent. A DHCPv6 relay agent forwards DHCPv6 request and reply packets between a DHCPv6 client and a DHCPv6 server.

The DHCPv6 relay agent server is fully compatible with the extended DHCP local server and DHCP relay agent. However, the options configured with the **dhcpv6** statement are incompatible with the DHCP/BOOTP relay agent options configured with the **bootp** statement. As a result, the DHCPv6 relay agent and the DHCP/BOOTP relay agent cannot be enabled on the router or switch at the same time.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
 interface-control—To add this statement to the configuration.

**Related Documentation**

- [dhcp-relay on page 398](#)
- [DHCPv6 Relay Agent Overview](#)
- [Using External AAA Authentication Services with DHCP](#)

## dial-options

<b>Syntax</b>	<pre>dial-options {   ipsec-interface-id <i>name</i>;   l2tp-interface-id <i>name</i>;   (shared   dedicated); }</pre>
<b>Hierarchy Level</b>	<pre>[edit interfaces <i>sp-fpc/pic/port</i> unit <i>logical-unit-number</i>], [edit interfaces <i>si-fpc/pic/port</i> unit <i>logical-unit-number</i>], [edit logical-systems <i>logical-system-name</i> interfaces <i>sp-fpc/pic/port</i> unit <i>logical-unit-number</i>], [edit logical-systems <i>logical-system-name</i> interfaces <i>si-fpc/pic/port</i> unit <i>logical-unit-number</i>]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>The <b>[edit ...si-...]</b> hierarchy levels introduced in Junos OS Release 11.4.</p>
<b>Description</b>	Specify the options for configuring logical interfaces for group and user sessions in L2TP or IPsec dynamic endpoint tunneling.
<b>Options</b>	<p><b>dedicated</b>—(LNS on M Series routers and MX Series routers only) Specify that a logical interface can host only one session at a time.</p> <p><b>ipsec-interface-id <i>name</i></b>—(M Series routers only) Interface identifier for group of dynamic peers. This identifier must be replicated at the <b>[edit access profile <i>name</i> client * ike]</b> hierarchy level.</p> <p><b>l2tp-interface-id <i>name</i></b>—Interface identifier that must be replicated at the <b>[edit access profile <i>name</i>]</b> hierarchy level.</p> <p><b>shared</b>—(LNS on M Series routers only) Specify that a logical interface can host multiple (shared) sessions at a time.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring the Identifier for Logical Interfaces that Provide L2TP Services</i></li> <li>• <i>Configuring Dynamic Endpoints for IPsec Tunnels</i></li> <li>• <a href="#">Configuring Options for the LNS Inline Services Logical Interface on page 227</a></li> </ul>

## dial-options (Dynamic Profiles)


<b>Syntax</b>	<pre>dial-options {   ipsec-interface-id <i>name</i>;   l2tp-interface-id <i>name</i>;   (shared   dedicated); }</pre>
<b>Hierarchy Level</b>	[edit dynamic-profiles <i>profile-name</i> interfaces <i>interface-name</i> <b>unit</b> <i>logical-unit-number</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Specify the options for configuring logical interfaces in dynamic profiles for group and user sessions in L2TP or IPsec dynamic endpoint tunneling.
<b>Options</b>	<p><b>dedicated</b>—(LNS on M Series routers and MX Series routers only) Specify that a logical interface can host only one session at a time.</p> <p><b>ipsec-interface-id <i>name</i></b>—Interface identifier for group of dynamic peers. This identifier must be replicated at the [edit access profile <i>name</i> client * <i>ike</i>] hierarchy level. This option is not currently supported for dynamic profiles.</p> <p><b>l2tp-interface-id <i>name</i></b>—(MX Series routers only) L2TP interface identifier that must be replicated at the [edit access profile <i>name</i>] hierarchy level.</p> <p><b>shared</b>—(LNS on M Series routers only) Specify that a logical interface can host multiple (shared) sessions at a time</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Dynamic Profile for Dynamic LNS Sessions on page 259</a></li> </ul>



## disable-calling-number-avp (L2TP LAC)

<b>Syntax</b>	disable-calling-number-avp;
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Prevent the LAC from sending L2TP Calling Number AVP 22 in incoming-call request (ICRQ) packets to the LNS. By default, the LAC in an L2TP network generates this AVP from the Calling-Station-Id and sends it to the LNS.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Preventing the LAC from Sending Calling Number AVP 22 to the LNS on page 205</a></li></ul>

## disable-failover-protocol (L2TP)

Syntax	disable-failover-protocol;				
Hierarchy Level	[edit services l2tp]				
Release Information	Statement introduced in Junos OS Release 11.2. Statement deprecated in Junos OS Release 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1.				
Description	<p>Configure the LAC or LNS to use only the silent failover method when resynchronizing with its peer in the event of a control plane failover. This statement prevents the default behavior, where the LAC first attempts to negotiate the failover protocol when it establishes control connections with the peer. If the remote peer does not support the failover protocol, then the LAC falls back on the silent failover method. Including this configuration is useful when the peers configured for silent failover or incorrectly negotiate use of the failover protocol even though they do not support it.</p>				
	<div>  <p><b>BEST PRACTICE:</b> We recommend that you include this statement on both the LAC and LNS to prevent the use of failover protocol. When failover protocol is used, the nonfailed peer (LAC or LNS) keeps the tunnel open with the failed peer, in case the failed peer is able to recover from the failure and resynchronize with the nonfailed peer. This behavior keeps the tunnel up and the subscribers logged in while traffic is not flowing, preventing service level agreements from being met.</p> </div>				
	<p>Starting in Junos OS Releases 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the <b>disable-failover-protocol</b> statement is deprecated and no longer needs to be used. The default failover resynchronization method is changed to silent failover, rather than the previous default method of failover-protocol-fall-back-to-silent-failover. The new default method conforms to our recommendation to use silent failover. Consequently, there is no need to disable the failover protocol. Configurations that include this statement are still supported when you upgrade to a release in which it is deprecated; The CLI informs you of the deprecation if the statement is included.</p>				
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>				
Release History Table	<table> <tr> <th>Release</th><th>Description</th></tr> <tr> <td>15.1R6</td><td>Starting in Junos OS Releases 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the <b>disable-failover-protocol</b> statement is deprecated and no longer needs to be used.</td></tr> </table>	Release	Description	15.1R6	Starting in Junos OS Releases 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the <b>disable-failover-protocol</b> statement is deprecated and no longer needs to be used.
Release	Description				
15.1R6	Starting in Junos OS Releases 15.1R6, 16.1R5, 16.2R2, 17.1R2, and 17.2R1, the <b>disable-failover-protocol</b> statement is deprecated and no longer needs to be used.				

- Related Documentation**
- [Configuring the L2TP Peer Resynchronization Method on page 265](#)

## drain

<b>Syntax</b>	<code>drain;</code>
<b>Hierarchy Level</b>	<pre>[edit services l2tp], [edit services l2tp destination address ip-address], [edit services l2tp destination address ip-address routing-instance routing-instance-name], [edit services l2tp destination name destination-name], [edit services l2tp tunnel name name], [edit services l2tp tunnel name name address ip-address], [edit services l2tp tunnel name name address ip-address routing-instance routing-instance-name]</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 15.1.
<b>Description</b>	Prevent the creation of new sessions, destinations, and tunnels globally at an L2TP access concentrator (LAC) or an L2TP network server (LNS). Prevent the creation of new tunnels and sessions for a specific destination. Prevent the creation of new sessions for a specific tunnel.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring L2TP Drain on page 146</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## dual-stack-group (DHCP Local Server)

```
Syntax dual-stack-group name {
    access-profile access-profile;
    authentication {
        password password-string;
        username-include {
            circuit-type;
            delimiter delimiter-character;
            domain-name domain-name-string;
            interface-description (device-interface | logical-interface);
            interface-name ;
            logical-system-name;
            mac-address;
            relay-agent-interface-id;
            relay-agent-remote-id;
            routing-instance-name;
            user-prefix user-prefix-string;
            vlan-tags;
        }
    }
    classification-key {
        circuit-id circuit-id;
        mac-address mac-address;
        remote-id remote-id;
    }
    dual-stack-interface-client-limit number;
    dynamic-profile profile-name {
        aggregate-clients (merge | replace);
        use-primary primary-profile-name;
    }
    liveness-detection {
        failure-action (clear-binding | clear-binding-if-interface-up | log-only);
        method {
            layer2-liveness-detection {
                max-consecutive-retries number;
                transmit-interval interval;
            }
        }
    }
    on-demand-address-allocation;
    protocol-master (inet | inet6);
    reauthenticate (<lease-renewal> <remote-id-mismatch >);
    service-profile service-profile;
    short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}
```

**Hierarchy Level** [edit logical-systems *name* routing-instances *name* system services [dhcp-local-server](#)],  
 [edit logical-systems *name* system services [dhcp-local-server](#)],  
 [edit routing-instances *name* system services [dhcp-local-server](#)],  
 [edit system services [dhcp-local-server](#)]

<b>Release Information</b>	Statement introduced in Junos OS Release 17.3R1 on MX Series routers.
<b>Description</b>	<p>Specifies common configuration settings that are used for both legs (DHCP and DHCPv6) of the DHCP local server dual-stack, and names the dual-stack group.</p> <p>When applied, the dual-stack configuration takes precedence over all other configurations, such as those specified in global, group, or interface settings.</p>
<b>Options</b>	<p><b>name</b>—Name of the dual-stack group.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement in the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Single-Session DHCP Dual-Stack Overview</i></li><li>• <i>DHCP Liveness Detection Using ARP and Neighbor Discovery Packets</i></li><li>• <i>Configuring RADIUS Reauthentication for DHCP Subscribers</i></li><li>• <i>RADIUS Reauthentication As an Alternative to RADIUS CoA for DHCP Subscribers</i></li></ul>

## dual-stack-group (DHCP Relay Agent)

```

Syntax dual-stack-group name {
    access-profile profile-name;
    authentication {
        password password-string;
        username-include {
            circuit-type;
            delimiter delimiter-character;
            domain-name domain-name-string;
            interface-description (device-interface | logical-interface);
            interface-name;
            logical-system-name;
            mac-address;
            relay-agent-interface-id;
            relay-agent-remote-id;
            routing-instance-name;
            user-prefix user-prefix-string;
            vlan-tags;
        }
    }
    classification-key {
        circuit-id circuit-id;
        mac-address mac-address;
        remote-id remote-id;
    }
    dual-stack-interface-client-limit number;
    dynamic-profile profile-name {
        aggregate-clients (merge | replace);
        use-primary primary-profile-name;
    }
    liveness-detection {
        failure-action (clear-binding | clear-binding-if-interface-up | log-only);
        method {
            layer2-liveness-detection {
                max-consecutive-retries number;
                transmit-interval interval;
            }
        }
    }
    }
    protocol-master (inet | inet6);
    relay-agent-interface-id {
        include-irb-and-l2;
        keep-incoming-interface-id;
        no-vlan-interface-name;
        prefix prefix;
        use-interface-description (logical | device);
        use-option-82 <strict>;
        use-vlan-id;
    }
    relay-agent-remote-id {
        include-irb-and-l2;
        keep-incoming-remote-id;
    }
}

```

```

no-vlan-interface-name;
prefix prefix;
use-interface-description (logical | device);
use-option-82 <strict>;
use-vlan-id;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit forwarding-options [dhcp-relay](#)],  
[edit logical-systems *logical-system-name* forwarding-options [dhcp-relay](#)],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name*  
forwarding-options [dhcp-relay](#)],  
[edit routing-instances *routing-instance-name* forwarding-options [dhcp-relay](#)]

**Release Information** Statement introduced in Junos OS Release 15.1.

**Description** Specifies common configuration settings that are used for both legs (DHCP and DHCPv6) of the DHCP dual stack, and names the dual stack group.

The group is assigned to each leg of the DHCP dual-stack with the *dual-stack* statement in the [overrides](#) stanza. When applied, the dual-stack configuration takes precedence over all other configurations, such as those specified in global, group, or interface settings.

**Options** *name*—Name of the dual-stack group.




The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement in the configuration.

**Related Documentation**

- *Single-Session DHCP Dual-Stack Overview*
- *Configuring Single-Session DHCP Dual-Stack Support*
- *DHCP Liveness Detection Using ARP and Neighbor Discovery Packets*

## duplicate-clients (DHCPv6 Local Server and Relay Agent)

<b>Syntax</b>	<code>duplicate-clients incoming-interface;</code>
<b>Hierarchy Level</b>	<code>[edit forwarding-options dhcp-relay <a href="#">dhcpv6</a>],</code> <code>[edit logical-systems <i>logical-system-name</i> ...],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>...],</code> <code>[edit routing-instances <i>routing-instance-name</i> ...],</code> <code>[edit system services dhcp-local-server <a href="#">dhcpv6</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 16.1.
<b>Description</b>	<p>Specify the criteria that the <code>jdhcpd</code> process uses to support duplicate clients. The router uses the additional criteria to distinguish between the duplicate clients.</p> <p>Duplicate clients have the same DUID (DHCP unique identifier). Typically, the router treats a request from a duplicate client as a renegotiation, and replaces the existing client entry with a new entry. However, in some cases, the duplicate request is from a different client, and replacement is not desired. When you enable duplicate client support, the router uses the additional criteria to distinguish between the two clients, and grants a lease to the new client while retaining the original client entry.</p>
	<p> <b>NOTE:</b> The only supported differentiating criterion is <code>incoming-interface</code>.</p>
	<p> <b>BEST PRACTICE:</b> To allow duplicate clients over the incoming interface for DHCPv6 relay, you must configure the <code>relay-agent-interface-id</code> statement to cause the DHCP relay agent to insert the DHCPv6 Interface-ID option (option 18) in DHCPv6 packets destined for the DHCPv6 server.</p> <p>Do not configure the <code>use-interface-description</code> statement, because option 18 must include the interface name rather than an interface description.</p>
	<p> <b>CAUTION:</b> We recommend that you do not enable or disable duplicate client support mode when clients are bound, because different client keys are used to store the clients in the database depending on the mode. Changing the mode removes clients from the database and then adds them back with a different key.</p> <p>Additionally, disabling duplicate client support mode causes all duplicate clients to be deleted.</p>



<b>Options</b>	<b>incoming-interface</b> —Allow duplicate clients when the incoming DHCPv6 requests are received over different underlying interfaces.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">DHCPv6 Duplicate Client DUIDs on page 90</a></li><li>• <a href="#">Configuring the Router to Use Underlying Interfaces to Distinguish Between DHCPv6 Duplicate Client DUIDs on page 90</a></li></ul>

## duplicate-clients-in-subnet (DHCP Local Server and DHCP Relay Agent)

**Syntax** duplicate-clients-in-subnet (incoming-interface | option-82);

**Hierarchy Level** [edit forwarding-options [dhcp-relay](#)],  
 [edit logical-systems *logical-system-name* forwarding-options [dhcp-relay](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* forwarding-options [dhcp-relay](#)],  
 [edit routing-instances *routing-instance-name* forwarding-options [dhcp-relay](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* system services [dhcp-local-server](#)],  
 [edit logical-systems *logical-system-name* system services [dhcp-local-server](#)],  
 [edit routing-instances *routing-instance-name* system services [dhcp-local-server](#)],  
 [edit system services [dhcp-local-server](#)]

**Release Information** Statement introduced in Junos OS Release 13.3.

**Description** Configure how the router distinguishes between duplicate clients in the same subnet. Duplicate clients are defined as clients that have the same hardware address or client ID.



**NOTE:** You must configure the duplicate-clients-in-subnet statement identically for both the DHCP local server ([edit forwarding-options [dhcp-relay](#)]) and the DHCP relay agent ([edit system services [dhcp-local-server](#)]).

**Options** **incoming-interface**—Use the incoming interface information in packets to differentiate between duplicate clients.

**option-82**—Use the option 82 information to differentiate between duplicate clients. Starting in Junos OS Release 16.1R5, 16.2R2, 17.1R2, and 17.2R1, only the ACI (suboption 1) and ARI (suboption 2) are used. Other suboptions, such as Vendor-Specific (suboption 9) are ignored.

**Required Privilege Level** interface—To view this statement in the configuration.  
 interface-control—To add this statement to the configuration.

### Release History Table

Release	Description
<a href="#">16.1R5</a>	Starting in Junos OS Release 16.1R5, 16.2R2, 17.1R2, and 17.2R1, only the ACI (suboption 1) and ARI (suboption 2) are used. Other suboptions, such as Vendor-Specific (suboption 9) are ignored.

- Related Documentation**
- [DHCPv4 Duplicate Client In Subnet Overview on page 85](#)
  - [Guidelines for Configuring Support for DHCPv4 Duplicate Clients on page 86](#)
  - [Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Their Incoming Interfaces on page 88](#)
  - [Configuring the Router to Distinguish Between DHCPv4 Duplicate Clients Based on Option 82 Information on page 87](#)

## dynamic-profile (L2TP)

<b>Syntax</b>	<code>dynamic-profile <i>profile-name</i>;</code>
<b>Hierarchy Level</b>	[edit services l2tp <b>tunnel-group</b> <i>name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Assign a dynamic profile to the tunnel group for dynamic LNS sessions.
<b>Options</b>	<b><i>profile-name</i></b> —Name of the dynamic profile for the tunnel group.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Dynamic Profile for Dynamic LNS Sessions on page 259</a></li> </ul>

## dynamic-profile (PPP)

---

<b>Syntax</b>	<code>dynamic-profile <i>profile-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> <a href="#">ppp-options</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5. Support for MLPPP on LSQ interfaces introduced in Junos OS Release 10.2.
<b>Description</b>	Specify the dynamic profile that is attached to the interface. On the MX Series routers, this statement is supported on PPPoE interfaces only.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Dynamic Profiles Overview</i></li><li>• <i>Configuring a Basic Dynamic Profile</i></li><li>• <a href="#">Attaching Dynamic Profiles to Static PPP Subscriber Interfaces on page 99</a></li><li>• <i>Attaching Dynamic Profiles to MLPPP Bundles</i></li><li>• For hardware requirements, see <i>Hardware Requirements for PPP Subscriber Services on Non-Ethernet Interfaces</i></li></ul>

## dynamic-profiles

```

Syntax  dynamic-profiles {
        profile-name {
            class-of-service {
                interfaces {
                    interface-name ;
                }
                unit logical-unit-number {
                    classifiers {
                        type (classifier-name | default);
                    }
                    output-traffic-control-profile (profile-name | $junos-cos-traffic-control-profile);
                    report-ingress-shaping-rate bps;
                    rewrite-rules {
                        dscp (rewrite-name | default);
                        dscp-ipv6 (rewrite-name | default);
                        ieee-802.1 (rewrite-name | default) vlan-tag (outer | outer-and-inner);
                        inet-precedence (rewrite-name | default);
                    }
                }
            }
        }
        scheduler-maps {
            map-name {
                forwarding-class class-name scheduler scheduler-name;
            }
        }
        schedulers {
            (scheduler-name) {
                buffer-size (seconds | percent percentage | remainder | temporal microseconds);
                drop-profile-map loss-priority (any | low | medium-low | medium-high | high)
                    protocol (any | non-tcp | tcp) drop-profile profile-name;
                excess-priority (low | high | $junos-cos-scheduler-excess-priority);
                excess-rate (percent percentage | percent $junos-cos-scheduler-excess-rate);
                overhead-accounting (shaping-mode) <bytes (byte-value)>;
                priority priority-level;
                shaping-rate (rate | predefined-variable);
                transmit-rate (percent percentage | rate | remainder) <exact | rate-limit>;
            }
        }
        traffic-control-profiles profile-name {
            delay-buffer-rate (percent percentage | rate | $junos-cos-delay-buffer-rate);
            excess-rate (percent percentage | proportion value | percent $junos-cos-excess-rate);
            guaranteed-rate (percent percentage | rate | $junos-cos-guaranteed-rate);
            overhead-accounting (shaping-mode) <bytes (byte-value)>;
            scheduler-map map-name;
            shaping-rate (rate | predefined-variable);
        }
    }
    firewall {
        family family {
            fast-update-filter filter-name {

```

```

interface-specific;
match-order [match-order];
term term-name {
    from {
        match-conditions;
    }
    then {
        action;
        action-modifiers;
    }
    only-at-create;
}
}
filter filter-name {
    enhanced-mode-override;
    fast-lookup-filter;
    instance-shared;
    interface-shared;
interface-specific;
    term term-name {
        from {
            match-conditions;
        }
        then {
            action;
            action-modifiers;
        }
        only-at-create;
    }
}
filter filter-name {
interface-specific;
    term term-name {
        from {
            match-conditions;
        }
        then {
            action;
            action-modifiers;
        }
    }
}
hierarchical-policer uid {
    aggregate {
        if-exceeding {
            bandwidth-limit-limit bps;
            burst-size-limit bytes;
        }
        then {
            policer-action;
        }
    }
}
premium {
    if-exceeding {
        bandwidth-limit bps;
        burst-size-limit bytes;
    }
    then {

```

```

        policer-action;
    }
}
}
policer uid {
    filter-specific;
    if-exceeding {
        (bandwidth-limit bps | bandwidth-percent percentage);
        burst-size-limit bytes;
    }
    logical-bandwidth-policer;
    logical-interface-policer;
    physical-interface-policer;
    then {
        policer-action;
    }
}
three-color-policer uid {
    action {
        loss-priority high then discard;
    }
    logical-interface-policer;
    single-rate {
        (color-aware | color-blind);
        committed-burst-size bytes;
        committed-information-rate bps;
        excess-burst-size bytes;
    }
    two-rate {
        (color-aware | color-blind);
        committed-burst-size bytes;
        committed-information-rate bps;
        peak-burst-size bytes;
        peak-information-rate bps;
    }
}
}
}
interfaces interface-name {
    interface-set interface-set-name {
        interface interface-name {
            unit logical unit number {
                advisory-options {
                    downstream-rate rate;
                    upstream-rate rate;
                }
            }
        }
    }
}
unit logical-unit-number {
    actual-transit-statistics;
    auto-configure {
        agent-circuit-identifier {
            dynamic-profile profile-name;
        }
    }
}

```

```

line-identity {
  include {
    accept-no-ids;
    circuit-id;
    remote-id;
  }
  dynamic-profile profile-name;
}
}
encapsulation (atm-ccc-cell-relay | atm-ccc-vc-mux | atm-cisco-nlpid |
atm-tcc-vc-mux | atm-mlppp-llc | atm-nlpid | atm-ppp-llc | atm-ppp-vc-mux |
atm-snap | atm-tcc-snap | atm-vc-mux | ether-over-atm-llc |
ether-vpls-over-atm-llc | ether-vpls-over-fr | ether-vpls-over-ppp | ethernet |
frame-relay-ccc | frame-relay-ppp | frame-relay-tcc | frame-relay-ether-type |
frame-relay-ether-type-tcc | multilink-frame-relay-end-to-end | multilink-ppp |
ppp-over-ether | ppp-over-ether-over-atm-llc | vlan-bridge | vlan-ccc | vlan-vci-ccc
| vlan-tcc | vlan-vpls);
family family {
  address address;
  filter {
    adf {
      counter;
      input-precedence precedence;
      not-mandatory;
      output-precedence precedence;
      rule rule-value;
    }
    input filter-name (
      precedence precedence;
      shared-name filter-shared-name;
    )
    output filter-name {
      precedence precedence;
      shared-name filter-shared-name;
    }
  }
}
rpf-check {
  fail-filter filter-name;
  mode loose;
}
service {
  input {
    service-set service-set-name {
      service-filter filter-name;
    }
    post-service-filter filter-name;
  }
  input-vlan-map {
    inner-tag-protocol-id tpid;
    inner-vlan-id number;
    (push | swap);
    tag-protocol-id tpid;
    vlan-id number;
  }
  output {

```



```

        service-set service-set-name {
            service-filter filter-name;
        }
    }
    output-vlan-map {
        inner-tag-protocol-id tpid;
        inner-vlan-id number;
        (pop | swap);
        tag-protocol-id tpid;
        vlan-id number;
    }
    pcef pcef-profile-name {
        activate rule-name | activate-all;
    }
}
unnumbered-address interface-name <preferred-source-address address>;
}
filter {
    input filter-name (
        shared-name filter-shared-name;
    )
    output filter-name {
        shared-name filter-shared-name;
    }
}
host-prefix-only;
ppp-options {
    aaa-options aaa-options-name;
    authentication [ authentication-protocols ];
    chap {
        challenge-length minimum minimum-length maximum maximum-length;
        local-name name;
    }
    ignore-magic-number-mismatch;
    initiate-ncp (dual-stack-passive | ipv6 | ip)
    ipcp-suggest-dns-option;
    mru size;
    mtu (size | use-lower-layer);
    on-demand-ip-address;
    pap;
    peer-ip-address-optional;
    local-authentication {
        password password;
        username-include {
            circuit-id;
            delimiter character;
            domain-name name;
            mac-address;
            remote-id;
        }
    }
}
targeted-options {
    backup backup;
    group group;
}

```

```

    primary primary;
    weight ($junos-interface-target-weight | weight-value);
  }
  telemetry {
    subscriber-statistics;
    queue-statistics {
      interface $junos-interface-name {
        refresh rate;
        queues queue set;
      }
      interface-set $junos-interface-set-name {
        refresh rate;
        queues queue set;
      }
    }
  }
  vlan-id number;
  vlan-tags outer [tpid].vlan-id [inner [tpid].vlan-id];
}
interfaces {
  demux0 {...}
}
interfaces {
  pp0 {...}
}
policy-options {
  prefix-list uid {
    ip-addresses;
    dynamic-db;
  }
}
predefined-variable-defaults predefined-variable <variable-option> default-value;
profile-type remote-device-service;
protocols {
  igmp {
    interface interface-name {
      accounting;
      disable;
      group-limit limit;
      group-policy;
      group-threshold value;
      immediate-leave
      log-interval seconds;
      no-accounting;
      oif-map;
      passive;
      promiscuous-mode;
      ssm-map ssm-map-name;
      ssm-map-policy ssm-map-policy-name
      static {
        group group {
          source source;
        }
      }
    }
  }
}

```

```

        version version;
    }
}
mld {
    interface interface-name {
        (accounting | no-accounting);
        disable;
        group-limit limit;
        group-policy;
        group-threshold value;
        immediate-leave;
        log-interval seconds;
        oif-map;
        passive;
        ssm-map ssm-map-name;
        ssm-map-policy ssm-map-policy-name;
        static {
            group multicast-group-address {
                exclude;
                group-count number;
                group-increment increment;
                source ip-address {
                    source-count number;
                    source-increment increment;
                }
            }
        }
    }
    version version;
}
}
router-advertisement {
    interface interface-name {
        current-hop-limit number;
        default-lifetime seconds;
        (managed-configuration | no-managed-configuration);
        max-advertisement-interval seconds;
        min-advertisement-interval seconds;
        (other-stateful-configuration | no-other-stateful-configuration);
        prefix prefix;
        reachable-time milliseconds;
        retransmit-timer milliseconds;
    }
}
}
routing-instances routing-instance-name {
    interface interface-name;
    routing-options {
        access {
            route prefix {
                next-hop next-hop;
                metric route-cost;
                preference route-distance;
                tag route-tag;
                tag2 route-tag2;
            }
        }
    }
}

```

```
}
access-internal {
  route subscriber-ip-address {
    qualified-next-hop underlying-interface {
      mac-address address;
    }
  }
}
multicast {
  interface interface-name {
    no-qos-adjust;
  }
}
}
rib routing-table-name {
  access {
    route prefix {
      next-hop next-hop;
      metric route-cost;
      preference route-distance;
      tag route-tag;
      tag2 route-tag2;
    }
  }
  access-internal {
    route subscriber-ip-address {
      qualified-next-hop underlying-interface {
        mac-address address;
      }
    }
  }
}
}
}
routing-options {
  access {
    route prefix {
      next-hop next-hop;
      metric route-cost;
      preference route-distance;
      tag route-tag;
      tag2 route-tag2;
    }
  }
  access-internal {
    route subscriber-ip-address {
      qualified-next-hop underlying-interface {
        mac-address address;
      }
    }
  }
}
multicast {
  interface interface-name {
    no-qos-adjust;
  }
}
}
```

```

}
services {
  captive-portal-content-delivery {
    rule name {
      match-direction (input | input-output | output);
      term name {
        then {
          accept;
          redirect url;
          rewrite destination-address address <destination-port port-number>;
          syslog;
        }
      }
    }
  }
}
variables {
  variable-name {
    default-value default-value;
    equals expression;
    mandatory;
    uid;
    uid-reference;
  }
}
}

```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 9.2.  
Support at the **filter**, **policer**, **hierarchical-policer**, **three-color-policer**, and **policy options** hierarchy levels introduced in Junos OS Release 11.4.

**Description** Create dynamic profiles for use with DHCP or PPP client access.

**Options** *profile-name*—Name of the dynamic profile; string of up to 80 alphanumeric characters.  
  
The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**


- *Configuring a Basic Dynamic Profile*
- *Configuring Dynamic VLANs Based on Agent Circuit Identifier Information*
- *Dynamic Profiles for Subscriber Management*

## enable-ipv6-services-for-lac (L2TP)

---

<b>Syntax</b>	enable-ipv6-services-for-lac;
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 17.1.
<b>Description</b>	Enable the LAC to create the IPv6 address family (inet6) when establishing a tunnel for subscribers, allowing IPv6 filters to be applied. By default, the LAC requires only family inet to enable forwarding into an IP tunnel. It can apply IPv4 firewall filters to the session. Even when family inet6 is included in the dynamic profile, by default it is not created and IPv6 firewall filters cannot be applied.
<b>Default</b>	Disabled.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Enabling the LAC for IPv6 Services on page 182</a></li><li>• <a href="#">Configuring an L2TP LAC on page 148</a></li></ul>

## enable-snmp-tunnel-statistics (L2TP)

<b>Syntax</b>	enable-snmp-tunnel-statistics;
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1R4 and supported in later 12.1Rx releases. Statement supported in Junos OS Release 12.2R2 and later 12.2Rx releases. (Not supported in Junos OS Release 12.2R1.) Statement supported in Junos OS Release 12.3 and later releases.
<b>Description</b>	Enable collection of L2TP tunnel and global counters for SNMP statistics.
	<div>  <p><b>NOTE:</b> The system load can increase when you enable these counters and also use RADIUS interim accounting updates. We recommend you enable these counters when you are using only SNMP statistics.</p> </div>
<b>Default</b>	Disabled.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Enabling Tunnel and Global Counters for SNMP Statistics Collection on page 131</a></li> </ul>

## encapsulation (Logical Interface)

<b>Syntax</b>	encapsulation (atm-ccc-cell-relay   atm-ccc-vc-mux   atm-cisco-nlpid   atm-mlppp-llc   atm-nlpid   atm-ppp-llc   atm-ppp-vc-mux   atm-snap   atm-tcc-snap   atm-tcc-vc-mux   atm-vc-mux   ether-over-atm-llc   ether-vpls-over-atm-llc   ether-vpls-over-fr   ether-vpls-over-ppp   ethernet   ethernet-ccc   ethernet-vpls   ethernet-vpls-fr   frame-relay-ccc   frame-relay-ether-type   frame-relay-ether-type-tcc   frame-relay-ppp   frame-relay-tcc   gre-fragmentation   multilink-frame-relay-end-to-end   multilink-ppp   ppp-over-ether   ppp-over-ether-over-atm-llc   vlan-bridge   vlan-ccc   vlan-vci-ccc   vlan-tcc   vlan-vpls   vxlan);
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ], [edit interfaces rlsq <i>number</i> unit <i>logical-unit-number</i> ] [edit protocols evpn]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Routers ( <b>ethernet</b> , <b>vlan-ccc</b> , and <b>vlan-tcc</b> options only). Statement introduced in Junos OS Release 12.2 for the ACX Series Universal Metro Routers. Only the <b>atm-ccc-cell-relay</b> and <b>atm-ccc-vc-mux</b> options are supported on ACX Series routers. Statement introduced in Junos OS Release 17.3R1 for QFX10000 Series switches ( <b>ethernet-ccc</b> and <b>vlan-ccc</b> options only).
<b>Description</b>	Configure a logical link-layer encapsulation type. Not all encapsulation types are supported on the switches. See the switch CLI.
<b>Options</b>	<p><b>atm-ccc-cell-relay</b>—Use ATM cell-relay encapsulation.</p> <p><b>atm-ccc-vc-mux</b>—Use ATM virtual circuit (VC) multiplex encapsulation on CCC circuits. When you use this encapsulation type, you can configure the <b>ccc</b> family only.</p> <p><b>atm-cisco-nlpid</b>—Use Cisco ATM network layer protocol identifier (NLPID) encapsulation. When you use this encapsulation type, you can configure the <b>inet</b> family only.</p> <p><b>atm-mlppp-llc</b>—For ATM2 IQ interfaces only, use Multilink Point-to-Point (MLPPP) over AAL5 LLC. For this encapsulation type, your router must be equipped with a Link Services or Voice Services PIC. MLPPP over ATM encapsulation is not supported on ATM2 IQ OC48 interfaces.</p> <p><b>atm-nlpid</b>—Use ATM NLPID encapsulation. When you use this encapsulation type, you can configure the <b>inet</b> family only.</p> <p><b>atm-ppp-llc</b>—(ATM2 IQ interfaces and MX Series routers with MPC/MIC interfaces using the ATM MIC with SFP only) Use PPP over AAL5 LLC encapsulation.</p>



**atm-ppp-vc-mux**—(ATM2 IQ interfaces and MX Series routers with MPC/MIC interfaces using the ATM MIC with SFP only) Use PPP over ATM AAL5 multiplex encapsulation.

**atm-snap**—(All interfaces including MX Series routers with MPC/MIC interfaces using the ATM MIC with SFP) Use ATM subnetwork attachment point (SNAP) encapsulation.

**atm-tcc-snap**—Use ATM SNAP encapsulation on translational cross-connect (TCC) circuits.

**atm-tcc-vc-mux**—Use ATM VC multiplex encapsulation on TCC circuits. When you use this encapsulation type, you can configure the **tcc** family only.

**atm-vc-mux**—(All interfaces including MX Series routers with MPC/MIC interfaces using the ATM MIC with SFP) Use ATM VC multiplex encapsulation. When you use this encapsulation type, you can configure the **inet** family only.

**ether-over-atm-llc**—(All IP interfaces including MX Series routers with MPC/MIC interfaces using the ATM MIC with SFP) For interfaces that carry IP traffic, use Ethernet over ATM LLC encapsulation. When you use this encapsulation type, you cannot configure multipoint interfaces.

**ether-vpls-over-atm-llc**—For ATM2 IQ interfaces only, use the Ethernet virtual private LAN service (VPLS) over ATM LLC encapsulation to bridge Ethernet interfaces and ATM interfaces over a VPLS routing instance (as described in RFC 2684, *Multiprotocol Encapsulation over ATM Adaptation Layer 5*). Packets from the ATM interfaces are converted to standard ENET2/802.3 encapsulated Ethernet frames with the frame check sequence (FCS) field removed.

**ether-vpls-over-fr**—For E1, T1, E3, T3, and SONET interfaces only, use the Ethernet virtual private LAN service (VPLS) over Frame Relay encapsulation to support Bridged Ethernet over Frame Relay encapsulated TDM interfaces for VPLS applications, per RFC 2427, *Multiprotocol Interconnect over Frame Relay*.



**NOTE:** The SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP, the Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP, and the DS3/E3 MIC do not support Ethernet over Frame Relay encapsulation.

**ether-vpls-over-ppp**—For E1, T1, E3, T3, and SONET interfaces only, use the Ethernet virtual private LAN service (VPLS) over Point-to-Point Protocol (PPP) encapsulation to support Bridged Ethernet over PPP-encapsulated TDM interfaces for VPLS applications.

**ethernet**—Use Ethernet II encapsulation (as described in RFC 894, *A Standard for the Transmission of IP Datagrams over Ethernet Networks*).

**ethernet-ccc**—Use Ethernet CCC encapsulation on Ethernet interfaces.

**ethernet-vpls**—Use Ethernet VPLS encapsulation on Ethernet interfaces that have VPLS enabled and that must accept packets carrying standard Tag Protocol ID (TPID) values.



**NOTE:** The built-in Gigabit Ethernet PIC on an M7i router does not support extended VLAN VPLS encapsulation.

**ethernet-vpls-fr**—Use in a VPLS setup when a CE device is connected to a PE router over a time-division multiplexing (TDM) link. This encapsulation type enables the PE router to terminate the outer layer 2 Frame Relay connection, use the 802.1p bits inside the inner Ethernet header to classify the packets, look at the MAC address from the Ethernet header, and use the MAC address to forward the packet into a given VPLS instance.

**frame-relay-ccc**—Use Frame Relay encapsulation on CCC circuits. When you use this encapsulation type, you can configure the **ccc** family only.

**frame-relay-ether-type**—Use Frame Relay ether type encapsulation for compatibility with Cisco Frame Relay. The physical interface must be configured with flexible-frame-relay encapsulation.

**frame-relay-ether-type-tcc**—Use Frame Relay ether type TCC for Cisco-compatible Frame Relay on TCC circuits to connect different media. The physical interface must be configured with flexible-frame-relay encapsulation.

**frame-relay-ppp**—Use PPP over Frame Relay circuits. When you use this encapsulation type, you can configure the **ppp** family only.

**frame-relay-tcc**—Use Frame Relay encapsulation on TCC circuits for connecting different media. When you use this encapsulation type, you can configure the **tcc** family only.

**gre-fragmentation**—For adaptive services interfaces only, use GRE fragmentation encapsulation to enable fragmentation of IPv4 packets in GRE tunnels. This encapsulation clears the do not fragment (DF) bit in the packet header. If the packet's size exceeds the tunnel's maximum transmission unit (MTU) value, the packet is fragmented before encapsulation.

**multilink-frame-relay-end-to-end**—Use MLFR FRF.15 encapsulation. This encapsulation is used only on multilink, link services, and voice services interfaces and their constituent T1 or E1 interfaces, and is supported on LSQ and redundant LSQ interfaces.

**multilink-ppp**—Use MLPPP encapsulation. This encapsulation is used only on multilink, link services, and voice services interfaces and their constituent T1 or E1 interfaces.

**ppp-over-ether**—Use PPP over Ethernet encapsulation to configure an underlying Ethernet interface for a dynamic PPPoE logical interface on M120 and M320 routers with Intelligent Queuing 2 (IQ2) PICs, and on MX Series routers with MPCs.

**ppp-over-ether-over-atm-llc**—(MX Series routers with MPCs using the ATM MIC with SFP only) For underlying ATM interfaces, use PPP over Ethernet over ATM LLC encapsulation. When you use this encapsulation type, you cannot configure the interface address. Instead, configure the interface address on the PPP interface.

**vlan-bridge**—Use Ethernet VLAN bridge encapsulation on Ethernet interfaces that have IEEE 802.1Q tagging, flexible-ethernet-services, and bridging enabled and that must accept packets carrying TPID 0x8100 or a user-defined TPID.

**vlan-ccc**—Use Ethernet virtual LAN (VLAN) encapsulation on CCC circuits. When you use this encapsulation type, you can configure the **ccc** family only.

**vlan-vci-ccc**—Use ATM-to-Ethernet interworking encapsulation on CCC circuits. When you use this encapsulation type, you can configure the **ccc** family only.

**vlan-tcc**—Use Ethernet VLAN encapsulation on TCC circuits. When you use this encapsulation type, you can configure the **tcc** family only.

**vlan-vpls**—Use Ethernet VLAN encapsulation on VPLS circuits.

**vxlan**—Use VXLAN data plane encapsulation for EVPN.

<b>Required Privilege</b>	interface—To view this statement in the configuration.
<b>Level</b>	interface-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring Layer 2 Switching Cross-Connects Using CCC</i></li> <li>• <i>Configuring the Encapsulation for Layer 2 Switching TCCs</i></li> <li>• <i>Configuring Interface Encapsulation on Logical Interfaces</i></li> <li>• <i>Configuring the CCC Encapsulation for LSP Tunnel Cross-Connects</i></li> <li>• <i>Circuit and Translational Cross-Connects Overview</i></li> <li>• <i>Identifying the Access Concentrator</i></li> <li>• <i>Configuring ATM Interface Encapsulation</i></li> <li>• <i>Configuring VLAN and Extended VLAN Encapsulation</i></li> <li>• <i>Configuring ATM-to-Ethernet Interworking</i></li> <li>• <i>Configuring Interface Encapsulation on PTX Series Packet Transport Routers</i></li> <li>• <i>Configuring CCC Encapsulation for Layer 2 VPNs</i></li> <li>• <i>Configuring TCC Encapsulation for Layer 2 VPNs and Layer 2 Circuits</i></li> <li>• <i>Configuring ATM for Subscriber Access</i></li> <li>• <i>Understanding CoS on ATM IMA Pseudowire Interfaces Overview</i></li> <li>• <i>Configuring Policing on an ATM IMA Pseudowire</i></li> </ul>
------------------------------	--

## enforce-strict-scale-limit-license (Subscriber Management)

---


Syntax	enforce-strict-scale-limit-license;
Hierarchy Level	[edit system services subscriber-management]
Release Information	Statement introduced in Junos OS Release 11.2.
Description	Configure the router to strictly enforce the subscriber scaling license, and to not allow the normal grace period. No additional subscribers are allowed to log in after the number of subscribers reaches the maximum allowed for the license.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <i>Configuring User-Defined Dynamic Variables in Dynamic Profiles</i></li><li>• <i>User-Defined Variables</i></li><li>• <i>Using Variable Expressions in User-Defined Variables</i></li></ul>

## equals (Dynamic Profile)

---

Syntax	equals <i>expression</i> ;
Hierarchy Level	[edit dynamic-profiles <i>profile-name</i> variables <i>variable-name</i> ]
Release Information	Statement introduced in Junos OS Release 11.4.
Description	Configure an expression—a group of arithmetic operators, string operators, and operands—for a user-defined variable that is evaluated at run time and returned as the variable value.
Options	<b><i>expression</i></b> —Expression evaluated to return a value for the user-defined variable.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <i>Configuring User-Defined Dynamic Variables in Dynamic Profiles</i></li><li>• <i>User-Defined Variables</i></li><li>• <i>Using Variable Expressions in User-Defined Variables</i></li></ul>

## failover-resync

<b>Syntax</b>	<code>failover-resync (failover-protocol   silent-failover);</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 17.2R1 on MX Series.
<b>Description</b>	<p>Configure the method used by the LAC or the LNS to resynchronize with its peer in the event of a control plane failover. Failure can be the result of a Routing Engine switchover, a daemon restart, or some other cause. During tunnel setup, the L2TP endpoints negotiate the resynchronization method; silent failover is the default.</p> <p>With the silent failover method, only the failed endpoint is involved in recovering the tunnels and sessions; the nonfailed endpoint remains unaware of the failure.</p> <p>With the failover protocol method, the nonfailed endpoint keeps the tunnel open with the failed peer, in case the failed peer is able to recover from the failure and resynchronize with the nonfailed peer. The detection of tunnel keepalive failures is delayed. This behavior keeps the tunnel up and the subscribers logged in while traffic is not flowing, preventing service level agreements from being met.</p>
	<div>  <b>BEST PRACTICE:</b> Use the default method, silent failover. </div> <p>This statement supersedes the deprecated statement, <b>disable-failover-protocol</b>.</p>
<b>Options</b>	<p><b>failover-protocol</b>—Specify the L2TP failover protocol as the resynchronization method, but fall back to silent failover if the other endpoint does not support it.</p> <p><b>silent-failover</b>—Specify silent failover as the resynchronization method.</p> <p><b>Default:</b> <code>silent-failover</code></p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the L2TP Peer Resynchronization Method on page 265</a></li> <li>• <a href="#">L2TP Failover and Peer Resynchronization on page 264</a></li> </ul>

## failover-within-preference (L2TP LAC)

---

<b>Syntax</b>	failover-within-preference;
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Enable L2TP LAC tunnel selection within a preference level. When the router is unable to connect to a destination at a given preference level, it attempts to connect to another destination at the same level. By default, when a connection attempt fails at one preference level, the next attempt is made at the next lower level.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring LAC Tunnel Selection Failover Within a Preference Level on page 180</a></li><li>• <a href="#">Configuring the L2TP LAC Tunnel Selection Parameters on page 180</a></li></ul>

## fixed-wireless-access

```
Syntax fixed-wireless-access {
    anchor-point anchor-point-name;
    apn access-point-name {
        aaa-profile aaa-profile-name;
        apn-data-type type;
        authentication {
            password password;
            username-include {
                delimiter delimiter;
                domain-name domain-name;
                imsi;
                mei;
                msisdn;
                user-prefix user-prefix;
            }
        }
        description description;
        dynamic-profile dynamic-profile;
        ipv4-address-pool pool-name ;
        routing-instance routing-instance-name;
    }
    control-plane name {
        s11 {
            v4-address ip-address;
        }
    }
    data-plane name {
        s1-u {
            v4-address ip-address;
        }
    }
    traceoptions {
        file filename <files number> <match regular-expression> <size maximum-file-size>
            <(world-readable | no-world-readable)>;
        flag name;
        no-remote-trace;
    }
}
```

Hierarchy Level [edit services]

Release Information Statement introduced in Junos OS Release 19.2R1.

**Description** Configure a BNG to act as a 3GPP System Architecture Evolution gateway (SAEGW) for fixed wireless subscribers. The SAEGW incorporates both the serving gateway (SGW) and packet data network gateway (PGW) functions. The SGW function routes and forwards user data packets. The PGW function provides connectivity to external packet data networks.



**NOTE:** You must configure the following statements:

- **apn**
- **control-plane**—The S11 interface with the mobility management entity (MME).
- **data-plane**—The S1-U interface with one or more eNodeBs that determine the MME that authenticates the users.

**Options**     **anchor-point**—Name of the pseudowire interface on the router that terminates all incoming S1-U tunnels. You can configure only one anchor point.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level**     admin—To view this statement in the configuration.  
   admin-control—To add this statement to the configuration.

**Related Documentation**     • [How to Configure Fixed Wireless Access on page 319](#)



## flexible-vlan-tagging

<b>Syntax</b>	<code>flexible-vlan-tagging;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces aex],</code> <code>[edit interfaces ge-<i>fpc/pic/port</i>],</code> <code>[edit interfaces et-<i>fpc/pic/port</i>],</code> <code>[edit interfaces ps0],</code> <code>[edit interfaces xe-<i>fpc/pic/port</i>]</code>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Support for aggregated Ethernet added in Junos OS Release 9.0.</p> <p>Statement introduced in Junos OS Release 12.1x48 for PTX Series Packet Transport Routers.</p> <p>Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2X51-D20 for the QFX Series.</p>
<b>Description</b>	<p>Support simultaneous transmission of 802.1Q VLAN single-tag and dual-tag frames on logical interfaces on the same Ethernet port, and on pseudowire logical interfaces.</p> <p>This statement is supported on M Series and T Series routers, for Fast Ethernet and Gigabit Ethernet interfaces only on Gigabit Ethernet IQ2 and IQ2-E, IQ, and IQE PICs, and for aggregated Ethernet interfaces with member links in IQ2, IQ2-E, and IQ PICs or in MX Series DPCs, or on Ethernet interfaces for PTX Series Packet Transport Routers or 100-Gigabit Ethernet Type 5 PIC with CFP.</p> <p>This statement is supported on Gigabit Ethernet, 10-Gigabit Ethernet, 40-Gigabit Ethernet, and aggregated Ethernet interfaces on EX Series and QFX Series switches.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Enabling VLAN Tagging</i></li> <li>• <i>Configuring Flexible VLAN Tagging on PTX Series Packet Transport Routers</i></li> <li>• <i>Configuring Double-Tagged VLANs on Layer 3 Logical Interfaces</i></li> </ul>

## forward-snooped-clients (DHCP Local Server)

---

<b>Syntax</b>	<code>forward-snooped-clients (all-interfaces   configured-interfaces   non-configured-interfaces);</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> system services <a href="#">dhcp-local-server</a>],</code> <code>[edit logical-systems <i>logical-system-name</i> system services <a href="#">dhcp-local-server</a>],</code> <code>[edit routing-instances <i>routing-instance-name</i> system services <a href="#">dhcp-local-server</a>],</code> <code>[edit system services <a href="#">dhcp-local-server</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
<b>Description</b>	Configure how the DHCP local server filters and handles DHCP snooped packets on the specified interfaces.
<b>Options</b>	<b>all-interfaces</b> —Perform the action on all interfaces.  <b>configured-interfaces</b> —Perform the action only on interfaces that are configured as part of an interface group.  <b>non-configured-interfaces</b> —Perform the action only on interfaces that are not configured as part of a group.
<b>Required Privilege Level</b>	<b>system</b> —To view this statement in the configuration. <b>system-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>DHCP Snooping Support</i></li><li>• <a href="#">Configuring DHCP Snooped Packets Forwarding Support for DHCP Local Server on page 67</a></li></ul>

## forward-snooped-clients (DHCP Relay Agent)

<b>Syntax</b>	<code>forward-snooped-clients (all-interfaces   configured-interfaces   non-configured-interfaces);</code>
<b>Hierarchy Level</b>	<code>[edit forwarding-options <a href="#">dhcp-relay</a>],</code> <code>[edit forwarding-options dhcp-relay <a href="#">dhcpv6</a>],</code> <code>[edit logical-systems <i>logical-system-name</i> forwarding-options <a href="#">dhcp-relay</a>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i></code> <code>forwarding-options <a href="#">dhcp-relay</a>],</code> <code>[edit routing-instances <i>routing-instance-name</i> forwarding-options <a href="#">dhcp-relay</a>]</code>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p> <p>Support at the <code>[edit forwarding-options dhcp-relay dhcpv6]</code> hierarchy level introduced in Junos OS Release 15.1X53-D56 for EX Series switches and Junos OS Release 17.1R1.</p>
<b>Description</b>	<p>Configure how DHCP relay agent filters and handles DHCP snooped packets on the specified interfaces. The router or switch determines the DHCP snooping action to perform based on a combination of the <b>forward-snooped-clients</b> configuration and the configuration of either the <b>allow-snooped-clients</b> statement or the <b>no-allow-snooped-clients</b> statement.</p> <p>The router (or switch) also uses this statement to determine how to handle snooped BOOTREPLY packets received on non-configured interfaces.</p>
<b>Options</b>	<p><b>all-interfaces</b>—Perform the action on all interfaces.</p> <p><b>Default:</b> On EX Series switches, the action is performed on all interfaces by default.</p> <p><b>configured-interfaces</b>—Perform the action only on interfaces that are configured as part of an interface group.</p> <p><b>non-configured-interfaces</b>—Perform the action only on interfaces that are not part of a group.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>DHCP Snooping Support</i></li> <li>• <i>Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent</i></li> </ul>

## fpc (MX Series 5G Universal Routing Platforms)

```
Syntax  fpc slot-number {
        inline-services {
            flow-table-size {
                ipv4-flow-table-size units;
                ipv4-flow-table-size units;
                ipv6-extended-attrib;
            }
        }
        ir-mode (R | IR);
        pic number {
            inline-services {
                bandwidth (1g | 10g);
            }
            port-mirror-instance port-mirroring-instance-name-pic-level;
            tunnel-services {
                bandwidth (1g | 10g)
            }
        }
        port-mirror-instance port-mirroring-instance-name-fpc-level;
    }
```

Hierarchy Level [edit chassis]

**Release Information** Statement introduced in Junos OS Release 8.2.  
**port-mirror-instance** option added in Junos OS Release 9.3.  
**ipv6-extended-attrib** option added in Junos OS Release 14.2 for MX Series routers.

**Description** Configure properties for the DPC or MPC and corresponding Packet Forwarding Engines to create tunnel interfaces.

(MX Series Virtual Chassis only) When you configure chassis properties for MPCs installed in a Virtual Chassis member router, statements included at the **[edit chassis member member-id fpc slot slot-number]** hierarchy level apply to the MPC in the specified slot number only on the specified member router in the Virtual Chassis. Statements included at the **[edit chassis fpc slot slot-number]** hierarchy level apply to the MPCs in the specified slot number on *each* member router in the Virtual Chassis.



**BEST PRACTICE:** To ensure that the statement you use to configure MPC chassis properties in an MX Series Virtual Chassis applies to the intended member router and MPC, we recommend that you always include the **member member-id** option before the **fpc** statement, where **member-id** is 0 or 1 for a two-member MX Series Virtual Chassis.

**Options** **fpc slot-number**—Specify the slot number of the DPC.

**Range:** 0 through 11

**pic number**—Specify the number of the Packet Forwarding Engine. Each DPC includes four Packet Forwarding Engines.

**Range:** 0 through 4

**port-mirror-instance port-mirroring-instance-name-fpc-level**—Associate a port-mirroring instance with the DPC and its corresponding PICs. The port-mirroring instance is configured under the **[edit forwarding-options port-mirroring]** hierarchy level.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Port-Mirroring Instances on MX Series 5G Universal Routing Platforms*
- [Enabling Inline Service Interfaces on page 225](#)
- *Virtual Chassis Components Overview*

## gateway-name (LNS Local Gateway)

**Syntax** `gateway-name gateway-name;`

**Hierarchy Level** `[edit services l2tp tunnel-group group-name local-gateway]`

**Release Information** Statement introduced in Junos OS Release 12.2.

**Description** Specify the gateway name for the LNS, which the LNS returns to the LAC in response to the LAC's SCCRQ message. This name must match the remote gateway name configured on the LAC, or the tunnel cannot be established.

**Options** **gateway-name**—Name of the LNS.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248](#)

## gateway-name (Tunnel Profile Remote Gateway)

---

Syntax	gateway-name <i>server-name</i> ;
Hierarchy Level	[edit access tunnel-profile <i>profile-name</i> tunnel <i>tunnel-id</i> <b>remote-gateway</b> ]
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify the hostname expected by the remote gateway—the LNS—from the source gateway—the LAC—when you set up a tunnel.
Options	<i>server-name</i> —Name of the LNS.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## gateway-name (Tunnel Profile Source Gateway)

---

Syntax	gateway-name <i>client-name</i> ;
Hierarchy Level	[edit access tunnel-profile <i>profile-name</i> tunnel <i>tunnel-id</i> <b>source-gateway</b> ]
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify the hostname provided by the source gateway—the LAC—to the remote gateway—the LNS—when you set up a tunnel.
Options	<i>client-name</i> —Name of the LAC.
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## gres-route-flush-delay (Subscriber Management)

<b>Syntax</b>	gres-route-flush-delay;
<b>Hierarchy Level</b>	[edit system services <a href="#">subscriber-management</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.2.
<b>Description</b>	For a subscriber network configured with either nonstop active routing (NSR) or graceful restart, configure the router to wait 180 seconds (3 minutes) before removing (flushing) static or dynamic access routes and access-internal routes from the forwarding table after a graceful Routing Engine switchover (GRES) has taken place.
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Minimize Traffic Loss Due to Stale Route Removal After a Graceful Routing Engine Switchover on page 51</a></li></ul>

## group (DHCP Local Server)

```
Syntax  group group-name {
        access-profile profile-name;
        authentication {
            password password-string;
            username-include {
                circuit-type;
                client-id;
                delimiter delimiter-character;
                domain-name domain-name-string;
                interface-description (device-interface | logical-interface);
                logical-system-name;
                mac-address;
                option-60;
                option-82 <circuit-id> <remote-id>;
                relay-agent-interface-id
                relay-agent-remote-id;
                relay-agent-subscriber-id;
                routing-instance-name;
                user-prefix user-prefix-string;
                vlan-tags;
            }
        }
        dynamic-profile profile-name <aggregate-clients (merge | replace) | use-primary
            primary-profile-name>;
        interface interface-name {
            access-profile profile-name;
            exclude;
            overrides {
                asymmetric-lease-time seconds;
                asymmetric-prefix-lease-time seconds;
                client-discover-match <option60-and-option82>;
                client-negotiation-match incoming-interface;
                delay-advertise {
                    based-on (option-15 | option-16 | option-18 | option-37) {
                        equals {
                            ascii ascii-string;
                            hexadecimal hexadecimal-string;
                        }
                        not-equals {
                            ascii ascii-string;
                            hexadecimal hexadecimal-string;
                        }
                        starts-with {
                            ascii ascii-string;
                            hexadecimal hexadecimal-string;
                        }
                    }
                }
                delay-time seconds;
            }
            delay-offer {
                based-on (option-60 | option-77 | option-82) {
```



```

    equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
    }
    not-equals {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
    }
    starts-with {
        ascii ascii-string;
        hexadecimal hexadecimal-string;
    }
}
delay-time seconds;
}
dual-stack dual-stack-group-name;
interface-client-limit number;
process-inform {
    pool pool-name;
}
rapid-commit;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
trace;
upto upto-interface-name;
}
liveness-detection {
    failure-action (clear-binding | clear-binding-if-interface-up | log-only);
    method {
        bfd {
            version (0 | 1 | automatic);
            minimum-interval milliseconds;
            minimum-receive-interval milliseconds;
            multiplier number;
            no-adaptation;
            transmit-interval {
                minimum-interval milliseconds;
                threshold milliseconds;
            }
            detection-time {
                threshold milliseconds;
            }
            session-mode (automatic | multihop | singlehop);
            holddown-interval milliseconds;
        }
        layer2-liveness-detection {
            max-consecutive-retries number;
            transmit-interval interval;
        }
    }
}
}
overrides {
    asymmetric-lease-time seconds;
    asymmetric-prefix-lease-time seconds;
}

```

```
client-discover-match <option60-and-option82>;
client-negotiation-match incoming-interface;
delay-advertise {
  based-on (option-15 | option-16 | option-18 | option-37) {
    equals {
      ascii ascii-string;
      hexadecimal hexadecimal-string;
    }
    not-equals {
      ascii ascii-string;
      hexadecimal hexadecimal-string;
    }
    starts-with {
      ascii ascii-string;
      hexadecimal hexadecimal-string;
    }
  }
  delay-time seconds;
}
delay-offer {
  based-on (option-60 | option-77 | option-82) {
    equals {
      ascii ascii-string;
      hexadecimal hexadecimal-string;
    }
    not-equals {
      ascii ascii-string;
      hexadecimal hexadecimal-string;
    }
    starts-with {
      ascii ascii-string;
      hexadecimal hexadecimal-string;
    }
  }
  delay-time seconds;
}
delegated-pool;
delete-binding-on-renegotiation;
dual-stack dual-stack-group-name;
interface-client-limit number;
process-inform {
  pool pool-name;
}
protocol-attributes attribute-set-name;
rapid-commit;
}
reconfigure {
  attempts attempt-count;
  clear-on-abort;
  strict;
  timeout timeout-value;
  token token-value;
  trigger {
    radius-disconnect;
  }
}
```

```

}
route-suppression;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit system services [dhcp-local-server](#)],  
 [edit system services [dhcp-local-server dhcpv6](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* system services [dhcp-local-server](#) ...],  
 [edit logical-systems *logical-system-name* system services [dhcp-local-server](#) ...],  
 [edit routing-instances *routing-instance-name* system services [dhcp-local-server](#) ...]

**Release Information** Statement introduced in Junos OS Release 9.0.  
 Statement introduced in Junos OS Release 12.1 for EX Series switches.

**Description** Configure a group of interfaces that have a common configuration, such as authentication parameters. A group must contain at least one interface.

**Options** *group-name*—Name of the group.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- *Extended DHCP Local Server Overview*
- *Grouping Interfaces with Common DHCP Configurations*
- *Using External AAA Authentication Services with DHCP*
- *Attaching Dynamic Profiles to DHCP Subscriber Interfaces or DHCP Client Interfaces*
- *DHCP Liveness Detection Using ARP and Neighbor Discovery Packets*

## group (DHCP Relay Agent)

```
Syntax  group group-name {
        access-profile profile-name;
        active-server-group server-group-name;
        authentication {
            password password-string;
            username-include {
                circuit-type;
                client-id;
                delimiter delimiter-character;
                domain-name domain-name-string;
                interface-description (device-interface | logical-interface);
                interface-name interface-name;
                logical-system-name;
                mac-address mac-address;
                relay-agent-interface-id;
                relay-agent-remote-id;
                relay-agent-subscriber-id;
                routing-instance-name;
                user-prefix user-prefix-string;
                vlan-tags;
            }
        }
        dynamic-profile profile-name {
            aggregate-clients (merge | replace);
            use-primary primary-profile-name;
        }
        forward-only {
            logical-system <current | default | logical-system-name>;
            routing-instance <current | default | routing-instance-name>;
        }
        interface interface-name {
            access-profile profile-name;
            exclude;
            liveness-detection {
                failure-action (clear-binding | clear-binding-if-interface-up | log-only);
                method {
                    bfd {
                        version (0 | 1 | automatic);
                        minimum-interval milliseconds;
                        minimum-receive-interval milliseconds;
                        multiplier number;
                        no-adaptation;
                        transmit-interval {
                            minimum-interval milliseconds;
                            threshold milliseconds;
                        }
                    }
                    detection-time {
                        threshold milliseconds;
                    }
                }
                session-mode (automatic | multihop | singlehop);
                holddown-interval milliseconds;
            }
        }
    }
```

```

    }
  }
}
overrides {
  allow-no-end-option;
  allow-snooped-clients;
  always-write-giaddr;
  always-write-option-82;
  asymmetric-lease-time seconds;
  asymmetric-prefix-lease-time seconds;
  client-discover-match <option60-and-option82 | incoming-interface>;
  client-negotiation-match incoming-interface;
  delay-authentication;
  delete-binding-on-renegotiation;
  disable-relay;
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  layer2-unicast-replies;
  no-allow-snooped-clients;
  no-bind-on-request;
  proxy-mode;
  relay-source
  replace-ip-source-with;
  send-release-on-delete;
  trust-option-82;
}
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
trace;
upto upto-interface-name;
}
liveness-detection {
  failure-action (clear-binding | clear-binding-if-interface-up | log-only);
  method {
    bfd {
      version (0 | 1 | automatic);
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      detection-time {
        threshold milliseconds;
      }
      session-mode (automatic | multihop | singlehop);
      holddown-interval milliseconds;
    }
    layer2-liveness-detection {
      max-consecutive-retries number;
      transmit-interval interval;
    }
  }
}

```

```

}
overrides {
  allow-snooped-clients;
  always-write-giaddr;
  always-write-option-82;
  asymmetric-lease-time seconds;
  asymmetric-prefix-lease-time seconds;
  client-discover-match <option60-and-option82>;
  client-negotiation-match incoming-interface;
  disable-relay;
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  layer2-unicast-replies;
  no-allow-snooped-clients;
  no-bind-on-request;
  proxy-mode;
  relay-source
  replace-ip-source-with;
  send-release-on-delete;
  trust-option-82;
}
relay-agent-interface-id {
  include-irb-and-l2;
  keep-incoming-interface-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82 <strict>;
  use-vlan-id;
}
relay-agent-remote-id {
  include-irb-and-l2;
  keep-incoming-remote-id ;
  no-vlan-interface-name;
  prefix prefix;
  use-interface-description (logical | device);
  use-option-82 <strict>;
  use-vlan-id;
}
relay-option {
  option-number option-number;
  default-action {
    drop;
    forward-only;
    local-server-group local-server-group;
    relay-server-group relay-server-group;
  }
  equals (ascii ascii-string | hexadecimal hexadecimal-string) {
    drop;
    forward-only;
    local-server-group local-server-group;
    relay-server-group relay-server-group;
  }
  starts-with (ascii ascii-string | hexadecimal hexadecimal-string) {
    drop;
  }
}

```

```

    forward-only;
    local-server-group local-server-group;
    relay-server-group relay-server-group;
  }
}
relay-option-82 {
  circuit-id {
    prefix prefix;
    use-interface-description (logical | device);
    use-option-82;
  }
  remote-id {
    prefix prefix;
    use-interface-description (logical | device);
  }
  server-id-override
}
remote-id-mismatch disconnect;
route-suppression;
service-profile dynamic-profile-name;
short-cycle-protection <lockout-min-time seconds> <lockout-max-time seconds>;
}

```

**Hierarchy Level** [edit forwarding-options [dhcp-relay](#)],  
 [edit forwarding-options dhcp-relay [dhcpv6](#)],  
 [edit logical-systems *logical-system-name* forwarding-options [dhcp-relay ...](#)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*  
 forwarding-options [dhcp-relay ...](#)],  
 [edit routing-instances *routing-instance-name* forwarding-options dhcp-relay ...]

**Release Information** Statement introduced in Junos OS Release 8.3.  
 Support at the [edit ... [dhcpv6](#)] hierarchy levels introduced in Junos OS Release 11.4.  
 Statement introduced in Junos OS Release 12.1 for EX Series switches.

**Description** Specify the name of a group of interfaces that have a common DHCP or DHCPv6 relay agent configuration. A group must contain at least one interface. Use the statement at the [edit ... [dhcpv6](#)] hierarchy levels to configure DHCPv6 support.

**Options** *group-name*—Name of a group of interfaces that have a common DHCP or DHCPv6 relay agent configuration.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
 interface-control—To add this statement to the configuration.

- Related Documentation**
- *Extended DHCP Relay Agent Overview*
  - *Understanding the Extended DHCP Relay Agent for EX Series Switches*
  - *Configuring an Extended DHCP Relay Server on EX Series Switches (CLI Procedure)*
  - *Configuring Group-Specific DHCP Relay Options*
  - *Grouping Interfaces with Common DHCP Configurations*
  - *Using External AAA Authentication Services with DHCP*
  - *Attaching Dynamic Profiles to DHCP Subscriber Interfaces or DHCP Client Interfaces*
  - *DHCP Liveness Detection Using ARP and Neighbor Discovery Packets*



## group-profile (Group Profile)

```
Syntax  group-profile profile-name {
        l2tp {
            interface-id interface-id;
            lcp-renegotiation;
            local-chap;
            maximum-sessions-per-tunnel number;
        }
        ppp {
            cell-overhead;
            encapsulation-overhead bytes;
            framed-pool pool-id;
            idle-timeout seconds;
            interface-id interface-id;
            keepalive seconds;
            ppp-options {
                aaa-options aaa-options-name;
                chap;
                ignore-magic-number-mismatch;
                initiate-ncp (ip | ipv6 | dual-stack-passive)
                ipcp-suggest-dns-option;
                mru;
                mtu;
                pap;
                peer-ip-address-optional;
            }
            primary-dns primary-dns;
            primary-wins primary-wins;
            secondary-dns secondary-dns;
            secondary-wins secondary-wins;
        }
    }
```

Hierarchy Level [\[edit access\]](#)

Release Information Statement introduced before Junos OS Release 7.4.

Description Configure the group profile.



**NOTE:** Subordinate statement support depends on the platform. See individual statement topics for more detailed support information.

Options ***profile-name***—Name assigned to the group profile.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring the Group Profile for Defining L2TP Attributes</i></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li></ul>

## hierarchical-scheduler (Subscriber Interfaces on MX Series Routers)

<b>Syntax</b>	<pre> hierarchical-scheduler {   implicit-hierarchy;   maximum-hierarchy-levels <i>number</i>; } </pre>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.1.</p> <p><b>implicit-hierarchy</b> option added in Junos OS Release 13.1.</p> <p>Support on GRE tunnel interfaces configured on physical interfaces on MICs or MPCs in MX Series routers added in Junos OS Release 13.3.</p> <p>Support for up to four hierarchy levels added in Junos OS Release 16.1.</p>
<b>Description</b>	<p>Configure hierarchical scheduling options on the interface.</p> <p>The statement is supported on the following interfaces:</p> <ul style="list-style-type: none"> <li>• MIC and MPC interfaces in MX Series routers</li> <li>• GRE tunnel interfaces configured on physical interfaces hosted on MIC or MPC line cards in MX Series routers</li> </ul> <p>To enable hierarchical scheduling on MX Series routers, configure the <b>hierarchical-scheduler</b> statement at each member physical interface level of a particular aggregated Ethernet interface as well as at that aggregated Ethernet interface level. On other routing platforms, it is enough if you include this statement at the aggregated Ethernet interface level.</p>
<b>Options</b>	<p><b>implicit-hierarchy</b>—Configure four-level hierarchical scheduling. When you include the <b>implicit-hierarchy</b> option, a hierarchical relationship is formed between the CoS scheduler nodes at level 1, level 2, level 3, and level 4. The <b>implicit-hierarchy</b> option is supported only on MPC/MIC subscriber interfaces and interface sets on MX Series routers.</p> <p><b>maximum-hierarchy-levels <i>number</i></b>—Specify the maximum number of hierarchical scheduling levels allowed for node scaling, from 2 through 4 levels. The default number of levels is 3. The <b>maximum-hierarchy-levels</b> option is supported on MPC/MIC or EQ DPC subscriber interfaces and interface sets on MX Series routers.</p> <ul style="list-style-type: none"> <li>• If you set <b>maximum-hierarchy-levels</b> to 2, interface sets are not allowed. In this case, if you configure a level 2 interface set, you generate Packet Forwarding Engine errors.</li> <li>• If you do not include the <b>maximum-hierarchy-levels</b> option, keeping the default number of hierarchy levels at 3, interface sets can be at either level 2 or level 3, depending on whether the member logical interfaces within the interface set have a traffic control profile. If any member logical interface has a traffic control profile, then the interface</li> </ul>

set is a level 2 CoS scheduler node. If no member logical interface has a traffic control profile, the interface set is at level 3.



**CAUTION:** MPC3E, 32x10GE MPC4E, and 2x100GE + 8x10GE MPC4E MPCs support only two levels of scheduling hierarchy. When enabling hierarchical scheduling on these cards, you must explicitly set `maximum-hierarchy-levels` to 2.

**Required Privilege Level** view-level—To view this statement in the configuration.  
control-level—To add this statement to the configuration.

**Related Documentation**

- *Understanding Hierarchical CoS for Subscriber Interfaces*
- *Configuring Hierarchical CoS for a Subscriber Interface of Aggregated Ethernet Links*
- *Configuring Hierarchical Schedulers for CoS*
- *Configuring Hierarchical CoS on a Static PPPoE Subscriber Interface*
- *Hierarchical CoS on MPLS Pseudowire Subscriber Interfaces Overview*

## hello-interval (L2TP)

<b>Syntax</b>	<code>hello-interval <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit services l2tp <i>tunnel-group name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the keepalive timer for L2TP tunnels.
<b>Options</b>	<p><b><i>seconds</i></b>—Interval, in seconds, after which the server sends a hello message if no messages are received. A value of 0 means that no hello messages are sent.</p> <p><b>Range:</b> 0 through 3600</p> <p><b>Default:</b> 60 seconds</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring Timers for L2TP Tunnels</i></li> <li>• <i>Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</i></li> </ul>


---

## identification (Tunnel Profile)


---

<b>Syntax</b>	<code>identification <i>name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Specify the assignment ID of an L2TP tunnel. L2TP sessions with the same tunnel assignment identification and destination are grouped into the same tunnel.
<b>Options</b>	<b><i>name</i></b> —Tunnel assignment ID; string of up to 32 alphanumeric characters.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## idle-timeout (Access)

<b>Syntax</b>	<code>idle-timeout seconds;</code>
<b>Hierarchy Level</b>	<code>[edit access group-profile <i>profile-name</i> ppp],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> ppp]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for OCX Series switches.
<b>Description</b>	<p>Configure the idle timeout for a user. The router might consider a PPP session to be idle because of the following reasons:</p> <ul style="list-style-type: none"> <li>• There is no ingress traffic on the PPP session.</li> <li>• There is no egress traffic.</li> <li>• There is neither ingress or egress traffic on the PPP session.</li> <li>• There is no ingress or egress PPP control traffic. This is applicable only if keepalives are enabled.</li> </ul>
<b>Options</b>	<p><b>seconds</b>—Number of seconds a user can remain idle before the session is terminated.</p> <p><b>Range:</b> 0 through 4,294,967,295 seconds</p> <p><b>Default:</b> 0</p>
<div>  <p><b>NOTE:</b> The <code>[edit access]</code> hierarchy is not available on QFabric systems.</p> </div>	
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the PPP Attributes for a Group Profile</a></li> <li>• <a href="#">Configuring PPP Properties for a Client-Specific Profile</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> </ul>

## idle-timeout (L2TP)

<b>Syntax</b>	<code>idle-timeout <i>seconds</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1.
<b>Description</b>	Specify how long a tunnel is active after its last session is terminated. The timer starts when the session is terminated and the tunnel is disconnected when the timer expires.
	<div>  <p><b>BEST PRACTICE:</b> Before you downgrade to a Junos OS Release that does not support this statement, unconfigure the statement by issuing <code>no services l2tp tunnel idle-timeout</code>.</p> </div>
<b>Options</b>	<p><i>seconds</i>—Length of the idle timeout. A value of <b>0</b> creates a persistent tunnel; that is, the tunnel remains active indefinitely until the remote peer disconnects it or you issue the <b>clear services l2tp tunnel</b> command.</p> <p><b>Range:</b> 0 through 86,400</p> <p><b>Default:</b> 60</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Setting the L2TP Tunnel Idle Timeout on page 143</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## ignore-magic-number-mismatch (Access Group Profile)

Syntax	ignore-magic-number-mismatch;
Hierarchy Level	[edit access <b>group-profile</b> <i>name</i> <b>ppp</b> <b>ppp-options</b> ]
Release Information	Statement introduced in Junos OS Release 18.1R1 on MX Series routers.
Description	<p>Prevent the Packet Forwarding Engine from performing a validation check for magic numbers received in LCP keepalive (Echo-Request/Echo-Reply) exchanges for a group of tunneled PPP subscribers at the LNS.</p> <p>A mismatch occurs when the PPP magic number received from a remote peer in the keepalive exchange does not match the value agreed upon during LCP negotiation. Disabling the validation check prevents PPP from terminating the session when an unexpected number is received. Configuring this statement has no effect on LCP magic number negotiation or on the exchange of keepalives when the remote peer magic number is the expected negotiated number.</p>



**NOTE:** Because magic number validation is not performed, the Packet Forwarding Engine does not detect whether the remote peer sends the local peer's magic number, which would indicate a loopback or other network issue. This is considered to be an unlikely situation, because LCP negotiation completed successfully, meaning no loopback was present at that time.



**NOTE:** You can also configure this behavior in a dynamic PPP profile. When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the subscriber only when the dynamic profile does not include any PPP option available in the group profile.

This means that **ignore-magic-number-mismatch** configured in a group profile is not applied when the dynamic profile includes any PPP option, even when the dynamic profile does not include **ignore-magic-number-mismatch** statement.



**NOTE:** This statement is not supported on static interfaces.



**Required Privilege** access—To view this statement in the configuration.  
**Level** access-control—To add this statement to the configuration.

**Related Documentation**

- [Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218](#)
- For dynamic profiles: [Understanding How the Router Processes Subscriber-Initiated PPP Fast Keepalive Requests on page 94](#)

## ignore-magic-number-mismatch (Dynamic Profiles)

<b>Syntax</b>	<code>ignore-magic-number-mismatch;</code>
<b>Hierarchy Level</b>	<code>[edit dynamic-profiles <i>profile-name</i> interfaces <b>pp0</b> <i>unit</i> "\$junos-interface-unit" <b>ppp-options</b>],</code> <code>[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" <i>unit</i></code> <code>"\$junos-interface-unit" <b>ppp-options</b>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 18.1R1 on MX Series routers.
<b>Description</b>	<p>Prevent the Packet Forwarding Engine from performing a validation check for magic numbers received in LCP keepalive (Echo-Request/Echo-Reply) exchanges for dynamic PPP subscriber connections terminated at the router or for dynamic tunneled PPP subscribers on LNS inline service interfaces.</p> <p>A mismatch occurs when the PPP magic number received from a remote peer in the keepalive exchange does not match the value agreed upon during LCP negotiation. Disabling the validation check prevents PPP from terminating the session when an unexpected number is received. Configuring this statement has no effect on LCP magic number negotiation or on the exchange of keepalives when the remote peer magic number is the expected negotiated number.</p> <p>For dynamic PPP subscriber connections terminated at the router, configure the statement at the <code>[edit dynamic-profiles <i>profile-name</i> interfaces <b>pp0</b> <i>unit</i> "\$junos-interface-unit" <b>ppp-options</b>]</code> hierarchy level.</p> <p>For dynamic tunneled PPP subscribers on LNS inline service interfaces, configure the statement at the <code>[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" <i>unit</i> "\$junos-interface-unit" <b>ppp-options</b>]</code> hierarchy level.</p>



**NOTE:** Because magic number validation is not performed, the Packet Forwarding Engine does not detect whether the remote peer sends the local peer's magic number, which would indicate a loopback or other network issue. This is considered to be an unlikely situation, because LCP negotiation completed successfully, meaning no loopback was present at that time.



**NOTE:** You can also configure this behavior in an L2TP group profile that applies to tunneled PPP subscribers at the LNS. When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the

subscriber only when the dynamic profile does not include any PPP option available in the group profile.

This means that `ignore-magic-number-mismatch` configured in a group profile is not applied when the dynamic profile includes any PPP option, even when the dynamic profile does not include `ignore-magic-number-mismatch`.



**NOTE:** This statement is not supported on static interfaces.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration.
	interface-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Preventing the Validation of PPP Magic Numbers During PPP Keepalive Exchanges on page 98</a></li> <li>• <a href="#">Understanding How the Router Processes Subscriber-Initiated PPP Fast Keepalive Requests on page 94</a></li> <li>• For L2TP group profiles: <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> </ul>
------------------------------	--

## initiate-ncp (Dynamic and Static PPP)

<b>Syntax</b>	<code>initiate-ncp (ip   ipv6   dual-stack-passive);</code>
<b>Hierarchy Level</b>	<p>[edit access group-profile <i>profile-name</i> ppp <a href="#">ppp-options</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit “\$junos-interface-unit” <a href="#">ppp-options</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> interfaces “\$junos-interface-ifd-name” unit “\$junos-interface-unit” <a href="#">ppp-options</a>],</p> <p>[edit interfaces pp0 unit <i>logical-unit-number</i> <a href="#">ppp-options</a>],</p> <p>[edit interfaces <i>si-fpc/pic/port</i> unit <i>logical-unit-number</i> <a href="#">ppp-options</a>]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 14.1.
<b>Description</b>	Configure PPP Network Control Protocol (NCP) negotiation mode (active or passive) for dynamic and static IPv4 and IPv6 PPP subscriber interfaces. You can also configure PPP NCP negotiation mode for the PPP server in an IPv4/IPv6 dual-stack configuration.
<b>Options</b>	<p><b>dual-stack-passive</b>—Enable passive PPP NCP negotiation for the PPP server in an IPv4/IPv6 dual-stack configuration. The <b>initiate-ncp dual-stack-passive</b> statement overrides the <b>initiate-ncp ip</b> and <b>initiate-ncp ipv6</b> statements if they are configured in an IPv4/IPv6 dual-stack configuration.</p> <p><b>ip</b>—Enable active PPP NCP negotiation for dynamic and static PPP subscriber interfaces configured with the IPv4 (<b>inet</b>) protocol address family, and for which IPv4 address attributes are assigned during authorization. By default, dynamic and static IPv4 subscriber interfaces use passive PPP NCP negotiation. In an IPv4/IPv6 dual-stack configuration, use the <b>initiate-ncp ip</b> statement to enable active PPP NCP negotiation for the IPv4 subscriber interface.</p> <p><b>ipv6</b>—Enable active PPP NCP negotiation for dynamic and static PPP subscriber interfaces configured with the IPv6 (<b>inet6</b>) protocol address family, and for which IPv6 address attributes are assigned during authorization. By default, dynamic and static IPv6 subscriber interfaces use passive PPP NCP negotiation. In an IPv4/IPv6 dual-stack configuration, use the <b>initiate-ncp ipv6</b> statement to enable active PPP NCP negotiation for the IPv6 subscriber interface.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the PPP Network Control Protocol Negotiation Mode on page 113</a></li> <li>• <a href="#">PPP Network Control Protocol Negotiation Mode Overview on page 108</a></li> </ul>

## inline-services (PIC level)

<b>Syntax</b>	<pre>inline-services {   <b>bandwidth</b> (1g   10g   20g   30g   40g   100g); }</pre>
<b>Hierarchy Level</b>	[edit chassis <b>fpc</b> <i>slot-number</i> pic <i>number</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	<p>Enable inline services on PICs residing on MPCs and optionally specify a bandwidth for traffic on the inline service interface.</p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Enabling Inline Service Interfaces on page 225</a></li><li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li></ul>

## input-hierarchical-policer

---

<b>Syntax</b>	<code>input-hierarchical-policer <i>policer-name</i>;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> layer2-policer], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> layer2-policer],
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
<b>Description</b>	Apply a hierarchical policer to the Layer 2 input traffic for all protocol families at the physical or logical interface.
<b>Options</b>	<i>policer-name</i> —Name of the hierarchical policer.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Hierarchical Policers</i></li><li>• <i>layer2-policer (Hierarchical Policer)</i></li></ul>

## interface (Dynamic Routing Instances)

---

<b>Syntax</b>	<code>interface <i>interface-name</i>;</code>
<b>Hierarchy Level</b>	[edit dynamic-profiles <i>profile-name</i> <b>routing-instances</b> <i>routing-instance-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6.
<b>Description</b>	Assign the specified interface to the dynamically created routing instance.
<b>Options</b>	<i>interface-name</i> —The interface name variable ( <i>\$junos-interface-name</i> ). The interface name variable is dynamically replaced with the interface the accessing client uses when connecting to the router.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	

## interface (L2TP Service Interfaces)

<b>Syntax</b>	<code>interface <i>service-interface-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services service-device-pools <b>pool</b> <i>pool-name</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Specify a service interface assigned to a service interface pool. You specify more than one interface for each pool; the interfaces are used by an L2TP tunnel group to balance traffic loads.
<b>Options</b>	<i>service-interface-name</i> —Name of the service interface.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions on page 258</a></li><li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li></ul>

## interface-id

<b>Syntax</b>	<code>interface-id <i>interface-id</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access group-profile <i>profile-name</i> l2tp],</code> <code>[edit access group-profile <i>profile-name</i> <b>ppp</b>],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> ike],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> <b>l2tp</b>],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> ppp]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the interface identifier.
<b>Options</b>	<b><i>interface-id</i></b> —Identifier for the interface representing a Layer 2 Tunneling Protocol (L2TP) session configured at the <code>[edit interfaces <i>interface-name</i> unit <i>local-unit-number</i> dial-options]</code> hierarchy level. For more information about the interface ID, see <i>Services Interface Naming Overview</i> .
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring L2TP for a Group Profile</i></li> <li>• <i>Configuring the PPP Attributes for a Group Profile</i></li> <li>• <i>Configuring L2TP Properties for a Client-Specific Profile</i></li> <li>• <i>Configuring PPP Properties for a Client-Specific Profile</i></li> <li>• <i>Configuring an IKE Access Profile</i></li> <li>• <a href="#">Configuring an L2TP Access Profile on the LNS on page 220</a></li> </ul>



## interfaces (Static and Dynamic Subscribers)

```

Syntax  interfaces {
        interface-name {
            unit logical-unit-number {
                actual-transit-statistics;
                auto-configure {
                    agent-circuit-identifier {
                        dynamic-profile profile-name;
                    }
                }
                line-identity {
                    include {
                        accept-no-ids;
                        circuit-id;
                        remote-id;
                    }
                    dynamic-profile profile-name;
                }
            }
        }
        family family {
            access-concentrator name;
            address address;
            direct-connect;
            duplicate-protection;
            dynamic-profile profile-name;
            filter {
                adf {
                    counter;
                    input-precedence precedence;
                    not-mandatory;
                    output-precedence precedence;
                    rule rule-value;
                }
                input filter-name {
                    precedence precedence;
                    shared-name filter-shared-name;
                }
                output filter-name {
                    precedence precedence;
                    shared-name filter-shared-name;
                }
            }
            max-sessions number;
            max-sessions-vs-a-ignore;
            rpf-check {
                mode loose;
            }
            service {
                input {
                    service-set service-set-name {
                        service-filter filter-name;
                    }
                }
                post-service-filter filter-name;
            }
        }
    }

```

```

    }
    output {
        service-set service-set-name {
            service-filter filter-name;
        }
    }
}
service-name-table table-name
short-cycle-protection <lockout-time-min minimum-seconds lockout-time-max
    maximum-seconds>;
unnumbered-address interface-name <preferred-source-address address>;
}
filter {
    input filter-name (
        precedence precedence;
        shared-name filter-shared-name;
    )
    output filter-name {
        precedence precedence;
        shared-name filter-shared-name;
    }
}
host-prefix-only;
ppp-options {
    chap;
    pap;
}
proxy-arp;
service {
    pcef pcef-profile-name {
        activate rule-name | activate-all;
    }
}
targeted-options {
    backup backup;
    group group;
    primary primary;
    weight ($junos-interface-target-weight | weight-value);
}
vlan-id;
vlan-tags outer [tpid].vlan-id [inner [tpid].vlan-id];
}
vlan-tagging;
}
interface-set interface-set-name {
    interface interface-name {
        unit logical unit number {
            advisory-options {
                downstream-rate rate;
                upstream-rate rate;
            }
        }
    }
}
pppoe-underlying-options {
    max-sessions number;
}

```

```

    }
  }
  demux0 {
    unit logical-unit-number {
      demux-options {
        underlying-interface interface-name
      }
      family family {
        access-concentrator name;
        address address;
        direct-connect;
        duplicate-protection;
        dynamic-profile profile-name;
        demux-source {
          source-prefix;
        }
        filter {
          input filter-name (
            precedence precedence;
            shared-name filter-shared-name;
          )
          output filter-name {
            precedence precedence;
            shared-name filter-shared-name;
          }
        }
        mac-validate (loose | strict);
        max-sessions number;
        max-sessions-vsa-ignore;
        rpf-check {
          fail-filter filter-name;
          mode loose;
        }
        service-name-table table-name
        short-cycle-protection <lockout-time-min minimum-seconds lockout-time-max
          maximum-seconds>;
        unnumbered-address interface-name <preferred-source-address address>;
      }
      filter {
        input filter-name;
        output filter-name;
      }
      vlan-id number;
      vlan-tags outer [tpid].vlan-id [inner [tpid].vlan-id];
    }
  }
  pp0 {
    unit logical-unit-number {
      keepalives interval seconds;
      no-keepalives;
      pppoe-options {
        underlying-interface interface-name;
        server;
      }
      ppp-options {

```

```

aaa-options aaa-options-name;
authentication [ authentication-protocols ];
chap {
    challenge-length minimum minimum-length maximum maximum-length;
    local-name name;
}
ignore-magic-number-mismatch;
initiate-ncp (dual-stack-passive | ipv6 | ip)
ipcp-suggest-dns-option;
mru size;
mtu (size | use-lower-layer);
on-demand-ip-address;
pap;
peer-ip-address-optional;
local-authentication {
    password password;
    username-include {
        circuit-id;
        delimiter character;
        domain-name name;
        mac-address;
        remote-id;
    }
}
}
family inet {
    unnumbered-address interface-name;
    address address;
    service {
        input {
            service-set service-set-name {
                service-filter filter-name;
            }
            post-service-filter filter-name;
        }
        output {
            service-set service-set-name {
                service-filter filter-name;
            }
        }
    }
}
filter {
    input filter-name {
        precedence precedence;
        shared-name filter-shared-name;
    }
    output filter-name {
        precedence precedence;
        shared-name filter-shared-name;
    }
}
}
}
}
}

```

**Hierarchy Level** [edit [dynamic-profiles](#) *profile-name*]

**Release Information** Statement introduced in Junos OS Release 9.2.

**Description** Define interfaces for dynamic client profiles.

**Options** *interface-name*—The interface variable (`$junos-interface-ifd-name`). The interface variable is dynamically replaced with the interface the DHCP client accesses when connecting to the router.



**NOTE:** Though we do not recommend it, you can also enter the specific name of the interface you want to assign to the dynamic profile.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Dynamic Subscriber Interfaces Using IP Demux Interfaces in Dynamic Profiles*
- *Configuring Dynamic PPPoE Subscriber Interfaces*
- *Configuring Dynamic VLANs Based on Agent Circuit Identifier Information*
- *DHCP Subscriber Interface Overview*
- *Subscribers over Static Interfaces Configuration Overview*
- *Demultiplexing Interface Overview*

## ip-reassembly

**Syntax**

```
ip-reassembly {
  profile profile-name
  rule rule-name {
    match-direction direction
  };
}
```

**Hierarchy Level** [edit services]

**Release Information** Statement introduced in Junos OS Release 13.1.

**Description** Configure the IP reassembly parameters to be applied to the L2TP server.



**NOTE:** Inline IP reassembly configuration does not require you to configure the **profile** statement. The **profile** configuration is used when IP reassembly is configured on services PICs.

**Options** **profile *profile-name***—Name of the IP reassembly profile.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level**

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring IP Inline Reassembly for L2TP on page 262](#)
- [IP Packet Fragment Reassembly for L2TP Overview on page 262](#)

## ip-reassembly (L2TP)

**Syntax** `ip-reassembly {  
    service-set service-set-name;  
}`

**Hierarchy Level** [edit services [l2tp](#)]

**Release Information** Statement introduced in Junos OS Release 13.1.

**Description** Associate the reassembly service-set with the L2TP service.



**NOTE:** The service set must be defined at the [edit services] hierarchy level.

**Options** `service-set service-set-name`—Identifies the service set to be associated with the L2TP service.


**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [IP Packet Fragment Reassembly for L2TP Overview on page 262](#)
- [Configuring IP Inline Reassembly for L2TP on page 262](#)

## ip-reassembly-rules (Service Set)

---

Syntax	<code>ip-reassembly-rules <i>rule-name</i>;</code>
Hierarchy Level	<code>[edit services service-set <i>service-set-name</i>]</code>
Release Information	Statement introduced in Junos OS Release 13.1.
Description	Specify one or more previously configured IP reassembly rules to associate with the service set.
	<div> <b>NOTE:</b> The IP reassembly rule must be defined at the <code>[edit services ip-reassembly rule]</code> hierarchy level.</div>
Options	<i>rule-name</i> —Name of an IP reassembly rule.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring IP Inline Reassembly for L2TP on page 262</a></li><li>• <a href="#">IP Packet Fragment Reassembly for L2TP Overview on page 262</a></li></ul>



## ipcp-suggest-dns-option

<b>Syntax</b>	<code>ipcp-suggest-dns-option;</code>
<b>Hierarchy Level</b>	<p>[edit access group-profile <i>group-profile-name</i> ppp <a href="#">ppp-options</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit "\$junos-interface-unit" <a href="#">ppp-options</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" unit "\$junos-interface-unit" <a href="#">ppp-options</a>],</p> <p>[edit interfaces pp0 unit <i>logical-unit-number</i> <a href="#">ppp-options</a>],</p> <p>[edit interfaces si-<i>fpc/pic/port</i> unit <i>logical-unit-number</i> <a href="#">ppp-options</a>]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 16.1.
<b>Description</b>	Configure the router to prompt Customer Premises Equipment (CPE) to negotiate both primary and secondary DNS addresses during IPCP negotiation for terminated PPPoE and LNS subscribers. You can configure this for dynamic or static PPPoE subscribers, dynamic or static LNS subscribers, and in an LNS group profile.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Ensuring IPCP Negotiation for Primary and Secondary DNS Addresses on page 114</a></li> <li>• <a href="#">Configuring the PPP Attributes for a Group Profile</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Configuring Dynamic Authentication for PPP Subscribers on page 103</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## keepalive

---

<b>Syntax</b>	<code>keepalive seconds;</code>
<b>Hierarchy Level</b>	<code>[edit access group-profile <i>profile-name</i> <b>ppp</b>],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> ppp]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the keepalive interval for an L2TP tunnel.
<b>Options</b>	<p><b>seconds</b>—Time period that must elapse before the Junos OS checks the status of the Point-to-Point Protocol (PPP) session by sending an echo request to the peer.</p> <p>For L2TP on MX Series routers, the minimum recommended interval is 30 seconds. A value of 0 disables generation of keepalive messages from the LNS.</p> <p><b>Range:</b> 0 through 32,767 seconds</p> <p><b>Default:</b> 30 seconds</p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the PPP Attributes for a Group Profile</a></li><li>• <a href="#">Configuring PPP Properties for a Client-Specific Profile</a></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li></ul>

## keepalives

<b>Syntax</b>	<code>keepalives &lt;interval seconds&gt; &lt;down-count number&gt; &lt;up-count number&gt;;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	<p>Enable the sending of keepalives on a physical interface configured with PPP, Frame Relay, or Cisco HDLC encapsulation.</p> <p>For ATM2 IQ interfaces only, you can enable keepalives on a logical interface unit if the logical interface is configured with one of the following PPP over ATM encapsulation types:</p> <ul style="list-style-type: none"> <li>• <b>atm-ppp-llc</b>—PPP over AAL5 LLC encapsulation.</li> <li>• <b>atm-ppp-vc-mux</b>—PPP over AAL5 multiplex encapsulation.</li> </ul>
<b>Default</b>	Sending of keepalives is enabled by default. The default keepalive interval is 10 seconds for PPP, Frame Relay, or Cisco HDLC. The default down-count is 3 and the default up-count is 1 for PPP or Cisco HDLC.
<b>Options</b>	<p><b>down-count <i>number</i></b>—The number of keepalive packets a destination must fail to receive before the network takes down a link.  <b>Range:</b> 1 through 255  <b>Default:</b> 3</p> <p><b>interval <i>seconds</i></b>—The time in seconds between successive keepalive requests.  <b>Range:</b> 1 through 32767 seconds  <b>Default:</b> 10 seconds</p> <p><b>up-count <i>number</i></b>—The number of keepalive packets a destination must receive to change a link's status from down to up.  <b>Range:</b> 1 through 255  <b>Default:</b> 1</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring Keepalives</i></li> <li>• <i>Configuring Frame Relay Keepalives</i></li> </ul>

- [Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216](#)

## keepalives (Dynamic Profiles)

<b>Syntax</b>	<pre>keepalives {   interval <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	<pre>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 <b>unit</b> <i>logical-unit-number</i> ] [edit dynamic-profiles <i>profile-name</i> interfaces pp0 <b>unit</b> "\$junos-interface-unit"] [edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" <b>unit</b> "\$junos-interface-unit"]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the <code>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 <b>unit</b> "\$junos-interface-unit"]</code> hierarchy level introduced in Junos OS Release 10.1.</p> <p>Support at the <code>[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" <b>unit</b> "\$junos-interface-unit"]</code> hierarchy level introduced in Junos OS Release 12.2.</p>
<b>Description</b>	<p>Specify the keepalive interval in a PPP dynamic profile.</p> <p>Starting in Junos OS Release 15.1R5, you can configure the PPP keepalive interval for subscriber services in the range 1 second through 600 seconds. Subscriber PPP keepalives are handled by the Packet Forwarding Engine. If you configure a value greater than 600 seconds, the number is accepted by the CLI, but the Packet Forwarding Engine limits the interval to 600 seconds.</p> <p>In earlier Junos OS releases, the range is from 1 second through 60 seconds. The Packet Forwarding Engine limits any higher configured value to an interval of 60 seconds.</p> <p>PPP keepalives for nonsubscriber services are handled by the Routing Engine with an interval range from 1 second through 32,767 seconds.</p>
<b>Default</b>	Sending of keepalives is enabled by default.
<b>Options</b>	<p><b>interval <i>seconds</i></b>—The time in seconds between successive keepalive requests.</p> <p><b>Range:</b> 1 through 600 seconds for subscriber services</p> <p><b>Range:</b> 1 through 32767 seconds for nonsubscriber services</p> <p><b>Default:</b> 30 seconds for LNS-based PPP sessions. 10 seconds for all other PPP sessions.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Dynamic Profiles Overview</a></li> <li>• <a href="#">Configuring Dynamic Authentication for PPP Subscribers on page 103</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## l2tp

```
Syntax l2tp {
    access-line-information <connection-speed-update>;
    destination {
        address ip-address {
            access-line-information <connection-speed-update>;
            drain;
            routing-instance routing-instance-name {
                drain;
            }
        }
        lockout-timeout seconds;
        name destination-name {
            drain;
        }
    }
    destination-equal-load-balancing;
    destruct-timeout seconds;
    disable-calling-number-avp;
    disable-failover-protocol;
    drain;
    enable-ipv6-services-for-lac;
    enable-snmp-tunnel-statistics;
    failover-within-preference;
    ip-reassembly;
    maximum-sessions number;
    rx-connect-speed-when-equal;
    sessions-limit-group limit-group-name {
        maximum-sessions number;
    }
    traceoptions {
        debug-level level;
        file filename <files number> <match regular-expression> <size maximum-file-size>
            <world-readable | no-world-readable>;
        filter {
            protocol name;
            user user@domain;
            user-name username;
        }
        flag flag;
        interfaces interface-name {
            debug-level severity;
            flag flag;
        }
        level (all | error | info | notice | verbose | warning);
        no-remote-trace;
    }
    tunnel {
        assignment-id-format (assignment-id | client-server-id);
        failover-resync (failover-protocol | silent-failover);
        idle-timeout seconds;
        maximum-sessions number;
    }
}
```

```

minimum-retransmission-timeout;
name name {
  address ip-address {
    drain;
    routing-instance routing-instance-name {
      drain;
    }
  }
  drain;
}
nas-port-method;
retransmission-count-established count;
retransmission-count-not-established count;
rx-window-size packets;
tx-address-change (accept | ignore | ignore-ip-address | ignore-udp-port | reject |
  reject-ip-address | reject-udp-port);
}
tunnel-group group-name {
  aaa-access-profile profile-name;
  dynamic-profile profile-name;
  hello-interval seconds;
  hide-avps;
  l2tp-access-profile profile-name;
  local-gateway {
    address address;
    gateway-name gateway-name;
  }
  maximum-send-window packets;
  maximum-sessions number;
  ppp-access-profile profile-name;
  receive-window packets;
  retransmit-interval seconds;
  service-device-pool pool-name;
  service-interface interface-name;
  service-profile profile-name(parameter)&profile-name;
  syslog {
    host hostname {
      facility-override facility-name;
      log-prefix prefix-value;
      services severity-level;
    }
  }
  tos-reflect;
  tunnel-switch-profile profile-name;
  tunnel-timeout seconds;
}
tunnel-switch-profile profile-name;
tx-connect-speed-method method;
weighted-load-balancing;
}

```

Hierarchy Level [edit services]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Support for LAC on MX Series routers introduced in Junos OS Release 10.4.  
Support for LNS on MX Series routers introduced in Junos OS Release 11.4.

**Description** Configure L2TP services to establish PPP tunnels across a network.



**NOTE:** L2TP is not supported over GRE tunnels.

---

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

---



**NOTE:** Subordinate statement support depends on the platform. See individual statement topics for more detailed support information.

---

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Layer 2 Tunneling Protocol Overview](#)
- [L2TP for Subscriber Access Overview on page 121](#)



## l2tp (Profile)

**Syntax**

```
l2tp {
  interface-id interface-id;
  lcp-renegotiation;
  local-chap;
  maximum-sessions number;
  maximum-sessions-per-tunnel number;
  multilink {
    drop-timeout milliseconds;
    fragment-threshold bytes;
  }
  override-result-code session-out-of-resource;
  ppp-authentication (chap | pap);
  ppp-profile profile-name;
  sessions-limit-group;
  service-profile profile-name(parameter)&profile-name;
  shared-secret shared-secret;
}
```

**Hierarchy Level** [edit access profile *profile-name* *client* *client-name*]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Configure the L2TP properties for a profile.



**NOTE:** Only the `interface-id`, `lcp-renegotiation`, `maximum-sessions`, `maximum-sessions-per-tunnel`, `sessions-limit-group` and `shared-secret` statements are supported for L2TP LNS on MX Series routers.

**Options** `interface-id`—Configure the interface identifier.

**Values:**

- `interface-id`—Identifier for the interface representing a Layer 2 Tunneling Protocol (L2TP) session configured at the [edit interfaces *interface-name* unit *local-unit-number* dial-options] hierarchy level. For more information about the interface ID, see *Services Interface Naming Overview*.

`lcp-renegotiation`—Configure the L2TP network server (LNS) so it renegotiates the link control protocol (LCP) with the PPP client. When LCP renegotiation is disabled, LNS uses the pre-negotiated LCP parameters between the L2TP access concentrator (LAC) and PPP client to set up the session. When LCP renegotiation is enabled, authentication is also renegotiated.



**NOTE:** This statement is not supported at the [edit access group-profile l2tp] hierarchy level for L2TP LNS on MX Series routers.

**local-chap**—Configure the Junos OS so that the LNS ignores proxy authentication attribute-value pairs (AVPs) from the L2TP access concentrator (LAC) and reauthenticates the PPP client using a Challenge Handshake Authentication Protocol (CHAP) challenge. When you do this, the LNS directly authenticates the PPP client.



**NOTE:** This statement is not supported for L2TP LNS on MX Series routers.

**maximum-sessions**—Specify the maximum number of L2TP sessions for the chassis, all tunnels, a tunnel group, a session limit group, or a client.

**Values:**

- *number*—Number of sessions allowed.
- Range: (Chassis, tunnel group, session limit group, or client) 1 through the default maximum chassis limit
- Range: (Tunnel) 1 through 65,536

**maximum-sessions-per-tunnel**—Configure the maximum sessions for a Layer 2 tunnel.



**NOTE:** This statement is not supported at the [edit access group-profile l2tp] hierarchy level for L2TP LNS on MX Series routers.

**Values:**

- *number*—Maximum number of sessions for a Layer 2 tunnel.

**multilink**—Configure Multilink PPP for Layer 2 Tunneling Protocol (L2TP).

The options for this statement are explained separately. Click the linked statement for details.

**override-result-code**—Configure the LNS to override result codes in Call-Disconnect-Notify (CDN) messages.

**Values:**

- **session-out-of-resource**—Override result codes 4 and 5 with result code 2. These result codes indicate that the number of L2TP sessions have reached the configured maximum value and the LNS can support no more sessions. When the LAC receives the code, it fails over to another LNS to establish subsequent sessions. Some third-party LACs respond only to result code 2.

**ppp-authentication**—(T Series only) Configure PPP authentication.



**NOTE:** This statement is not supported for L2TP LNS on MX Series routers.

**Values:**

- **chap**—Challenge Handshake Authentication Protocol.
- **pap**—Password Authentication Protocol.

**ppp-profile**—(M Series, T Series only) Specify the profile used to validate PPP session requests through L2TP tunnels.



**NOTE:** This statement is not supported for L2TP LNS on MX Series routers.

**Values:** *profile-name*—Identifier for the PPP profile.

**sessions-limit-group**—(MX Series only) Starting in Junos OS Release 16.1, specify in an L2TP access profile the session limit group to which a client is assigned by the profile.

**Values:** *limit-group-name*—Identifier of the session-limit group to which a client is assigned.

**service-profile**—Configure one or more dynamic service profiles to be applied to subscriber sessions at activation for all subscribers in the specified tunnel group or on the specified LAC. Services are typically applied to L2TP sessions with RADIUS VSAs or CoA requests. In multivendor environments, you might use only standard attributes to simplify management of multiple vendor VSAs. This statement enables you to apply services without using an external authority such as RADIUS. The locally configured list of services (service profiles) serves as local authorization that is applied by authd during client session activation. This list of services is subject to the same validation and processing as services originating from an external authority, such as RADIUS.

You can optionally specify parameters that are passed to the corresponding service when it is activated for the session. The parameter might override values configured in the profile itself, such as a downstream shaping rate for a CoS service. This enables you to use the same service profile for multiple situations with different requirements, or to modify a previously applied value for a service.

You can still use RADIUS VSAs or CoA requests together with the service profiles. If services are sourced from an external authority as authorization during authentication or during subscriber session provisioning (activation), the services from the external authority take strict priority over those in the local configuration. If a service applied with RADIUS is the same as a service applied with a service profile in the CLI, but with different parameters, the RADIUS service is applied with a new session ID and takes precedence over the earlier service profile.

When service profiles are configured on a LAC client and on a tunnel group that uses that LAC client, the LAC configuration overrides the tunnel group configuration. Only the service profile configured on the LAC client is applied to subscribers in the tunnel group.

**Values:**

- *profile-name*—Name of a dynamic service profile that defines a service to be applied to L2TP subscriber sessions. You can specify one or more service profiles, separated by an ampersand (&).
- *parameter*—(Optional) Value to be passed to the service when it is activated on the subscriber session.

**shared-secret**—Configure the shared secret.

**Values:**

- *shared-secret*—Shared secret key for authenticating the peer.

<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
---------------------------------	---

- Related Documentation**
- [Configuring L2TP Properties for a Client-Specific Profile](#)
  - [Configuring an L2TP Access Profile on the LNS on page 220](#)
  - [Limiting the Number of L2TP Sessions Allowed by the LAC or LNS on page 175](#)
  - [Configuring an L2TP LAC on page 148](#)
  - [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
  - [Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248](#)
  - [L2TP for Subscriber Access Overview on page 121](#)

## l2tp-access-profile

<b>Syntax</b>	<code>l2tp-access-profile <i>profile-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel-group name</a>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the profile used to validate all L2TP connection requests to the local gateway address.
<b>Options</b>	<i>profile-name</i> —Identifier for the L2TP connection profile.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Access Profiles for L2TP Tunnel Groups</a></li> <li>• <a href="#">Configuring an L2TP Access Profile on the LNS on page 220</a></li> </ul>

## l2tp-maximum-session (Service Interfaces)


<b>Syntax</b>	<code>l2tp-maximum-session <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces <i>si-slot/pic/port</i>],</code> <code>[edit interfaces <i>asinumber</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 16.2.
<b>Description</b>	<p>Specify the maximum number of L2TP sessions allowed on a physical service interface (si) or aggregated service interface (asi).</p> <p>New session requests on an interface are accepted only when the session count is less than the maximum session limit. If the limit has been reached, subsequent requests are dropped and the LNS responds with a CDN message (Result Code 2, Error Code 4). When a pool of interfaces is configured, interfaces at the maximum limit are ignored in favor of an interface in the pool that has a lower session count. For an asi interface, the configuration applies only to the asi interface. You cannot configure a session limit on the individual member interfaces of an asi bundle.</p> <p>Configuring the session limit to be less than the current number of sessions on the interface has no effect on existing sessions, but prevents any new sessions from being created until the number of session drops below the new limit.</p>
<b>Options</b>	<p><b><i>number</i></b>—Maximum number of L2TP sessions allowed for the interface. A value of 0 prevents the interface from being considered.</p> <p><b>Default:</b> 64,000</p> <p><b>Range:</b> 0 through 64,000</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Limiting the Number of L2TP Sessions Allowed by the LAC or LNS on page 175</a></li> <li>• <a href="#">L2TP Session Limits and Load Balancing for Service Interfaces on page 233</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> <li>• <a href="#">L2TP for Subscriber Access Overview on page 121</a></li> </ul>

## layer2-liveness-detection (Receive)

<b>Syntax</b>	layer2-liveness-detection;
<b>Hierarchy Level</b>	[edit system services <a href="#">subscriber-management overrides</a> interfaces family (inet   inet6)]
<b>Release Information</b>	Statement introduced in Junos OS Release 17.4R1.
<b>Description</b>	<p>Enable a DHCP client host to determine the state of the DHCPv4 or DHCPv6 client session from the perspective of a router acting as a broadband network gateway (BNG). This statement causes the BNG to conduct a host connectivity check on its directly connected DHCPv4 and DHCPv6 clients when it receives ARP or Neighbor Discovery (ND) packets.</p> <p>When the BNG receives either of these packets, it does the following:</p> <ol style="list-style-type: none"> <li>1. Checks whether Layer 2 liveness detection for subscriber management is enabled globally for the relevant address family, inet or inet6.</li> <li>2. If liveness detection is not enabled, then the BNG responds as usual to the received packets without checking the state of the client session.  If liveness detection is enabled for the family, then the BNG checks whether the client session is still in the bound state.</li> <li>3. If the client session is bound, the BNG responds to the client with the appropriate ARP or ND packet.  If the session is not bound, the BNG drops the received packet. It does not send an ARP or ND response packet to the host, enabling the host to determine that the BNG considers the session to be down.</li> </ol> <p>This behavior can be referred to as the <i>receive</i> functionality for BNG Layer 2 liveness detection, as opposed to the <i>send</i> functionality configured with the <b>layer2-liveness-detection (Send)</b> statement for DHCP relay or DHCP local server.</p> <p>The usefulness of the receive functionality depends on the ability of the DHCP client host to reclaim resources from the stale client based on the absence of a response packet from the BNG for an unbound client session. If this capability requires a change in the client implementation, you may want to use the send functionality.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>DHCP Liveness Detection Using ARP and Neighbor Discovery Packets</i></li> <li>• <i>DHCP Liveness Detection Overview</i></li> </ul>

- *Configuring Junos OS Enhanced Subscriber Management*

## lcp-renegotiation

<b>Syntax</b>	<code>lcp-renegotiation;</code>
<b>Hierarchy Level</b>	<code>[edit access group-profile <i>profile-name</i> l2tp],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> l2tp]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the L2TP network server (LNS) so it renegotiates the link control protocol (LCP) with the PPP client. When LCP renegotiation is disabled, LNS uses the pre-negotiated LCP parameters between the L2TP access concentrator (LAC) and PPP client to set up the session. When LCP renegotiation is enabled, authentication is also renegotiated.
<div>  <p><b>NOTE:</b> This statement is not supported at the <code>[edit access group-profile l2tp]</code> hierarchy level for L2TP LNS on MX Series routers.</p> </div>	
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring L2TP for a Group Profile</i></li> <li>• <i>Configuring L2TP Properties for a Client-Specific Profile</i></li> <li>• <i>Configuring an L2TP Access Profile on the LNS on page 220</i></li> </ul>



## local-authentication (Dynamic PPP Options)


<b>Syntax</b>	<pre> local-authentication {   password <i>password</i>;   username-include {     circuit-id;     delimiter <i>character</i>;     domain-name <i>name</i>;     mac-address;     remote-id;   } } </pre>
<b>Hierarchy Level</b>	[edit dynamic-profiles <i>name</i> interfaces \$junos-interface-ifd-name <b>unit</b> \$junos-interface-unit <b>ppp-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 18.2R1.
<b>Description</b>	Configure local authentication for terminated PPP subscribers. This enables the external RADIUS server to pass implementation-specific configuration for successfully authenticated subscribers. Local authentication enables the same dynamic profile to support both CPEs that do not negotiate authentication protocols and CPEs that use PAP or CHAP authentication.
<b>Options</b>	<p><b>password <i>password</i></b>—Specify the local authentication password</p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	interface
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Local Authentication in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers on page 101</a></li> </ul>

## local-gateway (L2TP LNS)

---

Syntax	<pre>local-gateway {   address address;   gateway-name gateway-name; }</pre>
Hierarchy Level	[edit services l2tp <b>tunnel-group name</b> ]
Release Information	Statement introduced before Junos OS Release 7.4.
Description	<p>Specify the IP address or name for the local (LNS) gateway for L2TP tunnel.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
Options	<b>address</b> —Local IP address; corresponds to the IP address that is used by LACs to identify the LNS. When the LAC is an MX Series router, this address matches the remote gateway address configured in the LAC tunnel profile.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <i>Configuring the Local Gateway Address and PIC.</i></li><li>• <i>Configuring L2TP Tunnel Groups</i></li><li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li></ul>

## lockout-timeout (L2TP Destination Lockout)

Syntax	lockout-timeout <i>seconds</i> ;
Hierarchy Level	[edit services l2tp <a href="#">destination</a> ]
Release Information	Statement introduced in Junos OS Release 13.2.
Description	<p>Set the duration of the timeout period for which all future destinations are locked out, meaning that they are not considered for selection when a new tunnel is created. Destinations are locked out when L2TP cannot connect to the destination during the tunnel selection process. This statement does not affect destinations that are currently locked out.</p>
	<p> <b>NOTE:</b> The <i>ip-address</i> option for the <i>destination</i> statement does not apply to the <i>lockout-timeout</i> statement.</p>
Options	<p><b><i>seconds</i></b>—Length of the period during which the destination is locked out.</p> <p><b>Range:</b> 60 through 3600 seconds</p> <p><b>Default:</b> 300 seconds</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the L2TP Destination Lockout Timeout on page 145</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## logical-system (Tunnel Profile)

---

Syntax	<code>logical-system <i>logical-system-name</i>;</code>
Hierarchy Level	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify a logical system for a tunnel. When you specify a logical system, you must also specify a routing instance.
Options	<b><i>logical-system-name</i></b> — Name of the logical system. <b>Default:</b> Logical system <i>default</i>
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## mac

<b>Syntax</b>	<code>mac <i>mac-address</i>;</code>
<b>Hierarchy Level</b>	<code>[edit interfaces <i>interface-name</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	<p>Set the MAC address of the interface.</p> <p>Use this statement at the <b>[edit interfaces ... ps0]</b> hierarchy level to configure the MAC address for a pseudowire logical device that is used for subscriber interfaces over point-to-point MPLS pseudowires.</p>
<b>Options</b>	<p><b><i>mac-address</i></b>—MAC address. Specify the MAC address as six hexadecimal bytes in one of the following formats: <i>nnnn.nnnn.nnnn</i> or <i>nn:nn:nn:nn:nn:nn</i>. For example, <b>0000.5e00.5355</b> or <b>00:00:5e:00:53:55</b>.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring the MAC Address on the Management Ethernet Interface</i></li> <li>• <a href="#">Configuring a Pseudowire Subscriber Logical Interface Device on page 284</a></li> </ul>

## mac-address (Dynamic Access-Internal Routes)

<b>Syntax</b>	<code>mac-address <i>address</i>;</code>
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access-internal route <i>subscriber-ip-address</i> <a href="#">qualified-next-hop</a> <i>underlying-interface</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access-internal route <i>subscriber-ip-address</i> <a href="#">qualified-next-hop</a> <i>underlying-interface</i>],</p> <p>[edit dynamic-profiles routing-options <a href="#">access-internal route</a> <i>subscriber-ip-address</i> <a href="#">qualified-next-hop</a> <i>underlying-interface</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options route <i>subscriber-ip-address</i> <a href="#">qualified-next-hop</a> <i>underlying-interface</i>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> route <i>subscriber-ip-address</i> <a href="#">qualified-next-hop</a> <i>underlying-interface</i>] hierarchy levels introduced in Junos OS Release 10.1.</p>
<b>Description</b>	Dynamically configure the MAC address variable for an access-internal route for unnumbered interfaces such as DHCP subscriber interfaces.
<b>Options</b>	<i>address</i> —Either the specific MAC address you want to assign to the access-internal route or the MAC address variable (\$junos-subscriber-mac-address). The MAC address variable is dynamically replaced with the value supplied by DHCP when a subscriber logs in.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers on page 55</a></li> </ul>

## match-direction (IP Reassembly Rule)


Syntax	<code>match-direction <i>direction</i></code>
Hierarchy Level	[edit services <a href="#">ip-reassemblyrule</a> <i>rule-name</i> ]
Release Information	Statement introduced in Junos OS Release 13.1.
Description	Configure the direction in which the IP reassembly rule matching is applied. The match direction is used with respect to the traffic flow through the inline services interface. You must configure a match direction for an IP reassembly rule.
Options	<b><i>direction</i></b> —Match direction. For inline IP reassembly, <b>input</b> is the only match direction supported.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring IP Inline Reassembly for L2TP on page 262</a></li><li>• <a href="#">IP Packet Fragment Reassembly for L2TP Overview on page 262</a></li></ul>

## maximum-sessions (L2TP)

<b>Syntax</b>	<code>maximum-sessions <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access profile <i>profile-name</i> <b>client</b> <i>client-name</i>],</code> <code>[edit services <b>l2tp</b>],</code> <code>[edit services l2tp <b>sessions-limit-group</b>],</code> <code>[edit services l2tp <b>tunnel</b>],</code> <code>[edit services l2tp <b>tunnel-group</b> <i>group-name</i>],</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 16.1.
<b>Description</b>	Specify the maximum number of L2TP sessions for the chassis, all tunnels, a tunnel group, a session limit group, or a client.
<b>Options</b>	<p><b><i>number</i></b>—Number of sessions allowed.</p> <p><b>Range:</b> (Chassis, tunnel group, session limit group, or client) 1 through the default maximum chassis limit</p> <p><b>Range:</b> (Tunnel) 1 through 65,536</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Limiting the Number of L2TP Sessions Allowed by the LAC or LNS on page 175</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> <li>• <a href="#">L2TP for Subscriber Access Overview on page 121</a></li> </ul>



## maximum-sessions-per-tunnel

<b>Syntax</b>	<code>maximum-sessions-per-tunnel <i>number</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access group-profile l2tp],</code> <code>[edit access profile <i>profile-name</i> client <i>client-name</i> l2tp]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the maximum sessions for a Layer 2 tunnel.
	<div>  <p><b>NOTE:</b> This statement is not supported at the <code>[edit access group-profile l2tp]</code> hierarchy level for L2TP LNS on MX Series routers.</p> </div>
<b>Options</b>	<i>number</i> —Maximum number of sessions for a Layer 2 tunnel.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring L2TP for a Group Profile</a></li> <li>• <a href="#">Configuring L2TP Properties for a Client-Specific Profile</a></li> <li>• <a href="#">Configuring an L2TP Access Profile on the LNS on page 220</a></li> </ul>

## max-sessions (Tunnel Profile)

---

Syntax	max-sessions <i>number</i> ;
Hierarchy Level	[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i> ]
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify the maximum number of sessions allowed in the tunnel.
Options	<b>number</b> —Maximum number of sessions allowed in the tunnel. A value of 0 means that the maximum configurable number of sessions is allowed. <b>Range:</b> 0 through 60,000 <b>Default:</b> 0
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## medium (Tunnel Profile)

---

Syntax	medium <i>type</i> ;
Hierarchy Level	[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i> ]
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Specify the medium type for the tunnel.
Default	ipv4
Options	<b>type</b> —Medium type for the tunnel. The only value currently available is <b>ipv4</b> .
Required Privilege Level	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## metric (Dynamic Access-Internal Routes)

<b>Syntax</b>	<code>metric <i>route-cost</i>;</code>
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options access <i>route prefix</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>] hierarchy levels introduced in Junos OS Release 10.1.</p>
<b>Description</b>	Dynamically configure the cost for an access route.
<b>Options</b>	<p><i>route-cost</i>—Either the specific cost you want to assign to the access route or either of the following cost variables:</p> <ul style="list-style-type: none"> <li>• <b>\$junos-framed-route-cost</b>—Cost of an IPv4 access route; the variable is dynamically replaced with the metric value (Subattribute 3) from the RADIUS Framed-Route attribute [22].</li> <li>• <b>\$junos-framed-route-ipv6-cost</b>—Cost of an IPv6 access route; the variable is dynamically replaced with the metric value (Subattribute 3) from the RADIUS Framed-IPv6-Route attribute [99].</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic Access Routes for Subscriber Management on page 53</a></li> </ul>

## minimum-retransmission-timeout (L2TP Tunnel)

---

<b>Syntax</b>	<code>minimum-retransmission-timeout <i>seconds</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 14.1.
<b>Description</b>	Configure the minimum (initial) interval that the LAC or the LNS waits for a response after transmitting an L2TP control message to a peer. If no response has been received by the time the period expires, the message is retransmitted. The timeout period is doubled for each retransmission until the maximum of 16 seconds is reached.
<b>Options</b>	<p><i>seconds</i>—Minimum interval before initial retransmission.</p> <p><b>Range:</b> 1, 2, 4, 8, or 16 seconds</p> <p><b>Default:</b> 1</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Retransmission Attributes for L2TP Control Messages on page 128</a></li><li>• <a href="#">Configuring an L2TP LAC on page 148</a></li><li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li></ul>

## mtu

<b>Syntax</b>	<code>mtu bytes;</code>
<b>Hierarchy Level</b>	<pre> [edit interfaces <i>interface-name</i>], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i>], [edit interfaces interface-range <i>name</i>], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>family</i>], [edit logical-systems <i>logical-system-name</i> protocols l2circuit local-switching interface <i>interface-name</i> backup-neighbor <i>address</i>], [edit logical-systems <i>logical-system-name</i> protocols l2circuit neighbor <i>address</i> interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> protocols l2circuit neighbor <i>address</i> interface <i>interface-name</i> backup-neighbor <i>address</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols l2vpn interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols vpls], [edit protocols l2circuit local-switching interface <i>interface-name</i> backup-neighbor <i>address</i>], [edit protocols l2circuit neighbor <i>address</i> interface <i>interface-name</i>] [edit protocols l2circuit neighbor <i>address</i> interface <i>interface-name</i> backup-neighbor <i>address</i>], [edit routing-instances <i>routing-instance-name</i> protocols l2vpn interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols vpls], [edit logical-systems <i>name</i> protocols ospf area <i>name</i> interface ], [edit logical-systems <i>name</i> routing-instances <i>name</i> protocols ospf area <i>name</i> interface], [edit protocols ospf area <i>name</i> interface ], [edit routing-instances <i>name</i> protocols ospf area <i>name</i> interface] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for Layer 2 VPNs and VPLS introduced in Junos OS Release 10.4.</p> <p>Statement introduced in Junos OS Release 12.1X48 for PTX Series Packet Transport Routers.</p> <p>Statement introduced in Junos OS Release 12.2 for ACX Series Universal Metro Routers.</p> <p>Support at the <b>[set interfaces interface-name unit logical-unit-number family ccc]</b> hierarchy level introduced in Junos OS Release 12.3R3 for MX Series routers.</p> <p>Statement introduced in Junos OS 17.3R1 Release for MX Series Routers.</p>
<b>Description</b>	<p>Specify the maximum transmission unit (MTU) size for the media or protocol. The default MTU size depends on the device type. Changing the media MTU or protocol MTU causes an interface to be deleted and added again.</p> <p>To route jumbo data packets on an integrated routing and bridging (IRB) interface or routed VLAN interface (RVI) on EX Series switches, you must configure the jumbo MTU size on the member physical interfaces of the VLAN that you have associated with the IRB interface or RVI, as well as on the IRB interface or RVI itself (the interface named <i>irb</i> or <i>vlan</i>, respectively).</p>



.....

**CAUTION:** For EX Series switches, setting or deleting the jumbo MTU size on an IRB interface or RVI while the switch is transmitting packets might cause packets to be dropped.

.....



.....

**NOTE:**

The MTU for an IRB interface is calculated by removing the Ethernet header overhead [6(DMAC)+6(SMAC)+2(EtherType)]. Because, the MTU is the lower value of the MTU configured on the IRB interface and the MTU configured on the IRB's associated bridge domain IFDs or IFLs, the IRB MTU is calculated as follows:

- In case of Layer 2 IFL configured with the `flexible-vlan-tagging` statement, the IRB MTU is calculated by including 8 bytes overhead (SVLAN+CVLAN).
  - In case of Layer 2 IFL configured with the `vlan-tagging` statement, the IRB MTU is calculated by including a single VLAN 4 bytes overhead.
- .....

**NOTE:**

- If a packet whose size is larger than the configured MTU size is received on the receiving interface, the packet is eventually dropped. The value considered for MRU (maximum receive unit) size is also the same as the MTU size configured on that interface.
- Not all devices allow you to set an MTU value, and some devices have restrictions on the range of allowable MTU values. You cannot configure an MTU for management Ethernet interfaces (fxp0, em0, or me0) or for loopback, multilink, and multicast tunnel devices.
- On ACX Series routers, you can configure the protocol MTU by including the `mtu` statement at the [edit interfaces *interface-name* unit *logical-unit-number* family inet] or [edit interfaces *interface-name* unit *logical-unit-number* family inet6] hierarchy level.
  - If you configure the protocol MTU at any of these hierarchy levels, the configured value is applied to all families that are configured on the logical interface.
  - If you are configuring the protocol MTU for both inet and inet6 families on the same logical interface, you must configure the same value for both the families. It is not recommended to configure different MTU size values for inet and inet6 families that are configured on the same logical interface.
- Starting in Release 14.2, MTU for IRB interfaces is calculated by removing the Ethernet header overhead (6(DMAC)+6(SMAC)+2(EtherType)), and the MTU is a minimum of the two values:
  - Configured MTU
  - Associated bridge domain's physical or logical interface MTU
    - For Layer 2 logical interfaces configured with flexible-vlan-tagging, IRB MTU is calculated by including 8 bytes overhead (SVLAN+CVLAN).
    - For Layer 2 logical interfaces configured with vlan-tagging, IRB MTU is calculated by including single VLAN 4 bytes overhead.



**NOTE:** Changing the Layer 2 logical interface option from `vlan-tagging` to `flexible-vlan-tagging` or vice versa adjusts the logical interface MTU by 4 bytes with the existing MTU size. As a result, the Layer 2 logical interface is deleted and re-added, and the IRB MTU is re-computed appropriately.

For more information about configuring MTU for specific interfaces and router or switch combinations, see *Configuring the Media MTU*.

**Options** *bytes*—MTU size.

**Range:** 256 through 9192 bytes, 256 through 9216 (EX Series switch interfaces), 256 through 9500 bytes (Junos OS 12.1X48R2 for PTX Series routers), 256 through 9500 bytes (Junos OS 16.1R1 for MX Series routers)



**NOTE:** Starting in Junos OS Release 16.1R1, the MTU size for a media or protocol is increased from 9192 to 9500 for Ethernet interfaces on the following MX Series MPCs:

- MPC1
- MPC2
- MPC2E
- MPC3E
- MPC4E
- MPC5E
- MPC6E

---

**Default:** 1500 bytes (INET, INET6, and ISO families), 1448 bytes (MPLS), 1514 bytes (EX Series switch interfaces)

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring the Media MTU*
- *Configuring the MTU for Layer 2 Interfaces*
- *Setting the Protocol MTU*



## name (L2TP Destination)

<b>Syntax</b>	<pre>name <i>destination-name</i> {     drain; }</pre>
<b>Hierarchy Level</b>	[edit services l2tp <a href="#">destination</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	Specify the name of the L2TP destination for the tunnel.
<b>Options</b>	<p><b><i>destination-name</i></b>—Locally assigned name of the tunnel destination.</p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Drain on page 146</a></li></ul>

## name (L2TP Tunnel Destination)

**Syntax**

```
name name {
  address ip-address {
    drain;
  }
  routing-instance routing-instance-name {
    drain;
  }
  drain;
}
```

**Hierarchy Level** [edit services l2tp tunnel]

**Release Information** Statement introduced in Junos OS Release 13.2.

**Description** Specify the local name and other attributes of the L2TP tunnel.

**Options** *name* —Locally assigned name of the tunnel; in the format *destination-name/tunnel-name* or *tunnel-name*.



**NOTE:** When only the tunnel name is provided, then you must identify the destination for the tunnel by including the `address ip-address` statement at the [edit services l2tp tunnel name *name*] hierarchy level.


The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring L2TP Drain on page 146](#)

## nas-port-method (L2TP LAC)

<b>Syntax</b>	nas-port-method cisco-avp;
<b>Hierarchy Level</b>	[edit services l2tp <a href="#">tunnel</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 14.1.
<b>Description</b>	Globally configure the LAC to interoperate with Cisco LNS devices by including the Cisco NAS Port Info AVP (100) in the ICRQ to the LNS. This AVP conveys the physical NAS port number identifier and the type of the physical port, such as Ethernet or ATM.
<div>  <b>NOTE:</b> This global configuration can be overridden by the configuration in a tunnel profile or by the RADIUS configuration. </div>	
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Globally Configuring the LAC to Interoperate with Cisco LNS Devices on page 153</a></li> <li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li> <li>• <a href="#">LAC Interoperation with Third-Party LNS Devices on page 152</a></li> </ul>


## nas-port-method (Tunnel Profile)

<b>Syntax</b>	<code>nas-port-method cisco-avp;</code>
<b>Hierarchy Level</b>	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	Configure the LAC to interoperate with Cisco LNS devices by including the Cisco NAS Port Info AVP (100) in the ICRQ to the LNS. This AVP conveys the physical NAS port number identifier and the type of the physical port, such as Ethernet or ATM.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>


## next-hop (Dynamic Access Routes)

<b>Syntax</b>	<code>next-hop <i>next-hop</i>;</code>
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options <i>access route prefix</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>] hierarchy levels introduced in Junos OS Release 10.1.</p>
<b>Description</b>	<p>Dynamically configure the next-hop address for an access route. Access routes are typically unnumbered interfaces.</p> <p>The next-hop gateway can be specified explicitly in the framed route, as either the subscriber's fixed address (common for business subscribers) or 0.0.0.0. Alternatively, the absence of the gateway address implies address 0.0.0.0. The address 0.0.0.0, whether implicit or explicitly configured, resolves to the subscriber's assigned address (host route).</p> <p>If the RADIUS Framed-Route attribute (22) or Framed-IPv6-Route attribute [99] does not specify the next-hop gateway—as is common—the variable representing the next-hop automatically resolves to the subscriber's IP address.</p>
<b>Options</b>	<p><i>next-hop</i>—Either the specific next-hop address you want to assign to the access route or one of the following next-hop address predefined variables.</p> <ul style="list-style-type: none"> <li>For IPv4 access routes, use the variable, <b>\$junos-framed-route-nexthop</b>. The route prefix variable is dynamically replaced with the value in Framed-Route RADIUS attribute [22].</li> <li>For IPv6 access routes, use the variable, <b>\$junos-framed-route-ipv6-nexthop</b>. The variable is dynamically replaced with the value in Framed-IPv6-Route RADIUS attribute [99].</li> </ul>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Configuring Dynamic Access Routes for Subscriber Management on page 53</a></li> </ul>

## next-hop-service

Syntax	<pre> next-hop-service {   inside-service-interface <i>interface-name.unit-number</i>;   outside-service-interface <i>interface-name.unit-number</i>;   outside-service-interface-type <i>interface-type</i>;   service-interface-pool <i>name</i>; } </pre>
Hierarchy Level	[edit services service-set <i>service-set-name</i> ]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p><b>service-interface-pool</b> option added in Junos OS Release 9.3.</p>
Description	Specify interface names or a service interface pool for the forwarding next-hop service set. You cannot specify both a service interface pool and an inside or outside interface.
Options	<p><b>inside-service-interface <i>interface-name.unit-number</i></b>—Name and logical unit number of the service interface associated with the service set applied inside the network.</p> <p><b>outside-service-interface <i>interface-name.unit-number</i></b>—Name and logical unit number of the service interface associated with the service set applied outside the network.</p> <p><b>outside-service-interface-type <i>interface-type</i></b>—Identifies the interface type of the service interface associated with the service set applied outside the network. For inline IP reassembly, set the interface type to local.</p> <p><b>service-interface-pool <i>name</i></b>—Name of the pool of logical interfaces configured at the [edit services service-interface-pools pool <i>pool-name</i>] hierarchy level. You can configure a service interface pool only if the service set has a PGCP rule configured. The service set cannot contain any other type of rule.</p>
<div>  <p><b>NOTE:</b> <b>service-interface-pool</b> is not applicable for IP reassembly configuration on L2TP.</p> </div>	
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>Configuring Service Sets to be Applied to Services Interfaces</li> </ul>

## no-allow-snooped-clients

Syntax	no-allow-snooped-clients;
Hierarchy Level	<pre>[edit forwarding-options dhcp-relay <b>dhcpv6</b> group <i>group-name</i> interface <i>interface-name</i> <b>overrides</b>], [edit forwarding-options dhcp-relay <b>dhcpv6</b> group <i>group-name</i> <b>overrides</b>], [edit forwarding-options dhcp-relay <b>dhcpv6</b> <b>overrides</b>], [edit forwarding-options dhcp-relay group <i>group-name</i> interface <i>interface-name</i> <b>overrides</b>], [edit forwarding-options dhcp-relay group <i>group-name</i> <b>overrides</b>], [edit forwarding-options dhcp-relay <b>overrides</b>], [edit logical-systems <i>logical-system-name</i> forwarding-options <b>dhcp-relay</b> ...], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> forwarding-options <b>dhcp-relay</b> ...], [edit routing-instances <i>routing-instance-name</i> forwarding-options <b>dhcp-relay</b> ...]</pre>
Release Information	<p>Statement introduced in Junos OS Release 10.2.</p> <p>Support at the <b>[edit ... dhcpv6]</b> hierarchy levels introduced in Junos OS Release 12.1.</p> <p>Statement introduced in Junos OS Release 12.3 for EX Series switches.</p>
Description	<p>Explicitly disable DHCP snooping support on DHCP relay agent.</p> <p>Use the statement at the <b>[edit ... dhcpv6]</b> hierarchy levels to explicitly disable snooping support for DHCPv6 relay agent.</p>
<div>  <p><b>NOTE:</b> In Junos OS Release 10.0 and earlier, DHCP snooping is <i>enabled</i> by default. In Release 10.1 and later, DHCP snooping is <i>disabled</i> by default.</p> </div>	
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <i>Extended DHCP Relay Agent Overview</i></li> <li>• <i>Overriding the Default DHCP Relay Configuration Settings</i></li> <li>• <i>DHCP Snooping Support</i></li> <li>• <i>Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent</i></li> </ul>

## no-gratuitous-arp-request

---

<b>Syntax</b>	no-gratuitous-arp-request;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 12.2 for ACX Series Universal Metro Routers.
<b>Description</b>	For Ethernet interfaces and pseudowire logical interfaces, do not respond to gratuitous ARP requests.
<b>Default</b>	Gratuitous ARP responses are enabled on all Ethernet interfaces.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring Gratuitous ARP</i></li></ul>



## no-snoop (DHCP Local Server and Relay Agent)

<b>Syntax</b>	no-snoop;
<b>Hierarchy Level</b>	[edit forwarding-options <a href="#">dhcp-relay</a> ], [edit forwarding-options dhcp-relay <a href="#">dhcpv6</a> ], [edit logical-systems <i>logical-system-name</i> ...], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> ...], [edit routing-instances <i>routing-instance-name</i> ...], [edit system services <a href="#">dhcp-local-server</a> ], [edit system services dhcp-local-server <a href="#">dhcpv6</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 15.1R2.
<b>Description</b>	<p>Disable DHCP snooping filters.</p> <p>DHCP snooping provides DHCP security by identifying incoming DHCP packets. In the default DHCP snooping configuration, all traffic is snooped. You can optionally use the <b>forward-snooped-clients</b> statement to evaluate the snooped traffic and to determine if the traffic is forwarded or dropped, based on whether or not the interface is configured as part of a group.</p> <p>In both the default configuration and in configurations using the <b>forward-snooped-clients</b> statement, all DHCP traffic is forwarded from the hardware control plane to the routing plane of the routing instance to ensure that all DHCP packets are intercepted. In certain topologies, such as a Metropolitan Routing Ring topology, forwarding all DHCP traffic to the control plane can result in excessive traffic. The <b>no-snoop</b> configuration statement disables the snooping filter for DHCP traffic that can be directly forwarded on the hardware control plane, such as Layer 3 unicast packets with a valid route, causing those DHCP packets to bypass the slower routing plane.</p>
<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Disabling DHCP Snooping Filters on page 76</a></li> <li>• <a href="#">Configuring DHCP Snooped Packets Forwarding Support for DHCP Local Server on page 67</a></li> <li>• <a href="#">Configuring DHCP Snooped Packets Forwarding Support for DHCP Relay Agent</a></li> </ul>

## on-demand-ip-address

<b>Syntax</b>	on-demand-ip-address;
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" <b>unit</b> "\$junos-interface-unit"].</p> <p>[edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit "\$junos-interface-unit" <b>ppp-options</b>], [edit interfaces pp0 unit <i>unit-number</i> <b>ppp-options</b>], [edit protocols ppp-service]</p>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	<p>For IPv4 and IPv6 dual-stack PPP subscribers, enables on-demand allocation and de-allocation of an IPv4 address after initial PPP authentication for a subscriber who does not have an existing IPv4 address.</p> <p>Configuration changes take effect as follows:</p> <ul style="list-style-type: none"> <li>• When you change this setting for a dynamic PPP interface (at the <b>[edit dynamic-profiles]</b> hierarchy level), the change takes effect only for new subscriber logins.</li> <li>• When you change this setting for a static PPP interface (at the <b>[edit interfaces pp0]</b> hierarchy level), the subscribers on the interface are logged out.</li> <li>• When you change this setting globally (at the <b>[edit protocols ppp-service]</b> hierarchy level), the change takes effect only for new subscriber logins.</li> </ul> <p>If you enable on-demand allocation at both the interface and global levels, the global configuration takes precedence and changes take effect for new subscriber logins.</p>
<b>Default</b>	This functionality is disabled by default.
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Conserving IPv4 Addresses for Dual-Stack PPP Subscribers Using On-Demand IPv4 Address Allocation</i></li> <li>• <i>Configuring Static On-Demand IPv4 Address Allocation for Dual-Stack PPP Subscribers</i></li> <li>• <i>Configuring Dynamic On-Demand IPv4 Address Allocation for Dual-Stack PPP Subscribers</i></li> <li>• <i>Configuring Global On-Demand IPv4 Address Allocation for Dual-Stack PPP Subscribers</i></li> </ul>

## options (Access Profile)

```
Syntax  options {
    accounting-session-id-format (decimal | description);
    calling-station-id-delimiter delimiter-character;
    calling-station-id-format {
        agent-circuit-id;
        agent-remote-id;
        interface-description;
        nas-identifier;
    }
    chap-challenge-in-request-authenticator;
    client-accounting-algorithm (direct | round-robin);
    client-authentication-algorithm (direct | round-robin);
    coa-dynamic-variable-validation;
    ethernet-port-type-virtual;
    access-loop-id-local;
    interface-description-format {
        exclude-adapter;
        exclude-channel;
        exclude-sub-interface;
    }
    ip-address-change-notify message;
    juniper-access-line-attributes;
    nas-identifier identifier-value;
    nas-port-extended-format {
        adapter-width width;
        ae-width width;
        port-width width;
        slot-width width;
        stacked-vlan-width width;
        vlan-width width;
        atm {
            adapter-width width;
            port-width width;
            pw-width width;
            slot-width width;
            vci-width width;
            vpi-width width;
        }
    }
    nas-port-id-delimiter delimiter-character;
    nas-port-id-format {
        agent-circuit-id;
        agent-remote-id;
        interface-description;
        interface-text-description;
        nas-identifier;
        order {
            agent-circuit-id;
            agent-remote-id;
            interface-description;
            interface-text-description;
```

```

        nas-identifier;
        postpend-vlan-tags;
    }
    postpend-vlan-tags;
}
nas-port-type {
    ethernet {
        port-type;
    }
}
override {
    calling-station-id remote-circuit-id;
    nas-ip-address tunnel-client-gateway-address;
    nas-port tunnel-client-nas-port;
    nas-port-type tunnel-client-nas-port-type;
}
remote-circuit-id-delimiter;
remote-circuit-id-fallback;
remote-circuit-id-format {
    agent-circuit-id;
    agent-remote-id;
}
revert-interval interval;
service-activation {
    dynamic-profile (optional-at-login | required-at-login);
    extensible-service (optional-at-login | required-at-login);
}
vlan-nas-port-stacked-format;
}

```

**Hierarchy Level** [edit access profile *profile-name* **radius**]

**Release Information** Statement introduced in Junos OS Release 9.1.  
Statement introduced in Junos OS Release 9.1 for EX Series switches.  
**juniper-dsl-attributes** introduced in Junos OS Release 11.4.  
**nas-port-id-delimiter** introduced in Junos OS Release 11.4. Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
**calling-station-id-delimiter** introduced in Junos OS Release 13.1.  
**ip-address-change-notify** introduced in Junos OS Release 13.1.  
**coa-dynamic-variable-validation**, **client-authentication-algorithm**, and **client-accounting-algorithm** introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
**remote-circuit-id-delimiter**, **remote-circuit-id-fallback**, and **remote-circuit-id-format** introduced in Junos OS Release 13.3R1 on MX Series.  
**chap-challenge-in-request-authenticator** introduced in Junos OS Release 15.1.  
**nas-identifier** introduced in Junos OS Release 15.1X49-D110 for SRX300, SRX320, SRX340, SRX345, and SRX550M Series devices.  
**service-activation** introduced in Junos OS Release 16.2.

**Description** Configure the options used by RADIUS authentication and accounting servers.

**Options** **accounting-session-id-format**—(EX Series, MX Series only) Configure the format the router or switch uses to identify the accounting session. The default is **decimal**.

**Values:**

- **decimal**—Use the decimal format.
- **description**—Use the generic format, in the form: **jnpr interface-specifier:subscriber-session-id**.

**calling-station-id-delimiter**—(MX Series, T Series only) Starting in Junos OS Release 13.1, specify the character that the router uses as a separator between the concatenated values in the Calling-Station-ID (RADIUS IETF attribute 31) string. The router uses the delimiter when you configure more than one value in the **calling-station-id-format** statement. The default is the hash (#) character.

**Values:**

- **delimiter-character**—Character to use for the delimiter. You must enclose the delimiter character in quotation marks (" ").

**chap-challenge-in-request-authenticator**—(MX Series only) Starting in Junos OS Release 15.1, configure the **authd** process to insert the random challenge generated by the NAS into the Request Authenticator field of Access-Request packets, if the challenge value is 16 bytes long. If you enable the **chap-challenge-in-request-authenticator** statement and the random challenge is not 16 bytes long, **authd** ignores the statement and uses the default behavior, which inserts the random challenge as the CHAP-Challenge attribute (RADIUS attribute 60) in Access-Request packets.

**client-accounting-algorithm**—(EX Series, MX Series only) Starting in Junos OS Release 13.2X50-D10 for EX Series switches, configure the access method the router uses to access RADIUS accounting servers. The default is the **direct** option.

**Values:**

- **direct**—Use the direct method.
- **round-robin**—Use the round-robin method.

**client-authentication-algorithm**—(EX Series, M Series, MX Series only) Starting in Junos OS Release 13.2X50-D10 for EX Series switches, configure the method that the authenticator uses to access RADIUS authentication servers when there are multiple servers configured. Initially, a RADIUS client sends a request to a RADIUS authentication or accounting server. The router or switch, acting as the authenticator, waits for a response from the server before sending another request.

When there are multiple RADIUS server connections configured for a client, the authenticator attempts to reach the different servers in the order that they are configured. If there is no response from the first RADIUS server, the authenticator attempts to reach the next RADIUS server. This process repeats until the client is either granted access or there are no more configured servers.

If the **direct** method is configured, the authenticator always treats the first server in the list as the primary server. The authenticator moves on to the second server only

if the attempt to reach the first server fails. If the **round-robin** method is configured, the server chosen first will be rotated based on which server was used last. The first server in the list is treated as a primary for the first authentication request, but for the second request, the second server configured is treated as primary, and so on. With this method, all of the configured servers receive roughly the same number of requests on average so that no single server has to handle all of the requests.



**NOTE:** The **round-robin** access method is not recommended for use with EX Series switches.

---

**Default:** The default is the **direct** option.

**Values:**

- **direct**—Use the direct access method. The authenticator contacts the first RADIUS server on the list for each request, the second server if the first one fails, and so on.
- **round-robin**—Use the round-robin method. The authenticator contacts the first RADIUS server for the first request, the second server for the second request, and so on.

**coa-dynamic-variable-validation**—(EX Series, M Series, MX Series only) Starting in Junos OS Release 13.2X50-D10 for EX Series switches, specify that when a CoA operation includes a change to a client profile dynamic variable that cannot be applied (such as an update to a non-existent filter), the router does not apply any changes to client profile dynamic variables in the request, and responds with a NACK message.

**Default:** If you do not configure this statement, the router does not apply any incorrect variable updates, but does make any other changes to the client profile dynamic variables, and responds with an ACK message.

**ethernet-port-type-virtual**—(EX Series, M Series, MX Series only) Specify the physical port type the router or switch uses to authenticate clients. The router or switch passes a port type of **ethernet** in RADIUS attribute 61 (NAS-Port-Type) by default. This statement specifies a port type of **virtual**.



**NOTE:** This statement takes precedence over the **nas-port-type** statement if you include both statements in the same access profile.

---

**access-loop-id-local**—Specify that the Agent-Remote-Id and Agent-Circuit-Id are generated locally when these values are not present in the client database.

**ip-address-change-notify**—(MX Series only) Starting in Junos OS Release 13.1, for on-demand address allocation for dual-stack PPP subscribers, specify that the BNG includes the IPv4-Release-Control VSA (26–164) in the Access-Request that is sent during on-demand IP address allocation and in the Interim-Accounting messages that are sent to report an address change. The configuration of this statement has no effect when on-demand IP address allocation or deallocation is not configured.

Optionally, configure a message that is included in the VSA when it is sent to the RADIUS server.

**Default:** This functionality is disabled by default.

**Values:** *message*—VSA message.

**Range:** Up to 32 characters.

**juniper-access-line-attributes**—Configure AAA to add Juniper Networks access line VSAs to the RADIUS authentication and accounting request messages for subscribers. If the router has not received and processed the corresponding ANCP attributes from the access node, then AAA provides only the following in these RADIUS messages:

- Downstream-Calculated-QoS-Rate (IANA 4874, 26-141)—Default configured advisory transmit speed.
- Upstream-Calculated-QoS-Rate (IANA 4874, 26-142)—Default configured advisory receive speed.



**NOTE:** Starting in Junos OS Release 19.2R1, the **juniper-access-line-attributes** option replaces the **juniper-dsl-attributes** option. For backward compatibility with existing scripts, the **juniper-dsl-attributes** option redirects to the new **juniper-access-line-attributes** option. We recommend that you use **juniper-access-line-attributes**.

**Default:** The Juniper Networks access line VSAs are not added to the RADIUS authentication and accounting request messages. However, the DSL Forum VSA—if available—is added to RADIUS messages by default.

**nas-identifier**—(EX Series, MX Series, SRX Series only) Configure the value for the client RADIUS attribute 32 (NAS-Identifier). This attribute is used for authentication and accounting requests. This statement was introduced in Junos OS Release 15.1X49-D110 for SRX300, SRX320, SRX340, SRX345, and SRX550M Series devices.

**Values:** *identifier-value*—String to use for authentication and accounting requests.

**Range:** 1 through 64 characters.

**nas-port-id-delimiter**—(MX Series only) Starting in Junos OS Release 11.4, specify the character that the router uses as a separator between the concatenated values in the NAS-Port-ID string. The router uses the delimiter when you configure more than one value in the **nas-port-id-format** statement. The default is the hash (#) character. This statement was introduced in Junos OS Release 13.2X50-D10 for EX Series switches.

**Values:** *delimiter-character*—Character used for the delimiter.

**remote-circuit-id-delimiter**—(MX Series only) Starting in Junos OS Release 13.3R1 on MX Series, configure a delimiter character for the remote circuit ID string when you use the **remote-circuit-id-format** statement to configure the string to use instead of the Calling-Station ID in L2TP Calling Number AVP 22. If more than one value is configured for the remote circuit ID format, the delimiter character is used as a separator between the concatenated values in the resulting remote circuit ID string. The default is the hash (#) character.

**Values:** *delimiter*—Delimiter character to be used between components of the remote circuit ID string.

**remote-circuit-id-fallback**—(MX Series only) Starting in Junos OS Release 13.3R1 on MX Series, configure the fallback value for the LAC to send in L2TP Calling Number AVP 22, either the configured Calling-Station-ID or the default underlying interface. Use of the fallback value is triggered when the components of the override string you configured with the **remote-circuit-id-format** statement—the ACI, the ARI, or both ACI and ARI—are not received by the LAC in the PPPoE Active Discovery Request (PADR) packet.

**Values:**

- **configured-calling-station-id**—Send the configured Calling-Station-ID in the Calling Number AVP.
- **default**—Send the underlying interface value in the Calling Number AVP.



**remote-circuit-id-format**—(MX Series only) Starting in Junos OS Release 13.3R1 on MX Series, configure the format of the string that overrides the Calling-Station-ID format in the Calling Number AVP 22 sent by the LAC to the LNS in the ICRQ packet when an L2TP session is being established. You can specify the ACI, the ARI, or both the ACI and ARI. This statement enables you to decouple the AVP 22 value from the RADIUS Calling-Station-ID attribute (31); the values for AVP 22 and the Calling-Station-ID attribute are the same when you use the **calling-station-id-format** statement to configure AVP 22.



**NOTE:** You must configure the **override calling-circuit-id remote-circuit-id** statement for the remote circuit ID format to be used in the calling number AVP.

**Values:**

- **agent-circuit-id**—Specifies use of the ACI string that uniquely identifies the subscriber's access node and the digital subscriber line (DSL) on the access node. For PPPoE traffic, the ACI string is in the DSL Forum Agent-Circuit-ID VSA [26-1] of PPPoE Active Discovery Initiation (PADI) and PPPoE Active Discovery Request (PADR) control packets.
- **agent-remote-id**—Specifies use of the ARI string that identifies the subscriber on the digital subscriber line access multiplexer (DSLAM) interface that initiated the service request. The agent remote identifier (ARI) string is stored in the DSL Forum Agent-Remote-ID VSA [26-2] for PPPoE traffic.

**service-activation**—(MX Series only) Starting in Junos OS Release 16.2, specify whether subscribers are allowed to log in even when service activation failures related to configuration errors occur during family activation request processing by authd for a newly authenticated subscriber. Configuration errors include missing or incorrect syntax, missing or incomplete references to dynamic profiles, and missing or incomplete variables.



**NOTE:** This configuration does not apply to services activated by means of RADIUS CoA requests, JSRC Push-Profile-Request (PPR) messages, or subscriber secure policies.

You can enable separate configurations for subscriber login services for two **service-activation** types: **dynamic-profile** and **extensible-service**. You configure the **dynamic-profile** type services in the dynamic profile at the **[edit dynamic-profiles]** hierarchy level; the profile is used to provide dynamic subscriber access and services for broadband applications. The **extensible-service** type is for business services configured in an operation script and provisioned by the Extensible Subscriber Services Manager daemon (essmd).

**Default:**

Default behavior depends on the service type:

- For **extensible-service** services: **optional-at-login**.
- For **dynamic-profile** services: **required-at-login**.

**Values:**

- **optional-at-login**—Service activation is optional. Failure due to configuration errors does not prevent activation of the address family; it allows subscriber access. Failure for any other reason causes network family activation to fail. If no other network family is already active for the subscriber, then the client application logs out the subscriber.
- **required-at-login**—Service activation is required. Failure for any reason causes the Network-Family-Activate-Request for that network family to fail. If no other network family is already active for the subscriber, then the client application logs out the subscriber.

**vlan-nas-port-stacked-format**—(MX Series only) Configure RADIUS attribute 5 (NAS-Port) to include the S-VLAN ID, in addition to the VLAN ID, for subscribers on Ethernet interfaces.

The remaining statements are explained separately. Search for a statement in CLI Explorer or click a linked statement in the Syntax section for details.

<b>Required Privilege</b>	admin—To view this statement in the configuration.
<b>Level</b>	admin-control—To add this statement to the configuration.

- Related Documentation**
- *Configuring Access Profile Options for Interactions with RADIUS Servers*
  - *RADIUS Servers and Parameters for Subscriber Access*
  - *Configuring Authentication and Accounting Parameters for Subscriber Access*
  - *Configuring a Calling-Station-ID with Additional Options*

## override (RADIUS Options)

Syntax	<pre> override {   calling-station-id remote-circuit-id;   nas-ip-address tunnel-client-gateway-address;   nas-port tunnel-client-nas-port;   nas-port-type tunnel-client-nas-port-type; } </pre>
Hierarchy Level	[edit access profile <i>profile-name</i> radius <a href="#">options</a> ]
Release Information	<p>Statement introduced in Junos OS Release 13.3R1 on MX Series.</p> <p><b>nas-ip-address tunnel-client-gateway-address</b> and <b>nas-port tunnel-client-nas-port</b> options added in Junos OS Release 17.3R1 on MX Series.</p> <p><b>calling-station-id remote-circuit-id</b> option added in Junos OS Release 13.3R1 on MX Series.</p>
Description	Override the values for certain RADIUS options.
Options	<p><b>calling-station-id remote-circuit-id</b>—Override the Calling-Station-ID format for the string that the LAC sends to the LNS in the Calling Number AVP 22. AVP 22 is included in the incoming-call request (ICRQ) packet when the L2TP session is being established.</p> <p>If you have configured the <b>calling-station-id-format</b> statement, the LAC sends AVP 22 in a different format that can include other information in addition to the ACI or ARI. In this case, the LNS sends the value of AVP 22 to the RADIUS server as the Calling-Station-ID attribute (31).</p> <p>If you do not want the AVP 22 value to be used as the Calling-Station-ID attribute (31) for some subscribers, you can override that format in the access profile by including the <b>calling-station-id remote-circuit-id</b> override option. You must also configure the new format to be used with the <b>remote-circuit-id-format</b> statement; you can specify: the ACI, ARI, or both the ACI and ARI received from the PADR packet.</p> <p><b>nas-ip-address tunnel-client-gateway-address</b>—Check the SDB to determine whether the session's LAC endpoint IP address is available. If so, use that value in the RADIUS NAS-IP-Address attribute (4). The LNS subsequently sends the attribute to the RADIUS server in Access-Request and accounting messages. If the value is not present, the attribute is not sent.</p> <p><b>nas-port tunnel-client-nas-port</b>—Check the SDB to determine whether the LAC NAS port information is conveyed to the LNS in the Cisco Systems NAS Port Info AVP (100). If so, use that value in the RADIUS NAS-Port attribute (5). The LNS subsequently sends the attribute to the RADIUS server in Access-Request and accounting messages. If the value is not present, the LNS sends its local IP address.</p>

**nas-port-type tunnel-client-nas-port-type**—Check the SDB to determine whether the LAC NAS port information is conveyed to the LNS in the Cisco Systems NAS Port Info AVP (100). If so, override the value of the RADIUS NAS-Port-Type attribute (61) at the LNS with that value. Otherwise, use the original NAS-Port-Type in attribute 61.

**Required Privilege Level**    admin—To view this statement in the configuration.  
                                     admin-control—To add this statement to the configuration.

**Related Documentation**

- [Override the Calling-Station-ID Format for the Calling Number AVP on page 206](#)
- *RADIUS Servers and Parameters for Subscriber Access*

## overrides (DHCP Relay Agent)

**Syntax**

```
overrides {
  allow-no-end-option;
  allow-snooped-clients;
  always-write-giaddr;
  always-write-option-82;
  asymmetric-lease-time seconds;
  asymmetric-prefix-lease-time seconds;
  client-discover-match <option60-and-option82 | incoming-interface>;
  client-negotiation-match incoming-interface;
  delay-authentication;
  delete-binding-on-renegotiation;
  disable-relay;
  dual-stack dual-stack-group-name;
  interface-client-limit number;
  layer2-unicast-replies;
  no-allow-snooped-clients;
  no-bind-on-request;
  proxy-mode;
  relay-source
  replace-ip-source-with;
  send-release-on-delete;
  trust-option-82;
}
```

**Hierarchy Level**

```
[edit forwarding-options dhcp-relay],
[edit forwarding-options dhcp-relay dhcpv6],
[edit forwarding-options dhcp-relay dhcpv6 group group-name],
[edit forwarding-options dhcp-relay dhcpv6 group group-name interface interface-name],
[edit forwarding-options dhcp-relay group group-name],
[edit forwarding-options dhcp-relay group group-name interface interface-name],
[edit logical-systems logical-system-name forwarding-options dhcp-relay ...],
[edit logical-systems logical-system-name routing-instances routing-instance-name
  forwarding-options dhcp-relay ...],
[edit routing-instances routing-instance-name forwarding-options dhcp-relay ...]
```

**Release Information** Statement introduced in Junos OS Release 8.3.  
Support at the **[edit ... dhcpv6]** hierarchy levels introduced in Junos OS Release 11.4.  
Statement introduced in Junos OS Release 12.1 for EX Series switches.

**Description** Override the default configuration settings for the extended DHCP relay agent. Specifying the **overrides** statement with no subordinate statements removes all DHCP relay agent overrides at that hierarchy level. Use the statement at the **[edit ... dhcpv6]** hierarchy levels to configure DHCPv6 support.

M120 and M320 routers do not support DHCPv6.

The following statements are supported at both the **[edit ... dhcp-relay]** and **[edit ... dhcpv6]** hierarchy levels.

- `allow-snooped-clients`
- `asymmetric-lease-time`
- `delete-binding-on-renegotiation`
- `dual-stack`
- `interface-client-limit`
- `no-allow-snooped-clients`
- `no-bind-on-request`
- `relay-source`
- `send-release-on-delete`

The following statements are supported at the `[edit ... dhcpv6]` hierarchy levels only.

- `asymmetric-prefix-lease-time`

All other statements are supported at the `[edit ... dhcp-relay]` hierarchy levels only.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration.
	interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	• <i>Extended DHCP Relay Agent Overview</i>
	• <i>Overriding the Default DHCP Relay Configuration Settings</i>

## overrides (Enhanced Subscriber Management)

```
Syntax overrides {
    event {
        catastrophic-failure {
            reboot (master | standby);
        }
    }
    interfaces {
        family (inet | inet6) {
            layer2-liveness-detection;
            ipoe-dynamic-arp-enable;
            receive-gratuitous-arp;
        }
    }
    no-unsolicited-ra;
    ra-initial-interval-max seconds;
    ra-initial-interval-min seconds;
    shmlog {
        disable;
        file filename <files maximum-no-files> <size maximum-file-size>;
        filtering enable;
        log-name {
            all;
            logname {
                <brief | detail | extensive | none | terse>;
                <file-logging | no-file-logging>;
            }
        }
        log-type (debug | info | notice);
    }
}
```

Hierarchy Level [edit system services [subscriber-management](#)]

**Release Information** Statement introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management.

**ra-initial-interval-max** and **ra-initial-interval-min** options added in Junos OS Release 18.2R1 on MX Series routers.

**ipoe-dynamic-arp-enable** and **receive-gratuitous-arp** options added in Junos OS Release 18.4R1 on MX Series routers.

**Description** Override the default configuration settings for the Junos OS enhanced subscriber management software for subscriber management.

**Options** **ra-initial-interval-max *seconds***—Specify the high end of the range from which the router randomly selects an interval for sending the first three unsolicited IPv6 router advertisement messages. You must also configure the **ra-initial-interval-min** option.

**Range:** 1 through 16



**ra-initial-interval-min seconds**—Specify the low end of the range from which the router randomly selects an interval for sending the first three unsolicited IPv6 router advertisement messages. You must also configure the **ra-initial-interval-max** option.



**BEST PRACTICE:** Always configure the value of **ra-initial-interval-min** to be less than or equal to the value of **ra-initial-interval-max**. If you configure the values to be the same, the initial router advertisement intervals are constant and not randomized.

**Range:** 1 through 16

**ipoe-dynamic-arp-enable**—Enable dynamic ARP to resolve the MAC address for IPv4 framed host (32-bit) routes. By default the framed route is permanently associated with the source MAC address received in the packet that triggered creation of the dynamic VLAN.

**receive-gratuitous-arp**—Enable the router to compare the source MAC address received in a gratuitous ARP request or reply packet with the value in the ARP cache. The router updates the cache with the received MAC address when it determines this address is different from the cache entry.

This situation occurs when an IPv4 address is moved to a different device. The device broadcasts a gratuitous ARP reply packet with its MAC address as the source MAC address. When the **receive-gratuitous-arp** option is configured, the router compares the MAC addresses and updates the cache to associate the IPv4 address with the new MAC address.

If the **receive-gratuitous-arp** option is not configured, the router does not accept the gratuitous ARP request or reply packet and cannot quickly learn about the new address. Instead, the original dynamic ARP entry in the cache eventually times out. Before deleting the entry, the router sends an ARP request for the target IP address. The client responds with the new MAC address. This delay in learning about the new address means there is a period during which the MAC address in the ARP cache does not match the address in the new device's NIC.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

<b>Required Privilege Level</b>	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Junos OS Enhanced Subscriber Management</a></li> <li>• <a href="#">Junos OS Enhanced Subscriber Management Overview</a></li> <li>• <a href="#">DHCP Liveness Detection Using ARP and Neighbor Discovery Packets</a></li> <li>• <a href="#">Configuring an Interval Range for Unsolicited Router Advertisements to IPv6 Neighbors</a></li> </ul>
------------------------------	--

## pap

**Syntax**

```
pap {
  access-profile name;
  default-pap-password password;
  local-name name;
  local-password password;
  passive;
}
```

**Hierarchy Level** [edit interfaces *interface-name* [ppp-options](#)],  
[edit interfaces *interface-name* unit *logical-unit-number* [ppp-options](#)],  
[edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* [ppp-options](#)]

**Release Information** Statement introduced in Junos OS Release 8.3.

**Description** Configure the Password Authentication Protocol (PAP). Use PAP authentication as a means to provide a simple method for the peer to establish its identity using a two-way handshake. This is done only upon initial link establishment.

After the link is established, an ID and password pair is repeatedly sent by the peer to the authenticator until authentication is acknowledged or the connection is terminated.



**BEST PRACTICE:** On inline service (si) interfaces for L2TP, only the `pap` statement itself is typically used for subscriber management. We recommend that you leave the subordinate statements at their default values.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring the PPP Challenge Handshake Authentication Protocol*
- *Configuring the PPP Password Authentication Protocol On a Logical Interface*
- *Tracing Operations of the pppd Process*
- *traceoptions (PPP Process)*
- *Example: Configuring PAP for an L2TP Profile*
- [Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216](#)

## pap (Dynamic PPP)

<b>Syntax</b>	<code>pap;</code>
<b>Hierarchy Level</b>	[edit dynamic-profiles <i>profile-name</i> interfaces pp0 unit "\$junos-interface-unit" <b>pap-options</b> ], [edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" unit "\$junos-interface-unit" <b>pap-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5. Support at the [edit dynamic-profiles <i>profile-name</i> interfaces "\$junos-interface-ifd-name" unit "\$junos-interface-unit" <b>pap-options</b> ] hierarchy level introduced in Junos OS Release 12.2.
<b>Description</b>	Specify PAP authentication in a PPP dynamic profile.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Dynamic Profiles Overview</a></li> <li>• <a href="#">Configuring Dynamic Authentication for PPP Subscribers on page 103</a></li> <li>• <a href="#">Attaching Dynamic Profiles to Static PPP Subscriber Interfaces on page 99</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## pap (L2TP)

<b>Syntax</b>	<code>pap;</code>
<b>Hierarchy Level</b>	[edit access group-profile <i>profile-name</i> ppp <b>pap-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	(MX Series routers only) Specify PAP authentication for PPP subscribers in an L2TP LNS user group profile.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> </ul>

## parse-direction (Access Profile)

Syntax	parse-direction (left-to-right   right-to-left);
Hierarchy Level	[edit access profile <i>profile-name</i> session-options <a href="#">strip-user-name</a> ]
Release Information	Statement introduced in Junos OS Release 16.2.
Description	Specify the direction in which a subscriber login string is parsed to identify the first delimiter that matches one configured with the <a href="#">delimiter</a> statement. When subscriber username stripping is configured in a subscriber access profile, the characters to the right of the identified delimiter are stripped and discarded along with the delimiter. characters become the new, modified username.
Default	left-to-right
Options	<p><b>left-to-right</b>—Parse the subscriber login string from left to right up to the delimiter.</p> <p>For example, when the direction is <b>left-to-right</b>, the characters <code>/@\$%#</code> are configured as the delimiters, and the login string is <code>drgt21@example.com\$84</code>, the <code>@</code> is reached before the <code>\$</code>, so the username is modified to <code>drgt21</code>.</p> <p><b>right-to-left</b>—Parse the subscriber login string from right to left up to the delimiter.</p> <p>For example, when the direction is <b>right-to-left</b>, the characters <code>/@\$%#</code> are configured as the delimiters, and the login string is <code>drgt21@example.com\$84</code>, the <code>\$</code> is reached before the <code>@</code>, so the username is modified to <code>drgt21@example.com</code>.</p>
Required Privilege Level	<p>access—To view this statement in the configuration.</p> <p>access-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <i>Understanding Session Options for Subscriber Access</i></li> <li>• <i>Configuring Username Modification for Subscriber Sessions</i></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## pic (M Series and T Series Routers)

```
Syntax  pic pic-number {
        cel {
            el port-number {
                channel-group group-number timeslots slot-number;
            }
        }
        ct3 {
            port port-number {
                tl link-number {
                    channel-group group-number timeslots slot-number;
                }
            }
        }
        framing (sdh | sonet);
        idle-cell format {
            itu-t;
            payload-pattern payload-pattern-byte;
        }
        inline-services {
            bandwidth (1g | 10g);
        }
        max-queues-per-interface (8 | 4);
        no-concatenate;
    }
```

**Hierarchy Level** [edit chassis fpc *slot-number*]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Configure properties for an individual PIC.

**Options** *pic-number*—Slot number in which the PIC is installed.

**Range:** 0 through 3

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring the Junos OS to Enable SONET/SDH Framing for SONET/SDH PICs*
- *Configuring the Junos OS to Enable a SONET PIC to Operate in Channelized (Multiplexed) Mode*
- *Configuring the Junos OS to Support Channelized DS3-to-DS0 Naming for Channel Groups and Time Slots*

- *Configuring the Junos OS to Support Channel Groups and Time Slots for Channelized E1 PICs*

## pool (L2TP Service Interfaces)

---

**Syntax** `pool pool-name {  
    interface service-interface-name;  
}`

**Hierarchy Level** `[edit services service-device-pools]`

**Release Information** Statement introduced in Junos OS Release 11.4.

**Description** Define a pool of service interfaces that can be assigned to an L2TP tunnel group for traffic load-balancing. The service device pool is required for dynamic LNS sessions.

**Options** ***pool-name***—Name of the service interface pool.

The remaining statement is explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions on page 258](#)

## pp0 (Dynamic PPPoE)

```
Syntax  pp0 {
    unit logical-unit-number {
        keepalives interval seconds;
        no-keepalives;
        pppoe-options {
            underlying-interface interface-name;
            server;
        }
        ppp-options {
            aaa-options aaa-options-name;
            authentication [ authentication-protocols ];
            chap {
                challenge-length minimum minimum-length maximum maximum-length;
            }
            ignore-magic-number-mismatch;
            initiate-ncp (ip | ipv6 | dual-stack-passive)
            ipcp-suggest-dns-option;
            mru size;
            mtu (size | use-lower-layer);
            on-demand-ip-address;
            pap;
            peer-ip-address-optional;
        }
        family inet {
            unnumbered-address interface-name;
            address address;
            service {
                input {
                    service-set service-set-name {
                        service-filter filter-name;
                    }
                    post-service-filter filter-name;
                }
                output {
                    service-set service-set-name {
                        service-filter filter-name;
                    }
                }
            }
            filter {
                input filter-name {
                    precedence precedence;
                }
                output filter-name {
                    precedence precedence;
                }
            }
        }
    }
}
```

**Hierarchy Level** [edit [dynamic-profiles](#) *profile-name* [interfaces](#)]

**Release Information** Statement introduced in Junos OS Release 10.1.

**Description** Configure the dynamic PPPoE logical interface in a dynamic profile. When the router creates a dynamic PPPoE logical interface on an underlying Ethernet interface configured with PPPoE (**ppp-over-ether**) encapsulation, it uses the information in the dynamic profile to determine the properties of the dynamic PPPoE logical interface.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring a PPPoE Dynamic Profile*
- [Configuring Dynamic Authentication for PPP Subscribers on page 103](#)
- For information about creating static PPPoE interfaces, see *Configuring PPPoE*



## ppp (Group Profile)

<b>Syntax</b>	<pre> ppp {   cell-overhead;   encapsulation-overhead <i>bytes</i>;   framed-pool <i>framed-pool</i>;   idle-timeout <i>seconds</i>;   interface-id <i>interface-id</i>;   keepalive <i>seconds</i>;   ppp-options {     aaa-options <i>aaa-options-name</i>;     chap;     ignore-magic-number-mismatch;     initiate-ncp (ip   ipv6   dual-stack-passive)     ipcp-suggest-dns-option;     mru;     mtu;     pap;     peer-ip-address-optional;   }   primary-dns <i>primary-dns</i>;   primary-wins <i>primary-wins</i>;   secondary-dns <i>secondary-dns</i>;   secondary-wins <i>secondary-wins</i>; } </pre>
<b>Hierarchy Level</b>	[edit access <b>group-profile</b> <i>profile-name</i> ]
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement <b>idle-timeout</b> introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement <b>idle-timeout</b> introduced in Junos OS Release 14.1X53-D20 for OCX Series switches.</p>
<b>Description</b>	Configure PPP properties for a group profile.
<b>Options</b>	<p><b>cell-overhead</b>—(M Series, MX Series, PTX Series, T Series only) Configure the session to use Asynchronous Transfer Mode (ATM)-aware egress shaping on the IQ2 PIC.</p> <p><b>encapsulation-overhead</b>—(MX Series, T Series only) Configure the encapsulation overhead for class-of-service calculations.  <b>Values:</b> <i>bytes</i>—The number of bytes used as encapsulation overhead for the session.</p> <p><b>framed-pool</b>—(M Series, MX Series, PTX Series, T Series only) Configure the address pool.  <b>Values:</b> <i>framed-pool</i>—References a configured address pool.</p> <p><b>idle-timeout</b>—(EX4600, M Series, MX Series, OCX1100, PTX Series, QFX Series, T Series only) Configure the idle timeout for a user. Starting in Junos OS Release 11.1, this statement is available on the QFX Series. Starting in Junos OS Release 14.1X53-D20,</p>

this statement is available on OCX Series switches. The router might consider a PPP session to be idle because of the following reasons:

- There is no ingress traffic on the PPP session.
- There is no egress traffic.
- There is neither ingress or egress traffic on the PPP session.
- There is no ingress or egress PPP control traffic. This is applicable only if keepalives are enabled.

**Values:** *seconds*—Number of seconds a user can remain idle before the session is terminated.

**Range:** 0 through 4,294,967,295 seconds

**Default:** 0

**interface-id** *interface-id*—(M Series, MX Series, PTX Series, T Series only) Configure the interface identifier.

**Values:** *interface-id*—Identifier for the interface representing a Layer 2 Tunneling Protocol (L2TP) session configured at the **[edit interfaces *interface-name* unit *local-unit-number* dial-options]** hierarchy level. For more information about the interface ID, see *Services Interface Naming Overview*.

**keepalive**—(M Series, MX Series, PTX Series, T Series only) Configure the keepalive interval for an L2TP tunnel.

**Values:** *seconds*—Time period that must elapse before the Junos OS checks the status of the Point-to-Point Protocol (PPP) session by sending an echo request to the peer. For L2TP on MX Series routers, the minimum recommended interval is 30 seconds. A value of 0 disables generation of keepalive messages from the LNS.

**Range:** 0 through 32,767 seconds

**Default:** 30 seconds

**primary-dns**—(EX Series, SRX Series only) Configure the primary Domain Name System (DNS) server.

**Values:** *primary-dns*—An IPv4 address.

**primary-wins**—(M Series, MX Series, PTX Series, T Series only) Configure the primary Windows Internet name server.

**Values:** *primary-wins*—An IPv4 address.

**secondary-dns**—(SRX Series only) Configure the secondary DNS server.

**Values:** *secondary-dns*—An IPv4 address.

**secondary-wins**—(M Series, MX Series, PTX Series, SRX Series, T Series only) Configure the secondary Windows Internet name server.

**Values:** *secondary-wins*—An IPv4 address.

<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
---------------------------------	---

- Related Documentation**
- *Configuring the PPP Attributes for a Group Profile*
  - [Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218](#)
  - *Configuring PPP Properties for a Client-Specific Profile*

## ppp-options

**Syntax**

```
ppp-options {
  authentication [ authentication-protocols ];
  mru size;
  mtu (size | use-lower-layer);
  chap {
    access-profile name;
    challenge-length minimum minimum-length maximum maximum-length;
    default-chap-secret name;
    local-name name;
    passive;
  }
  compression {
    acfc;
    pfc;
  }
  dynamic-profile profile-name;
  initiate-ncp (ip | ipv6 | dual-stack-passive)
  ipcp-suggest-dns-option;
  lcp-max-conf-req number
  lcp-restart-timer milliseconds;
  loopback-clear-timer seconds;
  ncp-max-conf-req number
  ncp-restart-timer milliseconds;
  on-demand-ip-address
  pap {
    access-profile name;
    default-pap-password password;
    local-name name;
    local-password password;
    passive;
  }
}
```

**Hierarchy Level** [edit interfaces *interface-name*],  
[edit interfaces *interface-name* unit *logical-unit-number*],  
[edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** On interfaces with PPP encapsulation, configure PPP-specific interface properties.

For ATM2 IQ interfaces only, you can configure CHAP on the logical interface unit if the logical interface is configured with one of the following PPP over ATM encapsulation types:

- **atm-ppp-llc**—PPP over AAL5 LLC encapsulation.
- **atm-ppp-vc-mux**—PPP over AAL5 multiplex encapsulation.



**BEST PRACTICE:** On inline service (si) interfaces for L2TP, only the `chap` and `pap` statements are typically used for subscriber management. We recommend that you leave the other statements subordinate to `ppp-options`—including those subordinate to `chap` and `pap`—at their default values.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring the PPP Challenge Handshake Authentication Protocol</i></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li></ul>
------------------------------	---

## ppp-options (Dynamic PPP)

**Syntax**

```
ppp-options {
  aaa-options aaa-options-name;
  authentication [ authentication-protocols ];
  chap {
    challenge-length minimum minimum-length maximum maximum-length;
    local-name name;
  }
  ignore-magic-number-mismatch;
  initiate-ncp (dual-stack-passive | ipv6 | ip)
  ipcp-suggest-dns-option;
  mru size;
  mtu (size | use-lower-layer);
  on-demand-ip-address;
  pap;
  peer-ip-address-optional;
  local-authentication {
    password password;
    username-include {
      circuit-id;
      delimiter character;
      domain-name name;
      mac-address;
      remote-id;
    }
  }
}
```

**Hierarchy Level** [edit dynamic-profiles *profile-name* interfaces "\$junos-interface-ifd-name" **unit** "\$junos-interface-unit"].  
[edit dynamic-profiles *profile-name* interfaces pp0 **unit** "\$junos-interface-unit"]

**Release Information** Statement introduced in Junos OS Release 9.5.  
Support at the [edit dynamic-profiles *profile-name* interfaces "\$junos-interface-ifd-name" **unit** "\$junos-interface-unit"] hierarchy level introduced in Junos OS Release 12.2.

**Description** Configure PPP-specific interface properties in a dynamic profile.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.



### NOTE:

PPP options can also be configured in a group profile with the [ppp-options \(L2TP\)](#) statement. The following behavior determines the interaction between the PPP options configured in a group profile and the PPP options configured in a dynamic profile:

- When PPP options are configured only in the group profile, the group profile options are applied to the subscriber.
  - When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the subscriber only when the dynamic profile does not include any PPP option available in the group profile.
- 

<b>Required Privilege</b>	interface—To view this statement in the configuration.
<b>Level</b>	interface-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Dynamic Profiles Overview</a></li><li>• <a href="#">Configuring a PPPoE Dynamic Profile</a></li><li>• <a href="#">Configuring Dynamic Authentication for PPP Subscribers on page 103</a></li><li>• <a href="#">Attaching Dynamic Profiles to Static PPP Subscriber Interfaces on page 99</a></li><li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li></ul>
------------------------------	---

## ppp-options (L2TP)

**Syntax**

```
ppp-options {
  aaa-options aaa-options-name;
  chap;
  ignore-magic-number-mismatch;
  initiate-ncp (ip | ipv6 | dual-stack-passive)
  ipcp-suggest-dns-option;
  mru;
  mtu;
  pap;
  peer-ip-address-optional;
}
```

**Hierarchy Level** [edit access group-profile *profile-name* **ppp**]

**Release Information** Statement introduced in Junos OS Release 11.4.  
**mtu** statement introduced in Junos OS Release 14.2

**Description** Configure PPP-specific properties in a group profile that applies to tunneled PPP subscribers at the LNS.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.



### NOTE:

PPP options can also be configured for an inline service interface within a dynamic profile with the **ppp-options (Dynamic PPP)** statement. The following behavior determines the interaction between the PPP options configured in a group profile and the PPP options configured in a dynamic profile:

- When PPP options are configured only in the group profile, the group profile options are applied to the subscriber.
- When PPP options are configured in both the dynamic profile and the group profile, the group profile options are applied to the subscriber only when the dynamic profile PPP options do not include any of the following attributes: **aaa-options**, **chap**, **ipcp-suggest-dns-option**, **mru**, **mtu**, **pap**, and **peer-ip-address-optional**. When any of these attributes is present, the dynamic profile is applied to the subscriber.

When PPP options are configured in both a group profile and a dynamic profile, the dynamic profile configuration takes complete precedence over the group profile when the dynamic profile includes one or more of the PPP options that can be configured in the group profile. Complete precedence means that there is no merging of options between the profiles. The group profile is applied to the subscriber only when the dynamic profile does not include any PPP option available in the group profile.



<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the PPP Attributes for a Group Profile</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> </ul>

## preference (Subscriber Management)

<b>Syntax</b>	<code>preference route-distance</code>
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <a href="#">route prefix</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <a href="#">route prefix</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options <a href="#">access route prefix</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>] hierarchy levels introduced in Junos OS Release 10.1.</p>
<b>Description</b>	Dynamically configure the distance for an access route.
<b>Options</b>	<p><b><i>route-distance</i></b>—Either the specific distance you want to assign to the access route or either of the following distance variables:</p> <ul style="list-style-type: none"> <li>• <b><i>\$junos-framed-route-distance</i></b>—Distance of an IPv4 access route; the variable is dynamically replaced with the preference value (Subattribute 5) from the RADIUS Framed-Route attribute [22].</li> <li>• <b><i>\$junos-framed-route-ipv6-distance</i></b>—Distance of an IPv6 access route; the variable is dynamically replaced with the preference value (Subattribute 5) from the RADIUS Framed-IPv6-Route attribute [99].</li> </ul>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic Access Routes for Subscriber Management on page 53</a></li> </ul>

## preference (Tunnel Profile)

---

Syntax	<code>preference <i>number</i>;</code>
Hierarchy Level	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
Release Information	Statement introduced in Junos OS Release 10.4.
Description	<p>Specify the preference for a tunnel. You can specify up to 8 levels of preference, and you can assign the same preference to a maximum of 31 tunnels. When you define multiple preferences for a destination, you increase the probability of a successful connection.</p> <p>This value can be overridden by RADIUS attribute Tunnel-Preference [83].</p>
Options	<p><b>number</b>—Number that indicates the order in which the router attempts to connect to the destination. Zero is the highest level of preference.</p> <p><b>Range:</b> 0 through 2000</p> <p><b>Default:</b> 2000</p>
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## primary-interface (Aggregated Inline Services)

Syntax	<code>primary-interface <i>interface-name</i>;</code>
Hierarchy Level	[edit interfaces asix <a href="#">aggregated-inline-services-options</a> ]
Release Information	Statement introduced in Junos OS Release 16.2.
Description	<p>Specify the primary (active) inline services member link in the asi bundle. You must also configure a secondary (backup) member link on a different MPC with the <b>secondary-interface</b> statement. The secondary member provides 1:1 redundancy for subscriber service sessions on the primary member link. The bandwidth configured at the <code>[edit chassis fpc slot pic <i>number</i> inline-services bandwidth]</code> hierarchy level must be the same for both member links.</p> <p>Redundancy is not achievable if you configure the primary and secondary interface on the same MPC, because both member interfaces go down if the card goes down. Consequently, if you configure both interfaces on the same MPC, the subsequent configuration commit fails.</p>
Options	<b><i>interface-name</i></b> —Name of an inline services physical interface.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces on page 229</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## profile (Access)

```

Syntax  profile profile-name {
        accounting {
            address-change-immediate-update
            accounting-stop-on-access-deny;
            accounting-stop-on-failure;
            ancp-speed-change-immediate-update;
            coa-immediate-update;
            coa-no-override service-class-attribute;
            duplication;
            duplication-filter;
            duplication-vrf {
                access-profile-name profile-name;
                vrf-name vrf-name;
            }
            immediate-update;
            order [ accounting-method ];
            send-acct-status-on-config-change;
            statistics (time | volume-time);
            update-interval minutes;
            wait-for-acct-on-ack;
        }
        accounting-order (radius | [accounting-order-data-list]);
        authentication-order [ authentication-methods ];
        client client-name {
            chap-secret chap-secret;
            group-profile profile-name;
            ike {
                allowed-proxy-pair {
                    remote remote-proxy-address local local-proxy-address;
                }
                pre-shared-key (ascii-text character-string | hexadecimal hexadecimal-digits);
                ike-policy policy-name;
                interface-id string-value;
            }
            l2tp {
                aaa-access-profile profile-name;
                interface-id interface-id;
                lcp-renegotiation;
                local-chap;
                maximum-sessions number;
                maximum-sessions-per-tunnel number;
                multilink {
                    drop-timeout milliseconds;
                    fragment-threshold bytes;
                }
                override-result-code session-out-of-resource;
                ppp-authentication (chap | pap);
                ppp-profile profile-name;
                service-profile profile-name(parameter)&profile-name;
                sessions-limit-group limit-group-name;
                shared-secret shared-secret;
            }
        }
    }

```

```

}
pap-password pap-password;
ppp {
    cell-overhead;
    encapsulation-overhead bytes;
    framed-ip-address ip-address;
    framed-pool framed-pool;
    idle-timeout seconds;
    interface-id interface-id;
    keepalive seconds;
    primary-dns primary-dns;
    primary-wins primary-wins;
    secondary-dns secondary-dns;
    secondary-wins secondary-wins;
}
user-group-profile profile-name;
}
domain-name-server;
domain-name-server-inet;
domain-name-server-inet6;
local {
    flat-file-profile profile-name;
}
preauthentication-order preauthentication-method;
provisioning-order (gx-plus | jsr | pcrf);
radius {
    accounting-server [ ip-address ];
    attributes {
        exclude {
            attribute-name packet-type;
            standard-attribute number {
                packet-type [ access-request | accounting-off | accounting-on | accounting-start
                    | accounting-stop ];
            }
            vendor-id id-number {
                vendor-attribute vsa-number {
                    packet-type [ access-request | accounting-off | accounting-on | accounting-start
                        | accounting-stop ];
                }
            }
        }
    }
    ignore {
        dynamic-iflset-name;
        framed-ip-netmask;
        idle-timeout;
        input-filter;
        logical-system:routing-instance;
        output-filter;
        session-timeout;
        standard-attribute number;
        vendor-id id-number {
            vendor-attribute vsa-number;
        }
    }
}
}

```

```
authentication-server [ ip-address ];
options {
    accounting-session-id-format (decimal | description);
    calling-station-id-delimiter delimiter-character;
    calling-station-id-format {
        agent-circuit-id;
        agent-remote-id;
        interface-description;
        interface-text-description;
        mac-address;
        nas-identifier;
        stacked-vlan;
        vlan;
    }
    chap-challenge-in-request-authenticator;
    client-accounting-algorithm (direct | round-robin);
    client-authentication-algorithm (direct | round-robin);
    coa-dynamic-variable-validation;
    ethernet-port-type-virtual;
    interface-description-format {
        exclude-adapter;
        exclude-channel;
        exclude-sub-interface;
    }
    juniper-access-line-attributes;
    nas-identifier identifier-value;
    nas-port-extended-format {
        adapter-width width;
        ae-width width;
        port-width width;
        pw-width width;
        slot-width width;
        stacked-vlan-width width;
        vlan-width width;
        atm {
            adapter-width width;
            port-width width;
            slot-width width;
            vci-width width;
            vpi-width width;
        }
    }
    nas-port-id-delimiter delimiter-character;
    nas-port-id-format {
        agent-circuit-id;
        agent-remote-id;
        interface-description;
        interface-text-description;
        nas-identifier;
        order {
            agent-circuit-id;
            agent-remote-id;
            interface-description;
            interface-text-description;
            nas-identifier;
        }
    }
}
```

```

        postpend-vlan-tags;
    }
    postpend-vlan-tags;
}
nas-port-type {
    ethernet {
        port-type;
    }
}
override {
    calling-station-id remote-circuit-id;
    nas-ip-address tunnel-client-gateway-address;
    nas-port tunnel-client-nas-port;
    nas-port-type tunnel-client-nas-port-type;
}
remote-circuit-id-delimiter;
remote-circuit-id-fallback {
    remote-circuit-id-format;
    agent-circuit-id;
    agent-remote-id;
}
revert-interval interval;
service-activation {
    dynamic-profile (optional-at-login | required-at-login);
    extensible-service (optional-at-login | required-at-login);
}
vlan-nas-port-stacked-format;
}
preauthentication-server ip-address;
}
radius-server server-address {
    accounting-port port-number;
    accounting-retry number;
    accounting-timeout seconds;
    dynamic-request-port
    port port-number;
    preauthentication-port port-number;
    preauthentication-secret password;
    retry attempts;
    routing-instance routing-instance-name;
    secret password;
    max-outstanding-requests value;
    source-address source-address;
    timeout seconds;
}
service {
    accounting {
        statistics (time | volume-time);
        update-interval minutes;
    }
    accounting-order (activation-protocol | local | radius);
}
session-limit-per-username number;
session-options {
    client-idle-timeout minutes;

```

```

client-idle-timeout-ingress-only;
client-session-timeout minutes;
pcc-context {
    input-service-filter-name filter-name;
    input-service-set-name service-set-name;
    ipv6-input-service-filter-name filter-name;
    ipv6-input-service-set-name service-set-name;
    ipv6-output-service-filter-name filter-name;
    ipv6-output-service-set-name service-set-name;
    output-service-filter-name filter-name;
    output-service-set-name service-set-name;
    profile-name pcef-profile-name;
}
strip-user-name {
    delimiter [ delimiter ];
    parse-direction (left-to-right | right-to-left);
}
}
subscriber username {
    delegated-pool delegated-pool-name;
    framed-ip-address ipv4-address;
    framed-ipv6-pool ipv6-pool-name;
    framed-pool ipv4-pool-name;
    password password;
    target-logical-system logical-system-name <target-routing-instance (default |
        routing-instance-name)>;
    target-routing-instance (default | routing-instance-name);
}
}

```

Hierarchy Level [\[edit access\]](#)

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Configure a subscriber access profile that includes subscriber access, L2TP, or PPP properties.

**Options** *profile-name*—Name of the profile.

For CHAP, the name serves as the mapping between peer identifiers and CHAP secret keys. This entity is queried for the secret key whenever a CHAP challenge or response is received.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.



**Related  
Documentation**

- *Configuring the PPP Authentication Protocol*
- *Configuring Access Profiles for L2TP or PPP Parameters*
- *Configuring L2TP Properties for a Client-Specific Profile*
- [Configuring an L2TP Access Profile on the LNS on page 220](#)
- [Configuring an L2TP LNS with Inline Service Interfaces on page 213](#)
- *Configuring PPP Properties for a Client-Specific Profile*
- *Configuring Service Accounting with JSRC*
- *Configuring Service Accounting in Local Flat Files*
- *AAA Service Framework Overview*
- *Enabling Direct PCC Rule Activation by a PCRF for Subscriber Management*

## proxy-mode

<b>Syntax</b>	<code>proxy-mode;</code>
<b>Hierarchy Level</b>	<p>[edit forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay <a href="#">overrides</a>],  [edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group <i>group-name</i> <a href="#">overrides</a>],  [edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group <i>group-name</i> interface <i>interface-name</i> <a href="#">overrides</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>
<b>Description</b>	<p>Enable DHCP relay proxy mode on the extended DHCP relay. Proxy mode supports all extended DHCP relay functionality.</p> <p>You cannot configure both the DHCP relay proxy and the extended DHCP local server on the same interface.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>DHCP Relay Proxy Overview</i></li> <li>• <i>Extended DHCP Relay Agent Overview</i></li> <li>• <i>Enabling DHCP Relay Proxy Mode</i></li> </ul>

## ps0 (Pseudowire Subscriber Interfaces)

<b>Syntax</b>	<pre>ps0 {   anchor-point <i>lt-device</i>;   mtu <i>bytes</i>;   mac <i>mac-address</i>;   no-gratuitous-arp-request;   (flexible-vlan-tagging   stacked-vlan-tagging   untagged   vlan-tagging); }</pre>
<b>Hierarchy Level</b>	[edit logical-systems transport-ls interfaces]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	<p>Configure the pseudowire logical device.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Pseudowire Subscriber Logical Interfaces Overview on page 274</a></li> <li>• <a href="#">Configuring a Pseudowire Subscriber Logical Interface on page 281</a></li> <li>• <a href="#">Configuring a Pseudowire Subscriber Logical Interface Device on page 284</a></li> <li>• <a href="#">Configuring the Transport Logical Interface for a Pseudowire Subscriber Logical Interface on page 288</a></li> <li>• <a href="#">Configuring the Service Logical Interface for a Pseudowire Subscriber Logical Interface on page 291</a></li> </ul>

## pseudowire-service (Pseudowire Subscriber Interfaces)

---

<b>Syntax</b>	<pre>pseudowire-service {     device-count <i>number</i>; }</pre>
<b>Hierarchy Level</b>	[edit chassis]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	<p>Configure properties for the pseudowire devices on the router.</p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Pseudowire Subscriber Logical Interfaces Overview on page 274</a></li><li>• <a href="#">Configuring a Pseudowire Subscriber Logical Interface on page 281</a></li><li>• <a href="#">Configuring the Maximum Number of Pseudowire Logical Interface Devices Supported on the Router on page 283</a></li></ul>

## qualified-next-hop (Dynamic Access-Internal Routes)

<b>Syntax</b>	qualified-next-hop <i>interface-name</i> { <code>mac-address</code> <i>address</i> ; }
<b>Hierarchy Level</b>	[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access-internal <code>route</code> <i>subscriber-ip-address</i> ], [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access-internal <code>route</code> <i>subscriber-ip-address</i> ], [edit dynamic-profiles <i>profile-name</i> routing-options <code>access-internal route</code> <i>subscriber-ip-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.5. Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options route <i>subscriber-ip-address</i> ] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> route <i>subscriber-ip-address</i> ] hierarchy levels introduced in Junos OS Release 10.1.
<b>Description</b>	Dynamically configure the qualified next-hop and the MAC address for an access-internal route for DHCP and PPP subscriber interfaces.
<b>Options</b>	<i>interface-name</i> —Either the specific interface you want to assign to the access route or the variable, or the \$junos-interface-name variable. The variable is dynamically replaced with the value supplied by DHCP or PPP when a subscriber logs in.  The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers on page 55</a></li> </ul>

## radius (Access Profile)

```

Syntax radius {
    accounting-server [ ip-address ];
    attributes {
        exclude
            attribute-name packet-type;
        standard-attribute number {
            packet-type [ access-request | accounting-off | accounting-on | accounting-start |
                accounting-stop ];
        }
        vendor-id id-number {
            vendor-attribute vsa-number {
                packet-type [ access-request | accounting-off | accounting-on | accounting-start
                    | accounting-stop ];
            }
        }
    }
    ignore {
        dynamic-iflset-name;
        framed-ip-netmask;
        idle-timeout;
        input-filter;
        logical-system-routing-instance;
        output-filter;
        session-timeout;
        standard-attribute number;
        vendor-id id-number {
            vendor-attribute vsa-number;
        }
    }
}
authentication-server [ ip-address ];
options {
    accounting-session-id-format (decimal | description);
    calling-station-id-delimiter delimiter-character;
    calling-station-id-format {
        agent-circuit-id;
        agent-remote-id;
        interface-description;
        nas-identifier;
    }
    chap-challenge-in-request-authenticator;
    client-accounting-algorithm (direct | round-robin);
    client-authentication-algorithm (direct | round-robin);
    coa-dynamic-variable-validation;
    ethernet-port-type-virtual;
    interface-description-format {
        exclude-adapter;
        exclude-channel;
        exclude-sub-interface;
    }
    ip-address-change-notify message;
}

```

```

juniper-access-line-attributes;
nas-identifier identifier-value;
nas-port-extended-format {
    adapter-width width;
    ae-width width;
    port-width width;
    slot-width width;
    stacked-vlan-width width;
    vlan-width width;
    atm {
        adapter-width width;
        port-width width;
        slot-width width;
        vci-width width;
        vpi-width width;
    }
}
nas-port-id-delimiter delimiter-character;
nas-port-id-format {
    agent-circuit-id;
    agent-remote-id;
    interface-description;
    interface-text-description;
    nas-identifier;
    order {
        agent-circuit-id;
        agent-remote-id;
        interface-description;
        interface-text-description;
        nas-identifier;
        postpend-vlan-tags;
    }
    postpend-vlan-tags;
}
nas-port-type {
    ethernet {
        port-type;
    }
}
override {
    calling-station-id remote-circuit-id;
    nas-ip-address tunnel-client-gateway-address;
    nas-port tunnel-client-nas-port;
    nas-port-type tunnel-client-nas-port-type;
}
remote-circuit-id-delimiter;
remote-circuit-id-fallback;
remote-circuit-id-format {
    agent-circuit-id;
    agent-remote-id;
}
revert-interval interval;
service-activation {
    dynamic-profile (optional-at-login | required-at-login);
    extensible-service (optional-at-login | required-at-login);
}

```

```

    }
    vlan-nas-port-stacked-format;
  }
  preauthentication-server ip-address;
}

```

**Hierarchy Level** [edit access [profile](#) *profile-name*]

**Release Information** Statement introduced in Junos OS Release 9.1.  
Statement introduced in Junos OS Release 9.1 for EX Series switches.

**Description** Configure the RADIUS parameters that the router uses for AAA authentication and accounting for subscribers.

**Options** **accounting-server**—(MX Series only) Specify a list of the RADIUS accounting servers used for accounting for DHCP, L2TP, and PPP clients.

**Values:** *ip-address*—IP version 4 (IPv4) address.

**authentication-server**—(SRX Series only) Specify a list of the RADIUS authentication servers used to authenticate DHCP, L2TP, and PPP clients. The servers in the list are also used as RADIUS dynamic-request servers, from which the router accepts and processes RADIUS disconnect requests, CoA requests, and dynamic service activations and deactivations.

**Values:** *ip-address*—IPv4 address.

**preauthentication-server**—(MX Series only) Starting in Junos OS Release 13.3, specify the RADIUS preauthentication server, which is used for the LLID service.



**NOTE:** You cannot configure this statement if the Calling-Station-ID attribute is excluded from RADIUS Access-Request messages by the `exclude` statement.

**Values:** *ip-address*—IPv4 address.

The remaining statements are explained separately. Search for a statement in CLI Explorer or click a linked statement in the Syntax section for details.


**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Authentication and Accounting Parameters for Subscriber Access*
- *RADIUS Logical Line Identifier (LLID) Overview*
- *Configuring Logical Line Identification (LLID) Preauthentication*



## reject-unauthorized-ipv6cp

<b>Syntax</b>	reject-unauthorized-ipv6cp;
<b>Hierarchy Level</b>	[edit protocols ppp-service]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.3.
<b>Description</b>	Configure the router to reject any IPv6 Control Protocol (IPv6CP) negotiation messages on dynamic interfaces when no appropriate IPv6 address or prefix has been received from AAA. IPv6CP negotiation attempts are also rejected when only a Framed-IPv6-Prefix attribute is received but router advertisement is not enabled in the dynamic profile.
	<div>  <b>NOTE:</b> IPv6CP negotiation messages are not rejected for static interfaces. </div>
<b>Default</b>	IPv6CP negotiation is allowed regardless of the presence of IPv6 attributes received from AAA.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><i>Avoiding Negotiation of IPv6CP in the Absence of an Authorized Address</i></li> </ul>

## relay-option-82

**Syntax**

```

relay-option-82 {
  circuit-id {
    include-irb-and-l2;
    keep-incoming-circuit-id ;
    no-vlan-interface-name;
    prefix prefix;
    use-interface-description (logical | device);
    use-vlan-id;
  }
  remote-id {
    include-irb-and-l2;
    keep-incoming-remote-id ;
    no-vlan-interface-name;
    prefix prefix;
    use-interface-description (logical | device);
    use-vlan-id;
  }
  server-id-override
  vendor-specific{
    host-name;
    location;
  }
}

```

**Hierarchy Level**

```

[edit forwarding-options dhcp-relay],
[edit forwarding-options dhcp-relay group group-name],
[edit logical-systems logical-system-name forwarding-options dhcp-relay],
[edit logical-systems logical-system-name forwarding-options dhcp-relay group group-name],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 forwarding-options dhcp-relay],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 forwarding-options dhcp-relay group group-name],
[edit routing-instances routing-instance-name forwarding-options dhcp-relay],
[edit routing-instances routing-instance-name forwarding-options dhcp-relay group
 group-name]

```

**Release Information** Statement introduced in Junos OS Release 8.3.  
Statement introduced in Junos OS Release 12.3 for EX Series switches.

**Description** Enable or disable the insertion of the DHCP relay agent information option (option 82) in DHCP packets destined for a DHCP server.

To enable insertion of option 82 information in DHCP packets, you must specify at least one of the **circuit-id** or **remote-id** statements.

You can use the **relay-option-82** statement and its subordinate statements at the **[edit forwarding-options dhcp-relay]** hierarchy level to control insertion of option 82 information

globally, or at the `[edit forwarding-options dhcp-relay group group-name]` hierarchy level to control insertion of option 82 information for a named group of interfaces.

To restore the default behavior (option 82 information is not inserted into DHCP packets), use the `delete relay-option-82` statement.


The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

<b>Required Privilege Level</b>	interface—To view this statement in the configuration.
	interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Using DHCP Relay Agent Option 82 Information</i></li> <li>• <a href="#">dhcp-relay on page 398</a></li> </ul>

## remote-gateway (Tunnel Profile)

<b>Syntax</b>	<pre>remote-gateway {   address server-ip-address;   gateway-name server-name; }</pre>
<b>Hierarchy Level</b>	<code>[edit access tunnel-profile profile-name tunnel tunnel-id]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Specify the IP address and hostname of the remote gateway at the L2TP tunnel endpoint, the LNS.
	The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration.
	admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li> </ul>

## report-ingress-shaping-rate (Dynamic CoS Interfaces)

Syntax	report-ingress-shaping-rate <i>bps</i> ;
Hierarchy Level	[edit dynamic-profiles <i>profile-name</i> class-of-service interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ]
Release Information	Statement introduced in Junos OS Release 17.2 on MX Series.
Description	Report the ingress shaping rate in bits per second that is used as the receive speed (Rx) for the LAC to send to the LNS. The ingress shaping rate is used when the method for deriving the connect speed is configured as <b>service-profile</b> with the <b>tx-connect-speed</b> statement at the [edit services l2tp] hierarchy level.
	<div>  <p><b>NOTE:</b> This statement is supported only when the effective <b>shaping-rate</b> statement is included at the [edit chassis] hierarchy level. If it is not, the subscriber login fails and a system log message is generated. There is no commit check failure because a commit check cannot be performed at run time.</p> </div>
Options	<p><b>bps</b>—Ingress shaping rate in bits per second.</p> <p><b>Range:</b> 1000 through 6,400,000,000,000 (6.4Tbps)</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Method to Derive the LAC Connection Speeds Sent to the LNS on page 198</a></li> <li>• <a href="#">Transmission of Tx and Rx Connection Speeds from LAC to LNS on page 190</a></li> <li>• <a href="#">Guidelines for Configuring Dynamic CoS for Subscriber Access</a></li> <li>• <a href="#">Applying a Classifier to a Subscriber Interface in a Dynamic Profile</a></li> </ul>

## request services l2tp destination unlock


<b>Syntax</b>	<code>request services l2tp destination unlock <i>destination-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 13.2.
<b>Description</b>	Remove the specified destination from the destination lockout list immediately, before its lockout period expires. As a result, the L2TP process can again consider the destination during the selection of new tunnels.
<b>Options</b>	<i>destination-name</i> —Name of the destination to be unlocked.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Removing an L2TP Destination from the Destination Lockout List on page 145</a></li> <li>• <a href="#">Configuring the L2TP Destination Lockout Timeout on page 145</a></li> <li>• <a href="#">show services l2tp destination lockout on page 752</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">request services l2tp destination unlock on page 589</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output


#### request services l2tp destination unlock

```
user@host> request services l2tp destination unlock dest-a
Destination dest-a unlocked
```

## retransmission-count-established (L2TP)

<b>Syntax</b>	<code>retransmission-count-established <i>count</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1.
<b>Description</b>	Set the maximum number of times control messages are retransmitted for established tunnels.
	<div>  <p><b>BEST PRACTICE:</b> Before you downgrade to a Junos OS Release that does not support this statement, unconfigure the statement by issuing <code>no services l2tp tunnel retransmission-count-established</code>.</p> </div>
<b>Options</b>	<p><i>count</i>—Number of retransmissions.</p> <p><b>Range:</b> 2 through 30</p> <p><b>Default:</b> 7</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Retransmission Attributes for L2TP Control Messages on page 128</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## retransmission-count-not-established (L2TP)

<b>Syntax</b>	<code>retransmission-count-not-established <i>count</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 12.1.
<b>Description</b>	Set the maximum number of times control messages are retransmitted for tunnels that are not established.
	<div>  <p><b>BEST PRACTICE:</b> Before you downgrade to a Junos OS Release that does not support this statement, unconfigure the statement by issuing <code>no services l2tp tunnel retransmission-count-not-established</code>.</p> </div>
<b>Options</b>	<p><i>count</i>—Number of retransmissions.</p> <p><b>Range:</b> 2 through 30</p> <p><b>Default:</b> 5</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Retransmission Attributes for L2TP Control Messages on page 128</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## route (Access)


Syntax	<pre>route <i>prefix</i> {     metric <i>route-cost</i>;     next-hop <i>next-hop</i>;     preference <i>route-distance</i>;     tag <i>route-tag</i>;     tag2 <i>route-tag2</i>; }</pre>
Hierarchy Level	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options <a href="#">access</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> <a href="#">access</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options <a href="#">access</a>]</p>
Release Information	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options <a href="#">access</a>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> <a href="#">access</a>] hierarchy levels introduced in Junos OS Release 10.1.</p>
Description	Dynamically configure the parameters for access routes.
Options	<p><i>prefix</i>—Either the specific route prefix that you want to assign to the access route or one of the following route prefix variables.</p> <ul style="list-style-type: none"> <li>For IPv4 access routes, use the variable, <b>\$junos-framed-route-ip-address-prefix</b>. The route prefix variable is dynamically replaced with the value in Framed-Route RADIUS attribute [22].</li> <li>For IPv6 access routes, use the variable, <b>\$junos-framed-route-ipv6-address-prefix</b>. The variable is dynamically replaced with the value in Framed-IPv6-Route RADIUS attribute [99].</li> </ul> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li><a href="#">Configuring Dynamic Access Routes for Subscriber Management on page 53</a></li> </ul>



## route (Access Internal)

<b>Syntax</b>	<pre>route <i>subscriber-ip-address</i> {   next-hop <i>next-hop</i>;   qualified-next-hop <i>underlying-interface</i> {     mac-address <i>address</i>;   } }</pre>
<b>Hierarchy Level</b>	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options <a href="#">access-internal</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> <a href="#">access-internal</a>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options <a href="#">access-internal</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options <a href="#">access-internal</a>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> <a href="#">access-internal</a>] hierarchy levels introduced in Junos OS Release 10.1.</p>
<b>Description</b>	<p>Dynamically configure parameters for an access-internal route.</p>
<b>Options</b>	<p><i>subscriber-ip-address</i>—Either the specific IP address you want to assign to the access-internal route or the subscriber IP address variable (\$junos-subscriber-ip-address). The subscriber IP address variable is dynamically replaced with the value supplied by DHCP or PPP when a subscriber logs in.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers on page 55</a></li> </ul>

## route-suppression (DHCP Local Server and Relay Agent)

<b>Syntax</b>	<code>route-suppression (access   access-internal   destination);</code>
<b>Hierarchy Level</b>	<pre>[edit forwarding-options <a href="#">dhcp-relay</a>], [edit forwarding-options dhcp-relay <a href="#">dhcpv6</a>], [edit forwarding-options dhcp-relay <a href="#">group group-name</a>], [edit forwarding-options dhcp-relay dhcpv6 <a href="#">group group-name</a>], [edit logical-systems <i>logical-system-name</i> ...], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>...], [edit routing-instances <i>routing-instance-name</i> ...], [edit system services <a href="#">dhcp-local-server</a>], [edit system services dhcp-local-server <a href="#">dhcpv6</a>], [edit system services dhcp-local-server <a href="#">group group-name</a>], [edit system services dhcp-local-server dhcpv6 <a href="#">group group-name</a>]</pre>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	Configure the <code>jdhcpd</code> process to suppress the installation of access, access-internal, or destination routes during client binding.
	<div>  <p><b>NOTE:</b> You cannot suppress access-internal routes when the subscriber is configured with both IA_NA and IA_PD addresses over IP demux interfaces—the IA_PD route relies on the IA_NA route for next hop connectivity.</p> </div>
<b>Options</b>	<p><b>access</b>—(DHCPv6 only) Suppress installation of access routes. You can use the <b>access</b> and <b>access-internal</b> options in the same statement for DHCPv6.</p> <p><b>access-internal</b>—In a DHCPv4 hierarchy, suppress installation of both access-internal and destination routes. In a DHCPv6 hierarchy, suppress access-internal routes only. Can be configured in the same statement with the <b>access</b> option.</p> <p><b>destination</b>—(DHCPv4 only) Suppress installation of destination routes. This option and the <b>access-internal</b> option are mutually exclusive; however, the <b>access-internal</b> option also suppresses destination routes.</p>
<b>Required Privilege Level</b>	<p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><i>Preventing DHCP from Installing Access, Access-Internal, and Destination Routes by Default</i></li> </ul>

## routing-instance (Tunnel Profile)

<b>Syntax</b>	<code>routing-instance <i>routing-instance-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Specify a routing instance for a tunnel.
<b>Options</b>	<p><b><i>routing-instance-name</i></b>—Name of the routing instance.</p> <p><b>Default:</b> Routing instance <i>default</i></p>
<b>Required Privilege Level</b>	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li> </ul>

## routing-instance (L2TP Destination)

<b>Syntax</b>	<pre>routing-instance <i>routing-instance-name</i> {   drain; }</pre>
<b>Hierarchy Level</b>	<code>[edit services l2tp destination <b>address</b> <i>ip-address</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	Specify the routing instance in which the destination is created.
<b>Options</b>	<p><b><i>routing-instance-name</i></b>— Name of the routing instance.</p> <p><b>Default:</b> Routing instance <i>default</i></p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring L2TP Drain on page 146</a></li> </ul>

## routing-instance (L2TP Tunnel Destination)

---

<b>Syntax</b>	<pre>routing-instance <i>routing-instance-name</i> {     drain; }</pre>
<b>Hierarchy Level</b>	[edit services l2tp tunnel name <i>tunnel-name</i> address <i>ip-address</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	Specify the routing instance in which the tunnel to the destination address is created.
<b>Options</b>	<p><i>routing-instance-name</i>— Name of the routing instance.</p> <p><b>Default:</b> Routing instance <i>default</i></p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Drain on page 146</a></li></ul>

## routing-instances (Dynamic Profiles)

```

Syntax  routing-instances routing-instance-name {
        interface interface-name;
        multicast-snooping-options {
        }
        routing-options {
            access {
                route prefix {
                    metric route-cost;
                    next-hop next-hop;
                    preference route-distance;
                    tag route-tag;
                    tag2 route-tag2;
                }
            }
            access-internal {
                route subscriber-ip-address {
                    qualified-next-hop underlying-interface {
                        mac-address address;
                    }
                }
            }
        }
        multicast {
            interface interface-name {
                no-qos-adjust;
            }
        }
        rib routing-table-name {
            access {
                route prefix {
                    metric route-cost;
                    next-hop next-hop;
                    preference route-distance;
                    tag route-tag;
                    tag2 route-tag2;
                }
            }
            access-internal {
                route subscriber-ip-address {
                    qualified-next-hop underlying-interface {
                        mac-address address;
                    }
                }
            }
        }
    }
}

```

Hierarchy Level [edit [dynamic-profiles](#)]  
 [edit logical-systems *logical-system-name* ]

<b>Release Information</b>	Statement introduced in Junos OS Release 9.6. Support at the <b>logical-systems</b> hierarchy level was introduced in Junos OS Release 14.2.
<b>Description</b>	Dynamically configure an additional routing entity for a router in a dynamic client profile or a dynamic service profile.
<b>Options</b>	<p><b><i>routing-instance-name</i></b>—The routing instance variable (<i>\$junos-routing-instance</i>). The routing instance variable is dynamically replaced with the routing instance the accessing client uses when connecting to the router.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring a Dynamic Profile for use by a Retailer in the DHCPv4 Solution</i></li></ul>

## routing-options (Dynamic Profiles)

```
Syntax routing-options {
  access {
    route prefix {
      metric route-cost;
      next-hop next-hop;
      preference route-distance;
      tag route-tag;
      tag2 route-tag2;
    }
  }
  access-internal {
    route subscriber-ip-address {
      qualified-next-hop underlying-interface {
        mac-address address;
      }
    }
  }
}
multicast {
  interface interface-name {
    no-qos-adjust;
  }
}
rib routing-table-name {
  access {
    route prefix {
      metric route-cost;
      next-hop next-hop;
      preference route-distance;
      tag route-tag;
      tag2 route-tag2;
    }
  }
  access-internal {
    route subscriber-ip-address {
      qualified-next-hop underlying-interface {
        mac-address address;
      }
    }
  }
}
}
```

**Hierarchy Level** [edit **dynamic-profiles** *profile-name*],  
[edit **dynamic-profiles** *profile-name* **routing-instances** \$junos-routing-instance]

**Release Information** Statement introduced in Junos OS Release 9.6.  
Support at the [edit **dynamic-profiles** *profile-name* **routing-instances** \$junos-routing-instance] hierarchy level introduced in Junos OS Release 10.1.

**Description** Configure protocol-independent routing properties in a dynamic client profile.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Dynamic Access Routes for Subscriber Management on page 53](#)
- [Configuring Dynamic Access-Internal Routes for DHCP and PPP Subscribers on page 55](#)



## rule (IP Reassembly)

**Syntax**

```
rule rule-name {
  match-direction direction;
}
```

**Hierarchy Level** [edit services [ip-reassembly](#)]

**Release Information** Statement introduced in Junos OS Release 13.1.

**Description** Configure an IP reassembly rule, which is used for inline IP reassembly on the inline services interface. The IP reassembly rule can be attached to a service set to indicate that the service set is of type IP reassembly. For inline IP reassembly, each rule must include the **match-direction** statement, which specifies the direction in which the match is applied.



**NOTE:** If you configure an IP reassembly rule, then you must configure the **match-direction** statement.



**NOTE:** To create more than one IP reassembly rule, include the rule statement multiple times.

**Options** ***rule-name***—Name of the IP reassembly rule.  
**Range:** Up to 63 characters

The remaining statement is explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring IP Inline Reassembly for L2TP on page 262](#)
- [IP Packet Fragment Reassembly for L2TP Overview on page 262](#)

## rx-connect-speed-when-equal (L2TP LAC)

---

<b>Syntax</b>	rx-connect-speed-when-equal
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.1.
<b>Description</b>	Enable sending the receive connect speed, which is represented by AVP 38, even when its value is equal to that of the transmit connect speed, which is represented by AVP 24. By default, AVP 38 is sent from the LAC to the LNS during the establishment of an L2TP tunnel session, only when its value is different from AVP 24. You can override the default setting with this configuration statement.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring the Method to Derive the LAC Connection Speeds Sent to the LNS on page 198</a></li><li>• <a href="#">Transmission of the Receive Connect Speed AVP When Transmit and Receive Connect Speeds are Equal on page 198</a></li></ul>

## rx-window-size (L2TP)

<b>Syntax</b>	<code>rx-window-size <i>packets</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <a href="#">tunnel</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 13.3.
<b>Description</b>	Configure the L2TP receive window size for an L2TP tunnel.
<b>Options</b>	<p><i>packets</i>—Number of packets that a peer can transmit without receiving an acknowledgment from the router. By default, this value is set to 4 packets. If the receive window size is configured to its default value, the router does not send the Receive Window Size AVP (AVP 10) in the first tunnel negotiation packet that is sent to its peer.</p> <p><b>Range:</b> 4 through 128</p> <p><b>Default:</b> 4</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Setting the L2TP Receive Window Size on page 143</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>

## secondary-interface (Aggregated Inline Services)


---

Syntax	<code>secondary-interface <i>interface-name</i>;</code>
Hierarchy Level	[edit interfaces asix <a href="#">aggregated-inline-services-options</a> ]
Release Information	Statement introduced in Junos OS Release 16.2.
Description	<p>Specify the secondary (backup) inline services member link in the asi bundle. You must also configure a primary (active) member link on a different MPC with the <b>primary-interface</b> statement. The secondary member provides 1:1 redundancy for subscriber service sessions on the primary member link. The bandwidth configured at the <b>[edit chassis fpc slot pic number inline-services bandwidth]</b> hierarchy level must be the same for both member links.</p> <p>Redundancy is not achievable if you configure the primary and secondary interface on the same MPC, because both member interfaces go down if the card goes down. Consequently, if you configure both interfaces on the same MPC, the subsequent configuration commit fails.</p>
Options	<b><i>interface-name</i></b> —Name of an inline services physical interface.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring 1:1 LNS Stateful Redundancy on Aggregated Inline Service Interfaces on page 229</a></li><li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li></ul>

## secret (Tunnel Profile)

<b>Syntax</b>	<code>secret <i>password</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Specify the tunnel password sent to the LNS for authentication.
<b>Options</b>	<i>password</i> —Cleartext password.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li> </ul>

## service-device-pool (L2TP)


<b>Syntax</b>	<code>service-device-pool <i>pool-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit services l2tp <b>tunnel-group</b> <i>name</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Assign a pool of service interfaces to the tunnel group to balance traffic across.
	<div style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;"> <div style="display: flex; align-items: center;">  <div> <p><b>NOTE:</b> The service interface configuration is required for static LNS sessions. Either the service interface configuration or the service device pool configuration can be used for dynamic LNS sessions.</p> </div> </div> </div>
<b>Options</b>	<i>pool-name</i> —Name of the service device pool.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> </ul>

## service-device-pools (L2TP Service Interfaces)

---

<b>Syntax</b>	<pre>service-device-pools {   pool pool-name {     interface service-interface-name;   } }</pre>
<b>Hierarchy Level</b>	[edit services]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.4.
<b>Description</b>	Configure one or more pools of service interfaces that can be assigned to an L2TP tunnel group for traffic load-balancing. The service device pool is required for dynamic LNS sessions.
<b>Options</b>	<p><b>pool-name</b>—Name of the service interface pool.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Pool of Inline Services Interfaces for Dynamic LNS Sessions on page 258</a></li></ul>

## service-interface (L2TP Processing)

Syntax	<code>service-interface <i>interface-name</i>;</code>
Hierarchy Level	<code>[edit services l2tp <a href="#">tunnel-group name</a>]</code>
Release Information	Statement introduced before Junos OS Release 7.4. <code>si-fpc/pic/port</code> option added in Junos OS Release 11.4. Option <code>asifpc</code> added in Junos OS Release 16.2.
Description	Specify the service interface responsible for handling L2TP processing.
<div>  <p><b>NOTE:</b> On MX Series routers, the service interface configuration is required for static LNS sessions. Either the service interface configuration or the service device pool configuration can be used for dynamic LNS sessions.</p> </div>	
Options	<p><b><i>interface-name</i></b>—Name of the service interface. The ae, si, and sp interface types are supported as follows:</p> <ul style="list-style-type: none"> <li>• <b>asix</b>—(MPCs on MX Series routers) Aggregated inline services interface.</li> <li>• <b>sp-fpc/pic/port</b>—On AS or Multiservices PICs on M7i, M10i, and M120 routers.</li> <li>• <b>si-fpc/pic/port</b>—On MPCs on MX Series routers.</li> </ul>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring the Local Gateway Address and PIC</a></li> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> </ul>

## service-profile (L2TP)

<b>Syntax</b>	<code>service-profile <i>profile-name</i>(<i>parameter</i>)&amp;<i>profile-name</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access profile <i>profile-name</i> <b>client</b> <i>client-name</i> <b>l2tp</b>]</code> <code>[edit services <b>l2tp</b> <b>tunnel-group</b> <i>group-name</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 18.1R1 on MX Series routers.
<b>Description</b>	<p>Configure one or more dynamic service profiles to be applied to subscriber sessions at activation for all subscribers in the specified tunnel group or on the specified LAC. Services are typically applied to L2TP sessions with RADIUS VSAs or CoA requests. In multivendor environments, you might use only standard attributes to simplify management of multiple vendor VSAs. This statement enables you to apply services without using an external authority such as RADIUS. The locally configured list of services (service profiles) serves as local authorization that is applied by authd during client session activation. This list of services is subject to the same validation and processing as services originating from an external authority, such as RADIUS.</p> <p>You can optionally specify parameters that are passed to the corresponding service when it is activated for the session. The parameter might override values configured in the profile itself, such as a downstream shaping rate for a CoS service. This enables you to use the same service profile for multiple situations with different requirements, or to modify a previously applied value for a service.</p> <p>You can still use RADIUS VSAs or CoA requests together with the service profiles. If services are sourced from an external authority as authorization during authentication or during subscriber session provisioning (activation), the services from the external authority take strict priority over those in the local configuration. If a service applied with RADIUS is the same as a service applied with a service profile in the CLI, but with different parameters, the RADIUS service is applied with a new session ID and takes precedence over the earlier service profile.</p> <p>When service profiles are configured on a LAC client and on a tunnel group that uses that LAC client, the LAC configuration overrides the tunnel group configuration. Only the service profile configured on the LAC client is applied to subscribers in the tunnel group.</p>
<b>Options</b>	<p><b><i>profile-name</i></b>—Name of a dynamic service profile that defines a service to be applied to L2TP subscriber sessions. You can specify one or more service profiles, separated by an ampersand (&amp;).</p> <p><b><i>parameter</i></b>—(Optional) Value to be passed to the service when it is activated on the subscriber session.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>



- Related Documentation**
- [Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248](#)
  - [Configuring an L2TP Access Profile on the LNS on page 220](#)

## service-rate-limiter (Access)

**Syntax**

```
service-rate-limiter {
  rx-multiplier rx-multiplier;
  service-name service-profile-name;
  tx-multiplier tx-multiplier;
}
```

**Hierarchy Level** [edit access]

**Release Information** Statement introduced in Junos OS Release 18.1R1 on MX Series routers.

**Description** Specify a dynamic service profile that provides rates for upstream and downstream traffic that the LAC communicates to the LNS. When the Juniper Networks Activate-Service VSA (26-65) is received in the RADIUS Access-Accept message at subscriber login, the VSA is evaluated to determine whether the configured name is also conveyed in the VSA. If it is, the rate values are collected and stored in the session database for the subscriber and then sent in the ICCN message to the LNS. You can either define the rate values as defaults in the service profile or configure them to be passed by RADIUS in VSA 26-65. When they are passed by the VSA, the first value is taken as the receive speed (the upstream rate from the subscriber to the LAC) and the second value is taken as the transmit speed (the downstream rate from the LAC to the subscriber).

The multipliers convert the rates from Kbps to bps, which is required for the AVPs. You can also use the multiplier options to adjust the rates up or down. The adjusted values correspond to the Juniper Networks RADIUS VSAs, Rx-Connect-Speed (26-163) and Tx-Connect-Speed (26-162). These values are stored as such in the session database (SDB). Because the values are available in the SDB before the L2TP connection is negotiated, the LAC includes them in the ICCN message as AVP 38 (Rx connect speed) and AVP 24 (Tx connect speed). The rate values are treated as RADIUS-sourced values and consequently have the highest precedence among multiple sources.

**Options** *rx-multiplier*—(Optional) Multiplier applied to convert the Rx connect speed value Kbps to bps and optionally adjust the rate up or down.

**Default:** 1000

**Range:** 1 through 2000

*service-profile-name*—Name of the dynamic service profile conveyed in VSA 26-65 that specifies upstream and downstream traffic rates.

*tx-multiplier*—(Optional) Multiplier applied to convert the Tx connect speed value Kbps to bps and optionally adjust the rate up or down.

**Default:** 1000

**Range:** 1 through 2000

**Required Privilege** access—To view this statement in the configuration.  
**Level** access-control—To add this statement to the configuration.

**Related Documentation**

- [Specifying a Rate-Limiting Service Profile for L2TP Connection Speeds on page 208](#)
- [Configuring an L2TP LAC on page 148](#)
- [Transmission of Tx and Rx Connection Speeds from LAC to LNS on page 190](#)

## session-options

**Syntax**

```
session-options {
  client-group [ group-names ];
  client-idle-timeout minutes;
  client-idle-timeout-ingress-only;
  client-session-timeout minutes;
  pcc-context {
    input-service-filter-name filter-name;
    input-service-set-name service-set-name;
    ipv6-input-service-filter-name filter-name;
    ipv6-input-service-set-name service-set-name;
    ipv6-output-service-filter-name filter-name;
    ipv6-output-service-set-name service-set-name;
    output-service-filter-name filter-name;
    output-service-set-name service-set-name;
    profile-name pcef-profile-name;
  }
  strip-user-name {
    delimiter [ delimiter ];
    parse-direction (left-to-right | right-to-left);
  }
}
```

**Hierarchy Level** [edit access [profile](#) *profile-name*]

**Release Information** Statement introduced in Junos OS Release 8.5.

**Description** (MX Series and SRX Series devices) Define options to place limits on subscriber access based on how long the session has been up, how long the user has been inactive, or both.

(MX Series) Define options to modify a subscriber username at login based on the subscriber's access profile.

(MX Series) Specify characteristics related to policy and charging control (PCC) rules, such as the PCEF profile that contains the rules, service sets to process the rules, and service filters for the service sets.

**Options** **client-idle-timeout**—(MX Series only) Specify the grace period that begins after an authenticated user terminates all sessions and connections. Authentication is not required if a new connection is initiated during the grace period by the same user.

During this period, the router determines whether the subscriber is inactive by monitoring data traffic, both upstream from the user (ingress) and downstream to the user (egress). Control traffic is ignored. The subscriber is not considered idle as long as data traffic is detected in either direction. When no traffic is detected for the duration of the idle time out, non-DHCP subscribers (such as L2TP or PPP) are gracefully logged out, similarly to a RADIUS-initiated disconnect or a CLI-initiated logout; DHCP subscribers are disconnected.

When you additionally configure the related **client-idle-timeout-ingress-only** statement (MX Series only), the router monitors only ingress traffic to determine whether the subscriber is inactive; it does not monitor any egress traffic. The related **client-session-timeout** statement terminates the subscriber session when the session timeout expires regardless of user activity.

Client idle timeouts are most often used for residential services rather than business services. The most practical use case for this timeout is in a PPP access model. It is not practical for DHCP or DHCPv6 subscribers.

Although you can use the **client-idle-timeout** statement for dynamically configured subscriber VLANs, this configuration is useful only in limited circumstances (such as IP over Ethernet without DHCP and with fixed addresses) and is not typically used. If you do use the idle timeout for VLANs, the timeout period starts when the VLAN is instantiated. It resets when a client session is created or an existing session is reactivated. When no traffic is detected on an authenticated VLAN for the duration of the timeout, the VLAN is considered inactive and is deleted. If no client sessions are ever created on the VLAN, then the VLAN is removed when the timeout expires.

**Default:** The timeout is not configured.

**Values:** *minutes*—Number of minutes of idle time that elapse before the session is terminated. The value that you specify must be determined locally with consideration of the services and policies that you offer.

**Range:** 10 through 1440 minutes

**client-idle-timeout-ingress-only**—(MX Series only) Starting in Junos OS Release 16.2, specify that only ingress traffic is monitored for subscriber idle timeout processing for the duration of the idle timeout period that you specify with the **client-idle-timeout** statement. If no ingress traffic is received for the duration of the timeout, then the subscriber is gracefully logged out (non-DHCP subscribers) or disconnected (DHCP subscribers).

If you configure **client-idle-timeout** alone, then both ingress and egress traffic are monitored during the idle timeout. Monitoring only ingress traffic is useful in cases where the LNS sends traffic to the remote peer even when the peer is not up, such as when the LNS does not have PPP keepalives enabled and therefore does not detect that the peer is not up. Because the LAC monitors both ingress and egress traffic by default, in this situation it receives the egress traffic from the LNS and either does not log out the subscriber or delays detection of inactivity until the egress traffic ceases. When you specify that only ingress traffic is monitored in this case, the LAC can detect that the peer is inactive and then initiate logout.

**client-session-timeout**—(SRX Series, vSRX only) Specify the amount of time after which user sessions are terminated, regardless of user activity (also known as a forced or hard authentication timeout).

Alternatively, when you want subscribers to be identified as inactive before they are terminated, use the related statements, **client-idle-timeout** and **client-idle-timeout-ingress-only**. Use **client-idle-timeout** alone to specify a period of time during which both ingress and egress subscriber data traffic is monitored; if no traffic is detected for the duration of the period, the subscriber is considered inactive and is terminated. Add the **client-idle-timeout-ingress-only** statement to monitor only ingress traffic for the duration of the timeout set with the **client-idle-timeout statement**.



**BEST PRACTICE:** We recommend that you do not configure a session timeout for subscribers receiving voice services. Because the session timeout is a simple time-based timeout, it is likely to interrupt subscribers actively using a voice service and terminate their calls unexpectedly (from the subscriber viewpoint). This result is a particular concern for emergency services calls.

Client session timeouts are most often used for residential services rather than business services. The most practical use case for this timeout is in a PPP access model when no voice services are offered. For DHCP or DHCPv6 subscribers, the session timeout is used as the DHCP lease timer if no other lease time configuration is present.

Although you can use the **client-session-timeout** statement for dynamically configured subscriber VLANs, this configuration is useful only in limited circumstances (such as IP over Ethernet without DHCP and with fixed addresses) and is not typically used. If you do use the session timeout for VLANs, the timeout period starts when the VLAN is instantiated.

**Default:** The timeout is not configured.

**Values:** *minutes*—Number of minutes after which user sessions are terminated. The value that you specify must be determined locally with consideration of the services and policies that you offer.

**Range:** 1 through 527040 minutes

The remaining statements are explained separately. Search for a statement in CLI Explorer or click a linked statement in the Syntax section for details.

<b>Required Privilege Level</b>	access—To view this statement in the configuration. access-control—To add this statement to the configuration.
---------------------------------	---

- Related Documentation**
- [Understanding Session Options for Subscriber Access](#)
  - [Configuring Subscriber Session Timeout Options](#)
  - [Configuring Username Modification for Subscriber Sessions](#)
  - [Removing Inactive Dynamic Subscriber VLANs](#)
  - [Enabling Direct PCC Rule Activation by a PCRF for Subscriber Management](#)

## sessions-limit-group (L2TP)

<b>Syntax</b>	<pre>sessions-limit-group <i>limit-group-name</i> {     <b>maximum-sessions</b> <i>number</i>; }</pre>
<b>Hierarchy Level</b>	[edit services <b>l2tp</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 16.1.
<b>Description</b>	Create a group of clients so that you can limit the number of L2TP sessions allowed for the client group. You can create up to 200 groups.
<b>Options</b>	<p><b><i>limit-group-name</i></b>—Identifier of the session-limit group for which the session limit is configured.</p> <p>The remaining statement is explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Limiting the Number of L2TP Sessions Allowed by the LAC or LNS on page 175</a></li> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> <li>• <a href="#">Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248</a></li> <li>• <a href="#">L2TP for Subscriber Access Overview on page 121</a></li> </ul>

## soft-gre

**Syntax**

```

soft-gre {
  destination-networks {
    [prefix];
  }
  dynamic-profile profile-name;
  group-name;
  service-interface psn;
  source-address wag-ip-address;
  <tunnel-idle-timeout seconds>;
}

```

**Hierarchy Level** [edit services]

**Release Information** Statement introduced in Junos OS Release 17.2R1 on MX Series routers.

**Description** Configure the conditions for enabling dynamic-bridged generic routing encapsulation (GRE) tunnel creation on the MX Series router Wi-Fi access gateway (WAG).



**NOTE:** Configuration of multiple dynamic tunnel groups is supported.

**Options** **destination-networks** [*prefix*]**—**Use the specified IP subnets from which soft-GRE connection requests from the customer can be processed.

**group-name****—**Name of the dynamic GRE tunnel group.

**profile-name****—**Name of the dynamic profile that creates the tunnel.



**NOTE:** To support VLAN autosensing on a GRE tunnel, you must also specify the auto-configure options at the [edit dynamic-profile *profile-name* interfaces unit] hierarchy level. These options include a reference to the dynamic profile that creates VLANs.

**service-interface psn****—**Use the specified pseudowire subscriber interface device (IFD) on which the tunnels are built.

**source-address wag-ip-address****—**Use the specified source IP address of the GRE tunnels for the WAG. This is the IP address on which incoming GRE traffic must be received by the MX Series router.



**tunnel-idle-timeout *seconds***—(Optional) Use the specified number of seconds that a GRE tunnel remains up after the last subscriber session on the tunnel has ended. If set to 0, then no idle timeout is set, and the tunnel remains up for an unlimited period of time.

**Range:** 0 through 65535

**Default:** 120

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Wi-Fi Access Gateway Deployment Model Overview on page 299](#)
- [Supported Access Models for Dynamic-Bridged GRE Tunnels on the Wi-Fi Access Gateway on page 300](#)
- [Configuring Conditions for Enabling Dynamic-Bridged GRE Tunnel Creation on page 304](#)
- [show services soft-gre tunnel on page 795](#)

## source-gateway (Tunnel Profile)

**Syntax**

```
source-gateway {
  address client-ip-address;
  gateway-name client-name;
}
```

**Hierarchy Level** [edit access tunnel-profile *profile-name* **tunnel** *tunnel-id*]

**Release Information** Statement introduced in Junos OS Release 10.4.

**Description** Specify the IP address and hostname of the source gateway at the local L2TP tunnel endpoint, the LAC.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring a Tunnel Profile for Subscriber Access on page 177](#)

## stacked-vlan-tagging

---

<b>Syntax</b>	stacked-vlan-tagging;
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 12.2 for ACX Series Universal Metro Routers.
<b>Description</b>	<p>For Gigabit Ethernet IQ interfaces, Gigabit Ethernet, 10-Gigabit Ethernet LAN/WAN PIC, and 100-Gigabit Ethernet Type 5 PIC with CFP, enable stacked VLAN tagging for all logical interfaces on the physical interface.</p> <p>For pseudowire subscriber interfaces, enable stacked VLAN tagging for logical interfaces on the pseudowire service.</p>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Stacking and Rewriting Gigabit Ethernet VLAN Tags Overview</i></li></ul>


## statistics (Access Profile)

<b>Syntax</b>	<code>statistics (time   volume-time);</code>
<b>Hierarchy Level</b>	<code>[edit access profile <i>profile-name</i> accounting]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.1. Statement introduced in Junos OS Release 9.1 for EX Series switches. <b>volume-time</b> option added in Junos OS Release 9.4.
<b>Description</b>	Configure the router or switch to collect time statistics, or both volume and time statistics, for the sessions being managed by AAA.
<b>Options</b>	<b>time</b> —Collect uptime statistics only.  <b>volume-time</b> —Collect both volume and uptime statistics.
<b>Required Privilege Level</b>	<b>admin</b> —To view this statement in the configuration. <b>admin-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring Authentication and Accounting Parameters for Subscriber Access</i></li> </ul>

## strip-user-name (Access Profile)

<b>Syntax</b>	<pre>strip-user-name {   delimiter <i>delimiter</i>;   parse-direction (left-to-right   right-to-left); }</pre>
<b>Hierarchy Level</b>	[edit access profile <i>profile-name</i> <b>session-options</b> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 16.2.
<b>Description</b>	<p>Configure the details of username stripping for a subscriber access profile. This configuration determines how a portion of a subscriber login string is identified and discarded, leaving the remainder for subsequent use as a modified username by an external AAA server for session authentication and accounting. For example, the modified username might appear in RADIUS Access-Request, Acct-Start, and Acct-Stop messages, as well as RADIUS-initiated disconnect requests and change of authorization (CoA) requests.</p> <p>You can use the <b>aaa-options</b> <i>aaa-options-name</i> statement at the <b>[edit access]</b> hierarchy level to define options that specify the LS:RI context for AAA authorization and configuration for a specific subscriber or a set of subscribers, overriding any such configuration within a domain map.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>access—To view this statement in the configuration.</p> <p>access-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Understanding Session Options for Subscriber Access</i></li> <li>• <i>Configuring Username Modification for Subscriber Sessions</i></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## subscriber-context (AAA Options)

Syntax	<code>subscriber-context <i>subscriber-context-name</i>;</code>
Hierarchy Level	[edit access <a href="#">aaa-options</a> <i>aaa-options-name</i> ]
Release Information	Statement introduced in Junos OS Release 16.2.
Description	Specify the logical-system:routing-instance (LS:RI) in which the subscriber interface is placed. For example, this may correspond to the LAC-facing interface on the LNS that is accessed by all requests from a subscriber residence.
<div>  <b>NOTE:</b> Only the default (master) logical system is supported. </div>	
Options	<i>subscriber-context-name</i> —Name of the logical-system:routing-instance in which the subscriber interface is placed.
Required Privilege Level	access—To view this statement in the configuration. access-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li>• <i>Understanding Session Options for Subscriber Access</i></li> <li>• <i>Configuring Username Modification for Subscriber Sessions</i></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers with a User Group Profile on page 218</a></li> <li>• <a href="#">Applying PPP Attributes to L2TP LNS Subscribers per Inline Service Interface on page 216</a></li> </ul>

## subscriber-management (Subscriber Management)

```
Syntax subscriber-management {
    enable;
    enforce-strict-scale-limit-license;
    gres-route-flush-delay;
}
overrides {
    event {
        catastrophic-failure {
            reboot (master | standby);
        }
    }
    interfaces {
        family (inet | inet6) {
            layer2-liveness-detection;
            ipoe-dynamic-arp-enable;
            receive-gratuitous-arp;
        }
    }
    no-unsolicited-ra;
    ra-initial-interval-max seconds;
    ra-initial-interval-min seconds;
    shmlog {
        disable;
        file filename <files maximum-no-files> <size maximum-file-size—>;
        filtering enable;
        log-name {
            all;
            logname {
                <brief | detail | extensive | none | terse>;
                <file-logging | no-file-logging>;
            }
        }
        log-type (debug | info | notice);
    }
}
redundancy {
    interface name {
        virtual-inet-address virtual-v4-address;
        virtual-inet6-address virtual-v6-address;
    }
    no-advertise-routes-on-backup;
    protocol vrrp;
}
traceoptions {
    file filename <files number> <match regular-expression > <size maximum-file-size>
    <world-readable | no-world-readable>;
    flag flag;
}
}
```

<b>Hierarchy Level</b>	[edit system services]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.1.
<b>Description</b>	<p>Configure global services for subscriber management, such as maintaining subscribers, tracing operations, and enabling enhanced subscriber management.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
<b>Required Privilege Level</b>	<p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring the Router to Maintain DHCP Subscribers During Interface Delete Events</i></li> <li>• <i>Tracing Subscriber Management Database Events for Troubleshooting</i></li> <li>• <i>Configuring Junos OS Enhanced Subscriber Management</i></li> <li>• <i>Configuring Junos OS Enhanced Subscriber Management</i></li> <li>• <i>DHCP Liveness Detection Using ARP and Neighbor Discovery Packets</i></li> <li>• <a href="#">Minimize Traffic Loss Due to Stale Route Removal After a Graceful Routing Engine Switchover on page 51</a></li> <li>• <i>How to Configure M:N Subscriber Redundancy with DHCP Binding Synchronization</i></li> </ul>

## tag (Access)

Syntax	<code>tag route-tag;</code>
Hierarchy Level	<p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>],</p> <p>[edit dynamic-profiles <i>profile-name</i> routing-options access <i>route prefix</i>]</p>
Release Information	<p>Statement introduced in Junos OS Release 10.2.</p> <p>Support at the [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options access <i>route prefix</i>] and [edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options rib <i>routing-table-name</i> access <i>route prefix</i>] hierarchy levels introduced in Junos OS Release 10.1.</p>
Description	Dynamically configure the tag for an access route.
Options	<p><b>route-tag</b>—Either the specific tag you want to assign to the access route or either of the following tag variables:</p> <ul style="list-style-type: none"> <li>• <b>\$junos-framed-route-tag</b>—Tag assigned to an IPv4 access route; the variable is dynamically replaced with the preference value (Subattribute 6) from the RADIUS Framed-Route attribute [22].</li> <li>• <b>\$junos-framed-route-ipv6-tag</b>—Tag assigned to an IPv6 access route; the variable is dynamically replaced with the preference value (Subattribute 6) from the RADIUS Framed-IPv6-Route attribute [99].</li> </ul>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic Access Routes for Subscriber Management on page 53</a></li> </ul>



## tag2 (Dynamic Access Routes)

Syntax	<code>tag2 route-tag2;</code>
Hierarchy Level	[edit dynamic-profiles <i>profile-name</i> routing-instances \$junos-routing-instance routing-options <a href="#">access route prefix</a> ], [edit dynamic-profiles <i>profile-name</i> routing-options <a href="#">access route prefix</a> ]
Release Information	Statement introduced in Junos OS Release 18.2R1.
Description	
Options	<p><b>route-tag2</b>—One of the following values the specific tag2 value you want to assign to the access route or the following predefined variable:</p> <ul style="list-style-type: none"> <li>A specific tag 2 value for the specified access route prefix.</li> <li><b>\$junos-framed-route-tag2</b>—Tag2 value assigned to an IPv4 access route. The value is dynamically replaced with the preference value (subattribute 6) from the RADIUS Framed-Route attribute [22]. You configure this variable only when the access route prefix is derived from the \$junos-framed-route-ip-address-prefix predefined variable; this value is (subattribute 1) of the RADIUS Framed-Route attribute [22].</li> </ul>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li><a href="#">Migrating Static PPP Subscriber Configurations to Dynamic Profiles Overview on page 99</a></li> </ul>

## tos-reflect (L2TP)

---

Syntax	tos-reflect;
Hierarchy Level	[edit services l2tp <b>tunnel-group</b> <i>name</i> ]
Release Information	Statement introduced in Junos OS Release 11.4.
Description	Configure the LNS to reflect the IP ToS value in the inner IP header to the outer IP header. When CoS rewrite rules are also configured ([ <b>edit class-of-service interfaces</b> <i>interface-name</i> <b>unit</b> <i>logical-unit-number</i> <b>rewrite-rules</b> ]), the rewrite is performed only on the inner IP ToS; the outer IP TOS value is not affected.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <i>Configuring Dynamic CoS for an L2TP LNS Inline Service</i></li></ul>

## trace (DHCP Relay Agent)

<b>Syntax</b>	<code>trace;</code>
<b>Hierarchy Level</b>	<code>[edit forwarding-options dhcp-relay dhcpv6 group <i>group-name</i> interface <i>interface-name</i>],</code> <code>[edit forwarding-options dhcp-relay group <i>group-name</i> interface <i>interface-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> forwarding-options dhcp-relay dhcpv6 group</code> <code>  <i>group-name</i> interface <i>interface-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> forwarding-options dhcp-relay group <i>group-name</i></code> <code>  interface <i>interface-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i></code> <code>  forwarding-options dhcp-relay dhcpv6 group <i>group-name</i> interface <i>interface-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i></code> <code>  forwarding-options dhcp-relay group <i>group-name</i> interface <i>interface-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay dhcpv6 group</code> <code>  <i>group-name</i> interface <i>interface-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> forwarding-options dhcp-relay group</code> <code>  <i>group-name</i> interface <i>interface-name</i>]</code>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 10.4.</p> <p>Support at the <b>[edit ... dhcpv6]</b> hierarchy levels introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.1 for EX Series switches.</p>
<b>Description</b>	<p>Enable trace operations for a group of interfaces or for a specific interface within a group. Use the statement at the <b>[edit ... dhcpv6]</b> hierarchy levels to configure DHCPv6 support.</p> <p>EX Series switches do not support DHCPv6.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring an Extended DHCP Relay Server on EX Series Switches (CLI Procedure)</i></li> <li>• <i>Tracing Extended DHCP Operations</i></li> <li>• <i>Tracing Extended DHCP Operations for Specific Interfaces</i></li> </ul>

## traceoptions (Fixed Wireless Access)

Syntax	<pre> traceoptions {   file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>maximum-file-size</i>&gt;   &lt;(world-readable   no-world-readable)&gt;;   flag <i>flag</i>;   no-remote-trace; } </pre>
Hierarchy Level	[edit services <a href="#">fixed-wireless-access</a> ]
Release Information	Statement introduced in Junos OS Release 19.2R1.
Description	Define tracing operations for fixed wireless access processes.
Options	<p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the filename within quotation marks. All files are placed in the directory <b>/var/log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files to create before overwriting the oldest one. If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 3 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p><b>Values:</b></p> <ul style="list-style-type: none"> <li>• <b>all</b>—Trace all events</li> <li>• <b>authentication</b>—Trace authentication events</li> <li>• <b>cli</b>—Trace CLI events</li> <li>• <b>configuration</b>—Trace configuration events</li> <li>• <b>gateway</b>—Trace mobile management entity (MME) events</li> <li>• <b>general</b>—Trace general events</li> <li>• <b>infra</b>—Trace infrastructure events</li> <li>• <b>statistics</b>—Trace statistics events</li> <li>• <b>tunnel</b>—Trace GTP-U tunnel events</li> </ul> <p><b>match <i>regular-expression</i></b>—(Optional) Refine the output to include lines that contain the regular expression.</p> <p><b>no-remote-trace</b>—(Optional) Disable remote tracing.</p>

**no-world-readable**—(Optional) Disable unrestricted file access.

**size *maximum-file-size***—(Optional) Maximum size of each trace file. By default, the number entered is treated as bytes. Alternatively, you can include a suffix to the number to indicate kilobytes (KB), megabytes (MB), or gigabytes (GB). If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *sizek* to specify KB, *sizem* to specify MB, or *sizeg* to specify GB

**Range:** 10240 through 1073741824

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.

<b>Required Privilege</b>	trace—To view this statement in the configuration.
<b>Level</b>	trace-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Tracing Fixed Wireless Access Events for Troubleshooting on page 323</a></li><li>• <a href="#">Fixed Wireless Access Networks on page 311</a></li></ul>
------------------------------	---

## traceoptions (Protocols PPP Service)

**Syntax**

```

traceoptions {
  file <filename> <files number> <match regular-expression> <size maximum-file-size>
    <world-readable | no-world-readable>;
  filter {
    aci regular-expression;
    ari regular-expression;
    service-name regular-expression;
    underlying-interface interface-name;
    user user@domain;
  }
  flag flag;
  level (all | error | info | notice | verbose | warning);
  no-remote-trace;
}

```

**Hierarchy Level** [edit protocols ppp-service]

**Release Information** Statement introduced in Junos OS Release 9.5.  
**user** option added in Junos OS Release 14.1.

**Description** Define tracing operations for PPP service processes.

**Options** **file filename**—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**.

**files number**—(Optional) Maximum number of trace files to create before overwriting the oldest one. If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000

**Default:** 3 files

**disable**—Disable this trace flag.

**filter**—Additional filter to refine the output to display particular subscribers. Filtering based on the following subscriber identifiers simplifies troubleshooting in a scaled environment.



**BEST PRACTICE:** Due to the complexity of agent circuit identifiers and agent remote identifiers, we recommend that you do not try an exact match when filtering on these options. For service names, searching on the exact name is appropriate, but you can also use a regular expression with that option.

- **aci** *regular-expression*—Regular expression to match the agent circuit identifier provided by PPP client.
- **ari** *regular-expression*—Regular expression to match the agent remote identifier provided by PPP client.
- **service** *regular-expression*—Regular expression to match the name of PPPoE service.
- **underlying-interface** *interface-name*—Name of a PPP underlying interface. You cannot use a regular expression for this filter option.
- **user** *user@domain*—Username of a subscriber. Optionally use an asterisk (\*) as a wildcard to substitute for characters at the beginning or end of either term or both terms.

**flag flag**—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. You can include the following flags:

- **accounting-statistics**—Trace accounting statistics events.
- **all**—Trace all operations.
- **authentication**—Trace authentication events.
- **chap**—Trace CHAP events.
- **events**—Trace interface events.
- **gres**—Trace GRES events.
- **init**—Trace daemon initialization events.
- **interface-db**—Trace interface database events.
- **lcp**—Trace LCP state machine events.
- **memory**—Trace memory processing events.
- **ncp**—Trace NCP state machine events.
- **packet-error**—Trace packet error events.
- **pap**—Trace PAP events.
- **parse**—Trace parsing events.
- **profile**—Trace libdynamic profile events.
- **receive-packets**—Trace received PPP packets.
- **routing-process**—Trace routing process interactions.
- **rtp**—Trace real-time priority events.
- **rtsock**—Trace routing socket events.
- **session-db**—Trace session database interactions.
- **smi-services-sentry**—Trace SMI services requests and retries.
- **states**—Trace state machine events.
- **transmit-packets**—Trace transmitted PPP packets.
- **tunnel**—Trace L2TP tunneling events.



**level**—Level of tracing to perform. You can specify any of the following levels:

- **all**—Match all levels.
- **error**—Match error conditions.
- **info**—Match informational messages.
- **notice**—Match notice messages about conditions requiring special handling.
- **verbose**—Match verbose messages.
- **warning**—Match warning messages.

**Default:** error

**match *regular-expression***—(Optional) Refine the output to include lines that contain the regular expression.

**no-remote-trace**—Disable remote tracing.

**no-world-readable**—(Optional) Disable unrestricted file access.

**size *maximum-file-size***—(Optional) Maximum size of each trace file. By default, the number entered is treated as bytes. Alternatively, you can include a suffix to the number to indicate kilobytes (KB), megabytes (MB), or gigabytes (GB). If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *sizek* to specify KB, *sizem* to specify MB, or *sizeg* to specify GB

**Range:** 10240 through 1073741824

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.

<b>Required Privilege Level</b>	trace—To view this statement in the configuration. trace-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	• <a href="#">Tracing PPP Service Events for Troubleshooting on page 116</a>
------------------------------	--

## traceoptions (Services L2TP)

**Syntax**

```

traceoptions {
  debug-level level;
  file filename <files number> <match regular-expression > <size maximum-file-size>
    <world-readable | no-world-readable>;
  filter {
    protocol name;
    user user@domain;
    user-name username;
  }
  flag flag;
  interfaces interface-name {
    debug-level level;
    flag flag;
  }
  level (all | error | info | notice | verbose | warning);
  no-remote-trace;
}

```

**Hierarchy Level** [edit services [l2tp](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define tracing operations for L2TP processes.

**Options** **debug-level *level***—Trace level for PPP, L2TP, RADIUS, and UDP; this option does not apply to L2TP on MX Series routers:

- **detail**—Trace detailed debug information.
- **error**—Trace error information.
- **packet-dump**—Trace packet decoding information.

**file *filename***—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**.

**files *number***—(Optional) Maximum number of trace files to create before overwriting the oldest one. If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000

**Default:** 3 files

**filter**—Additional filter to refine the output to display particular subscribers. Filtering based on the following subscriber identifiers simplifies troubleshooting in a scaled environment.

- **protocol *name***—One of the following protocols; this option does not apply to L2TP on MX Series routers:
  - **l2tp**
  - **ppp**
  - **radius**
  - **udp**
- **user *user@domain***—Username of a subscriber; this option does not apply to L2TP on M Series routers. Optionally use an asterisk (\*) as a wildcard to substitute for characters at the beginning or end of either term or both terms.
- **user-name *username***—Username of a subscriber; this option does not apply to L2TP on MX Series routers.

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. You can include the following flags:

- **all**—Trace all operations.
- **configuration**—Trace configuration events.
- **events**—Trace interface events.
- **general**—Trace general events.
- **gres**—Trace GRES events.
- **init**—Trace daemon initialization.
- **ipc-rx**—Trace IPC receive events.
- **ipc-tx**—Trace IPC transmit events.
- **memory**—Trace memory management code.
- **message**—Trace message processing code.
- **packet-error**—Trace packet error events.
- **parse**—Trace parsing events.
- **protocol**—Trace L2TP events.
- **receive-packets**—Trace received L2TP packets.
- **routing-process**—Trace routing process interactions.
- **routing-socket**—Trace routing socket events.
- **session-db**—Trace session database interactions.
- **states**—Trace state machine events.
- **timer**—Trace timer events.
- **transmit-packets**—Trace transmitted L2TP packets.
- **tunnel**—Trace tunnel events.

**interfaces *interface-name***—Apply L2TP traceoptions to a specific services interface. This option does not apply to L2TP on MX Series routers.

- **debug-level *level***—Trace level for the interface; this option does not apply to L2TP on MX Series routers:
  - **detail**—Trace detailed debug information.
  - **error**—Trace error information.
  - **extensive**—Trace all PIC debug information.
- **flag *flag***—Tracing operation to perform for the interface. This option does not apply to L2TP on MX Series routers. To specify more than one tracing operation, include multiple **flag** statements. You can include the following flags:
  - **all**—Trace everything.
  - **ipc**—Trace L2TP Inter-Process Communication (IPC) messages between the PIC and the Routing Engine.
  - **packet-dump**—Dump each packet content based on debug level.
  - **protocol**—Trace L2TP, PPP, and multilink handling.
  - **system**—Trace packet processing on the PIC.

**level**—Specify level of tracing to perform. The option you configure enables tracing of events at that level and all higher (more restrictive) levels. You can specify any of the following levels:

- **all**—Match messages of all levels.
- **error**—Match error messages.
- **info**—Match informational messages.
- **notice**—Match notice messages about conditions requiring special handling.
- **verbose**—Match verbose messages. This is the lowest (least restrictive) severity level; when you configure **verbose**, messages at all higher levels are traced. Therefore, the result is the same as when you configure **all**.
- **warning**—Match warning messages.

**Default:** error

**match *regular-expression***—(Optional) Refine the output to include lines that contain the regular expression.

**no-remote-trace**—Disable remote tracing.

**no-world-readable**—(Optional) Disable unrestricted file access.

**size** *maximum-file-size*—(Optional) Maximum size of each trace file. By default, the number entered is treated as bytes. Alternatively, you can include a suffix to the number to indicate kilobytes (KB), megabytes (MB), or gigabytes (GB). If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *sizek* to specify KB, *sizem* to specify MB, or *sizeg* to specify GB

**Range:** 10240 through 1073741824

**world-readable**—(Optional) Enable unrestricted file access.

<b>Required Privilege Level</b>	trace—To view this statement in the configuration.
	trace-control—To add this statement to the configuration.
<b>Related Documentation</b>	• <i>Tracing L2TP Operations</i>
	• <a href="#">Tracing L2TP Events for Troubleshooting on page 267</a>

## traceoptions (Subscriber Management)

Syntax	<pre> traceoptions {   file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>maximum-file-size</i>&gt;   &lt;world-readable   no-world-readable&gt;;   flag <i>flag</i>; } </pre>
Hierarchy Level	[edit system services <a href="#">subscriber-management</a> ]
Release Information	Statement introduced in Junos OS Release 11.1.
Description	Define tracing operations for subscriber management interface processes.
Options	<p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the filename within quotation marks. All files are placed in the directory <code>/var/log</code>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files to create before overwriting the oldest one. If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 3 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. You can include the following flags:</p> <ul style="list-style-type: none"> <li>• <b>all</b>—Trace all operations.</li> <li>• <b>database</b>—Trace database events.</li> <li>• <b>general</b>—Trace general events.</li> <li>• <b>issu</b>—Trace unified ISSU events.</li> <li>• <b>server</b>—Trace server events.</li> <li>• <b>session-db</b>—Trace session database interactions.</li> <li>• <b>ui</b>—Trace user interface events.</li> </ul> <p><b>match <i>regular-expression</i></b>—(Optional) Refine the output to include lines that contain the regular expression.</p> <p><b>no-world-readable</b>—(Optional) Disable unrestricted file access.</p> <p><b>size <i>maximum-file-size</i></b>—(Optional) Maximum size of each trace file. By default, the number entered is treated as bytes. Alternatively, you can include a suffix to the number to indicate kilobytes (KB), megabytes (MB), or gigabytes (GB). If you specify a maximum file size, you also must specify a maximum number of trace files with the <b>files</b> option.</p> <p><b>Syntax:</b> <b>sizek</b> to specify KB, <b>sizem</b> to specify MB, or <b>sizeg</b> to specify GB</p>

**Range:** 10240 through 1073741824

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.

<b>Required Privilege</b>	trace—To view this statement in the configuration.
<b>Level</b>	trace-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Tracing Subscriber Management Database Events for Troubleshooting</i></li></ul>
------------------------------	--

## tunnel (L2TP)

Syntax	<pre> tunnel {   assignment-id-format (assignment-id   client-server-id);   failover-resync (failover-protocol   silent-failover);   idle-timeout <i>seconds</i>;   maximum-sessions <i>number</i>;   minimum-retransmission-timeout;   name <i>name</i> {     address <i>ip-address</i> {       drain;       routing-instance <i>routing-instance-name</i> {         drain;       }     }     drain;   }   nas-port-method;   retransmission-count-established <i>count</i>;   retransmission-count-not-established <i>count</i>;   rx-window-size <i>packets</i>;   tx-address-change (accept   ignore   ignore-ip-address   ignore-udp-port   reject       reject-ip-address   reject-udp-port); } </pre>
Hierarchy Level	[edit services <a href="#">l2tp</a> ]
Release Information	<p>Statement introduced in Junos OS Release 11.4.</p> <p><b>rx-window-size</b> option added in Junos OS Release 13.2.</p>
Description	<p>Configure L2TP tunnel characteristics.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an L2TP LAC on page 148</a></li> <li>• <a href="#">Configuring an L2TP LNS with Inline Service Interfaces on page 213</a></li> </ul>



## tunnel (Tunnel Profile)

**Syntax**

```
tunnel tunnel-id {
  identification name;
  logical-system logical-system-name;
  max-sessions number;
  medium type;
  nas-port-method cisco-avp;
  preference number;
  remote-gateway {
    address server-ip-address;
    gateway-name server-name;
  }
  routing-instance routing-instance-name;
  secret password;
  source-gateway {
    address client-ip-address;
    gateway-name client-name;
  }
  type tunnel-type;
}
```

**Hierarchy Level** [edit access [tunnel-profile](#) *profile-name*]

**Release Information** Statement introduced in Junos OS Release 10.4.

**Description** Define the attributes of a tunnel for the tunnel profile. You can define up to 31 tunnels for each tunnel profile.

**Options** *tunnel-id*—Unique integer that identifies a tunnel defined within a profile. For a subscriber, RADIUS attributes and VSAs can supply or override the attributes defined here for the tunnel.

**Range:** 1 through 31

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring a Tunnel Profile for Subscriber Access on page 177](#)

## tunnel-group

**Syntax**

```
tunnel-group group-name {
  aaa-access-profile profile-name;
  dynamic-profile profile-name;
  hello-interval seconds;
  hide-avps;
  l2tp-access-profile profile-name;
  local-gateway address {
    address address;
    gateway-name gateway-name;
  }
  maximum-send-window packets;
  maximum-sessions number;
  ppp-access-profile profile-name;
  receive-window packets;
  retransmit-interval seconds;
  service-device-pool pool-name;
  service-interface interface-name;
  service-profile profile-name(parameter)&profile-name;
  syslog {
    host hostname {
      services severity-level;
      facility-override facility-name;
      log-prefix prefix-value;
    }
  }
  tos-reflect;
  tunnel-switch-profile profile-name;
  tunnel-timeout seconds;
}
```

**Hierarchy Level** [edit services [l2tp](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Support for MX Series routers introduced in Junos OS Release 11.4.

**Description** Specify the L2TP tunnel properties.



**NOTE:** Subordinate statement support depends on the platform. See individual statement topics for more detailed support information.

**Options** *group-name*—Identifier for the tunnel group.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring L2TP Tunnel Groups](#)
- [Configuring an L2TP Tunnel Group for LNS Sessions with Inline Services Interfaces on page 248](#)

## tunnel-profile (L2TP Tunnel Switching)

**Syntax** tunnel-profile *profile-name*;

**Hierarchy Level** [edit access [tunnel-switch-profile](#) *profile-name*]

**Release Information** Statement introduced in Junos OS Release 13.2.

**Description** Specify the name of an L2TP tunnel profile that defines the tunnel to which PPP subscriber traffic is switched.

**Options** *profile-name*—Unique name that identifies the tunnel profile; configured with the tunnel-profile statement at the [edit access] hierarchy level.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring L2TP Tunnel Switching on page 141](#)

## tunnel-profile (Tunnel Profile)

Syntax	<pre> tunnel-profile <i>profile-name</i> {   tunnel <i>tunnel-id</i> {     identification <i>name</i>;     logical-system <i>logical-system-name</i>;     max-sessions <i>number</i>;     medium <i>type</i>;     nas-port-method cisco-avp;     preference <i>number</i>;     remote-gateway {       address <i>server-ip-address</i>;       gateway-name <i>server-name</i>;     }     routing-instance <i>routing-instance-name</i>;     secret <i>password</i>;     source-gateway {       address <i>client-ip-address</i>;       gateway-name <i>client-name</i>;     }     type <i>tunnel-type</i>;   } } </pre>
Hierarchy Level	[edit access]
Release Information	Statement introduced in Junos OS Release 10.4.
Description	Define a tunnel profile for subscriber access.
Options	<p><b><i>profile-name</i></b>—Unique name that identifies the tunnel profile. The profile can be referenced from within a domain map or by the RADIUS Tunnel-Group VSA [26-64].</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <li><a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li> </ul>

## tunnel-switch-profile (L2TP Tunnel Switching, Application)

<b>Syntax</b>	<code>tunnel-switch-profile <i>profile-name</i>;</code>
<b>Hierarchy Level</b>	[edit access domain map <i>domain-map-name</i> ], [edit services l2tp], [edit services l2tp <b>tunnel-group</b> <i>group-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2.
<b>Description</b>	Specify a tunnel switch profile that determines whether packets in an L2TP session from a LAC are switched to another session that has a different destination LNS.
<b>Options</b>	<i>profile-name</i> —Unique name that identifies the tunnel switch profile.
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Tunnel Switching on page 141</a></li></ul>

## tunnel-switch-profile (L2TP Tunnel Switching, Definition)

---

Syntax	<pre>tunnel-switch-profile <i>profile-name</i> {   avp {     bearer-type <i>action</i>;     calling-number <i>action</i>;     cisco-nas-port-info <i>action</i>;   }   tunnel-profile <i>profile-name</i>; }</pre>
Hierarchy Level	[edit access]
Release Information	Statement introduced in Junos OS Release 13.2.
Description	<p>Define a tunnel switch profile for subscriber access; specify actions to take for L2TP AVPs in the switched packets and the profile for the tunnel to which the PPP traffic is switched.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>
Options	<p><b><i>profile-name</i></b>—Unique name that identifies the tunnel switch profile. The profile can be applied as a default or referenced from within a domain map, a tunnel group, or by the RADIUS Tunnel-Group VSA [26-64].</p>
Required Privilege Level	<p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">Configuring L2TP Tunnel Switching on page 141</a></li></ul>

## tx-address-change (L2TP LAC)

<b>Syntax</b>	tx-address-change (accept   ignore   ignore-ip-address   ignore-udp-port   reject   reject-ip-address   reject-udp-port);
<b>Hierarchy Level</b>	[edit services l2tp <a href="#">tunnel</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 13.2. <b>reject</b> , <b>reject-ip-address</b> , and <b>reject-udp-port</b> options added in Junos OS Release 16.1.
<b>Description</b>	<p>Configure whether the LAC accepts, ignores, or rejects requests from an LNS to change the destination IP address, UDP port, or both.</p> <p>When configured to ignore change requests, the LAC continues to send packets to the original address or port, but accepts packets from the new address or port.</p> <p>When configured to reject change requests, the LAC sends a StopCCN message to the original address or port and then terminates the connection to that LNS. This method has precedence over the ignore configuration.</p>
<b>Default</b>	The LAC accepts IP address or UDP port change requests from the LNS.
<b>Options</b>	<p><b>accept</b>—Accept all change requests for IP address or UDP port.</p> <p><b>ignore</b>—Ignore all change requests for IP address or UDP port.</p> <p><b>ignore-ip-address</b>—Ignore a change request for IP address, but accept a change request for UDP port.</p> <p><b>ignore-udp-port</b>—Ignore a change request for UDP port, but accept a change request for IP address.</p> <p><b>reject</b>—Reject all change requests for IP address or UDP port.</p> <p><b>reject-ip-address</b>—Reject a change request for IP address, but accept a change request for UDP port.</p> <p><b>reject-udp-port</b>—Reject a change request for UDP port, but accept a change request for IP address.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Configuring How the LAC Responds to Address and Port Changes Requested by the LNS on page 150</a></li> </ul>

## tx-connect-speed-method (L2TP LAC)

Syntax	<code>tx-connect-speed-method <i>method</i>;</code>
Hierarchy Level	<code>[edit services l2tp]</code>
Release Information	<p>Statement introduced in Junos OS Release 11.4.</p> <p>Options <b>ancp</b>, <b>pppoe-ia-tag</b>, and <b>static</b> introduced in Junos OS Release 13.1.</p> <p>Option <b>static</b> deprecated in Junos OS Release 15.1.</p> <p>Options <b>actual</b> and <b>none</b> added in Junos OS Release 15.1.</p> <p>Option <b>actual</b> deprecated in Junos OS Release 17.2.</p> <p>Option <b>service-profile</b> added in Junos OS Release 17.2.</p> <p>Option <b>static</b> undeprecated in Junos OS Release 17.2.</p>
Description	<p>Specify the method that determines how to derive the connect speed values sent from the LAC to the LNS.</p> <p>When the session is being established, the speeds are included in the Incoming-Call-Connected (ICCN) message. The transmit speed is conveyed in AVP 24 (Tx-Connect-Speed) and the receive speed is conveyed in AVP 38 (Rx-Connect-Speed). Both values are in bits per seconds (bps). The LAC typically uses the <b>static</b> or <b>pppoe-ia-tags</b> method, because values for other configured methods are not available when the session is being established.</p> <p>When connect speed updates are configured, the LAC sends the updated values for each session to the LNS in Connect-Speed-Update-Notification (CSUN) messages. The updated speeds are conveyed in the Connect Speed Update AVP (97).</p> <p>When connection speed values are not available from the configured method, the LAC falls back to another source for the values. See <a href="#">“Transmission of Tx and Rx Connection Speeds from LAC to LNS” on page 190</a> for tables describing the LAC fallback behavior by Junos OS release.</p>
Options	<p><b>method</b>—Method used to derive the connection speed values.</p> <ul style="list-style-type: none"> <li><b>actual</b>—(Junos OS Releases 15.1, 16.1, 16.2, 17.1) The speed is derived from the CoS effective shaping rate that is enforced on the level 3 node based on local policy. In the supported releases, <b>actual</b> is the default method and has the highest preference among all configured methods.</li> </ul> <p>This method is not available starting in Junos OS Release 17.2. However, it is configurable in the Tunnel-Tx-Speed-Method VSA (26-94). If you do so, it is translated to the <b>service-profile</b> method.</p> <ul style="list-style-type: none"> <li><b>ancp</b>—The speed is derived from the configured ANCP value for the underlying interface. This value results from a user-defined percentage correction to the values received from the access node; this is configured per subscriber access line.</li> </ul>



The percentage accounts for encapsulation differences between, the router, the access loop, and the Layer 1 transport overhead. The initial rate sent to the LNS is the ANCP value reported at the time the ICCN is sent. The ANCP value is not available for the ICCN message and falls over to another method. You can change the configured correction after a subscriber has logged in, but those changes do not affect the actual rate used by the LNS for that subscriber.

- **none**—This method prevents the LAC from sending AVP 24 and AVP 38 to the LNS. This option also overrides the Juniper Networks RADIUS VSAs, Tx-Connect-Speed (26-162) and Rx-Connect-Speed (26-163).
- **pppoe-ia-tags**—The speed is derived from the PPPoE IA tags received by the LAC from the DSLAM. This speed value is transmitted when a subscriber logs in and it cannot subsequently be changed. The value of Actual-Data-Rate-Downstream (VSA 26-129) is used for AVP 24. The value of Actual-Data-Rate-Upstream (VSA 26-130) is used for AVP 38; it is sent only when the values differ.



**NOTE:** This speed derived from the IA tags does not apply to subscribers that are already logged in; it is effective only for subscribers that log in after this setting has been saved.

---

- **service-profile**—(Junos OS Releases 17.2 and higher) The downstream (Tx) speed is derived from the actual CoS that is enforced on the L3 node based on local policy. The upstream (Rx) speed is the value configured in the dynamic service profile; no adjustment is made to this value. The service-profile value is not available for the ICCN message and falls over to another method.

The **service-profile** method is supported only when the **effective shaping-rate** statement is included at the **[edit chassis]** hierarchy level. If it is not, the commit check fails. If the method is received from RADIUS in VSA 26-94, a system log message is generated instead, because no commit check is performed in this case.

- **static**—(Junos OS Releases 13.3, 14.1, and 14.2; Junos OS Releases 17.2 and higher) The speed is derived from the configured static Layer 2 speed. For Ethernet VLANs, this is the recommended (advisory) shaping rate configured on the PPPoE logical interface underlying the subscriber interface. If the advisory shaping rate is not configured on the underlying interface, then the actual speed of the underlying physical port is used. In the supported releases, **static** is the default method.

In Junos OS Releases 15.1, 16.1, 16.2, and 17.2, the **static** method is configurable for backward compatibility, but it is not supported. If you configure this method in the CLI or in the Tunnel-Tx-Speed-Method VSA (26-94), the LAC falls back to the port speed of the subscriber access interface.



**NOTE:** For ge and xe interfaces, the port speed value is set to 1,000,000,000 and for ae interfaces, the port speed value is set to 0. The value is sent in both AVP 24 and AVP 38.

#### Default:

- **static** (Starting in Junos OS Release 17.2)
- **actual** (Junos OS Releases 15.1, 16.1, 16.2, 17.1)
- **static** (Junos OS Releases 13.3, 14.1, and 14.2)

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring the Method to Derive the LAC Connection Speeds Sent to the LNS on page 198](#)
- [Transmission of Tx and Rx Connection Speeds from LAC to LNS on page 190](#)

## type (Tunnel Profile)

<b>Syntax</b>	<code>type <i>tunnel-type</i>;</code>
<b>Hierarchy Level</b>	<code>[edit access tunnel-profile <i>profile-name</i> <b>tunnel</b> <i>tunnel-id</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	Specify the tunnel type (protocol).
<b>Default</b>	l2tp
<b>Options</b>	<i>tunnel-type</i> —Tunnel protocol type. The only value currently available is <b>l2tp</b> .
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring a Tunnel Profile for Subscriber Access on page 177</a></li></ul>

## unit (Dynamic PPPoE)

```

Syntax  unit logical-unit-number {
    keepalives interval seconds;
    no-keepalives;
    pppoe-options {
        underlying-interface interface-name;
        server;
    }
    ppp-options {
        aaa-options aaa-options-name;
        authentication [ authentication-protocols ];
        mru size;
        mtu (size | use-lower-layer);
        chap {
            challenge-length minimum minimum-length maximum maximum-length;
        }
        ignore-magic-number-mismatch;
        initiate-ncp (ip | ipv6 | dual-stack-passive)
        ipcp-suggest-dns-option;
        mru size;
        mtu (size | use-lower-layer);
        on-demand-ip-address;
        pap;
        peer-ip-address-optional;
    }
    family inet {
        unnumbered-address interface-name;
        address address;
        service {
            input {
                service-set service-set-name {
                    service-filter filter-name;
                }
                post-service-filter filter-name;
            }
            output {
                service-set service-set-name {
                    service-filter filter-name;
                }
            }
        }
        filter {
            input filter-name {
                precedence precedence;
            }
            output filter-name {
                precedence precedence;
            }
        }
    }
    filter {
        input filter-name;
    }
}

```

```

    output filter-name;
  }
}

```

**Hierarchy Level** [edit [dynamic-profiles](#) *profile-name* [interfaces](#) *pp0*]

**Release Information** Statement introduced in Junos OS Release 10.1.

**Description** In a dynamic profile, configure a logical unit number for the dynamic PPPoE logical interface. You must configure a logical interface to be able to use the router.

**Options** ***logical-unit-number***—Variable used to specify the unit number when the PPPoE logical interface is dynamically created. In the **unit *logical-unit-number*** statement for dynamic PPPoE logical interfaces, you must use the predefined variable ***\$junos-interface-unit*** in place of ***logical-unit-number***. The ***\$junos-interface-unit*** predefined variable is dynamically replaced with the unit number supplied by the router when the subscriber logs in.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring a PPPoE Dynamic Profile*
- *Dynamic PPPoE Subscriber Interfaces over Static Underlying Interfaces Overview*

## unit (Dynamic Profiles Standard Interface)

```

Syntax  unit logical-unit-number {
        actual-transit-statistics;
        auto-configure {
            agent-circuit-identifier {
                dynamic-profile profile-name;
            }
            line-identity {
                include {
                    accept-no-ids;
                    circuit-id;
                    remote-id;
                }
                dynamic-profile profile-name;
            }
        }
        dial-options {
            ipsec-interface-id name;
            l2tp-interface-id name;
            (shared | dedicated);
        }
        encapsulation (atm-ccc-cell-relay | atm-ccc-vc-mux | atm-cisco-nlpid | atm-tcc-vc-mux
            | atm-mlppp-llc | atm-nlpid | atm-ppp-llc | atm-ppp-vc-mux | atm-snap | atm-tcc-snap
            | atm-vc-mux | ether-over-atm-llc | ether-vpls-over-atm-llc | ether-vpls-over-fr |
            ether-vpls-over-ppp | ethernet | frame-relay-ccc | frame-relay-ppp | frame-relay-tcc |
            frame-relay-ether-type | frame-relay-ether-type-tcc | multilink-frame-relay-end-to-end
            | multilink-ppp | ppp-over-ether | ppp-over-ether-over-atm-llc | vlan-bridge | vlan-ccc |
            vlan-vci-ccc | vlan-tcc | vlan-vpls);
        family family {
            address address;
            demux-destination,
            filter {
                adf {
                    counter;
                    input-precedence precedence;
                    not-mandatory;
                    output-precedence precedence;
                    rule rule-value;
                }
                input filter-name {
                    precedence precedence;
                    shared-name filter-shared-name;
                }
                output filter-name {
                    precedence precedence;
                    shared-name filter-shared-name;
                }
            }
        }
        max-sessions number;
        max-sessions-vsa-ignore;
        rpf-check {
            fail-filter filter-name;
        }
    }

```

```

    mode loose;
  }
  service {
    input {
      service-set service-set-name {
        service-filter filter-name;
      }
      post-service-filter filter-name;
    }
    input-vlan-map {
      inner-tag-protocol-id tpid;
      inner-vlan-id number;
      (push | swap);
      tag-protocol-id tpid;
      vlan-id number;
    }
    output {
      service-set service-set-name {
        service-filter filter-name;
      }
    }
    output-vlan-map {
      inner-tag-protocol-id tpid;
      inner-vlan-id number;
      (pop | swap);
      tag-protocol-id tpid;
      vlan-id number;
    }
  }
  service-name-table table-name
  short-cycle-protection <lockout-time-min minimum-seconds lockout-time-max
    maximum-seconds>;
  unnumbered-address interface-name <preferred-source-address address>;
}
filter {
  input filter-name {
    shared-name filter-shared-name;
  }
  output filter-name {
    shared-name filter-shared-name;
  }
}
host-prefix-only;
keepalives {
  interval seconds;
}
ppp-options {
  aaa-options aaa-options-name;
  authentication [ authentication-protocols ];
  chap {
    challenge-length minimum minimum-length maximum maximum-length;
    local-name name;
  }
  ignore-magic-number-mismatch;
  initiate-ncp (dual-stack-passive | ipv6 | ip)

```

```

ipcp-suggest-dns-option;
mru size;
mtu (size | use-lower-layer);
on-demand-ip-address;
pap;
peer-ip-address-optional;
local-authentication {
    password password;
    username-include {
        circuit-id;
        delimiter character;
        domain-name name;
        mac-address;
        remote-id;
    }
}
service {
    pcef pcef-profile-name {
        activate rule-name | activate-all;
    }
}
targeted-options {
    backup backup;
    group group;
    primary primary;
    weight ($junos-interface-target-weight | weight-value);
}
vlan-id number;
vlan-tags outer [tpid].vlan-id [inner [tpid].vlan-id];
}

```

**Hierarchy Level** [edit [dynamic-profiles](#) *profile-name* [interfaces](#) *interface-name*]

**Release Information** Statement introduced in Junos OS Release 9.2.

**Description** Configure a logical interface on the physical device. You must configure a logical interface to be able to use the physical device.



**Options** *logical-unit-number*—The specific unit number of the interface you want to assign to the dynamic profile, or one of the following predefined variables:

- **\$junos-underlying-interface-unit**—For static VLANs, the unit number variable. The static unit number variable is dynamically replaced with the client unit number when the client session begins. The client unit number is specified by the DHCP when it accesses the subscriber network.
- **\$junos-interface-unit**—The unit number variable on a dynamic underlying VLAN interface for which you want to enable the creation of dynamic VLAN subscriber interfaces based on the ACI.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Dynamic Underlying VLAN Interfaces to Use Agent Circuit Identifier Information*
- *Configuring Static Underlying VLAN Interfaces to Use Agent Circuit Identifier Information*
- *Agent Circuit Identifier-Based Dynamic VLANs Overview*

## untagged

**Syntax** untagged;

**Hierarchy Level** [edit interfaces ps0]

**Release Information** Statement introduced in Junos OS Release 13.1.

**Description** Specify that the router supports untagged traffic on pseudowire subscriber interfaces.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring a Pseudowire Subscriber Logical Interface Device on page 284](#)

## username-include (Local Authentication)

Syntax	<pre>username-include {   circuit-id;   delimiter <i>character</i>;   domain-name <i>name</i>;   mac-address;   remote-id; }</pre>
Hierarchy Level	[edit dynamic-profiles <i>name</i> interfaces \$junos-interface-ifd-name <b>unit</b> \$junos-interface-unit <b>ppp-options local-authentication</b> ]
Release Information	Statement introduced in Junos OS Release 18.2R1.
Description	<p>Configure a local username that authd can use to request authentication for terminated PPP subscribers. This enables the external RADIUS server to pass implementation-specific configuration for successfully authenticated subscribers. Local authentication supports CPEs that do not negotiate authentication protocols in the same dynamic profile as CPEs that use only PAP or CHAP authentication.</p> <p>The username takes the following format when you use the default delimiter:</p> <pre><i>mac-address.circuit-id.remote-id@domain-name</i></pre>
Options	<p><b>circuit-id</b>—Include the agent circuit identifier (ACI) in the local username.</p> <p><b>delimiter <i>character</i></b>—Specify the character that separates components that make up the concatenated username.  <b>Default:</b> Period (.)</p> <p><b>domain-name <i>name</i></b>—Specify the domain name that ends the local username created for the subscribers. The username is sent to RADIUS in the Access-Request message. The string can include the following characters: a through z, A through Z, 0 through 9, “-”, or “.”.</p> <p><b>mac-address</b>—Include the MAC address from the client PDU in the local username.</p> <p><b>remote-id</b>—Include the agent remote identifier (ARI) in the local username.</p>
Required Privilege Level	interface
Related Documentation	<ul style="list-style-type: none"> <li><a href="#">Configuring Local Authentication in Dynamic Profiles for Static Terminated IPv4 PPP Subscribers on page 101</a></li> </ul>

## weighted-load-balancing (L2TP LAC)

<b>Syntax</b>	weighted-load-balancing;
<b>Hierarchy Level</b>	[edit services <a href="#">l2tp</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 10.4.
<b>Description</b>	<p>Specify that the router considers tunnel weight when selecting from among multiple tunnels that share the same preference level. A higher maximum session limit on a tunnel corresponds to a higher tunnel weight. A tunnel with a higher weight is more likely to be selected than a tunnel with a lower weight. The distribution of sessions across all tunnels in the preference level, on average, is proportional to the tunnel weight</p> <p>Disabled by default. By default, tunnel selection within a preference level is strictly random. The <a href="#">destination-equal-load-balancing</a> statement must be disabled to successfully enable this statement.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Weighted Load Balancing for LAC Tunnel Sessions on page 181</a></li> <li>• <a href="#">Configuring the L2TP LAC Tunnel Selection Parameters on page 180</a></li> </ul>

## vlan-id (Dynamic Profiles)

---

Syntax	<code>vlan-id (<i>number</i>   none);</code>
Hierarchy Level	<code>[edit <b>dynamic-profiles</b> <i>profile-name</i> <b>interfaces</b> <i>interface-name</i> <b>unit</b> <i>logical-unit-number</i>]</code>
Release Information	Statement introduced in Junos OS Release 9.5. VLAN demux interface support introduced in Junos OS Release 10.2.
Description	For VLAN demux, Fast Ethernet, Gigabit Ethernet, and Aggregated Ethernet interfaces only, bind a 802.1Q VLAN tag ID to a logical interface.
Options	<p><b>number</b>—A valid VLAN identifier. When used in the <b>dynamic-profiles</b> hierarchy, specify the <b>\$junos-vlan-id</b> predefined variable to dynamically obtain the VLAN identifier.</p> <p><b>none</b>—Enable the use of untagged pseudo-wire frames on dynamic interfaces.</p> <ul style="list-style-type: none"><li>• For aggregated Ethernet, 4-port, 8-port, and 12-port Fast Ethernet PICs, and for management and internal Ethernet interfaces, 1 through 1023.</li><li>• For 48-port Fast Ethernet and Gigabit Ethernet PICs, 1 through 4094.</li><li>• VLAN ID 0 is reserved for tagging the priority of frames.</li></ul>
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"><li>• <i>Configuring Dynamic Subscriber Interfaces Using VLAN Demux Interfaces in Dynamic Profiles</i></li></ul>

## vlan-tagging

Syntax	vlan-tagging;
Syntax (QFX Series, NFX Series, and EX4600)	vlan-tagging;
Syntax (SRX Series Interfaces)	vlan-tagging native-vlan-id <i>vlan-id</i> ;
Hierarchy Level	[edit interfaces <i>interface-name</i> ], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> ]
QFX Series, NFX Series, and EX4600 Interfaces	[edit interfaces (QFX Series) <i>interface-name</i> ] [edit interfaces (QFX Series) interface-range <i>interface-range-name</i> ]
SRX Series Interfaces	[edit interfaces <i>interface</i> ]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.2 for ACX Series Universal Metro Routers. Statement introduced in Junos OS Release 13.2 for PTX Series Routers. Statement introduced in Junos OS Release 14.1X53-D10 for the QFX Series.
Description	For Fast Ethernet and Gigabit Ethernet interfaces, aggregated Ethernet interfaces configured for VPLS, and pseudowire subscriber interfaces, enable the reception and transmission of 802.1Q VLAN-tagged frames on the interface.



**NOTE:** For QFX Series configure VLAN identifier for untagged packets received on the physical interface of a trunk mode interface. Enable VLAN tagging. The platform receives and forwards single-tag frames with 802.1Q VLAN tags.

On EX Series switches except for EX4300 and EX9200 switches, the `vlan-tagging` and `family ethernet-switching` statements cannot be configured on the same interface. Interfaces on EX2200, EX3200, EX3300, EX4200, and EX4500 switches are set to `family ethernet-switching` by the default factory configuration. EX6200 and EX8200 switch interfaces do not have a default family setting.

**Default** VLAN tagging is disabled by default.

**Options** **native-vlan-id**— (SRX Series) Configures a VLAN identifier for untagged packets. Enter a number from 0 through 4094.



**NOTE:** The **native-vlan-id** can be configured only when either **flexible-vlan-tagging mode** or **interface-mode trunk** is configured.


---

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.



**Related Documentation**

- *802.1Q VLANs Overview*
- *Configuring a Layer 3 Subinterface (CLI Procedure)*
- *Configuring Tagged Aggregated Ethernet Interfaces*
- *Example: Configuring Layer 3 Subinterfaces for a Distribution Switch and an Access Switch*
- *vlan-id*
- *Configuring a Layer 3 Logical Interface*
- *Configuring VLAN Tagging*

## vlan-tagging (Dynamic)

<b>Syntax</b>	vlan-tagging;
<b>Hierarchy Level</b>	[edit dynamic-profiles <i>profile-name</i> <b>interfaces</b> <i>interface-name</i> ], [edit <b>interfaces</b> <i>interface-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2.
<b>Description</b>	For Fast Ethernet and Gigabit Ethernet interfaces and aggregated Ethernet interfaces configured for VPLS, enable the reception and transmission of 802.1Q VLAN-tagged frames on the interface.
	<div>  <p><b>NOTE:</b> For Ethernet, Fast Ethernet, Tri-Rate Ethernet copper, Gigabit Ethernet, 10-Gigabit Ethernet, and aggregated Ethernet interfaces supporting VPLS, the Junos OS supports a subset of the IEEE 802.1Q standard for channelizing an Ethernet interface into multiple logical interfaces, allowing many hosts to be connected to the same Gigabit Ethernet switch, but preventing them from being in the same routing or bridging domain.</p> </div>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring an Interface to Use the Dynamic Profile Configured to Create Stacked VLANs</a></li> <li>• <a href="#">Configuring an Interface to Use the Dynamic Profile Configured to Create Single-Tag VLANs</a></li> <li>• <a href="#">Configuring the L2TP LNS Peer Interface on page 224</a></li> </ul>

## vlan-tags

Syntax	<code>vlan-tags outer [<i>tpid</i>].<i>vlan-id</i> [inner [<i>tpid</i>].<i>vlan-id</i>];</code>
Hierarchy Level	<code>[edit dynamic-profiles <i>profile-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i>]</code>
Release Information	Statement introduced in Junos OS Release 9.5. VLAN demux interface support introduced in Junos OS Release 10.2.
Description	For Gigabit Ethernet IQ and IQE interfaces only, binds TPIDs and 802.1Q VLAN tag IDs to a logical interface. You must include the <b>stacked-vlan-tagging</b> statement at the <code>[edit interfaces <i>interface-name</i>]</code> hierarchy level.
<div>  <p><b>NOTE:</b> The inner-range <i>vid1–vid2</i> option is supported on IQE PICs only.</p> </div>	
Options	<code>inner [<i>tpid</i>].<i>vlan-id</i></code> —A TPID (optional) and a valid VLAN identifier in the format <i>tpid.vlan-id</i> . When used in the <b>dynamic-profiles</b> hierarchy, specify the <code>\$junos-vlan-id</code> predefined variable to dynamically obtain the VLAN ID.
<div>  <p><b>NOTE:</b> On the network-to-network (NNI) or egress interfaces of provider edge (PE) routers, you cannot configure the inner-range <i>tpid. vid1–vid2</i> option with the <code>vlan-tags</code> statement for ISP-facing interfaces.</p> </div>	
<p><b>Range:</b> For VLAN ID, 1 through 4094. VLAN ID 0 is reserved for tagging the priority of frames.</p> <p><code>outer [<i>tpid</i>].<i>vlan-id</i></code>—A TPID (optional) and a valid VLAN identifier in the format <i>tpid.vlan-id</i>. When used in the <b>dynamic-profiles</b> hierarchy, specify the <code>\$junos-stacked-vlan-id</code> predefined variable.</p> <p><b>Range:</b> For VLAN ID, 1 through 511 for normal interfaces, and 512 through 4094 for VLAN CCC interfaces. VLAN ID 0 is reserved for tagging the priority of frames.</p>	
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <li>Configuring Dual VLAN Tags</li> </ul>



## CHAPTER 9

# Operational Commands

- clear services l2tp destination
- clear services l2tp destination lockout
- clear services l2tp session
- clear services l2tp session statistics
- clear services l2tp tunnel
- clear services l2tp tunnel statistics
- request interface (revert | switchover) (Aggregated Inline Service Interfaces)
- restart
- show ancp subscriber
- show bfd subscriber session
- show dynamic-profile session
- show services fixed-wireless-access statistics
- show interfaces ps0 (Pseudowire Subscriber Interfaces)
- show interfaces redundancy
- show ppp interface
- show ppp statistics
- show ppp summary
- show services inline ip-reassembly statistics
- show services l2tp client
- show services l2tp destination
- show services l2tp destination lockout
- show services l2tp session
- show services l2tp session-limit-group
- show services l2tp summary
- show services l2tp tunnel
- show services l2tp tunnel-group
- show services l2tp tunnel-switch destination
- show services l2tp tunnel-switch session

- `show services l2tp tunnel-switch summary`
- `show services l2tp tunnel-switch tunnel`
- `show services soft-gre tunnel`
- `show subscribers`
- `show subscribers summary`
- `show system subscriber-management statistics`
- `show system subscriber-management summary`
- `test services l2tp tunnel`

## clear services l2tp destination

**Syntax** clear services l2tp destination  
<all | local-gateway *gateway-address* | peer-gateway *gateway-address*>

**Release Information** Command introduced in Junos OS Release 10.4.

**Description** Clear all Layer 2 Tunneling Protocol (L2TP) destinations and all tunnels and sessions that belong to the destinations. This command is available only for LAC on MX Series routers.



**NOTE:** You cannot issue the `clear services l2tp destination` command in parallel with statistics-related `show services l2tp` commands from separate terminals. If this clear command is running, then you must press Ctrl+c to make the command run in the background before issuing any of the show commands listed in the following table:

show services l2tp destination extensive	show services l2tp summary statistics
show services l2tp destination statistics	show services l2tp tunnel extensive
show services l2tp session extensive	show services l2tp tunnel statistics
show services l2tp session statistics	

**Options** all—Close all L2TP destinations.



**BEST PRACTICE:** The all option is not intended to be used as a means to perform a bulk logout of L2TP subscribers. We recommend that you do not use the all option in a production environment. Instead of clearing all subscribers at once, consider clearing subscribers in smaller group, based on interface, tunnel, or destination end point.

**local-gateway *gateway-address***—Clear only the L2TP destinations and all tunnels and sessions associated with the specified local gateway address.

**peer-gateway *gateway-address***—Clear only the L2TP destinations and all tunnels and sessions associated with the peer gateway with the specified address.

**Required Privilege Level** clear

**Related Documentation**

- [show services l2tp destination on page 748](#)

**List of Sample Output** [clear services l2tp destination all on page 668](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[clear services l2tp destination all](#)

```
user@host> clear services l2tp destination all
```

```
Destination 2 closed
```

## clear services l2tp destination lockdown

**Syntax** `clear services l2tp destination lockdown  
<all | local-gateway gateway-address | peer-gateway gateway-address>`

**Release Information** Command introduced in Junos OS Release 16.1 on MX Series Routers.

**Description** Clear the lockout timer for all or only the specified Layer 2 Tunneling Protocol (L2TP) destinations and all tunnels and sessions that belong to the destinations. Clearing the lockout timer removes the destination from the lockout list. This command is available only for LAC on MX Series routers.



**NOTE:** You cannot issue the `clear services l2tp destination` command in parallel with statistics-related `show services l2tp` commands from separate terminals. If this clear command is running, then you must press Ctrl+c to make the command run in the background before issuing any of the show commands listed in the following table:

<code>show services l2tp destination extensive</code>	<code>show services l2tp summary statistics</code>
<code>show services l2tp destination statistics</code>	<code>show services l2tp tunnel extensive</code>
<code>show services l2tp session extensive</code>	<code>show services l2tp tunnel statistics</code>
<code>show services l2tp session statistics</code>	

**Options** `all`—(Optional) Unlock all L2TP destinations.

`local-gateway gateway-address`—(Optional) Unlock only the L2TP destination with the specified local gateway address.

`peer-gateway gateway-address`—(Optional) Unlock only the L2TP destination with the specified address.

**Required Privilege Level** `clear`

**Related Documentation**

- [clear services l2tp destination on page 667](#)
- [show services l2tp destination on page 748](#)

**List of Sample Output** [clear services l2tp destination lockdown all on page 670](#)

**Output Fields** When you enter this command, you are provided no feedback on the status of your request.

## Sample Output

`clear services l2tp destination lockout all`

```
user@host> clear services l2tp destination lockout all
```

## clear services l2tp session

**Syntax** clear services l2tp session (all | interface *interface-name* | local-gateway *gateway-address* | local-gateway-name *gateway-name* | local-session-id *session-id* | local-tunnel-id *tunnel-id* | peer-gateway *gateway-address* | peer-gateway-name *gateway-name* | tunnel-group *group-name* | user *username*)

**Release Information** Command introduced before Junos OS Release 7.4.

**Description** (M10i and M7i routers only) Clear Layer 2 Tunneling Protocol (L2TP) sessions on LNS.  
(MX Series routers only) Clear L2TP sessions on LAC and LNS.



**NOTE:** On MX Series routers, you cannot issue the clear services l2tp session command in parallel with statistics-related show services l2tp commands from separate terminals. If this clear command is running, then you must press Ctrl+c to make the command run in the background before issuing any of the show commands listed in the following table:

show services l2tp destination extensive	show services l2tp summary statistics
show services l2tp destination statistics	show services l2tp tunnel extensive
show services l2tp session extensive	show services l2tp tunnel statistics
show services l2tp session statistics	

**Options** all—Close all L2TP sessions.



**BEST PRACTICE:** The all option is not intended to be used as a means to perform a bulk logout of L2TP subscribers. We recommend that you do not use the all option in a production environment. Instead of clearing all subscribers at once, consider clearing subscribers in smaller group, based on interface, tunnel, or destination end point.

**interface *interface-name***—Clear only the L2TP sessions using the specified adaptive services or inline services interface. The interface type depends on the line card as follows:

- **si-fpc/pic/port**—MPCs on MX Series routers only. This option is not available for L2TP on M Series routers.

- **sp-fpc/pic/port**—AS or Multiservices PICs on M7i, M10i, and M120 routers only. This option is not available for L2TP on MX Series routers.

**local-gateway gateway-address**—Clear only the L2TP sessions associated with the specified local gateway address.

**local-gateway-name gateway-name**—Clear only the L2TP sessions associated with the specified local gateway name.

**local-session-id session-id**—Clear only the L2TP sessions with this identifier for the local endpoint of the L2TP session.

**local-tunnel-id tunnel-id**—Clear only the L2TP sessions associated with the specified local tunnel identifier.

**peer-gateway gateway-address**—Clear only the L2TP sessions associated with the peer gateway with the specified address.

**peer-gateway-name gateway-name**—Clear only the L2TP sessions associated with the peer gateway with the specified name.

**tunnel-group group-name**—Clear only the L2TP sessions associated with the specified tunnel group. This option is not available for L2TP LAC on MX Series routers.

**user username**—(M Series routers only) Clear only the L2TP sessions for the specified username.

**Required Privilege Level** clear

**Related Documentation**

- [L2TP Services Configuration Overview](#)
- [L2TP Minimum Configuration](#)
- [clear services l2tp session statistics on page 674](#)
- [show services l2tp session on page 754](#)

**List of Sample Output** [clear services l2tp session on page 672](#)  
[clear services l2tp session interface on page 673](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[clear services l2tp session](#)

```
user@host> clear services l2tp session 31694
```

```
Session 31694 closed
```



## Sample Output

### clear services l2tp session interface

```
user@host> show services l2tp session Tunnel local ID: 17185
```

Local ID	Remote ID	State	Interface unit	Interface Name
5117	1	Established	1073741828	si-2/0/0
34915	2	Established	1073741829	si-2/1/0
6454	3	Established	1073741830	si-2/0/0
46142	4	Established	1073741831	si-2/1/0

```
user@host> clear services l2tp session interface si-2/0/0
```

```
Session 5117 closed
Session 6454 closed
```

```
user@host> show services l2tp session Tunnel local ID: 17185
```

Local ID	Remote ID	State	Interface unit	Interface Name
34915	2	Established	1073741829	si-2/1/0
46142	4	Established	1073741831	si-2/1/0

## clear services l2tp session statistics

**Syntax** clear services l2tp session statistics (all | interface *interface-name* | local-gateway *gateway-address* | local-gateway-name *gateway-name* | local-session-id *session-id* | local-tunnel-id *tunnel-id* | peer-gateway *gateway-address* | peer-gateway-name *gateway-name* | tunnel-group *group-name* | user *username*)

**Release Information** Command introduced before Junos OS Release 7.4.  
Support for MX Series routers added in Junos OS Release 10.4.

**Description** (M10i and M7i routers: LNS only. MX Series routers: LAC and LNS.) Clear statistics for Layer 2 Tunneling Protocol (L2TP) sessions.

**Options** all—Clear statistics for all L2TP sessions.

**interface *interface-name***—Clear only the L2TP sessions using the specified adaptive services or inline services interface. The interface type depends on the line card as follows:

- **si-*fpc/pic/port***—MPCs on MX Series routers only. This option is not available for L2TP on M Series routers.
- **sp-*fpc/pic/port***—AS or Multiservices PICs on M7i, M10i, and M120 routers only. This option is not available for L2TP on MX Series routers.

**local-gateway *gateway-address***—Clear statistics for only the L2TP sessions associated with the local gateway with the specified address.

**local-gateway-name *gateway-name***—Clear statistics for only the L2TP sessions associated with the local gateway with the specified name.

**local-session-id *session-id***—Clear statistics for only the L2TP sessions with this identifier for the local endpoint of the L2TP session.

**local-tunnel-id *tunnel-id***—Clear statistics for only the L2TP sessions associated with the specified local tunnel identifier.

**peer-gateway *gateway-address***—Clear statistics for only the L2TP sessions associated with the peer gateway with the specified address.

**peer-gateway-name *gateway-name***—Clear statistics for only the L2TP sessions associated with the peer gateway with the specified name.

**tunnel-group *group-name***—Clear statistics for only the L2TP sessions associated with the specified tunnel group. This option is not available for L2TP LAC on MX Series routers.

**user *username***—Clear statistics for only the L2TP sessions for the specified username. This option is not available for L2TP LAC on MX Series routers.

**Required Privilege Level**    view

**Related Documentation**

- *L2TP Services Configuration Overview*
- *L2TP Minimum Configuration*
- [clear services l2tp session on page 671](#)
- [show services l2tp session on page 754](#)

**List of Sample Output**    [clear services l2tp session statistics all on page 675](#)

**Output Fields**    When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[clear services l2tp session statistics all](#)

```
user@host> clear services l2tp session statistics all
Session 26497 statistics cleared
```

## clear services l2tp tunnel

**Syntax** `clear services l2tp tunnel (all | interface sp-fpc/pic/port | local-gateway gateway-address | local-gateway-name gateway-name | local-tunnel-id tunnel-id | peer-gateway gateway-address | peer-gateway-name gateway-name | tunnel-group group-name)`

**Release Information** Command introduced before Junos OS Release 7.4.  
Support for LAC on MX Series routers introduced in Junos OS Release 10.4.  
Support for LNS on MX Series routers introduced in Junos OS Release 11.4.

**Description** (M10i and M7i routers: LNS only. MX Series routers: LAC and LNS.) Clear Layer 2 Tunneling Protocol (L2TP) tunnels.



**NOTE:** On MX Series routers, you cannot issue the `clear services l2tp tunnel` command in parallel with statistics-related `show services l2tp` commands from separate terminals. If this clear command is running, then you must press Ctrl+c to make the command run in the background before issuing any of the `show` commands listed in the following table:

<code>show services l2tp destination extensive</code>	<code>show services l2tp summary statistics</code>
<code>show services l2tp destination statistics</code>	<code>show services l2tp tunnel extensive</code>
<code>show services l2tp session extensive</code>	<code>show services l2tp tunnel statistics</code>
<code>show services l2tp session statistics</code>	

**Options** `all`—Clear all L2TP tunnels.



**BEST PRACTICE:** The `all` option is not intended to be used as a means to perform a bulk logout of L2TP subscribers. We recommend that you do not use the `all` option in a production environment. Instead of clearing all subscribers at once, consider clearing subscribers in smaller group, based on interface, tunnel, or destination end point.

***sp-fpc/pic/port***—(Optional) Clear only the L2TP tunnels using the specified adaptive services interface. This option is not available for L2TP on MX Series routers.

***local-gateway gateway-address***—Clear only the L2TP tunnels associated with the local gateway with the specified address.

**local-gateway-name *gateway-name***—Clear only the L2TP tunnels associated with the local gateway with the specified name.

**local-tunnel-id *tunnel-id***—Clear only the L2TP tunnels that have the specified local tunnel identifier.

**peer-gateway *gateway-address***—Clear only the L2TP tunnels associated with the peer gateway with the specified address.

**peer-gateway-name *gateway-name***—Clear only the L2TP tunnels associated with the peer gateway with the specified name.

**tunnel-group *group-name***—Clear only the L2TP tunnels in the specified tunnel group. This option is not available for L2TP LAC on MX Series routers.

**Required Privilege Level** view

**Related Documentation**

- *L2TP Services Configuration Overview*
- *L2TP Minimum Configuration*
- [clear services l2tp tunnel statistics on page 678](#)
- [show services l2tp tunnel on page 771](#)

**List of Sample Output** [clear services l2tp tunnel on page 677](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

`clear services l2tp tunnel`

```
user@host> clear services l2tp tunnel 17185
```

```
Tunnel 17185 closed
```

## clear services l2tp tunnel statistics

<b>Syntax</b>	clear services l2tp tunnel statistics (all   interface <i>sp-fpc/pic/port</i>   local-gateway <i>gateway-address</i>   local-gateway-name <i>gateway-name</i>   local-tunnel-id <i>tunnel-id</i>   peer-gateway <i>gateway-address</i>   peer-gateway-name <i>gateway-name</i>   tunnel-group <i>group-name</i> )
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Support for MX Series routers added in Junos OS Release 10.4.
<b>Description</b>	(M10i and M7i routers: LNS only. MX Series routers: LAC only.) Clear statistics for Layer 2 Tunneling Protocol (L2TP) tunnels.
<b>Options</b>	<p><b>all</b>—Clear statistics for all L2TP tunnels.</p> <p><b>interface <i>sp-fpc/pic/port</i></b>—Clear statistics for only the L2TP tunnels using the specified adaptive services interface. This option is not available for L2TP LAC on MX Series routers.</p> <p><b>local-gateway <i>gateway-address</i></b>—Clear statistics for only the L2TP tunnels associated with the local gateway with the specified address.</p> <p><b>local-gateway-name <i>gateway-name</i></b>—Clear statistics for only the L2TP tunnels associated with the local gateway with the specified name.</p> <p><b>local-tunnel-id <i>tunnel-id</i></b>—Clear statistics for only the L2TP tunnels that have the specified local tunnel identifier.</p> <p><b>peer-gateway <i>gateway-address</i></b>—Clear statistics for only the L2TP tunnels associated with the peer gateway with the specified address.</p> <p><b>peer-gateway-name <i>gateway-name</i></b>—Clear statistics for only the L2TP tunnels associated with the peer gateway with the specified name.</p> <p><b>tunnel-group <i>group-name</i></b>—Clear statistics for only the L2TP tunnels in the specified tunnel group. This option is not available for L2TP LAC on MX Series routers.</p>
<b>Required Privilege Level</b>	clear
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>L2TP Services Configuration Overview</i></li> <li>• <i>L2TP Minimum Configuration</i></li> <li>• <a href="#">clear services l2tp tunnel on page 676</a></li> <li>• <a href="#">show services l2tp tunnel on page 771</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear services l2tp tunnel statistics all on page 679</a>

**Output Fields** When you enter this command, you are provided feedback on the status of your request.


## Sample Output

`clear services l2tp tunnel statistics all`

```
user@host> clear services l2tp tunnel statistics all
```

```
Tunnel 9933 statistics cleared
```

## request interface (revert | switchover) (Aggregated Inline Service Interfaces)

<b>Syntax</b>	<code>request interface (revert   switchover) <i>bundle-name</i></code>
<b>Release Information</b>	Command introduced in Junos OS Release 16.2.
<b>Description</b>	Manually revert L2TP data traffic from the designated backup link to the designated primary link of an aggregated inline service interface bundle interface for which 1:1 redundancy is configured, or manually switch data traffic from the primary link to the backup link.
	<div>  <p><b>NOTE:</b> When 1:1 redundancy protection is configured for an aggregated inline service interface, if the primary link fails, the router automatically routes data traffic destined for the L2TP session on that link to the backup link. However, the router does not automatically route data traffic back to the primary link when the primary link is subsequently reestablished. Instead, you manually divert traffic back to the primary link by issuing the <code>request interface revert</code> operational command.</p> </div>
<b>Options</b>	<p><b>revert</b>—Restore data traffic for the LNS session to the primary link.</p> <p><b>switchover</b>—Transfer data traffic for the LNS session to the secondary (backup) link.</p> <p><b><i>bundle-name</i></b>—Name of the aggregated inline service interface bundle.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">request interface switchover on page 680</a> <a href="#">request interface revert on page 680</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

#### request interface switchover

```
user@host >request interface switchover asi0
error: requesting cmd SWITCH when primary is not active
```

### Sample Output

#### request interface revert

```
user@host >request interface revert asi0
```



```
request succeeded
```

## restart

- List of Syntax**
- [Syntax on page 682](#)
  - [Syntax \(ACX Series Routers\) on page 682](#)
  - [Syntax \(EX Series Switches\) on page 682](#)
  - [Syntax \(MX Series Routers\) on page 683](#)
  - [Syntax \(QFX Series\) on page 683](#)
  - [Syntax \(Routing Matrix\) on page 683](#)
  - [Syntax \(TX Matrix Routers\) on page 684](#)
  - [Syntax \(TX Matrix Plus Routers\) on page 684](#)
  - [Syntax \(QFX Series\) on page 684](#)

**Syntax** restart

```
<adaptive-services | ancpd-service | application-identification | audit-process |
  auto-configuration | captive-portal-content-delivery | ce-l2tp-service | chassis-control |
  class-of-service | clksyncd-service | database-replication | datapath-trace-service
  | dhcp-service | diameter-service | disk-monitoring | dynamic-flow-capture |
  ecc-error-logging | ethernet-connectivity-fault-management
  | ethernet-link-fault-management | event-processing | firewall |
  general-authentication-service | gracefully | iccp-service | idp-policy | immediately
  | interface-control | ipsec-key-management | kernel-health-monitoring | kernel-replication
  | l2-learning | l2cpd-service | l2tp-service | l2tp-universal-edge | lacp | license-service
  | link-management | local-policy-decision-function | mac-validation | mib-process |
  mounstd-service | mpls-traceroute | mspd | multicast-snooping | named-service | nfsd-service
  | packet-triggered-subscribers | peer-selection-service | pgm | pic-services-logging |
  pki-service | ppp | ppp-service | pppoe | protected-system-domain-service |
  redundancy-interface-process | remote-operations | root-system-domain-service | routing
  <logical-system logical-system-name> | sampling | sbc-configuration-process | sdk-service
  | service-deployment | services | snmp | soft | static-subscribers | statistics-service |
  subscriber-management | subscriber-management-helper | tunnel-oamd | usb-control |
  vrrp | web-management>
<gracefully | immediately | soft>
```

**Syntax (ACX Series Routers)** restart

```
<adaptive-services | audit-process | auto-configuration | autoinstallation | chassis-control |
  class-of-service | clksyncd-service | database-replication | dhcp-service | diameter-service
  | disk-monitoring | dynamic-flow-capture | ethernet-connectivity-fault-management |
  ethernet-link-fault-management | event-processing | firewall |
  general-authentication-service | gracefully | immediately | interface-control |
  ipsec-key-management | l2-learning | lacp | link-management | mib-process | mounstd-service
  | mpls-traceroute | mspd | named-service | nfsd-service | pgm | pki-service | ppp | pppoe |
  redundancy-interface-process | remote-operations | routing | sampling | sdk-service
  | secure-neighbor-discovery | service-deployment | services | snmp | soft | statistics-service |
  subscriber-management | subscriber-management-helper | tunnel-oamd | vrrp>
```

**Syntax (EX Series Switches)** restart

```
<autoinstallation | chassis-control | class-of-service | database-replication | dhcp |
  dhcp-service | diameter-service | dot1x-protocol | ethernet-link-fault-management |
  ethernet-switching | event-processing | firewall | general-authentication-service |
```

```
interface-control | kernel-health-monitoring | kernel-replication | l2-learning | lacp |
license-service | link-management | lldpd-service | mib-process | mounstd-service |
multicast-snooping | pgm | redundancy-interface-process | remote-operations | routing |
secure-neighbor-discovery | service-deployment | sflow-service | snmp | vrrp |
web-management>
```

#### Syntax (MX Series Routers)

```
restart
<adaptive-services | ancpd-service | application-identification | audit-process |
auto-configuration | bbe-stats-service | captive-portal-content-delivery | ce-l2tp-service
| chassis-control | class-of-service | clksyncd-service | database-replication |
datapath-trace-service | dhcp-service | diameter-service | disk-monitoring |
dynamic-flow-capture | ecc-error-logging | ethernet-connectivity-fault-management |
ethernet-link-fault-management | event-processing | firewall |
general-authentication-service | gracefully | iccp-service | idp-policy | immediately
| interface-control | ipsec-key-management | kernel-health-monitoring | kernel-replication
| l2-learning | l2cpd-service | l2tp-service | l2tp-universal-edge | lacp | license-service |
link-management | local-policy-decision-function | mac-validation | mib-process |
mounstd-service | mpls-traceroute | mspd | multicast-snooping | named-service | nfsd-service
| packet-triggered-subscribers | peer-selection-service | pgm | pic-services-logging |
pki-service | ppp | ppp-service | pppoe | protected-system-domain-service |
redundancy-interface-process | remote-operations | root-system-domain-service | routing
| routing <logical-system logical-system-name> | sampling | sbc-configuration-process |
sdk-service | service-deployment | services | snmp | soft | static-subscribers
| statistics-service | subscriber-management | subscriber-management-helper | tunnel-oam
| usb-control | vrrp | web-management>
<all-members>
<gracefully | immediately | soft>
<local>
<member member-id>
```

#### Syntax (QFX Series)

```
restart
<adaptive-services | audit-process | chassis-control | class-of-service | dialer-services |
diameter-service | dlsd | ethernet-connectivity | event-processing | fibre-channel | firewall
| general-authentication-service | igmp-host-services | interface-control |
ipsec-key-management | isdn-signaling | l2ald | l2-learning | l2tp-service | mib-process |
named-service | network-access-service | nstrace-process | pgm | ppp | pppoe |
redundancy-interface-process | remote-operations | logical-system-name> | routing |
sampling | secure-neighbor-discovery | service-deployment | snmp | usb-control |
web-management>
<gracefully | immediately | soft>
```

#### Syntax (Routing Matrix)

```
restart
<adaptive-services | audit-process | chassis-control | class-of-service | disk-monitoring |
dynamic-flow-capture | ecc-error-logging | event-processing | firewall | interface-control
| ipsec-key-management | kernel-replication | l2-learning | l2tp-service | lacp |
link-management | mib-process | pgm | pic-services-logging | ppp | pppoe |
redundancy-interface-process | remote-operations | routing <logical-system
logical-system-name> | sampling | service-deployment | snmp>
<all | all-lcc | lcc number>
<gracefully | immediately | soft>
```

Syntax (TX Matrix Routers)	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system logical-system-name&gt;   sampling   service-deployment   snmp  statistics-service&gt; &lt;all-chassis   all-lcc   lcc number   scc&gt; &lt;gracefully   immediately   soft&gt;</pre>
Syntax (TX Matrix Plus Routers)	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dhcp-service   diameter-service   disk-monitoring   dynamic-flow-capture   ecc-error-logging   event-processing   firewall   interface-control   ipsec-key-management   kernel-replication   l2-learning   l2tp-service   lacp   link-management   mib-process   pgm   pic-services-logging   ppp   pppoe   redundancy-interface-process   remote-operations   routing &lt;logical-system logical-system-name&gt;   sampling   service-deployment   snmp  statistics-service&gt; &lt;all-chassis   all-lcc   all-sfc   lcc number   sfc number&gt; &lt;gracefully   immediately   soft&gt;</pre>
Syntax (QFX Series)	<pre>restart &lt;adaptive-services   audit-process   chassis-control   class-of-service   dialer-services   diameter-service   dlsw   ethernet-connectivity   event-processing   fibre-channel   firewall   general-authentication-service   igmp-host-services   interface-control   ipsec-key-management   isdn-signaling   l2ald   l2-learning   l2tp-service   mib-process   named-service   network-access-service   nstrace-process   pgm   ppp   pppoe   redundancy-interface-process   remote-operations  logical-system-name&gt;   routing   sampling  secure-neighbor-discovery   service-deployment   snmp   usb-control   web-management&gt; &lt;gracefully   immediately   soft&gt;</pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 12.2 for ACX Series routers.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Options added:</p> <ul style="list-style-type: none"> <li>• <b>dynamic-flow-capture</b> in Junos OS Release 7.4.</li> <li>• <b>dlsw</b> in Junos OS Release 7.5.</li> <li>• <b>event-processing</b> in Junos OS Release 7.5.</li> <li>• <b>ppp</b> in Junos OS Release 7.5.</li> <li>• <b>l2ald</b> in Junos OS Release 8.0.</li> <li>• <b>link-management</b> in Junos Release 8.0.</li> <li>• <b>pgcp-service</b> in Junos OS Release 8.4.</li> </ul>

- **sbcc-configuration-process** in Junos OS Release 9.5.
- **services pgcp gateway** in Junos OS Release 9.6.
- **sfc** and **all-sfc** for the TX Matrix Router in Junos OS Release 9.6.
- **bbe-stats-service** in Junos OS Release 18.4R1 on MX Series routers.
- **kernel-health-monitoring** in Junos OS Release 19.1R1.

**Description** Restart a Junos OS process.



**CAUTION:** Never restart a software process unless instructed to do so by a customer support engineer. A restart might cause the router or switch to drop calls and interrupt transmission, resulting in possible loss of data.

**Options** **none**—Same as **gracefully**.

**adaptive-services**—(Optional) Restart the configuration management process that manages the configuration for stateful firewall, Network Address Translation (NAT), intrusion detection services (IDS), and IP Security (IPsec) services on the Adaptive Services PIC.

**all-chassis**—(TX Matrix and TX Matrix Plus routers only) (Optional) Restart the software process on all chassis.

**all-lcc**—(TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process on all T640 routers connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process on all T1600 routers connected to the TX Matrix Plus router.

**all-members**—(MX Series routers only) (Optional) Restart the software process for all members of the Virtual Chassis configuration.

**all-sfc**—(TX Matrix Plus routers only) (Optional) For a TX Matrix Plus router, restart the software processes for the TX Matrix Plus router (or switch-fabric chassis).

**ancpd-service**—(Optional) Restart the Access Node Control Protocol (ANCP) process, which works with a special Internet Group Management Protocol (IGMP) session to collect outgoing interface mapping events in a scalable manner.

**application-identification**—(Optional) Restart the process that identifies an application using intrusion detection and prevention (IDP) to allow or deny traffic based on applications running on standard or nonstandard ports.

**audit-process**—(Optional) Restart the RADIUS accounting process that gathers statistical data that can be used for general network monitoring, analyzing, and tracking usage patterns, for billing a user based on the amount of time or type of services accessed.

**auto-configuration**—(Optional) Restart the Interface Auto-Configuration process.

**autoinstallation**—(EX Series switches only) (Optional) Restart the autoinstallation process.

**bbe-stats-service**—(MX Series routers only) (Optional) Restart bbe-statsd, the BBE statistics collection and management process.

**captive-portal-content-delivery**—(Optional) Restart the HTTP redirect service by specifying the location to which a subscriber's initial Web browser session is redirected, enabling initial provisioning and service selection for the subscriber.

**ce-l2tp-service**—(M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Universal Edge Layer 2 Tunneling Protocol (L2TP) process, which establishes L2TP tunnels and Point-to-Point Protocol (PPP) sessions through L2TP tunnels.

**chassis-control**—(Optional) Restart the chassis management process.

**class-of-service**—(Optional) Restart the class-of-service (CoS) process, which controls the router's or switch's CoS configuration.

**clksyncd-service**—(Optional) Restart the external clock synchronization process, which uses synchronous Ethernet (SyncE).

**database-replication**—(EX Series switches and MX Series routers only) (Optional) Restart the database replication process.

**datapath-trace-service**—(Optional) Restart the packet path tracing process.

**dhcp**—(EX Series switches only) (Optional) Restart the software process for a Dynamic Host Configuration Protocol (DHCP) server. A DHCP server allocates network IP addresses and delivers configuration settings to client hosts without user intervention.

**dhcp-service**—(Optional) Restart the Dynamic Host Configuration Protocol process.

**dialer-services**—(EX Series switches only) (Optional) Restart the ISDN dial-out process.

**diameter-service**—(Optional) Restart the diameter process.

**disk-monitoring**—(Optional) Restart disk monitoring, which checks the health of the hard disk drive on the Routing Engine.

**dls**—(QFX Series only) (Optional) Restart the data link switching (DLSw) service.

**dot1x-protocol**—(EX Series switches only) (Optional) Restart the port-based network access control process.

**dynamic-flow-capture**—(Optional) Restart the dynamic flow capture (DFC) process, which controls DFC configurations on Monitoring Services III PICs.

**ecc-error-logging**—(Optional) Restart the error checking and correction (ECC) process, which logs ECC parity errors in memory on the Routing Engine.

**ethernet-connectivity-fault-management**—(Optional) Restart the process that provides IEEE 802.1ag Operation, Administration, and Management (OAM) connectivity fault

management (CFM) database information for CFM maintenance association end points (MEPs) in a CFM session.

**ethernet-link-fault-management**—(EX Series switches and MX Series routers only) (Optional) Restart the process that provides the OAM link fault management (LFM) information for Ethernet interfaces.

**ethernet-switching**—(EX Series switches only) (Optional) Restart the Ethernet switching process.

**event-processing**—(Optional) Restart the event process (eventd).

**fibre-channel**—(QFX Series only) (Optional) Restart the Fibre Channel process.

**firewall**—(Optional) Restart the firewall management process, which manages the firewall configuration and enables accepting or rejecting packets that are transiting an interface on a router or switch.

**general-authentication-service**—(EX Series switches and MX Series routers only) (Optional) Restart the general authentication process.

**gracefully**—(Optional) Restart the software process.

**iccp-service**—(Optional) Restart the Inter-Chassis Communication Protocol (ICCP) process.

**idp-policy**—(Optional) Restart the intrusion detection and prevention (IDP) protocol process.

**immediately**—(Optional) Immediately restart the software process.

**interface-control**—(Optional) Restart the interface process, which controls the router's or switch's physical interface devices and logical interfaces.

**ipsec-key-management**—(Optional) Restart the IPsec key management process.

**isdn-signaling**—(QFX Series only) (Optional) Restart the ISDN signaling process, which initiates ISDN connections.

**kernel-health-monitoring**—(Optional) Restart the Routing Engine kernel health monitoring process, which enables health parameter data to be sent from kernel components to data collection applications. When you change the polling interval through `sysctl kern.jkhmd_polling_time_secs`, you must restart the kernel health monitoring process for the new polling interval to take effect.

**kernel-replication**—(Optional) Restart the kernel replication process, which replicates the state of the backup Routing Engine when graceful Routing Engine switchover (GRES) is configured.

**l2-learning**—(Optional) Restart the Layer 2 address flooding and learning process.

**l2cpd-service**—(Optional) Restart the Layer 2 Control Protocol process, which enables features such as Layer 2 protocol tunneling and nonstop bridging.

**l2tp-service**— (M10, M10i, M7i, and MX Series routers only) (Optional) Restart the Layer 2 Tunneling Protocol (L2TP) process, which sets up client services for establishing Point-to-Point Protocol (PPP) tunnels across a network and negotiating Multilink PPP if it is implemented.

**l2tp-universal-edge**— (MX Series routers only) (Optional) Restart the L2TP process, which establishes L2TP tunnels and PPP sessions through L2TP tunnels.

**lACP**— (Optional) Restart the Link Aggregation Control Protocol (LACP) process. LACP provides a standardized means for exchanging information between partner systems on a link to allow their link aggregation control instances to reach agreement on the identity of the LAG to which the link belongs, and then to move the link to that LAG, and to enable the transmission and reception processes for the link to function in an orderly manner.

**lcc *number***— (TX Matrix and TX Matrix Plus routers only) (Optional) For a TX Matrix router, restart the software process for a specific T640 router that is connected to the TX Matrix router. For a TX Matrix Plus router, restart the software process for a specific router that is connected to the TX Matrix Plus router.

Replace *number* with the following values depending on the LCC configuration:

- 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix.
- 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix.
- 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
- 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.

**license-service**— (EX Series switches only) (Optional) Restart the feature license management process.

**link-management**— (TX Matrix and TX Matrix Plus routers and EX Series switches only) (Optional) Restart the Link Management Protocol (LMP) process, which establishes and maintains LMP control channels.

**lldpd-service**— (EX Series switches only) (Optional) Restart the Link Layer Discovery Protocol (LLDP) process.

**local**— (MX Series routers only) (Optional) Restart the software process for the local Virtual Chassis member.

**local-policy-decision-function**— (Optional) Restart the process for the Local Policy Decision Function, which regulates collection of statistics related to applications and application groups and tracking of information about dynamic subscribers and static interfaces.



**mac-validation**— (Optional) Restart the Media Access Control (MAC) validation process, which configures MAC address validation for subscriber interfaces created on demux interfaces in dynamic profiles on MX Series routers.

**member *member-id***—(MX Series routers only) (Optional) Restart the software process for a specific member of the Virtual Chassis configuration. Replace ***member-id*** with a value of 0 or 1.

**mib-process**—(Optional) Restart the Management Information Base (MIB) version II process, which provides the router's MIB II agent.

**mobile-ip**—(Optional) Restart the Mobile IP process, which configures Junos OS Mobile IP features.

**mountd-service**—(EX Series switches and MX Series routers only) (Optional) Restart the service for NFS mount requests.

**mpls-traceroute**—(Optional) Restart the MPLS Periodic Traceroute process.

**mspd**—(Optional) Restart the Multiservice process.

**multicast-snooping**—(EX Series switches and MX Series routers only) (Optional) Restart the multicast snooping process, which makes Layer 2 devices, such as VLAN switches, aware of Layer 3 information, such as the media access control (MAC) addresses of members of a multicast group.

**named-service**—(Optional) Restart the DNS Server process, which is used by a router or a switch to resolve hostnames into addresses.

**network-access-service**—(QFX Series only) (Optional) Restart the network access process, which provides the router's Challenge Handshake Authentication Protocol (CHAP) authentication service.

**nfsd-service**—(Optional) Restart the Remote NFS Server process, which provides remote file access for applications that need NFS-based transport.

**packet-triggered-subscribers**—(Optional) Restart the packet-triggered subscribers and policy control (PTSP) process, which allows the application of policies to dynamic subscribers that are controlled by a subscriber termination device.

**peer-selection-service**—(Optional) Restart the Peer Selection Service process.

**pgcp-service**—(Optional) Restart the pgcpd service process running on the Routing Engine. This option does not restart pgcpd processes running on mobile station PICs. To restart pgcpd processes running on mobile station PICs, use the **services pgcp gateway** option.

**pgm**—(Optional) Restart the process that implements the Pragmatic General Multicast (PGM) protocol for assisting in the reliable delivery of multicast packets.

**pic-services-logging**—(Optional) Restart the logging process for some PICs. With this process, also known as fsad (the file system access daemon), PICs send special logging information to the Routing Engine for archiving on the hard disk.

**pki-service**—(Optional) Restart the PKI Service process.

**ppp**—(Optional) Restart the Point-to-Point Protocol (PPP) process, which is the encapsulation protocol process for transporting IP traffic across point-to-point links.

**ppp-service**—(Optional) Restart the Universal edge PPP process, which is the encapsulation protocol process for transporting IP traffic across universal edge routers.

**pppoe**—(Optional) Restart the Point-to-Point Protocol over Ethernet (PPPoE) process, which combines PPP that typically runs over broadband connections with the Ethernet link-layer protocol that allows users to connect to a network of hosts over a bridge or access concentrator.

**protected-system-domain-service**—(Optional) Restart the Protected System Domain (PSD) process.

**redundancy-interface-process**—(Optional) Restart the ASP redundancy process.

**remote-operations**—(Optional) Restart the remote operations process, which provides the ping and traceroute MIBs.

**root-system-domain-service**—(Optional) Restart the Root System Domain (RSD) service.

**routing**—(ACX Series routers, QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the routing protocol process.

**routing <logical-system *logical-system-name*>**—(Optional) Restart the routing protocol process, which controls the routing protocols that run on the router or switch and maintains the routing tables. Optionally, restart the routing protocol process for the specified logical system only.

**sampling**—(Optional) Restart the sampling process, which performs packet sampling based on particular input interfaces and various fields in the packet header.

**sbc-configuration-process**—(Optional) Restart the session border controller (SBC) process of the border signaling gateway (BSG).

**scc**—(TX Matrix routers only) (Optional) Restart the software process on the TX Matrix router (or switch-card chassis).

**sdk-service**—(Optional) Restart the SDK Service process, which runs on the Routing Engine and is responsible for communications between the SDK application and Junos OS. Although the SDK Service process is present on the router, it is turned off by default.

**secure-neighbor-discovery**—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the secure Neighbor Discovery Protocol (NDP) process, which provides support for protecting NDP messages.

**sfc *number***—(TX Matrix Plus routers only) (Optional) Restart the software process on the TX Matrix Plus router (or switch-fabric chassis). Replace *number* with 0.

**service-deployment**—(Optional) Restart the service deployment process, which enables Junos OS to work with the Session and Resource Control (SRC) software.

**services**—(Optional) Restart a service.

**services pgcp gateway *gateway-name***—(Optional) Restart the pgcpd process for a specific border gateway function (BGF) running on an MS-PIC. This option does not restart the pgcpd process running on the Routing Engine. To restart the pgcpd process on the Routing Engine, use the **pgcp-service** option.

**sflow-service**—(EX Series switches only) (Optional) Restart the flow sampling (sFlow technology) process.

**snmp**—(Optional) Restart the SNMP process, which enables the monitoring of network devices from a central location and provides the router's or switch's SNMP master agent.

**soft**—(Optional) Reread and reactivate the configuration without completely restarting the software processes. For example, BGP peers stay up and the routing table stays constant. Omitting this option results in a graceful restart of the software process.

**static-subscribers**—(Optional) Restart the static subscribers process, which associates subscribers with statically configured interfaces and provides dynamic service activation and activation for these subscribers.

**statistics-service**—(Optional) Restart the process that manages the Packet Forwarding Engine statistics.

**subscriber-management**—(Optional) Restart the Subscriber Management process.

**subscriber-management-helper**—(Optional) Restart the Subscriber Management Helper process.

**tunnel-oamd**—(Optional) Restart the Tunnel OAM process, which enables the Operations, Administration, and Maintenance of Layer 2 tunneled networks. Layer 2 protocol tunneling (L2PT) allows service providers to send Layer 2 protocol data units (PDUs) across the provider's cloud and deliver them to Juniper Networks EX Series Ethernet Switches that are not part of the local broadcast domain.

**usb-control**—(MX Series routers) (Optional) Restart the USB control process.

**vrrp**—(ACX Series routers, EX Series switches, and MX Series routers only) (Optional) Restart the Virtual Router Redundancy Protocol (VRRP) process, which enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts.

**web-management**—(QFX Series, EX Series switches, and MX Series routers only) (Optional) Restart the Web management process.

**Required Privilege Level**    reset

**Related Documentation** • [Overview of Junos OS CLI Operational Mode Commands](#)

**List of Sample Output** [restart interface-control gracefully on page 692](#)

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

[restart interface-control gracefully](#)

```
user@host> restart interface-control gracefully
Interface control process started, pid 41129
```

## show ancp subscriber

**Syntax** `show ancp subscriber`  
`<brief | detail>`  
`<access-aggregation-circuit-id circuit-identifier>`  
`<identifier identifier>`  
`<ip-address ip-address>`  
`<system-name mac-address>`

**Release Information** Command introduced in Junos OS Release 9.4.  
**neighbor** option replaced with **ip-address** in Junos OS Release 16.1.  
**system-name** option introduced in Junos OS Release 16.1.  
**access-aggregation-circuit-id** option introduced in Junos OS Release 18.4R1.

**Description** Display information about active subscribers regardless of the subscriber's operational state, for all subscribers (local access loops), the subscriber associated with the access line specified by an ACI, or the subscriber associated with the specified ANCP neighbor (access node).

After an ancpd restart, this command displays orphaned entries (marked with an **o**) for subscriber sessions that were established before the restart but which have not yet been reestablished. As sessions are reestablished, the number of orphaned entries displayed by the command decreases. The number reaches zero when all sessions are reestablished or when the orphaned-interface timer expires.

**Options** **none**—Display information about all subscribers.

**brief | detail**—(Optional) Display the specified level of detail.

**access-aggregation-circuit-id *circuit-identifier***—(Optional) Display information about ANCP subscribers whose Access-Aggregation-Circuit-ID-ASCII attribute (TLV 0x0003) matches the specified value.

A *circuit-identifier* that begins with the **#** character indicates a backhaul line identifier. You can specify a wildcard (\*) anywhere in the string.

**identifier *identifier***—(Optional) Display information about the subscriber associated with the access line (ACI) specified by the access identifier.

**ip-address *ip-address***—(Optional) Display information about the subscribers connected to the access node specified by the IP address.

**system-name *mac-address***—(Optional) Display information about the subscribers connected to the access node specified by the MAC address.

**Required Privilege Level** view

- Related Documentation**
- [clear ancp subscriber](#)
  - [show ancp cos](#)
  - [show ancp neighbor](#)
  - [show ancp statistics](#)

- List of Sample Output**
- [show ancp subscriber on page 697](#)
  - [show ancp subscriber \(After ancpd Restart\) on page 697](#)
  - [show ancp subscriber brief on page 697](#)
  - [show ancp subscriber detail on page 697](#)
  - [show ancp subscriber access-aggregation-circuit-id detail on page 698](#)
  - [show ancp subscriber identifier identifier-string detail on page 699](#)

- Output Fields** Table 31 on page 694 lists the output fields for the **show ancp subscriber** command. Output fields are listed in the approximate order in which they appear.

*Table 31: show ancp subscriber Output Fields*

Field Name	Field Description	Level of Output
<b>Loop Identifier</b>	<p>Access loop identifier as sent by the access node and configured to map the subscriber to an interface.</p> <p>An asterisk (*) indicates that the information might be stale due to receiving a Port Down message with a DSL Line State of Idle.</p> <p>Two asterisks (**) indicate that the neighbor associated with the subscriber has lost its adjacency. In this case, the DSL Line State might be Established.</p> <p>An <b>o</b> indicates that the entry is for an orphaned interface and represents a previously established subscriber session that has not been reestablished after an ancpd restart.</p> <p>The number of orphaned entries decreases as the ANCP neighbors reestablish adjacencies and the protocol subscriber sessions are reestablished. The command output indicates this by removing the <b>o</b> marker.</p> <p>Eventually the number of orphaned entries reaches zero, because either all the adjacencies and subscriber sessions have been reestablished or any remaining orphaned entries are removed when the orphaned-interface timer expires.</p>	<b>brief none</b>
<b>DSL Line State</b>	State of the DSL line: <b>Idle</b> , <b>Showtime</b> , or <b>Silent</b> .	<b>brief detail</b>
<b>Access Type</b>	Type of access line employed by the access node: <b>ADSL1</b> , <b>ADSL2</b> , <b>ADSL2+</b> , <b>VDSL1</b> , <b>VDSL2</b> , <b>SDSL</b> , <b>G.fast</b> , <b>VDSL2 Annex Q</b> , <b>SDSL bonded</b> , <b>VDSL2 bonded</b> , <b>G.fast bonded</b> , <b>VDSL2 Annex Q bonded</b> or <b>OTHER</b> .	<b>brief detail none</b>
<b>Interface</b>	Name of the interface set or logical interface.	<b>brief detail none</b>

Table 31: show ancp subscriber Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Rate Kbps</b>	Actual downstream data rate for this local loop.	<b>brief none</b>
<b>Neighbor</b>	IP address of ANCP neighbor (access node).	<b>brief none</b>
<b>Access Loop Circuit Identifier</b>	<p>Access loop circuit identifier as sent by the access node and configured to map the subscriber to an interface.</p> <p>An asterisk (*) indicates that the information might be stale due to receiving a Port Down message with a DSL Line State of Idle.</p> <p>Two asterisks (**) indicate that the neighbor associated with the subscriber has lost its adjacency. In this case, the DSL Line State might be Established.</p>	<b>detail</b>
<b>Neighbor IP Address</b>	IP address of the ANCP neighbor (access node).	<b>detail</b>
<b>Aggregate Circuit Identifier</b>	ASCII identifier for the subscriber access loop; value of the Access-Aggregation-Circuit-ID-ASCII attribute (TLV 0x0003).	<b>detail</b>
<b>Aggregate Circuit Identifier Binary</b>	Binary identifier for the VLAN circuit ID.	<b>detail</b>
<b>Tech Type</b>	Type of technology employed by the subscriber. Currently Junos OS supports <b>DSL</b> technology type only.	<b>detail</b>
<b>DSL Line Data Link</b>	Data link protocol employed on the access loop: <b>AAL5</b> or <b>Ethernet</b> .	<b>detail</b>
<b>DSL Line Encapsulation</b>	<p>Encapsulation type on the access loop, for Ethernet only:</p> <ul style="list-style-type: none"> <li>0—NA, type not conveyed</li> <li>1—Untagged Ethernet</li> <li>2—Single-tagged Ethernet</li> </ul>	<b>detail</b>
<b>DSL Line Encapsulation Payload</b>	<p>Payload carried across the access loop:</p> <ul style="list-style-type: none"> <li>0—NA, type not conveyed</li> <li>1—PPPoA LLC</li> <li>2—PPPoA null</li> <li>3—IPoA LLC</li> <li>4—IPoA null</li> <li>5—Ethernet over AAL5 LLC with FCS</li> <li>6—Ethernet over AAL5 LLC without FCS</li> <li>7—Ethernet over AAL5 null with FCS</li> <li>8—Ethernet over AAL5 null without FCS</li> </ul>	<b>detail</b>

Table 31: show ancp subscriber Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Interface Type</b>	Type of interface employed for subscriber traffic: ifl for a single VLAN or <b>interface-set</b> for a configured group of VLANs.	<b>detail</b>
<b>Actual Net Data Upstream</b>	Actual upstream data rate for this local loop, in Kbps.	<b>detail</b>
<b>Actual Net Data Downstream</b>	Actual downstream data rate for this local loop, in Kbps.	<b>detail</b>
<b>Minimum Net Data Upstream</b>	Minimum upstream data rate desired by the operator for this local loop, in Kbps.	<b>detail</b>
<b>Minimum Net Data Downstream</b>	Minimum downstream data rate desired by the operator for this local loop, in Kbps.	<b>detail</b>
<b>Maximum Net Data Upstream</b>	Maximum upstream data rate desired by the operator for this local loop, in Kbps.	<b>detail</b>
<b>Maximum Net Data Downstream</b>	Maximum downstream data rate desired by the operator for this local loop, in Kbps.	<b>detail</b>
<b>Attainable Net Data Upstream</b>	Maximum attainable upstream data rate for this local loop, in Kbps.	<b>detail</b>
<b>Attainable Net Data Downstream</b>	Maximum attainable downstream data rate for this local loop, in Kbps.	<b>detail</b>
<b>Minimum Low Power Data Downstream</b>	Minimum downstream data rate desired by the operator for this local loop in low power state, in Kbps.	<b>detail</b>
<b>Minimum Low Power Data Upstream</b>	Minimum upstream data rate desired by the operator for this local loop in low power state, in Kbps.	<b>detail</b>
<b>Maximum Interleave Delay Downstream</b>	Maximum interleaving delay for downstream data, in milliseconds.	<b>detail</b>
<b>Maximum Interleave Delay Upstream</b>	Maximum interleaving delay for upstream data, in milliseconds.	<b>detail</b>
<b>Actual Interleave Delay Downstream</b>	Actual interleaving delay for downstream data, in milliseconds.	<b>detail</b>
<b>Actual Interleave Delay Upstream</b>	Actual interleaving delay for upstream data, in milliseconds.	<b>detail</b>



## Sample Output

### show ancp subscriber

```
user@host> show ancp subscriber
```

Loop Identifier Rate Neighbor	DSL Line State	Tech Type	Access Type	Interface Kbps
**circuit 101 203.0.113.13	Idle	DSL	ADSL1 ----	32
**circuit 102 203.0.113.13	Idle	DSL	ADSL1 ----	32
circuit 301 203.0.113.15	Showtime	DSL	ADSL1 ----	32
circuit 302 203.0.113.15	Showtime	DSL	ADSL1 ----	32

### show ancp subscriber (After ancpd Restart)

```
user@host> show ancp subscriber
```

Loop Identifier Rate Neighbor	DSL Line State	Tech Type	Access Type	Interface Kbps
o circuit 201	Showtime	DSL	ADSL1 ----	222222
o circuit 202	Showtime	DSL	ADSL1 ----	222222

### show ancp subscriber brief

```
user@host> show ancp subscriber brief
```

Loop Identifier	Type	Interface	Rate Kbps	Neighbor
port-1-10	VDSL2	set-ge-10410	64	203.0.113.102
port-1-11	VDSL2	set-ge-10411	64	203.0.113.111
port-2-10	VDSL2	ge-1/0/4.12	64	203.0.113.112
port-2-11	VDSL2	ge-1/0/4.13	64	203.0.113.113

### show ancp subscriber detail

```
user@host> show ancp subscriber detail
```

```
Subscriber Information
* Access Loop Circuit Identifier : circuit 101
  Neighbor IP Address           : 203.0.113.13
  Aggregate Circuit Identifier Binary : 0/0
  Tech Type                     : DSL
  Access Type                   : ADSL1
  DSL Line State                : Idle
  DSL Line Data Link            : Data link 2
  DSL Line Encapsulation        : N/A
  DSL Line Encapsulation Payload : N/A
```

```

Interface Type           : N/A
Interface                : ----
Actual Net Data Upstream : 32
Actual Net Data Downstream : 32
Minimum Net Data Upstream : 0
Minimum Net Data Downstream : 0
Maximum Net Data Upstream : 0
Maximum Net Data Downstream : 0
Attainable Net Data Upstream : 1024
Attainable Net Data Downstream : 8192
Minimum Low Power Data Downstream : 32
Minimum Low Power Data Upstream : 32
Maximum Interleave Delay Downstream : 20
Maximum Interleave Delay Upstream : 20
Actual Interleave Delay Downstream : 20
Actual Interleave Delay Upstream : 20
* Access Loop Circuit Identifier: circuit 102
  Neighbor IP Address      : 213.0.113.13
  Aggregate Circuit Identifier Binary : 0/0
  Tech Type                : DSL
  Access Type              : ADSL1
  DSL Line State           : Idle
  DSL Line Data Link       : Data link 2
  DSL Line Encapsulation   : N/A
  DSL Line Encapsulation Payload : N/A
  Interface Type          : N/A
  Interface                : ----
  Actual Net Data Upstream : 32
  Actual Net Data Downstream : 32
  Minimum Net Data Upstream : 0
  Minimum Net Data Downstream : 0
  Maximum Net Data Upstream : 0
  Maximum Net Data Downstream : 0
  Attainable Net Data Upstream : 1024
  Attainable Net Data Downstream : 8192
  Minimum Low Power Data Downstream : 32
  Minimum Low Power Data Upstream : 32
  Maximum Interleave Delay Downstream : 20
  Maximum Interleave Delay Upstream : 20
  Actual Interleave Delay Downstream : 20
  Actual Interleave Delay Upstream : 20
...

```

### show ancpc subscriber access-aggregation-circuit-id detail

```
user@host> show ancpc subscriber access-aggregation-circuit-id "#TEST-DPU-C-100" detail
```

```

Subscriber Information
* Access Loop Circuit Identifier : circuit 201
  Neighbor IP Address      : 192.0.2.1
  Access Loop Remote Identifier : remote 123
  Aggregate Circuit Identifier : #TEST-DPU-C-100
  Aggregate Circuit Identifier Binary : 50
  Tech Type               : DSL
  Interface Type          : interface
  Interface               : ge-1/0/0.3221225475
  Actual Net Data Upstream : 1024
  Actual Net Data Downstream : 2048
  Maximum Net Data Upstream : 0
  Maximum Net Data Downstream : 0

```

```
* Access Loop Circuit Identifier : circuit 202
  Neighbor IP Address           : 192.0.2.1
  Access Loop Remote Identifier : remote 185
  Aggregate Circuit Identifier   : #TEST-DPU-C-100
  Aggregate Circuit Identifier Binary : 50
  Tech Type:                   : DSL
  Interface Type               : interface
  Interface                    : ge-1/0/0.3221225476
  Actual Net Data Upstream     : 1024
  Actual Net Data Downstream   : 2048
  Maximum Net Data Upstream    : 0
  Maximum Net Data Downstream  : 0
```

### show ancp subscriber identifier identifier-string detail

```
user@host> show ancp subscriber identifier port-1-11 detail
```

```
Access Loop Identifier : port-1-11
  Neighbor IP Address           : 203.0.113.112
  Aggregate Circuit Identifier Binary : 0/0
  DSL Type                     : DSL 0
  Interface Type               : interface-set
  Interface                    : set-ge-10411
  DSL Line State               : Show Time
  Actual Net Data Upstream     : 64
  Actual Net Data Downstream   : 64
  DSL Line Data Link           : AAL5
  DSL Line Encapsulation       : N/A
  DSL Line Encapsulation Payload : N/A
  Minimum Net Data Upstream    : 64
  Minimum Net Data Downstream  : 64
  Maximum Net Data Upstream    : 64
  Maximum Net Data Downstream  : 64
  Attainable Net Data Upstream : 64
  Attainable Net Data Downstream : 64
  Minimum Low Power Data Downstream : 64
  Minimum Low Power Data Upstream : 64
  Maximum Interleave Delay Downstream : 50
  Maximum Interleave Delay Upstream : 50
  Actual Interleave Delay Downstream : 50
  Actual Interleave Delay Upstream : 50
```

## show bfd subscriber session

<b>Syntax</b>	<code>show bfd subscriber session</code> <code>&lt;brief   detail   extensive   summary&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 15.1 on MX Series routers.
<b>Description</b>	Display information about active Bidirectional Forwarding Detection (BFD) subscriber sessions.
<b>Options</b>	<b>none</b> —(Same as <b>brief</b> ) Display information about active BFD subscriber sessions. <b>brief   detail   extensive   summary</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><i>clear bfd session</i></li> <li><i>Examples: Configuring BFD for Static Routes</i></li> </ul>
<b>List of Sample Output</b>	<a href="#">show bfd subscriber session on page 702</a> <a href="#">show bfd subscriber session brief on page 702</a> <a href="#">show bfd subscriber session detail on page 703</a> <a href="#">show bfd subscriber session extensive on page 703</a> <a href="#">show bfd subscriber session summary on page 704</a>
<b>Output Fields</b>	Table 32 on page 700 describes the output fields for the <b>show bfd subscriber session</b> command. Output fields are listed in the approximate order in which they appear.

Table 32: show bfd subscriber session Output Fields

Field Name	Field Description	Level of Output
Address	IP Address on which the BFD subscriber session is active.	<b>brief detail extensive</b> none
State	State of the BFD subscriber session: <b>Up</b> , <b>Down</b> , <b>Init</b> (initializing), or <b>Failing</b> .	<b>brief detail extensive</b> none
Interface	Interface on which the BFD subscriber session is active.	<b>brief detail extensive</b> none
Detect Time	Negotiated time interval, in seconds, used to detect BFD control packets.	<b>brief detail extensive</b> none
Transmit Interval	Time interval, in seconds, used by the transmitting system to send BFD control packets.	<b>brief detail extensive</b> none

Table 32: show bfd subscriber session Output Fields (continued)

Field Name	Field Description	Level of Output
Multiplier	Negotiated multiplier by which the time interval is multiplied to determine the detection time for the transmitting system.	detail extensive
Session up time	How long a BFD subscriber session has been established in <i>hh:mm:ss</i> .	detail extensive
Client	Protocol for which the BFD subscriber session is active: <b>DHCP</b> , <b>ISIS</b> , <b>OSPF</b> , or <b>Static</b> .	detail extensive
TX interval	Time interval, in seconds, used by the host system to transmit BFD control packets.	detail extensive
RX interval	Time interval, in seconds, used by the host system to receive BFD control packets.	detail extensive
Local diagnostic	Local diagnostic information about failing BFD subscriber sessions.	detail extensive
Remote diagnostic	Remote diagnostic information about failing BFD subscriber sessions.	detail extensive
Remote state	Indication that the remote system's BFD packets have been received and whether the remote system is receiving transmitted control packets.	detail extensive
Version	BFD version: <b>0</b> or <b>1</b> .	extensive
Replicated	Indication that nonstop routing or graceful Routing Engine switchover is configured and the BFD subscriber session has been replicated to the backup Routing Engine.	detail extensive
Min async interval	Minimum amount of time, in seconds, between asynchronous control packet transmissions across the BFD subscriber session.	extensive
Min slow interval	Minimum amount of time, in seconds, between synchronous control packet transmissions across the BFD subscriber session.	extensive
Adaptive async TX interval	Transmission interval being used because of adaptation.	extensive
Local min TX interval	Minimum amount of time, in seconds, between control packet transmissions on the local system.	extensive
Local min RX interval	Minimum amount of time, in seconds, between control packet detections on the local system.	extensive
Remote min TX interval	Minimum amount of time, in seconds, between control packet transmissions on the remote system.	extensive
Remote min RX interval	Minimum amount of time, in seconds, between control packet detections on the remote system.	extensive

Table 32: show bfd subscriber session Output Fields (continued)

Field Name	Field Description	Level of Output
Local discriminator	Authentication code used by the local system to identify that BFD subscriber session.	extensive
Remote discriminator	Authentication code used by the remote system to identify that BFD subscriber session.	extensive
Echo mode	Information about the state of echo transmissions on the BFD subscriber session, such as disabled or inactive.	extensive
Remote is control-plane independent	Indication that the BFD subscriber session on the remote peer is running on its Packet Forwarding Engine. In this case, when the remote node undergoes a graceful restart, the local peer can help the remote peer with the graceful restart.  The following BFD subscriber sessions are not distributed to the Packet Forwarding Engine: tunnel-encapsulated sessions, and sessions over integrated routing and bridging (IRB) interfaces.	extensive
Session ID	BFD subscriber session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).	detail extensive
sessions	Total number of active BFD subscriber sessions.	All levels
clients	Total number of clients that are hosting active BFD subscriber sessions.	All levels
Cumulative transmit rate	Total number of BFD control packets transmitted per second on all active sessions.	detail extensive
Cumulative receive rate	Total number of BFD control packets received per second on all active sessions.	detail extensive

## Sample Output

### show bfd subscriber session

```
user@host> show bfd subscriber session
```

Address	State	Interface	Detect	Transmit	Multiplier
			Time	Interval	
203.0.113.2	Up	ae0.0	90.000	30.000	3
203.0.113.6	Up	ae0.1	90.00	30.000	3
203.0.113.10	Up	ae0.2	90.000	30.000	3
203.0.113.14	Up	ae0.3	90.000	30.000	3
203.0.113.18	Up	ae0.4	90.000	30.000	3

```
20 sessions, 20 clients
```

### show bfd subscriber session brief

The output for the **show bfd subscriber session brief** command is identical to that for the **show bfd subscriber session** command.

## show bfd subscriber session detail

```
user@host> show bfd subscriber session detail
```

Address	State	Interface	Transmit		Multiplier
			Detect Time	Interval	
203.0.113.2	Up	ae0.0	90.000	30.000	3
Client DHCP, TX interval 30.000, RX interval 30.000, multiplier 3					
Session up time 09:11:50					
Local diagnostic None, remote diagnostic NbrSignal					
Remote state Up, version 1					
Replicated					
203.0.113.6	Up	ae0.1	90.000	30.000	3
Client DHCP, TX interval 30.000, RX interval 30.000					
Session up time 09:11:50					
Local diagnostic None, remote diagnostic NbrSignal					
Remote state Up, version 1					

20 sessions, 20 clients  
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

## show bfd subscriber session extensive

```
user@host> show bfd subscriber session extensive
```

Address	State	Interface	Detect	Transmit	Multiplier
			Time	Interval	
203.0.113.2	Up	ae0.0	90.000	30.000	3
Client DHCP, TX interval 30.000, RX interval 30.000					
Session up time 09:11:50					
Local diagnostic None, remote diagnostic NbrSignal					
Remote state Up, version 1					
Replicated					
Min async interval 30.000, min slow interval 30.000					
Adaptive async TX interval 30.000, RX interval 30.000					
Local min TX interval 30.000, minimum RX interval 30.000, multiplier 3					
Remote min TX interval 30.000, min RX interval 30.000, multiplier 3					
Local discriminator 20, remote discriminator 16					
Echo mode disabled/inactive					
Remote is control-plane independent					
Session ID: 0x1					
203.0.113.6	Up	ae0.1	90.000	30.000	3
Client DHCP, TX interval 30.000, RX interval 30.000					
Session up time 09:11:50					
Local diagnostic None, remote diagnostic NbrSignal					
Remote state Up, version 1					
Replicated					
Min async interval 30.000, min slow interval 30.000					
Adaptive async TX interval 30.000, RX interval 30.000					
Local min TX interval 30.000, minimum RX interval 30.000, multiplier 3					
Remote min TX interval 30.000, min RX interval 30.000, multiplier 3					
Local discriminator 21, remote discriminator 17					
Echo mode disabled/inactive					
Remote is control-plane independent					
Session ID: 0x2					

### show bfd subscriber session summary

```
user@host> show bfd subscriber session summary
```

```
20 sessions, 20 clients
```

```
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps
```



## show dynamic-profile session

**Syntax** show dynamic-profile session  
 <client-id *client-id*>  
 <profile-name *profile-name*>  
 <service-id *service-id*>

**Release Information** Command introduced in Junos OS Release 13.3.

**Description** Display dynamic profile (client or service) information for all subscribers or for subscribers specified by client ID or service session ID. You can filter the output by also specifying a dynamic profile.



### NOTE:

- The output does not display the variable stanzas defined in the dynamic profile configuration.
- The variables in the profile configuration are replaced with subscriber specific values.
- If the conditional variable in the dynamic profile is evaluated as NULL, the subscriber value for the variable is displayed as NONE in the command output.
- The variable is also displayed as NONE when the variable (any variable and not necessarily conditional) in the dynamic profile has no value associated with it.
- The format in which the configuration is displayed looks similar, but not exactly the same as the format of the `show configuration dynamic-profiles` command.

**Options** **client-id *client-id***—Display dynamic profile information for subscribers associated with the specified client.

**profile-name *profile-name***—(Optional) Display dynamic profile information for the specified subscriber or service profile.

**service-id *service-id***—Display dynamic profile information for subscribers associated with the specified service session.

**Required Privilege Level** view

**List of Sample Output** [show dynamic-profile session client-id \(Client ID\) on page 706](#)

[show dynamic-profile session client-id profile-name \(Client ID and Dynamic Profile\) on page 708](#)

[show dynamic-profile session service-id \(Service Session\) on page 708](#)

**Output Fields** This command displays the dynamic client or service profile configuration for each subscriber.

## Sample Output

[show dynamic-profile session client-id \(Client ID\)](#)

```
user@host>show dynamic-profile session client-id 20
```

```
pppoe {
  interfaces {
    pp0 {
      unit 1073741831 {
        ppp-options {
          chap;
          pap;
        }
        pppoe-options {
          underlying-interface ge-2/0/0.0;
          server;
        }
        family {
          inet {
            unnumbered-address lo0.0;
          }
        }
      }
    }
  }
}
class-of-service {
  traffic-control-profiles {
    tcp1 {
      scheduler-map smap1_UID1024;
      shaping-rate 100m;
    }
  }
  interfaces {
    pp0 {
      unit 1073741831 {
        output-traffic-control-profile tcp1;
      }
    }
  }
  scheduler-maps {
    smap1_UID1024 {
      forwarding-class best-effort scheduler sch1_UID1023;
    }
  }
  schedulers {
    sch1_UID1023 {
      transmit-rate percent 40;
      buffer-size percent 40;
      priority low;
    }
  }
}
```

```

    }
  }
  filter-service {
    interfaces {
      pp0 {
        unit 1073741831 {
          family {
            inet {
              filter {
                input input-filter_UID1026 precedence 50;
                output output-filter_UID1027 precedence 50;
              }
            }
          }
        }
      }
    }
  }
  firewall {
    family {
      inet {
        filter input-filter_UID1026 {
          interface-specific;
          term t1 {
            then {
              policer policer1_UID1025;
              service-accounting;
            }
          }
          term rest {
            then accept;
          }
        }
        filter output-filter_UID1027 {
          interface-specific;
          term rest {
            then accept;
          }
        }
      }
    }
    policer policer1_UID1025 {
      if-exceeding {
        bandwidth-limit 1m;
        burst-size-limit 15k;
      }
      then discard;
    }
  }
}
cos-service {
  class-of-service {
    scheduler-maps {
      smap2_UID1029 {
        forwarding-class assured-forwarding scheduler sch2_UID1028;
      }
    }
    schedulers {
      sch2_UID1028 {
        transmit-rate percent 60;
        buffer-size percent 60;
      }
    }
  }
}

```

```

        priority high;
    }
}
}
bsimmons
}

```

### show dynamic-profile session client-id profile-name (Client ID and Dynamic Profile)

```

user@host>show dynamic-profile session client-id 20 profile-name cos-service

cos-service {
  class-of-service {
    scheduler-maps {
      smap2_UID1029 {
        forwarding-class assured-forwarding scheduler sch2_UID1028;
      }
    }
    schedulers {
      sch2_UID1028 {
        transmit-rate percent 60;
        buffer-size percent 60;
        priority high;
      }
    }
  }
}

```

### show dynamic-profile session service-id (Service Session)

```

user@host>show dynamic-profile session service-id 21

filter-service {
  interfaces {
    pp0 {
      unit 1073741831 {
        family {
          inet {
            filter {
              input input-filter_UID1026 precedence 50;
              output output-filter_UID1027 precedence 50;
            }
          }
        }
      }
    }
  }
}
firewall {
  family {
    inet {
      filter input-filter_UID1026 {
        interface-specific;
        term t1 {
          then {
            policer policer1_UID1025;
            service-accounting;
          }
        }
      }
    }
  }
}

```



## show services fixed-wireless-access statistics

<b>Syntax</b>	show services fixed-wireless-access statistics
<b>Release Information</b>	Command introduced in Junos OS Release 19.2R1.
<b>Description</b>	Display statistics for fixed wireless access messages. The statistics are collected on the master Routing Engine because that is where the UDP port is maintained.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Fixed Wireless Access Networks on page 311</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show services fixed-wireless-access statistics on page 711</a>
<b>Output Fields</b>	<a href="#">Table 33 on page 710</a> lists the output fields for the <b>show system subscriber-management resiliency</b> command. Output fields are listed in the approximate order in which they appear.

*Table 33: show system subscriber-management resiliency Output*

Field Name	Field Description
<b>GTPv2 Message</b>	<p>Message type supported by the General Packet Radio Service (GPRS) Tunnelling Protocol, version 2.</p> <ul style="list-style-type: none"> <li>• <b>Create Session</b>—When the SAEGW receives a Create Session request message from the MME, it creates the session. The SAEGW then sends a Create Session response to the MME with the L-TEID-C and L-TEID-U values for the session.</li> <li>• <b>Modify Bearer</b>—When the SAEGW receives a Modify Bearer request message from the MME, it creates the dynamic pseudowire interface that receives the GTP-U encapsulated data packets from the UE by means of the eNodeB. When the dynamic pseudowire interface is created, the SAEGW sends a Modify Bearer response message to the MME.</li> <li>• <b>Delete Session</b>—When the SAEGW receives a Delete Session request message from the MME to delete the default bearer for a subscriber, the SAEGW initiates a subscriber logout. When the logout completes, the SAEGW sends a Delete Session response to the MME.</li> <li>• <b>Delete Bearer</b>—When the SAEGW receives a Delete Bearer request message from the MME or the eNodeB to delete a specific bearer context, the SAEGW deletes the specified context and sends a Delete Bearer response to the appropriate entity.</li> <li>• <b>Echo</b>—The Echo request/response messages are path management messages. Some networks use them as a keepalive mechanism to determine whether the path to the SAEGW is still alive and available. The SAEGW does not originate any Echo requests, but it does send an Echo response to any Echo request that it receives.</li> </ul>
<b>Request Rcv</b>	Number of requests received on the BNG.
<b>Response Xmit</b>	Number of response transmitted by the BNG.

## Sample Output

### show services fixed-wireless-access statistics

```
user@host> show services fixed-wireless-access statistics
```

GTPv2 Message	Request Rcv	Response Xmit
Create Session	650	0
Modify Bearer	650	0
Delete Session	327	0
Delete Bearer	0	0
Error Indication	0	0
Echo	0	0

## show interfaces ps0 (Pseudowire Subscriber Interfaces)

<b>Syntax</b>	<code>show interfaces ps0</code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced at Junos OS Release 13.1.
<b>Description</b>	Display status information about the pseudowire subscriber interface.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Pseudowire Subscriber Logical Interfaces Overview on page 274</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show interfaces ps0 on page 714</a> <a href="#">show interfaces ps0 extensive on page 715</a>
<b>Output Fields</b>	<a href="#">Table 34 on page 712</a> lists the output fields for the <b>show interfaces ps0</b> command. Output fields are listed in the approximate order in which they appear.

Table 34: show interfaces ps0 Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	<b>brief detail extensive</b> none
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	<b>brief detail extensive</b> none
<b>Interface index</b>	Physical interface index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive</b> none
<b>Type</b>	Physical interface type (Software-Pseudo).	<b>brief detail extensive</b> none
<b>Link-level type</b>	Encapsulation being used on the physical interface.	<b>brief detail extensive</b>
<b>MTU</b>	MTU size on the physical interface.	<b>brief detail extensive</b>
<b>Clocking</b>	Reference clock source. It can be <b>Internal</b> or <b>External</b> .	<b>brief detail extensive</b>
<b>Speed</b>	Speed at which the interface is running.	<b>brief detail extensive</b>



Table 34: show interfaces ps0 Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under <i>Common Output Fields Description</i> .	<b>brief detail extensive</b> none
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under <i>Common Output Fields Description</i> .	<b>brief detail extensive</b> none
<b>Current address</b>	Configured MAC address.	<b>detail extensive</b> none
<b>Hardware address</b>	MAC address of the hardware.	<b>detail extensive</b> none
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up or up to down. The format is Last flapped: <i>year-month-day hours:minutes:seconds: timezone (hours:minutes:seconds ago)</i> . or Never. For example, Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago).	<b>detail extensive</b> none
<b>input packets</b>	Number of packets received on the logical interface.	<b>detail extensive</b> none
<b>output packets</b>	Number of packets transmitted on the logical interface.	<b>detail extensive</b> none
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	<b>brief detail extensive</b> none
<b>Index</b>	Logical interface index number (which reflects its initialization sequence).	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the "Logical Interface Flags" section under <i>Common Output Fields Description</i> .	<b>brief detail extensive</b> none
<b>Encapsulation</b>	Type of encapsulation configured on the logical interface.	<b>brief extensive</b> none
<b>Traffic statistics</b>	Total number of bytes and packets received and transmitted on the logical interface. These statistics are the sum of the local and transit statistics. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. This counter usually takes less than 1 second to stabilize.	<b>detail extensive</b>

Table 34: show interfaces ps0 Output Fields (continued)

Field Name	Field Description	Level of Output
<b>IPv6 transit statistics</b>	<p>Number of IPv6 transit bytes and packets received and transmitted on the logical interface if IPv6 statistics tracking is enabled.</p> <p><b>NOTE:</b> The packet and byte counts in these fields include traffic that is dropped and does not leave the router.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Number of bytes received on the interface.</li> <li>• <b>Output bytes</b>—Number of bytes transmitted on the interface.</li> <li>• <b>Input packets</b>—Number of packets received on the interface.</li> <li>• <b>Output packets</b>—Number of packets transmitted on the interface.</li> </ul>	<b>detail extensive</b>
<b>Local statistics</b>	Statistics for traffic received from and transmitted to the Routing Engine. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. This counter usually takes less than 1 second to stabilize.	<b>detail extensive</b>
<b>Transit statistics</b>	<p>Statistics for traffic transiting the router. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. This counter usually takes less than 1 second to stabilize.</p> <p><b>NOTE:</b> The packet and byte counts in these fields include traffic that is dropped and does not leave the router.</p>	<b>detail extensive</b>
<b>Protocol</b>	Protocol family configured on the logical interface.	<b>detail extensive none</b>
<b>MTU</b>	MTU size on the logical interface.	<b>detail extensive none</b>
<b>Flags</b>	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Donor interface</b>	(Unnumbered Ethernet) Interface from which an unnumbered Ethernet interface borrows an IPv4 address.	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about the addresses configured for the protocol family. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive terse none</b>
<b>Broadcast</b>	Broadcast address.	<b>detail extensive none</b>

## Sample Output

### show interfaces ps0

```
user@host> show interfaces ps0
```

```

Physical interface: ps0, Enabled, Physical link is Up
Interface index: 166, SNMP ifIndex: 658
Type: Software-Pseudo, Link-level type: 90, MTU: 1518, Clocking: 1, Speed: 800mbps

Device flags : Present Running
Interface flags: Point-To-Point Internal: 0x4000
Current address: 00:00:5E:00:53:4a, Hardware address: 00:00:5E:00:53:4a
Last flapped : Never
Input packets : 0
Output packets: 0

Logical interface ps0.0 (Index 74) (SNMP ifIndex 656)
Flags: Point-To-Point 0x4000 Encapsulation: Ethernet-CCC
Input packets : 482
Output packets: 0
Protocol ccc, MTU: 1518
Flags: Is-Primary

Logical interface ps0.1 (Index 78) (SNMP ifIndex 665)
Flags: Point-To-Point 0x4000 VLAN-Tag [ 0x8100.100 ] Encapsulation: ENET2
Input packets : 0
Output packets: 482
Protocol inet, MTU: 1500
Flags: Sendbcast-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
Destination: 203.0.113.0/24, Local: 203.0.113.1, Broadcast: 203.0.113.255

Logical interface ps0.32767 (Index 75) (SNMP ifIndex 692)
Flags: Point-To-Point 0x4000 VLAN-Tag [ 0x0000.0 ] Encapsulation: ENET2
Input packets : 0
Output packets: 0

```

### show interfaces ps0 extensive

```
user@host> show interfaces ps0.1 extensive
```

```

Logical interface ps0.1 (Index 389) (SNMP ifIndex 0) (Generation 199)
Flags: Up 0x4000 VLAN-Tag [ 0x8100.100 ] Encapsulation: ENET2
Traffic statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
IPv6 transit statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Local statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Transit statistics:
  Input bytes : 0 0 bps
  Output bytes : 0 0 bps
  Input packets: 0 0 pps
  Output packets: 0 0 pps
IPv6 transit statistics:
  Input bytes : 0

```

```
Output bytes : 0
Input packets: 0
Output packets: 0
Protocol inet, MTU: 1500, Generation: 194, Route table: 0
Flags: Sendbcst-pkt-to-re, Unnumbered
Donor interface: lo0.0 (Index 322)
Addresses, Flags: Primary Is-Default Is-Primary
Destination: Unspecified, Local: 203.0.113.144, Broadcast: Unspecified,
Generation: 138
Protocol inet6, MTU: 1500, Generation: 198, Route table: 0
Flags: Unnumbered
Donor interface: lo0.0 (Index 322)
Destination: Unspecified, Local: 2001:db8::e187
Generation: 157
```

## show interfaces redundancy

**Syntax** `show interfaces redundancy  
<brief | detail>`

**Release Information** Command introduced before Junos OS Release 7.4.  
**detail** option added in Junos OS Release 10.0.

**Description** (M Series, T Series, and MX Series routers only) Display general information about redundancy for aggregated multiservices (AMS) interfaces configured for warm standby, adaptive services and link services intelligent queuing (IQ) interfaces, aggregated Ethernet interfaces redundancy, and LNS aggregated inline service interfaces.



**NOTE:** When you run the `show interfaces redundancy` command on an MX80 router, it displays the error message, `error:the redundancy-interface-process subsystem is not running`. This is because an MX80 router does not have a redundant FPC and does not support link protection.

**Options** `brief | detail`—(Optional) Display the specified level of output.

**Required Privilege Level** view

**List of Sample Output** [show interfaces redundancy on page 718](#)  
[show interfaces redundancy \(Aggregated Ethernet\) on page 718](#)  
[show interfaces redundancy \(Aggregated Inline Service Interface\) on page 718](#)  
[show interfaces redundancy detail on page 719](#)

**Output Fields** [Table 35 on page 717](#) lists the output fields for the `show interfaces redundancy` command. Output fields are listed in the approximate order in which they appear.

*Table 35: show interfaces redundancy Output Fields*

Field Name	Field Description	Level of Output
<b>Interface</b>	Name of the AMS interface, redundant adaptive services, link services IQ interfaces, aggregated Ethernet interfaces, or LNS aggregated inline service interfaces.	All levels
<b>State</b>	State of the redundant interface: <b>Not present</b> , <b>On primary</b> , <b>On secondary</b> , or <b>Waiting for primary MS PIC</b> .	All levels

Table 35: show interfaces redundancy Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Last Change</b>	Timestamp for the last change in status. This value resets after a master Routing Engine switchover event if any of the following conditions is met: <ul style="list-style-type: none"> <li>• GRES is not configured on the router.</li> <li>• The <b>rlsq</b> interface is configured without the <b>hot-standby</b> or <b>warm-standby</b> statements and the backup <b>lsq</b> interface was active before the switchover.</li> <li>• No logical interfaces are configured or all of the configured logical interfaces are down at the time of the switchover.</li> </ul>	All levels
<b>Primary</b>	Name of the interface configured to be the primary interface.	All levels
<b>Secondary</b>	Name of the interface configured to be the backup interface.	All levels
<b>Current Status</b>	Physical status of the primary and secondary interfaces.	All levels
<b>Mode</b>	Standby mode.	<b>detail</b>

## Sample Output

### show interfaces redundancy

```
user@host> show interfaces redundancy
```

Interface	State	Last change	Primary	Secondary	Current status
rsp0	Not present		sp-1/0/0	sp-0/2/0	both down
rsp1	On secondary	1d 23:56	sp-1/2/0	sp-0/3/0	primary down
rsp2	On primary	10:10:27	sp-1/3/0	sp-0/2/0	secondary down
rlsq0	On primary	00:06:24	lsq-0/3/0	lsq-1/0/0	both up
ams0	On primary	00:39:51	mams-5/0/0	mams-5/1/0	both up

### show interfaces redundancy (Aggregated Ethernet)

```
user@host> show interfaces redundancy
```

Interface	State	Last change	Primary	Secondary	Current status
rlsq0	On secondary	00:56:12	lsq-4/0/0	lsq-3/0/0	both up
ae0					
ae1					
ae2					
ae3					
ae4					

### show interfaces redundancy (Aggregated Inline Service Interface)

```
user@host> show interfaces redundancy asi0
```

Interface	State	Last change	Primary	Secondary	Current status
asi0	On primary	00:00:09	si-1/0/0	si-0/0/0	both up

### show interfaces redundancy detail

```
user@host> show interfaces redundancy detail
```

```
Interface      : rlsq0
State          : On primary
Last change    : 00:45:47
Primary        : lsq-0/2/0
Secondary      : lsq-1/2/0
Current status : both up
Mode           : hot-standby
```

```
Interface      : rlsq0:0
State          : On primary
Last change    : 00:45:46
Primary        : lsq-0/2/0:0
Secondary      : lsq-1/2/0:0
Current status : both up
Mode           : warm-standby
```

```
Interface      : asi0
State          : On primary
Last change    : 00:03:42
Primary        : si-1/0/0
Secondary      : si-0/0/0
Mode           : hot-standby
Current status : both up
```

```
Interface      :ams0
State : On primary
Last change : 00:39:52
Primary : mams-5/0/0
Secondary : mams-5/1/0
Mode : warm-standby
Current status : both up
Replication state : Disconnected
```

## show ppp interface

<b>Syntax</b>	<code>show ppp interface <i>interface-name</i></code> <code>&lt;extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Display information about PPP interfaces.
<b>Options</b>	<i>interface-name</i> —Name of a logical interface.  <b>extensive   terse</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show ppp interface on page 728</a> <a href="#">show ppp interface extensive on page 728</a> <a href="#">show ppp interface terse on page 728</a>
<b>Output Fields</b>	<a href="#">Table 36 on page 720</a> lists the output fields for the <b>show ppp interface</b> command. Output fields are listed in the approximate order in which they appear.

Table 36: show ppp interface Output Fields

Field Name	Field Description	Level of Output
<b>Session</b>	Name of the logical interface on which the session is running.	All levels
<b>Type</b>	Session type: PPP.	All levels
<b>Phase</b>	PPP process phase: <b>Authenticate</b> , <b>Pending</b> , <b>Establish</b> , <b>LCP</b> , <b>Network</b> , <b>Disabled</b> , and <b>Tunneled</b> .	All levels
<b>Session flags</b>	Special conditions present in the session: <b>Bundled</b> , <b>TCC</b> , <b>No-keepalives</b> , <b>Looped</b> , <b>Monitored</b> , and <b>NCP-only</b> .	All levels
<b>protocol State</b>	Protocol state information. See specific protocol state fields for information.	None specified
<b>AUTHENTICATION</b>	Challenge-Handshake Authentication Protocol (CHAP) authentication state information or Password Authentication Protocol (PAP) state information. See the <b>Authentication</b> field description for further information.	None specified



Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Keepalive settings</b>	<p>Keepalive settings for the PPP sessions on the L2TP network server (LNS). LNS-based PPP sessions are supported only on service interfaces (si).</p> <ul style="list-style-type: none"> <li>• <b>Interval</b>—Time in seconds between successive keepalive requests. Keepalive aging timeout is calculated as a product of the <b>interval</b> and <b>Down-count</b> values. If the keepalive aging timeout is greater than 180 seconds, the keepalive packets are handled by the Routing Engine. If the aging timeout is less than or equal to 180 seconds, the packets are handled by the Packet Forwarding Engine.</li> <li>• <b>Up-count</b>—The number of keepalive packets a destination must receive to change a link's status from down to up.</li> <li>• <b>Down-count</b>—The number of keepalive packets a destination must fail to receive before the network takes down a link.</li> </ul>	<b>extensive</b>
<b>Magic-Number validation</b>	<p>Indicates whether the local peer is configured to ignore mismatches between peer magic numbers when the numbers are validated during PPP keepalive (Echo-Request/Echo-Reply) exchanges.</p> <ul style="list-style-type: none"> <li>• <b>Enable</b>—Mismatch detection sends failed Echo-Reply packets to the Routing Engine. If a valid magic number is not received within the configurable keepalive interval, PPP treats this as a keepalive failure and tears down the PPP sessions.</li> <li>• <b>Disable</b>—The Packet Forwarding Engine does not perform a validation check for magic numbers received from remote peers. A mismatch cannot be detected, so receipt of its own magic number or an unexpected value does not trigger notification to the Routing Engine.</li> </ul>	<b>extensive</b>
<b>RE Keepalive statistics</b>	<p>Keepalive statistics for the packets handled by the Routing Engine.</p> <ul style="list-style-type: none"> <li>• <b>LCP echo req Tx</b>—LCP echo requests sent from the Routing Engine.</li> <li>• <b>LCP echo req Rx</b>—LCP echo requests received at the Routing Engine.</li> <li>• <b>LCP echo rep Tx</b>—LCP echo responses sent from the Routing Engine.</li> <li>• <b>LCP echo rep Rx</b>—LCP echo responses received at the Routing Engine.</li> <li>• <b>LCP echo req timeout</b>—Number of keepalive packets where the keepalive aging timer has expired.</li> <li>• <b>LCP Rx echo req Magic Num Failures</b>—LCP echo requests where the magic numbers shared between the PPP peers during LCP negotiation did not match.</li> <li>• <b>LCP Rx echo rep Magic Num Failures</b>—LCP echo responses where the magic numbers shared between the PPP peers during LCP negotiation did not match.</li> </ul>	<b>extensive</b>

Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
LCP	<p><b>LCP information:</b></p> <ul style="list-style-type: none"> <li>• <b>State</b>—LCP protocol state (all platforms except M120 and M320 routers): <ul style="list-style-type: none"> <li>• <b>Ack-rcvd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is not available for traffic.</li> <li>• <b>Opened</b>—Link is administratively available for traffic.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection.</li> </ul> </li> <li>• <b>State</b>—LCP protocol state (M120 and M320 routers): <ul style="list-style-type: none"> <li>• <b>Ack-rcvd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is available (up), but no Open has occurred.</li> <li>• <b>Closing</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> <li>• <b>Opened</b>—Link is administratively available for traffic. A Configure-Ack has been both sent and received.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection. A Configure-Request has been sent but a Configure-Ack has not yet been received.</li> <li>• <b>Starting</b>—An administrative Open has been initiated, but the lower layer is still unavailable (Down).</li> <li>• <b>Stopped</b>—The system is waiting for a Down event after the This-Layer-Finished action, or after sending a Terminate-Ack.</li> <li>• <b>Stopping</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> </ul> </li> <li>• <b>Last started</b>—LCP state start time.</li> <li>• <b>Last completed</b>—LCP state completion time.</li> </ul>	extensive

Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"> <li>• <b>Negotiated options:</b> <ul style="list-style-type: none"> <li>• <b>ACFC</b>—Address and-Control Field Compression. A configuration option that provides a method to negotiate the compression of the Data Link Layer Address and Control fields.</li> <li>• <b>Asynchronous map</b>—Asynchronous control character map. A configuration option used on asynchronous links such as telephone lines to identify control characters that must be replaced by a two-character sequence to prevent them from being interpreted by equipment used to establish the link.</li> <li>• <b>Authentication protocol</b>—Protocol used for authentication. This option provides a method to negotiate the use of a specific protocol for authentication. It requires a peer to authenticate itself before allowing network-layer protocol packets to be exchanged. By default, authentication is not required.</li> <li>• <b>Authentication algorithm</b>—Type of authentication algorithm. The Message Digest algorithm (MD5) is the only algorithm supported.</li> <li>• <b>Endpoint discriminator class</b>—For multilink PPP (MLPPP), a configuration option that identifies the system transmitting the packet. This option advises a system that the peer on this link could be the same as the peer on another existing link.</li> <li>• <b>Magic number</b>—A configuration option that provides a method to detect looped-back links and other data-link layer anomalies. By default, the magic number is not negotiated.</li> <li>• <b>MRU</b>—Maximum receive unit. A configuration option that may be sent to inform the peer that the implementation can receive larger packets, or to request that the peer send smaller packets. The default value is 1500 octets.</li> <li>• <b>MRRU</b>—For multilink PPP, the maximum receive reconstructed unit. A configuration option that specifies the maximum number of octets in the Information fields of reassembled packets.</li> <li>• <b>Multilink header suspendable classes</b>—For MLPPP, an LCP option that advises the peer that the implementation wishes to receive fragments with a format given by the code number, with the maximum number of suspendable classes given.</li> <li>• <b>Multilink header format classes</b>—For MLPPP, an LCP option that advises the peer that the implementation wishes to receive fragments with a format given by the code number.</li> <li>• <b>PFC</b>—Protocol-Field-Compression. A configuration option that provides a method to negotiate the compression of the PPP Protocol field.</li> <li>• <b>short sequence</b>—For MLPPP, an option that advises the peer that the implementation wishes to receive fragments with short, 12-bit sequence numbers.</li> </ul> </li> </ul>	

Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
Authentication	<p>CHAP or PAP authentication state information. For CHAP authentication:</p> <ul style="list-style-type: none"> <li>• <b>Chap-ans-rcvd</b>—Packet was sent from the peer, indicating that the peer received the <b>Chap-resp-sent</b> packet.</li> <li>• <b>Chap-ans-sent</b>—Packet was sent from the authenticator, indicating that the authenticator received the peer's <b>Chap-resp-rcvd</b> packet.</li> <li>• <b>Chap-chal-rcvd</b>—Challenge packet has been received by the peer.</li> <li>• <b>Chap-chal-sent</b>—Challenge packet has been sent by the authenticator to begin the CHAP protocol or has been transmitted at any time during the Network-Layer Protocol (NCP) phase to ensure that the connection has not been altered.</li> <li>• <b>Chap-resp-rcvd</b>—CHAP response packet has been received by the authenticator.</li> <li>• <b>Chap-resp-sent</b>—CHAP response packet has been sent to the authenticator.</li> <li>• <b>Closed</b>—Link is not available for authentication.</li> <li>• <b>Failure</b>—Authenticator compares the response value in the response packet from the peer with its own response value, but the value does not match. Authentication fails.</li> <li>• <b>Success</b>—Authenticator compares the response value in the response packet from the peer with its own response value, and the value matches. Authentication is successful.</li> </ul> <p>For PAP authentication:</p> <ul style="list-style-type: none"> <li>• <b>Pap-resp-sent</b>—PAP response sent to peer (ACK/NACK).</li> <li>• <b>Pap-req-rcvd</b>—PAP request packet received from peer.</li> <li>• <b>Pap-resp-rcvd</b>—PAP response received from the peer (ACK/NACK).</li> <li>• <b>Pap-req-sent</b>—PAP request packet sent to the peer.</li> <li>• <b>Closed</b>—Link is not available for authentication.</li> <li>• <b>Failure</b>—Authenticator compares the response value in the response packet from the peer with its own response value, but the value does not match. Authentication fails.</li> <li>• <b>Success</b>—Authenticator compares the response value in the response packet from the peer with its own response value, and the value matches. Authentication is successful.</li> </ul>	None specified

Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
IPCP	<p>Internet Protocol Control Protocol (IPCP) information.</p> <ul style="list-style-type: none"> <li>• <b>State</b>—(All platforms except M120 and M320 routers) One of the following values: <ul style="list-style-type: none"> <li>• <b>Ack-rcvcd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is not available for traffic.</li> <li>• <b>Opened</b>—Link is administratively available for traffic.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection.</li> </ul> </li> <li>• <b>State</b>—(M120 and M320 routers) One of the following values: <ul style="list-style-type: none"> <li>• <b>Ack-rcvcd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is available (up), but no Open has occurred.</li> <li>• <b>Closing</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> <li>• <b>Opened</b>—Link is administratively available for traffic. A Configure-Ack has been both sent and received.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection. A Configure-Request has been sent but a Configure-Ack has not yet been received.</li> <li>• <b>Starting</b>—An administrative Open has been initiated, but the lower layer is still unavailable (Down).</li> <li>• <b>Stopped</b>—The system is waiting for a Down event after the This-Layer-Finished action, or after sending a Terminate-Ack.</li> <li>• <b>Stopping</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> </ul> </li> <li>• <b>Last started</b>—IPCP state start time.</li> <li>• <b>Last completed</b>—IPCP state authentication completion time.</li> <li>• <b>Negotiated options</b>: <ul style="list-style-type: none"> <li>• <b>compression protocol</b>—Negotiate the use of a specific compression protocol. By default, compression is not enabled.</li> <li>• <b>local address</b>—Desired local address of the sender of a Configure-Request. If all four octets are set to zero, the peer provides the IP address.</li> <li>• <b>primary DNS server</b>—Negotiate with the remote peer to select the address of the primary DNS server to be used on the local end of the link.</li> <li>• <b>primary WINS server</b>—Negotiate with the remote peer to select the address of the primary WINS server to be used on the local end of the link.</li> <li>• <b>remote address</b>—IP address of the remote end of the link in dotted quad notation.</li> <li>• <b>secondary DNS server</b>—Negotiate with the remote peer to select the address of the secondary DNS server to be used on the local end of the link.</li> <li>• <b>secondary WINS server</b>—Negotiate with the remote peer to select the address of the secondary WINS server to be used on the local end of the link.</li> </ul> </li> <li>• <b>Negotiation mode</b>—PPP Network Control Protocol (NCP) negotiation mode configured for IPCP: <b>Active</b> or <b>Passive</b></li> </ul>	extensive

Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
IPV6CP	<p>Internet Protocol version 6 Control Protocol (IPv6CP) information.</p> <ul style="list-style-type: none"> <li>• <b>State</b>—(All platforms except M120 and M320 routers) One of the following values: <ul style="list-style-type: none"> <li>• <b>Ack-rcvcd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is not available for traffic.</li> <li>• <b>Opened</b>—Link is administratively available for traffic.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection.</li> </ul> </li> <li>• <b>State</b>—(M120 and M320 routers) One of the following values: <ul style="list-style-type: none"> <li>• <b>Ack-rcvcd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is available (up), but no Open has occurred.</li> <li>• <b>Closing</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> <li>• <b>Opened</b>—Link is administratively available for traffic. A Configure-Ack has been both sent and received.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection. A Configure-Request has been sent but a Configure-Ack has not yet been received.</li> <li>• <b>Starting</b>—An administrative Open has been initiated, but the lower layer is still unavailable (Down).</li> <li>• <b>Stopped</b>—The system is waiting for a Down event after the This-Layer-Finished action, or after sending a Terminate-Ack.</li> <li>• <b>Stopping</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> </ul> </li> <li>• <b>Last started</b>—IPv6CP state start time.</li> <li>• <b>Last completed</b>—IPv6CP state authentication completion time.</li> <li>• <b>Negotiated options</b>: <ul style="list-style-type: none"> <li>• <b>local interface identifier</b>—Desired local address of the sender of a Configure-Request. If all four octets are set to zero, the peer provides the IP address.</li> <li>• <b>remote interface identifier</b>—IP address of the remote end of the link in dotted quad notation.</li> </ul> </li> <li>• <b>Negotiation mode</b>—PPP Network Control Protocol (NCP) negotiation mode configured for IPv6CP: <b>Active</b> or <b>Passive</b></li> </ul>	extensive

Table 36: show ppp interface Output Fields (continued)

Field Name	Field Description	Level of Output
OSINLCP State	<p>OSI Network Layer Control Protocol (OSINLCP) protocol state information (all platforms except M120 and M320 routers):</p> <ul style="list-style-type: none"> <li>• <b>State:</b> <ul style="list-style-type: none"> <li>• <b>Ack-rcvd</b>—Configure-Request has been sent and Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—Configure-Request and Configure-Ack have both been sent, but Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is not available for traffic.</li> <li>• <b>Opened</b>—Link is administratively available for traffic.</li> <li>• <b>Req-sent</b>—Attempt has been made to configure the connection.</li> </ul> </li> <li>• <b>Last started</b>—OSINLCP state start time.</li> <li>• <b>Last completed</b>—OSINLCP state completion time.</li> </ul>	extensive
TAGCP	<p>TAGCP information.</p> <ul style="list-style-type: none"> <li>• <b>State</b>—(All platforms except M120 and M320 routers) One of the following values: <ul style="list-style-type: none"> <li>• <b>Ack-rcvd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is not available for traffic.</li> <li>• <b>Opened</b>—Link is administratively available for traffic.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection.</li> </ul> </li> <li>• <b>State</b>—(M120 and M320 routers) One of the following values: <ul style="list-style-type: none"> <li>• <b>Ack-rcvd</b>—A Configure-Request has been sent and a Configure-Ack has been received.</li> <li>• <b>Ack-sent</b>—A Configure-Request and a Configure-Ack have both been sent, but a Configure-Ack has not yet been received.</li> <li>• <b>Closed</b>—Link is available (up), but no Open has occurred.</li> <li>• <b>Closing</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> <li>• <b>Opened</b>—Link is administratively available for traffic. A Configure-Ack has been both sent and received.</li> <li>• <b>Req-sent</b>—An attempt has been made to configure the connection. A Configure-Request has been sent but a Configure-Ack has not yet been received.</li> <li>• <b>Starting</b>—An administrative Open has been initiated, but the lower layer is still unavailable (Down).</li> <li>• <b>Stopped</b>—The system is waiting for a Down event after the This-Layer-Finished action, or after sending a Terminate-Ack.</li> <li>• <b>Stopping</b>—A Terminate-Request has been sent but a Terminate-Ack has not yet been received.</li> </ul> </li> <li>• <b>Last started</b>—TAGCP state start time.</li> <li>• <b>Last completed</b>—TAGCP state authentication completion time.</li> </ul>	extensive none

## Sample Output

### show ppp interface

```
user@host> show ppp interface si-1/3/0.0
```

```
Session si-1/3/0.0, Type: PPP, Phase: Authenticate
Session flags: Monitored
LCP State: Opened
AUTHENTICATION: CHAP State: Chap-resp-sent, Chap-ans-sent
IPCP State: Closed, OSINLCP State: Closed
```

### show ppp interface extensive

```
user@host> show ppp interface si-0/0/3.0 extensive
```

```
Session si-0/0/3.0, Type: PPP, Phase: Network
Keepalive settings: Interval 30 seconds, Up-count 1, Down-count 3
                    Magic-Number validation: disable
RE Keepalive statistics:
  LCP echo req Tx      : 657 (last sent 00:50:10 ago)
  LCP echo req Rx      : 0 (last seen: never)
  LCP echo rep Tx      : 0
  LCP echo rep Rx      : 657
  LCP echo req timeout : 0
  LCP Rx echo req Magic Num Failures : 0
  LCP Rx echo rep Magic Num Failures : 0
LCP
  State: Opened
  Last started: 2007-01-29 10:43:50 PST
  Last completed: 2007-01-29 10:43:50 PST
  Negotiated options:
    Authentication protocol: PAP, Magic number: 2341124815, MRU: 4470
Authentication: PAP
  State: Success
  Last started: 2007-01-29 10:43:50 PST
  Last completed: 2007-01-29 10:43:50 PST
IPCP
  State: Opened
  Last started: 2007-01-29 10:43:50 PST
  Last completed: 2007-01-29 10:43:50 PST
  Negotiated options:
    Local address: 203.0.113.21, Remote address: 203.0.113.22
  Negotiation mode: Active
IPV6CP
  State: Opened
  Last started: 2007-01-29 10:43:50 PST
  Last completed: 2007-01-29 10:43:50 PST
  Negotiated options:
    Local interface identifier: 2a0:a522:64:d319, Remote interface identifier: 0:0:0:c
  Negotiation mode: Passive
```

### show ppp interface terse

```
user@host> show ppp interface si-1/3/0 terse
```

Session name	Session type	Session phase	Session flags
si-1/3/0.0	PPP	Authenticate	Monitored





## show ppp statistics

**Syntax**    `show ppp statistics`  
               `<detail>`  
               `<memory>`  
               `<recovery>`

**Release Information**    Command introduced in Junos OS Release 7.5.

**Description**    Display PPP interface statistics information.

**Options**    **detail**—(Optional) Display the detailed statistics.

**memory**—(Optional) Display PPP process memory statistics.

**recovery**—(Optional) Display recovery state of PPP after a GRES or restart. It is safe to force another GRES or restart only when the recovery state indicates the recovery is done.



**NOTE:** When you issue this command option during the recovery process, the command may time out or fail silently rather than display output. Recovery is not complete until the command displays **Recovery state: recovery done**.

**Required Privilege Level**    view

**List of Sample Output**    [show ppp statistics on page 735](#)  
                                   [show ppp statistics detail on page 735](#)  
                                   [show ppp statistics recovery \(Safe to Restart\) on page 736](#)  
                                   [show ppp statistics recovery \(Unsafe to Restart\) on page 736](#)

**Output Fields**    [Table 37 on page 730](#) lists the output fields for the **show ppp statistics** command. Output fields are listed in the approximate order in which they appear.

*Table 37: show ppp statistics Output Fields*

Field Name	Field Description	Level of Output
Total sessions	Number of PPP sessions on an interface.	none <b>detail</b>

Table 37: show ppp statistics Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Sessions in disabled phase</b>	Number of PPP sessions disabled. Number of sessions where the link is either administratively or physically down. Once the PPP process learns from the kernel that Layer 2 is ready to send and receive traffic, it will do a phase transition from disabled to established. When LCP and NCP transitions through states, links transition to the establish phase when terminate packets are exchanged or some other failure, such as authentication or expiration of a timer occurs.	none <b>detail</b>
<b>Sessions in establish phase</b>	Number of PPP sessions in establish phase. In order to establish communications over a point-to-point link, each end of the PPP link must first send LCP packets to configure and test the data link.	none <b>detail</b>
<b>Sessions in authenticate phase</b>	Number of PPP sessions in authenticate phase. Each end of the PPP link must first send LCP packets to configure the data link during the link establishment phase. After the link has been established, PPP provides for an optional authentication phase before proceeding to the Network-Layer Protocol (NLP) phase.	none <b>detail</b>
<b>Sessions in network phase</b>	Number of PPP sessions in the network phase. After a link has been established and optional facilities have been negotiated as needed by the LCP, PPP must send Network Control Protocol (NCP) packets to choose and configure one or more network-layer protocols, such as IP, IPX, or AppleTalk. Once each of the chosen network-layer protocols has been configured, datagrams from each network-layer protocol can be sent over the link.	none <b>detail</b>
<b>Bundles in pending phase</b>	Number of unique bundles to which PPP links are referring.	none <b>detail</b>

Table 37: show ppp statistics Output Fields (continued)

Field Name	Field Description	Level of Output
Type	<p>Type of structure for which memory is allocated.</p> <ul style="list-style-type: none"> <li>• <b>Queued rtsock msgs</b>—Queued route socket messages. When a PPP process is unable to send a route socket message to the kernel (typically because of congestion of the route socket interface), the message is queued for deferred processing.</li> <li>• <b>PPP session</b>—Active PPP session. Stores all the information for a PPP session, such as authentication, sequence number, LCP session, and NCP session information.</li> <li>• <b>Interface address</b>—Interface address associated with a PPP connection. Stores the information about the interface address that PPP obtains from the kernel.</li> <li>• <b>Destination profile</b>—Stores the destination profile information associated with an interface address.</li> <li>• <b>ML link settings</b>—Stores information about an MLPPP link, such as the bundle name and compressed real-time transport protocol (CRTP) settings.</li> <li>• <b>IPCP blocked address</b>—When addresses are blocked in an address pool (for example, when the interface address is within the range of an address pool, it will be implicitly blocked), this structure is used to store the address in the pool.</li> <li>• <b>PPP session trace</b>—A PPP session trace is allocated for record keeping for each session listed at the [set protocols ppp monitor-session] hierarchy level.</li> <li>• <b>IFL redundancy state</b>—Stores redundancy state information needed for high availability (HA) operation.</li> <li>• <b>Protocol family</b>—Stores the information about the protocol family that PPP obtains from the kernel.</li> </ul>	detail

Table 37: show ppp statistics Output Fields (continued)

Field Name	Field Description	Level of Output
Type (continued)	<ul style="list-style-type: none"> <li>• <b>ML bundle settings</b>—Multilink bundle settings. Stores the context information for a MLPPP bundle.</li> <li>• <b>PPP LCP session</b>—PPP Link Control Protocol session, used for establishing, configuring, and testing the data-link connection. Stores the information for an LCP session, such as negotiated options, current state, and statistics.</li> <li>• <b>PPP NCP session</b>—PPP Network Control Protocol (NCP) phase in the PPP link connection process. Stores the information for an NCP session, such as negotiated options, current state, address family, and statistics.</li> <li>• <b>Physical interface</b>—Stores the information about the physical interface that PPP obtains from the kernel.</li> <li>• <b>Access profile</b>—Stores the information found at the [edit access profile] hierarchy level for each profile.</li> <li>• <b>ML wait entry</b>—Created when there are MLPPP links joining a bundle. before its addition to the PPP process. Links are saved here, and when the bundle is added, are properly assigned to the bundle.</li> <li>• <b>Group profile</b>—Stores information set in the PPP stanza of a group profile, such as the primary and secondary Domain Name System (DNS), primary and secondary NDNS, and address pool name.</li> <li>• <b>Profile client</b>—Stores the per-client information of the access profile (information obtained from the [set access profile name client client-name] hierarchy level.</li> <li>• <b>PPP Auth session</b>—PPP authentication session. Stores all the session-specific authentication protocol parameters.</li> <li>• <b>Logical interface</b>—Stores the information about the logical interface that PPP obtains from the kernel.</li> <li>• <b>Non-tagged</b>—Generic catch-all for allocations not of a particular structure type.</li> </ul>	detail

Table 37: show ppp statistics Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Type</b>	<p>If you specify the <b>memory</b> keyword, the following memory statistics are displayed for Ethernet interfaces on M120 and M320 routers.</p> <ul style="list-style-type: none"> <li>• <b>authenticate</b>—Stores information common to all PPP authentication protocols.</li> <li>• <b>linkInterface</b>—Stores information about PPP link interfaces.</li> <li>• <b>pap</b>—Stores information about PPP PAP authentication protocol. Includes authenticator and authenticate state machines.</li> <li>• <b>lcp</b>—PPP Link Control Protocol session. Used for establishing, configuring and testing the data-link connection. Stores information for LCP session, such as negotiated options, state, and statistics.</li> <li>• <b>chap</b>—Stores information about PPP CHAP authentication protocol. Includes authenticator and authenticate state machines.</li> <li>• <b>eapBuffer</b>—Stores runtime authentication information for EAP.</li> <li>• <b>eap</b>—Stores information about PPP EAP authentication protocol. Includes authenticator and authenticate state machines.</li> <li>• <b>authNone</b>—Stores information about no PPP authentication. Includes the authenticator state machine.</li> <li>• <b>networkInterface</b>—Stores information about NCP portions of PPP protocol.</li> <li>• <b>ipNcp</b>—PPP IPCP session information. Used for configuring, negotiating, and establishing IPCP protocol. Stores the current state, and configured and negotiated options.</li> <li>• <b>ipv6Ncp</b>—PPP IPv6CP session information. Used for configuring, negotiating, and establishing IPv6CP protocol. Stores the current state, and configured and negotiated options.</li> <li>• <b>osiNcp</b>—PPP OSICP session information. Used for configuring, negotiating, and establishing OSICP protocol. Stores the current state, and configured and negotiated options.</li> <li>• <b>mplsNcp</b>—PPP MPLSCP session information. Used for configuring, negotiating, and establishing MPLSCP protocol. Stores the current state.</li> <li>• <b>trace</b>—Stores information for PPP debugging.</li> </ul>	<b>memory</b>
<b>Total</b>	Total memory allocations.	<b>detail</b>
<b>Size</b>	Size of the structure.	<b>detail</b>
<b>Active</b>	Number of instances of the structure that are used.	<b>detail</b>
<b>Free</b>	Number of instances of the structure that are on the free list. Types with a number in the <b>Free</b> column are pooled structures, and are typically types that are often used.	<b>detail</b>
<b>Limit</b>	Maximum number of instances that can be on the free list. Types with a number in the <b>Limit</b> column are pooled structures, and are typically types that are often used.	<b>detail</b>
<b>Total size</b>	Total amount of memory being used by a type of structure (includes active and free instances).	<b>detail</b>
<b>Requests</b>	Number of allocation requests made by a type of structure.	<b>detail</b>

Table 37: show ppp statistics Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Failures</b>	Number of failed allocations.	<b>detail</b>
<b>Recovery state</b>	State of PPP recovery after a GRES or restart: <ul style="list-style-type: none"> <li>recovery done—All sessions have recovered; it is safe to force another GRES or restart.</li> <li>recovery cleanup pending—Not all PPP sessions have recovered; it is not safe to force another GRES or restart.</li> </ul>	none
<b>Subscriber sessions pending retention</b>	Number of PPP subscriber sessions that are in the process of being recovered.	none
<b>Subscriber sessions recovered OK</b>	Number of PPP subscriber sessions that have recovered after a GRES or restart.	none
<b>Subscriber sessions recovery failed</b>	Number of PPP subscriber sessions that have failed to recover after a GRES or restart.	none

## Sample Output

### show ppp statistics

```

user@host> show ppp statistics
Session statistics from PPP process
  Total sessions: 0
    Sessions in disabled phase   : 0
    Sessions in establish phase  : 0
    Sessions in authenticate phase: 0
    Sessions in network phase    : 0
    Bundles in pending phase     : 0

Session statistics from PPP universal edge process
  Total subscriber sessions: 32
    Subscriber sessions in disabled phase   : 32
    Subscriber sessions in establish phase  : 0
    Subscriber sessions in authenticate phase: 0
    Subscriber sessions in network phase    : 0

```

### show ppp statistics detail

```

user@host> show ppp statistics detail
Session statistics from PPP process
  Total sessions: 0
    Sessions in disabled phase   : 0
    Sessions in establish phase  : 0
    Sessions in authenticate phase: 0
    Sessions in network phase    : 0
    Bundles in pending phase     : 0
Type      Size  Active  Free  Limit  Total size  Requests  Failures
Queued rtsock msgs    28      0      0  65535         0         0
PPP session           60      0          0         0         0

```

Interface address	64	0	0	65535	0	0
Destination profile	65	0			0	0
ML link settings	68	0			0	0
IPCP blocked address	68	0			0	0
PPP session trace	76	0			0	0
IFL redundancy state	76	0			0	0
Protocol family	84	0	0	65535	0	0
ML bundle settings	108	0			0	0
PPP LCP session	120	0			0	0
PPP NCP session	124	0			0	0
Physical interface	124	170	0	65535	21080	170
Access profile	132	0			0	0
ML wait entry	144	0	0	20	0	0
Group profile	164	0			0	0
Profile client	272	0			0	0
PPP Auth session	356	0			0	0
Logical interface	524	0	0	65535	0	0
Non-tagged					8	2
Total					21088	172

## Session statistics from PPP universal edge process

Total subscriber sessions: 32

Subscriber sessions in disabled phase : 32

Subscriber sessions in establish phase : 0

Subscriber sessions in authenticate phase: 0

Subscriber sessions in network phase : 0

Type	Size	Active	Free	Limit	Total size	Requests	Failures
authenticate	224	1	99	16384	224	0	0
linkInterface	152	1	99	16384	152	0	0
pap	256	1	99	16384	256	0	0
lcp	272	1	99	16384	272	0	0
chap	284	0	0	16384	0	0	0
eapBuffer	1464	0	0	16384	0	0	0
eap	276	0	0	16384	0	0	0
authNone							
networkInterface	220	1	99	16384	220	0	0
ipNcp	256	1	99	16384	256	0	0
ipv6Ncp	204	0	0	16384	0	0	0
osiNcp	192	0	0	16384	0	0	0
mplsNcp	188	0	0	16384	0	0	0
trace	2052	0	16	16	0	0	0
Total					1380	0	0

**show ppp statistics recovery (Safe to Restart)**

user@host&gt; show ppp statistics recovery

## Recovery statistics from PPP universal edge process

Recovery state: recovery done

Subscriber sessions recovered OK : 32001

Subscriber sessions recovery failed : 0

**show ppp statistics recovery (Unsafe to Restart)**

user@host&gt; show ppp statistics recovery

## Recovery statistics from PPP universal edge process

Recovery state: recovery cleanup pending

Subscriber sessions pending retention : 32001



```
Subscriber sessions recovered OK      : 0  
Subscriber sessions recovery failed  : 0
```

## show ppp summary

<b>Syntax</b>	show ppp summary
<b>Release Information</b>	Command introduced in Junos OS Release 7.5.
<b>Description</b>	Display PPP session summary information.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show ppp summary on page 738</a>
<b>Output Fields</b>	<a href="#">Table 38 on page 738</a> lists the output fields for the <b>show ppp summary</b> command. Output fields are listed in the approximate order in which they appear.

*Table 38: show ppp summary Output Fields*

Field Name	Field Description
<b>Interface</b>	Interface on which the PPP session is running. An interface type of pp0 indicates an Ethernet interface type on a M120 or M320 router.
<b>Session type</b>	Type of session: <b>PPP</b> or <b>Cisco-HDLC</b> .
<b>Session phase</b>	PPP process phases: <b>Authenticate</b> , <b>Pending</b> , <b>Establish</b> , <b>Network</b> , <b>Disabled</b> .
<b>Session flags</b>	Special conditions present in the session, such as <b>Bundled</b> , <b>TCC</b> , <b>No-keepalives</b> , <b>Looped</b> , <b>Monitored</b> , and <b>NCP-only</b> .

## Sample Output

### show ppp summary

```

user@host> show ppp summary
Interface      Session type  Session phase  Session flags
at-4/0/0.456   PPP          Network       NCP-only
lsq-0/3/0.0    PPP          Disabled
lsq-1/0/0.0    PPP          Disabled
rlsq0.0        PPP          Network
so-1/0/0.0     PPP          Authenticate
so-1/0/1.0     PPP          Disabled      Looped
so-2/0/0.0     Cisco-HDLC   Establish
so-4/0/0.0     PPP          Establish      Monitored
t1-1/3/0:1.0   PPP          Network       Bundled

```

t1-1/3/0:2.0	PPP	Network	Bundled
pp0.12	PPP	Network	

## show services inline ip-reassembly statistics

**Syntax** `show services inline ip-reassembly statistics`  
`<fpc fpc-slot>`  
`<pfe pfe-slot>`

**Release Information** Statement introduced in Junos OS Release 12.2X49.

**Description** Display the inline IP reassembly statistics for the Packet Forwarding Engines on one or more MPCs. Inline IP reassembly statistics are collected at the Packet Forwarding Engine level.



**NOTE:** For more information on MPCs that support inline IP reassembly, refer to *Protocols and Applications Supported on the MPC1E for MX Series Routers*.

**Options** **none**—Displays standard inline IP reassembly statistics for all MPCs.  
**fpc fpc**—(Optional) Displays inline IP reassembly statistics for the specified MPC.



**NOTE:** Starting with Junos OS Release 14.2, the FPC option is not displayed for MX Series routers that do not contain switch fabrics, such as MX80 and MX104 routers.

**pfe pfe**—(Optional) Displays inline IP reassembly for the specified Packet Forwarding Engine slot. You must specify an FPC slot number before specifying a Packet Forwarding Engine slot.

**Required Privilege Level** view

**Related Documentation** • [ip-reassembly on page 494](#)

**List of Sample Output** [show services inline ip-reassembly statistics fpc on page 744](#)

**Output Fields** [Table 39 on page 741](#) lists the output fields for the **show services inline ip-reassembly statistics** command. Output fields are listed in the approximate order in which they appear.

**Table 39: show services inline ip-reassembly statistics Output Fields**

Field Name	Field Description
<b>FPC</b>	MPC slot number for which the statistics are displayed.
<b>PFE</b>	Packet Forwarding Engine on the MPC for which the statistics are displayed.

**NOTE:** The output fields displayed (per Packet Forwarding Engine) are arranged in a logical sequence from top to bottom to enable users to understand how the inline IP reassembly statistics are gathered.

The information about total number of fragments received is displayed first, and then the information about the reassembled packets and those pending reassembly are displayed. Then, the reasons why the fragments were dropped or not reassembled are displayed. Finally, the information about the fragments reassembled, fragments dropped, and fragments sent to the backup user plane PIC (services PIC) are displayed.

<b>Total Fragments Received</b>	<p>Total number of fragments received and the current rate of fragments received for inline IP reassembly. The following information is also displayed:</p> <ul style="list-style-type: none"> <li>• <b>First Fragments</b>—Number of first fragments received and current rate of first fragments processed.</li> <li>• <b>Intermediate Fragments</b>—Number of intermediate fragments received and current rate of intermediate fragments processed.</li> <li>• <b>Last Fragments</b>—Number and rate of last fragments received.</li> </ul> <p><b>NOTE:</b> Current rate refers to the current number of fragments processed per second in the instant preceding the command's execution.</p>
<b>Total Packets Reassembled</b>	Total number of packets reassembled and current rate, in the instant preceding the command's execution, at which the packets are reassembled.
<b>Approximate Packets Pending Reassembly</b>	Approximate number of packets pending reassembly.

Table 39: show services inline ip-reassembly statistics Output Fields (continued)

Field Name	Field Description
<b>Fragments Dropped Reasons</b>	<p>Total number of fragments dropped reasons and the current rate of total fragment dropped reasons. The number of dropped reasons and rate corresponding to each of the following reasons are also displayed:</p> <ul style="list-style-type: none"> <li>• Buffers not available</li> <li>• Fragments per packet exceeded</li> <li>• Packet length exceeded</li> <li>• Record insert error</li> <li>• Record in use error</li> <li>• Duplicate first fragments</li> <li>• Duplicate last fragments</li> <li>• Missing first fragment</li> </ul> <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>• These fields indicate <i>why</i> a fragment was dropped. When a fragment is dropped, the corresponding reason field is incremented by 1. For example, when a fragment is dropped because the memory runs out, the <b>Buffers not available</b> field increases by 1.</li> <li>• The maximum number of fragments allowed for reassembly is 16. If the interface encounters a 17th fragment, it drops the entire packet and increments the <b>Fragment per packet exceeded</b> field by 17.</li> <li>• Current rate refers to the current number of fragment dropped reasons per second in the instant preceding the command's execution.</li> </ul>
<b>Reassembly Errors Reasons</b>	<p>Number of errors during reassembly and the current rate of reassembly errors. The number of errors and the rate for each of the following types of errors are also displayed:</p> <ul style="list-style-type: none"> <li>• Fragment not found</li> <li>• Fragment not in sequence</li> <li>• ASIC errors</li> </ul> <p><b>NOTE:</b> Current rate refers to the current number of reassembly errors processed per second in the instant preceding the command's execution.</p>
<b>Aged out packets</b>	<p>Number of aged out packets and the current number of packets aged out per second in the instant preceding the command's execution.</p> <p><b>NOTE:</b> In some cases, aged out packets can refer to aged out fragments. If previous fragments of the packet have already been discarded then linking of the dropped fragments to the aged out fragments cannot occur.</p>
<b>Total Fragments Successfully Reassembled</b>	<p>Number of fragments successfully reassembled and the current number of fragments reassembled per second in the instant preceding the command's execution.</p>

Table 39: show services inline ip-reassembly statistics Output Fields (continued)

Field Name	Field Description
<b>Total Fragments Dropped</b>	<p>Total number of fragments dropped and the current rate of total number of fragments dropped. The number of fragments dropped and rate corresponding to each of the following reasons are also displayed:</p> <ul style="list-style-type: none"> <li>• Buffers not available</li> <li>• Fragments per packet exceeded</li> <li>• Packet length exceeded</li> <li>• Record insert error</li> <li>• Record in use error</li> <li>• Duplicate first fragments</li> <li>• Duplicate last fragments</li> <li>• Missing first fragment</li> <li>• Fragment not found</li> <li>• Fragment not in sequence</li> <li>• ASIC errors</li> <li>• Aged out fragments</li> </ul>
<b>Total fragments punted to UPIC</b>	Number of fragments sent to the backup user plane PIC (services PIC) and current rate of fragments sent per second in the instant preceding the command's execution

The following information applies to the **Total Fragments Dropped** field.

- These fields indicate *how many* of the packet fragments received were then dropped due to a particular reason.

For example, consider a packet that has 10 fragments, 9 of which have been received and stored in memory. When the tenth fragment arrives, if the memory runs out (Buffers not available), then this fragment is dropped. Because the tenth fragment has been dropped, the other 9 fragments must also be dropped. In this case, the **Buffers not available** field (under the **Fragments Dropped Reasons** field) is incremented by 1 and the **Buffers not available** field (under the **Total Fragments Dropped** field) is incremented by 10.

For the next packet arriving, which also has 10 fragments, the first four fragments are stored but the memory runs out for the fifth fragment. Then the first 5 fragments (fifth and the first four) are dropped. In this case, the **Buffers not available** field (under the **Fragments Dropped Reasons** field) is incremented by 1 and the **Buffers not available** field (under the **Total Fragments Dropped** field) is incremented by 5.

For fragments of the packet, if memory becomes available, the next 5 fragments (6 through 10) that arrive are stored in memory. The fragments are stored until the timeout period elapses, and are eventually dropped. In this case, the **Aged out packets** field is incremented by 1 and the **Aged out fragments** field (under the **Total Fragments Dropped** field) is incremented by 5.

The fragment counters (after both packets have been processed) are as follows:

- **Fragments Dropped Reasons**
  - Buffers not available 2
  - Aged out packets 1
- **Total Fragment Dropped**
  - Buffers not available 15
  - Aged out packets 5
- Current rate refers to the current total number fragments dropped per second in the instant preceding the command's execution.

## Sample Output

show services inline ip-reassembly statistics fpc

```

user@host> show services inline ip-reassembly statistics fpc 0
FPC: 0 PFE: 0
=====

```

	Total	Current Rate
Total Fragments Received	728177644	83529
First Fragments	260759430	29924
Intermediate Fragments	206658784	23681
Last Fragments	260759430	29924
Total Packets Successfully Reassembled	260746982	29924
Approximate Packets Pending Reassembly	4	
Fragments Dropped Reasons	34558	3
Buffers not available	0	0
Fragments per packet exceeded	0	0
Packet length exceeded	0	0
Record insert error	0	0
Record in use error	34558	3
Duplicate first fragments	0	0
Duplicate last fragments	0	0
Missing first fragment	0	0
Reassembly Errors Reasons	0	0
Fragment not found	0	0
Fragment not in sequence	0	0
ASIC errors	0	0
Aged out packets	63	0
Total Fragments Successfully Reassembled	728142977	83528
Total Fragments Dropped	34673	3
Buffers not available	0	0
Fragments per packet exceeded	0	0
Packet length exceeded	0	0
Record insert error	0	0
Record in use error	34558	3
Duplicate first fragments	0	0
Duplicate last fragments	0	0



Missing first fragment	0	0
Fragment not found	0	0
Fragment not in sequence	0	0
ASIC errors	0	0
Aged out fragments	115	0
Total fragments punted to UPIC	0	0

## show services l2tp client

<b>Syntax</b>	<code>show services l2tp client</code> <code>&lt;client-name&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 16.1.
<b>Description</b>	Display information about all L2TP clients or a specific L2TP client.
<b>Options</b>	<b>client-name</b> —(Optional) Name of a client.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show services l2tp session-limit-group on page 763</a></li> <li>• <a href="#">show services l2tp tunnel-group on page 777</a></li> <li>• <a href="#">L2TP Session Limits Overview on page 170</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show services l2tp client on page 746</a> <a href="#">show services l2tp client (Client Name) on page 747</a>
<b>Output Fields</b>	<a href="#">Table 40 on page 746</a> lists the output fields for the <b>show services l2tp client</b> command. Output fields are listed in the approximate order in which they appear.

Table 40: show services l2tp client Output Fields

Field Name	Field Description
Client	Name of the client.
Client Name	
Tunnels	Number of tunnels in the tunnel group.
Sessions	Number of L2TP sessions established for tunnels in the tunnel group.
Tunnel-group	Name of a tunnel group to which the client belongs.
Session-limit-group	Name of a session-limit group to which the client belongs.

## Sample Output

### show services l2tp client

```
user@host> show services l2tp client
```

Client	Tunnels	Sessions	Tunnel-group	Session-limit-group
entA-serviceA	2	20	l2tp-tunnel-group1	enterpriseA
entA-serviceB	3	120	l2tp-tunnel-group2	enterpriseB

#### show services l2tp client (Client Name)

```
user@host> show services l2tp client entA-serviceA
```

Client Name	Tunnels	Sessions	Tunnel-group	Session-limit-group
entA-serviceA	2	20	l2tp-tunnel-group1	enterpriseA

## show services l2tp destination

---

Syntax	<pre>show services l2tp destination &lt;brief   detail   extensive&gt; &lt;local-gateway gateway-address&gt; &lt;peer-gateway gateway-address&gt; &lt;statistics&gt;</pre>
Release Information	Command introduced in Junos OS Release 10.4.
Description	Display information about L2TP tunnel destinations.
Options	<p><b>brief   detail   extensive</b>—(Optional) Display the specified level of information.</p> <p><b>local-gateway gateway-address</b>—(Optional) Display L2TP session information for only the specified local gateway address.</p> <p><b>peer-gateway gateway-address</b>—(Optional) Display L2TP session information for only the specified peer gateway address.</p> <p><b>statistics</b>—(Optional) Display the number of control packets and bytes transmitted and received for the destination. You cannot include this option with any of the level options, <b>brief</b>, <b>detail</b>, or <b>extensive</b>.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">clear services l2tp destination on page 667</a></li><li>• <a href="#">show services l2tp destination lockout on page 752</a></li><li>• <a href="#">show services l2tp session on page 754</a></li><li>• <a href="#">show services l2tp summary on page 765</a></li><li>• <a href="#">show services l2tp tunnel on page 771</a></li></ul>
List of Sample Output	<p><a href="#">show services l2tp destination on page 750</a></p> <p><a href="#">show services l2tp destination detail on page 750</a></p> <p><a href="#">show services l2tp destination extensive (LAC) on page 751</a></p> <p><a href="#">show services l2tp destination extensive (LNS) on page 751</a></p> <p><a href="#">show services l2tp destination statistics (LAC only on MX Series Routers) on page 751</a></p>
Output Fields	<p><a href="#">Table 41 on page 749</a> lists the output fields for the <b>show services l2tp destination</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 41: show services l2tp destination Output Fields

Field Name	Field Description	Level of Output
<b>Local Name</b>	Name of this destination.	All levels
<b>Remote IP</b>	IP address of the remote peer (LNS).	All levels
<b>Tunnels</b>	Number of tunnel connections for the destination in the following categories: <ul style="list-style-type: none"> <li>total</li> <li>active</li> <li>failed</li> </ul>	All levels for total <b>extensive</b> for active and failed
<b>Sessions</b>	Number of session connections for the destination in the following categories: <ul style="list-style-type: none"> <li>total</li> <li>active</li> <li>failed</li> </ul>	All levels for total <b>extensive</b> for active and failed
<b>State</b>	Administrative state of the L2TP destination: <ul style="list-style-type: none"> <li><b>Enabled</b>—No restrictions exist on creation or operation of sessions and tunnels for this destination.</li> <li><b>Disabled</b>—Existing sessions and tunnels for this destination have been disabled and no new sessions or tunnels are created while in the <b>Disabled</b> state.</li> <li><b>Drain</b>—Creation of new sessions and tunnels is disabled for this destination.</li> </ul>	All levels
<b>Local IP</b>	IP address of the local gateway (LAC).	<b>detail extensive</b>
<b>Transport</b>	Medium used for tunneling. Only <b>ipUdp</b> is supported.	<b>detail extensive</b>
<b>Logical System</b>	Logical system in which the tunnel is configured.	<b>detail extensive</b>
<b>Router Instance</b>	Routing instance in which the tunnel is configured.	<b>detail extensive</b>
<b>Lockout State</b>	Reachability state of the destination: <ul style="list-style-type: none"> <li><b>not locked</b>—Destination is considered reachable.</li> <li><b>waiting for lockout timeout</b>—Destination is locked out by L2TP because it is unreachable, so no attempts are made to reach the destination until the lockout timeout (300 seconds) expires, unless this is the only destination available for tunneling the subscriber.</li> </ul>	<b>detail extensive</b>
<b>Access Line Information</b>	State of the LAC per-destination configuration for forwarding subscriber line information to the LNS, <b>Enabled</b> or <b>Disabled</b> .  Starting in Junos OS Release 17.4R1, this information is displayed on the LNS for information it receives from the LAC, <b>Enabled</b> or <b>Disabled</b> .	<b>detail extensive</b>

Table 41: show services l2tp destination Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Speed Updates</b>	State of the LAC per-destination configuration for including connection speed updates when it forwards subscriber line information to the LNS, <b>Enabled</b> or <b>Disabled</b> .  Starting in Junos OS Release 17.4R1, this information is displayed on the LNS for updates it receives from the LAC, <b>Enabled</b> or <b>Disabled</b> .	<b>detail extensive</b>
<b>Connections</b>	Number of total, active, and failed tunnel and session connections for the destination.	<b>extensive</b>
<b>Control Tx</b>	Amount of control information transmitted, in packets and bytes.	<b>statistics</b>
<b>Control Rx</b>	Amount of control information received, in packets and bytes.	<b>statistics</b>
<b>Data Tx</b>	Amount of data transmitted, in packets and bytes.	<b>statistics</b>
<b>Data Rx</b>	Amount of data received, in packets and bytes.	<b>statistics</b>
<b>Error Tx</b>	Number of errors transmitted, in packets.	<b>statistics</b>
<b>Error Rx</b>	Number of errors received, in packets.	<b>statistics</b>

## Sample Output

### show services l2tp destination

```
user@host> show services l2tp destination
```

Local Name	Remote IP	Tunnels	Sessions	State
1	203.0.113.101	1	1	Enabled

### show services l2tp destination detail

```
user@host> show services l2tp destination detail
```

```
Local name: 1
  Remote IP: 203.0.113.101
  Tunnels: 1, Sessions: 1
  State: Enabled
  Local IP: 203.0.113.102
  Transport: ipUdp, Logical System: default, Router Instance: default
  Lockout State: not locked
  Access Line Information: Enabled, Speed Updates: Enabled
Local name: 1
  Remote IP: 203.0.113.108
  Tunnels: 1, Sessions: 1
  State: Enabled
  Local IP: 203.0.113.2
  Transport: ipUdp, Logical System: default, Router Instance: default
  Lockout State: waiting for lockout timeout
  Access Line Information: Enabled, Speed Updates: Enabled
```

**show services l2tp destination extensive (LAC)**

```
user@host> show services l2tp destination extensive
```

```
Local name: 1
Remote IP: 203.0.113.101
State: Enabled
Local IP: 203.0.113.102
Transport: ipUdp, Logical System: default, Router Instance: default
Lockout State: not locked
Access Line Information: Enabled, Speed Updates: Enabled
Connections      Totals      Active      Failed
Tunnels          1           1           0
Sessions         1           1           0
```

**show services l2tp destination extensive (LNS)**

```
user@host> show services l2tp destination extensive
```

```
Local name: 3
Remote IP: 203.0.113.103
State: Enabled
Local IP: 203.0.113.102
Transport: ipUdp, Logical System: default, Router Instance: default
Lockout State: not locked
Access Line Information: Enabled, Speed Updates: Disabled
Connections      Totals      Active      Failed
Tunnels          1           1           0
Sessions         1           1           0
```

**show services l2tp destination statistics (LAC only on MX Series Routers)**

```
user@host> show services l2tp destination statistics
```

```
Local name: 2, Tunnels: 1, Sessions: 210
Packets      Bytes
Control Tx   680        63.3k
Control Rx   283        10.6k
Data Tx      1129       14.3k
Data Rx      877        10.9k
Errors Tx    0
Errors Rx    0
```

## show services l2tp destination lockdown

<b>Syntax</b>	<b>show services l2tp destination lockdown</b>
<b>Release Information</b>	Command introduced in Junos OS Release 13.2.
<b>Description</b>	Display a list of destinations that are currently locked out and the time remaining for each to remain in the lockdown state.
<b>Options</b>	This command has no options.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">clear services l2tp destination on page 667</a></li> <li>• <a href="#">request services l2tp destination unlock on page 589</a></li> <li>• <a href="#">show services l2tp destination on page 748</a></li> <li>• <a href="#">show services l2tp session on page 754</a></li> <li>• <a href="#">show services l2tp summary on page 765</a></li> <li>• <a href="#">show services l2tp tunnel on page 771</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show services l2tp destination lockdown on page 752</a>
<b>Output Fields</b>	Table 42 on page 752 lists the output fields for the <b>show services l2tp destination lockdown</b> command. Output fields are listed in the approximate order in which they appear.

*Table 42: show services l2tp destination lockdown Output Fields*

Field Name	Field Description
<b>Destination</b>	Name of the destination.
<b>Time Remaining</b>	Time remaining for the destination to be locked out.
<b>L2TP lockdown destinations found</b>	Total count of lockdown destinations.

## Sample Output

### show services l2tp destination lockdown

```
user@host> show services l2tp destination lockdown
```



Destination	Time Remaining
4	45
5	43
6	8

3 L2TP lockout destinations found

## show services l2tp session

**Syntax**

```
show services l2tp session
<brief | detail | extensive>
<interface interface-name>
<local-gateway gateway-address>
<local-gateway-name gateway-name>
<local-session-id session-id>
<local-tunnel-id tunnel-id>
<peer-gateway gateway-address>
<peer-gateway-name gateway-name>
<statistics>
<tunnel-group group-name>
<user username>
```

**Release Information** Command introduced before Junos OS Release 7.4.  
Support for LAC on MX Series routers introduced in Junos OS Release 10.4.  
Support for LNS on MX Series routers introduced in Junos OS Release 11.4.

**Description** (M10i and M7i routers only) Display information about active L2TP sessions for LNS.  
  
(MX Series routers only) Display information about active L2TP sessions for LAC and LNS.

**Options** **none**—Display standard information about all active L2TP sessions.

**brief | detail | extensive**—(Optional) Display the specified level of output.

**interface *interface-name***—(Optional) Display L2TP session information for only the specified adaptive services or inline services interface. The interface type depends on the line card as follows:

- **si-*fpc/pic/port***—MPCs on MX Series routers only. This option is not available for L2TP on M Series routers.
- **sp-*fpc/pic/port***—AS or Multiservices PICs on M7i, M10i, and M120 routers only. This option is not available for L2TP on MX Series routers.

**local-gateway *gateway-address***—(Optional) Display L2TP session information for only the specified local gateway address.

**local-gateway-name *gateway-name***—(Optional) Display L2TP session information for only the specified local gateway name.

**local-session-id *session-id***—(Optional) Display L2TP session information for only the specified local session identifier.

**local-tunnel-id *tunnel-id***—(Optional) Display L2TP session information for only the specified local tunnel identifier.

**peer-gateway *gateway-address***—(Optional) Display L2TP session information for only the specified peer gateway address.

**peer-gateway-name *gateway-name***—(Optional) Display L2TP session information for only the specified peer gateway name.

**statistics**—(Optional) Display the number of control packets and bytes transmitted and received for the session. You cannot include this option with any of the level options, **brief**, **detail**, or **extensive**.

**tunnel-group *group-name***—(Optional) Display L2TP session information for only the specified tunnel group. To display information about L2TP CPU and memory usage, you can include the tunnel group name in the **show services service-sets memory-usage *group-name*** and **show services service-sets cpu-usage *group-name*** commands. This option is not available for L2TP LAC on MX Series routers.

**user *username***—(M Series routers only) (Optional) Display L2TP session information for only the specified username.

**Required Privilege Level** view

**Related Documentation**

- [L2TP Services Configuration Overview](#)
- [L2TP Minimum Configuration](#)
- [clear services l2tp session on page 671](#)

**List of Sample Output**

- [show services l2tp session \(LNS on M Series Routers\) on page 759](#)
- [show services l2tp session \(LNS on MX Series Routers\) on page 759](#)
- [show services l2tp session \(LAC\) on page 759](#)
- [show services l2tp session detail \(LAC\) on page 759](#)
- [show services l2tp session extensive \(LAC\) on page 760](#)
- [show services l2tp session extensive \(LAC on MX Series Routers\) on page 760](#)
- [show services l2tp session extensive \(LNS on M Series Routers\) on page 760](#)
- [show services l2tp session extensive \(LNS on MX Series Routers\) on page 761](#)
- [show services l2tp session statistics \(MX Series Routers\) on page 762](#)

**Output Fields** [Table 43 on page 755](#) lists the output fields for the **show services l2tp session** command. Output fields are listed in the approximate order in which they appear.

*Table 43: show services l2tp session Output Fields*

Field Name	Field Description	Level of Output
<b>Interface</b>	(LNS only) Name of an adaptive services interface.	All levels
<b>Tunnel group</b>	(LNS only) Name of a tunnel group.	All levels
<b>Tunnel local ID</b>	Identifier of the local endpoint of the tunnel, as assigned by the L2TP network server (LNS).	All levels

Table 43: show services l2tp session Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Session local ID</b>	Identifier of the local endpoint of the L2TP session, as assigned by the LNS.	All levels
<b>Session remote ID</b>	Identifier of the remote endpoint of the L2TP session, as assigned by the L2TP access concentrator (LAC).	All levels
<b>State</b>	<p>State of the L2TP session:</p> <ul style="list-style-type: none"> <li>• <b>Established</b>—Session is operating. This is the only state supported for the LAC.</li> <li>• <b>closed</b>—Session is being closed.</li> <li>• <b>destroyed</b>—Session is being destroyed.</li> <li>• <b>clean-up</b>—Session is being cleaned up.</li> <li>• <b>lns-ic-accept-new</b>—New session is being accepted.</li> <li>• <b>lns-ic-idle</b>—Session has been created and is idle.</li> <li>• <b>lns-ic-reject-new</b>—New session is being rejected.</li> <li>• <b>lns-ic-wait-connect</b>—Session is waiting for the peer's incoming call connected (ICCN) message.</li> </ul>	All levels
<b>Bundle ID</b>	(LNS only) Bundle identifier. Indicates the session is part of a multilink bundle. Sessions that have a blank <b>Bundle</b> field are not participating in the Multilink Protocol. Sessions in a multilink bundle might belong to different L2TP tunnels. For L2TP output organized by bundle ID, issue the <b>show services l2tp multilink extensive</b> command.	All levels
<b>Mode</b>	<p>(LNS) Mode of the interface representing the session: <b>shared</b> or <b>exclusive</b>.</p> <p>(LAC) Mode of the interface representing the session: <b>shared</b> or <b>dedicated</b>. Only <b>dedicated</b> is currently supported for the LAC.</p>	extensive
<b>Local IP</b>	IP address of local endpoint of the Point-to-Point Protocol (PPP) session.	extensive
<b>Remote IP</b>	IP address of remote endpoint of the PPP session.	extensive
<b>Username</b>	(LNS only) Name of the user logged in to the session.	All levels
<b>Assigned IP address</b>	(LNS only) IP address assigned to remote client.	extensive
<b>Local name</b>	For LNS, name of the LNS instance in which the session was created. For LAC, name of the LAC.	extensive
<b>Remote name</b>	For LNS, name of the LAC from which the session was created. For LAC, name of the LAC instance.	extensive
<b>Local MRU</b>	(LNS only) Maximum receive unit (MRU) setting of the local device, in bytes.	extensive
<b>Remote MRU</b>	(LNS only) MRU setting of the remote device, in bytes.	extensive

Table 43: show services l2tp session Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Tx speed</b>	<p>Transmit speed of the session conveyed from the LAC to the LNS, in bits per second (bps) and the source method from which the speed is derived.</p> <p>Starting in Junos OS Release 14.1, either the initial (<b>initial</b>) line speed or both the initial and current (<b>update</b>) line speeds can be displayed on MX Series routers:</p> <ul style="list-style-type: none"> <li>When connection speed updates are not enabled, then only the initial line speed is displayed.</li> <li>When connection speed updates are enabled, then both the initial and the current speeds are displayed.</li> </ul> <p>For Junos OS Release 17.2 and Release 17.3, only the current (<b>update</b>) line speed can be displayed on MX Series routers.</p> <p>Starting in Junos OS Release 17.4R1, once again either the initial (<b>initial</b>) line speed or both the initial and current (<b>update</b>) line speeds can be displayed on MX Series routers.</p> <p>Starting in Junos OS Release 15.1, when the Tx connect speed method is set to none, the value of zero (0) is displayed.</p>	<b>extensive</b>
<b>Rx speed</b>	<p>Receive speed of the session conveyed from the LAC to the LNS, in bits per second (bps) and the source method from which the speed is derived.</p> <p>Starting in Junos OS Release 14.1, either the initial (<b>initial</b>) line speed or both the initial and current (<b>update</b>) line speeds can be displayed on MX Series routers:</p> <ul style="list-style-type: none"> <li>When connection speed updates are not enabled, then only the initial line speed is displayed.</li> <li>When connection speed updates are enabled, then both the initial and the current speeds are displayed.</li> </ul> <p>For Junos OS Release 17.2 and Release 17.3, only the current (<b>update</b>) line speed can be displayed on MX Series routers.</p> <p>Starting in Junos OS Release 17.4R1, once again either the initial (<b>initial</b>) line speed or both the initial and current (<b>update</b>) line speeds can be displayed on MX Series routers.</p> <p>Starting in Junos OS Release 15.1, when the Tx connect speed method is set to none, the value of zero (0) is displayed.</p>	<b>extensive</b>
<b>Bearer type</b>	<p>Type of bearer enabled:</p> <ul style="list-style-type: none"> <li>0—Might indicate that the call was not received over a physical link (for example, when the LAC and PPP are located in the same subsystem).</li> <li>1—Digital access requested.</li> <li>2—Analog access requested.</li> <li>4—Asynchronous Transfer Mode (ATM) bearer support.</li> </ul>	<b>extensive</b>
<b>Framing type</b>	<p>Type of framing enabled:</p> <ul style="list-style-type: none"> <li>1—Synchronous framing</li> <li>2—Asynchronous framing</li> </ul>	<b>extensive</b>

*Table 43: show services l2tp session Output Fields (continued)*

Field Name	Field Description	Level of Output
<b>LCP renegotiation</b>	(LNS only) Whether Link Control Protocol (LCP) renegotiation is configured: <b>On</b> or <b>Off</b> .	<b>extensive</b>
<b>Authentication</b>	Type of authentication algorithm used: Challenge Handshake Authentication Protocol (CHAP) or Password Authentication Protocol (PAP).	<b>extensive</b>
<b>Interface ID</b>	(LNS only) Identifier used to look up the logical interface for this session.	<b>extensive</b>
<b>Interface unit</b>	Logical interface for this session.	All levels
<b>Call serial number</b>	Unique serial number assigned to the call.	<b>extensive</b>
<b>Policer bandwidth</b>	Maximum policer bandwidth configured for this session.	<b>extensive</b>
<b>Policer burst size</b>	Maximum policer burst size configured for this session.	<b>extensive</b>
<b>Firewall filter</b>	Configured firewall filter name.	<b>extensive</b>
<b>Session encapsulation overhead</b>	Overhead allowance configured for this session, in bytes.	<b>extensive</b>
<b>Session cell overhead</b>	Cell overhead activation ( <b>On</b> or <b>Off</b> ).	<b>extensive</b>
<b>Create time</b>	Date and time when the call was created.	<b>extensive</b>
<b>Up time</b>	Length of time elapsed since the call became active, in hours, minutes, and seconds.	<b>extensive</b>
<b>Idle time</b>	Length of time elapsed since the call became idle, in hours, minutes, and seconds.	<b>extensive</b>

Table 43: show services l2tp session Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Statistics since</b>	<p>Date and time when collection of the following statistics began:</p> <ul style="list-style-type: none"> <li><b>Control Tx</b>—Amount of control information transmitted, in packets and bytes.</li> <li><b>Control Rx</b>—Amount of control information received, in packets and bytes.</li> <li><b>Data Tx</b>—Amount of data transmitted, in packets and bytes.</li> <li><b>Data Rx</b>—Amount of data received, in packets and bytes.</li> <li><b>Errors Tx</b>—Number of errors transmitted, in packets.</li> <li><b>Errors Rx</b>—Number of errors received, in packets.</li> <li><b>LCP echo req Tx</b>—Number of LCP echo requests transmitted, in packets.</li> <li><b>LCP echo req Rx</b>—Number of LCP echo requests received, in packets.</li> <li><b>LCP echo rep Tx</b>—Number of LCP echo responses transmitted, in packets.</li> <li><b>LCP echo rep Rx</b>—Number of LCP echo responses received, in packets.</li> <li><b>LCP echo Req timeout</b>—Number of LCP echo requests that timed out.</li> <li><b>LCP echo Req error</b>—Number of errors received for LCP echo packets.</li> <li><b>LCP echo Rep error</b>—Number of errors transmitted for LCP echo packets.</li> </ul>	<b>extensive</b>

## Sample Output

### show services l2tp session (LNS on M Series Routers)

```
user@host> show services l2tp session

Interface: sp-1/2/0, Tunnel group: group1, Tunnel local ID: 8802
  Local Remote Interface State      Bundle Username
  ID    ID    unit
  37966    5        2 Established
```

### show services l2tp session (LNS on MX Series Routers)

```
user@host> show services l2tp session

Tunnel local ID: 40553
  Local Remote State      Interface      Interface
  ID    ID              unit          Name
  17967 1        Established  1073749824    si-5/2/0
```

### show services l2tp session (LAC)

```
user@host> show services l2tp session

Tunnel local ID: 31889
  Local Remote State      Interface      Interface
  ID    ID              unit          Name
  31694 1        Established  311           pp0
```

### show services l2tp session detail (LAC)

```
user@host> show services l2tp session detail
```

```
Tunnel local ID: 31889
Session local ID: 31694, Session remote ID: 1, Interface unit: 311
State: Established, Interface: pp0, Mode: Dedicated
Local IP: 203.0.113.2:1701, Remote IP: 203.0.113.1:1701
Local name: ce-lac, Remote name: ce-lns
```

### show services l2tp session extensive (LAC)

```
user@host> show services l2tp session extensive
```

```
Tunnel local ID: 31889
Session local ID: 31694, Session remote ID: 1
Interface unit: 311
State: Established, Mode: Dedicated
Local IP: 203.0.113.2:1701, Remote IP: 203.0.113.1:1701
Local name: ce-lac, Remote name: ce-lns
Tx speed: 0, Rx speed: 0
Bearer type: 1, Framing type: 1
LCP renegotiation: N/A, Authentication: None, Interface ID: N/A
Interface unit: 311, Call serial number: 0
Policer bandwidth: 0, Policer burst size: 0
Policer exclude bandwidth: 0, Firewall filter: 0
Session encapsulation overhead: 0, Session cell overhead: 0
Create time: Tue Aug 24 14:38:23 2010, Up time: 01:06:25
Idle time: N/A
```

### show services l2tp session extensive (LAC on MX Series Routers)

```
user@host> show services l2tp session extensive
```

```
Tunnel local ID: 31889
Session local ID: 31694, Session remote ID: 1
Interface unit: 311
State: Established, Mode: Dedicated
Local IP: 203.0.113.102:1701, Remote IP: 203.0.113.101:1701
Local name: ce-lac, Remote name: ce-lns
Tx speed: 256000, source service-profile
Rx speed: 128000, source ancp
Bearer type: 1, Framing type: 1
LCP renegotiation: N/A, Authentication: None, Interface ID: N/A
Interface unit: 311, Call serial number: 0
Policer bandwidth: 0, Policer burst size: 0
Policer exclude bandwidth: 0, Firewall filter: 0
Session encapsulation overhead: 0, Session cell overhead: 0
Create time: Tue Aug 24 14:38:23 2010, Up time: 01:06:25
Idle time: N/A
```

### show services l2tp session extensive (LNS on M Series Routers)

```
user@host> show services l2tp session extensive
```

```
Interface: sp-1/2/0, Tunnel group: group1, Tunnel local ID: 62746
Session local ID: 56793, Session remote ID: 53304
State: Established, Bundle ID: 5, Mode: shared
Local IP: 203.0.113.121:1701, Remote IP: 203.0.113.202:1701
Username: user@example.com, Assigned IP address: 203.0.113.51/32
Local MRU: 4000, Remote MRU: 1500, Tx speed: 64000, Rx speed: 64000
Bearer type: 2, Framing type: 1
LCP renegotiation: Off, Authentication: CHAP, Interface ID: unit_20
```



```

Interface unit: 20, Call serial number: 4137941434
Policer bandwidth: 64000, Policer burst size: 51200
Firewall filter: f1
Session encapsulation overhead: 16, Session cell overhead: On
Create time: Tue Mar 23 14:13:15 2004, Up time: 01:16:41
Idle time: 00:00:00
Statistics since: Tue Mar 23 14:13:13 2004

```

	Packets	Bytes
Control Tx	4	88
Control Rx	2	28
Data Tx	0	0
Data Rx	461	29.0k
Errors Tx	0	
Errors Rx	0	

```

Interface: sp-1/2/0, Tunnel group: group_company_dns, Tunnel local ID: 37266
Session local ID: 39962, Session remote ID: 53303
State: Established, Bundle ID: 5, Mode: shared
Local IP: 203.0.113.121:1701, Remote IP: 203.0.113.222:1701
Username: usr1@company.example.com, Assigned IP address: 203.0.113.3/24
Local name: router-1, Remote name: router-2
Local MRU: 4470, Remote MRU: 4470, Tx speed: 155000000, Rx speed: 155000000
Bearer type: 2, Framing type: 1
LCP renegotiation: Off, Authentication: CHAP, Interface ID: unit_31
Interface unit: 31, Call serial number: 4137941433
Policer bandwidth: 64000, Policer burst size: 51200
Firewall filter: f1
Create time: Tue Mar 23 14:13:17 2004, Up time: 01:16:39
Idle time: 01:16:36
Statistics since: Tue Mar 23 14:13:15 2004

```

	Packets	Bytes
Control Tx	6	196
Control Rx	4	150
Data Tx	0	0
Data Rx	1	80
Errors Tx	0	
Errors Rx	0	

### show services l2tp session extensive (LNS on MX Series Routers)

```
user@host> show services l2tp session extensive
```

```

Tunnel local ID: 40553
Session local ID: 17967, Session remote ID: 1
Interface unit: 1073749824
State: Established
Interface: si-5/2/0
Mode: Dedicated
Local IP: 192.0.2.2:1701, Remote IP: 192.0.2.3:1701
Local name: lns-mx960, Remote name: testlac
Tx speed: initial 64000, Update 256000
Rx speed: initial 64000, Update 256000
Bearer type: 2, Framing type: 1
LCP renegotiation: Off, Authentication: None
Call serial number: 1
Create time: Mon Apr 25 20:27:50 2011, Up time: 00:01:48
Idle time: N/A
Statistics since: Mon Apr 25 20:27:50 2011

```

	Packets	Bytes
Control Tx	4	219

Control Rx	4	221
Data Tx	0	0
Data Rx	10	228
Errors Tx	0	
Errors Rx	0	

#### show services l2tp session statistics (MX Series Routers)

```
user@host>show services l2tp session statistics local session-id 1
Tunnel local ID: 17185
Session local ID: 1, Session remote ID: 14444, Interface unit: 1073788352
State: Established
Statistics since: Mon Aug 1 13:27:47 2011
    Packets  Bytes
Data Tx    4    51
Data Rx    3    36
```

## show services l2tp session-limit-group

**Syntax** `show services l2tp session-limit-group  
<limit-group-name>`

**Release Information** Command introduced in Junos OS Release 16.1.

**Description** Display information about all session-limit groups or a specific session limit group.

**Options** *limit-group-name*—(Optional) Name of a session-limit group.

**Required Privilege Level** view

**Related Documentation**

- [show services l2tp client on page 746](#)
- [show services l2tp tunnel-group on page 777](#)
- [L2TP Session Limits Overview on page 170](#)

**List of Sample Output** [show services l2tp session-limit-group on page 763](#)  
[show services l2tp session-limit-group \(Limit Group Name\) on page 764](#)

**Output Fields** [Table 44 on page 763](#) lists the output fields for the **show services l2tp session-limit-group** command. Output fields are listed in the approximate order in which they appear.

*Table 44: show services l2tp session-limit-group Output Fields*

Field Name	Field Description
Session-limit-group	Name of a session-limit group.
Tunnels	Number of tunnels associated with the session-limit group in the tunnel group.
Sessions	Number of L2TP sessions established for session-limit group.
Maximum limit	Maximum number of sessions allowed for the session-limit group.

## Sample Output

### show services l2tp session-limit-group

user@host> show services l2tp session-limit-group

Session-limit-group	Tunnels	Sessions	
enterpriseA	2	10	1000
enterpriseB	10	120	2000

**show services l2tp session-limit-group (Limit Group Name)**

```
user@host> show services l2tp session-limit-group enterpriseA
```

Session-limit-group	Tunnels	Sessions	Maximum limit
enterpriseA	2	10	1000
enterpriseC	10	120	2000

## show services l2tp summary

<b>Syntax</b>	<pre>show services l2tp summary &lt;interface sp-fpc/pic/port&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Support for LAC on MX Series routers introduced in Junos OS Release 10.4.</p> <p>Support for LNS on MX Series routers introduced in Junos OS Release 11.4.</p> <p>Support for <b>statistics</b> option introduced in Junos OS Release 13.1.</p>
<b>Description</b>	(M10i and M7i routers: LNS only. MX Series routers: LAC and LNS.) Display Layer 2 Tunneling Protocol (L2TP) summary information.
<b>Options</b>	<p><b>none</b>—Display complete L2TP summary information. For LNS on M Series routers, display L2TP summary information for all adaptive services interfaces. For LNS on MX Series routers, display L2TP summary information for all inline services interfaces.</p> <p><b>interface sp-fpc/pic/port</b>—(Optional) Display L2TP summary information for only the specified adaptive services interface. This option is not available for L2TP on MX Series routers.</p> <p><b>statistics</b>—(Optional) Display a summary of control packets and bytes transmitted and received.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">L2TP Services Configuration Overview</a></li> <li>• <a href="#">L2TP Minimum Configuration</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show services l2tp summary (LAC on M Series routers) on page 768</a></p> <p><a href="#">show services l2tp summary (LAC on MX Series routers) on page 769</a></p> <p><a href="#">show services l2tp summary (LNS on MX Series routers) on page 769</a></p> <p><a href="#">show services l2tp summary (LNS on M Series routers) on page 769</a></p> <p><a href="#">show services l2tp summary statistics (MX Series routers) on page 769</a></p>
<b>Output Fields</b>	<p><a href="#">Table 45 on page 765</a> lists the output fields for the <b>show services l2tp summary</b> command. Output fields are listed in the approximate order in which they appear.</p>

*Table 45: show services l2tp summary Output Fields*

Field Name	Field Description
<b>Administrative state</b>	Administrative state of the tunnel is drain. In this state you cannot configure new sessions, destinations, or tunnels at the LAC or LNS.

Table 45: show services l2tp summary Output Fields (continued)

Field Name	Field Description
<b>Failover within a preference level</b>	State of this tunnel selection method on the LAC. When enabled, tunnel selection fails over within a preference level. When disabled, tunnel selection drops to the next lower preference level. Not displayed for LNS on M Series routers.
<b>Weighted load balancing</b>	State of this tunnel selection method on the LAC. When enabled, the maximum session limit of a tunnel determines its weight within a preference level. Tunnel selection proceeds from greatest to least weight. When disabled, selection defaults to a round robin method. Not displayed for LNS on M Series routers.
<b>Destination equal load balancing</b>	State of this tunnel selection method on the LAC. When enabled, the LAC selects tunnels based on the session count for destinations and the tunnel session count. Not displayed for LNS on M Series routers.
<b>Tunnel authentication challenge</b>	State of tunnel authentication, indicating whether the LAC and LNS exchange an authentication challenge and response during the establishment of the tunnel. The state is <b>Enabled</b> when a secret is configured in the tunnel profile or on the RADIUS server in the Tunnel-Password attribute [69]. The state is <b>Disabled</b> when the secret is not present. Not displayed for LNS on M Series routers.
<b>Calling number avp</b>	When the state is <b>Enabled</b> , the LAC includes the value of the Calling Number AVP 22 in ICRQ packets sent to the LNS. When the state is <b>Disabled</b> , the attribute is not sent to the LNS. Not displayed for LNS on M Series routers.
<b>Failover Protocol</b>	When the state is enabled, the LAC operates in the default <i>failover-protocol-fall-back-to-silent-failover</i> manner. When the state is disabled, the <b>disable-failover-protocol</b> statement has been issued and the LAC operates only in silent failover mode. Not displayed for LNS on M Series routers.
<b>Tx connect speed method</b>	<p>The connection speed method configured to send the speed values in the L2TP Tx Connect Speed (AVP 24) and L2TP Rx Connect Speed (AVP 38). Possible values are:</p> <ul style="list-style-type: none"> <li>• <b>actual</b> This is the default value in Junos OS Releases 15.1, 16.1, 16.2, and 17.1. It is deprecated in Junos Releases 17.2 and higher.</li> <li>• <b>ancp</b></li> <li>• <b>none</b></li> <li>• <b>pppoe-ia-tag</b></li> <li>• <b>service-profile</b></li> <li>• <b>static</b> This is the default value in Junos Releases 13.3, 14.1, 14.2, 17.2 and higher. It is deprecated in Junos OS Releases 15.1, 16.1, 16.2, and 17.1.</li> </ul>
<b>Rx speed avp when equal</b>	Indicates if the Rx connect speed when equal configuration is <b>enabled</b> or <b>disabled</b> .

Table 45: show services l2tp summary Output Fields (continued)

Field Name	Field Description
<b>Tunnel assignment id</b>	<p>Format of the tunnel name.</p> <p>Format of the tunnel name, based on RADIUS attributes returned from the AAA server:</p> <ul style="list-style-type: none"> <li>• <b>authentication-id</b>—Name consists of only Tunnel Assignment-Id [82]. This is the default value.</li> <li>• <b>client-server-id</b>—Name is a combination of Tunnel-Client-Auth-Id [90], Tunnel-Server-Endpoint [67], and Tunnel-Assignment-Id [82]. This format is available only on MX Series routers.</li> </ul>
<b>Tunnel Tx Address Change</b>	<p>Action taken by LAC when it receives a request from a peer to change the destination IP address, UDP port, or both:</p> <ul style="list-style-type: none"> <li>• <b>accept</b>—Accepts change requests for the IP address or UDP port. This is the default action.</li> <li>• <b>ignore</b>—Ignores all change requests.</li> <li>• <b>ignore-ip-address</b>—Ignores change requests for the IP address but accepts them for the UDP port.</li> <li>• <b>ignore-udp-port</b>—Ignores change requests for the UDP port but accepts them for the IP address.</li> </ul>
<b>Min Retransmission Timeout for control packets</b>	Minimum number of seconds that the local peer waits for the initial response after transmitting an L2TP control packet. If no response has been received by the time the period expires, the local peer retransmits the packet.
<b>Min Retransmission Timeout for control packets</b>	Minimum number of seconds that the local peer waits for the initial response after transmitting an L2TP control packet. If no response has been received by the time the period expires, the local peer retransmits the packet.
<b>Max Retransmissions for Established Tunnel</b>	Maximum number of times control messages are retransmitted for established tunnels.
<b>Max Retransmissions for Not Established Tunnel</b>	Maximum number of times control messages are retransmitted for tunnels that are not established.
<b>Tunnel Idle Timeout</b>	Period that a tunnel can be inactive—that is, carrying no traffic—before it times out and is torn down.
<b>Destruct Timeout</b>	Period that the router attempts to maintain dynamic destinations, tunnels, and sessions after they have been destroyed.
<b>Reassembly Service Set</b>	Indicates active IP reassembly configured for the interface.
<b>Destination Lockout Timeout</b>	Timeout period for which all future destinations are locked out, meaning that they are not considered for selection when a new tunnel is created.

Table 45: show services l2tp summary Output Fields (continued)

Field Name	Field Description
<b>Access Line Information</b>	<p>State of LAC global configuration for forwarding subscriber line information to the LNS, <b>Enabled</b> or <b>Disabled</b>.</p> <p>Indicates active IP reassembly configured for the interface.</p> <p>Starting in Junos OS Release 17.4R1, this information can also be displayed on the LNS for information it receives from the LAC.</p>
<b>IPv6 Services for LAC Sessions</b>	<p>State of LAC IPv6 service configuration for creating the IPv6 (inet6) address family for LAC subscribers, allowing the application of IPv6 firewall filters, <b>Enabled</b> or <b>Disabled</b>.</p>
<b>Speed Updates</b>	<p>State of LAC global configuration for including connection speed updates when it forwards subscriber line information to the LNS, <b>Enabled</b> or <b>Disabled</b>.</p> <p>Starting in Junos OS Release 17.4R1, this information can also be displayed on the LNS for updates it receives from the LAC.</p>
<b>Destinations</b>	Number of L2TP destinations for the LAC. Not displayed for LNS on M Series routers.
<b>Tunnels</b>	Number of L2TP tunnels established on the router.
<b>Sessions</b>	Number of L2TP sessions established on the router.
<b>Switched sessions</b>	Number of L2TP tunnel-switched sessions established on the router.
<b>Control</b>	Count of L2TP control packets and bytes sent and received.
<b>Data</b>	Count of L2TP data packets and bytes sent and received.
<b>Errors</b>	Count of L2TP error packets and bytes sent and received.

## Sample Output

### show services l2tp summary (LAC on M Series routers)

```

user@host> show services l2tp summary

Administrative state is Drain
Failover within a preference level is Disabled
Weighted load balancing is Enabled
Destination equal load balancing is Disabled
Tunnel authentication challenge is Enabled
Calling number avp is Enabled
Failover Protocol is Disabled
Tunnel assignment id format is authentication-id
Destinations: 1 Tunnels: 1, Sessions: 1
  Tx packets    Rx packets  Memory (bytes)
Control      260           144          11513856

```



Data	7.5k	16.9k	8.3k
Errors	0	0	

#### show services l2tp summary (LAC on MX Series routers)

```
user@host> show services l2tp summary
Administrative state is Drain
  Failover within a preference level is Disabled
  Weighted load balancing is Disabled
  Destination equal load balancing is Enabled
  Tunnel authentication challenge is Enabled
  Calling number avp is Enabled
  Failover Protocol is Disabled
  Tx Connect speed method is static
  Rx speed avp when equal is enabled
  Tunnel Tx Address Change is Accept
  Min Retransmissions Timeout for control packets is 2 seconds
  Max Retransmissions for Established Tunnel is 7
  Max Retransmissions for Not Established Tunnel is 5
  Tunnel Idle Timeout is 60 seconds
  Destruct Timeout is 300 seconds
  Destination Lockout Timeout is 300 seconds
  Reassembly Service Set is ssnr3
  Access Line Information is Enabled, Speed Updates is Enabled
  IPv6 Services For LAC Sessions is Enabled
  Destinations: 0, Tunnels: 0, Sessions: 0, Switched sessions: 0
```

#### show services l2tp summary (LNS on MX Series routers)

```
user@host show services l2tp summary
Administrative state is Drain
  Failover within a preference level is Disabled
  Weighted load balancing is Disabled
  Destination equal load balancing is Disabled
  Tunnel authentication challenge is Enabled
  Calling number avp is Enabled
  Failover Protocol is Enabled
  Tx Connect speed method is static
  reassembly Service Set is ssnr3
  Destinations: 4, Tunnels: 19, Sessions: 65, Switched sessions: 2
  Access Line Information is Enabled, Speed Updates is Enabled
```

#### show services l2tp summary (LNS on M Series routers)

```
user@host> show services l2tp summary
Tunnels: 2, Sessions: 2, Errors: 0
  Tx packets    Rx packets    Memory (bytes)
Control        6k            9k            688k
Data           70k           70k           3054
```

#### show services l2tp summary statistics (MX Series routers)

```
user@host>show services l2tp summary statistics
Administrative state is Drain
Failover within a preference level is Disabled
```

```
Weighted load balancing is Disabled
Destination equal load balancing is Disabled
Tunnel authentication challenge is Enabled
Calling number avp is Enabled
Failover Protocol is Enabled
Tx Connect speed method is advisory
Tunnel assignment id format is assignment-id
Tunnel Tx Address Change is Accept
Min Retransmissions Timeout for control packets is 4 seconds
Max Retransmissions for Established Tunnel is 7
Max Retransmissions for Not Established Tunnel is 5
Tunnel Idle Timeout is 60 seconds
Destruct Timeout is 300 seconds
Destination Lockout Timeout is 300 seconds
Destinations: 1, Tunnels: 1, Sessions: 31815, Switched sessions: 0
  Tx packets  Rx packets  Memory (bytes)
Control      90.4k         32.0k         245678080
Data        127.3k        100.8kk          0
Errors           0           0
```

## show services l2tp tunnel

**Syntax**

```
show services l2tp tunnel
<brief | detail | extensive>
<interface sp-fpc/pic/port>
<local-gateway gateway-address>
<local-gateway-name gateway-name>
<local-tunnel-id tunnel-id>
<peer-gateway gateway-address>
<peer-gateway-name gateway-name>
<statistics>
<tunnel-group group-name>
```

**Release Information** Command introduced before Junos OS Release 7.4.

**Description** (M10i and M7i routers only) Display information about active Layer 2 Tunneling Protocol (L2TP) tunnels for LNS.

(MX Series routers only) Display information about L2TP tunnels for LAC and LNS; the tunnels may or may not have active sessions.

**Options** **none**—Display standard information about all active L2TP tunnels.

**brief | detail | extensive**—(Default) Display the specified level of output.

**interface *sp-fpc/pic/port***—(Optional) Display L2TP tunnel information for only the specified adaptive services interface. This option is not available for L2TP on MX Series routers.

**local-gateway *gateway-address***—(Optional) Display L2TP tunnel information for only the specified local gateway address.

**local-gateway-name *gateway-name***—(Optional) Display L2TP tunnel information for only the specified local gateway name.

**local-tunnel-id *tunnel-id***—(Optional) Display L2TP tunnel information for only the specified local tunnel identifier.

**peer-gateway *gateway-address***—(Optional) Display L2TP tunnel information for only the specified peer gateway address.

**peer-gateway-name *gateway-name***—(Optional) Display L2TP tunnel information for only the specified peer gateway name.

**statistics**—(Optional) Display the number of control packets and bytes transmitted and received for the tunnel. The statistics for a tunnel are retained until the tunnel is disconnected, rather than until the last session in the tunnel is cleared. Retaining the statistics enables them to increment in the event a new session subsequently uses the tunnel. You cannot include this option with any of the level options, **brief**, **detail**, or **extensive**.

**tunnel-group *group-name***—(Optional) Display L2TP tunnel information for only the specified tunnel group.

**Required Privilege Level** view

**Related Documentation**

- *L2TP Services Configuration Overview*
- *L2TP Minimum Configuration*

**List of Sample Output**

[show services l2tp tunnel \(LAC\) on page 774](#)  
[show services l2tp tunnel detail \(LAC\) on page 774](#)  
[show services l2tp tunnel detail \(LAC on MX Series Routers\) on page 774](#)  
[show services l2tp tunnel detail \(LNS on MX Series Routers\) on page 775](#)  
[show services l2tp tunnel extensive \(LAC\) on page 775](#)  
[show services l2tp tunnel extensive \(LNS on M Series Routers\) on page 775](#)  
[show services l2tp tunnel extensive \(LNS on MX Series Routers\) on page 776](#)  
[show services l2tp tunnel statistics \(MX Series Routers\) on page 776](#)

**Output Fields** [Table 46 on page 772](#) lists the output fields for the **show services l2tp tunnel** command. Output fields are listed in the approximate order in which they appear.

*Table 46: show services l2tp tunnel Output Fields*

Field Name	Field Description
<b>Interface</b>	(LNS only) Name of an adaptive services interface.
<b>Tunnel group</b>	(LNS only) Name of a tunnel group.
<b>Local ID</b>	On the LNS, number assigned by the LNS that identifies the local endpoint of the tunnel relative to the LNS: the LNS.  On the LAC, number assigned by the LAC that identifies the local endpoint of the tunnel relative to the LAC: the LAC.
<b>Remote ID</b>	On the LNS, number assigned by the LAC that identifies the remote endpoint of the tunnel relative to the LNS: the LAC.  On the LAC, number assigned by the LNS that identifies the remote endpoint of the tunnel relative to the LAC: the LNS.
<b>Remote IP</b>	IP address of the peer endpoint of the tunnel.
<b>Sessions</b>	Number of L2TP sessions established through the tunnel.

Table 46: *show services l2tp tunnel Output Fields (continued)*

Field Name	Field Description
<b>State</b>	<p>State of the L2TP tunnel:</p> <ul style="list-style-type: none"> <li>• <b>cc_responder_accept_new</b>—The tunnel has received and accepted the start control connection request (SCCRQ).</li> <li>• <b>cc_responder_reject_new</b>—The tunnel has received and rejected the SCCRQ.</li> <li>• <b>cc_responder_idle</b>—The tunnel has just been created.</li> <li>• <b>cc_responder_wait_ctl_conn</b>—The tunnel has sent the start control connection response (SCCRP) and is waiting for the start control connection connected (SCCCN) message.</li> <li>• <b>clean-up</b>—The tunnel is being cleaned up.</li> <li>• <b>closed</b>—The tunnel is being closed.</li> <li>• <b>destroyed</b>—The tunnel is being destroyed.</li> <li>• <b>Drain</b>—Creation of new sessions and destinations is disabled for this tunnel.</li> <li>• <b>Established</b>—The tunnel is operating. This is the only state supported for the LAC.</li> <li>• <b>Terminate</b>—The tunnel is terminating.</li> <li>• <b>Unknown</b>—The tunnel is not connected to the router.</li> </ul>
<b>Tunnel Name</b>	(LAC only) Name of the created tunnel. This value includes the destination name followed by the value of the RADIUS Tunnel-Assignment-ID VSA [82].
<b>Local IP</b>	IP address of the local endpoint of the tunnel.
<b>Local name</b>	Name used for local tunnel endpoint during tunnel negotiation.
<b>Remote name</b>	Name used for remote tunnel endpoint during tunnel negotiation.
<b>Effective Peer Resync Mechanism</b>	<p>(LAC only) Peer resynchronization mechanism (PRM) in effect for the tunnel:</p> <ul style="list-style-type: none"> <li>• Failover protocol</li> <li>• Silent failover—Recovery takes place in the failed endpoint only using the proprietary silent failover protocol.</li> </ul>
<b>Nas Port Method</b>	<p>NAS port method (type), which indicates whether the LAC sends Cisco NAS Port Info AVP (100) in ICRQs to the LNS:</p> <ul style="list-style-type: none"> <li>• <b>cisco-avp</b>—sends the AVP.</li> <li>• <b>none</b>—does not send the AVP.</li> </ul>
<b>Tunnel Logical System</b>	Logical system in which the L2TP tunnel is brought up.
<b>Tunnel Routing Instance</b>	Routing instance in which the L2TP tunnel is brought up.
<b>Max sessions</b>	Maximum number of sessions that can be established on this tunnel.
<b>Window size</b>	Number of control messages that can be sent without receipt of an acknowledgment.
<b>Hello interval</b>	Interval between the transmission of hello messages, in seconds.

Table 46: show services l2tp tunnel Output Fields (continued)

Field Name	Field Description
<b>Create time</b>	Date and time when the tunnel was created. While the LNS and LAC are connected, this value should correspond to the router's uptime. If connection to the LAC is severed, the State changes to <b>Unknown</b> and the <b>Create time</b> value resets.
<b>Up time</b>	Amount of time elapsed since the tunnel became active, in hours, minutes, and seconds.
<b>Idle time</b>	Amount of time elapsed since the tunnel became idle, in hours, minutes, and seconds.
<b>Statistics since</b>	<p>Date and time when collection of the following statistics began:</p> <ul style="list-style-type: none"> <li>• <b>Control Tx</b>—Amount of control information transmitted, in packets and bytes.</li> <li>• <b>Control Rx</b>—Amount of control information received, in packets and bytes.</li> <li>• <b>Data Tx</b>—Amount of data transmitted, in packets and bytes.</li> <li>• <b>Data Rx</b>—Amount of data received, in packets and bytes.</li> <li>• <b>Errors Tx</b>—Number of errors transmitted, in packets.</li> <li>• <b>Errors Rx</b>—Number of errors received, in packets.</li> </ul>

## Sample Output

### show services l2tp tunnel (LAC)

```
user@host> show services l2tp tunnel
```

```
Local ID  Remote ID  Remote IP          Sessions  State
17185      1    203.0.113.101:1701      1    Established
```

### show services l2tp tunnel detail (LAC)

```
user@host> show services l2tp tunnel detail
```

```
Tunnel local ID: 31889, Tunnel remote ID:      1
Remote IP: 203.0.113.101:1701
Sessions: 1, State: Established
Tunnel Name: 1/tunnel-to-LNS-1
Local IP: 192.0.2.2:1701
Local name: ce-lac, Remote name: ce-lns
Effective Peer Resync Mechanism: silent failover
```

### show services l2tp tunnel detail (LAC on MX Series Routers)

```
user@host> show services l2tp tunnel detail
```

```
Tunnel local ID: 17301, Tunnel remote ID: 1
Remote IP: 203.0.113.101:1701
Sessions: 1, State: Established
Tunnel Name: 2/tunnel-to-LNS-2
Local IP: 192.0.2.2:1701
Local name: ce-lac, Remote name: ce-lns
Effective Peer Resync Mechanism: silent failover
Tunnel Logical System: default, Tunnel Routing Instance: default
```

**show services l2tp tunnel detail (LNS on MX Series Routers)**

```

user@host> show services l2tp tunnel detail
Tunnel local ID: 17301, Tunnel remote ID: 1
Remote IP: 198.51.100.15:1701
Sessions: 1, State: Established
Tunnel Name: 2/2
Local IP: 198.51.100.5:1701
Local name: ce-bras-mx240-e, Remote name: testlac2
Effective Peer Resync Mechanism: silent failover
Tunnel Logical System: default, Tunnel Routing Instance: vrf1

```

**show services l2tp tunnel extensive (LAC)**

```

user@host> show services l2tp tunnel extensive
Tunnel local ID: 17185, Tunnel remote ID: 1
Remote IP: 203.0.113.101:1701
Sessions: 1, State: Established
Tunnel Name: 2/tunnel-to-LNS-2
Local IP: 192.0.2.22:1701
Local name: ce-lac, Remote name: ce-lns
Effective Peer Resync Mechanism: failover protocol
Max sessions: 32000, Window size: 4, Hello interval: 60
Create time: Tue Nov 9 15:23:29 2010, Up time: 00:00:26
Idle time: 00:00:00

```

**show services l2tp tunnel extensive (LNS on M Series Routers)**

```

user@host> show services l2tp tunnel extensive
Interface: sp-1/2/0, Tunnel group: group1
Tunnel local ID: 62746, Tunnel remote ID: 16930
Remote IP: 203.0.113.202:1701
Sessions: 1, State: Established
Local IP: 203.0.113.121:1701
Local name: router-1, Remote name: router-2
Max sessions: 50, Window size: 32, Hello interval: 60
Create time: Tue Mar 23 14:13:15 2004, Up time: 01:14:58
Idle time: 00:00:07
Statistics since: Tue Mar 23 14:13:13 2004

```

	Packets	Bytes
Control Tx	80	1152
Control Rx	3	272
Data Tx	0	0
Data Rx	450	28.0k
Errors Tx	0	
Errors Rx	0	

```

Interface: sp-1/2/0, Tunnel group: group_company_dns
Tunnel local ID: 37266, Tunnel remote ID: 36217
Remote IP: 203.0.113.222:1701
Sessions: 1, State: Established
Local IP: 203.0.113.111:1701
Local name: router-1, Remote name: router-2
Max sessions: unlimited, Window size: 32, Hello interval: 60
Create time: Tue Mar 23 14:13:15 2004, Up time: 01:14:59
Idle time: 01:14:55
Statistics since: Tue Mar 23 14:13:13 2004

```

	Packets	Bytes
Control Tx	81	1164
Control Rx	3	273
Data Tx	0	0
Data Rx	1	80
Errors Tx	0	
Errors Rx	0	

### show services l2tp tunnel extensive (LNS on MX Series Routers)

```
user@host> show services l2tp tunnel extensive
```

```
Tunnel local ID: 40553, Tunnel remote ID: 1
Remote IP: 192.0.2.3:1701
Sessions: 1, State: Established
Tunnel Name: 3/1838
Local IP: 203.0.113.2:1701
Local name: lns-mx960, Remote name: testlac
Effective Peer Resync Mechanism: silent failover
Nas Port Method: none
Tunnel Logical System: default, Tunnel Routing Instance: vrf1
Max sessions: 60000, Window size: 4, Hello interval: 60
Create time: Mon Apr 25 20:27:50 2011, Up time: 00:01:11
Idle time: 00:00:00, ToS Reflect: Enabled
Tunnel Group Name: tg1
Statistics since: Mon Apr 25 20:27:50 2011
```

	Packets	Bytes
Control Tx	4	219
Control Rx	4	221
Data Tx	0	0
Data Rx	6	64
Errors Tx	0	
Errors Rx		

### show services l2tp tunnel statistics (MX Series Routers)

```
user@host>show services l2tp tunnel statistics
```

```
Tunnel local ID: 17185, Tunnel remote ID: 1
Sessions: 31.8k, State: Established
Statistics since: Mon Aug 1 13:21:38 2011
```

	Packets	Bytes
Control Tx	90.3k	9.0M
Control Rx	32.0k	1296.9k
Data Tx	127.3k	1591.6k
Data Rx	100.8k	1273.4k
Errors Tx	0	
Errors Rx	0	



## show services l2tp tunnel-group

**Syntax** `show services l2tp tunnel-group  
<group-name>`

**Release Information** Command introduced in Junos OS Release 16.1.

**Description** Display information about all L2TP tunnel groups or a specific L2TP tunnel group.

**Options** *group-name*—(Optional) Name of a tunnel group.

**Required Privilege Level** view

**Related Documentation**

- [show services l2tp client on page 746](#)
- [show services l2tp session-limit-group on page 763](#)
- [L2TP Session Limits Overview on page 170](#)

**List of Sample Output** [show services l2tp tunnel-group on page 777](#)  
[show services l2tp tunnel-group \(Group Name\) on page 778](#)

**Output Fields** [Table 47 on page 777](#) lists the output fields for the **show services l2tp tunnel-group** command. Output fields are listed in the approximate order in which they appear.

*Table 47: show services l2tp tunnel-group Output Fields*

Field Name	Field Description
Tunnel-group	Name of a tunnel group.
Tunnels	Number of tunnels in the tunnel group.
Sessions	Number of L2TP sessions established for tunnels in the tunnel group.

## Sample Output

### show services l2tp tunnel-group

```
user@host> show services l2tp tunnel-group
Tunnel-group      Tunnels      Sessions
l2tp-tunnel-group1  2             20
l2tp-tunnel-group2  3            120
```

**show services l2tp tunnel-group (Group Name)**

```
user@host> show services l2tp tunnel-group l2tp-tunnel-group1
```

Tunnel-group	Tunnels	Sessions
l2tp-tunnel-group1	2	20

## show services l2tp tunnel-switch destination

**Syntax** `show services l2tp tunnel-switch destination  
< detail | extensive >  
<statistics>`

**Release Information** Command introduced in Junos OS Release 13.2.

**Description** Display information about L2TP switched tunnel destinations.

**Options** **none**—Display standard information for all L2TP switched tunnel destinations.

**detail | extensive**—(Optional) Display the specified level of information.

**statistics**—(Optional) Display the number of control packets and bytes transmitted and received for the destination. You cannot include this option with either of the level options, **detail** or **extensive**.

**Required Privilege Level** view

**Related Documentation**

- [show services l2tp tunnel-switch session on page 783](#)
- [show services l2tp tunnel-switch summary on page 788](#)
- [show services l2tp tunnel-switch tunnel on page 790](#)

**List of Sample Output**

- [show services l2tp tunnel-switch destination on page 781](#)
- [show services l2tp tunnel-switch destination detail on page 781](#)
- [show services l2tp tunnel-switch destination extensive on page 781](#)
- [show services l2tp tunnel-switch destination statistics on page 782](#)

**Output Fields** Table 48 on page 779 lists the output fields for the **show services l2tp tunnel-switch destination** command. Output fields are listed in the approximate order in which they appear.

*Table 48: show services l2tp tunnel-switch destination Output Fields*

Field Name	Field Description	Level of Output
<b>Local Name</b>	Name of this destination.	All levels
<b>Remote IP</b>	IP address of the remote peer (LNS).	All levels

Table 48: show services l2tp tunnel-switch destination Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Tunnels</b>	Number of tunnel connections for the destination in the following categories: <ul style="list-style-type: none"> <li>total</li> <li>active</li> <li>failed</li> </ul>	All levels for total <b>extensive</b> for active and failed
<b>Sessions</b>	Number of session connections for the destination in the following categories: <ul style="list-style-type: none"> <li>total</li> <li>active</li> <li>failed</li> </ul>	All levels for total <b>extensive</b> for active and failed
<b>Switched-sessions</b>	Number of L2TP sessions established by tunnel switching.	All levels
<b>State</b>	Administrative state of the L2TP destination: <ul style="list-style-type: none"> <li><b>Enabled</b>—No restrictions exist on creation or operation of sessions and tunnels for this destination.</li> <li><b>Disabled</b>—Existing sessions and tunnels for this destination have been disabled and no new sessions or tunnels are created while in the <b>Disabled</b> state.</li> </ul>	All levels
<b>Local IP</b>	IP address of the local gateway (LAC).	<b>detail extensive</b>
<b>Transport</b>	Medium used for tunneling. Only <b>ipUdp</b> is supported.	<b>detail extensive</b>
<b>Logical System</b>	Logical system in which the tunnel is configured.	<b>detail extensive</b>
<b>Router Instance</b>	Routing instance in which the tunnel is configured.	<b>detail extensive</b>
<b>Lockout State</b>	Reachability state of the destination: <ul style="list-style-type: none"> <li><b>not locked</b>—Destination is considered reachable.</li> <li><b>waiting for lockout timeout</b>—Destination is locked out by L2TP because it is unreachable, so no attempts are made to reach the destination until the lockout timeout (300 seconds) expires, unless this is the only destination available for tunneling the subscriber.</li> </ul>	<b>detail extensive</b>
<b>Connections</b>	Number of total, active, and failed tunnel and session connections for the destination.	<b>extensive</b>
<b>Control Tx</b>	Amount of control information transmitted, in packets and bytes.	<b>extensive statistics</b>
<b>Control Rx</b>	Amount of control information received, in packets and bytes.	<b>extensive statistics</b>
<b>Data Tx</b>	Amount of data transmitted, in packets and bytes.	<b>extensive statistics</b>
<b>Data Rx</b>	Amount of data received, in packets and bytes.	<b>extensive statistics</b>

Table 48: show services l2tp tunnel-switch destination Output Fields (continued)

Field Name	Field Description	Level of Output
Error Tx	Number of errors transmitted, in packets.	extensive statistics
Error Rx	Number of errors received, in packets.	extensive statistics

## Sample Output

### show services l2tp tunnel-switch destination

```
user@host> show services l2tp tunnel-switch destination
```

Local Name	Remote IP	Tunnels	Sessions	Switched-sessions	State
1	192.0.2.3	1	1	1	Enabled
2	203.0.113.10	1	1	1	Enabled

### show services l2tp tunnel-switch destination detail

```
user@host> show services l2tp tunnel-switch destination detail
```

```
Local name: 1
Remote IP: 192.0.2.3
Tunnels: 1, Sessions: 1, Switched sessions: 1
State: Enabled
Local IP: 203.0.113.51
Transport: ipUdp, Logical System: default, Router Instance: default
Lockout State: not locked
Local name: 2
Remote IP: 198.51.100.10
Tunnels: 1, Sessions: 1, Switched sessions: 1
State: Enabled
Local IP: 203.0.113.31
Transport: ipUdp, Logical System: default, Router Instance: default
Lockout State: not locked
```

### show services l2tp tunnel-switch destination extensive

```
user@host> show services l2tp tunnel-switch destination extensive
```

```
Waiting for statistics...
```

```
Local name: 1
Remote IP: 192.0.2.3
Tunnels: 1, Sessions: 1, Switched sessions: 1
State: Enabled
Local IP: 203.0.113.51
Transport: ipUdp, Logical System: default, Router Instance: default
Lockout State: not locked
Connections      Totals      Active      Failed
Tunnels          1           1           0
Sessions         1           1           0
                  Packets      Bytes
Control Tx       6           239
Control Rx       6           267
Data Tx          67          815
Data Rx          0           0
Errors Tx        0
```

```

Errors Rx          0
Local name: 2
Remote IP: 198.51.100.10
Tunnels: 1, Sessions: 1, Switched sessions: 1
State: Enabled
Local IP: 203.0.113.31
Transport: ipUdp, Logical System: default, Router Instance: default
Lockout State: not locked

```

Connections	Totals	Active	Failed
Tunnels	1	1	0
Sessions	1	1	0

	Packets	Bytes
Control Tx	7	462
Control Rx	6	171
Data Tx	0	0
Data Rx	66	798
Errors Tx	0	
Errors Rx	0	

### show services l2tp tunnel-switch destination statistics

```
user@host> show services l2tp tunnel-switch destination statistics
```

```

Waiting for statistics...
Local name: 2, Tunnels: 1, Sessions: 1

```

	Packets	Bytes
Control Tx	5	452
Control Rx	4	147
Data Tx	0	0
Data Rx	4	54
Errors Tx	0	
Errors Rx	0	

```

Local name: 1, Tunnels: 1, Sessions: 1

```

	Packets	Bytes
Control Tx	4	184
Control Rx	4	243
Data Tx	5	71
Data Rx	0	0
Errors Tx	0	
Errors Rx	0	

## show services l2tp tunnel-switch session

**Syntax** `show services l2tp tunnel-switch session  
<detail | extensive>  
<statistics>`

**Release Information** Command introduced in Junos OS Release 13.2.

**Description** Display information about L2TP switched tunnel sessions.

**Options** **none**—Display standard information about all active L2TP switched tunnel sessions.

**detail | extensive**—(Optional) Display the specified level of output.

**statistics**—(Optional) Display the number of control packets and bytes transmitted and received for the session. You cannot include this option with either of the level options, **detail** or **extensive**.

### Additional Information

**Required Privilege Level** view

**Related Documentation**

- [show services l2tp tunnel-switch destination on page 779](#)
- [show services l2tp tunnel-switch summary on page 788](#)
- [show services l2tp tunnel-switch tunnel on page 790](#)

**List of Sample Output** [show services l2tp tunnel-switch session on page 785](#)  
[show services l2tp tunnel-switch session detail on page 786](#)  
[show services l2tp tunnel-switch session extensive on page 786](#)

**Output Fields** [Table 49 on page 783](#) lists the output fields for the **show services l2tp tunnel-switch session** command. Output fields are listed in the approximate order in which they appear.

*Table 49: show services l2tp tunnel-switch session Output Fields*

Field Name	Field Description	Level of Output
<b>Tunnel local ID</b>	Identifier of the local endpoint of the tunnel, as assigned by the L2TP network server (LNS).	All levels
<b>Local ID</b>	Identifier of the local endpoint of the L2TP session, as assigned by the LNS.	none
<b>Remote ID</b>	Identifier of the remote endpoint of the L2TP session, as assigned by the L2TP access concentrator (LAC).	none

Table 49: show services l2tp tunnel-switch session Output Fields (continued)

Field Name	Field Description	Level of Output
<b>State</b>	State of the L2TP session: <ul style="list-style-type: none"> <li>• <b>Established</b>—Session is operating. This is the only state supported for the LAC.</li> <li>• <b>closed</b>—Session is being closed.</li> <li>• <b>destroyed</b>—Session is being destroyed.</li> <li>• <b>clean-up</b>—Session is being cleaned up.</li> <li>• <b>lms-ic-accept-new</b>—New session is being accepted.</li> <li>• <b>lms-ic-idle</b>—Session has been created and is idle.</li> <li>• <b>lms-ic-reject-new</b>—New session is being rejected.</li> <li>• <b>lms-ic-wait-connect</b>—Session is waiting for the peer's incoming call connected (ICCN) message.</li> </ul>	All levels
<b>Interface unit</b>	Logical interface for this session.	All levels
<b>Interface Name</b>	(LNS only) Name of an adaptive services interface.	none
<b>Session local ID</b>	Identifier of the local endpoint of the L2TP session, as assigned by the LNS.	<b>detail extensive</b>
<b>Session remote ID</b>	Identifier of the remote endpoint of the L2TP session, as assigned by the L2TP access concentrator (LAC).	<b>detail extensive</b>
<b>Tunnel switch profile name</b>	Name of a tunnel switch profile.	<b>detail extensive</b>
<b>Mode</b>	(LNS) Mode of the interface representing the session: <b>shared</b> or <b>exclusive</b> .  (LAC) Mode of the interface representing the session: <b>shared</b> or <b>dedicated</b> . Only <b>dedicated</b> is currently supported for the LAC.	<b>detail extensive</b>
<b>Local IP</b>	IP address of local endpoint of the Point-to-Point Protocol (PPP) session.	<b>detail extensive</b>
<b>Remote IP</b>	IP address of remote endpoint of the PPP session.	<b>detail extensive</b>
<b>Local name</b>	For LNS, name of the LNS instance in which the session was created. For LAC, name of the LAC.	<b>detail extensive</b>
<b>Remote name</b>	For LNS, name of the LAC from which the session was created. For LAC, name of the LAC instance.	<b>detail extensive</b>
<b>Bearer type</b>	Type of bearer enabled: <ul style="list-style-type: none"> <li>• <b>0</b>—Might indicate that the call was not received over a physical link (for example, when the LAC and PPP are located in the same subsystem).</li> <li>• <b>1</b>—Digital access requested.</li> <li>• <b>2</b>—Analog access requested.</li> <li>• <b>4</b>—Asynchronous Transfer Mode (ATM) bearer support.</li> </ul>	<b>extensive</b>



Table 49: `show services l2tp tunnel-switch session` Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Framing type</b>	Type of framing enabled: <ul style="list-style-type: none"> <li>1—Synchronous framing</li> <li>2—Asynchronous framing</li> </ul>	extensive
<b>LCP renegotiation</b>	(LNS only) Whether Link Control Protocol (LCP) renegotiation is configured: <b>On</b> or <b>Off</b> .	extensive
<b>Authentication</b>	Type of authentication algorithm used: Challenge Handshake Authentication Protocol (CHAP) or Password Authentication Protocol (PAP).	extensive
<b>Interface ID</b>	(LNS only) Identifier used to look up the logical interface for this session.	extensive
<b>Call serial number</b>	Unique serial number assigned to the call.	extensive
<b>Tx speed</b>	Transmit speed of the session conveyed from the LAC to the LNS, in bits per second (bps).	extensive
<b>Rx speed</b>	Receive speed of the session conveyed from the LAC to the LNS, in bits per second (bps).	extensive
<b>Create time</b>	Day, date, and time when the call was created.	extensive
<b>Up time</b>	Length of time elapsed since the call became active, in hours, minutes, and seconds.	extensive
<b>Idle time</b>	Length of time elapsed since the call became idle, in hours, minutes, and seconds.	extensive
<b>ToS Reflect</b>	Status of IP ToS value reflection, <b>Disabled</b> or <b>Enabled</b> .	extensive
<b>Statistics since</b>	Date and time when collection of the following statistics began: <ul style="list-style-type: none"> <li><b>Data Tx</b>—Amount of data transmitted, in packets and bytes.</li> <li><b>Data Rx</b>—Amount of data received, in packets and bytes.</li> </ul>	extensive

## Sample Output

### `show services l2tp tunnel-switch session`

```
user@host> show services l2tp tunnel-switch session
```

```
Tunnel local ID: 37602
  Local  Remote  State          Interface      Interface
  ID     ID                               unit           Name
  13545  1           Established    1073741842     si-2/1/0

Tunnel local ID: 37060
  Local  Remote  State          Interface      Interface
```

ID	ID		unit	Name
58296	1	Established	1073741843	si-2/1/0

### show services l2tp tunnel-switch session detail

```

user@host> show services l2tp tunnel-switch session detail

Tunnel local ID: 37602
  Session local ID: 13545, Session remote ID: 1, Interface unit: 1073741842
  State: Established, Interface: si-2/1/0
  Tunnel switch profile name: ce-lts-profile
  Mode: Dedicated
  Local IP: 203.0.113.51:1701, Remote IP: 192.0.2.3:1701
  Local name: ce-bras-mx240-f, Remote name: testlac

Tunnel local ID: 37060
  Session local ID: 58296, Session remote ID: 1, Interface unit: 1073741843
  State: Established, Interface: si-2/1/0
  Tunnel switch profile name: ce-lts-profile
  Mode: Dedicated
  Local IP: 203.0.113.31:1701, Remote IP: 198.51.100.10:1701
  Local name: lns, Remote name: lns

```

### show services l2tp tunnel-switch session extensive

```

user@host> show services l2tp tunnel-switch session extensive

Tunnel local ID: 37602
  Session local ID: 13545, Session remote ID: 1
  Interface unit: 1073741842
  State: Established
  Interface: si-2/1/0
  Tunnel switch profile name: ce-lts-profile
  Mode: Dedicated
  Local IP: 203.0.113.51:1701, Remote IP: 192.0.2.3:1701
  Local name: ce-bras-mx240-f, Remote name: testlac
  Bearer type: 2, Framing type: 1
  LCP renegotiation: On, Authentication: None, Interface ID: si-2/1/0
  Call serial number: 0
  Tx speed: 56000, Rx speed: 0
  Create time: Fri Jan 18 03:01:11 2013, Up time: 00:06:50
  Idle time: N/A, ToS Reflect: Disabled
  Statistics since: Fri Jan 18 03:01:11 2013
    Packets      Bytes
  Data Tx       85    1031
  Data Rx        0        0

Tunnel local ID: 37060
  Session local ID: 58296, Session remote ID: 1
  Interface unit: 1073741843
  State: Established
  Interface: si-2/1/0
  Tunnel switch profile name: ce-lts-profile
  Mode: Dedicated
  Local IP: 203.0.113.31:1701, Remote IP: 198.51.100.10:1701
  Local name: lns, Remote name: lns
  Bearer type: 2, Framing type: 1
  LCP renegotiation: N/A, Authentication: None, Interface ID: N/A
  Call serial number: 0

```

```
Tx speed: 56000, Rx speed: 0
Create time: Fri Jan 18 03:01:14 2013, Up time: 00:06:48
Idle time: N/A
Statistics since: Fri Jan 18 03:01:14 2013
```

	Packets	Bytes
Data Tx	0	0
Data Rx	84	1014

## show services l2tp tunnel-switch summary

**Syntax** `show services l2tp tunnel-switch summary  
<statistics>`

**Release Information** Command introduced in Junos OS Release 13.2.

**Description** Display L2TP tunnel switch summary information.

**Options** **none**—Display complete L2TP switched tunnel summary information.

**statistics**—(Optional) Display the number of control packets and bytes transmitted and received for all switched tunnels and sessions.

### Additional Information

**Required Privilege Level** view

**Related Documentation**

- [show services l2tp tunnel-switch destination on page 779](#)
- [show services l2tp tunnel-switch session on page 783](#)
- [show services l2tp tunnel-switch tunnel on page 790](#)

**List of Sample Output** [show services l2tp tunnel-switch summary on page 789](#)

**Output Fields** [Table 50 on page 788](#) lists the output fields for the **show services l2tp tunnel-switch summary** command. Output fields are listed in the approximate order in which they appear.

*Table 50: show services l2tp tunnel-switch summary Output Fields*

Field Name	Field Description
<b>Tunnel switch profile name</b>	Name of a tunnel switch profile.
<b>LNS local session id</b>	Identifier assigned by the LNS function on the LTS to the local endpoint of the L2TP session originating on a remote LAC (the first session)
<b>LAC local session id</b>	Identifier assigned by the LAC function on the LTS to the local endpoint of the L2TP session originating on the LTS (the second session).
<b>LNS state</b>	State of the L2TP session (the first session) between a remote LAC and the LNS function on the LTS.

*Table 50: show services l2tp tunnel-switch summary Output Fields (continued)*

Field Name	Field Description
<b>LAC state</b>	State of the L2TP session (the second session) between the LAC function on the LTS and a remote LNS.

## Sample Output

### show services l2tp tunnel-switch summary

```
user@host> show services l2tp tunnel-switch summary
```

```
Tunnel switch profile name: ce-lts-profile
LNS local  LAC local  LNS state   LAC state   Interface
session ID session ID
13545      58296      established established si-2/1/0
```

## show services l2tp tunnel-switch tunnel

**Syntax** `show services l2tp tunnel-switch tunnel  
<detail | extensive>  
<statistics>`

**Release Information** Command introduced in Junos OS Release 13.2.

**Description** Display information about L2TP switched tunnels.

**Options** **none**—Display standard information about all active L2TP tunnels.

**detail | extensive**—(Default) Display the specified level of output.

**statistics**—(Optional) Display the number of control packets and bytes transmitted and received for the tunnel. You cannot include this option with either of the level options, **detail** or **extensive**.

### Additional Information

**Required Privilege Level** view

**Related Documentation**

- [show services l2tp tunnel-switch destination on page 779](#)
- [show services l2tp tunnel-switch session on page 783](#)
- [show services l2tp tunnel-switch summary on page 788](#)

**List of Sample Output** [show services l2tp tunnel-switch tunnel on page 793](#)  
[show services l2tp tunnel-switch tunnel detail on page 793](#)  
[show services l2tp tunnel-switch tunnel extensive on page 793](#)

**Output Fields** [Table 51 on page 790](#) lists the output fields for the **show services l2tp tunnel-switch tunnel** command. Output fields are listed in the approximate order in which they appear.

*Table 51: show services l2tp tunnel-switch tunnel Output Fields*

Field Name	Field Description	Level of Output
Local ID	On the LNS, number assigned by the LNS that identifies the local endpoint of the tunnel relative to the LNS: the LNS.  On the LAC, number assigned by the LAC that identifies the local endpoint of the tunnel relative to the LAC: the LAC.	none

Table 51: show services l2tp tunnel-switch tunnel Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Remote ID</b>	<p>On the LNS, number assigned by the LAC that identifies the remote endpoint of the tunnel relative to the LNS: the LAC.</p> <p>On the LAC, number assigned by the LNS that identifies the remote endpoint of the tunnel relative to the LAC: the LNS.</p>	none
<b>Remote IP</b>	IP address of the peer endpoint of the tunnel.	All levels
<b>Sessions</b>	Number of L2TP sessions established through the tunnel.	All levels
<b>Switched-sessions</b>	Number of L2TP sessions established by tunnel switching.	All levels
<b>State</b>	<p>State of the L2TP tunnel:</p> <ul style="list-style-type: none"> <li>• <b>cc_responder_accept_new</b>—The tunnel has received and accepted the start control connection request (SCCRQ).</li> <li>• <b>cc_responder_reject_new</b>—The tunnel has received and rejected the SCCRP.</li> <li>• <b>cc_responder_idle</b>—The tunnel has just been created.</li> <li>• <b>cc_responder_wait_ctl_conn</b>—The tunnel has sent the start control connection response (SCCRP) and is waiting for the start control connection connected (SCCCN) message.</li> <li>• <b>clean-up</b>—The tunnel is being cleaned up.</li> <li>• <b>closed</b>—The tunnel is being closed.</li> <li>• <b>destroyed</b>—The tunnel is being destroyed.</li> <li>• <b>Established</b>—The tunnel is operating. This is the only state supported for the LAC.</li> <li>• <b>Terminate</b>—The tunnel is terminating.</li> <li>• <b>Unknown</b>—The tunnel is not connected to the router.</li> </ul>	All levels
<b>Tunnel local ID</b>	<p>On the LNS, number assigned by the LNS that identifies the local endpoint of the tunnel relative to the LNS: the LNS.</p> <p>On the LAC, number assigned by the LAC that identifies the local endpoint of the tunnel relative to the LAC: the LAC.</p>	detail extensive
<b>Tunnel remote ID</b>	<p>On the LNS, number assigned by the LAC that identifies the remote endpoint of the tunnel relative to the LNS: the LAC.</p> <p>On the LAC, number assigned by the LNS that identifies the remote endpoint of the tunnel relative to the LAC: the LNS.</p>	detail extensive
<b>Tunnel Name</b>	(LAC only) Name of the created tunnel. This value includes the destination name followed by the value of the RADIUS Tunnel-Assignment-ID VSA [82].	detail extensive
<b>Local IP</b>	IP address of the local endpoint of the tunnel.	detail extensive
<b>Local name</b>	Name used for local tunnel endpoint during tunnel negotiation.	detail extensive
<b>Remote name</b>	Name used for remote tunnel endpoint during tunnel negotiation.	detail extensive

Table 51: show services l2tp tunnel-switch tunnel Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Effective Peer Resync Mechanism</b>	(LAC only) Peer resynchronization mechanism (PRM) in effect for the tunnel: <ul style="list-style-type: none"> <li>Failover protocol</li> <li>Silent failover—Recovery takes place in the failed endpoint only using the proprietary silent failover protocol.</li> </ul>	<b>detail extensive</b>
<b>NAS Port Method</b>	(LAC only) Status of interoperation with Cisco LNS devices: <ul style="list-style-type: none"> <li>none—NAS port method is not enabled for interoperation.</li> <li>cisco-avp—NAS port method is enabled for interoperation.</li> </ul>	<b>detail extensive</b>
<b>Tunnel Logical System</b>	Logical system in which the L2TP tunnel is brought up.	<b>detail extensive</b>
<b>Tunnel Routing Instance</b>	Routing instance in which the L2TP tunnel is brought up.	<b>detail extensive</b>
<b>Max sessions</b>	Maximum number of sessions that can be established on this tunnel.	<b>extensive</b>
<b>Window size</b>	Number of control messages that can be sent without receipt of an acknowledgment.	<b>extensive</b>
<b>Hello interval</b>	Interval between the transmission of hello messages, in seconds.	<b>extensive</b>
<b>Create time</b>	Date and time when the tunnel was created. While the LNS and LAC are connected, this value should correspond to the router's uptime. If connection to the LAC is severed, the State changes to <b>Unknown</b> and the <b>Create time</b> value resets.	<b>extensive</b>
<b>Up time</b>	Amount of time elapsed since the tunnel became active, in hours, minutes, and seconds.	<b>extensive</b>
<b>Idle time</b>	Amount of time elapsed since the tunnel became idle, in hours, minutes, and seconds.	<b>extensive</b>
<b>ToS Reflect</b>	Status of IP ToS value reflection, <b>Disabled</b> or <b>Enabled</b> .	<b>extensive</b>
<b>Interface Name</b>	(LNS only) Name of an adaptive services interface.	<b>extensive</b>
<b>Tunnel Group Name</b>	(LNS only) Name of a tunnel group.	<b>extensive</b>
<b>Statistics since</b>	Date and time when collection of the following statistics began: <ul style="list-style-type: none"> <li><b>Control Tx</b>—Amount of control information transmitted, in packets and bytes.</li> <li><b>Control Rx</b>—Amount of control information received, in packets and bytes.</li> <li><b>Data Tx</b>—Amount of data transmitted, in packets and bytes.</li> <li><b>Data Rx</b>—Amount of data received, in packets and bytes.</li> <li><b>Errors Tx</b>—Number of errors transmitted, in packets.</li> <li><b>Errors Rx</b>—Number of errors received, in packets.</li> </ul>	<b>extensive</b>



## Sample Output

### show services l2tp tunnel-switch tunnel

```
user@host> show services l2tp tunnel-switch tunnel
```

Local ID	Remote ID	Remote IP	Sessions	Switched-sessions	State
37602	1	192.0.2.3:1701	1	1	Established
37060	1	198.51.100.10:1701	1	1	Established

### show services l2tp tunnel-switch tunnel detail

```
user@host> show services l2tp tunnel-switch tunnel detail
```

```
Tunnel local ID: 37602, Tunnel remote ID: 1
Remote IP: 192.0.2.3:1701
Sessions: 1, Switched sessions: 1, State: Established
Tunnel Name: 1/1
Local IP: 203.0.113.51:1701
Local name: ce-bras-mx240-f, Remote name: testlac
Effective Peer Resync Mechanism: silent failover
Nas Port Method: none
Tunnel Logical System: default, Tunnel Routing Instance: default
Tunnel local ID: 37060, Tunnel remote ID: 1
Remote IP: 198.51.100.10:1701
Sessions: 1, Switched sessions: 1, State: Established
Tunnel Name: 2/1
Local IP: 203.0.113.31:1701
Local name: lns, Remote name: lns
Effective Peer Resync Mechanism: silent failover
Nas Port Method: none
Tunnel Logical System: default, Tunnel Routing Instance: default
```

### show services l2tp tunnel-switch tunnel extensive

```
user@host> show services l2tp tunnel-switch tunnel extensive
```

```
Waiting for statistics...
Tunnel local ID: 37602, Tunnel remote ID: 1
Remote IP: 192.0.2.3:1701
Sessions: 1, Switched sessions: 1, State: Established
Tunnel Name: 1/1
Local IP: 203.0.113.51:1701
Local name: ce-bras-mx240-f, Remote name: testlac
Effective Peer Resync Mechanism: silent failover
Nas Port Method: none
Tunnel Logical System: default, Tunnel Routing Instance: default
Max sessions: 128100, Window size: 4, Hello interval: 60
Create time: Fri Jan 18 03:01:11 2013, Up time: 00:07:49
Idle time: 00:00:00, ToS Reflect: Disabled
Interface Name: si-2/1/0, Tunnel Group Name: ce-l2tp-tunnel-group
Statistics since: Fri Jan 18 03:01:11 2013
```

	Packets	Bytes
Control Tx	7	259
Control Rx	7	279
Data Tx	97	1175
Data Rx	0	0

```
Errors Tx          0
Errors Rx          0
Tunnel local ID: 37060, Tunnel remote ID: 1
Remote IP: 198.51.100.10:1701
Sessions: 1, Switched sessions: 1, State: Established
Tunnel Name: 2/1
Local IP: 203.0.113.31:1701
Local name: lns, Remote name: lns
Effective Peer Resync Mechanism: silent failover
Nas Port Method: none
Tunnel Logical System: default, Tunnel Routing Instance: default
Max sessions: 128100, Window size: 4, Hello interval: 60
Create time: Fri Jan 18 03:01:14 2013, Up time: 00:07:46
Idle time: 00:00:00
Statistics since: Fri Jan 18 03:01:14 2013
```

	Packets	Bytes
Control Tx	8	482
Control Rx	7	183
Data Tx	0	0
Data Rx	96	1158
Errors Tx	0	
Errors Rx	0	

## show services soft-gre tunnel

<b>Syntax</b>	<pre>show services soft-gre tunnel &lt;brief   detail   extensive&gt; &lt;interface <i>interface-name</i>&gt; &lt;local-ip <i>local-ip-address</i>&gt; &lt;remote-ip <i>remote-ip-address</i>&gt; &lt;statistics&gt; &lt;tunnel-group <i>group-name</i>&gt;</pre>
<b>Release Information</b>	Command introduced in Junos OS Release 17.2R1 on MX Series routers.
<b>Description</b>	Display information about dynamic generic routing encapsulation (GRE) tunnels and pseudowire subscriber (psn) interface devices.
<b>Options</b>	<p><b>none</b>—Display standard information about all active dynamic GRE tunnels.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of detail.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display information for a specific pseudowire subscriber (psn) interface.</p> <p><b>local-ip <i>local-ip-address</i></b>—(Optional) Display information for a specific local or source IP address of the GRE tunnel endpoint (Wi-Fi access gateway side).</p> <p><b>remote-ip <i>remote-ip-address</i></b>—(Optional) Display information for a specific remote IP address of the GRE tunnel endpoint.</p> <p><b>statistics</b>—(Optional) Display dynamic GRE tunnel statistics.</p> <p><b>tunnel-group <i>group-name</i></b>—(Optional) Display information for a specific dynamic GRE tunnel group.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Wi-Fi Access Gateway Deployment Model Overview on page 299</a></li> <li>• <a href="#">Supported Access Models for Dynamic-Bridged GRE Tunnels on the Wi-Fi Access Gateway on page 300</a></li> <li>• <a href="#">Configuring Conditions for Enabling Dynamic-Bridged GRE Tunnel Creation on page 304</a></li> <li>• <a href="#">soft-gre on page 616</a></li> </ul>
<b>List of Sample Output</b>	<p><a href="#">show services soft-gre tunnel brief on page 796</a></p> <p><a href="#">show services soft-gre tunnel detail on page 796</a></p> <p><a href="#">show services soft-gre tunnel extensive on page 797</a></p>

**Output Fields** Table 52 on page 796 describes the output fields for the **show services soft-gre tunnel** command. Output fields are listed in the approximate order in which they appear.

Table 52: *show services soft-gre tunnel* Output Fields

Field Name	Field Description	Level of Output
<b>Interface or Interface Name</b>	Name of the pseudowire subscriber (ps0) interface configured for the GRE tunnel	All levels
<b>Remote IP</b>	Remote IP address of the GRE tunnel endpoint	All levels
<b>Local IP</b>	Local or source IP address of the GRE tunnel endpoint (Wi-Fi access gateway side)	All levels
<b>Subscribers</b>	Number of subscribers accessing the GRE tunnel	All levels
<b>Group Name</b>	Name of the dynamic GRE tunnel group	<b>detail</b> <b>extensive</b>
<b>Routing Instance</b>	Type of routing instance used for the GRE tunnel	<b>detail</b> <b>extensive</b>
<b>Create time</b>	Date and time when the GRE tunnel was created: <i>yyyy-mm-dd hh:mm:ss timezone</i>	<b>detail</b> <b>extensive</b>
<b>Statistics since</b>	Day of the week, date, time, and year when statistics for packets received and transmitted were recorded: <i>Dayofweek Month date hh:mm:ss yyyy</i>	<b>extensive</b>
<b>Statistic</b>	Type of data through the GRE tunnel: Data Rx (data received) and Data Tx (transmitted)	<b>extensive</b>
<b>Packets</b>	Number of data packets received (Data Rx) and transmitted (Data Tx) through the GRE tunnel	<b>extensive</b>
<b>Bytes</b>	Number of data bytes received (Data Rx) and transmitted (Data Tx) through the GRE tunnel	<b>extensive</b>

## Sample Output

### show services soft-gre tunnel brief

```
user@host> show services soft-gre tunnel brief
```

Interface	Remote IP	Local IP	Subscribers
ps0.3221225475	192.0.2.10	198.51.100.1	1

### show services soft-gre tunnel detail

```
user@host> show services soft-gre tunnel detail
```

```
Interface Name: ps0.3221225475, Group Name: landslide_v4_1
Local IP: 198.51.100.1
Remote IP: 192.0.2.10
Subscribers: 1
```

```
Routing Instance: default
Create time: 2015-03-02 08:06:28 PST
```

#### show services soft-gre tunnel extensive

```
user@host> show services soft-gre tunnel extensive
```

```
Interface Name: ps0.3221225475, Group Name: landslide_v4_1
Local IP: 198.51.100.1
Remote IP: 192.0.2.10
Subscribers: 1
Routing Instance: default
Create time: 2015-03-02 08:06:28 PST
Statistics since: Mon Mar 2 08:06:28 2015
```

Statistic	Packets	Bytes
Data Rx	31	3324
Data Tx	32	3613

## show subscribers

**Syntax**

```
show subscribers
<detail | extensive | terse>
<aci-interface-set-name aci-interface-set-name>
<address address>
<agent-circuit-identifier agent-circuit-identifier>
<agent-remote-identifier agent-remote-identifier>
<aggregation-interface-set-name interface-set-name>
<client-type client-type>
<count>
<id session-id <accounting-statistics>>
<interface interface <accounting-statistics>>
<logical-system logical-system>
<mac-address mac-address>
<physical-interface physical-interface-name>
<profile-name profile-name>
<routing-instance routing-instance>
<stacked-vlan-id stacked-vlan-id>
<subscriber-state subscriber-state>
<user-name user-name>
<vci vci-identifier>
<vpi vpi-identifier>
<vlan-id vlan-id>
```

**Release Information**

Command introduced in Junos OS Release 9.3.

Command introduced in Junos OS Release 9.3 for EX Series switches.

**client-type**, **mac-address**, **subscriber-state**, and **extensive** options introduced in Junos OS Release 10.2.

**count** option usage with other options introduced in Junos OS Release 10.2.

Command introduced in Junos OS Release 11.1 for the QFX Series.

Options **aci-interface-set-name** and **agent-circuit-identifier** introduced in Junos OS Release 12.2.

The **physical-interface** and **user-name** options introduced in Junos OS Release 12.3.

Options **vci** and **vpi** introduced in Junos OS Release 12.3R3 and supported in later 12.3Rx releases.

Options **vci** and **vpi** supported in Junos OS Release 13.2 and later releases. (Not supported in Junos OS Release 13.1.)

Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Enhanced subscriber management supported in Junos OS Release 15.1R3 on MX Series routers.

**accounting-statistics** option added in Junos OS Release 15.1R3 and 17.4R1 on MX Series routers.

**aggregation-interface-set-name** option added in Junos OS Release 18.4R1 on MX Series routers.

**Description** Display information for active subscribers.

**Options** **detail | extensive | terse**—(Optional) Display the specified level of output.

**aci-interface-set-name**—(Optional) Display all dynamic subscriber sessions that use the specified agent circuit identifier (ACI) interface set. Use the ACI interface set name generated by the router, such as aci-1003-ge-1/0/0.4001, and not the actual ACI value found in the DHCP or PPPoE control packets.

**address**—(Optional) Display subscribers whose IP address matches the specified address. You must specify the IPv4 or IPv6 address prefix without a netmask (for example, 192.0.2.0). If you specify the IP address as a prefix with a netmask (for example, 192.0.2.0/32), the router displays a message that the IP address is invalid, and rejects the command.

**agent-circuit-identifier**—(Optional) Display all dynamic subscriber sessions whose ACI value matches the specified string. You can specify either the complete ACI string or a substring. To specify a substring, you must enter characters that form the beginning of the string, followed by an asterisk (\*) as a wildcard to substitute for the remainder of the string. The wildcard can be used only at the end of the specified substring; for example:

```
user@host1> show subscribers agent-circuit-identifier substring*
```

Junos OS Release	Substring Support
Junos OS Release 13.3R1	You can specify a substring without a wildcard.
Starting in Junos OS Release 14.1R1	You must specify the complete ACI string; you cannot specify a wildcard.
Starting in Junos OS Release 15.1R7, 16.1R7, 16.2R3, 17.1R3, 17.2R3, 17.3R3, 17.4R2, 18.1R2, 18.2R1	You can specify a substring, but you must include the wildcard character at the end of the substring.

**agent-remote-identifier**—(Optional) Display all dynamic subscriber sessions whose ARI value matches the specified string. You must specify the complete ACI string; you cannot specify a wildcard.

**aggregation-interface-set-name** *interface-set-name*—(Optional) Display summary information for the specified aggregation node interface set, including interface, VLAN ID, username and LS:RI.

**client-type**—(Optional) Display subscribers whose client type matches one of the following client types:

- **dhcp**—DHCP clients only.
- **dotlx**—DotLx clients only.
- **essm**—ESSM clients only.
- **fixed-wireless-access**—Fixed wireless access clients only.
- **fwauth**—FwAuth (authenticated across a firewall) clients only.
- **l2tp**—L2TP clients only.

- **mlppp**—MLPPP clients only.
- **ppp**—PPP clients only.
- **pppoe**—PPPoE clients only.
- **static**—Static clients only.
- **vlan**—VLAN clients only.
- **vlan-oob**—VLAN out-of-band (ANCP-triggered) clients only.
- **vpls-pw**—VPLS pseudowire clients only.
- **xauth**—Xauth clients only.

**count**—(Optional) Display the count of total subscribers and active subscribers for any specified option. You can use the **count** option alone or with the **address**, **client-type**, **interface**, **logical-system**, **mac-address**, **profile-name**, **routing-instance**, **stacked-vlan-id**, **subscriber-state**, or **vlan-id** options.

**id session-id**—(Optional) Display a specific subscriber session whose session ID matches the specified subscriber ID. You can display subscriber IDs by using the **show subscribers extensive** or the **show subscribers interface extensive** commands.

**id session-id accounting-statistics**—(Optional) Display accurate subscriber accounting statistics for a subscriber session with the specified ID. Requires the **actual-transmit-statistics** statement to be configured in the dynamic profile for the dynamic logical interface. If the statement is not configured, a value of 0 is displayed for accounting statistics.

**interface**—(Optional) Display subscribers whose interface matches the specified interface.

**interface accounting-statistics**—(Optional) Display subscriber accounting statistics for the specified interface. Requires the **actual-transmit-statistics** statement to be configured in the dynamic profile for the dynamic logical interface.

**logical-system**—(Optional) Display subscribers whose logical system matches the specified logical system.

**mac-address**—(Optional) Display subscribers whose MAC address matches the specified MAC address.

**physical-interface-name**—(M120, M320, and MX Series routers only) (Optional) Display subscribers whose physical interface matches the specified physical interface.

**profile-name**—(Optional) Display subscribers whose dynamic profile matches the specified profile name.

**routing-instance**—(Optional) Display subscribers whose routing instance matches the specified routing instance.

**stacked-vlan-id**—(Optional) Display subscribers whose stacked VLAN ID matches the specified stacked VLAN ID.



**subscriber-state**—(Optional) Display subscribers whose subscriber state matches the specified subscriber state (ACTIVE, CONFIGURED, INIT, TERMINATED, or TERMINATING).

**user-name**—(M120, M320, and MX Series routers only) (Optional) Display subscribers whose username matches the specified subscriber name.

**vci-identifier**—(MX Series routers with MPCs and ATM MICs with SFP only) (Optional) Display active ATM subscribers whose ATM virtual circuit identifier (VCI) matches the specified VCI identifier. The range of values is 0 through 255.

**vpi-identifier**—(MX Series routers with MPCs and ATM MICs with SFP only) (Optional) Display active ATM subscribers whose ATM virtual path identifier (VPI) matches the specified VPI identifier. The range of values is 0 through 65,535.

**vlan-id**—(Optional) Display subscribers whose VLAN ID matches the specified VLAN ID, regardless of whether the subscriber uses a single-tagged or double-tagged VLAN. For subscribers using a double-tagged VLAN, this option displays subscribers where the inner VLAN tag matches the specified VLAN ID. To display only subscribers where the specified value matches only double-tagged VLANs, use the **stacked-vlan-id** option to match the outer VLAN tag.



**NOTE:** Because of display limitations, logical system and routing instance output values are truncated when necessary.

**Required Privilege Level**

view

**Related Documentation**

- [show subscribers summary on page 834](#)
- *Verifying and Managing Agent Circuit Identifier-Based Dynamic VLAN Configuration*
- *Verifying and Managing Configurations for Dynamic VLANs Based on Access-Line Identifiers*
- *Verifying and Managing Junos OS Enhanced Subscriber Management*

**List of Sample Output**

[show subscribers \(IPv4\) on page 810](#)  
[show subscribers \(IPv6\) on page 810](#)  
[show subscribers \(IPv4 and IPv6 Dual Stack\) on page 810](#)  
[show subscribers \(Single Session DHCP Dual Stack\) on page 810](#)  
[show subscribers \(Single Session DHCP Dual Stack detail\) on page 811](#)  
[show subscribers \(LNS on MX Series Routers\) on page 811](#)  
[show subscribers \(L2TP Switched Tunnels\) on page 811](#)  
[show subscribers aggregation-interface-set-name on page 811](#)  
[show subscribers client-type dhcp detail on page 811](#)  
[show subscribers client-type dhcp detail \(DHCPv6\) on page 812](#)  
[show subscribers client-type dhcp extensive on page 813](#)

[show subscribers client-type fixed-wireless-access on page 813](#)  
[show subscribers client-type fixed-wireless-access detail \(Detail\) on page 813](#)  
[show subscribers client-type vlan-oob detail on page 814](#)  
[show subscribers count on page 814](#)  
[show subscribers address detail \(IPv6\) on page 814](#)  
[show subscribers detail \(IPv4\) on page 815](#)  
[show subscribers detail \(IPv6\) on page 815](#)  
[show subscribers detail \(pseudowire Interface for GRE Tunnel\) on page 816](#)  
[show subscribers detail \(IPv6 Static Demux Interface\) on page 816](#)  
[show subscribers detail \(L2TP LNS Subscribers on MX Series Routers\) on page 816](#)  
[show subscribers detail \(L2TP Switched Tunnels\) on page 816](#)  
[show subscribers detail \(Tunneled Subscriber\) on page 817](#)  
[show subscribers detail \(IPv4 and IPv6 Dual Stack\) on page 817](#)  
[show subscribers detail \(ACI Interface Set Session\) on page 818](#)  
[show subscribers detail \(PPPoE Subscriber Session with ACI Interface Set\) on page 818](#)  
[show subscribers extensive on page 819](#)  
[show subscribers extensive \(Aggregation Node Interface Set and DSL Forum Attributes\) on page 819](#)  
[show subscribers extensive \(Passive Optical Network Circuit Interface Set\) on page 820](#)  
[show subscribers extensive \(DNS Addresses from Access Profile or Global Configuration\) on page 821](#)  
[show subscribers extensive \(DNS Addresses from RADIUS\) on page 821](#)  
[show subscribers extensive \(IPv4 DNS Addresses from RADIUS, IPv6 from Access Profile or Global Configuration\) on page 822](#)  
[show subscribers extensive \(RPF Check Fail Filter\) on page 822](#)  
[show subscribers extensive \(L2TP LNS Subscribers on MX Series Routers\) on page 823](#)  
[show subscribers extensive \(IPv4 and IPv6 Dual Stack\) on page 823](#)  
[show subscribers extensive \(ADF Rules \) on page 824](#)  
[show subscribers extensive \(Effective Shaping-Rate\) on page 824](#)  
[show subscribers extensive \(PPPoE Subscriber Access Line Rates on page 825](#)  
[show subscribers extensive \(Subscriber Session Using PCEF Profile\) on page 826](#)  
[show subscribers aci-interface-set-name detail \(Subscriber Sessions Using Specified ACI Interface Set\) on page 827](#)  
[show subscribers agent-circuit-identifier detail \(Subscriber Sessions Using Specified ACI Substring\) on page 828](#)  
[show subscribers id accounting-statistics on page 828](#)  
[show subscribers interface accounting-statistics on page 828](#)  
[show subscribers interface extensive on page 829](#)  
[show subscribers logical-system terse on page 830](#)  
[show subscribers physical-interface count on page 830](#)  
[show subscribers routing-instance inst1 count on page 830](#)  
[show subscribers stacked-vlan-id detail on page 830](#)  
[show subscribers stacked-vlan-id vlan-id detail \(Combined Output\) on page 830](#)  
[show subscribers stacked-vlan-id vlan-id interface detail \(Combined Output for a Specific Interface\) on page 831](#)  
[show subscribers user-name detail on page 831](#)  
[show subscribers vlan-id on page 831](#)  
[show subscribers vlan-id detail on page 831](#)  
[show subscribers vpi vci extensive \(PPPoE-over-ATM Subscriber Session\) on page 832](#)

[show subscribers address detail \(Enhanced Subscriber Management\) on page 832](#)

**Output Fields** [Table 53 on page 803](#) lists the output fields for the **show subscribers** command. Output fields are listed in the approximate order in which they appear.

*Table 53: show subscribers Output Fields*

Field Name	Field Description
Interface	Interface associated with the subscriber. The router or switch displays subscribers whose interface matches or begins with the specified interface.  The * character indicates a continuation of addresses for the same session.
IP Address/VLAN ID	Subscriber IP address or VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i>  No IP address or VLAN ID is assigned to an L2TP tunnel-switched session. For these subscriber sessions the value is <b>Tunnel-switched</b> .
User Name	Name of subscriber.
LS:RI	Logical system and routing instance associated with the subscriber.
Type	Subscriber client type (DHCP, FWA, GRE, L2TP, PPP, PPPoE, STATIC-INTERFACE, VLAN).
IP Address	Subscriber IPv4 address.
IP Netmask	Subscriber IP netmask.  (MX Series) This field displays 255.255.255.255 by default. For tunneled or terminated PPP subscribers only, this field displays the actual value of Framed-IP-Netmask when the SDB_FRAMED_PROTOCOL attribute in the session database is equal to AUTHD_FRAMED_PROTOCOL_PPP. This occurs in the use case where the LNS generates access-internal routes when it receives Framed-IP-Netmask from RADIUS during authorization. When it receives Framed-Pool from RADIUS, the pool mask is ignored and the default /32 mask is used.
Primary DNS Address	IP address of primary DNS server.  This field is displayed with the <b>extensive</b> option only when the address is provided by RADIUS.
Secondary DNS Address	IP address of secondary DNS server.  This field is displayed with the <b>extensive</b> option only when the address is provided by RADIUS.
IPv6 Primary DNS Address	IPv6 address of primary DNS server.  This field is displayed with the <b>extensive</b> option only when the address is provided by RADIUS.
IPv6 Secondary DNS Address	IPv6 address of secondary DNS server.  This field is displayed with the <b>extensive</b> option only when the address is provided by RADIUS.
Domain name server inet	IP addresses for the DNS server, displayed in order of configuration.  This field is displayed with the <b>extensive</b> option only when the addresses are derived from the access profile or the global access configuration.

Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
Domain name server inet6	IPv6 addresses for the DNS server, displayed in order of configuration.  This field is displayed with the <b>extensive</b> option only when the addresses are derived from the access profile or the global access configuration.
Primary WINS Address	IP address of primary WINS server.
Secondary WINS Address	IP address of secondary WINS server.
IPv6 Address	Subscriber IPv6 address, or multiple addresses.
IPv6 Prefix	Subscriber IPv6 prefix. If you are using DHCPv6 prefix delegation, this is the delegated prefix.
IPv6 User Prefix	IPv6 prefix obtained through NDRA.
IPv6 Address Pool	Subscriber IPv6 address pool. The IPv6 address pool is used to allocate IPv6 prefixes to the DHCPv6 clients.
IPv6 Network Prefix Length	Length of the network portion of the IPv6 address.
IPv6 Prefix Length	Length of the subscriber IPv6 prefix.
Logical System	Logical system associated with the subscriber.
Routing Instance	Routing instance associated with the subscriber.
Interface	(Enhanced subscriber management for MX Series routers) Name of the enhanced subscriber management logical interface, in the form <b>demux0.nnnn</b> (for example, <b>demux0.3221225472</b> ), to which access-internal and framed subscriber routes are mapped.
Interface Type	Whether the subscriber interface is <b>Static</b> or <b>Dynamic</b> .

Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
<b>Interface Set</b>	<p>Internally generated name of the dynamic ACI or ALI interface set used by the subscriber session. The prefix of the name indicates the string received in DHCP or PPPoE control packets on which the interface set is based. For ALI interface sets, the prefix indicates that the value is configured as a trusted option to identify the subscriber line.</p> <p>The name of the interface set uses one of the following prefixes:</p> <ul style="list-style-type: none"> <li>• <b>aci</b>—ACI; for example, aci-1033-demux0.3221225524. This is the only prefix allowed for ACI interface sets.</li> <li>• <b>ari</b>—ARI; for example, ari-1033-demux0.3221225524.</li> <li>• <b>aci+ari</b>—Both the ACI and ARI; for example, aci+ari-1033-demux0.3221225524.</li> <li>• <b>noids</b>—Neither the ACI nor the ARI were received; for example, noids-1033-demux0.3221225524.</li> </ul> <p><b>NOTE:</b> ACI interface sets are configured with the <b>agent-circuit-identifier</b> autoconfiguration stanza. ALI interface sets are configured with the <b>line-identity</b> autoconfiguration stanza.</p> <p>Besides dynamic ACI and ALI interface sets, this field can be an interface set based on a substring of the ARI string. This occurs when the dynamic profile includes the predefined variable \$junos-pon-id-interface-set-name, and the profile is applied for a passive optical network (PON). The ARI string is inserted by the optical line terminal (OLT). The final substring in the string, unique for the PON, identifies individual subscriber circuits, and is used as the name of the interface set.</p>
<b>Interface Set Type</b>	Interface type of the ACI interface set: <b>Dynamic</b> . This is the only ACI interface set type currently supported.
<b>Interface Set Session ID</b>	Identifier of the dynamic ACI interface set entry in the session database.
<b>Underlying Interface</b>	Name of the underlying interface for the subscriber session.
<b>Dynamic Profile Name</b>	Dynamic profile used for the subscriber.
<b>Dynamic Profile Version</b>	Version number of the dynamic profile used for the subscriber.
<b>MAC Address</b>	MAC address associated with the subscriber.
<b>State</b>	Current state of the subscriber session ( <b>Init</b> , <b>Configured</b> , <b>Active</b> , <b>Terminating</b> , <b>Tunneled</b> ).
<b>L2TP State</b>	Current state of the L2TP session, <b>Tunneled</b> or <b>Tunnel-switched</b> . When the value is <b>Tunnel-switched</b> , two entries are displayed for the subscriber; the first entry is at the LNS interface on the LTS and the second entry is at the LAC interface on the LTS.
<b>Tunnel switch Profile Name</b>	Name of the L2TP tunnel switch profile that initiates tunnel switching.
<b>Local IP Address</b>	IP address of the local gateway (LAC).
<b>Remote IP Address</b>	IP address of the remote peer (LNS).
<b>VLAN Id</b>	VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> .

Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
Stacked VLAN Id	Stacked VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i> .
RADIUS Accounting ID	RADIUS accounting ID associated with the subscriber.
Agent Circuit ID	<p>For the <b>dhcp</b> client type, option 82 agent circuit ID associated with the subscriber. The ID is displayed as an ASCII string unless the value has nonprintable characters, in which case it is displayed in hexadecimal format.</p> <p>For the <b>vlan-oob</b> client type, the agent circuit ID or access-loop circuit identifier that identifies the subscriber line based on the subscriber-facing DSLAM interface on which the subscriber request originates.</p>
Agent Remote ID	<p>For the <b>dhcp</b> client type, option 82 agent remote ID associated with the subscriber. The ID is displayed as an ASCII string unless the value has nonprintable characters, in which case it is displayed in hexadecimal format.</p> <p>For the <b>vlan-oob</b> client type, the agent remote ID or access-loop remote identifier that identifies the subscriber line based on the NAS-facing DSLAM interface on which the subscriber request originates.</p>
Aggregation Interface-set Name	<p>Value of the \$junos-aggregation-interface-set-name predefined variable; one of the following:</p> <ul style="list-style-type: none"> <li>When the <b>hierarchical-access-network-detection</b> option is configured for the access lines and the value of the Access-Aggregation-Circuit-ID-ASCII attribute (TLV 0x0003) received either in the ANCP Port Up message or PPPoE PADR IA tags begins with a <b>#</b> character, then the variable takes the value of the remainder of the string after the <b>#</b> character.</li> <li>When the <b>hierarchical-access-network-detection</b> option is not configured, or if the string does not begin with the <b>#</b> character, then the variable takes the value specified with the <b>predefined-variable-defaults</b> statement.</li> </ul>
Accounting Statistics	Actual transmitted subscriber accounting statistics by session ID or interface. Service accounting statistics are not included. These statistics do not include overhead bytes or dropped packets; they are the accurate statistics used by RADIUS. The statistics are counted when the <b>actual-transmit-statistics</b> statement is included in the dynamic profile.
DHCP Relay IP Address	IP address used by the DHCP relay agent.
ATM VPI	(MX Series routers with MPCs and ATM MICs with SFP only) ATM virtual path identifier (VPI) on the subscriber's physical interface.
ATM VCI	(MX Series routers with MPCs and ATM MICs with SFP only) ATM virtual circuit identifier (VCI) for each VPI configured on the subscriber interface.
Login Time	Date and time at which the subscriber logged in.
DHCPV6 Options	<b>len</b> = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCPv6 options.
Server DHCP Options	<b>len</b> = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCP options.
Server DHCPV6 Options	<b>len</b> = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCPv6 options.

Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
DHCPV6 Header	<b>len</b> = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCPv6 options.
Effective shaping-rate	Actual downstream traffic shaping rate for the subscriber, in kilobits per second.
IPv4 Input Service Set	Input service set in access dynamic profile.
IPv4 Output Service Set	Output service set in access dynamic profile.
PCEF Profile	PCEF profile in access dynamic profile.
PCEF Rule/Rulebase	PCC rule or rulebase used in dynamic profile.
Dynamic configuration	Values for variables that are passed into the dynamic profile from RADIUS.
Service activation time	Time at which the first family in this service became active.
IPv4 rpf-check Fail Filter Name	Name of the filter applied by the dynamic profile to IPv4 packets that fail the RPF check.
IPv6 rpf-check Fail Filter Name	Name of the filter applied by the dynamic profile to IPv6 packets that fail the RPF check.
DHCP Options	<b>len</b> = number of hex values in the message. The hex values specify the type, length, value (TLV) for DHCP options, as defined in RFC 2132.
Session ID	ID number for a subscriber session.
Underlying Session ID	For DHCPv6 subscribers on a PPPoE network, displays the session ID of the underlying PPPoE interface.
Service Sessions	Number of service sessions (that is, a service activated using RADIUS CoA) associated with the subscribers.
Service Session ID	ID number for a subscriber service session.
Service Session Name	Service session profile name.
Session Timeout (seconds)	Number of seconds of access provided to the subscriber before the session is automatically terminated.
Idle Timeout (seconds)	Number of seconds subscriber can be idle before the session is automatically terminated.
IPv6 Delegated Address Pool	Name of the pool used for DHCPv6 prefix delegation.
IPv6 Delegated Network Prefix Length	Length of the prefix configured for the IPv6 delegated address pool.

Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
<b>IPv6 Interface Address</b>	Address assigned by the Framed-Ipv6-Prefix AAA attribute. This field is displayed only when the predefined variable \$junos-ipv6-address is used in the dynamic profile.
<b>IPv6 Framed Interface Id</b>	Interface ID assigned by the Framed-Interface-Id AAA attribute.
<b>ADF IPv4 Input Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv4 input filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>ADF IPv4 Output Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv4 output filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>ADF IPv6 Input Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv6 input filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>ADF IPv6 Output Filter Name</b>	Name assigned to the Ascend-Data-Filter (ADF) interface IPv6 output filter (client or service session). The filter name is followed by the rules (in hexadecimal format) associated with the ADF filter and the decoded rule in Junos OS filter style.
<b>IPv4 Input Filter Name</b>	Name assigned to the IPv4 input filter (client or service session).
<b>IPv4 Output Filter Name</b>	Name assigned to the IPv4 output filter (client or service session).
<b>IPv6 Input Filter Name</b>	Name assigned to the IPv6 input filter (client or service session).
<b>IPv6 Output Filter Name</b>	Name assigned to the IPv6 output filter (client or service session).
<b>IFL Input Filter Name</b>	Name assigned to the logical interface input filter (client or service session).
<b>IFL Output Filter Name</b>	Name assigned to the logical interface output filter (client or service session).
<b>DSL type</b>	PPPoE subscriber's access line type reported by the PPPoE intermediate agent in a PADI or PADO packet in the Vendor-Specific-Tags TLV in subattribute DSL-Type (0x0091). The DSL type is one of the following types: <b>ADSL</b> , <b>ADSL2</b> , <b>ADSL2+</b> , <b>OTHER</b> , <b>SDSL</b> , <b>VDSL</b> , or <b>VDSL2</b> .
<b>Frame/Cell Mode</b>	<p>Mode type of the PPPoE subscriber's access line determined by the PPPoE daemon based on the received subattribute DSL-Type (0x0091):</p> <ul style="list-style-type: none"> <li>• <b>Cell</b>—When the DSL line type is one of the following: <b>ADSL</b>, <b>ADSL2</b>, or <b>ADSL2+</b>.</li> <li>• <b>Frame</b>—When the DSL line type is one of the following: <b>OTHER</b>, <b>SDSL</b>, <b>VDSL</b>, or <b>VDSL2</b>.</li> </ul> <p>The value is stored in the subscriber session database.</p>
<b>Overhead accounting bytes</b>	Number of bytes added to or subtracted from the actual downstream cell or frame overhead to account for the technology overhead of the DSL line type. The value is determined by the PPPoE daemon based on the received subattribute DSL-Type (0x0091). The value is stored in the subscriber session database.



Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
<b>Actual upstream data rate</b>	Unadjusted upstream data rate for the PPPoE subscriber's access line reported by the PPPoE intermediate agent in a PADI or PADO packet in the Vendor-Specific-Tags TLV in subattribute Actual-Net-Data-Rate-Upstream (0x0081).
<b>Actual downstream data rate</b>	Unadjusted downstream data rate for the PPPoE subscriber's access line reported by the PPPoE intermediate agent in a PADI or PADO packet in the Vendor-Specific-Tags TLV in subattribute Actual-Net-Data-Rate-Downstream (0x0082).
<b>Adjusted downstream data rate</b>	Adjusted downstream data rate for the PPPoE subscriber's access line, calculated by the PPPoE daemon and stored in the subscriber session database.
<b>Adjusted upstream data rate</b>	Adjusted upstream data rate for the PPPoE subscriber's access line, calculated by the PPPoE daemon and stored in the subscriber session database.
<b>Local TEID-U</b>	<p>Tunnel endpoint identifier on the BNG for the GTP-U user plane tunnel to the eNodeB. The identifier is allocated by the BNG.</p> <p>A fully qualified local TEID-C consists of this identifier and the <b>GTPU Tunnel Local IP address</b> value.</p>
<b>Local TEID-C</b>	<p>Tunnel endpoint identifier on the BNG for the GTP-C control plane tunnel to the MME. The identifier is allocated by the BNG.</p> <p>A fully qualified local TEID-C consists of this identifier and the <b>GTPC Local IP address</b> value.</p>
<b>Remote TEID-U</b>	<p>Tunnel endpoint identifier on the eNodeB for the GTP-U user plane tunnel to the BNG. The identifier is allocated by the eNodeB.</p> <p>A fully qualified remote TEID-U consists of this identifier and the <b>GTPU Tunnel Remote IP address</b> value.</p>
<b>Remote TEID-C</b>	<p>Tunnel endpoint identifier on the MME for the GTP-C control plane tunnel to the BNG. The identifier is allocated by the MME.</p> <p>A fully qualified remote TEID-C consists of this identifier and the <b>GTPC Remote IP address</b> value.</p>
<b>GTPU Tunnel Remote IP address</b>	<p>IP address of the S1-U interface on the eNodeB for the GTP-U tunnel endpoint.</p> <p>A fully qualified remote TEID-U consists of this address and the <b>Remote TEID-U</b> value.</p>
<b>GTPU Tunnel Local IP address</b>	<p>IP address of the S1-U interface on the BNG for the GTP-U tunnel endpoint.</p> <p>A fully qualified local TEID-U consists of this address and the <b>Local TEID-U</b> value.</p>
<b>GTPC Remote IP address</b>	<p>IP address of the S11 interface on the MME for the GTP-C tunnel endpoint.</p> <p>A fully qualified remote TEID-C consists of this address and the <b>Remote TEID-C</b> value.</p>
<b>GTPC Local IP address</b>	<p>IP address of the S11 interface on the BNG for the GTP-C tunnel endpoint.</p> <p>A fully qualified local TEID-C consists of this address and the <b>Local TEID-C</b> value.</p>

Table 53: show subscribers Output Fields (continued)

Field Name	Field Description
<b>Access Point Name</b>	Access point name (APN) for the user equipment. The APN corresponds to the connection and service parameters that the subscriber's mobile device can use for connecting to the carrier's gateway to the Internet.

## Sample Output

### show subscribers (IPv4)

```
user@host> show subscribers
```

Interface	IP Address/VLAN ID	User Name	LS:RI
ge-1/3/0.1073741824	10		default:default
demux0.1073741824	203.0.113.10	WHOLESALE-CLIENT	default:default
demux0.1073741825	203.0.113.3	RETAILER1-CLIENT	test1:retailer1
demux0.1073741826	203.0.113.3	RETAILER2-CLIENT	test1:retailer2

### show subscribers (IPv6)

```
user@host> show subscribers
```

Interface	IP Address/VLAN ID	User Name	LS:RI
ge-1/0/0.0	2001:db8:c0:0:0:0/74	WHOLESALE-CLIENT	default:default
*	2001:db8:1/128	subscriber-25	default:default

### show subscribers (IPv4 and IPv6 Dual Stack)

```
user@host> show subscribers
```

Interface	IP Address/VLAN ID	User Name
LS:RI		
demux0.1073741834	0x8100.1002 0x8100.1	
default:default		
demux0.1073741835	0x8100.1001 0x8100.1	
default:default		
pp0.1073741836	203.0.113.13	dualstackuser1@example1.com
default:ASP-1		
*	2001:db8:1::/48	
*	2001:db8:1:1::/64	
pp0.1073741837	203.0.113.33	dualstackuser2@example1.com
default:ASP-1		
*	2001:db8:1:2:5::/64	

### show subscribers (Single Session DHCP Dual Stack)

```
user@host> show subscribers
```

Interface	IP Address/VLAN ID	User Name	LS:RI
demux0.1073741364	192.168.10.10	dual-stack-retail35	default:default
	2001:db8::100:0:0:0/74		default:default
	2001:db8:3ffe:0:4::/64		

**show subscribers (Single Session DHCP Dual Stack detail)**

```
user@host> show subscribers id 27 detail
```

```
Type: DHCP
User Name: dual-stack-retail33
IP Address: 10.10.0.53
IPv6 Address: 2001:db8:3000:0:0:8003::2
IPv6 Prefix: 2001:db8:3ffe:0:4::/64
Logical System: default
Routing Instance: default
Interface: ae0.3221225472
Interface type: Static
Underlying Interface: ae0.3221225472
Dynamic Profile Name: dhcp-retail-18
MAC Address: 00:00:5E:00:53:02
State: Active
DHCP Relay IP Address: 10.10.0.1
Radius Accounting ID: 27
Session ID: 27
PFE Flow ID: 2
Stacked VLAN Id: 2000
VLAN Id: 1
Login Time: 2014-05-15 10:12:10 PDT
DHCP Options: len 60
00 08 00 02 00 00 00 01 00 0a 00 03 00 01 00 00 64 01 01 02
00 06 00 04 00 03 00 19 00 03 00 0c 00 00 00 00 00 00 00 00
00 00 00 00 00 19 00 0c 00 00 00 00 00 00 00 00 00 00 00 00
```

**show subscribers (LNS on MX Series Routers)**

```
user@host> show subscribers
```

Interface	IP Address/VLAN ID	User Name	LS:RI
si-4/0/0.1	192.0.2.0	user@example.com	default:default

**show subscribers (L2TP Switched Tunnels)**

```
user@host> show subscribers
```

Interface	IP Address/VLAN ID	User Name	LS:RI
si-2/1/0.1073741842	Tunnel-switched	user@example.com	default:default
si-2/1/0.1073741843	Tunnel-switched	user@example.com	default:default

**show subscribers aggregation-interface-set-name**

```
user@host> show subscribers aggregation-interface-set-name FRA*
```

Interface	IP Address/VLAN ID	User Name	LS:RI
ge-1/0/0.3221225472	50	ancp	default:isp1-subscriber

**show subscribers client-type dhcp detail**

```
user@host> show subscribers client-type dhcp detail
```

```
Type: DHCP
IP Address: 203.0.113.29
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073744127
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux
MAC Address: 00:00:5e:00:53:98
State: Active
Radius Accounting ID: user :2304
Login Time: 2009-08-25 14:43:52 PDT
```

```
Type: DHCP
IP Address: 203.0.113.27
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073744383
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:00:5e:00:53:f3
State: Active
Radius Accounting ID: 1234 :2560
Login Time: 2009-08-25 14:43:56 PDT
```

### show subscribers client-type dhcp detail (DHCPv6)

```
user@host> show subscribers client-type dhcp detail
```

```
Type: DHCP
User Name: DEFAULTUSER
IPv6 Address: 2001:db8::2
IPv6 Prefix: 2001:db8:1::/64
Logical System: default
Routing Instance: default
Interface: demux0.3221225602
Interface type: Static
Underlying Interface: demux0.3221225602
Dynamic Profile Name: client-profile
MAC Address: 00:00:5E:00:53:01
State: Active
Radius Accounting ID: 142
Session ID: 142
PFE Flow ID: 148
Stacked VLAN Id: 1
VLAN Id: 1
Login Time: 2018-03-29 12:27:38 EDT
DHCP Options: len 56
00 08 00 02 00 00 00 01 00 0e 00 01 00 01 22 4f d0 33 00 11
01 00 00 01 00 03 00 0c 00 00 00 0a 00 04 9d 40 00 07 62 00
00 19 00 0c 00 00 00 0b 00 04 9d 40 00 07 62 00
Server DHCPV6 Options: len 94
00 0a 00 06 11 22 33 44 55 66 00 11 00 09 00 00 0c 4c 00 02
00 01 aa 00 11 00 20 00 00 0a 4c 00 02 00 02 32 33 00 03 00
03 34 35 36 00 05 00 06 31 32 33 34 35 36 00 06 00 01 31 00
11 00 09 00 00 0b 4c 00 02 00 01 bb 00 11 00 12 00 00 0d e9
00 01 00 03 aa bb cc 00 02 00 03 dd ee cc
DHCPV6 Header: len 4
01 fc e4 96
```

**show subscribers client-type dhcp extensive**

```

user@host> show subscribers client-type dhcp extensive
Type: DHCP
User Name: user
IP Address: 192.0.2.4
IP Netmask: 255.0.0.0
IPv6 Address: 2001:db8:3::103
IPv6 Prefix: 2001:db8::/68
Domain name server inet6: 2001:db8:1 abcd::2
Logical System: default
Routing Instance: default
Interface: ge-0/0/0.0
Interface type: Static
Underlying Interface: ge-0/0/0.0
MAC Address: 00:00:5e:00:53:01
State: Configured
Radius Accounting ID: 10
Session ID: 10
PFE Flow ID: 2
VLAN Id: 100
Agent Circuit ID: ge-0/0/0:100
Agent Remote ID: ge-0/0/0:100
Login Time: 2017-05-23 12:52:22 IST
DHCPV6 Options: len 69
00 01 00 0e 00 01 00 01 59 23 e3 31 00 10 94 00 00 01 00 08
00 02 00 00 00 19 00 29 00 00 00 00 04 9d 40 00 07 62 00
00 1a 00 19 00 09 3a 80 00 27 8d 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00
Server DHCP Options: len 13
3a 04 00 00 00 ff 00 3b 04 00 00 0f 00
Server DHCPV6 Options: len 8
00 0a 00 04 ab cd ef ab
DHCPV6 Header: len 4
01 00 00 04
IP Address Pool: a1_pool30
IPv6 Address Pool: ia_na_pool
IPv6 Delegated Address Pool: prefix_delegate_pool

```

**show subscribers client-type fixed-wireless-access**

```

user@host> show subscribers client-type fixed-wireless-access

```

Interface	IP Address/VLAN ID	User Name
LS:RI		
ps1.3221225472	192.0.2.10	505024101215074
default:default		
ps1.3221225473	192.0.2.11	505024101215075
default:default		

**show subscribers client-type fixed-wireless-access detail (Detail)**

```

user@host> show subscribers client-type fixed-wireless-access detail
Type: FWA
User Name: 505024101215074
IP Address: 192.0.2.10
IP Netmask: 255.255.0.0

```

```

Interface: ps1.3221225472
Interface type: Dynamic
Dynamic Profile Name: fwa-profile
State: Active
Radius Accounting ID: 1
Session ID: 1
PFE Flow ID: 11
Login Time: 2019-04-10 14:10:12 PDT
Local TEID-U: 1
Local TEID-C: 1
Remote TEID-U: 2000000
Remote TEID-C: 1000000
GTPU Tunnel Remote IP Address: 203.0.113.1.3
GTPU Tunnel Local IP Address: 203.0.113.2.5
GTPC Remote IP Address: 203.0.113.1.2
GTPC Local IP Address: 203.0.113.1.1
Access Point Name: user21

```

### show subscribers client-type vlan-oob detail

```

user@host> show subscribers client-type vlan-oob detail

Type: VLAN-OOB
User Name: L2WS.line-aci-1.line-ari-1
Logical System: default
Routing Instance: ISP1
Interface: demux0.1073744127
Interface type: Dynamic
Underlying Interface: ge-1/0/0
Dynamic Profile Name: Prof_L2WS
Dynamic Profile Version: 1
State: Active
Radius Accounting ID: 1234
Session ID: 77
VLAN Id: 126
Core-Facing Interface: ge-2/1/1
VLAN Map Id: 6
Inner VLAN Map Id: 2001
Agent Circuit ID: line-aci-1
Agent Remote ID: line-ari-1
Login Time: 2013-10-29 14:43:52 EDT

```

### show subscribers count

```

user@host> show subscribers count

Total Subscribers: 188, Active Subscribers: 188

```

### show subscribers address detail (IPv6)

```

user@host> show subscribers address 203.0.113.137 detail

Type: PPPoE
User Name: pppoeTerV6User1Svc
IP Address: 203.0.113.137
IP Netmask: 255.0.0.0
IPv6 User Prefix: 2001:db8:0:c88::/32
Logical System: default
Routing Instance: default

```

```

Interface: pp0.1073745151
Interface type: Dynamic
Underlying Interface: demux0.8201
Dynamic Profile Name: pppoe-client-profile
MAC Address: 00:00:5e:00:53:53
Session Timeout (seconds): 31622400
Idle Timeout (seconds): 86400
State: Active
Radius Accounting ID: example demux0.8201:6544
Session ID: 6544
Agent Circuit ID: if13720
Agent Remote ID: if13720
Login Time: 2012-05-21 13:37:27 PDT
Service Sessions: 1

```

#### show subscribers detail (IPv4)

```

user@host> show subscribers detail

Type: DHCP
IP Address: 203.0.113.29
IP Netmask: 255.255.0.0
Primary DNS Address: 192.0.2.0
Secondary DNS Address: 192.0.2.1
Primary WINS Address: 192.0.2.3
Secondary WINS Address: 192.0.2.4
Logical System: default
Routing Instance: default
Interface: demux0.1073744127
Interface type: Dynamic
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:00:5e:00:53:98
State: Active
Radius Accounting ID: example :2304
Idle Timeout (seconds): 600
Login Time: 2009-08-25 14:43:52 PDT
DHCP Options: len 52
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 08 33 04 00 00
00 3c 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 36 2f
33 2d 37 2d 30 37 05 01 06 0f 21 2c
Service Sessions: 2

```

#### show subscribers detail (IPv6)

```

user@host> show subscribers detail

Type: DHCP
User Name: pd-user1
IPv6 Prefix: 2001:db8:ffff:1::/32
Logical System: default
Routing Instance: default
Interface: ge-3/1/3.2
Interface type: Static
MAC Address: 00:00:5e:00:53:03
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-08-25 12:12:26 PDT
DHCP Options: len 42

```

```
00 08 00 02 00 00 00 01 00 0a 00 03 00 01 00 51 ff ff 00 03
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00
00 00
```

#### show subscribers detail (pseudowire Interface for GRE Tunnel)

```
user@host> show subscribers detail
```

Interface	IP Address/VLAN ID	User Name	LS:RI
ps0.3221225484	192.0.2.2		
ps0.3221225485	192.0.2.3		
demux0.3221225486	1		default:default
demux0.3221225487	1		default:default
demux0.3221225488	198.51.0.1		default:default
demux0.3221225489	198.51.0.2		default:default

#### show subscribers detail (IPv6 Static Demux Interface)

```
user@host> show subscribers detail
```

```
Type: STATIC-INTERFACE
User Name: user@example.com
IPv6 Prefix: 2001:db8:3:4:5:6:7:aa/32
Logical System: default
Routing Instance: default
Interface: demux0.1
Interface type: Static
Dynamic Profile Name: junos-default-profile
State: Active
Radius Accounting ID: 185
Login Time: 2010-05-18 14:33:56 EDT
```

#### show subscribers detail (L2TP LNS Subscribers on MX Series Routers)

```
user@host> show subscribers detail
```

```
Type: L2TP
User Name: user@example.com
IP Address: 203.0.113.58
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: si-5/2/0.1073749824
Interface type: Dynamic
Dynamic Profile Name: dyn-lns-profile2
Dynamic Profile Version: 1
State: Active
Radius Accounting ID: 8001
Session ID: 8001
Login Time: 2011-04-25 20:27:50 IST
```

#### show subscribers detail (L2TP Switched Tunnels)

```
user@host> show subscribers detail
```



```
Type: L2TP
User Name: user@example.com
Logical System: default
Routing Instance: default
Interface: si-2/1/0.1073741842
Interface type: Dynamic
Dynamic Profile Name: dyn-lts-profile
State: Active
L2TP State: Tunnel-switched
Tunnel switch Profile Name: ce-lts-profile
Local IP Address: 203.0.113.51
Remote IP Address: 192.0.2.0
Radius Accounting ID: 21
Session ID: 21
Login Time: 2013-01-18 03:01:11 PST
```

```
Type: L2TP
User Name: user@example.com
Logical System: default
Routing Instance: default
Interface: si-2/1/0.1073741843
Interface type: Dynamic
Dynamic Profile Name: dyn-lts-profile
State: Active
L2TP State: Tunnel-switched
Tunnel switch Profile Name: ce-lts-profile
Local IP Address: 203.0.113.31
Remote IP Address: 192.0.2.1
Session ID: 22
Login Time: 2013-01-18 03:01:14 PST
```

### show subscribers detail (Tunneled Subscriber)

```
user@host> show subscribers detail
```

```
Type: PPPoE
User Name: user1@example.com
Logical System: default
Routing Instance: default
Interface: pp0.1
State: Active, Tunneled
Radius Accounting ID: 512
```

### show subscribers detail (IPv4 and IPv6 Dual Stack)

```
user@host> show subscribers detail
```

```
Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlanProfile
State: Active
Session ID: 1
Stacked VLAN Id: 0x8100.1001
VLAN Id: 0x8100.1
Login Time: 2011-11-30 00:18:04 PST
```

```

Type: PPPoE
User Name: dualstackuser1@example1.com
IP Address: 203.0.113.13
IPv6 Prefix: 2001:db8:1::/32
IPv6 User Prefix: 2001:db8:1:1::/32
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Dynamic
Dynamic Profile Name: dualStack-Profile1
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: 2
Session ID: 2
Login Time: 2011-11-30 00:18:05 PST

Type: DHCP
IPv6 Prefix: 2001:db8:1::/32
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Static
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: test :3
Session ID: 3
Underlying Session ID: 2
Login Time: 2011-11-30 00:18:35 PST
DHCP Options: len 42
00 08 00 02 0b b8 00 01 00 0a 00 03 00 01 00 00 64 03 01 02
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00 00
00 00

```

#### show subscribers detail (ACI Interface Set Session)

```

user@host> show subscribers detail

Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0
Interface Set: aci-1001-ge-1/0/0.2800
Interface Set Session ID: 0
Underlying Interface: ge-1/0/0.2800
Dynamic Profile Name: aci-vlan-set-profile-2
Dynamic Profile Version: 1
State: Active
Session ID: 1
Agent Circuit ID: aci-ppp-dhcp-20
Login Time: 2012-05-26 01:54:08 PDT

```

#### show subscribers detail (PPPoE Subscriber Session with ACI Interface Set)

```

user@host> show subscribers detail

Type: PPPoE
User Name: ppphint2
IP Address: 203.0.113.15

```

```

Logical System: default
Routing Instance: default
Interface: pp0.1073741825
Interface type: Dynamic
Interface Set: aci-1001-demux0.1073741824
Interface Set Type: Dynamic
Interface Set Session ID: 2
Underlying Interface: demux0.1073741824
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: 3
Session ID: 3
Agent Circuit ID: aci-ppp-dhcp-dvlan-50
Login Time: 2012-03-07 13:46:53 PST

```

### show subscribers extensive

```

user@host> show subscribers extensive

Type: DHCP
User Name: pd-user1
IPv6 Prefix: 2001:db8:ffff:1::/32
Logical System: default
Routing Instance: default
Interface: ge-3/1/3.2
Interface type: Static
MAC Address: 00:00:5e:00:53:03
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-08-25 12:12:26 PDT
DHCP Options: len 42
00 08 00 02 00 00 00 00 01 00 0a 00 03 00 01 00 51 ff ff 00 03
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00 00
00 00
IPv6 Address Pool: pd_pool
IPv6 Network Prefix Length: 48

```

### show subscribers extensive (Aggregation Node Interface Set and DSL Forum Attributes)

```

user@host> show subscribers extensive

Type: VLAN-00B
User Name: ancp
Logical System: default
Routing Instance: isp1-subscriber
Interface: ge-1/0/0.3221225472
Interface type: Dynamic
Interface Set: FRA-DPU-C-100
Underlying Interface: ge-1/0/0
Core IFL Name: ge-1/0/4.0
Dynamic Profile Name: Prof_L2BSA
State: Active
Radius Accounting ID: 1
Session ID: 1
PFE Flow ID: 13
VLAN Id: 50

```

```

VLAN Map Id: 20
Inner VLAN Map Id: 1
Inner VLAN Tag Protocol Id: 0x88a8
Agent Circuit ID: circuit 201
Agent Remote ID: remote-id
Aggregation Interface-set Name: FRA-DPU-C-100
Login Time: 2018-05-29 08:43:42 EDT
Accounting interval: 72000
Dynamic configuration:
    junos-cos-scheduler-map: 100m
    junos-inner-vlan-tag-protocol-id: 0x88a8
    junos-vlan-map-id: 20

Type: PPPoE
IP Address: 192.85.128.1
IP Netmask: 255.255.255.255
Logical System: default
Routing Instance: default
Interface: pp0.3221225474
Interface type: Dynamic
Interface Set: ge-1/0/0
Underlying Interface: demux0.3221225473
Dynamic Profile Name: pppoe-client-profile-with-cos
MAC Address: 00:10:94:00:00:03
State: Active
Radius Accounting ID: 3
Session ID: 3
PFE Flow ID: 16
Stacked VLAN Id: 50
VLAN Id: 7
Agent Circuit ID: circuit 201
Agent Remote ID: remote-id
Aggregation Interface-set Name: FRA-DPU-C-100
Login Time: 2018-05-29 08:43:45 EDT
IP Address Pool: pool-1
Accounting interval: 72000
DSL type: G.fast
Frame/cell mode: Frame
Overhead accounting bytes: 10
Actual upstream data rate: 100000 kbps
Actual downstream data rate: 200000 kbps
Calculated downstream data rate: 180000 kbps
Calculated upstream data rate: 90000 kbps
Adjusted upstream data rate: 80000 kbps
Adjusted downstream data rate: 160000 kbps
DSL Line Attributes
    Agent Circuit ID: circuit 201
    Agent Remote ID: remote-id
    Actual upstream data rate: 100000
    Actual downstream data rate: 200000
    DSL type: G.fast
    Access Aggregation Circuit ID: #FRA-DPU-C-100
    Attribute type: 0xAA, Attribute length: 4
    198 51 100 78

```

### show subscribers extensive (Passive Optical Network Circuit Interface Set)

```
user@host> show subscribers client-type dhcp extensive
```

```

Type: DHCP
IP Address: 192.0.2.136
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: demux0.1073741842
Interface type: Dynamic
Interface Set: ot101.xyz101-202
Underlying Interface: demux0.1073741841
Dynamic Profile Name: dhcp-profile
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: user :19
Session ID: 19
VLAN Id: 1100
Agent Remote ID: ABCD01234|100M|AAA01234|ot101.xyz101-202

Login Time: 2017-03-29 10:30:46 PDT
DHCP Options: len 97
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 02 33 04 00 00
17 70 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 32 2f
32 2d 31 2d 31 37 05 01 06 0f 21 2c 52 2b 02 29 41 42 43 44
30 31 32 33 34 7c 31 30 30 4d 7c 41 41 41 41 30 31 32 33 34
7c 6f 74 6c 30 31 2e 78 79 7a 31 30 31 2d 32 30 32
IP Address Pool: POOL-V4

```

#### show subscribers extensive (DNS Addresses from Access Profile or Global Configuration)

```

user@host> show subscribers extensive

Type: DHCP
User Name: test-user@example-com
IP Address: 192.0.2.119
IP Netmask: 255.255.255.255
Domain name server inet: 198.51.100.1 198.51.100.2
IPv6 Address: 2001:db8::1:11
Domain name server inet6: 2001:db8:5001::12 2001:db8:3001::12
Logical System: default
Routing Instance: default
Interface: ge-2/0/3.0
Interface type: Static
Underlying Interface: ge-2/0/3.0
MAC Address: 00:00:5E:00:53:00
State: Active
Radius Accounting ID: 5
Session ID: 5
Login Time: 2017-01-31 11:16:21 IST
DHCP Options: len 53
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 03 33 04 00 00
00 3c 0c 16 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 35 2f
31 32 2d 30 2d 30 37 05 01 06 0f 21 2c
IP Address Pool: v4-pool

```

#### show subscribers extensive (DNS Addresses from RADIUS)

```

user@host> show subscribers extensive

Type: DHCP
User Name: test-user@example-com

```

```

IP Address: 192.0.2.119
IP Netmask: 255.255.255.255
Primary DNS Address: 198.51.100.1
Secondary DNS Address: 198.51.100.2
IPv6 Address: 2001:db8::1:11
IPv6 Primary DNS Address: 2001:db8:5001::12
IPv6 Secondary DNS Address: 2001:db8:3001::12
Logical System: default
Routing Instance: default
Interface: ge-2/0/3.0
Interface type: Static
Underlying Interface: ge-2/0/3.0
MAC Address: 00:00:5E:00:53:00
State: Active
Radius Accounting ID: 5
Session ID: 5
Login Time: 2017-01-31 11:16:21 IST
DHCP Options: len 53
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 03 33 04 00 00
00 3c 0c 16 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 35 2f
31 32 2d 30 2d 30 37 05 01 06 0f 21 2c
IP Address Pool: v4-pool

```

#### show subscribers extensive (IPv4 DNS Addresses from RADIUS, IPv6 from Access Profile or Global Configuration)

```

user@host> show subscribers extensive

Type: DHCP
User Name: test-user@example-com
IP Address: 192.0.2.119
IP Netmask: 255.255.255.255
Primary DNS Address: 198.51.100.1
Secondary DNS Address: 198.51.100.2
IPv6 Address: 2001:db8::1:11
Domain name server inet6: 2001:db8:5001::12 2001:db8:3001::12
Logical System: default
Routing Instance: default
Interface: ge-2/0/3.0
Interface type: Static
Underlying Interface: ge-2/0/3.0
MAC Address: 00:00:5E:00:53:00
State: Active
Radius Accounting ID: 5
Session ID: 5
Login Time: 2017-01-31 11:16:21 IST
DHCP Options: len 53
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 03 33 04 00 00
00 3c 0c 16 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 35 2f
31 32 2d 30 2d 30 37 05 01 06 0f 21 2c
IP Address Pool: v4-pool

```

#### show subscribers extensive (RPF Check Fail Filter)

```

user@host> show subscribers extensive

...
Type: VLAN
  Logical System: default
  Routing Instance: default

```

```

Interface: ae0.1073741824
Interface type: Dynamic
Dynamic Profile Name: vlan-prof
State: Active
Session ID: 9
VLAN Id: 100
Login Time: 2011-08-26 08:17:00 PDT
IPv4 rpf-check Fail Filter Name: rpf-allow-dhcp
IPv6 rpf-check Fail Filter Name: rpf-allow-dhcpv6
...

```

### show subscribers extensive (L2TP LNS Subscribers on MX Series Routers)

```

user@host> show subscribers extensive

Type: L2TP
User Name: user@example.com
IP Address: 203.0.113.58
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: si-5/2/0.1073749824
Interface type: Dynamic
Dynamic Profile Name: dyn-lns-profile2
Dynamic Profile Version: 1
State: Active
Radius Accounting ID: 8001
Session ID: 8001
Login Time: 2011-04-25 20:27:50 IST
IPv4 Input Filter Name: classify-si-5/2/0.1073749824-in
IPv4 Output Filter Name: classify-si-5/2/0.1073749824-out

```

### show subscribers extensive (IPv4 and IPv6 Dual Stack)

```

user@host> show subscribers extensive

Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlanProfile
State: Active
Session ID: 1
Stacked VLAN Id: 0x8100.1001
VLAN Id: 0x8100.1
Login Time: 2011-11-30 00:18:04 PST

Type: PPPoE
User Name: dualstackuser1@example1.com
IP Address: 203.0.113.13
IPv6 Prefix: 2001:db8:1::/32
IPv6 User Prefix: 2001:db8:1:1::/32
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Dynamic
Dynamic Profile Name: dualStack-Profile1
MAC Address: 00:00:5e:00:53:02

```

```

State: Active
Radius Accounting ID: 2
Session ID: 2
Login Time: 2011-11-30 00:18:05 PST
IPv6 Delegated Network Prefix Length: 48
IPv6 Interface Address: 2001:db8:2016:1:1::1/64
IPv6 Framed Interface Id: 1:1:2:2
IPv4 Input Filter Name: FILTER-IN-pp0.1073741825-in
IPv4 Output Filter Name: FILTER-OUT-pp0.1073741825-out
IPv6 Input Filter Name: FILTER-IN6-pp0.1073741825-in
IPv6 Output Filter Name: FILTER-OUT6-pp0.1073741825-out

Type: DHCP
IPv6 Prefix: 2001:db8:1::/32
Logical System: default
Routing Instance: ASP-1
Interface: pp0.1073741825
Interface type: Static
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: test :3
Session ID: 3
Underlying Session ID: 2
Login Time: 2011-11-30 00:18:35 PST
DHCP Options: len 42
00 08 00 02 0b b8 00 01 00 0a 00 03 00 01 00 00 64 03 01 02
00 06 00 02 00 19 00 19 00 0c 00 00 00 00 00 00 00 00 00
00 00
IPv6 Delegated Network Prefix Length: 48

```

### show subscribers extensive (ADF Rules )

```

user@host> show subscribers extensive

...
Service Session ID: 12
Service Session Name: SERVICE-PROFILE
State: Active
Family: inet
  ADF IPv4 Input Filter Name: __junos_adf_12-demux0.3221225474-inet-in
    Rule 0: 010101000b0101020b020200201811
      from {
        source-address 203.0.113.232;
        destination-address 198.51.100.0/24;
        protocol 17;
      }
      then {
        accept;
      }

```

### show subscribers extensive (Effective Shaping-Rate)

```

user@host> show subscribers extensive

Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.1073741837

```



```

Interface type: Dynamic
Interface Set: ifset-1
Underlying Interface: ae1
Dynamic Profile Name: svlan-dhcp-test
State: Active
Session ID: 1
Stacked VLAN Id: 0x8100.201
VLAN Id: 0x8100.201
Login Time: 2011-11-30 00:18:04 PST
Effective shaping-rate: 31000000k
...

```

### show subscribers extensive (PPPoE Subscriber Access Line Rates)

```
user@host> show subscribers extensive
```

```

Type: PPPoE
IP Address: 198.51.100.1
IP Netmask: 255.255.255.255
Logical System: default
Routing Instance: default
Interface: pp0.3221225475
Interface type: Dynamic
Underlying Interface: demux0.3221225474
Dynamic Profile Name: pppoe-client-profile-with-cos
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: 4
Session ID: 4
PFE Flow ID: 14
Stacked VLAN Id: 40
VLAN Id: 1
Agent Circuit ID: circuit0
Agent Remote ID: remote0
Login Time: 2017-04-06 15:52:32 PDT

User Name: DAVE-L2BSA-SERVICE
Logical System: default
Routing Instance: isp-1-subscriber
Interface: ge-1/2/4.3221225472
Interface type: Dynamic
Interface Set: ge-1/2/4
Underlying Interface: ge-1/2/4
Core IFL Name: ge-1/3/4.0
Dynamic Profile Name: L2BSA-88a8-400LL1300V0
State: Active
Radius Accounting ID: 1
Session ID: 1
PFE Flow ID: 14
VLAN Id: 13
VLAN Map Id: 102
Inner VLAN Map Id: 1
Agent Circuit ID: circuit-aci-3
Agent Remote ID: remote49-3
Login Time: 2017-04-05 16:59:29 EDT
Service Sessions: 4
IFL Input Filter Name: L2BSA-CP-400LL1300V0-ge-1/2/4.3221225472-in
IFL Output Filter Name: L2BSA-CP-400LL1300V0-ge-1/2/4.3221225472-out
Accounting interval: 900
DSL type: VDSL

```

```

Frame/Cell Mode: Frame
Overhead accounting bytes: -10
Actual upstream data rate: 1024 kbps
Actual downstream data rate: 4096 kbps
Adjusted downstream data rate: 3686 kbps
Adjusted upstream data rate: 922 kbps
Dynamic configuration:
  junos-vlan-map-id: 102
  Service Session ID: 5
  Service Session Name: SRL-L1
  State: Active
  Family: inet, inet6
  IFL Input Filter Name: L2BSA-FWF-in-10048-ge-1/2/4.3221225472-in
  IFL Output Filter Name: L2BSA-FWF-out-25088-ge-1/2/4.3221225472-out
  Service Activation time: 2017-04-05 16:59:30 EDT
Dynamic configuration:
  l2bsa-fwf-in: L2BSA-FWF-in-10048
  l2bsa-fwf-out: L2BSA-FWF-out-25088
  rldown: 25088
  rlup: 10048

```

#### show subscribers extensive (Subscriber Session Using PCEF Profile)

```

user@host> show subscribers extensive

Type: VLAN
Logical System: default
Routing Instance: default
Interface: demux0.3221225517
Interface type: Dynamic
Underlying Interface: ge-1/0/3
Dynamic Profile Name: svlan-dhcp
State: Active
Session ID: 59
PFE Flow ID: 71
Stacked VLAN Id: 0x8100.1
VLAN Id: 0x8100.2
Login Time: 2017-03-28 08:23:08 PDT

Type: DHCP
User Name: pcefuser
IP Address: 192.0.2.26
IP Netmask: 255.0.0.0
Logical System: default
Routing Instance: default
Interface: demux0.3221225518
Interface type: Dynamic
Underlying Interface: demux0.3221225517
Dynamic Profile Name: dhcp-client-prof
MAC Address: 00:00:5e:00:53:01
State: Active
Radius Accounting ID: 60
Session ID: 60
PFE Flow ID: 73
Stacked VLAN Id: 1
VLAN Id: 2
Login Time: 2017-03-28 08:23:08 PDT
Service Sessions: 1
DHCP Options: len 9
35 01 01 37 04 01 03 3a 3b

```

```

IP Address Pool: pool-ipv4
IPv4 Input Service Set: tdf-service-set
IPv4 Output Service Set: tdf-service-set
PCEF Profile: pcef-prof-1
PCEF Rule/Rulebase: default
Dynamic configuration:
  junos-input-service-filter: svc-filt-1
  junos-input-service-set: tdf-service-set
  junos-output-service-filter: svc-filt-1
  junos-output-service-set: tdf-service-set
  junos-pcef-profile: pcef-prof-1
  junos-pcef-rule: default

Service Session ID: 61
Service Session Name: pcef-serv-prof
State: Active
Family: inet
IPv4 Input Service Set: tdf-service-set
IPv4 Output Service Set: tdf-service-set
PCEF Profile: pcef-prof-1
PCEF Rule/Rulebase: limit-fb
Service Activation time: 2017-03-28 08:31:19 PDT
Dynamic configuration:
  pcef-prof: pcef-prof-1
  pcef-rule1: limit-fb
  svc-filt: svc-filt-1
  svc-set: tdf-service-set

```

#### show subscribers aci-interface-set-name detail (Subscriber Sessions Using Specified ACI Interface Set)

```
user@host> show subscribers aci-interface-set-name aci-1003-ge-1/0/0.4001 detail
```

```

Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-set-profile
Dynamic Profile Version: 1
State: Active
Session ID: 13
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:56 PDT

Type: PPPoE
User Name: ppphint2
IP Address: 203.0.113.17
Logical System: default
Routing Instance: default
Interface: pp0.1073741834
Interface type: Dynamic
Interface Set: aci-1003-ge-1/0/0.4001
Interface Set Type: Dynamic
Interface Set Session ID: 13
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address:
State: Active
Radius Accounting ID: 14

```

```

Session ID: 14
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:57 PDT

```

### show subscribers agent-circuit-identifier detail (Subscriber Sessions Using Specified ACI Substring)

```
user@host> show subscribers agent-circuit-identifier aci-ppp-vlan detail
```

```

Type: VLAN
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-set-profile
Dynamic Profile Version: 1
State: Active
Session ID: 13
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:56 PDT

Type: PPPoE
User Name: ppphint2
IP Address: 203.0.113.17
Logical System: default
Routing Instance: default
Interface: pp0.1073741834
Interface type: Dynamic
Interface Set: aci-1003-ge-1/0/0.4001
Interface Set Type: Dynamic
Interface Set Session ID: 13
Underlying Interface: ge-1/0/0.4001
Dynamic Profile Name: aci-vlan-pppoe-profile
Dynamic Profile Version: 1
MAC Address: 00:00:5e:00:53:52
State: Active
Radius Accounting ID: 14
Session ID: 14
Agent Circuit ID: aci-ppp-vlan-10
Login Time: 2012-03-12 10:41:57 PDT

```

### show subscribers id accounting-statistics

```
user@host> show subscribers id 601 accounting-statistics
```

```

Session ID: 601
Accounting Statistics:
Input bytes : 199994
Output bytes : 121034
Input packets: 5263
Output packets: 5263
IPv6:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0

```

### show subscribers interface accounting-statistics

```
user@host> show subscribers interface pp0.3221226949 accounting-statistics
```

```

Session ID: 501
Accounting Statistics:
Input bytes : 199994
Output bytes : 121034
Input packets: 5263
Output packets: 5263
IPv6:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0

```

```

Session ID: 502
Accounting Statistics:
Input bytes : 87654
Output bytes : 72108
Input packets: 3322
Output packets: 3322
IPv6:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0

```

```

Session ID: 503
Accounting Statistics:
Input bytes : 156528
Output bytes : 123865
Input packets: 7448
Output packets: 7448
IPv6:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0

```

### show subscribers interface extensive

```
user@host> show subscribers interface demux0.1073741826 extensive
```

```

Type: VLAN
User Name: user@test.example.com
Logical System: default
Routing Instance: testnet
Interface: demux0.1073741826
Interface type: Dynamic
Dynamic Profile Name: profile-vdemux-relay-23qos
MAC Address: 00:00:5e:00:53:04
State: Active
Radius Accounting ID: 12
Session ID: 12
Stacked VLAN Id: 0x8100.1500
VLAN Id: 0x8100.2902
Login Time: 2011-10-20 16:21:59 EST

Type: DHCP
User Name: user@test.example.com
IP Address: 192.0.2.0
IP Netmask: 255.255.255.0
Logical System: default

```

```

Routing Instance: testnet
Interface: demux0.1073741826
Interface type: Static
MAC Address: 00:00:5e:00:53:04
State: Active
Radius Accounting ID: 21
Session ID: 21
Login Time: 2011-10-20 16:24:33 EST
Service Sessions: 2

Service Session ID: 25
Service Session Name: SUB-QOS
State: Active

Service Session ID: 26
Service Session Name: service-cb-content
State: Active
IPv4 Input Filter Name: content-cb-in-demux0.1073741826-in
IPv4 Output Filter Name: content-cb-out-demux0.1073741826-out

```

#### show subscribers logical-system terse

```
user@host> show subscribers logical-system test1 terse
```

Interface	IP Address/VLAN ID	User Name	LS:RI
demux0.1073741825	203.0.113.3	RETAILER1-CLIENT	test1:retailer1
demux0.1073741826	203.0.113.4	RETAILER2-CLIENT	test1:retailer2

#### show subscribers physical-interface count

```
user@host> show subscribers physical-interface ge-1/0/0 count
```

```
Total subscribers: 3998, Active Subscribers: 3998
```

#### show subscribers routing-instance inst1 count

```
user@host> show subscribers routing-instance inst1 count
```

```
Total Subscribers: 188, Active Subscribers: 183
```

#### show subscribers stacked-vlan-id detail

```
user@host> show subscribers stacked-vlan-id 101 detail
```

```

Type: VLAN
Interface: ge-1/2/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT

```

#### show subscribers stacked-vlan-id vlan-id detail (Combined Output)

```
user@host> show subscribers stacked-vlan-id 101 vlan-id 100 detail
```

```
Type: VLAN
Interface: ge-1/2/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT
```

#### show subscribers stacked-vlan-id vlan-id interface detail (Combined Output for a Specific Interface)

```
user@host> show subscribers stacked-vlan-id 101 vlan-id 100 interface ge-1/2/0.* detail
```

```
Type: VLAN
Interface: ge-1/2/0.1073741824
Interface type: Dynamic
Dynamic Profile Name: svlan-prof
State: Active
Stacked VLAN Id: 0x8100.101
VLAN Id: 0x8100.100
Login Time: 2009-03-27 11:57:19 PDT
```

#### show subscribers user-name detail

```
user@host> show subscribers user-name larry1 detail
```

```
Type: DHCP
User Name: larry1
IP Address: 203.0.113.37
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: ge-1/0/0.1
Interface type: Static
Dynamic Profile Name: foo
MAC Address: 00:00:5e:00:53:01
State: Active
Radius Accounting ID: 1
Session ID: 1
Login Time: 2011-11-07 08:25:59 PST
DHCP Options: len 52
35 01 01 39 02 02 40 3d 07 01 00 10 94 00 00 01 33 04 00 00
00 3c 0c 15 63 6c 69 65 6e 74 5f 50 6f 72 74 20 2f 2f 32 2f
37 2d 30 2d 30 37 05 01 06 0f 21 2c
```

#### show subscribers vlan-id

```
user@host> show subscribers vlan-id 100
```

Interface	IP Address	User Name
ge-1/0/0.1073741824		
ge-1/2/0.1073741825		

#### show subscribers vlan-id detail

```
user@host> show subscribers vlan-id 100 detail
```

```
Type: VLAN
Interface: ge-1/0/0.1073741824
```

```

Interface type: Dynamic
Dynamic Profile Name: vlan-prof-tpid
State: Active
VLAN Id: 100
Login Time: 2009-03-11 06:48:54 PDT

Type: VLAN
Interface: ge-1/2/0.1073741825
Interface type: Dynamic
Dynamic Profile Name: vlan-prof-tpid
State: Active
VLAN Id: 100
Login Time: 2009-03-11 06:48:54 PDT

```

### show subscribers vpi vci extensive (PPPoE-over-ATM Subscriber Session)

```

user@host> show subscribers vpi 40 vci 50 extensive

Type: PPPoE
User Name: testuser
IP Address: 203.0.113.2
IP Netmask: 255.255.0.0
Logical System: default
Routing Instance: default
Interface: pp0.0
Interface type: Static
MAC Address: 00:00:5e:00:53:02
State: Active
Radius Accounting ID: 2
Session ID: 2
ATM VPI: 40
ATM VCI: 50
Login Time: 2012-12-03 07:49:26 PST
IP Address Pool: pool_1
IPv6 Framed Interface Id: 200:65ff:fe23:102

```

### show subscribers address detail (Enhanced Subscriber Management)

```

user@host> show subscribers address 203.0.113.111 detail

Type: DHCP
User Name: simple_filters_service
IP Address: 203.0.113.111
IP Netmask: 255.0.0.0
Logical System: default
Routing Instance: default
Interface: demux0.3221225482
Interface type: Dynamic
Underlying Interface: demux0.3221225472
Dynamic Profile Name: dhcp-demux-prof
MAC Address: 00:00:5e:00:53:0f
State: Active
Radius Accounting ID: 11
Session ID: 11
PFE Flow ID: 15
Stacked VLAN Id: 210
VLAN Id: 209
Login Time: 2014-03-24 12:53:48 PDT
Service Sessions: 1

```



```
DHCP Options: len 3  
35 01 01
```

## show subscribers summary

**Syntax** show subscribers summary  
 <all>  
 <detail | extensive | terse>  
 <count>  
 <physical-interface *physical-interface-name*>  
 <logical-system *logical-system* pic | port | routing-instance *routing-instance* | slot>

**Release Information** Command introduced in Junos OS Release 10.2.

**Description** Display summary information for subscribers.

**Options** **none**—Display summary information by state and client type for all subscribers.

**all**—(Optional) Display summary information by state, client type, and LS:RI.

**detail | extensive | terse**—(Not supported on MX Series routers) (Optional) Display the specified level of output.

**count**—(Not supported on MX Series routers) (Optional) Display the count of total subscribers and active subscribers for any specified option.

**logical-system *logical-system***—(Optional) Display subscribers whose logical system matches the specified logical system.

**physical-interface *physical-interface-name***—(M120, M320, and MX Series routers only) (Optional) Display a count of subscribers whose physical interface matches the specified physical interface, by subscriber state, client type, and LS:RI.

**pic**—(M120, M320, and MX Series routers only) (Optional) Display a count of subscribers by PIC number and the total number of subscribers.

**port**—(M120, M320, and MX Series routers only) (Optional) Display a count of subscribers by port number and the total number of subscribers.

**routing-instance *routing-instance***—(Optional) Display subscribers whose routing instance matches the specified routing instance.

**slot**—(M120, M320, and MX Series routers only) (Optional) Display a count of subscribers by FPC slot number and the total number of subscribers.



**NOTE:** Due to display limitations, logical system and routing instance output values are truncated when necessary.

**Required Privilege Level** view

**Related Documentation** • [show subscribers on page 798](#)

**List of Sample Output** [show subscribers summary on page 836](#)  
[show subscribers summary all on page 837](#)  
[show subscribers summary physical-interface on page 837](#)  
[show subscribers summary physical-interface pic on page 837](#)  
[show subscribers summary physical-interface port on page 838](#)  
[show subscribers summary physical-interface slot on page 838](#)  
[show subscribers summary pic on page 838](#)  
[show subscribers summary pic \(Aggregated Ethernet Interfaces\) on page 838](#)  
[show subscribers summary port on page 839](#)  
[show subscribers summary port \(Pseudowire Interfaces\) on page 839](#)  
[show subscribers summary port extensive on page 839](#)  
[show subscribers summary slot on page 839](#)  
[show subscribers summary terse on page 840](#)

**Output Fields** [Table 54 on page 835](#) lists the output fields for the **show subscribers summary** command. Output fields are listed in the approximate order in which they appear.

*Table 54: show subscribers summary Output Fields*

Field Name	Field Description	Level of Output
<b>Subscribers by State</b>	Number of subscribers summarized by state. The summary information includes the following: <ul style="list-style-type: none"> <li>Init—Number of subscriber currently in the initialization state.</li> <li>Configured—Number of configured subscribers.</li> <li>Active—Number of active subscribers.</li> <li>Terminating—Number of subscribers currently terminating.</li> <li>Terminated—Number of terminated subscribers.</li> <li>Total—Total number of subscribers for all states.</li> </ul>	<b>detail none</b>
<b>Subscribers by Client Type</b>	Number of subscribers summarized by client type. Client types can include DHCP, GRE, L2TP, PPP, PPPOE, STATIC-INTERFACE, VLAN, and VLAN-OOB. Also displays the total number of subscribers for all client types (Total).	<b>detail extensive none</b>
<b>Subscribers by LS:RI</b>	Number of subscribers summarized by logical system:routing instance (LS:RI) combination. Also displays the total number of subscribers for all LS:RI combinations (Total).	<b>detail none</b>
<b>Subscribers by Connection Type</b>	Number of subscribers summarized by connection type, <b>Cross-connected</b> or <b>Terminated</b> .	<b>extensive</b>

Table 54: show subscribers summary Output Fields (continued)

Field Name	Field Description	Level of Output
<b>Interface</b>	<p>Interface associated with the subscriber. The router or switch displays subscribers whose interface matches or begins with the specified interface.</p> <p>The * character indicates a continuation of addresses for the same session.</p> <p>For aggregated Ethernet interfaces, the output of the <b>summary (pic   port   slot)</b> options prefixes the interface name with ae0:.</p> <p>For pseudowire IFDs, this field displays both the pseudowire and the associated logical tunnel (LT) and redundant logical tunnel (RLT) anchor interface. For example:</p> <p>ps0: 1t-2/1/0 ps1: r1t0: 1t-4/0/0</p>	All levels
<b>Count</b>	<p>Count of subscribers displayed for each PIC, port, or slot when those options are specified with the <b>summary</b> option. For an aggregated Ethernet configuration, the total subscriber count does not equal the sum of the individual PIC, port, or slot counts, because each subscriber can be in more than one aggregated Ethernet link.</p> <p>Multiple pseudowire interfaces can share a given logical tunnel or redundant logical tunnel anchor interface. Starting in Junos OS Release 18.1R1, the field displays subscribers per individual pseudowire interface.</p> <p>In earlier releases, the field displays the same number of subscribers for all pseudowire interfaces that share the same tunnel interface as their anchor point.</p>	<b>detail extensive none</b>
<b>Total Subscribers</b>	Total number of subscribers for all physical interfaces, all PICs, all ports, or all LS:RI slots.	<b>detail extensive none</b>
<b>IP Address/VLAN ID</b>	Subscriber IP address or VLAN ID associated with the subscriber in the form <i>tpid.vlan-id</i>	<b>terse</b>
<b>User Name</b>	Name of subscriber.	<b>terse</b>
<b>LS:RI</b>	Logical system and routing instance associated with the subscriber.	<b>terse</b>

## Sample Output

### show subscribers summary

```
user@host> show subscribers summary
```

```
Subscribers by State
Init      3
Configured  2
Active 183
Terminating  2
Terminated  1
```

```

TOTAL          191

Subscribers by Client Type
DHCP           107
PPP            76
VLAN            8
VLAN-OOB        2
TOTAL          193

```

### show subscribers summary all

```
user@host> show subscribers summary all
```

```

Subscribers by State
Init           3
Configured     2
Active         183
Terminating    2
Terminated     1

TOTAL          191

Subscribers by Client Type
DHCP           107
PPP            76
VLAN            8

TOTAL          191

Subscribers by LS:RI
default:default 1
default:ri1     28
default:ri2     16
ls1:default     22
ls1:riA         38
ls1:riB         44
logsysX:routinstY 42

TOTAL          191

```

### show subscribers summary physical-interface

```
user@host> show subscribers summary physical-interface ge-1/0/0
```

```

Subscribers by State
Active: 3998
Total: 3998

Subscribers by Client Type
DHCP: 3998
Total: 3998

Subscribers by LS:RI
default:default: 3998
Total: 3998

```

### show subscribers summary physical-interface pic

```
user@host> show subscribers summary physical-interface ge-0/2/0 pic
```

```
Subscribers by State
Active: 4825
Total: 4825

Subscribers by Client Type
DHCP: 4825
Total: 4825

Subscribers by LS:RI
default:default: 4825
Total: 4825
```

#### show subscribers summary physical-interface port

```
user@host> show subscribers summary physical-interface ge-0/3/0 port

Subscribers by State
Active: 4825
Total: 4825

Subscribers by Client Type
DHCP: 4825
Total: 4825

Subscribers by LS:RI
default:default: 4825
Total: 4825
```

#### show subscribers summary physical-interface slot

```
user@host> show subscribers summary physical-interface ge-2/0/0 slot

Subscribers by State
Active: 4825
Total: 4825

Subscribers by Client Type
DHCP: 4825
Total: 4825

Subscribers by LS:RI
default:default: 4825
Total: 4825
```

#### show subscribers summary pic

```
user@host> show subscribers summary pic

Interface      Count
ge-1/0         1000
ge-1/3         1000

Total Subscribers: 2000
```

#### show subscribers summary pic (Aggregated Ethernet Interfaces)

```
user@host> show subscribers summary pic
```

```

Interface          Count
ae0: ge-1/0        801
ae0: ge-1/3        801

Total Subscribers: 801

```

### show subscribers summary port

```
user@host> show subscribers summary port
```

```

Interface          Count
ge-5/0/1           201
ge-5/0/2           301

Total Subscribers: 502

```

### show subscribers summary port (Pseudowire Interfaces)

```
user@host> show subscribers summary port
```

```

ps0: lt-2/1/0 10
ps1: lt-2/1/0 20

Total Subscribers: 30

```

### show subscribers summary port extensive

```
user@host> show subscribers summary port extensive
```

```

Interface: ge-5/0/1
Count: 201
Detail:
Subscribers by Client Type
  DHCP: 100
  PPPoE: 100
  VLAN-OOB: 1
Subscribers by Connection Type
  Terminated: 200
  Cross-connected: 1

Interface: ge-5/0/2
Count: 301
Detail:
Subscribers by Client Type
  DHCP: 200
  PPPoE: 100
  VLAN-OOB: 1
Subscribers by Connection Type
  Terminated: 300
  Cross-connected: 1

Total Subscribers: 502

```

### show subscribers summary slot

```
user@host> show subscribers summary slot
```

```

Interface          Count
ge-1                2000

```

Total Subscribers: 2000

#### show subscribers summary terse

user@host> show subscribers summary terse

Interface	IP Address/VLAN ID	User Name	LS:RI
ge-1/3/0.1073741824	100		default:default
demux0.1073741824	203.0.113.10	WHOLESALE-CLIENT	default:default
demux0.1073741825	203.0.113.13	RETAILER1-CLIENT	test1:retailer1
demux0.1073741826	203.0.113.213	RETAILER2-CLIENT	test1:retailer2



## show system subscriber-management statistics

<b>Syntax</b>	show system subscriber-management statistics <all> <dhcp> <pppoe>
<b>Release Information</b>	Command introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management. Enhanced I/O Statistics introduced as part of Extensive output in Junos OS Release 15.1R4 on MX Series routers for enhanced subscriber management.
<b>Description</b>	Display statistics for the specified option. You can customize the output by including one or more optional filters in the command. With the exception of the <b>extensive</b> option, all filter options can be combined in a single command.
<b>Options</b>	<b>all</b> —(Optional) Display packet statistics for all protocol.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Understanding Dropped Packets and Untransmitted Traffic Using show Commands</i></li> </ul>
<b>List of Sample Output</b>	<a href="#">show system subscriber-management statistics all on page 842</a> <a href="#">show system subscriber-management statistics pppoe on page 843</a> <a href="#">show system subscriber-management statistics dhcp on page 843</a> <a href="#">show system subscriber-management statistics dhcp extensive on page 844</a> <a href="#">show system subscriber-management statistics extensive on page 846</a>
<b>Output Fields</b>	<a href="#">Table 55 on page 841</a> lists the output fields for the <b>show system subscriber-management statistics</b> command. Output fields are listed in the approximate order in which they appear.

Table 55: show system subscriber-management statistics Output Fields

Field Name	Field Description
<b>Rx Statistics</b>	Statistics for packets received.
<b>Tx Statistics</b>	Statistics for packets sent.
<b>Enhanced I/O Statistics</b>	Statistics for visibility into packet drops from the queue.
<b>Error Statistics</b>	Includes connection packets, flow control, and messages and packets sent to and received from the daemon.

Table 55: show system subscriber-management statistics Output Fields (continued)

Field Name	Field Description
<b>ERA discards</b>	Event Rate Analyzer discards. For DHCP and PPPoE in advanced subscriber management, ERA packet discard counts are included for Discover, Solicit, and PADI packets .
<b>padis</b>	PPPoE Active Discovery Initiation (PADI) packets. PADI is the first step in the PPPoE establishment protocol.
<b>padrs</b>	PPPoE Active Discovery Request packets.
<b>ppp</b>	Point-to-Point Protocol packets.
<b>router solicitations</b>	Number of router solicitations sent or received. Router solicitations are sent to prompt all on-link routers to send it router advertisements.
<b>router advertisements</b>	Number of router advertisements sent or received.
<b>route solicit response packet</b>	Number of router solicitation responses sent or received.

## Sample Output

The following examples displays packet statistics accumulated for DHCP and PPPoE since the last time the session manager was cleared.

### show system subscriber-management statistics all

```

user@host> show system subscriber-management statistics all
user@host> show system subscriber-management statistics all
Session Manager started @ Tue Nov  3 10:00:57 2015
Session Manager cleared @ Tue Nov  3 11:10:01 2015
-----
                        Packet Statistics
-----
I/O Statistics:
-----
    Rx Statistics
      packets                : 784711
    Tx Statistics
      packets                : 7013122
  Layer 3 Statistics
    Rx Statistics
      packets                : 356218
    Tx Statistics
      packets                : 6604660
DHCP Statistics:
-----
    Rx Statistics
      packets                : 320008
      ERA discards           : 6274
    Tx Statistics

```

```

        transmit request packets      : 320482
        sent packets                  : 320482
    Error Statistics
    Connection Statistics
        no connection packets         : 0

```

#### PPPoE Statistics:

```

-----
    Rx Statistics
        packets                      : 486165
        padis                        : 36768
        padrs                        : 35421
        ppp packets                  : 341787
        ERA discards                 : 8249
    Tx Statistics
        packets                      : 70842
        send failures                : 6240

```

### show system subscriber-management statistics pppoe

```
user@host> show system subscriber-management statistics pppoe
```

```

Session Manager started @ Tue Nov  3 10:00:57 2015
Session Manager cleared @ Tue Nov  3 11:10:01 2015

```

#### Packet Statistics

#### I/O Statistics:

```

-----
    Rx Statistics
        packets                      : 784711
    Tx Statistics
        packets                      : 7013122
    Layer 3 Statistics
        Rx Statistics
            packets                  : 356218
        Tx Statistics
            packets                  : 6604660

```

#### PPPoE Statistics:

```

-----
    Rx Statistics
        packets                      : 486165
        padis                        : 36768
        padrs                        : 35421
        ppp packets                  : 341787
        ERA discards                 : 8249
    Tx Statistics
        packets                      : 70842
        send failures                : 6240

```

### show system subscriber-management statistics dhcp

```
user@host> show system subscriber-management statistics dhcp
```

```

Session Manager started @ Tue Nov  3 10:00:57 2015
Session Manager cleared @ Tue Nov  3 11:10:01 2015

```

#### Packet Statistics

-----  
I/O Statistics:

Rx Statistics	
packets	: 784711
Tx Statistics	
packets	: 7013122
Layer 3 Statistics	
Rx Statistics	
packets	: 356218
Tx Statistics	
packets	: 6604660

## DHCP Statistics:

Rx Statistics	
packets	: 320008
ERA discards	: 6274
Tx Statistics	
transmit request packets	: 320482
sent packets	: 320482
Error Statistics	
Connection Statistics	
no connection packets	: 0

**show system subscriber-management statistics dhcp extensive**user@host> **show system subscriber-management statistics dhcp extensive**

Session Manager started @ Tue Nov 3 10:00:57 2015  
 Session Manager cleared @ Tue Nov 3 11:10:01 2015

-----  
Packet Statistics-----  
I/O Statistics:

Rx Statistics	
packets	: 784711
Tx Statistics	
packets	: 7013122
Buffer Statistics	
allocations	: 7032618
frees	: 7032624
allocation failures	: 0
Layer 3 Statistics	
Rx Statistics	
packets	: 356218
Tx Statistics	
packets	: 6604660
PFE Event Statistics	
packets	: 0

-----  
DHCP Statistics:

Rx Statistics	
packets	: 320008
ERA discards	: 6274
Tx Statistics	
transmit request packets	: 320482

```

    sent packets                : 320482
DHCPv4 Rx Statistics
    total packets              : 0
DHCPv4 Tx Statistics
    total packets              : 0
DHCPv6 Rx Statistics
    total packets              : 320008
    solicit                    : 36250
    request                    : 36382
    renew                      : 247376
    ERA discards                : 6274
DHCPv6 Tx Statistics
    total packets              : 320482
    advertise                  : 36382
    reply                      : 284100
Error Statistics
Connection Statistics
    no connection packets      : 0
    connection down events     : 0
    connection up events       : 0
    flow control invoked        : 0
    flow control released       : 0
    packets sent to daemon      : 320008
    packets received from daemon : 320482
    messages sent to daemon     : 0
    messages received from daemon : 0
    notifies while not connected : 0

```

## NET Statistics:

```

-----
ICMP6 Statistics
Rx Statistics
    packets:                   : 36271
    router solicitations       : 36271
Tx Statistics
    packets:                   : 6284178
    router advertisements      : 6284178
    route solicit response packet : 36271

```

## Management Statistics:

```

-----
    dvlan                      : 33912
    dvlan adds                  : 33912
    pppoe                      : 143651
    pppoe add                   : 35750
    pppoe changes               : 107901
    ip flow                     : 143633
    ip flow add                 : 107883

```

## Management Config Status:

```

-----
    gres state enabled state    : 1
    shmlog disabled state       : 0
Rx Statistics
    packets                    : 167361
    ERA discards                : 15116
Tx Statistics
    transmit request packets    : 150903
    sent packets                : 150903
DHCPv4 Rx Statistics

```

```

total packets      : 167361
discover           : 91910
request            : 75451
ERA discards       : 15116

```

### show system subscriber-management statistics extensive

```
user@host> show system subscriber-management statistics extensive
```

```

Session Manager started @ Tue Nov  3 10:00:57 2015
Session Manager cleared @ Tue Nov  3 11:10:01 2015

```

#### ----- Packet Statistics -----

#### I/O Statistics: -----

```

Rx Statistics
  packets      : 784711
Tx Statistics
  packets      : 7013122
Buffer Statistics
  allocations   : 7032618
  frees         : 7032624
  allocation failures : 0
Layer 3 Statistics
  Rx Statistics
    packets      : 356218
  Tx Statistics
    packets      : 6604660
PFE Event Statistics
  packets      : 0

```

#### ----- Enhanced I/O Statistics: -----

```

bbe_io_rcv l2      : 0
bbe_io_rcv l3      : 0
bbe_io_rcv l3 v4    : 0

io low queue drops :12
io mlow queue drops :0
io medium queue drops :0
io high queue drops :0

```

## show system subscriber-management summary

<b>Syntax</b>	show system subscriber-management summary
<b>Release Information</b>	Command introduced in Junos OS Release 11.1. Command introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management.
<b>Description</b>	Display complete subscriber management database summary information.
<b>Options</b>	<b>none</b> —This command has no options.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>show database-replication statistics</i></li> <li>• <i>show database-replication summary</i></li> </ul>
<b>List of Sample Output</b>	<a href="#">show system subscriber-management summary on page 848</a> <a href="#">show system subscriber-management summary (Enhanced Subscriber Management) on page 849</a>
<b>Output Fields</b>	<p><a href="#">Table 56 on page 847</a> lists the output fields for the <b>show system subscriber-management summary</b> command. Output fields are listed in the approximate order in which they appear.</p>

*Table 56: show system subscriber-management summary Output Fields*

Field Name	Field Description
Graceful Restart	<p>State of graceful Routing Engine switchover (GRES):</p> <ul style="list-style-type: none"> <li>• <b>Enabled</b></li> <li>• <b>Disabled</b></li> </ul> <p>(Enhanced subscriber management for MX Series routers) The name of this field is <b>Graceful Switchover</b>.</p>
Mastership	<p>State of the Routing Engine:</p> <ul style="list-style-type: none"> <li>• <b>Master</b></li> <li>• <b>Standby</b></li> </ul>
Database	<p>State of the subscriber management database:</p> <ul style="list-style-type: none"> <li>• <b>Available</b></li> <li>• <b>Init</b></li> <li>• <b>Not-available</b></li> </ul>

Table 56: show system subscriber-management summary Output Fields (continued)

Field Name	Field Description
<b>Standby</b>	<p>(Enhanced subscriber management for MX Series routers) State of the standby Routing Engine:</p> <ul style="list-style-type: none"> <li>• <b>Connected</b>—Connected but not synchronized</li> <li>• <b>Disconnected</b>—Not connected</li> <li>• <b>Resync (nn%)</b>—Connected and <i>nn</i> percent synchronized with the master Routing Engine</li> <li>• <b>Synchronized</b>—Synchronized with the master Routing Engine</li> </ul>
Chassisd ISSU State	<p>State of unified ISSU chassis daemon:</p> <ul style="list-style-type: none"> <li>• ABORT</li> <li>• DAEMON_ISSU_PREPARE</li> <li>• DAEMON_ISSU_PREPARE_DONE</li> <li>• DAEMON_SWITCHOVER_PREPARE</li> <li>• DAEMON_SWITCHOVER_PREPARE_DONE</li> <li>• FRU_ISSU</li> <li>• FRU_ISSU_DONE</li> <li>• IDLE</li> <li>• UNKNOWN</li> </ul>
ISSU State	<p>State of unified ISSU aggregate daemon:</p> <ul style="list-style-type: none"> <li>• ABORT</li> <li>• IDLE</li> <li>• PREPARE</li> <li>• READY</li> <li>• SWITCHOVER_PREPARE</li> <li>• SWITCHOVER_READY</li> <li>• UNKNOWN</li> </ul>
ISSU Wait	<p>Amount of time, in seconds, requested by a daemon to perform cleanup. If multiple daemons request time, the displayed value is the highest wait time requested by a daemon.</p>

## Sample Output

### show system subscriber-management summary

```
user@host> show system subscriber-management summary
```

#### General:

```
Graceful Restart    Enabled
Mastership          Master
Database            Available
Chassisd ISSU State DAEMON_ISSU_PREPARE
ISSU State          PREPARE
ISSU Wait           198
```



**show system subscriber-management summary (Enhanced Subscriber Management)**

```
user@host> show system subscriber-management summary
```

**General:**

Graceful Switchover	Enabled
Mastership	Master
Database	Available
Standby	Resync (75%)
Chassisd ISSU State	IDLE
ISSU State	IDLE
ISSU Wait	0

## test services l2tp tunnel

<b>Syntax</b>	<b>test services l2tp tunnel user <i>user-name</i></b> <b>&lt;password <i>user-password</i>&gt;</b> <b>&lt;tunnel-name <i>name</i>&gt;</b>
<b>Release Information</b>	Command introduced in Junos OS Release 11.4.
<b>Description</b>	(MX Series routers only) Test and verify Layer 2 Tunneling Protocol (L2TP) tunnel configurations from the L2TP access concentrator (LAC). The test determines whether the user can be authenticated and tunneled according to the L2TP configuration. The establishment of all tunnels associated with the user is tested. You can optionally specify a particular tunnel to test for the user.
<b>Options</b>	<p><b>user <i>user-name</i></b>—Name of the user under test. You must use an existing configured username, although it can be created solely for testing a tunnel configuration.</p> <p><b>password <i>user-password</i></b>—(Optional) Authentication password for the specified user. If you omit this option, the test generates a dummy password—<i>testpass</i>—for the user.</p> <p><b>tunnel-name <i>name</i></b>—(Optional) Name of a tunnel to test.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Testing L2TP Tunnel Configurations from the LAC on page 182</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">test services l2tp tunnel user (User authentication fails) on page 851</a> <a href="#">test services l2tp tunnel user (Multiple tunnels tested) on page 851</a> <a href="#">test services l2tp tunnel user tunnel-name (Specific tunnel tested) on page 851</a>
<b>Output Fields</b>	<a href="#">Table 57 on page 850</a> lists the output fields for the <b>test services l2tp tunnel</b> command. Output fields are listed in the approximate order in which they appear.

Table 57: test services l2tp tunnel Output Fields

Field Name	Field Description
Tunnel-name	Name of the tunnel as configured in the local tunnel profile.
Tunnel-peer	IP address of the tunnel's remote peer (the L2TP network server [LNS]).
Logical-System	Logical system in which the tunnel is created.
Routing-Instance	Routing instance in which the tunnel is created.

Table 57: test services l2tp tunnel Output Fields (continued)

Field Name	Field Description
Status	Status of the tunnel.

## Sample Output

### test services l2tp tunnel user (User authentication fails)

```
user@host> test services l2tp tunnel user testuser@example.com
Subscriber: testuser@example.com, authentication failed
```

### test services l2tp tunnel user (Multiple tunnels tested)

```
user@host> test services l2tp tunnel user testuser@example.com
Subscriber: testuser@example.com, authentication success, l2tp tunneled
Tunnel-name  Tunnel-peer  Logical-System  Routing-Instance  Status
test1tunnel  192.0.2.3    default         default           Up
test2tunnel  198.51.100.243  default         default           Peer unresponsive
test3tunnel  198.51.100.251  default         test              Up
```

### test services l2tp tunnel user tunnel-name (Specific tunnel tested)

```
user@host> test services l2tp tunnel user testuser@example.com tunnel-name test1tunnel
Subscriber: testuser@example.com, authentication success, l2tp tunneled
Tunnel-name  Tunnel-peer  Logical-System  Routing-Instance  Status
test1tunnel  192.0.2.3    default         default           Up
```

