

# Junos® OS

---

## OVSDB and VXLAN User Guide for QFX Series Switches (Contrail)

Published  
2022-09-13

Juniper Networks, Inc.  
1133 Innovation Way  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

*Junos® OS OVSDb and VXLAN User Guide for QFX Series Switches (Contrail)*  
Copyright © 2022 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

## YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

## END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

About This Guide | vii

1

## Overview

OVSDB and VXLAN Overview | 2

Understanding VXLANs | 2

VXLAN Benefits | 3

How Does VXLAN Work? | 4

VXLAN Implementation Methods | 5

Using QFX5100, QFX5110, QFX5120, QFX5200, QFX5210, EX4300-48MP, and EX4600  
Switches with VXLANs | 5

Changing the UDP Port on QFX5100, QFX5110, QFX5200, QFX5210, and EX4600 Switches | 6

Controlling Transit Multicast Traffic on QFX5100, QFX5110, QFX5200, QFX5210, and EX4600  
Switches | 7

Using an MX Series Router, EX9200 Switch, or QFX10000 Switch as a VTEP | 8

Manual VXLANs Require PIM | 8

Load Balancing VXLAN Traffic | 9

VLAN IDs for VXLANs | 9

Enabling QFX5120 Switches to Tunnel Traffic on Core-Facing Layer 3 Tagged and IRB  
Interfaces | 9

Using ping and traceroute with a VXLAN | 10

Supported VXLAN Standards | 10

VXLAN Constraints on EX Series, QFX Series and PTX Series Devices | 11

OVSDB Support on Juniper Networks Devices | 19

Features Supported on OVSDB-Managed Interfaces | 20

Understanding the OVSDB Protocol Running on Juniper Networks Devices | 21

Understanding How to Set Up OVSDB Connections on a Juniper Networks Device | 22

Understanding How Layer 2 BUM and Layer 3 Routed Multicast Traffic Are Handled with OVSDB | 23

Understanding Dynamically Configured VXLANs in an OVSDB Environment | 25

OVSDB Schema for Physical Devices | 35

## 2

## Configuration

### Configuring OVSDB and VXLAN | 41

Installing OVSDB on Juniper Networks Devices | 41

Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers | 42

Setting Up OVSDB on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs | 44

Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs | 45

Creating a Virtual Network | 46

Creating a Logical Interface | 47

Creating a Physical Router | 48

Example: Setting Up a VXLAN Layer 2 Gateway and OVSDB Connections in a Contrail Environment (Trunk Interfaces That Support Untagged Packets) | 49

Requirements | 50

Overview and Topology | 51

Non-OVSDB and Non-VXLAN Configuration | 55

OVSDB and VXLAN Configuration | 56

Verification | 58

Example: Setting Up a VXLAN Layer 2 Gateway and OVSDB Connections in a Contrail Environment (Trunk Interfaces That Support Tagged Packets) | 62

Requirements | 62

Overview and Topology | 63

Non-OVSDB and Non-VXLAN Configuration | 69

OVSDB and VXLAN Configuration | 71

Verification | 73

Verifying That a Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN Are Working Properly | 76

Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN | 78

## 3

## Configuration Statements and Operational Commands

### OVSDB Configuration Statements | 83

controller (OVSDB) | 83

inactivity-probe-duration | 85

interfaces (OVSDB) | 87

maximum-backoff-duration | 88

ovsdb | 89

ovsdb-managed | 91

port (OVSDB) | 93

protocol (OVSDB) | 94

traceoptions (OVSDB) | 96

## **VXLAN Configuration Statements | 99**

vtep-source-interface | 99

## **Monitoring OVSDB | 101**

clear ovsdb commit failures | 101

show ovsdb commit failures | 104

show ovsdb controller | 107

show ovsdb interface | 110

show ovsdb logical-switch | 112

show ovsdb mac | 116

show ovsdb statistics interface | 121

show ovsdb virtual-tunnel-end-point | 124

## **Monitoring VXLAN | 127**

Monitoring a Remote VTEP Interface | 127

Understanding Overlay ping and traceroute Packet Support | 129

Example: Troubleshooting a VXLAN Overlay Network By Using Overlay Ping and Traceroute on QFX Series Switches | 133

Requirements | 134

Overview and Topology | 134

Verification | 138

ping overlay | **148**

show bridge mac-table | **155**

show vpls mac-table | **163**

traceroute overlay | **170**

Verifying VXLAN Reachability | **176**

Verifying That a Local VXLAN VTEP Is Configured Correctly | **177**

Verifying MAC Learning from a Remote VTEP | **178**

# About This Guide

The Open vSwitch Database (OVSDb) management protocol provides a control plane through which QFX Series switches in the physical underlay can exchange control and statistical information with Juniper Networks Contrail controllers in the virtual overlay. Virtual Extensible LAN (VXLAN) provides a data plane through which Layer 2 data packets can be tunneled over a Layer 3 transport network. Use this guide to learn how OVSDb-VXLAN is implemented on QFX Series switches and to configure and monitor OVSDb-VXLAN on these Juniper Networks devices.

# 1

PART

## Overview

---

[OVSDB and VXLAN Overview](#) | 2

---



## CHAPTER 1

# OVSDB and VXLAN Overview

**IN THIS CHAPTER**

- Understanding VXLANs | 2
- VXLAN Constraints on EX Series, QFX Series and PTX Series Devices | 11
- OVSDB Support on Juniper Networks Devices | 19
- Features Supported on OVSDB-Managed Interfaces | 20
- Understanding the OVSDB Protocol Running on Juniper Networks Devices | 21
- Understanding How to Set Up OVSDB Connections on a Juniper Networks Device | 22
- Understanding How Layer 2 BUM and Layer 3 Routed Multicast Traffic Are Handled with OVSDB | 23
- Understanding Dynamically Configured VXLANs in an OVSDB Environment | 25
- OVSDB Schema for Physical Devices | 35

## Understanding VXLANs

**IN THIS SECTION**

- VXLAN Benefits | 3
- How Does VXLAN Work? | 4
- VXLAN Implementation Methods | 5
- Using QFX5100, QFX5110, QFX5120, QFX5200, QFX5210, EX4300-48MP, and EX4600 Switches with VXLANs | 5
- Changing the UDP Port on QFX5100, QFX5110, QFX5200, QFX5210, and EX4600 Switches | 6
- Controlling Transit Multicast Traffic on QFX5100, QFX5110, QFX5200, QFX5210, and EX4600 Switches | 7
- Using an MX Series Router, EX9200 Switch, or QFX10000 Switch as a VTEP | 8
- Manual VXLANs Require PIM | 8

- [Load Balancing VXLAN Traffic | 9](#)
- [VLAN IDs for VXLANs | 9](#)
- [Enabling QFX5120 Switches to Tunnel Traffic on Core-Facing Layer 3 Tagged and IRB Interfaces | 9](#)
- [Using ping and traceroute with a VXLAN | 10](#)
- [Supported VXLAN Standards | 10](#)

Virtual Extensible LAN protocol (VXLAN) technology allows networks to support more VLANs. According to the IEEE 802.1Q standard, traditional VLAN identifiers are 12 bits long—this naming limits networks to 4094 VLANs. The VXLAN protocol overcomes this limitation by using a longer logical network identifier that allows more VLANs and, therefore, more logical network isolation for large networks such as clouds that typically include many virtual machines.

## VXLAN Benefits

VXLAN technology allows you to segment your networks (as VLANs do), but it provides benefits that VLANs cannot. Here are the most important benefits of using VXLANs:

- You can theoretically create as many as 16 million VXLANs in an administrative domain (as opposed to 4094 VLANs on a Juniper Networks device).
  - MX Series routers and EX9200 switches support as many as 32,000 VXLANs, 32,000 multicast groups, and 8000 virtual tunnel endpoints (VTEPs). This means that VXLANs based on MX Series routers provide network segmentation at the scale required by cloud builders to support very large numbers of tenants.
  - QFX10000 Series switches support 4000 VXLANs and 2000 remote VTEPs.
  - QFX5100, QFX5110, QFX5200, QFX5210, and EX4600 switches support 4000 VXLANs, 4000 multicast groups, and 2000 remote VTEPs.
  - EX4300-48MP switches support 4000 VXLANs.
- You can enable migration of virtual machines between servers that exist in separate Layer 2 domains by tunneling the traffic over Layer 3 networks. This functionality allows you to dynamically allocate resources within or between data centers without being constrained by Layer 2 boundaries or being forced to create large or geographically stretched Layer 2 domains.

Using VXLANs to create smaller Layer 2 domains that are connected over a Layer 3 network means that you do not need to use Spanning Tree Protocol (STP) to converge the topology but can use more robust routing protocols in the Layer 3 network instead. In the absence of STP, none of your links are blocked, which means you can get full value from all the ports that you purchase. Using routing protocols to

connect your Layer 2 domains also allows you to load-balance the traffic to ensure that you get the best use of your available bandwidth. Given the amount of east-west traffic that often flows within or between data centers, maximizing your network performance for that traffic is very important.

The video *Why Use an Overlay Network in a Data Center?* presents a brief overview of the advantages of using VXLANs.



Video: [Why Use an Overlay Network in a Data Center?](#)

## How Does VXLAN Work?


VXLAN is often described as an overlay technology because it allows you to stretch Layer 2 connections over an intervening Layer 3 network by encapsulating (tunneling) Ethernet frames in a VXLAN packet that includes IP addresses. Devices that support VXLANs are called *virtual tunnel endpoints (VTEPs)*—they can be end hosts or network switches or routers. VTEPs encapsulate VXLAN traffic and de-encapsulate that traffic when it leaves the VXLAN tunnel. To encapsulate an Ethernet frame, VTEPs add a number of fields, including the following fields:

- Outer media access control (MAC) destination address (MAC address of the tunnel endpoint VTEP)
- Outer MAC source address (MAC address of the tunnel source VTEP)
- Outer IP destination address (IP address of the tunnel endpoint VTEP)
- Outer IP source address (IP address of the tunnel source VTEP)
- Outer UDP header
- A VXLAN header that includes a 24-bit field—called the *VXLAN network identifier (VNI)*—that is used to uniquely identify the VXLAN. The VNI is similar to a VLAN ID, but having 24 bits allows you to create many more VXLANs than VLANs.

**NOTE:** Because VXLAN adds 50 to 54 bytes of additional header information to the original Ethernet frame, you might want to increase the MTU of the underlying network. In this case, configure the MTU of the physical interfaces that participate in the VXLAN network, not the MTU of the logical VTEP source interface, which is ignored.

Figure 1 on page 5 shows the VXLAN packet format.

Figure 1: VXLAN Packet Format

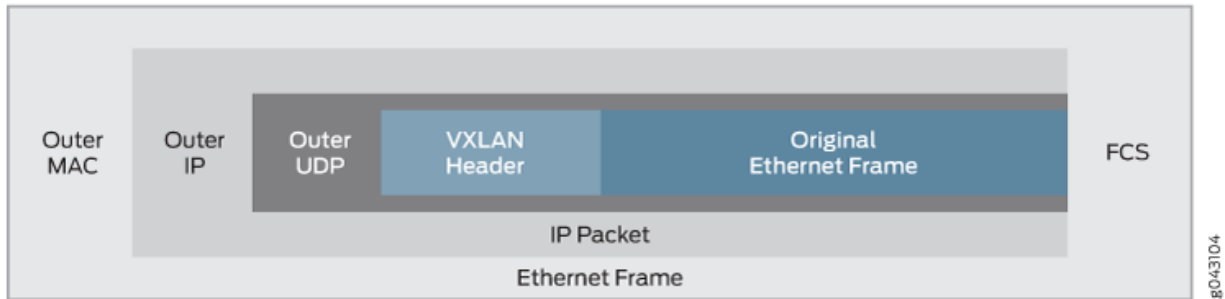

## VXLAN Implementation Methods

Junos OS supports implementing VXLANs in the following environments:

- **Manual VXLAN**—In this environment, a Juniper Networks device acts as a transit device for downstream devices acting as VTEPs, or a gateway that provides connectivity for downstream servers that host virtual machines (VMs), which communicate over a Layer 3 network. In this environment, software-defined networking (SDN) controllers are not deployed.

**NOTE:** QFX10000 switches do not support manual VXLANs.

- **OVSDB-VXLAN**—In this environment, SDN controllers use the Open vSwitch Database (OVSDB) management protocol to provide a means through which controllers (such as a VMware NSX or Juniper Networks Contrail controller) and Juniper Networks devices that support OVSDB can communicate.
- **EVPN-VXLAN**—In this environment, Ethernet VPN (EVPN) is a control plane technology that enables hosts (physical servers and VMs) to be placed anywhere in a network and remain connected to the same logical Layer 2 overlay network, and VXLAN creates the data plane for the Layer 2 overlay network.

## Using QFX5100, QFX5110, QFX5120, QFX5200, QFX5210, EX4300-48MP, and EX4600 Switches with VXLANs

You can configure the switches to perform all of the following roles:

- (All switches except EX4300-48MP) In an environment without an SDN controller, act as a transit Layer 3 switch for downstream hosts acting as VTEPs. In this configuration, you do not need to configure any VXLAN functionality on the switch. You do need to configure IGMP and PIM so that the switch can form the multicast trees for the VXLAN multicast groups. (See "[Manual VXLANs Require PIM](#)" on page 8 for more information.)
- (All switches except EX4300-48MP) In an environment with or without an SDN controller, act as a Layer 2 gateway between virtualized and nonvirtualized networks in the same data center or between data centers. For example, you can use the switch to connect a network that uses VXLANs to one that uses VLANs.
- (EX4300-48MP switches) Act as a Layer 2 gateway between virtualized and nonvirtualized networks in a campus network. For example, you can use the switch to connect a network that uses VXLANs to one that uses VLANs.
- (All switches except EX4300-48MP) Act as a Layer 2 gateway between virtualized networks in the same or different data centers and allow virtual machines to move (VMotion) between those networks and data centers. For example, if you want to allow VMotion between devices in two different networks, you can create the same VLAN in both networks and put both devices on that VLAN. The switches connected to these devices, acting as VTEPs, can map that VLAN to the same VXLAN, and the VXLAN traffic can then be routed between the two networks.
- (QFX5110 and QFX5120 switches with EVPN-VXLAN) Act as a Layer 3 gateway to route traffic between different VXLANs in the same data center.
- (QFX5110 and QFX5120 switches with EVPN-VXLAN) Act as a Layer 3 gateway to route traffic between different VXLANs in different data centers over a WAN or the Internet using standard routing protocols or virtual private LAN service (VPLS) tunnels.

**NOTE:** If you want a QFX5110 or QFX5120 switch to be a Layer 3 VXLAN gateway in an EVPN-VXLAN environment, you must configure integrated routing and bridging (IRB) interfaces to connect the VXLANs, just as you do if you want to route traffic between VLANs.

Because the additional headers add 50 to 54 bytes, you might need to increase the MTU on a VTEP to accommodate larger packets. For example, if the switch is using the default MTU value of 1514 bytes and you want to forward 1500-byte packets over the VXLAN, you need to increase the MTU to allow for the increased packet size caused by the additional headers.

## Changing the UDP Port on QFX5100, QFX5110, QFX5200, QFX5210, and EX4600 Switches

Starting with Junos OS Release 14.1X53-D25 on QFX5100 switches, Junos OS Release 15.1X53-D210 on QFX5110 and QFX5200 switches, Junos OS Release 18.1R1 on QFX5210 switches, and Junos OS

Release 18.2R1 on EX4600 switches, you can configure the UDP port used as the destination port for VXLAN traffic. To configure the VXLAN destination port to be something other than the default UDP port of 4789, enter the following statement:

```
set protocols l2-learning destination-udp-port port-number
```

The port you configure will be used for all VXLANs configured on the switch.

**NOTE:** If you make this change on one switch in a VXLAN, you must make the same change on all the devices that terminate the VXLANs configured on your switch. If you do not do so, traffic will be disrupted for all the VXLANs configured on your switch. When you change the UDP port, the previously learned remote VTEPs and remote MACs are lost and VXLAN traffic is disrupted until the switch relearns the remote VTEPs and remote MACs.

## Controlling Transit Multicast Traffic on QFX5100, QFX5110, QFX5200, QFX5210, and EX4600 Switches

When the switch acting as a VTEP receives a broadcast, unknown unicast, or multicast packet, it performs the following actions on the packet:

1. It de-encapsulates the packet and delivers it to the locally attached hosts.
2. It then adds the VXLAN encapsulation again and sends the packet to the other VTEPs in the VXLAN.

These actions are performed by the loopback interface used as the VXLAN tunnel address and can, therefore, negatively impact the bandwidth available to the VTEP. Starting with Junos OS Release 14.1X53-D30 for QFX5100 switches, Junos OS Release 15.1X53-D210 for QFX5110 and QFX5200 switches, Junos OS Release 18.1R1 for QFX5210 switches, and Junos OS Release 18.2R1 for EX4600 switches, if you know that there are no multicast receivers attached to other VTEPs in the VXLAN that want traffic for a specific multicast group, you can reduce the processing load on the loopback interface by entering the following statement:

```
set protocols l2-learning disable-vxlan-multicast-transit vxlan-multicast-group multicast-group
```

In this case, no traffic will be forwarded for the specified group but all other multicast traffic will be forwarded. If you do not want to forward any multicast traffic to other VTEPs in the VXLAN, enter the following statement:

```
set protocols l2-learning disable-vxlan-multicast-transit vxlan-multicast-group all
```

## Using an MX Series Router, EX9200 Switch, or QFX10000 Switch as a VTEP

You can configure an MX Series router, EX9200 switch, or QFX10000 switch to act as a VTEP and perform all of the following roles:

- Act as a Layer 2 gateway between virtualized and nonvirtualized networks in the same data center or between data centers. For example, you can use an MX Series router to connect a network that uses VXLANs to one that uses VLANs.
- Act as a Layer 2 gateway between virtualized networks in the same or different data centers and allow virtual machines to move (VMotion) between those networks and data centers.
- Act as a Layer 3 gateway to route traffic between different VXLANs in the same data center.
- Act as a Layer 3 gateway to route traffic between different VXLANs in different data centers over a WAN or the Internet using standard routing protocols or virtual private LAN service (VPLS) tunnels.

**NOTE:** If you want one of the devices described in this section to be a VXLAN Layer 3 gateway, you must configure integrated routing and bridging (IRB) interfaces to connect the VXLANs, just as you do if you want to route traffic between VLANs.

## Manual VXLANs Require PIM

In an environment with a controller (such as a VMware NSX or Juniper Networks Contrail controller), you can provision VXLANs on a Juniper Networks device. A controller also provides a control plane that VTEPs use to advertise their reachability and learn about the reachability of other VTEPs. You can also manually create VXLANs on Juniper Networks devices instead of using a controller. If you use this approach, you must also configure Protocol Independent Multicast (PIM) on the VTEPs so that they can create VXLAN tunnels between themselves.

You must also configure each VTEP in a given VXLAN to be a member of the same multicast group. (If possible, you should assign a different multicast group address to each VXLAN, although this is not required. Multiple VXLANs can share the same multicast group.) The VTEPs can then forward ARP requests they receive from their connected hosts to the multicast group. The other VTEPs in the group de-encapsulate the VXLAN information, and (assuming they are members of the same VXLAN) they forward the ARP request to their connected hosts. When the target host receives the ARP request, it responds with its MAC address, and its VTEP forwards this ARP reply back to the source VTEP. Through this process, the VTEPs learn the IP addresses of the other VTEPs in the VXLAN and the MAC addresses of the hosts connected to the other VTEPs.

The multicast groups and trees are also used to forward broadcast, unknown unicast, and multicast (BUM) traffic between VTEPs. This prevents BUM traffic from being unnecessarily flooded outside the VXLAN.

**NOTE:** Multicast traffic that is forwarded through a VXLAN tunnel is sent only to the remote VTEPs in the VXLAN. That is, the encapsulating VTEP does not copy and send copies of the packets according to the multicast tree—it only forwards the received multicast packets to the remote VTEPs. The remote VTEPs de-encapsulate the encapsulated multicast packets and forward them to the appropriate Layer 2 interfaces. Junos OS Release 18.1R1 for QFX5210 switches

## Load Balancing VXLAN Traffic

The Layer 3 routes that form VXLAN tunnels use per-packet load balancing by default, which means that load balancing is implemented if there are ECMP paths to the remote VTEP. This is different from normal routing behavior in which per-packet load balancing is not used by default. (Normal routing uses per-prefix load balancing by default.)

The source port field in the UDP header is used to enable ECMP load balancing of the VXLAN traffic in the Layer 3 network. This field is set to a hash of the inner packet fields, which results in a variable that ECMP can use to distinguish between tunnels (flows).

None of the other fields that flow-based ECMP normally uses are suitable for use with VXLANs. All tunnels between the same two VTEPs have the same outer source and destination IP addresses, and the UDP destination port is set to port 4789 by definition. Therefore, none of these fields provide a sufficient way for ECMP to differentiate flows.

## VLAN IDs for VXLANs

When configuring a VLAN ID for a VXLAN on any Juniper Networks device that supports VXLANs except QFX10000 switches, we strongly recommend using a VLAN ID of 3 or higher. If you use a VLAN ID of 1 or 2, replicated broadcast, multicast, and unknown unicast (BUM) packets for these VXLANs might be untagged, which in turn might result in the packets being dropped by a device that receives the packets.

## Enabling QFX5120 Switches to Tunnel Traffic on Core-Facing Layer 3 Tagged and IRB Interfaces

**NOTE:** This section applies only to QFX5120 switches running Junos OS Releases 18.4R1, 18.4R2, 18.4R2-S1 through 18.4R2-S3, 19.1R1, 19.1R2, 19.2Rx, and 19.3Rx.

When a QFX5120 switch attempts to tunnel traffic on core-facing Layer 3 tagged interfaces or IRB interfaces, the switch drops the packets. To avoid this issue, you can configure a simple two-term filter-based firewall on the Layer 3 tagged or IRB interface.



**NOTE:** QFX5120 switches support a maximum of 256 two-term filter-based firewalls.

For example:

```
set interfaces et-0/0/3 unit 0 family inet filter input vxlan100
set firewall family inet filter vxlan100 term 1 from destination-address 192.168.0.1/24 then
accept
set firewall family inet filter vxlan100 term 2 then routing-instance route1
```

Term 1 matches and accepts traffic that is destined for the QFX5210 switch, which is identified by the source VTEP IP address (192.168.0.1/24) assigned to the switch's loopback interface. For term 1, note that when specifying an action, you can alternatively count traffic instead of accepting it.

Term 2 matches and forwards all other data traffic to a routing instance (route 1), which is configured interface et-0/0/3.

In this example, note that interface et-0/0/3 is referenced by routing instance route1. As a result, you must include the `set firewall family inet filter vxlan100 term 2 then routing-instance route1` command. Without this command, the firewall filter will not work properly.

## Using ping and traceroute with a VXLAN

On QFX5100 and QFX5110 switches, you can use the `ping` and `traceroute` commands to troubleshoot traffic flow through a VXLAN tunnel by including the `overlay` parameter and various options. You use these options to force the `ping` or `traceroute` packets to follow the same path as data packets through the VXLAN tunnel. In other words, you make the underlay packets (`ping` and `traceroute`) take the same route as the overlay packets (data traffic). See *ping overlay* and *traceroute overlay* for more information.

## Supported VXLAN Standards

RFCs and Internet drafts that define standards for VXLAN:

- RFC 7348, *Virtual eXtensible Local Area Network (VXLAN): A Framework for Overlaying Virtualized Layer 2 Networks over Layer 3 Networks*
- Internet draft draft-ietf-nvo3-vxlan-gpe, *Generic Protocol Extension for VXLAN*

Release History Table

Release	Description
14.1X53-D30	Starting with Junos OS Release 14.1X53-D30 for QFX5100 switches, Junos OS Release 15.1X53-D210 for QFX5110 and QFX5200 switches, Junos OS Release 18.1R1 for QFX5210 switches, and Junos OS Release 18.2R1 for EX4600 switches, if you know that there are no multicast receivers attached to other VTEPs in the VXLAN that want traffic for a specific multicast group, you can reduce the processing load on the loopback interface
14.1X53-D25	Starting with Junos OS Release 14.1X53-D25 on QFX5100 switches, Junos OS Release 15.1X53-D210 on QFX5110 and QFX5200 switches, Junos OS Release 18.1R1 on QFX5210 switches, and Junos OS Release 18.2R1 on EX4600 switches, you can configure the UDP port used as the destination port for VXLAN traffic.

RELATED DOCUMENTATION

<i>Examples: Manually Configuring VXLANs on QFX Series and EX4600 Switches</i>
<i>Understanding EVPN with VXLAN Data Plane Encapsulation</i>
<i>OVSDb Support on Juniper Networks Devices</i>
<a href="#">mtu</a>

## VXLAN Constraints on EX Series, QFX Series and PTX Series Devices

IN THIS SECTION

- [VXLAN Constraints on QFX5xxx, EX4300-48MP, EX4400, and EX4600 Switches | 12](#)
- [VXLAN Constraints on QFX10000 Series Switches | 17](#)
- [VXLAN Constraints on PTX10000 Series Routers | 19](#)

When configuring Virtual Extensible LANs (VXLANs) on QFX Series and EX Series switches, be aware of the constraints described in the following sections. In these sections, “Layer 3 side” refers to a network-facing interface that performs VXLAN encapsulation and de-encapsulation, and “Layer 2 side” refers to a server-facing interface that is a member of a VLAN that is mapped to a VXLAN.

## VXLAN Constraints on QFX5xxx, EX4300-48MP, EX4400, and EX4600 Switches

- VXLAN support on a Virtual Chassis or Virtual Chassis Fabric (VCF) has the following constraints and recommendations:
  - We support EVPN-VXLAN on an EX4300-48MP Virtual Chassis only in campus networks.
  - Standalone EX4400 switches and EX4400 Virtual Chassis support EVPN-VXLAN. For multihoming use cases, hosts can be multihomed to standalone EX4400 switches, but we don't support multihoming a host with ESI-LAG interfaces to EX4400 Virtual Chassis.
  - In data center networks, we support EVPN-VXLAN only on a Virtual Chassis or VCF consisting of all QFX5100 switches, and not on any other mixed or non-mixed Virtual Chassis or VCF. We support VCF in EVPN-VXLAN data center environments running Junos OS releases starting in 14.1X53-D40 and prior to 17.1R1. However, we don't recommend using EVPN-VXLAN on a QFX5100 Virtual Chassis or VCF because the feature support is at parity only with support on standalone QFX5100 switches running Junos OS Release 14.1X53-D40.

We have deprecated VCF support in general from Junos OS Release 21.4R1 onward.

- When a QFX5100 Virtual Chassis learns a MAC address on a VXLAN interface, the MAC table entry can possibly take up to 10 to 15 minutes to age out (two to three times the 5-minute default aging interval). This happens when the Virtual Chassis learns a MAC address from an incoming packet on one Virtual Chassis member switch, and then must forward that packet over the Virtual Chassis port (VCP) links to another member switch in the Virtual Chassis on the way to its destination. The Virtual Chassis marks the MAC address as seen again at the second member switch, so the MAC address might not age out for one or two additional aging intervals beyond the first one. MAC learning can't be turned off on VXLAN interfaces only at the second Virtual Chassis member switch, so you can't avoid the extra delay in this case.
- (QFX5120 switches only) Traffic that is tunneled via a core-facing Layer 3 tagged interface or IRB interface is dropped. To avoid this limitation, you can configure flexible VLAN tagging. For more information, see *Understanding VXLANs*.
- (QFX5110 and QFX5120) If you configure an interface in the enterprise style with flexible Ethernet services encapsulation, the device drops transit Layer 2 VXLAN-encapsulated packets on that interface. To work around this issue, configure the interface in the service provider style instead of using the enterprise style. For more information on enterprise style and service provider style configurations, see *Flexible Ethernet Services Encapsulation*. For an overview of configuring flexible Ethernet services in an EVPN-VXLAN fabric, see *Understanding Flexible Ethernet Services Support With EVPN-VXLAN*.
- (QFX5110 and QFX5120 switches) In EVPN-VXLAN fabrics, we don't support enterprise style, service provider style, and native VLAN configurations on the same physical interface if the native VLAN is the same as one of the VLANs in the service provider style configuration. The native VLAN

can be one of the VLANs in the enterprise style configuration. For more information on enterprise style and service provider style configurations, see *Flexible Ethernet Services Encapsulation*.

- (QFX5100, QFX5110, QFX5200, and QFX5210 switches) We support VXLAN configuration in the default-switch routing instance and in MAC VRF routing instances (`instance-type mac-vrf`).

(EX4300-48MP and EX4600 switches) We support VXLAN configuration only in the default-switch routing instance.

- (QFX5100, QFX5200, QFX5210, EX4300-48MP, and EX4600 switches) Routing traffic between different VXLANs is not supported.

**NOTE:** The following switches support VXLAN routing as of the indicated releases, so this limitation no longer applies:

- EX4300-48MP switches: Starting in Junos OS Release 19.4R1.
- QFX5210 switches: Starting in Junos OS Release 21.3R1.

- (QFX5100, QFX5110, QFX5120, EX4600, and EX4650 switches) These switches support only one VTEP next hop on VXLAN underlay IRB interfaces. If you don't want to use multiple egress ports but need more than one VTEP next hop, as a workaround you can do one of the following:
  - Place a router between the switch and the remote VTEPs so only one next hop is between them.
  - Use physical Layer 3 interfaces instead of IRB interfaces for remote VTEP reachability.
- (QFX5110 switches) By default, routing traffic between a VXLAN and a Layer 3 logical interface—for example, an interface configured with the `set interfaces interface-name unit logical-unit-number family inet address ip-address/prefix-length` command—is not enabled. If this routing functionality is required in your EVPN-VXLAN network, you can perform some additional configuration to make it work. For more information, see *Understanding How to Configure VXLANs and Layer 3 Logical Interfaces to Interoperate*.
- Integrated routing and bridging (IRB) interfaces used in EVPN-VXLAN overlay networks do not support the IS-IS routing protocol.
- (QFX5100, QFX5110, QFX5120, QFX5200, QFX5210, EX4300-48MP, and EX4600 switches) A physical interface cannot be a member of a VLAN and a VXLAN. That is, an interface that performs VXLAN encapsulation and de-encapsulation cannot also be a member of a VLAN. For example, if a VLAN that is mapped to a VXLAN is a member of trunk port xe-0/0/0, any other VLAN that is a member of xe-0/0/0 must also be assigned to a VXLAN.

**NOTE:** Starting in Junos OS Releases 18.1R3 and 18.4R1 for QFX5100, QFX5110, QFX5200, and QFX5210 switches and Junos OS Release 19.4R1 for QFX5120 and EX4650 switches, this limitation no longer applies because you can configure flexible Ethernet services on the physical interface. (The same is true for aggregated Ethernet (AE) bundle interfaces.)

Also, starting in Junos OS Release 20.3R1 on QFX5110 and QFX5120 switches, we support Layer 2 VLAN and VXLAN logical interfaces on the same physical interface using service provider style interface configurations only.

For more information, see *Understanding Flexible Ethernet Services Support With EVPN-VXLAN*.

- (QFX5120, EX4400, and EX4650 switches) With 802.1X authentication for VXLAN traffic on an access port, upon authentication, the RADIUS server dynamically switches the traffic from the original VLAN to a dynamic VLAN you configure as a VXLAN-enabled VLAN. A VXLAN-enabled VLAN is a VLAN for which you configure a VXLAN network identifier (VNI) mapping using the `vxlان vni` statement at the `[edit vlans vlan-name]` hierarchy.

When you configure the 802.1X dynamic VLAN and its corresponding VNI mapping, you must also configure the original VLAN as a VXLAN-enabled VLAN with a VNI mapping. If you don't explicitly configure the port as a member of a VLAN, the port uses the default VLAN. In that case, you must configure the default VLAN as a VXLAN-enabled VLAN with a VNI mapping.

- Multichassis link aggregation groups (MC-LAGs) are not supported with VXLAN.

**NOTE:** In an EVPN-VXLAN environment, EVPN multihoming active-active mode is used instead of MC-LAG for redundant connectivity between hosts and leaf devices.

- IP fragmentation and defragmentation are not supported on the Layer 3 side.
- The following features are not supported on the Layer 2 side:
  - (QFX5100, QFX5200, QFX5210, EX4300-48MP, and EX4600 switches) IGMP snooping with EVPN-VXLAN.
  - Redundant trunk groups (RTGs).
  - The ability to shut down a Layer 2 interface or temporarily bring down the interface when a storm control level is exceeded is not supported.
  - We don't support full STP, MSTP, RSTP, or VSTP (xSTP) features with VXLAN. However, you can configure xSTP on edge (access port) for BPDU block-on-edge support. See *BPDU Protection for Spanning-Tree Protocols* for details.

- Access port security features such as the following are not supported with VXLAN:
  - DHCP snooping.
  - Dynamic ARP inspection.
  - MAC limiting and MAC move limiting.

**NOTE:** Exceptions:

MAC limiting is supported on OVSDB-managed interfaces in an OVSDB-VXLAN environment with Contrail controllers. For more information, see ["Features Supported on OVSDB-Managed Interfaces" on page 20](#).

- Ingress node replication is not supported in the following cases:
  - When PIM is used for the control plane (manual VXLAN).
  - When an SDN controller is used for the control plane (OVSDB-VXLAN).

Ingress node replication is supported with EVPN-VXLAN.
- PIM-BIDIR and PIM-SSM are not supported with VXLANs.
- If you configure a port-mirroring instance to mirror traffic exiting from an interface that performs VXLAN encapsulation, the source and destination MAC addresses of the mirrored packets are invalid. The original VXLAN traffic is not affected.
- (QFX5110 switches only) VLAN firewall filters are not supported on IRB interfaces on which EVPN-VXLAN is enabled.
- (EX4650 and QFX5000 Series switches) Firewall filter and policer support:
  - (QFX5100 switches) Firewall filters and policers are not supported on transit traffic on which EVPN-VXLAN is enabled. They are supported only in the ingress direction on CE-facing interfaces.
  - (QFX5100 switches) For IRB interfaces in an EVPN-VXLAN one-layer IP fabric, firewall filtering and policing is supported only at the ingress point of non-encapsulated frames routed through the IRB interface.
  - (EX4650, QFX5110, and QFX5120 switches) We support ingress filtering and policing for routed VXLAN interfaces (IRB interfaces) as ingress route Access Control Lists [IRACLs].
  - (QFX5110, QFX5120, and QFX5210 switches) We support Ingress filtering and policing on non-routed VXLAN interfaces as ingress port ACLs [IPACLs]).

- (QFX5110 and QFX5120 switches) Filtering and policing support on non-routed VXLAN interfaces extends to the egress direction as egress Port ACLs ([EPACLs]).
- (EX4300-48MP switches only) The following styles of interface configuration are not supported:
  - Service provider style, where a physical interface is divided into multiple logical interfaces, each of which is dedicated to a particular customer VLAN. The `extended-vlan-bridge` encapsulation type is configured on the physical interface.
  - Flexible Ethernet services, which is an encapsulation type that enables a physical interface to support both service provider and enterprise styles of interface configuration.

For more information about these styles of interface configuration, see [Flexible Ethernet Services Encapsulation](#).

- (QFX5100 switches only) Using the `no-arp-suppression` configuration statement, you can turn off the suppression of ARP requests on one or more specified VLANs. However, starting in Junos OS Release 18.4R3, you must turn off this feature on all VLANs. To do so, you can use one of these configuration options:
  - Use a batch command to turn off the feature on all VLANs—`set groups group-name vlans * no-arp-suppression`. With this command, we use the asterisk (\*) as a wildcard that specifies all VLANs.
  - Use a command to turn off the feature on each individual VLAN—`set vlans vlan-name no-arp-suppression`.

**NOTE:** The `no-arp-suppression` statement is no longer supported on EX Series and QFX Series switches starting in Junos OS Release 19.1R1. The statement has been deprecated.

- QFX5120-48Y, QFX5120-32C, and QFX5200 switches support hierarchical equal-cost multipath (ECMP), which allows these switches to perform a two-level route resolution. However, all other QFX5xxx switches do not support hierarchical ECMP. As a result, when an EVPN Type-5 packet is encapsulated with a VXLAN header, then de-encapsulated by a QFX5xxx switch that does not support hierarchical ECMP, the switch is unable to resolve the two-levels of routes that were in the inner packet. The switch then drops the packet.
- (QFX5100, QFX5110, QFX5120, QFX5200, and QFX5210 switches) When you configure the IRB interfaces on a device that is concurrently supporting configured VLANs on both a centrally-routed bridging overlay and an edge-routed bridging overlay, the IRB MAC address and virtual gateway MAC address on the IRB interface for the centrally-routed bridging overlay must be different from the IRB MAC address and virtual gateway MAC address on the IRB interface for the edge-routed bridging overlay.

- (QFX5110 and QFX5120 switches only) In an EVPN-VXLAN overlay, we do not support running a routing protocol on an IRB interface that is in a default routing instance (default.inet.0). Instead, we recommend including the IRB interface in a routing instance of type vrf.
- The following constraints apply to both VXLANs and VLANs.
  - (QFX5xxx switches only) When configuring route leaking between virtual routing and forwarding (VRF) instances, you must specify each prefix with a subnet mask that is equal to or longer than /16 for IPv4 prefixes or equal to or longer than /64 for IPv6 prefixes. If a subnet mask that you specify does not meet these parameters, the specified routes will not be leaked.
  - (QFX5120 switches only) By default, QFX5120 switches allocate 5 MB of a shared buffer to absorb bursts of multicast traffic. If a burst of multicast traffic exceeds 5 MB, the switch will drop the packets that the switch receives after the buffer space is exceeded. To prevent the switch from dropping multicast packets when this situation occurs, you can do one of the following:
    - Use the [shared-buffer](#) configuration statement in the [edit class-of-service] hierarchy level to reallocate a higher percentage of the shared buffer for multicast traffic. For more information about fine-tuning a shared buffer, see [Understanding CoS Buffer Configuration](#).
    - On the Juniper Networks switch from which the bursts of multicast traffic are coming, apply a shaper on the egress link.
  - (QFX5xxx switches only) If you have enabled storm control on an interface, you might notice a significant difference between the configured and actual traffic rates for the interface. This difference is the result of an internal storm control meter that quantifies the actual traffic rate for the interface in increments of 64 kbps, for example, 64 kbps, 128 kbps, 192 kbps, and so on.
  - (QFX5xxx and EX46xx switches) You can't use hardware-assisted inline Bidirectional Forwarding Detection (BFD) with VXLAN encapsulation of BFD packets. Also, if you configure EVPN overlay BGP peerings, use distributed BFD instead of hardware-assisted inline BFD. See *Understanding How BFD Detects Network Failures* for details on the different types of BFD sessions that you can configure.
  - (QFX5xxx and EX46xx switches) We don't support configuring and using MPLS and EVPN-VXLAN at the same time on the same device. We have this constraint because Broadcom-based platforms use the same hardware tables to store tunnel and virtual port information used by both the MPLS and VXLAN feature sets.

Also, you can't use an MPLS underlay with EVPN and a VXLAN overlay; this is a Broadcom hardware limitation.

## VXLAN Constraints on QFX10000 Series Switches

- MC-LAGs are not supported with VXLAN.



**NOTE:** In an EVPN-VXLAN environment, EVPN multihoming active-active mode is used instead of MC-LAG for redundant connectivity between hosts and leaf devices.

- IP fragmentation is not supported on the Layer 3 side.
- The following features are not supported on the Layer 2 side:
  - IGMP snooping with EVPN-VXLAN in Junos OS Releases before Junos OS Release 17.2R1.
  - STP (any variant).
- Access port security features are not supported with VXLAN. For example, the following features are not supported:
  - DHCP snooping.
  - Dynamic ARP inspection.
  - MAC limiting and MAC move limiting.
- Ingress node replication is not supported when an SDN controller is used for the control plane (OVSDB-VXLAN). Ingress node replication is supported for EVPN-VXLAN.
- QFX10000 switches that are deployed in an EVPN-VXLAN environment do not support an IPv6 physical underlay network.
- When the next-hop database on a QFX10000 switch includes next hops for both the underlay network and the EVPN-VXLAN overlay network, the next hop to a VXLAN peer cannot be an Ethernet segment identifier (ESI) or a virtual tunnel endpoint (VTEP) interface.
- IRB interfaces used in EVPN-VXLAN overlay networks do not support the IS-IS routing protocol.
- VLAN firewall filters applied to IRB interfaces on which EVPN-VXLAN is enabled.
- Filter-based forwarding (FBF) is not supported on IRB interfaces used in an EVPN-VXLAN environment.
- QFX10002, QFX10008, and QFX10016 switches do not support port mirroring and analyzing when EVPN-VXLAN is also configured.
- When you configure the IRB interfaces on a device that is concurrently supporting configured VLANs on both a centrally-routed bridging overlay and an edge-routed bridging overlay, the IRB MAC address and virtual gateway MAC address on the IRB interface for the centrally-routed bridging overlay must be different from the IRB MAC address and virtual gateway MAC address on the IRB interface for the edge-routed bridging overlay.

- In an EVPN-VXLAN overlay, we do not support running a routing protocol on an IRB interface that is in a default routing instance (default.inet.0). Instead, we recommend including the IRB interface in a routing instance of type vrf.

## VXLAN Constraints on PTX10000 Series Routers

- You can't use a firewall filter on these devices to block VXLAN tunnel termination.

## RELATED DOCUMENTATION

*Understanding VXLANs*

*Examples: Manually Configuring VXLANs on QFX Series and EX4600 Switches*

*Manually Configuring VXLANs on QFX Series and EX4600 Switches*

## OVSDB Support on Juniper Networks Devices

The following Juniper Networks devices support the *Open vSwitch Database (OVSDB)* management protocol:

- EX9200 Line of Ethernet Switches
- MX80, MX104, MX240, MX480, MX960, MX2010, and MX2020 Universal Routing Platforms
- QFX Series Switches

Starting with Junos OS Release 14.1X53-D30 for QFX5100 switches, 15.1X53-D20 for QFX10002 switches, 15.1X53-D30 for QFX10008 switches, 15.1X53-D60 for QFX10016 switches, 15.1X53-D210 for QFX5110 and QFX5200 switches, 16.1R1 for EX9200 switches and MX routers, and 18.1R1 for QFX5210 switches, the OVSDB software (jsdn) package is included in the Junos OS software (jinstall) package. As a result, if you have one of the listed releases or a later release, you no longer need to install the separate jsdn package on the Juniper Networks devices.

Release History Table

Release	Description
14.1X53-D30	Starting with Junos OS Release 14.1X53-D30 for QFX5100 switches, 15.1X53-D20 for QFX10002 switches, 15.1X53-D30 for QFX10008 switches, 15.1X53-D60 for QFX10016 switches, 15.1X53-D210 for QFX5110 and QFX5200 switches, 16.1R1 for EX9200 switches and MX routers, and 18.1R1 for QFX5210 switches, the OVSDb software (jsdn) package is included in the Junos OS software (jinstall) package. As a result, if you have one of the listed releases or a later release, you no longer need to install the separate jsdn package on the Juniper Networks devices.

## Features Supported on OVSDb-Managed Interfaces

Table 1 on page 20 lists features supported on Open vSwitch Database (OVSDb)-managed interfaces of QFX5100 switches, the release in which support is introduced, the environment in which the feature is supported, and where to find information about the feature.

Table 1: Features Supported on OVSDb-Managed Interfaces

Feature	Junos OS Release in Which Feature Is Initially Introduced	Supported Environment	Where to Find Information
Classifiers	14.1X53-D30	Contrail	<a href="#">Understanding CoS on OVSDb-Managed VXLAN Interfaces</a>
DSCP rewrite rules	14.1X53-D30	Contrail	<a href="#">Understanding CoS on OVSDb-Managed VXLAN Interfaces</a>
Firewall filters	14.1X53-D30	Contrail	<a href="#">Example: Applying a Firewall Filter to OVSDb-Managed Interfaces</a>
MAC limiting  <b>NOTE:</b> MAC move limiting is not supported on OVSDb-managed interfaces.	14.1X53-D30	Contrail	<a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security</a>

**Table 1: Features Supported on OVSDB-Managed Interfaces (*Continued*)**

Feature	Junos OS Release in Which Feature Is Initially Introduced	Supported Environment	Where to Find Information
Schedulers	14.1X53-D30	Contrail	<a href="#">Understanding CoS on OVSDB-Managed VXLAN Interfaces</a>
Storm control	14.1X53-D26	Contrail	<a href="#">Understanding Storm Control</a>
Two-rate three-color markers	14.1X53-D30	Contrail	<a href="#">Example: Applying a Policer to OVSDB-Managed Interfaces</a>

## Understanding the OVSDB Protocol Running on Juniper Networks Devices

The Juniper Networks Junos OS implementation of the Open vSwitch Database (OVSDB) management protocol provides a means through which Juniper Networks devices that support OVSDB can communicate with software-defined networking (SDN) controllers. Juniper Networks devices exchange control and statistical information with the SDN controllers, thereby enabling *virtual machine (VM)* traffic from the entities in a virtualized network to be forwarded to entities in a physical network and vice versa.

The Junos OS implementation of OVSDB includes an OVSDB server and an OVSDB client, both of which run on each Juniper Networks device that supports OVSDB.

The OVSDB server on a Juniper Networks device can communicate with an OVSDB client on an SDN controller. To establish a connection between a Juniper Networks device and an SDN controller, you must specify information about the SDN controller (IP address) and the connection (port over which the connection occurs and the communication protocol to be used) on each Juniper Networks device. After the configuration is successfully committed, the connection is established between the management port of the Juniper Networks device and the SDN controller port that you specify in the Junos OS configuration.

The OVSDB server stores and maintains an OVSDB database schema, which is defined for physical devices. This schema contains control and statistical information provided by the OVSDB client on the Juniper Networks devices and on SDN controllers. This information is stored in various tables in the schema. The OVSDB client monitors the schema for additions, deletions, and modifications to this

information, and the information is used for various purposes, such as learning the media access control (MAC) addresses of virtual hosts and physical servers.

The schema provides a means through which the Juniper Networks devices and the SDN controllers can exchange information. For example, the Juniper Networks devices capture MAC routes to entities in the physical network and push this information to a table in the schema so that SDN controllers with connections to these Juniper Networks devices can access the MAC routes. Conversely, SDN controllers capture MAC routes to entities in the virtualized network and push this information to a table in the schema so that Juniper Networks devices with connections to the SDN controllers can access the MAC routes.

Some of the OVSDB table names include the words *local* or *remote*, for example, *unicast MACs local table* and *unicast MACs remote table*. Information in *local* tables is learned by a Juniper Networks device that functions as a hardware *virtual tunnel endpoint (VTEP)*, while information in *remote* tables is learned from other software or hardware VTEPs.

## Understanding How to Set Up OVSDB Connections on a Juniper Networks Device

The Juniper Networks Junos OS implementation of the Open vSwitch Database (OVSDB) management protocol provides a means through which Juniper Networks devices that support OVSDB can communicate with software-defined networking (SDN) controllers. A Juniper Networks device exchanges control and statistical data with each SDN controller to which it is connected.

You can connect a Juniper Networks device to more than one SDN controller for redundancy.

In a VMware NSX environment, one cluster of NSX controllers typically includes three or five controllers. To implement the OVSDB management protocol on a Juniper Networks device, you must explicitly configure a connection to one SDN controller, using the Junos OS CLI. If the SDN controller to which you explicitly configure a connection is in a cluster, the controller pushes information about other controllers in the same cluster to the device, and the device establishes connections with the other controllers. However, you can also explicitly configure connections with the other controllers in the cluster, using the Junos OS CLI.

To implement the OVSDB management protocol on a Juniper Networks device in a Contrail environment, you must configure a connection to a Contrail controller, using the Junos OS CLI.

Connections to all SDN controllers are made on the management interface of the Juniper Networks device. To set up a connection between a Juniper Networks device and an SDN controller, you need to configure the following parameters on the Juniper Networks device:

- IP address of the SDN controller.

- The protocol that secures the connection. *Secure Sockets Layer (SSL)* is the supported protocol.

**NOTE:** The SSL connection requires a private key and certificates, which must be stored in the `/var/db/certs` directory of the Juniper Networks device. See *Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers*.

- Number of the port over which the connection is made. The port number of the default port is 6632.

Optionally, you can configure the following connection timers on the Juniper Networks device:

- Inactivity probe duration—The maximum amount of time, in milliseconds, that the connection can be inactive before an inactivity probe is sent. The default value is 0 milliseconds, which means that an inactivity probe is never sent.
- Maximum backoff duration—If an attempt to connect to an SDN controller fails, the maximum amount of time, in milliseconds, before the device can make the next attempt. The default value is 1000 milliseconds.

## RELATED DOCUMENTATION

*Setting Up the OVSDb Protocol on Juniper Networks Devices that Support Manual Configuration of VXLANs*

*Setting Up OVSDb on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs*

## Understanding How Layer 2 BUM and Layer 3 Routed Multicast Traffic Are Handled with OVSDb

The Juniper Networks Junos OS implementation of the Open vSwitch Database (OVSDb) management protocol provides a means through which software-defined networking (SDN) controllers and Juniper Networks devices that support OVSDb can communicate.

This topic explains how a Juniper Networks device with Virtual Extensible LAN (VXLAN) and OVSDb management protocol capabilities handles the following types of traffic:

- (This scenario applies to all Juniper Networks devices that support VXLAN and OVSDb.) Layer 2 *broadcast, unknown unicast, and multicast (BUM)* traffic that originates in an OVSDb-managed VXLAN and is forwarded to interfaces within the same VXLAN.

**NOTE:** You must explicitly configure the replication of unknown unicast traffic in a Contrail environment.

- (This scenario applies only to Juniper Networks devices that can function as a Layer 3 VXLAN gateway in an OVSDB-VXLAN environment.) Layer 3 multicast traffic that is received by an *integrated routing and bridging (IRB)* interface in an OVSDB-managed VXLAN and is forwarded to interfaces in another OVSDB-managed VXLAN.

By default, Layer 2 BUM traffic that originates in an OVSDB-managed VXLAN is handled by one or more software *virtual tunnel endpoints (VTEPs)*, service nodes, or top-of-rack service nodes (TSNs) in the same VXLAN. (In this topic, software VTEPs, service nodes, and TSNs are known collectively as *replicators*.) The table for remote multicast media access control (MAC) addresses in the OVSDB schema for physical devices contains only one entry that has the keyword `unknown-dst` as the MAC string and a list of replicators.

Given the previously described table entry, Layer 2 BUM traffic received on an interface in the OVSDB-managed VXLAN is forwarded to one of the replicators. The replicator to which a BUM packet is forwarded is determined by the Juniper Networks device on which the OVSDB-managed VXLAN is configured. On receiving the BUM packet, the entity replicates the packet and forwards the replicas to all interfaces within the VXLAN.

Instead of using replicators, you can optionally enable ingress node replication to handle Layer 2 BUM traffic on Juniper Networks devices that support OVSDB.

**NOTE:** Ingress node replication is supported on all Juniper Networks devices that support OVSDB except the QFX Series switches.

With ingress node replication enabled, on receiving a Layer 2 BUM packet on an interface in an OVSDB-managed VXLAN, the Juniper Networks device replicates the packet and then forwards the replicas to all software VTEPs included in the unicast MACs remote table in the OVSDB schema. The software VTEPs then forward the replicas to all *virtual machines (VMs)*, except service VMs, or nodes, on the same host.

**NOTE:** When Juniper Networks devices replicate Layer 2 BUM packets to a large number of remote software VTEPs, the performance of the Juniper Networks devices can be impacted.

On IRB interfaces that forward Layer 3 multicast traffic from one OVSDB-managed VXLAN to another, ingress node replication is automatically implemented. With ingress node replication, the Juniper Networks device replicates a Layer 3 multicast packet and then the IRB interface forwards the replicas

to all hardware and software VTEPs, but not to service nodes, in the other OVSDB-managed VXLAN. For the routing of Layer 3 multicast traffic from one OVSDB-managed VXLAN to another, ingress node replication is the only option and does not need to be configured.

## RELATED DOCUMENTATION

*Configuring OVSDB-Managed VXLANs*

*Understanding BFD in a VMware NSX Environment with OVSDB and VXLAN*

## Understanding Dynamically Configured VXLANs in an OVSDB Environment

### IN THIS SECTION

- [Performing Tasks Before and After the Dynamic Configuration of OVSDB-Managed VXLANs | 26](#)
- [What the Juniper Networks Switch Actually Creates Dynamically | 32](#)

**NOTE:** This topic applies only to QFX Series switches, which support the dynamic configuration of Open vSwitch Database (OVSDB)-managed Virtual Extensible LANs (VXLANs). Although the configuration of OVSDB-managed VXLANs is automated on these switches, there are tasks that you must perform before and after the dynamic configuration.

On all other Juniper Networks devices that support OVSDB and VXLAN, you must manually configure OVSDB-managed VXLANs using the Junos OS CLI. For more information about manually configuring OVSDB-managed VXLANs, see *Configuring OVSDB-Managed VXLANs*.

The Juniper Networks Junos OS implementation of the OVSDB management protocol provides a means through which Juniper Networks devices that support OVSDB can communicate with software-defined networking (SDN) controllers. Support for OVSDB enables the devices in a physical network to be integrated into a virtualized network.

In a Junos OS environment, the concept of an OVSDB-managed Layer 2 broadcast domain in which data flows are limited to that domain is known as a *VXLAN*. The term used for the same concept in other OVSDB environments depends on the environment:



- In an NSX environment, the same concept is known as a *logical switch*.
- In a Contrail environment, the same concept is known as a *virtual network*.

Understanding the terminology used in the different environments will help you to better understand the workflow associated with the dynamic configuration of OVSDB-managed VXLANs, including tasks that you must perform before and after the dynamic configuration.

The following sections describe the dynamic configuration of OVSDB-managed VXLANs:

## Performing Tasks Before and After the Dynamic Configuration of OVSDB-Managed VXLANs

Although the configuration of OVSDB-managed VXLANs is automated, there are some tasks that you must perform before and after the dynamic configuration. [Table 2 on page 26](#) includes a sequentially ordered workflow of tasks and events for the dynamic configuration of OVSDB-managed VXLANs in an NSX environment, while [Table 3 on page 29](#) includes the equivalent information for a Contrail environment. Your familiarity with these workflows will ensure that the dynamic configuration of OVSDB-managed VXLANs is properly implemented.

In [Table 2 on page 26](#), the NSX controller and Juniper Networks switch handle the events described in workflow numbers 4, 6, and 7. You must perform the tasks described in workflow numbers 1, 2, 3, 5, and 8. If you perform a task in a different order than that outlined in [Table 2 on page 26](#), the dynamic configuration might not work or the dynamically configured OVSDB-managed VXLAN might not become functional.

**Table 2: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in an NSX Environment**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
1	Enable the Juniper Networks switch to dynamically configure an OVSDB-managed VXLAN.	You must manually enable this capability by entering the <code>set switch-options ovssdb-managed configuration mode</code> command on the switch.	–

**Table 2: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in an NSX Environment (*Continued*)**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
2	On the Juniper Networks switch, configure each physical interface that is connected to a physical server so that the interface is managed by OVSDB.	For each physical interface, you must manually enter the set protocols <code>ovsdb interfaces <i>interface-name</i></code> configuration mode command.	When entering the interface name, you do not need to include a logical unit number.
3	For each OVSDB-managed VXLAN that you want to implement, configure a logical switch.	You must manually configure the logical switch by using NSX Manager or the NSX API. See the documentation that accompanies NSX Manager or the NSX API.	A universally unique identifier (UUID) for the logical switch is dynamically generated.
4	Relevant information about the logical switch is pushed to the Juniper Networks switch.	The NSX controller pushes relevant information to the logical switch table in the OVSDB schema for physical devices. This schema resides in the Juniper Networks switch.	–

**Table 2: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in an NSX Environment (Continued)**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
5	<p>Create the following entities:</p> <ul style="list-style-type: none"> <li>For each Juniper Networks switch that you deploy as a hardware VTEP, you create a gateway.</li> <li>For each OVSDB-managed interface that you configured in workflow number 2, you create a gateway service.</li> <li>For each interface that you plan to implement for a VXLAN, configure a logical switch port.</li> </ul>	<p>You must manually configure these entities by using NSX Manager or the NSX API. See the documentation that accompanies NSX Manager or the NSX API. Also see <i>VMware NSX Configuration for Juniper Networks Devices Functioning as Virtual Tunnel Endpoints</i>.</p>	–
6	<p>Relevant information about the gateway service and logical switch port are pushed to the Juniper Networks switch.</p>	<p>The NSX controller pushes this information to the Juniper Networks switch.</p>	–
7	<p>A corresponding VXLAN is dynamically created. Based on the gateway service and logical switch port configured in NSX Manager or the NSX API, one or more interfaces are also created and associated with the VXLAN.</p>	<p>The Juniper Networks switch dynamically creates the VXLAN and interface configuration.</p>	<p>For the name of the VXLAN, the Juniper Networks switch uses the UUID of the logical switch.</p>

**Table 2: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in an NSX Environment (Continued)**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
8	(Recommended) Verify that the logical switch, corresponding VXLAN, and associated interfaces are configured properly and are operational.	You can enter the show ovssdb logical-switch operational mode command on the Juniper Networks switch. In the output, check the Flags field for the logical switches that you configured as described in workflow number 3 to ensure that it displays Created by both.	If the output of the show ovssdb logical-switch operational mode command does not include the Created by both state, see <i>Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN</i> .

In [Table 3 on page 29](#), the Contrail controller and Juniper Networks switch handle the events described in workflow numbers 5, 8, and 9. You must perform all other tasks described in the table. If you perform a task in a different order than that outlined in [Table 3 on page 29](#), the dynamic configuration might not work or the dynamically configured OVSDB-managed VXLAN might not become functional.

**NOTE:** Although you can perform the Contrail configurations outlined in [Table 3 on page 29](#) in the Contrail Web user interface or in the Contrail REST API, [Table 3 on page 29](#) only describes how to perform tasks in the Contrail Web user interface.

**Table 3: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in a Contrail Environment**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
1	On the Juniper Networks switch, configure a unique hostname for the switch.	You must manually enter the set system host-name <i>host-name</i> configuration mode command on the switch.	If implementing a virtual chassis, be aware that all members of the virtual chassis must have the same hostname.

**Table 3: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in a Contrail Environment (Continued)**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
2	Enable the Juniper Networks switch to dynamically configure an OVSDB-managed VXLAN.	You must manually enable this capability by entering the <code>set switch-options ovbdb-managed configuration mode</code> command on the switch.	–
3	On the Juniper Networks switch, configure each physical interface that is connected to a physical server so that the interface is managed by OVSDB.	For each physical interface, you must manually enter the <code>set protocols ovbdb interfaces interface-name configuration mode</code> command.	When entering the interface name, you do not need to include a logical unit number.
4	For each OVSDB-managed VXLAN that you want to implement, configure a virtual network in the Contrail Web user interface.	You must manually configure the virtual network by navigating to <b>Configure &gt; Networking &gt; Networks</b> .  See <a href="#">Creating a Virtual Network</a> .	See <a href="#">"Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs"</a> on page 45.
5	Relevant information about the virtual network is pushed to the Juniper Networks switch.	The Contrail controller pushes relevant information to the logical switch table in the OVSDB schema for physical devices. This schema resides in the Juniper Networks switch.	–

**Table 3: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in a Contrail Environment *(Continued)***

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
6	For each interface that you plan to implement for a VXLAN, configure a logical interface.	<p>In the Contrail Web user interface, you must manually configure the logical interface by navigating to Configure &gt; Physical Devices &gt; Interfaces.</p> <p>For information about configuring a logical interface, see <a href="#">Using TOR Switches and OVSDB to Extend the Contrail Cluster to Other Instances</a>.</p>	See <a href="#">"Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs"</a> on page 45.
7	For each Juniper Networks switch that you deploy as a hardware VTEP, you create a physical router.	<p>In the Contrail Web user interface, you must manually configure the physical router by navigating to Configure &gt; Physical Devices &gt; Physical Routers.</p> <p>For information about configuring a physical router, see <a href="#">Using TOR Switches and OVSDB to Extend the Contrail Cluster to Other Instances</a>.</p>	See <a href="#">"Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs"</a> on page 45.
8	Relevant information about the logical interfaces is pushed to the Juniper Networks switch.	The Contrail controller pushes this information to the Juniper Networks switch.	–

**Table 3: Workflow of Tasks and Events for the Dynamic Configuration of OVSDB-Managed VXLANs in a Contrail Environment (Continued)**

Workflow Number	Task or Event	How Task or Event Is Handled	More Information About Task or Event
9	A corresponding VXLAN is dynamically created. Based on the logical interface configured in the Contrail Web user interface, one or more interfaces are also created and associated with the VXLAN.	The Juniper Networks switch dynamically creates the VXLAN and interface configurations.	For the name of the VXLAN, the Juniper Networks switch uses the prefix “Contrail-” and the UUID of the virtual network.
10	(Recommended) Verify that the virtual network, corresponding VXLAN, and interfaces are configured properly and are operational.	You can enter the show ovssdb logical-switch operational mode command on the Juniper Networks switch. In the output, check the Flags field for the virtual network that you configured as described in workflow number 4 to ensure that it displays Created by both.	If the output of the show ovssdb logical-switch operational mode command does not include the Created by both state, see <i>Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN</i> .

## What the Juniper Networks Switch Actually Creates Dynamically

When a Juniper Networks switch creates a VXLAN, it sets up a configuration similar to the following sample:

```
set vlans 28805c1d-0122-495d-85df-19abd647d772 vxlan vni 100
```

Note the following meanings for this sample configuration:

- The name of the VXLAN is 28805c1d-0122-495d-85df-19abd647d772. The UUID of the logical switch, which was configured in NSX Manager or in the NSX API, is 28805c1d-0122-495d-85df-19abd647d772. For a VXLAN created in a Contrail environment, the name would be preceded by “Contrail-”.

- For the *virtual network identifier (VNI)*, the Juniper Networks switch uses either the VNI specified in the logical switch configuration (NSX) or the VXLAN identifier specified in the virtual network configuration (Contrail). In this example, VNI 100 is used. If the Juniper Networks switch detects that VNI 100 is a duplicate of a VNI from a VXLAN configured by manually using the `set vlans vlan-name vxlan vni (1 - 16777214)` command in the Junos OS CLI, the switch deletes the manually configured VXLAN. Or, if the Juniper Networks switch detects that VNI 100 is specified in the dynamically configured VXLAN, but for some reason, the VNI is no longer in the equivalent logical switch or virtual network configuration, the Juniper Networks switch deletes VNI 100 from the VXLAN.

If you need to modify or delete an OVSDB-managed VXLAN that was dynamically configured by the Juniper Networks switch, you must modify or delete either the corresponding logical switch configuration (NSX), or the corresponding virtual network configuration (Contrail). After you modify or delete the configuration, the SDN controller pushes the update to the Juniper Networks switch, and the switch modifies or deletes its configuration accordingly.

Depending on either the gateway service and logical switch ports configuration (NSX), or the logical interface configuration (Contrail), the Juniper Networks switch dynamically creates and associates one or more interfaces with the VXLAN. The configuration generated by the switch depends on whether an interface must support untagged or tagged packets. The following sections provide information about the configuration that the switch dynamically generates for each interface:

- ["Dynamic Association of a Trunk Interface Supporting Untagged Packets to a Dynamically Created VXLAN" on page 33](#)
- ["Dynamic Association of a Trunk Interface Supporting Tagged Packets to a Dynamically Created VXLAN" on page 34](#)

### Dynamic Association of a Trunk Interface Supporting Untagged Packets to a Dynamically Created VXLAN

To determine the type of interface to create and associate with an OVSDB-managed VXLAN, the Juniper Networks switch uses the VLAN ID that you specified when configuring either the logical switch port (NSX), or the logical interface (Contrail). If you specified **0** as the VLAN ID, the switch dynamically configures a trunk interface that can handle untagged packets. (If you specified a valid non-zero VLAN ID, the switch creates a trunk interface that handles tagged packets.)

After the SDN controller pushes either the NSX or Contrail configurations to the Juniper Networks switch, the switch dynamically creates a configuration similar to the following:

```
set interfaces ge-1/0/0 flexible-vlan-tagging
set interfaces ge-1/0/0 native-vlan-id 4094
set interfaces ge-1/0/0 encapsulation extended-vlan-bridge
```



```
set interfaces ge-1/0/0 unit 0 vlan-id 4094
set vlans 28805c1d-0122-495d-85df-19abd647d772 interface ge-1/0/0.0
```

This sample configuration sets up physical interface ge-1/0/0 as a trunk interface. It also configures a native VLAN with an ID of 4094 and specifies that logical interface ge-1/0/0.0 is a member of the native VLAN. As a result, logical interface ge-1/0/0.0 handles incoming untagged packets.

**NOTE:** We reserve VLAN ID 4094 for native VLANs in an OVSDB environment. As a result, when you create either a logical switch port (NSX) or a logical interface (Contrail), if you specify VLAN ID 4094, the Juniper Networks switch does not dynamically configure a corresponding interface. Also, a system log error message is generated.

Instead of dynamically configuring physical interface ge-1/0/0 as an access interface, which typically handles untagged packets, the Juniper Networks switch configures it as a trunk interface. The intent of this configuration is to support the division of physical interface ge-1/0/0 into multiple logical interfaces, some of which are associated with VXLANs that handle untagged packets and some of which are associated with VXLANs that handle tagged packets.

The sample configuration also creates logical interface ge-1/0/0.0 and associates this interface with VXLAN 28805c1d-0122-495d-85df-19abd647d772.

### Dynamic Association of a Trunk Interface Supporting Tagged Packets to a Dynamically Created VXLAN

Starting with Junos OS Release 14.1X53-D15 for QFX5100 switches, 15.1X53-D10 for QFX10002 switches, 15.1X53-D30 for QFX10008 switches, 15.1X53-D60 for QFX10016 switches, 15.1X53-D210 for QFX5110 and QFX5200 switches, and 18.1R1 for QFX5210 switches, the dynamic configuration of trunk interfaces and their association with an OVSDB-managed VXLAN is supported.

In a network that is divided into multiple VXLANs, each VXLAN has a VLAN ID associated with it. Packets associated with a particular VXLAN include the corresponding tag. In this situation, the interface that connects the Juniper Networks switch to a physical server in an OVSDB environment is a trunk interface that handles only tagged packets.

To determine the type of interface to create and associate with an OVSDB-managed VXLAN, the Juniper Networks switch uses the VLAN ID that you specified when configuring either the logical switch port (NSX), or the logical interface (Contrail). If you specified a valid VLAN ID other than 0 in either configuration, the switch creates a trunk interface that can handle tagged packets. (If you specified 0 as the VLAN ID, the switch creates a trunk interface that handles untagged packets.)

After the SDN controller pushes the NSX or Contrail configuration to the Juniper Networks switch, the switch dynamically creates a configuration similar to the following:

```
set interfaces ge-1/0/0 flexible-vlan-tagging
set interfaces ge-1/0/0 encapsulation extended-vlan-bridge
set interfaces ge-1/0/0 unit 10 vlan-id 10
set vlans 28805c1d-0122-495d-85df-19abd647d772 interfaces ge-1/0/0.10
```

The sample configuration sets up physical interface ge-1/0/0 as a trunk interface. It also configures a VLAN with an ID of 10 and specifies that interface ge-1/0/0.10 is a member of the VLAN. With the configuration of VLAN 10, logical interface ge-1/0/0.10 accepts incoming packets with a VLAN tag of 10 and adds a tag of 100 to each packet. Adding a tag of 100 identifies the packets as received by the VXLAN 28805c1d-0122-495d-85df-19abd647d772, which has a VNI of 100. This configuration also associates the trunk interface with VXLAN 28805c1d-0122-495d-85df-19abd647d772.

Release History Table

Release	Description
14.1X53-D15	Starting with Junos OS Release 14.1X53-D15 for QFX5100 switches, 15.1X53-D10 for QFX10002 switches, 15.1X53-D30 for QFX10008 switches, 15.1X53-D60 for QFX10016 switches, 15.1X53-D210 for QFX5110 and QFX5200 switches, and 18.1R1 for QFX5210 switches, the dynamic configuration of trunk interfaces and their association with an OVSDB-managed VXLAN is supported.

RELATED DOCUMENTATION

<i>Understanding the OVSDB Protocol Running on Juniper Networks Devices</i>
<i>show ovbdb logical-switch</i>

OVSDB Schema for Physical Devices

An Open vSwitch Database (OVSDB) server runs on a Juniper Networks device that supports the OVSDB management protocol. When this device is connected to one or more SDN controllers, the connections provide a means through which the Juniper Networks device and the SDN controllers can communicate.

Juniper Networks devices that support OVSDB and SDN controllers exchange control and statistical data. This data is stored in the OVSDB database schema defined for physical devices. The schema resides in the OVSDB server. The schema includes several tables. Juniper Networks devices and SDN

controllers, both of which have OVSDb clients, can add rows to the tables as well as monitor the tables for the addition, deletion, and modification of rows.

For example, the OVSDb client on a Juniper Networks device and an SDN controller can collect MAC routes learned by entities in the physical or virtualized networks, respectively, and publish the routes to the appropriate table in the schema. By using the MAC routes and other information provided in the table, Juniper Networks devices in the physical network and entities in the virtualized network can determine where to forward *virtual machine (VM)* traffic.

Some of the OVSDb table names include the words *local* or *remote*—for example, the *unicast MACs local table* and the *unicast MACs remote table*. Information in *local* tables is learned by a Juniper Networks device that functions as a hardware virtual tunnel endpoint (VTEP), whereas information in *remote* tables is learned by other software or hardware VTEPs.

[Table 4 on page 36](#) describes the tables in the schema, the physical or virtual entity that is the source of the data provided in the table, and the command that you can enter in the CLI of the Juniper Networks device to get similar information.

**Table 4: OVSDb Schema Tables**

Table Name	Description	Source of Information	Command
Global table	Includes the top-level configuration for the Juniper Networks device.	Juniper Networks device	–
Manager table	Includes information about each SDN controller that is connected to the Juniper Networks device.	Juniper Networks device	show ovsdb controller
Physical switch table	Includes information about a Juniper Networks device that functions as a hardware VTEP. This table includes information only for the device on which the table resides.	Juniper Networks device	–
Physical port table	Includes information about OVSDb-managed interfaces.	Juniper Networks device	show ovsdb interface

Table 4: OVSDb Schema Tables *(Continued)*

Table Name	Description	Source of Information	Command
Logical switch table	<p>Includes the following information:</p> <ul style="list-style-type: none"> <li>Logical switches, which you configured in a VMware NSX environment, or virtual networks, which you configured in a Contrail environment.</li> <li>The equivalent VXLANs, which were configured on the Juniper Networks device.</li> </ul>	<ul style="list-style-type: none"> <li>SDN controller</li> <li>Juniper Networks device</li> </ul>	show ovssdb logical-switch
Logical binding statistics table	Includes statistics for OVSSDB-managed interfaces.	Juniper Networks device	show ovssdb statistics interface
Physical locator table	Includes information about Juniper Networks devices configured as hardware VTEPs, software VTEPs, and service nodes in an NSX environment.	Juniper Networks device	show ovssdb virtual-tunnel-end-point
Physical locator set table	Includes a list of software VTEPs, service nodes, or top-of-rack service nodes (TSNs) for a logical switch.	Juniper Networks device	–
Unicast MACs remote table	Reachability information, including unicast MAC addresses, for entities in the virtualized network.	SDN controller	show ovssdb mac

Table 4: OVSDB Schema Tables *(Continued)*

Table Name	Description	Source of Information	Command
Unicast MACs local table	Reachability information, including unicast MAC addresses, for entities in the physical network.	Juniper Networks device	show ovsdb mac
Multicast MACs remote table	Includes only one row. In this row, the MAC column includes the keyword unknown dst along with a list of software VTEPs, service nodes, or TSNs, which handle multicast traffic.	SDN controller	show ovsdb mac
Multicast MACs local table	<p>Includes one row for each logical switch. In this row, the MAC column includes the keyword unknown dst and a list of hardware VTEPs, which are identified by the IP address assigned to the hardware VTEP loopback interface (lo0). These hardware VTEPs can terminate or originate a VXLAN tunnel.</p> <p>The Multicast MACs local table is introduced in Junos OS Release 14.1X53-D25 for QFX5100 switches and in Junos OS Release 14.2R4 for MX Series routers and EX9200 switches. For all other QFX switches that support OVSDB, this table is present when OVSDB support is introduced.</p>	Juniper Networks device	show ovsdb mac

Table 4: OVSDB Schema Tables *(Continued)*

Table Name	Description	Source of Information	Command
Tunnel table	<p><b>NOTE:</b> Only the Juniper Networks switches that support OVSDB with BFD in turn support this table.</p> <p>Includes information about tunnels through which BFD control messages are transmitted between the hardware VTEP and entities that replicate and forward BUM packets (software VTEPs and service nodes) within an OVSDB-managed VXLAN. Using BFD, the hardware VTEP can determine which replicators are reachable.</p>	Juniper Networks device	show ovssdb tunnels

## Release History Table

Release	Description
14.1X53-D25	The Multicast MACs local table is introduced in Junos OS Release 14.1X53-D25 for QFX5100 switches and in Junos OS Release 14.2R4 for MX Series routers and EX9200 switches. For all other QFX switches that support OVSDB, this table is present when OVSDB support is introduced.

## RELATED DOCUMENTATION

---

*Understanding the OVSDB Protocol Running on Juniper Networks Devices*

---

*Understanding How to Set Up OVSDB Connections on a Juniper Networks Device*

# 2

PART

## Configuration

---

[Configuring OVSDB and VXLAN](#) | 41

---

# Configuring OVSDB and VXLAN

## IN THIS CHAPTER

- Installing OVSDB on Juniper Networks Devices | 41
- Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers | 42
- Setting Up OVSDB on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs | 44
- Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs | 45
- Example: Setting Up a VXLAN Layer 2 Gateway and OVSDB Connections in a Contrail Environment (Trunk Interfaces That Support Untagged Packets) | 49
- Example: Setting Up a VXLAN Layer 2 Gateway and OVSDB Connections in a Contrail Environment (Trunk Interfaces That Support Tagged Packets) | 62
- Verifying That a Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN Are Working Properly | 76
- Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN | 78

## Installing OVSDB on Juniper Networks Devices

**NOTE:** The Open vSwitch Database (OVSDB) software is included in the **jsdn** package. For some Juniper Networks devices, the **jsdn** package is included in the Junos OS software (**jinstall**) package. On these Juniper Networks devices, you do not need to install the separate **jsdn** package, which means that you can skip the task described in this topic. For information about which devices do not require installation of the separate **jsdn** package, see *OVSDB Support on Juniper Networks Devices*.

If the **jsdn** package for your Juniper Networks device is not included in the **jinstall** package, you must copy a separate **jsdn** package to the Juniper Networks device and then install the package. The package name uses the following format:

`jsdn-packageID-release`



where:

- *packageID* identifies the package that must run on each Juniper Networks device.
- *release* identifies the release; for example, 16.2. The **jsdn** package release and the **jinstall** release running on the device must be the same.

To install the **jsdn** package on a Juniper Networks device:

1. Download the software package to the Juniper Networks device.
2. If an older **jsdn** package already exists on the Juniper Networks device, remove the package by issuing the `request system software delete operational mode` command.

```
user@device> request system software delete existing-ovsdb-package
```

3. Install the new **jsdn** package by using the `request system software add operational mode` command.

```
user@device> request system software add path-to-ovsdb-package
```

## RELATED DOCUMENTATION

*Understanding the OVSDb Protocol Running on Juniper Networks Devices*

*OVSDb and VXLAN Configuration Workflows for VMware NSX Environment*

## Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers

To secure a connection between a Juniper Networks device that supports the Open vSwitch Database (OVSDb) management protocol and one or more software-defined networking (SDN) controllers, the following Secure Sockets Layer (SSL) files must be present in the **/var/db/certs** directory on the device:

- **vtep-privkey.pem**
- **vtep-cert.pem**
- **ca-cert.pem**

You must create the **vtep-privkey.pem** and **vtep-cert.pem** files for the device and then install the two files in the **/var/db/certs** directory on the device.

Upon initial connection between a Juniper Networks device with OVSDb implemented and an SDN controller, the **ca-cert.pem** file is automatically generated and then installed in the **/var/db/certs** directory on the device.

**NOTE:** The situation at your particular site determines the possible methods that you can use to create the **vtep-privkey.pem** and **vtep-cert.pem** files and install them in the Juniper Networks device. Instead of providing procedures for all possible situations, this topic provides a procedure for one common scenario.

The procedure provided in this topic uses the OpenFlow public key infrastructure (PKI) management utility **ovs-pki** on a Linux computer to initialize a PKI and create the **vtep-privkey.pem** and **vtep-cert.pem** files. (If you have an existing PKI on your Linux computer, you can skip the step to initialize a new one.) By default, the utility initializes the PKI and places these files in the **/usr/local/share/openvswitch/pki** directory of the Linux computer.

To create and install an SSL key and certificate on a Juniper Networks device:

1. Initialize a PKI if one does not already exist on your Linux computer.

```
# ovs-pki init
```

2. On the same Linux computer on which the PKI exists, create a new key and certificate for the Juniper Networks device.

```
# ovs-pki req+sign vtep
```

3. Copy only the **vtep-privkey.pem** and **vtep-cert.pem** files from the Linux computer to the **/var/db/certs** directory on the Juniper Networks device.

## RELATED DOCUMENTATION

| *Understanding How to Set Up OVSDb Connections on a Juniper Networks Device*

## Setting Up OVSDb on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs

To implement the Open vSwitch Database (OVSDb) management protocol on a Juniper Networks device, you must configure a connection between the Juniper Networks device and a software-defined networking (SDN) controller using the Junos OS CLI.

All SDN controller connections are made on the management interface of the Juniper Networks device. This connection is secured by using the Secure Sockets Layer (SSL) protocol. The default port number for the connection is 6632.

You must also specify that each physical interface that is connected to a physical server is managed by OVSDb. By performing this configuration, you essentially disable the Juniper Networks device from learning about other Juniper Networks devices that function as hardware virtual tunnel endpoints (VTEPs) and the MAC addresses learned by the hardware VTEPs. Instead, this configuration enables OVSDb to learn about these elements.

Before setting up OVSDb on a Juniper Networks device, you must do the following:

- Create an SSL private key and certificate, if they do not already exist, and install them in the `/var/db/certs` directory of the Juniper Networks device. See *Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers*.

To set up OVSDb on a Juniper Networks device:

1. Specify the IP address of the SDN controller.

```
[edit protocols ovbdb]
user@host# set controller ip-address
```

2. Specify SSL as the protocol that secures the connection between the Juniper Networks device and the SDN controller.

```
[edit protocols ovbdb]
user@host# set controller ip-address protocol ssl
```

3. Set the number of the port over which the connection to the SDN controller is made.

```
[edit protocols ovbdb]
user@host# set controller ip-address protocol ssl port number
```

4. (Optional) Specify (in milliseconds) how long the connection can be inactive before an inactivity probe is sent.

```
[edit protocols ovssdb]
user@host# set controller ip-address inactivity-probe-duration milliseconds
```

5. (Optional) Specify (in milliseconds) how long the device must wait before it can try to connect to the SDN controller again if the previous attempt failed.

```
[edit protocols ovssdb]
user@host# set controller ip-address maximum-backoff-duration milliseconds
```

6. (Optional) Repeat Steps 1 through 5 to configure a connection to an additional SDN controller in the NSX environment.
7. Specify that each physical interface that is connected to a physical server is managed by OVSSDB.

```
[edit protocols ovssdb]
user@host# set interfaces interface-name
```

When specifying the *interface-name*, you do not need to include a logical unit number.

8. Complete the remaining configuration tasks, which are described in *OVSSDB and VXLAN Configuration Workflows for VMware NSX Environment*.

## Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs

### IN THIS SECTION

- [Creating a Virtual Network | 46](#)
- [Creating a Logical Interface | 47](#)
- [Creating a Physical Router | 48](#)

When extending a Contrail topology to include physical servers that are connected to a Juniper Networks switch that supports the *Open vSwitch Database (OVSDB)* management protocol and Virtual Extensible LANs (VXLANs), you must perform the following tasks in the Contrail Web user interface:

- For each OVSDB-managed VXLAN that you plan to implement on the Juniper Networks switch, configure an equivalent virtual network. Also configure a logical interface to associate with the virtual network.
- Configure a physical router, which enables the Contrail controller to recognize the Juniper Networks device as a hardware *virtual tunnel endpoint (VTEP)*.

This topic provides a high-level summary of the tasks that you must perform to configure a virtual network, logical interface, and physical router. Although you can create these virtual entities in either the Contrail Web user interface or in the Contrail REST API, this topic only describes how to perform the tasks in the Contrail Web user interface. Also, this topic does not include a complete procedure for each task. Rather, it includes key configuration details for ensuring the correct configuration of the virtual entities so that they function properly with their counterparts in the physical network.

For more information about performing the tasks described in this topic, see [Creating a Virtual Network](#) and [Using TOR Switches and OVSDB to Extend the Contrail Cluster to Other Instances](#).

This topic describes the following tasks:

## Creating a Virtual Network

For each OVSDB-managed VXLAN that you plan to implement on a Juniper Networks switch, configure an equivalent virtual network in the Contrail Web user interface.

[Table 5 on page 46](#) provides key configuration details to keep in mind when you configure a virtual network.

**Table 5: Key Configuration Details for Creating a Virtual Network in the Contrail Web User Interface**

Contrail Web User Interface Navigation	Configuration Field	Configuration Details
Configure > Networking > Networks	VXLAN Identifier in Advanced Options	<ul style="list-style-type: none"> <li>• In the Contrail Web user interface, you can configure a VXLAN identifier mode so that VXLAN identifiers are either automatically configured or user configured. We recommend setting this mode to user configured, which enables you to initially configure a VXLAN identifier and modify it later if needed.</li> <li>• In a Junos OS environment, a VXLAN identifier is also known as a <i>VXLAN network identifier (VNI)</i>.</li> </ul>

## Creating a Logical Interface

In the Contrail Web user interface, you must create a logical interface for each virtual network that you created.

Before you start this task, you must complete the configurations of the following entities:

- The OVSDDB-managed physical interfaces on the Juniper Networks device. For information about configuring OVSDDB-managed interfaces on Juniper Networks devices that support the dynamic configuration of VXLANs, see ["Setting Up OVSDDB on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs" on page 44.](#)
- The virtual network with which you want to associate the logical interface.

[Table 6 on page 47](#) provides a summary of key configuration details to keep in mind when you configure a logical interface.

**Table 6: Key Configuration Details for Creating a Logical Interface in the Contrail Web User Interface**

Contrail Web User Interface Navigation	Configuration Field	Configuration Details
Configure > Physical Devices > Interfaces	Type	Select <b>Logical</b> .
	Name	When you specify a logical interface name, use the same naming convention for configuring a logical interface in the Junos OS CLI. A sample logical interface name is ge-1/0/0.10.
	Parent	Select an OVSDDB-managed physical interface that is configured on the Juniper Networks device.
	Logical Interface Type	Select <b>L2 Server</b> .

**Table 6: Key Configuration Details for Creating a Logical Interface in the Contrail Web User Interface**  
(Continued)

Contrail Web User Interface Navigation	Configuration Field	Configuration Details
	VLAN ID	<ul style="list-style-type: none"> <li>If you want the logical interface to handle untagged packets, specify <b>0</b>.</li> <li>If you want the logical interface to handle tagged packets, specify <b>3</b> through <b>4000</b>.</li> </ul> <p><b>NOTE:</b> VLAN IDs 1, 2, and 4094 are reserved. As a result, you must not specify these VLAN IDs.</p>
	Virtual Network	Select the virtual network with which you want to associate the logical interface.

## Creating a Physical Router

In the Contrail Web user interface, you must create a physical router, which enables the Contrail controller to recognize a Juniper Networks switch as a hardware VTEP.

Before you start this task, you must complete the following configurations:

- On the Juniper Networks switch, configure a hostname for the switch (**set system host-name *hostname***), an IP address for the management interface (**set interfaces *management-interface-name* unit 0 family inet address *ip-address/destination prefix***), and an IP address for the loopback interface (**set interfaces lo0 unit 0 family inet address *ip-address/destination prefix***). Also, set the loopback interface as the interface that identifies the switch as the hardware VTEP (**set vtep-source interface lo0.0**).
- Configure one or more virtual networks with which you want to associate the Juniper Networks switch.

[Table 7 on page 49](#) provides a summary of key configuration details to keep in mind when you configure a physical router.

**Table 7: Key Configuration Details for Creating a Physical Router in the Contrail Web User Interface**

Contrail Web User Interface Navigation	Configuration Field	Configuration Details
Configure > Physical Devices > Physical Routers	Name	Specify the hostname that you configured on the Juniper Network switch.
	Management IP	Specify the IP address of the management interface on the Juniper Networks switch. The connection with the Contrail controller is made over this interface.
	VTEP address	Specify the IP address of the loopback interface on the Juniper Networks switch.
	Virtual Network	Specify one or more virtual networks that serve as counterparts to the OVSDb-managed VXLANs that the Juniper Networks switch automatically configures.

## Example: Setting Up a VXLAN Layer 2 Gateway and OVSDb Connections in a Contrail Environment (Trunk Interfaces That Support Untagged Packets)

### IN THIS SECTION

- [Requirements | 50](#)
- [Overview and Topology | 51](#)
- [Non-OVSDb and Non-VXLAN Configuration | 55](#)
- [OVSDb and VXLAN Configuration | 56](#)
- [Verification | 58](#)



In a physical network, a Juniper Networks switch that supports Virtual Extensible LAN (VXLAN) can function as a hardware *virtual tunnel endpoint (VTEP)*. In this role, the Juniper Networks switch encapsulates in VXLAN packets Layer 2 Ethernet frames received from software applications that run directly on a physical server. The VXLAN packets are tunneled over a Layer 3 transport network. Upon receipt of the VXLAN packets, software VTEPs in the virtual network de-encapsulate the packets and forward them to *virtual machines (VMs)*.

In this VXLAN environment, you can also include Contrail controllers and implement the *Open vSwitch Database (OVSDB)* management protocol on the Juniper Networks switch that functions as a hardware VTEP.

The Junos OS implementation of OVSDB provides a means through which Contrail controllers and Juniper Networks switches can exchange MAC addresses of entities in the physical and virtual networks. This exchange of MAC addresses enables the Juniper Networks switch that functions as a hardware VTEP to forward traffic to software VTEPs in the virtual network and software VTEPs in the virtual network to forward traffic to the Juniper Networks switch in the physical network.

This example explains how to configure a Juniper Networks switch as a hardware VTEP, which serves as a Layer 2 gateway, and set up this switch with an OVSDB connection to a Contrail controller.

In this example, only one VXLAN is deployed. Given this scenario, the packets exchanged between an application running on a physical server and a VM in the VXLAN are untagged. Therefore, in this example, a trunk interface is used for the connection between the physical server and the switch, as well as a native VLAN. The native VLAN enables the trunk interface to handle the untagged packets.

## Requirements

This example includes the following hardware and software components:

- A physical server on which software applications directly run.
- A QFX10002 switch running Junos OS Release 15.1X53-D30 or later.
- On the Juniper Networks switch, physical interface ge-1/0/0 provides a connection to physical server 1.
- A Contrail controller.
- Contrail Web user interface.
- A vRouter that includes VMs managed by a hypervisor, which includes a software VTEP.

**NOTE:** All components in the Contrail environment (Contrail controller, TSN, Contrail Web user interface, and vRouters must be running Contrail Release 2.20 or later.

For information about the Contrail components, see [Using TOR Switches and OVSDb to Extend the Contrail Cluster to Other Instances..](#)

Before you begin:

- Create an SSL private key and certificate, if they do not already exist. The private key and certificate must be installed in the `/var/db/certs` directory of the Juniper Networks switch. See ["Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers"](#) on page 42


## Overview and Topology

### IN THIS SECTION

- [Topology | 53](#)

[Figure 2 on page 51](#) shows a topology in which a software application running directly on physical server 1 in the physical network needs to communicate with virtual machine VM 1 in VXLAN 1 and vice versa.

**Figure 2: VXLAN-OVSDb Layer 2 Gateway Topology with a Contrail Controller**

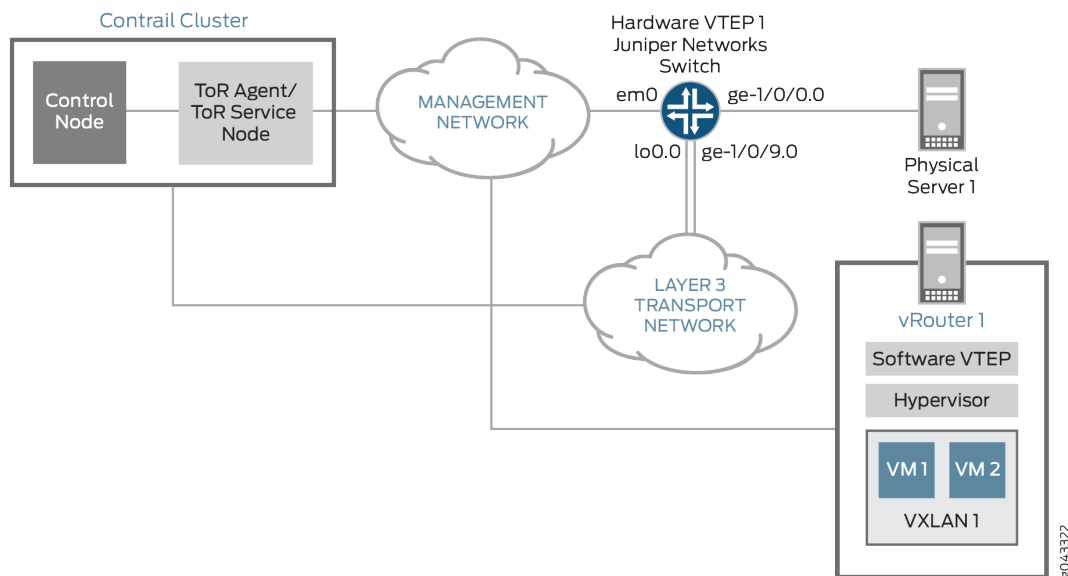

To establish communication between the software application on physical server 1 and VM 1 in VXLAN 1, a connection with a Contrail controller is configured on the management interface of the Juniper Networks switch.

Some entities in the OVSDb-VXLAN topology must be configured in both the Contrail Web user interface and on the Juniper Networks switch. [Table 8 on page 52](#) provides a summary of the entities that must be configured and where they must be configured.

**NOTE:** The term used for an entity configured in the Contrail Web user interface can differ from the term used for essentially the same entity that is configured on the Juniper Networks switch. To prevent confusion, [Table 8 on page 52](#) shows the Contrail Web user interface and Junos OS entities side-by-side.

**Table 8: Contrail and Junos OS Entities That Must Be Configured for a VXLAN Layer 2 Gateway Topology with OVSDb Connections and Trunk Interfaces Supporting Untagged Packets**

Entity	Entity to Be Configured in the Contrail Web User Interface	Entity to Be Configured on the Juniper Networks Switch
VXLAN 1	Virtual network for VXLAN 1	VXLAN 1  <b>NOTE:</b> The Juniper Networks switch dynamically configures this VXLAN.
Physical interface (ge-1/0/0) between physical server 1 and Juniper Networks switch	–	OVSDb management. Specify that interface ge-1/0/0 is managed by OVSDb.
One logical interface (ge-1/0/0.0) associated with VXLAN 1	One logical interface for VXLAN 1. For this interface, specify VLAN ID 0.  <b>NOTE:</b> A VLAN ID of 0 indicates that the interface must handle untagged packets.	One logical interface (ge-1/0/0.0) for VXLAN 1.  <b>NOTE:</b> The Juniper Networks switch dynamically configures this logical interface.
Juniper Networks switch (hardware VTEP 1)	Physical router	Hardware VTEP functionality. Configure the Juniper Networks switch to function as a hardware VTEP.

In the Contrail Web user interface, a virtual network is configured. In this configuration, a VXLAN identifier of 100 is specified. Also, the universally unique identifier (UUID) assigned to the virtual network is Contrail-28805c1d-0122-495d-85df-19abd647d772. Based on this configuration, the Juniper Networks switch dynamically creates the following configuration for a Junos OS-equivalent VXLAN:

```
set vlans Contrail-28805c1d-0122-495d-85df-19abd647d772 vxlan vni 100
```

Based on the logical interface configuration (VLAN number 0) in the Contrail Web user interface, the Juniper Networks switch dynamically creates the following configuration for a Junos OS-equivalent interface:

```
set interfaces ge-1/0/0 flexible-vlan-tagging
set interfaces ge-1/0/0 native-vlan-id 4094
set interfaces ge-1/0/0 encapsulation extended-vlan-bridge
set interfaces ge-1/0/0 unit 0 vlan-id 4094
set vlans Contrail-28805c1d-0122-495d-85df-19abd647d772 interface ge-1/0/0.0
```

This sample configuration does the following:

- Configures physical interface ge-1/0/0 as a Layer 2 trunk interface.
- Creates a native VLAN with an ID of 4094.
- Creates logical interface ge-1/0/0.0, and specifies that it is a member of the native VLAN.
- Associates logical interface ge-1/0/0.0 with VXLAN Contrail-28805c1d-0122-495d-85df-19abd647d772.

As a result of the above configuration, logical interface ge-1/0/0.0 handles incoming untagged packets.

[Table 9 on page 53](#) provides a summary of the VXLAN-OVSDB topology components that are configured on the Juniper Networks switch and the configuration settings for each component.

Topology

**Table 9: Components Configured on the Juniper Networks Switch (Hardware VTEP) in a VXLAN Layer 2 Gateway Topology with OVSDB Connections and Trunk Interfaces Supporting Untagged Packets**

Component	Setting
Contrail controller	IP address: 10.94.184.1

**Table 9: Components Configured on the Juniper Networks Switch (Hardware VTEP) in a VXLAN Layer 2 Gateway Topology with OVSDB Connections and Trunk Interfaces Supporting Untagged Packets**  
*(Continued)*

Component	Setting
OVSDB-managed physical interface	Interface name: ge-1/0/0  Native VLAN ID: 4094
VXLAN 1 and associated logical interface	<p><b>NOTE:</b> The Juniper Networks switch dynamically configures the VXLAN and associated logical interface, which are based on the virtual network and associated logical interface configurations in the Contrail Web user interface. Therefore, no manual configuration is required.</p> <p>VXLAN name: Contrail-28805c1d-0122-495d-85df-19abd647d772</p> <p>VNI: 100</p> <p>Logical interface name: ge-1/0/0.0</p> <p>Interface type: trunk</p> <p>Member of native VLAN 4094</p> <p>Associated with VXLAN Contrail-28805c1d-0122-495d-85df-19abd647d772</p>
OVSDB tracing operations	<p>Filename: /var/log/ovsdb</p> <p>File size: 10 MB</p> <p>Flag: All</p>
Hardware VTEP	<p>Hostname: hw-vtep1</p> <p>Source interface: loopback (lo0.0)</p> <p>Source IP address: 10.17.17.17/32</p>

Table 9: Components Configured on the Juniper Networks Switch (Hardware VTEP) in a VXLAN Layer 2 Gateway Topology with OVSDb Connections and Trunk Interfaces Supporting Untagged Packets  
(Continued)

Component	Setting
Handling of Layer 2 BUM traffic in VXLAN Contrail-28805c1d-0122-495d-85df-19abd647d772	TSN  <b>NOTE:</b> By default, one or more TSNs handle Layer 2 BUM traffic within a VXLAN; therefore, no manual configuration is required.

Non-OVSDb and Non-VXLAN Configuration

IN THIS SECTION

- [CLI Quick Configuration | 55](#)
- [Procedure | 55](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your configuration, copy and paste the commands into the CLI at the [edit] hierarchy level, and then enter `commit` from configuration mode.

```
set interfaces ge-1/0/9 unit 0 family inet address 10.40.40.1/24
set routing-options static route 10.19.19.19/32 next-hop 10.40.40.2
set routing-options router-id 10.17.17.17
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface ge-1/0/9.0
```

Procedure

Step-by-Step Procedure

To configure the Layer 3 network over which the packets exchanged between physical server 1 and VM 1 are tunneled:

### 1. Configure the Layer 3 interface.

```
[edit interfaces]
user@switch# set ge-1/0/9 unit 0 family inet address 10.40.40.1/24
```

### 2. Set the routing options.

```
[edit routing-options]
user@switch# set static route 10.19.19.19/32 next-hop 10.40.40.2
user@switch# set router-id 10.17.17.17
```

### 3. Configure the routing protocol.

```
[edit protocols]
user@switch# set ospf area 0.0.0.0 interface lo0.0
user@switch# set ospf area 0.0.0.0 interface ge-1/0/9.0
```

## OVSDb and VXLAN Configuration

### IN THIS SECTION

- [CLI Quick Configuration | 56](#)
- [Procedure | 57](#)

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your configuration, copy and paste the commands into the CLI at the [edit] hierarchy level, and then enter `commit` from configuration mode.

```
set system host-name hw-vtep1
set switch-options ovssdb-managed
set protocols ovssdb controller 10.94.184.1
set protocols ovssdb interfaces ge-1/0/0
set protocols ovssdb traceoptions file ovssdb
set protocols ovssdb traceoptions file size 10m
```

```
set protocols ovssdb traceoptions flag all
set interfaces lo0 unit 0 family inet address 10.17.17.17/32 primary
set interfaces lo0 unit 0 family inet address 10.17.17.17/32 preferred
set switch-options vtep-source-interface lo0.0
```

## Procedure

### Step-by-Step Procedure

To configure the Juniper Networks switch as a hardware VTEP with an OVSSDB connection to a Contrail controller:

1. Configure a unique hostname for the Juniper Networks switch.

```
[edit system]
user@switch# set host-name hw-vtep1
```

2. Enable the Juniper Networks switch to dynamically configure OVSSDB-managed VXLANs and associated interfaces.

```
[edit switch-options]
user@switch# ovssdb-managed
```

3. Configure a connection with a Contrail controller.

```
[edit protocols]
user@switch# set ovssdb controller 10.94.184.1
```

4. Specify that the interface between hardware VTEP 1 and physical server 1 is managed by OVSSDB.

```
[edit protocols]
user@switch# set ovssdb interfaces ge-1/0/0
```

5. Set up OVSSDB tracing operations.

```
[edit protocols]
user@switch# set ovssdb traceoptions file ovssdb
```



```
user@switch# set ovssdb traceoptions file size 10m
user@switch# set ovssdb traceoptions flag all
```

6. Specify an IP address for the loopback interface. This IP address serves as the source IP address in the outer header of any VXLAN-encapsulated packet.

```
[edit interfaces]
user@switch# set lo0 unit 0 family inet address 10.17.17.17/32 primary
user@switch# set lo0 unit 0 family inet address 10.17.17.17/32 preferred
```

7. Set the loopback interface as the interface that identifies hardware VTEP 1.

```
[edit switch-options]
user@switch# set vtep-source-interface lo0.0
```

8. In the Contrail Web user interface, configure a virtual network for VXLAN 1. See ["Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs" on page 45](#).
9. In the Contrail Web user interface, configure a logical interface for the virtual network that you created in step 6. See ["Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs" on page 45](#).
10. In the Contrail Web user interface, configure a physical router, which enables the Contrail controller to recognize the Juniper Networks switch as a VTEP. See ["Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs" on page 45](#).

## Verification

### IN THIS SECTION

- [Verifying the Logical Switch Configuration | 59](#)
- [Verifying the MAC Address of VM 1 | 59](#)
- [Verifying the Contrail Controller Connection | 60](#)
- [Verifying the OVSDb-Managed Interface | 61](#)

Confirm that the configuration is working properly:

## Verifying the Logical Switch Configuration

### Purpose

In the Contrail Web user interface, you configured a virtual network for VXLAN 1. Using the same terminology as in the OVSDb schema for physical devices, the virtual network is also known as a *logical switch*. Verify that the configuration of the logical switch with the UUID of Contrail-28805c1d-0122-495d-85df-19abd647d772 is present in the OVSDb schema and that the Flags field for the logical switch is Created by both.

### Action

From the operational mode, enter the `show ovssdb logical-switch` command.

```
user@switch> show ovssdb logical-switch
Logical switch information:
Logical Switch Name: Contrail-28805c1d-0122-495d-85df-19abd647d772
Flags: Created by both
VNI: 100
Num of Remote MAC: 1
Num of Local MAC: 0
```

### Meaning

The output verifies that the configuration for the logical switch is present. The Created by both state indicates that the virtual network was configured in the Contrail Web user interface, and that the Juniper Networks switch dynamically created the corresponding VXLAN. In this state, the virtual network and the VXLAN are operational.

If the state of the logical switch is something other than Created by both, see ["Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDb-Managed VXLAN"](#) on page 78.

## Verifying the MAC Address of VM 1

### Purpose

Verify that the MAC address of VM 1 is present in the OVSDb schema.

## Action

From operational mode, enter the `show ovssdb mac remote` command.

```
user@switch> show ovssdb mac remote
Logical Switch Name: Contrail-28805c1d-0122-495d-85df-19abd647d772
  Mac          IP          Encapsulation  Vtep
  Address      Address      Address
a8:59:5e:f6:38:90  0.0.0.0      Vxlan over Ipv4  10.17.17.17
```

## Meaning

The output shows that the MAC address for VM 1 is present and is associated with the logical switch with the UUID of Contrail-28805c1d-0122-495d-85df-19abd647d772. Given that the MAC address is present, VM 1 is reachable through the Juniper Networks switch, which functions as a hardware VTEP.

## Verifying the Contrail Controller Connection

### Purpose

Verify that the connection with the Contrail controller is up.

## Action

From operational mode, enter the `show ovssdb controller` command to verify that the Contrail controller connection state is up.

```
user@switch> show ovssdb controller
VTEP controller information:
Controller IP address: 10.94.184.1
Controller protocol: ssl
Controller port: 6632
Controller connection: up
Controller seconds-since-connect: 542325
Controller seconds-since-disconnect: 542346
Controller connection status: active
```

## Meaning

The output shows that the state of the connection is up, in addition to other information about the connection. The up state indicates that OVSDb is enabled on the Juniper Networks switch.

## Verifying the OVSDb-Managed Interface

### Purpose

Verify that interface ge-1/0/0.0 is managed by OVSDb.

### Action

From operational mode, enter the `show ovssdb interface` command to verify that interface ge-1/0/0.0 is managed by OVSDb.

```
user@switch> show ovssdb interface
Interface  VLAN ID Bridge-domain
ge-1/0/0   0      Contrail-28805c1d-0122-495d-85df-19abd647d772
```

## Meaning

The output shows that interface ge-1/0/0 is managed by OVSDb. It also indicates that the interface is associated with VXLAN Contrail-28805c1d-0122-495d-85df-19abd647d772, which has a VLAN ID of 0.

## RELATED DOCUMENTATION

[Example: Setting Up a VXLAN Layer 2 Gateway and OVSDb Connections in a Contrail Environment \(Trunk Interfaces That Support Tagged Packets\) | 62](#)

## Example: Setting Up a VXLAN Layer 2 Gateway and OVSDb Connections in a Contrail Environment (Trunk Interfaces That Support Tagged Packets)

### IN THIS SECTION

- [Requirements | 62](#)
- [Overview and Topology | 63](#)
- [Non-OVSDb and Non-VXLAN Configuration | 69](#)
- [OVSDb and VXLAN Configuration | 71](#)
- [Verification | 73](#)

In a physical network, a Juniper Networks switch that supports Virtual Extensible LANs (VXLANs) can function as a hardware *virtual tunnel endpoint (VTEP)*. In this role, the Juniper Networks switch encapsulates in VXLAN packets Layer 2 Ethernet frames received from software applications that run directly on a physical server. The VXLAN packets are tunneled over a Layer 3 transport network. Upon receipt of the VXLAN packets, software VTEPs in the virtual network de-encapsulate the packets and forward the packets to *virtual machines (VMs)*.

In this VXLAN environment, you can also include Contrail controllers and implement the *Open vSwitch Database (OVSDb)* management protocol on the Juniper Networks switch that functions as a hardware VTEP.

The Junos OS implementation of OVSDb provides a means through which Contrail controllers and Juniper Networks switches can exchange MAC addresses of entities in the physical and virtual networks. This exchange of MAC addresses enables the Juniper Networks switch that functions as a hardware VTEP to forward traffic to software VTEPs in the virtual network and software VTEPs in the virtual network to forward traffic to the Juniper Networks switch in the physical network.

This example explains how to configure a Juniper Networks switch as a hardware VTEP, which serves as a Layer 2 gateway, and set up this switch with an OVSDb connection to a Contrail controller.

In this example, two VXLANs are deployed. Given this scenario, the packets exchanged between the applications that are running on a physical server and the VMs in the VXLANs are tagged. As a result, trunk interfaces, which can handle the tagged packets, are used for the connection between the physical server and the Juniper Networks switch.

### Requirements

This example includes the following hardware and software components:

- A physical server on which software applications directly run.
- A QFX10002 switch running Junos OS Release 15.1X53-D30 or later.
- On the Juniper Networks switch, physical interface ge-1/0/0 provides a connection to physical server 1.
- A Contrail controller.
- A top-of-rack service node (TSN) that handles the replication and forwarding of Layer 2 broadcast, unknown unicast, and multicast (BUM) traffic within the two VXLANs used in this example.

**NOTE:** You must explicitly configure the replication of unknown unicast traffic in a Contrail environment.

- The Contrail Web user interface.
- Two vRouters that include VMs. Each vRouter is managed by a hypervisor, and each hypervisor includes a software VTEP.

**NOTE:** All components in the Contrail environment (Contrail controller, TSN, Contrail Web user interface, and vRouters) must be running Contrail Release 2.20 or later.

For information about the Contrail components, see [Using TOR Switches and OVSDB to Extend the Contrail Cluster to Other Instances](#).

Before you begin:

- Create an SSL private key and certificate, if they do not already exist. The private key and certificate must be installed in the `/var/db/certs` directory of the Juniper Networks switch. See "[Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers](#)" on page 42.


## Overview and Topology

### IN THIS SECTION

- [Topology](#) | 67

Figure 3 on page 64 shows a topology in which a software application running directly on physical server 1 in the physical network needs to communicate with virtual machine VM 1 in VXLAN 1, and vice versa; and another software application on physical server 1 needs to communicate with virtual machines VM 3 and VM 4 in VXLAN 2, and vice versa. To enable this communication, a Juniper Networks switch is configured as hardware VTEP 1. Further, the Juniper Networks switch is connected to a Contrail controller by way of management interface em0 on the switch.

**Figure 3: VXLAN/OVSDB Layer 2 Gateway Topology**

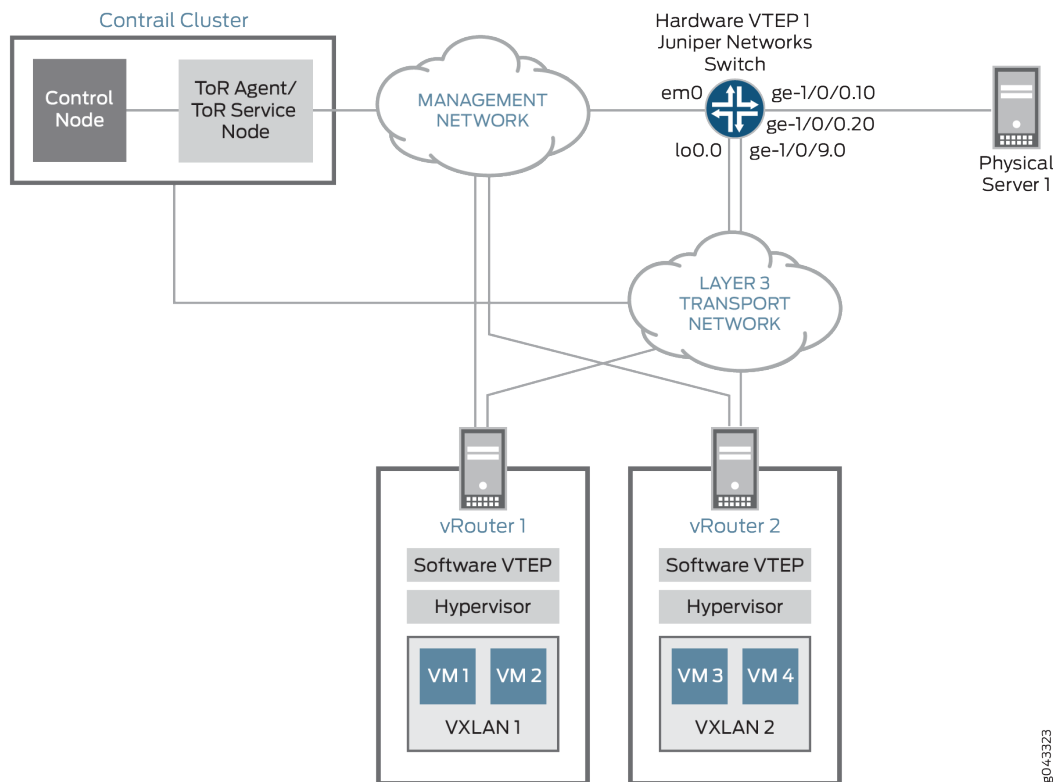

Some entities in the VXLAN-OVSDB topology must be configured in both the Contrail Web user interface and on the Juniper Networks switch. Table 10 on page 65 provides a summary of the entities that must be configured and where they must be configured.

**NOTE:** The term used for an entity that is configured in the Contrail Web user interface can differ from the term used for essentially the same entity that is configured on the Juniper Networks switch. To prevent confusion, Table 10 on page 65 shows the Contrail Web user interface and the Junos OS entities side by side.

**Table 10: Contrail and Junos OS Entities That Must Be Configured for a VXLAN Layer 2 Gateway Topology with OVSDB Connections and Trunk Interfaces Supporting Tagged Packets**

Entity	Entity to Be Configured in the Contrail Web User Interface	Entity to Be Configured on the Juniper Networks Switch
VXLAN 1	Virtual network for VXLAN 1	VXLAN 1
VXLAN 2	Virtual network for VXLAN 2	VXLAN 2  <b>NOTE:</b> The Juniper Networks switch dynamically configures these VXLANs.
Physical interface ge-1/0/0 between physical server 1 and Juniper Networks switch	–	OVSDB management. Specify that interface ge-1/0/0 is managed by OVSDB.
One logical interface (ge-1/0/0.10) associated with VXLAN 1  One logical interface (ge-1/0/0.20) associated with VXLAN 2	One logical interface for VXLAN 1. For this interface, specify VLAN ID 10.  One logical interface for VXLAN 2. For this interface, specify VLAN ID 20.  <b>NOTE:</b> A VLAN ID from 3 through 4000 indicates that the interface must handle tagged packets.	One logical interface (ge-1/0/0.10) for VXLAN 1.  One logical interface (ge-1/0/0.20) for VXLAN 2.  <b>NOTE:</b> The Juniper Networks switch dynamically configures these logical interfaces.
Juniper Networks switch (hardware VTEP 1)	Physical router	Hardware VTEP functionality. Configure the Juniper Networks switch to function as a hardware VTEP.

Based on the configuration of the entities in the Contrail Web user interface as described in [Table 10 on page 65](#), the Juniper Networks switch dynamically creates VXLANs 1 and 2 and their associated logical interfaces. [Table 11 on page 66](#) provides the relevant Contrail Web user interface configuration and the resulting VXLANs and associated logical interfaces that the Juniper Networks switch dynamically configures.



**Table 11: Contrail Web User Interface Configurations and Dynamic Configurations by Juniper Networks Switch**

Contrail Web User Interface Configuration: Virtual Network and Logical Interface	VXLANs and Associated Logical Interfaces Dynamically Configured By Juniper Networks Switch
<p>Virtual network configuration:</p> <p>UUID: Contrail-28805c1d-0122-495d-85df-19abd647d772</p> <p>VXLAN Identifier: 100</p> <p>Logical Interface configuration:</p> <p>VLAN ID: 10</p>	<p>For VXLAN 1:</p> <pre>set vlans Contrail-28805c1d-0122-495d-85df-19abd647d772 vxlan vni 100</pre> <p>For associated logical interface ge-1/0/0.10:</p> <pre>set interfaces ge-1/0/0 flexible-vlan-tagging set interfaces ge-1/0/0 encapsulation extended-vlan-bridge set interfaces ge-1/0/0 unit 10 vlan-id 10 set vlans Contrail-28805c1d-0122-495d-85df-19abd647d772 interfaces ge-1/0/0.10</pre>
<p>Virtual network configuration:</p> <p>UUID: Contrail-9acc24b3-7b0a-4c2e-b572-3370c3e1acff</p> <p>VXLAN Identifier: 200</p> <p>Logical Interface configuration:</p> <p>VLAN ID: 20</p>	<p>For VXLAN 2:</p> <pre>set vlans Contrail-9acc24b3-7b0a-4c2e- b572-3370c3e1acff vxlan vni 200</pre> <p>For associated logical interface ge-1/0/0.20:</p> <pre>set interfaces ge-1/0/0 flexible-vlan-tagging set interfaces ge-1/0/0 encapsulation extended-vlan-bridge set interfaces ge-1/0/0 unit 20 vlan-id 20 set vlans Contrail-9acc24b3-7b0a-4c2e- b572-3370c3e1acff interfaces ge-1/0/0.20</pre>

**NOTE:** In the Contrail environment, a numerical value that identifies a VXLAN is known as a *VXLAN identifier*. In the Junos OS environment, the same numerical value is known as a *VXLAN network identifier (VNI)*.

For VXLANs 1 and 2, the Juniper Networks switch uses the UUIDs and VXLAN Identifier values that were provided for the corresponding virtual networks.

In the logical interface configurations in the Contrail Web user interface, VLAN ID values 10 and 20 and virtual network mappings are specified. As a result, the Juniper Networks switch creates logical interfaces ge-1/0/0.10 and ge-1/0/0.20, respectively. Both of these logical interfaces function as trunk interfaces that handle tagged packets. The Juniper Networks switch also maps the logical interfaces ge-1/0/0.10 and ge-1/0/0.20 to their respective VXLANs.

Based on the configurations generated by the Juniper Networks switch, interface ge-1/0/0.10 accepts packets with a VLAN tag of 10 from VXLAN 1, and interface ge-1/0/0.20 accepts packets with a VLAN tag of 20 from VXLAN 2. On receiving packets from VXLAN 1, a VLAN tag of 100 is added to the packets, and a VLAN tag of 200 is added to packets from VXLAN 2. These tags are added to the respective packet streams to map the VLAN ID in a particular VXLAN to the corresponding VNI.

## Topology

[Table 12 on page 67](#) provides a summary of the components that are configured on the Juniper Networks switch. Unless noted, all configurations are performed manually in the Junos OS CLI.

**Table 12: Components Configured on Juniper Networks Switch (Hardware VTEP) in a VXLAN Layer 2 Gateway Topology with OVSDB Connections and Trunk Interfaces Supporting Tagged Packets**

Components	Settings
Contrail controller	IP address: 10.94.184.1
OVSDB-managed interface	Interface name: ge-1/0/0

**Table 12: Components Configured on Juniper Networks Switch (Hardware VTEP) in a VXLAN Layer 2 Gateway Topology with OVSDb Connections and Trunk Interfaces Supporting Tagged Packets**  
*(Continued)*

Components	Settings
VXLAN 1 and associated logical interface	<p><b>NOTE:</b> The Juniper Networks switch dynamically configures the VXLAN and associated logical interface, which are based on the virtual network and associated logical interface configurations in the Contrail Web user interface. Therefore, no manual configuration is required.</p> <p>VXLAN name: Contrail-28805c1d-0122-495d-85df-19abd647d772</p> <p>VNI: 100</p> <p>Logical interface name: ge-1/0/0.10</p> <p>VLAN ID: 10</p> <p>Interface type: trunk</p>
VXLAN 2 and associated logical interface	<p><b>NOTE:</b> The Juniper Networks switch dynamically configures the VXLAN and associated logical interface, which are based on the virtual network and associated logical interface configurations in the Contrail Web user interface. Therefore, no manual configuration is required.</p> <p>VXLAN name: Contrail-VXLAN 9acc24b3-7b0a-4c2e-b572-3370c3e1acff</p> <p>VNI: 200</p> <p>Logical interface name: ge-1/0/0.20</p> <p>VLAN ID: 20</p> <p>Interface type: trunk</p>
OVSDb tracing operations	<p>Filename: /var/log/ovsdb</p> <p>File size: 10 MB</p> <p>Flag: All</p>

**Table 12: Components Configured on Juniper Networks Switch (Hardware VTEP) in a VXLAN Layer 2 Gateway Topology with OVSDB Connections and Trunk Interfaces Supporting Tagged Packets**  
*(Continued)*

Components	Settings
Hardware VTEP functionality	Hostname: hw-vtep1  Source interface: loopback (lo0.0)  Source IP address: 10.17.17.17/32
Handling of Layer 2 BUM traffic within VXLAN Contrail-28805c1d-0122-495d-85df-19abd647d772 and Contrail-VXLAN 9acc24b3-7b0a-4c2e-b572-3370c3e1acff	TSN  <b>NOTE:</b> By default, one or more TSNs handle Layer 2 BUM traffic within a VXLAN; therefore, no configuration is required.
Hardware VTEP source identifier	Source interface: loopback (lo0.0)  Source IP address: 10.17.17.17/32
OVSDB tracing operations	Filename: /var/log/ovsdb  File size: 10 MB  Flag: All

**Non-OVSDB and Non-VXLAN Configuration**

**IN THIS SECTION**

- [CLI Quick Configuration | 70](#)
- [Procedure | 70](#)

## CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your configuration, copy and paste the commands into the CLI at the [edit] hierarchy level, and then enter `commit` from configuration mode.

```
set interfaces ge-1/0/9 unit 0 family inet address 10.40.40.1/24
set routing-options static route 10.19.19.19/32 next-hop 10.40.40.2
set routing-options router-id 10.17.17.17
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface ge-1/0/9.0
```

## Procedure

### Step-by-Step Procedure

To configure the Layer 3 network over which the packets exchanged between the physical servers and VMs are tunneled:

1. Configure the Layer 3 interface.

```
[edit interfaces]
user@switch# set ge-1/0/9 unit 0 family inet address 10.40.40.1/24
```

2. Set the routing options.

```
user@switch# set static route 10.19.19.19/32 next-hop 10.40.40.2
user@switch# set router-id 10.17.17.17
```

3. Configure the routing protocol.

```
[edit protocols]
user@switch# set ospf area 0.0.0.0 interface lo0.0
user@switch# set ospf area 0.0.0.0 interface ge-1/0/9.0
```

## OVSDb and VXLAN Configuration

### IN THIS SECTION

- [CLI Quick Configuration | 71](#)
- [Procedure | 71](#)

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your configuration, copy and paste the commands into the CLI at the [edit] hierarchy level, and then enter `commit` from configuration mode.

```
set system host-name hw-vtep1
set switch-options ovssdb-managed
set protocols ovssdb controller 10.94.184.1
set protocols ovssdb interfaces ge-1/0/0
set protocols ovssdb traceoptions file ovssdb
set protocols ovssdb traceoptions file size 10m
set protocols ovssdb traceoptions flag all
set interfaces lo0 unit 0 family inet address 10.17.17.17/32 primary
set interfaces lo0 unit 0 family inet address 10.17.17.17/32 preferred
set switch-options vtep-source-interface lo0.0
```

### Procedure

#### Step-by-Step Procedure

To configure the Juniper Networks switch as a hardware VTEP with an OVSDb connection to the Contrail controller:

1. Configure a unique hostname for the Juniper Networks switch.

```
[edit system]
user@switch# set host-name hw-vtep1
```

2. Enable the Juniper Networks switch to dynamically configure OVSDb-managed VXLANs and associated interfaces.

```
[edit switch-options]
user@switch# ovsdb-managed
```

3. Configure a connection with the Contrail controller.

```
[edit protocols]
user@switch# set ovsdb controller 10.94.184.1
```

4. Specify that the interface between hardware VTEP 1 and physical server 1 is managed by OVSDb.

```
[edit protocols]
user@switch# set ovsdb interfaces ge-1/0/0
```

5. Set up OVSDb tracing operations.

```
[edit protocols]
user@switch# set ovsdb traceoptions file ovsdb
user@switch# set ovsdb traceoptions file size 10m
user@switch# set ovsdb traceoptions flag all
```

6. Specify an IP address for the loopback interface. This IP address serves as the source IP address in the outer header of any VXLAN-encapsulated packet.

```
[edit interfaces]
user@switch# set lo0 unit 0 family inet address 10.17.17.17/32 primary
user@switch# set lo0 unit 0 family inet address 10.17.17.17/32 preferred
```

7. Set the loopback interface as the interface that identifies hardware VTEP 1.

```
[edit switch-options]
user@switch# set vtep-source-interface lo0.0
```

8. In the Contrail Web user interface, configure a virtual network for VXLAN 1 and a virtual network for VXLAN 2. See ["Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs" on page 45.](#)
9. In the Contrail Web user interface, configure a logical interface for each of the virtual networks that you created in Step 8. See ["Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs" on page 45.](#)
10. In the Contrail Web user interface, configure a physical router, which enables the Contrail controller to recognize the Juniper Networks switch as a VTEP. See ["Contrail Configuration for Juniper Networks Devices That Function as Hardware VTEPs" on page 45.](#)

## Verification

### IN THIS SECTION

- [Verifying the Logical Switch Configuration | 73](#)
- [Verifying the MAC Addresses of VM 1, VM 3, and VM 4 | 74](#)
- [Verifying the Contrail Controller Connection | 75](#)
- [Verifying the OVSDb-Managed Interface | 76](#)

Confirm that the configuration is working properly:

### Verifying the Logical Switch Configuration

#### Purpose

In the Contrail Web user interface, you configured a virtual network for VXLAN 1 and a virtual network for VXLAN 2. Using the same terminology as in the OVSDb schema for physical devices, a virtual network is also known as a *logical switch*. Verify that the configuration of the logical switches with the UUIDs of Contrail-28805c1d-0122-495d-85df-19abd647d772 and Contrail-9acc24b3-7b0a-4c2e-b572-3370c3e1acff are present in the OVSDb schema and that the Flags field for each logical switch is Created by both.



## Action

Issue the `show ovssdb logical-switch` command.

```
user@switch> show ovssdb logical-switch
Logical switch information:
Logical Switch Name: Contrail-28805c1d-0122-495d-85df-19abd647d772
Flags: Created by both
VNI: 100
Num of Remote MAC: 1
Num of Local MAC: 0
Logical Switch Name: Contrail-9acc24b3-7b0a-4c2e-b572-3370c3e1acff
Flags: Created by both
VNI: 200
Num of Remote MAC: 2
Num of Local MAC: 0
```

## Meaning

The output verifies that the configurations for the logical switches are present. The Created by both state indicates that the logical switches were configured in the Contrail Web user interface, and that the Juniper Networks switch dynamically created the corresponding VXLANs. In this state, the virtual networks and VXLANs are operational.

If the state of the logical switches is something other than Created by both, see ["Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSSDB-Managed VXLAN" on page 78](#).

## Verifying the MAC Addresses of VM 1, VM 3, and VM 4

### Purpose

Verify that the MAC addresses of VM 1, VM 3, and VM 4 are present in the OVSSDB schema.

## Action

Issue the `show ovssdb mac remote operational mode` command.

```
user@switch> show ovssdb mac remote
Logical Switch Name: Contrail-28805c1d-0122-495d-85df-19abd647d772
  Mac                IP                Encapsulation    Vtep
```

Address	Address		Address
a8:59:5e:f6:38:90	0.0.0.0	Vxlan over Ipv4	10.17.17.17
Logical Switch Name: Contrail-9acc24b3-7b0a-4c2e-b572-3370c3e1acff			
Mac	IP	Encapsulation	Vtep
Address	Address		Address
00:23:9c:5e:a7:f0	0.0.0.0	Vxlan over Ipv4	10.17.17.17
00:23:9c:5e:a7:f0	0.0.0.0	Vxlan over Ipv4	10.17.17.17

## Meaning

The output shows that the MAC addresses for VM 1, VM 3, and VM 4 are present and are associated with their respective logical switches. Given that the MAC addresses are present, VM 1, VM 3, and VM 4 are reachable through the Juniper Networks switch, which functions as a hardware VTEP.

## Verifying the Contrail Controller Connection

### Purpose

Verify that the connection with the Contrail controller is up.

### Action

Issue the `show ovssdb controller operational mode` command to verify that the Contrail controller connection state is up.

```
user@switch> show ovssdb controller
VTEP controller information:
Controller IP address: 10.94.184.1
Controller protocol: ssl
Controller port: 6632
Controller connection: up
Controller seconds-since-connect: 542325
Controller seconds-since-disconnect: 542346
Controller connection status: active
```

## Meaning

The output shows that the state of the connection is up, in addition to other information about the connection. By virtue of this connection being up, OVSSDB is enabled on the Juniper Networks switch.

## Verifying the OVSDb-Managed Interface

### Purpose

Verify that interface ge-1/0/0 is managed by OVSDb.

### Action

Issue the `show ovssdb interface operational mode` command, and verify that interface ge-1/0/0 is managed by OVSDb.

```
user@switch> show ovssdb interface
Interface  VLAN ID  Bridge-domain
ge-1/0/0   10       Contrail-28805c1d-0122-495d-85df-19abd647d772
ge-1/0/0   20       Contrail-9acc24b3-7b0a-4c2e-b572-3370c3e1acff
```

### Meaning

The output shows that interface ge-1/0/0 is managed by OVSDb. It also indicates that the interface is associated with VXLAN Contrail-28805c1d-0122-495d-85df-19abd647d772, which has a VLAN ID of 10, and VXLAN Contrail-9acc24b3-7b0a-4c2e-b572-3370c3e1acff, which has a VLAN ID of 20.

## RELATED DOCUMENTATION

[Example: Setting Up a VXLAN Layer 2 Gateway and OVSDb Connections in a Contrail Environment \(Trunk Interfaces That Support Untagged Packets\) | 49](#)

## Verifying That a Logical Switch and Corresponding Junos OS OVSDb-Managed VXLAN Are Working Properly

### IN THIS SECTION

- [Purpose | 77](#)
- [Action | 77](#)
- [Meaning | 77](#)

## Purpose

Verify the following:

- A logical switch, which is configured in an NSX environment, or a virtual network, which is configured in a Contrail environment, is learning MAC addresses in their respective environments.
- The corresponding OVSDB-managed Virtual Extensible LAN (VXLAN), which is configured on a Juniper Networks device, is learning MAC addresses in the Junos OS environment.
- The logical switch or virtual network and OVSDB-managed VXLAN are exchanging the MAC addresses learned in their respective environments so that virtual and physical servers can communicate.

## Action

To verify that a logical switch or virtual network and its corresponding OVSDB-managed VXLAN are learning and exchanging MAC addresses in their respective environments, enter the `show ovssdb logical-switch operational mode` command.

```
user@device> show ovssdb logical-switch
Logical switch information:
Logical Switch Name: 28805c1d-0122-495d-85df-19abd647d772
Flags: Created by both
VNI: 100
Num of Remote MAC: 1
Num of Local MAC: 0
```

**NOTE:** In the Open vSwitch Database (OVSDB) schema for physical devices, the logical switch table stores information about the Layer 2 broadcast domain that you configured in a VMware NSX or Contrail environment. In the NSX environment, the Layer 2 broadcast domain is known as a *logical switch*, while in the Contrail environment, the domain is known as a *virtual network*. In the context of the `show ovssdb logical-switch` command, the term *logical switch* refers to the logical switch or virtual network that was configured in the NSX or Contrail environments, respectively, and the corresponding configuration that was pushed to the OVSDB schema.

## Meaning

The output in the Flags field (Created by both) indicates that the logical switch or virtual network and its corresponding OVSDB-managed VXLAN are both properly configured. In this state, the logical switch or

virtual network and the VXLAN are learning and exchanging MAC addresses in their respective environments.

If the output in the Flags field displays a state other than Created by both, see *Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDb-Managed VXLAN*.

## RELATED DOCUMENTATION

| `show ovssdb logical-switch`

## Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDb-Managed VXLAN

### IN THIS SECTION

- Problem | 78
- Cause | 78
- Solution | 79

### Problem

#### Description

The Flags field in the `show ovssdb logical-switch` operational mode command output is one of the following:

- Created by Controller
- Created by L2ALD
- Tunnel key mismatch

#### Cause

- If the Flags field displays Created by Controller, a logical switch is configured in the NSX environment or a virtual network is configured in the Contrail environment. However, an equivalent VXLAN is not configured or is improperly configured on the Juniper Networks device.

- If the Flags field displays `Created by L2ALD`, a VXLAN is configured on the Juniper Networks device. However, an equivalent logical switch is not configured in the NSX environment or an equivalent virtual network is not configured in the Contrail environment.
- If the Flags field displays `Tunnel key mismatch`, the VXLAN network identifier (VNI) specified in the logical switch configuration or the VXLAN identifier specified in the virtual network configuration do not match the VNI in the equivalent VXLAN configuration.

## Solution

If the Flags field displays `Created by Controller`, take the following action:

- On a QFX Series switch, verify that the `set switch-options ovssdb-managed` configuration command was issued in the Junos OS CLI. Issuing this command and committing the configuration enable the Juniper Networks device to dynamically create OVSDb-managed VXLANs.

Another possible cause is that the L2ALD daemon has become nonfunctional. If this is the case, wait for a few seconds, reissue the `show ovssdb logical-switch operational mode` command, and recheck the setting of the Flags field.

Another possible cause is that the Juniper Networks device dynamically configured the VXLAN and its associated logical interface, but there is an error in the configuration of these entities themselves or in an entity that was committed in the same transaction. If there is an issue with one or more of the configurations in a transaction, all configurations in the transaction, even the ones that are correctly configured, remain uncommitted and in a queue until you troubleshoot and resolve the configuration issues. As a result, the Juniper Networks device was unable to commit all configurations in the transaction. Starting with Junos OS Release 14.1X53-D26 for QFX5100 switches, Junos OS Release 15.1X53-D210 for QFX5110 and QFX5200 switches, and 18.1R1 for QFX5210 switches, you can enter the `show ovssdb commit failures operational mode` command to determine which configurations in a transaction are erroneous. After resolving the errors, enter the `clear ovssdb commit failures` command to remove the transaction from the queue and then retry committing all configurations in the transaction. Issues that can cause commitment errors include but are not limited to the detection of the same VXLAN name or VXLAN network identifier (VNI) in a dynamically configured VXLAN and in a VXLAN that was previously configured using the Junos OS CLI.

- On all other Juniper Networks devices that support VXLAN and OVSDb, determine whether a VXLAN equivalent to the logical switch configuration or virtual network configuration exists on the device. If the VXLAN is not configured, configure it using the procedure in *Configuring OVSDb-Managed VXLANs*. If a VXLAN is configured, check the VXLAN name to make sure that it is the same as the universally unique identifier (UUID) of the logical switch (NSX) or virtual network (Contrail) configuration. Also, check the VNI to make sure that the value is the same as the value in the logical switch (NSX) or virtual network (Contrail) configuration.

If the Flags field displays Created by L2ALD, take the following action:

- On a QFX Series switch, two issues exist. First, despite the fact that the Juniper Networks device dynamically creates OVSDB-managed VXLANs, this VXLAN was configured by using the Junos OS CLI. Second, a corresponding logical switch (NSX) or virtual network (Contrail) was not configured. To resolve both issues, configure a logical switch in the NSX environment or a virtual network in the Contrail environment. After the software-defined networking (SDN) controller pushes relevant logical switch or virtual network information to the Juniper Networks device, the device dynamically creates a corresponding VXLAN and deletes the VXLAN configured using the Junos OS CLI.
- On all other Juniper Networks devices that support VXLAN and OVSDB, determine whether an equivalent logical switch is configured in the NSX environment or a virtual network is configured in the Contrail environment. If a logical switch or virtual network is not configured, configure one, keeping in mind that a UUID is automatically generated for the logical switch or virtual network and that this UUID must be used as the name of the VXLAN. That is, the VXLAN name must be reconfigured with the logical switch or virtual network UUID.

Another possibility is that the logical switch or virtual network configuration might exist, but the UUID of the entity might not match the VXLAN name. In the NSX or Contrail environment, check for a logical switch or virtual network, respectively, that has the same configuration as the VXLAN but has a different UUID.

If the Flags field displays Tunnel key mismatch, take the following action:

- For a QFX Series switch, check the configuration of the VNI in the NSX environment or the VXLAN identifier in the Contrail environment to see whether it was changed after the Juniper Networks device dynamically created the equivalent VXLAN. If it was changed, update the VNI on the QFX Series switch using the Junos OS CLI.
- On all other Juniper Networks devices that support VXLAN and OVSDB, check the value of the VNI in the NSX environment or the VXLAN identifier in the Contrail environment and the Junos OS CLI. Change the incorrect value.

#### Release History Table

Release	Description
14.1X53-D26	Starting with Junos OS Release 14.1X53-D26 for QFX5100 switches, Junos OS Release 15.1X53-D210 for QFX5110 and QFX5200 switches, and 18.1R1 for QFX5210 switches, you can enter the <code>show ovssdb commit failures operational mode</code> command to determine which configurations in a transaction are erroneous.

## RELATED DOCUMENTATION

---

*Understanding Dynamically Configured VXLANs in an OVSDb Environment*

---

*Understanding How to Manually Configure OVSDb-Managed VXLANs*

---

*show ovbdb logical-switch*

---

*show ovbdb commit failures*

---

*clear ovbdb commit failures*



# 3

PART

## Configuration Statements and Operational Commands

---

OVSDB Configuration Statements | 83

VXLAN Configuration Statements | 99

Monitoring OVSDB | 101

Monitoring VXLAN | 127

---

## CHAPTER 3

# OVSDB Configuration Statements

**IN THIS CHAPTER**

- [controller \(OVSDB\) | 83](#)
- [inactivity-probe-duration | 85](#)
- [interfaces \(OVSDB\) | 87](#)
- [maximum-backoff-duration | 88](#)
- [ovsdb | 89](#)
- [ovsdb-managed | 91](#)
- [port \(OVSDB\) | 93](#)
- [protocol \(OVSDB\) | 94](#)
- [traceoptions \(OVSDB\) | 96](#)

## controller (OVSDB)

**IN THIS SECTION**

- [Syntax | 84](#)
- [Hierarchy Level | 84](#)
- [Description | 84](#)
- [Options | 84](#)
- [Required Privilege Level | 85](#)
- [Release Information | 85](#)

## Syntax

```
controller ip-address {
    inactivity-probe-duration milliseconds;
    maximum-backoff-duration milliseconds;
    protocol protocol {
        port number;
    }
}
```

## Hierarchy Level

```
[edit protocols ovsdb]
```

## Description

Configure a connection between a Juniper Networks device running the *Open vSwitch Database (OVSDB)* management protocol and a software-defined networking (SDN) controller. You can connect a Juniper Networks device to more than one SDN controller for redundancy.

In a VMware NSX environment, one cluster of NSX controllers typically includes three or five controllers. To implement the OVSDB management protocol on a Juniper Networks device, you must explicitly configure a connection to one NSX controller, using the Junos OS CLI. If the NSX controller to which you explicitly configure a connection is in a cluster, the controller pushes information about other controllers in the same cluster to the device, and the device establishes connections with the other controllers. However, you can also explicitly configure connections with the other controllers in the cluster, using the Junos OS CLI.

To implement the OVSDB management protocol on a Juniper Networks device in a Contrail environment, you must configure a connection to a Contrail controller, using the Junos OS CLI.

Connections to all SDN controllers are made on the management interface of the Juniper Networks device.

## Options

*ip-address*—IPv4 address of the SDN controller.

The remaining statements are explained separately. See [CLI Explorer](#).

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

*Setting Up OVSDDB on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs*

*Setting Up the OVSDDB Protocol on Juniper Networks Devices that Support Manual Configuration of VXLANs*

*Understanding How to Set Up OVSDDB Connections on a Juniper Networks Device*

## inactivity-probe-duration

### IN THIS SECTION

- [Syntax | 85](#)
- [Hierarchy Level | 86](#)
- [Description | 86](#)
- [Options | 86](#)
- [Required Privilege Level | 86](#)
- [Release Information | 86](#)

## Syntax

```
inactivity-probe-duration milliseconds;
```

## Hierarchy Level

```
[edit protocols ovsdb controller ]
```

## Description

Configure the maximum amount of time, in milliseconds, that the connection between a Juniper Networks device that supports the *Open vSwitch Database (OVSDB)* management protocol and a software-defined networking (SDN) controller can be inactive before an inactivity probe is sent.

## Options

*milliseconds*—Number of milliseconds that the connection can be inactive before an inactivity probe is sent.

- **Range:** 0 through 4,294,967,295
- **Default:** 0. This value indicates that an inactivity probe is never sent.

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

| *Understanding How to Set Up OVSDB Connections on a Juniper Networks Device*

## interfaces (OVSDB)

## IN THIS SECTION

- Syntax | 87
- Hierarchy Level | 87
- Description | 87
- Options | 87
- Required Privilege Level | 87
- Release Information | 88

## Syntax

```
interfaces interface-name;
```

## Hierarchy Level

```
[edit protocols ovssdb]
```

### Description

Specify the physical interfaces on a Juniper Networks device that you want the *Open vSwitch Database (OVSDB)* protocol to manage. Typically, the only interfaces that need to be managed by OVSDB are interfaces that are connected to physical servers.

## Options

<i>interface-name</i>	Name of the interface.
-----------------------	------------------------

### Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

*Setting Up the OVSDb Protocol on Juniper Networks Devices that Support Manual Configuration of VXLANs*

*Setting Up OVSDb on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs*

## maximum-backoff-duration

### IN THIS SECTION

- [Syntax | 88](#)
- [Hierarchy Level | 88](#)
- [Description | 89](#)
- [Options | 89](#)
- [Required Privilege Level | 89](#)
- [Release Information | 89](#)

## Syntax

```
maximum-backoff-duration milliseconds;
```

## Hierarchy Level

```
[edit protocols ovsdb controller ]
```

## Description

Specify (in milliseconds) how long a Juniper Networks device that supports the *Open vSwitch Database (OVSDB)* management protocol waits before it tries again to connect with a software-defined networking (SDN) controller after a previous attempt has failed.

## Options

*milliseconds*—Number of milliseconds a Juniper Networks device waits before it tries again to connect with an SDN controller.

- **Range:** 1000 through 4,294,967,295
- **Default:** 1000

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

| *Understanding How to Set Up OVSDB Connections on a Juniper Networks Device*

## ovsdb

### IN THIS SECTION

- [Syntax | 90](#)
- [Hierarchy Level | 90](#)
- [Description | 90](#)
- [Default | 90](#)



- Required Privilege Level | 91
- Release Information | 91

## Syntax

```
ovsdb {
  controller ip-address {
    inactivity-probe-duration milliseconds;
    maximum-backoff-duration milliseconds;
    protocol protocol {
      port number;
    }
  }
  interfaces interface-name;
  traceoptions {
    file <filename> <files number> <match regular-expression> <no-world-readable | world-
readable> <size size>;
    flag flag;
    no-remote-trace;
  }
}
```

## Hierarchy Level

[edit protocols]

## Description

Configure support for the *Open vSwitch Database (OVSDB)* management protocol on a Juniper Networks device.

The remaining statements are explained separately. See [CLI Explorer](#).

## Default

The OVSDB management protocol is disabled on Juniper Networks devices.

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

*Understanding the OVSDb Protocol Running on Juniper Networks Devices*

## ovsdb-managed

### IN THIS SECTION

- [Syntax | 91](#)
- [Hierarchy Level | 91](#)
- [Description | 92](#)
- [Required Privilege Level | 92](#)
- [Release Information | 92](#)

## Syntax

```
ovsdb-managed;
```

## Hierarchy Level

```
[edit bridge-domains bridge-domain-name vxlan],
[edit routing-instances routing-instance-name bridge-domains bridge-domain-name vxlan],
[edit routing-instances routing-instance-name switch-options],
```

```
[edit routing-instances routing-instance-name vlans vlan-name vxlan],
[edit routing-instances routing-instance-name vxlan],
[edit switch-options],
[edit vlans vlan-name vxlan]
```

## Description

Disable a Juniper Networks device from learning about other Juniper Networks devices that function as hardware *virtual tunnel endpoints (VTEPs)* in a specified Virtual Extensible LAN (VXLAN) and the media access control (MAC) addresses learned by the hardware VTEPs. Instead, the Juniper Networks device uses the *Open vSwitch Database (OVSDb)* management protocol to learn about the hardware VTEPs in the VXLAN and the MAC addresses learned by the hardware VTEPs.

The specified VXLAN must have a VXLAN network identifier (VNI) configured, using the `vni` statement in the `[edit bridge-domains bridge-domain-name vxlan]`, `[edit routing-instance routing-instance-name vxlan]`, or `[edit vlans vlan-name vxlan]` hierarchy.

Also, for OVSDb-managed VXLANs, the multicast scheme described in *Understanding How Layer 2 BUM and Layer 3 Routed Multicast Traffic Are Handled with OVSDb* is used. Therefore, specifying the `multicast-group` statement in the `[edit bridge-domains bridge-domain-name vxlan]`, `[edit routing-instances routing-instance-name vxlan]`, or `[edit vlans vlan-name vxlan]` hierarchy has no effect.

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

---

*Understanding Dynamically Configured VXLANs in an OVSDb Environment*  
*Configuring OVSDb-Managed VXLANs*

## port (OVSDB)

### IN THIS SECTION

- [Syntax | 93](#)
- [Hierarchy Level | 93](#)
- [Description | 93](#)
- [Options | 93](#)
- [Required Privilege Level | 94](#)
- [Release Information | 94](#)

### Syntax

```
port number;
```

### Hierarchy Level

```
[edit protocols ovsdb controller protocol ]
```

### Description

Specify the software-defined networking (SDN) controller port to which a Juniper Networks device that supports the *Open vSwitch Database (OVSDB)* management protocol connects.

### Options

***number***                      Number of SDN controller port.

- **Range:** 1024 through 65,535
- **Default:** 6632

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

*Understanding How to Set Up OVSDDB Connections on a Juniper Networks Device*

## protocol (OVSDDB)

### IN THIS SECTION

- [Syntax | 94](#)
- [Hierarchy Level | 95](#)
- [Description | 95](#)
- [Options | 95](#)
- [Required Privilege Level | 95](#)
- [Release Information | 95](#)

## Syntax

```
protocol protocol {  
    port number;  
}
```

## Hierarchy Level

```
[edit protocols ovsdb controller ]
```

## Description

Configure the security protocol that protects the connection between a Juniper Networks device that supports the *Open vSwitch Database (OVSDb)* management protocol and a software-defined networking (SDN) controller.

The *Secure Sockets Layer (SSL)* connection requires a private key and certificates, which must be stored in the `/var/db/certs` directory of the Juniper Networks device. See *Creating and Installing an SSL Key and Certificate on a Juniper Networks Device for Connection with SDN Controllers*.

## Options

***protocol*** Establish a secure connection to the SDN controller, using SSL or TCP.

**NOTE:** SSL is the only supported connection protocol.

- **Default:** ssl

The remaining statement is explained separately. See [CLI Explorer](#).

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

| *Understanding How to Set Up OVSDb Connections on a Juniper Networks Device*

## traceoptions (OVSDB)

### IN THIS SECTION

- [Syntax | 96](#)
- [Hierarchy Level | 96](#)
- [Description | 96](#)
- [Default | 96](#)
- [Options | 97](#)
- [Required Privilege Level | 98](#)
- [Release Information | 98](#)

### Syntax

```
traceoptions {
    file <filename> <files number> <match regular-expression> <no-world-readable | world-
readable> <size size>;
    flag flag;
    no-remote-trace;
}
```

### Hierarchy Level

```
[edit protocols ovssdb]
```

### Description

Define tracing operations for the *Open vSwitch Database (OVSDB)* management protocol, which is supported on Juniper Networks devices.

### Default

If you do not include this statement, OVSDB-specific tracing operations are not performed.

## Options

**file *filename*** Name of file in which the system places the output of the tracing operations. By default, the system places all files in the **/var/log** directory.

- **Default:** **/var/log/vgd**

**files *number*** (Optional) Maximum number of trace files. When a trace file reaches the size specified by the **size** option, the filename is appended with 0 and compressed. For example, a trace file named **trace-file.gz** would be renamed **trace-file.0.gz**. When **trace-file.0.gz** reaches the specified size, it is renamed **trace-file.1.gz** and its contents are compressed to **trace-file.0.gz**. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option and a filename.

- **Range:** 2 through 1000 files
- **Default:** 10 files

**flag *flag*** Tracing operation to perform. You can include one or more of the following flags:

**all** All OVSDB events.

**configuration** OVSDB configuration events.

**core** OVSDB core events.

**function** OVSDB function events.

**interface** OVSDB interface events.

**l2-client** OVSDB Layer 2 client events.

**netconf-client** (QFX Series switches only) Events for the dynamic configuration of Virtual Extensible LANs (VXLANs).

**ovs-client** OVSDB client events.

**match *regular-expression*** (Optional) Only log lines that match the regular expression.



<b>no-remote-trace</b>	(Optional) Disable tracing and logging operations that track normal operations, error conditions, and packets that are generated by or passed through the Juniper Networks device.
<b>no-world-readable</b>	<p>Restrict access to the trace files to the owner.</p> <ul style="list-style-type: none"> <li>• <b>Default:</b> no-world-readable</li> </ul>
<b>size <i>size</i></b>	<p>(Optional) Maximum size of each trace file in bytes, kilobytes (KB), megabytes (MB), or gigabytes (GB). If you do not specify a unit, the default is bytes. If you specify a maximum file size, you also must specify a maximum number of trace files by using the <code>files</code> option and a filename by using the <code>file</code> option.</p> <ul style="list-style-type: none"> <li>• <b>Syntax:</b> <i>size</i> to specify bytes, <i>sizek</i> to specify KB, <i>sizem</i> to specify MB, or <i>sizeg</i> to specify GB.</li> <li>• <b>Range:</b> 10,240 through 1,073,741,824 bytes</li> <li>• <b>Default:</b> 128 KB</li> </ul>
<b>world-readable</b>	Enable any user to access the trace files.

## Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1R2.

## CHAPTER 4

# VXLAN Configuration Statements

**IN THIS CHAPTER**

- [vtep-source-interface | 99](#)

## vtep-source-interface

**IN THIS SECTION**

- [Syntax | 99](#)
- [Hierarchy Level | 99](#)
- [Description | 100](#)
- [Options | 100](#)
- [Required Privilege Level | 100](#)
- [Release Information | 100](#)

### Syntax

```
vtep-source-interface  
  interface-name (inet | inet6 );
```

### Hierarchy Level

```
[edit switch-options]  
[edit routing-instances routing-instance-name]
```

## Description

Configure a source interface for a Virtual Extensible LAN (VXLAN) tunnel. You must provide the name of a logical interface configured on the loopback interface.

If you specify an IPv4 address (`inet` option) as the VTEP source address, the VXLAN tunnel endpoint (VTEP) encapsulates VXLAN packets with an IPv4 outer header and tunnels the packets through an IPv4 underlay network.

If you specify an IPv6 address (`inet6` option) as the VTEP source address, the VTEP encapsulates VXLAN packets with an IPv6 outer header and tunnels the packets through an IPv6 underlay network.

## Options

<i>interface-name</i>	Loopback interface name.
<code>inet</code>	IPv4 source address.
<code>inet6</code>	IPv6 source address.

## Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 14.1X53-D10.

Support at the `[edit routing-instances routing-instance-name]` hierarchy level introduced in Junos OS Release 17.3.

## RELATED DOCUMENTATION

*Understanding VXLANs*

*EVPN-VXLAN with an IPv6 Underlay*

*Manually Configuring VXLANs on QFX Series and EX4600 Switches*

*Examples: Manually Configuring VXLANs on QFX Series and EX4600 Switches*

## CHAPTER 5

# Monitoring OVSDb

**IN THIS CHAPTER**

- [clear ovssdb commit failures | 101](#)
- [show ovssdb commit failures | 104](#)
- [show ovssdb controller | 107](#)
- [show ovssdb interface | 110](#)
- [show ovssdb logical-switch | 112](#)
- [show ovssdb mac | 116](#)
- [show ovssdb statistics interface | 121](#)
- [show ovssdb virtual-tunnel-end-point | 124](#)

## clear ovssdb commit failures

**IN THIS SECTION**

- [Syntax | 102](#)
- [Description | 102](#)
- [Options | 103](#)
- [Required Privilege Level | 103](#)
- [Sample Output | 103](#)
- [Release Information | 103](#)

## Syntax

```
clear ovssdb commit failures  
<transaction-id>
```

## Description

Remove a transaction from a queue maintained by a Juniper Networks switch that supports the *Open vSwitch Database (OVSSDB)* management protocol and Virtual Extensible LANs (VXLANs). The transaction includes OVSSDB-managed VXLANs and associated logical interfaces that the Juniper Networks switch dynamically configured and tried to commit but was unable to because of an issue with one or more of the configurations. In addition to removing the transaction, entering the `clear ovssdb commit failures` command causes the Juniper Networks switch to automatically retry committing all configurations in the transaction.

If there is an issue with one or more of the configurations in a transaction, this causes all configurations in the transaction, even the ones that are correctly configured, to remain uncommitted and in the queue until you troubleshoot and resolve the configuration issue(s).

You can display an erroneous transaction by entering the `show ovssdb commit failures` command. In the output that appears, you must determine which configuration(s) are erroneous and therefore prevent the Juniper Networks switch from committing the configurations in the transaction.

Issues that can cause commitment errors include but are not limited to the detection of the same VXLAN name or VXLAN network identifier (VNI) in a dynamically configured VXLAN and in a VXLAN that was previously configured using the Junos OS CLI.

To monitor for issues with dynamically configured OVSSDB-managed VXLANs and their associated interfaces, we recommend checking for system log messages and traceoptions files for OVSSDB.

After resolving the error(s), enter the `clear ovssdb commit failures` command to remove the transaction from the queue and retry committing all configurations in the transaction.

**NOTE:** While an erroneous transaction exists in the queue, the Juniper Networks switch cannot commit the dynamic configurations of additional VXLANs and their associated logical interfaces. The commitment of these VXLANs and logical interfaces remain in a pending state until all VXLAN and logical interface configurations in the erroneous transaction are resolved and successfully committed.

## Options

- none** Remove the transaction that currently appears in the `show ovssdb commit failures` command output, and retry committing all configurations in the transaction.
- transaction-id*** Remove the transaction with the specified numerical ID, and retry committing the configurations in the transaction.

## Required Privilege Level

clear

## Sample Output

### clear ovssdb commit failures

```
user@host> clear ovssdb commit failures
```

### clear ovssdb commit failures (Specific Transaction)

```
user@host> clear ovssdb commit failures 1
```

## Release Information

Command introduced in Junos OS Release 14.1X53-D26.

## RELATED DOCUMENTATION

| *show ovssdb commit failures*

## show ovsdb commit failures

### IN THIS SECTION

- [Syntax | 104](#)
- [Description | 104](#)
- [Options | 105](#)
- [Required Privilege Level | 105](#)
- [Output Fields | 105](#)
- [Sample Output | 106](#)
- [Release Information | 106](#)

### Syntax

```
show ovsdb commit failures  
<transaction-id>
```

### Description

Display configurations of *Open vSwitch Database (OVSDB)*-managed Virtual Extensible LANs (VXLANs) and associated logical interfaces that the Juniper Networks switch dynamically configured but was unable to commit.

For each OVSDB-managed VXLAN and associated logical interface that you plan to implement in a Junos OS environment, you must configure equivalent entities in NSX Manager or in the NSX API for an NSX environment, or in the Contrail Web user interface for a Contrail environment. The software-defined networking (SDN) controller pushes these configurations to the connected Juniper Networks switch by way of the OVSDB schema for physical devices. After the Juniper Networks switch receives these configurations, it dynamically configures a Junos OS-equivalent VXLAN and associated logical interface, and attempts to commit the configurations.

During the commitment of the dynamic configurations, If there is an issue with one or more of the configurations, all configurations in the transaction, even the ones that are correctly configured, remain uncommitted and are saved in a queue. All configurations in the transaction remain uncommitted and in the queue until you troubleshoot and resolve the configuration issues. After you resolve the

configuration issues, you must use the `clear ovssdb commit failures` command to remove the transaction from the queue and retry committing the configurations.

**NOTE:** While an erroneous transaction exists in the queue, the Juniper Networks switch cannot commit the dynamic configurations of additional VXLANs and their associated logical interfaces. The commitment of these VXLANs and logical interfaces remain in a pending state until all VXLAN and logical interface configurations in the erroneous transaction are resolved and successfully committed.

Issues that can cause commitment errors include but are not limited to the detection of the same VXLAN name or VXLAN network identifier (VNI) in a dynamically configured VXLAN and in a VXLAN that was previously configured using the Junos OS CLI.

To monitor for issues with dynamically configured OVSSDB-managed VXLANs and their associated interfaces, we recommend checking for system log messages and traceoptions files for OVSSDB.

Options

- none**                      Display information about an erroneous transaction.
- transaction-id***        Display information about the transaction with the specified numerical ID.

Required Privilege Level

admin

Output Fields

Table 13 on page 105 lists the output fields for the `show ovssdb commit failures` command. Output fields are listed in the approximate order in which they appear.

Table 13: show ovssdb commit failures Output Fields

Field Name	Field Description
Txn ID	ID assigned to a transaction by the Juniper Networks switch.



**Table 13: show ovsdb commit failures Output Fields (Continued)**

Field Name	Field Description
Logical-switch	Name of the VXLAN that the Juniper Networks switch dynamically configured but was unable to commit the configuration of.
Port	Name of an OVSDb-managed physical interface that is associated with the VXLAN.
VLAN ID	ID that is assigned to the VXLAN.

## Sample Output

### show ovsdb commit failures

```

user@host> show ovsdb commit failures
Txn ID      Logical-switch      Port      VLAN ID
1           28805c1d-0122-495d-85df-19abd647d772
1                                     xe-0/0/5:0      1016
1           9acc24b3-7b0a-4c2e-b572-3370c3e1acff
1                                     xe-0/0/5:0      1017
...

```

### show ovsdb commit failure (Specific Transaction)

```

user@host> how ovsdb commit failures 1
Txn ID      Logical-switch      Port      VLAN ID
1           28805c1d-0122-495d-85df-19abd647d772
1                                     xe-0/0/5:0      1016
1           9acc24b3-7b0a-4c2e-b572-3370c3e1acff
1                                     xe-0/0/5:0      1017
...

```

## Release Information

Command introduced in Junos OS Release 14.1X53-D26.

RELATED DOCUMENTATION

<i>Understanding Dynamically Configured VXLANs in an OVSDB Environment</i>
<i>traceoptions (OVSDB)</i>

show ovsdb controller

IN THIS SECTION

- Syntax | 107
- Description | 107
- Options | 107
- Required Privilege Level | 108
- Output Fields | 108
- Sample Output | 108
- Release Information | 109

Syntax

```
show ovsdb controller
<address ip-address>
```

Description

Display information and connection status for software-defined networking (SDN) controllers to which the Juniper Networks device is connected.

Options

<b>none</b>	Display information about all SDN controllers to which the Juniper Networks device is connected.
<b>address <i>ip-address</i></b>	Display information about the SDN controller at the specified IP address.

## Required Privilege Level

admin

## Output Fields

Table 14 on page 108 lists the output fields for the `show ovssdb controller` command. Output fields are listed in the approximate order in which they appear.

**Table 14: show ovssdb controller Output Fields**

Field Name	Field Description
Controller IP address	IP address of the SDN controller to which the Juniper Networks device is connected.
Controller protocol	Protocol used by the Juniper Networks device to initiate the connection.
Controller port	Port to which the Juniper Networks device is connected.
Controller connection	State of the connection with the SDN controller.
Controller seconds-since-connect	Number of seconds since the connection with the SDN controller was established.
Controller seconds-since-disconnect	Number of seconds since the connection with the SDN controller was dropped.
Controller connection status	Status of the connection with the SDN controller.

## Sample Output

### `show ovssdb controller`

```
user@host> show ovssdb controller
VTEP controller information:
Controller IP address: 10.168.66.189
```

```

Controller protocol: ssl
Controller port: 6632
Controller connection: up
Controller seconds-since-connect: 56290
Controller seconds-since-disconnect: 0
Controller connection status: active

```

```

Controller IP address: 10.168.181.54
Controller protocol: ssl
Controller port: 6632
Controller connection: up
Controller seconds-since-connect: 56292
Controller seconds-since-disconnect: 0
Controller connection status: active

```

```

Controller IP address: 10.168.182.45
Controller protocol: ssl
Controller port: 6632
Controller connection: up
Controller seconds-since-connect: 56292
Controller seconds-since-disconnect: 0
Controller connection status: active

```

### **show ovsdb controller address**

```

user@host> show ovsdb controller address 10.168.182.45
VTEP controller information:
Controller IP address: 10.168.182.45
Controller protocol: ssl
Controller port: 6632
Controller connection: up
Controller seconds-since-connect: 56347
Controller seconds-since-disconnect: 0
Controller connection status: active

```

### **Release Information**

Command introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

*Setting Up the OVSDb Protocol on Juniper Networks Devices that Support Manual Configuration of VXLANs*

*Setting Up OVSDb on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs*

*Understanding How to Set Up OVSDb Connections on a Juniper Networks Device*

## show ovssdb interface

### IN THIS SECTION

- [Syntax | 110](#)
- [Description | 110](#)
- [Options | 110](#)
- [Required Privilege Level | 111](#)
- [Output Fields | 111](#)
- [Sample Output | 111](#)
- [Release Information | 112](#)

## Syntax

```
show ovssdb interface
<interface-name>
```

## Description

Display information about *Open vSwitch Database (OVSDb)*-managed interfaces configured by using the interfaces *interface-name* statement in the [edit protocols ovssdb] hierarchy.

## Options

**none**                      Display information about all OVSDb-managed interfaces.

*interface-name*      Display information about the specified OVSDb-managed interface.

### Required Privilege Level

admin

### Output Fields

Table 15 on page 111 lists the output fields for the `show ovbdb interface` command. Output fields are listed in the approximate order in which they appear.

**Table 15: show ovbdb interface Output Fields**

Field Name	Field Description
Interface	Name of interface.
VLAN ID	ID of Virtual Extensible LAN (VXLAN) with which the interface is associated. <b>NOTE:</b> This field is not supported by MX Series routers or EX9200 switches.
Bridge domain or VLAN	Bridge domain or VLAN under which the VXLAN is created. <b>NOTE:</b> This field is not supported by MX Series routers or EX9200 switches.

### Sample Output

#### `show ovbdb interface`

```

user@host> show ovbdb interface
Interface          VLAN ID          Bridge-domain
ge-7/0/9.0
ge-7/0/9.1
irb.11
irb.12
irb.2
irb.3

```

```
xe-10/3/0.0
xe-10/3/0.1
```

### show ovssdb (Specific Interface)

```
user@host> show ovssdb interface ge-7/0/9.0
Interface          VLAN ID      Bridge-domain
ge-7/0/9.0
```

### Release Information

Command introduced in Junos OS Release 14.1R2.

### RELATED DOCUMENTATION

*Setting Up the OVSSDB Protocol on Juniper Networks Devices that Support Manual Configuration of VXLANs*

*Setting Up OVSSDB on Juniper Networks Devices That Support the Dynamic Configuration of VXLANs*

## show ovssdb logical-switch

### IN THIS SECTION

- [Syntax | 113](#)
- [Description | 113](#)
- [Options | 114](#)
- [Required Privilege Level | 114](#)
- [Output Fields | 114](#)
- [Sample Output | 115](#)
- [Release Information | 115](#)

Syntax

```
show ovsdb logical-switch
<logical-switch-name>
```

Description

**NOTE:** In the Open vSwitch Database (OVSDB) schema for physical devices, the logical switch table stores information about the Layer 2 broadcast domain that you configured in a VMware NSX or Contrail environment. In the NSX environment, the Layer 2 broadcast domain is known as a *logical switch*, while in the Contrail environment, the domain is known as a *virtual network*. In the context of the `show ovsdb logical-switch` command, the term *logical switch* refers to the logical switch or virtual network that was configured in the NSX or Contrail environments, respectively, and the corresponding configuration that was pushed to the OVSDB schema.

Display information about logical switches and the corresponding Virtual Extensible LANs (VXLANs), which were configured on the Juniper Networks device.

In the command output, each logical switch is identified by a universally unique identifier (UUID), which in the context of this command, is also known as a logical switch name.

The `show ovsdb logical-switch` command displays the state of the logical switch (Flags), which can be one of the following:

Created by Controller	A logical switch is configured. However, a corresponding VXLAN is not yet configured. In this state, the logical switch and corresponding VXLAN are not yet operational.
Created by L2ALD	A VXLAN is configured. However, a corresponding logical switch is not yet configured. In this state, the logical switch and corresponding VXLAN are not yet operational.
Created by both	A logical switch and a corresponding VXLAN are configured. In this state, the logical switch and corresponding VXLAN are operational.
Tunnel key mismatch	The VNIs specified in the logical switch and corresponding VXLAN configurations do not match. In this state, the logical switch and corresponding VXLAN are not yet operational.



# Options

- none** Display information about all logical switches that are present in the OVSDB schema for physical devices.
- logical-switch-name*** Display information about the specified logical switch.

## Required Privilege Level

admin

## Output Fields

Table 16 on page 114 lists the output fields for the `show ovssdb logical-switch` command. Output fields are listed in the approximate order in which they appear.

**Table 16: show ovssdb logical-switch Output Fields**

Field Name	Field Description
Logical Switch Name	UUID that is automatically generated and assigned to the logical switch. When you configure the corresponding VXLAN in the Junos OS CLI, you must specify the same UUID as the VXLAN name.
Flags	State of the logical switch. For possible states, see the Description section of this topic.
VNI	VNI that is configured for the logical switch and corresponding VXLAN.
Num of Remote MAC	The total number of remote media access control (MAC) addresses associated with the logical switch. These addresses are learned by software and hardware <i>virtual tunnel endpoints (VTEPs)</i> .
Num of Local MAC	The total number of local MAC addresses associated with the logical switch. <i>Local MAC addresses</i> are addresses learned on the local physical ports.

## Sample Output

### show ovsdb logical-switch

```
user@host> show ovsdb logical-switch
Logical switch information:
Logical Switch Name: 24a76aff-7e61-4520-a78d-3eca26ad7510
Flags: Created by both
VNI: 3
Num of Remote MAC: 13
Num of Local MAC: 12
Logical Switch Name: 9b4f880e-dac8-4612-a832-97ad9dec270f
Flags: Created by Controller
VNI: 50
Num of Remote MAC: 0
Num of Local MAC: 0
Logical Switch Name: bc0da2da-6c16-44bf-b655-442484294ded
Flags: Created by Controller
VNI: 51
Num of Remote MAC: 0
Num of Local MAC: 0
```

### show ovsdb logical-switch (Specific Logical Switch)

```
user@host> show ovsdb logical-switch 24a76aff-7e61-4520-a78d-3eca26ad7510
Logical switch information:
Logical Switch Name: 24a76aff-7e61-4520-a78d-3eca26ad7510
Flags: Created by both
VNI: 3
Num of Remote MAC: 13
Num of Local MAC: 12
```

## Release Information

Command introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

*OVSDB Schema for Physical Devices*

*Troubleshooting a Nonoperational Logical Switch and Corresponding Junos OS OVSDB-Managed VXLAN*

## show ovsdb mac

### IN THIS SECTION

- [Syntax | 116](#)
- [Description | 116](#)
- [Options | 117](#)
- [Required Privilege Level | 117](#)
- [Output Fields | 117](#)
- [Sample Output | 118](#)
- [Release Information | 121](#)

## Syntax

```
show ovsdb mac
<address mac-address>
<local>
<logical-switch logical-switch-uuid>
<multicast>
<remote>
<unicast>
```

## Description

Display media access control (MAC) addresses, as well as information about the MAC addresses, learned by a Juniper Networks device that functions as a hardware *virtual tunnel endpoint (VTEP)*. Using the *Open vSwitch Database (OVSDB)* management protocol, this hardware VTEP can learn about MAC addresses directly or from other software or hardware VTEPs. The MAC addresses learned directly by

the hardware VTEP are known as *local addresses*, while the addresses learned from other software or hardware VTEPs are known as *remote addresses*.

### Options

Use one or more of the following options to display a more specific list of MAC addresses and information about the MAC addresses. For example, to display a list of local unicast MAC addresses, you can issue the `show ovssdb mac local unicast` command.

<b>none</b>	Display all MAC addresses, which includes all local, remote, unicast, and multicast addresses associated with all logical switches.
<b>address <i>mac-address</i></b>	Display the specified MAC address.
<b>count</b>	(All Juniper Networks devices that support OVSSDB except EX9200 switches) Display the number of MAC addresses learned by the Juniper Networks device. Using this option alone, the number includes all local, remote, unicast, and multicast MAC addresses associated with all logical switches in the logical switch table of the OVSSDB schema for physical devices. You can use this option with one or more of the other options to display a more specific count of MAC addresses. For example, to display the number of local and remote unicast MAC addresses, you can issue the <code>show ovssdb mac count local remote unicast</code> command.
<b>local</b>	Display all local MAC addresses.
<b>logical-switch <i>logical-switch-uuid</i></b>	Display all MAC addresses associated with the specified logical switch in the logical switch table of the OVSSDB schema for physical devices.
<b>multicast</b>	Display all multicast MAC addresses.
<b>remote</b>	Display all remote MAC addresses.
<b>unicast</b>	Display all unicast MAC addresses.

### Required Privilege Level

admin

### Output Fields

[Table 17 on page 118](#) lists the output fields for the `show ovssdb mac` command. Output fields are listed in the approximate order in which they appear.

**Table 17: show ovssdb mac Output Fields**

Field Name	Field Description
Logical Switch Name	Universally unique identifier (UUID) of the logical switch.
MAC Address	MAC addresses of <i>virtual machines (VMs)</i> .
IP Address	IP address of VMs.  <b>NOTE:</b> If the IP addresses of VMs are not published by the SDN controller, this field displays 0.0.0.0.
Encapsulation	Encapsulation type.
VTEP Address	IP address of the hardware or software VTEP from which the MAC address was learned. Further, this VTEP can forward VM traffic to the associated host.
MAC Count	<b>NOTE:</b> This field is supported by all Juniper Networks devices that support OVSSDB except EX9200 switches.  Number of all or specified MAC addresses learned by the Juniper Networks device.

## Sample Output

### show ovssdb mac

```
user@host> show ovssdb mac
```

```
Logical Switch Name: 24a76aff-7e61-4520-a78d-3eca26ad7510
```

Mac Address	IP Address	Encapsulation	Vtep Address
02:00:00:00:03:01	0.0.0.0	Vxlan over Ipv4	10.255.18.22
02:00:00:00:03:02	0.0.0.0	Vxlan over Ipv4	10.255.18.22
02:00:00:00:03:03	0.0.0.0	Vxlan over Ipv4	10.255.18.22
02:00:00:00:03:04	0.0.0.0	Vxlan over Ipv4	10.255.18.22
02:00:00:00:03:05	0.0.0.0	Vxlan over Ipv4	10.255.18.22
04:00:00:00:03:05	0.0.0.0	Vxlan over Ipv4	10.255.18.22
06:00:00:00:03:01	0.0.0.0	Vxlan over Ipv4	10.255.18.22
06:00:00:00:03:02	0.0.0.0	Vxlan over Ipv4	10.255.18.22

06:00:00:00:03:03	0.0.0.0	Vxlan over Ipv4	10.255.18.22
06:00:00:00:03:04	0.0.0.0	Vxlan over Ipv4	10.255.18.22
06:00:00:00:03:05	0.0.0.0	Vxlan over Ipv4	10.255.18.22
40:b4:f0:06:6f:f0	0.0.0.0	Vxlan over Ipv4	10.255.18.22
ff:ff:ff:ff:ff:ff	0.0.0.0	Vxlan over Ipv4	10.100.100.1

Logical Switch Name: bf6d4fd4-f5f6-430c-8c37-4033ef1c55ab

Mac Address	IP Address	Encapsulation	Vtep Address
02:00:00:00:11:01	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:02	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:03	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:04	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.1.1.29
04:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:01	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:02	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:03	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:04	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.1.1.29
40:b4:f0:06:6f:f0	0.0.0.0	Vxlan over Ipv4	10.1.1.29
00:23:9c:5e:a7:f0	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:01	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:02	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:03	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:04	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.255.18.22
ff:ff:ff:ff:ff:ff	0.0.0.0	Vxlan over Ipv4	10.110.110.1
...			

## show ovssdb mac address

user@host> show ovssdb mac address 02:00:00:00:03:01

Mac Address	IP Address	Encapsulation	Vtep Address
02:00:00:00:03:01	0.0.0.0	Vxlan over Ipv4	10.255.18.22

## show ovsdb mac logical-switch

```
user@host> show ovsdb mac logical-switch bf6d4fd4-f5f6-430c-8c37-4033ef1c55ab
```

Logical Switch Name: bf6d4fd4-f5f6-430c-8c37-4033ef1c55ab

Mac	IP	Encapsulation	Vtep
Address	Address		Address
02:00:00:00:11:01	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:02	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:03	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:04	0.0.0.0	Vxlan over Ipv4	10.1.1.29
02:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.1.1.29
04:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:01	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:02	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:03	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:04	0.0.0.0	Vxlan over Ipv4	10.1.1.29
06:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.1.1.29
40:b4:f0:06:6f:f0	0.0.0.0	Vxlan over Ipv4	10.1.1.29
00:23:9c:5e:a7:f0	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:01	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:02	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:03	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:04	0.0.0.0	Vxlan over Ipv4	10.255.18.22
08:00:00:00:11:05	0.0.0.0	Vxlan over Ipv4	10.255.18.22
ff:ff:ff:ff:ff:ff	0.0.0.0	Vxlan over Ipv4	10.110.110.1

## show ovsdb mac local unicast

```
user@host> show ovsdb mac local unicast
```

Logical Switch Name: 24a76aff-7e61-4520-a78d-3eca26ad7510

Mac	IP	Encapsulation	Vtep
Address	Address		Address
02:00:00:00:03:01	0.0.0.0	Vxlan over Ipv4	10.255.181.72
02:00:00:00:03:02	0.0.0.0	Vxlan over Ipv4	10.255.181.72
02:00:00:00:03:03	0.0.0.0	Vxlan over Ipv4	10.255.181.72
02:00:00:00:03:04	0.0.0.0	Vxlan over Ipv4	10.255.181.72
02:00:00:00:03:05	0.0.0.0	Vxlan over Ipv4	10.255.181.72
04:00:00:00:03:05	0.0.0.0	Vxlan over Ipv4	10.255.181.72
06:00:00:00:03:01	0.0.0.0	Vxlan over Ipv4	10.255.181.72
06:00:00:00:03:02	0.0.0.0	Vxlan over Ipv4	10.255.181.72

```

06:00:00:00:03:03      0.0.0.0      Vxlan over Ipv4      10.255.181.72
06:00:00:00:03:04      0.0.0.0      Vxlan over Ipv4      10.255.181.72
06:00:00:00:03:05      0.0.0.0      Vxlan over Ipv4      10.255.181.72
40:b4:f0:06:6f:f0      0.0.0.0      Vxlan over Ipv4      10.255.181.72
...

```

## show ovssdb mac (Count of All Local, Remote, Unicast, and Multicast MAC Addresses for All Logical Switches)

```

user@host> show ovssdb mac count
MAC count: 6877

```

## Release Information

Command introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

| *OVSSDB Schema for Physical Devices*

## show ovssdb statistics interface

### IN THIS SECTION

- [Syntax | 122](#)
- [Description | 122](#)
- [Options | 122](#)
- [Required Privilege Level | 122](#)
- [Output Fields | 122](#)
- [Sample Output | 123](#)
- [Release Information | 123](#)



# Syntax

```
show ovsdb statistics interface
<interface-name>
```

# Description

Display statistics for *Open vSwitch Database (OVSDB)*-managed interfaces configured by using the interfaces *interface-name* statement in the [edit protocols ovsdb] hierarchy.

When an interface is configured as OVSDB-managed, the collection of statistics for that interface begins, and the statistics displayed at any given time reflects the data collected up to that point.

# Options

- none**                      Display statistics for all configured OVSDB-managed interfaces.
- interface-name***              Display statistics for the specified interface.

# Required Privilege Level

admin

# Output Fields

[Table 18 on page 122](#) lists the output fields for the show ovsdb statistics interface command. Output fields are listed in the approximate order in which they appear.

**Table 18: show ovsdb statistics interface Output Fields**

Field Name	Field Description
Num of rx pkts	Number of packets received by the interface.
Num of tx pkts	Number of packets sent by the interface.
Num of rx bytes	Number of bytes received by the interface.

**Table 18: show ovssdb statistics interface Output Fields (Continued)**

Field Name	Field Description
Num of tx bytes	Number of bytes sent by the interface.

## Sample Output

### show ovssdb statistics interface

```

user@host> show ovssdb statistics interface
Interface Name: ge-7/0/9.0
Num of rx pkts: 945           Num of tx pkts: 113280890
Num of rx bytes: 56700       Num of tx bytes: 57531319540
Interface Name: ge-7/0/10.0
Num of rx pkts: 459          Num of tx pkts: 473840856
Num of rx bytes: 84747       Num of tx bytes: 45830738532
Interface Name: ge-7/0/11.0
Num of rx pkts: 305          Num of tx pkts: 367483456
Num of rx bytes: 98974       Num of tx bytes: 33495468092

```

### show ovssdb statistics interface (Specific Interface)

```

user@host> show ovssdb statistics interface ge-7/0/9.0
Interface Name: ge-7/0/9.0
Num of rx pkts: 945           Num of tx pkts: 113280890
Num of rx bytes: 56700       Num of tx bytes: 57531319540

```

## Release Information

Command introduced in Junos OS Release 14.1R2.

## RELATED DOCUMENTATION

| *interfaces*

## show ovsdb virtual-tunnel-end-point

### IN THIS SECTION

- [Syntax | 124](#)
- [Description | 124](#)
- [Options | 124](#)
- [Required Privilege Level | 125](#)
- [Output Fields | 125](#)
- [Sample Output | 125](#)
- [Release Information | 126](#)

### Syntax

```
show ovsdb virtual-tunnel-end-point  
address <ip-address>  
encapsulation <encapsulation-type>
```

### Description

Display information about the following entities that the Juniper Networks device has learned:

- Other Juniper Networks devices that function as hardware *virtual tunnel endpoints (VTEPs)*
- Software VTEPs
- Service nodes
- Top-of-rack service nodes (TSNs)

### Options

<b>none</b>	Display information about all VTEPs, service nodes, and TSNs that the Juniper Networks device has learned.
<b>address</b> <i>ip-address</i>	Display information about the entity with the specified IP address.

**encapsulation**                      Display information about all entities with the specified encapsulation type.  
**encapsulation-type**

## Required Privilege Level

admin

## Output Fields

Table 19 on page 125 lists the output fields for the `show ovssdb virtual-tunnel-end-point` command. Output fields are listed in the approximate order in which they appear.

**Table 19: show ovssdb virtual-tunnel-end-point Output Fields**

Field Name	Field Description
Encapsulation	Encapsulation type of entity.
IP Address	IP address of entity.
Num of MACs	Number of media access control (MAC) addresses learned by the entity.

## Sample Output

### show ovssdb virtual-tunnel-end-point

```
user@host> show ovssdb virtual-tunnel-end-point
```

Encapsulation	Ip Address	Num of MAC's
VXLAN over IPv4	10.255.181.43	24
VXLAN over IPv4	10.255.181.50	12
VXLAN over IPv4	10.255.181.72	24

### show ovssdb virtual-tunnel-end-point address (Specific Address)

```
user@host> show ovssdb virtual-tunnel-end-point address 10.255.181.43
```

Encapsulation	Ip Address	Num of MAC's
VXLAN over IPv4	10.255.181.43	24

### **show ovsdb virtual-tunnel-end-point encapsulation (Specific Encapsulation)**

```
user@host> show ovsdb virtual-tunnel-end-point encapsulation vxlan-over-ipv4
```

Encapsulation	Ip Address	Num of MAC's
VXLAN over IPv4	10.255.181.43	24
VXLAN over IPv4	10.255.181.50	12
VXLAN over IPv4	10.255.181.72	24

### **show ovsdb virtual-tunnel-end-point address (Specific Address) encapsulation (Specific Encapsulation)**

```
user@host> show ovsdb virtual-tunnel-end-point address 10.255.181.43 encapsulation vxlan-over-ipv4
```

Encapsulation	Ip Address	Num of MAC's
VXLAN over IPv4	10.255.181.43	24

## **Release Information**

Command introduced in Junos OS Release 14.1R2.

## CHAPTER 6

# Monitoring VXLAN

**IN THIS CHAPTER**

- [Monitoring a Remote VTEP Interface | 127](#)
- [Understanding Overlay ping and traceroute Packet Support | 129](#)
- [Example: Troubleshooting a VXLAN Overlay Network By Using Overlay Ping and Traceroute on QFX Series Switches | 133](#)
- [ping overlay | 148](#)
- [show bridge mac-table | 155](#)
- [show vpls mac-table | 163](#)
- [traceroute overlay | 170](#)
- [Verifying VXLAN Reachability | 176](#)
- [Verifying That a Local VXLAN VTEP Is Configured Correctly | 177](#)
- [Verifying MAC Learning from a Remote VTEP | 178](#)

## Monitoring a Remote VTEP Interface

**IN THIS SECTION**

- [Purpose | 127](#)
- [Action | 128](#)
- [Meaning | 128](#)

### Purpose

Monitor traffic details for a remote VTEP interface.

## Action

```

user@switch> show interface logical-name detail

M   Flags: Up SNMP-Traps Encapsulation: ENET2
      VXLAN Endpoint Type: Remote, VXLAN Endpoint Address: 10.1.1.2, L2 Routing Instance: default-
switch, L3 Routing Instance: default
      Traffic statistics:
        Input bytes   :          228851738624
        Output bytes  :                   0
        Input packets :          714162415
        Output packets:                   0
      Local statistics:
        Input bytes   :                   0
        Output bytes  :                   0
        Input packets :                   0
        Output packets:                   0
      Transit statistics:
        Input bytes   :          228851738624          0 bps
        Output bytes  :                   0          0 bps
        Input packets :          714162415          0 pps
        Output packets:                   0          0 pps
      Protocol eth-switch, MTU: 1600, Generation: 277, Route table: 5

```

## Meaning

The output shows traffic details for the remote VTEP interface. To get this information, you must supply the logical name of the remote VTEP interface (vtep.12345 in the above output), which you can learn by using the `show ethernet-switching table` command.

## RELATED DOCUMENTATION

*Understanding VXLANs*

*Manually Configuring VXLANs on QFX Series and EX4600 Switches*

*Examples: Manually Configuring VXLANs on QFX Series and EX4600 Switches*

## Understanding Overlay ping and traceroute Packet Support

### IN THIS SECTION

- [Overlay ping and traceroute Functionality | 130](#)
- [Overlay OAM Packet Format for UDP Payloads | 130](#)

In a virtualized overlay network, existing ping and traceroute mechanisms do not provide enough information to determine whether or not connectivity is established throughout the network. The existing ping and traceroute commands can only verify the basic connectivity between two endpoints in the underlying physical network, but not in the overlay network. For example, you can issue the existing ping command on a Juniper Networks device that functions as a virtual tunnel endpoint (VTEP) to another Juniper Networks device that also functions as a VTEP in a Virtual Extensible LAN (VXLAN) overlay. In this situation, the ping output might indicate that the connection between the source and destination VTEPs is up and running despite the fact that one of the endpoints (physical servers upon which applications directly run) is not reachable.

Starting with Junos OS Release 14.1X53-D30 for QFX5100 switches, Release 16.1 for EX9200 switches, and Release 16.2 for MX Series routers, overlay ping and traceroute are introduced as troubleshooting tools for overlay networks.

For ping and traceroute mechanisms to work in overlay networks, the ping and traceroute packets, also referred to collectively as Operations, Administration, and Management (OAM) packets, must be encapsulated with the same VXLAN UDP headers (outer headers) as the data packets forwarded over the overlay segment. This implementation ensures that transit nodes forward the OAM packets in the same way as a data packet for that particular overlay segment.

If any connectivity issues arise for a particular data flow, the overlay OAM packet corresponding to the flow would experience the same connectivity issues as the data packet for that flow.

When using ping overlay and traceroute overlay, keep the following in mind:

- The only tunnel type supported is VXLAN tunnels.
- The VTEPs in the overlay network that send and receive the overlay ping packets must be Juniper Networks devices that support overlay ping and traceroute.



# Overlay ping and traceroute Functionality

Overlay ping and traceroute packets are sent as User Datagram Protocol (UDP) echo requests and replies and are encapsulated in the VXLAN header. VTEPs, which initiate and terminate overlay tunnels, send and receive overlay OAM packets. Overlay ping and traceroute are supported only in VXLAN overlay networks in which the sending and receiving VTEPs are both Juniper Networks devices.

The overlay ping functionality validates both the data plane and the MAC address and IP address of the VTEPs. This additional validation is different from the more commonly known IP ping functionality where the actual destination replies to the echo request without the overlay segment context.

While tracing a route in a VXLAN overlay network, Juniper Networks devices that are along the route that support overlay traceroute additionally provide a timestamp. Third-party devices and Juniper Networks devices that do not support overlay traceroute do not provide this timestamp.

## Overlay OAM Packet Format for UDP Payloads

The format of overlay OAM packets depends on the type of payload that is carried in the tunnel. In the case of VXLAN tunnels, the inner packet is a Layer 2 packet.

**NOTE:** Only Layer 2 UDP payloads are supported.

Figure 4 on page 130 shows complete headers on a VXLAN-encapsulated overlay OAM packet.

**Figure 4: VXLAN-Encapsulated Overlay OAM Packet**



- Outer Ethernet header—Contains the source MAC (SMAC) and destination MAC (DMAC) addresses of directly connected nodes in the physical network. These addresses change at every hop.
- Outer IP header—Contains the source and destination IP addresses of the Juniper Networks devices that function as the VTEPs that initiate and terminate the tunnel.
- Outer UDP header—Contains the source port associated with the flow entropy and destination port. The source port is an internally calculated hash value. The destination port is the standard UDP port (4789) used for VXLAN.
- VXLAN header—Contains the VXLAN Network Identifier (VNI) or the segment ID of the VXLAN, and new router alert (RA) flag bits.

- Inner Ethernet header—Contains a control MAC address (00-00-5E-90-xx-xx) for both the SMAC and DMAC. This address is not forwarded out of the VTEP. Alternatively, the SMAC can be set to a non-control MAC address. However, if a non-control MAC address is used, the VTEP must not learn the SMAC from the overlay OAM packets.
- Inner IP header—Contains the source IP address that can be set to the IP address of the endpoint or source VTEP. The destination IP address can be set to the 127/8 address, which ensures that the overlay OAM packet is not forwarded out of the ports of the Juniper Networks device that is configured as a VTEP.
- Inner UDP header—Contains a new reserved value used in the destination port field in the inner UDP header. This value identifies the incoming UDP packet as an overlay OAM packet.
- Inner UDP payload—Contains all of the overlay OAM-specific message format and type, length, and value (TLV) definitions.

Starting in Junos OS Release 19.3R1, you can use the `ping overlay` and `traceroute overlay` commands to verify connectivity and detect fault in a static VxLAN tunnel with multiple routing instances. The ping and traceroute packets created for the `ping overlay` and `traceroute overlay` commands follow the same underlay network path as the data packets. This allow you to verify the connectivity between two VTEPs in the overlay VxLAN tunnel. The devices that are configured as the source and destination VTEP must both be running a Junos OS release that supports multiple routing instance, but the transit devices do not.

## Release History Table

Release	Description
19.3R1	Starting in Junos OS Release 19.3R1, you can use the ping overlay and traceroute overlay commands to verify connectivity and detect fault in a static VxLAN tunnel with multiple routing instances.
14.1X53-D30	Starting with Junos OS Release 14.1X53-D30 for QFX5100 switches, Release 16.1 for EX9200 switches, and Release 16.2 for MX Series routers, overlay ping and traceroute are introduced as troubleshooting tools for overlay networks.

## RELATED DOCUMENTATION

*Example: Troubleshooting a VXLAN Overlay Network By Using Overlay Ping and Traceroute on QFX Series Switches*

*ping overlay*

*traceroute overlay*

## Example: Troubleshooting a VXLAN Overlay Network By Using Overlay Ping and Traceroute on QFX Series Switches

### IN THIS SECTION

- [Requirements | 134](#)
- [Overview and Topology | 134](#)
- [Verification | 138](#)

In a Virtual Extensible LAN (VXLAN) overlay network, the existing ping and traceroute commands can verify the basic connectivity between two Juniper Networks devices that function as virtual tunnel endpoints (VTEPs) in the underlying physical network. However, in between the two VTEPs, there could be multiple routes through intermediary devices to the same destinations, and the ping and traceroute packets might successfully reach their destinations, while a connectivity issue exists in another route along which the data packets are typically forwarded.

With the introduction of the `overlay` parameter and other options in Junos OS Release 14.1X53-D30 for QFX5100 switches, you can use the `ping` and `traceroute` commands to troubleshoot a VXLAN overlay network.

For ping and traceroute mechanisms to work in a VXLAN overlay network, the ping and traceroute packets, also referred to as Operations, Administration, and Management (OAM) packets, must be encapsulated with the same VXLAN UDP headers (outer headers) as the data packets forwarded over the VXLAN segment with possible connectivity issues. If any connectivity issues arise, the overlay OAM packet would experience the same issues as the data packet.

This example shows how to use overlay ping and traceroute on a VTEP to verify the following in a VXLAN overlay network:

- Scenario 1—Verify that a particular VXLAN is configured on another VTEP.
- Scenario 2—Verify that the MAC address of a particular endpoint is associated with a VXLAN on another VTEP.
- Scenario 3—Verify that no issues exist in a particular data flow between sending and receiving endpoints.

**NOTE:** When issuing the `ping overlay` and `traceroute overlay` commands, the source VTEP on which you issue the command and the destination VTEP that receives the ping or traceroute packet must be Juniper Networks devices that support overlay ping and traceroute.

## Requirements

This example uses the following hardware and software components:

- Three physical (bare-metal) servers on which applications directly run.
- Two QFX5100 switches running Junos OS Release 14.1X53-D30 or later software. These switches function as VTEPs.
- Two Layer 3 routers, which can be Juniper Networks routers or routers provided by another vendor.


Before issuing the `ping overlay` and `traceroute overlay` commands, gather the information needed for each parameter—for example, IP addresses or MAC addresses—used for a particular scenario. See [Table 20 on page 136](#) to determine which parameters are used for each scenario.

## Overview and Topology

The VXLAN overlay network topology shown in [Figure 5 on page 135](#) includes physical servers A, B, and C on which applications directly run. The applications on physical servers A and B need to communicate with the applications on physical server C. These servers are on the same subnet, so the communication

between the applications occurs at the Layer 2 level, and VXLAN encapsulation or tunnels are used to transport their data packets over a Layer 3 network.

**Figure 5: Using Overlay Ping and Traceroute to Troubleshoot a VXLAN Overlay Network**

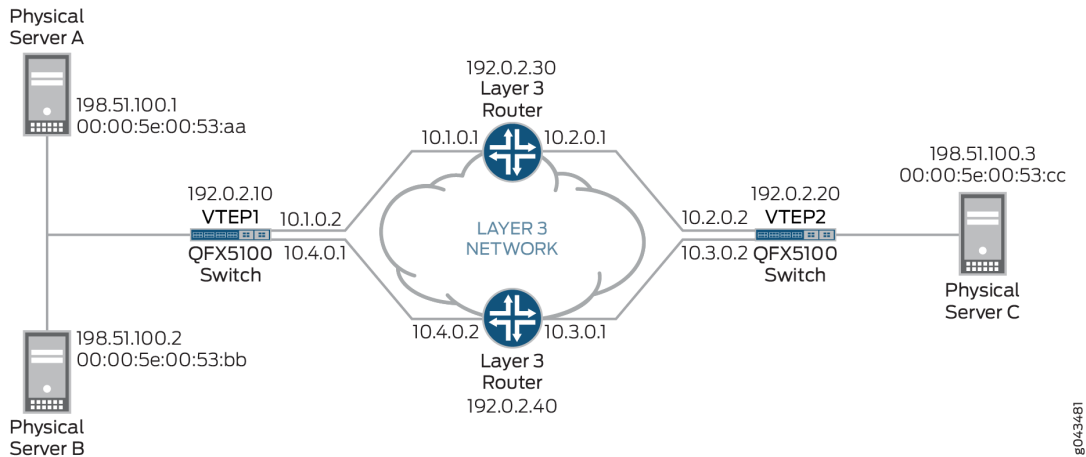

In this topology, there are two QFX5100 switches that function as VTEPs. VTEP1 initiates and terminates VXLAN tunnels for physical servers A and B, and VTEP2 does the same for physical server C. VTEP1 and VTEP2 are in VXLAN 100.

A data packet sent from physical server A is typically routed to the Layer 3 router with the IP address of 192.0.2.30 to reach physical server C.

In this VXLAN overlay network topology, a communication issue arises between physical servers A and C. To troubleshoot the issue with this data flow, you can initiate the ping overlay and traceroute overlay commands on VTEP1 (the source VTEP or tunnel-src) and specify that VTEP2 is the destination VTEP or tunnel-dst.

The ping overlay and traceroute overlay commands include several parameters. [Table 20 on page 136](#) explains the purpose and provides a value for each of the parameters used in scenarios 1, 2, and 3.

[Table 20 on page 136](#) does not include all available ping overlay and traceroute overlay parameters. This example uses the default values of these omitted parameters.

**Table 20: Ping and Traceroute Overlay Parameter Values For Scenarios 1, 2, and 3**

ping overlay and traceroute overlay Parameters	Description	Scenario to Which Parameter Applies	Value
tunnel-type	Identifies type of tunnel that you are troubleshooting.	All	vxlan
vni	VXLAN network identifier (VNI) of VXLAN used in this example.	All	100
tunnel-src	IP address of VTEP1, on which you initiate overlay ping or traceroute.	All	192.0.2.10
tunnel-dst	IP address of VTEP2, which receives the overlay ping or traceroute packets.	All	192.0.2.20
mac	MAC address of physical server C, which is the destination endpoint.	Scenarios 2 and 3 only	00:00:5E:00:53:cc
count	Number of overlay ping requests that VTEP1 sends.  <b>NOTE:</b> The count parameter does not apply to overlay traceroute.	All	5
hash-source-mac	MAC address of physical server A, which is the source endpoint.	Scenario 3 only	00:00:5E:00:53:aa

**Table 20: Ping and Traceroute Overlay Parameter Values For Scenarios 1, 2, and 3 (Continued)**

ping overlay and traceroute overlay Parameters	Description	Scenario to Which Parameter Applies	Value
hash-destination-mac	MAC address of physical server C, which is the destination endpoint.  <b>NOTE:</b> When specifying this parameter for scenario 3, the MAC address must be the same MAC address as specified for the mac parameter.	Scenario 3 only	00:00:5E:00:53:cc
hash-source-address	IP address of physical server A.	Scenario 3 only	198.51.100.1
hash-destination-address	IP address of physical server C.	Scenario 3 only	198.51.100.3
hash-vlan	VLAN ID of source endpoint.  <b>NOTE:</b> If the source endpoint is not a member of a VLAN, you do not need to use this parameter.	Scenario 3 only	150
hash-input-interface	VTEP1 interface on which data flow originates.	Scenario 3 only	xe-0/0/2
hash-protocol	A value for the protocol used in the data flow.	Scenario 3 only	17
hash-source-port	A value for the outer TCP/UDP source port.	Scenario 3 only	4456



**Table 20: Ping and Traceroute Overlay Parameter Values For Scenarios 1, 2, and 3 (Continued)**

ping overlay and traceroute overlay Parameters	Description	Scenario to Which Parameter Applies	Value
hash-destination-port	A value for the outer UDP destination port.	Scenario 3 only	4540

Table 20 on page 136 includes several hash parameters, which are used for scenario 3. For each of these parameters, you must specify a value associated with the data flow that you are troubleshooting. Based on the values that you specify, the system calculates a VXLAN UDP header source port hash, which is included in the VXLAN UDP header of the overlay ping and traceroute packets. Including the calculated hash in the VXLAN UDP header enables the overlay ping and traceroute packets to emulate data packets in the flow that you are troubleshooting.

**BEST PRACTICE:** When using the hash parameters, we recommend that you specify a value for each parameter. The exception to this guideline is the hash-vlan parameter, which you do not have to use if the source endpoint is not a member of a VLAN. This practice ensures that the overlay ping and traceroute processes are successful and that the output for each command is accurate. If you do not specify a value for one or more of the hash parameters, the system sends an OAM request that might include incorrect hash values and generates a warning message.

## Verification

### IN THIS SECTION

- Scenario 1: Verifying That VXLAN 100 Is Configured on VTEP2 | 139
- Scenario 2: Verifying That the MAC Address of the Destination Endpoint Is on VTEP2 | 142
- Scenario 3: Verifying a Data Flow | 145

This section includes the following verification tasks:

## Scenario 1: Verifying That VXLAN 100 Is Configured on VTEP2

### Purpose

Verify that a VXLAN with the VNI of 100 is configured on VTEP2. You can use either overlay ping or traceroute to perform this verification.

### Action

#### Overlay Ping

On VTEP1, initiate an overlay ping:

```
user@switch> ping overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst 192.0.2.20
count 5
ping-overlay protocol vxlan

    vni 100
    tunnel src ip 192.0.2.10
    tunnel dst ip 192.0.2.20
    mac address 00:00:00:00:00:00
    count 5
    ttl 255

    WARNING: following hash-parameters are missing -
        hash computation may not succeed

        end-host smac
        end-host dmac
        end-host src ip
        end-host dst ip
        end-host vlan
        end-host input interface
        end-host protocol
        end-host l4-src-port
        end-host l4-dst-port

Request for seq 1, to 192.0.2.20, at 09-24 22:03:16 PDT.033 msec

Response for seq 1, from 192.0.2.20, at 09-24 22:03:16 PDT.036 msec, rtt 10 msec

Overlay-segment not present at RVTEP 192.0.2.20
```

Request for seq 2, to 192.0.2.20, at 09-24 22:03:16 PDT.044 msecs

Response for seq 2, from 192.0.2.20, at 09-24 22:03:16 PDT.046 msecs, rtt 10 msecs

Overlay-segment not present at RVTEP 192.0.2.20

Request for seq 3, to 192.0.2.20, at 09-24 22:03:16 PDT.054 msecs

Response for seq 3, from 192.0.2.20, at 09-24 22:03:16 PDT.057 msecs, rtt 10 msecs

Overlay-segment not present at RVTEP 192.0.2.20

Request for seq 4, to 192.0.2.20, at 09-24 22:03:16 PDT.065 msecs

Response for seq 4, from 192.0.2.20, at 09-24 22:03:16 PDT.069 msecs, rtt 10 msecs

Overlay-segment not present at RVTEP 192.0.2.20

Request for seq 5, to 192.0.2.20, at 09-24 22:03:16 PDT.076 msecs

Response for seq 5, from 192.0.2.20, at 09-24 22:03:16 PDT.079 msecs, rtt 10 msecs

Overlay-segment not present at RVTEP 192.0.2.20

## Overlay Traceroute

On VTEP1, initiate an overlay traceroute:

```
user@switch> traceroute overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst
192.0.2.20
traceroute-overlay protocol vxlan

    vni 100
    tunnel src ip 192.0.2.10
    tunnel dst ip 192.0.2.20
    mac address 00:00:00:00:00:00
    ttl 255
```

WARNING: following hash-parameters are missing -  
hash computation may not succeed

end-host smac  
end-host dmac  
end-host src ip  
end-host dst ip  
end-host vlan  
end-host input interface  
end-host protocol  
end-host l4-src-port  
end-host l4-dst-port

t1l	Address	Sender Timestamp	Receiver Timestamp	Response Time
1	10.1.0.1	09-25 00:51:10 PDT.599 msec	*	10 msec
2	192.0.2.20	09-25 00:51:10 PDT.621 msec	09-25 00:51:10 PDT.635 msec	21 msec

Overlay-segment not present at RVTEP 192.0.2.20

## Meaning

The sample overlay ping output indicates the following:

- VTEP1 sent five ping requests to VTEP2, and VTEP2 responded to each request.
- VTEP2 indicated that the VNI of 100 is not configured (Overlay-segment not present at RVTEP 192.0.2.20) and included this information in its response to VTEP1.

The sample overlay traceroute output indicates the following:

- Upon receiving an overlay traceroute packet with a time-to-live (TTL) value of 1 hop, the Layer 3 router responds to VTEP1.
- Upon receiving an overlay traceroute packet with a TTL value of 2 hops, VTEP2 responds to VTEP1.
- VTEP2 indicated that the VNI of 100 is not configured (Overlay-segment not present at RVTEP 192.0.2.20) and included this information in its response to VTEP1.

**NOTE:** The asterisk (\*) in the Receiver Timestamp column of the overlay traceroute output indicates that the Layer 3 router that received the overlay traceroute packet is not a Juniper Networks device or is a Juniper Networks device that does not support overlay traceroute.

Given that the output of both overlay ping and traceroute indicates that VXLAN 100 is not present, check for this configuration on VTEP2. If you must configure a VNI of 100 on VTEP2, use the `vni` configuration statement at the `[edit vlans vlan-id vxlan]` hierarchy level, and reissue the `ping overlay` or `traceroute overlay` command to verify that VXLAN 100 is now recognized.

## Scenario 2: Verifying That the MAC Address of the Destination Endpoint Is on VTEP2

### Purpose

Verify that the MAC address (00:00:5E:00:53:cc) of physical server C, which is the destination endpoint, is in the forwarding table of VTEP2. You can use either overlay ping or traceroute to perform this verification.

### Action

#### Overlay Ping

On VTEP1, initiate an overlay ping:

```
user@switch> ping overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst 192.0.2.20
mac 00:00:5E:00:53:cc count 5
ping-overlay protocol vxlan

    vni 100
    tunnel src ip 192.0.2.10
    tunnel dst ip 192.0.2.20
    mac address 00:00:5E:00:53:cc
    count 5
    ttl 255

    WARNING: following hash-parameters are missing -
        hash computation may not succeed

        end-host smac
        end-host dmac
        end-host src ip
        end-host dst ip
        end-host vlan
        end-host input interface
        end-host protocol
        end-host l4-src-port
        end-host l4-dst-port
```

Request for seq 1, to 192.0.2.20, at 09-24 23:53:54 PDT.089 msec

Response for seq 1, from 192.0.2.20, at 09-24 23:53:54 PDT.089 msec, rtt 6 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Not Present

Request for seq 2, to 192.0.2.20, at 09-24 23:53:54 PDT.096 msec

Response for seq 2, from 192.0.2.20, at 09-24 23:53:54 PDT.100 msec, rtt 10 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Not Present

Request for seq 3, to 192.0.2.20, at 09-24 23:53:54 PDT.107 msec

Response for seq 3, from 192.0.2.20, at 09-24 23:53:54 PDT.111 msec, rtt 10 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Not Present

Request for seq 4, to 192.0.2.20, at 09-24 23:53:54 PDT.118 msec

Response for seq 4, from 192.0.2.20, at 09-24 23:53:54 PDT.122 msec, rtt 11 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Not Present

Request for seq 5, to 192.0.2.20, at 09-24 23:53:54 PDT.129 msec

Response for seq 5, from 192.0.2.20, at 09-24 23:53:54 PDT.133 msec, rtt 10 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Not Present

### Overlay Traceroute

On VTEP1, initiate an overlay traceroute:

```

user@switch> traceroute overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst
192.0.2.20 mac 00:00:5E:00:53:cc
traceroute-overlay protocol vxlan

vni 100
tunnel src ip 192.0.2.10
tunnel dst ip 192.0.2.20
mac address 00:00:5E:00:53:cc
ttl 255

WARNING: following hash-parameters are missing -
hash computation may not succeed

end-host smac
end-host dmac
end-host src ip
end-host dst ip
end-host vlan
end-host input interface
end-host protocol
end-host l4-src-port
end-host l4-dst-port

ttl  Address      Sender Timestamp          Receiver Timestamp          Response Time
1   10.1.0.1    09-25 00:56:17 PDT.663 msecs          *                          10 msecs
2   192.0.2.20  09-25 00:56:17 PDT.684 msecs  09-25 00:56:17 PDT.689 msecs  11 msecs

Overlay-segment present at RVTEP 192.0.2.20

End-System Not Present

```

### Meaning

The sample overlay ping output indicates the following:

- VTEP1 sent five ping requests to VTEP2, and VTEP2 responded to each request.
- VTEP2 verified that the VNI of 100 is configured (Overlay-segment present at RVTEP 192.0.2.20) but that the MAC address of physical server C is not in the forwarding table (End-System Not Present). VTEP2 included this information in its response to VTEP1.

The sample overlay traceroute output indicates the following:

- Upon receiving an overlay traceroute packet with a TTL value of 1 hop, the Layer 3 router responds to VTEP1.
- Upon receiving an overlay traceroute packet with a TTL value of 2 hops, VTEP2 responds to VTEP1.
- VTEP2 verified that the VNI of 100 is configured (Overlay-segment present at RVTEP 192.0.2.20) but that the MAC address of physical server C is not in the forwarding table (End-System Not Present). VTEP2 included this information in its response to VTEP1.

**NOTE:** The asterisk (\*) in the Receiver Timestamp column of the overlay traceroute output indicates that the Layer 3 router that received the overlay traceroute packet is not a Juniper Networks device or is a Juniper Networks device that does not support overlay traceroute.

Given that the output of both overlay ping and traceroute indicates that the MAC address of physical server C is not known by VTEP2, you must further investigate to determine why this MAC address is not in the forwarding table of VTEP2.

### Scenario 3: Verifying a Data Flow

#### Purpose

Verify that there are no issues that might impede the flow of data from physical server A to physical server C. The networking devices that support this flow include VTEP1, the Layer 3 router with the IP address of 192.0.2.30, and VTEP2 (see [Figure 5 on page 135](#)).

Initially, use overlay ping, and if the overlay ping results indicate an issue, then use overlay traceroute to determine in which segment of the path the issue exists.

With both overlay ping and traceroute, use the hash parameters to specify information about the devices in this data flow so that the system can calculate a VXLAN UDP header source port hash, which is included in the VXLAN UDP header of the overlay ping and traceroute packets. With the calculated hash included in the VXLAN UDP header, the overlay ping and traceroute packets can emulate data packets in this flow, which should produce more accurate ping and traceroute results.



**BEST PRACTICE:** When using the hash parameters, we recommend specifying a value for each parameter. The exception to this guideline is the hash-vlan parameter, which you do not have to use if the source endpoint is not a member of a VLAN. This practice ensures that the overlay ping and traceroute processes are successful and that the output for each command is accurate. If you do not specify a value for one or more of the hash parameters, the system sends an OAM request that might include incorrect hash values and generates a warning message.

## Action

### Overlay Ping

On VTEP1, initiate an overlay ping:

```
user@switch> ping overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst 192.0.2.20
mac 00:00:5E:00:53:cc count 5 hash-source-mac 00:00:5E:00:53:aa hash-destination-mac
00:00:5E:00:53:cc hash-source-address 198.51.100.1 hash-destination-address 198.51.100.3 hash-
vlan 150 hash-input-interface xe-0/0/2 hash-protocol 17 hash-source-port 4456 hash-destination-
port 4540
ping-overlay protocol vxlan
```

```
vni 100
tunnel src ip 192.0.2.10
tunnel dst ip 192.0.2.20
mac address 00:00:5E:00:53:cc
count 5
ttl 255
```

hash-parameters:

```
input-ifd-idx 653
end-host smac 00:00:5E:00:53:aa
end-host dmac 00:00:5E:00:53:cc
end-host src ip 198.51.100.1
end-host dst ip 198.51.100.3
end-host protocol 17
end-host l4-src-port 4456
end-host l4-dst-port 4540
end-host vlan 150
```

Request for seq 1, to 192.0.2.20, at 09-24 19:15:33 PDT.352 msec

```
Request for seq 2, to 192.0.2.20, at 09-24 19:15:33 PDT.363 msecs

Request for seq 3, to 192.0.2.20, at 09-24 19:15:33 PDT.374 msecs

Request for seq 4, to 192.0.2.20, at 09-24 19:15:33 PDT.385 msecs

Request for seq 5, to 192.0.2.20, at 09-24 19:15:33 PDT.396 msecs
```

Overlay Traceroute

If needed, on VTEP1, initiate an overlay traceroute:

```
user@switch> traceroute overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst
192.0.2.20 mac 00:00:5E:00:53:cc hash-source-mac 00:00:5E:00:53:aa hash-destination-mac
00:00:5E:00:53:cc hash-source-address 198.51.100.1 hash-destination-address 198.51.100.3 hash-
vlan 150 hash-input-interface xe-0/0/2 hash-protocol 17 hash-source-port 4456 hash-destination-
port 4540
traceroute-overlay protocol vxlan

vni 100
tunnel src ip 192.0.2.10
tunnel dst ip 192.0.2.20
mac address 00:00:5E:00:53:cc
ttl 255

hash-parameters:
    input-ifd-idx 653
    end-host smac 00:00:5E:00:53:aa
    end-host dmac 00:00:5E:00:53:cc
    end-host src ip 198.51.100.1
    end-host dst ip 198.51.100.3
    end-host protocol 17
    end-host l4-src-port 4456
    end-host l4-dst-port 4540
    end-host vlan 150

ttl  Address      Sender Timestamp              Receiver Timestamp            Response Time
1   10.1.0.1      09-25 00:56:17 PDT.663 msecs          *                             10 msecs
```

## Meaning

The sample overlay ping output indicates that VTEP1 sent five ping requests to VTEP2, but VTEP2 did not respond to any of the requests. The lack of response from VTEP2 indicates that a connectivity issue exists along the path between VTEP1 and the Layer 3 router or the path between the Layer 3 router and VTEP2.

To further troubleshoot in which path the issue lies, overlay traceroute is used. The sample overlay traceroute output indicates the following:

- Upon receiving an overlay traceroute packet with a TTL value of 1 hop, the Layer 3 router responds to VTEP1, which indicates that the path between VTEP1 and the Layer 3 router is up.
- VTEP2 does not respond to the overlay traceroute packet, which indicates that the path between the Layer 3 router and VTEP2 might be down.

**NOTE:** The asterisk (\*) in the Receiver Timestamp column of the overlay traceroute output indicates that the Layer 3 router that received the overlay traceroute packet is not a Juniper Networks device or is a Juniper Networks device that does not support overlay traceroute.

Given that the overlay traceroute output indicates that there is a connectivity issue between the Layer 3 router and VTEP2, you must further investigate this path segment to determine the source of the issue.

## RELATED DOCUMENTATION

*Understanding Overlay ping and traceroute Packet Support*

*ping overlay*

*traceroute overlay*

## ping overlay

### IN THIS SECTION

- [Syntax | 149](#)
- [Description | 149](#)
- [Options | 150](#)

- Required Privilege Level | 152
- Output Fields | 152
- Sample Output | 153
- Release Information | 154

## Syntax

```
ping overlay
<tunnel-type>
vni vni
tunnel-src ip-source-address
tunnel-dst ip-destination-address
<mac mac-address>
<count requests>
<ttl value>
<hash-source-mac source-mac-address>
<hash-destination-mac destination-mac-address>
<hash-source-address source-IP-address>
<hash-destination-address destination-IP-address>
<hash-vlan vlan-id>
<hash-input-interface input-interface>
<hash-protocol protocol-id>
<hash-source-port source-layer4-port>
<hash-destination-port destination-layer4-port>
```

## Description

Verify the presence of the Virtual Extensible LAN (VXLAN) tunnel endpoints (VTEPs), which can originate and terminate VXLAN tunnels, and service connectivity within the context of the overlay VXLAN segment. Use `ping overlay` as a fault detection tool to determine failure within an overlay VXLAN tunnel. Type **Ctrl+c** to interrupt a `ping overlay` command.

**NOTE:** The `ping overlay` command is not supported for IPv6.

**NOTE:** The `ping overlay` command is not supported when there are multiple virtual-switch routing instances.

## Options

**tunnel-type** (Optional) Specify the overlay tunnel type used in a virtualized environment such as: VXLAN, Network Virtualization using Generic Routing Encapsulation (NVGRE), MPLS over User Datagram Protocol (UDP), and MPLS over General Routing Encapsulation (GRE) tunnels.

**NOTE:** Only VXLAN overlay tunnel types are supported.

**vni *vni*** Specify the VNI of the VXLAN overlay segment.

**tunnel-src *ip-source-address*** Specify the IP address of the source entity at the end of the tunnel, such as the source VTEP.

**tunnel-dst *ip-destination-address*** Specify the IP address of the destination entity at the end of the tunnel, such as a remote VTEP.

**mac *mac-address*** (Optional) Include the physical or hardware address on the end host system you are trying to reach.

**count *requests*** (Optional) Number of ping requests to send.

For QFX and EX9200 switches, the range of values is **1** through **65,535**. The default value is **10**.

For MX Series routers, the range of values is **1** through **2,000,000,000**. The default value is **5**.

**ttl *value*** (Optional) Time-to-live (TTL) value to include in the ping request.

For QFX and EX9200 switches, the range of values is **1** through **255**. The default value is **255**.

For MX Series routers, the range of values is **0** through **255**. The default value is **255**.

**hash-source-mac *source-mac-address*** (Optional) Specify the MAC address of the source end host system.

**NOTE:** The hash parameters provide values that correspond to a particular data flow that the `ping overlay` command debugs. Based on the values that you specify, the system calculates a VXLAN UDP header source port hash, which is included in the VXLAN UDP header of the overlay ping and traceroute packets. Including the calculated hash in the VXLAN header enables the overlay ping and traceroute packets to emulate data packets in the flow that you are troubleshooting.

When using the hash parameters, we recommend that you specify a value for each parameter. The exception to this guideline is the `hash-vlan` parameter, which you do not have to use if the source endpoint is not a member of a VLAN. This practice ensures that the overlay ping and traceroute processes are successful and that the output for each command is accurate. If you do not specify a value for one or more of the hash parameters, the system sends an OAM request that might include incorrect hash values and generates a warning message.

Hash computation supports TCP and UDP protocols only.

<b>hash-destination-mac</b> <i>destination-mac-address</i>	(Optional) Specify the MAC address of the destination end host system.
<b>hash-source-address</b> <i>source-IP-address</i>	(Optional) Specify the IP address of the source end host system.
<b>hash-destination-address</b> <i>destination-IP-address</i>	(Optional) Specify the IP address of the destination end host system.
<b>hash-vlan</b> <i>vlan-id</i>	(Optional, QFX switches only) Specify the VLAN ID of the end host system.
<b>hash-input-interface</b> <i>input-interface</i>	(Optional, QFX switches only) Specify the ingress interface of the flow on the Juniper Networks device.
<b>hash-protocol</b> <i>protocol-id</i>	(Optional) Specify the TCP/UDP IP protocol ID. The range of values is <b>1</b> through <b>255</b> .
<b>hash-source-port</b> <i>source-layer4-port</i>	(Optional) Specify the Layer 4 source port. The range of values is <b>1</b> through <b>65,535</b> .
<b>hash-destination-port</b> <i>destination-layer4-port</i>	(Optional) Specify the Layer 4 destination port. The range of values is <b>1</b> through <b>65,535</b> .

## Required Privilege Level

network

## Output Fields

When you enter this command, you are provided feedback on the status of your request. An exclamation point (!) indicates that an echo reply was received. A period (.) indicates that an echo reply was not received within the timeout period. An **x** indicates that an echo reply was received with an error code. These packets are not counted in the received packets count. They are accounted for separately.

[Table 21 on page 152](#) lists the output fields for the `ping overlay` command. Output fields are listed in the approximate order in which they appear.

**Table 21: ping overlay Output Fields**

Field Name	Field Description
vni	The VNI of the VXLAN overlay segment.
tunnel src ip	The IP address of the source end of the tunnel.
tunnel dst ip	The IP address of the destination end of the tunnel.
mac address	The physical or hardware address on the end host system you are trying to reach.
count	Number of ping requests sent.
ttl	TTL value for maximum number of pings.
hash-parameters	The hash parameters provide the input-interface, source MAC address, destination MAC address, source IP address, destination IP address, and the VLAN of the two end hosts within an overlay segment. Hash parameters enable platform-specific hash computation to use as the source port in the outer UDP header.
Request/Response for seq <i>x</i> to/ from <i>address</i> at <i>timestamp</i>	Number of ping request and response counts for determining overlay segments in tunnel.

## Sample Output

### run ping overlay

```

user@host> ping overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst 192.0.2.20
mac 00:00:5E:00:53:cc count 5 hash-source-mac 00:00:5E:00:53:aa hash-destination-mac
00:00:5E:00:53:cc hash-source-address 198.51.100.1 hash-destination-address 198.51.100.3 hash-
vlan 150 hash-input-interface xe-0/0/2 hash-protocol 17 hash-source-port 4456 hash-destination-
port 4540
vni 100
    tunnel src ip 192.0.2.10
    tunnel dst ip 192.0.2.20
    mac address 00:00:5E:00:53:cc
    count 5
    ttl 255

    hash-parameters:
        input-ifd-idx 653
        end-host smac 00:00:5E:00:53:aa
        end-host dmac 00:00:5E:00:53:cc
        end-host src ip 198.51.100.1
        end-host dst ip 198.51.100.3
        end-host protocol 17
        end-host l4-src-port 4456
        end-host l4-dst-port 4540
        end-host vlan 150

Request for seq 1, to 192.0.2.20, at 09-24 19:15:33 PDT.352 msecs

Response for seq 1, from 192.0.2.20, at 09-24 19:15:33 PDT.359 msecs, rtt 11 msecs

    Overlay-segment present at RVTEP 192.0.2.20

    End-System Present

Request for seq 2, to 192.0.2.20, at 09-24 19:15:33 PDT.363 msecs

Response for seq 2, from 192.0.2.20, at 09-24 19:15:33 PDT.370 msecs, rtt 10 msecs

    Overlay-segment present at RVTEP 192.0.2.20

```



End-System Present

Request for seq 3, to 192.0.2.20, at 09-24 19:15:33 PDT.374 msec

Response for seq 3, from 192.0.2.20, at 09-24 19:15:33 PDT.381 msec, rtt 10 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Present

Request for seq 4, to 192.0.2.20, at 09-24 19:15:33 PDT.385 msec

Response for seq 4, from 192.0.2.20, at 09-24 19:15:33 PDT.392 msec, rtt 10 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Present

Request for seq 5, to 192.0.2.20, at 09-24 19:15:33 PDT.396 msec

Response for seq 5, from 192.0.2.20, at 09-24 19:15:33 PDT.403 msec, rtt 11 msec

Overlay-segment present at RVTEP 192.0.2.20

End-System Present

## Release Information

Command introduced in Junos OS Release 14.1X53-D30.

## RELATED DOCUMENTATION

*Understanding Overlay ping and traceroute Packet Support*

*Example: Troubleshooting a VXLAN Overlay Network By Using Overlay Ping and Traceroute on QFX Series Switches*

*traceroute overlay*

## show bridge mac-table

### IN THIS SECTION

- [Syntax | 155](#)
- [Description | 155](#)
- [Options | 155](#)
- [Additional Information | 156](#)
- [Required Privilege Level | 156](#)
- [Output Fields | 156](#)
- [Sample Output | 158](#)
- [Release Information | 162](#)

### Syntax

```
show bridge mac-table  
<age>  
<brief | count | detail | extensive>  
<bridge-domain (all | bridge-domain-name)>  
<global-count>  
<instance instance-name>  
<interface interface-name>  
<mac-address>  
<instance instance-name>  
<vlan-id (all-vlan | vlan-id)>
```

### Description

(MX Series routers only) Display Layer 2 MAC address information.

### Options

**none**                      Display all learned Layer 2 MAC address information.

<b>age</b>	(Optional) Display age of a single mac-address.
<b>brief   count   detail   extensive</b>	(Optional) Display the specified level of output.
<b>bridge-domain (all   <i>bridge-domain-name</i>)</b>	(Optional) Display learned Layer 2 MAC addresses for all bridging domains or for the specified bridging domain.
<b>global-count</b>	(Optional) Display the total number of learned Layer 2 MAC addresses on the system.
<b>instance <i>instance-name</i></b>	(Optional) Display learned Layer 2 MAC addresses for the specified routing instance.
<b>interface <i>interface-name</i></b>	(Optional) Display learned Layer 2 MAC addresses for the specified interface.
<b><i>mac-address</i></b>	(Optional) Display the specified learned Layer 2 MAC address information.
<b>vlan-id (all-vlan   <i>vlan-id</i>)</b>	(Optional) Display learned Layer 2 MAC addresses for all VLANs or for the specified VLAN.

## Additional Information

When Layer 2 protocol tunneling is enabled, the tunneling MAC address 01:00:0c:cd:cd:d0 is installed in the MAC table. When the Cisco Discovery Protocol (CDP), Spanning Tree Protocol (STP), or VLAN Trunk Protocol (VTP) is configured for Layer 2 protocol tunneling on an interface, the corresponding protocol MAC address is installed in the MAC table.

## Required Privilege Level

view

## Output Fields

[Table 22 on page 157](#) describes the output fields for the `show bridge mac-table` command. Output fields are listed in the approximate order in which they appear.

**Table 22: show bridge mac-table Output Fields**

Field Name	Field Description
Age	Age of a single mac-address.
Routing instance	Name of the routing instance.
Bridging domain	Name of the bridging domain.
MAC address	MAC address or addresses learned on a logical interface.
MAC flags	<p>Status of MAC address learning properties for each interface:</p> <ul style="list-style-type: none"> <li>• S—Static MAC address is configured.</li> <li>• D—Dynamic MAC address is configured.</li> <li>• L—Locally learned MAC address is configured.</li> <li>• C—Control MAC address is configured.</li> <li>• SE—MAC accounting is enabled.</li> <li>• NM—Non-configured MAC.</li> <li>• R—Remote PE MAC address is configured.</li> <li>• P—MAC Pinned interface is configured</li> </ul>
Logical interface	Name of the logical interface.
MAC count	Number of MAC addresses learned on the specific routing instance or interface.
Learning interface	Name of the logical interface on which the MAC address was learned.
Learning VLAN	VLAN ID of the routing instance or bridge domain in which the MAC address was learned.
VXLAN ID/VXLAN	VXLAN Network Identifier (VNI).

**Table 22: show bridge mac-table Output Fields (Continued)**

Field Name	Field Description
Layer 2 flags	Debugging flags signifying that the MAC address is present in various lists.
Epoch	Spanning Tree Protocol epoch number identifying when the MAC address was learned. Used for debugging.
Sequence number	Sequence number assigned to this MAC address. Used for debugging.
Learning mask	Mask of the Packet Forwarding Engines where this MAC address was learned. Used for debugging.
IPC generation	Creation time of the logical interface when this MAC address was learned. Used for debugging.

## Sample Output

### show bridge mac-table

```

user@host> show bridge mac-table
MAC flags (S -static MAC, D -dynamic MAC, L -locally learned, C -Control MAC
          SE -Statistics enabled, NM -Non configured MAC, R -Remote PE MAC)

Routing instance : default-switch
Bridging domain : test1, VLAN : 1

```

MAC address	MAC flags	Logical interface	NH Index	RTR ID
01:00:0c:cc:cc:cc	S,NM	NULL		
01:00:0c:cc:cc:cd	S,NM	NULL		
01:00:0c:cd:cd:d0	S,NM	NULL		
64:87:88:6a:17:d0	D	ae0.1		
64:87:88:6a:17:f0	D	ae0.1		

## show bridge mac-table (with Layer 2 Services over GRE Interfaces)

```
user@host> show bridge mac-table
MAC flags (S -static MAC, D -dynamic MAC, L -locally learned
          SE -Statistics enabled, NM -Non configured MAC, R -Remote PE MAC)

Routing instance : default-switch
Bridging domain : vlan-1, VLAN : 1
  MAC          MAC      Logical
  address      flags    interface
  00:01:01:00:01:f7 D,SE   gr-1/2/10.0
  00:03:00:32:01:f7 D,SE   gr-1/2/10.0
  00:00:21:11:11:10 DL      ge-1/0/0.0
  00:00:21:11:11:11 DL      ge-1/1/0.0

Routing instance : default-switch
Bridging domain : vlan-2, VLAN : 2
  MAC          MAC      Logical
  address      flags    interface
  00:02:01:33:01:f7 D,SE   gr-1/2/10.1
  00:00:21:11:21:10 DL      ge-1/0/0.1
  00:00:21:11:21:11 DL      ge-1/1/0.1
```

## show bridge mac-table (with VXLAN enabled)

```
user@host> show bridge mac-table
MAC flags (S -static MAC, D -dynamic MAC, L -locally learned
          SE -Statistics enabled, NM -Non configured MAC, R -Remote PE MAC)

Routing instance : default-switch
Bridging domain : vlan-1, VLAN : 1
VXLAN: Id : 100, Multicast group: 233.252.0.1
  MAC          MAC      Logical
  address      flags    interface
  00:01:01:00:01:f7 D,SE   vtep.1052010
  00:03:00:32:01:f7 D,SE   vtep.1052011
  00:00:21:11:11:10 DL      ge-1/0/0.0
  00:00:21:11:11:11 DL      ge-1/1/0.0
```

```

Routing instance : default-switch
Bridging domain : vlan-2, VLAN : 2, VXLAN : 200
VXLAN: Id : 200, Multicast group: 233.252.0.2
  MAC          MAC      Logical
  address      flags    interface
00:02:01:33:01:f7 D,SE    vtep.1052010
00:04:00:14:01:f7 D,SE    vtep.1052011
00:00:21:11:21:10 DL      ge-1/0/0.1
00:00:21:11:21:11 DL      ge-1/1/0.1

```

### show bridge mac-table age (for GE interface)

```

user@host> show vpls mac-table age 00:02:03:aa:bb:1a instance vpls_instance_1
MAC Entry Age information
Current Age: 4 seconds

```

### show bridge mac-table age (for AE interface)

```

user@host> show vpls mac-table age 00:02:03:aa:bb:1a instance vpls_instance_1
MAC Entry Age information
Current Age on FPC1: 102 seconds
Current Age on FPC2: 94 seconds

```

### show bridge mac-table count

```

user@host> show bridge mac-table count
2 MAC address learned in routing instance vs1 bridge domain vlan100

MAC address count per interface within routing instance:
  Logical interface      MAC count
  ge-11/0/3.0            1
  ge-11/1/4.100          0
  ge-11/1/1.100          0
  ge-11/1/0.100          0
  xe-10/2/0.100          1
  xe-10/0/0.100          0

```

MAC address count per learn VLAN within routing instance:

Learn VLAN ID	MAC count
0	2

0 MAC address learned in routing instance vs1 bridge domain vlan200

MAC address count per interface within routing instance:

Logical interface	MAC count
ge-11/1/0.200	0
ge-11/1/1.200	0
ge-11/1/4.200	0
xe-10/0/0.200	0
xe-10/2/0.200	0

MAC address count per learn VLAN within routing instance:

Learn VLAN ID	MAC count
0	0

## show bridge mac-table detail

```
user@host> show bridge mac-table detail
```

MAC address: 00:00:00:19:1c:db

Routing instance: vs1

Bridging domain: vlan100

Learning interface: ge-11/0/3.0      Learning VLAN: 0

Layer 2 flags: in\_ifd, in\_ifl, in\_vlan, kernel

Epoch: 4      Sequence number: 0

Learning mask: 0x800      IPC generation: 0

MAC address: 00:00:00:59:3a:2f

Routing instance: vs1

Bridging domain: vlan100

Learning interface: xe-10/2/0.100      Learning VLAN: 0

Layer 2 flags: in\_ifd, in\_ifl, in\_vlan, kernel

Epoch: 7      Sequence number: 0

Learning mask: 0x400      IPC generation: 0



## show bridge mac-table instance pbb-evpn

```
user@host> show bridge mac-table instance pbb-evpn
Routing instance : pbb-evpn
Bridging domain : isid-bd10000, ISID : 10000
  MAC          MAC      Logical      NH      RTR
  address      flags      interface  Index  ID
00:19:e2:b0:76:eb  D        cbp.1000
aa:bb:cc:dd:ee:f2  DC                    1048576 1048576
aa:bb:cc:dd:ee:f3  DC                    1048575 1048575
```

## show bridge mac-table

```
user@host>run show bridge mac-table
MAC flags (S -static MAC, D -dynamic MAC, L -locally learned, C -Control MAC
O -OVSDB MAC, SE -Statistics enabled, NM -Non configured MAC, R -Remote PE MAC, P -Pinned MAC)

Routing instance : VS-541
Bridging domain : 541, VLAN : 541
MAC MAC Logical NH RTR
address flags interface Index ID
00:00:01:00:00:01 DPRC xe-0/0/3.0
00:00:02:00:00:01 DP  xe-0/0/3.0
```

## Release Information

Command introduced in Junos OS Release 8.4.

Support for PBB-EVPN instance added in Junos OS Release 16.1

MAC Flag P to indicate a MAC Pinned interface introduced in Junos OS 16.2

## show vpls mac-table

### IN THIS SECTION

- [Syntax | 163](#)
- [Description | 163](#)
- [Options | 163](#)
- [Required Privilege Level | 164](#)
- [Output Fields | 164](#)
- [Sample Output | 166](#)
- [Release Information | 170](#)

### Syntax

```
show vpls mac-table  
<age>  
<brief | detail | extensive | summary>  
<bridge-domain bridge-domain-name>  
<instance instance-name>  
<interface interface-name>  
<logical-system (all | logical-system-name)>  
<mac-address>  
<vlan-id vlan-id-number>
```

### Description

Display learned virtual private LAN service (VPLS) media access control (MAC) address information.

### Options

- |             |   |
|-------------|---|
| <b>none</b> | Display all learned VPLS MAC address information. |
| <b>age</b>  | (Optional) Display age of a single mac-address.   |

<b>brief   detail   extensive   summary</b>	(Optional) Display the specified level of output.
<b>bridge-domain <i>bridge-domain-name</i></b>	(Optional) Display learned VPLS MAC addresses for the specified bridge domain.
<b>instance <i>instance-name</i></b>	(Optional) Display learned VPLS MAC addresses for the specified instance.
<b>interface <i>interface-name</i></b>	(Optional) Display learned VPLS MAC addresses for the specified instance.
<b>logical-system (all   <i>logical-system-name</i>)</b>	(Optional) Display learned VPLS MAC addresses for all logical systems or for the specified logical system.
<b>mac-address</b>	(Optional) Display the specified learned VPLS MAC address information..
<b>vlan-id <i>vlan-id-number</i></b>	(Optional) Display learned VPLS MAC addresses for the specified VLAN.

## Required Privilege Level

view

## Output Fields

[Table 23 on page 164](#) describes the output fields for the `show vpls mac-table` command. Output fields are listed in the approximate order in which they appear.

**Table 23: show vpls mac-table Output fields**

Field Name	Field Description
Age	Age of a single mac-address.
Routing instance	Name of the routing instance.
Bridging domain	Name of the bridging domain.
MAC address	MAC address or addresses learned on a logical interface.

**Table 23: show vpls mac-table Output fields (Continued)**

Field Name	Field Description
MAC flags	<p>Status of MAC address learning properties for each interface:</p> <ul style="list-style-type: none"> <li>• S—Static MAC address configured.</li> <li>• D—Dynamic MAC address learned.</li> <li>• SE—MAC accounting is enabled.</li> <li>• NM—Nonconfigured MAC.</li> </ul>
Logical interface	Name of the logical interface.
MAC count	Number of MAC addresses learned on a specific routing instance or interface.
Learning interface	Logical interface or logical Label Switched Interface (LSI) the address is learned on.
Base learning interface	Base learning interface of the MAC address. This field is introduced in Junos OS Release 14.2.
Learn VLAN ID/ VLAN	VLAN ID of the routing instance or bridge domain in which the MAC address was learned.
VXLAN ID/VXLAN	VXLAN Network Identifier (VNI)
Layer 2 flags	Debugging flags signifying that the MAC address is present in various lists.
Epoch	Spanning Tree Protocol epoch number identifying when the MAC address was learned. Used for debugging.
Sequence number	Sequence number assigned to this MAC address. Used for debugging.
Learning mask	Mask of Packet Forwarding Engines where this MAC address was learned. Used for debugging.

Table 23: show vpls mac-table Output fields (*Continued*)

Field Name	Field Description
IPC generation	Creation time of the logical interface when this MAC address was learned. Used for debugging.

## Sample Output

### show vpls mac-table

```
user@host> show vpls mac-table
MAC flags (S -static MAC, D -dynamic MAC,
          SE -Statistics enabled, NM -Non configured MAC)
```

```
Routing instance : vpls_ldp1
```

```
VLAN : 223
```

MAC address	MAC flags	Logical interface
00:00:5e:00:53:5d	D	ge-0/2/5.400

```
MAC flags (S -static MAC, D -dynamic MAC,
          SE -Statistics enabled, NM -Non configured MAC)
```

```
Routing instance : vpls_red
```

```
VLAN : 401
```

MAC address	MAC flags	Logical interface
00:00:5e:00:53:12	D	lsi.1051138
00:00:5e:00:53:f0	D	lsi.1051138

### show vpls mac-table (with Layer 2 Services over GRE Interfaces)

```
user@host> show vpls mac-table
MAC flags (S -static MAC, D -dynamic MAC, L -locally learned
          SE -Statistics enabled, NM -Non configured MAC, R -Remote PE MAC)
```

```
Routing instance : vpls_4site:1000
```

Bridging domain : __vpls_4site:1000__,	MAC	MAC	Logical
address	flags	interface	
00:00:5e:00:53:f4	D,SE	ge-4/2/0.1000	
00:00:5e:00:53:33	D,SE	lsi.1052004	
00:00:5e:00:53:32	D,SE	lsi.1048840	
00:00:5e:00:53:14	D,SE	lsi.1052005	
00:00:5e:00:53:f7	D,SE	gr-1/2/10.10	

### show vpls mac-table (with VXLAN enabled)

```
user@host> show vpls mac-table
MAC flags (S -static MAC, D -dynamic MAC, L -locally learned
          SE -Statistics enabled, NM -Non configured MAC, R -Remote PE MAC)

Routing instance : vpls_4site:1000
Bridging domain : __vpls_4site:1000__, VLAN : 4094,4093
VXLAN: Id : 300, Multicast group: 233.252.0.1
MAC          MAC      Logical
address      flags    interface
00:00:5e:00:53:f4 D,SE    ge-4/2/0.1000
00:00:5e:00:53:33 D,SE    lsi.1052004
00:00:5e:00:53:32 D,SE    lsi.1048840
00:00:5e:00:53:14 D,SE    lsi.1052005
00:00:5e:00:53:f7 D,SE    vtep.1052010
00:00:5e:00:53:3f D,SE    vtep.1052011
```

### show vpls mac-table age (for GE interface)

```
user@host> show vpls mac-table age 00:00:5e:00:53:1a instance vpls_instance_1
MAC Entry Age information
Current Age: 4 seconds
```

### show vpls mac-table age (for AE interface)

```
user@host> show vpls mac-table age 00:00:5e:00:53:1a instance vpls_instance_1
MAC Entry Age information
```

Current Age on FPC1: 102 seconds

Current Age on FPC2: 94 seconds

## show vpls mac-table count

```
user@host> show vpls mac-table count
```

```
0 MAC address learned in routing instance __example_private1__
```

MAC address count per interface within routing instance:

Logical interface	MAC count
lc-0/0/0.32769	0
lc-0/1/0.32769	0
lc-0/2/0.32769	0
lc-2/0/0.32769	0
lc-0/3/0.32769	0
lc-2/1/0.32769	0
lc-9/0/0.32769	0
lc-11/0/0.32769	0
lc-2/2/0.32769	0
lc-9/1/0.32769	0
lc-11/1/0.32769	0
lc-2/3/0.32769	0
lc-9/2/0.32769	0
lc-11/2/0.32769	0
lc-11/3/0.32769	0
lc-9/3/0.32769	0

MAC address count per learn VLAN within routing instance:

Learn VLAN ID	MAC count
0	0

```
1 MAC address learned in routing instance vpls_ldp1
```

MAC address count per interface within routing instance:

Logical interface	MAC count
lsi.1051137	0
ge-0/2/5.400	1

MAC address count per learn VLAN within routing instance:

Learn VLAN ID	MAC count
0	1

1 MAC address learned in routing instance vpls\_red

MAC address count per interface within routing instance:

Logical interface	MAC count
ge-0/2/5.300	1

MAC address count per learn VLAN within routing instance:

Learn VLAN ID	MAC count
0	1

## show vpls mac-table detail

```
user@host> show vpls mac-table detail
```

MAC address: 00:00:5e:00:53:5d

Routing instance: vpls\_ldp1

Learning interface: ge-0/2/5.400

Layer 2 flags: in\_ifd, in\_ifl, in\_vlan, kernel

Epoch: 0 Sequence number: 1

Learning mask: 0x1 IPC generation: 0

MAC address: 00:00:5e:00:53:5d

Routing instance: vpls\_red

Learning interface: ge-0/2/5.300

Layer 2 flags: in\_ifd, in\_ifl, in\_vlan, kernel

Epoch: 0 Sequence number: 1

Learning mask: 0x1 IPC generation: 0

## show vpls mac-table extensive

```
user@host> show vpls mac-table extensive
```

MAC address: 00:00:5e:00:53:00

Routing instance: vpls\_1

Bridging domain: \_\_vpls\_1\_\_, VLAN : NA

Learning interface: lsi.1049165

Base learning interface: lsi.1049165

Layer 2 flags: in\_hash,in\_ifd,in\_ifl,in\_vlan,in\_rtt,kernel,in\_ifbd

Epoch: 0 Sequence number: 1

Learning mask: 0x00000001



```

MAC address: 00:00:5e:00:53:01
Routing instance: vpls_1
  Bridging domain: __vpls_1__, VLAN : NA
  Learning interface: lsi.1049165
  Base learning interface: lsi.1049165
  Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
  Epoch: 0                               Sequence number: 1
  Learning mask: 0x00000001

```

```

MAC address: 00:00:5e:00:53:02
Routing instance: vpls_1
  Bridging domain: __vpls_1__, VLAN : NA
  Learning interface: lsi.1049165
  Base learning interface: lsi.1049165
  Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
  Epoch: 0                               Sequence number: 1
  Learning mask: 0x00000001

```

```

MAC address: 00:00:5e:00:53:03
Routing instance: vpls_1
  Bridging domain: __vpls_1__, VLAN : NA
  Learning interface: lsi.1049165
  Base learning interface: lsi.1049165
  Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
  Epoch: 0                               Sequence number: 1
  Learning mask: 0x00000001

```

## Release Information

Command introduced in Junos OS Release 8.5.

## traceroute overlay

### IN THIS SECTION

● [Syntax](#) | 171

- [Description | 171](#)
- [Options | 172](#)
- [Required Privilege Level | 174](#)
- [Output Fields | 174](#)
- [Sample Output | 175](#)
- [Release Information | 176](#)

## Syntax

```

traceroute overlay
<tunnel-type>
vni vni
tunnel-src source-ip-address
tunnel-dst destination-ip-address
<mac mac-address>
<ttl value>
<hash-input-interface input-interface>
<hash-source-mac source-mac-address>
<hash-destination-mac destination-mac-address>
<hash-source-address source-IP-address>
<hash-destination-address destination-IP-address>
<hash-vlan vlan-id>
<hash-protocol protocol-id>
<hash-source-port source-layer4-port>
<hash-destination-port destination-layer4-port>

```

## Description

Display the route that packets take between two Virtual Extensible LAN (VXLAN) tunnel endpoints (VTEPs) and within the context of a VXLAN overlay segment. Use `traceroute overlay` as an isolation and debugging tool to locate points of failure within an overlay VXLAN tunnel. The output is useful for diagnosing a point of failure in the path from the device to the destination host, and for addressing network traffic latency and throughput problems.

**NOTE:** The traceroute overlay command is not supported for IPv6.

**NOTE:** The traceroute overlay command is not supported when there are multiple virtual-switch routing instances.

## Options

**tunnel-type** (Optional) Specify the overlay tunnel type used in a virtualized environment such as: VXLAN, Network Virtualization using Generic Routing Encapsulation (NVGRE), MPLS over User Datagram Protocol (UDP), and MPLS over General Routing Encapsulation (GRE) tunnels.

**NOTE:** Only VXLAN overlay tunnel types are supported.

**vni vni** Specify the VNI of the VXLAN overlay segment.

- **Range:** 1 through 16,777,215

**tunnel-src source-ip-address** Specify the IP address of the source entity at end of the tunnel, such as the source VTEP.

**tunnel-dst destination-ip-address** Specify the IP address of the destination entity at the end of the tunnel, such as the remote VTEP.

**mac mac-address** (Optional) Include the physical or hardware address on the end host you are trying to reach.

**ttl value** (Optional) Time-to-live (TTL) value to include as the maximum number of hops in the traceroute request.

For MX Series routers, the range of values is **0** through **255**. The default value is **255**.

- **Range:** (QFX Series, EX9200 switches) 1 through 255
- **Default:** 255

**hash-source-mac source-mac-address** (Optional) Specify the MAC address of the source end host.

**NOTE:** The hash parameters provide values that correspond to a particular data flow that the traceroute overlay command debugs. Based on the values that you specify, the system calculates a VXLAN UDP header source port hash, which is included in the VXLAN UDP header of the overlay ping and traceroute packets. Including the calculated hash in the VXLAN header enables the overlay ping and traceroute packets to emulate data packets in the flow that you are troubleshooting.

When using the hash parameters, we recommend that you specify a value for each parameter. The exception to this guideline is the hash-vlan parameter, which you do not have to use if the source endpoint is not a member of a VLAN. This practice ensures that the overlay ping and traceroute processes are successful and that the output for each command is accurate. If you do not specify a value for one or more of the hash parameters, the system sends an OAM request that might include incorrect hash values and generates a warning message.

Hash computation supports TCP and UDP protocols only.

<b>hash-destination-mac</b> <i>destination-mac-address</i>	(Optional) Specify the MAC address of the destination end host.
<b>hash-source-address</b> <i>source-IP-address</i>	(Optional) Specify the IP address of the source end host.
<b>hash-destination-address</b> <i>destination-IP-address</i>	(Optional) Specify the IP address of the destination end host.
<b>hash-vlan</b> <i>vlan-id</i>	(Optional, QFX Series switches only) Specify the VLAN ID of the end host. <ul style="list-style-type: none"> <li>• <b>Range:</b> 1 through 4094</li> </ul>
<b>hash-input-interface</b> <i>interface-name</i>	(Optional, QFX Series switches only) Specify the ingress interface of the flow on the Juniper Networks device.
<b>hash-protocol</b> <i>protocol-id</i>	(Optional) Specify the TCP/UDP IP protocol ID of the end host. <ul style="list-style-type: none"> <li>• <b>Range:</b> 1 through 255</li> </ul>
<b>hash-source-port</b> <i>source-layer4-port</i>	(Optional) Specify the Layer 4 source port of the end host. <ul style="list-style-type: none"> <li>• <b>Range:</b> 1 through 65,535</li> </ul>

**hash-destination-port** *destination-layer4-port* (Optional) Specify the Layer 4 destination port of the end host.

- **Range:** 1 through 65,535

### Required Privilege Level

network

### Output Fields

Use the `traceroute overlay` command to determine overlay segments within a VXLAN tunnel. The output is useful for diagnosing a point of failure in the path from the device to the destination host, and for addressing network traffic latency and throughput problems.

[Table 24 on page 174](#) lists the output fields for the `traceroute overlay` command. Output fields are listed in the approximate order in which they appear.

**Table 24: traceroute overlay Output Fields**

Field Name	Field Description
vni	The VNI of the VXLAN overlay segment.
tunnel src ip	The IP address of the source end of the tunnel.
tunnel dst ip	The IP address of the destination end of the tunnel.
mac address	The physical or hardware address of the end host you are trying to reach.
ttl	TTL value for the maximum number of hops in the traceroute request.
hash-parameters	The hash parameters provide the input interface, source MAC address, destination MAC address, source IP address, destination IP address, and the VLAN ID of the two end hosts within an overlay segment. Hash parameters enable platform-specific hash computation to use as the source port in the outer UDP header.

**Table 24: traceroute overlay Output Fields (Continued)**

Field Name	Field Description
ttl	Number of hops remaining in the traceroute message. The TTL is decremented at each hop.
Address	The sending IPv4 address.
Sender Timestamp	Timestamp in microseconds when hop was sent.
Receiver Timestamp	Timestamp in microseconds when hop was received.
Response Time	Time in microseconds for traceroute to respond.

## Sample Output

### run traceroute overlay

```

user@host> traceroute overlay tunnel-type vxlan vni 100 tunnel-src 192.0.2.10 tunnel-dst
192.0.2.20 mac 00:00:5E:00:53:cc hash-source-mac 00:00:5E:00:53:aa hash-destination-mac
00:00:5E:00:53:cc hash-source-address 198.51.100.1 hash-destination-address 198.51.100.3 hash-
vlan 150 hash-input-interface xe-0/0/2 hash-protocol 17 hash-source-port 4456 hash-destination-
port 4540
traceroute-overlay protocol vxlan

vni 100
tunnel src ip 192.0.2.10
tunnel dst ip 192.0.2.20
mac address 00:00:5E:00:53:cc
ttl 255

hash-parameters:
    input-ifd-idx 653
    end-host smac 00:00:5E:00:53:aa
    end-host dmac 00:00:5E:00:53:cc
    end-host src ip 198.51.100.1
    end-host dst ip 198.51.100.3

```

```

end-host protocol 17
end-host l4-src-port 4456
end-host l4-dst-port 4540
end-host vlan 150

```

t1	Address	Sender Timestamp	Receiver Timestamp	Response Time
1	10.1.0.1	09-25 00:56:17 PDT.663 msecs	*	10 msecs
2	192.0.2.20	09-25 00:56:17 PDT.684 msecs	09-25 00:56:17 PDT.689 msecs	11 msecs

```
Overlay-segment present at RVTEP 192.0.2.20
```

```
End-System Present
```

## Release Information

Command introduced in Junos OS Release 14.1X53-D30.

## RELATED DOCUMENTATION

*Understanding Overlay ping and traceroute Packet Support*

*Example: Troubleshooting a VXLAN Overlay Network By Using Overlay Ping and Traceroute on QFX Series Switches*

*ping overlay*

## Verifying VXLAN Reachability

### IN THIS SECTION

- Purpose | 177
- Action | 177
- Meaning | 177

### Purpose

On the local VTEP, verify that there is connectivity with the remote VTEP.

### Action

```

user@switch> show ethernet-switching vxlan-tunnel-end-point remote
Logical System Name      Id  SVTEP-IP      IFL  L3-Idx
<default>                0   10.1.1.2      lo0.0  0
RVTEP-IP                IFL-Idx  NH-Id
10.1.1.2                 559      1728
VNID                     MC-Group-IP
100                      233.252.0.1

```

### Meaning

The remote VTEP is reachable because its IP address appears in the output. The output also shows that the VXLAN (VNI 100) and corresponding multicast group are configured correctly on the remote VTEP.

### RELATED DOCUMENTATION

- [Understanding VXLANs](#)
- [Manually Configuring VXLANs on QFX Series and EX4600 Switches](#)
- [Examples: Manually Configuring VXLANs on QFX Series and EX4600 Switches](#)

## Verifying That a Local VXLAN VTEP Is Configured Correctly

#### IN THIS SECTION

- [Purpose | 178](#)
- [Action | 178](#)
- [Meaning | 178](#)



Purpose

Verify that a local VTEP is correct.

Action

```
user@switch> show ethernet-switching vxlan-tunnel-end-point source
```

Logical System Name	Id	SVTEP-IP	IFL	L3-Idx
<default>	0	10.1.1.1	lo0.0	0
L2-RTT	Bridge Domain			VNID MC-Group-IP
default-switch	VLAN1+100			100 233.252.0.1

Meaning

The output shows the correct tunnel source IP address (loopback address), VLAN, and multicast group for the VXLAN.

RELATED DOCUMENTATION

| [Understanding VXLANs](#)

Verifying MAC Learning from a Remote VTEP

IN THIS SECTION

- [Purpose | 178](#)
- [Action | 179](#)
- [Meaning | 179](#)

Purpose

Verify that a local VTEP is learning MAC addresses from a remote VTEP.

# Action

```

user@switch> show ethernet-switching table

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent static
           SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)
Ethernet switching table : 2 entries, 2 learned
Routing instance : default-switch
  Vlan      MAC      MAC      Age   Logical
  name      address  flags
  VLAN1     00:00:00:ff:ff:ff  D      -    vtep.12345
  VLAN1     00:10:94:00:00:02  D      -    xe-0/0/0.0

```

# Meaning

The output shows the MAC addresses learned from the remote VTEP (in addition to those learned on the normal Layer 2 interfaces). It also shows the logical name of the remote VTEP interface (vtep.12345 in the above output).

# RELATED DOCUMENTATION

<i>Understanding VXLANs</i>
<i>Manually Configuring VXLANs on QFX Series and EX4600 Switches</i>
<i>Examples: Manually Configuring VXLANs on QFX Series and EX4600 Switches</i>