

# Junos® OS

---

## Link and Multilink Services Interfaces User Guide for Routing Devices

Published  
2022-12-09

Juniper Networks, Inc.  
1133 Innovation Way  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

*Junos® OS Link and Multilink Services Interfaces User Guide for Routing Devices*  
Copyright © 2022 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

## YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

## END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

About This Guide | viii

1

## Overview

Understanding Link and Multilink Services | 2

Link and Multilink Services Overview | 2

Multilink and Link Services PICs Overview | 3

Multilink Interfaces on Channelized MICs Overview | 7

2

## Achieving Greater Bandwidth, Load Balancing, and Redundancy with Multilink Bundles

Configuring Link and Multilink Services Bundles | 10

Understanding MLPPP Bundles and Link Fragmentation and Interleaving (LFI) on Serial Links | 10

Configuring the Number of Bundles on Link Services PICs | 11

Configuring the Links in a Multilink or Link Services Bundle | 12

Example: Configuring a Link Services Interface with Two Links | 14

Example: Configuring Link and Voice Services Interfaces with a Combination of Bundle Types | 16

Enabling MLPPP Link Fragmentation and Interleaving | 24

Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces | 30

Configuring MLPPP | 34

Understanding MLPPP | 34

Guidelines for Configuring MLPPP With LSQ Interfaces on ACX Series Routers | 35

Example: Configuring an MLPPP Bundle on ACX Series | 42

Requirements | 42

Overview | 42

Configuration | 42

Configuring LSQ Interfaces as NxT1 or Nx E1 Bundles Using MLPPP on ACX Series | 44

Example: Configuring an LSQ Interface as an NxT1 Bundle Using MLPPP | 48

Understanding Multiclass MLPPP | 52

Configuring Multiclass MLPPP on LSQ Interfaces | 53

## **Examples: Bundling Multiple PPP Links on a Single Link Using MLPPP | 54**

Example: Configuring a Multilink Interface with MLPPP | 55

Example: Configuring a Multilink Interface with MLPPP over ATM 2 Interfaces | 56

Example: Configuring an MLPPP Bundle | 58

Requirements | 59

Overview | 59

Configuration | 59

Verification | 63

Example: Configuring a Link Services Interface with MLPPP | 64

Example: Configuring Inline MLPPP and Multilink Frame Relay End-to-End (FRF.15) for WAN Interfaces | 65

Requirements | 65

Overview | 65

Configuration | 66

Verification | 75

## **Examples: Bundling Multiple Frame Relay DLCIs into a Single Link Using MLFR | 88**

Example: Configuring a Multilink Interface with MLFR FRF.15 | 88

Example: Configuring Multilink Frame Relay FRF.16 | 90

Requirements | 90

Overview | 90

Configuration | 90

Verification | 95

Example: Configuring Multilink Frame Relay FRF.15 | 96

Requirements | 96

Overview | 96

Configuration | 96

Verification | 100

Configuring DLCIs on Link Services Logical Interfaces | 100

Example: Configuring a Link Services PIC with MLFR FRF.16 | 102

Example: Configuring Inline Multilink Frame Relay (FRF.16) for WAN Interfaces | 103

Requirements | 104

Overview | 104

Configuration | 105

Verification | 111

**Example: Configuring Link Interfaces on Channelized MICs | 122**

Requirements | 122

Overview | 122

Configuration on 4-Port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP | 123

Verification | 134

**Unified ISSU on Inline LSQ Interfaces Overview | 136**

### 3

## Configuring the Physical and Logical Interfaces in a Link and Multilink Configuration

**Configuring Link Services Physical Interfaces | 140**

**Configuring Link and Multilink Services Logical Interfaces | 140**

Multilink and Link Services Logical Interface Configuration Overview | 141

Configuring Encapsulation for Multilink and Link Services Logical Interfaces | 142

Configuring the Drop Timeout Period on Multilink and Link Services Logical Interfaces | 143

Limiting Packet Payload Size on Multilink and Link Services Logical Interfaces | 145

Configuring the Minimum Number of Active Links on Multilink and Link Services Logical Interfaces | 146

Configuring MRRU on Multilink and Link Services Logical Interfaces | 147

Configuring the Sequence Header Format on Multilink and Link Services Logical Interfaces | 148

Configuring CoS on Link Services Interfaces | 149

### 4

## Configuration Statements

**acknowledge-retries | 158**

**acknowledge-timer | 159**

**action-red-differential-delay | 161**

address (Interfaces) | 163

bundle | 165

destination (Interfaces) | 166

disable-mlppp-inner-ppp-pfc | 168

dlci | 169

drop-timeout | 171

encapsulation (Logical Interface) | 173

encapsulation (Physical Interface) | 175

family | 177

fragment-threshold | 179

hello-timer | 181

interfaces | 182

interleave-fragments | 184

lmi-type | 185

mlfr-uni-nni-bundle-options | 187

mrru | 189

mtu | 190

multicast-dlci | 192

n391 | 194

n392 | 195

n393 | 197

red-differential-delay | 199

short-sequence | 201

t391 | 202

t392 | 204

unit (Interfaces) | 206

yellow-differential-delay | 208

5

## Operational Commands

show interfaces (Link Services) | 211

show interfaces (Link Services IQ) | 234

show interfaces (Multilink Services) | 272

# About This Guide

Use this guide to configure and monitor multilink bundles. Multilink bundles coordinate multiple independent links between a fixed pair of systems, providing a virtual link with greater bandwidth than any of the member links.

# 1

CHAPTER

## Overview

---

[Understanding Link and Multilink Services](#) | 2

---

# Understanding Link and Multilink Services

## IN THIS SECTION

- [Link and Multilink Services Overview | 2](#)
- [Multilink and Link Services PICs Overview | 3](#)
- [Multilink Interfaces on Channelized MICs Overview | 7](#)

## Link and Multilink Services Overview

### IN THIS SECTION

- [Standards | 3](#)

Multilink-based protocols enable you to split, recombine, and sequence datagrams across multiple logical data links. The goal of a multilink operation is to coordinate multiple independent links between a fixed pair of systems, providing a virtual link with greater bandwidth than any of the members. In addition to providing incremental bandwidth, bundling multiple links can add a level of fault tolerance to your dedicated access service, because you can implement bundling across multiple PICs, protecting against the failure of any single PIC.

Junos OS supports several multilink-based protocols including Multilink Point-to-Point Protocol (MLPPP) and Multilink Frame Relay (MLFR). MLPPP enables you to bundle multiple PPP links into a single logical link. MLFR enables you to bundle multiple Frame Relay data-link connection identifiers (DLCIs) into a single logical link. MLPPP and MLFR provide service option granularity between low-speed T1 and E1 services and higher-speed T3 and E3 services. You use MLPPP and MLFR to increase bandwidth in smaller, more cost-effective increments.

The multiclass extension to the MLPPP extension enables multiple classes of service using MLPPP. For more information, see RFC 2686, *The Multi-Class Extension to Multi-Link PPP*. The Junos OS PPP implementation does not support the negotiation of address field compression and protocol field compression PPP NCP options. The software always sends a full 4-byte PPP header.

## Standards

The standards for MLPPP, MLFR FRF.15, and MLFR FRF.16 are defined in the following specifications:

- RFC 1990, *The PPP Multilink Protocol (MP)*
- FRF.15, *End-to-End Multilink Frame Relay Implementation Agreement*
- FRF.16.1, *Multilink Frame Relay UNI/NNI Implementation Agreement*

**NOTE:** Endpoint Discriminator Class compatibility checking is enabled on MLPPP interfaces. Prior to Junos OS Release 8.0, when a Juniper Networks router received an unsupported Endpoint Discriminator Class message from an MLPPP session peer, it returned an ACK response.

## Multilink and Link Services PICs Overview

### IN THIS SECTION

- [Support on Service PICs | 4](#)
- [Support on Interface Types | 5](#)

Each Multilink Services or Link Services PIC can support a number of *bundles*. A bundle can contain up to eight individual *links*.

For Multilink Services PICs, the links can be T1, E1, or DS0 physical interfaces, and each link is associated with a logical unit number that you configure. For Link Services PICs, the links can be E1, T1, channelized DS3-to-DS1, channelized DS3-to-DS0, channelized E1, channelized STM1 interfaces, or channelized IQ interfaces. For MLFR FRF.16 bundles, each link is associated with a channel number that you configure.

You must configure a link before it can join a bundle. Each bundle should consist solely of one type of link; the mixing of physical interfaces of differing speeds within a bundle is not supported.

Three versions of Multilink Services and three versions of Link Services PICs are available, as shown in [Table 1 on page 4](#). The PIC hardware is identical, except for different faceplates that enable you to

identify which version you are installing. The software limits the unit numbers and maximum number of physical interfaces you assign to the PIC.

**Table 1: Multilink and Link Services PIC Capacities**

PIC Capacity	Unit Numbers	Maximum Number of T1/DS0 Interfaces	Maximum Number of E1 Interfaces
4-bundle PIC	0 through 3	32 links	32 links
32-bundle PIC	0 through 31	256 links	219 links
128-bundle PIC	0 through 127	292 links	219 links

A single PIC can support an aggregate bandwidth of 450 megabits per second (Mbps).

You can configure a larger number of links, but the Multilink Services and Link Services PICs can reliably process only 450 Mbps of traffic. A higher rate of traffic might degrade performance.

**NOTE:** In Junos OS releases 9.0 and above you are not allowed to configure a unit number greater than the maximum unit number available on your link services PIC. Attempting to do so will cause an error message.

## Support on Service PICs

Junos OS supports multilink-based protocols on services PICs such as the Multilink Services PIC and the Link Services PIC, as well as the link services intelligent queuing (IQ) and voice services configured on the Adaptive Services (AS) and MultiServices PICs. For more information about link services IQ, see *Layer 2 Service Package Capabilities and Interfaces*. For more information about voice services, see *Configuring Services Interfaces for Voice Services*.

Starting with Junos OS Release 12.1, the following channelized MICs on MX240, MX480, and MX960 routers support Multilink Point-to-Point Protocol (MLPPP)-based services:

- 4-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-4CHOC3-2CHOC12)
- 8-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-8CHOC3-4CHOC12)
- 8-port Channelized DS3/E3 MIC (MIC-3D-8CHDS3-E3-B)

For more information about MLPPP-based services MICs, see ["Multilink Interfaces on Channelized MICs Overview" on page 7](#).

The Link Services and Multilink Services PICs support the following encapsulation types:

- MLPPP
- MLFR

Starting with Junos OS Release 12.1, support for the following encapsulation types and protocols has been extended to the MX240, MX480, and MX960 routers with Multiservices DPCs:

- MLPPP
- Multiclass MLPPP
- MLFR end-to-end (FRF.15)
- MLFR UNI NNI (FRF.16) (also referred to as MFR)
- Compressed Real-Time Transport Protocol (CRTP)

**NOTE:** Only MLPPP is supported on ACX Series routers. MLFR is not supported on ACX Series routers.

At the logical unit level, the Multilink Services and Link Services PICs support the MLPPP and MLFR Frame Relay Forum (FRF) 15 encapsulation types. At the physical interface level, the Link Services PIC also supports the MLFR FRF.16 encapsulation type.

**NOTE:** On M Series Multiservice Edge Routers, only one DS3 link is allowed in an MLFR bundle. MLPPP bundles can include two DS3 links.

On ACX Series routers, even if the PIC can support up to 4xDS3 total throughput, each aggregate can only run a volume of traffic equal to one DS3 in bandwidth. Aggregating DS3 links is not supported.

## Support on Interface Types

MLPPP and MLFR FRF.15 are supported on interface types `ml-fpc/pic/port`, `ls-fpc/pic/port`, and `lsq-fpc/pic/port`. For MLFR FRF.15, multiple permanent virtual circuits (PVCs) are combined into one aggregated virtual circuit (AVC). This provides fragmentation over multiple PVCs on one end and reassembly of the AVC on the other end.

MLFR FRF.16 is supported on a channelized interface, `ls-fpc/pic/port:channel`, which denotes a single MLFR FRF.16 bundle. For MLFR FRF.16, multiple links are combined to form one logical link. Packet fragmentation and reassembly occur on a per-VC basis. Each bundle can support multiple VCs. Link Services PICs can support up to 256 DLCIs per MLFR FRF.16 bundle. The physical connections must be E1, T1, channelized DS3-to-DS1, channelized DS3-to-DS0, channelized E1, channelized STM1, or channelized IQ interfaces. When you bundle channelized interfaces using the link services interface, the channelized interfaces require M Series Enhanced Flexible PIC Concentrators (FPCs).

The `ml-` interface type is used to configure interfaces on the Multilink Services PIC and does not support class-of-service (CoS) features. The `ls-` interface type is used for limited CoS configurations on the Link Services PIC, and the `lsq-` interface type is used for full CoS configurations on the Adaptive Services and MultiServices PICs. The bundle interfaces are configured on the Multiservices DPC as link services IQ (`lsq`) interfaces and virtual LSQ redundancy (`rlsq`) interfaces.

For link services IQ (`lsq`) interfaces, Junos OS CoS components are fully supported and are handled normally on M Series and T Series routers, as described in the [Junos OS Class of Service User Guide for Routing Devices](#). For more information on link services IQ configuration, see *Layer 2 Service Package Capabilities and Interfaces*.

When running MLPPP or MLFR on a non-QPP interface, you cannot mix logical units that are members of an aggregate with logical units configured using other families, such as `inet`. For example, the following configuration is not valid:

```
interface e3-0/0/0 {
  encapsulation frame-relay;
  unit 99 {
    dlci 99;
    family mlfr-end-to-end {
      bundle ls-0/0/0.1;
    }
  }
  unit 100 {  ## mixes mlfr with family inet
    dlci 100;
    family inet {
      address 192.168.164.53/30;
    }
  }
}
```

## SEE ALSO

[Configuring Link and Multilink Services Logical Interfaces](#) | 140

## Multilink Interfaces on Channelized MICs Overview

Multiservices Modular Interface Cards (MICs) enable you to perform multiple services on the same MIC by configuring a set of services and applications such as voice services and Layer 2 Tunneling Protocol (L2TP) services. On Juniper Networks MX Series 5G Universal Routing Platforms, the Multiservices DPC provides essentially the same capabilities as the Multiservices PIC. The interfaces on both platforms are configured in the same way. The Multilink interfaces are hosted on a channelized MIC. The bundle interfaces are configured on Multiservices DPC as virtual LSQ redundancy (rlsq) interfaces.

Starting with Junos OS Release 12.1, the following channelized MICs on MX240, MX480, and MX960 routers support Multilink Point-to-Point Protocol (MLPPP)-based services:

- 4-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-4CHOC3-2CHOC12)
- 8-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-8CHOC3-4CHOC12)
- 8-port Channelized DS3/E3 MIC (MIC-3D-8CHDS3-E3-B)

The following encapsulations, interfaces, protocol, and packet types are supported on the aforementioned MICs:

- Multilink Point-to-Point Protocol (MLPPP)—Supports *Priority-based Flow Control* (PFC) for data packets and Link Control Protocol (LCP) for control packets. Compressed Real-Time Transport Protocol (CRTP) and Multiclass MLPPP are supported for both data and control packets.
- Multilink Frame Relay (MLFR) end-to-end (FRF.15)—Supports Ethernet Local Management Interface (LMI), Consortium LMI (C-LMI), and Link Integrity Protocol (LIP) for data and control packets.
- Multilink Frame Relay (MFR) UNI NNI (FRF.16)—Supports Ethernet Local Management Interface (LMI), Consortium LMI (C-LMI), and Link Integrity Protocol (LIP) for data and control packets.
- Link fragmentation and interleaving (LFI) non multilink MLPPP and MLFR packets.

Layer 2 services and voice services functionality are implemented on the Multiservices Dense Port Concentrators, which supports the following two kinds of traffic that are routed by the Packet Forwarding Engine:

- Customer-end to provider-end (also, known as customer traffic)—Here, the Multilink fragments from the customer end arrive at the Multiservices interfaces configured on the channelized MIC. These

fragments are then transmitted to the Multiservices DPC for Layer 2 processing such as CoS and are reassembled by the Multiservices software running on the Multiservices DPC. These reassembled packets are sent to the Packet Forwarding Engine where they go through the regular router lookup process and are finally sent over the Internet to the provider end. The voice packets also go through the same process.

- Provider-end to customer-end (also, known as Internet traffic)—Here, the data packets that are sent from the Internet provider end are received at any generic ingress interface in the Packet Forwarding Engine. These packets are then sent to the Multiservices DPC for Layer 2 processing. The Multiservices software running on Multiservices DPC fragment these data packets and send it to the Packet Forwarding Engine. These Multilink fragments are sent over the channelized MIC interfaces to the customer end. The voice packets also go through the same process.

**NOTE:** All the features that are supported on Multilink and Link Services PICs are also supported on the Multilink Services or Link Services MICs. For more information about Multilink and Link Services PICs, see ["Multilink and Link Services PICs Overview" on page 3](#).

Support for the following encapsulations, interfaces, protocol, and packet types are now extended to the aforementioned MICs:

- Multilink Point-to-Point Protocol (MLPPP)—Supports priority-based flow control (PFC) for data packets and Link Control Protocol (LCP) for control packets. Compressed Real-Time Transport Protocol (CRTP) and multiclass MLPPP are supported for both data and control packets.
- Multilink Frame Relay (MLFR) end-to-end (FRF.15)—Supports Ethernet Local Management Interface (LMI) and Consortium LMI (C-LMI) for data and control packets.
- Multilink Frame Relay (MLFR) UNI NNI (FRF.16)—Supports Ethernet Local Management Interface (LMI), Consortium LMI (C-LMI), and Link Integrity Protocol (LIP) for data and control packets.
- Link fragmentation and interleaving (LFI) on multilink MLPPP and MLFR packets—Reduces delay and *jitter* on links by breaking up large data packets and interleaving delay-sensitive voice packets with the resulting smaller packets.

## RELATED DOCUMENTATION

[Configuring MLPPP | 34](#)

[Example: Configuring an MLPPP Bundle | 58](#)

[Example: Configuring Multilink Frame Relay FRF.15 | 96](#)

[Example: Configuring Multilink Frame Relay FRF.16 | 90](#)

[Example: Configuring Link Interfaces on Channelized MICs | 122](#)

# 2

CHAPTER

## Achieving Greater Bandwidth, Load Balancing, and Redundancy with Multilink Bundles

---

Configuring Link and Multilink Services Bundles | 10

Configuring MLPPP | 34

Examples: Bundling Multiple PPP Links on a Single Link Using MLPPP | 54

Examples: Bundling Multiple Frame Relay DLCIs into a Single Link Using MLFR | 88

Example: Configuring Link Interfaces on Channelized MICs | 122

Unified ISSU on Inline LSQ Interfaces Overview | 136

---

# Configuring Link and Multilink Services Bundles

## IN THIS SECTION

- Understanding MLPPP Bundles and Link Fragmentation and Interleaving (LFI) on Serial Links | 10
- Configuring the Number of Bundles on Link Services PICs | 11
- Configuring the Links in a Multilink or Link Services Bundle | 12
- Example: Configuring a Link Services Interface with Two Links | 14
- Example: Configuring Link and Voice Services Interfaces with a Combination of Bundle Types | 16
- Enabling MLPPP Link Fragmentation and Interleaving | 24
- Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces | 30

## Understanding MLPPP Bundles and Link Fragmentation and Interleaving (LFI) on Serial Links

MX240, MX480, and MX960 Universal Routing Platforms support MLPPP and MLFR multilink encapsulations. MLPPP enables you to bundle multiple PPP links into a single multilink bundle, and MLFR enables you to bundle multiple Frame Relay data-link connection identifiers (DLCIs) into a single multilink bundle. Multilink bundles provide additional bandwidth, load balancing, and redundancy by aggregating low-speed links, such as T1, E1, and serial links.

You configure multilink bundles as logical units or channels on the link services interface `lsq-0/0/0`:

- With MLPPP and MLFR FRF.15, multilink bundles are configured as logical units on `lsq-0/0/0`—for example, `lsq-0/0/0.0` and `lsq-0/0/0.1`.
- With MLFR FRF.16, multilink bundles are configured as channels on `lsq-0/0/0`—for example, `lsq-0/0/0:0` and `lsq-0/0/0:1`.

After creating multilink bundles, you add constituent links to the bundle. The constituent links are the low-speed physical links that are to be aggregated. Depending on the system license and hardware, you can create up to 1023 multilink bundles per Chassis, and on each multilink bundle add up to 8 constituent links. See "[Multilink and Link Services PICs Overview](#)" on page 3 for more information.

The following rules apply when you add constituent links to a multilink bundle:

- On each multilink bundle, add only interfaces of the same type. For example, you can add either T1 or E1, but not both.
- Only interfaces with a PPP encapsulation can be added to an MLPPP bundle, and only interfaces with a Frame Relay encapsulation can be added to an MLFR bundle.
- If an interface is a member of an existing bundle and you add it to a new bundle, the interface is automatically deleted from the existing bundle and added to the new bundle.

Configuring a multilink bundle on the two serial links increases the bandwidth by 70 percent from approximately 1 Mbps to 1.7 Mbps and prepends each packet with a multilink header as specified in the FRF.12 standard. To increase the bandwidth further, you can add up to eight serial links to the bundle. In addition to a higher bandwidth, configuring the multilink bundle provides load balancing and redundancy. If one of the serial links fails, traffic continues to be transmitted on the other links without any interruption. In contrast, independent links require routing policies for load balancing and redundancy. Independent links also require IP addresses for each link as opposed to one IP address for the bundle. In the routing table, the multilink bundle is represented as a single interface.

Starting with Junos OS Release 13.3, if you attempt to delete or deactivate a static inline service (si) MLPPP bundle interface that is still referenced by a member link interface, which could be PPPoE (pp0) or si logical interfaces, and commit the configuration, the commit operation fails. You must reactivate such MLPPP bundle interface before committing the settings. Alternatively, you must ensure that member links do not refer a static MLPPP bundle before you delete or deactivate the bundle. This method of deactivation and reactivation of an MLPPP bundle is not applicable for interfaces other than si-interfaces, such as link services IQ (lsq-) and virtual LSQ redundancy (rlsq-) interfaces.

## SEE ALSO

[Example: Configuring Link Interfaces on Channelized MICs | 122](#)

[Example: Configuring an MLPPP Bundle | 58](#)

[Example: Configuring Multilink Frame Relay FRF.15 | 96](#)

[Example: Configuring Multilink Frame Relay FRF.16 | 90](#)

## Configuring the Number of Bundles on Link Services PICs

You can combine MLFR FRF.16, MLPPP, and MLFR FRF.15 bundles on a single Link Services PIC. For a sample configuration, see "[Example: Configuring a Link Services Interface with Two Links](#)" on page 14.

To configure the number of bundles on a Link Services PIC, include the `mlfr-uni-nni-bundles` statement at the `[edit chassis fpc slot-number pic pic-number]` hierarchy level:

```
mlfr-uni-nni-bundles number;
```

Each Link Services PIC can accommodate a maximum of 256 MLFR UNI NNI bundles. For more information, see the [Junos OS Administration Library for Routing Devices](#).

A link can associate with one link services bundle only. All Link Services PICs support up to 256 single-link bundles and up to 256 DLCIs. For an example configuration, see the configuration examples.

**NOTE:** When one or more links in a bundle are put in loopback, reassembly buffering and hence processing are reduced so as to not affect other bundles. This prevents packet loss on other bundles, while reducing the reassembly buffers available for the bundle with looped links.

## SEE ALSO

[Example: Configuring a Link Services Interface with MLPPP | 64](#)

[Example: Configuring a Link Services Interface with MLFR FRF.15](#)


[Example: Configuring a Link Services PIC with MLFR FRF.16 | 102](#)

## Configuring the Links in a Multilink or Link Services Bundle

To complete a multilink or link services interface configuration, you need to configure both the physical interface and the multilink or link services bundle. For multilink interfaces, you configure the link bundle on the logical unit. For link services interfaces, you configure the link bundle as a channel (see [Figure 1](#)

on page 13). The physical interface is usually connected to networks capable of supporting MLPPP or MLFR (FRF.15 or FRF.16).

**Figure 1: Multilink Interface Configuration**

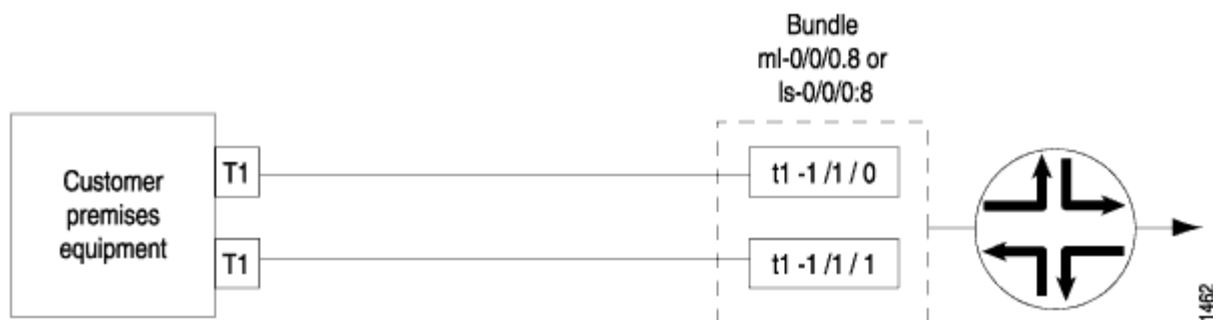

The following sample configuration refers to the topology in [Figure 1 on page 13](#) and configures a multilink or link services bundle over a T1 connection (for which the T1 physical interface is already configured).

1. To configure a physical T1 link for MLPPP, include the following statements at the [edit interfaces t1-*fpc/pic/port*] hierarchy level:

```
unit 0 {
  family mlppp {
    bundle (ml-fpc/pic/port | ls-fpc/pic/port);
  }
}
```

You do not need to configure an IP address on this link.

To configure a physical T1 link for MLFR FRF.16, include the following statements at the [edit interfaces t1-*fpc/pic/port*] hierarchy level:

```
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
  family mlfr-uni-nni {
    bundle ls-fpc/pic/port:channel;
  }
}
```

You do not need to configure an IP address or a DLCI on this link.

2. To configure the logical address for the MLPPP, MLFR FRF.15, or MLFR FRF.16 bundle, include the address and destination statements:

```
address address {  
    destination address;  
}
```

You can include these statements at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet]

When you add statements such as `mrru` to the configuration and commit, the T1 interface becomes part of the multilink bundle.

**NOTE:** For MLPPP and MLFR (FRF.15 and FRF.16) links, you must specify the subnet address as `/32` or `/30`. Any other subnet designation is treated as a mismatch.

SEE ALSO

- Link and Multilink Services Overview | 2
- Example: Configuring an MLPPP Bundle | 58

Example: Configuring a Link Services Interface with Two Links

This example uses the MLFR UNI NNI protocol between Router A and Router B and logically connects link services bundles `ls-1/1/0.3` and `ls-0/0/0.10`, as specified in Table 2 on page 14.

Table 2: Link Services Bundle

Router A	Router B
t1-0/1/0 (ls-1/1/0:3)	t1-0/3/0 (ls-0/0/0:10)
t1-0/1/1 (ls-1/1/0:3)	t1-0/3/1 (ls-0/0/0:10)

For LMI to work properly, you must configure one router to be a DCE.

### Configuration on Router A

```
[edit interfaces]
ls-1/1/0:3 {
  dce;
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    dlci 16;
    family inet {
      address 10.3.3.1/32 {
        destination 10.3.3.2;
      }
    }
  }
}
t1-0/1/0 {
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    family mlfr-uni-nni {
      bundle ls-1/1/0:3;
    }
  }
}
t1-0/1/1 {
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    family mlfr-uni-nni {
      bundle ls-1/1/0:3;
    }
  }
}
```

### Configuration on Router B

```
[edit interfaces]
ls-0/0/0:10 {
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    dlci 16;
    family inet {
```

```

        address 10.3.3.2/32 {
            destination 10.3.3.1;
        }
    }
}
t1-0/3/0 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle ls-0/0/0:10;
        }
    }
}
t1-0/3/1 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle ls-0/0/0:10;
        }
    }
}
}

```

## SEE ALSO

[encapsulation \(Physical Interface\) | 175](#)

[Configuring Link Services Physical Interfaces | 140](#)

## Example: Configuring Link and Voice Services Interfaces with a Combination of Bundle Types

```

[edit chassis]
fpc 1 {
    pic 3 {
        mlfr-uni-nni-bundles 4;
    }
}
[edit interfaces]

```

```

t1-0/2/0:0 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle ls-1/3/0:0;
        }
    }
}
t1-0/2/0:1 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle ls-1/3/0:0;
        }
    }
}
t1-0/2/0:5 {
    unit 0 {
        family mlppp {
            bundle ls-1/3/0.2;
        }
    }
}
t1-0/2/0:6 {
    unit 0 {
        family mlppp {
            bundle ls-1/3/0.2;
        }
    }
}
t1-0/2/0:7 {
    encapsulation frame-relay;
    unit 0 {
        dlci 20;
        family mlfr-end-to-end {
            bundle ls-1/3/0.1;
        }
    }
}
t1-0/2/0:8 {
    encapsulation frame-relay;
    unit 0 {
        dlci 20;
    }
}

```

```

        family mlfr-end-to-end {
            bundle ls-1/3/0.1;
        }
    }
}
t1-0/2/0:10 {
    no-keepalives;
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.0;
        }
    }
}
t3-1/0/0 {
    no-keepalives;
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.2;
        }
    }
}
lsq-1/1/0 {
    unit 0 {
        encapsulation multilink-ppp;
        compression {
            rtp {
                f-max-period 100;
                queues [ q1 q2 ];
                port minimum 2000 maximum 6000;
            }
        }
        family inet {
            address 10.5.5.5/24;
        }
    }
    unit 1 {
        encapsulation multilink-ppp;
        compression {
            rtp {
                port minimum 2000 maximum 6000;
            }
        }
    }
}

```

```

    }
    family inet {
        address 10.6.6.1/24;
    }
}
unit 2 {
    encapsulation multilink-ppp;
    compression {
        rtp {
            port minimum 2000 maximum 6000;
        }
    }
    family inet {
        address 10.9.9.1/24;
    }
}
}
t1-1/2/0 {
    no-keepalives;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.1;
        }
    }
}
ls-1/3/0 {
    unit 1 {
        encapsulation multilink-frame-relay-end-to-end;
        family inet {
            address 10.1.4.1/24;
        }
    }
    unit 2 {
        encapsulation multilink-ppp;
        family inet {
            address 10.7.4.1/24;
        }
    }
}
ls-1/3/0:0 {
    encapsulation multilink-frame-relay-uni-nni;
    mlfr-uni-nni-bundle-options {
        debug-flags 15;
    }
}

```

```

    }
    unit 0 {
        dlci 20;
        family inet {
            address 10.5.4.1/24;
        }
    }
}
[edit routing-options]
static {
    route 10.12.12.0/24 next-hop 10.1.1.9;
}

```

On Router B:

```

[edit chassis]
fpc 1 {
    pic 3 {
        mlfr-uni-nni-bundles 4;
    }
}
[edit interfaces]
ge-0/0/0 {
    unit 0 {
        family inet {
            address 10.1.1.1/24;
        }
    }
}
so-0/1/1 {
    encapsulation ppp;
    unit 0 {
        family inet {
            address 10.7.7.7/24;
        }
    }
}
t1-0/2/0:0 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle ls-1/3/0:0;
        }
    }
}

```

```

    }
  }
}
t1-0/2/0:1 {
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    family mlfr-uni-nni {
      bundle ls-1/3/0:0;
    }
  }
}
t1-0/2/0:5 {
  no-keepalives;
  unit 0 {
    family mlppp {
      bundle ls-1/3/0.2;
    }
  }
}
t1-0/2/0:6 {
  no-keepalives;
  unit 0 {
    family mlppp {
      bundle ls-1/3/0.2;
    }
  }
}
t1-0/2/0:7 {
  dce;
  encapsulation frame-relay;
  unit 0 {
    dlci 20;
    family mlfr-end-to-end {
      bundle ls-1/3/0.1;
    }
  }
}
t1-0/2/0:8 {
  dce;
  encapsulation frame-relay;
  unit 0 {
    dlci 20;
    family mlfr-end-to-end {

```

```

        bundle ls-1/3/0.1;
    }
}
t1-0/2/0:10 {
    no-keepalives;
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.0;
        }
    }
}
t3-0/3/0 {
    no-keepalives;
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.2;
        }
    }
}
ge-1/0/0 {
    unit 0 {
        family inet {
            address 10.2.2.1/24;
        }
    }
}
lsq-1/1/0 {
    unit 0 {
        compression {
            rtp {
                port minimum 2000 maximum 6000;
            }
        }
        family inet {
            address 10.5.5.1/24;
        }
    }
    unit 1 {
        encapsulation multilink-ppp;
        compression {

```

```

        rtp {
            port minimum 16384 maximum 20102;
        }
    }
    family inet {
        address 10.3.4.1/24;
    }
}
unit 2 {
    encapsulation multilink-ppp;
    compression {
        rtp {
            port minimum 2000 maximum 6000;
        }
    }
    family inet {
        address 10.9.9.9/24;
    }
}
}
t1-1/2/2 {
    no-keepalives;
    unit 0 {
        family mlppp {
            bundle ls-1/3/0.1;
        }
    }
}
t1-1/2/3 {
    no-keepalives;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.1;
        }
    }
}
ls-1/3/0 {
    unit 1 {
        encapsulation multilink-frame-relay-end-to-end;
        family inet {
            address 10.1.4.4/24;
        }
        family iso;
    }
}

```

```

    }
    unit 2 {
        encapsulation multilink-ppp;
        family inet {
            address 10.7.4.4/24;
        }
    }
}
ls-1/3/0:0 {
    dce;
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        dlci 20;
        family inet {
            address 10.5.4.4/24;
        }
    }
}
[edit routing-options]
static {
    route 10.12.12.0/24 next-hop 10.3.4.4;
}

```

## SEE ALSO

[Configuring Link Services Physical Interfaces | 140](#)

[encapsulation \(Physical Interface\) | 175](#)

## Enabling MLPPP Link Fragmentation and Interleaving

MLPPP enables you to bundle multiple PPP links into a single multilink bundle. MLPPP bundle support on an inline LSQ interface is identical to a non-inline LSQ interface, because the configuration to enable fragmentation, link fragmentation and interleaving (LFI), and timeout is identical.

Priority scheduling on a multilink bundle determines the order in which an output interface transmits traffic from an output queue. The queues are serviced in a weighted round-robin fashion. But when a queue containing large packets starts using the multilink bundle, small and delay-sensitive packets must wait their turn for transmission. Because of this delay, some slow links, such as T1 and E1, can become useless for delay-sensitive traffic.

Link fragmentation and interleaving (LFI) solves this problem. It reduces delay and jitter on links by fragmenting large packets and interleaving delay-sensitive packets with the resulting smaller packets for simultaneous transmission across multiple links of a multilink bundle.

To configure schedule maps and fragmentation maps for MLPPP LFI:

1. Assign each forwarding class to an internal queue number by including the `forwarding-classes` statement at the `[edit class-of-service]` hierarchy level.

```
[edit class-of-service]
forwarding-classes {
    queue queue-number class-name;
}
```

For example, to set four output transmission queues:

```
[edit class-of-service]
user@host# set forwarding-classes queue 0 be
user@host# set forwarding-classes queue 1 ef
user@host# set forwarding-classes queue 2 af
user@host# set forwarding-classes queue 3 nc
```

2. To set a per-forwarding class fragmentation threshold, include the `fragment-threshold` statement in the `fragmentation-maps`.

```
[edit class-of-service]
fragmentation-maps {
    map-name{
        forwarding-class class-name {
            fragment-threshold bytes;
        }
    }
}
```

For example, to create two fragmentation maps and set a per-forwarding class fragmentation threshold:

```
[edit class-of-service]
user@host# set fragmentation-maps fragmap-1 forwarding-class af fragment-threshold 320
user@host# set fragmentation-maps fragmap-1 forwarding-class be fragment-threshold 256
user@host# set fragmentation-maps fragmap-1 forwarding-class ef fragment-threshold no-
```

**fragmentation**

```

user@host# set fragmentation-maps fragmap-2 forwarding-class af fragment-threshold 192
user@host# set fragmentation-maps fragmap-2 forwarding-class be fragment-threshold 320
user@host# set fragmentation-maps fragmap-2 forwarding-class ef fragment-threshold 192
user@host# set fragmentation-maps fragmap-2 forwarding-class nc fragment-threshold no-
fragmentation

```

The `fragment-threshold` statement in the LSQ bundle logical interface configuration applies to all forwarding classes. The `fragment-threshold` statement in `fragmentation-maps` for a particular forwarding class, if present, overrides the statement configured in the LSQ bundle logical interface for that class. If `fragment-threshold` is not configured anywhere in the configuration, packets are still fragmented if `fragment-threshold` exceeds the smallest maximum transmission unit (*MTU*) or maximum received reconstructed unit (*MRRU*) of all links in the bundle.

### 3. Configure transmission scheduling parameters.

```

[edit class-of-service scheduler scheduler-name]
schedulers {
    scheduler-name {
        priority priority-level;
        transmit-rate (percent percentage | rate | remainder) <exact | rate-limit>;
    }
}

```

For example, to set the transmit-rate percentage and the priority-level:

```
[edit class-of-service scheduler af-scheduler]
user@host# set transmit-rate percent 30
user@host# set priority low
```

```
[edit class-of-service scheduler be-scheduler]
user@host# set transmit-rate percent 20
user@host# set priority low
```

```
[edit class-of-service scheduler ef-scheduler]
user@host# set transmit-rate percent 35
user@host# set priority strict-high
```

```
[edit class-of-service scheduler nc-scheduler]
user@host# set transmit-rate percent 15
user@host# set priority high
```

4. After defining a scheduler, associate it with a specified forwarding class by including it in a *scheduler-map*.

```
[edit class-of-service]
scheduler-maps {
  map-name {
    forwarding-class class-name scheduler scheduler-name;
  }
}
```

For example, to associate the af-scheduler, be-scheduler, ef-scheduler, and nc-scheduler schedulers, with the af, be, ef, and nc forwarding-classes:

```
[edit class-of-service]
user@host# set scheduler-maps sched-map1 forwarding-class af scheduler af-scheduler
user@host# set scheduler-maps sched-map1 forwarding-class be scheduler be-scheduler
user@host# set scheduler-maps sched-map1 forwarding-class ef scheduler ef-scheduler
user@host# set scheduler-maps sched-map1 forwarding-class nc scheduler nc-scheduler
```

## 5. Configure traffic shaping and scheduling profiles.

```
[edit class-of-service]
traffic-control-profiles {
  profile-name {
    guaranteed-rate (percent percentage | rate) <burst-size bytes>;
    scheduler-map map-name;
    shaping-rate (percent percentage | rate) <burst-size bytes>;
  }
}
```

For example, to set the traffic-control policies:

```
[edit class-of-service traffic-control-policies m1-tcp1]
user@host# set guaranteed-rate 1m
user@host# set scheduler-map sched-map1
user@host# set shaping-rate 1m
```

## 6. Configure interface-specific CoS properties for incoming packets.

```
[edit class-of-service]
interfaces {
  interface-name {
    unit logical-unit-number {
      fragmentation-map map-name;
      output-traffic-control-profile profile-name;
    }
  }
}
```

For example, to apply the specified CoS traffic control profile (traffic scheduling and shaping configuration objects) to the output traffic at the logical interface:

```
[edit class-of-service]
user@host# set interfaces lsq-0/1/0 unit 100 fragmentation-map fragmap-1 output-traffic-
control-profile m1-tcp1
```

The following partial configuration shows when the fragment threshold for low priority queues inherits from the fragment threshold configured in the bundle IFL and will have the value of 640.

```
[edit class-of-service]
forwarding-classes {
    queue 0 be;
    queue 1 ef;
    queue 2 af;
    queue 3 nc;
}
fragmentation-maps {
    fragmap-3 {
        forwarding-class ef {
            no-fragmentation;
        }
    }
}
schedulers {
    af-scheduler {
        transmit-rate percent 30;
        priority low;
    }
    be-scheduler {
        transmit-rate percent 20;
        priority low;
    }
    ef-scheduler {
        transmit-rate percent 35 rate-limit;
        priority strict-high;
    }
    nc-scheduler {
        transmit-rate percent 15;
        priority high;
    }
}
....
```

## SEE ALSO

[Understanding MLPPP Bundles and Link Fragmentation and Interleaving \(LFI\) on Serial Links](#) | 10

*Inline MLPPP for WAN Interfaces Overview*

[Example: Configuring Inline MLPPP and Multilink Frame Relay End-to-End \(FRF.15\) for WAN Interfaces | 65](#)

[Example: Configuring Inline Multilink Frame Relay \(FRF.16\) for WAN Interfaces | 103](#)

## Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces

### IN THIS SECTION

- [Configuring LFI with DLCI Scheduling | 31](#)

For link services FRF.15 and MLPPP interfaces only, you can configure link fragment interleaving (LFI). LFI reduces excessive delays of Frame Relay packets by fragmenting long packets into smaller packets and interleaving them with real-time frames. This allows real-time and non-real-time data frames to be carried together on lower-speed links without causing excessive delays to the real-time traffic. When the peer interface receives the smaller fragments, it reassembles the fragments into their original packet. For example, short delay-sensitive packets, such as packetized voice, can race ahead of larger delay-insensitive packets, such as common data packets.

**NOTE:** All Link Services PICs (4-multilink bundle, 32-multilink bundle, and 128-multilink bundle) support up to 256 link services interfaces with LFI enabled, if those link services interfaces contain only one constituent link each. For the Link Services PIC, multiple-link LFI bundles are simply multilink bundles, and are limited based on the type of PIC (4-multilink bundle, 32-multilink bundle, and 128-multilink bundle).

In addition, the multilink bundles you configure subtract from the total of 256 possible LFI-enabled link services interfaces. For example, if a 32-multilink bundle Link Services PIC has 24 multilink bundles configured and active, then you can configure  $256 - 24 = 232$  LFI-enabled link services interfaces, each with a single constituent link.

For link services IQ interfaces (lsq), the `interleave-fragments` statement is not valid. Instead, you can enable LFI by configuring fragmentation maps. For more information, see *Configuring CoS Fragmentation by Forwarding Class on LSQ Interfaces*.

You can configure multiple links in a bundle and configure packet interleaving. However, if you use packet interleaving, high-priority, nonmultilink-encapsulated packets use a hash-based algorithm to choose a single link.

Per-bundle CoS queuing is supported on link services IQ interfaces (lsq). For more information about link services IQ interfaces, see *Layer 2 Service Package Capabilities and Interfaces*.

The Junos OS supports end-to-end fragmentation in compliance with the FRF.12 *Frame Relay Fragmentation Implementation Agreement* standard. Unlike user-to-network interface (UNI) and network-to-network (NNI) fragmentation, end-to-end supports fragmentation only at the endpoints.

By default, packet interleaving is disabled. To enable packet interleaving, include the `interleave-fragments` statement:

```
interleave-fragments;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

## Configuring LFI with DLCI Scheduling

For Link Services and Channelized DS3 IQ PICs, you can configure LFI and DLCI scheduling. For channelized DS3 interfaces, LFI is supported with FRF.15 only, and on M10i and M20 platforms only.

Configuring LFI with DLCI scheduling enables packets entering the Link Services PIC to be fragmented before being transmitted to the Channelized DS3 IQ PIC. Once the fragmented packets enter the Channelized DS3 IQ PIC, they are scheduled at the DLCI level, to allow priority transmission for real-time applications.

For more information about associating a scheduler with a DLCI, see the [Junos OS Class of Service User Guide for Routing Devices](#).

### Example: Configuring LFI with DLCI Scheduling

Configure packets entering the Link Services PIC to be fragmented before being transmitted to the Channelized DS3 IQ PIC. Once the fragmented packets enter the Channelized DS3 IQ PIC, they are scheduled at the DLCI level, to allow priority transmission for real-time applications.

```
[edit interfaces]
ls-1/0/0 {
  unit 1 {
```

```

encapsulation multilink-frame-relay-end-to-end;
interleave-fragments;
family inet {
    address 192.168.5.2/32 {
        destination 192.168.5.3;
    }
}
}
t3-1/0/0:1 {
    per-unit-scheduler;
    unit 0 {
        dlci 16;
        encapsulation multilink-frame-relay-end-to-end;
        family mlfr-end-to-end {
            bundle ls-1/0/0.1;
        }
    }
}
[edit class-of-service]
interfaces {
    t3-1/0/0:1 {
        unit 0 {
            scheduler-map sched-map-logical-0;
            shaping-rate 10m;
        }
        unit 1 {
            scheduler-map sched-map-logical-1;
            shaping-rate 20m;
        }
    }
}
scheduler-maps {
    sched-map-logical-0 {
        forwarding-class best-effort scheduler sched-best-effort-0;
        forwarding-class assured-forwarding scheduler sched-bronze-0;
        forwarding-class expedited-forwarding scheduler sched-silver-0;
        forwarding-class network-control scheduler sched-gold-0;
    }
    sched-map-logical-1 {
        forwarding-class best-effort scheduler sched-best-effort-1;
        forwarding-class assured-forwarding scheduler sched-bronze-1;
        forwarding-class expedited-forwarding scheduler sched-silver-1;
        forwarding-class network-control scheduler sched-gold-1;
    }
}

```

```

    }
    schedulers {
        sched-best-effort-0 {
            transmit-rate 4m;
        }
        sched-bronze-0 {
            transmit-rate 3m;
        }
        sched-silver-0 {
            transmit-rate 2m;
        }
        sched-gold-0 {
            transmit-rate 1m;
        }
        sched-best-effort-1 {
            transmit-rate 8m;
        }
        sched-bronze-1 {
            transmit-rate 6m;
        }
        sched-silver-1 {
            transmit-rate 4m;
        }
        sched-gold-1 {
            transmit-rate 2m;
        }
    }
}
}
}

```

## SEE ALSO

[Link and Multilink Services Overview | 2](#)

[Configuring Link and Multilink Services Bundles | 10](#)

[Configuring DLCIs on Link Services Logical Interfaces | 100](#)

# Configuring MLPPP

## IN THIS SECTION

- [Understanding MLPPP | 34](#)
- [Guidelines for Configuring MLPPP With LSQ Interfaces on ACX Series Routers | 35](#)
- [Example: Configuring an MLPPP Bundle on ACX Series | 42](#)
- [Configuring LSQ Interfaces as NxT1 or Nx E1 Bundles Using MLPPP on ACX Series | 44](#)
- [Example: Configuring an LSQ Interface as an NxT1 Bundle Using MLPPP | 48](#)
- [Understanding Multiclass MLPPP | 52](#)
- [Configuring Multiclass MLPPP on LSQ Interfaces | 53](#)

## Understanding MLPPP

### IN THIS SECTION

- [MLPPP Support on ACX Series Routers | 35](#)

Multilink Point-to-Point Protocol (MLPPP) enables you to bundle multiple PPP links into a single multilink bundle. Multilink bundles provide additional bandwidth, load balancing, and redundancy by aggregating low-speed links, such as T1 and E1 links.

You configure multilink bundles as logical units or channels on the link services interface. With MLPPP, multilink bundles are configured as logical units on the link service interface—for example, `lsq-0/0/0.0`, `lsq-0/0/0.1`. After creating multilink bundles, you add constituent links to the bundle. The constituent links are the low-speed physical links that are to be aggregated.

The following rules apply when you add constituent links to a multilink bundle:

- On each multilink bundle, add only interfaces of the same type. For example, you can add either T1 or E1, but not both.
- Only interfaces with a PPP encapsulation can be added to an MLPPP bundle.

- If an interface is a member of an existing bundle and you add it to a new bundle, the interface is automatically deleted from the existing bundle and added to the new bundle.

With MLPPP bundles, you can use PPP Challenge Handshake Authentication Protocol (CHAP) and Password Authentication Protocol (PAP) for secure transmission over the PPP interfaces. For more information, see *Configuring the PPP Challenge Handshake Authentication Protocol* and *Configuring the PPP Password Authentication Protocol*.

## MLPPP Support on ACX Series Routers

ACX Series routers support MLPPP encapsulations. MLPPP is supported on ACX1000, ACX2000, ACX2100 routers, and with Channelized OC3/STM1 (Multi-Rate) MICs with SFP and 16-port Channelized E1/T1 Circuit Emulation MIC on ACX4000 routers.

The following table shows the maximum number of multilink bundles you can create on ACX Series routers:

**Table 3: Multilink Bundles Supported by ACX Series Routers**

ACX Platform	Maximum Bundles	Maximum Links	Maximum Links Per Bundle
ACX2000 ACX2100	16	16	16
ACX4000 ACX-MIC-16CHE1-T1-CE	16	16	16
ACX4000 ACX-MIC-4COC3-1COC12CE	50	336	16
ACX1000	8	8	8

## Guidelines for Configuring MLPPP With LSQ Interfaces on ACX Series Routers

You can configure MLPPP bundle interfaces with T1/E1 member links. The traffic that is transmitted over the MLPPP bundle interface is spread over the member links in a round-robin manner. If the packet size is higher than the fragmentation size configured on the MLPPP interface, the packet are

fragmented. The fragments are also sent over member links in a round-robin pattern. The PPP control packets received on the interface are terminated on the router. The fragmentation size is configured at the MLPPP bundle-level. This fragmentation size is applied to all the packets on the bundle, regardless of the multilink class.

Multiclass MLPPP segregates the multilink protocol packets in to multiple classes. ACX routers support up to a maximum of four classes. One queue is associated with each of the four classes of multiclass MLPPP. The packets can be classified to be part of one of the classes. These packets take the queue associated with the class. The packets inside a queue are served in first-in first-out (FIFO) sequence.

Multiclass MLPPP is required to provide preferential treatment to high-priority, delay-sensitive traffic. The delay-sensitive smaller real-time frames are classified such that they end up in higher priority queue. While a lower priority packet is being fragmented, if a higher priority packet is enqueued, the lower priority fragmentation is suspended, the higher priority packet is fragmented and enqueued for transmission, and then the lower priority packet fragmentation is resumed.

Traditional LSQ interfaces (anchored on PICs) are supported to combine T1/E1 interfaces in an MLPPP bundle interface. Inline services (si-) interfaces and inline LSQ interfaces are not supported in MLPPP bundles. On ACX routers, MLPPP bundling is performed on the TDM MICs and traditional LSQ model is most effective mechanism. You can configure channelized OC interfaces (*t1-x/y/z:n:m*, *e1-x/y/z:n*) as members of an MLPPP bundle interface. A maximum of 16 member links per bundle is supported. The MPLS, ISO, and inet address families are supported. The ISO address family is supported only for IS-IS. You can configure MLPPP bundles on network-to-network interface (NNI) direction of an Ethernet pseudowire. Interleaving using multiclass MLPPP is supported.

Keep the following points in mind when you configure MLPPP bundles on ACX routers:

- The physical links must be of the same type and bandwidth.
- Round-robin packet distribution is performed over the member links.
- To add a T1 or E1 member link to the MLPPP bundle as link services LSQ interfaces, include the bundle statement at the [edit interfaces *t1-fpc/pic/port* unit *logical-unit-number* family *mlppp*] hierarchy level:

```
[edit interfaces t1-fpc/pic/port unit logical-unit-number family mlppp]
bundle lsq-fpc/pic/port.logical-unit-number;
```

- To configure the link services LSQ interface properties, include the following statements at the [edit interfaces *lsq-fpc/pic/port* unit *logical-unit-number*] hierarchy level:

```
[edit interfaces lsq-fpc/pic/port unit logical-unit-number]
encapsulation multilink-ppp;
fragment-threshold bytes;
```

```

minimum-links number;
mrru bytes;
short-sequence;
family inet {
    address address;
}

```

You can configure the address family as MPLS for the LSQ interfaces in an MLPPP bundle.

- PPP control protocol support depends on the processing of the PPP application for MLPPP bundle interfaces IPv4, Internet Protocol Control Protocol (IPCP), PPP Challenge Handshake Authentication Protocol (CHAP), and Password Authentication Protocol (PAP) applications are supported for PPP.
- Drop timeout configuration is not applicable to ACX routers
- The member links across MICs cannot be bundled. Only physical interfaces on the same MIC can be bundled.
- Fractional T1 and E1 interfaces are not supported. CoS is supported only for full T1 and E1 interfaces. Selective time slots of T1/E1 cannot be used and full T1/E1 interfaces must be used.
- Detailed statistics displayed depend on the parameters supported by the hardware. The counters that are supported by the hardware are displayed with appropriate values in the output of the `show interfaces lsq-fpc/pic/port detail` command.

In the following sample output, the fields that are displayed with a value of 0 denote the fields that are not supported for computation by ACX routers. In the `lsq-` interface statistics, non-fragment statistics of the bundle are not accounted. Non-fragments are typically treated as single-fragment frames and counted in the fragment statistics.

```

user@host# show interfaces lsq-1/1/0 detail
Physical interface: lsq-1/1/0, Enabled, Physical link is Up
  Interface index: 162, SNMP ifIndex: 550, Generation: 165
  Description: LSQ-interface
  Link-level type: LinkService, MTU: 1504
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps Internal: 0x0
  Last flapped   : 2015-06-22 19:01:47 PDT (2d 04:56 ago)
  Statistics last cleared: 2015-06-23 05:01:49 PDT (1d 18:56 ago)
  Traffic statistics:
    Input  bytes :           108824           208896 bps
    Output bytes :           90185           174080 bps
    Input  packets:           1075             256 pps
    Output packets:           1061             256 pps

```

```

IPv6 transit statistics:
  Input bytes : 0
  Output bytes : 0
  Input packets: 0
  Output packets: 0
Frame exceptions:
  Oversized frames 0
  Errored input frames 0
  Input on disabled link/bundle 0
  Output for disabled link/bundle 0
  Queuing drops 0
Buffering exceptions:
  Packet data buffer overflow 0
  Fragment data buffer overflow 0
Assembly exceptions:
  Fragment timeout 0
  Missing sequence number 0
  Out-of-order sequence number 0
  Out-of-range sequence number 0
Hardware errors (sticky):
  Data memory error 0
  Control memory error 0

Logical interface lsq-1/1/0.0 (Index 326) (SNMP ifIndex 599) (Generation 177)
Flags: Up Point-To-Point SNMP-Traps 0x0 Encapsulation: Multilink-PPP
Last flapped: 2015-06-24 23:57:34 PDT (00:00:51 ago)
Bandwidth: 6144kbps
Bundle links information:
  Active bundle links 4
  Removed bundle links 0
  Disabled bundle links 0
Bundle options:
  MRRU 2000
  Remote MRRU 2000
  Drop timer period 0
  Inner PPP Protocol field compression enabled
  Sequence number format short (12 bits)
  Fragmentation threshold 450
  Links needed to sustain bundle 3
  Multilink classes 4
  Link layer overhead 4.0 %
Bundle status:
  Received sequence number 0x0

```

```

Transmit sequence number      0x0
Packet drops                  0 (0 bytes)
Fragment drops                0 (0 bytes)
MRRU exceeded                 0
Fragment timeout              0
Missing sequence number       0
Out-of-order sequence number  0
Out-of-range sequence number  0
Packet data buffer overflow    0
Fragment data buffer overflow  0

Statistics      Frames      fps      Bytes      bps
Bundle:
Multilink:
  Input :      1076      256      484200      921600
  Output:      1061      256      477450      921600
Network:
  Input :      2182      256      201812      208896
  Output:      2168      256      192029      174080
IPv6 Transit Statistics      Packets      Bytes
Network:
  Input :      0      0
  Output:      0      0
Multilink class 0:
Multilink:
  Input :      1075      256      483750      921600
  Output:      1061      256      477450      921600
Network:
  Input :      1061      256      477450      921600
  Output:      1075      256      483750      921600
Multilink class 1:
Multilink:
  Input :      0      0      0      0
  Output:      0      0      0      0
Network:
  Input :      0      0      0      0
  Output:      0      0      0      0
Multilink class 2:
Multilink:
  Input :      0      0      0      0
  Output:      0      0      0      0
Network:
  Input :      0      0      0      0
  Output:      0      0      0      0

```

## Multilink class 3:

## Multilink:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Network:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Link:

## t1-1/1/1.0

Up time: 00:00:51

Input :	280	64	126000	230400
---------	-----	----	--------	--------

Output:	266	64	119700	230400
---------	-----	----	--------	--------

## t1-1/1/2.0

Up time: 00:00:51

Input :	266	64	119700	230400
---------	-----	----	--------	--------

Output:	265	64	119250	230400
---------	-----	----	--------	--------

## t1-1/1/3.0

Up time: 00:00:51

Input :	265	64	119250	230400
---------	-----	----	--------	--------

Output:	265	64	119250	230400
---------	-----	----	--------	--------

## t1-1/1/4.0

Up time: 00:00:51

Input :	265	64	119250	230400
---------	-----	----	--------	--------

Output:	265	64	119250	230400
---------	-----	----	--------	--------

## Multilink detail statistics:

## Bundle:

## Fragments:

Input :	1076	256	484200	921600
---------	------	-----	--------	--------

Output:	1061	256	477450	921600
---------	------	-----	--------	--------

## Non-fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## LFI:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Multilink class 0:

## Fragments:

Input :	1076	256	484200	921600
---------	------	-----	--------	--------

Output:	1061	256	477450	921600
---------	------	-----	--------	--------

## Non-fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Multilink class 1:

```

Fragments:
  Input :      0      0      0      0
  Output:      0      0      0      0
Non-fragments:
  Input :      0      0      0      0
  Output:      0      0      0      0
Multilink class 2:
  Fragments:
    Input :      0      0      0      0
    Output:      0      0      0      0
  Non-fragments:
    Input :      0      0      0      0
    Output:      0      0      0      0
Multilink class 3:
  Fragments:
    Input :      0      0      0      0
    Output:      0      0      0      0
  Non-fragments:
    Input :      0      0      0      0
    Output:      0      0      0      0
NCP state: inet: Opened, inet6: Not-configured, iso: Opened, mpls: Opened
Protocol inet, MTU: 1500, Generation: 232, Route table: 0
  Flags: Sendbcst-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 9.1.9/24, Local: 9.1.9.18, Broadcast: Unspecified, Generation: 212
Protocol iso, MTU: 1500, Generation: 233, Route table: 0
  Flags: Is-Primary
Protocol mpls, MTU: 1488, Maximum labels: 3, Generation: 234, Route table: 0
  Flags: Is-Primary

```

- For modifying the frame checksum (FCS) in the set of T1 options or E1 options on a MLPPP bundle member link, you must remove the member link out of the bundle by deactivating the link or unconfiguring it as a bundle member, and add the link back to the bundle after FCS modification. You must first remove the link from the bundle and modify FCS. If you are configuring FCS for the first time on the member link, specify the value before it is added to the bundle.

The following MLPPP functionalities are not supported on ACX Series routers:

- Member links across MICs.
- Fragmentation per class (only configurable at bundle level).

- IPv6 address family header compression (no address and control field compression [ACFC] or protocol field compression [PFC]).
- Prefix elision as defined in *RFC 2686, The Multi-Class Extension to Multi-Link PPP*.
- A functionality that resembles link fragmentation and interleaving (LFI) can be achieved using multiclass MLPPP (RFC 2686), which interleaves the high priority packets between lower priority packets. This methodology ensures that the delay desitive packets are sent as soon as they arrive. While LFI-classified packets are sent to a specific member link as PPP packets, the ACX implementation of interleaving contains multilink PPP (also referred to as PPP Multilink, MLP, and MP) headers and fragments that are sent on all member links in a round-robin manner.
- PPP over MLPPP bundle interfaces.

## Example: Configuring an MLPPP Bundle on ACX Series

### IN THIS SECTION

- [Requirements | 42](#)
- [Overview | 42](#)
- [Configuration | 42](#)

### Requirements

You require ACX Series routers to configure the following example

### Overview

The following is a sample for configuring an MLPPP bundle on ACX Series routers:

### Configuration

### IN THIS SECTION

- [CLI Quick Configuration | 43](#)
- [Procedure | 44](#)

## CLI Quick Configuration

```
[edit]
user@host# show interfaces
lsq-1/1/0 {
    description LSQ-interface;
    per-unit-scheduler;
    unit 0 {
        encapsulation multilink-ppp;
        mrru 2000;
        short-sequence;
        fragment-threshold 450;
        minimum-links 3;
        multilink-max-classes 4;
        family inet {
            address 9.1.9.18/24
        }
        family iso;
        family mpls;
    }
}
ct1-1/1/1 {
    enable;
    no-partition interface-type t1;
}
t1-1/1/1 {
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.0;
        }
    }
}
ct1-1/1/2 {
    enable;
    no-partition interface-type t1;
}
t1-1/1/2 {
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.0;
        }
    }
}
```

```

    }
  }
}
ct1-1/1/3 {
  enable;
  no-partition interface-type t1;
}
t1-1/1/3 {
  encapsulation ppp;
  unit 0 {
    family mlppp {
      bundle lsq-1/1/0.0;
    }
  }
}
ct1-1/1/4 {
  enable;
  no-partition interface-type t1;
}
t1-1/1/4 {
  encapsulation ppp;
  unit 0 {
    family mlppp {
      bundle lsq-1/1/0.0;
    }
  }
}
}

```

## Procedure

### Step-by-Step Procedure

## Configuring LSQ Interfaces as NxT1 or Nx E1 Bundles Using MLPPP on ACX Series

LSQ interfaces support both T1 and E1 physical interfaces. These instructions apply to T1 interfaces, but the configuration for E1 interfaces is similar.

To configure an  $N \times T1$  bundle using MLPPP, you aggregate  $N$  different T1 links into a bundle. The  $N \times T1$  bundle is called a logical interface, because it can represent, for example, a routing adjacency. To aggregate T1 links into a an MLPPP bundle, include the bundle statement at the [edit interfaces t1-*fpc/pic/port* unit *logical-unit-number* family mlppp] hierarchy level:

```
[edit interfaces t1-fpc/pic/port unit logical-unit-number family mlppp]
bundle lsq-fpc/pic/port.logical-unit-number;
```

To configure the LSQ interface properties, include the following statements at the [edit interfaces lsq-*fpc/pic/port* unit *logical-unit-number*] hierarchy level:

```
[edit interfaces lsq-fpc/pic/port unit logical-unit-number]
drop-timeout milliseconds;
encapsulation multilink-ppp;
fragment-threshold bytes;
link-layer-overhead percent;
minimum-links number;
mrru bytes;
short-sequence;
family inet {
    address address;
}
```

**NOTE:** ACX Series routers do not support drop-timeout and link-layer-overhead properties.

The logical link services IQ interface represents the MLPPP bundle. For the MLPPP bundle, there are four associated queues on M Series routers and eight associated queues on M320 and T Series routers. A scheduler removes packets from the queues according to a scheduling policy. Typically, you designate one queue to have strict priority, and the remaining queues are serviced in proportion to weights you configure.

For MLPPP, assign a single scheduler map to the link services IQ interface (lsq) and to each constituent link. The default schedulers for M Series and T Series routers, which assign 95, 0, 0, and 5 percent bandwidth for the transmission rate and buffer size of queues 0, 1, 2, and 3, are not adequate when you configure LFI or multiclass traffic. Therefore, for MLPPP, you should configure a single scheduler with nonzero percent transmission rates and buffer sizes for queues 0 through 3, and assign this scheduler to the link services IQ interface (lsq) and to each constituent link..

**NOTE:** For M320 and T Series routers, the default scheduler transmission rate and buffer size percentages for queues 0 through 7 are 95, 0, 0, 5, 0, 0, 0, and 0 percent.

If the bundle has more than one link, you must include the `per-unit-scheduler` statement at the `[edit interfaces lsq-fpc/pic/port]` hierarchy level:

```
[edit interfaces lsq-fpc/pic/port]  
per-unit-scheduler;
```

To configure and apply the scheduling policy, include the following statements at the `[edit class-of-service]` hierarchy level:

```
[edit class-of-service]  
interfaces {  
    t1-fpc/pic/port unit logical-unit-number {  
        scheduler-map map-name;  
    }  
}  
forwarding-classes {  
    queue queue-number class-name;  
}  
scheduler-maps {  
    map-name {  
        forwarding-class class-name scheduler scheduler-name;  
    }  
}  
schedulers {  
    scheduler-name {  
        buffer-size (percent percentage | remainder | temporal microseconds);  
        priority priority-level;  
        transmit-rate (rate | remainder) <exact>;  
    }  
}
```

For link services IQ interfaces, a strict-high-priority queue might starve the other three queues because traffic in a strict-high priority queue is transmitted before any other queue is serviced. This implementation is unlike the standard Junos CoS implementation in which a strict-high-priority queue does round-robin with high-priority queues, as described in the [Junos OS Class of Service User Guide for Routing Devices](#).

After the scheduler removes a packet from a queue, a certain action is taken. The action depends on whether the packet came from a multilink encapsulated queue (fragmented and sequenced) or a nonencapsulated queue (hashed with no fragmentation). Each queue can be designated as either multilink encapsulated or nonencapsulated, independently of the other. By default, traffic in all forwarding classes is multilink encapsulated. To configure packet fragmentation handling on a queue, include the `fragmentation-maps` statement at the `[edit class-of-service]` hierarchy level:

```
fragmentation-maps {
  map-name {
    forwarding-class class-name {
      multilink-class number;
    }
  }
}
```

For *NxT1* bundles using MLPPP, the byte-wise load balancing used in multilink-encapsulated queues is superior to the flow-wise load balancing used in nonencapsulated queues. All other considerations are equal. Therefore, we recommend that you configure all queues to be multilink encapsulated. You do this by including the `fragment-threshold` statement in the configuration. You use the `multilink-class` statement to map a forwarding class into a multiclass MLPPP. For more information about fragmentation maps, see *Configuring CoS Fragmentation by Forwarding Class on LSQ Interfaces*.

When a packet is removed from a multilink-encapsulated queue, the software gives the packet an MLPPP header. The MLPPP header contains a sequence number field, which is filled with the next available sequence number from a counter. The software then places the packet on one of the *N* different T1 links. The link is chosen on a packet-by-packet basis to balance the load across the various T1 links.

If the packet exceeds the minimum link MTU, or if a queue has a fragment threshold configured at the `[edit class-of-service fragmentation-maps map-name forwarding-class class-name]` hierarchy level, the software splits the packet into two or more fragments, which are assigned consecutive multilink sequence numbers. The outgoing link for each fragment is selected independently of all other fragments.

If you do not include the `fragment-threshold` statement in the fragmentation map, the fragmentation threshold you set at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level is the default for all forwarding classes. If you do not set a maximum fragment size anywhere in the configuration, packets are fragmented if they exceed the smallest MTU of all the links in the bundle.

Even if you do not set a maximum fragment size anywhere in the configuration, you can configure the maximum received reconstructed unit (MRRU) by including the `mrru` statement at the `[edit interfaces lsq-fpc/pic/port unit logical-unit-number]` hierarchy level. The MRRU is similar to the MTU, but is specific to link services interfaces. By default the MRRU size is 1500 bytes, and you can configure it to be from

1500 through 4500 bytes. For more information, see ["Configuring MRRU on Multilink and Link Services Logical Interfaces" on page 147](#).

When a packet is removed from a nonencapsulated queue, it is transmitted with a plain PPP header. Because there is no MLPPP header, there is no sequence number information. Therefore, the software must take special measures to avoid packet reordering. To avoid packet reordering, the software places the packet on one of the  $N$  different T1 links. The link is determined by hashing the values in the header. For IP, the software computes the hash based on source address, destination address, and IP protocol. For MPLS, the software computes the hash based on up to five MPLS labels, or four MPLS labels and the IP header.

For UDP and TCP the software computes the hash based on the source and destination ports, as well as source and destination IP addresses. This guarantees that all packets belonging to the same TCP/UDP flow always pass through the same T1 link, and therefore cannot be reordered. However, it does not guarantee that the load on the various T1 links is balanced. If there are many flows, the load is usually balanced.

The  $N$  different T1 interfaces link to another router, which can be from Juniper Networks or another vendor. The router at the far end gathers packets from all the T1 links. If a packet has an MLPPP header, the sequence number field is used to put the packet back into sequence number order. If the packet has a plain PPP header, the software accepts the packet in the order in which it arrives and makes no attempt to reassemble or reorder the packet.

## Example: Configuring an LSQ Interface as an NxT1 Bundle Using MLPPP

```
[edit interfaces]
lsq-1/1/0 {
  per-unit-scheduler;
  unit 0 {
    encapsulation multilink-ppp;
    mrru 2000;
    multilink-max-classes 4;
    family inet {
      address 20.1.1.1/24;
    }
    family mpls;
  }
}
ct1-1/1/4 {
  enable;
  no-partition interface-type t1;
```

```

}
t1-1/1/4 {
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.0;
        }
    }
}
ct1-1/1/5 {
    enable;
    no-partition interface-type t1;
}
t1-1/1/5 {
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle lsq-1/1/0.0;
        }
    }
}
}
}
class-of-service {
    classifiers {
        inet-precedence myIPv4 {
            forwarding-class best-effort {
                loss-priority low code-points 000;
            }
            forwarding-class expedited-forwarding {
                loss-priority low code-points 001;
            }
            forwarding-class assured-forwarding {
                loss-priority low code-points 011;
            }
            forwarding-class network-control {
                loss-priority low code-points 111;
            }
        }
    }
}
drop-profiles {
    dp1 {
        fill-level 50 drop-probability 0;
        fill-level 100 drop-probability 100;
    }
}

```

```

    }
    dp2 {
        fill-level 50 drop-probability 0;
        fill-level 100 drop-probability 100;
    }
}
interfaces {
    lsq-1/1/0 {
        unit 0 {
            scheduler-map sm;
            fragmentation-map frag;
            rewrite-rules {
                inet-precedence myRRIPv4;
            }
        }
    }
}
rewrite-rules {
    inet-precedence myRRIPv4 {
        forwarding-class best-effort {
            loss-priority low code-point 111;
        }
        forwarding-class expedited-forwarding {
            loss-priority low code-point 011;
        }
        forwarding-class assured-forwarding {
            loss-priority low code-point 001;
        }
        forwarding-class network-control {
            loss-priority low code-point 000;
        }
    }
}
scheduler-maps {
    sm {
        forwarding-class best-effort scheduler new;
        forwarding-class network-control scheduler new_nc;
        forwarding-class assured-forwarding scheduler new_af;
        forwarding-class expedited-forwarding scheduler new_ef;
    }
}
fragmentation-maps {
    frag {

```

```

        forwarding-class {
            best-effort {
                multilink-class 3;
            }
            network-control {
                multilink-class 0;
            }
            assured-forwarding {
                multilink-class 2;
            }
            expedited-forwarding {
                multilink-class 1;
            }
        }
    }
}

schedulers {
    new {
        transmit-rate 32k;
        shaping-rate 3m;
        priority low;
        drop-profile-map loss-priority low protocol any drop-profile dp1;
        drop-profile-map loss-priority high protocol any drop-profile dp2;
    }
    new_nc {
        transmit-rate 32k;
        shaping-rate 3m;
        priority strict-high;
    }
    new_af {
        transmit-rate 32k;
        shaping-rate 3m;
        priority medium-low;
    }
    new_ef {
        transmit-rate 32k;
        shaping-rate 3m;
        priority medium-high;
    }
}
}

```

## Understanding Multiclass MLPPP

Multiclass MLPPP makes it possible to have multiple classes of latency-sensitive traffic that are carried over a single multilink bundle with bulk traffic. In effect, multiclass MLPPP allows different classes of traffic to have different latency guarantees. With multiclass MLPPP, you can map each forwarding class into a separate multilink class, thus preserving priority and latency guarantees. Multiclass MLPPP is defined in RFC 2686, *The Multi-Class Extension to Multi-Link PPP*. You can only configure multiclass MLPPP for link services intelligent queuing (LSQ) interfaces (lsq-) with MLPPP encapsulation.

Multiclass MLPPP greatly simplifies packet ordering issues that occur when multiple links are used. Without multiclass MLPPP, all voice traffic belonging to a single flow is hashed to a single link to avoid packet ordering issues. With multiclass MLPPP, you can assign voice traffic to a high-priority class, and you can use multiple links. For more information about voice services support on LSQ interfaces, see *Configuring Services Interfaces for Voice Services*.

If you do not configure multiclass MLPPP, fragments from different classes cannot be interleaved. All fragments for a single packet must be sent before the fragments from another packet are sent. Nonfragmented packets can be interleaved between fragments of another packet to reduce latency seen by nonfragmented packets. In effect, latency-sensitive traffic is encapsulated as regular PPP traffic, and bulk traffic is encapsulated as multilink traffic. This model works as long as there is a single class of latency-sensitive traffic, and there is no high-priority traffic that takes precedence over latency-sensitive traffic.

This approach to link fragmentation interleaving (LFI), used on the Link Services PIC, supports only two levels of traffic priority, which is not sufficient to carry the four to eight forwarding classes that are supported by M Series and T Series routers. For more information about the Link Services PIC support of LFI, see ["Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces" on page 30](#).

**NOTE:** ACX Series routers do not support LFI.

Configuring both LFI and multiclass MLPPP on the same bundle is not necessary, nor is it supported, because multiclass MLPPP represents a superset of functionality. When you configure multiclass MLPPP, LFI is automatically enabled.

**NOTE:** The Junos OS implementation of multiclass MLPPP does not support compression of common header bytes, which is referred to in RFC 2686 as "prefix elision."

## Configuring Multiclass MLPPP on LSQ Interfaces

To configure multiclass MLPPP on a LSQ interface, you must specify how many multilink classes should be negotiated when a link joins the bundle, and you must specify the mapping of a forwarding class into an multiclass MLPPP class.

1. To specify how many multilink classes should be negotiated when a link joins the bundle, include the `multilink-max-classes` statement:

```
multilink-max-classes number;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

The number of multilink classes can be 1 through 8. The number of multilink classes for each forwarding class must not exceed the number of multilink classes to be negotiated.

**NOTE:** In ACX Series routers, the multilink classes can be 1 through 4.

2. To specify the mapping of a forwarding class into a multiclass MLPPP class, include the `multilink-class` statement at the [edit class-of-service fragmentation-maps *map-name* forwarding-class *class-name*] hierarchy level:

```
[edit class-of-service fragmentation-maps map-name forwarding-class class-name]  
multilink-class number;
```

The multilink class index number can be 0 through 7. The `multilink-class` statement and `no-fragmentation` statements are mutually exclusive.

**NOTE:** In ACX Series routers, the multilink class index number can be 0 through 3. ACX Series routers do not support the `no-fragmentation` statement for fragmentation map.

3. To view the number of multilink classes negotiated, issue the `show interfaces lsq-fpc/pic/port.logical-unit-number detail` command.

Considerations for link services IQ (lsq) interfaces on ACX Series routers:

- The maximum number of multilink classes to be negotiated when a link joins the bundle that you can specify by using the `multilink-max-classes` statement at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level is limited to 4.
- Fragmentation size is not specified under fragmentation map; instead, fragmentation size configured on the bundle is used.
- Compressed Real-Time Transport Protocol (RTP) is not supported.
- HDLC address and control field compression (ACFC) and PPP protocol field compression (PFC) are not supported.

## SEE ALSO

*Layer 2 Service Package Capabilities and Interfaces*

*Configuring LSQ Interfaces for ATM2 IQ Interfaces Using MLPPP*

*Configuring LSQ Interfaces for T3 Links Configured for Compressed RTP over MLPPP*

*Link Services Configuration for Junos Interfaces*

## RELATED DOCUMENTATION

[Understanding Link and Multilink Services | 2](#)

*Configuring PPP*

# Examples: Bundling Multiple PPP Links on a Single Link Using MLPPP

## IN THIS SECTION

- [Example: Configuring a Multilink Interface with MLPPP | 55](#)
- [Example: Configuring a Multilink Interface with MLPPP over ATM 2 Interfaces | 56](#)
- [Example: Configuring an MLPPP Bundle | 58](#)
- [Example: Configuring a Link Services Interface with MLPPP | 64](#)

- Example: Configuring Inline MLPPP and Multilink Frame Relay End-to-End (FRF.15) for WAN Interfaces | 65

## Example: Configuring a Multilink Interface with MLPPP

```
[edit interfaces]
ml-1/0/0 {
  unit 1 {
    fragment-threshold 128;
    family inet {
      address 192.168.5.1/32 {
        destination 192.168.200.200;
      }
    }
  }
  unit 10 {
    family inet {
      address 10.1.1.3/32 {
        destination 10.1.1.2;
      }
    }
  }
}
t1-5/1/0 {
  unit 0 {
    family mlppp {
      bundle ml-1/0/0.1;
    }
  }
}
t1-5/1/1 {
  unit 0 {
    family mlppp {
      bundle ml-1/0/0.1;
    }
  }
}
t1-5/1/2 {
```

```

    unit 0 {
        family mlppp {
            bundle ml-1/0/0.1;
        }
    }
}

```

## SEE ALSO

[Link and Multilink Services Overview | 2](#)

[fragment-threshold | 179](#)

## Example: Configuring a Multilink Interface with MLPPP over ATM 2 Interfaces

```

[edit interfaces]
at-0/0/0 {
    atm-options {
        pic-type atm2;
        vpi 10;
    }
    unit 0 {
        encapsulation atm-mlppp-llc;
        ppp-options {
            chap {
                access-profile pe-B-ppp-clients;
                local-name "pe-A-at-0/0/0";
            }
        }
        keepalive interval 5 up-count 6 down-count 4;
        vci 10.120;
        family mlppp {
            bundle ls-0/3/0.0;
        }
    }
}
at-0/0/1 {
    atm-options {

```

```

        pic-type atm2;
        vpi 11;
    }
    unit 1 {
        encapsulation atm-mlppp-llc;
        ppp-options {
            chap {
                access-profile pe-B-ppp-clients;
                local-name " pe-A-at-0/0/0";
            }
        }
        keepalive interval 5 up-count 6 down-count 4;
        vci 11.120;
        family mlppp {
            bundle ls-0/3/0.0;
        }
    }
}
at-1/2/3 {
    atm-options {
        pic-type atm2;
        vpi 12;
    }
    unit 2 {
        encapsulation atm-mlppp-llc;
        ppp-options {
            chap {
                access-profile pe-B-ppp-clients;
                local-name " pe-A-at-0/0/0";
            }
        }
        keepalive interval 5 up-count 6 down-count 4;
        vci 12.120;
        family mlppp {
            bundle ls-0/3/0.0;
        }
    }
}
...
ls-0/3/0 {
    encapsulation multilink-ppp;
    interleave-fragments;
    keepalive;
}

```

```

unit 0 {
    mrru 4500;
    short-sequence;
    fragment-threshold 16320;
    drop-timeout 2000;
    encapsulation multilink-ppp;
    interleave-fragments;
    minimum-links 8;
    family inet {
        address 10.10.0.1/32 {
            destination 10.10.0.2;
        }
    }
    family iso;
    family inet6 {
        address 2001:DB8::0:1/32 {
            destination 2001:DB8::0:2;
        }
    }
}
...
}

```

## SEE ALSO

[Configuring Encapsulation for Multilink and Link Services Logical Interfaces | 142](#)  
[encapsulation \(Logical Interface\) | 173](#)

## Example: Configuring an MLPPP Bundle

### IN THIS SECTION

- [Requirements | 59](#)
- [Overview | 59](#)
- [Configuration | 59](#)
- [Verification | 63](#)

This example shows how to configure an MLPPP bundle to increase traffic bandwidth.


Requirements

Before you begin, you should have two MX Series routers (MX240, MX480, or MX960 routers) configured with at least two serial interfaces that communicate over serial links.

Overview

In this example, you create the MLPPP bundle Isq-0/0/0.0 at the logical unit level of the link services interface Isq-0/0/0 on the MX Series routers R0 and R1. You then add the two serial interfaces se-1/0/0 and se-1/0/1 as constituent links to the multilink bundle. In [Figure 2 on page 59](#), your company's branch office is connected to its main branch using routers R0 and R1. You transmit data and voice traffic on two low-speed 1-Mbps serial links. To increase bandwidth, you configure MLPPP and join the two serial links se-1/0/0 and se-1/0/1 into the multilink bundle Isq-0/0/0.0. Then you configure LFI and CoS on R0 and R1 to enable them to transmit voice packets ahead of data packets.

Figure 2: Configuring MLPPP and LFI on Serial Links

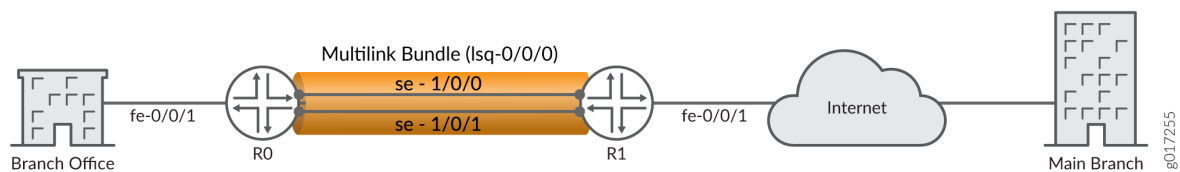

Configuration

IN THIS SECTION

Procedure | 60

## Procedure

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

For device R0

```
set interfaces lsq-0/0/0 unit 0 family inet address 10.0.0.10/24
set interfaces se-1/0/0 unit 0 family mlppp bundle lsq-0/0/0.0
set interfaces se-1/0/1 unit 0 family mlppp bundle lsq-0/0/0.0
set interfaces se-1/0/0 serial-options clocking-mode dce clock-rate 2.0mhz
set interfaces se-1/0/1 serial-options clocking-mode dce clock-rate 2.0mhz
```

For device R1

```
set interfaces lsq-0/0/0 unit 0 family inet address 10.0.0.9/24
set interfaces se-1/0/0 unit 0 family mlppp bundle lsq-0/0/0.0
set interfaces se-1/0/1 unit 0 family mlppp bundle lsq-0/0/0.0
```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure MLPPP bundle:

1. Create an interface on both the routers.

```
[edit]
user@host# edit interfaces lsq-0/0/0 unit 0
```

2. Configure a family inet and define the IP address on device R0.

```
[edit interfaces lsq-0/0/0 unit 0]
user@host# set family inet address 10.0.0.10/24
```

3. Configure a family inet and define the IP address on device R1.

```
[edit interfaces lsq-0/0/0 unit 0]
user@host# set family inet address 10.0.0.9/24
```

4. Specify the names of the constituent links to be added to the multilink bundle on both the routers.

```
[edit interfaces]
user@host# edit se-1/0/0 unit 0
user@host# set family mlppp bundle lsq-0/0/0.0
[edit interfaces]
user@host# edit se-1/0/1 unit 0
user@host# set family mlppp bundle lsq-0/0/0.0
```

5. Set the serial options to the same values for both interfaces on R0.

**NOTE:** R0 is set as a DCE device. The serial options are not set for interfaces on R1. You can set the serial options according to your network setup.

```
[edit interfaces]
user@host# set se-1/0/0 serial-options clocking-mode dce clock-rate 2.0mhz
user@host# set se-1/0/1 serial-options clocking-mode dce clock-rate 2.0mhz
```

## Results

From configuration mode, confirm your configuration by entering the `show interfaces lsq-0/0/0`, `show interfaces se-1/0/0`, and `show interfaces se-1/0/1` commands for R0 and R1. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
For device R0
[edit]
  user@host# show interfaces lsq-0/0/0
family inet {
  address 10.0.0.10/24;
}
}
[edit]
```

```

user@host# show interfaces se-1/0/0
  clocking-mode dce;
  clock-rate 2.0mhz;
}
  unit 0 {
    family mlppp {
      bundle lsq-0/0/0.0;
    }
  }
}
[edit]
user@host# show interfaces se-1/0/1
serial-options {
  clocking-mode dce;
  clock-rate 2.0mhz;
}
  unit 0 {
    family mlppp {
      bundle lsq-0/0/0.0;
    }
  }
}

```

For device R1

```

[edit]
user@host# show interfaces lsq-0/0/0
  family inet {
    address 10.0.0.9/24;
  }
}
[edit]
user@host# show interfaces se-1/0/0
  unit 0 {
    family mlppp {
      bundle lsq-0/0/0.0;
    }
  }
}
[edit]
user@host# show interfaces se-1/0/1
  unit 0 {
    family mlppp {
      bundle lsq-0/0/0.0;
    }
  }
}

```

```
}
}
```

If you are done configuring the router, enter `commit` from configuration mode.

## Verification

### IN THIS SECTION

- [Verifying the MLPPP Bundle | 63](#)

Confirm that the configuration is working properly:

### Verifying the MLPPP Bundle

#### Purpose

Verify that the constituent links are added to the bundle correctly.

#### Action

From operational mode, enter the `show interfaces lsq-0/0/0 statistics` command.

### SEE ALSO

---

[Link and Multilink Services Overview | 2](#)

---

[Multilink Interfaces on Channelized MICs Overview | 7](#)

---

[Understanding MLPPP Bundles and Link Fragmentation and Interleaving \(LFI\) on Serial Links | 10](#)

---

[Example: Configuring Link Interfaces on Channelized MICs | 122](#)

---

[Example: Configuring Multilink Frame Relay FRF.15 | 96](#)

---

[Example: Configuring Multilink Frame Relay FRF.16 | 90](#)

## Example: Configuring a Link Services Interface with MLPPP

```
[edit interfaces]
t1-0/0/0 {
  encapsulation ppp;
  unit 0 {
    family mlppp {
      bundle ls-0/3/0.0;
    }
  }
}
t1-0/0/1 {
  encapsulation ppp;
  unit 0 {
    family mlppp {
      bundle ls-0/3/0.0;
    }
  }
}
ls-0/3/0 {
  unit 0 {
    encapsulation multilink-ppp;
    family inet {
      address 10.16.1.2/32 {
        destination 10.16.1.1;
      }
    }
    family iso;
    family inet6 {
      address 2001:DB8::1:2/126;
    }
  }
}
```

### SEE ALSO

[Configuring Encapsulation for Multilink and Link Services Logical Interfaces](#) | 142

[encapsulation \(Logical Interface\)](#) | 173

## Example: Configuring Inline MLPPP and Multilink Frame Relay End-to-End (FRF.15) for WAN Interfaces

### IN THIS SECTION

- [Requirements | 65](#)
- [Overview | 65](#)
- [Configuration | 66](#)
- [Verification | 75](#)

Inline Multilink PPP (*MLPPP*), Multilink Frame Relay (*FRF.16*), and Multilink Frame Relay End-to-End (*FRF.15*) for time-division multiplexing (*TDM*) WAN interfaces provide bundling services through the Packet Forwarding Engine without requiring a PIC or Dense Port Concentrator (*DPC*).

This example shows how to configure a Multilink PPP (*MLPPP*) bundle and Multilink Frame Relay End-to-End (*FRF.15*) for additional bandwidth, load balancing, and redundancy by aggregating low-speed links such as T1 (WAN interfaces).

### Requirements

This example uses the following hardware and software components:

- Two MX Series Routers
- Junos OS Release 14.1 or later release

Before you begin, configure two MX Series routers (the MX240, MX480, or MX960) with at least two WAN interfaces that communicate over T1 links.

### Overview

#### IN THIS SECTION

- [Topology | 66](#)

Traditionally, bundling services are used to bundle multiple low-speed links to create a higher bandwidth pipe. This combined bandwidth is available to traffic from all links and supports link fragmentation and interleaving (*LF*) on the bundle, reducing high-priority packet transmission delay.

This support includes multiple links on the same bundle as well as multiclass extension for MLPPP. Through this service you can enable bundling services without additional DPC slots to support Service DPC and free up the slots for other MICs.


Configuring inline MLPPP for WAN interfaces benefits the following services:

- CE-PE link for Layer 3 VPN and DIA service with public switched telephone networks (PSTN)-based access networks
- PE-P link when PSTN is used for MPLS networks

In this example, to increase bandwidth, you configure MLPPP and join the T1 links into the multilink bundle. You aggregate T1 links to create the MLFR FRF.15 bundle on two MX Series routers, R0 and R1, and set the interface to `lsq-`. You configure logical units on the `lsq-` interface and set the family type to `inet` and an IP address. Then you configure an IP address for the multilink bundle on the unit level of the interface. You define the multilink bundle as an MLFR FRF.15 bundle by specifying the MLFR end-to-end encapsulation type. You specify the names of the constituent links to be added to the multilink bundle and set the encapsulation type to `frame-relay`. You then define Router R0 as a DCE device and Router R1 as a DTE device. You set the DLCI value (range is from 16 through 1022). Finally, you set the multilink bundle to `lsq-`.

## Topology

**Figure 3: Configuring Inline MLPPP and Multilink Frame Relay End-End (FRF.15) for WAN Interfaces**

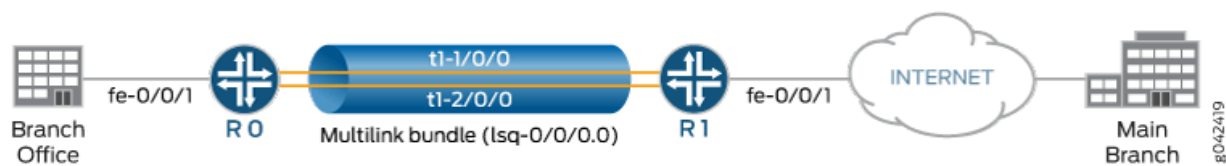

## Configuration

### IN THIS SECTION

- [CLI Quick Configuration | 67](#)

- [To Configure Router R0 | 68](#)
- [To Configure Router R1 | 69](#)
- [Results | 71](#)

## CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

### Device R0

```
set chassis fpc 1 pic 0 multi-link-layer-2-inline
set interfaces lsq-1/0/0 unit 0 encapsulation multilink-ppp
set interfaces lsq-1/0/0 unit 0 family inet address 192.0.2.1/24
set interfaces lsq-1/0/0 unit 1 encapsulation multilink-frame-relay-end-to-end
set interfaces lsq-1/0/0 unit 1 family inet address 198.51.100.1/24
set interfaces t1-1/0/0:1 unit 0 family mlppp bundle lsq-1/0/0.0
set interfaces t1-1/0/0:2 unit 0 family mlppp bundle lsq-1/0/0.0
set interfaces t1-1/0/0:3 dce
set interfaces t1-1/0/0:4 dce
set interfaces t1-1/0/0:3 encapsulation frame-relay
set interfaces t1-1/0/0:4 encapsulation frame-relay
set interfaces t1-1/0/0:3 unit 0 dlci 1 family mlfr-end-to-end bundle lsq-1/0/0.1
set interfaces t1-1/0/0:4 unit 0 dlci 2 family mlfr-end-to-end bundle lsq-1/0/0.1
```

### Device R1

```
set chassis fpc 2 pic 0 multi-link-layer-2-inline
set interfaces lsq-2/0/0 unit 0 encapsulation multilink-ppp
set interfaces lsq-2/0/0 unit 0 family inet address 192.0.2.2/24
set interfaces lsq-2/0/0 unit 1 encapsulation multilink-frame-relay-end-to-end
set interfaces lsq-2/0/0 unit 1 family inet address 198.51.100.2/24
set interfaces t1-2/0/0:1 unit 0 family mlppp bundle lsq-2/0/0.0
set interfaces t1-2/0/0:2 unit 0 family mlppp bundle lsq-2/0/0.0
set interfaces t1-2/0/0:3 encapsulation frame-relay
set interfaces t1-2/0/0:4 encapsulation frame-relay
```

```
set interfaces t1-2/0/0:3 unit 0 dlci 1 family mlfr-end-to-end bundle lsq-2/0/0.1
set interfaces t1-2/0/0:4 unit 0 dlci 2 family mlfr-end-to-end bundle lsq-2/0/0.1
```

## To Configure Router R0

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure inline MLPPP and Multilink Frame Relay End-to-End (FRF.15) for WAN Interfaces:

1. Enable inline Layer 2 bundling services.

```
[edit]
user@R0# set chassis fpc 1 pic 0 multi-link-layer-2-inline
```

2. Create the interface, specify a logical unit on the multilink bundle, and set the family type.

```
[edit]
user@R0# set interfaces lsq-1/0/0 unit 0 family inet address 192.0.2.1/24
```

3. Specify the *encapsulation* type as MLPPP.

```
[edit]
user@R0# set interfaces lsq-1/0/0 unit 0 encapsulation multilink-ppp
```

4. Create the interface, specify another logical unit on the multilink bundle, and set the family type.

```
[edit]
user@R0# set interfaces lsq-1/0/0 unit 1 family inet address 198.51.100.1/24
```

5. Specify another unit and define the multilink bundle as an MLFR FRF.15 bundle.

```
[edit]
user@R0# set interfaces lsq-1/0/0 unit 1 encapsulation multilink-frame-relay-end-to-end
```

- Specify the names of the constituent links to be added to the multilink bundle.

```
[edit]
user@R0# set interfaces t1-1/0/0:1 unit 0 family mlppp bundle lsq-1/0/0.0
user@R0# set interfaces t1-1/0/0:2 unit 0 family mlppp bundle lsq-1/0/0.0
```

- Define the router as a DCE device.

```
[edit]
user@R0# set interfaces t1-1/0/0:3 dce
user@R0# set interfaces t1-1/0/0:4 dce
```

- Specify the DLCI as well as the multilink bundle to which the interface is to be added.

```
[edit ]
user@R0# set interfaces t1-1/0/0:3 unit 0 dlci 1 family mlfr-end-to-end bundle lsq-1/0/0.1
user@R0# set interfaces t1-1/0/0:4 unit 0 dlci 2 family mlfr-end-to-end bundle lsq-1/0/0.1
```

- Specify the names of the constituent links to be added to the multilink bundle.

```
[edit]
user@R0# set interfaces t1-1/0/0:3 encapsulation frame-relay
user@R0# set interfaces t1-1/0/0:4 encapsulation frame-relay
```

## To Configure Router R1

### Step-by-Step Procedure

To configure inline MLPPP and Multilink Frame Relay End-to-End (FRF.15) for WAN Interfaces:

- Enable inline Layer 2 bundling services.

```
[edit]
user@R1# set chassis fpc 2pic 0 multi-link-layer-2-inline
```

2. Create the interface, specify a logical unit on the multilink bundle and set the family type.

```
[edit]
user@R1# set interfaces lsq-2/0/0 unit 0 family inet address 192.0.2.2/24
```

3. Specify the encapsulation type as MLPPP.

```
[edit]
user@R1# set interfaces lsq-2/0/0 unit 0 encapsulation multilink-ppp
```

4. Create the interface, specify another logical unit on the multilink bundle and set the family type.

```
[edit]
user@R1# set interfaces lsq-2/0/0 unit 1 family inet address 198.51.100.2/24
```

5. Specify another unit and define the multilink bundle as an MLFR FRF.15 bundle.

```
[edit]
user@R1# set interfaces lsq-2/0/0 unit 1 encapsulation multilink-frame-relay-end-to-end
```

6. Specify the names of the constituent links to be added to the multilink bundle.

```
[edit]
user@R1# set interfaces t1-2/0/0:1 unit 0 family mlppp bundle lsq-2/0/0.0
user@R1# set interfaces t1-2/0/0:2 unit 0 family mlppp bundle lsq-2/0/0.0
```

7. Specify the DLCI as well as the multilink bundle to which the interface is to be added.

```
[edit ]
user@R1# set interfaces t1-2/0/0:3 unit 0 dlci 1 family mlfr-end-to-end bundle lsq-2/0/0.1
user@R1# set interfaces t1-2/0/0:4 unit 0 dlci 2 family mlfr-end-to-end bundle lsq-2/0/0.1
```

8. Specify the names of the constituent links to be added to the multilink bundle.

```
[edit]
user@R1# set interfaces t1-2/0/0:3 encapsulation frame-relay
user@R1# set interfaces t1-2/0/0:4 encapsulation frame-relay
```

## Results

For Router R0, from configuration mode, confirm your configuration by entering the `show chassis`, `show interfaces lsq-1/0/0`, `show interfaces t1-1/0/0:1`, `show interfaces t1-1/0/0:2`, `show interfaces t1-1/0/0:3`, and `show interfaces t1-1/0/0:4` commands.

For Router R1, from configuration mode, confirm your configuration by entering the `show chassis`, `show interfaces lsq-2/0/0`, `show interfaces t1-2/0/0:1`, `show interfaces t1-2/0/0:2`, `show interfaces t1-2/0/0:3`, and `show interfaces t1-2/0/0:4` commands.

If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

For Router R0:

```
[edit]
user@R0# show chassis
fpc 1 {
  pic 0 {
    multi-link-layer-2-inline;
  }
}
```

```
[edit]
user@R0# show interfaces lsq-1/0/0
unit 0 {
  encapsulation multilink-ppp;
  family inet {
    address 192.0.2.1/24;
  }
}
unit 1 {
  encapsulation multilink-frame-relay-end-to-end;
  family inet {
```

```

        address 198.51.100.1/24;
    }
}

```

```

[edit]
user@R0# show interfaces t1-1/0/0:1
unit 0 {
    family mlppp {
        bundle lsq-1/0/0.0;
    }
}

```

```

[edit]
user@R0# show interfaces t1-1/0/0:2
unit 0 {
    family mlppp {
        bundle lsq-1/0/0.0;
    }
}

```

```

[edit]
user@R0# show interfaces t1-1/0/0:3
dce;
encapsulation frame-relay;
unit 0 {
    dlci 1;
    family mlfr-end-to-end {
        bundle lsq-1/0/0.1;
    }
}

```

```

[edit]
user@R0# show interfaces t1-1/0/0:4
dce;
encapsulation frame-relay;
unit 0 {
    dlci 2;
}

```

```

    family mlfr-end-to-end {
        bundle lsq-1/0/0.1;
    }
}

```

If you are done configuring the router, enter `commit` from configuration mode.

For Router R1:

```

[edit]
user@R1# show chassis
fpc 2{
    pic 0 {
        multi-link-layer-2-inline;
    }
}

```

```

[edit]
user@R1# show interfaces lsq-2/0/0
unit 0 {
    encapsulation multilink-ppp;
    family inet {
        address 192.0.2.2/24;
    }
}
unit 1 {
    encapsulation multilink-frame-relay-end-to-end;
    family inet {
        address 198.51.100.2/24;
    }
}

```

```

[edit]
user@R1# show interfaces t1-2/0/0:1
unit 0 {
    family mlppp {
        bundle lsq-2/0/0.0;
    }
}

```

```
    }  
}
```

```
[edit]  
user@R1# show interfaces t1-2/0/0:2  
unit 0 {  
    family mlppp {  
        bundle lsq-2/0/0.0;  
    }  
}
```

```
[edit]  
user@R1# show interfaces t1-2/0/0:3  
encapsulation frame-relay;  
unit 0 {  
    dlci 1;  
    family mlfr-end-to-end {  
        bundle lsq-2/0/0.1;  
    }  
}
```

```
[edit]  
user@R1# show interfaces t1-2/0/0:4  
encapsulation frame-relay;  
unit 0 {  
    dlci 2;  
    family mlfr-end-to-end {  
        bundle lsq-2/0/0.1;  
    }  
}
```

If you are done configuring the router, enter `commit` from configuration mode.

## Verification

### IN THIS SECTION

- [Verifying the MLPPP Bundle and the MLFR FRF.15 Configuration](#) | 75

## Verifying the MLPPP Bundle and the MLFR FRF.15 Configuration

### Purpose

Verify that the constituent links are added to the bundle correctly.

### Action

From operational mode, run the `show interfaces lsq-1/0/0` extensive command.

### Sample Output

#### command-name

```
user@R0> show interfaces lsq-1/0/0:0 extensive
Physical interface: lsq-1/0/0, Enabled, Physical link is Up
Interface index: 292, SNMP ifIndex: 1065, Generation: 4986
Link-level type: LinkService, MTU: 1504
Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Last flapped   : Never
Statistics last cleared: Never
Traffic statistics:
Input  bytes   :                0                0 bps
Output bytes   :                0                0 bps
Input  packets :                0                0 pps
Output packets :                0                0 pps
IPv6 transit statistics:
Input  bytes   :                0
Output bytes   :                0
Input  packets :                0
Output packets :                0
```

## Frame exceptions:

Oversized frames	0
Errored input frames	0
Input on disabled link/bundle	0
Output for disabled link/bundle	0
Queuing drops	0

## Buffering exceptions:

Packet data buffer overflow	0
Fragment data buffer overflow	0

## Assembly exceptions:

Fragment timeout	0
Missing sequence number	0
Out-of-order sequence number	0
Out-of-range sequence number	0

## Hardware errors (sticky):

Data memory error	0
Control memory error	0

Egress queues: 8 supported, 4 in use

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0	0	0	0
1	0	0	0
2	0	0	0
3	0	0	0

## Queue number: Mapped forwarding classes

0	best-effort
1	expedited-forwarding
2	assured-forwarding
3	network-control

Logical interface lsq-1/0/0.0 (Index 327) (SNMP ifIndex 113518) (Generation 6213)

Flags: Hardware-Down Up Point-To-Point SNMP-Traps 0x4000 **Encapsulation: Multilink-PPP**

Last flapped: 2014-04-24 04:37:39 PDT (00:08:50 ago)

Bandwidth: 0

## Bundle links information:

Active bundle links	0
Removed bundle links	2
Disabled bundle links	0

## Bundle options:

MRRU	1504
Remote MRRU	N/A
Drop timer period	32767
Inner PPP Protocol field compression enabled	
Sequence number format	long (24 bits)

```

Fragmentation threshold      0
Links needed to sustain bundle 1
Multilink classes            0
Link layer overhead          4.0 %

Multilink class 0 status:
Received sequence number     0x0
Transmit sequence number     0xffffffff
Packet drops                 0 (0 bytes)
Fragment drops               0 (0 bytes)
MRRU exceeded                0
Fragment timeout             0
Missing sequence number      0
Out-of-order sequence number 0
Out-of-range sequence number 0
Packet data buffer overflow   0
Fragment data buffer overflow 0
Multilink class drop timeout 0 (ms)

Statistics      Frames      fps      Bytes      bps
Bundle:
Multilink:
  Input :        0          0          0          0
  Output:        0          0          0          0
Network:
  Input :        0          0          0          0
  Output:        0          0          0          0
IPv6 Transit Statistics      Packets      Bytes
Network:
  Input :          0          0
  Output:          0          0
Link:
t1-1/0/0:1.0
  Up time: 00:00:00
  Input :        0          0          0          0
  Output:        0          0          0          0
t1-1/0/0:2.0
  Up time: 00:00:00
  Input :        0          0          0          0
  Output:        0          0          0          0
Multilink detail statistics:
Bundle:
Fragments:
  Input :        0          0          0          0
  Output:        0          0          0          0

```

## Non-fragments:

Input :	0	0	0	0
Output:	0	0	0	0

## LFI:

Input :	0	0	0	0
Output:	0	0	0	0

NCP state: inet: Not-configured, inet6: Not-configured, iso: Not-configured, mpls: Not-configured

Protocol inet, MTU: 1500, Generation: 6263, Route table: 0

Flags: Sendbroadcast-pkt-to-re, Protocol-Down

Addresses, Flags: Dest-route-down Is-Preferred Is-Primary

Destination: 192.0.2/24, Local: 192.0.2.1, Broadcast: Unspecified, Generation: 4211

Logical interface lsq-1/0/0.1 (Index 328) (SNMP ifIndex 113519) (Generation 6214)

Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-FR

Last flapped: 2014-04-24 04:46:00 PDT (00:00:29 ago)

Bandwidth: 3072kbps

## Bundle links information:

Active bundle links	2
Removed bundle links	0
Disabled bundle links	0

## Bundle options:

MRRU	1504
Drop timer period	32767
Inner PPP Protocol field compression	enabled
Sequence number format	short (12 bits)
Fragmentation threshold	0
Links needed to sustain bundle	1
Multilink classes	0
Link layer overhead	4.0 %

## Multilink class 0 status:

Received sequence number	0x0
Transmit sequence number	0xffffffff
Packet drops	0 (0 bytes)
Fragment drops	0 (0 bytes)
MRRU exceeded	0
Fragment timeout	0
Missing sequence number	0
Out-of-order sequence number	0
Out-of-range sequence number	0
Packet data buffer overflow	0
Fragment data buffer overflow	0
Multilink class drop timeout	0 (ms)

Statistics	Frames	fps	Bytes	bps
<b>Bundle:</b>				
<b>Multilink:</b>				
Input :	0	0	0	0
Output:	0	0	0	0
<b>Network:</b>				
Input :	0	0	0	0
Output:	0	0	0	0
<b>Link:</b>				
t1-1/0/0:3.0				
Up time: 00:00:29				
Input :	0	0	0	0
Output:	0	0	0	0
t1-1/0/0:4.0				
Up time: 00:00:29				
Input :	0	0	0	0
Output:	0	0	0	0
<b>Multilink detail statistics:</b>				
<b>Bundle:</b>				
<b>Fragments:</b>				
Input :	0	0	0	0
Output:	0	0	0	0
<b>Non-fragments:</b>				
Input :	0	0	0	0
Output:	0	0	0	0
<b>LFI:</b>				
Input :	0	0	0	0
Output:	0	0	0	0
Protocol inet, MTU: 1500, Generation: 6264, Route table: 0				
Flags: Sendbroadcast-pkt-to-re				
Addresses, Flags: Is-Preferred Is-Primary				
Destination: 198.51.100/24, Local: 198.51.100.1, Broadcast: Unspecified, Generation: 4213				

From the operational mode, enter the show interfaces lsq-2/0/0 extensive command.

```

user@R1> show interfaces lsq-2/0/0 extensive
Physical interface: lsq-2/0/0, Enabled, Physical link is Up
Interface index: 262, SNMP ifIndex: 44421, Generation: 270
Encapsulation: Multilink-PPPLink-level type: LinkService, MTU: 1504
Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Last flapped   : Never

```

```

Statistics last cleared: Never
Traffic statistics:
  Input bytes :           0           0 bps
  Output bytes :          0           0 bps
  Input packets:          0           0 pps
  Output packets:         0           0 pps
IPv6 transit statistics:
  Input bytes :           0
  Output bytes :          0
  Input packets:          0
  Output packets:         0
Frame exceptions:
  Oversized frames        0
  Errored input frames    0
  Input on disabled link/bundle 0
  Output for disabled link/bundle 0
  Queuing drops           0
Buffering exceptions:
  Packet data buffer overflow 0
  Fragment data buffer overflow 0
Assembly exceptions:
  Fragment timeout        0
  Missing sequence number 0
  Out-of-order sequence number 0
  Out-of-range sequence number 0
Hardware errors (sticky):
  Data memory error       0
  Control memory error    0
Egress queues: 8 supported, 4 in use
Queue counters:      Queued packets  Transmitted packets  Dropped packets
  0                   0               0                   0
  1                   0               0                   0
  2                   0               0                   0
  3                   0               0                   0
Queue number:        Mapped forwarding classes
  0                   best-effort
  1                   expedited-forwarding
  2                   assured-forwarding
  3                   network-control

Logical interface lsq-2/0/0.0 (Index 354) (SNMP ifIndex 44422) (Generation 167)
  Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-PPPEncapsulation:
Multilink-PPP

```

Last flapped: 2014-04-24 04:50:19 PDT (00:00:51 ago)

Bandwidth: 3072kbps

Bundle links information:

Active bundle links        2  
 Removed bundle links      0  
 Disabled bundle links      0

Bundle options:

MRRU                                1504  
 Remote MRRU                        1504  
 Drop timer period                32767  
 Inner PPP Protocol field compression enabled  
 Sequence number format            long (24 bits)  
 Fragmentation threshold           0  
 Links needed to sustain bundle    1  
 Multilink classes                 0  
 Link layer overhead                4.0 %

Multilink class 0 status:

Received sequence number        0x0  
 Transmit sequence number        0xffffffff  
 Packet drops                    0 (0 bytes)  
 Fragment drops                  0 (0 bytes)  
 MRRU exceeded                  0  
 Fragment timeout                0  
 Missing sequence number        0  
 Out-of-order sequence number    0  
 Out-of-range sequence number    0  
 Packet data buffer overflow      0  
 Fragment data buffer overflow    0  
 Multilink class drop timeout    0 (ms)

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

Bundle:

Multilink:

Input :	0	0	0	0
Output:	0	0	0	0

Network:

Input :	0	0	0	0
Output:	0	0	0	0

IPv6 Transit Statistics	Packets	Bytes
-------------------------	---------	-------

Network:

Input :	0	0
Output:	0	0

Link:

t1-2/0/0:1.0

```

    Up time: 00:00:51
    Input :          0          0          0          0
    Output:          0          0          0          0
t1-2/0/0:2.0
    Up time: 00:00:48
    Input :          0          0          0          0
    Output:          0          0          0          0
Multilink detail statistics:
Bundle:
Fragments:
    Input :          0          0          0          0
    Output:          0          0          0          0
Non-fragments:
    Input :          0          0          0          0
    Output:          0          0          0          0
LFI:
    Input :          0          0          0          0
    Output:          0          0          0          0
NCP state: inet: Opened, inet6: Not-configured, iso: Not-configured, mpls: Not-configured
Protocol inet, MTU: 1500, Generation: 199, Route table: 0
Flags: Sendbroadcast-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
    Destination: 192.0.2/24, Local: 192.0.2.2, Broadcast: Unspecified, Generation: 153

Logical interface lsq-4/0/0.1 (Index 355) (SNMP ifIndex 44423) (Generation 168)
Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-FR
Last flapped: 2014-04-24 04:50:19 PDT (00:00:51 ago)
Bandwidth: 3072kbps
Bundle links information:
    Active bundle links      2
    Removed bundle links     0
    Disabled bundle links    0
Bundle options:
    MRRU                      1504
    Drop timer period         32767
    Inner PPP Protocol field compression enabled
    Sequence number format     short (12 bits)
    Fragmentation threshold    0
    Links needed to sustain bundle 1
    Multilink classes          0
    Link layer overhead        4.0 %
Multilink class 0 status:
    Received sequence number   0x0

```

```

Transmit sequence number      0xffffffff
Packet drops                  0 (0 bytes)
Fragment drops                0 (0 bytes)
MRRU exceeded                 0
Fragment timeout              0
Missing sequence number       0
Out-of-order sequence number  0
Out-of-range sequence number  0
Packet data buffer overflow   0
Fragment data buffer overflow 0
Multilink class drop timeout  0 (ms)
Statistics      Frames      fps      Bytes      bps
Bundle:
Multilink:
  Input :        0          0          0          0
  Output:        0          0          0          0
Network:
  Input :        0          0          0          0
  Output:        0          0          0          0
Link:
t1-2/0/0:3.0
  Up time: 00:00:51
  Input :        0          0          0          0
  Output:        0          0          0          0
t1-2/0/0:4.0
  Up time: 00:00:51
  Input :        0          0          0          0
  Output:        0          0          0          0
Multilink detail statistics:
Bundle:
Fragments:
  Input :        0          0          0          0
  Output:        0          0          0          0
Non-fragments:
  Input :        0          0          0          0
  Output:        0          0          0          0
LFI:
  Input :        0          0          0          0
  Output:        0          0          0          0
Protocol inet, MTU: 1500, Generation: 200, Route table: 0
Flags: Sendbroadcast-pkt-to-re

```

Addresses, Flags: Is-Preferred Is-Primary

Destination: 198.51.100/24, Local: 198.51.100.2, Broadcast: Unspecified, Generation: 155

From operational mode, enter the `show interfaces lsq-1/0/0 statistics` command.

```

user@R0> show interfaces lsq-1/0/0 statistics
Physical interface: lsq-1/0/0, Enabled, Physical link is Up
  Interface index: 292, SNMP ifIndex: 1065
  Link-level type: LinkService, MTU: 1504
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
  Last flapped   : Never
  Statistics last cleared: Never
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)

Logical interface lsq-1/0/0.0 (Index 327) (SNMP ifIndex 113518)
  Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-PPP
  Last flapped: 2014-04-24 04:50:19 PDT (00:01:59 ago)
  Bandwidth: 3072kbps
  Bundle links information:
    Active bundle links      2
    Removed bundle links     0
    Disabled bundle links    0
  Statistics      Frames      fps      Bytes      bps
  Bundle:
    Multilink:
      Input :           0           0           0           0
      Output:           0           0           0           0
    Network:
      Input :           0           0           0           0
      Output:           0           0           0           0
  IPV6 Transit Statistics      Packets      Bytes
    Network:
      Input :                0           0
      Output:                0           0
  Link:
    t1-1/0/0:1.0
      Up time: 00:01:59
      Input :           0           0           0           0
      Output:           0           0           0           0
    t1-1/0/0:2.0

```

```

    Up time: 00:01:56
    Input :          0          0          0          0
    Output:          0          0          0          0
NCP state: inet: Opened, inet6: Not-configured, iso: Not-configured, mpls: Not-configured
Protocol inet, MTU: 1500
Flags: Sendbcast-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
    Destination: 192.0.2/24, Local: 192.0.2.1

Logical interface lsq-1/0/0.1 (Index 328) (SNMP ifIndex 113519)
Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-FR
Last flapped: 2014-04-24 04:50:29 PDT (00:01:49 ago)
Bandwidth: 3072kbps
Bundle links information:
    Active bundle links      2
    Removed bundle links     0
    Disabled bundle links    0
Statistics      Frames      fps      Bytes      bps
Bundle:
Multilink:
    Input :          0          0          0          0
    Output:          0          0          0          0
Network:
    Input :          0          0          0          0
    Output:          0          0          0          0
Link:
t1-1/0/0:3.0
    Up time: 00:01:49
    Input :          0          0          0          0
    Output:          0          0          0          0
t1-1/0/0:4.0
    Up time: 00:01:49
    Input :          0          0          0          0
    Output:          0          0          0          0
Protocol inet, MTU: 1500
Flags: Sendbcast-pkt-to-re
Addresses, Flags: Is-Preferred Is-Primary
    Destination: 198.51.100/24, Local: 198.51.100.1

```

From operational mode, enter the `show interfaces lsq-2/0/0 statistics` command.

```

user@R1> show interfaces lsq-2/0/0 statistics
Physical interface: lsq-2/0/0, Enabled, Physical link is Up
  Interface index: 262, SNMP ifIndex: 44421
  Link-level type: LinkService, MTU: 1504
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
  Last flapped   : Never
  Statistics last cleared: Never
  Input rate      : 0 bps (0 pps)
  Output rate     : 0 bps (0 pps)

Logical interface lsq-2/0/0.0 (Index 354) (SNMP ifIndex 44422)
  Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-PPP
  Last flapped: 2014-04-24 04:50:19 PDT (00:04:33 ago)
  Bandwidth: 3072kbps
  Bundle links information:
    Active bundle links      2
    Removed bundle links     0
    Disabled bundle links    0
  Statistics      Frames      fps      Bytes      bps
Bundle:
  Multilink:
    Input :           0         0         0         0
    Output:           0         0         0         0
  Network:
    Input :           0         0         0         0
    Output:           0         0         0         0
IPv6 Transit Statistics      Packets      Bytes
  Network:
    Input :              0         0
    Output:              0         0
Link:
  t1-2/0/0:1.0
    Up time: 00:04:33
    Input :           0         0         0         0
    Output:           0         0         0         0
  t1-2/0/0:2.0
    Up time: 00:04:30
    Input :           0         0         0         0
    Output:           0         0         0         0

```

NCP state: inet: Opened, inet6: Not-configured, iso: Not-configured, mpls: Not-configured

Protocol inet, MTU: 1500

Flags: Sendbcast-pkt-to-re

Addresses, Flags: Is-Preferred Is-Primary

Destination: 192.0.2/24, Local: 192.0.2.2

Logical interface lsq-2/0/0.1 (Index 355) (SNMP ifIndex 44423)

Flags: Up Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-FR

Last flapped: 2014-04-24 04:50:19 PDT (00:04:33 ago)

Bandwidth: 3072kbps

Bundle links information:

Active bundle links 2

Removed bundle links 0

Disabled bundle links 0

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

Bundle:

Multilink:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Network:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Link:

t1-2/0/0:3.0

Up time: 00:04:33

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

t1-2/0/0:4.0

Up time: 00:04:33

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Protocol inet, MTU: 1500

Flags: Sendbcast-pkt-to-re

Addresses, Flags: Is-Preferred Is-Primary

Destination: 198.51.100/24, Local: 198.51.100.2

## SEE ALSO

*Inline MLPPP for WAN Interfaces Overview*

[Enabling MLPPP Link Fragmentation and Interleaving](#) | 24

[Example: Configuring Multilink Frame Relay FRF.15 | 96](#)

*mlfr-uni-nni-bundles-inline*

*multi-link-layer-2-inline*

[pic \(MX Series Routers\)](#)

*show interfaces (Link Services IQ)*

## Examples: Bundling Multiple Frame Relay DLCIs into a Single Link Using MLFR

### IN THIS SECTION

- [Example: Configuring a Multilink Interface with MLFR FRF.15 | 88](#)
- [Example: Configuring Multilink Frame Relay FRF.16 | 90](#)
- [Example: Configuring Multilink Frame Relay FRF.15 | 96](#)
- [Configuring DLCIs on Link Services Logical Interfaces | 100](#)
- [Example: Configuring a Link Services PIC with MLFR FRF.16 | 102](#)
- [Example: Configuring Inline Multilink Frame Relay \(FRF.16\) for WAN Interfaces | 103](#)

### Example: Configuring a Multilink Interface with MLFR FRF.15

```
[edit interfaces]
ml-1/0/0 {
  unit 1 {
    encapsulation multilink-frame-relay-end-to-end;
    family inet {
      address 192.168.5.2/32 {
        destination 192.168.5.3;
      }
    }
  }
  unit 10 {
```

```

        encapsulation multilink-frame-relay-end-to-end;
        family inet {
            address 10.1.1.3/32 {
                destination 10.1.1.2;
            }
        }
    }
}

t1-5/1/0 {
    unit 0 {
        dlci 16;
        encapsulation multilink-frame-relay-end-to-end;
        family mlfr-end-to-end {
            bundle ml-1/0/0.1;
        }
    }
}

t1-5/1/1 {
    unit 0 {
        dlci 17;
        encapsulation multilink-frame-relay-end-to-end;
        family mlfr-end-to-end {
            bundle ml-1/0/0.10;
        }
    }
}

t1-5/1/2 {
    unit 0 {
        dlci 26;
        encapsulation multilink-frame-relay-end-to-end;
        family mlfr-end-to-end {
            bundle ml-1/0/0.10;
        }
    }
}
}

```

## SEE ALSO

[Configuring Encapsulation for Multilink and Link Services Logical Interfaces](#) | 142

[encapsulation \(Logical Interface\)](#) | 173

## Example: Configuring Multilink Frame Relay FRF.16

### IN THIS SECTION

- [Requirements | 90](#)
- [Overview | 90](#)
- [Configuration | 90](#)
- [Verification | 95](#)

This example shows how to configure MLFR FRF.16 for additional bandwidth, load balancing, and redundancy.

### Requirements

Before you begin, you should have two MX Series 5G Universal Routing Platforms configured with at least two serial interfaces that communicate over serial links.

### Overview

In this example, you aggregate two T1 interfaces to create an MLFR FRF.16 bundle on two MX Series, R0 and R1. You configure the chassis interface and specify the number of MLFR FRF.16 bundles to be created on the interface. You then specify the channel to be configured as a multilink bundle and create interface `lsq-0/0/0:0`. You set the multilink bundle as an MLFR FRF.16 bundle by specifying the MLFR UNI NNI encapsulation type.

Then you define R0 as a DCE device and R1 as a DTE device. You configure a logical unit on the multilink bundle `lsq-0/0/0:0`, and set the family type to `inet`. You then assign a DLCI of 400 and an IP address of `10.0.0.10/24` to the multilink bundle. You create the T1 interfaces, `t1-2/0/0` and `t1-2/0/1`, that are to be added as constituent links to the multilink bundle and define the Frame Relay encapsulation type. Finally, you set the multilink bundle to `lsq-0/0/0:0`.

### Configuration

#### IN THIS SECTION

- [Procedure | 91](#)

## Procedure

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

```
For device R0
set chassis fpc 0 pic 0 mlfr-uni-nni-bundles 1
set interfaces lsq-0/0/0:0 encapsulation multilink-frame-relay-uni-nni
set interfaces lsq-0/0/0 dce
set interfaces lsq-0/0/0 unit 0 dlci 400 family inet address 10.0.0.10/24
set interfaces t1-2/0/0 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-2/0/1 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-2/0/0 unit 0 family mlfr-uni-nni bundle lsq-0/0/0:0
set interfaces t1-2/0/1 unit 0 family mlfr-uni-nni bundle lsq-0/0/0:0
For device R1
set chassis fpc 0 pic 0 mlfr-uni-nni-bundles 1
set interfaces lsq-0/0/0:0 encapsulation multilink-frame-relay-uni-nni
set interfaces lsq-0/0/0 unit 0 dlci 400 family inet address 10.0.0.9/24
set interfaces t1-2/0/0 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-2/0/1 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-2/0/0 unit 0 family mlfr-uni-nni bundle lsq-0/0/0:0
set interfaces t1-2/0/1 unit 0 family mlfr-uni-nni bundle lsq-0/0/0:0
```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure an MLFR FRF.16 bundle:

1. Configure a chassis interface.

```
[edit]
user@host# edit chassis
```

2. Specify the number of MLFR bundles.

```
[edit chassis]
user@host# set fpc 0 pic 0 mlfr-uni-nni-bundles 1
```

3. Create an interface.

```
[edit]
user@host# edit interfaces lsq-0/0/0:0
```

4. Specify the MLFR encapsulation type.

```
[edit interfaces lsq-0/0/0:0]
user@host# set encapsulation multilink-frame-relay-uni-nni
```

5. Set the router R0 as a DCE device.

```
[edit]
user@host# edit interfaces lsq-0/0/0
user@host# set dce
```

6. Specify a logical unit on the multilink bundle and set the family type.

```
[edit interfaces lsq-0/0/0]
user@host# set unit 0 dlci 400 family inet address 10.0.0.10/24
```

7. Create the T1 interfaces and set the Frame Relay encapsulation.

```
[edit interfaces]
user@host# set t1-2/0/0 encapsulation multilink-frame-relay-uni-nni
user@host# set t1-2/0/1 encapsulation multilink-frame-relay-uni-nni
```

8. Specify the multilink bundle to which the interface is to be added as a constituent link on device R0.

```
[edit interfaces t1-2/0/0]
user@host# set unit 0 family mlfr-uni-nni bundle lsq-0/0/0:0
```

9. Specify the multilink bundle to which the interface is to be added as a constituent link on device R1.

```
[edit interfaces t1-2/0/1]
user@host# set unit 0 family mlfr-uni-nni bundle lsq-0/0/0:0
```

## Results

From configuration mode, confirm your configuration by entering the `show chassis`, `show interfaces lsq-0/0/0`, `show interfaces lsq-0/0/0:0`, `show interfaces t1-2/0/0`, and `show interfaces t1-2/0/1` commands for the routers R0 and R1. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
For device R0
[edit]
user@host# show chassis
fpc 0 {
  pic 0 {
    mlfr-uni-nni-bundles 1;
  }
}
[edit]
user@host# show interfaces lsq-0/0/0
dce;
unit 0 {
  dlci 400;
  family inet {
    address 10.0.0.10/24;
  }
}
[edit]
user@host# show interfaces lsq-0/0/0:0
encapsulation multilink-frame-relay-uni-nni;
[edit]
user@host# show interfaces t1-2/0/0
```

```

        encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle lsq-0/0/0:0;
        }
    }
[edit]
user@host# show interfaces t1-2/0/1
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
family mlfr-uni-nni {
    bundle lsq-0/0/0:0;
}
}

```

For device R1

```

[edit]
user@host# show chassis
unit 0 {
    dlci 400;
    family inet {
        address 10.0.0.9/24;
    }
}
[edit]
user@host# show interfaces lsq-0/0/0:0
encapsulation multilink-frame-relay-uni-nni;
[edit]
user@host# show interfaces t1-2/0/0
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
    family mlfr-uni-nni {
        bundle lsq-0/0/0:0;
    }
}
[edit]
user@host# show interfaces t1-2/0/1
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
    family mlfr-uni-nni {
        bundle lsq-0/0/0:0;
    }
}

```

```
}
}
```

If you are done configuring the device, enter `commit` from configuration mode.

## Verification

### IN THIS SECTION

- [Verifying the MLFR FRF.16 Configuration | 95](#)

Confirm that the configuration is working properly:

### Verifying the MLFR FRF.16 Configuration

#### Purpose

Verify the MLFR FRF.16 configuration.

#### Action

From operational mode, enter the `show interfaces` command.

### SEE ALSO

---

[Link and Multilink Services Overview | 2](#)

---

[Multilink Interfaces on Channelized MICs Overview | 7](#)

---

[Understanding MLPPP Bundles and Link Fragmentation and Interleaving \(LFI\) on Serial Links | 10](#)

---

[Example: Configuring Link Interfaces on Channelized MICs | 122](#)

---

[Example: Configuring an MLPPP Bundle | 58](#)

## Example: Configuring Multilink Frame Relay FRF.15

### IN THIS SECTION

- [Requirements | 96](#)
- [Overview | 96](#)
- [Configuration | 96](#)
- [Verification | 100](#)

This example shows how to configure MLFR FRF.15 for additional bandwidth, load balancing, and redundancy by aggregating low-speed links such as T1, E1, and serial links.

### Requirements

Before you begin, you should have two MX Series 5G Universal Routing Platforms (MX240, MX480, or MX960 routers) configured with at least two serial interfaces that communicate over serial links.

### Overview

In this example, you aggregate two T1 links to create the MLFR FRF.15 bundle on two MX Series routers, R0 and R1, and set the interface to `lsq-0/0/0`. You configure a logical unit on the `lsq-0/0/0` interface and set the family type to `inet` with address `10.0.0.4/24`. Then you configure an IP address for the multilink bundle on the unit level of the interface.

You define the multilink bundle as an MLFR FRF.15 bundle by specifying the MLFR end-to-end encapsulation type. You specify the names of the constituent links to be added to the multilink bundle as `t1-2/0/0` and `t1-2/0/1` and set the encapsulation type to `frame-relay`. You then define R0 as a DCE device and R1 as a DTE device. You set the DLCI value to 100 (range is from 16 through 1022). Finally, you set the multilink bundle to `lsq-0/0/0.0`.

### Configuration

#### IN THIS SECTION

- [Procedure | 97](#)

## Procedure

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

For device R0

```
set interfaces lsq-0/0/0 unit 0 family inet address 10.0.0.4/24
set interfaces lsq-0/0/0 unit 0 encapsulation multilink-frame-relay-end-to-end
set interfaces t1-2/0/0 encapsulation frame-relay
set interfaces t1-2/0/1 encapsulation frame-relay
set interfaces lsq-0/0/0 dce
set interfaces lsq-0/0/0 unit 0 dlci 100 family mlfr-end-to-end bundle lsq-0/0/0.0
```

For device R1

```
set interfaces lsq-0/0/0 unit 0 family inet address 10.0.0.5/24
set interfaces lsq-0/0/0 unit 0 encapsulation multilink-frame-relay-end-to-end
set interfaces t1-2/0/0 encapsulation frame-relay
set interfaces t1-2/0/1 encapsulation frame-relay
set interfaces lsq-0/0/0 unit 0 dlci 100 family mlfr-end-to-end bundle lsq-0/0/0.0
```

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure the MLFR FRF.15 bundle:

1. Create an interface on both the routers.

[edit]

```
user@host# edit interfaces lsq-0/0/0 unit 0
```

2. Set a logical unit on the interface and define the family type for the routers R0 and R1.

```
[edit interfaces lsq-0/0/0 unit 0]
user@host# set family inet address 10.0.0.4/24
user@host# set family inet address 10.0.0.5/24
```

3. Define the multilink bundle as an MLFR FRF.15 bundle.

```
[edit interfaces lsq-0/0/0 unit 0]
user@host# set encapsulation multilink-frame-relay-end-to-end
```

4. Specify the names of the constituent links to be added to the multilink bundle.

```
[edit interfaces]
user@host# set t1-2/0/0 encapsulation frame-relay
user@host# set t1-2/0/1 encapsulation frame-relay
```

5. Define the router R0 as a DCE device.

```
[edit interfaces]
user@host# edit lsq-0/0/0
user@host# set dce
```

6. Specify the DLCI as well as the multilink bundle to which the interface is to be added.

```
[edit interfaces lsq-0/0/0]
user@host# set unit 0 dlci 100 family mlfr-end-to-end bundle lsq-0/0/0.0
```

## Results

From configuration mode, confirm your configuration by entering the `show interfaces lsq-0/0/0`, `show interfaces t1-2/0/0`, and `show interfaces t1-2/0/1` commands for R0 and R1. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
For device R0
[edit]
```

```

user@host# show interfaces lsq-0/0/0
dce;
unit 0 {
  encapsulation multilink-frame-relay-end-to-end;
    dlci 100;
  family inet {
    address 10.0.0.4/24;
  }
  family mlfr-end-to-end {
    bundle lsq-0/0/0.0;
  }
}
[edit]
user@host# show interfaces t1-2/0/0
encapsulation frame-relay;
[edit]
user@host# show interfaces t1-2/0/1
encapsulation frame-relay;

```

For device R1

```

[edit]
user@host# show interfaces lsq-0/0/0
unit 0 {
  encapsulation multilink-frame-relay-end-to-end;
    dlci 100;
  family inet {
    address 10.0.0.5/24;
  }
  family mlfr-end-to-end {
    bundle lsq-0/0/0.0;
  }
}
[edit]
user@host# show interfaces t1-2/0/0
encapsulation frame-relay;
[edit]
user@host# show interfaces t1-2/0/1
encapsulation frame-relay;

```

If you are done configuring the router, enter `commit` from configuration mode.

## Verification

### IN THIS SECTION

- [Verifying the MLFR FRF.15 Configuration | 100](#)

Confirm that the configuration is working properly:

### Verifying the MLFR FRF.15 Configuration

#### Purpose

Verify the MLFR FRF.15 configuration.

#### Action

From operational mode, enter the `show interfaces` command.

### SEE ALSO

---

[Link and Multilink Services Overview | 2](#)

---

[Multilink Interfaces on Channelized MICs Overview | 7](#)

---

[Understanding MLPPP Bundles and Link Fragmentation and Interleaving \(LFI\) on Serial Links | 10](#)

---

[Example: Configuring Link Interfaces on Channelized MICs | 122](#)

---

[Example: Configuring an MLPPP Bundle | 58](#)

## Configuring DLCIs on Link Services Logical Interfaces

### IN THIS SECTION

- [Configuring Point-to-Point DLCIs for MLFR FRF.16 and MLPPP Bundles | 101](#)
- [Configuring Multicast-Capable DLCIs for MLFR FRF.16 Bundles | 101](#)

For link services interfaces only, you can configure multiple DLCIs for MLFR FRF.16 or MLPPP bundles.

DLCIs are not supported on multilink interfaces.

## Configuring Point-to-Point DLCIs for MLFR FRF.16 and MLPPP Bundles

For link services interfaces only, you can configure multiple point-to-point DLCIs for each MLFR FRF.16 or MLPPP bundle. A channelized interface, such as `ls-1/1/1:0`, denotes a single MLFR FRF.16 bundle. To configure a DLCI, include the `dlsi` statement:

```
dlsi dlsi-identifier;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

The DLCI identifier is a value from 16 through 1022. Numbers 1 through 15 are reserved for future use.

When you configure point-to-point connections, the maximum transmission unit (MTU) sizes on both sides of the connection must be the same.

## Configuring Multicast-Capable DLCIs for MLFR FRF.16 Bundles

For link services interfaces only, you can configure multiple multicast-capable DLCIs for each MLFR FRF.16 bundle. A channelized interface, such as `ls-1/1/1:0`, denotes a single MLFR FRF.16 bundle. By default, Frame Relay connections assume unicast traffic. If your Frame Relay switch performs multicast replication, you can configure the link services connection to support multicast traffic by including the `multicast-dlsi` statement:

```
multicast-dlsi dlsi-identifier;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

The DLCI identifier is a value from 16 through 1022 that defines the Frame Relay DLCI over which the switch expects to receive multicast packets for replication.

You can configure multicast support only on point-to-multipoint link services connections. Multicast-capable DLCIs are not supported on multilink interfaces.

If keepalives are enabled, causing the interface to send Local Management Interface (LMI) messages during idle times, the number of possible DLCI configurations is limited by the MTU selected for the interface. For more information, see ["Configuring Keepalives on Link Services Physical Interfaces" on page 140](#).

## SEE ALSO

[Link and Multilink Services Overview | 2](#)

[Configuring Link and Multilink Services Logical Interfaces | 140](#)

## Example: Configuring a Link Services PIC with MLFR FRF.16

```
[edit chassis]
fpc 1 {
  pic 2 {
    mlfr-uni-nni-bundles 5;
  }
}
[edit interfaces]
t1-0/0/0 {
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    family mlfr-uni-nni {
      bundle ls-1/2/0:0;
    }
  }
}
t1-0/0/1 {
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
    family mlfr-uni-nni {
      bundle ls-1/2/0:0;
    }
  }
}
ls-1/2/0:0 {
  dce;
  encapsulation multilink-frame-relay-uni-nni;
  unit 0 {
```

```

    dlci 26;
    family inet {
        address 10.26.1.1/32 {
            destination 10.26.1.2;
        }
    }
}

```

## SEE ALSO

[Configuring Link Services Physical Interfaces | 140](#)

[encapsulation \(Physical Interface\) | 175](#)

## Example: Configuring Inline Multilink Frame Relay (FRF.16) for WAN Interfaces

### IN THIS SECTION

- [Requirements | 104](#)
- [Overview | 104](#)
- [Configuration | 105](#)
- [Verification | 111](#)

Inline Multilink PPP (*MLPPP*), Multilink Frame Relay (*FRF.16*), and Multilink Frame Relay End-to-End (*FRF.15*) for time-division multiplexing (*TDM*) WAN interfaces provide bundling services through the Packet Forwarding Engine without requiring a PIC or Dense Port Concentrator (*DPC*).

Traditionally, bundling services are used to bundle multiple low-speed links to create a higher bandwidth pipe. This combined bandwidth is available to traffic from all links and supports link fragmentation and interleaving (*LF*) on the bundle, reducing high priority packet transmission delay.

This support includes multiple links on the same bundle as well as multiclass extension for MLPPP. Through this service you can enable bundling services without additional DPC slots to support Service DPC and free up the slots for other MICs.

This example shows how to configure Multilink Frame Relay (FRF.16) for additional bandwidth, load balancing, and redundancy by aggregating low-speed links such as T1 (WAN interfaces).

## Requirements

This example uses the following hardware and software components:

- Two MX Series Routers
- Junos OS Release 14.1 or later release

Before you begin, configure two MX Series routers (the MX240, MX480, or MX960) with at least two WAN interfaces that communicate over T1 links.

## Overview


### IN THIS SECTION

- [Topology | 104](#)

In this example, you aggregate T1 interfaces to create an MFR FRF.16 bundle on two MX Series routers, R0 and R1. You configure the chassis interface and specify the number of MFR FRF.16 bundles to be created on the interface. You then specify the channel to be configured as a multilink bundle and create interface `lsq-`. You set the multilink bundle as an MFR FRF.16 bundle by specifying the `multilink-frame-relay-uni-nni` encapsulation type. Then you define Router R0 as a DCE device and Router R1 as a DTE device. You configure a logical unit on the multilink bundle `lsq-`, and set the family type to `inet`. You create the T1 interfaces, that are to be added as constituent links to the multilink bundle and define the Frame Relay encapsulation type. Finally, you set the multilink bundle to `lsq-`.

## Topology

Figure 4: Configuring Inline Multilink Frame Relay (FRF.16) for WAN Interfaces

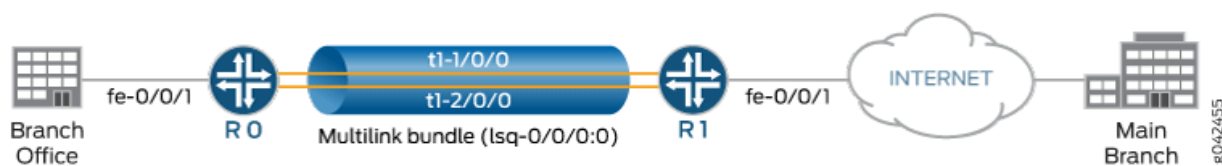

## Configuration

### IN THIS SECTION

- [CLI Quick Configuration | 105](#)
- [To Configure Router R0 | 106](#)
- [To Configure Router R1 | 107](#)
- [Results | 108](#)

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.

Device R0

```
set chassis fpc 1 pic 0 mlfr-uni-nni-bundles-inline 1
set interfaces lsq-1/0/0:0 dce
set interfaces lsq-1/0/0:0 encapsulation multilink-frame-relay-uni-nni
set interfaces lsq-1/0/0:0 unit 0 dlci 10
set interfaces lsq-1/0/0:0 unit 1 dlci 20
set interfaces lsq-1/0/0:0 unit 0 family inet address 10.1.1.1/24
set interfaces lsq-1/0/0:0 unit 1 family inet address 192.0.2.1./24
set interfaces t1-1/0/0:5 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-1/0/0:6 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-1/0/0:5 unit 0 family mlfr-uni-nni bundle lsq-1/0/0:0
set interfaces t1-1/0/0:6 unit 0 family mlfr-uni-nni bundle lsq-1/0/0:0
```

Device R1

```
set chassis fpc 2 pic 0 mlfr-uni-nni-bundles-inline 1
set interfaces lsq-2/0/0:0 encapsulation multilink-frame-relay-uni-nni
set interfaces lsq-2/0/0:0 unit 0 dlci 10
set interfaces lsq-2/0/0:0 unit 1 dlci 20
set interfaces lsq-2/0/0:0 unit 0 family inet address 10.1.1.2/24
set interfaces lsq-2/0/0:0 unit 1 family inet address 192.0.2.2/24
set interfaces t1-2/0/0:5 encapsulation multilink-frame-relay-uni-nni
```

```
set interfaces t1-2/0/0:6 encapsulation multilink-frame-relay-uni-nni
set interfaces t1-2/0/0:5 unit 0 family mlfr-uni-nni bundle lsq-2/0/0:0
set interfaces t1-2/0/0:6 unit 0 family mlfr-uni-nni bundle lsq-2/0/0:0
```

## To Configure Router R0

### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure inline Multilink Frame Relay (*FRF.16*) for WAN Interfaces:

1. Configure a chassis interface and specify the number of MFR bundles.

```
[edit]
user@R0# set chassis fpc 1 pic 0 mlfr-uni-nni-bundles-inline 1
```

2. Create the interface and specify the MFR encapsulation type.

```
[edit]
user@R0# set interfaces lsq-1/0/0:0 encapsulation multilink-frame-relay-uni-nni
```

3. Set Router R0 as a DCE device.

```
[edit ]
user@R0# set interfaces lsq-1/0/0:0 dce
```

4. Specify the DLCI value.

```
[edit]
user@R0# set interfaces lsq-1/0/0:0 unit 0 dlci 10
user@R0# set interfaces lsq-1/0/0:0 unit 1 dlci 20
```

5. Specify a logical unit on the multilink bundle and set the family type.

```
[edit]
user@R0# set interfaces lsq-1/0/0:0 unit 0 family inet address 10.1.1.1/24
user@R0# set interfaces lsq-1/0/0:0 unit 1 family inet address 192.0.2.1/24
```

6. Create the T1 interfaces and set the Frame Relay encapsulation.

```
[edit]
user@R0# set interfaces t1-1/0/0:5 encapsulation multilink-frame-relay-uni-nni
user@R0# set interfaces t1-1/0/0:6 encapsulation multilink-frame-relay-uni-nni
```

7. Specify the multilink bundle to which the interface is to be added as a constituent link on Router R0.

```
[edit]
user@R0# set interfaces t1-1/0/0:5 unit 0 family mlfr-uni-nni bundle lsq-1/0/0:0
user@R0# set interfaces t1-1/0/0:6 unit 0 family mlfr-uni-nni bundle lsq-1/0/0:0
```

## To Configure Router R1

### Step-by-Step Procedure

To configure inline Multilink Frame Relay (*FRF.16*) for WAN Interfaces:

1. Configure a chassis interface and specify the number of MFR bundles.

```
[edit]
user@R1# set chassis fpc 2 pic 0 mlfr-uni-nni-bundles-inline 1
```

2. Create the interface and specify the MFR encapsulation type.

```
[edit]
user@R1# set interfaces lsq-2/0/0:0 encapsulation multilink-frame-relay-uni-nni
```

### 3. Specify the DLCI value.

```
[edit]
user@R0# set interfaces lsq-2/0/0:0 unit 0 dlci 10
user@R0# set interfaces lsq-2/0/0:0 unit 1 dlci 20
```

### 4. Specify a logical unit on the multilink bundle and set the family type.

```
[edit]
user@R0# set interfaces lsq-2/0/0:0 unit 0 family inet address 10.1.1.2/24
user@R0# set interfaces lsq-2/0/0:0 unit 1 family inet address 192.0.2.2/24
```

### 5. Create the T1 interfaces and set the Frame Relay encapsulation.

```
[edit]
user@R1# set interfaces t1-2/0/0:5 encapsulation multilink-frame-relay-uni-nni
user@R1# set interfaces t1-2/0/0:6 encapsulation multilink-frame-relay-uni-nni
```

### 6. Specify the multilink bundle to which the interface is to be added as a constituent link on Router R1.

```
[edit]
user@R1# set interfaces t1-2/0/0:5 unit 0 family mlfr-uni-nni bundle lsq-2/0/0:0
user@R1# set interfaces t1-2/0/0:6 unit 0 family mlfr-uni-nni bundle lsq-2/0/0:0
```

## Results

For Router R0, from configuration mode, confirm your configuration by entering the `show chassis`, `show interfaces lsq-1/0/0:0`, `show interfaces t1-1/0/0:5`, and `show interfaces t1-1/0/0:6` commands.

For Router R1, from configuration mode, confirm your configuration by entering the `show chassis`, `show interfaces lsq-2/0/0:0`, `show interfaces t1-2/0/0:5`, and `show interfaces t1-2/0/0:6` commands.

If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

For Router R0:

```
[edit]
user@R0# show chassis
```

```
fpc 1 {
    pic 0 {
        mlfr-uni-nni-bundles-inline 1;
    }
}
```

```
[edit]
user@R0# show interfaces lsq-1/0/0:0
dce;
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
    dlci 10;
    family inet {
        address 10.1.1.1/24;
    }
}
unit 1 {
    dlci 20;
    family inet {
        address 192.0.2.1/24;
    }
}
```

```
[edit]
user@R0# show interfaces t1-1/0/0:5
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
    family mlfr-uni-nni {
        bundle lsq-1/0/0:0;
    }
}
```

```
[edit]
user@R0# show interfaces t1-1/0/0:6
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
    family mlfr-uni-nni {
        bundle lsq-1/0/0:0;
    }
}
```

```

    }
}

```

If you are done configuring the router, enter `commit` from configuration mode.

For Router R1:

```

[edit]
user@R1# show chassis
fpc 2{
  pic 0 {
    mlfr-uni-nni-bundles-inline 1;
  }
}

```

```

[edit]
user@R1# show interfaces lsq-2/0/0:0
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
  dlci 10;
  family inet {
    address 10.1.1.2/24;
  }
}
unit 1 {
  dlci 20;
  family inet {
    address 192.0.2.2/24;
  }
}

```

```

[edit]
user@R1# show interfaces t1-2/0/0:5
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
  family mlfr-uni-nni {
    bundle lsq-2/0/0:0;
  }
}

```

```
}
}
```

```
[edit]
user@R1# show interfaces t1-2/0/0:6
encapsulation multilink-frame-relay-uni-nni;
unit 0 {
    family mlfr-uni-nni {
        bundle lsq-2/0/0:0;
    }
}
```

If you are done configuring the router, enter `commit` from configuration mode.

## Verification

### IN THIS SECTION

- [Verifying the MFR FRF.16 Configuration | 111](#)

## Verifying the MFR FRF.16 Configuration

### Purpose

Verify the MFR FRF.16 configuration.

### Action

From operational mode, run the `show interfaces lsq-1/0/0:0 extensive` command.

### Sample Output

#### command-name

```
user@R0> show interfaces lsq-1/0/0:0 extensive
Physical interface: lsq-1/0/0:0, Enabled, Physical link is Up
Interface index: 261, SNMP ifIndex: 122042, Generation: 4955
```

**Link-level type: Multilink-FR-UNI-NNI, MTU: 1508**

Device flags : Present Running

Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000

Last flapped : Never

Statistics last cleared: Never

Hold-times : Up 0 ms, Down 0 ms

**Multilink Frame Relay UNI NNI bundle options:**

Device type	DCE
MRRU	1508
Bandwidth	3072kbps
Fragmentation threshold	0
Red differential delay limit	120
Yellow differential delay limit	72
Red differential delay action	Remove link
Reassembly drop timer	65535
Links needed to sustain bundle	1
Link layer overhead	4.0 %
LIP Hello timer	10
Acknowledgement timer	4
Acknowledgement retries	2
Bundle class	A
LMI type	Q.933 Annex A
T391 LIV polling timer	10
T392 polling verification timer	15
N391 full status polling count	6
N392 error threshold	3
N393 monitored event count	4

Q.933 Annex A LMI settings: n392dce 3, n393dce 4, t392dce 15 seconds

**LMI statistics:**

Input : 52 (last seen 00:00:01 ago)

Output: 54 (last sent 00:00:01 ago)

**DTE statistics:**

Enquiries sent	: 0
Full enquiries sent	: 0
Enquiry responses received	: 0
Full enquiry responses received	: 0

**DCE statistics:**

Enquiries received	: 44
Full enquiries received	: 8
Enquiry responses sent	: 46
Full enquiry responses sent	: 8

**Common statistics:**

Unknown messages received	: 0
---------------------------	-----

```

Asynchronous updates received      : 0
Out-of-sequence packets received   : 0
Keepalive responses timedout       : 1
Interface transmit statistics: Disabled
Traffic statistics:
Input bytes      :          0          0 bps
Output bytes    :          0          0 bps
Input packets   :          0          0 pps
Output packets  :          0          0 pps
IPv6 transit statistics:
Input bytes     :          0
Output bytes    :          0
Input packets   :          0
Output packets  :          0
Multilink Frame Relay UNI NNI bundle errors:
Packet drops    0 (0 bytes)
Fragment drops  0 (0 bytes)
MRRU exceeded   0
Exception events 0
Multilink Frame Relay UNI NNI bundle statistics:
              Frames      fps      Bytes      bps

Multilink:
Input :          0          0          0          0
Output:          0          0          0          0
Network:
Input :          0          0          0          0
Output:          0          0          0          0
Multilink Frame Relay UNI NNI bundle links information:
Active bundle links      2
Removed bundle links     0
Disabled bundle links    0
Multilink Frame Relay UNI NNI active bundle links statistics:
              Frames      fps      Bytes      bps
t1-1/0/0:5
Up time: 00:08:18
Input :          0          0          0          0
Output:          0          0          0          0
Current differential delay    0.1 ms
Recent high differential delay 0.8 ms
Times over red diff delay    0
Times over yellow diff delay 0
LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack

```

```

Rcv:      2      1      0      50      49      0      0
Xmt:     16      2      0      49      50      1      0

```

t1-1/0/0:6

Up time: 00:08:18

```

Input :          0          0          0          0

```

```

Output:          0          0          0          0

```

Current differential delay 0.0 ms

Recent high differential delay 0.7 ms

Times over red diff delay 0

Times over yellow diff delay 0

LIP:add\_lnk lnk\_ack lnk\_rej hello hel\_ack lnk\_rem rem\_ack

```

Rcv:      2      1      0      50      49      0      0

```

```

Xmt:     16      2      0      49      50      1      0

```

Logical interface lsq-1/0/0:0.0 (Index 336) (SNMP ifIndex 122044) (Generation 6209)

Flags: Up Point-To-Point SNMP-Traps **Encapsulation: Multilink-FR-UNI-NNI**

Last flapped: 2014-04-24 04:13:05 PDT (00:08:18 ago)

Multilink class 0 status:

Received sequence number 0x0

Transmit sequence number 0xffffffff

Packet drops 0 (0 bytes)

Fragment drops 0 (0 bytes)

MRRU exceeded 0

Fragment timeout 0

Missing sequence number 0

Out-of-order sequence number 0

Out-of-range sequence number 0

Packet data buffer overflow 0

Fragment data buffer overflow 0

Multilink class drop timeout 0 (ms)

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

Bundle:

Multilink:

```

Input :          0          0          0          0

```

```

Output:          0          0          0          0

```

Network:

```

Input :          0          0          0          0

```

```

Output:          0          0          0          0

```

Link:

t1-1/0/0:5

Up time: 00:08:18

```

Input :          0          0          0          0

```

```

Output:          0          0          0          0

```

```

t1-1/0/0:6
  Up time: 00:08:18
  Input :          0          0          0          0
  Output:          0          0          0          0
Multilink detail statistics:
Bundle:
  Fragments:
    Input :          0          0          0          0
    Output:          0          0          0          0
  Non-fragments:
    Input :          0          0          0          0
    Output:          0          0          0          0
Protocol inet, MTU: 1500, Generation: 6258, Route table: 0
  Flags: Sendbcast-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 10.1.1/24, Local: 10.1.1.1, Broadcast: Unspecified, Generation: 4209
DLCI 10
  Flags: Active
  Total down time: 01:15:17 sec, Last down: 01:23:28 ago
  Traffic statistics:
    Input bytes :          0
    Output bytes :          0
    Input packets:          0
    Output packets:          0

Logical interface lsq-1/0/0:0.1 (Index 337) (SNMP ifIndex 122067) (Generation 6210)
  Flags: Up Point-To-Point SNMP-Traps Encapsulation: Multilink-FR-UNI-NNI
  Last flapped: 2014-04-24 04:13:05 PDT (00:08:18 ago)
  Multilink class 0 status:
    Received sequence number      0x0
    Transmit sequence number      0xffffffff
    Packet drops                   0 (0 bytes)
    Fragment drops                 0 (0 bytes)
    MRRU exceeded                  0
    Fragment timeout                0
    Missing sequence number        0
    Out-of-order sequence number   0
  Out-of-range sequence number    0
    Packet data buffer overflow     0
    Fragment data buffer overflow   0
    Multilink class drop timeout    0 (ms)
Statistics      Frames      fps      Bytes      bps
Bundle:

```

```

Multilink:
  Input :          0          0          0          0
  Output:          0          0          0          0
Network:
  Input :          0          0          0          0
  Output:          0          0          0          0
Link:
  t1-1/0/0:5
    Up time: 00:08:18
    Input :          0          0          0          0
    Output:          0          0          0          0
  t1-1/0/0:6
    Up time: 00:08:18
    Input :          0          0          0          0
    Output:          0          0          0          0
Multilink detail statistics:
Bundle:
  Fragments:
    Input :          0          0          0          0
    Output:          0          0          0          0
  Non-fragments:
    Input :          0          0          0          0
    Output:          0          0          0          0
Protocol inet, MTU: 1500, Generation: 6260, Route table: 0
  Flags: Sendbcast-pkt-to-re
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 192.0.2/24, Local: 192.0.2.1, Broadcast: Unspecified, Generation: 4207
DLCI 20
  Flags: Active
  Total down time: 01:15:17 sec, Last down: 01:23:28 ago
  Traffic statistics:
    Input bytes :          0
    Output bytes :          0
    Input packets:          0
    Output packets:          0
DLCI statistics:
  Active DLCI :2 Inactive DLCI :0

```

From the operational mode, enter the `show interfaces lsq-2/0/0:0 extensive` command.

```

user@R1> show interfaces lsq-2/0/0:0 extensive
Physical interface: lsq-2/0/0:0, Enabled, Physical link is Up

```

Interface index: 232, SNMP ifIndex: 44389, Generation: 235

**Link-level type: Multilink-FR-UNI-NNI**, MTU: 1508

Device flags : Present Running

Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000

Last flapped : Never

Statistics last cleared: Never

Hold-times : Up 0 ms, Down 0 ms

**Multilink Frame Relay UNI NNI bundle options:**

Device type	DTE
MRRU	1508
Bandwidth	3072kbps
Fragmentation threshold	0
Red differential delay limit	120
Yellow differential delay limit	72
Red differential delay action	Remove link
Reassembly drop timer	65535
Links needed to sustain bundle	1
Link layer overhead	4.0 %
LIP Hello timer	10
Acknowledgement timer	4
Acknowledgement retries	2
Bundle class	A
LMI type	Q.933 Annex A
T391 LIV polling timer	10
T392 polling verification timer	15
N391 full status polling count	6
N392 error threshold	3
N393 monitored event count	4

Q.933 Annex A LMI settings: n391dte 6, n392dte 3, n393dte 4, t391dte 10 seconds

**LMI statistics:**

Input : 80 (last seen 00:00:10 ago)  
Output: 100 (last sent 00:00:10 ago)

**DTE statistics:**

Enquiries sent	: 82
Full enquiries sent	: 16
Enquiry responses received	: 67
Full enquiry responses received	: 13

**DCE statistics:**

Enquiries received	: 0
Full enquiries received	: 0
Enquiry responses sent	: 0
Full enquiry responses sent	: 0

**Common statistics:**

```

Unknown messages received      : 0
Asynchronous updates received  : 0
Out-of-sequence packets received : 0
Keepalive responses timedout    : 1
Interface transmit statistics: Disabled
Traffic statistics:
Input bytes : 0 0 bps
Output bytes : 0 0 bps
Input packets: 0 0 pps
Output packets: 0 0 pps
IPv6 transit statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Multilink Frame Relay UNI NNI bundle errors:
Packet drops 0 (0 bytes)
Fragment drops 0 (0 bytes)
MRRU exceeded 0
Exception events 0
Multilink Frame Relay UNI NNI bundle statistics:
      Frames      fps      Bytes      bps

Multilink:
Input : 0 0 0 0
Output: 0 0 0 0
Network:
Input : 0 0 0 0
Output: 0 0 0 0
Multilink Frame Relay UNI NNI bundle links information:
Active bundle links 2
Removed bundle links 0
Disabled bundle links 0
Multilink Frame Relay UNI NNI active bundle links statistics:
      Frames      fps      Bytes      bps

t1-2/0/0:5
Up time: 00:12:57
Input : 0 0 0 0
Output: 0 0 0 0
Current differential delay 0.0 ms
Recent high differential delay 2.8 ms
Times over red diff delay 0
Times over yellow diff delay 0

```

```

LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack
Rcv:      1      2      0      77      78      0      0
Xmt:     14      1      0      78      77      0      0

```

t1-2/0/0:6

Up time: 00:12:57

Input : 0 0 0 0

Output: 0 0 0 0

Current differential delay 0.0 ms

Recent high differential delay 2.8 ms

Times over red diff delay 0

Times over yellow diff delay 0

```

LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack

```

```

Rcv:      1      2      0      77      78      0      0

```

```

Xmt:     14      1      0      78      77      0      0

```

Logical interface lsq-2/0/0:0.0 (Index 348) (SNMP ifIndex 44399) (Generation 161)

Flags: Up Point-To-Point SNMP-Traps **Encapsulation: Multilink-FR-UNI-NNI**

Last flapped: 2014-04-24 04:13:05 PDT (00:12:57 ago)

Multilink class 0 status:

Received sequence number 0x0

Transmit sequence number 0xffffffff

Packet drops 0 (0 bytes)

Fragment drops 0 (0 bytes)

MRRU exceeded 0

Fragment timeout 0

Missing sequence number 0

Out-of-order sequence number 0

Out-of-range sequence number 0

Packet data buffer overflow 0

Fragment data buffer overflow 0

Multilink class drop timeout 0 (ms)

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

Bundle:

Multilink:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Network:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Link:

t1-2/0/0:5

Up time: 00:12:57

Input :	0	0	0	0
---------	---	---	---	---

```

Output:          0          0          0          0
t1-2/0/0:6
Up time: 00:12:57
Input :          0          0          0          0
Output:          0          0          0          0

```

#### Multilink detail statistics:

##### Bundle:

##### Fragments:

```

Input :          0          0          0          0
Output:          0          0          0          0

```

##### Non-fragments:

```

Input :          0          0          0          0
Output:          0          0          0          0

```

Protocol inet, MTU: 1500, Generation: 193, Route table: 0

Flags: Sendbcast-pkt-to-re

Addresses, Flags: Is-Preferred Is-Primary

Destination: 10.1.1/24, Local: 10.1.1.2, Broadcast: Unspecified, Generation: 149

#### DLCI 10

Flags: Active, DCE-Configured

Total down time: 00:03:18 sec, Last down: 00:15:38 ago

#### Traffic statistics:

```

Input bytes :          0
Output bytes :          0
Input packets:          0
Output packets:         0

```

Logical interface lsq-2/0/0:0.1 (Index 349) (SNMP ifIndex 44400) (Generation 162)

Flags: Up Point-To-Point SNMP-Traps Encapsulation: Multilink-FR-UNI-NNI

Last flapped: 2014-04-24 04:13:05 PDT (00:12:57 ago)

#### Multilink class 0 status:

```

Received sequence number  0x0
Transmit sequence number  0xffffffff
Packet drops              0 (0 bytes)
Fragment drops            0 (0 bytes)
MRRU exceeded             0
Fragment timeout          0
Missing sequence number   0
Out-of-order sequence number 0
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Multilink class drop timeout 0 (ms)

```

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

## Bundle:

## Multilink:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Network:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Link:

## t1-2/0/0:5

Up time: 00:12:57

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## t1-2/0/0:6

Up time: 00:12:57

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Multilink detail statistics:

## Bundle:

## Fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

## Non-fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Protocol inet, MTU: 1500, Generation: 194, Route table: 0

Flags: Sendbroadcast-pkt-to-re

Addresses, Flags: Is-Preferred Is-Primary

Destination: 192.0.2/24, Local: 192.0.2.2, Broadcast: Unspecified, Generation: 151

## DLCI 20

Flags: Active, DCE-Configured

Total down time: 00:03:18 sec, Last down: 00:15:38 ago

## Traffic statistics:

Input bytes :	0
---------------	---

Output bytes :	0
----------------	---

Input packets:	0
----------------	---

Output packets:	0
-----------------	---

## DLCI statistics:

Active DLCI :2 Inactive DLCI :0

**SEE ALSO**

*Inline MLPPP for WAN Interfaces Overview*

[Enabling MLPPP Link Fragmentation and Interleaving | 24](#)

*mlfr-uni-nni-bundles-inline*

*multi-link-layer-2-inline*

[pic \(MX Series Routers\)](#)

*show interfaces (Link Services IQ)*

## Example: Configuring Link Interfaces on Channelized MICs

**IN THIS SECTION**

- [Requirements | 122](#)
- [Overview | 122](#)
- [Configuration on 4-Port Channelized SONET/SDH OC3/STM1 \(Multi-Rate\) MIC with SFP | 123](#)
- [Verification | 134](#)

### Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.1 or later for MX240, MX480, and MX960 routers
- One MX240, MX480, or MX960 router

### Overview

This example provides information about configuring the link interfaces on the following channelized MICs:

- 4-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-4CHOC3-2CHOC12)
- 8-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-8CHOC3-4CHOC12)
- 8-port Channelized DS3/E3 MIC (MIC-3D-8CHDS3-E3-B)

You need to first partition each port on the MICs to configure the link interfaces T1, T3, and DS, and then you configure the link interfaces for bundles. An MLPPP bundle involves "bundling" multiple T1/T3/DS interfaces into a single, logical interface that uses only one IP address. For more information about MLPPP bundles, see ["Understanding MLPPP Bundles and Link Fragmentation and Interleaving \(LFI\) on Serial Links" on page 10](#). Similarly, you can partition the ports to configure the MICs to the E1/E3 interfaces by setting the framing mode to SDH.

For more information about multilink-based protocols on MX240, MX480, and MX960 routers with Multiservices DPC, see ["Multilink Interfaces on Channelized MICs Overview" on page 7](#).

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

**NOTE:** You can set the values for each parameter according to your requirement. The values given in this example are for illustration purposes only.

## Configuration on 4-Port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP

### IN THIS SECTION

- [CLI Quick Configuration | 124](#)
- [Partitioning Ports on the Channelized MICs and Configuring the Link Interfaces T1, T3, and DS | 125](#)
- [Configuring MLPPP, MLFR FRF.15, and MLFR FRF.16 on Link Interfaces for Bundles | 128](#)
- [Results | 130](#)

To partition each port on the MIC and configure the link interfaces T1, T3, and DS on it and to configure the link interfaces for bundles, perform the following tasks:

## CLI Quick Configuration

To quickly configure synchronization on the aforementioned routers, copy the following commands, paste them in a text file, remove any line breaks, and then copy and paste the commands into the CLI.

[edit]

```
set interfaces coc12-5/2/0 partition 1 interface-type coc1
set interfaces coc12-5/2/0 partition 1 oc-slice 1
set interfaces coc12-5/2/0 partition 2 oc-slice 2 interface-type coc1
set interfaces coc12-5/2/0 partition 3 oc-slice 3 interface-type coc1
set interfaces coc1-5/2/0:1 no-partition interface-type t3
set interfaces coc1-5/2/0:3 no-partition interface-type t3
set interfaces coc1-5/2/0:2 partition 1 interface-type ct1
set interfaces coc1-5/2/0:2 partition 2 interface-type t1
set interfaces coc1-5/2/0:2 partition 3 interface-type ct1
set interfaces coc1-5/2/0:2 partition 4 interface-type t1
set interfaces ct1-5/2/0:2:1 partition 1 timeslots 1 interface-type ds
set interfaces ct1-5/2/0:2:1 partition 2 timeslots 2 interface-type ds
set interfaces ct3-2/0/0 no-partition interface-type t3
set interfaces ct3-2/0/0 partition 1 interface-type t1
set interfaces ct3-2/0/0 partition 2 interface-type t1
set interfaces ct3-2/0/0 partition 3 interface-type t1
set interfaces ct3-2/0/0 partition 4 interface-type ct1
set interfaces ct1-5/2/0:2:1 partition 1 timeslots 1 interface-type ds
set interfaces t1-5/2/0:2:2 unit 0 family mlppp bundle rlsq0.1
set interfaces ds-5/2/0:2:1:1 unit 0 family mlppp bundle rlsq0.0
set interfaces ds-5/2/0:2:1:2 unit 0 family mlppp bundle rlsq0.0
set interfaces t3-5/2/0:3 unit 0 family mlppp bundle rlsq0.2
set interfaces t3-5/2/0:1 unit 0 family mlppp bundle rlsq0.2
set interfaces t1-5/2/0:2:2 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-uni-nni bundle rlsq0:0
set interfaces t1-5/2/0:2:4 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-uni-nni bundle rlsq0:0
set interfaces ds-5/2/0:2:1:1 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-uni-nni bundle rlsq0:0
set interfaces ds-5/2/0:2:1:2 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-uni-nni bundle rlsq0:0
set interfaces t1-5/2/0:2:2 encapsulation frame-relay unit 0 dlci 10 family mlfr-end-to-end bundle rlsq0:0
```

```

set interfaces t1-5/2/0:2:4 encapsulation frame-relay unit 0 dlci 11 family mlfr-end-to-end bundle
rlsq0.0
set interfaces ds-5/2/0:2:1:1 encapsulation frame-relay unit 0 dlci 10 family mlfr-end-to-end bundle
rlsq0.0
set interfaces ds-5/2/0:2:1:2 encapsulation frame-relay unit 0 dlci 11 family mlfr-end-to-end bundle
rlsq0.0
set interfaces t3-5/2/0:1 encapsulation frame-relay unit 0 dlci 11 family mlfr-end-to-end bundle rlsq0.1
set interfaces t3-5/2/0:3 encapsulation frame-relay unit 0 dlci 10 family mlfr-end-to-end bundle rlsq0.1

```

## Partitioning Ports on the Channelized MICs and Configuring the Link Interfaces T1, T3, and DS

### Step-by-Step Procedure

To partition each port on the channelized MICs:

1. Configure the `coc12-5/2/0` interface by setting the partition option to 1 with the sublevel interface type set to `coc1`.

```

[edit interfaces]
user@host# set coc12-5/2/0 partition 1 interface-type coc1

```

2. Configure the `coc12-5/2/0` interface with the OC-slice range (OC-slice range specifies the bandwidth size required for the interface type you are configuring) set to 1.

```

[edit interfaces]
user@host# set coc12-5/2/0 partition 1 oc-slice 1

```

3. Configure the `coc12-5/2/0` interface by setting the partition option to 2 with the sublevel interface type set to `coc1` and the OC-slice range set to 2.

```

[edit interfaces]
user@host# set coc12-5/2/0 partition 2 oc-slice 2 interface-type coc1

```

4. Configure the coc12-5/2/0 interface by setting the partition option to 3 with the sublevel interface type set to coc1 and the OC-slice range set to 3.

```
[edit interfaces]
user@host# set coc12-5/2/0 partition 3 oc-slice 3 interface-type coc1
```

5. Configure the coc1-5/2/0:1 interface as a clear channel by setting the no-partition option for the sublevel interface type t3 . (A clear channel consolidates the entire bandwidth of a channelized interface into a single unpartitioned stream that looks like a standard interface.)

```
[edit interfaces]
user@host# set coc1-5/2/0:1 no-partition interface-type t3
```

6. Configure the coc1-5/2/0:3 interface as a clear channel by setting the no-partition option for the sublevel interface type t3.

```
[edit interfaces]
user@host# set coc1-5/2/0:3 no-partition interface-type t3
```

7. Configure the coc1-5/2/0:2 interface by setting the partition option to 1 and 3 with the sublevel interface type set to ct1. Configure the coc1-5/2/0:2 interface by setting the partition option to 2 and 4 with the sublevel interface type set to t1.

```
[edit interfaces]
user@host# set coc1-5/2/0:2 partition 1 interface-type ct1
user@host# set coc1-5/2/0:2 partition 2 interface-type t1
user@host# set coc1-5/2/0:2 partition 3 interface-type ct1
user@host# set coc1-5/2/0:2 partition 4 interface-type t1
```

8. Configure the ct1-5/2/0:2:1 interface by setting the partition option to 1 and 2 with the sublevel interface type set to ds. Configure the time slots for the partitions.

```
[edit interfaces]
user@host# set ct1-5/2/0:2:1 partition 1 timeslots 1 interface-type ds
user@host# set ct1-5/2/0:2:1 partition 2 timeslots 2 interface-type ds
```

9. Configure a clear channel on the channelized interface ct3-2/0/0 by setting the no-partition option to the sublevel interface type t3 (a clear channel consolidates the entire bandwidth of a channelized interface into a single unpartitioned stream that looks like a standard interface).

```
[edit interfaces]
user@host# set ct3-2/0/0 no-partition interface-type t3
```

10. Configure a clear channel on the channelized interface ct3-2/0/0 by setting the partition option to 1, 2, and 3 with the sublevel interface type ds. Configure the ct3-2/0/0 interface by setting the partition option to 4 with the sublevel interface type ct1.

```
[edit interfaces]
user@host# set ct3-2/0/0 partition 1 interface-type t1
user@host# set ct3-2/0/0 partition 2 interface-type t1
user@host# set ct3-2/0/0 partition 3 interface-type t1
user@host# set ct3-2/0/0 partition 4 interface-type ct1
```

11. Configure the ct1-2/0/0:4 interface by setting the partition option to 1 and 2 with the sublevel interface type set to ds. Configure the time slots for the partitions.

```
[edit interfaces]
user@host# set ct1-5/2/0:2:1 partition 1 timeslots 1 interface-type ds
user@host# set ct1-5/2/0:2:1 partition 2 timeslots 2 interface-type ds
```

## Results

Display the results of partitioning each port on the MIC and configuring the link interfaces T1, T3, and DS:

### Results for CHOC12/3 interfaces

```
user@host# show interfaces
coc12-5/2/0 {
    partition 1 oc-slice 1 interface-type coc1;
    partition 2 oc-slice 2 interface-type coc1;
    partition 3 oc-slice 3 interface-type coc1;
}
coc1-5/2/0:1 {
    no-partition interface-type t3;
```

```

}
coc1-5/2/0:3 {
    no-partition interface-type t3;
}
coc1-5/2/0:2 {
    partition 1 interface-type ct1;
    partition 2 interface-type t1;
    partition 3 interface-type ct1;
    partition 4 interface-type t1;
}

```

### Results for CHDS3 MIC interfaces

```

user@host# show interfaces
ct1-5/2/0:2:1 {
    partition 1 timeslots 1 interface-type ds;
    partition 2 timeslots 2 interface-type ds;
}
ct3-2/0/0 {
    no-partition interface-type t3;
    partition 1 interface-type t1;
    partition 2 interface-type t1;
    partition 3 interface-type t1;
    partition 4 interface-type ct1;
}
ct1-2/0/0:4 {
    partition 1 timeslots 1 interface-type ds;
    partition 2 timeslots 2 interface-type ds;
}

```

## Configuring MLPPP, MLFR FRF.15, and MLFR FRF.16 on Link Interfaces for Bundles

### Step-by-Step Procedure

To configure MLPPP, MLFR FRF.15, and MLFR FRF.16 on the link interfaces T1, T3, and DS for bundles:

1. Configure the MLPPP encapsulation on the T1 link interfaces t1-5/2/0:2:2 and t1-5/2/0:2:4.

```
[edit interfaces]
user@host# set t1-5/2/0:2:2 unit 0 family mlppp bundle rlsq0.1
user@host# set t1-5/2/0:2:4 unit 0 family mlppp bundle rlsq0.1
```

2. Configure the MLPPP encapsulation on the DS link interfaces ds-5/2/0:2:1:1 and ds-5/2/0:2:1:2.

```
[edit interfaces]
user@host# set ds-5/2/0:2:1:1 unit 0 family mlppp bundle rlsq0.0
user@host# set ds-5/2/0:2:1:2 unit 0 family mlppp bundle rlsq0.0
```

3. Configure the MLPPP encapsulation on the T3 link interfaces t3-5/2/0:3 and t3-5/2/0:1.

```
[edit interfaces]
user@host# set t3-5/2/0:3 unit 0 family mlppp bundle rlsq0.2
user@host# set t3-5/2/0:1 unit 0 family mlppp bundle rlsq0.2
```

4. Configure the MLFR FRF.16 encapsulation on the T1 link interfaces t1-5/2/0:2:2 and t1-5/2/0:2:4.

```
[edit interfaces]
user@host# set t1-5/2/0:2:2 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-
uni-nni bundle rlsq0:0
user@host# set t1-5/2/0:2:4 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-
uni-nni bundle rlsq0:0
```

5. Configure the MLFR FRF.16 encapsulation on the DS link interfaces ds-5/2/0:2:1:1 and ds-5/2/0:2:1:2.

```
[edit interfaces]
user@host# set ds-5/2/0:2:1:1 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-
uni-nni bundle rlsq0:0
user@host# set ds-5/2/0:2:1:2 encapsulation multilink-frame-relay-uni-nni unit 0 family mlfr-
uni-nni bundle rlsq0:0
```

6. Configure the MLFR FRF.15 encapsulation on the T1 link interfaces t1-5/2/0:2:2 and t1-5/2/0:2:4.

```
[edit interfaces]
user@host# set t1-5/2/0:2:2 encapsulation frame-relay unit 0 dlci 10 family mlfr-end-to-end
bundle rlsq0.0
user@host# set t1-5/2/0:2:4 encapsulation frame-relay unit 0 dlci 11 family mlfr-end-to-end
bundle rlsq0.0
```

7. Configure the MLFR FRF.15 encapsulation on the DS link interfaces ds-5/2/0:2:1:1 and ds-5/2/0:2:1:2.

```
[edit interfaces]
user@host# set ds-5/2/0:2:1:1 encapsulation frame-relay unit 0 dlci 10 family mlfr-end-to-end
bundle rlsq0.0
user@host# set ds-5/2/0:2:1:2 encapsulation frame-relay unit 0 dlci 11 family mlfr-end-to-end
bundle rlsq0.0
```

8. Configure the MLFR FRF.15 encapsulation on the T3 link interfaces t3-5/2/0:1 and t3-5/2/0:3.

```
[edit interfaces]
user@host# set t3-5/2/0:1 encapsulation frame-relay unit 0 dlci 11 family mlfr-end-to-end
bundle rlsq0.1
user@host# set t3-5/2/0:3 encapsulation frame-relay unit 0 dlci 10 family mlfr-end-to-end
bundle rlsq0.1
```

## Results

Display the results of the configuration of link interfaces for bundles:

### MLPPP on T1 links

```
user@host# show interfaces
t1-5/2/0:2:2 {
  unit 0 {
    family mlppp {
      bundle rlsq0.1;
    }
  }
}
t1-5/2/0:2:4 {
```

```

    unit 0 {
        family mlppp {
            bundle rlsq0.1;
        }
    }
}

```

### MLPPP on DS links

```

user@host# show interfaces
ds-5/2/0:2:1:1 {
    unit 0 {
        family mlppp {
            bundle rlsq0.0;
        }
    }
}
ds-5/2/0:2:1:2 {
    unit 0 {
        family mlppp {
            bundle rlsq0.0;
        }
    }
}
}

```

### MLPPP on T3 links

```

user@host# show interfaces
t3-5/2/0:3 {
    unit 0 {
        family mlppp {
            bundle rlsq0.2;
        }
    }
}
t3-5/2/0:1 {
    unit 0 {
        family mlppp {
            bundle rlsq0.2;
        }
    }
}

```

```

    }
}

```

### MLFR FRF.15 on T1 links

```

user@host# show interfaces
t1-5/2/0:2:2 {
    encapsulation frame-relay;
    unit 0 {
        dlci 10;
        family mlfr-end-to-end {
            bundle rlsq0.0;
        }
    }
}
t1-5/2/0:2:4 {
    encapsulation frame-relay;
    unit 0 {
        dlci 11;
        family mlfr-end-to-end {
            bundle rlsq0.0;
        }
    }
}

```

### MLFR FRF.15 on DS links

```

user@host# show interfaces
ds-5/2/0:2:1:1 {
    encapsulation frame-relay;
    unit 0 {
        dlci 10;
        family mlfr-end-to-end {
            bundle rlsq0.0;
        }
    }
}
ds-5/2/0:2:1:2 {
    encapsulation frame-relay;
    unit 0 {
        dlci 11;
    }
}

```

```

        family mlfr-end-to-end {
            bundle rlsq0.0;
        }
    }
}

```

### MLFR FRF.15 on T3 links

```

user@host# show interfaces
t3-5/2/0:1 {
    encapsulation frame-relay;
    unit 0 {
        dlci 11;
        family mlfr-end-to-end {
            bundle rlsq0.1;
        }
    }
}
t3-5/2/0:3 {
    encapsulation frame-relay;
    unit 0 {
        dlci 10;
        family mlfr-end-to-end {
            bundle rlsq0.1;
        }
    }
}
}

```

### MLFR FRF.16 on T1 links

```

user@host# show interfaces
t1-5/2/0:2:2 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle rlsq0:0;
        }
    }
}
t1-5/2/0:2:4 {
    encapsulation multilink-frame-relay-uni-nni;

```

```

    unit 0 {
        family mlfr-uni-nni {
            bundle rlsq0:0;
        }
    }
}

```

## MLFR FRF.16 on DS links

```

user@host# show interfaces
ds-5/2/0:2:1:1 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle rlsq0:0;
        }
    }
}
ds-5/2/0:2:1:2 {
    encapsulation multilink-frame-relay-uni-nni;
    unit 0 {
        family mlfr-uni-nni {
            bundle rlsq0:0;
        }
    }
}
}

```

## Verification

### IN THIS SECTION

- [Verifying the MLPPP Bundle | 135](#)
- [Verifying the MLFR FRF.15 Configuration | 135](#)
- [Verifying the MLFR FRF.16 Configuration | 135](#)

Confirm that the configuration is working properly.

## Verifying the MLPPP Bundle

### Purpose

Verify that the constituent links are added to the bundle correctly.

### Action

From operational mode, enter the `show interfaces lsq-fpc/pic/port` command.

### Meaning

The output displays the constituent links that are added to the bundle. For more information about the `show interfaces lsq-fpc/pic/port` operational command, see the [CLI Explorer](#).

## Verifying the MLFR FRF.15 Configuration

### Purpose

Verify the MLFR FRF.15 configuration.

### Action

From operational mode, enter the `show interfaces lsq-fpc/pic/port` command.

### Meaning

The output displays the standard status information about the specified link services IQ interface. For more information about the `show interfaces lsq-fpc/pic/port` operational command, see the [CLI Explorer](#).

## Verifying the MLFR FRF.16 Configuration

### Purpose

Verify the MLFR FRF.16 configuration.

## Action

From operational mode, enter the `show interfaces lsq-fpc/pic/port` command.

## Meaning

The output displays the standard status information about the specified link services IQ interface. For more information about the `show interfaces lsq-fpc/pic/port` operational command, see the [CLI Explorer](#).

## RELATED DOCUMENTATION

[Link and Multilink Services Overview | 2](#)

[Multilink Interfaces on Channelized MICs Overview | 7](#)

[Example: Configuring an MLPPP Bundle | 58](#)

[Example: Configuring Multilink Frame Relay FRF.15 | 96](#)

[Example: Configuring Multilink Frame Relay FRF.16 | 90](#)

# Unified ISSU on Inline LSQ Interfaces Overview

Starting with Junos OS Release 15.1, unified in-service software upgrade (ISSU) is supported on inline link services intelligent queuing (LSQ) interfaces on MX Series routers. Unified ISSU enables an upgrade between two Junos OS releases with no disruption on the control plane and with minimal disruption of traffic. Inline Multilink PPP (MLPPP), Multilink Frame Relay (FRF.16), and Multilink Frame Relay End-to-End (FRF.15) for time-division multiplexing (TDM) WAN interfaces provide bundling services through the Packet Forwarding Engine without requiring a PIC or Dense Port Concentrator (DPC). The inline LSQ logical interface (`lsq-slot/pic/0`) is a virtual service logical interface that resides on the Packet Forwarding Engine to provide bundling services for Layer 2 packets that do not need a services PIC.

Unified ISSU support for inline LSQ interfaces provides backward compatibility with Junos OS releases in which this support is not available. You can perform a unified ISSU process between a Junos OS release that supports unified ISSU for inline LSQ interfaces and a Junos OS release in which unified ISSU support for inline LSQ interfaces is not available. This backward compatibility does not apply to the scenario where part of the software (such as the kernel software) is upgraded while another part (such as the Packet Forwarding Engine software) is not upgraded. Unified ISSU infrastructure provides APIs to store persistent data, perform cold boot (without resetting power), and manage post-ISSU reboot connectivity and synchronization with Routing Engine kernel and other processes. Unified ISSU is also supported for redundant LSQ (`rlsq-`) interfaces configured in hot-standby and warm-standby mode.

The following line cards on MX Series routers support unified ISSU for inline LSQ interfaces:

- 8-port Channelized DS3/E3 MIC (MIC-3D-8CHDS3-E3-B)
- 8-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP (MIC-3D-8CHOC3-4CHOC12)
- 4-port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP1 (MIC-3D-4CHOC3-2CHOC12)
- MPC Type 1 3D Q (MX-MPC1-3D-Q)
- MPC Type 2 3D Q (MX-MPC2-3D-Q)

LSQ interfaces support the following three types of multilink data traffic:

- Complete multilink packets (for which bandwidth and encapsulation are set)—These packets do not require the reassembly memory.
- Fragmented multilink packets—These packets require reassembly memory to form a complete packets until all the fragments of all packets arrive.
- Link fragment interleaving (LFI) packets—These packets do not have any multilink header.

There are two time intervals or durations called dark windows during the unified ISSU process. These dark windows denote the brief traffic disruption and outage in handling of packets that can occur when the Packet Forwarding Engines restart owing to the upgraded software being installed on them. The duration of these traffic disconnections vary in length based on several factors, such as the platform and the Junos OS version being upgraded. The following two dark windows are observed:

- The first dark window is during the unified ISSU boot phase. During this time period, host-bound packets are affected because the new microkernel image is being initialized and the path to the host is not discovered yet. The aging calculations for reassembly and fragmentation are stopped, which causes the fragmented traffic types to be dropped. However, LFI packets and complete multilink packets are not disrupted.
- The second dark window occurs during the hardware synchronization phase. During this time period, the hardware learns all the new states from the software. ASICs reinitialize themselves with the new configurations. During this period, all kinds of traffic drops are permissible. The duration for this dark window is approximately 4–5 seconds. During the second dark window, because packets are dropped at the fragmentation side, a receive-ml-seq number mismatch occurs at the other end of the connection (reassembly or receiver side). This behavior can cause additional packet drops.

During a unified ISSU, a switchover from the primary LSQ interface to the secondary lsq interface does not occur and the bundle remains up. The impact on fragmented packets (to be reassembled) remains the same as the packets on LSQ interfaces. LFI and non-fragmented packets are traversed until the second dark window starts. The dark window duration for rlsq- interfaces is the same as that for LSQ

interfaces. No particular attribute is maintained only on the local MPC hardware. All of the QoS functionalities behave in the same manner as the pre-unified ISSU phase.

During the unified ISSU process, none of the multilink counters are updated (except the multilink sequence number). The counters are reset and incremented from zero after unified ISSU is completed. The receive-ml-seq and send ml-seq counters need to be updated for reassembly to take place properly but the update of these counters is not exported to the Packet Forwarding Engine microkernel or the Routing Engine.

It is assumed that bundle links do not flap during the unified ISSU window. The following operations occur at the fragmentation and reassembly ends during a unified ISSU process:

When unified ISSU is completed, the send multilink sequence (send-ml-seq) number starts from zero and it causes the receive multilink sequence (receive-ml-seq) number mismatch at the other end of the connection, resulting in additional packet drops. Consider the case where LSQ bundles and links can be hosted on different Packet Forwarding Engines in a dual Packet Forwarding Engine setup. In this scenario, it is possible that these two Packet Forwarding Engines are in different states of the ISSU process, where dark windows for both of them might follow different timelines. This condition adds to more drops.

At the reassembly side:

1. The reassembly is stopped at the unified ISSU preparation or initialization phase, which can cause a longer dark window for fragmented packets. At the time of unified ISSU, reassembly memory is used for unified ISSU processing and is not available, starting from the unified ISSU preparation phase up to the unified ISSU hardware synchronization stage.
2. The two activities of link-load calculations and aging of fragments might impact the traversal of packets during unified ISSU.

At the fragmentation side:

1. The ml-seq number counter, which is needed for multilink fragmentation to work, is not part of the unified ISSU counters.
2. The host-generated packets (that are Layer 2-rewrite packets) are transferred as part of the fabric header and saved as binary large objects (BLOBs).
3. For LFI traffic, hash calculation must work properly for the links to be load-balanced. If the media link state changes during unified ISSU, the bundle state might also be affected.

## RELATED DOCUMENTATION

| *Enabling Inline LSQ Services*

# 3

CHAPTER

## Configuring the Physical and Logical Interfaces in a Link and Multilink Configuration

---

[Configuring Link Services Physical Interfaces | 140](#)

[Configuring Link and Multilink Services Logical Interfaces | 140](#)

---

# Configuring Link Services Physical Interfaces

You configure link services interface properties at the logical unit and physical interface level. Default settings for link services physical interface properties are described in ["Configuring Link Services Physical Interfaces" on page 140](#).

The following sections explain how to configure link services physical interfaces:

For information about link services physical interface properties that can also be configured at the logical unit level, see ["Configuring Link and Multilink Services Logical Interfaces" on page 140](#).

## RELATED DOCUMENTATION

[Link and Multilink Services Overview | 2](#)

[Example: Configuring a Link Services Interface with Two Links | 14](#)

# Configuring Link and Multilink Services Logical Interfaces

## IN THIS SECTION

- [Multilink and Link Services Logical Interface Configuration Overview | 141](#)
- [Configuring Encapsulation for Multilink and Link Services Logical Interfaces | 142](#)
- [Configuring the Drop Timeout Period on Multilink and Link Services Logical Interfaces | 143](#)
- [Limiting Packet Payload Size on Multilink and Link Services Logical Interfaces | 145](#)
- [Configuring the Minimum Number of Active Links on Multilink and Link Services Logical Interfaces | 146](#)
- [Configuring MRRU on Multilink and Link Services Logical Interfaces | 147](#)
- [Configuring the Sequence Header Format on Multilink and Link Services Logical Interfaces | 148](#)
- [Configuring CoS on Link Services Interfaces | 149](#)

# Multilink and Link Services Logical Interface Configuration Overview

## IN THIS SECTION

- [Default Settings for Multilink and Link Services Logical Interfaces](#) | 141

You configure multilink and link services interface properties at the logical unit level. Default settings for multilink and link services logical interface properties are described in ["Default Settings for Multilink and Link Services Logical Interfaces"](#) on page 141.

For general information about logical unit properties or `family inet` properties, see the [Junos OS Network Interfaces Library for Routing Devices](#). For information about multilink and link services properties you configure at the `family inet` hierarchy level, see ["Configuring the Links in a Multilink or Link Services Bundle"](#) on page 12.

**NOTE:** On DS0, E1, or T1 interfaces in LSQ bundles, you can configure the `bandwidth` statement, but the router does not use the bandwidth value if the interfaces are included in an MLPPP or MLFR bundle. The bandwidth is calculated internally according to the time slots, framing, and byte-encoding of the interface. For more information about logical interface properties, see the [Junos OS Network Interfaces Library for Routing Devices](#).

## Default Settings for Multilink and Link Services Logical Interfaces

[Table 4 on page 141](#) lists the default settings for multilink and link services statements, together with the other permitted values or value ranges.

**Table 4: Multilink and Link Services Logical Interface Statements**

Option	Default Value	Possible Values
DLCI	None	16 through 1022
Drop timeout period	500 ms for bundles greater than or equal to the T1 bandwidth value and 1500 ms for other bundles.	0 through 2000 milliseconds

**Table 4: Multilink and Link Services Logical Interface Statements *(Continued)***

Option	Default Value	Possible Values
Encapsulation	For multilink interfaces, multilink-ppp. For link services interfaces, multilink-frame-relay-end-to-end.	multilink-frame-relay-end-to-end, multilink-ppp
Fragmentation threshold	0 bytes	128 through 16,320 bytes ( $N \times 64$ )
Interleave fragments	disabled	enabled, disabled
Minimum links	1 link	1 through 8 links
Maximum received reconstructed unit (MRRU)	1504 bytes	1500 through 4500 bytes
Sequence ID format for MLPPP	24 bits	12 or 24 bits
Sequence ID format for MLFR FRF.15 and FRF.16	12 bits	12 bits

See ["Default Settings for Link Services Interfaces" on page 140](#) for statements that apply to link services physical interfaces only.

## SEE ALSO

[Configuring DLCIs on Link Services Logical Interfaces | 100](#)

[Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces | 30](#)

## Configuring Encapsulation for Multilink and Link Services Logical Interfaces

Multilink and link services interfaces support the following logical interface encapsulation types:

- MLPPP

- Multilink Frame Relay (MLFR) end-to-end

By default, the logical interface encapsulation type on multilink interfaces is MLPPP. The default logical interface encapsulation type on link services interfaces is MLFR end-to-end. For general information on encapsulation, see the [Junos OS Network Interfaces Library for Routing Devices](#).

You can also configure physical interface encapsulation on link services interfaces. For more information, see "[Configuring Encapsulation for Link Services Physical Interfaces](#)" on page 140.

To configure multilink or link services encapsulation, include the `encapsulation type` statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

You must also configure the T1, E1, or DS0 physical interface with the same encapsulation type.

**NOTE:** ACX Series routers do not support DS0 physical interface as member links.



**CAUTION:** When you configure the first MLFR encapsulated unit or delete the last MLFR encapsulated unit on a port, it triggers an interface encapsulation change on the port, which causes an interface flap on the other units within the port that are configured with generic Frame Relay.

## SEE ALSO

| [encapsulation \(Logical Interface\)](#) | 173

## Configuring the Drop Timeout Period on Multilink and Link Services Logical Interfaces

By default, the drop timeout parameter is disabled. You can configure a drop timeout value to provide a recovery mechanism if individual links in the multilink or link services bundle drop one or more packets. Drop timeout is not a differential delay tolerance setting, and does not limit the overall latency. However, you need to make sure the value you set is larger than the expected differential delay across the links, so that the timeout period does not elapse under normal jitter conditions, but only when there is actual packet loss. You can configure differential delay tolerance for link services interfaces only. For

more information, see ["Configuring Differential Delay Alarms on Link Services Physical Interfaces with MLFR FRF.16"](#) on page 140.

To configure the drop timeout value, include the drop-timeout statement:

```
drop-timeout milliseconds;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

For link services interfaces, you also can configure the drop timeout value at the physical interface level by including the drop-timeout statement at the [edit interfaces *ls-fpc/pic/port:channel* mlfr-uni-nni-bundle-options] hierarchy level:

```
drop-timeout milliseconds;
```

By default, the drop timer has a value of 500 ms for bundles greater than or equal to the T1 bandwidth value, and 1500 ms for other bundles. Any CLI-configured value overrides these defaults. Values can range from 1 through 2000 milliseconds. Values less than 5 milliseconds are not recommended, and a configured value of 0 reverts to the default value of 2000 milliseconds.

**NOTE:** For multilink or link services interfaces, if a packet or fragment encounters an error condition and is destined for a disabled bundle or link, it does not contribute to the dropped packet and frame counts in the per-bundle statistics. The packet is counted under the global error statistics and is not included in the global output bytes and output packet counts. This unusual accounting happens only if the error conditions are generated inside the multilink interface, not if the packet encounters errors on the wire or elsewhere in the network.

If you configure the drop-timeout statement with a value of 0, it disables any resequencing by the PIC for the specified class of MLPPP traffic. Packets are forwarded with the assumption that they arrived in sequence, and forwarding of fragmented packets is disabled for all classes. Fragments dropped as a result of this setting will increment the counter at the class level.

Alternatively, you can configure the drop-timeout statement at the [edit class-of-service fragmentation-maps *map-name* forwarding-class *class*] hierarchy level. The behavior and the default and range values are identical, but the setting applies only to the specified forwarding class. Configuration at the bundle level overrides configuration at the class-of-service level.

By default, compression of the inner PPP header in the MLPPP payload is enabled. To disable compression, include the `disable-mlppp-inner-ppp-pfc` statement at the `[edit interfaces interface-name unit logical-unit-number]` hierarchy level. For example:

```
interfaces lsq-1/2/0 {
  unit 0 {
    encapsulation multilink-ppp;
    disable-mlppp-inner-ppp-pfc;
    multilink-max-classes 4;
    family inet {
      address 10.50.1.2/30;
    }
  }
}
```

For more information about CoS configuration, see the [Junos OS Class of Service User Guide for Routing Devices](#). You can view the configured drop-timeout value and the status of inner PPP header compression by issuing the `show interfaces interface-name extensive` command.

## Limiting Packet Payload Size on Multilink and Link Services Logical Interfaces

For multilink and link services logical interfaces with MLPPP encapsulation only, you can configure a *fragmentation threshold* to limit the size of packet payloads transmitted across the individual links within the multilink circuit. The software splits any incoming packet that exceeds the fragmentation threshold into smaller units suitable for the circuit size; it reassembles the fragments at the other end, but does not affect the output traffic stream. The threshold value affects the payload only; it does not affect the MLPPP header. By default, the fragmentation threshold parameter is disabled.

**NOTE:** To ensure proper load balancing:

- For Link Services MLFR (FRF.15 and FRF.16) interfaces, do not include the `fragment-threshold` statement in the configuration.
- For MLPPP interfaces, do not include both the `fragment-threshold` statement and the `short-sequence` statement in the configuration.

- For MLFR (FRF.15 and FRF.16) and MLPPP interfaces, if the MTU of links in a bundle is less than the bundle MTU plus encapsulation overhead, then fragmentation is automatically enabled. You should avoid this situation for MLFR (FRF.15 and FRF.16) interfaces and for MLPPP interfaces on which short-sequencing is enabled.

To configure a fragmentation threshold value, include the `fragment-threshold` statement:

```
fragment-threshold bytes;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

For link services interfaces, you also can configure a fragmentation threshold value at the physical interface level by including the `fragment-threshold` statement at the [edit interfaces *ls-fpc/pic/port:channel* *mlfr-uni-nni-bundle-options*] hierarchy level:

```
fragment-threshold bytes;
```

The maximum fragment size can be from 128 through 16,320 bytes. The Junos OS automatically subdivides packet payloads that exceed this value. Any value you set must be a multiple of 64 bytes ( $N \times 64$ ). The default value, 0, results in no fragmentation.

## SEE ALSO

| [fragment-threshold](#) | 179

## Configuring the Minimum Number of Active Links on Multilink and Link Services Logical Interfaces

**NOTE:** Only MLPPP is supported on ACX Series routers. MLFR is not supported on ACX Series routers.

You can set the minimum number of links that must be up for the multilink bundle as a whole to be labeled up. By default, only one link must be up for the bundle to be labeled up. A member link is considered up when the PPP Link Control Protocol (LCP) phase transitions to open state.

The `minimum-links` value should be identical on both ends of the bundle.

To set the minimum number, include the `minimum-links` statement:

```
minimum-links number;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

For link services interfaces, you also can configure the minimum number of links at the physical interface level by including the `minimum-links` statement at the [edit interfaces *ls-fpc/pic/port:channel* *mlfr-uni-nni-bundle-options*] hierarchy level:

```
minimum-links number;
```

The number can be from 1 through 8. The maximum number of links supported in a bundle is 8. When 8 is specified, all configured links of a bundle must be up.

## Configuring MRRU on Multilink and Link Services Logical Interfaces

The *maximum received reconstructed unit (MRRU)* is the maximum packet size that the multilink interface can process. It is similar to a maximum transmission unit (MTU), but applies only to multilink bundles. By default, the MRRU is set to 1500 bytes. You can configure a different MRRU value if the peer equipment allows this. The MRRU accounts for the original payload, for example the Layer 3 protocol payload, but does not include the 2-byte PPP header or the additional MLPPP or MLFR header applied while the individual multilink packets are traversing separate links in the bundle.

To configure a different MRRU value, include the `mrru` statement:

```
mrru bytes;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]

- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

**NOTE:** ACX Series routers do not support logical systems.

For link services interfaces, you also can configure a different MRRU at the physical interface level by including the `mrru bytes` statement at the [edit interfaces *ls-fpc/pic/port:channel* mlfrr-uni-nni-bundle-options] hierarchy level. The MRRU size can range from 1500 through 4500 bytes.

**NOTE:** If you set the MRRU on a bundle to a value larger than the MTU of the individual links within it, you must enable a fragmentation threshold for that bundle. Set the threshold to a value no larger than the smallest MTU of any link included in the bundle.

Determine the appropriate MTU size for the bundle by ensuring that the MTU size does not exceed the sum of the encapsulation overhead and the MTU sizes for the links in the bundle.

You can configure separate family mtu values on the following protocol families under bundle interfaces: `inet`, `inet6`, `iso`, and `mpls`. If not configured, the default value of 1500 is used on all except for `mpls` configurations, in which the value 1488 is used.

**NOTE:** ACX Series routers do not support family `inet6` on MLPPP interfaces.

**NOTE:** The effective family MTU might be different from the MTU value specified for MLPPP configurations, because it is adjusted downward by the remote MRRU's constraints. The remote MRRU configuration is not supported on M120 routers.

## Configuring the Sequence Header Format on Multilink and Link Services Logical Interfaces

For MLPPP, the sequence header format is set to 24 bits by default. You can configure an alternative value of 12 bits, but 24 bits is considered the more robust value for most networks.

To configure a different sequence header value, include the `short-sequence` statement:

```
short-sequence;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number*]

For MLFR FRF.15, the sequence header format is set to 24 bits by default. This is the only valid option.

**NOTE:** Only MLPPP is supported on ACX Series routers. MLFR is not supported on ACX Series routers.

## Configuring CoS on Link Services Interfaces

### IN THIS SECTION

- [CoS for Link Services Interfaces on M Series and T Series Routers | 149](#)
- [Example: Configuring CoS on Link Services Interfaces | 151](#)

For link services IQ (lsq-) interfaces, Junos OS class of service (CoS) is fully supported and functions as described in the [Junos OS Class of Service User Guide for Routing Devices](#). For more information and detailed configuration examples, see *Layer 2 Service Package Capabilities and Interfaces*.

On SRX Series devices, the lsq- interface is an internal interface, which is not associated with a physical interface. For information about link services on SRX Series devices, see the *Junos OS Interfaces Configuration Guide for Security Devices*.

For information about CoS functions and link services on M Series or T Series routers, see the following sections:

### CoS for Link Services Interfaces on M Series and T Series Routers

For Link Services PIC interfaces (ls) on M Series and T Series routers, queue 0 is the only queue that you should configure to receive fragmented packets. Configure all other queues to be higher-priority queues.

[Table 5 on page 150](#) summarizes how CoS queues work on link services (ls) interfaces.

**Table 5: Link Services CoS Queues**

Supported Bundling Type	Queue 0	Higher-Priority Queues
Hash-based load balancing	No	Yes
MLFR FRF.15	Yes	No
MLFR FRF.16	Yes	No
MLPPP	Yes	No

For M Series and T Series routers, CoS on link services (ls) interfaces works as follows:

- On all platforms, the Link Services PIC currently supports up to four queues: 0, 1, 2, and 3.
- Queue 0 uses MLFR FRF.15, MLFR FRF.16, or MLPPP to bundle packets.
- Higher-priority queues (1, 2, and 3) use hash-based load balancing to bundle packets. IP and MPLS header information is included in the hash.
- MLPPP packets traversing link services interfaces using queue 0 are fragmented and distributed across the constituent links. Queue 0 packets are sent on the least utilized link, proportional to its bandwidth. The queue 0 load balancer attempts to maintain even distribution of all traffic across all constituent links. In situations with a small number of high-priority traffic flows (queues 1, 2, and 3), queue 0 traffic might be unevenly distributed.
- For the MLFR FRF.16 protocol, only queue 0 works. If you configure a bundled interface to use MLFR FRF.16 with queue 0, then you must ensure the classifier does not send any traffic to queues 1, 2, and 3 on that interface.
- To carry high-priority traffic correctly on MLFR FRF.16 interfaces, you must configure an output firewall filter that forces all traffic into queue 0 on the *ls-fpc/pic/port.channel* interface.
- MLFR FRF.15 and MLPPP interfaces support CoS through packet interleaving. The MLFR FRF.16 standard does not support packet interleaving, so all packets destined for an FRF.16 PVC interface must egress from the same queue.
- For constituent link interfaces of Link Services PICs, you can configure standard scheduler maps.
- For input packets and fragments received from constituent links, you can use regular input firewall filters and standard CoS classifiers on the link services interface.

- For packets that pass through a link services interface and are destined for a constituent link interface, all traffic using queue 0 is fragmented. Traffic using higher-priority queues (1, 2, and 3) is not fragmented.
- For MLFR FRF.15 and MLPPP, routing protocol packets smaller than 128 bytes are sent to queue 3; routing protocol packets that exceed 128 bytes are sent to queue 0 and fragmented accordingly. For MLFR FRF.16, queue 0 is used for all packet sizes.
- You must configure output firewall classification for egress traffic on the link services interface, not directly on the constituent link interface directly.
- Inverse multiplexing for ATM (IMA) is not supported on link services interfaces.

For more information, see ["Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces" on page 30](#) and the [Routing Policies, Firewall Filters, and Traffic Policers User Guide](#).

## Example: Configuring CoS on Link Services Interfaces

Configure CoS on a link services interface and its constituent link interfaces.

**NOTE:** This example applies to M Series and T Series routers. For examples that apply to SRX Series devices, see the *Junos OS Interfaces Configuration Guide for Security Devices*.

Packets that do not match the firewall filters are sent to a queue that performs load balancing by sending fragments to all constituent links.

Packets that match the firewall filters are sent to a queue that does not support packet fragmentation and reassembly; instead, this traffic is load-balanced by sending each packet flow to a different constituent link. Each packet that matches a firewall filter is subjected to a hash on the IP source address and the IP destination address to determine the packet flow to which each packet belongs.

When you configure the MLPPP encapsulation type or the multilink FRF.15 Frame Relay end-to-end encapsulation type, routing protocol packets smaller than 128 bytes are sent to the network-control queue on the constituent link interface. This keeps routing protocols operating normally, even when low-speed links are congested by regular packets.

```
[edit interfaces]
ls-7/0/0 {
  unit 0 {
    encapsulation multilink-ppp;
    interleave-fragments;
    family inet {
      filter {
```

```

        output lfi_ls_filter;
    }
    address 10.54.0.2/32 {
        destination 10.54.0.1;
    }
}
}
ge-7/2/0 {
    unit 0 {
        family inet {
            address 192.168.1.1/24;
        }
    }
}
ce1-7/3/6 {
    no-partition interface-type e1;
}
e1-7/3/6 {
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle ls-7/0/0.0;
        }
    }
}
ce1-7/3/7 {
    no-partition interface-type e1;
}
e1-7/3/7 {
    encapsulation ppp;
    unit 0 {
        family mlppp {
            bundle ls-7/0/0.0;
        }
    }
}
[edit class-of-service]
classifiers {
    dscp dscp_default {
        import default;
    }
    inet-precedence inet-precedence_default {

```

```

        import default;
    }
}
code-point-aliases {
    dscp {
        af11 001010;
        af12 001100;
        af13 001110;
        af21 010010;
        af22 010100;
        af23 010110;
        af31 011010;
        af32 011100;
        af33 011110;
        af41 100010;
        af42 100100;
        af43 100110;
        be 000000;
        cs1 001000;
        cs2 010000;
        cs3 011000;
        cs4 100000;
        cs5 101000;
        cs6 110000;
        cs7 111000;
        ef 101110;
    }
    inet-precedence {
        af11 001;
        af21 010;
        af31 011;
        af41 100;
        be 000;
        cs6 110;
        cs7 111;
        ef 101;
        nc1 110;
        nc2 111;
    }
}
forwarding-classes {
    queue 0 be;
    queue 1 ef;
}

```

```

    queue 2 af;
    queue 3 nc;
}
interfaces {
    ge-7/2/0 {
        scheduler-map sched-map;
        unit 0 {
            classifiers {
                dscp dscp_default;
            }
        }
    }
    e1-7/3/6 {
        scheduler-map sched-map;
    }
    e1-7/3/7 {
        scheduler-map sched-map;
    }
    ls-7/0/0 {
        scheduler-map sched-map;
        unit 0 {
            classifiers {
                inet-precedence inet-precedence_default;
            }
        }
    }
}
scheduler-maps {
    sched-map {
        forwarding-class af scheduler af-scheduler;
        forwarding-class be scheduler be-scheduler;
        forwarding-class ef scheduler ef-scheduler;
        forwarding-class nc scheduler nc-scheduler;
    }
}
schedulers {
    af-scheduler {
        transmit-rate percent 25;
        buffer-size percent 25;
    }
    be-scheduler {
        transmit-rate percent 25;
        buffer-size percent 25;
    }
}

```

```

}
ef-scheduler {
    transmit-rate percent 25;
    buffer-size percent 25;
}
nc-scheduler {
    transmit-rate percent 25;
    buffer-size percent 25;
}
}
[edit firewall]
filter lfi_ls_filter {
    term term0 {
        from {
            destination-address {
                192.168.1.3/32;
            }
            precedence 5;
        }
        then {
            count count-192-168-1-3;
            forwarding-class af;
            accept;
        }
    }
    term default {
        then {
            log;
            forwarding-class best effort;
            accept;
        }
    }
}
}

```

## RELATED DOCUMENTATION

[Link and Multilink Services Overview | 2](#)

[Configuring Link Services Physical Interfaces | 140](#)

[Example: Configuring a Multilink Interface with MLPPP | 55](#)

# 4

CHAPTER

## Configuration Statements

---

acknowledge-retries | 158

acknowledge-timer | 159

action-red-differential-delay | 161

address (Interfaces) | 163

bundle | 165

destination (Interfaces) | 166

disable-mlppp-inner-ppp-pfc | 168

dlci | 169

drop-timeout | 171

encapsulation (Logical Interface) | 173

encapsulation (Physical Interface) | 175

family | 177

fragment-threshold | 179

hello-timer | 181

interfaces | 182

interleave-fragments | 184

lmi-type | 185

mlfr-uni-nni-bundle-options | 187

mrru | 189

mtu | 190

[multicast-dlci](#) | 192

[n391](#) | 194

[n392](#) | 195

[n393](#) | 197

[red-differential-delay](#) | 199

[short-sequence](#) | 201

[t391](#) | 202

[t392](#) | 204

[unit \(Interfaces\)](#) | 206

[yellow-differential-delay](#) | 208

---

# acknowledge-retries

## IN THIS SECTION

- [Syntax | 158](#)
- [Hierarchy Level | 158](#)
- [Description | 158](#)
- [Options | 159](#)
- [Required Privilege Level | 159](#)
- [Release Information | 159](#)

## Syntax

```
acknowledge-retries number;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, configure the number of retransmission attempts to be made for consecutive hello or remove link messages following the expiration of the acknowledgment timer.

## Options

*number*—Number of retransmission attempts to be made following the expiration of the acknowledgment timer.

- **Range:** 1 through 5
- **Default:** 2

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[action-red-differential-delay](#) | 161

[hello-timer](#) | 181

[Configuring Link Services Physical Interfaces](#) | 140

# acknowledge-timer

### IN THIS SECTION

- [Syntax](#) | 160
- [Hierarchy Level](#) | 160
- [Description](#) | 160

- Options | 160
- Required Privilege Level | 161
- Release Information | 161

## Syntax

```
acknowledge-timer milliseconds;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, configure the maximum time, in milliseconds, to wait for an add link acknowledgment, hello acknowledgment, or remove link acknowledgment message.

## Options

*milliseconds*—Time to wait for an add link acknowledgment, hello acknowledgment, or remove link acknowledgment message.

- **Range:** 1 through 10 milliseconds
- **Default:** 4 milliseconds

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

---

[address \(Interfaces\) | 163](#)

---

[hello-timer | 181](#)

---

[Configuring Link Services Physical Interfaces | 140](#)

# action-red-differential-delay

### IN THIS SECTION

- [Syntax | 162](#)
- [Hierarchy Level | 162](#)
- [Description | 162](#)
- [Options | 162](#)
- [Required Privilege Level | 162](#)
- [Release Information | 162](#)

## Syntax

```
action-red-differential-delay (disable-tx | remove-link);
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, configure the action to be taken when the differential delay exceeds the red limit.

## Options

`disable-tx`—Disable transmission on the bundle link.

`remove-link`—Remove the bundle link from service.

- **Default:** `remove-link`

## Required Privilege Level

`interface`—To view this statement in the configuration.

`interface-control`—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

## RELATED DOCUMENTATION

[yellow-differential-delay](#) | 208

[Configuring Link Services Physical Interfaces](#) | 140

# address (Interfaces)

## IN THIS SECTION

- [Syntax](#) | 163
- [Hierarchy Level](#) | 163
- [Description](#) | 164
- [Options](#) | 164
- [Required Privilege Level](#) | 164
- [Release Information](#) | 164

## Syntax

```
address address {  
    destination address;  
}
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number  
family inet]
```

## Description

Configure the interface address.

## Options

*address*—Address of the interface.

The remaining statements are explained separately. See [CLI Explorer](#).

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

---

[Junos OS Network Interfaces Library for Routing Devices](#)

---

[Configuring the Links in a Multilink or Link Services Bundle](#) | 12

---

[Junos OS Network Interfaces Library for Routing Devices](#)

# bundle

## IN THIS SECTION

- [Syntax | 165](#)
- [Hierarchy Level | 165](#)
- [Description | 165](#)
- [Options | 166](#)
- [Required Privilege Level | 166](#)
- [Release Information | 166](#)

## Syntax

```
bundle (ml-fpc/pic/port | ls-fpc/pic/port);
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family mlfr-end-to-end],  
[edit interfaces interface-name unit logical-unit-number family mlfr-uni-nni]
```

## Description

Associate the multilink interface with the logical interface it is joining.

## Options

*m1-fpc/pic/port*—Name of the multilink interface you are linking.

*ls-fpc/pic/port*—Name of the link services interface you are linking.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring the Links in a Multilink or Link Services Bundle | 12](#)

# destination (Interfaces)

### IN THIS SECTION

- [Syntax | 167](#)
- [Hierarchy Level | 167](#)
- [Description | 167](#)
- [Options | 167](#)
- [Required Privilege Level | 167](#)
- [Release Information | 168](#)

## Syntax

```
destination address;
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number tunnel],
[edit interfaces interface-name unit logical-unit-number family inet address address],
[edit interfaces interface-name unit logical-unit-number tunnel],
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number
family inet address address]
```

## Description

For CoS on ATM interfaces, specify the remote address of the connection.

For point-to-point interfaces only, specify the address of the interface at the remote end of the connection.

For tunnel and encryption interfaces, specify the remote address of the tunnel.

## Options

*address*—Address of the remote side of the connection.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

*Configuring Linear RED Profiles on ATM Interfaces*

[Configuring Link and Multilink Services Logical Interfaces | 140](#)

*Configuring Encryption Interfaces*

*Configuring Traffic Sampling on MX, M and T Series Routers*

*Configuring Flow Monitoring*

*Configuring Unicast Tunnels*

# disable-mlppp-inner-ppp-pfc

### IN THIS SECTION

- [Syntax | 168](#)
- [Hierarchy Level | 169](#)
- [Description | 169](#)
- [Required Privilege Level | 169](#)
- [Release Information | 169](#)

## Syntax

```
disable-mlppp-inner-ppp-pfc;
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number]
```

## Description

For MLPPP interfaces only, disable compression of the inner PPP header in the MLPPP payload. By default, compression is enabled.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced in Junos OS Release 8.2.

### RELATED DOCUMENTATION

| [Configuring Link and Multilink Services Logical Interfaces](#) | 140

# dlci

### IN THIS SECTION

● [Syntax](#) | 170

- Hierarchy Level | 170
- Description | 170
- Options | 170
- Required Privilege Level | 171
- Release Information | 171

## Syntax

```
dlci dlci-identifier;
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number]
```

## Description

For Frame Relay and Multilink Frame Relay user-to-network interface (UNI) network-to-network interface (NNI) encapsulation only, and for link services and point-to-point interfaces only, configure the data-link connection identifier (DLCI) for a permanent virtual circuit (PVC) or a switched virtual circuit (SVC).

To configure a DLCI for a point-to-multipoint interface, use the `multipoint-destination` statement to specify the DLCI.

## Options

*dlci-identifier*—Data-link connection identifier.

- **Range:** 16 through 1022

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring DLCIs on Link Services Logical Interfaces | 100](#)

[Junos OS Network Interfaces Library for Routing Devices](#)

[Data-Link Connection Identifiers on Channelized Interfaces](#)

[Configuring Frame Relay DLCIs](#)

[Junos OS Services Interfaces Library for Routing Devices](#)

*encapsulation (Logical Interface)*

[multicast-dlci](#)

[multipoint-destination](#)

# drop-timeout

### IN THIS SECTION

- [Syntax | 172](#)
- [Hierarchy Level | 172](#)
- [Description | 172](#)

- [Options | 172](#)
- [Required Privilege Level | 173](#)
- [Release Information | 173](#)

## Syntax

```
drop-timeout milliseconds;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options],
[edit interfaces (ls-fpc/pic/port | ml-fpc/pic/port) unit logical-unit-number],
[edit logical-systems logical-system-name interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options],
[edit logical-systems logical-system-name interfaces (ls-fpc/pic/port | ml-fpc/pic/port) unit logical-unit-number]
```

## Description

For multilink and link services interfaces only, configure the drop timeout period, in milliseconds.

## Options

*milliseconds*—Drop timeout period.

- **Range:** 1 through 2000 milliseconds
- **Default:** 500 ms for bundles greater than or equal to the T1 bandwidth value, and 1500 ms for other bundles. Any CLI-configured value overrides these defaults. Setting a value of 0 reverts to the default.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Link and Multilink Services Logical Interfaces](#) | 140

# encapsulation (Logical Interface)

## IN THIS SECTION

- [Syntax](#) | 173
- [Hierarchy Level](#) | 174
- [Description](#) | 174
- [Options](#) | 174
- [Required Privilege Level](#) | 174
- [Release Information](#) | 174

## Syntax

```
encapsulation (atm-mlppp-llc | multilink-frame-relay-end-to-end | multilink-ppp | ... );
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number],
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number]
```

## Description

Logical link-layer encapsulation type.

## Options

**atm-mlppp-llc**—For ATM 2 interfaces, use Multilink Point-to-Point Protocol (MLPPP) over ATM Adaptation Layer 5 (AAL5) logical link control (LLC) encapsulation, as described in RFC 2364, *PPP over AAL5*.

**multilink-frame-relay-end-to-end**—Use Multilink Frame Relay (MLFR) FRF.15 encapsulation. This encapsulation is used on multilink “link services interfaces and their constituent T1 or E1 interfaces”, and is supported on LSQ and redundant LSQ interfaces.

**multilink-ppp**—Use MLPPP encapsulation. This encapsulation is used only on multilink and link services interfaces and their constituent T1 or E1 interfaces.

## Required Privilege Level

**interface**—To view this statement in the configuration.

**interface-control**—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

## RELATED DOCUMENTATION

[Configuring Encapsulation for Multilink and Link Services Logical Interfaces | 142](#)

[Junos OS Network Interfaces Library for Routing Devices](#)

# encapsulation (Physical Interface)

## IN THIS SECTION

- [Syntax | 175](#)
- [Hierarchy Level | 175](#)
- [Description | 176](#)
- [Default | 176](#)
- [Options | 176](#)
- [Required Privilege Level | 176](#)
- [Release Information | 176](#)

## Syntax

```
encapsulation (multilink-frame-relay-uni-nni | ... );
```

## Hierarchy Level

```
[edit interfaces interface-name],  
[edit interfaces rlsqnumber:number]
```

## Description

Physical link-layer encapsulation type.

## Default

MLFR UNI NNI encapsulation (on link services interfaces).

## Options

`multilink-frame-relay-uni-nni`—Use MLFR UNI NNI encapsulation. This encapsulation is used only on link services interfaces functioning as FRF.16 bundles and their constituent T1 or E1 interfaces, and is supported on LSQ and redundant LSQ interfaces.

## Required Privilege Level

`interface`—To view this statement in the configuration.

`interface-control`—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Link Services Physical Interfaces | 140](#)

[Junos OS Network Interfaces Library for Routing Devices](#)

# family

## IN THIS SECTION

- [Syntax | 177](#)
- [Hierarchy Level | 177](#)
- [Description | 177](#)
- [Options | 178](#)
- [Required Privilege Level | 178](#)
- [Release Information | 178](#)

## Syntax

```
family family {  
    address address {  
        destination address;  
    }  
}
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number]
```

## Description

Configure protocol family information for the logical interface.

## Options

*family*—Protocol family:

- `ccc`—Circuit cross-connect protocol suite
- `inet`—IP version 4 (IPv4)
- `inet6`—IP version 6 (IPv6)
- `iso`—Open Systems Interconnection (OSI) International Organization for Standardization (ISO) protocol suite
- `mlfr-end-to-end`—Multilink Frame Relay FRF.15
- `mlfr-uni-nni`—Multilink Frame Relay FRF.16
- `multilink-ppp`—Multilink Point-to-Point Protocol
- `mpls`—MPLS
- `tcc`—Translational cross-connect protocol suite
- `tnp`—Trivial Network Protocol
- `vpls`—Virtual private LAN service

The remaining statements are explained separately. See [CLI Explorer](#).

## Required Privilege Level

`interface`—To view this statement in the configuration.

`interface-control`—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

## RELATED DOCUMENTATION

[Link and Multilink Services Interfaces User Guide for Routing Devices](#)

[Junos OS Network Interfaces Library for Routing Devices](#)

# fragment-threshold

## IN THIS SECTION

- [Syntax | 179](#)
- [Hierarchy Level | 179](#)
- [Description | 180](#)
- [Options | 180](#)
- [Required Privilege Level | 180](#)
- [Release Information | 180](#)

## Syntax

```
fragment-threshold bytes;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options],
[edit interfaces (ls-fpc/pic/port| ml-fpc/pic/port) unit logical-unit-number],
[edit logical-systems logical-system-name interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options],
[edit logical-systems logical-system-name interfaces (ls-fpc/pic/port| ml-fpc/pic/port) unit logical-unit-number]
```

## Description

For multilink and link services interfaces only, set the fragmentation threshold, in bytes.

## Options

*bytes*—Maximum size, in bytes, for multilink packet fragments. Any nonzero value must be a multiple of 64 bytes.

- **Range:** 128 through 16,320 bytes
- **Default:** 0 bytes (no fragmentation)

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Example: Configuring a Multilink Interface with MLPPP](#) | 55

# hello-timer

## IN THIS SECTION

- [Syntax | 181](#)
- [Hierarchy Level | 181](#)
- [Description | 181](#)
- [Options | 182](#)
- [Required Privilege Level | 182](#)
- [Release Information | 182](#)

## Syntax

```
hello-timer milliseconds;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, configure the rate at which hello messages are sent. A hello message is transmitted after a period defined in milliseconds has elapsed.

## Options

*milliseconds*—The rate at which hello messages are sent.

- **Range:** 1 through 180 milliseconds
- **Default:** 10 milliseconds

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Link Services Physical Interfaces | 140](#)

[address \(Interfaces\) | 163](#)

[acknowledge-timer | 159](#)

# interfaces

### IN THIS SECTION

● [Syntax | 183](#)

● [Hierarchy Level | 183](#)

● [Description | 183](#)

- [Default | 183](#)
- [Required Privilege Level | 183](#)
- [Release Information | 184](#)

## Syntax

```
interfaces { ... }
```

## Hierarchy Level

```
[edit]
```

## Description

Configure interfaces on the router.

## Default

The management and internal Ethernet interfaces are automatically configured. You must configure all other interfaces.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Junos OS Network Interfaces Library for Routing Devices](#)

# interleave-fragments

## IN THIS SECTION

- [Syntax | 184](#)
- [Hierarchy Level | 184](#)
- [Description | 185](#)
- [Required Privilege Level | 185](#)
- [Release Information | 185](#)

## Syntax

```
interleave-fragments;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel unit logical-unit-number],  
[edit logical-systems logical-system-name interfaces ls-fpc/pic/port unit logical-unit-number]
```

## Description

For link services and voice services interfaces only, interleave long packets with high-priority packets.

Allows small delay-sensitive packets, such as voice over IP (VoIP) packets, to interleave with long fragmented packets. This minimizes the latency of delay-sensitive packets.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Delay-Sensitive Packet Interleaving on Link Services Logical Interfaces](#) | 30

# Imi-type

### IN THIS SECTION

- [Syntax](#) | 186
- [Hierarchy Level](#) | 186
- [Description](#) | 186
- [Options](#) | 186
- [Required Privilege Level](#) | 186
- [Release Information](#) | 186

## Syntax

```
lmi-type (ansi | itu);
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

Set the Frame Relay Local Management Interface (LMI) type.

## Options

*ansi*—Use American National Standards Institute (ANSI) T1.167 Annex D LMIs.

*itu*—Use ITU Q933 Annex A LMIs.

- **Default:** *itu*

## Required Privilege Level

*interface*—To view this statement in the configuration.

*interface-control*—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

## RELATED DOCUMENTATION

| [Configuring Link Services Physical Interfaces](#) | 140

# mlfr-uni-nni-bundle-options

## IN THIS SECTION

- [Syntax](#) | 187
- [Hierarchy Level](#) | 188
- [Description](#) | 188
- [Required Privilege Level](#) | 188
- [Release Information](#) | 188

## Syntax

```
mlfr-uni-nni-bundle-options {  
    acknowledge-retries number;  
    acknowledge-timer milliseconds;  
    action-red-differential-delay (disable-tx | remove-link);  
    cisco-interoperability send-lip-remove-link-for-link-reject;  
    drop-timeout milliseconds;  
    fragment-threshold bytes;  
    hello-timer milliseconds;  
    lmi-type (ansi | itu | c-lmi);  
    minimum-links number;  
    mrru bytes;  
    n391 number;  
    n392 number;  
    n393 number;  
    red-differential-delay milliseconds;  
    t391 number;  
    t392 number;
```

```
yellow-differential-delay milliseconds;  
}
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port :channel]
```

## Description

Configure link services interface management properties.

The remaining statements are explained separately. See [CLI Explorer](#).

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

| [Configuring Link Services Physical Interfaces](#) | 140

# mrru

## IN THIS SECTION

- [Syntax | 189](#)
- [Hierarchy Level | 189](#)
- [Description | 189](#)
- [Options | 190](#)
- [Required Privilege Level | 190](#)
- [Release Information | 190](#)

## Syntax

```
mrru bytes;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options],
[edit interfaces (ml-fpc/pic/port| ls-fpc/pic/port) unit logical-unit-number],
[edit logical-systems logical-system-name interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options],
[edit logical-systems logical-system-name interfaces (ml-fpc/pic/port| ls-fpc/pic/port) unit logical-unit-number]
```

## Description

For multilink or link services interfaces only, set the maximum received reconstructed unit (MRRU). The MRRU is similar to the maximum transmission unit (MTU), but is specific to multilink interfaces.

## Options

*bytes*—MRRU size.

- **Range:** 1500 through 4500 bytes
- **Default:** 1500 bytes

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring MRRU on Multilink and Link Services Logical Interfaces](#) | 147

# mtu

### IN THIS SECTION

- [Syntax](#) | 191
- [Hierarchy Level](#) | 191
- [Description](#) | 191
- [Options](#) | 191
- [Required Privilege Level](#) | 192

## Syntax

```
mtu bytes;
```

## Hierarchy Level

```
[edit interfaces interface-name],  
[edit interfaces interface-name unit logical-unit-number family family],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number  
family family]
```

## Description

Maximum transmission unit (MTU) size for the media or protocol. The default MTU size depends on the device type. Not all devices allow you to set an MTU value, and some devices have restrictions on the range of allowable MTU values.

## Options

*bytes*—MTU size.

- **Range:** 0 through 5012 bytes
- **Default:** 1500 bytes (inet, inet6, and iso families), 1448 bytes (mpls)

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring MRRU on Multilink and Link Services Logical Interfaces | 147](#)

[Junos OS Network Interfaces Library for Routing Devices](#)

# multicast-dlci

### IN THIS SECTION

- [Syntax | 192](#)
- [Hierarchy Level | 193](#)
- [Description | 193](#)
- [Options | 193](#)
- [Required Privilege Level | 193](#)
- [Release Information | 193](#)

## Syntax

```
multicast-dlci dlci-identifier;
```

## Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number],
[edit logical-systems logical-system-name interfaces interface-name unit logical-unit-number]
```

## Description

For point-to-multipoint link services interfaces only, enable multicast support on the interface. You can configure multicast support on the interface if the Frame Relay switch performs multicast replication.

## Options

*dlci-identifier*—DLCI identifier, a number from 16 through 1022 that defines the Frame Relay DLCI over which the switch expects to receive multicast packets for replication.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring DLCIs on Link Services Logical Interfaces | 100](#)

[Configuring a Multicast-Capable Frame Relay Connection](#)

[dlci](#)

[multipoint-destination](#)

# n391

## IN THIS SECTION

- [Syntax | 194](#)
- [Hierarchy Level | 194](#)
- [Description | 194](#)
- [Options | 195](#)
- [Required Privilege Level | 195](#)
- [Release Information | 195](#)

## Syntax

```
n391 number;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, set the Frame Relay full status polling interval.

## Options

*number*—Polling interval.

- **Range:** 1 through 255
- **Default:** 6

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Link Services Physical Interfaces | 140](#)

[n392 | 195](#)

[n393 | 197](#)

[t391 | 202](#)

[t392 | 204](#)

# n392

### IN THIS SECTION

 [Syntax | 196](#)

- Hierarchy Level | 196
- Description | 196
- Options | 196
- Required Privilege Level | 197
- Release Information | 197

## Syntax

```
n392 number;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, set the Frame Relay error threshold, in number of errors.

## Options

*number*—Error threshold.

- **Range:** 1 through 10
- **Default:** 3

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Link Services Physical Interfaces | 140](#)

[n391 | 194](#)

[n393 | 197](#)

[t391 | 202](#)

[t392 | 204](#)

# n393

### IN THIS SECTION

- [Syntax | 198](#)
- [Hierarchy Level | 198](#)
- [Description | 198](#)
- [Options | 198](#)
- [Required Privilege Level | 198](#)
- [Release Information | 198](#)

## Syntax

```
n393 number;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, set the Frame Relay monitored event count.

## Options

*number*—Event count.

- **Range:** 1 through 10
- **Default:** 4

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

## RELATED DOCUMENTATION

[Configuring Link Services Physical Interfaces](#) | [140](#)

[n391](#) | [194](#)

[n392](#) | [195](#)

[t391](#) | [202](#)

[t392](#) | [204](#)

# red-differential-delay

## IN THIS SECTION

- [Syntax](#) | [199](#)
- [Hierarchy Level](#) | [199](#)
- [Description](#) | [200](#)
- [Options](#) | [200](#)
- [Required Privilege Level](#) | [200](#)
- [Release Information](#) | [200](#)

## Syntax

```
red-differential-delay milliseconds;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, configure the red differential delay among bundle links to give warning when a link has a differential delay that exceeds the configured threshold.

## Options

*milliseconds*—Red differential delay threshold.

- **Range:** 1 through 2000 milliseconds
- **Default:** 120 milliseconds

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

---

[Configuring Link Services Physical Interfaces](#) | 140

---

[action-red-differential-delay](#) | 161

---

[yellow-differential-delay](#) | 208

# short-sequence

## IN THIS SECTION

- [Syntax | 201](#)
- [Hierarchy Level | 201](#)
- [Description | 201](#)
- [Default | 202](#)
- [Required Privilege Level | 202](#)
- [Release Information | 202](#)

## Syntax

```
short-sequence;
```

## Hierarchy Level

```
[edit interfaces (ls-fpc/pic/port | ml-fpc/pic/port) unit logical-unit-number],  
[edit logical-systems logical-system-name interfaces (ls-fpc/pic/port | ml-fpc/pic/port) unit  
logical-unit-number]
```

## Description

For multilink interfaces only, set the length of the packet sequence identification number to 12 bits.

## Default

If not included in the configuration, the length is set to 24 bits.

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring the Sequence Header Format on Multilink and Link Services Logical Interfaces](#) | 148

# t391

#### IN THIS SECTION

- [Syntax](#) | 203
- [Hierarchy Level](#) | 203
- [Description](#) | 203
- [Options](#) | 203
- [Required Privilege Level](#) | 203
- [Release Information](#) | 203

## Syntax

```
t391 number;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, set the Frame Relay link integrity polling interval.

## Options

*number*—Link integrity polling interval.

- **Range:** 5 through 30 seconds
- **Default:** 10 seconds

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

<a href="#">Configuring Link Services Physical Interfaces   140</a>
<a href="#">n391   194</a>
<a href="#">n392   195</a>
<a href="#">t392   204</a>
<a href="#">n393   197</a>

# t392

IN THIS SECTION

- [Syntax | 204](#)
- [Hierarchy Level | 204](#)
- [Description | 205](#)
- [Options | 205](#)
- [Required Privilege Level | 205](#)
- [Release Information | 205](#)

## Syntax

```
t392 number;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, set the Frame Relay polling verification interval.

## Options

*number*—Polling verification interval.

- **Range:** 5 through 30 seconds
- **Default:** 15 seconds

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Configuring Link Services Physical Interfaces | 140](#)

[n391 | 194](#)

[n392 | 195](#)

[n393 | 197](#)

[t391 | 202](#)

# unit (Interfaces)

## IN THIS SECTION

- [Syntax | 206](#)
- [Hierarchy Level | 207](#)
- [Description | 207](#)
- [Options | 207](#)
- [Required Privilege Level | 207](#)
- [Release Information | 207](#)

## Syntax

```
unit logical-unit-number {
    disable-mlppp-inner-ppp-pfc;
    dlci dlci-identifier;
    drop-timeout milliseconds;
    encapsulation type;
    fragment-threshold bytes;
    interleave-fragments;
    minimum-links number;
    mrru bytes;
    multicast-dlci dlci-identifier;
    short-sequence;
    family family {
        address address {
            destination address;
        }
        bundle (ml-fpc/pic/port | ls-fpc/pic/port);
    }
}
```

## Hierarchy Level

```
[edit interfaces interface-name]
```

## Description

Configure a logical interface on the physical device. You must configure a logical interface to be able to use the physical device.

## Options

*logical-unit-number*—Number of the logical unit.

- **Range:** 0 through 16,384

The remaining statements are explained separately. See [CLI Explorer](#).

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

[Link and Multilink Services Interfaces User Guide for Routing Devices](#)

[Junos OS Network Interfaces Library for Routing Devices](#)

# yellow-differential-delay

## IN THIS SECTION

- [Syntax | 208](#)
- [Hierarchy Level | 208](#)
- [Description | 208](#)
- [Options | 209](#)
- [Required Privilege Level | 209](#)
- [Release Information | 209](#)

## Syntax

```
yellow-differential-delay milliseconds;
```

## Hierarchy Level

```
[edit interfaces ls-fpc/pic/port:channel mlfr-uni-nni-bundle-options]
```

## Description

For link services interfaces only, configure the yellow differential delay among bundle links to give warning when a link has a differential delay that exceeds the configured threshold.

## Options

*milliseconds*—Yellow differential delay threshold.

- **Range:** 1 through 2000 milliseconds
- **Default:** 72 milliseconds

## Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

## Release Information

Statement introduced before Junos OS Release 7.4.

### RELATED DOCUMENTATION

---

[Configuring Link Services Physical Interfaces](#) | 140

---

[action-red-differential-delay](#) | 161

---

[red-differential-delay](#) | 199

# 5

CHAPTER

## Operational Commands

---

[show interfaces \(Link Services\)](#) | 211

[show interfaces \(Link Services IQ\)](#) | 234

[show interfaces \(Multilink Services\)](#) | 272

---

## show interfaces (Link Services)

### IN THIS SECTION

- [Syntax | 211](#)
- [Description | 212](#)
- [Options | 212](#)
- [Required Privilege Level | 212](#)
- [Output Fields | 212](#)
- [Sample Output | 228](#)
- [Release Information | 234](#)

### Syntax

For Multilink Frame Relay user-to-user network-to-network interface (UNI NNI):

```
show interfaces interface-type :channel  
<brief | detail | extensive | terse>  
<descriptions>  
<media>  
<snmp-index snmp-index>  
<statistics>
```

For Multilink Frame Relay end-to-end:

```
show interfaces interface-type  
<brief | detail | extensive | terse>  
<descriptions>  
<media>  
<snmp-index snmp-index>  
<statistics>
```

## Description

Display status information about the specified link services interface.

## Options

<i>interface-type</i>	On M Series and T Series routers, the interface type is <i>ls-fpc/pic/port</i> .
<b>brief   detail   extensive   terse</b>	(Optional) Display the specified level of output.
<i>channel</i>	Channel number of the link services interface.
<b>descriptions</b>	(Optional) Display interface description strings.
<b>media</b>	(Optional) Display media-specific information about network interfaces.
<b>snmp-index</b> <i>snmp-index</i>	(Optional) Display information for the specified SNMP index of the interface.
<b>statistics</b>	(Optional) Display static interface statistics.

## Required Privilege Level

view

## Output Fields

[Table 6 on page 212](#) lists the output fields for the `show interfaces (link services)` command. Output fields are listed in the approximate order in which they appear.

**Table 6: Link Services show interfaces Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface: <b>Multilink-Frame-Relay-UNI-NNI</b> (default), <b>LinkService</b> , <b>Frame-relay</b> , <b>Frame-relay-ccc</b> , or <b>Frame-relay-tcc</b> .	All levels
<b>MTU</b>	Maximum transmission unit size on the physical interface.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the “Device Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the “Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: <i>year-month-day hour.minute.second timezone (hour.minute.second ago)</i></b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive</b> none
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Link flags</b>	Information about the link. Possible values are described in the “Link Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Hold-times</b>	Current interface hold time up and hold time down, in milliseconds, in the format <b>Up <i>n</i> ms, Down <i>n</i> ms</b> .	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Multilink Frame Relay UNI NNI bundle options</b>	<p>Multilink Frame Relay UNI NNI only) Configured information about Multilink Frame Relay bundle options.</p> <ul style="list-style-type: none"> <li>• <b>Device type</b>—DCE (Data Communication Equipment) or DTE (Data Terminal Equipment).</li> <li>• <b>MRRU</b>—Configured size of the maximum received reconstructed unit (MRRU): <b>1500</b> to <b>4500</b> bytes. The default is <b>1524</b> bytes.</li> <li>• <b>Fragmentation threshold</b>—Configured fragmentation threshold: <b>128</b> through <b>16,320</b> bytes, in integer multiples of <b>64</b> bytes. The default setting is <b>0</b>, which disables fragmentation.</li> <li>• <b>Red differential delay limit</b>—Red differential delay limit among bundle links has been reached, indicating an action will occur.</li> <li>• <b>Yellow differential delay limit</b>—Yellow differential delay among bundle links has been reached, indicating a warning will occur.</li> <li>• <b>Red differential delay action</b>—Type of actions taken when the red differential delay exceeds the red limit: <b>Disable link transmit</b> or <b>Remove link from service</b>.</li> <li>• <b>Reassembly drop timer</b>—Drop timeout value to provide a recovery mechanism if individual links in the link services bundle drop one or more packets: <b>1</b> through <b>127</b> milliseconds. By default, the drop timeout parameter is <b>0</b> (disabled). A value that is under <b>5</b> ms is not recommended.</li> <li>• <b>Links needed to sustain bundle</b>—Minimum number of links to sustain the bundle: <b>1</b> through <b>8</b>.</li> <li>• <b>LIP Hello timer</b>—Link Interleaving Protocol hello timer: <b>1</b> through <b>180</b> seconds. <ul style="list-style-type: none"> <li>• <b>Acknowledgement timer</b>—Maximum period to wait for an add link acknowledgement, hello acknowledgement, or remove link acknowledgement: <b>1</b> through <b>10</b> seconds.</li> <li>• <b>Acknowledgement retries</b>—Number of retransmission attempts to be made for consecutive hello or remove link messages after the expiration of the acknowledgement timer: <b>1</b> through <b>5</b>.</li> </ul> </li> </ul>	<b>detail extensive</b> none

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Multilink Frame Relay UNI NNI bundle options</b> (continued)	<ul style="list-style-type: none"> <li>• <b>Bundle class</b>—Bundle class ID.</li> <li>• <b>LMI type</b>—Multilink Frame Relay UNI NNI LMI type: <b>ANSI</b> or <b>Q.933 ANNEX A</b>.</li> <li>• <b>T391 LIV polling timer</b>—Multilink Frame Relay UNI NNI Full status polling counter: <b>1</b> through <b>255</b>, with a default value of <b>6</b>.</li> <li>• <b>T392 polling verification timer</b>—Multilink Frame Relay UNI NNI LMI error threshold. The number of errors required to bring down the link, within the event count specified by <b>N393</b>. The range is <b>1</b> through <b>10</b>, with a default value of <b>3</b>.</li> <li>• <b>N391 full status polling count</b>—Multilink Frame Relay UNI NNI Full status polling counter: <b>1</b> through <b>255</b>.</li> <li>• <b>N392 error threshold</b>—Multilink Frame Relay UNI NNI LMI error threshold: <b>1</b> through <b>10</b>.</li> <li>• <b>N393 monitored event count</b>—Multilink Frame Relay UNI NNI LMI monitored event count: <b>1</b> through <b>10</b>, with a default value of <b>4</b>.</li> </ul>	<b>detail extensive</b> none
<b>Traffic statistics</b>	Number and rate of bytes and packets received and transmitted on the physical interface. All references to traffic direction (input or output) are defined with respect to the router. Input fragments received by the router are assembled into input packets; output packets are segmented into output fragments for transmission out of the router.	<b>detail extensive</b>
<b>Multilink Frame Relay UNI NNI bundle errors</b>	<p>Information about Multilink Frame Relay bundle errors.</p> <ul style="list-style-type: none"> <li>• <b>Packet drops</b>—Number of packets dropped.</li> <li>• <b>Fragment drops</b>—Number of fragments dropped.</li> <li>• <b>MRRU exceeded</b>—Number of times a packet was dropped because the configured MRRU value was exceeded.</li> <li>• <b>Exception events</b>—Exception events counter.</li> </ul>	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Multilink Frame Relay UNI NNI bundle statistics</b>	<p>Information about Multilink Frame Relay bundles.</p> <ul style="list-style-type: none"> <li>• <b>Fragments</b>—Bundle fragment information. <ul style="list-style-type: none"> <li>• <b>Input</b>—Total number and rate of frames and packets received, in <b>Frames</b>, <b>fps</b> (frames per second), <b>Bytes</b>, and <b>bps</b> (bits per second).</li> <li>• <b>Output</b>—Total number and rate of frames and packets transmitted, in <b>Frames</b>, <b>fps</b>, <b>Bytes</b>, and <b>bps</b>.</li> </ul> </li> <li>• <b>Packets</b>—Bundle packet information. <ul style="list-style-type: none"> <li>• <b>Input</b>—Total number and rate of frames and packets received, in <b>Frames</b>, <b>fps</b> (frames per second), <b>Bytes</b>, and <b>bps</b> (bits per second).</li> <li>• <b>Output</b>—Total number and rate of frames and packets transmitted, in <b>Frames</b>, <b>fps</b>, <b>Bytes</b>, and <b>bps</b>.</li> </ul> </li> </ul>	<b>detail extensive</b>
<b>Multilink Frame Relay UNI NNI bundle links information</b>	<ul style="list-style-type: none"> <li>• <b>Active bundle links</b>—Number of bundle links that are currently active.</li> <li>• <b>Removed bundle links</b>—Number of bundle links that have been removed (RED differential delay action).</li> <li>• <b>Disabled bundle links</b>—Number of bundle links that have been disabled (RED differential delay action).</li> </ul>	<b>detail extensive</b> none

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Multilink Frame Relay UNI NNI active bundle links statistics</b>	<p>(Multilink Frame Relay UNI NNI only) Display information for each active bundle link.</p> <ul style="list-style-type: none"> <li>• <b>Frames</b>—Number of multilink control frames received on this bundle link.</li> <li>• <b>fps</b>—Rate of multilink control frames received on this bundle link (in frames per second).</li> <li>• <b>Bytes</b>—Number of bytes received on this bundle link.</li> <li>• <b>bps</b>—Number of bits per second received on this bundle link.</li> <li>• <b><i>interface-name</i></b>—Name of the bundle link interface.</li> <li>• <b>Input</b>—Total number and rate of frames and packets received.</li> <li>• <b>Output</b>—Total number and rate of frames and packets transmitted.</li> <li>• <b>Current differential delay</b>—Compare this bundle link's round trip time to the average of all bundle links' round trip times in <b>ms</b> (milliseconds).</li> <li>• <b>Recent high differential delay</b>—Highest differential delay value from the latest 10 intervals, in milliseconds.</li> <li>• <b>Times over red diff delay</b>—Number of times this bundle link exceeded the configured red differential delay limit.</li> <li>• <b>Times over yellow diff delay</b>—Number of times this bundle link exceeded the configured yellow differential delay limit.</li> </ul>	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Multilink Frame Relay UNI NNI active bundle links statistics</b> (continued)	<ul style="list-style-type: none"> <li>• <b>LIP</b>—Link Interleaving Protocol information.</li> <li>• <b>Rcv</b>—Number of messages received.</li> <li>• <b>Xmt</b>—Number of messages transmitted.</li> <li>• <b>add_lnk</b>—ADD__LINK message notifies the peer endpoint that the local endpoint supports frame processing. It is generated on both ends of a bundle link when a bundle link endpoint is ready to become operational.</li> <li>• <b>lnk_ack</b>—ADD_LINK_ACK message notifies the peer that the local router has received a valid ADD_LINK message.</li> <li>• <b>lnk_rej</b>—ADD_LINK_REJ message notifies the peer that the local router has received an invalid ADD_LINK message.</li> <li>• <b>hello</b>—HELLO message notifies the peer that the local router is up. Both ends of a link bundle generate this message.</li> <li>• <b>hel_ack</b>—HELLO_ACK message notifies the peer that the local router has received a valid HELLO message.</li> <li>• <b>lnk_rem</b>—REMOVE_LINK message notifies the peer that the local router has received a REMOVE_LINK message.</li> <li>• <b>rem_ack</b>—REMOVE_LINK_ACK message notifies the peer that the local router has received a valid ADD_LINK message.</li> </ul>	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Frame exceptions</b>	<p>For Multilink Frame Relay end-to-end only. Information about framing exceptions. Includes events recorded under <b>Exception Events</b> for each logical interface.</p> <ul style="list-style-type: none"> <li>• <b>Oversized frames</b>—Number of frames received that exceed maximum frame length. Maximum length is 4500 Kb (kilobits).</li> <li>• <b>Errored input frames</b>—Number of input frame errors.</li> <li>• <b>Input on disabled link/bundle</b>—Number of frames received on disabled links. These frames can result either from an inconsistent configuration, or from a bundle or link being brought up or down with traffic actively flowing through it.</li> <li>• <b>Output for disabled link/bundle</b>—Number of frames sent for a disabled or unavailable link. These frames can result either from an inconsistent configuration, or from a bundle being brought up or down while traffic is flowing through it.</li> <li>• <b>Queuing drops</b>—Total number of packets dropped before traffic enters the link services IQ interface. Indicates that the interface is becoming oversubscribed.</li> </ul>	<b>detail extensive</b>
<b>Buffering exceptions</b>	<p>For Multilink Frame Relay end-to-end only. Information about buffering exceptions. Includes events recorded under <b>Exception Events</b> for each logical interface:</p> <ul style="list-style-type: none"> <li>• <b>Packet data buffer overflow</b>—Packet buffer memory is full. This overflow can occur when the aggregate data rate exceeds the physical link services interface capacity.</li> <li>• <b>Fragment data buffer overflow</b>—Fragment buffer memory is full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical link services interface capacity. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Assembly exceptions</b>	<p>For Multilink Frame Relay end-to-end only. Information about assembly exceptions. Includes events recorded under <b>Exception Events</b> for each logical interface.</p> <p>An assembly exception does not necessarily indicate an operational problem with the physical link services interface itself. If multilink-encapsulated traffic is dropped or reordered after a sequence number has been assigned, the assembling multilink interface records one or more exception events. The multilink interface can drop multilink-encapsulated fragments itself as a result. Any multilink packets or fragments dropped by the physical link services interface itself result in packet or fragment drop counts on individual logical interfaces. If the logical interface drop counts are zero, but exception events are seen, the most likely cause is a problem with the individual link interfaces. Even if the logical interface fragment drop counts are nonzero, excess differential delay or traffic losses on individual interfaces can be the root cause.</p>	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Assembly exceptions</b> (continued)	<ul style="list-style-type: none"> <li>• <b>Fragment timeout</b>—The drop timer expired while a fragment sequence number was outstanding. Occurs only if the drop timer is enabled. This timeout can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled. These events do not necessarily indicate any problem with the operation of the physical link services interface itself, but can occur when one or more individual links drop traffic. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Missing sequence number</b>—A gap was detected in the sequence numbers of fragments on a bundle. These events do not necessarily indicate any problem with the operation of the physical link services interface itself, but can occur when one or more individual links drop traffic. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Out-of-order sequence number</b>—Two frames with out-of-order sequence numbers occurred within a single link. This event indicates that an individual link within a bundle reordered traffic, making the multilink interface unable to correctly process the resulting stream. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Out-of-range sequence number</b>—Frame was received with an out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Hardware errors</b>	<p>For Multilink Frame Relay end-to-end only. Information about hardware errors:</p> <ul style="list-style-type: none"> <li>• <b>Data memory error</b>—A memory error was detected on the interface DRAM. Indicates possible hardware failure. Contact Juniper Networks technical support.</li> <li>• <b>Control memory error</b>—A memory error was detected on the interface DRAM. Indicates possible hardware failure. Contact Juniper Networks technical support.</li> </ul>	<b>detail extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface.	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface. Possible values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
<b>Encapsulation</b>	Encapsulation being used: PPP, Multilink - FR or Multilink - PPP	All levels
<b>Bandwidth</b>	Speed at which the interface is running.	All levels

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Bundle options</b>	<p>For Multilink Frame Relay end-to-end interfaces only:</p> <ul style="list-style-type: none"> <li>• <b>MRRU</b>—Configured size of the maximum received reconstructed unit (MRRU): <b>1500</b> to <b>4500</b> bytes. The default is <b>1524</b> bytes.</li> <li>• <b>Drop timer period</b>—Drop timeout value to provide a recovery mechanism if individual links in link services bundle drop one or more packets: <b>1</b> through <b>127</b> milliseconds. Values under <b>5</b> milliseconds are not recommended. The default setting is <b>0</b>, which disables the timer.</li> <li>• <b>Sequence number format</b>—(MLPPP) Short sequence number header format.</li> <li>• <b>Fragmentation threshold</b>—Configured fragmentation threshold: <b>128</b> through <b>16,320</b> bytes, in integer multiples of <b>64</b> bytes. The default setting is <b>0</b>, which disables fragmentation.</li> <li>• <b>Links needed to sustain bundle</b>—Minimum number of links to sustain the bundle: <b>1</b> through <b>8</b>.</li> <li>• <b>Interleave fragments</b>—State of the process that interleaves long packets with high-priority ones. Only <b>Disabled</b> is currently supported.</li> <li>• <b>Remote MRRU</b>—MRRU value received from remote peer. If negotiation has not been initiated, the default value is displayed.</li> </ul>	<b>detail extensive</b> none

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Bundle status (MLPPP) or Multilink class status (MC-MLPPP)</b>	<p>Information about bundle status:</p> <ul style="list-style-type: none"> <li>• <b>Remote MRRU</b>—MRRU value received from remote peer. If negotiation has not been initiated, the default value is displayed.</li> <li>• <b>Received sequence number</b>—Sequence number for received packets.</li> <li>• <b>Transmit sequence number</b>—Sequence number for transmitted packets.</li> <li>• <b>Packet drops</b>—Number and byte count of output packets that were dropped, rather than being encapsulated and sent out of the router as fragments. The packet drop counter is incremented if there is a temporary shortage of packet memory on the AS PIC, which causes packet fragmentation to fail.</li> <li>• <b>Fragment drops</b>—Number and byte count of input fragments that were dropped, rather than being reassembled and handled by the router as packets. This counter also includes fragments that have been received successfully but had to be dropped because not all fragments that constituted a packet had been received. The fragment drop counter is incremented when a fragment received on constituent links is dropped. Drop fragments can be triggered by sequence ordering errors, duplicate fragments, timed-out fragments, and bad multilink headers.</li> </ul>	<b>detail extensive</b> none

Table 6: Link Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Bundle status (MLPPP) or Multilink class status (MC-MLPPP) (continued)</b>	<ul style="list-style-type: none"> <li>• <b>MRRU exceeded</b>—Number of reassembled packets exceeding the MRRU. This counter is not implemented in this release.</li> <li>• <b>Fragment timeout</b>—Drop timer expired while a fragment sequence number was outstanding. Occurs only if the drop timer is enabled. This timeout can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled.</li> <li>• <b>Missing sequence number</b>—Gap detected in the sequence numbers of fragments on a bundle.</li> <li>• <b>Out-of-order sequence number</b>—Two frames with out-of-order sequence numbers within a single link. This event indicates that an individual link within a bundle reordered traffic, making the multilink interface unable to correctly process the resulting stream.</li> <li>• <b>Out-of-range sequence number</b>—Frame with an out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up.</li> <li>• <b>Packet data buffer overflow</b>—Packet buffer memory full. This overflow can occur when the aggregate data rate exceeds the physical link services IQ interface capacity.</li> <li>• <b>Fragment data buffer overflow</b>—Fragment buffer memory full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical link services IQ capacity.</li> </ul>	<b>detail extensive</b> none

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Bundle errors</b>	<p>Information about bundle errors.</p> <ul style="list-style-type: none"> <li>• <b>Packet drops</b>—Number and byte count of output packets that were dropped, rather than being encapsulated and sent out of the router as fragments.</li> <li>• <b>Fragment drops</b>—Number and byte count of input fragments that were dropped, rather than being reassembled and handled by the router as packets.</li> <li>• <b>MRRU exceeded</b>—Number of reassembled packets exceeding the MRRU.</li> <li>• <b>Exception events</b>—Number of exceptional events encountered other than MRRU exceeded errors. These events are categorized under the physical interface: <b>Frame exceptions</b>, <b>Buffering exceptions</b>, and <b>Fragment exceptions</b>. Exception events do not necessarily indicate that the multilink interface is not operating properly. Individual link failures can produce exceptional events.</li> </ul>	<b>detail extensive</b>
<b>Statistics</b>	<p>Information about fragments and packets received and sent by the router. All references to traffic direction (input or output) are defined with respect to the router. Input fragments received by the router are assembled into input packets; output packets are segmented into output fragments for transmission out of the router.</p> <ul style="list-style-type: none"> <li>• <b>Bundle</b>—Information about bundles.</li> <li>• <b>Link</b>—Information about links used in the multilink operation.</li> </ul>	<b>detail extensive</b>
<b>Protocol</b>	Protocol family configured on the logical interface.	<b>detail extensive</b> none
<b>MTU</b>	MTU size on the logical interface. If the MTU value is negotiated down to meet the MRRU requirement on the remote side, this value is marked <b>Adjusted</b> .	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

Table 6: Link Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Route table</b>	Routing table in which this address exists. For example, <b>Route table:0</b> refers to inet.0.	<b>detail extensive</b>
<b>Flags</b>	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive</b> none
<b>Local</b>	IP address of the logical interface.	<b>detail extensive</b> none
<b>Broadcast</b>	Broadcast address on the logical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>

## Sample Output

### show interfaces extensive (MFR UNI NNI)

```

user@host> show interfaces ls-1/3/0:0 extensive
Physical interface: ls-1/3/0:0, Enabled, Physical link is Up
  Interface index: 25, SNMP ifIndex: 35, Generation: 124
  Link-level type: Multilink-FR-UNI-NNI, MTU: 1524
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Last flapped  : 2002-11-01 15:26:25 PST (00:34:49 ago)

```

Statistics last cleared: Never

Link flags : None

Hold-times : Up 0 ms, Down 0 ms

Multilink Frame Relay UNI NNI bundle options:

Device type	DTE
MRRU	1524
Fragmentation threshold	1500
Red differential delay limit	10
Yellow differential delay limit	6
Red differential delay action	Disable link transmit
Reassembly drop timer	0
Links needed to sustain bundle	1
LIP Hello timer	10
Acknowledgement timer	4
Acknowledgement retries	2
Bundle class	A
LMI type	Q.933 Annex A
T391 LIV polling timer	10
T392 polling verification timer	15
N391 full status polling count	6
N392 error threshold	3
N393 monitored event count	4

Traffic statistics:

Input bytes :	0
Output bytes :	0
Input packets:	0
Output packets:	0

Multilink Frame Relay UNI NNI bundle errors:

Packet drops	0 (0 bytes)
Fragment drops	0 (0 bytes)
MRRU exceeded	0
Exception events	0

Multilink Frame Relay UNI NNI bundle statistics

	Frames	fps	Bytes	bps
Fragments:				
Input :	0	0	0	0
Output:	824	0	17304	320
Packets:				
Input :	0	0	0	0
Output:	824	0	17304	320

Multilink Frame Relay UNI NNI bundle links info:

Active bundle links	4
Removed bundle links	0

```

Disabled bundle links      0
Multilink Frame Relay UNI NNI active bundle links statistics:
      Frames      fps      Bytes      bps
t1-0/2/0:0.0
  Input :          0          0          0          0
  Output:         206          0        4326         80
  Current differential delay      0.2 ms
  Recent high differential delay  3.8 ms
  Times over red diff delay      0
  Times over yellow diff delay   0
  LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack
  Rcv:      2      2      0      206      207      0      0
  Xmt:      2      1      0      207      206      0      0
t1-0/2/0:1.0
  Input :          0          0          0          0
  Output:         206          0        4326         80
  Current differential delay      0.2 ms
  Recent high differential delay  3.7 ms
  Times over red diff delay      0
  Times over yellow diff delay   0
  LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack
  Rcv:      2      2      0      206      207      0      0
  Xmt:      2      1      0      207      206      0      0
t1-0/2/0:2.0
  Input :          0          0          0          0
  Output:         206          0        4326         80
  Current differential delay      0.4 ms
  Recent high differential delay  3.8 ms
  Times over red diff delay      0
  Times over yellow diff delay   0
  LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack
  Rcv:      2      2      0      206      207      0      0
  Xmt:      2      1      0      207      206      0      0
t1-0/2/0:3.0
  Input :          0          0          0          0
  Output:         206          0        4326         80
  Current differential delay      0.3 ms
  Recent high differential delay  3.8 ms
  Times over red diff delay      0
  Times over yellow diff delay   0
  LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack
  Rcv:      2      2      0      206      207      0      0
  Xmt:      2      1      0      207      206      0      0

```

Logical interface ls-1/3/0:0.0 (Index 5) (SNMP ifIndex 28) (Generation 10)

Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-FR-UNI-NNI

Bandwidth: 622080kbps

Bundle errors:

Packet drops 0 (0 bytes)

Fragment drops 0 (0 bytes)

MRRU exceeded 0

Exception events 0

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

Bundle:

Fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	824	0	17304	320
---------	-----	---	-------	-----

Packets:

Input :	0	0	0	0
---------	---	---	---	---

Output:	824	0	17304	320
---------	-----	---	-------	-----

Link:

t1-0/2/0:0.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	206	0	4326	80
---------	-----	---	------	----

t1-0/2/0:1.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	206	0	4326	80
---------	-----	---	------	----

t1-0/2/0:2.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	206	0	4326	80
---------	-----	---	------	----

t1-0/2/0:3.0

Input :	0	0	0	0
---------	---	---	---	---

Output:	206	0	4326	80
---------	-----	---	------	----

Protocol inet, MTU: 1500 [Adjusted], Generation: 15, Route table: 0

Flags: User-MTU, MTU-Protocol-Adjusted

Addresses, Flags: Is-Preferred Is-Primary

Destination: 192.0.2.1, Local: 192.0.2.2, Broadcast: Unspecified,

Generation: 10

## show interfaces extensive (MFR End-to-End)

user@host> **show interfaces ls-0/3/0 extensive**

Physical interface: ls-0/3/0, Enabled, Physical link is Up

Interface index: 264, SNMP ifIndex: 104, Generation: 525

Link-level type: LinkService, MTU: 1524

```

Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps
Last flapped   : 2002-10-16 17:53:49 PDT (00:22:00 ago)
Statistics last cleared: Never
Traffic statistics:
  Input bytes   :          73471          264 bps
  Output bytes  :          80335           0 bps
  Input packets:           822           0 pps
  Output packets:          819           0 pps
Frame exceptions:
  Oversized frames          0
  Errored input frames      0
  Input on disabled link/bundle 0
  Output for disabled link/bundle 4
  Queuing drops            3
Buffering exceptions:
  Packet data buffer overflow 0
  Fragment data buffer overflow 0
Assembly exceptions:
  Fragment timeout          0
  Missing sequence number    0
  Out-of-order sequence number 0
  Out-of-range sequence number 0
Hardware errors (sticky):
  Data memory error         0
  Control memory error      0
Logical interface ls-0/3/0.0 (Index 5) (SNMP ifIndex 527) (Generation 47)
  Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-PPP
  Bandwidth: 1536kbps
  Bundle options:
    MRRU          1524
    Drop timer period 0
    Sequence number format long (24 bits)
    Fragmentation threshold 0
    Links needed to sustain bundle 1
    Interleave fragments Disabled
  Bundle status:
    Remote MRRU          1500
    Received sequence number 0x19ec14
    Transmit sequence number 0x38cfa8
    Packet drops          0 (0 bytes)
    Fragment drops        0 (0 bytes)
    MRRU exceeded         0

```

```

Fragment timeout          0
Missing sequence number   0
Out-of-order sequence number 0
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Bundle errors:
  Packet drops            2 (68 bytes)
  Fragment drops          0 (0 bytes)
  MRRU exceeded           0
  Exception events        0
Statistics      Frames    fps      Bytes      bps
Bundle:
  Fragments:
    Input :      172      0      15544      288
    Output:      165      0      16645      0
  Packets:
    Input :      143      0      12885      288
    Output:      134      0      12276      0
Link:
  t1-0/0/0.0
    Input :      143      0      12885      288
    Output:      134      0      12276      0
Protocol inet, MTU: 1500, Generation: 76, Route table: 0
  Flags: None
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 10.16.1.2, Local: 10.16.1.1, Broadcast:
    Unspecified, Generation: 81
Protocol iso, MTU: 1500 [Adjusted], Generation: 77, Route table: 0
  Flags: Is-Primary
Protocol inet6, MTU: 1500, Generation: 78, Route table: 0
  Flags: Is-Primary
  Addresses, Flags: Is-Default Is-Preferred Is-Primary
    Destination: 2001:db8::1:0/126, Local: 2001:db8::1:1,
    Broadcast: Unspecified, Generation: 83
  Addresses, Flags: Is-Preferred
    Destination: 2001:db8::/64, Local: 2001:db8::2a0:a5ff:fe12:4777,
    Broadcast: Unspecified,
    Generation: 85

```

## Release Information

Command introduced before Junos OS Release 7.4.

# show interfaces (Link Services IQ)

### IN THIS SECTION

- [Syntax | 234](#)
- [Description | 235](#)
- [Options | 235](#)
- [Additional Information | 235](#)
- [Required Privilege Level | 235](#)
- [Output Fields | 236](#)
- [Sample Output | 259](#)
- [Release Information | 271](#)

## Syntax

```
show interfaces lsq-fpc/pic/port  
<brief | detail | extensive | terse>  
<descriptions>  
<l2-statistics>  
<media>  
<snmp-index snmp-index>  
<statistics>
```

## Description

(M Series, MX Series, and T Series routers only) Display status information about the specified link services intelligent queuing (IQ) interface.

## Options

<b><i>lsq-fpc/pic/port</i></b>	Display standard status information about the specified link services IQ interface.
<b><i>brief   detail   extensive   terse</i></b>	(Optional) Display the specified level of output.
<b><i>descriptions</i></b>	(Optional) Display interface description strings.
<b><i>l2-statistics</i></b>	(Optional) Display Layer 2 queue statistics for Multilink Point-to-Point Protocol (MLPPP), FRF.15, and FRF.16 bundles.
<b><i>media</i></b>	(Optional) Display media-specific information about network interfaces.
<b><i>snmp-index snmp-index</i></b>	(Optional) Display information for the specified SNMP index of the interface.
<b><i>statistics</i></b>	(Optional) Display static interface statistics.

## Additional Information

Link services IQ interfaces are similar to link services interfaces. The important difference is that link services IQ interfaces fully support Junos OS class-of-service (CoS) components.

## Required Privilege Level

view

## Output Fields

Table 7 on page 236 lists the output fields for the `show interfaces (link services IQ)` command. Output fields are listed in the approximate order in which they appear.

**Table 7: show interfaces (Link Services IQ) Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
Physical interface	Name of the physical interface.	All levels
Enabled	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels
Interface index	Physical interface index number, which reflects its initialization sequence.	<b>detail extensive</b> none
SNMP ifIndex	SNMP index number for the physical interface.	<b>detail extensive</b> none
Generation	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>
Link-level type	Encapsulation being used on the physical interface: Multilink-Frame-Relay-UNI-NNI Multilink-Frame-Relay-UNI-NNI (default), LinkService, Frame-relay, Frame-relay-ccc, or Frame-relay-tcc.	All levels
MTU	Maximum transmission unit size on the physical interface.	All levels
Device flags	Information about the physical device. Possible values are described in the “Device Flags” section under <i>Common Output Fields Description</i> .	All levels
Interface flags	Information about the interface. Possible values are described in the “Interface Flags” section under <i>Common Output Fields Description</i> .	All levels

Table 7: show interfaces (Link Services IQ) Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Last flapped	Date, time, and how long ago the interface went from down to up. The format is Last flapped: <i>year-month-day hour:minute:second timezone (hour:minute:second ago)</i> . For example, Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago).	<b>detail extensive</b> none

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Multilink Frame Relay UNI NNI bundle options	<p>(Multilink Frame Relay UNI NNI only) Configured information about Multilink Frame Relay bundle options.</p> <ul style="list-style-type: none"> <li>• Device type—DCE (data communication equipment) or DTE (data terminal equipment).</li> <li>• MRRU—Configured size of the maximum received reconstructed unit (MRRU): 1500 to 4500 bytes. The default is 1524 bytes.</li> <li>• Bandwidth—Speed at which the interface is running.</li> <li>• Fragmentation threshold—Configured fragmentation threshold: 128 through 16,320 bytes, in integer multiples of 64 bytes. The default setting is 0, which disables fragmentation.</li> <li>• Red differential delay limit—Red differential delay limit among bundle links has been reached, indicating an action will occur.</li> <li>• Yellow differential delay limit—Yellow differential delay among bundle links has been reached, indicating a warning will occur.</li> <li>• Red differential delay action—Type of actions taken when the red differential delay exceeds the red limit: <i>Disable link transmit</i> or <i>Remove link from service</i>.</li> <li>• Link layer overhead—Percentage of bundle bandwidth to be set aside for link layer overhead.</li> <li>• Reassembly drop timer—Drop timeout value to provide a recovery mechanism if individual links in the link services bundle drop one or more packets: 1 through 127 milliseconds. By default, the drop timeout parameter is 0 (disabled). A value under 5 ms is not recommended.</li> <li>• Links needed to sustain bundle—Minimum number of links to sustain the bundle: 1 through 8.</li> <li>• LIP Hello timer—Link Interleaving Protocol hello timer: 1 through 180 seconds.</li> </ul>	<b>detail extensive</b> none

**Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)**

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"><li>• Acknowledgement timer—Maximum period to wait for an add link acknowledgement, hello acknowledgement, or remove link acknowledgement: 1 through 10 seconds.</li><li>• Acknowledgement retries—Number of retransmission attempts to be made for consecutive hello or remove link messages after the expiration of the acknowledgement timer: 1through 5.</li></ul>	

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Multilink Frame Relay UNI NNI bundle options (continued)	<ul style="list-style-type: none"> <li>• Bundle class—Bundle class ID.</li> <li>• LMI type—Multilink Frame Relay UNI NNI LMI type: ANSI, Q.933 ANNEX A, or Consortium.</li> <li>• T391 LIV polling timer—Multilink Frame Relay UNI NNI Full status polling counter: 1 through 255, with a default value of 6.</li> <li>• T392 polling verification timer—Multilink Frame Relay UNI NNI LMI error threshold. The number of errors required to bring down the link, within the event count specified by N393. The range is 1 through 10, with a default value of 3.</li> <li>• N391 full status polling count—Multilink Frame Relay UNI NNI Full status polling counter: 1 through 255.</li> <li>• N392 error threshold—Multilink Frame Relay UNI NNI LMI error threshold: 1 through 10.</li> <li>• N393 monitored event count—Multilink Frame Relay UNI NNI LMI monitored event count: 1 through 10, with a default value of 4.</li> <li>• Consortium LMI Settings <ul style="list-style-type: none"> <li>• n391dte—DTE full status polling interval in seconds: 1 through 255.</li> <li>• n392dce—DCE error threshold: 1 through 10.</li> <li>• n392dte—DTE error threshold: 1 through 10.</li> <li>• n393dce—DCE monitored event count: 1 through 10.</li> <li>• n393dte—DTE monitored event count: 1 through 10.</li> <li>• t391dte—DTE polling verification timer (in seconds): 5 through 30.</li> <li>• t392dce—DCE polling verification timer (in seconds): 5 through 30.</li> </ul> </li> </ul>	detail extensive none

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
LMI	<p>Local Managment Interface packet statistics:</p> <ul style="list-style-type: none"> <li>Input—Number of packets arriving on the interface (nn) and timestamp of the most recent packet arrival, in the format:  Input: <i>nn</i> (last seen <i>hh:mm:ss ago</i>)</li> <li>Output—Number of packets sent out on the interface (nn) and how much time has passed since the last packet was sent, in the format:  Output: <i>nn</i> (last seen <i>hh:mm:ss ago</i>)</li> </ul>	<b>detail extensive</b> none
DTE Statistics	<p>Statistics about information transferred from the data terminal equipment (DTE) to the data communications equipment (DCE).</p> <ul style="list-style-type: none"> <li>Enquiries sent—Number of link status enquiries sent from the DTE to the DCE.</li> <li>Full enquiries sent—Number of full enquiries sent from the DTE to the DCE.</li> <li>Enquiry responses received—Number of enquiry responses received by the DCE from the DTE.</li> <li>Full enquiry responses received—Number of full enquiry responses received by DCE from the DTE.</li> </ul>	<b>detail extensive</b> none
DCE Statistics	<p>Statistics about information transferred from the DCE to the DTE.</p> <ul style="list-style-type: none"> <li>Enquiries received—Number of enquiries received by the DCE from the DTE.</li> <li>Full enquiries received—Number of full enquiries received by the DCE from the DTE.</li> <li>Enquiry responses sent—Number of enquiry responses sent from the DCE to the DTE.</li> <li>Full enquiry responses sent—Number of full enquiry responses sent from the DCE to the DTE.</li> </ul>	<b>detail extensive</b> none

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Common Statistics	<p>Statistics about messages snet between the DTE and the DCE.</p> <ul style="list-style-type: none"> <li>Unknown messages received—Number of received packets that do not fall into any other category.</li> <li>Asynchronouts updates received—Number of link status peer changes received.</li> <li>Out-of-sequence packets received—Number of packets for which the sequence of the packets received is different from the expected sequence.</li> <li>Keepalive responses timed out—Number of keepalive responses that time out when no Local Management Interface (LMI) packet was reported for n392dte or n393dce intervals. (See <i>LMI settings</i>.)</li> </ul>	
Traffic statistics	<p>Number and rate of bytes and packets received and transmitted on the physical interface. All references to traffic direction (input or output) are defined with respect to the Packet Forwarding Engine (PFE). Input traffic refers to the fragments received by the ingress PFE, which get assembled into Layer 3 input packets. Output packets refer to the IP packets transmitted out of the ingress PFE to the LSQ, which get segmented into output fragments.</p>	<b>detail extensive</b>

**Table 7: show interfaces (Link Services IQ) Output Fields (Continued)**

Field Name	Field Description	Level of Output
DLCI <i>nn</i>	<p>Data-link connection identifier (DLCI) number of the logical interface. The following information is displayed.</p> <ul style="list-style-type: none"> <li>Flags—Values are: <ul style="list-style-type: none"> <li>Active—Set when the link is active and the DTE and DCE are exchanging information.</li> <li>Down—Set when the link is active, but no information is received from the DTE.</li> <li>DCE unconfigured—Set when the corresponding DLCI in the DCE is not configured.</li> <li>Configured—Set when the corresponding DLCI is configured.</li> <li>DCE-Configured—Displayed when the command is issued from the DTE.</li> </ul> </li> </ul>	
DLCI Statistics	<p>(Frame Relay) Data-link connection identifier (DLCI) statistics.</p> <ul style="list-style-type: none"> <li>Active DLCI—Number of active DLCIs.</li> <li>Inactive DLCI—Number of inactive DLCIs.</li> </ul>	
Input rate	(Redundant LSQ) Rate of bits and packets received on the interface.	None specified
Output rate	(Redundant LSQ) Rate of bits and packets transmitted on the interface.	None specified
Statistics last cleared	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
Traffic statistics	Number and rate of bytes and packets received and transmitted on the physical interface. All references to traffic direction (input or output) are defined with respect to the router. Input fragments received by the router are assembled into input packets; output packets are segmented into output fragments for transmission out of the router.	<b>detail extensive</b>

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Frame exceptions	<p>Information about framing exceptions. Includes events recorded under Exception Events for each logical interface.</p> <ul style="list-style-type: none"> <li>• Oversized frames—Number of frames received that exceed maximum frame length. Maximum length is 4500 Kb (kilobits).</li> <li>• Errored input frames—Number of input frame errors.</li> <li>• Input on disabled link/bundle—Number of frames received on disabled links. These frames can result either from an inconsistent configuration, or from a bundle or link being brought up or down with traffic actively flowing through it.</li> <li>• Output for disabled link/bundle—Number of frames sent for a disabled or unavailable link. These frames can result either from an inconsistent configuration, or from a bundle being brought up or down while traffic is flowing through it.</li> <li>• Queuing drops—Total number of packets dropped before traffic enters the link services IQ interface. Indicates that the interface is becoming oversubscribed.</li> </ul>	<b>extensive</b>
Buffering exceptions	<p>Information about buffering exceptions. Includes events recorded under Exception Events for each logical interface:</p> <ul style="list-style-type: none"> <li>• Packet data buffer overflow—Packet buffer memory is full. This overflow can occur when the aggregate data rate exceeds the physical link services IQ interface capacity.</li> <li>• Fragment data buffer overflow—Fragment buffer memory is full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical link services IQ capacity. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	<b>extensive</b>

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Assembly exceptions	<p>(Multilink Frame Relay end-to-end only) Information about assembly exceptions. Includes events recorded under Exception Events for each logical interface.</p> <p>An assembly exception does not necessarily indicate an operational problem with the physical link services IQ interface itself. If multilink-encapsulated traffic is dropped or reordered after a sequence number has been assigned, the interface records one or more exception events. The physical interface can drop multilink-encapsulated fragments itself as a result. Any multilink packets or fragments dropped by the interface itself result in packet or fragment drop counts on individual logical interfaces. If the logical interface drop counts are zero, but exception events are seen, the most likely cause is a problem with the individual link interfaces. Even if the logical interface fragment drop counts are nonzero, excess differential delay or traffic losses on individual interfaces can be the root cause.</p> <ul style="list-style-type: none"> <li>• <b>Fragment timeout</b>—The drop timer expired while a fragment sequence number was outstanding. Occurs only if the drop timer is enabled. This timeout can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled. These events do not necessarily indicate any problem with the operation of the physical link services IQ interface itself, but can occur when one or more individual links drop traffic. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Missing sequence number</b>—A gap was detected in the sequence numbers of fragments on a bundle. These events do not necessarily indicate any problem with the operation of the physical link services IQ interface itself, but can occur when one or more individual links drop traffic. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Out-of-order sequence number</b>—Two frames with out-of-order sequence numbers within a single link. This event indicates that an individual link within a bundle reordered traffic, making the link services IQ interface unable to correctly process the resulting stream. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	<b>extensive</b>

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"> <li>Out-of-range sequence number—Received a frame with an out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	
Hardware errors (sticky)	<p>(Multilink Frame Relay end-to-end only) Information about hardware errors:</p> <ul style="list-style-type: none"> <li>Data memory error—A memory error was detected on the interface DRAM. Indicates possible hardware failure. Contact Juniper Networks technical support.</li> <li>Control memory error—A memory error was detected on the interface DRAM. Indicates possible hardware failure. Contact Juniper Networks technical support.</li> </ul>	<b>extensive</b>
Egress queues	Total number of egress queues supported on the specified interface.	<b>detail extensive</b> none
Queue counters	<p>Queue number and its associated user-configured forwarding class name.</p> <ul style="list-style-type: none"> <li>Queued packets—Number of queued packets.</li> <li>Transmitted packets—Number of transmitted packets.</li> <li>Dropped packets—Number of packets dropped by the ASIC's RED mechanism.</li> </ul>	<b>detail extensive</b> none
<b>Logical Interface</b>		
Logical interface	Name of the logical interface.	All levels
Index	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive</b> none

**Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)**

Field Name	Field Description	Level of Output
SNMP ifIndex	Logical interface SNMP interface index number.	<b>detail extensive</b> none
Generation	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>
Flags	Information about the logical interface. Possible values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
Encapsulation	Encapsulation being used: PPP or Multilink PPP.	All levels
Bandwidth	Speed at which the interface is running.	All levels
Bundle options	<p>(Multilink Frame Relay end-to-end interfaces only)</p> <ul style="list-style-type: none"> <li>• MRRU—Configured size of the maximum received reconstructed unit (MRRU): 1500 through 4500 bytes. The default is 1504 bytes.</li> <li>• Drop timer period—Drop timeout value to provide a recovery mechanism if individual links in link services bundle drop one or more packets: 0 through 2000 milliseconds. Values under 5 ms are not recommended. The default setting is 0, which disables the timer.</li> <li>• Sequence number format—Short sequence number header format (MLPPP only).</li> <li>• Fragmentation threshold—Configured fragmentation threshold: 64 through 16,320 bytes, in integer multiples of 64 bytes. The default setting is 0, which disables fragmentation.</li> <li>• Links needed to sustain bundle—Minimum number of links to sustain the bundle: 1 through 8.</li> <li>• Multilink classes—Number of multilink classes negotiated.</li> <li>• Link layer overhead—Percentage of bundle bandwidth to be set aside for link-layer overhead.</li> </ul>	<b>detail extensive</b> none

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Bundle status (MLPPP) or Multilink class status (Multiclass MLPPP)	<p>Information about bundle status:</p> <ul style="list-style-type: none"> <li>• Remote MRRU—MRRU value received from remote peer. If negotiation has not been initiated, the default value is displayed.</li> <li>• Received sequence number—Sequence number for received packets.</li> <li>• Transmitted sequence number—Sequence number for transmitted packets.</li> <li>• Packet drops—Number and byte count of output packets that were dropped, rather than being encapsulated and sent out of the router as fragments. The packet drop counter is incremented if there is a temporary shortage of packet memory on the AS PIC, which causes packet fragmentation to fail.</li> <li>• Fragment drops—Number and byte count of input fragments that were dropped, rather than being reassembled and handled by the router as packets. This counter also includes fragments that have been received successfully, but had to be dropped because not all fragments that constituted a packet had been received. The fragment drop counter is incremented when a fragment received on constituent links is dropped. Drop fragments can be triggered by sequence ordering errors, duplicate fragments, timed-out fragments, and bad multilink headers.</li> <li>• MRRU exceeded—Number of reassembled packets exceeding the MRRU. This counter is not implemented in this release.</li> <li>• Fragment timeout—The drop timer expired while a fragment sequence number was outstanding. Occurs only if the drop timer is enabled. This timeout can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled.</li> <li>• Missing sequence number—A gap was detected in the sequence numbers of fragments on a bundle.</li> <li>• Out-of-order sequence number—Two frames with out-of-order sequence numbers within a single link. This event indicates that an individual link within a bundle reordered traffic, making the multilink interface unable to correctly process the resulting stream.</li> </ul>	<b>detail extensive</b> none

**Table 7: show interfaces (Link Services IQ) Output Fields *(Continued)***

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"> <li>• Out-of-range sequence number—Received a frame with an out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up.</li> <li>• Packet data buffer overflow—Packet buffer memory is full. This overflow can occur when the aggregate data rate exceeds the physical link services IQ interface capacity.</li> <li>• Fragment data buffer overflow—Fragment buffer memory is full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical link services IQ capacity.</li> </ul>	

**Table 7: show interfaces (Link Services IQ) Output Fields (Continued)**

Field Name	Field Description	Level of Output
Statistics	<p>Information about fragments and packets received and sent by the router. All references to traffic direction (input or output) are defined with respect to the router. Input fragments received by the router are assembled into input packets; output packets are segmented into output fragments for transmission out of the router. Each field has columns that indicate the number of frames received and transmitted, frames per second (fps), the number of bytes received and transmitted, and bits per second (bps).</p> <ul style="list-style-type: none"> <li>• Bundle—Information for each active bundle link. <ul style="list-style-type: none"> <li>• Fragments: Input and Output—Total number and rate of fragments received and transmitted.</li> <li>• Packets: Input and Output—Total number and rate of packets received and transmitted.</li> <li>• Multilink class—(Multiclass MLPPP only) Information about multiclass links used in the multilink operation.</li> </ul> </li> <li>• Link—Information about links used in the multilink operation. <ul style="list-style-type: none"> <li>• Link name—Interface name of the link services IQ channel and state information (physical link up or down).</li> <li>• Input and Output—Total number and rate of fragments and packets received and transmitted.</li> </ul> </li> </ul>	<b>detail extensive</b>
NCP state	<p>(PPP) Network Control Protocol state.</p> <ul style="list-style-type: none"> <li>• Conf-ack-received—Acknowledgement was received.</li> <li>• Conf-ack-sent—Acknowledgement was sent.</li> <li>• Conf-req-sent—Request was sent.</li> <li>• Down—NCP negotiation is incomplete (not yet completed or has failed).</li> <li>• Not-configured—NCP is not configured on the interface.</li> <li>• Opened—NCP negotiation is successful.</li> </ul>	<b>detail extensive</b> none

**Table 7: show interfaces (Link Services IQ) Output Fields (Continued)**

Field Name	Field Description	Level of Output
Protocol	Protocol family configured on the logical interface.	<b>detail extensive</b> none
MTU	MTU size on the logical interface. If the MTU value is negotiated down to meet the MRRU requirement on the remote side, this value is marked Adjusted.	<b>detail extensive</b> none
Generation	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
Route Table	Routing table in which this address exists. For example, Route table:0 refers to inet.0.	<b>detail extensive</b>
Flags	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
Addresses, Flags	Information about the addresses configured on the logical interface. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
Destination	IP address of the remote side of the connection.	<b>detail extensive</b> none
Local	IP address of the logical interface.	<b>detail extensive</b> none
Broadcast	Broadcast address on the logical interface.	<b>detail extensive</b> none
Generation	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>

**MLPPP Bundle Interface**

**Table 7: show interfaces (Link Services IQ) Output Fields (Continued)**

Field Name	Field Description	Level of Output
Logical interface	Name of the logical interface.	All levels
Index	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive</b> none
SNMP ifIndex	Logical interface SNMP interface index number.	<b>detail extensive</b> none
Generation	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>
Flags	Information about the logical interface. Possible values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	All levels
SNMP-Traps	SNMP trap notifications are enabled.	All levels
Encapsulation	Encapsulation being used: PPP, Multilink PPP, or Multilink-FR.	All levels
Last flapped	Date, time, and how long ago the interface went from down to up. The format is Last flapped: <i>year-month-day hour:minute:second timezone (hour:minute:second ago)</i> . For example, Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago).	<b>detail extensive</b> none
Bandwidth	Speed at which the interface is running.	All levels
Bundle links Information	Information about the bundled links. <ul style="list-style-type: none"> <li>Active bundle links—Number of active links.</li> <li>Removed bundle links—Information about links used in the multilink operation.</li> <li>Disabled bundle links—Number of disabled links.</li> </ul>	<b>detail extensive</b> none

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Bundle options	<p>(Multilink Frame Relay end-to-end interfaces only)</p> <ul style="list-style-type: none"> <li>• MRRU—Configured size of the maximum received reconstructed unit (MRRU): 1500 through 4500 bytes. The default is 1504 bytes.</li> <li>• Drop timer period—Drop timeout value to provide a recovery mechanism if individual links in link services bundle drop one or more packets: 0 through 2000 milliseconds. Values under 5 ms are not recommended. The default setting is 0, which disables the timer.</li> <li>• Inner PPP Protocol field compression—Inner PPP protocol compression is enabled or disabled.</li> <li>• Sequence number format—Short sequence number header format (MLPPP only).</li> <li>• Fragmentation threshold—Configured fragmentation threshold: 64 through 16,320 bytes, in integer multiples of 64 bytes. The default setting is 0, which disables fragmentation.</li> <li>• Links needed to sustain bundle—Minimum number of links to sustain the bundle: 1 through 8.</li> <li>• Multilink classes—Number of multilink classes negotiated.</li> <li>• Link layer overhead—Percentage of bundle bandwidth to be set aside for link-layer overhead.</li> </ul>	<p><b>detail extensive</b> none</p>

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Bundle status (MLPPP)	<p>Information about bundle status:</p> <ul style="list-style-type: none"> <li>Received sequence number—Sequence number for received packets.</li> <li>Transmit sequence number—Sequence number for transmitted packets.</li> <li>Packet drops—Number and byte count of output packets that were dropped, rather than being encapsulated and sent out of the router as fragments. The packet drop counter is incremented if there is a temporary shortage of packet memory on the AS PIC, which causes packet fragmentation to fail.</li> <li>Fragment drops—Number and byte count of input fragments that were dropped, rather than being reassembled and handled by the router as packets. This counter also includes fragments that have been received successfully but had to be dropped because not all fragments that constituted a packet had been received. The fragment drop counter is incremented when a fragment received on constituent links is dropped. Drop fragments can be triggered by sequence ordering errors, duplicate fragments, timed-out fragments, and bad multilink headers.</li> <li>MRRU exceeded—Number of reassembled packets exceeding the MRRU. This counter is not implemented in this release.</li> <li>Fragment timeout—The drop timer expired while a fragment sequence number was outstanding. Occurs only if the drop timer is enabled. This timeout can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled.</li> <li>Missing sequence number—A gap was detected in the sequence numbers of fragments on a bundle.</li> <li>Out-of-order sequence number—Two frames with out-of-order sequence numbers occurred within a single link. This event indicates that an individual link within a bundle reordered traffic, making the multilink interface unable to correctly process the resulting stream.</li> </ul>	<p><b>detail extensive</b> none</p>

Table 7: show interfaces (Link Services IQ) Output Fields *(Continued)*

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"><li>• Out-of-range sequence number—A frame was received with an out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up.</li><li>• Packet data buffer overflow—Packet buffer memory is full. This overflow can occur when the aggregate data rate exceeds the physical link services IQ interface capacity.</li><li>• Fragment data buffer overflow—Fragment buffer memory is full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical link services IQ capacity.</li></ul>	

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Statistics	<p>Information about frames, bytes, and bits per second received and sent by the router. All references to traffic direction (input or output) are defined with respect to the router. Each field has columns that indicate the number of frames received and transmitted, frames per second (fps), the number of bytes received and transmitted, and bits per second (bps).</p> <p>The bundle, multilink, and network statistics are reported by the Packet Forwarding Engine (PFE). The Multi Link Detail statistics like fragments, non-fragments and LFI are reported by the PIC.</p> <p>However, the PFE reports an extra overhead of 2 bytes in the output when compared with the Multilink Detail Statistics. This is due to the service-cookie in the PFE which does the link demux for the ML header.</p> <p>The difference in the bytes received and transmitted from Network and Multilink interfaces and Multilink statistics for each member link is divided between the ML and the PPP headers. For example the header counter for a long sequence configuration would be as follows.</p> <ul style="list-style-type: none"> <li>• Input side - Total overhead = 6 bytes. <ul style="list-style-type: none"> <li>• ML: 4 bytes of ML header = 1 byte of Flag + 3 bytes of long sequence number.</li> <li>• PPP: 2 bytes of protocol field.</li> </ul> </li> <li>• Output side - Total overhead = 11 bytes. <ul style="list-style-type: none"> <li>• ML: 4 bytes of ML Header = 1 byte of Flag + 3 bytes of Long sequence number.</li> <li>• PPP: 5 bytes = 4 bytes of header + 1 byte of Idle flag.</li> <li>• 2 bytes of Service Cookie.</li> </ul> </li> <li>• Bundle—Information for each active bundle link.</li> <li>• Multilink: Input and Output—Total number and rate of multilink frames, bytes, and bits per second received and transmitted. It is a module connecting LSQ PIC and its member link. Multilink</li> </ul>	<b>extensive</b>

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
	<p>Input displays L2 fragments received from the member link to the LSQ PIC. Multilink Output displays the L2 fragments transmitted from LSQ PIC to the member links.</p> <ul style="list-style-type: none"> <li>• Network: Input and Output—Total number of network frames, bytes, and bits per second received and transmitted. It refers to the packets transmitted from an ingress interface to the PFE and then to the LSQ PIC. Network Input displays the L3 packets received from the LSQ PIC to the PFE. Network Output displays the L3 packets transmitted from PFE to LSQ PIC.</li> <li>• Link—Information about links used in the multilink operation.</li> <li>• Link name—The interface name of the link services IQ channel and state information (physical link <i>up</i> or <i>down</i>) and up time.</li> <li>• Input and Output—Total number and rate of frames, bytes, and bits per second received and transmitted.</li> </ul>	

Table 7: show interfaces (Link Services IQ) Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Multilink detail statistics	<p>Frames, bytes, and bits per second received and sent by the bundle. All references to traffic direction (input or output) are defined with respect to the router. Each field has columns that indicate the number of frames received and transmitted, frames per second (fps), the number of bytes received and transmitted, and bits per second (bps).</p> <p>The difference in the bytes received and transmitted from the bundle is divided between the ML and the PPP headers. For example the header counter for a long sequence configuration would be as follows:</p> <ul style="list-style-type: none"> <li>• Input side - Total overhead = 6 bytes. <ul style="list-style-type: none"> <li>• ML: 4 bytes of ML header = 1 byte of Flag + 3 bytes of long sequence number.</li> <li>• PPP: 2 bytes of protocol field.</li> </ul> </li> <li>• Output side - Total overhead = 9 bytes. <ul style="list-style-type: none"> <li>• ML: 4 bytes of ML Header = 1 byte of Flag + 3 bytes of Long sequence number.</li> <li>• PPP: 5 bytes = 4 bytes of header + 1 byte of Idle flag.</li> </ul> </li> <li>• Bundle—Information for the bundle link. <ul style="list-style-type: none"> <li>• Fragments: Input and Output—Total number and rate of multilink fragments received and transmitted.</li> <li>• Non-fragments: Input and Output—Total number and rate of nonfragmented multilink frames received and transmitted.</li> <li>• LFI: Input and Output—Total number and rate of link fragmented and interleaved frames and bytes.</li> </ul> </li> </ul>	<b>extensive</b>
Protocol	Protocol family configured on the logical interface.	<b>detail extensive</b> none
MTU	MTU size on the logical interface. If the MTU value is negotiated down to meet the MRRU requirement on the remote side, this value is marked <i>Adjusted</i> .	<b>detail extensive</b> none

**Table 7: show interfaces (Link Services IQ) Output Fields (Continued)**

Field Name	Field Description	Level of Output
Generation	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
Route Table	Routing table in which this address exists. For example, Route table:0 refers to inet.0.	<b>detail extensive</b>
Addresses, Flags	Information about the addresses configured on the logical interface. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
Destination	IP address of the remote side of the connection.	<b>detail extensive</b> none
Local	IP address of the logical interface.	<b>detail extensive</b> none
Broadcast	Broadcast address on the logical interface.	<b>detail extensive</b> none
Generation	Unique number for use by Juniper Networks technical support.	<b>detail extensive</b>

## Sample Output

### show interfaces extensive (MLPPP on Link Services IQ)

```

user@host> show interfaces lsq-0/2/0 extensive
Physical interface: lsq-0/2/0, Enabled, Physical link is Up
  Interface index: 140, SNMP ifIndex: 25, Generation: 23
  Link-level type: LinkService, MTU: 1504
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Last flapped   : 2005-06-02 08:54:36 PDT (00:05:45 ago)
  Statistics last cleared: Never

```

## Traffic statistics:

Input bytes :	8872424	229080 bps
Output bytes :	9856960	234448 bps
Input packets:	38202	117 pps
Output packets:	39453	117 pps

## Frame exceptions:

Oversized frames	0
Errored input frames	0
Input on disabled link/bundle	0
Output for disabled link/bundle	0
Queuing drops	0

## Buffering exceptions:

Packet data buffer overflow	0
Fragment data buffer overflow	0

## Assembly exceptions:

Fragment timeout	0
Missing sequence number	0
Out-of-order sequence number	0
Out-of-range sequence number	0

## Hardware errors (sticky):

Data memory error	0
Control memory error	0

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 be	0	0	0
1 ef	0	0	0
2 af	0	0	0
3 nc	0	0	0

Logical interface lsq-0/2/0.0 (Index 66) (SNMP ifIndex 26) (Generation 5)

Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-PPP

Bandwidth: 256kbps

## Bundle options:

MRRU	1504
Drop timer period	2000
Sequence number format	long (24 bits)
Fragmentation threshold	0
Links needed to sustain bundle	1
Multilink classes	0
Link layer overhead	4.0 %

## Bundle status:

Remote MRRU	1500
Received sequence number	0x0
Transmit sequence number	0x0
Packet drops	0 (0 bytes)

```

Fragment drops          9 (1401 bytes)
MRRU exceeded           0
Fragment timeout        0
Missing sequence number 0
Out-of-order sequence number 4
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Statistics      Frames      fps      Bytes      bps
Bundle:
Multilink:
  Input :      79827      239      9593009      232288
  Output:      77533      234      9811743      238056
Network:
  Input :      38202      117      8872424      229080
  Output:      39453      117      9856960      234448
Link:
ds-1/0/2:1:1.0 <-- up
  Input :      1114       87      180183      113608
  Output:      1577      118      199215      119064
ds-1/0/2:1:2.0 <-- down
  Input :      1941      152      187948      118680
  Output:      1574      116      199494      118992
Protocol inet, MTU: 1500 [Adjusted]
  Flags: User-MTU, MTU-Protocol-Adjusted
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 10.74.11/24, Local: 10.74.11.10
Protocol iso, MTU: 1500 [Adjusted]
  Flags: User-MTU, MTU-Protocol-Adjusted
Protocol mpls, MTU: 1488 [Adjusted], Maximum labels: 3
  Flags: User-MTU, MTU-Protocol-Adjusted

```

### show interfaces extensive (Multiclass MLPPP on Link Services IQ)

```

user@host> show interfaces extensive lsq-0/2/0
Physical interface: lsq-0/2/0, Enabled, Physical link is Up
Interface index: 140, SNMP ifIndex: 25, Generation: 23
Link-level type: LinkService, MTU: 1504
Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps
Last flapped   : 2005-06-02 08:54:36 PDT (00:02:25 ago)

```

Statistics last cleared: Never

Traffic statistics:

Input bytes :	3474024	223704 bps
Output bytes :	4193992	233888 bps
Input packets:	15809	116 pps
Output packets:	16788	117 pps

Frame exceptions:

Oversized frames	0
Errored input frames	0
Input on disabled link/bundle	0
Output for disabled link/bundle	0
Queuing drops	0

Buffering exceptions:

Packet data buffer overflow	0
Fragment data buffer overflow	0

Assembly exceptions:

Fragment timeout	0
Missing sequence number	0
Out-of-order sequence number	0
Out-of-range sequence number	0

Hardware errors (sticky):

Data memory error	0
Control memory error	0

Queue counters:	Queued packets	Transmitted packets	Dropped packets
0 be	0	0	0
1 ef	0	0	0
2 af	0	0	0
3 nc	0	0	0

Logical interface lsq-0/2/0.0 (Index 66) (SNMP ifIndex 26) (Generation 5)

Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-PPP

Bandwidth: 256kbps

Bundle options:

MRRU	1504
Drop timer period	2000
Sequence number format	long (24 bits)
Fragmentation threshold	0
Links needed to sustain bundle	1
Multilink classes	2
Link layer overhead	4.0 %

Multilink class 0 status:

Received sequence number	0x4c38
Transmit sequence number	0x4890
Packet drops	0 (0 bytes)

```

Fragment drops          2551 (397084 bytes)
MRRU exceeded           0
Fragment timeout        52
Missing sequence number 0
Out-of-order sequence number 953
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Multilink class 1 status:
Received sequence number 0xffffffff
Transmit sequence number 0x3710
Packet drops             0 (0 bytes)
Fragment drops           0 (0 bytes)
MRRU exceeded            0
Fragment timeout          0
Missing sequence number  0
Out-of-order sequence number 0
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Statistics      Frames      fps      Bytes      bps
Bundle:
Fragments:
  Input :      33719      239      4041763      231632
  Output:      32371      234      4096545      237488
Packets:
  Input :      15809      116      3474024      223704
  Output:      16788      117      4193992      233888
Multilink class 0:
Fragments:
  Input :      19331       0         0         0
  Output:       0         0         0         0
Packets:
  Input :      2064       0         0         0
  Output:      1864       0         0         0
Multilink class 1:
Fragments:
  Input :       0         0         0         0
  Output:     14096       0         0         0
Packets:
  Input :      14096       0         0         0
  Output:       0         0         0         0
Link:

```

```

ds-1/0/2:1:1.0, Enabled, Physical link is Up
  Input :          20972          151          2030595          118080
  Output:          16184          116          2048468          118488
ds-1/0/2:1:2.0, Enabled, Physical link is Up
  Input :          12747           88          2011168          113552
  Output:          16187          118          2048077          119000
Protocol inet, MTU: 1500 [Adjusted], Generation: 14, Route table: 0
Flags: User-MTU, MTU-Protocol-Adjusted
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 10.0.1.0/30, Local: 10.0.1.2, Broadcast: Unspecified,
  Generation: 18

```

### show interfaces extensive (MLPPP on Link Services IQ Bundle)

```

user@host> show interfaces lsq-7/1/0.0 extensive
Logical interface lsq-7/1/0.0 (Index 88) (SNMP ifIndex 114) (Generation 188)
  Flags: Point-To-Point SNMP-Traps 0x4000 Encapsulation: Multilink-FR
  Last flapped: Never
  Bandwidth: 256kbps
  Bundle links information:
    Active bundle links      2
    Removed bundle links     0
    Disabled bundle links    0
  Bundle options:
    MRRU                      1504
    Drop timer period         1500
    Inner PPP Protocol field compression enabled
    Sequence number format    short (12 bits)
    Fragmentation threshold   0
    Links needed to sustain bundle 1
    Multilink classes         0
    Link layer overhead       4.0 %
  Bundle status:
    Received sequence number   0xb74
    Transmit sequence number   0xb74
    Packet drops               0 (0 bytes)
    Fragment drops             0 (0 bytes)
    MRRU exceeded              0
    Fragment timeout           0
    Missing sequence number    0
    Out-of-order sequence number 0

```

```

Out-of-range sequence number    0
Packet data buffer overflow      0
Fragment data buffer overflow    0
Statistics      Frames      fps      Bytes      bps
Bundle:
Multilink:
  Input :      315381      0      42757818      0
  Output:      315381      0      43388580      0
Network:
  Input :      315381      0      40952064      0
  Output:      315381      0      40952064      0
Link:
ds-6/0/0:1:1.0
  Up time: Up since boot
  Input :      63794      0      25146728      0
  Output:      63778      0      25273164      0
ds-6/0/0:1:2.0
  Up time: Up since boot
  Input :      251587      0      17611090      0
  Output:      251603      0      18115416      0
Multilink detail statistics:
Bundle:
Fragments:
  Input :      0      0      0      0
  Output:      0      0      0      0
Non-fragments:
  Input :      293748      0      19387368      0
  Output:      293748      0      20562360      0
LFI:
  Input :      21633      0      22152192      0
  Output:      21633      0      22325256      0
Protocol inet, MTU: 1500, Generation: 204, Route table: 0
Addresses, Flags: Is-Preferred Is-Primary
  Destination: 10.0.1.0/30, Local: 10.0.1.2, Broadcast:
Unspecified, Generation: 214

```

### show interfaces extensive (MFR on Link Services IQ Bundle)

```

user@host> show interfaces lsq-1/0/0:0 extensive
Physical interface: lsq-1/0/0:0, Enabled, Physical link is Up

```

```

Interface index: 179, SNMP ifIndex: 746, Generation: 182
Link-level type: Multilink-FR-UNI-NNI, MTU: 1508
Device flags   : Present Running
Interface flags: Point-To-Point SNMP-Traps Internal: 0x4000
Last flapped   : 2010-11-15 01:11:00 PST (00:31:58 ago)
Statistics last cleared: Never
Hold-times     : Up 0 ms, Down 0 ms
Multilink Frame Relay UNI NNI bundle options:
  Device type           DCE
  MRRU                  1508
  Bandwidth              1536kbps
  Fragmentation threshold 0
  Red differential delay limit 120
  Yellow differential delay limit 72
  Red differential delay action Remove link
  Reassembly drop timer  65535
  Links needed to sustain bundle 1
  Link layer overhead    4.0 %
  LIP Hello timer        10
    Acknowledgement timer 4
    Acknowledgement retries 2
  Bundle class           A
  LMI type                Consortium
    T391 LIV polling timer 10
    T392 polling verification timer 15
    N391 full status polling count 6
    N392 error threshold 3
    N393 monitored event count 4
Consortium LMI settings: n392dce 3, n393dce 4, t392dce 15 seconds
LMI statistics:
  Input : 188 (last seen 00:00:01 ago)
  Output: 189 (last sent 00:00:01 ago)
DTE statistics:
  Enquiries sent           : 0
  Full enquiries sent      : 0
  Enquiry responses received : 0
  Full enquiry responses received : 0
DCE statistics:
  Enquiries received       : 157
  Full enquiries received  : 31
  Enquiry responses sent   : 158
  Full enquiry responses sent : 31
Common statistics:

```

```

Unknown messages received      : 0
Asynchronous updates received  : 0
Out-of-sequence packets received : 0
Keepalive responses timedout    : 0
Traffic statistics:
Input  bytes :                0                0 bps
Output bytes :                0                0 bps
Input  packets:              0                0 pps
Output packets:              0                0 pps
IPv6 transit statistics:
Input  bytes :                0
Output bytes :                0
Input  packets:              0
Output packets:              0
Multilink Frame Relay UNI NNI bundle errors:
Packet drops                0 (0 bytes)
Fragment drops              0 (0 bytes)
MRRU exceeded               0
Exception events            0
Multilink Frame Relay UNI NNI bundle statistics:
              Frames      fps      Bytes      bps

Multilink:
  Input :          0        0          0        0
  Output:          0        0          0        0
Network:
  Input :          0        0          0        0
  Output:          0        0          0        0
Multilink Frame Relay UNI NNI bundle links information:
Active bundle links      1
Removed bundle links     0
Disabled bundle links    0
Multilink Frame Relay UNI NNI active bundle links statistics:
              Frames      fps      Bytes      bps
t1-7/0/0:1:3.0
Up time: 00:31:24
Input :          0        0          0        0
Output:          0        0          0        0
Current differential delay  0.0 ms
Recent high differential delay 0.0 ms
Times over red diff delay  0
Times over yellow diff delay 0
LIP:add_lnk lnk_ack lnk_rej  hello hel_ack lnk_rem rem_ack

```

```

Rcv:      2      2      0      0      189      0      0
Xmt:      2      1      0      189      0      0      0

```

Logical interface lsq-1/0/0:2.0 (Index 77) (SNMP ifIndex 751) (Generation 142)

Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-FR-UNI-NNI

Last flapped: 2010-11-15 01:11:40 PST (00:31:18 ago)

Bundle status:

```

Received sequence number      0xffff
Transmit sequence number      0x0
Packet drops                   0 (0 bytes)
Fragment drops                 0 (0 bytes)
MRRU exceeded                  0
Fragment timeout               0
Missing sequence number        0
Out-of-order sequence number   0
Out-of-range sequence number   0
Packet data buffer overflow    0
Fragment data buffer overflow  0

```

Statistics	Frames	fps	Bytes	bps
------------	--------	-----	-------	-----

Bundle:

Multilink:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Network:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Link:

t1-7/0/0:1:3.0

Up time: 00:31:24

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Multilink detail statistics:

Bundle:

Fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Non-fragments:

Input :	0	0	0	0
---------	---	---	---	---

Output:	0	0	0	0
---------	---	---	---	---

Protocol inet, MTU: 1500, Generation: 153, Route table: 0

Flags: Sendbcst-pkt-to-re

Addresses, Flags: Is-Preferred Is-Primary

Destination: 10.0.1.8/30, Local: 10.0.1.9, Broadcast: Unspecified, Generation: 154

```

DLCI 12
  Flags: Active
  Total down time: 00:00:32 sec, Last down: 00:31:50 ago
  Traffic statistics:
    Input  bytes :           0
    Output bytes :           0
    Input  packets:           0
    Output packets:           0
  DLCI statistics:
    Active DLCI  :1  Inactive DLCI  :0

```

### show interfaces extensive (Multiclass MLPPP on Link Services IQ)

```

user@host> show interfaces extensive lsq-0/2/0
Physical interface: lsq-0/2/0, Enabled, Physical link is Up
  Interface index: 140, SNMP ifIndex: 25, Generation: 23
  Link-level type: LinkService, MTU: 1504
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Last flapped   : 2005-06-02 08:54:36 PDT (00:02:25 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input  bytes :           3474024           223704 bps
    Output bytes :           4193992           233888 bps
    Input  packets:           15809             116 pps
    Output packets:           16788             117 pps
  Frame exceptions:
    Oversized frames           0
    Errored input frames       0
    Input on disabled link/bundle 0
    Output for disabled link/bundle 0
    Queuing drops              0
  Buffering exceptions:
    Packet data buffer overflow 0
    Fragment data buffer overflow 0
  Assembly exceptions:
    Fragment timeout           0
    Missing sequence number     0
    Out-of-order sequence number 0
    Out-of-range sequence number 0
  Hardware errors (sticky):

```

```

Data memory error          0
Control memory error       0
Queue counters:            Queued packets  Transmitted packets  Dropped packets
0 be                        0              0              0
1 ef                        0              0              0
2 af                        0              0              0
3 nc                        0              0              0
Logical interface lsq-0/2/0.0 (Index 66) (SNMP ifIndex 26) (Generation 5)
Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-PPP
Bandwidth: 256kbps
Bundle options:
MRRU                        1504
Drop timer period          2000
Sequence number format     long (24 bits)
Fragmentation threshold    0
Links needed to sustain bundle 1
Multilink classes          2
Link layer overhead        4.0 %
Multilink class 0 status:
Received sequence number    0x4c38
Transmit sequence number    0x4890
Packet drops                0 (0 bytes)
Fragment drops              2551 (397084 bytes)
MRRU exceeded              0
Fragment timeout            52
Missing sequence number     0
Out-of-order sequence number 953
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Multilink class 1 status:
Received sequence number    0xffffffff
Transmit sequence number    0x3710
Packet drops                0 (0 bytes)
Fragment drops              0 (0 bytes)
MRRU exceeded              0
Fragment timeout            0
Missing sequence number     0
Out-of-order sequence number 0
Out-of-range sequence number 0
Packet data buffer overflow 0
Fragment data buffer overflow 0
Statistics      Frames      fps      Bytes      bps

```

```

Bundle:
  Fragments:
    Input :      33719      239      4041763      231632
    Output:      32371      234      4096545      237488
  Packets:
    Input :      15809      116      3474024      223704
    Output:      16788      117      4193992      233888
Multilink class 0:
  Fragments:
    Input :      19331         0         0         0
    Output:         0         0         0         0
  Packets:
    Input :      2064         0         0         0
    Output:      1864         0         0         0
Multilink class 1:
  Fragments:
    Input :         0         0         0         0
    Output:      14096         0         0         0
  Packets:
    Input :      14096         0         0         0
    Output:         0         0         0         0
Link:
  ds-1/0/2:1:1.0, Enabled, Physical link is Up
    Input :      20972      151      2030595      118080
    Output:      16184      116      2048468      118488
  ds-1/0/2:1:2.0, Enabled, Physical link is Up
    Input :      12747       88      2011168      113552
    Output:      16187      118      2048077      119000
Protocol inet, MTU: 1500 [Adjusted], Generation: 14, Route table: 0
  Flags: User-MTU, MTU-Protocol-Adjusted
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 10.0.1.0/30, Local: 10.0.1.2, Broadcast: Unspecified,
    Generation: 18

```

## Release Information

Command introduced before Junos OS Release 7.4.

l2-statistics option introduced with Junos OS Release 12.1.

## RELATED DOCUMENTATION

[Link and Multilink Services Overview | 2](#)

[Multilink Interfaces on Channelized MICs Overview | 7](#)

# show interfaces (Multilink Services)

## IN THIS SECTION

- [Syntax | 272](#)
- [Description | 272](#)
- [Options | 273](#)
- [Required Privilege Level | 273](#)
- [Output Fields | 273](#)
- [Sample Output | 282](#)
- [Release Information | 284](#)

## Syntax

```
show interfaces ml-fpc/pic/port  
<brief | detail | extensive | terse>  
<descriptions>  
<media>  
<snmp-index>  
<statistics>
```

## Description

(M Series and T Series routers only) Display status information about the specified multilink services interface.

## Options

<b>ml-<i>fpc/pic/port</i></b>	Display standard status information about the specified multilink services interface.
<b>brief   detail   extensive   terse</b>	(Optional) Display the specified level of output.
<b>descriptions</b>	(Optional) Display interface description strings.
<b>media</b>	(Optional) Display media-specific information about network interfaces.
<b>snmp-index</b>	(Optional) Display the SNMP index of interface.
<b>statistics</b>	(Optional) Display static interface statistics.

## Required Privilege Level

view

## Output Fields

[Table 8 on page 273](#) lists the output fields for the `show interfaces` (Multilink Services) command. Output fields are listed in the approximate order in which they appear.

**Table 8: Multilink Services show interfaces Output Fields**

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical interface</b>	Name of the physical interface.	All levels
<b>Enabled</b>	State of the interface. Possible values are described in the “Enabled Field” section under <i>Common Output Fields Description</i> .	All levels

Table 8: Multilink Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Interface index</b>	Physical interface's index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Link-level type</b>	Encapsulation being used on the physical interface: <b>Multilink</b> .	All levels
<b>MTU</b>	MTU size on the physical interface.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under <i>Common Output Fields Description</i> .	All levels
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: <i>year-month-day hour.minute.second timezone (hour.minute.second ago)</i></b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive</b> none
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received and transmitted on the physical interface. All references to traffic direction (input or output) are defined with respect to the router. Input fragments received by the router are assembled into input packets; output packets are segmented into output fragments for transmission out of the router.	<b>detail extensive</b>

Table 8: Multilink Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Frame exceptions</b>	<p>Information about framing exceptions. Includes events recorded under <b>Exception Events</b> for each logical interface:</p> <ul style="list-style-type: none"> <li>• <b>Oversized frames</b>—Number of frames received that exceed maximum frame length. Maximum length is 4500 Kb (kilobits).</li> <li>• <b>Errored input frames</b>—Number of input frame errors.</li> <li>• <b>Input on disabled link/bundle</b>—Number of frames received on disabled links. These can result either from an inconsistent configuration, or from a bundle or link being brought up or down with traffic actively flowing through it.</li> <li>• <b>Output for disabled link/bundle</b>—Number of frames sent for a disabled or unavailable link. These can result either from an inconsistent configuration, or from a bundle being brought up or down with traffic actively flowing through it.</li> <li>• <b>Queuing drops</b>—Total number of packets dropped before traffic enters the link services IQ interface. Indicates that the interface is becoming oversubscribed.</li> </ul>	<b>extensive</b>
<b>Buffering exceptions</b>	<p>Information about buffering exceptions. Includes events recorded under <b>Exception Events</b> for each logical interface:</p> <ul style="list-style-type: none"> <li>• <b>Packet data buffer overflow</b>—Packet buffer memory is full. This overflow can occur when the aggregate data rate exceeds the physical multilink services interface capacity.</li> <li>• <b>Fragment data buffer overflow</b>—Fragment buffer memory is full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical multilink services interface capacity. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	<b>extensive</b>

Table 8: Multilink Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Assembly exceptions</b>	<p>Information about assembly exceptions. Includes events recorded under <b>Exception Events</b> for each logical interface.</p> <p>An assembly exception does not necessarily indicate an operational problem with the Multilink PIC itself. If multilink-encapsulated traffic is dropped or reordered after a sequence number has been assigned, the assembling multilink interface records one or more exception events. The multilink interface can drop multilink-encapsulated fragments itself as a result. Any multilink packets or fragments dropped by the Multilink PIC itself result in packet or fragment drop counts on individual logical interfaces. If the logical interface drop counts are zero, but exception events are seen, the most likely cause is a problem with the individual link interfaces. Even if the logical interface fragment drop counts are nonzero, excess differential delay or traffic losses on individual interfaces can be the root cause.</p> <ul style="list-style-type: none"> <li>• <b>Fragment timeout</b>—Drop-timer expired while a fragment sequence number was outstanding. Occurs only if drop-timer is enabled. This can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled. These events do not necessarily indicate any problem with the operation of the Multilink PIC itself. If one or more individual links drop traffic, these events can occur. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Missing sequence number</b>—A gap was detected in the sequence numbers of fragments on a bundle. These events do not necessarily indicate any problem with the operation of the Multilink PIC itself. If one or more individual links drop traffic, these events can occur. Check the logical interface exception event counters to determine which bundle is responsible.</li> <li>• <b>Out-of-order sequence number</b>—Two frames with out-of-order sequence numbers occurred within a single link. This event indicates that an individual link within a bundle reordered traffic, making the multilink interface unable to correctly process the resulting stream. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	<b>extensive</b>

Table 8: Multilink Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"> <li>• <b>Out-of-range sequence number</b>—Frame was received with out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost, or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up. Check the logical interface exception event counters to determine which bundle is responsible.</li> </ul>	
<b>Hardware errors</b>	<p>Information about hardware errors:</p> <ul style="list-style-type: none"> <li>• <b>Data memory error</b>—A memory error was detected on the interface DRAM. Indicates possible hardware failure. Contact Juniper Networks technical support.</li> <li>• <b>Control memory error</b>—A memory error was detected on the interface DRAM. Indicates possible hardware failure. Contact Juniper Networks technical support.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Logical interface name.	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive</b> none
<b>SNMP ifIndex</b>	SNMP interface index number.	<b>detail extensive</b> none
<b>Encapsulation</b>	Encapsulation being used: PPP or Multilink PPP.	All levels
<b>Bandwidth</b>	Speed at which the interface is running.	All levels
<b>Flags</b>	Logical interface flags. Possible values are described in the “Logical Interface Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none

Table 8: Multilink Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Bundle options</b>	<p>Information about configured bundle options:</p> <ul style="list-style-type: none"> <li>• <b>MRRU</b>—Configured size of the MRRU (maximum received reconstructed unit). It can be <b>1500</b> to <b>4500</b> bytes.</li> <li>• <b>Drop timer period</b>—Configured drop timeout period. It can be <b>0</b> through <b>127</b> ms. A value of <b>0</b> disables the timer. The default setting is <b>0</b>.</li> <li>• <b>Sequence number format</b>—Configured size of the sequence header: <b>12</b> or <b>24</b> bits. The default is <b>24</b> bits.</li> <li>• <b>Fragmentation threshold</b>—Configured fragmentation threshold. A value of 0 results in no fragmentation. Nonzero values can be <b>128</b> through <b>16,320</b> bytes, in integer multiples of <b>64</b> bytes. The default is <b>0</b>.</li> <li>• <b>Links needed to sustain bundle</b>—Minimum number of links to sustain the bundle: <b>1</b> through <b>8</b>.</li> </ul>	<b>detail extensive</b> none

Table 8: Multilink Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Bundle status (MLPPP) or Multilink class status (MC-MLPPP)</b>	<p>Information about bundle status:</p> <ul style="list-style-type: none"> <li>• <b>Remote MRRU</b>—MRRU value received from remote peer. If negotiation has not been initiated, the default value is displayed.</li> <li>• <b>Received sequence number</b>—Sequence number for received packets.</li> <li>• <b>Transmitted sequence number</b>—Sequence number for transmitted packets.</li> <li>• <b>Packet drops</b>—Number and byte count of output packets that were dropped, rather than being encapsulated and sent out of the router as fragments. The packet drop counter is incremented if there is a temporary shortage of packet memory on the AS PIC, which causes packet fragmentation to fail.</li> <li>• <b>Fragment drops</b>—Number and byte count of input fragments that were dropped, rather than being reassembled and handled by the router as packets. This counter also includes fragments that have been received successfully but had to be dropped because not all fragments that constituted a packet had been received. The fragment drop counter is incremented when a fragment received on constituent links is dropped. Drop fragments can be triggered by sequence ordering errors, duplicate fragments, timed-out fragments, and bad multilink headers.</li> <li>• <b>MRRU exceeded</b>—Number of reassembled packets exceeding the MRRU. This counter is not implemented in this release.</li> <li>• <b>Fragment timeout</b>—Drop timer expired while a fragment sequence number was outstanding. Occurs only if the drop timer is enabled. This timeout can occur if the differential delay across the links in a bundle exceeds the drop-timer setting, or if a multilink packet is lost in transit while the drop timer is enabled.</li> <li>• <b>Missing sequence number</b>—Gap detected in the sequence numbers of fragments on a bundle.</li> <li>• <b>Out-of-order sequence number</b>—Two frames with out-of-order sequence numbers within a single link. This event indicates that an individual link within a bundle reordered traffic, making the multilink interface unable to correctly process the resulting stream.</li> </ul>	<b>detail extensive</b>

Table 8: Multilink Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
	<ul style="list-style-type: none"> <li>• <b>Out-of-range sequence number</b>—Frame with an out-of-range sequence number. These events can occur when a large amount of multilink-encapsulated traffic is lost or the multilink peer is reset, so that a large jump in sequence numbers results. A small number of these events can occur when the far end of a bundle is taken down or brought up.</li> <li>• <b>Packet data buffer overflow</b>—Packet buffer memory full. This overflow can occur when the aggregate data rate exceeds the physical link services IQ interface capacity.</li> <li>• <b>Fragment data buffer overflow</b>—Fragment buffer memory full. This overflow can occur when excessive differential delay is experienced across the links within a single bundle, or when the aggregate data rate exceeds the physical link services IQ capacity.</li> </ul>	
<b>Remote MRRU</b>	MRRU value received from remote peer. If negotiation has not been initiated, the default value is displayed.	<b>detail extensive</b> none
<b>Bundle errors</b>	<p>Information about bundle errors:</p> <ul style="list-style-type: none"> <li>• <b>Packet drops</b>—Number and byte count of output packets dropped, rather than being encapsulated and sent out of the router as fragments.</li> <li>• <b>Fragment drops</b>—Number and byte count of input fragments dropped, rather than being reassembled and handled by the router as packets.</li> <li>• <b>MRRU exceeded</b>—Number of reassembled packets exceeding the MRRU.</li> <li>• <b>Exception events</b>—Number of exceptional events encountered while handling traffic on the bundle, other than MRRU exceeded errors. These events are categorized under the physical interface: <b>Frame exceptions</b>, <b>Buffering exceptions</b>, and <b>Fragment exceptions</b>. Exception events do not necessarily indicate that the multilink interface is not operating properly. Individual link failures can produce exceptional events.</li> </ul>	<b>detail extensive</b>

Table 8: Multilink Services show interfaces Output Fields (*Continued*)

Field Name	Field Description	Level of Output
<b>Statistics</b>	<p>Information about fragments and packets received and sent by the router. All references to traffic direction (input or output) are defined with respect to the router. Input fragments received by the router are assembled into input packets; output packets are segmented into output fragments for transmission out of the router.</p> <ul style="list-style-type: none"> <li>• <b>Bundle</b>—Information about bundles.</li> <li>• <b>Link</b>—Information about links used in the multilink operation.</li> </ul>	<b>detail extensive</b>
<b>Protocol</b>	Protocol family configured on the logical interface.	<b>detail extensive</b> none
<b>MTU</b>	MTU size on the logical interface. If the MTU value is negotiated down to meet the MRRU requirement on the remote side, this value is marked <b>Adjusted</b> .	<b>detail extensive</b> none
<b>Flags</b>	Information about the protocol family flags. Possible values are described in the “Family Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route table</b>	Route table in which this address exists. For example, <b>Route table:0</b> refers to inet.0.	<b>detail extensive</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under <i>Common Output Fields Description</i> .	<b>detail extensive</b> none
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive</b> none
<b>Local</b>	IP address of the logical interface.	<b>detail extensive</b> none

Table 8: Multilink Services show interfaces Output Fields *(Continued)*

Field Name	Field Description	Level of Output
<b>Broadcast</b>	Broadcast address on the logical interface.	<b>detail extensive</b> none
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

## Sample Output

### show interfaces extensive (Multilink Services)

```

user@host> show interfaces ml-0/3/0 extensive
Physical interface: ml-0/3/0, Enabled, Physical link is Up
  Interface index: 273, SNMP ifIndex: 196, Generation: 535
  Link-level type: Multilink, MTU: 4474
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps
  Last flapped   : 2002-04-25 14:21:34 PDT (21:06:59 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes   :           3535           0 bps
    Output bytes  :           4135           0 bps
    Input packets :            87           0 pps
    Output packets:           103           0 pps
  Frame exceptions:
    Oversized frames           0
    Errored input frames       0
    Input on disabled link/bundle 0
    Output for disabled link/bundle 0
    Queuing drops              0
  Buffering exceptions:
    Packet data buffer overflow 0
    Fragment data buffer overflow 0
  Assembly exceptions:
    Fragment timeout           0
    Missing sequence number     0

```

```

Out-of-order sequence number      0
Out-of-range sequence number      0
Hardware errors (sticky):
  Data memory error                0
  Control memory error             0

Logical interface ml-0/3/0.1 (Index 110) (SNMP ifIndex 674)
(Generation 402)
  Flags: Point-To-Point SNMP-Traps Encapsulation: Multilink-PPP
  Bandwidth: 12288kbps
  Bundle options:
    MRRU                            1524
    Drop timer period                0
    Sequence number format          long (24 bits)
    Fragmentation threshold         0
    Links needed to sustain bundle  1
  Bundle status:
    Remote MRRU                     1500
    Received sequence number        0x19ec14
    Transmit sequence number        0x38cfa8
    Packet drops                    0 (0 bytes)
    Fragment drops                  0 (0 bytes)
    MRRU exceeded                   0
    Fragment timeout                 0
    Missing sequence number         0
    Out-of-order sequence number    0
    Out-of-range sequence number    0
    Packet data buffer overflow     0
    Fragment data buffer overflow   0
  Bundle errors:
    Packet drops                    0 (0 bytes)
    Fragment drops                  0 (0 bytes)
    MRRU exceeded                   0
    Exception events                0
  Statistics      Frames      fps      Bytes      bps
Bundle:
  Fragments:
    Input :        5          0        450          0
    Output:        6          0        499          0
  Packets:
    Input :        5          0        450          0
    Output:       12          0       1202          0
Link:

```

```

t1-0/1/0:11.0
  Input :          1          0          90          0
  Output:          1          0          92          0
t1-0/1/0:12.0
  Input :          1          0          90          0
  Output:          1          0          92          0
t1-0/1/0:10.0
  Input :          1          0          90          0
  Output:          1          0          92          0
t1-0/1/0:14.0
  Input :          1          0          90          0
  Output:          1          0          92          0
t1-0/1/0:13.0
  Input :          1          0          90          0
  Output:          1          0          92          0
t1-0/1/0:8.0
  Input :          0          0          0          0
  Output:          0          0          0          0
t1-0/1/0:9.0
  Input :          0          0          0          0
  Output:          0          0          0          0
Protocol inet, MTU: 1500 [Adjusted], Flags: Generation: 752 Route table: 0
  Addresses, Flags: Is-Preferred Is-Primary, MTU-Protocol-Adjusted
    Destination: 198.51.100.2, Local: 198.51.100.1, Broadcast: Unspecified,
    Generation: 1090
Protocol iso, MTU: 1500 [Adjusted], Flags: Is-Primary,
Generation: 753 Route table: 0

```

## Release Information

Command introduced before Junos OS Release 7.4.