


## Removing a JCS 1200 Switch Module or Module Filler

---

Figure 1 on page 1 shows how to remove and install a switch module.

**Figure 1: Removing and Installing a JCS 1200 Switch Module**

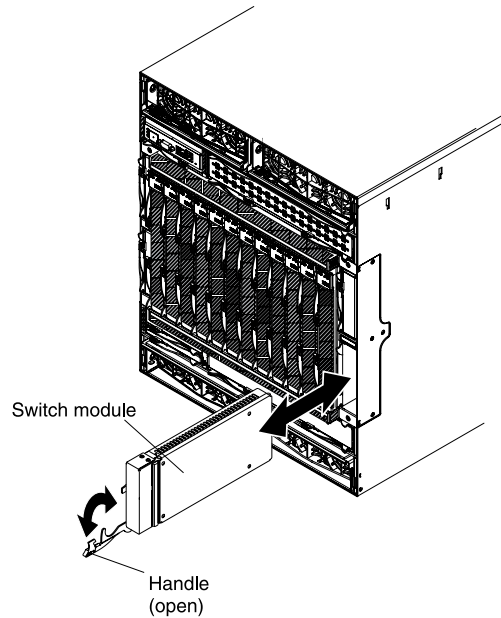

To remove a switch module or module filler (see Figure 1 on page 1):

1. Attach an electrostatic discharge (ESD) grounding strap to your bare wrist and connect the strap to one of the ESD points on the chassis.
2. Pull the release handle to the open position. The module moves out of the bay approximately 0.25 in. (0.6 cm).
3. Slide the switch module out of the bay.

- Related Topics**
- Preventing Electrostatic Discharge Damage to the JCS 1200 Platform
  - Installing a JCS 1200 Switch Module or Module Filler
  - JCS 1200 Switch Module Description

