

Connecting an EX-series Switch to a Network for Out-of-Band Management

EX-series switches have an out-of-band management port with an RJ-45 connector on the rear panel. If you need to monitor and manage an EX-series switch using a dedicated management channel, you can use the out-of-band management port to connect the EX-series switch to the management device.

Ensure you have an Ethernet cable with an RJ-45 connector available. One such cable is provided with the switch. Figure 3 on page 2 shows the RJ-45 connector of the Ethernet cable supplied with the switch.

To connect an EX-series switch to a network for out-of-band management (see Figure 1 on page 1 and Figure 2 on page 1):

1. Connect one end of the Ethernet cable to the management port (labelled MGMT) on the rear panel of the EX-series switch.
2. Connect the other end of the Ethernet cable to the network device.

Figure 1: Connecting an EX 3200 Switch to a Network for Out-of-Band Management

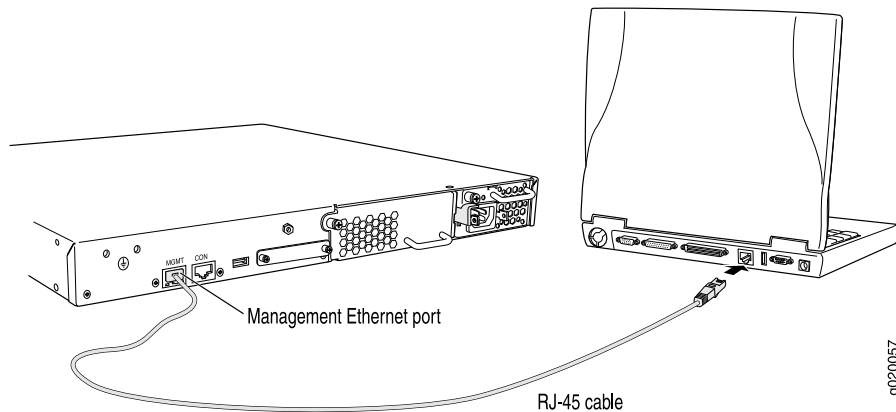


Figure 2: Connecting an EX 4200 Switch to a Network for Out-of-Band Management


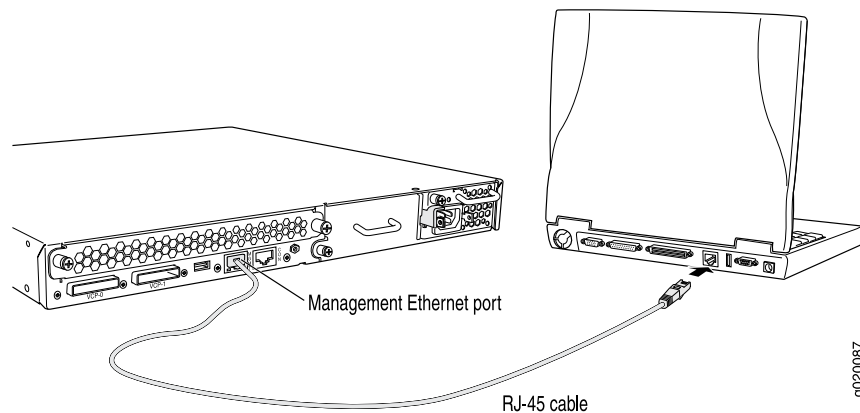


Figure 3: Ethernet Cable Connector



Related Topics

- Connecting an EX-series Switch to a Management Console
- EX 3200 Switch—Rear-Panel Description
- EX 4200 Switch—Rear-Panel Description
- EX-series Switch—Management Port Connector Pinout Information